


**DIGITUS Professional Full HD WDR IP Network Outdoor fixed Dome Camera**

4016032369004  
DN-16082-1



## Full HD WDR IP Network Outdoor fixed Dome Camera 4MP (H.264), Progressive Scan CMOS Sensor, PoE, IP 66, IK10, 3mm-9mm motorized

With the DIGITUS® WDR camera range using SONY Exmor sensor, every pixel of the image is processed for optimal exposure and color reproduction. In high contrast scenes, most over or under exposed areas are corrected, producing usable video. DIGITUS® WDR cameras are designed for high-contrast lighting conditions, where high quality identification is needed, such as airports, passport controls and casinos and so ideal for intelligent video analysis applications. The DIGITUS® WDR outdoor vandal proof Dome camera comes with 4 megapixel and 1080p with 60 frames for high-quality video, real-time viewing, removable infrared cut filter and 6 solid light LEDs for delivering low-noise images in total darkness at a distance of up to 40 meters. The camera is designed with IP66 weatherproof outdoor housing and IK10 vandal-proof. With 802.3af compliant PoE there is no need to install the camera near a power source, power and data are received through only one single Ethernet cable. The DIGITUS® WDR camera is equipped with a built-in microSD/SDHC card slot for local storage. With 3-axis mechanical design, it offers a flexible installation for all applications. With the H.264 codec the camera transfers High Definition data through LAN and Internet without distortion.

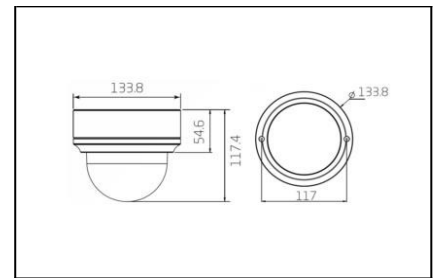

- 1 Image Sensor: 1/3" Progressive CMOS
- 1 Effective Pixels: 4 Megapixel (2688 x 1520 )
- 1 Minimum Illumination: 0.1 lux
- 1 White Balance: Manual / AWB / ATW
- 1 Shutter Speed: 1~ 1/10000 sec.
- 1 Focal Length: 3-9mm motorized
- 1 F Number: F1.7
- 1 FOV: Wide 109° / Tele 33°
- 1 Wide Dynamic Range: Shutter WDR (96dB)
- 1 Privacy Mask: On/Off
- 1 Brightness: Manual
- 1 Exposure: Auto / Manual
- 1 Contrast: Manual
- 1 Saturation: Manual
- 1 Hue: Manual
- 1 Digital Zoom: Supported
- 1 Number of Built-in LEDs: 6
- 1 Working Distance (night): up to 40m
- 1 Motion Detection: On / Off / By schedule
- 1 Privacy Mask Typ: Color
- 1 Tampering Alarm: On / Off / By schedule
- 1 Interface: RJ-45, 10/100/1000 Mbps Ethernet (Gigabit Ethernet)
- 1 Event Notification: HTTP / FTP / SMTP
- 1 Storage: Supports microSD up to 32GB
- 1 User Accounts: up to 20
- 1 Password Levels: User and Administrator
- 1 Operating Temperatur: -10°C to + 50°C
- 1 IP66 housing design for outdoor use
- 1 Dimensions: 133.8 x 117.4 mm
- 1 Weight: 725g
- 1 Power Source: PoE (Power over Ethernet)
- 1 Power consumption: 12.85 Watt

### Package Content

- 1 Outdoor Dome Camera
- 1 Manual
- 1 Support CD-ROM

**DIGITUS Professional Full HD WDR IP Network Outdoor fixed Dome Camera DN-16082- 4016032369004**  
1

→ **Logistics**

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	18	19,00	37,00	55,00	58,00	118030,00
Packaging Unit Inside	1	1,06	16,50	17,00	17,50	4908,75
Packaging Unit Single	1	1,06	16,50	17,00	17,50	4908,75
Net single without Packaging	1	0,73	0,00	11,70	13,30	0,00

→ **Packaging type**

