



ENGLISH
हिंदी



GS190 USER GUIDE

This manual may differ from the phone depending on the phone software version and service provider used.



Bluetooth QD ID B015953

GS190 USER GUIDE

This manual may differ from the phone depending on the phone software version and service provider used.



Contents

Installing the SIM card and the handset battery	3
Installing the SIM Card	3
Illustrations	3
Phone Components	4
Turning Your Phone On and Off	5
Making a call	5
Making an international call	5
Answering a call	5
Selecting functions and options	6
Entering Text	7
T9 Mode	7
ABC Mode	7
123 Mode (Numbers Mode)	7
Symbol Mode	7
Anti Theft Mobile Tracker (ATMT)	8

Menu tree	9
Quick feature reference	10
Browser	10
Call history	10
Tools	11
Multimedia	12
Messaging	12
My stuff	13
Profiles	14
Contacts	14
Settings	15
Guidelines for safe and efficient use	17
Product care and maintenance	17
Battery information and care	19
Exposure to radio frequency energy	20
Accessories	21
Technical Data	22

Installing the SIM card and the handset battery

Installing the SIM Card

When you subscribe to a cellular network, you are provided with a plug-in SIM card loaded with your subscription details, such as your PIN, any optional services available and many others.


Important!

- › The plug-in SIM card and its contacts can be easily damaged by scratches or bending, so be careful when handling, inserting or removing the card. Keep all SIM cards out of the reach of small children.
- › USIM is not supported in this phone.

Illustrations

Always switch the device off and disconnect the charger before removing the battery.

- 1** Press the release button and remove the back cover.
- 2** Lift battery away.
- 3** Insert the SIM card.
- 4** Insert the battery pack.
- 5** Attach the back cover.
- 6** Charge the battery.

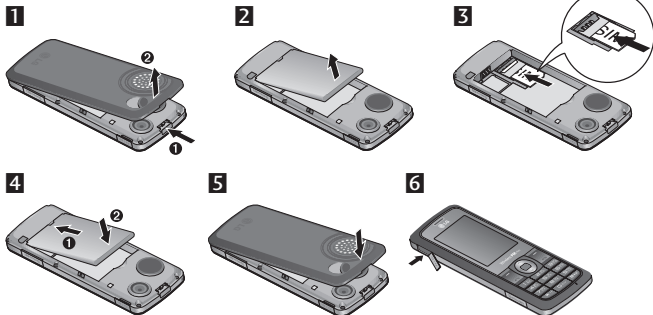

Fully charge the battery before using it for the first time.



Phone Components





Turning Your Phone On and Off

1. Press and hold the End key until the power comes on.
2. Press and hold the End key until the power goes off.



Making a call

1. Enter a phone number including the area code.
2. Press the  key to call the number.
3. To end the call, press the  key or the right soft key.



Making an international call

1. Press and hold the  key for the international prefix. The '+' character automatically selects the international access code.
2. Enter the country code, area code, and the phone number.
3. Press  [Send] key to call the number.


Answering a call

1. When you receive a call, the phone rings and the flashing phone icon appears on the screen.
2. If the Any key has been set as the answer mode, any key press will answer a call except for the  key.
3. To end the call, press the  key.


Selecting functions and options

Your phone offers a set of functions that allow you to customize the phone. These functions are arranged in menus and sub-menus, accessed via the two soft keys marked  and . Each menu and sub-menu lets you view and alter the settings of a particular function.

The roles of the soft keys vary according to the current context; the label on the bottom line of the screen just above each key indicates its current role.

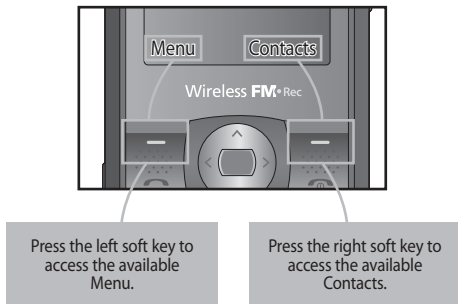

Entering Text

You can enter alphanumeric characters by using the phone's keypad. Change the text input mode by pressing the  key.

T9 Mode

The T9 predictive text input mode lets you enter words easily with a minimum number of key presses. As you press each key, the phone begins to display the characters that it thinks you are typing based on the built-in dictionary.

ABC Mode

This mode allows you to enter letters by pressing the key labeled with the required letter once, twice, three or four times until the letter is displayed.

123 Mode (Numbers Mode)

Type numbers using one keystroke per number.

Symbol Mode

The symbol mode enables you to enter various symbols or special characters. To enter a symbol, select **Options → Insert Symbol**. Use the navigation and numeric keys to select the desired symbol and press the OK key.

Anti Theft Mobile Tracker (ATMT)

Anti-theft mobile tracker Anti-Theft Mobile Tracker (ATMT) allows you to track your lost phone. When someone uses your phone without your permission, the tracking service will be activated.

You are reminded by a text message sent to the default phone number you have set, without the unauthorized user's knowledge. You can always activate the ATMT and configure your personal settings.

To activate Anti-theft mobile tracker

1. From the main menu, select **Settings > Security > Anti theft mobile tracker** and press **OK**.
2. Select **Set ATMT** and press **OK**.
3. Switch **On** or **Off** and press **OK**.
4. Input the ATMT code to enable or disable this function.

Note

- › The default ATMT code is "0000". You have to enter the code before configuring the ATMT settings.

1. Browser

- 1.1 Home
- 1.2 Yahoo!
- 1.3 Bookmarks
- 1.4 Enter address
- 1.5 Recent pages
- 1.6 Settings

2. Call history

- 2.1 All calls
- 2.2 Missed calls
- 2.3 Dialed calls
- 2.4 Received calls
- 2.5 Call duration
- 2.6 Call costs
- 2.7 Data information

3. Tools

- 3.1 Alarm clock
- 3.2 Calendar
- 3.3 Calculator
- 3.4 Memo
- 3.5 To do
- 3.6 Unit converter
- 3.7 World clock

4. Multimedia

- 4.1 MP3 player
- 4.2 Camera
- 4.3 Video camera
- 4.4 FM radio
- 4.5 Schedule FM record
- 4.6 Voice recorder
- 4.7 Melody composer
- 4.8 Ringtone creator

5. Messaging

- 5.1 New message
- 5.2 Inbox
- 5.3 Drafts
- 5.4 Outbox
- 5.5 Sent
- 5.6 Listen to voicemail
- 5.7 Info message
- 5.8 Templates
- 5.9 Settings

6. My stuff

- 6.1 Images
- 6.2 Sounds
- 6.3 Videos
- 6.4 Others
- 6.5 External memory
- 6.6 Games & Apps

7. Profiles

- 7.1 Normal
- 7.2 Silent
- 7.3 Outdoor
- 7.4 Flight mode

8. Contacts

- 8.1 Search
- 8.2 New contact
- 8.3 Speed dials
- 8.4 Groups
- 8.5 Copy all
- 8.6 Delete all
- 8.7 Settings
- 8.8 Information

9. Settings

- 9.1 Date & Time
- 9.2 Languages
- 9.3 Display
- 9.4 Shortcut
- 9.5 Call
- 9.6 Security
- 9.7 Connectivity
- 9.8 Power save
- 9.9 Reset
- 9.0 Memory status

Quick feature reference

This section provides brief explanations of features on your phone.

Browser Menu 1

Home	Connects to a homepage. The homepage will be the site which is defined in the activated profile. It will be defined by the service provider if you have not defined it in the activated profile.
Yahoo!	You can access to your Yahoo! Messenger, email accounts from any major providers, do a quick search, or view latest news on the Web. For more information, you can visit Yahoo!® Mobile for more information.
Bookmarks	This menu allows you to store the URL of favorite web pages for easy access at a later time.
Enter address	You can connect directly to the site you want. After entering a specific URL, press the OK key and select the Connect.
Recent pages	This menu shows the recently browsed pages.
Settings	You can set the profile, cache and security related to internet service.

Call history Menu 2

All calls	You can view all lists of outgoing or incoming calls.
Missed calls	You can view the unanswered calls.
Dialled calls	You can view the outgoing calls (called or attempted).
Received calls	You can view the incoming calls.

Call history Menu 2 (Continued)

Call duration	Allows you to view the duration of your incoming and outgoing calls. You can also reset the call timers.
Call cost	View the charges applied to your dialled numbers and the call duration of all your received and dialled calls.
Data information	You can check the amount of data transferred over the network through the GPRS information option. In addition, you can also view how much time you are online.

Tools Menu 3

Alarm clock	You can set the alarm clock to go on at a specified time.
Calendar	When you enter this menu, a calendar appears. A square cursor is located on the current date.
Calculator	The calculator provides the basic arithmetic functions: addition, subtraction, multiplication and division.
Memo	You can add new memo, view and manage saved memos.
To Do	You can view, edit and add tasks to do.
Unit converter	This converts any measurement into a unit you want. There are 2 types that can be converted into units: Length, Weight
World clock	The World Clock function provides time information on major cities worldwide.

Multimedia Menu 4

- MP3 player** Using the MP3 player in your phone, you can easily enjoy various music.
- Camera** You can take photos with the built in camera and adjust its settings to suit your needs.
- Video camera** You can record a video clip through the built-in camera.
- FM radio** With embedded FM antenna, you can receive FM radio without an external earphone. You can listen to your favor radio station anytime.
- Note:** In weak FM radio signal area the sensitivity can degrade with wireless and antenna mode. So it is advisable to insert the ear-mic for better and enhanced FM quality.
- Schedule FM record** This function allows you to pre-schedule FM radio recordings.
- Voice recorder** You can record voice memo.
- Melody composer** This function allows you to compose a ring tone or melody.
- Ringtone creator** This function allows you to create your own personal ringtones by using this tool.

Messaging Menu 5

- New message** This menu includes functions related to SMS (Short Message Service) and MMS (Multimedia Message Service).
- Note:** You can send SMS to many users at a time. Simply press Option and select Send to Many. This will open contact list where in user can mark/unmark contacts for sending SMS message.
- Note:** To send the SMS to a particular group of contacts, simply press Options and select Send to Group after composing the SMS.

Messaging Menu 5 (Continued)

Inbox	You will be alerted when you have received messages. They will be stored in Inbox. You can save SMS up to 150 respectively (summing up all the messages in each folder; inbox, drafts, sent and outbox).
Drafts	Using 'Save to drafts' menu, you can save the message temporarily in Drafts.
Outbox	This is a temporary storage folder for the unsent messages or messages that you have sent but fail to deliver.
Sent	After sending out the message, the text message or multimedia message is saved in the Sent folder.
Listen to voicemail	This menu provides you with a quick way of accessing your voice mailbox (if provided by your network).
Info message	Info service messages are text messages delivered by the network to GSM.
Templates	There are pre-defined messages in the list. You can view and edit the template messages or create new messages.
Settings	This menu allows you to set features of your network service provider.

My stuff Menu 6

Images	Shows the list of image files such as JPG, GIF, BMP, etc.
Sounds	Plays the list of MP3, AMR, MID, WAV, AAC files in Multimedia memory.
Videos	Displays the list of video files.
Others	Other files except images, sounds are stored in this folder.
External memory	When you insert the memory card, you can view Image, Sounds and Others menu in memory card.



My stuff Menu 6 (Continued)

- Games & Apps** You can access a great selection of games and applications on your phone.
- › **Data Wallet:** This application where users can safely store important data and personal informations (bank account, credit card, loan, e-mail ID details...etc.).
 - › **LG Help Desk:** This application helps users to find the LG Mobile service centre and Call Centre number directory.

Profiles Menu 7

In Profiles, you can adjust and customize the phone tones for different events, environments, or caller groups. There are four preset profiles: Normal, Silent, Outdoor and Flight mode.

Contacts Menu 8

- Search** Select Search and enter the name that you want to search.
- New contact** You can register a new contact address. You can enter the name, different phone numbers and email addresses of a new contact.
- Speed dials** You can assign any of the keys from  to  with a Name list entry. You can call directly by pressing this key when you are in idle screen.
- Groups** You can list up to the members per each group. There are 7 groups you can make lists to.
- Copy all** You can copy entries from SIM card memory to Phone memory and vice versa.
- Delete all** You can delete all the entries from SIM or Phone. This function requires the security code.

Contacts Menu 8 (Continued)

- Settings** You can set the contact display option.
- Information**
- › **Service dial number:** Use this function to access a particular list of services provided by your network operator (if supported by the SIM card).
 - › **Own number:** You can save and check your own number in SIM card.
 - › **My business card:** This option allows you to create your own business card featuring Name, any numbers and email.

Settings Menu 9

- Date & Time** You can set functions relating to the date and time.
- Languages** You can change the language for the display texts in your phone. This change will also affect the Language Input mode.
- Display** You can change settings for the phone display.
- Shortcut** You can set the functions of 4 navigation keys to use as shortcuts in idle mode.
- Call** You can set the menu relevant to a call by pressing the left soft key [Select] in the Setting menu.
- Security** This menu allows you to set the phone safely.
- › **PIN code request:** You can set the phone to ask for the PIN code of your SIM card when the phone is switched on.
 - › **Auto key lock:** You can make the key pad locked automatically after some time.
 - › **Phone lock:** You can use a security code to avoid unauthorized use of the phone.

Settings Menu 9 (Continued)

Security (Continued)

- › **Anti Theft Mobile Tracker:** The ATMT feature of this phone provides you with the ability to have a tracking system in place for your mobile in case you lose or misplace it.
- › **Application lock:** To prevent unauthorized use of phone applications, you can enable application lock which requires user to enter a password when accessing applications. Password is the same as the security code (Default password is 0000).
- › **Secret folder:** To keep your personal data protected, you can save files in Secret folder. When secret folder feature is activated, user will be required to enter a password when accessing the selected folder. Default password is 0000.
- › **Change codes:** PIN is an abbreviation of Personal Identification Number to prevent use by unauthorized persons. You can change the access codes: Security code, PIN code, PIN2 code.

Connectivity

You can connect between a phone and other devices.

- › **Bluetooth:** This enables wireless connections between electronic devices.
- › **Network:** You can also select a network manually and set a network.

Power save

Choose among the followings, Off/Night only/Always On, to change the factory set power saving settings.

Reset

You can initialize all factory defaults. You need Security code to activate this function.

Memory status

You can check free space and memory usage of phone, SIM card and external memory (if inserted).

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal. Further detailed information is given in this manual.

Warning

- › For your safety, use **ONLY** specified **ORIGINAL** batteries and chargers.
- › Switch off the phone in any area where required by special regulations, e.g. in a hospital where it may affect medical equipment.
- › Batteries should be disposed off in accordance with relevant legislation.

Product care and maintenance

WARNING! Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- › Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- › The unit should be kept away from heat sources such as radiators or cookers.
- › Use a dry cloth to clean the exterior of the unit. (Do not use any solvents.)
- › Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.

Electronic devices

All mobile phones may get interference, which could affect performance.

- › Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over a pacemaker, i.e. in your breast pocket.

Road safety

Check the laws and regulations on the use of mobile phones in the areas when you drive.

- › Do not use a hand-held phone while driving.
- › Use a hands-free kit, if available.
- › Pull off the road and park before making or answering a call if driving conditions so require.

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Potentially explosive atmospheres

Do not use the phone at a refueling point. Do not use near fuel or chemicals.

In aircraft

Wireless devices can cause interference in aircraft.

- › Turn off your mobile phone before boarding any aircraft.

Children

Keep the phone in a safe place out of children's reach. It includes small parts which if detached may cause a choking hazard.

Emergency calls

Emergency calls may not be available under all cellular networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Battery information and care

- › You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- › Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.
- › Do not disassemble or short-circuit the battery pack.
- › Replace the battery when it no longer provides acceptable performance. The battery pack may be recharged hundreds of times before it needs to be replaced.
- › Do not expose the battery charger to direct sunlight or use it in high humidity, such as the bathroom.
- › Risk of explosion if battery is replaced by an incorrect type.
- › Dispose off used batteries according to the manufacturer's instructions.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information

This mobile phone model GS190 has been designed to comply with applicable safety requirement for exposure to radio waves. This requirement is based on scientific guidelines that include safety margins designed to ensure safety of all persons, regardless of age and health.

- › The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used frequency bands.
- › While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- › The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over ten (10) gram of tissue.
- › The highest SAR value for this model phone tested by DASY4 for use at the ear is 0.966W/kg (10g) and when worn on the body is 1.07W/kg (10g).
- › SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE) is 1.6 W/kg averaged over one (1) gram of tissue (for example USA, Canada, Australia and Taiwan).

Accessories

There are various accessories for your mobile phone. You can select these options according to your personal communication requirements.

Standard Battery



USB cable and CD

You can connect your phone to PC to exchange the data between them.



Headset




Note

- › Always use genuine LG accessories. Failure to do this may invalidate your warranty.
- › Accessories may be different in different regions; please check with our regional service company or agent for further enquires.

Travel Adapter

Connect this and the included USB cable. This allows you to charge the battery.



General

- › Product name : GS190
- › System : GSM 900 / DCS 1800

Ambient Temperatures

- › Max. : +55°C,
Charging
(0~+45°C)
- › Min : -10°C

Declaration of Conformity



Supplier Details

Name

LG Electronics Inc.

Address

LG Electronics Inc. LG Twin Towers 20,
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

Product Details

Product Name

GSM 900 / DCS 1800 Dual band Terminal Equipment

Model Name

GS190, GS200

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 V1.8.1, EN 301 488-07 v1.3.1, EN 301 489-17 v1.2.1
EN 301 511 V9.0.2
EN 60360:2001/ EN 62209-1:2008
EN 60660-1:2001
EN 300 328 V1.7.1

Supplementary Information

The conformity to above standards is verified by the following Notified Body (NB/T)

BABT, Foreyth House-Churchfield Road - Walton-on-Thames Surrey - KT12 2TD, United Kingdom

Notified Body Identification Number : 0188

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

Issued Date

Seung Myoun, Ji / Director

18. Sep. 2009

European Standard Center
LG Electronics Logistics and Services B.V.
Volkenscom 15, 1327 AE Almere, The Netherlands
Tel: +31 - 36-547-8940, Fax: +31 - 36-547-8794
e-mail: jacob @ lge.com

Signature of representative

GS190

उपयोगकर्ता निर्देशिका

यह मैनुअल फ़ोन सॉफ्टवेयर संस्करण और उपयोग किए गए सेवा प्रदाता के आधार पर फ़ोन से भिन्न हो सकता है।



सामग्रियों की तालिका

सिम कार्ड और हैंडसेट बैटरी स्थापित करना	3	मेनू ट्री	9
सिम कार्ड लगाना	3	त्वरित सेवा संदर्भ	10
उदाहरण	3	ब्राउज़र	10
फ़ोन घटक	4	कॉल इतिहास	11
फ़ोन चालू या बंद करना	5	उपकरण	12
कॉल करना	5	मल्टीमीडिया	13
अंतर्राष्ट्रीय कॉल करना	5	संदेश सेवा	14
किसी कॉल का उत्तर देना	5	मेरा सामान	15
फंक्शंस और विकल्पों का चयन करना	6	प्रोफ़ाइल	15
पाठ दर्ज करना	7	संपर्क	16
T9 मोड	7	सेटिंग्स	17
ABC मोड	7	सुरक्षित और कुशल उपयोग के लिए दिशानिर्देश	19
123 मोड (नंबर मोड)	7	उत्पाद की देख-भाल और रख-रखाव	19
प्रतीक मोड	7	बैटरी जानकारी और देखभाल	21
चोरी रोधी मोबाइल ट्रैकर (ATMT)	8	रेडियो फ्रीक्वेंसी ऊर्जा के संपर्क में आना	22
		एक्सेसरीज	23
		तकनीकी डेटा	24

सिम कार्ड और हैंडसेट बैटरी स्थापित करना

सिम कार्ड लगाना

किसी सेल्युलर नेटवर्क के सदस्य बनने पर, आपको आपके सदस्यता विवरण जैसे आपका पिन, उपलब्ध वेकल्पिक सेवाएं और अन्य जानकारी वाला प्लग-इन सिम कार्ड दिया जाएगा।

महत्वपूर्ण!


› प्लग-इन सिम कार्ड और उसके संपर्क खरोंचों या मुड़ने से आसानी से खराब हो सकते हैं, इसलिए कार्ड को हैंडल करते समय, डालते और निकालते समय सावधानी रखें। सभी सिम कार्ड छोटे बच्चों की पहुँच से दूर रखें।

› USIM इस फोन में समर्थित नहीं है।


उदाहरण

बैटरी निकालने से पहले डिवाइस हमेशा बंद करें और चार्जर डिस्कनेक्ट कर दें।

- 1 रिलीज़ बटन दबाएं और बैक कवर निकालें।
- 2 बैटरी बाहर निकालें।
- 3 सिम कार्ड डालें।
- 4 बैटरी पैक डालें।
- 5 बैक कवर संलग्न करें।
- 6 बैटरी चार्ज करें।

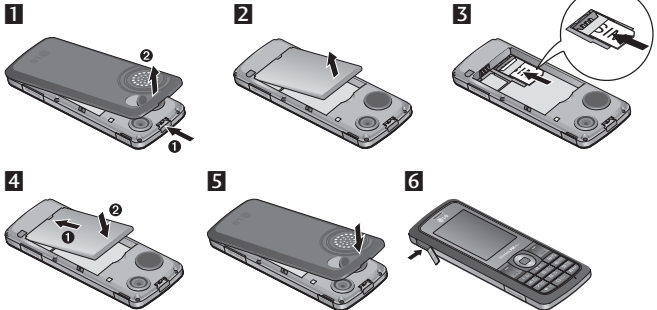

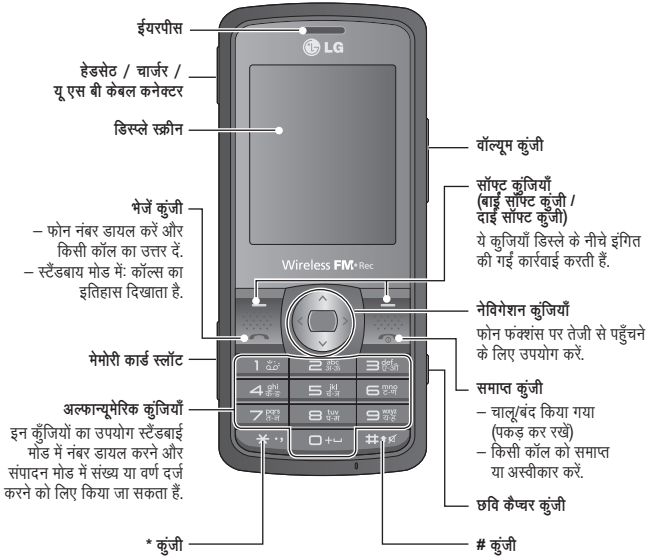

बैटरी पहली बार उपयोग करने से पहले इसे पूरी तरह से चार्ज करें।





फ़ोन चालू या बंद करना

1. पॉवर के आ जाने तक समाप्त कुंजी दबा कर रखें.
2. पॉवर के चले जाने तक समाप्त कुंजी दबा कर रखें.



कॉल करना

1. क्षेत्र कोड सहित फोन नंबर दर्ज करें.
2. नंबर कॉल करने के लिए  कुंजी दबाएं.
3. कॉल समाप्त करने के लिए,  कुंजी या दाईं सॉफ्ट कुंजी दबाएं.

अंतर्राष्ट्रीय कॉल करना

1. अंतर्राष्ट्रीय उपसर्ग के लिए  कुंजी दबा कर रखें. '+' वर्ण स्वरूप अंतर्राष्ट्रीय एक्सेस कोड का चयन करता है.
2. देश का कोड, क्षेत्र कोड और फोन नंबर दर्ज करें.
3. नंबर कॉल करने के लिए  [भेजें] कुंजी दबाएं.

किसी कॉल का उत्तर देना

1. जब आप कोई कॉल प्राप्त करते हैं, तो फोन बजता है और चमकते हुए फोन का चिह्न स्क्रीन पर आता है.
2. यदि कोई भी कुंजी उत्तर मोड के रूप में सेट की गई है,  कुंजी को छोड़कर कोई भी कुंजी दबाएं, वह कॉल का उत्तर देगी.
3. कॉल समाप्त करने के लिए,  कुंजी दबाएं.

फंक्शंस और विकल्पों का चयन करना

आपका फोन फंक्शंस के सेट का ऑफर करता है, जो आपको फोन कस्टमाइज़ करने की अनुमति देता है। ये फंक्शंस मेनूज और सबमेनूज में व्यवस्थित किये जाते हैं, [−] और [−] से चिह्नित किए गए दो सॉफ्ट कुंजियों द्वारा एक्सेस किये जाते हैं। प्रत्येक मेनू और सबमेनू आपको किसी विशेष फंक्शन को देखने और उसकी सेटिंग्स परिवर्तित करने देता है।

वर्तमान संदर्भ के अनुसार सॉफ्ट कुंजियों के रोलस भिन्न होते हैं प्रत्येक कुंजी के ठीक ऊपर स्क्रीन की निचली पंक्ति पर इसका वर्तमान रोल इंगित करता है।



उपलब्ध मेनू एक्सेस करने के लिए बाईं सॉफ्ट कुंजी दबाएं।

उपलब्ध सम्पर्कों को एक्सेस करने के लिए बाईं सॉफ्ट कुंजी दबाएं।

फ़ोन के कीपैड का उपयोग करके आप अल्फ़ान्यूमेरिक वर्ण दर्ज कर सकते हैं. *****#** कुंजी दबा कर पाठ इनपुट मोड बदलें.

T9 मोड

T9 प्रेडिक्टिव पाठ इनपुट आपको कम से कम कुंजियाँ दबाकर आसानी से शब्दों को लिखने देता है. जैसे ही आप प्रत्येक कुंजी दबाते हैं, तो फ़ोन अक्षरों को प्रदर्शित करने लगता है जो यह सोचता है कि आप बिल्ट-इन शब्दकोश के आधार पर टाइप कर रहे हैं. आप शब्दकोश में नये शब्द भी जोड़ सकते हैं. जैसे ही नये शब्द जोड़े जाते हैं, तो शब्दकोश में से अत्यधिक संभावित उम्मीदवार दिखाने के लिए शब्द बदलता है.

ABC मोड

इस मोड में आप अपने इच्छित अक्षर वाली कुंजी को दबाकर अक्षर डाल सकते हैं, इसके लिए अक्षर दिखाई देने तक आपको एक, दो, तीन या चार बार कुंजी दबाना पड़ सकता है.

123 मोड (नंबर मोड)

प्रत्येक अंक के लिए एक बार कुंजी दबाकर नंबर टाइप करें.

प्रतीक मोड

प्रतीक मोड आपको विभिन्न प्रतीकों या विशेष अक्षरों को दर्ज करने में सक्षम बनाता है. कोई प्रतीक दर्ज करने के लिए, विकल्प → प्रतीक डालें का चयन करें. इच्छित प्रतीक का चयन करने के लिए नेविगेशन और सांख्यिक कुंजियों का उपयोग करें और ठीक कुंजी दबाएं.

चोरी रोधी मोबाइल ट्रैकर (ATMT)

चोरी-रोधी मोबाइल ट्रैकर चोरी-रोधी मोबाइल ट्रैकर (ATMT) आपको आपके खोए हुए फोन को ट्रैक करने की अनुमति देता है। जब कोई आपकी अनुमति के बिना आपके फोन का उपयोग करता है तो ट्रैकिंग सेवा सक्रिय हो जाएगी।

आपको अनाधिकृत उपयोगकर्ता को बताए बिना आपने जो डिफॉल्ट फोन नंबर सेट किया है, उसपर पाठ संदेश द्वारा याद दिलाया जाता है। आप ATMT हमेशा सक्रिय कर सकते हैं और अपनी व्यक्तिगत सेटिंग्स कॉन्फिगर कर सकते हैं।

चोरी-रोधी मोबाइल ट्रैकर सक्रिय करने के लिए

1. मुख्य मेनू से, सेटिंग्स > सुरक्षा > चोरी-रोधी मोबाइल ट्रैकर का चयन करें और ठीक दबाएं।
2. ATMT सेट करें चुनें और ठीक दबाएं।
3. चालू या बंद करें और ठीक दबाएं।
4. इस फंक्शन को सक्षम या अक्षम करने के लिए ATMT कोड डालें।

नोट

› डिफॉल्ट ATMT कोड "0000" है। आपको ATMT सेटिंग कॉन्फिगर करने से पहले कोड डालना होगा।

1. ब्राउज़र

- 1.1 मुख पृष्ठ
- 1.2 Yahoo!
- 1.3 बुकमार्क
- 1.4 पता दर्ज करें
- 1.5 नवीनतम पृष्ठ
- 1.6 सेटिंग्स

2. कॉल इतिहास

- 2.1 सभी कॉल्स
- 2.2 छूटे कॉल्स
- 2.3 डायलड कॉल्स
- 2.4 प्राप्त कॉल्स
- 2.5 कॉल समय
- 2.6 कॉल लागत
- 2.7 डेटा जानकारी

3. उपकरण

- 3.1 अलार्म घड़ी
- 3.2 कैलेंडर
- 3.3 गणक
- 3.4 मेमो
- 3.5 टू डू
- 3.6 मात्रक कनवर्टर
- 3.7 विश्व घड़ी

4. मल्टीमीडिया

- 4.1 संगीत प्लेयर
- 4.2 कैमरा
- 4.3 वीडियो कैमरा
- 4.4 FM रेडियो
- 4.5 FM रिकॉर्ड शेड्यूल
- 4.6 ध्वनि रिकॉर्डर
- 4.7 मेलॉडी बनाना
- 4.8 रिंग टोन निर्माता

5. संदेश भेजना

- 5.1 नया संदेश
- 5.2 इनबॉक्स
- 5.3 ड्राफ्ट्स
- 5.4 आउटबॉक्स
- 5.5 भेजे गए
- 5.6 वॉइस मेल सुनें
- 5.7 जानकारी संदेश
- 5.8 टेम्पलेट्स
- 5.9 सेटिंग्स

6. मेरी सामान

- 6.1 छवियाँ
- 6.2 ध्वनियाँ
- 6.3 वीडियो
- 6.4 अन्य
- 6.5 बाहरी स्मृति
- 6.6 खेल और अनुप्रयोग

7. प्रोफाइल्स

- 7.1 सामान्य
- 7.2 मौन
- 7.3 आउटडोर
- 7.4 फ्लाइट मोड

8. संपर्क

- 8.1 खोजें
- 8.2 नया संपर्क
- 8.3 शीघ्र डायल्स
- 8.4 समूह
- 8.5 सभी की प्रतिलिपि बनाएं
- 8.6 सभी हटाएं
- 8.7 सेटिंग्स
- 8.8 जानकारी

9. सेटिंग्स

- 9.1 समय व दिनांक
- 9.2 भाषाएँ
- 9.3 प्रदर्शन
- 9.4 शॉर्टकट
- 9.5 कॉल
- 9.6 सुरक्षा
- 9.7 कनेक्टिविटी
- 9.8 ऊर्जा बचत
- 9.9 रीसेट
- 9.0 स्मृति स्थिति

यह अनुभाग आपके फोन पर उपलब्ध सुविधाओं की संक्षिप्त जानकारी देता है।

ब्राउज़र मेनू 1

मुख पृष्ठ	मुख पृष्ठ से कनेक्ट करता है। मुख पृष्ठ वह साइट होगा जो सक्रिय प्रोफाइल में परिभाषित किया गया है। यदि आपने इसे सक्रिय प्रोफाइल में परिभाषित नहीं किया है, तो यह सेवा प्रदाता द्वारा परिभाषित किया जाएगा।
Yahoo!	आप किसी भी मुख्य प्रदाता से अपना Yahoo! Messenger, ई-मेल खाते एक्सेस कर सकते हैं, त्वरित खोज करें या वेब पर नवीनतम समाचार देखें। अधिक जानकारी के लिए आप Yahoo!® Mobile पर विज़िट कर सकते हैं।
बुकमार्क	कुछ समय बाद आसानी से एक्सेस करने के लिए यह मेनू आपको पसंदीदा वेबपृष्ठों के URL संग्रहित करने की अनुमति देता है।
पते दर्ज करें	जिस साइट से आप जुड़ना चाहते हैं, आप सीधे उससे से जुड़ सकते हैं। विशिष्ट URL दर्ज करने के बाद, ठीक कुंजी दबाएं और कनेक्ट का चयन करें।
नवीनतम पृष्ठ सेटिंग्स	यह मेनू हाल ही में ब्राउज़ किये गये पृष्ठों को दिखाता है। आप इंटरनेट सेवा से संबंधित प्रोफाइल, कैश और सुरक्षा सेट कर सकते हैं।

कॉल इतिहास मेनू 2

सभी कॉल्स	आप आउटगोइंग और इनकमिंग कॉल्स की सभी सूचियाँ देख सकते हैं.
छूटे कॉल्स	आप अनुत्तरित कॉल्स देख सकते हैं.
डायलड कॉल्स	आप आउटगोइंग कॉल्स देख सकते हैं (कॉल या प्रयास की गई).
प्राप्त कॉल्स	आप इनकमिंग कॉल्स देख सकते हैं.
कॉल समय	आपको अपनी इनकमिंग और आउटगोइंग कॉल्स की अवधि देखने की अनुमति देता है. आप कॉल टाइमर्स को भी रीसेट कर सकते हैं.
कॉल लागत	आपके डायल किये गये नंबरों के लिए लागू किये गये शुल्क और प्राप्त तथा डायल की गई कॉल अवधि देखें.
डेटा जानकारी	आप GPRS जानकारी विकल्प नेटवर्क पर ट्रांसफर किये गये डेटा देख सकते हैं. इसके अलावा, आप यह भी देख सकते हैं कि आप कितने समय ऑनलाइन हैं.

अलार्म घड़ी	किसी निर्दिष्ट समय पर जाने के लिए आप अलार्म घड़ी सेट कर सकते हैं.
कैलेंडर	जब आप यह मेनू दर्ज करते हैं, तो एक कैलेंडर दिखाई देता है. वर्तमान दिनांक पर वर्गाकार कर्सर स्थित होता है.
गणक	गणक मूलभूत गणितीय कार्रवाइयाँ प्रदान करता है: जोड़, घटा, गुणा और भाग.
मेमो	आप नये मेमो जोड़ सकते हैं, सहेजे गये मेमो को देख और व्यवस्थित कर सकते हैं.
टू डू	टू डू आप कार्यों को देख, संपादित और जोड़ सकते हैं.
मात्रक कनवर्टर	यह किसी इच्छित माप को मात्रक में कनवर्ट करता है. 2 प्रकार हैं जिन्हें इकाईयों में कनवर्ट कर सकते हैं: लंबाई, मोटाई.
विश्व घड़ी	विश्व घड़ी फंक्शन दुनियाभर के मुख्य शहरों की समय जानकारी प्रदान करती है.

- संगीत प्लेयर** अपने फोन में संगीत प्लेयर का उपयोग करके, आप आसानी से विभिन्न संगीत का आनंद ले सकते हैं.
- कैमरा** आप बिल्ट इन कैमरे से फोटो ले सकते हैं और अपनी आवश्यकतानुसार इसकी सेटिंग्स समायोजित कर सकते हैं.
- वीडियो कैमरा** आप बिल्ट-इन कैमरे के द्वारा कोई वीडियो क्लिप रिकॉर्ड कर सकते हैं.
- FM रेडियो** एम्बेडेड FM एंटीना से, आप किसी बाहरी ईयरफोन के बिना FM रेडियो प्राप्त कर सकते हैं. आप किसी भी समय अपना पसंदीदा रेडियो स्टेशन सुन सकते हैं.
नोट: कमजोर FM रेडियो सिग्नल वाले क्षेत्रों में वायरलेस और एंटीना मोड के साथ संवेदनशीलता कम हो सकती है. बेहतर और उन्नत श्रुति गुणवत्ता के लिए ईयर-माइक लगाने की सलाह दी जाती है.
- FM रिकॉर्ड शेड्यूल** यह फंक्शन आपको प्री-शेड्यूल FM रिकॉर्डिंग्स की अनुमति देता है.
- ध्वनि रिकॉर्डर** आप ध्वनि मेमो रिकार्ड कर सकते हैं.
- मेलॉडी बनाना** यह फंक्शन आपको एक रिंग टोन या मेलोडी कंपोज करने की अनुमति देता है.
- रिंगटोन निर्माता** यह फंक्शन आपको इस उपकरण का उपयोग कर अपनी व्यक्तिगत रिंगटोन बनाने की अनुमति देता है.



- नया संदेश** इस मेनू में SMS (शॉर्ट संदेश सेवा) और MMS (मल्टीमीडिया संदेश सेवा) से संबंधित फंक्शंस शामिल होते हैं।
- नोट:** आप एक बार में अनेक उपयोगकर्ताओं को SMS भेज सकते हैं। केवल विकल्प दबाएं और अनेक को भेजें चुनें। इससे संपर्क सूची खुल जाएगी जिसमें उपयोगकर्ता SMS संदेश भेजने के लिए संपर्कों को चिह्नित/अचिह्नित कर सकता है।
- नोट:** संपर्कों के किसी विशेष समूह को SMS भेजने के लिए SMS लिखने के बाद केवल विकल्प दबाएं और समूह को भेजें चुनें।
- इनबॉक्स** जब आप संदेशों को प्राप्त करते हैं, तो आपको अलर्ट कर दिया जाएगा। वे इनबॉक्स में संग्रहित होंगे। आप क्रमशः 150 SMS सहेज सकते हैं (सभी संदेशों को प्रत्येक फोल्डर इनबॉक्स, ड्राफ्ट्स, प्रेषित और आउटबॉक्स में इकट्ठा करके)।
- ड्राफ्ट्स** 'ड्राफ्ट में सहेजें' मेनू का उपयोग करके, आप संदेश को ड्राफ्ट में अस्थायी रूप से सहेज सकते हैं।
- आउटबॉक्स** यह अप्रेषित संदेशों के लिए या ऐसे संदेश जिनको आपने भेजा है लेकिन प्रेषित होने में विफल रहे उनके लिए एक अस्थायी संग्रह फोल्डर है।
- सेंट** संदेश भेजने के बाद, पाठ संदेश या मल्टीमीडिया संदेश भेजे गए फोल्डर में सहेजता है। यह मेनू आपको आपकी ध्वनि मेलबॉक्स को त्वरित तरीके से एक्सेस करने का मार्ग प्रदान करता है (यदि आपके नेटवर्क द्वारा प्रदान किया जाता है)।
- जानकारी संदेश** जानकारी सेवा संदेश नेटवर्क द्वारा GSM को प्रेषित किये जाने वाले पाठ संदेश होते हैं।
- टेम्पलेट्स** सूची में प्री-डिफाइन्ड संदेश हैं। आप टेम्पलेट संदेशों को देख और संपादित कर सकते हैं या नए संदेशों को बना सकते हैं।
- सेटिंग्स** यह मेनू आपको नेटवर्क सेवा प्रदाता के फीचर सेट करने की अनुमति देता है।

मेरा सामान मेनू 6

छवियाँ	छवि फाइलों की सूची दिखाता है, जैसे JPG, GIF, BMP, आदि.
ध्वनियाँ	मल्टीमीडिया मेमोरी में MP3, AMR, MID, WAV, AAC फाइलों की सूची चलाता है.
वीडियो	वीडियो फाइलों की सूची प्रदर्शित करता है.
अन्य	छवियों और ध्वनियों के अलावा इस फोल्डर में अन्य फाइलें संग्रहित होती हैं.
बाहरी मेमोरी	जब आप मेमोरी कार्ड डालते हैं, तो आप मेमोरी कार्ड में छवि, आवाज और अन्य मेनू देख सकते हैं.
खेल और अनुप्रयोग	आप अपने फोन पर खेलों और अनुप्रयोगों के शानदार संग्रह तक पहुंच बना सकते हैं. <ul style="list-style-type: none">› डेटा वॉलेट: यह अनुप्रयोग जहां उपयोगकर्ता महत्वपूर्ण डेटा और व्यक्तिगत जानकारी (बैंक खाता, क्रेडिट कार्ड, ऋण, ई-मेल ID विवरण ... आदि) को सुरक्षित रूप से स्टोर कर सकते हैं.› LG हैल्प डेस्क: यह अनुप्रयोग LG मोबाइल सर्विस सेंटर और कॉल सेंटर नंबर डायरेक्टरी खोजने में उपयोगकर्ताओं की मदद करती है.

प्रोफाइल मेनू 7

प्रोफाइल में, आप विभिन्न इवेंट, वातावरण या कॉलर समूह के लिए फोन टोन समायोजित और कस्टमाइज कर सकते हैं. चार प्रोफाइल पहले से ही सेट हैं सामान्य, मौन आउटडोर और फ्लाइट मोड.

- खोजें** खोज का चयन करें और वह नाम दर्ज करें जिसकी आप खोज करना चाहते हैं.
- नया संपर्क** आप एक नया संपर्क पता रजिस्टर कर सकते हैं. आप किसी नये संपर्क का नाम, भिन्न फोन नंबर और ईमेल पते दर्ज कर सकते हैं.
- शीघ्र डायल्स** आप किसी नाम सूची प्रविष्टि के साथ  से  तक कोई भी कुंजी असाइन कर सकते हैं. जब आप निष्क्रिय स्क्रीन में हों, तो आप इस कुंजी को दबा कर सीधे कॉल कर सकते हैं.
- समूह** आप प्रत्येक समूह के मुताबिक सदस्यों को सूचीबद्ध कर सकते हैं. 7 समूह हैं आप सूचियाँ बना सकते हैं.
- सभी की प्रतिलिपि बनाएं** आप सिम कार्ड मेमोरी से फोन मेमोरी पर प्रविष्टियों की प्रतिलिपि बना सकते हैं और इसकी विपरीत कार्रवाई भी कर सकते हैं.
- सभी हटाएं** आप सिम या फोन से सभी प्रविष्टियाँ हटा सकते हैं. इस फंक्शन में सुरक्षा कोड की आवश्यकता होती है.
- सेटिंग्स** आप संपर्क डिस्प्ले विकल्प सेट कर सकते हैं.
- जानकारी**
- ✧ **सेवा डायल नंबर:** इस फंक्शन का उपयोग आपके नेटवर्क संचालक द्वारा प्रदान की गई सेवाओं की विशेष सूची एक्सेस करने के लिए करें (यदि सिम कार्ड द्वारा समर्थित है).
 - ✧ **अपना नंबर:** आप सिम कार्ड में अपना नंबर सहेज और जाँच सकते हैं.
 - ✧ **मेरा व्यवसाय कार्ड:** यह विकल्प नाम, कोई नंबर और ईमेल की उपलब्धता वाले आपको अपने स्वयं के बिजनेस कार्ड बनाने की अनुमति देता है.

समय व दिनांक	आप समय व दिनांक से संबंधित फंक्शन सेट कर सकते हैं.
भाषाएँ	आप अपने फोन में डिस्प्ले पाठ के लिए भाषा बदल सकते हैं. यह बदलाव भाषा इनपुट मोड को भी प्रभावित करेगा.
प्रदर्शन	आप फोन डिस्प्ले के लिए सेटिंग्स बदल सकते हैं.
शॉर्टकट	आप निष्क्रिय मोड में शॉर्टकट के रूप में उपयोग करने के लिए 4 नेविगेशन कुंजियों के फंक्शन सेट कर सकते हैं.
कॉल	आप सेटिंग मेनू में बाई सॉफ्ट कुँजी [चयन] दबा कर किसी कॉल से संगत मेनू सेट कर सकते हैं.
सुरक्षा	<p>यह मेनू आपको फोन सुरक्षित रूप से सेट करने की अनुमति देता है.</p> <ul style="list-style-type: none">› PIN कोड अनुरोध: जब फोन चालू हो तो आप अपने सिम कार्ड का PIN कोड पूछने के लिए फोन सेट कर सकते हैं.› स्वतः कुंजी लॉक: आप कुछ समय बाद कुंजी पैड स्वचालित रूप से लॉक कर सकते हैं.› फोन लॉक: फोन के अनाधिकृत उपयोग से बचने के लिए आप सुरक्षा कोड का उपयोग कर सकते हैं.› चोरी रोधी मोबाइल ट्रैकर: आपके फोन के खोने या गलत जगह पर रख देने की स्थिति में इस फोन की ATMT सेवा आपको क्षमता के साथ ट्रैकिंग सिस्टम प्रदान करती है.› Application lock: फोन का अनअधिकृत इस्तमाल रोकने के लिए, Application Lock सक्रिय कर सकते हैं. एक बार Application Lock सक्रिय होने पर सिर्फ पासवर्ड से ही Application Lock में प्रवेश कर सकते हैं. डिफॉल्ट पासवर्ड 0000 हैं.

- › **Secret folder:** आप आपने व्यक्तिगत डेटा कि सुरक्षा केलिए आपने फाइल्स Secret folder में डाल सकते हैं. एक बार Secret folder सक्रिय होने पर सिर्फ पासवर्ड से ही Secret folder में प्रवेश कर सकते हैं. डिफॉल्ट Password **0000** हैं.
- › **कोड्स बदलें:** अनाधिकृत व्यक्तियों द्वारा उपयोग करने से रोकने के लिए PIN एक निजी पहचान नंबर होता है. आप एक्सेस कोड्स बदल सकते हैं: सुरक्षा कोड, PIN कोड, PIN2 कोड.

कनेक्टिविटी

आप किसी फोन और अन्य डिवाइसों के बीच जुड़ सकते हैं.

- › **ब्लूटूथ:** यह इलेक्ट्रॉनिक डिवाइसों के बीच वायरलेस कनेक्शन सक्षम बनाता है.
- › **नेटवर्क:** आप स्वयं किसी नेटवर्क का चयन कर सकते हैं और एक नेटवर्क सेट कर सकते हैं.

ऊर्जा बचत

फैक्ट्री द्वारा सेट पॉवर सेविंग सेटिंग्स बदलने के लिए निम्नलिखित में से चयन करें, बंद/केवल रात्रि/हमेशा चालू.

रीसेट

आप सभी फैक्टरी डिफॉल्ट्स प्रारंभ कर सकते हैं. इस फंक्शन को सक्रिय करने के लिए आपको सुरक्षा कोड की आवश्यकता होती है.

स्मृति स्थिति

आप फोन के रिक्त स्थान और मेमोरी उपयोग, सिम कार्ड और बाहरी मेमोरी (यदि सम्मिलित है) जाँच सकते हैं.

सुरक्षित और कुशल उपयोग के लिए दिशानिर्देश

कृपया ये सरल दिशानिर्देश पढ़ें। इन दिशानिर्देशों का पालन न करना खतरनाक या गैरकानूनी हो सकता है। अन्य विस्तृत जानकारी इस मैनुअल में दी गई है।

चेतावनी

- › अपनी सुरक्षा के लिए, निर्दिष्ट वास्तविक बैटरियाँ और चार्जर ही उपयोग करें।
- › जिस क्षेत्र विशेष नियमों के अंतर्गत आवश्यक हो, वहाँ फोन बंद कर दें, उदाहरण के लिए चिकित्सालय में जहाँ इससे चिकित्सा संबंधी उपकरणों पर प्रभाव पड़ता है।
- › बैटरियाँ संगत कानून के अनुसार नष्ट होनी चाहिए।

उत्पाद की देख-भाल और रख-रखाव

चेतावनी! इस विशेष फोन मॉडल के साथ केवल बताई गई बैटरियाँ, चार्जर्स और सहायक उपकरणों का ही उपयोग करें। किसी भी दूसरे प्रकार का उपयोग करने पर फोन पर लागू होने वाले अनुमोदन या वॉरंटी अमान्य हो सकते हैं और यह खतरनाक हो सकता है।

- › इस इकाई को वियोजित करें। सुधारने की आवश्यकता होने पर इसे योग्य सेवा तकनीशियन के पास ले जाएँ।
- › इस इकाई को गर्म स्रोतों से दूर रखना चाहिए जैसे विकिरण या कूर्स।
- › इकाई का बाहरी भाग साफ करने के लिए किसी सूखे कपड़े का उपयोग करना चाहिए। (किसी द्रव पदार्थ का उपयोग न करें।)
- › फोन क्रेडिट कार्ड या परिवहन टिकट्स के पास न रखें यह चुंबकीय पट्टी पर मौजूद जानकारी को प्रभावित कर सकता है।

इलेक्ट्रॉनिक डिवाइस

सभी मोबाइल फोन में रुकावट आ सकती है, जो कार्यक्षमता को प्रभावित कर सकती है।

- › अनुमति का अनुरोध किए बिना किसी मेडिकल उपकरण के नजदीक अपने मोबाइल फोन का उपयोग न करें। किसी पेसमेकर, जैसे अपने सीने के पास वाले जेब में फोन न रखें।

सड़क सुरक्षा

जिन क्षेत्रों में आप गाड़ी चलाते हैं, वहाँ मोबाइल फोन के उपयोग से संबंधित कानूनों और नियमों की जानकारी ले लें.

- › ड्राइविंग करते समय हाथ वाले फोन का उपयोग न करें.
- › किसी हस्त-रिक्त किट का उपयोग करें, यदि उपलब्ध हो तो.
- › यदि ड्राइविंग की अवस्था है तो आवश्यकता है कि कोई कॉल करने या किसी कॉल का उत्तर देने से पहले सड़क से किनारे हो जाएं.

विस्फोटक क्षेत्र

फोन का उपयोग ऐसे स्थान पर न करें जहाँ विस्फोट हो रहे हों. प्रतिबंधों पर ध्यान दें, और नियम या शर्तों का पालन करें.

संभावित रूप से विस्फोट वाले वातावरण

फोन का उपयोग ईंधन भरने के स्थान पर न करें. ईंधन या रसायनों के पास उपयोग न करें.

एयरक्राफ्ट में

वायरलेस डिवाइस से एयरक्राफ्ट में बाधा उत्पन्न हो सकती है.

- › किसी विमान पर चढ़ने से पहले अपना मोबाइल फोन बंद कर दें.

बच्चे

फोन को बच्चों की पहुँच से दूर किसी सुरक्षित स्थान पर रखें. इसमें ऐसे कई भाग होते हैं, जिन्हें हटाने पर श्वासरोधन होने का खतरा हो सकता है.

आपातकालीन कॉल्स

आपातकालीन कॉल सभी सेल्युलर नेटवर्क में उपलब्ध नहीं होते हैं। इसलिए, आपको आपातकालीन कॉल्स के लिए केवल फोन पर ही निर्भर नहीं रहना चाहिए। अपने स्थानीय सेवा प्रदाता से इसकी जानकारी लें।

बैटरी जानकारी और देखभाल

- › **बैटरी पुनः चार्ज** करने से पहले आपको इसे पूर्ण रूप से डिस्चार्ज करने की आवश्यकता नहीं है। अन्य बैटरी सिस्टम्स के विपरीत, ऐसा कोई मेमोरी प्रभाव नहीं है जिससे बैटरी के प्रदर्शन पर असर पड़ता है।
- › केवल LG बैटरियाँ और चार्जर का ही उपयोग करें। LG के चार्जर्स बैटरी का जीवन बढ़ाने के लिए बने होते हैं।
- › बैटरी पैक को अलग-अलग न करें या उसे शॉर्ट-सर्किट से बचाएँ।
- › जब बैटरी स्वीकार्य कार्यक्षमता प्रदान नहीं करती है, तो आप इसे बदल दें। बैटरी बदलने की आवश्यकता होने के पहले, बैटरी को सैकड़ों बार रीचार्ज किया जा सकता है।
- › बैटरी चार्जर को सीधे धूप में न रखें या अधिक नमी वाली जगहों पर जैसे कि बाथरूम में इसका उपयोग न करें।
- › यदि बैटरी गलत प्रकार से बदली है, तो विस्फोट का खतरा हो सकता है।
- › निर्माता के अनुदेशों के अनुसार उपयोग की गई बैटरी नष्ट कर दें।

रेडियो फ्रीक्वेंसी ऊर्जा के संपर्क में आना

रेडियो तरंगों से संपर्क और विशिष्ट अवशोषण दर (स्पेसिफिक एब्जॉर्शन रेट) (SAR) की जानकारी

यह मोबाइल फोन मॉडल GS190 रेडियो तरंगों के एक्सपोजर के लिए लागू सुरक्षा आवश्यकताओं का पालन करने के लिए डिजाइन किया गया है। यह आवश्यकताएँ उन वैज्ञानिक दिशानिर्देशों पर आधारित हैं, जिसमें आयु और स्वास्थ्य पर ध्यान दिए बिना सभी व्यक्तियों की सुरक्षा सुनिश्चित करने के लिए सुरक्षा सीमाएँ शामिल हों।

- रेडियो तरंग एक्सपोजर दिशानिर्देश माप की इकाई का प्रयोग करता है जिसे स्पेसिफिक एब्सोर्प्शन रेट या SAR कहते हैं। फोन पर SAR के परीक्षण मानक विधियों के उपयोग से किए जाते हैं, इसके लिए उपयोग होने वाले सभी फ्रीक्वेंसी बैंड्स में फोन के उच्चतम प्रमाणित पॉवर स्तर पर संप्रेषण किया जाता है।
- विभिन्न LG फोन मॉडल के SAR स्तरों में अंतर हो सकते हैं, लेकिन उन्हें रेडियो तरंगों के एक्सपोजर के लिए संगत दिशानिर्देशों को पूर्ण करने के लिए बनाया गया है।
- अंतर्राष्ट्रीय आयोग नॉन-आयोनाइजिंग रेडिएशन प्रोटेक्शन (ICNIRP) द्वारा अनुशंसित SAR सीमा टिश्यू के दस (10) ग्राम के ऊपर 2W/kg औसत है।
- इस मॉडल फोन के लिए DASY4 द्वारा कान पर उपयोग करने के लिए परीक्षण किया गया उच्चतम SAR मान 0.966W/kg (10g) और जब शरीर पर पहना जाता है, तो 1.07W/kg (10g) होता है।
- देशों/क्षेत्रों के निवासियों के लिए SAR डेटा जानकारी इलेक्ट्रिकल एवं इलेक्ट्रॉनिक्स इंजीनियर्स संस्था (IEEE) द्वारा अनुशंसित SAR सीमा को अपनाया है जो एक (1) से ऊपर 1.6W/kg औसत है। (उदाहरण के लिए यूएसए, कनाडा, ऑस्ट्रेलिया और ताइवान)।

आपके मोबाइल फोन के लिए विभिन्न सहायक उपकरण हैं। आप अपनी व्यक्तिगत संप्रेषण आवश्यकताओं के अनुसार इन विकल्पों का चयन कर सकते हैं।

मानक बैटरी



USB केबल और CD

फोन और पीसी में डेटा बदलने के लिए आप अपने फोन को पीसी से कनेक्ट कर सकते हैं।



हेडसेट




नोट

- › हमेशा प्रामाणिक LG सहायक उपकरणों का उपयोग करें। ऐसा नहीं करने पर आपकी वॉरंटी अमान्य हो जाएगी।
- › एक्सेसरीज भिन्न क्षेत्रों में भिन्न हो सकती हैं; कृपया अधिक पूछताछ के लिए हमारे क्षेत्रीय सेवा कंपनी एजेंट से संपर्क करें।

यात्रा एडॉप्टर

इसे कनेक्ट करें और USB केबल जोड़ें। यह आपको बैटरी चार्ज करने की अनुमति देता है।



सामान्य

- › उत्पाद का नाम : GS190
- › सिस्टम : GSM 900 / DCS 1800

परिवेश का तापमान

- › अधिकतम : +55°C,
चार्ज हो रहा है
(0~+45°C)
- › न्यूनतम : -10°C

Declaration of Conformity



LG Electronics

Suppliers Details

Name

LG Electronics Inc

Address

LG Electronics Inc. LG Twin Towers 20,
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

Product Details

Product Name

GSM 900 / DCS 1800 Dual band Terminal Equipment

Model Name

GS190, GS200

Trade Name

LG

C E 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 V1.6.1, EN 301 489-07 v1.3.1, EN 301 489-17 v1.2.1

EN 301 511 V9.0.2

EN 50360:2001/ EN 62209-1:2006

EN 60950-1 : 2001

EN 300 328 V1.7.1

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Foreyth House-Churchfield Road - Walton-on-ThamesSurrey - KT12 2TD , United Kingdom

Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

Issued Date

Seung Hyoun, Ji / Director 18. Sep. 2009

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36- 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob @ lge.com

Signature of representative

Memo

LG Mobile



WARRANTY CARD

This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

LG 24 x 7 CALL CENTER OPERATIONS	
 1800-180-9999 <small>CALL (Toll Free)</small>	 5757554 <small>SEND (Send SMS)</small>
 www.lgindia.com lgservice@lgindia.com	

BRANCH ADDRESSES

S. No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGEIL, 233-234, Platinum Plaza, Judges Bungalow Road, Bodakdev Road, Ahmedabad - 51	079	40040013 / 14
2	Asansol	LGEIL, Block-E, 1st Floor, P.C. Chattarjee Market, Rambandhu Tala, GT Road (E) Asansol - 713303	0341	3292009 / 3292010
3	Aurangabad	LGEIL, 302 CIDCO No 3, Opp Hotel Ramgiri, Jalna Road, Aurangabad - 431003	0240	2474055 / 32095436 / 32095437 / 32095438
4	Bangalore	LGEIL, No 514, 2nd Floor, Sri Venkateshwara Complex, Opp. BP Petrol Bunk, 80th Road, 6th Block, Koramangala - Bangalore - 560095	080	41145145 / 41144750 / 41144751 / 30910754 / 30910753
5	Bhopal	13A Vignes Warehousing Corporation, Sector-G Govindpura Industrial Area J K Road Bhopal	0755	4062900 / 3092938 / 3959804
6	Bhubaneswar	LGEIL, Plot No. 02, 1st Flr., Bapuji Nagar, Bhubaneswar - 751009	0674	2531430 / 2534280 / 3966525 / 3966526
7	Chandigarh	LGEIL, SCO No. 142-143, 3rd Floor, Sector-34A Chandigarh. - 160002	0172	5087389 / 90 / 5089107 / 3256001 / 3256003
8	Chennai	LGEIL, AA11, 2nd Avenue, Fatima Tower, Anna Nagar West, Chennai - 600040	044	65510501 ~ 04
9	Cochin	LGEIL, 40/1270, Vasudeva Buildings, T.D. Road, Erumakulam Cochin - 682011	0484	2369743 / 2370744 / 2370484 / 4027444 / 4027555
10	Coimbatore	LGEIL, 250a, Sanganur Main Road, Kannappa Nagar, Coimbatore - 641027	0422	2332197 / 2332195 / 2332506 / 3094613 / 3094573
11	Dehradun	LGEIL, M - 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2644213 / 283
12	Delhi	LGEIL, A-27, Mohan Co-operative, Industrial Estate, New Delhi	011	26991411 / 12 / 13
13	Ghaziabad	LGEIL, J-10, RDC Rajnagar Ghaziabad - 201001	0120	9811354152 / 3 / 64 / 65
14	Goa	LGEIL, Plot No. D-36D-4, Rego Baug, Alto Santacruz, Bambolim, Goa - 403	0832	3294955 / 3294956 / 3294759
15	Gurgaon	LGEIL, I Ind Flr. A Block, Centre Point Bldg, Sushant Lok, PH-I, Gurgaon - 122001	0124	4047461 / 62 / 63 / 4272867 / 4047460
16	Guwahati	LGEIL, Shantmeer Bhawan, C K Aggarwal Path, Chenikurthi, Guwahati - 781003	0361	2663895 / 2666958 / 2665983 / 2668984
17	Hubli	LGEIL, 603/1B, Ravi Nagar Road, Behind Renuka Petrol Pump, Gokul Road, Hubli - 580030	0836	4250251 / 52 / 2337251 / 52
18	Hyderabad	LGEIL, 1st Floor, Survey No.54, Pulla Reddy Building, Vikarampuri Main Road Kharkhana, Secunderabad - 500004	040	27811732 / 33 / 34
19	Indore	LGEIL, 3rd flr., 304 Bansi Trade Centre, 58/1 S.M.G. Road, Indore - 452003	0731	4065523 / 24 / 40822157
20	Jaipur	LGEIL, B-71, Sahakar Marg, Lal Kothi Scheme, Jaipur - 302015	0141	5111118 / 5113028 / 5105392
21	Jalandhar	LGEIL, Village Khajuria, Near Hawali Restaurant Jalandhar, Phagwara Highway, G T Road, Jalandhar	01824	502667 / 508025 / 502668
22	Jammu	LGEIL, Plot No. -52, Yard No. 6, Transport Nagar, Narwal, Jammu - 180006	0191	2477420 / 2474719 / 2474396 / 2474384
23	Jodhpur	LGEIL, 221(A)-212(B)/2, RIICO Heavy Industrial area, Jodhpur - 342003	0291	2742384 / 392
24	Kolkata	LGEIL, 1, Ho-Chi-Min-Sarani, 6th Floor, Metro Towers, Kolkata - 700071	033	22883250 / 51 / 52
25	Kundli	LGEIL, Sunshine Enterprises, Sunder Cold Storage, Gt Karnal Road, Kundli - Sonipat	0130	2219201 / 02 / 03
26	Lucknow	LGEIL, B-537, Hari Kunj, Keshav Nagar, Sitapur Road Lucknow - 226020	0522	2757538 / 39 / 2759121
27	Ludhiana	LGEIL, Village Jhande, Near Badawal Railway Station, Opp ferozpur Road Ludhiana.	0161	2804413 / 19
28	Mumbai	LGEIL, Trade Star, 4th Floor, A Wing, J B Nagar, Andheri Kurla Road, Andheri (E) Mumbai - 400059	022	28352882 - 2887
29	Nagpur	LGEIL, Sa, Road No.13, Behind Msr Workshop, MIDC Hinga, Nagpur - 440016	07104	2551283 / 255122
30	Patna	LGEIL, 2nd Floor, Ankit Chandra Deep Complex, Bander Bageecha, Near Samrat Hotel, Patna - 800001.	0612	3299156
31	Pune	LGEIL, 105/106, Premium Point, GM Road, Opp Modern High School, IIIRD Floor, Shivaji Marg, Pune - 411005	020	6600100 / 732
32	Raipur	LGEIL, Nathani Compound, Shyam Nagar, Katora Talab, Raipur (C.G)	0771	4053171 / 4037470 / 4048745
33	Ranchi	LGEIL, 402, Commerce Tower, Opp. Gel Church Complex, Main Road, Ranchi	0651	3294026 / 231815 / 3090426
34	Surat	LGEIL, 1001-1004, Ascon Plaza, Ind Flr, Anand Mahal Road, Behind Bhulka Bhavan School, Adajan, Surat - 395009	0261	2730982 / 83 / 84
35	Thane	LGEIL, Gal Shop No - 206, 207, 2nd Floor, Sa Plaza, Above Vijay Sales Opp. Cine Wonder Mall, Ghodunder Road, Thane(West) - 400607	022	2542633 / 2637
36	Varanasi	LGEIL, Pama Complex, D.W., Lahartara Road, Shivdaspur, Manduadih, Varanasi UP - 221002	0542	2373452 / 36 / 37
37	Vijaywada	LGEIL, Door No 32-21-7, Ratnamamba Street, Prajapatti Nagar, Vijaywada - 520010, Andhra Pradesh	0866	2497283 / 87
38	Warangal	LGEIL, HOUSE NO. 1-8-598/1 FIRST FLOOR, BESIDE HDFC BANK NAKKALGUTTA, HANAMAKONDA-506001 (WARANGAL)	0870	2551453



Dealer name with Stamp **Dealer address**
IMEI No. **Date of sale** **Serial no.**

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

CHOLAMANDALAM MS GENERAL INSURANCE CO. LTD.
2nd Floor, 9B, DLF Cyber City, Phase-III,
Gurgaon - 122002

TO

CHOLAMANDALAM MS GENERAL
INSURANCE CO. LTD.

DATE...../...../.....

2nd Floor, 9B, DLF Cyber City,
Phase-III, Gurgaon - 122002.
Haryana

Dear Sir,

RE: Loss of mobile phone no.:

MAKEMODEL

This is to inform that my mobile phone has been lost due to theft on
.....at.....FIR/DD entry has been lodged
with Police Station. I am enclosing the Claim
Form cum Bill along with required documents for settlement of the claims.

Thanking you

Yours Sincerely,

Signature of the Insured

Name

CLAIM FORM CUM CLAIM BILL

To be filled in by the ultimate consumer

Name

Present Address

Tel. No.

Make & Model of the Handset

Invoice No. Date of Purchase

Dealer Name

Address

Tel. No.

IMEI No.

Date of Theft Time

Place of Theft

Details of Theft

FIR No./DD No. Date

Police Station

Amount Claimed

Block the SIM Card within 3 days

YES ☐

NO ☐

DATE

PLACE

SIGNATURE OF CUSTOMER

TERMS AND CONDITIONS:

POLICY COVERAGE

1. Theft coverage of LG GSM HANDSET for one year from the date of purchase/invoice only.No other loss covered.
2. Offer applicable on all purchases made from 7th April 2010 to 6th April 2011 under Policy No. **PBG-00016391-000-00** Dated 07/04/2010
3. Only theft registered under section 379 IPC or theft reported under Daily Dairy with Police FIR is covered.
4. Reimbursement will be subject to following depreciation/ deduction on the invoice value from date of purchase:

Handset upto 3 months old	-10%
More than 3 months upto 6 months	-15%
More than 6 months upto 9 months	-25%
More than 9 months upto 12 months	-35%

CLAIM PROCESSING DOCUMENTS

In the event of handset loss, the buyer should follow the understated procedure:

- a) (i) Lodge FIR under Section 379 IPC or theft to be entered in Daily Dairy with the Police Station in whose jurisdiction the theft occurred within 24 hours of occurrence of the same.
- (ii) Block the SIM Card with your service provider within 3 days.
- (iii) Send information to the insurance company within 7 days of the loss.
- b) Documents required:
 - (i) Original Invoice & Cash Memo.
 - (ii) Original certified copy of DD/FIR u/s 379 by the police authority.
 - (iii) Translation of vernacular documents in English/Hindi.
 - (iv) Complete claim Form cum Bill and Discharge Voucher.

These documents should be sent to the Policy Issuing Office within 7 days of the loss by regd. post/courier. All document to be submitted in English/Hindi language. The company reserves the right to call for any other necessary document in addition to the documents listed above.

Subject to all the conditions being fulfilled, claim will be settled within 15 days of our receipt of the above documents.

Deduction of Rs. 350/- will be applicable towards accessories.

Note: In case the handset cost is more than Rs. 20,000/-, a survey is required. Contact nearest office of Cholamandalam MS General Insurance Co. Ltd. for survey.

For any future queries assistance related to the policy exclusion and claim settlement you may write to Cholamandalam MS General Insurance Co. Ltd. 2nd Floor, 9B, DLF Cyber City, Phase-III, Gurgaon - 122002. Tel. No. 1800-200-5544, Fax No. 0124-30051-99, e-mail id : customercare@cholams.murugappa.com



DISCHARGE VOUCHER

Received from Cholamandalam MS General Insurance Co. Ltd. under Policy No..... in full and final discharge of our claim, the sum of (in words)
Rs.

Signature of Insured /Customer
across revenue stamp

Affix Re.1 revenue stamp

Date:

Place:

Customer Information Center

For any query related to the after sales service and customer support please contact us at below details

 **LG**

24 x 7 CALL CENTER OPERATIONS

 **1800-180-9999**
CALL (Toll Free)

 **5757554**
SMS (Send SMS)

 **CLICK**

www.lgindia.com
lgservice@lgindia.com

Memo