

Gigaset

S790 - S795

Issued by Gigaset Communications GmbH, Frankenstr. 2a, D-46395 Bocholt
Manufactured by Gigaset Communications GmbH under trademark license of Siemens AG.

As of 1 Oct. 2011 Gigaset products bearing the trademark 'Siemens' will exclusively use the trademark 'Gigaset'.
© Gigaset Communications GmbH 2010. All rights reserved. Subject to availability. Rights of modification reserved. www.gigaset.com

Gigaset

S790 - S795



Gigaset S790/S795 – more than just a telephone

Your telephone sets new standards for the way you communicate at home.

The configuration and user interface of the cordless phone are excellent, providing you with first-class voice quality in speaker mode, while the USB port offers you enormous flexibility.

The large TFT display, user-friendly keypad and clearly laid out menu are very simple to use.

Your phone can do a whole lot more:

- ◆ You can synchronise your directories on your telephone, mobile phone and PC via the USB port using the Gigaset QuickSync software (→ page 83).
- ◆ You can save appointments (→ page 53) and anniversaries, e.g., birthdays (→ page 32), in your phone and it will remind you of them in advance.
- ◆ You can designate important people as VIPs to identify important calls from the ringtone (→ page 30).
- ◆ You can assign a picture to entries in the directory – in future the picture will appear every time you receive a call from this number (→ page 30).
- ◆ If you do not want to take calls where the caller has withheld their number, just set your handset to only ring if Calling Line Identification has not been withheld (→ page 64).
- ◆ If you do not wish to be disturbed, you can simply set up a time control so that your phone will only ring when it is convenient (→ page 63). VIP calls are still connected.
- ◆ You can assign important numbers to the number keys on your phone. The number is then dialled by simply pressing a key (→ page 60).
- ◆ Adapt your Gigaset to suit your handsfree requirements (→ page 63) and adjust the brightness of your keypad to suit you (→ page 62).
- ◆ View your personal pictures as a screensaver slide show (→ page 61).
- ◆ You can set the display to large font to increase readability in particularly important situations (e.g., the directory and lists) (→ page 62).
- ◆ You can adapt the menu display to suit your individual requirements so that only the most important functions (**standard mode**) or all functions (**expert mode** ) are displayed (→ page 25). Menu options that are only available in expert mode are marked with the  icon.
- ◆ Gigaset Green Home — Be environmentally aware when using your phone. Details about our ECO DECT products can be found at www.gigaset.com/service.

You can find additional information about your phone at www.gigaset.com/gigasets790.

Have fun using your new phone!

The handset at a glance



- 1 **Display** in idle status
- 2 **Battery charge status** (→ page 16)
- 3 **Side keys**
Set call (→ page 62) or ringtone volume (→ page 63)
- 4 **Display keys** (→ page 20)
- 5 **Message key** (→ page 35)
Access to call and message lists;
Flashes: new message or new call
- 6 **End call key, On/Off key**
End call, cancel function, go back one menu level (press briefly), back to idle status (press and hold), activate/deactivate handset (press and hold in idle status)
- 7 **Hash key**
Keypad lock on/off (press and hold in idle status);
toggles between upper/lower case and digits
- 8 **Mute key** (→ page 29)
Mute the microphone
- 9 **Microphone**
- 10 **Recall key**
- Consultation call (flash)
- Insert a dialling pause (press and hold)
- 11 **Star key**
Ringtone on/off (press and hold);
with an open connection: switch between pulse dialling/tone dialling (press briefly);
text input: open table of special characters
- 12 **Headset socket** (→ page 17)
- 13 **Key 1**
Dial answering machine (S795 only)/network mailbox (press and hold)
- 14 **Talk key**
Flashes: incoming call;
Accept a call; open redial list (press briefly);
start dialling (press and hold);
When writing an SMS: send SMS
- 15 **Speaker key**
Switch between earpiece and speaker mode
- 16 **Control key** (→ page 19)
- 17 **Signal strength** (→ page 16)
Green: Eco Mode (→ page 52) activated
- 18 **Answering machine symbol** (S795 only)
Answering machine switched on;
Flashes: answering machine is recording a message or is being operated by another internal party

Display symbols

The following symbols are displayed dependent on the settings and the operating status of your telephone:

- Signal strength (→ page 52)
or ECO Mode+ icon (→ page 52)
- Answering machine switched on (S795 only, → page 4)
- Ringtone switched off (→ page 64)
- Keypad lock switched on (→ page 22)
- Batteries are charged (→ page 16)
- Charge status of the batteries (→ page 16)
- Alarm switched on and wake-up time set (→ page 55)
- Current time (→ page 15)
- Current day and month (→ page 15)
- Name of the handset (→ page 58)
- Number of new messages:
 - ◆ on the network mailbox (→ page 35)
 - ◆ in the list of missed calls (→ page 35)
 - ◆ in the SMS list (→ page 39)
 - ◆ in the list of missed appointments (→ page 35)

Signalling

External call (→ page 28)



Alarm (→ page 55)



Internal call (→ page 56)



Anniversary (→ page 53)



Answering machine is recording (→ page 45)




Appointment (→ page 53)



The base at a glance

You can use the keys on the base to register handsets to the base, search for handsets (paging), (→ page 56) and operate the integrated answering machine (Gigaset S795 only).

Gigaset S795 base

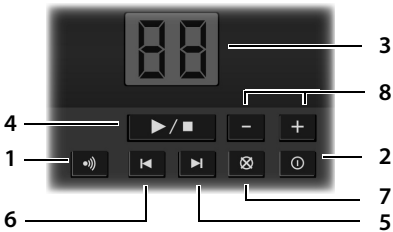

- 1 **Registration/Paging key**
Press **briefly**: search for handsets (paging) (→ page 56).
Press and **hold**: register handsets and DECT devices (→ page 55).
- 2 **On/Off key**
Activating/deactivating the answering machine.
- 3 **Display**
Lights up: answering machine is activated.
The number of saved messages is displayed.
00 flashes: the answering machine is recording a new message.
Flashes slowly: there are new messages. The number of **new** messages is displayed.
99 flashes quickly: the answering machine is full.

During message playback:

- 4 **Play/Stop key**
Play back new messages from answering machine or cancel playback (press **briefly**).
Play back new and old messages (press and **hold**).
- 5 Skip to next message (press once) or skip ahead two messages (press twice).
- 6 Skip back five seconds (press **briefly** once), skip back to the beginning of the message (press and **hold**) or skip back to the previous message (press twice).
- 7 Delete current message.
- 8 Adjust **volume** during message playback: = quieter; = louder.
While an external call is being signalled: adjust ringtone volume.

Please note:

If the answering machine is being operated from a handset or if it is recording a message (00 flashes), it cannot be operated from the base at the same time.

Gigaset S790 base



Registration/Paging key

- Press **briefly**: search for handsets (paging) → page 56.
- Press and **hold**: register handsets and DECT devices (→ page 55).

Contents

Gigaset S790/S795 – more than just a telephone	1
The handset at a glance	2
Display symbols	3
The base at a glance	4
Safety precautions	8
First steps	9
Checking the package contents	9
Setting up the base and charger (if included)	10
Connecting the base	10
Connecting the charger (if included)	11
Setting up the handset for use	12
Setting the date and time	15
Connecting the headset	17
Connecting the USB data cable	17
What would you like to do next?	18
Using the phone	19
Control key	19
Display keys	20
Keys on the keypad	20
Side keys	20
Correcting incorrect entries	20
Using the menus	21
Activating/deactivating the handset	22
Activating/deactivating the keypad lock	22
Using this guide	23
Menu overview	25
Making calls	28
Making an external call	28
Ending a call	28
Accepting a call	28
Calling Line Identification	28
Speaker mode	29
Switching to mute	29

Using the directory and lists	30
Directory	30
Redial list	33
Incoming SMS message list	34
Answering machine list (Gigaset S795 only)	34
Call lists	34
Opening lists with the message key	35
List of missed alarms	35
Making cost-effective calls	36
Automatic network provider code (preselection)	36
SMS (text messages)	37
Writing/sending an SMS	37
Receiving an SMS	39
SMS with vCard	41
Notification via SMS	41
SMS mailboxes	41
Setting SMS centres	42
SMS on a PABX	43
Activating/deactivating SMS function	43
SMS troubleshooting	44
Operating the Gigaset S795 base answering machine	45
Operating via the handset	45
Activating/deactivating call screening	48
Setting the recording parameters	48
Resetting fast access for the answering machine using key 1	49
Operating when on the move (remote operation)	49
Using the network mailbox	51
Configuring fast access for the network mailbox	51
Viewing the network mailbox message	51
ECO DECT	52
Setting an appointment (calendar)	53
Displaying missed appointments, anniversaries	54
Setting the alarm clock	55
Using multiple handsets	55
Registering handsets	55
De-registering handsets	56
Locating a handset ("Paging")	56
Changing the base	56
Making internal calls	56
Listening in to an external call	58
Changing the name of a handset	58
Changing a handset's internal number	58
Using a handset as a room monitor	59

Handset settings	60
Quick access to numbers and functions	60
Changing the display language	61
Setting the display	61
Setting keypad illumination	62
Activating/deactivating auto answer	62
Changing the speaker/earpiece volume	62
Setting a handsfree profile	63
Changing ringtones	63
Resource Directory	64
Activating/deactivating advisory tones	65
Setting your own area code	66
Restoring the handset default settings	66
Setting the base	66
Changing the Gigaset S795 base ringtones	66
Activating/deactivating music on hold	66
Repeater support	67
Protecting against unauthorised access	67
Resetting the base to the factory settings	67
Connecting the base to the PABX	68
Dialling modes and recall	68
Saving an access code (outside line code)	68
Setting pauses	69
Switching temporarily to tone dialling (DTMF)	69
Customer Service & Assistance	70
Questions and answers	72
Authorisation	73
Warranty	74
Protecting our environment	79
Appendix	80
Caring for your telephone	80
Contact with liquid	80
Specifications	80
Writing and editing text	81
Additional functions via the PC interface	83
Accessories	85
Mounting the base on the wall (Gigaset S790 only)	88
Mounting the charger on the wall	88
Index	89

Safety precautions

Warning

Be sure to read this user guide and the safety precautions before using your telephone. Explain their content and the potential hazards associated with using the telephone to your children.



Use only the power adapter supplied, as indicated on the underside of the base.



Use only **rechargeable batteries** that correspond to the **specification provided on page 80**, as this could otherwise result in significant health risks and personal injury.



Using your telephone may affect nearby medical equipment. Be aware of the technical conditions in your particular environment, e.g., doctor's surgery.



Do not hold the rear of the handset to your ear when it is ringing or when speaker mode is activated. Otherwise you risk serious and permanent damage to your hearing.

Your Gigaset is compatible with the majority of digital hearing aids on the market. However, perfect function with all hearing aids cannot be guaranteed.

The handset may cause an unpleasant humming or whistling noise in hearing aids or cause them to overload. If you require assistance, please contact the hearing aid supplier.



Do not install the base or charger in bathrooms or shower rooms. The base and charger are not splashproof (→ page 79).



Do not use your phone in environments with a potential explosion hazard (e.g., paint shops).



If you give your Gigaset to a third party, make sure you also give them the user guide.



Remove faulty bases from use or have them repaired by our Service department, as they could interfere with other wireless services.

Please note

Not all of the functions described in this user guide are available in all countries.


First steps

Checking the package contents



- 1 One Gigaset S790/S795 base
- 2 One power adapter
- 3 One Gigaset S79H handset
- 4 One phone cord
- 5 Two batteries
- 6 One battery cover
- 7 One belt clip
- 8 One plastic headset socket cover
- 9 One user guide

If you have purchased a **model with multiple handsets** the package should contain two batteries, a battery cover, a belt clip and a charger **9** with power adapter **10** for each additional handset.

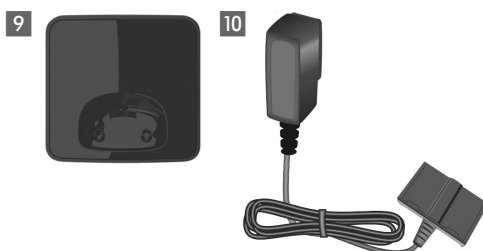

Setting up the base and charger (if included)

The base and charger are designed for use in dry rooms in a temperature range of +5°C to +45°C.

- ▶ Set up the base at a central point in the building on a level, non-slip surface or mount the base (Gigaset S790 only) or charger on the wall (→ page 88).

Please note

Pay attention to the range of the base.

This is up to 300 m in unobstructed outdoor areas and up to 50 m inside buildings. The range is reduced when Eco Mode (→ page 52) is activated.


The phone's feet do not usually leave any marks on surfaces. However, due to the multitude of different varnishes and polishes used on today's furnishings, the occurrence of marks on the surfaces cannot be completely ruled out.

Please note:

- ◆ Never expose the telephone to the influence of heat sources, direct sunlight or other electrical devices.
- ◆ Protect your Gigaset from moisture, dust, corrosive liquids and fumes.

Connecting the base


- ▶ **First** connect the telephone jack **2** and insert the cables into the cable ducts.
- ▶ **Then** connect the power adapter **1**.

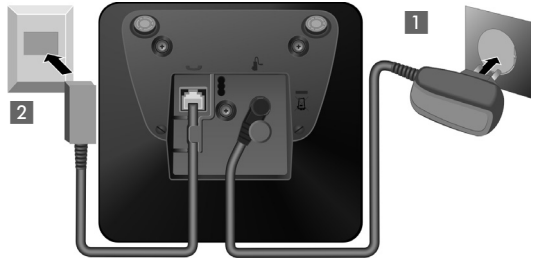

Please note:


- ◆ The power adapter must **always be connected**, as the phone will not operate without a mains connection.
- ◆ Use only the power adapter and phone cord **supplied**. Pin connections on telephone cables can vary (pin connections → page 81).

Connecting the charger (if included)

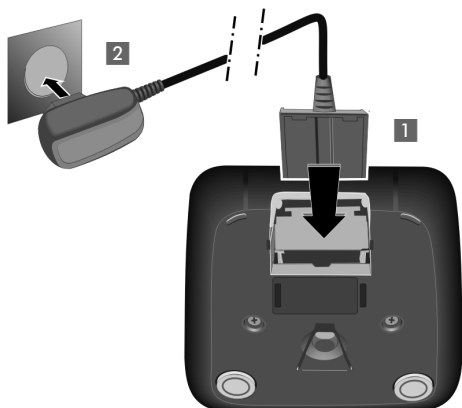

- ▶ Connect the flat plug from the power adapter **1**.
- ▶ Plug the power adapter into the plug socket **2**.

To disconnect the plug from the charger, press the release button **1** and disconnect the plug **2**.



Setting up the handset for use


The display and keypad are protected by plastic films.
Remove the protective films!

Inserting the batteries and closing the battery cover

Warning

Use only rechargeable batteries recommended by Gigaset Communications GmbH (→ page 80), i.e., Never use conventional (non-rechargeable) batteries, as this could result in significant health risks and personal injury. For example, the outer casing of the batteries could be damaged or the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.

- ▶ Insert the batteries with the polarity in the correct direction.
The polarity is indicated in/on the battery compartment.

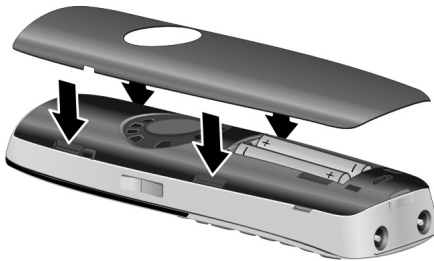

- ▶ First insert the battery cover at the top.
- ▶ Then press the cover until it clicks into place.

To open the battery cover, for instance to replace the batteries, insert a coin into the cavity on the left-hand side of the casing, then pull the battery cover in an upward direction.




- ▶ Insert the plastic cover provided for the headset socket to ensure optimum sound in speaker mode.



Attaching the belt clip

The handset has notches on each side to attach the belt clip.

- ▶ **To attach** — press the belt clip onto the back of the handset so that the protrusions on the belt clip engage with the notches.
- ▶ **To remove** — press the centre of the belt clip firmly with your right thumb, push the fingernail of your left index finger up between the clip and the housing and pull the clip in an upward direction.

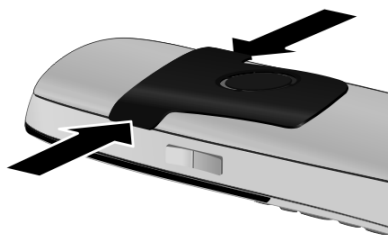

Placing the handset in the base/charger

- ▶ Place the handset in the base/charger with its **display facing forward**.

Each handset is registered with the base at the factory. You do not need to register the handset again. If you wish to use your handset with a different base or use further handsets with your base, you have to register the handset manually (→ page 55).

To charge the batteries, leave the handset in the base/charger.

Please note

Only place the handset in the designated base/charger.

First battery charge and discharge

The correct charge level can only be displayed if the batteries are first fully charged and discharged.



▶ Charge the handset for **8.5 hours** in the base/charger.




▶ Then remove the handset from the base/charger and do not replace it until the batteries are fully charged.

Please note

- ◆ After the first battery charge **and** discharge, you may replace your handset in the base/charger after every call.
- ◆ Always repeat the charging and discharging procedure if you remove the batteries from the handset and reinsert them.
- ◆ The batteries may warm up during charging. This is not dangerous.
- ◆ After a while, the charge capacity of the batteries will decrease for technical reasons.

Setting the date and time

Set the date and time so that the correct date and time can be assigned to incoming calls, and so that the alarm can be used.

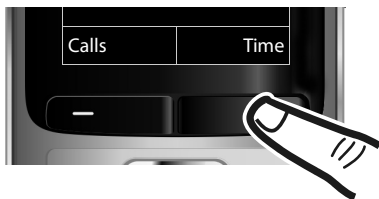


- ▶ Press the key below **Time** on the display screen to open the input field. (If you have already set the time and date, open the input field via the menu → page 27.)




The **Date/Time** submenu is shown on the display.

- ▶ The active input position flashes. Enter day, month and year as an 8-digit number via the keypad, e.g.,

 for 14/10/2009.



Press the **right** or **left** control key to change the input position and correct an entry.



- ▶ Press **down** on the control key to switch to the time input field.

- ▶ Enter the hours and minutes in 4-digit format via the keypad, e.g.,
 for 07:15 am.
 Change the input position with the control key if necessary.






► Press the key below **Save** on the display screen to confirm your entry.








The display shows **Saved**. You will hear a confirmation tone and the handset will automatically return to idle status.

Display in idle status

Once the phone is registered and the time is set, the idle display is shown as in this example. If the answering machine is activated, the answering machine icon  is displayed in the header.

Displays

◆ Reception between the base and the handset:

- Poor to good:    
- No reception: 


Green: Eco Mode activated (→ page 52)

◆ Charge status of the batteries:

-     (empty to full)
-  flashes red: batteries almost empty
-    (charging)


◆ INT 1

Internal name of the handset (→ page 58)

If **Eco Mode+** (→ page 52) is activated, the  icon is displayed in the top left corner of the display.

Your answering machine is set with a pre-recorded announcement.

Your phone is now ready for use!



Connecting the headset



After removing the plastic cover, you can connect a headset to the left-hand side of your telephone with the 2.5 mm jack connector.

See the relevant product page at www.gigaset.com for information on recommended headsets.

The headset volume corresponds to the settings for the handset volume (→ page 62).

After using the headset, replace the plastic cover to enable optimum sound in speaker mode.

Connecting the USB data cable

You can connect a standard USB data cable with a mini-B connector to the back of your handset to connect the handset to a PC (→ page 83).

- ▶ Remove the belt clip (if attached) (→ page 13).
- ▶ Remove the battery cover (→ page 12).
- ▶ Connect the USB data cable to USB socket **1**.

Please note

Please connect your handset **directly** to the PC; do **not** connect via a USB hub.



What would you like to do next?

Now you have successfully set up your Gigaset, you will certainly want to adapt it to your personal requirements. Use the following guide to quickly locate the most important topics.



If you are unfamiliar with menu-driven devices such as other Gigaset telephones, read the section entitled "Using the phone" (→ page 19) first.

Information on is located here.
Setting the ringtone and volume	page 63
Setting the earpiece volume	page 62
Recording your own announcement for the answering machine	page 45
Setting Eco Mode / Eco Mode+	page 52
Preparing the telephone for SMS reception	page 37
Operating the telephone on a PABX	page 68
Registering existing Gigaset handsets to a base	page 55
Transferring directory entries from existing Gigaset handsets to new handset(s)	page 32
Connecting the phone to the PC	page 83


If you have any questions about using your phone, please read the tips on troubleshooting (→ page 72) or contact our Customer Care team (→ page 70).

Using the phone





Control key

Below, the side of the control key that you must press in the respective operating situation is marked in black (top, bottom, right, left, centre), e.g.,  for "press right on the control key" or  for "press the centre of the control key".





The control key has a number of different functions:





When the handset is in idle status

-  Open the directory.
-  Open the main menu.
-  Open the list of handsets.
-  Call up the menu for setting the handset's call volume (→ page 62).







In the main menu

- , ,  or  Navigate to the required function.



In submenus and lists

-  /  Scroll up/down line by line.

In input fields

Use the control key to move the cursor up , down , right  or left . Press and **hold**  or  to move the cursor **word by word**.

During an external call

-  Open the directory.
-  Initiate an internal consultation call.

Functions when pressing the middle of the control key

Depending on the operating situation, the key has different functions.


- ◆ **In idle status** the key opens the main menu.
- ◆ **In submenus, selection and input fields**, the key takes on the function of the display keys **OK**, **Yes**, **Save**, **Select** or **Change**.

Please note

These instructions demonstrate the main menu being opened by pressing the right of the control key and functions being actuated by pressing the appropriate display key. However, if you prefer, you can use the control key as described above.

Display keys


The functions of the display keys change depending on the particular operating situation. Example:

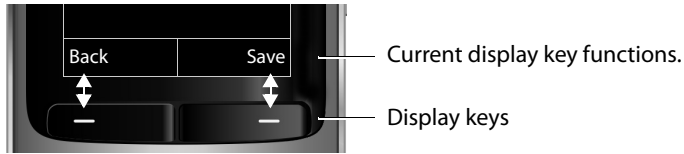


Some important display keys:



Options	Open a menu for further functions.
OK	Confirm selection.
< C	Delete key: delete character by character/word by word from right to left.
Back	Go back one menu level or cancel operation.
Save	Store entry.
→→	Open the redial list.
→ 00	Forwarding a call to the answering machine.

Keys on the keypad

 /  /  etc.
Press the matching key on the handset.


Enter digits or letters.

Side keys

 /  Press the keys on the right of the handset to set the volume for the **handset, ringtone, speaker, alarm**, signalling of **appointments** and the **headset** depending on the situation.


Correcting incorrect entries


You can correct incorrect characters in the input fields by navigating to the incorrect entry using the control key. You can then:

- ◆ Delete the **character** to the left of the cursor with the display key **< C** (**press and hold** to delete the **word**)
- ◆ Insert characters at the cursor position
- ◆ Overwrite the highlighted (flashing) character, e.g., when entering time and date.

Using the menus


Your telephone's functions are accessed using a menu that has a number of levels.

The menu display can be extended (**expert mode** ) or restricted (**standard mode**). Expert mode is the active default setting.

Settings or functions that are only available in expert mode are marked in these instructions by the  icon.


Switching between standard mode/expert mode and the menu overview (→ page 25).

Main menu (first menu level)


- ▶ When the handset is in idle status press the **right** control key  to open the main menu.

The main menu functions are shown in the display with icons. The icon for the selected function is highlighted in orange and the name of the associated function appears in the display header.

To access a function, i.e., to open the corresponding submenu (next menu level):

- ▶ Use the control key  to select the required function and press the display key **OK**.


Briefly press the display key **Back** or the end call key  to revert back to idle status.





Submenus

The functions in the submenus are displayed as lists (example on the right).

To access a function:


- ▶ Scroll to the function with the control key  and press **OK**.

Briefly press the display key **Back** or the end call key  to return to the previous menu level/cancel the operation.



Reverting to idle status

You can revert to idle status from anywhere in the menu as follows:

- ▶ Press and **hold** the end call key .

or:

- ▶ Do not press any key: after 2 minutes the display will **automatically** revert to idle status.

Settings that have not been saved by selecting the display keys **OK**, **Yes**, **Save** or **Change** are lost.

An example of the display in idle status is shown on page 16.

Activating/deactivating the handset



With the phone in idle status, press and **hold** the end call key (confirmation tone) to switch off the handset.
Press and **hold** the end call key again to switch the handset on.

Please note

When the handset is switched on, an animation showing the **Gigaset** logo is displayed for several seconds.

Activating/deactivating the keypad lock

The keypad lock prevents any inadvertent use of the phone.



Press and **hold** the hash key in idle status to activate or deactivate the keypad lock. You will hear the confirmation tone.

If the keypad lock is activated, you will see a message when you press a key.

The keypad lock deactivates automatically when you receive a call. It is reactivated when the call is finished.

Please note



When the keypad lock is active, you cannot even call emergency numbers.

Using this guide


The operating steps are shown in abbreviated form.


Example:

The illustration:


 →  → **Eco Mode** → **Eco Mode+** (☑ = on)

means:

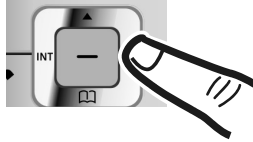


- ▶ Press **right** on the control key  to open the main menu.



- ▶ Press right, left, down and up on control key  to navigate to the **Settings** submenu.

- ▶ Press the display key **OK** to confirm your selection.




- ▶ Press down on the control key  until the **Eco Mode** menu option appears on the display.

- ▶ Press the display key **OK** to confirm your selection.

Using the phone



- ▶ Press down on the control key  until the **Eco Mode+** menu option appears on the display.


- ▶ Press the display key **Change** to activate/deactivate the function.



The change is effective immediately and does not need to be confirmed.



- ▶ Press the key below **Back** on the display screen to jump back to the previous menu level.

or

Press and **hold** the end call key  to return to idle status.

Menu overview

Setting standard mode or expert mode

The menu display can be extended (**expert mode** ) or restricted (**standard mode**). Menu options that are only available in expert mode are marked with the  icon.

To change these settings:

Select  →  → **Menu View** → **Simplified** (standard mode) or **Complete** (expert mode) → **Select** (the active mode is marked with )

Open the main menu: press  when the phone is in idle mode.

 **Alarm Clock** → page 55

Resource Directory

Screensavers	→ page 65
Caller Pictures	→ page 65
Sounds	→ page 65
Capacity	→ page 65

★ Additional Features

Room Monitor → page 59

Call Lists


All Calls	→ page 34
Outgoing Calls	→ page 34
Accepted Calls	→ page 34
Missed Calls	→ page 34

 **SMS**








You have activated an SMS mailbox (general or private) without a PIN

New SMS	→ page 37
Incoming	→ page 40
Draft	→ page 38

You have activated an SMS mailbox with a PIN or 2–3 mailboxes

Mailbox	New SMS	→ page 37
	Incoming	→ page 40
	Draft	→ page 38
Mailbox 1 Mailbox 2 Mailbox 3	New SMS	→ page 37
	Incoming	→ page 40
	Draft	→ page 38
 Settings	Service Centres	→ page 43
	SMS Mailboxes	→ page 41
	Notification	→ page 41
	Status Report	→ page 38

 **Voice Mail**

Play Messages	Network Mailbox	→ page 51
	Answering Machine *	→ page 45
Activation *	→ page 45	
Announcements *	Rec. Announcement *	→ page 45
	Play Announcement *	→ page 45
	Del. Announcement *	→ page 45
	 Rec. Advisory Msg. *	→ page 45
	 Play Advisory Msg. *	→ page 46
 Del. Advisory Msg. *	→ page 46	
 Recordings *	→ page 48	
 Call Screening *	→ page 48	
 Network Mailbox **	→ page 51	
 Set Key 1 *	Network Mailbox	→ page 51
	Answering Machine	→ page 51

* Base with answering machine only

** Base without answering machine only






 **Organizer**

Calendar	→ page 53
Missed Alarms	→ page 54

 Directory

→ page 30

 Settings


Date/Time	→ page 15
Audio Settings	Handset Volume → page 62
	Handsfree Profiles → page 63
	 Advisory Tones → page 65
	Ringtones(Handset) → page 63
	Ringtones (Base) → page 66
	 Music on hold → page 66
Display + Keypad	Screensaver → page 61
	Large Font → page 62
	Colour Schemes → page 62
	 Display Backlight → page 62
	Keypad Illumination → page 62
Language	→ page 61
Registration	Register Handset → page 55
	De-reg. Handset → page 56
	Select Base → page 56
 Telephony	Auto Answer → page 62
	Area Codes → page 66
	Listening In → page 58
	Preselection → page 36
	Access Code → page 68
	Dialling Mode → page 68
	Recall → page 68
 System	Handset Reset → page 66
	Base Reset → page 67
	Repeater Mode → page 67
	System PIN → page 67
Menu View	Simplified → page 25
	Complete → page 25
Eco Mode	Eco Mode → page 52
	Eco Mode+ → page 52

Making calls



If the backlight is deactivated (→ page 62) it is switched on by pressing any key. In this case the pressed key has no other function.


Making an external call

External calls are calls using the public telephone network.

 Enter the number and press the talk key.

or:

 Press and **hold** the talk key  and then enter the number.


You can cancel the dialling operation with the end call key .

You are shown the duration of the call while the call is in progress.


Please note

Dialling with the directory (→ page 30), call list (→ page 34), redial list (→ page 33) and automatic redial (→ page 33) saves you from repeatedly keying in phone numbers.




Ending a call

 Press the end call key.

Accepting a call

The handset indicates an incoming call in three ways: by ringing, by a display on the screen and by the flashing talk key .

Accept the call by:

- ▶ Pressing the talk key .
- ▶ Pressing the speaker key .
- ▶ Gigaset S790: press the display key **Accept**.
- ▶ Gigaset S795: press the display key →  to divert the call to the answering machine (→ page 48).

If the handset is in the base/charger and the **Auto Answer** function is activated (→ page 62), the handset automatically answers the call when you remove it from the base/charger.

To deactivate the ringtone, press the **Silence** display key. You can accept the call as long as it is displayed on the screen.


Calling Line Identification

When you receive a call, the caller's number is displayed on the screen if the following conditions are met:


- ◆ Your network provider supports CLIP, CLI.
 - CLI (Calling Line Identification): the caller's number is transmitted.
 - CLIP (Calling Line Identification Presentation): the caller's number is displayed.
- ◆ You have requested CLIP from your network provider.
- ◆ The caller has requested CLI from the network provider.

Call display with CLIP/CLI

If the number of the caller is saved in your directory, you will see their name, and if you have assigned a caller picture to that caller, this will also be displayed.

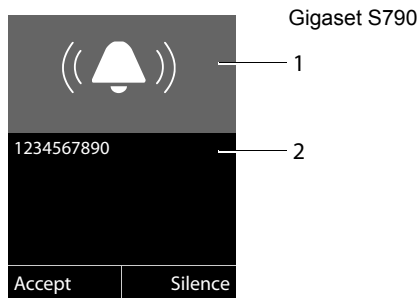

or

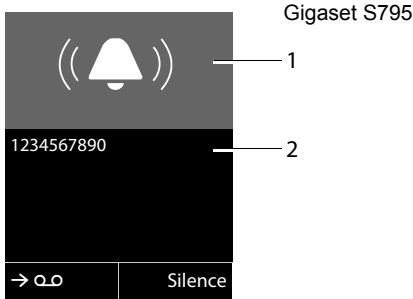

- 1 Ringtone icon
- 2 Number or name of caller

The following is displayed in place of the number:

- ◆ **External**, if no number is transmitted.
- ◆ **Unavailable**, if the caller has not arranged Calling Line Identification.

Please note

The ringtone can be switched off for unknown calls (calls with Calling Line Identification withheld) (→ page 64).

Speaker mode

In speaker mode, instead of holding the handset to your ear you can put it down, for example on the table in front of you. This allows others to participate in the call.

Activating/deactivating speaker mode

Activating while dialling



Enter the number and press the speaker key.

- ▶ Inform your caller before you use the speaker function so that the caller knows a third party may be listening.


Switching between earpiece and speaker mode



Press the speaker key.

During a call and when listening to the answering machine (Gigaset S795 only), activate or deactivate speaker mode.

If you wish to place the handset in the base/charger during a call:

- ▶ Press and hold the speaker key  while placing the handset in the base/charger and for a further 2 seconds.

For instructions on adjusting the speaker volume (→ page 62).

Please note

If you have a headset connected, you can switch between the headset and speaker mode.

Switching to mute



You can deactivate the microphone in your handset during an external call.



Press key to mute the handset. The display shows **Microphone is off**.

Press the key again to reactivate the microphone.

Please note

- ◆ If the telephone is muted, all keys except the mute key  and the end-call key  will not work.
- ◆ A connected headset will also be muted.

Using the directory and lists

The options are:

- ◆ Directory
- ◆ Redial list
- ◆ Incoming SMS message list
- ◆ Call lists
- ◆ List of missed appointments
- ◆ Answering machine list
(Gigaset S795 only).

You can create a personalised directory for your own handset. You can also send lists/entries to other handsets (→ page 32).

Directory

You can save up to 500 entries in the directory.


Please note

To quickly access a number from the directory (quick dial), you can assign the number to a key (→ page 60).

Directory

In the **directory**, you can save:

- ◆ Up to three numbers and associated first names and surnames
- ◆ E-mail addresses
- ◆ Anniversaries with reminder
- ◆ VIP ringtone with VIP icon
- ◆ Caller pictures.

You open the directory in idle status using the  key.

Length of the entries

3 numbers:

each max. 32 digits

First name and surname:

each max. 16 characters

E-mail address:

max. 64 characters

Saving a number in the directory

 → <New Entry>

▶ You can enter data in the following fields:

First Name:/Surname:

Enter first names and/or surnames.




If you do not enter a name in either of the fields, the phone number is saved and displayed in place of a surname.

(For instructions on entering text and special characters, please see

→ page 81.)

Phone (Home):/Phone (Office):/Phone (Mobile):

Enter a number in at least one of the fields.

When scrolling through the directory, the entries are highlighted by a prefixed symbol:  /  / .

E-mail:

Enter the e-mail address.

Anniversary:


Select **On** or **Off**.

With setting **On**:

Enter **Annivers. (Date)** and **Anniversary (time)** and select reminder type: **Anniversary (tone)** → page 32.

Caller Melody (VIP):

Mark a directory entry as a **VIP** (Very Important Person) by assigning a specific ringtone to it. VIP calls are recognised by the ringtone.

When scrolling through the directory, VIP entries are highlighted by the  icon.

Prerequisite: Calling Line Identification (CLIP).

Save

Press the display key.

Caller Picture:

If required, select a picture to be displayed when this person calls (see "Resource Directory", page 64).

Prerequisite: Calling Line Identification (CLIP).

Order of directory entries

Directory entries are generally sorted alphabetically by surname. Spaces and digits take first priority. If only the first name was entered in the directory, this is incorporated into the sort order instead of the surname.

The sort order is as follows:



1. Space
2. Digits (0–9)
3. Letters (alphabetical)
4. Other characters

To get round the alphabetical order of the entries, insert a space or a digit in front of the first letter of the surname. These entries will then move to the beginning of the directory.

Select a directory entry



 Open the directory.




You have the following options:

- ◆ Use  to scroll through the entries until the required name is selected.
- ◆ Enter the first letters of the name (max. 8), if necessary scroll to the entry with the  key.

The directory searches for the surname. If a surname has not been entered, the directory searches for the first name.



Select from the directory

 →  (Select entry)

 Press the talk key.
(If several numbers are entered, select the required number by pressing  and press the talk key  again).
The number is dialled.


Managing directory entries

Viewing entries



 →  (Select entry)

View Press the display key. The entry is displayed.

Options Press the display key.

The following functions can be selected with :

Display Number

To edit or add to a saved number, or to save it as a new entry, press   after the number is displayed.

Delete Entry



Delete selected entry.

Copy Entry

to Internal: Send a single entry to a handset (→ page 32).

vCard via SMS: Send a single entry in vCard format via SMS.



Editing entries

 →  (Select entry)


View **Edit** Press display keys one after the other.

▶ Carry out changes and save.




Using other functions

 →  (Select entry)

→ **Options** (Open menu)

The following functions can be selected with :

Display Number

Edit or add to a saved number and then dial with  or save as a new entry; to do so, press   after the number is displayed.

Edit Entry

Edit selected entry.

Delete Entry

Delete selected entry.

Copy Entry

to Internal: Send a single entry to a handset (→ page 32).

vCard via SMS: Send a single entry in vCard format via SMS.

Delete All

Delete **all** entries in the directory.

Copy All

to Internal: Send the complete list to a handset (→ page 32).

Available Memory

Display the number of entries that are still available in the directory (→ page 30).




Using quick dial keys

- ▶ Press and hold the required quick dial key (→ page 60).

Transferring the directory to another handset

Prerequisites:

- ◆ The sending and receiving handsets must both be registered to the same base.
- ◆ The other handset and the base can send and receive directory entries.

 →  (Select entry)
→ **Options** (Open menu) → **Copy Entry / Copy All** → **to Internal**
 Select the internal number of the receiving handset and press **OK**.

You can transfer several individual entries one after the other by responding to the **Entry copied - Copy next entry?** prompt with **Yes**.

A successful transfer is confirmed by a message and confirmation tone on the receiving handset.

Please note:

- ◆ Entries with identical numbers are not overwritten on the receiving handset.
- ◆ The transfer is cancelled if the phone rings or if the memory of the receiving handset is full.
- ◆ Pictures and sounds assigned to entries are not transferred.

Copying the displayed number to the directory

You can copy numbers displayed in a list, e.g., the call list or the redial list, or in an SMS, to the directory.

A number is displayed:




Options → **Copy to Directory**

- ▶ Complete the entry (→ page 30).

Gigaset S795: Message playback is interrupted during the number transfer from the answering machine list.





Copying a number or e-mail address from the directory

In some operating situations, you can open the directory to copy a number or e-mail address, for example. Your handset need not be in idle status.

- ▶ Depending on the operating situation, open the directory with  or .
-  Select entry (→ page 31).

Storing an anniversary in the directory

For each number in the directory, you can save an anniversary and specify a time at which a reminder call should be made on the anniversary (default setting: **Anniversary: Off**).

-  →  (Select entry)
View **Edit** Press display keys one after the other.
 Scroll to the **Anniversary** line.
 Select **On**.

- ▶ You can enter data in the following fields:

Annivers. (Date)

Enter day/month/year in 8-digit format.

Anniversary (time)

Enter the hour/minute for the reminder call in 4-digit format.

Anniversary (tone)



Select the reminder type.

Save Press the display key.


Please note


A time must be specified for reminder calls. If you select a visual signal, a time is not required and is automatically set to 00.00.

Deactivating anniversaries

 →  (Select entry)

View **Edit** Press display keys one after the other.


 Scroll to the **Anniversary** line.

 Select **Off**.

Save Press the display key.

Reminder call on an anniversary



In **idle status**, a reminder call is indicated on the handset display and by the selected ringtone and volume that has been set for internal calls (→ page 63).



You can:

SMS Write an SMS.

Off Press the display key to acknowledge and end the reminder call.

During the reminder call, you can permanently change the volume by pressing the side keys  (louder) or  (quieter).


When you are on the phone, a reminder call is indicated on the handset with a **single** advisory tone.


Anniversaries that are indicated during a call and are not acknowledged are entered in the **Missed Alarms** list (→ page 35).


Redial list

The redial list contains the twenty numbers last dialled with the handset (max. 32 digits). If one of the numbers is in the directory, the corresponding name is displayed.

Manual redial


 Press the key **briefly**.


 Select entry.

 Press the talk key again. The number is dialled.


When a name is displayed, you can display the corresponding phone number by pressing the display key **View**.

Managing entries in the redial list

 Press the key **briefly**.

 Select entry.

Options Open menu.

The following functions can be selected with :

Copy to Directory

Copy an entry to the directory (page 30).

Automatic Redial

The selected number is automatically dialled at fixed intervals (at least every 20 seconds). The speaker key flashes and "open listening" is activated.

– Party answers:

Press the talk key . The function is ended.

– Party does not answer:

The call is terminated after approx. 30 seconds. The function is ended after pressing any key or after 5 unsuccessful attempts.

Display Number (as in the directory, page 31)

Delete Entry (as in the directory, page 31)

Delete All (as in the directory, page 31)

Incoming SMS message list

All received SMS messages are saved in the incoming message list (→ page 39).

Answering machine list (Gigaset S795 only)

You can use the **answering machine list** to listen to the messages that are on the answering machine.

Call lists

Prerequisite: Calling Line Identification (CLIP, page 28)

Your telephone stores various types of calls:

- ◆ Answered calls
- ◆ Outgoing calls
- ◆ Missed calls
- ◆ Calls recorded by the answering machine (Gigaset S795 only)

You can view each type of call separately or gain an overview of all calls. Each call record contains the last 20 numbers in its category.

When in idle status, open the call lists by selecting the **Calls** display key or via the menu:




List entry

New messages are displayed at the top.

Example of list entries:

All Calls	
📞 Frank	
14.10.09, 15:40	
📞 089563795	
14.10.09, 15:32	
📞 ...0123727859362922	
14.10.09, 15:07	
View	Options

- ◆ List type (in header)
- ◆ Status of entry
Bold: New entry
- ◆ Number or name of caller
- ◆ Date and time of call (if set, page 15)
- ◆ Type of entry:
 - Accepted calls (📞)
 - Missed calls (📞_x)
 - Outgoing calls (📞_→)
 - Calls recorded by the answering machine (📞, Gigaset S795 only)

Press the talk key  to call the selected caller back.

Press the **View** display key to access additional information, including for example the number linked to the name.

Select the **Options** display key to select the following options:

Copy to Directory

Copy the number to the directory.

Delete Entry

Delete selected entry.

Delete All


Delete all entries.





When you quit the call lists, all entries are set to the status "old", i.e., the next time you call up the list, they will no longer be shown in bold.

Opening lists with the message key





Use the message key  to open the following list selection:

- ◆ Answering machine list (Gigaset S795 only) or network mailbox, if your network provider supports this function and fast access is set for the network mailbox (→ page 51).
- ◆ Incoming SMS message list (→ page 39)
If **multiple** mailboxes are set up (→ page 41), several lists are displayed.
- ◆ List of missed calls
- ◆ List of missed alarms (→ page 35)

An advisory tone sounds as soon as a **new message** arrives in a list. The  key flashes (it goes off when the key is pressed). In **idle status**, the display shows an icon for the new message:


Icon	New message...
	... in the answering machine list (Gigaset S795 only) or on the network mailbox
	... in the missed calls list
	... in the SMS list
	... in the Missed Alarms list:

The number of **new** entries is displayed under the corresponding icon.

			
02	10	09	08

Please note

If calls are saved in the network mailbox, you will receive a message if the appropriate settings have been made (see your network provider user guide).

After pressing the message key , you can see all lists containing messages and the network mailbox list.


Lists containing new messages are at the top of the list and are marked in a bold font.

Messages & Calls	
Calls:	(3)
Missed Alarms	(1)
SMS:	(2)
Back	OK

Select a list with . To open, press **OK**.

List of missed alarms

Missed (unacknowledged) appointments from the calendar (→ page 53) and anniversaries (→ page 32) are saved in the **Missed Alarms** list under the following circumstances:

- ◆ You do not accept an appointment/anniversary.
- ◆ The appointment/anniversary was signalled during a phone call.
- ◆ The handset is deactivated at the time of the appointment/anniversary.
- ◆ Automatic redial was activated at the time of an appointment/anniversary (→ page 33).
- ◆ Open the list by pressing the **message key**  (→ page 35).

Each entry is displayed with:

- ◆ Number or name
- ◆ Date and time

The most recent entry is at the head of the list.

Press the display key **Delete**, to delete the selected entry.

If 10 entries are already stored in the list, the next appointment reminder will delete the oldest entry.

Making cost-effective calls

Make phone calls through a network provider who offers particularly low-cost call rates (call-by-call).

Automatic network provider code (preselection)

You can store a call-by-call number (preselection number), which is **automatically** placed in front of numbers when you dial them.

In the "**With Preselection**" list, specify the access codes or the first digits of the access codes that you wish to assign to the preselection number.

In the "**No Preselection**" list, enter the exceptions to the "**With Preselection**" list.



Example:


Preselection No.	0999
With Preselection	08
No Preselection	081 084

All numbers that start with 08, except for 081 and 084, are dialled with the preselection number 0999.

Phone number	Dialled number
07112345678	→ 07112345678
08912345678	→ 0999 08912345678
08412345678	→ 08412345678

Saving preselection numbers

 →  → Telephony → Preselection → Preselection No.



 Enter or change the preselection number (call-by-call number).


Save Press the display key.


Save or change entries in the preselection lists

Each of the two lists can contain 20 entries, each with 6 digits.

Numbers may be prefixed according to the country in the "**With Preselection**" list. This means, for example, that all national calls or calls to the mobile network are **automatically** linked to the preselection number you have saved previously.



 →  → Telephony → Preselection → With Preselection / No Preselection

 Select entry.

 Enter or edit the first digits of the number.

Save Press the display key.

Permanently deactivating preselection

 →  → Telephony → Preselection → Preselection No.

<C Press and **hold** the display key until the preselection number is deleted.

Save Press the display key.

SMS (text messages)

Prerequisites:

- ◆ Calling Line Identification is enabled for your phone line.
- ◆ Your network provider supports SMS on the fixed line network (information on this can be obtained from your network provider).
- ◆ You are registered with your service provider to send and receive SMS messages.
- ◆ To receive SMS messages, you must be registered with your service provider. This occurs automatically when you send your first SMS.

Please note

If your phone is connected to a PABX, please read → page 43.

Please note

- ◆ For instructions on entering text and special characters, please see page 81.
- ◆ An SMS may contain up to 612 characters when the writing language is English. If there are more than 160 characters, the SMS is sent as a **linked SMS** (up to 4 SMS messages with 153 characters each). The top right of the display shows how many characters are still available and which part of a linked SMS is currently being written.
- ◆ When the writing language is Arabic the length of the message is 268 and if the message is more 70 character the message will be sent as linked SMS (up to 4 SMS messages with 64 messages each)

Writing/sending an SMS

Writing an SMS



Mailbox 2 Select mailbox if necessary and press **OK**.



Enter mailbox PIN if necessary and press **OK**.

New SMS Select and press **OK**.



Write an SMS.

Sending an SMS



Press the talk key

or:



Press the display key.

Send

Select and press **OK**.

SMS

Select and press **OK**.



Select number with access code (even if you are in that area) from the directory or enter directly. For sending SMS messages to an SMS mailbox: add the mailbox ID to the **end** of the number.

SMS (text messages)

Send Press the display key. The SMS is sent.

Please note



- ◆ If you are interrupted by an external call while writing an SMS, the text is automatically saved in the draft SMS list.
- ◆ If the memory is full, or if the SMS function on the base is being used by another handset, the operation is cancelled. An appropriate message appears in the display. Delete SMS messages you no longer require or send the SMS later.

SMS status report


Prerequisite: Your network provider supports this feature.

If you have activated the status report, you will receive an SMS with a confirmation message after sending.

Activating/deactivating a status report


 →  → **Settings**

Status Report

Select **Change** and press  (= on).

Reading/deleting status report/saving number to directory

- ▶ Open the incoming message list (→ page 39) and then:

 Select SMS with **State OK** or **State not OK** status.

Read Press the display key.

- ◆ Delete:
Options → **Delete Entry** → **OK**.
- ◆ Number in directory:
Options → **Copy to Directory** → **OK**.
- ◆ Delete entire list:
Options → **Delete All** → **OK**.

Draft SMS list

You can save an SMS in the draft SMS list, and edit and send it later.




Saving an SMS in the draft SMS list

- ▶ You are writing an SMS (→ page 37).


Options Press the display key.

Save Entry Select and press **OK**.

Opening the draft message list

 →  → , if necessary 
(mailbox, mailbox PIN), → **Draft**

The first entry in the list is displayed, e.g.:





Saved
14.10.08 15:07

If the entry has been saved with the phone number, i.e., when the SMS was saved from the incoming message list, the number is displayed in the first line.

Reading or deleting SMS messages

- ▶ Open the draft message list and then:

 Select SMS.

Read Press the display key. The text is displayed. Scroll line by line using .

or delete the SMS with

Options → **Delete Entry** → **OK**.

Writing/editing an SMS

- ▶ You are reading an SMS in the draft SMS list.

Options Open menu.

You have the following options:

Copy

Send stored SMS.

Edit

Edit the text of the saved SMS and then send it (→ page 37).

Character Set

Display text in the selected character set.

Deleting draft SMS list

- ▶ Open the draft message list and then:



Options Open menu.



Delete All Select, press **OK** and confirm with **Yes**. The list is deleted.

Sending SMS messages to an e-mail address

If your service provider supports the **SMS as e-mail** feature, you can also send your SMS messages to e-mail addresses.

The e-mail address must be at the beginning of the text. You must send the SMS to your SMS send centre's e-mail service.

 →  → (mailbox, mailbox PIN)
→ **New SMS**

 /  Copy the e-mail address from the directory or enter it directly. End the entry with a space or colon (depending on the service provider).

 Enter the SMS text.

Options Press the display key.

Send Select and press **OK**.

E-mail Select and press **OK**. If the number of the e-mail service is not already entered (→ page 42), enter the number of the e-mail service.

Send Press the display key.

Sending SMS messages as a fax

You can also send an SMS to a fax machine.



Prerequisite: Your network provider supports this feature.

▶ You are writing an SMS (→ page 37).

Options Press the display key.

Send Select and press **OK**.

Fax Select and press **OK**.

 /  Select number from the directory or enter it manually. Enter the number with access code (even if you are in the same area).

Send Press the display key.


Receiving an SMS




All received SMS messages are saved in the incoming SMS list. Linked SMS messages are displayed as **one** message. If this is too long or is not transferred completely, it is split into individual messages. Since an SMS remains in the list even after it has been read, **regularly delete SMS messages from the list**.

The display tells you if the SMS memory is full.



Activating/deactivating first ringtone muting

Each incoming SMS is signalled by a single ring (ringtone as for external calls). If you accept such a "call", the SMS is lost. To prevent this ring, suppress the first ringtone for all external calls.



 Open the main menu.

Press keys.

  Make the first ringtone audible.



or:

  Mute the first ringtone.

Incoming message list

The incoming message list contains:

- ◆ All received SMS messages, starting with the most recent.
- ◆ SMS messages that could not be sent due to an error.

New SMS messages are signalled on all Gigaset S79H handsets by the  icon on the display, the flashing message key  and an advisory tone.

Opening the incoming message list with the key

 Press.

The incoming message list is indicated by the mailbox name and the number of entries (example):

SMS: (2)


SMS (text messages)

Bold: new entries

Normal font: old entries

If necessary select a mailbox and open list by selecting **OK** (enter mailbox PIN if required and confirm by pressing **OK**).



The number and date of receipt are displayed in the entry list.



0123727859362922

14.10.09 09:07

Opening the incoming message list via the SMS menu

 →  → (If necessary, select mailbox, enter mailbox PIN) → **Incoming**

Deleting the incoming message list

All new and old SMS messages in the list are deleted.


▶ Open the incoming message list.


Options Open menu.

Delete All Select, press **OK** and confirm with **Yes**. The list is deleted.

Reading or deleting SMS messages

▶ Open the incoming message list, then:

 Select SMS.

Read Press the display key. The text is displayed. Scroll line by line using .

or delete the SMS with

Options → **Delete Entry** → **OK**.

After you have read a new SMS, it is given the status "Old" (is no longer shown in bold).

Changing the character set

▶ Read the SMS

Options Press the display key.

Character Set

Text is shown in the selected character set.

Replying to or forwarding SMS messages

▶ Read the SMS

Options Press the display key.

You have the following options:

Reply

Write and send a new SMS in reply to the sender (→ page 37).

Edit

Edit the text in the SMS and return it to the sender (→ page 37).

Forward

Forward the SMS to another number (→ page 37).

Copying the number to the directory

Copying the sender's number

▶ Open the incoming message list and select the SMS (→ page 39).

Options → **Copy to Directory**

▶ Complete the entry → page 32.


Please note

An attached mailbox identifier is added to the directory.

Copying/dialling numbers from an SMS


▶ Read the SMS and scroll to the telephone number.

The digits are highlighted.

 Press the display key.

Complete the entry (→ page 32).


or:

 Press the talk key to dial the number.

If you wish to use the number to send an SMS:

▶ Save the number with the local area code (access code) in the directory.

SMS with vCard

The vCard is an electronic business card. It is displayed by the  icon in the body of the SMS.

A vCard can include:

- ◆ Name
- ◆ Private number
- ◆ Business number
- ◆ Mobile phone number
- ◆ Birthday

Entries in a vCard can be saved to the directory individually.

Opening the vCard

- ▶ Read the SMS containing the vCard.

View Press the display key.
To return to the body of the SMS, press **Back**.

 Select number.

Save Press the display key.

When you save a number, the directory is opened automatically. The number and name are copied. If a birthday is entered on the vCard, the date is copied to the directory as an anniversary.

- ▶ If necessary, edit the entry in the directory and save it. You will return to the vCard automatically.

Notification via SMS

You can be notified about missed calls or new answering machine messages (Gigaset S795 only) via SMS.

Prerequisite: For missed calls, the caller's number (CLI) must have been transmitted.

Notification is sent to your mobile phone or another phone with SMS functionality.

You only need to save the telephone number to which you wish the notification to be sent.

 →  → **Settings** → **Notification**

- ▶ You can enter data in the following fields:

To:

Enter the number to which the SMS should be sent.

On missed call

Select **On** if you require SMS notification.

On message on answer machine

(Gigaset S795 only)

Select **On** if you require SMS notification.

Save Press the display key.

Warning

Do **not** enter your own fixed line network number for the notification of missed calls. This can lead to chargeable endless looping.

SMS mailboxes

The **general mailbox** is the default setting. Anyone can access this mailbox and it cannot be protected by a PIN. You can set up three additional **personal mailboxes** and protect these with a **PIN**. Each mailbox is identified by a name and a "mailbox ID" (a kind of extension number).

Please note:

- ◆ If you operate a number of devices (bases) with SMS functionality on a single phone line, then each SMS mailbox ID may only occur once. In this case, you must also change the preset ID of the general mailbox ("0").
- ◆ Only use personal mailboxes if your service provider supports this function. You can tell whether this is the case by the addition of a star (*) to the number of a (preset) SMS centre.
- ◆ If you have forgotten your mailbox PIN, you can reset it by restoring the base's default settings. This will **delete all SMS messages from all mailboxes**.

Setting up and editing a personal mailbox

Setting up a personal mailbox

 →  → **Settings** → **SMS Mailboxes**

 Select mailbox, e.g., **Mailbox 2** and press **Edit**.

▶ You can enter data in the following fields:

Activation:

Activate or deactivate mailbox.

Name:

Enter name.

Box ID:

Select mailbox ID (0–9). You can only select the available numbers.

Protection:

Activate/deactivate PIN protection.

SMS PIN

If necessary, enter 4-digit PIN.

Save Press the display key.

Active mailboxes are marked with ✓ in the SMS Mailboxes list.

Deactivating a mailbox

▶ Set **Activation** to **Off**. Confirm message with **Yes** if necessary.

All SMS messages saved in this mailbox are deleted.

Deactivating PIN protection

▶ Set **Protection** to **Off**.

The mailbox PIN is reset to "0000".

Changing the name of a mailbox

 →  → **Settings** → **SMS Mailboxes**



→  (Select mailbox)


Edit Press the display key.

 Enter new name.

Save Press the display key.

Changing a mailbox's PIN and ID

 →  → **Settings** → **SMS Mailboxes**

→  (Select mailbox)

 Enter mailbox PIN if necessary and press **OK**.

▶ Set **Box ID**, **Protection** and **SMS PIN** (→ page 42).

Sending an SMS to a personal mailbox

To send an SMS to a personal mailbox, the sender must know your ID and enter it after your number.

▶ You can send your SMS contact an SMS via your personal mailbox.

Along with this SMS, your SMS contact will receive your SMS number with current ID and can save it in their directory. If the ID is invalid, the SMS will not be delivered.

Setting SMS centres

SMS messages are exchanged between SMS centres operated by service providers. You must enter the SMS centre through which you wish to send and receive SMS messages into your phone. You can receive SMS messages from **every** SMS centre that is entered, provided you have registered with your service provider.


Your SMS messages are sent via the **SMS centre** that is entered as the active **send service centre**. However, you can activate any other SMS centre as the active send service centre to send a current message (→ page 43).

If no SMS service centre is entered, the SMS menu only contains the entry **Settings**. Enter an SMS Service Centre (→ page 42).

Entering/changing SMS centres

- ▶ Find out about the services and special functions offered by your service provider **before you make a new application** and/or before you delete pre-configured call numbers.

 →  → **Settings** → **Service Centres**

 Select SMS centre (e.g., **Service Centr.1**) and press **Edit**.

- ▶ You can enter data in the following fields:

Active Send:

Select **Yes** if SMS messages are to be sent via the SMS centre. For the SMS centres 2 to 4, the setting only applies to the next SMS.

SMS Service Centre no.:

Enter the number of the SMS service and insert a star if your service provider supports personal mailboxes.

Send e-mail to:

Enter the number of the e-mail service.

Save Press the display key.

Please note

Ask your service provider for details on entering service numbers if you wish to use personal mailboxes (prerequisite: your service provider supports this function).

Sending an SMS via another SMS centre

- ▶ Activate the SMS centre (2 to 4) as the active send service centre.
- ▶ Send the SMS.

This setting only applies to the next SMS to be sent. After that, the setting returns to **Service Centr.1**.

SMS on a PABX


- ◆ You can only receive an SMS when the **Calling Line Identification is forwarded** to the extension of the PABX (CLIP). The CLIP evaluation of the SMS centre number is completed in your **Gigaset**.
- ◆ Depending on your PABX, you may have to add the access code (external line prefix) before the number of the SMS centre. If in doubt, test your PABX, e.g., by sending an SMS to your own number: once with and once without the access code.
- ◆ When you send SMS messages, your sender number may be sent without your extension number. In this case, the recipient cannot reply to you directly.

Sending and receiving SMS messages on **ISDN PABXs** is only possible via the MSN number assigned to your base.

Activating/deactivating SMS function


If you deactivate the SMS function, you cannot send or receive any SMS messages with your phone.

The settings you have made for sending and receiving SMS messages (e.g., the numbers of the SMS centres) and the entries in the incoming and draft message lists are saved even after deactivation.


 Open the main menu.

Enter the digits.

 **OK** Deactivate the SMS function.

or:

 **OK** Activate the SMS function (default setting).

SMS troubleshooting

Error codes when sending

EO	Calling Line Identification permanently withheld (CLIR) or Calling Line Identification not activated.
FE	Error occurred during SMS transfer.
FD	Connection to SMS centre failed; see self-help.

Self-help with errors

The following table lists problem situations and possible causes and provides advice on troubleshooting.

<p>You cannot send messages.</p> <ol style="list-style-type: none"> 1. You have not requested the CLIP service (Calling Line Identification Presentation). <ul style="list-style-type: none"> ▶ Ask your service provider to enable this service. 2. SMS transmission has been interrupted (e.g., by a call). <ul style="list-style-type: none"> ▶ Re-send the SMS. 3. The network provider does not support this feature. 4. No number or an invalid number is entered for the SMS centre set as the active send service centre. <ul style="list-style-type: none"> ▶ Enter the number (→ page 42).
<p>You receive an incomplete SMS.</p> <ol style="list-style-type: none"> 1. Your phone's memory is full. <ul style="list-style-type: none"> ▶ Delete old SMS messages (→ page 38). 2. The service provider has not yet sent the rest of the SMS.

You have stopped receiving SMS messages.

1. You have changed the ID of your mailbox.
 - ▶ Give your SMS contacts your new ID or undo the change (→ page 42).
2. You have not activated your mailbox.
 - ▶ Activate your mailbox (→ page 42).

The SMS is played back.

1. The "display call number" feature is not activated.
 - ▶ Ask your service provider to activate this function (chargeable).
2. No agreement is in place between your mobile phone operator and your fixed line network SMS service provider.
 - ▶ Obtain information from your fixed line network SMS service provider.
3. Your terminal has been recorded by your SMS provider as having no fixed line network SMS functionality, i.e., you are not registered with the provider.
 - ▶ Send any SMS to automatically register your telephone to receive SMS.

Messages are only received during the day.

The terminal is recorded in your SMS provider's database as having no fixed line network SMS functionality, i.e., you are not registered with the provider.

- ▶ Obtain information from your fixed line network SMS service provider.
- ▶ Send any SMS to automatically register your telephone to receive SMS.

Operating the Gigaset S795 base answering machine


You can access the answering machine via the handset, the buttons on the base (→ page 4) or by remote operation (from another phone/mobile phone). You can record your own announcement message or advisory message via the handset.

Answering machine mode

You can use the answering machine in two different modes.

- ◆ In **Answer & record** mode, the caller hears the announcement and can then leave a message.
- ◆ In **Answer only** mode, the caller hears your announcement but cannot leave a message.

Operating via the handset

The handset loudspeaker activates **automatically** if you receive an acoustic prompt or message while operating. You can switch it off with the speaker key .

Activating/deactivating and setting the answering machine mode

You can choose between **Answer & record**, **Answer only** and **Alternating**. By using the **Alternating** setting, you can activate answer and record mode for a set period of time, outside this period the caller will only hear the announcement.

 →  → **Activation** (✓ = on)

Edit Press the display key.

▶ You can enter data in the following fields:

Activation:

Select **On** or **Off** to activate/deactivate the answering machine.

Mode:

Select **Answer & record**, **Answer only** or **Alternating**.

If **Alternating** mode is selected:

Record from:

Enter hours/minutes for the start of the period in 4-digit format.
(The time **must** be set on the phone beforehand.)


Record until:

Enter hours/minutes for the end of the period in 4-digit format.

If **Answer & record** is not set, **Answer only** mode applies.

Save Press the display key.

If the messages memory is full and **Activation: On** has been selected, saving is interrupted and you will receive an instruction to delete old messages.

When you switch the answering machine on, the remaining memory time is announced. If the time has not yet been set, an appropriate announcement is made (set time → page 15). The  icon appears in the display. The LED display on the base lights up (→ page 4).

The phone is supplied with pre-recorded announcements for **Answer & record** mode and for **Announcement only** mode. If a personal announcement has not been recorded, the relevant pre-recorded announcement is used.

Recording personal announcements/ advisory messages

 →  → **Announcements**
→ **Rec. Announcement / Rec. Advisory**
Msg.


OK Press the display key to start the recording.

You hear the ready tone (short tone).

▶ Now speak your announcement (at least 3 secs.).

End Press the display key to end the recording.

Operating the Gigaset S795 base answering machine


Cancel recording with  or **Back**. Restart the recording with **OK**.

After recording, the announcement is played back for you to check. You can re-record the announcement with **New**.

Please note:

- ◆ Recording ends automatically if the maximum recording time of 170 seconds is exceeded or there is a break in speech for more than 2 seconds.
- ◆ If you cancel the recording, the pre-recorded announcement is used again.
- ◆ If the answering machine's memory is full, it will switch to **Answer only** mode.
 - ▶ Delete old messages and the answering machine will automatically switch back to **Answer & record** mode. Repeat recording if required.

Playing back personal announcements/ advisory messages

 →  → **Announcements**
→ **Play Announcement / Play Advisory Msg.**

If you have not recorded a personal announcement, the relevant pre-recorded announcement is played.

Record a new announcement while playing back the announcement:

New Press the display key.

If the answering machine's memory is full, it will switch to **Answer only** mode.

- ▶ Delete old messages and the answering machine will automatically switch back to **Answer & record** mode. Repeat recording if required.

Deleting personal announcements/ advisory messages

 →  → **Announcements**
→ **Del. Announcement / Del. Advisory Msg.**

Yes Press the display key to confirm the prompt.

Once you have deleted your announcement, the relevant pre-recorded announcement is used again.

Please note

Deleting announcements can take some time.


Playing back messages


The date and time of each message is logged (provided this has been set, → page 15) and displayed during the playback. If Calling Line Identification is activated, the caller's number is displayed. If the caller's number is saved in the directory, their name is displayed.

Playing back new messages

New messages that have not yet been played back are indicated on the display with an icon and number:



The  key on the handset and the display on the base will flash. The number of new messages is displayed on the base.

 Press the message key.

Answer. Mach.:

Select and press **OK**.

If there are new messages, playback then begins with the first new message. After the last new message, you will hear the end tone and an announcement stating how much recording time remains.

If the message has been saved with the date and time, you will hear an appropriate announcement before playback begins.

Playing back old messages

You can listen to old messages if there are no more new messages. Begin playback as described under "Playing back new messages".

After the entry time and date have been played back (after approx. 3 seconds) a new message assumes the status "old".

Stopping and controlling playback

During message playback:

2 ABC Pause playback. Press **2 ABC** again to resume.

or

Options Open menu.

Pause Select and press **OK**.
To continue select **Continue** and press **OK**.

1 or **1 CD**

Go to the start of the current message.

Press twice to go back to the previous message.

3 or **3 DEF**

Skip to next message.

Press twice to skip ahead two messages.

If playback is interrupted for over a minute, the answering machine returns to idle status.

Marking a message as "new"

A previously played back "old" message is displayed as a "new" message again.

During message playback:

*** Δ** Press the star key.

or:

Options Open menu.

Mark as New

Select and press **OK**.

An announcement informs you of the message's new status.

Playback of the current message is cancelled. Playback of next message starts, if applicable.

The **☒** key on the handset flashes.

Copying a phone number from a message to the directory

During playback or pause:

Options → **Copy to Directory**

▶ Complete the entry (→ page 32).

Deleting messages

You can either delete all old messages together or individually.

Deleting all old messages

During playback or pause:

Options → **Delete Old List**

OK Press the display key to confirm the prompt.

Yes Press the display key to confirm the prompt.

Deleting individual old messages

During playback or pause:

Delete Press the display key.

Picking up a call from the answering machine

You can pick up a call while the answering machine is recording or is being operated via remote operation:

☒ / **Accept**

Press the talk or display key.

Recording stops and you can speak to the caller.

If two seconds of the call have already been recorded when you pick it up, the call is displayed as a new message. The **☒** key on the handset flashes.

You can answer the call, even if it is not signalled on the handset.

Diverting an external call to the answering machine

You can divert an incoming external call to the answering machine, even if it is deactivated.

Prerequisite: Sufficient memory space is available on the answering machine.

An external call is signalled on the handset:

 Select display key.

The answering machine starts immediately in **Answer & record** mode and records the call. The set time for ring delay (→ page 48) is ignored.

Activating/deactivating two-way record

You can record an **external** call with the answering machine.

- ▶ Inform the caller that the call is being recorded.

Options Open menu.

Two-way Record

Select and press **OK**.

Two-way record is indicated on the display by an advisory text and is added to the answering machine list as a new message.



End Press the display key to stop two-way record.

The maximum recording time depends on the memory available on the answering machine. If the memory is full, you will hear an end tone, the recording is aborted, and the call recorded up to that point is listed in the answering machine list as a new message.

Activating/deactivating call screening

While a message is recording, you can screen calls via the base loudspeaker and registered handsets.

Permanently activating/deactivating call screening

 →  → **Call Screening**
→ **Handset / Base** (☑ = on)

Change Select display key to activate/deactivate the function.

Call screening can be simultaneously activated on the base and handset.

Deactivating call screening for the current recording

You can deactivate the function for your own handset during the recording.

Silence Press the display key.

Setting the recording parameters

The answering machine has already been preset at the factory. Individual settings can be adjusted using the handset.

 →  → **Recordings**

- ▶ You can enter data in the following fields:

Length:

Select maximum recording time **1 min., 2 min., 3 min.** or **Maximum**.

Quality:

Select **Long Play** or **High** recording quality. If the quality is higher, the maximum recording time is reduced.

Ring Delay:

Select when the answering machine should accept a call:

Immediately, after **10 sec., 18 sec., 30 sec.** or **Automatic**.

Save Press the display key.

Information about ring delay

In **Automatic** mode, the following applies for ring delay:


- ◆ If there are no new messages, the answering machine answers a call after 18 seconds.
- ◆ If there are new messages, the answering machine answers a call after 10 seconds.








When operating remotely (→ page 49), you can tell after approx. 15 seconds that there are no new messages (otherwise the answering machine would have already accepted your call). There are no call charges if you hang up now.

Please note:

You can configure your telephone so that the **first** ring is **suppressed** on all calls (→ page 39). This means that the time selected for the ring delay predetermines how long the caller must wait before the answering machine accepts the call.

Changing the language for voice prompt and pre-recorded announcement


 Open the main menu.


Enter digits **and** press



  To set English.

  To set French.

  To set Arabian.


Resetting fast access for the answering machine using key 1

By default, key  has been assigned for fast access to the integrated answering machine. However, if you have set the network mailbox for fast access (→ page 51), you can reset this setting.

 →  → **Set Key 1**

Answering Machine

Select and press **OK**.

Once you have selected the answering machine, press and **hold** key . You are connected directly.

The setting for fast access applies to all registered handsets.

Operating when on the move (remote operation)

You can check and activate your answering machine from any other telephone (hotel, pay phone etc.), or initiate ringback from the answering machine with an SMS.

Prerequisites:

- ◆ You have set a system PIN other than 0000 (→ page 67).
- ◆ The phone you are using for remote operation has tone dialling (DTMF), i.e., you hear different tones when you press the keys. Alternatively, you can use a code transmitter (available from your mobile phone retailer).

Calling the answering machine and playing back messages



Dial your own number.

When you hear your announcement, press **9** and enter the system PIN.

You are informed whether any new messages have been recorded. The messages are now played back. You can now operate the answering machine with the keypad.

The following keys are used for operation:

- 1** To return to the start of the current message.
Press twice to go back to the previous message.
- 2** Stop playback. Press again to resume.
- 3** Go to the next message.
- 0** Delete current message.

Activating the answering machine

- ▶ Phone home and let the phone ring until you hear: "Please enter PIN".



Enter system PIN.

Your answering machine is activated. It tells you how much memory time is left.

The messages are now played back.

The answering machine cannot be deactivated remotely.

Initiating ringback from the answering machine with SMS and listening to messages

Prerequisite: You must have stored an SMS notification number (→ page 41).

You can use the telephone (mobile phone or any other device with SMS functionality) for which you have stored the SMS notification number in your phone to send an SMS to your answering machine when you are away from home. It will then call you back. The message playback begins when you accept the call and press any digit key.

The SMS must contain the following:

<System PIN><Ringback number>*

The ringback number is optional.

Examples:

4711 or *4711*089123456*

If a ringback number is entered, it is dialled; otherwise the SMS notification number is dialled.

You can now operate the answering machine via the keypad, as described in the previous sections.

Using the network mailbox

The network mailbox is your network provider's answering machine within the network. You cannot use the network mailbox unless you have **requested** it from your network provider.

Configuring fast access for the network mailbox



With fast access, you can dial the network mailbox or the integrated answering machine (Gigaset S795 only) directly.

Gigaset S790: Fast access is preset for the network mailbox. You only need to enter the number of the network mailbox.

Gigaset S795: The integrated answering machine is preset for fast access. You can configure the network mailbox instead. Ask your network provider about this.

Configuring fast access for the network mailbox and entering the network mailbox number

Gigaset S790:

 →  → **Set Key 1**

Network Mailbox

Select and press **Network Mailbox**
( **Select=** selected).

Gigaset S795:

 →  → **Network Mailbox**

To continue:



Enter the number for the network mailbox.

Save

Press the display key.


The setting for fast access applies to all Gigaset S79H handsets.

Calling the network mailbox



Press and **hold**. You are connected straight to the network mailbox.



Press speaker key  if required. You will hear the network mailbox announcement.

Viewing the network mailbox message

When a message is recorded, you receive a call from the network mailbox. If you have requested Calling Line Identification, the network mailbox number is displayed. If you accept the call, the new messages are played back. If you do not accept the call, the network mailbox number is saved in the missed call list and the message key flashes (→ page 35).

Please note

Enter the network mailbox phone number into your directory along with the designation "Network mailbox"; the display and the call list will then show this designation.

ECO DECT

You are helping to protect the environment with your Gigaset S790/S795.

Reducing energy consumption

By using a power-saving adapter plug, your telephone consumes less power.

Reducing radiation

The radiation from your telephone is reduced **automatically**:

- ◆ **Handset:** The closer the handset is to the base, the lower the radiation.
- ◆ **Base station:** The radiation is reduced to virtually zero when only one handset is registered and the handset is placed in the base.

You can reduce the radiation from the handset and base even more by using **Eco Mode**.

Eco Mode

Reduces the radiation of the base station and handset by 80% - whether you are making a call or not. **Eco Mode** reduces the range of the base station by approx. 50%. Using **Eco Mode** always makes sense when a reduced range is sufficient.



Switching off radiation


Eco Mode+

When you activate **Eco Mode+**, radiation (DECT transmission power) from the base and handset is switched off in the idle state. This is also true when multiple handsets are used, provided the handsets support **Eco Mode+**.






Eco Mode / Eco Mode+ can be activated/deactivated independently of one another and can also be used with multiple handsets. The handset need not be placed in the base.

Activate/deactivate Eco Mode /Eco Mode+:


 →  → **Eco Mode**
→ **Eco Mode / Eco Mode+**

Change Press the display key ( = on).

Status displays

Display icon	
	Signal strength: – good to poor – no signal
 white	Eco Mode deactivated
 green	Eco Mode activated
 white	Eco Mode+ activated (displayed instead of the reception strength icon when in idle status)
	Eco Mode and Eco Mode+ activated

Please note

- ◆ With **Eco Mode+** activated, press and hold the talk key () to check that the base can be reached. You will hear the dial tone if the base can be reached.
- ◆ When **Eco Mode+** is activated:
 - Call setup is delayed by approx. two seconds.
 - Handset standby time is reduced by approx. 50%.
- ◆ Registering handsets that do not support **Eco Mode+** will cause the mode to be deactivated on the base and all other handsets.
- ◆ Activating **Eco Mode** reduces the range of the base.
- ◆ **Eco Mode / Eco Mode+** and repeater support (→ page 67) cancel each other out, i.e., if you use a repeater, you cannot use **Eco Mode** or **Eco Mode+**.


Setting an appointment (calendar)

You can use your handset to remind yourself of up to **30 appointments**. Anniversaries (→ page 32) entered in the directory are automatically recorded in the calendar.



Saving an appointment.

Prerequisite: The date and time have already been set (→ page 15).


 →  → **Calendar**




- ◆ The current day is selected (highlighted in white).
- ◆ Days on which appointments have already been saved are highlighted in orange.

  Select the required day in the graphical calendar.

The selected day is highlighted in orange. The current day is no longer highlighted.

 Press the centre of the control key.

- ◆ If appointments have already been entered, this will open the list of saved appointments on that day. Select **<New Entry>** →  to open the data input window.
 - ◆ If no appointments have been entered, the data input window will open immediately to add the new appointment.
- ▶ You can enter data in the following fields:

Activation:

Select **On** or **Off**.

Date:

Enter day/month/year in 8-digit format.

Time:

Enter hours/minutes in 4-digit format.

Text:

Enter text (max. of 16 characters). The text appears as the appointment name in the list and is displayed on the screen during the appointment reminder. If you do not enter any text, only the date and time of the appointment are displayed.

Signal:

Select the reminder type.



Save


Press the display key.

Please note

If you have already saved thirty appointments, you will have to first delete an existing appointment before adding a new one.

Signalling appointments and anniversaries

An appointment reminder is signalled in idle status for 60 seconds with the selected ringtone at the volume that has been set for internal calls (→ page 63). **During the reminder call**, you can permanently change the volume by pressing the side keys  (louder) or  (quieter).



Setting an appointment (calendar)

The name is displayed for anniversaries, while the entered text is displayed for appointments along with the date and time.

You can either deactivate or answer an appointment reminder:

Off Press the display key to deactivate the appointment reminder.

or:

SMS Press the display key to respond to the appointment reminder with an SMS.




Please note

During a call, the appointment reminder is signalled by a short tone.

Managing appointments

 →  → **Calendar**

Editing individual appointments

 /  Select a day in the graphical calendar and press the control key . (Days on which appointments have already been saved are highlighted in orange in the calendar).

 Select appointment for the day.

You have the following options:

View Press the display key and edit or confirm the entry.

or

Options Open the menu for editing, deleting and activating/deactivating.


Deleting all appointments for one day


Options → **Delete all Appoints.** → **OK**

Displaying missed appointments, anniversaries

Missed appointments/anniversaries (→ page 32) are displayed in the **Missed Alarms** list if:

- ◆ You do not accept an appointment/anniversary.
- ◆ The appointment/anniversary was signalled during a phone call.
- ◆ The handset is deactivated at the time of the appointment/anniversary.
- ◆ Automatic redial was activated at the time of an appointment/anniversary (→ page 33).

The icon  and the number of **new** entries are shown in the display. The most recent entry is at the head of the list.

Open the list by pressing the **message key**  (→ page 35) or via the **menu**:

 →  → **Missed Alarms**

Select appointment/anniversary.

Information about the appointment/anniversary is displayed. A missed appointment is displayed with the appointment name and a missed anniversary is displayed with the last name and first name. The date and time will also be given.

Delete Delete appointment.

SMS Write an SMS.

If 10 entries are already stored in the list, the next appointment reminder will delete the oldest entry.

Setting the alarm clock

Prerequisite: The date and time have already been set (→ page 15).

Activating/deactivating and setting the alarm clock

 → **Alarm Clock**

▶ You can enter data in the following fields:

Activation:

Select **On** or **Off**.

Time:

Enter the wake-up time in 4-digit format.

How often:

Select **Daily** or **Monday-Friday**.

Volume:

Set the volume (1–6).



Melody:

Select melody.

Save Press the display key.

In idle status, the  icon and wake-up time are displayed.

A wake-up call is signalled on the display and with the selected ringtone (→ page 3). The wake-up call sounds for 60 seconds. If no key is pressed, the wake-up call is repeated twice at five minute intervals and then switched off.

While the wake-up call sounds, you can permanently change the volume by pressing the side keys  (louder) or  (quieter).

During a call, the wake-up call is only signalled by a short tone.

Deactivating the wake-up call/ repeating after a pause (snooze mode)

Prerequisite: A wake-up call is sounding.

OFF Press the display key. The wake-up call is deactivated.

or

Snooze Press the display key or any key. The wake-up call is deactivated and then repeated after 5 minutes. After the second repetition the wake-up call is deactivated completely.

Using multiple handsets

Registering handsets

You can register up to six handsets to your base.

A Gigaset S79H handset can be registered on up to four bases.

Manually registering a Gigaset S79H to a Gigaset S790/ S795

You must activate manual registration of the handset on both the handset (1) and the base (2).

When the registration process has completed successfully, the handset returns to idle status. The handset's internal number is shown in the display e.g., INT 1. If not, repeat the procedure.

1) On the handset


The handset is not registered to a base.


Register Press the display key.

The handset is already registered to a base:

 →  → **Registration**
→ **Register Handset**

If the handset is already registered to four bases:

 Select base, e.g., **Base 3** and press **OK**.

 If required, enter the system PIN for the base and press **OK**.

A message appears stating that the handset is searching for a base that is ready for registration.

2) On the base

Within 60 seconds press and **hold** the registration/paging key on the base (→ page 4) (approx. 3 seconds).

Registering other handsets

You can register other Gigaset handsets and handsets for other devices with GAP functionality as follows.

1) On the handset


Start to register the handset as described in its user guide.


2) On the base


Press and **hold** the registration/paging key on the base (→ page 4) (approx. 3 sec.).

De-registering handsets

You can de-register any other registered handset from any registered Gigaset S79H handset.

 →  → **Registration**
→ **De-reg. Handset**

 Select the internal subscriber you wish to de-register and press **OK**.
(The handset you are currently using is highlighted with <).)

 Enter the current system PIN and press **Save**.


Yes Press the display key.

Locating a handset ("Paging")

You can locate your handset using the base.




- ▶ **Briefly** press the registration/paging key on the base (→ page 4).
- ▶ All handsets will ring simultaneously ("paging"), even if the ringtones are deactivated.

Ending paging

- ▶ **Briefly** press the registration/paging key on the base or press the talk key  on the handset.

Changing the base



If your handset is registered to more than one base, you can set it to a particular base or to the base that has the best reception (**Best Base**).

 →  → **Registration** → **Select Base**
 Select one of the registered bases or **Best Base** and press **Select**.




Making internal calls

Internal calls to other handsets registered on the same base are free.

Calling a specific handset

 Initiate internal call.
 Enter the number of the handset.



or:

 Initiate internal call.
 Select handset.
 Press the talk key.

Calling all handsets ("group call")

 Press and **hold**.

or:


 Initiate internal call.
 Press the star key.
or

Call All

 Select
 Press the talk key.




All handsets are called.

Ending a call

 Press the end call key.


Transferring a call to another handset

You can transfer an external call to another handset (connect).

-  Open the list of handsets. The external participant hears music on hold, if activated (→ page 66).
-  Select a handset or **Call All** and press .


When the internal participant answers:

- ▶ If necessary, announce the external call.

 Press the end call key.

The external call is transferred to the other handset.

If the internal participant does **not** answer or the line is busy, press the display key **End** to return to the external call.




When transferring a call, you can also press the end call key  before the internal participant answers.

Then, if the internal participant does not answer or the line is busy, the call will automatically return to you.

Internal consultation/conference calls

When you are conducting an **external** call, you can call an **internal** participant at the same time for consultation or hold a conference call between all 3 participants.

You are conducting an **external** call:

-  Open the list of handsets. The external participant hears music on hold, if activated (→ page 66).
-  Select handset and press . The internal participant is called.



If the participant picks up, you can **either**:

- End** Press the display key. You are reconnected with the external participant.


or:


- Conference** Press the display key. All 3 participants are connected with each other.

Please note

- ◆ If only **two** handsets are registered, the other handset is called **immediately** by pressing the  key.
- ◆ Pressing and **holding** the  key calls **all** handsets **immediately**.

Ending a conference call

 Press the end call key.

If an **internal** participant presses the end call key , the other handset remains connected to the external participant.

Accepting/rejecting call waiting

If you receive an **external** call during an **internal** call, you will hear the call waiting tone (short tone). With Calling Line Identification, the caller's number will appear in the display.

Ending an internal call, accepting an external call

Accept Press the display key.

The internal call is **ended**. You are connected to the external caller.

Rejecting the external call

Reject Press the display key.

The call waiting tone is turned off. You remain connected to the internal participant. The ringtone can still be heard on other registered handsets.


Listening in to an external call

Prerequisite: The **Listening In** function must be activated.

You are conducting an external call. An internal participant can listen in on this call and take part in the conversation. All the participants are made aware of additional listeners by a signal tone.


Activating/deactivating listening in

 →  → **Telephony** → **Listening In**

Press **Change** to activate/deactivate the function ( = on).


Internal listening in

The line is engaged with an external call. Your screen will display information to that effect. To listen in to the external call.


 Press and **hold** the talk key.

You can listen in to the call. All participants hear a signal tone. During this time, this handset displays the **Conference** message and it is not possible to dial another number from this handset.

Ending listening in



 Press the end call key.

All participants hear a signal tone.

If the **first** internal participant presses the end call key , the handset that has "listened in" remains connected to the external participant.

Changing the name of a handset


The names "INT 1", "INT 2" etc. are assigned automatically on registration. You can change these names. The name must be no more than 10 characters. The changed name is displayed in every handset's list.

 Open the list of handsets. Your own handset is indicated by .

 Select handset.

Options Open menu.



Rename

 Enter name.

Save Press the display key.

Changing a handset's internal number


A handset is **automatically** assigned the lowest free number when it is registered. If all slots are occupied, number 6 is overwritten if this handset is in idle status. You can change the internal number of all registered handsets (1–6).

 Open the list of handsets. Your own handset is indicated by .

Options Open menu.

Assign Handset No.

Select and press **OK**.

 Select number. Only numbers that have not been assigned are displayed.

Save Press the display key to save the input.

Using a handset as a room monitor

If the room monitor is activated, a previously saved destination number is called as soon as a set noise level is reached. You can save an internal or external number in your handset as the destination number. All of the handset keys are deactivated, with the exception of the display keys.

The room monitor call to an external number is terminated after approximately 90 seconds. The room monitor call to an internal number (handset) is terminated after approximately 3 minutes (depending on the base). When the room monitor is activated, all keys are locked except the end call key. The handset's speaker is muted.

When the room monitor is activated, incoming calls to the handset are indicated **without a ringtone** and are only shown on the screen. The display and keypad are not illuminated and advisory tones are also turned off.

If you accept an incoming call, the room monitor is suspended for the duration of the call, but the function **remains** activated.

If you deactivate then reactivate the handset, the room monitor remains activated.

Warning!

- ◆ **Always check the operation of the room monitor before use. For example, test its sensitivity. Check the connection if you are diverting the room monitor to an external number.**
- ◆ When the function is switched on, the handset's operating time is considerably reduced. If necessary, place the handset in the base/charger. This ensures that the battery does not run down.
- ◆ Ideally the handset should be positioned 1 to 2 metres away from the baby. The microphone must be directed towards the baby.
- ◆ The connection to which the room monitor is diverted must not be blocked by an activated answering machine.

Activating the room monitor and entering the destination number

 →  → Room Monitor


- ▶ You can enter data in the following fields:

Activation:

Select **On** to activate.

Alarm to:

Select **Internal** or **External**.

External number: Select the number from the directory (press display key ) or enter it manually.

Internal number: Select display key **Change** → . Select handset or **Call All** to call all registered handsets → **OK**.

In idle status, the destination number or the internal destination number is displayed.

Sensitivity:

Select noise level sensitivity (**Low** or **High**).

- ▶ Press **Save** to save the settings.

Handset settings

When the room monitor function is activated, the idle display appears as shown below:



Changing the set destination number

☰ → ★ → Room Monitor

- ▶ Enter and save number as described in "Activating the room monitor and entering the destination number" (→ page 59).

Cancel/deactivate room monitor

Press the end call key  to cancel the call when the **room monitor is activated**.

In **idle status**, press the display key **OFF** to deactivate room monitor mode.

Deactivating the room monitor remotely

Prerequisites: The phone must support tone dialling and the room monitor should be set for an external destination number.

- ▶ Accept the call from the room monitor and press keys  .

The room monitor function will deactivate after the call ends. There are no further room monitor calls. The other room monitor settings on the handset (e.g., no ringtone) will remain activated until you press the display key **OFF** on the handset.




To reactivate the room function with the same phone number:

- ▶ Turn on the activation again and save with **Save** (→ page 59).

Handset settings

Your handset is preconfigured, but you can change the settings to suit your individual requirements.

Quick access to numbers and functions

You can assign a **number from the directory** to each of the **digit keys**  and  to .

The left and right **display keys** have a default **function**. You can change the assignment (→ page 61).

The number is then dialled or the function started by simply pressing a key.

Assigning digit keys

Prerequisite: You have not yet assigned a number to the digit key.

- ▶ Press and **hold** the digit key **or** Press the digit key **briefly** and press the display key **QuickDial**.

The directory opens.

- ▶ Select an entry and press **OK**.

The entry is saved to the corresponding digit key.

Please note

If you delete or edit the entry in the directory at a later date, this will not affect the assignment to the number key.

Selecting numbers/changing an assignment

Prerequisite: The digit key already has a number assigned to it.

When the handset is in idle status

- ▶ Press and **hold** the digit key:
The number is dialled immediately.

or

- ▶ **Briefly** press the digit key.
Press the display key with the number/ name (abbreviated if necessary) to select the number **or** press the display key **Change** to change the assignment or to delete the assignment.

Changing display key assignments

- ▶ Press and **hold** the left or right side of the display key.

The list of possible key assignments is opened. The following can be selected:

Room Monitor

Assign menu for setting and activating the room monitor to a key (→ page 59).

Alarm Clock

Assign menu for setting and activating the alarm clock to a key (→ page 55).

Calendar

Display graphical calendar (→ page 53).

Redial

Display the redial list.

Hotline

Assign a special hotline directory to a display key so that you can quickly enter, find and dial important phone numbers.

You can save the entries with name (max. 16 characters) and number (max. 32 characters).

For directory handling (→ page 30).

More Functions...

More features are available:

Call Lists

Display call lists (→ page 34).

INT

Internal calls (→ page 56).

SMS


Assign menu for SMS functions to a key (→ page 37).

- ▶ Select an entry and press **OK**.

Changing the display language

You can view the display texts in different languages.

 →  → **Language**


The current language is indicated by a .

 Select language and press **Select**.

If you accidentally choose a language you do not understand:

 →  →  →  → 

Press keys in sequence and confirm by selecting **OK**.


 Select the correct language and press the **right display key**.

Setting the display

Setting the screensaver/slide show

When in idle status, a picture or a slide show (all the pictures are displayed one after the other) from the **Screensaver** folder of the **Resource Directory** (→ page 64) or the time can be displayed as a screensaver. This will replace the idle status display.

The screensaver is not displayed in certain situations, e.g., during a call or if the handset is de-registered.

If a screensaver is activated, the **Screensaver** menu option is marked with .

 →  → **Display + Keypad**
→ **Screensaver**

The current setting is displayed.


- ▶ You can enter data in the following fields:

Activation:

Select **On** (screensaver is displayed) or **Off** (no screensaver).

Selection :

Select screensaver **or**

 Press the display key. The active screensaver is displayed.

Handset settings



Select screensaver and press **OK**.

Save

Press the display key.

Briefly press the end call key to return to the idle display.

Please note

If the **analogue clock** has been set as the screensaver, the **second hand** is shown only when the handset is in the base.

Setting large font

You can increase the font size of print and symbols in call lists and in the directory to improve readability. Only one entry is shown at a time on the display instead of several entries and names are abbreviated if necessary.

→ → **Display + Keypad** → **Large Font**

Change

Press display key (= on).

Setting the colour scheme

You can set the display to be shown in various colour combinations.

→ → **Display + Keypad** → **Colour Schemes**

Select **Colour Scheme** (1 to 5) and press **OK**.



Setting the display backlight

Depending on whether or not the handset is in the base/charger, you can activate or deactivate the backlight. If it is activated, the display is permanently dimmed. If the backlight is deactivated it is switched on by pressing any key. In this case the pressed key has no other function.

→ → **Display + Keypad** → **Display Backlight**

The current setting is displayed.

▶ You can enter data in the following fields:

In Charger

Select **On** or **Off**.

Out of Charger

Select **On** or **Off**.

Please note

With the **On** setting, the standby time of the handset can be significantly reduced.

Save

Press the display key.

Setting keypad illumination

The brightness of the keypad illumination can be set to one of five levels.

→ → **Display + Keypad** → **Keypad Illumination**

The current setting is displayed.

▶ Modify the entry:

Intensity:

Select 1 (darkest) to 5 (brightest).

Save

Press the display key.



Activating/deactivating auto answer

If you activate this function, when you receive a call you can simply lift the handset out of the base/charger without having to press the talk key .

→ → **Telephony** → **Auto Answer**

Change

Press display key (= on).

Changing the speaker/earpiece volume

You can set the loudspeaker volume for speaker mode and the earpiece volume to five different levels.

During a conversation via the earpiece or in speaker mode:

/ Press the side key to call up the **Handset Volume** menu.
Change the volume by pressing (louder) or (quieter).

or



Press the control key to call up the **Handset Volume** menu. Set the earpiece or speaker volume by pressing

The setting will automatically be saved after approximately 3 seconds, if not then press the display key **Save**.

If is assigned to another function:

Options

Open menu.

Volume Select and press **OK**.

Configure setting (see above).

Please note

- ◆ The settings for the earpiece also apply to a connected headset.
- ◆ You can also set the call volume using the menu (→ page 27).

Setting a handsfree profile

Profile 1

The optimum setting for most connections and set as default.

Profile 2

Optimum volume in handsfree mode. However, this means that the participants cannot speak at the same time as the person speaking is given preferential transmission (making two-way conversations difficult).

Profile 3

Optimises two-way conversations, both callers can hear each other, even if they talk at the same time.

Profile 4

Optimised for special connections. If the default setting (profile 1) does not provide optimum sound, please give this a try.



→ → **Audio Settings**
→ **Handsfree Profiles**

Select handsfree profile (1 to 4) and press **Select**.

Changing ringtones

◆ Volume:

You can choose between five volumes (1–5; e.g., volume 3 =) and the "crescendo" ringtone (6; volume increases with each ring =).

◆ Ringtones:

You can select a ringtone from a list of pre-loaded melodies.

You can select various ringtones, melodies or any sound from the Resource Directory (→ page 64).

You can set different ringtones for the following functions:

- ◆ Int. Calls
- ◆ Extern. Calls

Setting volume/melodies

In idle status:



→ → **Audio Settings**
→ **Ringtones(Handset)** → **Volume/Melodies**



Setting volume/melodies for internal calls and anniversaries.



Scroll to the next line.



Setting volumes/melodies for external calls.

Save

Press the display key to save the setting.

While the phone is ringing, you can permanently change the volume by pressing the side keys **+** (louder) or **-** (quieter).



Additionally for external calls:

You can specify a time period when you do not want the telephone to ring, e.g., during the night.



→ → **Audio Settings**
→ **Ringtones(Handset)** → **Time Control**

Time Control:

Select **On** or **Off**.

If the time control is activated:

Handset settings

Suspend ring. from:

Enter the start of the period in 4-digit format.

Suspend ring. until:

Enter the end of the period in 4-digit format.

Please note

During this period, you will continue to receive calls from numbers to which you have assigned a personalised melody in the directory (VIP).

Activating/deactivating the ringtone for unknown calls.

You can set your handset so that it doesn't ring for calls where Calling Line Identification has been withheld (not answering machine). The call will only be signalled on the display.

In idle status:


 →  → **Audio Settings**
→ **Ringtones(Handset)** → **Anon. Calls Silent**

Press **Change** to activate or deactivate the function (= on).

Activating/deactivating the ringtone


You can deactivate the ringtone on your handset before you answer a call or when the handset is in idle status; the ringtone can be deactivated permanently or just for the current call. The ringtone cannot be re-activated while an external call is in progress.

Deactivating the ringtone permanently

 Press and **hold** the star key.

The  icon appears in the display.

Reactivating the ringtone


 Press and **hold** the star key.

Deactivating the ringtone for the current call


Silence Press the display key.

Activating/deactivating the alert tone

In place of the ringtone, you can activate an alert tone. When you receive a call, you will hear a **short tone** ("Beep") instead of the ringtone.

 Press and **hold** the star key and **within 3 seconds:**

Beep Press the display key. A call will now be signalled by **one** short alert tone.

 appears in the display.

Resource Directory



The resource directory on the handset manages sounds, which you can use as ringtones, and pictures, which you can use as caller pictures or as screensavers. Prerequisite: Calling Line Identification (CLIP). The resource directory can manage the following media types:

Type	Format
Sound	
Ringtones	Internal
Monophonic	Internal
Polyphonic	Internal
Imported sounds	WMA, MP3, WAV
Picture	BMP, JPG, GIF
– Caller picture	128 x 86 pixels
– Screensaver	128 x 160 pixels


Various mono and polyphonic sounds and pictures are preconfigured on your handset. You can listen to the available sounds and view the pictures.

You can download pictures and sounds from a PC (→ page 83). If there is not enough memory available, you must first delete one or more pictures or sounds.

Playing back sounds/viewing caller pictures


 →  → Screensavers / Caller Pictures / Sounds (select entry)

Pictures:

View Press the display key. The selected picture is displayed. Switch between pictures using the  key.

If you have saved a picture in an invalid file format, you will see an error message after selecting the entry.


Sounds:

The selected sound is played back immediately. Switch between the sounds using the  key.

You can set the volume during playback.

Options Open menu.

Volume Select and press **OK**.


 Set volume.

Save Press the display key.

Deleting/renaming a picture/sound

You have selected an entry.

Options Open menu.

If a picture/sound cannot be deleted () , these options are not available. You can select the following functions:

Delete Entry



The selected entry is deleted.

Rename

Change the name (max. 16 characters) and press **Save**. The entry is stored with the new name.

Checking the memory

You can check how much memory is available for screensavers and caller pictures.



 →  → Capacity

Activating/deactivating advisory tones

Your handset uses advisory tones to tell you about different activities and statuses. The following advisory tones can be activated/deactivated independently of each other:

- ◆ **Key tone:** every key press is confirmed.
- ◆ **Acknowledge tones:**
 - **Confirmation tone** (ascending tone sequence): at the end of an entry/setting and when an SMS or a new entry arrives in the answering machine list or call list
 - **Error tone** (descending tone sequence): when you make an incorrect entry
 - **Menu end tone:** when scrolling to the end of a menu
- ◆ **Battery low beep:** the battery needs charging.

In idle status:

 →  → **Audio Settings**
→ **Advisory Tones**

▶ You can enter data in the following fields:

Key Tones:

Select **On** or **Off**.

Confirmation:

Select **On** or **Off**.

Battery:

Select **On** or **Off**.

Save Press the display key.

Setting your own area code

To transfer phone numbers (e.g., in vCards), it is essential that your area code (international and local area code) is saved on the phone.


Some of these numbers are already preset.


 →  → **Telephony** → **Area Codes**


Check that the (pre)set area code is correct.


▶ You can enter data in the following fields:

 Select/change input field.

 Navigate in the input field.

 **< C** If necessary, delete number: press the display key.

 Enter number.

 **Save** Press the display key.

Example:

Area Codes	
International code:	00 - 49
Local area code:	0 - []
< C	Save


Restoring the handset default settings

You can reset individual settings and changes that you have made.

The following settings are **not** affected by a reset:

- ◆ Registration to the base
- ◆ Date and time
- ◆ Entries in the calendar
- ◆ Entries in the directory, the call lists, the SMS lists and the content of the resource directory

 →  → **System** → **Handset Reset**



 **Yes** Press the display key.

Setting the base

The base settings are carried out using a registered Gigaset S79H handset.

Changing the Gigaset S795 base ringtones

◆ **Volume:**

You can choose between five volumes (1–5; e.g., volume 3 = ) and the "crescendo" ringtone (6; volume increases with each ring = )

◆ **Ringtones:**


You can select a ringtone from a list of pre-loaded melodies.


In idle status:


 →  → **Audio Settings**


→ **Ringtones (Base)**

▶ You can enter data in the following fields:

 Set volume.

 Scroll to the next line.

 Set melody.

 **Save** Press the display key to save the setting.

Activating/deactivating music on hold

 →  → **Audio Settings**



→ **Music on hold**

Press **Change** to activate or deactivate the music on hold (= on).

Repeater support

With a repeater, you can increase the range and signal strength of your base. You will need to activate repeater mode. This will terminate any calls that are in progress at the time.

Prerequisite: A repeater is registered.

 →  → **System** → **Repeater Mode**

Press **Change** to activate or deactivate repeater mode (= on).

After activating or deactivating the repeater, switch your handset off and on again (→ page 22).

Please note

- ◆ Eco Mode / Eco Mode+ (→ page 52) and repeater support cancel each other out, i.e., if you use a repeater, you cannot use Eco Mode or Eco Mode+.
- ◆ Encrypted transmission activated at the factory is deactivated when a repeater is registered.

Protecting against unauthorised access

Protect the system settings of the base with a PIN known only to yourself. The system PIN must be entered when, for example, registering/de-registering a handset to/from the base or when restoring the default settings.

Changing the system PIN

You can change the 4-digit system PIN set on the base (default setting: **0000**) to a 4-digit PIN known only by you.

Gigaset S795: Setting a system PIN facilitates remote operation of the answering machine (→ page 49).

 →  → **System** → **System PIN**



Enter the current system PIN and press **OK**.



Enter your new system PIN and press **OK**.

Resetting the system PIN

If you have forgotten your system PIN, you can reset the base to the original code **0000**:

Disconnect the power cable from the base. Hold down the registration/paging key on the base while reconnecting the power cable to the base. Hold down the key for at least 5 seconds.

The base has now been reset and the system PIN set to **0000**.

Please note

All handsets are de-registered and must be re-registered. All settings are reset to the factory settings.

Resetting the base to the factory settings

When the settings are restored:

- ◆ Date and time are retained
- ◆ Handsets are still registered
- ◆ **Eco Mode** is activated and **Eco Mode+** is deactivated,
- ◆ The system PIN is not reset.

 →  → **System** → **Base Reset**



Enter the system PIN and press **OK**.

Yes


Press the display key.

Connecting the base to the PABX

The following settings are only necessary if your PABX requires them; see the PABX user guide.

You cannot send or receive SMS messages on PABXs that do not support Calling Line Identification.





Dialling modes and recall

The current setting is indicated by .

Changing the dialling mode





The following dialling modes can be selected:

- ◆ Tone dialling (DTMF)
- ◆ Pulse dialling (PD).

 →  → **Telephony** → **Dialling Mode**
 Select dialling mode and press **Select** ( = selected).

Setting recall


Your phone is preset at the factory for operation on the main connection. For operation on a PABX, you may have to change this value. Please refer to the user guide for your PABX.

 →  → **Telephony** → **Recall**
 Select recall and press **Select** ( = set value). Possible values are:
80 ms, 100 ms, 120 ms, 180 ms, 250 ms, 300 ms, 400 ms, 600 ms, 800 ms.

Saving an access code (outside line code)


Prerequisite: You may have to enter an access code in front of the number for external calls in your PABX, e.g., "0".

 →  → **Telephony** → **Access Code**

 Enter or change access code, max. 3 digits.


Save Press the display key.


If an access code has been saved:








- ◆ The access code is prefixed automatically when you dial a number from the following lists: SMS centre numbers, call lists or answering machine list.
- ◆ The access code must be entered when dialling manually and when manually entering directory, emergency/quick dial numbers or SMS centre numbers.
- ◆ If you copy the recipient's number from the directory when sending an SMS, you have to delete the access code.
- ◆ An existing access code is deleted using .

Setting pauses

Changing the pause after line seizure

You can change the length of the pause that is inserted between pressing the talk key  and sending the number.

 Open the main menu.


Press keys.



Enter number for the length of the pause (1 = 1 sec.; 2 = 3 secs.; 3 = 7 secs.) and press **OK**.

Change pause after recall key

You can change the length of the pause if your PABX requires this (refer to the user guide for your PABX).

 Open the main menu.


      








Press keys.

~ Enter a number for the length of the pause (1 = 800 ms; 2 = 1600 ms; 3 = 3200 ms) and press **OK**.

Changing a dialling pause (pause after access code)

Prerequisite: You have saved an access code (→ page 68).


 Open the main menu.

Press keys.



Enter number for the length of the pause (1 = 1 sec.; 2 = 2 secs.; 3 = 3 secs.; 4 = 6 secs.) and press **OK**.

To insert a dialling pause: press and hold  for 2 seconds. A P appears in the display.

Switching temporarily to tone dialling (DTMF)

If your PABX still operates with pulse dialling (PD), but you need tone dialling for a connection (e.g., to listen to the network mailbox), you must switch to tone dialling for the call.

Prerequisite: You are conducting a call or have already dialled an external number.

 Press the star key.

After the call ends, pulse dialling is automatically activated again.

Customer Service & Assistance

Do you have any questions? As a Gigaset customer, you can find help quickly in this User Manual and in the service section of our Gigaset online portal www.gigaset.com/service.

In our constantly updated online service you can find:

- ◆ Extensive information about our products
- ◆ FAQ compilations
- ◆ Keyword search to help find topics quickly
- ◆ Compatibility database: Find out which base stations and handsets can be combined.
- ◆ Product comparison: Compare the features of several products with each other.
- ◆ Downloads for user manuals and current software updates
- ◆ E-mail contact form for customer service

Please register your phone online right after purchase.

This enables us to provide you with even better service regarding questions or an after sales query/issue/claim. In order to contact our customer service via email, please use the email contact form from our Gigaset online portal after selecting your home country.

Our representatives are also available on the telephone hotlines for consultation.

Customer Service & Assistance

Australia	1300 780 878	Jordan	00962 6 5625460/1/2
Austria.....	0043 1 311 3046	Kuwait	+965 -22458737/22458738
Bahrain	97 31 73 11 173	Lebanon	+9611240259/+9611236110
Belgium	0 78 15 66 79	Luxembourg	+352 8002 3811
Bosnia Herzegovina	033 276 649	Malaysia	+603-8076 9696
Brazil	4003 3020	Malta	+390 2360 46789 (0,10 €)
(grandes cidades e regiões metropolitanas - Custo de uma ligação local)		Mexico	
.....	0800 888 3020	01800 999 4442738 (01800 999 GIGASET)
(demais localidades - Gratuito)		Netherlands.....	0900-3333102
Bulgaria	+359 2 9710666	(0,25 € per minuut (vast net). Voor oproepen uit het mobiele netwerk kunnen andere prijzen gelden.)	
(0.50 евро на минута от всички държави за стационарни телефони. За обаждания от мобилни телефони може да има други цени).		New Zealand	0800 780 878
Canada	1-866 247-8758	Norway	22 70 84 00
China	0 21 400 670 6007 (RMB 0.11)	(Oppstartskost 89 øre + 15 øre pr minutt fra fasttelefon linje. For samtaler fra mobil vil det gjelde egne priser.)	
Croatia.....	01 2456 555 (0,23 Kn)	Oman.....	+968 709281 Ext. 49/21/75
Czech Republic.....	+420 23303 2727	Poland	801 140 160
Denmark.....	+45 (0) 35 25 86 00	Portugal	(351) 808 781 223
Finland	09 231 134 25	(custo de uma chamada local)	
France	+33 170 706 181	Qatar	00974 4257777 / 00974 4257844
Coût d'un appel local depuis une ligne fixe France Télécom.		Romania	+40 021 204 9130
Germany.....	01805 333 222	Russia.....	8 (495) 2281312
Der Anruf kostet Sie aus den deutschen Fest- netzen 0,14 € pro Minute. Anrufe aus den deut- schen Mobilfunknetzen kosten höchstens 0,42 € pro Minute.		Saudi Arabia	00966 2 6500282 Ext. 209
Greece	801-1000 500	Serbia.....	0800 222 111
(Χρέωση 0,0026 € το λεπτό για το σταθερό δίκτυο της Ελλάδας. Για κλήσεις από κινητό ίσως ισχύουν άλλες χρεώσεις)		Singapore.....	6735 9100
Hong Kong	2763 0203	Slovak Republic	02 59 68 22 66 (4,428 sk)
.....	2389 7285	Slovenija	01 5644171
Hungary	06 14 71 24 44 (27 Ft)	South Africa	+2711 46 13 181
India.....	Please refer to your	Spain	902 103935
.....	local warranty card	Sweden	08-750 99 11
Indonesia	(62-21) 5673813	Switzerland	0848 212 000
.....	(62-21) 888856000	Taiwan	02 266 24343
Ireland.....	18 50 77 72 77	Turkey	0216 459 98 59
Italy	199.15.11.15	Ukraine	+380-44-451-71-72
(€ cent 8,36 + IVA al minuto da telefono fisso della rete Telecom Italia senza scatto alla ris- posta mentre per le chiamate effettuate attra- verso la rete di altri operatori fissi o mobili con- sultate le tariffe del vostro operatore)		United Arab Emirates	+9714445825/+97144458254
		United Kingdom.....	0 84 53 67 08 12
		USA.....	1-866 247-8758
		Vietnam.....	1900 545 416

Please have your record of purchase ready when calling. After sales service is not offered in countries where our product is not sold by authorised dealers.



For Southern Africa:


In the event of an after-sales issue/query/claim please refer back to your point of purchase.

Proof of purchase (receipt) has to be submitted.

Questions and answers

If you have any questions about the use of your phone, you can contact us 24/7 at www.gigaset.com/service. The table below contains a list of common problems and possible solutions.

<p>The display is blank.</p> <ol style="list-style-type: none"> The handset is not switched on. <ul style="list-style-type: none"> Press and hold the end call key . The battery is empty. <ul style="list-style-type: none"> Charge the battery or replace it (→ page 12).
<p>Not all menu items are displayed.</p> <p>The menu display is restricted (standard mode).</p> <ul style="list-style-type: none"> Activate extended menu display (expert mode ) (→ page 25).
<p>No Base flashes on the display.</p> <ol style="list-style-type: none"> The handset is outside the range of the base. <ul style="list-style-type: none"> Move the handset closer to the base. The base's range is reduced because Eco Mode is activated. <ul style="list-style-type: none"> Deactivate Eco Mode (→ page 52) or reduce the distance between the handset and the base. The base is not switched on. <ul style="list-style-type: none"> Check the base power adapter (→ page 10).
<p>Please register handset flashes on the display.</p> <p>Handset has not been registered with the base or has been deregistered.</p> <ul style="list-style-type: none"> Register the handset (→ page 55).
<p>Handset does not ring.</p> <ol style="list-style-type: none"> The ringtone is deactivated. <ul style="list-style-type: none"> Activate the ringtone (→ page 64). The phone only rings if the phone number has been transferred. <ul style="list-style-type: none"> Switch on the ringtone for unknown calls (→ page 64).
<p>You cannot hear a ringtone/dialling tone from the fixed line network.</p> <p>The phone cord supplied has not been used or has been replaced by a new cord with the wrong pin connections.</p> <ul style="list-style-type: none"> Please always use the phone cord supplied or ensure that the pin connections are correct when purchasing from a retailer (→ page 10).

<p>The connection always terminates after approx. 30 seconds.</p> <p>Repeater activated/deactivated (→ page 67).</p> <ul style="list-style-type: none"> Activate/deactivate the handset (→ page 22).
<p>Error tone sounds after system PIN prompt.</p> <p>You have entered the wrong system PIN.</p> <ul style="list-style-type: none"> Reset the system PIN to 0000 (→ page 67).
<p>Forgotten the system PIN.</p> <ul style="list-style-type: none"> Reset the system PIN to 0000 (→ page 67).
<p>The other party cannot hear you.</p> <p>You have pressed the mute button . The handset is "muted".</p> <ul style="list-style-type: none"> Reactivate the microphone (→ page 29).
<p>The number of the caller is not displayed despite CLIP.</p> <p>Calling Line Identification is not enabled.</p> <ul style="list-style-type: none"> The caller should ask the network provider to enable Calling Line Identification (CLI).
<p>You hear an error tone when keying an input (a descending tone sequence).</p> <p>Action has failed/invalid input.</p> <ul style="list-style-type: none"> Repeat the operation. <ul style="list-style-type: none"> Watch the display and refer to the user guide if necessary.
<p>You cannot listen to messages on the network mailbox.</p> <p>Your PABX is set for pulse dialling.</p> <ul style="list-style-type: none"> Set your PABX to tone dialling.

Gigaset S795 only:

<p>No time is specified for a message in the call list.</p> <p>Date and time have not been set.</p> <ul style="list-style-type: none"> Set the date and time (→ page 15).
<p>The answering machine announces "PIN is incorrect" during remote operation.</p> <ol style="list-style-type: none"> You have entered the wrong system PIN. <ul style="list-style-type: none"> Enter the system PIN again. The system PIN is still set to 0000. <ul style="list-style-type: none"> Set the system PIN to something other than 0000 (→ page 67).
<p>The answering machine is not recording any messages/has switched over to answer only.</p> <p>Its memory is full.</p> <ul style="list-style-type: none"> Delete old messages. Play back new messages and delete.

Exclusion of liability

Some displays may contain pixels (picture elements), which remain activated or deactivated. As a pixel is made up of three sub-pixels (red, green, blue), it is possible that pixel colours may vary.

This is completely normal and does not indicate an error.

Authorisation

This device is intended for connection to analogue networks outside the EEA (with the exception of Switzerland) depending on national type approval.

Country-specific requirements have been taken into consideration.

We, Gigaset Communications GmbH, declare that this device meets the essential requirements and other relevant regulations laid down in Directive 1999/5/CE.

A copy of the 1999/5/EC Declaration of Conformity is available at this Internet address: www.gigaset.com/docs

CE 0682

Warranty

Service Centres (Middle East)

UAE

Customer Service Hotline UAE

Tel: 00971-4-4458255 / 00971-4-4458254

Service Collection Point

www.technocare-prodigy.com

KARAMA

Sea Shell Electronics

Opp. Karama Centre

Dubai, UAE

TEL: 00971-4-3979228

FAX: 00971-4-3966205

Deira

Souvenir Mobiles,

Omar Bin Katab Road,

Oppst: Gulf Peral Hotel (Tahir Hotel),

Al Baraha Street,

Tel: 00971-4-2731910 / 2737377,

Sharjah

Hotline Telecom

Sahara Centre

Sharjah, UAE

Tel: 00971-6-5312126

Al Ain

Phone Station,

Al Ain Mall, Town Centre,

Tel: 00971-3-7515588

Fujairah

Al Manzil,

Al Gurfa Street,

Main Market Road,

Tel: 00971-9-2233488,

Oman

National Telephone Services Co. LLC

P.O.Box 2786 PC:112, Sultanate of Oman

Tel: +968 709281 Ext. 46/21/75 Fax: +968 791013

email: isonts@omentel.net.om

Qatar

MODERN HOME,

51-East - Salwa Road,

Al-Maha Complex, Doha

Tel: 00974 4257844 / 00974 4257777

Fax: 00974 4314700

Bahrain

Authorized Service Center,
Bldg: 211, Rd: 339, Block: 321,
Old Palace Road, Manama,
Tel: 00973 17311173,
email: servicemanager@ashrafs-com.bh

Saudi Arabian

Service Centers:

Ahmed Abdulwahed Trading Co.

JEDDAH SERVICE CENTER:

AL-AMAL PLAZA, HAIL STREET,
TEL: 02-6500282 EXT. 209,
JEDDEH, SAUDI ARABIA.

RIYADH SERVICE CENTER:

OLAYA STREET,
TEL: 01-4622470/4623850,
RIYADH, SAUDI ARABIA.

KHOBAR SERVICE CENTER:

AL-KHOBAR STREET,
TEL: 03-8944193/03-8952359,
AL-KHOBAR, SAUDI ARABIA.

Madina Munawara

Al-Ayon Street,
Tel: 00966-4-8387931

Khamis Mushyat

Al-Khalidiya St.,
TEL: 00966-7-2230772

Tabuk

Main Street,
TEL: 00966-4-4219232

Kuwait

Customer Service Hotline Kuwait

Tel: 0096522458737 / 0096522458738

Al-Babtain Service Center

Shop #: 247,

Qibla, Block 11,

Avenue 11,

Souk al Kabeer,

Fahad Al Salem Street,

Tel: 00965-2464993

Jordan

SEDR Home & office Electronics

Co - Tronicom

Wasfi Al-Tal St.,

Building No. 80,

2nd floor,

Tel: 00962 6 5625460/1/2,

Lebanon

306, Jdeideh Sin el Fil Blvd,

Tel: 009611240259 / 00961-1236110

Manufacturer warranty (Middle East)

On the purchase of your new Gigaset product, we guarantee that this equipment is a genuine manufacturer's product and extend the following warranty:

We guarantee this product against manufacturing defects for two full years from the date of purchase, unless specified otherwise.

Adaptors and batteries for cordless phones carry 6 months warranty from the date of purchase.

Gigaset Communications authorized Service Centres will replace or repair, if necessary, any defective part/parts free of charge by presenting this certificate of warranty at the Service Centre mentioned overleaf.

This Certificate of Warranty does not apply if the telephone has:

1. Been misused, mishandled, willfull damaged, neglected, damaged by liquid, lightning, improperly repaired, tested, altered improperly in any way.
2. A defect arising out of any failure to follow instructions either in the manual or product specification.
3. In case repairs are carried out by unauthorized personnel or unauthorized source warranty will be void.
4. A defect arising from using non-Gigaset approved accessories or ancillary items attached to or in connection with the telephone.
5. If this Certificate of Warranty is not signed and stamped by the authorised distributor.
6. Any other claim resulting out of or in connection with the device shall be excluded from this warranty.

For Southern Africa:

In the event of an after-sales issue/warranty claim please refer back to your point of purchase.

Proof of purchase (receipt) has to be submitted.

Certificate of Warranty (Middle East)

The Warranty is not valid if it is not signed and stamped by the authorized distributor.

Please fill in the following details and stamp the card to validate the Warranty.
All details must be filled in by the Dealer and retained by the Customer.

This warranty shall apply to products purchased in the Middle East only.

Customer's Name:

Product / Model:

Dealer's Name

Date of Purchase: Invoice / Cash Memo Details:

Dealer's Stamp

Protecting our environment

Our environmental mission statement

We, Gigaset Communications GmbH, bear social responsibility and are actively committed to a better world. Our ideas, technologies and actions serve people, society and the environment. The aim of our global activity is to secure sustainable life resources for humanity. We are committed to a responsibility for our products that comprises their entire life cycle. The environmental impact of products, including their manufacture, procurement, distribution, use, service and disposal, are already evaluated during product and process design.

Further information on environmentally friendly products and processes is available on the Internet at www.gigaset.com.

Environmental management system



Gigaset Communications GmbH is certified pursuant to the international standards EN 14001 and ISO 9001.

ISO 14001 (Environment): certified since September 2007 by TÜV SÜD Management Service GmbH.

ISO 9001 (Quality): certified since 17/02/1994 by TÜV SÜD Management Service GmbH.

Ecological energy consumption

The use of ECO DECT (→ page 52) saves energy and makes an active contribution towards protecting the environment.

Disposal

Batteries should not be disposed of in general household waste. Observe the local waste disposal regulations, details of which can be obtained from your local authority.

All electrical and electronic equipment must be disposed of separately from general household waste using the sites designated by local authorities.



If a product displays this symbol of a crossed-out rubbish bin, the product is subject to European Directive 2002/96/EC.

The appropriate disposal and separate collection of used equipment serve to prevent potential harm to the environment and to health. They are a precondition for the re-use and recycling of used electrical and electronic equipment.

For further information on disposing of your used equipment, please contact your local authority, your refuse collection service.

Appendix

Caring for your telephone

Wipe the device with a **damp cloth** or an **antistatic cloth**. Do not use solvent or a microfibre cloth.

Impairments in the high-gloss finish can be carefully removed using display polishes for mobile phones.

Never use a dry cloth as this can cause static.

Contact with liquid

If the device comes into contact with liquid:

1. **Unplug the power supply** and/or **remove the battery** from the handset **immediately**.
2. Allow the liquid to drain from the device.
3. Pat all parts dry. Place the device (handset with the battery compartment open and the keypad facing down) in a dry, warm place **for at least 72 hours** (not in a microwave, oven etc.).
4. **Do not switch on the device again until it is completely dry.**

When it has fully dried out, you will normally be able to use it again.

Specifications

Batteries

Technology:

Nickel-metal-hydride (NiMH)

Size: AAA (Micro, HR03)

Voltage: 1.2 V

Capacity: 550 - 1000 mAh

The device is supplied with two approved batteries.

Handset operating times/charging times

This Gigaset can charge batteries up to a capacity of 1000 mAh. The use of special high-performance batteries or batteries with high capacities is not recommended for cordless phones.

The operating time of your Gigaset depends on the capacity and age of the batteries and the way they are used. (All times are maximum possible times).

	Capacity (mAh) approx.			
	550	700	800	1000
Standby time (hours)*	140/ 50	165/ 58	185/ 67	230/ 83
Talktime (hours)	11	12	14	17
Operating time for 1.5 hrs of calls per day (hours)**	85	95	110	135
Charging time in base (hours)	7,5	8,5	10	12
Charging time in charger (hours)	6,5	7,5	8,5	10,5

* without/with display backlight

** without display backlight

(Setting the display backlight → page 62)

Due to the constant progression in battery development, the list of recommended batteries in the FAQ section of the Gigaset Customer Care pages is regularly updated:

www.gigaset.com/service

Base power consumption

In standby mode:

Gigaset S790: approx. 1.1 watt

Gigaset S795: approx. 1.2 watt

During the conversation:


Gigaset S790: approx. 1.0 watt

Gigaset S795: approx. 1.1 watt

General specifications

DECT standard	Is supported
GAP standard	Is supported
No. of channels	60 duplex channels
Radio frequency range	1880–1900 MHz
Duplex method	Time multiplex, 10 ms frame length
Channel grid	1728 kHz
Bit rate	1152 kbit/s
Modulation	GFSK
Language code	32 kbit/s
Transmission power	10 mW, average power per channel
Range	Up to 300 m outdoors, up to 50 m indoors
Base power supply	230 V ~/50 Hz
Environmental conditions in operation	+5°C to +45°C, 20% to 75% relative humidity
Dialling mode	DTMF (tone dialling)/ PD (pulse dialling)

Pin connections on the telephone jack



Writing and editing text

The following rules apply when writing text:

- ◆ Each key between **[0 +]** and **[9wxyz]** is assigned several letters and characters.
- ◆ Control the cursor with **[←]**, **[→]**, **[↑]**, **[↓]**. Press and **hold** **[←]** or **[→]** to move the cursor **word by word**.
- ◆ Characters are inserted at the cursor position.
- ◆ Press the star key **[* Δ]** to display the table of special characters. Select the required character and press the display key **[Insert]** to insert the character at the cursor position.
- ◆ Press and **hold** **[0 +]** to **[9wxyz]** to enter digits.
- ◆ Press display key **[<C]** to delete the **character** to the left of the cursor. Press and **hold** to delete the **word** to the left of the cursor.
- ◆ The first letter of the name of directory entries is automatically capitalised, followed by lower case letters.

Setting upper/lower case or digits

Repeatedly press the hash key **[# ↔]** to change the text input mode.

123	Writing digits
Abc	Upper case *
abc	Lower case

* First letter in capitals, all others in lower case

The active mode is indicated at the bottom right of the screen.

Writing an SMS/names

- ▶ Enter the individual letters/characters by pressing the corresponding key.

The characters assigned to the key are shown in a selection line at the bottom left of the screen. The selected character is highlighted.

- ▶ **Briefly** press the key several times in succession to select the required letter/character.

Standard characters

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x
1 [SD]	␣ ¹⁾	↵ ²⁾	1							
2 [ABC]	a	b	c	2	ä	á	à	â	ã	ç
3 [DEF]	d	e	f	3	ë	é	è	ê		
4 [GHI]	g	h	i	4	ï	í	ì	î		
5 [JKL]	j	k	l	5						
6 [MNO]	m	n	o	6	ö	ñ	ó	ò	ô	õ
7 [PQRS]	p	q	r	s	7	ß				
8 [TUV]	t	u	v	8	ü	ú	ù	û		
9 [WXYZ]	w	x	y	z	9	ÿ	ý	æ	ø	å
0 [+]	.	,	?	!	0					

- 1) Space
- 2) Line break

Arabic

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x	11x	12x
1 [SD]	␣ ¹⁾	↵ ²⁾	1	\$								
2 [ARAB]	ث	ج	ح	خ	2	a	b	c				
3 [DEF]	ا	ب	ة	ت	أ	إ	آ	3	d	e	f	
4 [GHI]	ط	ظ	ع	غ	4	g	h	i				
5 [JKL]	س	ش	ص	ض	5	j	k	l				
6 [MNO]	د	ذ	ر	ز	6	m	n	o				
7 [PQRS]	ي	ى	ة	ئ	7	p	q	r	s			
8 [TUV]	م	ن	ه	و	ؤ	8	t	u	v			
9 [WXYZ]	ف	ق	ك	ل	9	w	x	y	z			
0 [+]	.	,	?	!	0	+	-	:	“	‘	;	_

- 1) Space
- 2) Line break

Additional functions via the PC interface

To enable your handset to communicate with the PC, the "Gigaset QuickSync" program must be installed on your PC (free to download at www.gigaset.com/gigaset790).

After installing "Gigaset QuickSync", connect the handset to your computer using a USB data cable (→ page 17).

Please note

Please connect your handset **directly** to the PC; do **not** connect via a USB hub.

Transferring data

Start the "Gigaset QuickSync" program. You can now:

- ◆ Synchronise your handset directory with Outlook
- ◆ Download caller pictures (.bmp) from the computer to the handset,
- ◆ Download pictures (.bmp) as a screen-saver from the computer to the handset.
- ◆ Download sounds (ringtones) from the computer to the handset.

During the transfer of data between handset and PC, you will see **Data transfer in progress** on the display. During this time the keypad is disabled, and incoming calls will be ignored.



Completing a firmware update

- ▶ Connect you phone to your PC using a **USB data cable** (→ page 17).
- ▶ Start the "Gigaset QuickSync" program on your PC.
- ▶ Establish a connection to your handset.
- ▶ Select **[Settings]** → **[Device properties]** to open the **[Device properties]** tab.
- ▶ Click on **[Firmware update]**.

This launches the firmware update.

The update process can take up to 10 minutes (not including the download time). **Do not interrupt the process or remove the USB data cable.**

The data is initially loaded from the update server on the Internet. The amount of time this takes is dependent on the speed of your Internet connection.

The display on your phone is switched off and the message key  and the talk key  start flashing.

Once the update is complete, your phone will automatically restart.

Procedure in case of an error

If the update procedure fails or your phone does not work properly following the update, repeat the update procedure as follows:

- ▶ Close the "Gigaset QuickSync" program on the PC.
- ▶ Remove the USB data cable from the telephone.
- ▶ Remove the battery (→ page 12).
- ▶ Replace the battery.
- ▶ Complete the firmware update as described.

If the update procedure fails several times or you can no longer connect to the PC, proceed as follows (**Emergency update**):

- ▶ Close the "Gigaset QuickSync" program on the PC.
- ▶ Remove the USB data cable from the telephone.
- ▶ Remove the battery (→ page 12).
- ▶ Press and hold keys **[4 ONI]** and **[6 MNO]** with the index and middle finger.

Accessories

Gigaset handsets

Upgrade your Gigaset to a cordless PABX:

Gigaset S79H handset

- ◆ Illuminated graphic colour display (65k colours)
- ◆ Illuminated keypad
- ◆ Speaker mode
- ◆ Polyphonic ringtones
- ◆ Directory for approx. 500 entries
- ◆ Caller picture
- ◆ SMS (prerequisite: CLIP must be enabled)
- ◆ PC interface, e.g., for managing directory entries, ringtones and screensavers
- ◆ Headset socket
- ◆ Room monitor

www.gigaset.com/gigasets79h



Gigaset C59H handset

- ◆ Illuminated graphic colour display (65k colours)
- ◆ Illuminated keypad
- ◆ Speaker mode
- ◆ Polyphonic ringtones
- ◆ Directory for approx. 150 entries
- ◆ SMS (prerequisite: CLIP must be enabled)
- ◆ Headset socket
- ◆ Room monitor

www.gigaset.com/gigasetc59h



Gigaset SL78H handset

- ◆ Illuminated graphic colour display (256k colours)
- ◆ Illuminated keypad
- ◆ Speaker mode
- ◆ Polyphonic ringtones
- ◆ Directory for approx. 500 entries
- ◆ Caller picture
- ◆ SMS (prerequisite: CLIP must be enabled)
- ◆ PC interface, e.g., for managing directory entries, ringtones and screensavers
- ◆ Room monitor

www.gigaset.com/gigasetSL78h



Gigaset S67H/S68H handset

- ◆ Illuminated graphic colour display (65k colours)
- ◆ Illuminated keypad
- ◆ Speaker mode
- ◆ Polyphonic ringtones
- ◆ Directory for approx. 250 entries
- ◆ Caller picture
- ◆ SMS (prerequisite: CLIP must be enabled)
- ◆ Headset socket
- ◆ Bluetooth (Gigaset S68H only)
- ◆ Room monitor

www.gigaset.com/gigasetS67h



Gigaset SL37H handset

- ◆ Illuminated graphic colour display (65k colours)
- ◆ Illuminated keypad
- ◆ Speaker mode
- ◆ Polyphonic ringtones
- ◆ Directory for approx. 250 entries
- ◆ Caller picture
- ◆ SMS (prerequisite: CLIP must be enabled)
- ◆ PC interface, e.g., for managing directory entries, ringtones and screensavers
- ◆ Headset socket
- ◆ Bluetooth
- ◆ Room monitor
- ◆ Walky-talky function

www.gigaset.com/gigasetSL37h



Gigaset repeater

The Gigaset repeater can be used to increase the reception range between your Gigaset handset and the base.

www.gigaset.com/gigasetrepeater




All accessories and batteries are available from your phone retailer.




Use only original accessories. This will avoid possible health risks and personal injury, and also ensure that all the relevant regulations are complied with.


Mounting the base on the wall (Gigaset S790 only)

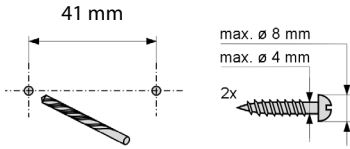

Approx. 5.5 mm

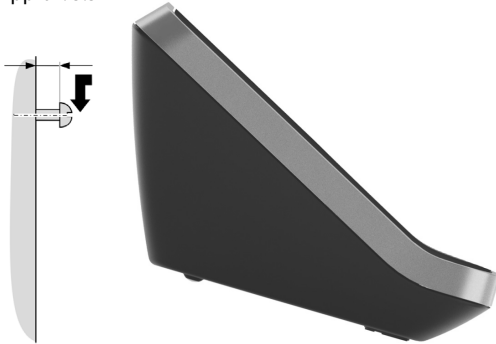

Mounting the charger on the wall



Approx. 4 mm



Index

A

- Access code 68
 - for a PABX 68
- Access protection 67
- Accessories 85
- Acknowledge tones 65
- Activating
 - advisory tones 65
 - answering machine 45
 - answering machine (remote operation) 50
 - appointment 53
 - handset 22
 - keypad lock 22
 - listening in 58
 - muting ringtone 39
 - ring delay 62
 - room monitor 59
 - two-way record 48
- Advisory tones 65
- Alarm clock 55
- Alert tone 64
- Anniversary 32
 - deactivating 33
 - missed 35, 54
 - saving in the directory 32
- Announcement
 - (answering machine) 46
- Answer only mode
 - (answering machine) 45
- Answering machine 45
 - activating/deactivating 45
 - deleting messages 47
 - playing back messages 46
 - recording a personal announcement/advisory message 45
 - remote operation 49
 - scrolling back 47
 - scrolling forward 47
- Answering machine list 34, 35
- Answering machine, see also Network mailbox
- Appointment 53
- Appointment/anniversary display missed 54
- Appointments
 - activating/deactivating 54
 - deleting 54
 - managing 54
- Area code
 - setting own area code 66
- Assigning a number key 60
- Authorisation 73
- Automatic
 - network provider preselection 36
 - redial 33
 - ring delay 28, 62
- B**
- Base
 - changing 56
 - connecting 10
 - connecting to PABX 68
 - restoring to factory settings 67
 - setting ringtone 66
 - setting up 10
 - settings 66
 - system PIN 67
- Battery
 - charging 2, 3, 14
 - display 2, 3
 - icon 2, 3
 - inserting 12
 - tone 65
- Best base 56
- Birthday, see Anniversary
- C**
- Calendar 53
- Call
 - accepting 28
 - connect participant 58
 - ending 28
 - external 28
 - internal 56
 - picking up from answering machine 47
 - transferring (connecting) 57, 58
 - two-way record 48
- Call duration 28
- Call lists 34
- Call screening during recording 48
- Call waiting
 - internal call 57
- Call-by-call 36

Index

Caller Picture 30, 64
Calling
 external 28
 internal 56
Calling Line Identification 28
Care of the telephone 80
Changing
 destination number
 (room monitor) 60
 dialling mode 68
 display language 61
 earpiece volume 62
 internal number of a handset 58
 name of a handset 58
 pauses 69
 ringtone 63, 66
 speaker volume 62
 system PIN 67
Changing the system PIN 67
Character set 38, 40, 82
Charge status display 2, 3
CLI, CLIP 28
Colour scheme 62
Conference
 internal 57
Confirmation tone 65
Connecting the headset 17
Connecting, base to PABX 68
Consultation call
 internal 57
Control key 2, 19
Correcting incorrect entries 20
Customer Care 70
Customer Service & Assistance 70

D

Deactivating
 advisory tones 65
 answering machine 45
 appointment 53
 handset 22
 keypad lock 22
 listening in 58
 muting ringtone 39
 ring delay 62
 room monitor 60
 two-way record 48
Delete key 20

Deleting
 announcement for answering
 machine 46
 characters 20
 message 47
De-registering (handset) 56
Destination number (room monitor) 59
Dialling
 using quick dial 32, 60
 using the directory 31
Dialling mode 68
Dialling pause 69
Directory 30
 copying number from text 32
 managing entries 31
 opening 19
 order of entries 31
 saving anniversary 32
 saving entry 30
 saving sender's (SMS) number 40
 sending entry/list to handset 32
 using to enter numbers 32
Display
 backlight 62
 changing display language 61
 colour scheme 62
 directory memory 31
 in idle status 16, 21
 memory (resource directory) 65
 missed anniversaries 35
 missed
 appointments/anniversaries 54
 network mailbox message 51
 number (CLI/CLIP) 28
 screensaver 61
 setting 61
Display keys 2, 20
 assigning 60
Disposal 79
Draft message list (SMS) 38

E

Earpiece volume 62
ECO DECT 52
Eco mode 52
Eco mode+ 52
E-mail address 39
 copying from
 the directory 32
End call key 2, 28

- Ending, call 28
- Entry
 - saving, changing (preselection) 36
 - selecting from directory 31
- Environment 79
- Error tone 65
- Expert mode 25, 72
- External call
 - forwarding to ans. mach. 48
- F**
- Fast access
 - answering machine 49
 - network mailbox 51
- Fax (SMS) 39
- Firmware update 83
- G**
- General troubleshooting 72
- Group call 56
- H**
- Handset
 - activating/deactivating 22
 - advisory tones 65
 - changing internal number 58
 - changing name 58
 - changing the number 58
 - changing to a different base 56
 - changing to best reception 56
 - colour scheme 62
 - contact with liquid 80
 - de-registering 55, 56
 - display backlight 62
 - display language 61
 - earpiece volume 62
 - idle status 21
 - keypad illumination 62
 - large font 62
 - list 19
 - locating 56
 - muting 29
 - paging 56
 - registering 55
 - registering to a different base 56
 - restoring to factory settings 66
 - screensaver 61
 - set up for use 12
 - setting 60
 - speaker volume 62
 - transferring a call 57
 - using multiple 55
 - using room monitor 59
- Handset mode 29
- Handset operating time
 - in room monitor mode 59
- Handsfree
 - set profile 63
- Handsfree profile 63
- Hash key 2, 22
- Headset socket 17
- Hearing aids 8
- Help 72
- I**
- Icon
 - alarm clock 55
 - answering machine 45, 48
 - for new messages 35
 - keypad lock 22
 - new message 46
 - new SMS 39
 - ringtone 64
- Idle status (display) 16, 21
- Idle status, returning to 21
- Illumination
 - keypad 62
- Incoming message list (SMS) 39
- Incorrect entries (correction) 20
- Installing, base 10
- Internal
 - conference 57
 - consulting 57
 - listening in 58
 - making calls 56
- Internal call 56
- call waiting 57
- K**
- Key
 - assigning to a function or number 60
- Key 1 (fast access) 2, 49
- Keypad illumination 62
- Keypad lock 22
- Keys
 - control key 2, 19
 - delete key 20
 - display keys 2, 20
 - end call key 2, 28

Index

fast access	2, 49
hash key	2, 22
message key	2
mute key	2
on/off key	2
quick dial	32
recall key	2
side keys	2
speaker key	2
star key	2
talk key	2, 28

L

Language, display	61
Large font	62
Linking, see SMS	
Liquid	80
List	
answering machine	34, 35
call lists	34
handsets	19
missed calls	34
network mailbox	35
SMS draft message list	38
SMS incoming message list	39
SMS list	35
Listening in to a call	58
Locating, handset	56
Lock	
activating/deactivating keypad lock ..	22

M

Mailbox ID, see SMS	
Mailboxes, see SMS	
Making calls	
accepting a call	28
external	28
internal	56
Making cost-effective calls	36
Manual redial	33
Medical equipment	8
Memory	
directory	31
resource directory	65
Menu	
end tone	65
opening	19
overview	25
using	21

Menu display	
expert mode	25, 72
standard mode	25, 72

Message key	
open list	39
opening lists	35

Messages	45
copying the number to the	
directory	47
deleting	47
key	2
marking as "new"	47
new message icon	46
playing back	46

Microphone	2
------------------	---

Missed

anniversary	54
appointment	54

Missed calls	34
--------------------	----

Music on hold	66
---------------------	----

Mute key	2
----------------	---

Muting

first ringtone	39
----------------------	----

Muting the handset	29
--------------------------	----

N

Name

of a handset	58
--------------------	----

Network mailbox	51
-----------------------	----

Network provider preselection,	
automatic	36

Notification via SMS	41
----------------------------	----

Number

as destination for room monitor	59
---------------------------------------	----

copying from an SMS text	40
--------------------------------	----

copying from directory	32
------------------------------	----

copying to the directory	32
--------------------------------	----

displaying caller's number (CLIP)	28
---	----

entering with directory	32
-------------------------------	----

saving in directory	30
---------------------------	----

O

On/Off key	2
------------------	---

Operating remotely	49
--------------------------	----

Order in directory	31
--------------------------	----

- P**
- PABX
 - connecting base 68
 - pauses 69
 - saving access code 68
 - setting dialling mode 68
 - setting recall 68
 - SMS 43
 - switching to tone dialling 69
 - Package contents 9
 - Paging 56
 - Pause
 - after access code 69
 - after line seizure 69
 - after recall key 69
 - PC interface 83
 - PD (pulse dialling) 68
 - Picture
 - Caller 30, 64
 - deleting 65
 - renaming 65
 - PIN change
 - system PIN 67
 - Pin connections 81
 - Playing back
 - announcement
 - (answering machine) 46
 - message (answering machine) 46
 - Power adapter 8
 - Power consumption 81
 - Preselection 36
 - Protecting the phone against access 67
 - Pulse dialling 68
- Q**
- Questions and answers 72
 - Quick dial 30, 60
- R**
- Range 10
 - Recall 68
 - Recall key 2, 69
 - Reception booster, see Repeater
 - Recording
 - two-way record 48
 - Recording quality 48
 - Recording time 48
 - Redial 33
 - Registering (handset) 55
 - Reminder call 33
 - Repeater 67
 - Resource directory 64
 - Ring delay 48, 62
 - Ringtone
 - changing 63, 66
 - muting 39
 - setting volume 63, 66
 - Ringtone deactivated
 - for unknown call 64
 - Room monitor 59
- S**
- Saving (access code) 68
 - Screensaver 61
 - Search directory 31
 - Sending
 - directory entry to handset 32
 - Sensitivity (room monitor) 59
 - Setting the date 15, 27
 - Setting the time 15, 27
 - Setting up
 - handset 12
 - Side keys 2
 - Signal tone, see Advisory tones
 - SMS 37
 - active send service centre 42
 - changing mailbox 42
 - deleting 38, 40
 - draft message list 38
 - forwarding 40
 - incoming message list 39
 - linked 37
 - list 35
 - mailbox ID 41
 - mailboxes 41
 - notification by SMS 41
 - PIN protection 42
 - reading 38, 40
 - receiving 39
 - replying to or forwarding 40
 - saving number 40
 - self help with error messages 44
 - sending as a fax 39
 - sending to a personal mailbox 42
 - sending to an e-mail address 39
 - status report 38
 - to PABXs 43
 - troubleshooting 44
 - vCard 41
 - writing 37, 81

Index

SMS centre	
changing number.....	43
setting	42
Snooze mode.....	55
Sound, see Ringtone	
Speaker	
key	2
Speaker mode	29
Special functions.....	68
Specifications.....	80
Standard mode	25, 72
Star key	2
System settings	67

T

Talk key	2, 28
Telephone jack, pin connections.....	81
Text message, see SMS	
Tone dialling.....	68, 69
Troubleshooting (SMS)	44

U

Update.....	83
USB connection	17

V

vCard (SMS).....	41
Viewing the network mailbox	
message	51
Volume	
earpiece.....	62
handset speaker volume.....	62
loudspeaker	62
ringtone	63, 66

W

Warning tone, see Advisory tones	
Warranty	74
Writing (SMS)	37
Writing and editing text	81