



BarDIMM Pro model JM30100X

The BarDIMM Pro JM30100X is the solution adding the barcode creation intelligence to all HP printers released after the 1st of January 2015 and not equipped with the HP optional kit B5L28A adding two-Internal USB Ports for Solutions. The first printer models are the following:

	
HP Color LaserJet M552, M553	HP LaserJet M604, M605, M606

Installation of BarDIMM Pro:

If the printer is equipped with the optional **HP option kit B5L28A - Two-Internal USB Ports for Solutions**, this document is not applicable to this case and you just need to insert the BarDIMM Pro USB stick directly in one of the two internal USB slots.

If you have received the BarDIMM Pro version JM30100X with its USB cable you can insert the USB stick directly any one of the two B5L28A slots, without using the cable.

Content and preparation of BarDIMM Pro model JM30100X

	
One USB stick One micro USB cable	Connect the USB stick to the connector cable

Installation in printer

Open the printer formatter like to install extra memory (refer to your printer manual as procedure differs between printer models).

IMPORTANT

Hazardous voltages are present in the printer. You must unplug the printer from network and power before opening any access cover of the printer. Never remove any access cover or work near exposed electrical parts while the power cable or network cable is connected to the printer. If you are not an IT hardware specialist, you must ask a trained and qualified IT technician to install the USB stick it for you. Jetmobile shall bear no responsibility for any direct or indirect damage to individuals, the printer or the surrounding property related to the installation of BarDIMM Pro.

HP LaserJet M604, M605, M606



Locate the USB cable with the micro USB, the one in the center




Unplug the middle USB cable from the micro USB board connector.



Connect the BarDIMM Pro cable to the board micro USB plug.

Close the formatter, put the power cable back and switch on the printer.

HP Color LaserJet M552, M553

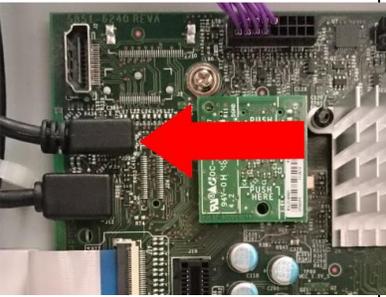

Locate the USB cable with the micro USB, the one in the top



Unplug the top USB cable from the micro USB board connector.



Connect the BarDIMM Pro cable to the board micro USB plug.
Close the formatter, put the power cable back and switch on the printer.