

WORLDWIDE HEADQUARTERS GPI International Limited

SALES AND MARKETING OFFICES

ASEAI

GP Battery Marketing (Singapore) Pte Ltd

55 Ayer Rajah Crescent #03-03 Singapore 139949 Tel: (65) 6559 9760 Fax: (65) 6559 9761 Email: gpbms@gpbatteries.com.sg Website: sq. opbatteries.com

Representative Offices

GP Battery Marketing (Singapore) Pte Ltd

Thien Phuoc 2 Building, 7th Floor, 110 Cach Mang Thang 8 Street, Ward 7, Dist 3, Ho Chi Minh City, Vietnam Tel: (84) 28 3930-5096 Email: gpbmvn@gpbatteries.com.sg

GP Battery Marketing (Malaysia) Sdn Bhd

A-05-3A, Level 5, Capital 1, No. 2, PJU 1A/7A,
Oasis Square, Oasis Damansara,
47301 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.
Tel No: 603 7832 3496 (Main Line)
Fax No: 603 7832 3497
Email: gpbmm@gpbatteries.com.sg
Website: my.gpbatteries.com

GP Battery Marketing (Thailand) Co Ltd

106 Soi Sukhumvit 26, Sukhumvit Road Klongton, Klongtoey Bangkok 10110, Thailand Tel: (66) 2-260 1318 Fax: (66) 2-260 1315 Email: thaicontact@gpbatteries.com.sg

CHINA

GP International (Shenzhen) Ltd.

Rm G, 18/F International Trade Commercial Building No. 3005 Nanhu Road, Luohu District Shenzhen, China (Postal Code 518000) Tel: (86) 755-6186-2233 Fax: (86) 755-2519 0260 Email: gpii_shenzhen@gpbatteries.com.cn

Representative Offices

Huizhou Chao Ba Batteries Co Ltd

No. 29, 6th Gaoxin Road Zhongkai Gaoxin Industrial Zone Huizhou City, Guangdong, China Tel: (86) 752 263 8698 Fax: (86) 752 263 8666 Email: gpconsumer@pbatteries.com.cn Website: cn.gpbatteries.com

Beijing Branch

Tel: (86) 10 5205 9095 Fax: (86) 10 5205 1096

Guangzhou Branch

Tel: (86) 20 8319 8232 Fax: (86) 20 8330 8334

Shanghai Branch

Tel: (86) 21 6336 0966 Fax: (86) 21 6336 0968

Wuhan Branch

Tel: (86) 27 8366 6701 Fax: (86) 27 8333 0658

HONG KONG

GP Battery Marketing (H.K.) Limited

7/F, Building 16W, 16 Science Park West Avenue, Hong Kong Science Park, New Territories, Hong Kong Tel: (852) 2420 0281 Fax: (852) 2484 3648 E mail: gpii@goldpeak.com Website: hk.gpbatteries.com

TAIWAN

GPI International Limited (Taiwan Sales Office)

11/F, No. 368, Section 1, Fuxing S. Road, Da'an District, Taipei City, 106 Taiwan Tel: (886) 2-2325 8160

SOUTH KOREA

GP Battery Marketing (Korea) Limited

5/F, WhaDeok Building 319-11, Yangjae-Dong Seocho-Gu, Seoul, South Korea Tel: (82) 2-549 7188 / 549 7189 Fax: (82) 2-514 0623 Email: jh_baak@goldpeak.com Website: www.gpbatteries.co.kr 7/F, Building 16W, 16 Science Park West Avenue, Hong Kong Science Park, New Territories, Hong Kong SAR Tel: (852) 2484 3333 Fax: (852) 2480 5912 Email: gpii@goldpeak.com Website: www.gpbatteries.com

EUROPE

AZ Limited

Building 4, vlad. "Tricolor", mic. dist. Vostryakovo Domodedovo, Moscow Region, Russia, 142072 Prospekt Andropova 18, korp. 5, floor 18 Moscow, Russia, 115432 Tel/Fax: (7) 495 926 5050 Email: DRomaniouk@azcompany.ru Website: ru.gpbatteries.com

GP Batteries Europe B.V.

Kaldenkerkerweg 20 5913 AE, Venlo, The Netherlands Tel: (31) 077 3020044 Email: info_gpeurope@goldpeak.com Website: www.gpbatteries.com

GP Batteries (U.K.) Limited

Monument View, Chelston Business Park Wellington, Somerset, TA21 9ND, UK Tel: (44) 1823 660044 Fax: (44) 1823 665595 Email: sales@gpbatteries.co.uk Website: uk.gpbatteries.com

GP Battery Marketing France SA

ZAE du Trou Grillon – BP 49 91280 Saint Pierre du Perray, France Tel: (33) 1 6989 6200 Fax: (33) 1 6989 6210 Email: info@gpbmfrance.fr Website: www.gpbatteries.fr

GP Battery Marketing (Germany) GmbH

Prinzenallee 7, D-40549 Düsseldorf, Germany Tel: (49) 211-5229540 Fax: (49) 211-52295454 Email: info@gpbatteries.de Website: www.gpbatteries.de

GP Battery Marketing Italy S.r.I

Via. Alessandro Volta 3, 20090 Assago (Mi), Italy Tel: (39) 02-488 2512 Fax: (39) 02-488 2865 Email: info@gpbatteries.it Website: www.gpbatteries.it

GP Battery (Poland) Sp. z.o.o.

UI. Lopuszanska 36, 02-220, Warszawa, Poland Tel: (48) 22-500 9500 / 868 0490 Fax: (48) 22-846 7535 Email: pl_office@goldpeak.com Website: pl.gpbatteries.com

GPBM Nordic AB

Argongatan 2 B, SE-431 53, Molndal, Sweder Tel: (46) 31-799 1600 Fax: (46) 31-799 1601 Email: info@gpbmnordic.se Website: www.gnbatteries.se

US & LATIN AMERICA

GP Batteries (Americas), Inc OEM / Industrial Division

11245 West Bernardo Court, Suite 104, San Diego, CA 92127, USA Tel: (800) 268-3416; (858) 674-6099 Fax: (858) 674-6496 Email: GPBA_Ind_Sales@goldpeak.com

Consumer Sales Division


9485 Sunset Dr. Suite A-225 Miami. FL. 33173, USA Tel: (1) 305-471 7717 Fax: (1) 305-471 7718 Email: gpbatteriesamericas@goldpeak.com Website: us.gpbatteries.com

UAE

GP Battery Marketing (Middle East) Limited (FZC)


P.O.Box: 7989, M4 -02, Saif Zone, SHARJAH, U A E
Tel: (971) 6 5578787 Fax: (971) 6 5578777
Email: md_pme@emirates.net.ae
Website: uae.gpbatteries.com

CP Batteries

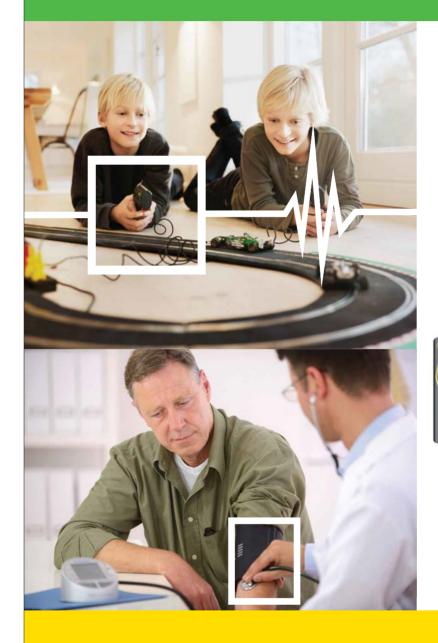



Primary Batteries

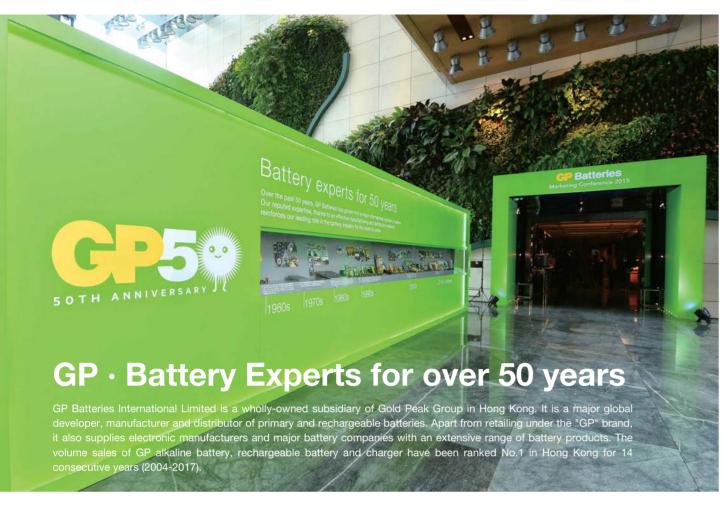



R&D

GP has dedicated significant amount of resources and efforts to the R&D center for its construction, development of new products and introduction of advanced equipment. Our R&D center prides itself on various facilities, namely the professional trial-production workshops, performance test rooms, chemical labs and material analysis rooms.



Automation

In order to meet the increasing market demand, we have equipped ourselves with cost-effective automated systems that enhance productivity and quality control.



Quality

Our quality management system and manufacturing process is data-driven and we follow the Six Sigma philosophy for continuous improvement. Factors / parameters that could affect product quality are hence prevented by data automation. We also possess world-class inspection equipment exclusive to the battery industry such as AAS (Atomic Absorption Spectroscopy), UV - VIS (UV - Visible Spectrometry) and EDXRF (Energy Dispersive X-Ray Fluorescence).







Product Compliance

GP Batteries adheres to strict safety and complies with the highest international safety standards.

GP Batteries's IEC62133-certified **NiMH** and Lithium-ion batteries offer quick market penetration into **54** certification body scheme participating countries*.

GP Batteries manufactures **4** out of **8** brands of certified primary 9V brands complying with UL217 specifically for Smoke Alarm application.

GP Batteries is amongst the **first batch of Lithium-ion battery brands** presented voluntary CQC mark in China, as well as UR, BIS, and MC marks in the USA, India and Malaysia, catering for respective business needs more efficiently.

With **UN38.3** certification, all GP Lithium batteries are easily transported by air and sea to **5** continents*.









Laboratory Services

China and Singapore

GP Batteries' quality assurance centers, located strategically in China, Singapore and Hong Kong, provide full range R&D facilities for quality and safety assurance.

The laboratories in China and Singapore are well-recognized by more than 90 international regions under International Laboratory Accreditation Cooperation-Mutual Recognition Agreement (ILAC-MRA).

China (Dongguan) - Chemical & Calibration Laboratory

· CNAS (China National Accreditation Service for Conformity Assessment) Accreditation





TESTING / CALIBRATION

- Testing scope
- 2011/65/EU (RoHS Directive)
- 2006/66/EC (Battery & Accumulator Directive)

Battery Performance Test in Singapore

- · SAC-SINGLAS (Singapore Laboratory Accreditation Scheme) Accreditation
- · Testing scope
- IEC 60086-1
- IEC 60086-2
- IEC 60086-5

Hong Kong Science Park

The GP Hong Kong laboratory is the first in Hong Kong, also the one out of six UL WTDP (Witnessed Test Data Program) certified and one out of five UL CTF (Customers' Testing Facilities - Stage 2) certified laboratories in China and Hong Kong.

UL Data Acceptance Program

UN38.3

· WTDP (Witnessed Testing Data Program) UL1642 UL2054 UL62133




IEC Manufacturer's Testing Laboratory

· CTF (Customer's Testing Facilities (CTF) - Stage 2) IEC62133

Reliability Test for Benchmarking

· Test conditions to be agreed with clients

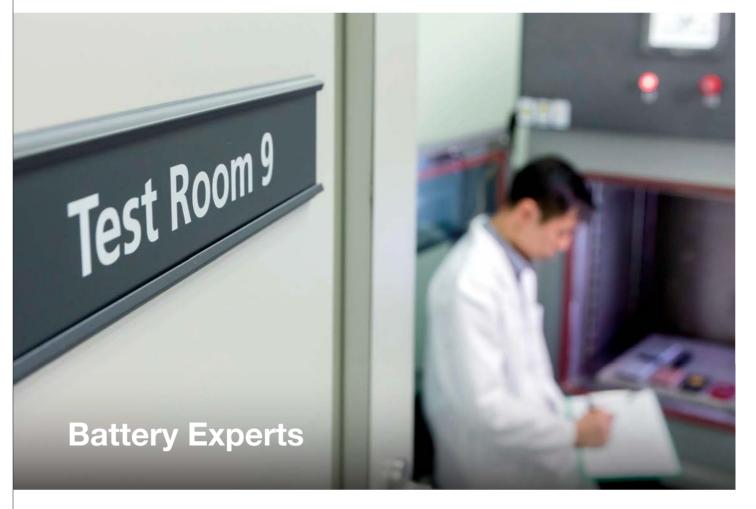

System Certification

GP has a strong Quality Management System in place and is ISO9001, ISO14001, OHSAS18001 certified and Responsible Business Alliance (RBA) Code of Conduct audited, as well as the ones highlighted below:



Global Security Verification (GSV)

Safety matters. Our GSV certified supply chain security excellence ensures shipments to clients is secured, protected against terrorist acts and against illegal trafficking.

ISO26000 Social Responsibility

We value the relationship with society and our environment. Our social responsibility performance is ISO 26000 certified which proves our commitment to social responsibility.



Our China and Singapore laboratories are ISO17025 certified - a standard ensuring most reliable testing and calibration services.



Awards

GP Batteries' continuous commitment to high standards is recognized by customers and the industry

Most Valuable Supplier:

This award was presented by Panasonic Corporation to recognize GP Batteries' contributions as a most valuable supplier, and we are also authorized by SONY as Green Partner.

Asia Quality Best Practice Award:

Handed out by the International Six Sigma Council, the gold award celebrates GP Batteries being top in quality improvement.

MAKE (Most Admired Knowledge Enterprise) Award:

The award recognizes organisations which out-perform their peers in creating shareholder's value by transforming tacit and explicit enterprise knowledge and intellectual capital into superior products/services/solutions.













As the leading battery expert, GP is dedicated and committed to creating and producing power solutions for a full range of consumer and professional devices. Aside from rechargeable batteries and PowerBanks, GP also prides itself in being a leader in offering an extensive primary battery portfolio, which consists of:

Alkaline Batteries: specifically designed for common consumer and household items such as toys, lights, flashlights and portable consumer electronic devices. Our durable batteries ensure your devices have longer operating times, allowing you to enjoy your gadgets for a longer period of time without needing to constantly replace batteries. Worry and hassle-free!

Carbon Zinc Batteries: our Greencell batteries strike a perfect balance between value and performance. These batteries are suited for low to medium powered items, such as timepieces, radios and flashlights. Economical, yet provides you with optimal performance.

Lithium Batteries: designed for high-powered professional and consumer devices that need to perform consistently well in extreme weather conditions, such as medical equipment, sophisticated cameras, electronic games, recreational appliances and GPS devices. Dependable and reliable; never leaving you

Specialty Batteries: used in a broad range of applications, GP's specialty batteries provide stable voltage and good power durability for devices requiring high energy density (cameras, watches, remote controls) and long lasting power (car alarms, keyless entry remotes, electronic organizers, hearing aids). Giving you a peace of mind that your devices will have the enduring power it needs to operate well on a daily basis.

High capacity, long service life, high drain performance and superior endurance make GP Batteries the best back-up for all battery powered devices. Produced and packaged in user-friendly format with multi-use adaptations, GP products ensure consumer acceptability.

Alkaline



ULTRA PLUS ALKALINE



ULTRA ALKALİNE



SUPER ALKALINE

Carbon Zinc



GREENCELL



SUPERCELL

Lithium





Specialty



LITHIUM COIN



HIGH VOLTAGE ALKALINE





SILVER OXIDE



ALKALINE CELL



ZINC AIR





Ultra Plus Alkaline

The popularity of portable electronic devices brings along the increased demand for long-lasting battery power. Ultra Plus Alkaline battery, made with advanced materials, is designed to provide reliable and long operating power for high drain devices. Ultra Plus Alkaline battery offers users seamless enjoyment with portable gadgets.

Features

- ★ The No.1 GP Alkaline Battery
- ★ Longer lasting in power hungry devices
- ★ Up to 7 years shelf life
- ★ Complete line of AA, AAA, C, D and 9 Volt

Major Applications

Photo flash, MP3, wireless mouse & keyboard, portable electronics, electronic games, remote-controlled cars and battery-operated toys























15AUP-U2 AA 1.5V (AA 2's)



15AUP-U4 AA 1.5V (AA 4's)



15AUP-U8 AA 1.5V (AA 8's)



24AUP-U2 AAA 1.5V (AAA 2's)



24AUP-U4 AAA 1.5V (AAA 4's)



24AUP-U8 AAA 1.5V (AAA 8's)



13AUP-U2 D 1.5V



14AUP-U2 C 1.5V (C 2's)



1604AUP-U1 9V (9V 1's)



15AUP-U4 AA 1.5V (AA 4's x 10 cards)



24AUP-U4 AAA 1.5V (AAA 4's x 10 cards)



Jltra Alkaline

Specially designed for ever-growing number of battery powered devices, Ultra Alkaline delivers reliable portable power. There's a better chance to score top marks with Ultra Alkaline batteries with their longer operating time and unmatched performance on power hungry devices. Win increased customer satisfaction by providing the right support for leisure time devices.

Features

- ★ Longer operating time
- ★ Up to 7 years shelf life
- ★ Complete line of AA, AAA, C, D and 9 Volt
- ★ Blister packs, multi-packs and value packs are available

Major Applications

MP3, photo flash, wireless mouse & keyboard, portable electronics, electronic games and battery-operated toys



























15AU-U4 AA 1.5V



15AU-U8 AA 1.5V (AA 8's)



24AU-U2 AAA 1.5V (AAA 2's)



24AU-U4 AAA 1.5V (AAA 4's)



24AU-U8 AAA 1.5V (AAA 8's)



13AU-U2 D 1.5V (D 2's)



14AU-U2 C 1.5V (C 2's)



1604AU-U1 9V (9V 1's)



908AU-S1 6V (908AU 1's)



(AA 4's x 10 cards)



24AU-U4 AAA 1.5V (AAA 4's x 10 cards)

Value Packs



15AU-UD12 AA 1.5V (AA 12's)




(AAA 12's)



15AU-P10 AA 1.5V (AA 10's)



24AU-P10 AAA 1.5V (AAA 10's)












(AA 4's x 10 packs)



24AU-DP40 AAA 1.5V (AAA 4's x 10 packs)







Super Alkaline is formulated to meet the increasing power demand of everyday devices for value conscious customers. Dependable performance builds customer loyalty through the dependable power of Super Alkaline batteries. With a long shelf life, this extensive product range offers a reliable product for a wide range of applications for consumers of all ages.

Features

- ★ Long lasting
- ★ Dependable performance
- ★ Up to 7 years shelf life
- ★ Extensive range including AA, AAA, C, D and 9 Volt, N, J ...
- ★ Blister packs, multi packs and value packs are available

Major Applications

Walkie talkies, remote control, smoke alarms and flashlights























15A-U2 AA 1.5V (AA 2's)



15A-U4 AA 1.5V (AA 4's)



15A-U8 AA 1.5V (AA 8's)



24A-U2 AAA 1.5V (AAA 2's)



24A-U4 AAA 1.5V (AAA 4's)



24A-U8 AAA 1.5V (AAA 8's)



25A-U2 AAAA 1.5V (AAAA 2's)



13A-U2 D 1.5V (D 2's)



14A-U2 C 1.5V (C 2's)



1604A-U1 9V (9V 1's)



910A-U2 N 1.5V (N 2's)



312A-U1 4.5V (312A 1's)

Standard Packs



1412AP-U1 J 6V



908A-S1 6V (908A 1's)



15A-U4 AA 1.5V (AA 4's x 10 cards)



24A-U4 AAA 1.5V (AAA 4's x 10 cards)

Value Packs











15A-UD12 AA 1.5V (AA 12's)



24A-UD12 AAA 1.5V (AAA 12's)



15A-P10 AA 1.5V (AA 10's)



(AAA 10's)



(AA 4's x 10 packs)



24A-DP40 AAA 1.5V (AAA 4's x 10 packs)







Greencell

Stay in tune with the times for domestic and day-to-day items by using value to performance Greencell batteries. They're dependable, and offer an economical, reliable power source for medium to low-drain applications such as self-standing or wall hanging timepieces. An ideal choice for price-conscious customers.

Features

- ★ Dependable
- ★ Value to performance
- ★ Full range of AA, AAA, C, D, 9 Volt and so on
- ★ Blister packs, multi packs and value packs are available
- ★ No Lead added

Major Applications

Alarm clocks, radios, remote controls, flashlights and smoke detectors



















15G-U4 AA 1.5V (AA 4's)



24G-U2 AAA 1.5V (AAA 2's)



24G-U4 AAA 1.5V (AAA 4's)



13G-U2 D 1.5V



14G-U2 C 1.5V



1604GLF-U1 9V



312G-U1 4.5V (312G 1's)



908G-S1 6V (908G 1's)



15G-U4 AA 1.5V (AA 4's x 18 cards)



(AAA 4's x 18 cards)









(AA 10's)



24G-P10 AAA 1.5V (AAA 10's)





13G-VS8 D 1.5V



Supercell is economical and suitable power sources for general battery operated devices and many small household appliances including a variety of children's toys. Ideally perfect to give good performance on moderate to low-drain devices. Dependable at very affordable prices and most welcomed by price-conscious consumers.

Features

- ★ Good performance
- ★ Full range of AA, AAA, C, D, 9 Volt and so on

Major Applications

Flashlights, toys, alarm clocks, radios and remote controls















Standard Packs



15PL-U2 AA 1.5V (AA 2's)



(AA 4's)



15PL-U8 AA 1.5V (AA 8's)



24PL-U2 AAA 1.5V (AAA 2's)




24PL-U4 AAA 1.5V (AAA 4's)



24PL-U8 AAA 1.5V (AAA 8's)



13S-U2 D 1.5V (D 2's)



14S-U2 C 1.5V (C 2's)



(9V 1's)



15PL-U4 AA 1.5V (AA 4's x 10 cards)



24PL-U4 AAA 1.5V (AAA 4's x 10 cards)



24PL-S2 AAA 1.5V (AAA 2's)









1603S-S1 9V (1603S 1's)



15PL-S4 AA 1.5V (AA 4's x 10 packs)



24PL-S4 AAA 1.5V (AAA 4's x 10 packs)



_ithium

Lithium AA & AAA are the longest lasting AA & AAA size batteries, both models show the best performance for all power hungry devices by providing the high power and long lasting power. It is 40% lighter than alkaline battery and it can function well under extreme weather condition.

Features

- ★ Suitable for power hungry / medical / professional devices
- ★ 40% lighter than Alkaline Battery
- * Performs well in extreme weather (-30°C to +60°C)
- ★ Built-in short-circuit safety protection
- ★ Long shelf life of 10 years

Major Applications

Photo flash, digital camera, medical devices, electronic games, battery-operated toys, shavers, GPS devices



Standard Packs












24LF-U4 1.5V





AAAApplication Test (23±2°C) DIGITAL STILL CAMERA Cycles



Lithium 9V

GP Lithium 9V is the best choice of battery for smoke detectors. It provides 10-year shelf life, highest energy density, stable discharge voltage and wide operating temperature which outperforms any comparable 9V battery. It also lasts up to 5 times longer than ordinary alkaline 9V batteries making it the best consumerreplacement battery for 9-volt devices in home security, wireless mics, meters, and recreation applications etc.

batteries ★ Built-in safety mechanism

Features ★ Long shelf life of 10 years

- ★ Environmentally friendlier
- ★ Wide operating temperature range of -40°C to +60°C and excellent discharge performance at extremely low temperature

★ Excellent high current discharge

★ 5 times longer lasting than alkaline

Major Applications

Smoke detectors, medical equipment, carbon monoxide alarms, explosion gas alarms, meters, wireless transmitters, stun guns, military applications, electronic toll collection system








Standard Packs




CR-V9SD-U1 9V ANSI 10K ohm background



U-Brand Time (Hours)

50mA continuous discharge

to 7.5V at 23°C



10-year Service Life in Smoke Detectors

Voltage characteristics remain stable even for a long period of discharge, greatly improving the reliability of the ionisation-type smoke detector that uses GP Lithium 9V battery (GPCR-V9). Such smoke detector is also maintenance free (battery replacement is seldom required).

Lightweight, High Voltage and High **Energy Density**

GP Lithium 9V battery (GPCR-V9) lasts 5 times longer than Alkaline batteries.

Excellent Temperature Characteristics

GP Lithium 9V battery (GPCR-V9) outperforms competition by demonstrating much longer operating time and stable performance over a wide temperature range of -40°C to +60°C.



It's often the preferred power source used in the most sophisticated photographic and medical equipment. The batteries have a long shelf life of 10 years, making them the most intelligent answer to keep devices in top operating condition - primed and ready to go!

Features

- ★ Excellent high current discharge performance
- ★ Built-in safety mechanism
- ★ Environmentally friendlier
- ★ Wide operating temperature range of -40°C to +60°C and excellent discharge performance at extremely low temperature
- ★ All sizes of CR123A, CR2, CR-P2 and 2CR5 are available

Major Applications


Cameras, LED flashlights, memory back-up, medical equipment, meters, photo flash







Standard Packs











2CR5-U1 6V



Excellent Pulse Discharge Performance at Room Temperature

GPCR123A shows superior high pulse discharge performance and longer duration than competitors.



Outstanding Pulse Discharge Capability at -20°C

The outstanding high pulse discharge capability of GPCR123A remains strong at extremely low temperature.

ithium ЗV For Electronic Device

Use the correct batteries for the right appliances. With a broad range of applications and a wide range of operating temperatures, Lithium Coin batteries are ideal for different kinds of cameras, watches, remote controls and other electronic devices. They are the perfect partner for computers and other sensitive devices with long shelf life of 10 years.

Features

- ★ High energy density
- ★ Wide range of operating temperatures, from -10°C to +60°C
- ★ Flat discharge curve
- ★ Long shelf life of 10 years
- ★ Environmentally friendlier
- ★ Broad range of sizes and models

Major Applications

Computer memory back-up, camera, remote controls, calculators and thermometers.





Standard Packs










CR2016-C2 3V



CR2032-C1 3V

CR2032



LITHIUN

CR2016-C5 3V



CR2032-C2 3V



CR2032-C5 3V

Available models

Model No.	Pack	ing Type
CR1/3N	C1	1pc/card
CH I/3N	C5	5pcs/card
004040	C1	1pc/card
CR1216	C5	5pcs/card
004000	C1	1pc/card
CR1220	C5	5pcs/card
001010	C1	1pc/card
CR1616	C5	5pcs/card
CR1620	C1	1pc/card
CR1620	C5	5pcs/card
004000	C1	1pc/card
CR1632	C5	5pcs/card
	C1	1pc/card
CR2016	C2	2pcs/card
	C5	5pcs/card
	C1	1pc/card
CR2025	C2	2pcs/card
	C5	5pcs/card
	C1	1pc/card
CR2032	C2	2pcs/card
	C5	5pcs/card
CR2430	C1	1pc/card
0112430	C5	5pcs/card
OD0450	C1	1pc/card
CR2450	C5	5pcs/card



In tune with the most advanced remote control apparatus, High Voltage Alkaline batteries are especially built to conform to the highest standards of performance excellence in remote controls for cars, photo equipment and other electronic devices. To give maximum endorsement, they hold a stable operating voltage throughout use.

Features

- ★ Long lasting power
- ★ 0% Mercury added
- ★ Stable operating voltage
- ★ Wide range of models

Major Applications

Car alarm, keyless entry remotes, toys, electronic organizers



Standard Packs







Available models

Model No.	Pacl Type	-
10A	C1	1pc/card
IUA	C5	5pcs/card
11A	C1	1pc/card
HA	C5	5pcs/card
004	C1	1pc/card
23A	C5	5pcs/card
26A	C1	1pc/card
20A	C5	5pcs/card
27A	C1	1pc/card
21A	C5	5pcs/card
29A	C1	1pc/card
23M	C5	5pcs/card
476A	C1	1pc/card



Keep yourself in step with the times, choose the best battery for fashion watches and quality timepieces. Silver oxide button cells offer high voltage stability, maintaining almost the same voltage from the beginning to the end of its service life. They are suitable to power precision devices and assure the time reliability of watches.

Features

- ★ Very long runtime
- ★ 0% Mercury added
- ★ Stable operating voltage
- ★ Wide range of models

Major Applications

Watches, calculators, and exposure meter



Standard Packs

Ultra Plus Series







357 362 364 371 377 379

Ultra Plus Series available models

357F-C5 1.55V

377F-C5 1.55V



With its comprehensive product range, alkaline button cells are used to power various kinds of small portable electronic devices, including electronic toys, calculators and remote controls.

Features

- ★ Deliver power required for small electronic devices
- ★ 0% Mercury added
- ★ Comprehensive product range
- ★ Multi applications

Major Applications

Electronic toys, calculators, remote controls





Available models

Model | Packing Type

C10 10pcs/card

C5 5pcs/card

C10 10pcs/card

C1 1pc/card

C5 5pcs/card C10 10pcs/card C1 1pc/card C5 5pcs/card C10 10pcs/card C5 5pcs/card C10 10pcs/card C1 1pc/card

C5 5pcs/card C10 10pcs/card PX625A C1 1pc/card C5 5pcs/card C1 1pc/card A76 C2 2pcs/card C5 5pcs/card C10 10pcs/card

Standard Packs







A76-C5 1.5V



A76-C10 1.5V



Sensible device is always using the correct battery to protect delicate devices. GP zinc air batteries are specifically designed to deliver reliable quality for sensitive hearing aid devices. It offers a long-lasting experience for different styles and models of hearing aids. It holds a stable operating voltage throughout use and performs well over a wide range of temperatures.

Features

- ★ Long-lasting power
- ★ 0% Mercury added
- ★ Reliable precise quality
- ★ Wide range operating temperatures

Major Applications

Hearing aids and accessories









ZA13F-D6 1.45V



ZA312F-D6 1.45V



ZA675F-D6 1.45V



Ultra Plus Alkaline



	Dimension (mm)		Voltage		Cross Reference			
Model No.	Diameter	Height	(V)	IEC	JIS	Energizer	Other	
13AUP	34.2	61.5	1.5	LR20	LR20	E95	D	
14AUP	26.2	50.0	1.5	LR14	LR14	E93	С	
15AUP	14.5	50.5	1.5	LR6	LR6	E91	AA	
24AUP	10.5	44.5	1.5	LR03	LR03	E92	AAA	
1604AUP	26.5(L) x 17.5	(W) x 48.5(H)	9.0	6LR61 / 6LP3146	6LF22	522	_	

Ultra Alkaline



	_ Dimension (mm)		Voltage		Cross I	s Reference		
Model No.	Diameter	Height	(V)	IEC	JIS	Energizer	Other	
13AU	34.2	61.5	1.5	LR20	LR20	E95	D	
14AU	26.2	50.0	1.5	LR14	LR14	E93	С	
15AU	14.5	50.5	1.5	LR6	LR6	E91	AA	
24AU	10.5	44.5	1.5	LR03	LR03	E92	AAA	
908AU	66.0(L) x 66.0((W) x 111.0(H)	6.0	4LR25	4LR25X	-	_	
1604AU	26.5(L) x 17.5	(W) x 48.5(H)	9.0	6LR61 / 6LP3146	6LF22	522	-	

Super Alkaline



		n (mm) —	Voltage		Cross Reference			
Model No.	Diameter	Height	(V)	IEC	JIS	Energizer	Other	
13A	34.2	61.5	1.5	LR20	LR20	E95	D	
14A	26.2	50.0	1.5	LR14	LR14	E93	С	
15A	14.5	50.5	1.5	LR6	LR6	E91	AA	
24A	10.5	44.5	1.5	LR03	LR03	E92	AAA	
25A	8.3	42.5	1.5	LR8D425	-	E96	AAAA	
312A	62.0(L) x 22.0	(W) x 67.0(H)	4.5	3LR12	-	_	_	
908A	66.0(L) x 66.0	(W) x 111.0(H)	6.0	4LR25	4LR25X	528	_	
910A	12.0	30.2	1.5	LR1	LR1	-	N	
1604A	26.5(L) x 17.5	(W) x 48.5(H)	9.0	6LR61 / 6LP3146	6LF22	522	-	
1412AP	35.5(L) x 9.2	(W) x 48.4(H)	6.0	4LR61	4LR61	539	J	

Greencell Extra Heavy Duty



	_ Dimensio	n (mm) —	Voltage	Cross Reference					
Model No.	Diameter	Height	(V)	IEC	JIS	Eveready	Other		
13G	34.2	61.5	1.5	R20P	R20P	1250	D		
14G	26.2	50.0	1.5	R14P	R14P	1235	С		
15G	14.5	50.5	1.5	R6P	R6P	1215	AA		
24G	10.5	44.5	1.5	R03	R03	1212	AAA		
312G	62.0(L) x 22.0	(W) x 67.0(H)	4.5	3R12	3R12	_	-		
908G	66.0(L) x 66.0(W) x 111.0(H)		6.0	4R25	4F	509	-		
1604G	26.5(L) x 17.5(W) x 48.5(H)		9.0	6F22	6F22	1222	-		

Supercell Super Heavy Duty



	- Dimensio	─ Dimension (mm) —			Cross Reference			
Model No.	Diameter	Height	(V)	IEC	JIS	Eveready	Other	
13S	34.2	61.5	1.5	R20P	R20P	1050	D	
148	26.2	50.0	1.5	R14P	R14P	1035	С	
15PL	14.5	50.5	1.5	R6P	R6P	1015	AA	
24PL	10.5	44.5	1.5	R03	R03	912	AAA	
1603S	66.0(L) x 52.0(W) x 81.0(H)		9.0	6F100	6F100	276	-	
1604S	26.5(L) x 17.5(26.5(L) x 17.5(W) x 48.5(H)		6F22	6F22	216	_	



Lithium AA & AAA



NA - 1-1 N -	— Dimensio	n (mm) —	Voltage		Reference —		
Model No.	Diameter	Height	(V)	IEC	JIS	Energizer	Duracell
15LF	14.5	50.5	1.5	FR6	FR6	L91	LF1500
24LF	10.5	44.5	1.5	FR03	FR03	L92	LF2400

CR-V9 9V

Lithium 9V

Model No.	┌─ Dimension (mm) ─┐ Diameter Height		Voltage (V)	IEC	Cross	Ultralife	
CR-V9	26.5(L) x 17.5	i(W) x 48.5(H)	9.0	-	_	1604LC	U9VL

Lithium Cylindrical



	Dimension (mm)				Cross Reference					
Model No.	Model No. Diameter		(V)	IEC	JIS	Eveready	Duracell			
CR2	15.6	27.0	3.0	-	-	-	DLCR2			
CR123A	16.8	34.5	3.0	CR17345	-	EL123AP	DL123A			
CR-P2	34.8(L) x 19.5	(W) x 35.8(H)	6.0	CR-P2	CR-P2	EL223AP	DL223A			
2CR5	34.0(L) x 17.0(W) x 45.0(H)		6.0	2CR5	2CR5	EL2CR5BP	DL245			

Lithium Coin



Model No.		ion (mm)—	Voltage	Nominal Capacity	IEC (IIC	Cross Ref		Duranell
	Diameter	Height	(V)	(mAh)	IEC /JIS	Eveready	Varta	Duracell
CR1/3N	11.6	10.8	3.0	160	CR1/3N	2L76	CR1/3N	_
CR1216	12.5	1.6	3.0	25	CR1216	CR1216	CR1216	-
CR1220	12.5	2.0	3.0	36	CR1220	CR1220	CR1220	1220
CR1616	16.0	1.6	3.0	55	CR1616	CR1616	CR1616	1616
CR1620	16.0	2.0	3.0	78	CR1620	CR1620	CR1620	1620
CR1632	16.0	3.2	3.0	140	CR1632	_	-	-
CR2016	20.0	1.6	3.0	90	CR2016	CR2016	CR2016	2016
CR2025	20.0	2.5	3.0	160	CR2025	CR2025	CR2025	2025
CR2032	20.0	3.2	3.0	220	CR2032	CR2032	CR2032	2032
CR2430	24.5	3.0	3.0	300	CR2430	CR2430	CR2430	2430
CR2450	24.5	5.0	3.0	610	CR2450	CR2450	CR2450	2450

Silver Oxide (Ultra Plus Series)



Model No.	□ Dimension (mm)				Cross Reference				
wodel No.	Diameter	Height	(V)	(mAh)	IEC/JIS	Eveready	Varta	Duracell	Sony
357	11.6	5.4	1.55	155	SR44	357/303Z	V357	303/357	SR44SW
362	7.9	2.1	1.55	24	SR58	362/361Z	V362	361/362	SR721SW
364	6.8	2.15	1.55	17	SR60	364/363Z	V364	364	SR621SW
371	9.5	2	1.55	35	SR69	371	V371	370/371	SR920SW
377	6.8	2.6	1.55	23	SR66	377/376Z	V377	377	SR626SW
379	5.8	2.15	1.55	14	SR63	379Z	V379	379	SR521SW
386	11.6	4.2	1.55	115	SR43	386Z	V386	301/386	SR43SW
389	11.6	3.05	1.55	67	SR54	389Z	V389	389	SR1130SW
391	11.6	2	1.55	55	SR55	391	V391	381/391	SR1120/W/SW
392	7.9	3.6	1.55	40	SR41	392/384Z	V392	384/392	SR41SW
394	9.5	3.6	1.55	60	-	394/380Z	V394	-	SR936SW
395	9.5	2.7	1.55	55	SR57	395/399Z	V395	395/399	SR927SW

Silver Oxide (Ultra Series)



Model No.	☐ Dimension (mm) ☐		Voltage	Nominal Capacity	Cross Reference				
	Diameter	Height	(V)	(mAh)	IEC/JIS	Eveready	Varta	Duracell	Sony
357	11.6	5.4	1.55	140	SR44	357/303Z	V357	303/357	SR44SW
364	6.8	2.15	1.55	14	SR60	364/363Z	V364	364	SR621SW
371	9.5	2	1.55	31	SR69	371	V371	370/371	SR920SW
377	6.8	2.6	1.55	20	SR66	377/376Z	V377	377	SR626SW
386	11.6	4.2	1.55	95	SR43	386Z	V386	301/386	SR43SW
389	11.6	3.05	1.55	58	SR54	389Z	V389	389	SR1130SW
391	11.6	2	1.55	50	SR55	391	V391	381/391	SR1120/W/SW
392	7.9	3.6	1.55	33	SR41	392/384Z	V392	384/392	SR41SW

Alkaline Cells (Mercury Free Series)



Model No.	Dimension Diameter	on (mm) — Height	Voltage (V)	Nominal Capacity (mAh)	IEC	JIS	Cross Reference Eveready	Varta	Duracell
A76	11.6	5.4	1.5	110	LR44	LR44	A76Z	V13GA	LR44
164	6.8	2.15	1.5	8	LR60	-	-	-	LR620
177	6.8	2.6	1.5	12	LR626	LR626	-	-	_
186	11.6	4.2	1.5	70	LR43	LR43	186	V12GA	LR43
189	11.6	3.05	1.5	44	LR54	LR54	189	V10GA	LR54
191	11.6	2.05	1.5	24	LR55	LR55	191	V8GA	_
192	7.9	3.6	1.5	24	LR41	LR41	192Z	V3GA	_
PX625A	15.6	5.95	1.5	190	LR9	LR9	E625G	V625U	625A

High Voltage Alkaline (Mercury Free Series)



	Dimension (mm)		Voltage	Nominal Capacity	Cross Reference					
Model No.	Diameter	Height	(V)	(mAh)	IEC	JIS	Eveready	Varta	Duracell	
10A	10.22	22.1	9.0	38	-	-	-	-	-	
11A	10.22	16.5	6.0	38	-	-	E11A	-	-	
23A	10.22	28.5	12.0	38	-	-	A23	V23GA	MN21	
26A	8.0	15.7	6.0	18	-	-	-	-	-	
27A	8.0	28.2	12.0	18	-	-	A27	-	MN27	
29A	8.0	21.9	9.0	18	-	-	-	-	-	
476A	13	25.2	6	105	4LR44	4LR44	A544	V4034PX	28A	

ZINC AIr Hearing Aid



Model No.	☐Dimension (mm) ☐		Voltage	Nominal Capacity				
	Diameter	Height	(V)	(mAh)	IEC /JIS	Eveready	Varta	Duracell
ZA10	5.8	3.6	1.45	90	PR536	AC10	10	10
ZA13	7.9	5.4	1.45	290	PR48	AC13	13	13
ZA312	7.9	3.6	1.45	170	PR41	AC312	312	312
ZA675	11.6	5.4	1.45	620	PR44	AC675	675	675