

AUDIO ANYWHERE 625™



USER MANUAL

1

SAFETY WARNINGS

- To prevent short circuits, this product should only be used inside and only in dry spaces. Do not expose the components to rain or moisture. Do not use the product close to a bath, swimming pool etc.
- Do not expose the components of your systems to extremely high temperatures or bright light sources.
- In case of improper usage or if you have altered and repaired the product yourself, all guarantees expire. Marmitek does not accept responsibility in the case of improper usage of the product or when the product is used for purposes other than specified. Marmitek does not accept responsibility for additional damage other than covered by the legal product responsibility.
- This product is not a toy. Keep out of reach of children.
- Do not open the product: the device may contain live parts. The product should only be repaired or serviced by a qualified expert.
- Only connect the adapter to the mains after checking whether the mains voltage is the same as the values on the identification tags. Never connect an adapter or power cord when it is damaged. In that case, contact your supplier.

TABLE OF CONTENTS

SAFETY WARNINGS	3
TABLE OF CONTENTS.....	4
INTRODUCTION.....	5
SET CONTENTS	6
AUDIO ANYWHERE 625 CONNECTIONS.....	6
INSTALLING THE AUDIO ANYWHERE 625 TRANSMITTER	7
INSTALLING THE AUDIO ANYWHERE 625 RECEIVER	7
EXTRA RECEIVER.....	8
FREQUENTLY ASKED QUESTIONS	9
TECHNICAL DATA	11

INTRODUCTION

Congratulations with your purchase of the Marmitek Audio Anywhere 625. The Audio Anywhere 625 comprises a transmitter and a receiver. The signal is transmitted on 2.4 GHz and can thus pass through walls and ceilings.

This transmitter/receiver allows (stereo) audio signals to be transmitted wirelessly.

- Digital, wireless audio transmitter
- Enjoy music and TV sound wirelessly
- Transmit the sound from your TV or computer wirelessly to your stereo or home cinema set
- Listen to the music you are playing in the living room and in other rooms (e.g. kitchen/conservatory) simultaneously
- Digital technology for interference-free CD quality
- Easy to connect and use
- Multiple receivers can be connected to one transmitter

You can play music from a sound source, via the Audio Anywhere 625, on your audio installation without having to connect the source with cables. This source could be a PC or laptop or even a TV.


You can then control your music via the sound source without having to walk over to the sound system.

The Audio Anywhere 625 has a range of about 10 metres, allowing you to control your music in the same or in an adjoining room.

SET CONTENTS

- 1 x Audio Anywhere 625 transmitter
- 1 x Audio Anywhere 625 receiver
- 2 x mini USB cable
- 2 x USB power adapter
- 2 x Mini Jack female to coaxial converter cable
- 2 x Mini Jack to Mini Jack cable
- 1 x set of instructions in English, German, French, Spanish, Italian, Dutch

AUDIO ANYWHERE 625 CONNECTIONS

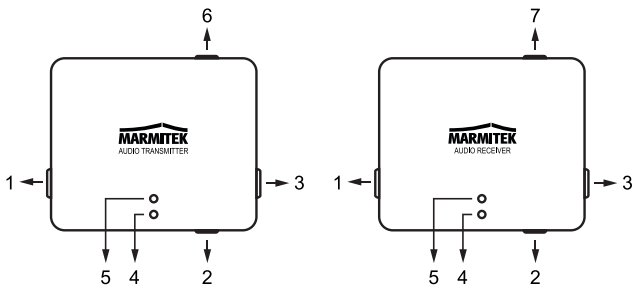

1. Mute
2. Mini USB port for power supply
3. On/off switch
4. Connection LED. Lights up green if a connection is made. Blinks if there is no audio or no connection. Off if the transmitter/receiver is off.
5. Power LED. Lights up red if the transmitter/receiver is receiving power.
6. Audio input
7. Audio output

INSTALLING THE AUDIO ANYWHERE 625 TRANSMITTER

The transmitter can be connected to any audio source, including a TV, satellite receiver, MP3 player, stereo equipment, etc.

1. Connect the mini jack plug to the headphone connection point on a device such as your TV, smartphone or radio/CD player.
Use the converter cable supplied to connect the Audio Anywhere 625 transmitter to the AUX OUT coaxial (Cinch/RCA) connection on your sound system.
2. Connect the adapter to the mini USB port and insert the adapter into the electrical socket. The red LED will now light up.
3. The Audio Anywhere 625 transmitter will now automatically switch on and the green LED will begin to flash.
4. Now the sound of your audio source will be reproduced.

INSTALLING THE AUDIO ANYWHERE 625 RECEIVER

1. Connect the mini jack-plug to the AUX IN on a docking speaker or radio/CD player, for example.
Use the converter cable supplied to connect the Audio Anywhere 625 receiver to the AUX IN coaxial (Cinch/RCA) connection on your sound system.
2. Connect the adapter to the mini USB port and insert the adapter into the electrical socket. The red LED will now light up.
3. The Audio Anywhere 625 receiver will now automatically switch on and the green LED will begin to flash.

The transmitter and receiver will now attempt to connect with one another and you will hear the audio source on the device

connected to the receiver. The green LED will stop flashing and then stay illuminated.

EXTRA RECEIVER

Extra receiver for your Audio Anywhere 625.

With an extra receiver you can receive the signal of the sender at more places in your house.

FREQUENTLY ASKED QUESTIONS

I can't connect my Audio Anywhere 625.

Check the following:

1. Ensure that the power adapter is connected and the power LED (5) is on (red).
2. Ensure that the distance between the transmitter and receiver is not greater than 10 metres and that there are no large obstacles in the way.
3. Check that the connection LED (4) is on (not blinking). If it is not on, press the ON/OFF switch (3).

No sound comes out of the audio installation.

- Ensure that the audio cable is correctly connected (AUX IN), that the correct input has been selected on your audio installation and that your audio system's volume is set to the desired level.
- Check that neither the transmitter nor receiver is muted.

I have connected the sound from the TV wirelessly with my audio installation but the sound is not synchronised with the picture.

Your TV needs more time to construct the picture than it does to play the sound.

The sound from your TV is therefore played slightly later so that both picture and sound are synchronised.

For the best result, connect the Audio Anywhere transmitter to the audio output on your TV and not to the audio output on your set-top box or satellite receiver.

If you connect the transmitter to the headphone output, the TV's speakers will be disconnected and you can continue to use the TV remote control to regulate volume via the Audio Anywhere 625.

Can I connect my speakers directly to the receiver?

In order to hear sound or music, connect the receiver to an amplifier with separate (built-in) speakers or so-called active speakers (with built-in amplifier). You cannot connect passive speakers directly to the receiver.

Can I connect the USB cable from my transmitter/receiver to a USB connection on my amplifier or TV, for example?

Yes you can. But the connection is only used for powering your Audio Anywhere 625. The transmitter/receiver then switches on and off automatically in line with the amplifier or TV (auto power on).

Do you have other questions that have not been resolved by the above information? Please go to www.marmitek.com

TECHNICAL DATA

Supply voltage:	230VAC +10% -10% 50 Hz 5V 500mA by Mini USB
Power Consumption:	< 2W
LEDs	Power, Link
AV RF transmission	digital
pairing	Automatically
RF data rate	Up to 2 Mbps, GFSK modulation
Audio frequency range	20Hz ~ 48KHz
audio in/output	RCA and 3.5mm jack
Audio	Stereo
Transmission Range	Up to 40m free field, up to 10m through walls and ceilings
RF frequency	2.4 GHz
Ambient temperature:	0 ~ +50°C (Operation) -20°C tot +70°C (storage)
weight	20 grams
Dimensions:	61 x 51 x 12 mm

Specifications may be modified without prior notice.



Environmental Information for Customers in the European Union

European Directive 2002/96/EC requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The

symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

DECLARATION OF CONFORMITY

Hereby, Marmitek BV, declares that this AUDIO ANYWHERE 625 is in compliance with the essential requirements and other relevant provisions of the following Directives:

Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity

Directive 2004/108/ec of the european parliament and of the council of 15 December 2004 on the approximation of the laws of the Member States relating to electromagnetic compatibility

Directive 2006/95/EC of the European Parliament and of the Council of 12 December 2006 on the harmonisation of the laws of Member States relating to electrical equipment designed for use within certain voltage limits

Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment

Commission Regulation (EC) No 278/2009 of 6 April 2009 implementing Directive 2005/32/EC of the European Parliament and of the Council with regard to ecodesign requirements for no-load condition electric power consumption and average active efficiency of external power supplies

Hiermit erklärt Marmitek BV die Übereinstimmung des Gerätes AUDIO ANYWHERE 625 den grundlegenden Anforderungen und den anderen relevanten Festlegungen der Richtlinien:

Richtlinie 1999/5/EG des Europäischen Parlaments und des Rates vom 9. März 1999 über Funkanlagen und Telekommunikationsendeinrichtungen und die gegenseitige Anerkennung ihrer Konformität

Richtlinie 2004/108/eg des europäischen parlaments und des rates vom 15. Dezember 2004 zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über die elektromagnetische Verträglichkeit

Richtlinie 2006/95/EG des Europäischen Parlaments und des Rates vom 12. Dezember 2006 zur Angleichung der Rechtsvorschriften der Mitgliedstaaten betreffend elektrische Betriebsmittel zur Verwendung innerhalb bestimmter Spannungsgrenzen

Richtlinie 2002/95/EG des Europäischen Parlaments und des Rates vom 27. Januar 2003 zur Beschränkung der Verwendung bestimmter gefährlicher Stoffe in Elektro- und Elektronikgeräten

Verordnung (EG) Nr. 278/2009 der Kommission vom 6. April 2009 zur Durchführung der Richtlinie 2005/32/EG des Europäischen Parlaments und des Rates im Hinblick auf die Festlegung von Ökodesign-Anforderungen an die Leistungsaufnahme externer Netzteile bei Nulllast sowie ihre durchschnittliche Effizienz im Betrieb

Par la présente Marmitek BV déclare que l'appareil AUDIO ANYWHERE 625 est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directives:

Directive 1999/5/CE du Parlement européen et du Conseil, du 9 mars 1999, concernant les équipements hertziens et les équipements terminaux de télécommunications et la reconnaissance mutuelle de leur conformité

Directive 2004/108/ce du parlement européen et du conseil du 15 décembre 2004 relative au rapprochement des législations des États membres concernant la compatibilité électromagnétique

Directive 2006/95/CE du Parlement européen et du Conseil du 12 décembre 2006 concernant le rapprochement des législations des États membres relatives au matériel électrique destiné à être employé dans certaines limites de tension

Directive 2002/95/CE du Parlement européen et du Conseil du 27 janvier 2003 relative à la limitation de l'utilisation de certaines substances dangereuses dans les équipements électriques et électroniques

Règlement (CE) no 278/2009 de la Commission du 6 avril 2009 portant application de la directive 2005/32/CE du Parlement européen et du Conseil en ce qui concerne les exigences d'écoconception relatives à la consommation d'électricité hors charge et au rendement moyen en mode actif des sources d'alimentation externes

Marmitek BV declara que este AUDIO ANYWHERE 625 cumple con las exigencias esenciales y con las demás reglas relevantes de la directriz:

Directiva 1999/5/CE del Parlamento Europeo y del Consejo, de 9 de marzo de 1999, sobre equipos radioeléctricos y equipos terminales de telecomunicación y reconocimiento mutuo de su conformidad

Directiva 2004/108/ce del parlamento europeo y del consejo de 15 de diciembre de 2004 relativa a la aproximación de las legislaciones de los Estados miembros en materia de compatibilidad electromagnética

Directiva 2006/95/CE del Parlamento Europeo y del Consejo de 12 de diciembre de 2006 relativa a la aproximación de las legislaciones de los Estados miembros sobre el material eléctrico destinado a utilizarse con determinados límites de tensión

Directiva 2002/95/CE del Parlamento Europeo y del Consejo de 27 de enero de 2003 sobre restricciones a la utilización de determinadas sustancias peligrosas en aparatos eléctricos y electrónicos

Reglamento (CE) no 278/2009 de la Comisión de 6 de abril de 2009 por el que se desarrolla la Directiva 2005/32/CE del Parlamento Europeo y del Consejo en lo concerniente a los requisitos de diseño ecológico aplicables a la eficiencia media en activo de las fuentes de alimentación externas y a su consumo de energía eléctrica durante el funcionamiento en vacío

Con ciò, Marmitek BV, dichiara che il AUDIO ANYWHERE 625 è conforme ai requisiti essenziali ed alter disposizioni relative alla Direttiva :

Direttiva 1999/5/CE del Parlamento europeo e del Consiglio, del 9 marzo 1999, riguardante le apparecchiature radio e le apparecchiature terminali di telecomunicazione e il reciproco riconoscimento della loro conformità

Direttiva 2004/108/ce del parlamento europeo e del consiglio del 15 dicembre 2004 concernente il ravvicinamento delle legislazioni degli Stati membri relative alla compatibilità elettromagnetica

Direttiva 2006/95/CE del Parlamento europeo e del Consiglio del 12 dicembre 2006 concernente il ravvicinamento delle legislazioni degli Stati membri relative al materiale elettrico destinato ad essere adoperato entro taluni limiti di tensione

Direttiva 2002/95/CE del Parlamento europeo e del Consiglio del 27 gennaio 2003 sulla restrizione dell'uso di determinate sostanze pericolose nelle apparecchiature elettriche ed elettroniche

Regolamento (CE) n. 278/2009 della Commissione del 6 aprile 2009 recante misure di esecuzione della direttiva 2005/32/CE del Parlamento europeo e del Consiglio per quanto riguarda le specifiche di progettazione ecocompatibile relative al consumo di energia elettrica a vuoto e al rendimento medio in modo attivo per gli alimentatori esterni

Bij deze verklaart Marmitek BV, dat deze AUDIO ANYWHERE 625 voldoet aan de essentiële eisen en aan de overige relevante bepalingen van Richtlijnen:

Richtlijn 1999/5/EG van het Europees Parlement en de Raad van 9 maart 1999 betreffende radioapparatuur en telecommunicatie-eindapparatuur en de wederzijdse erkenning van hun conformiteit

Richtlijn 2004/108/eg van het Europees parlement en de raad van 15 december 2004 betreffende de onderlinge aanpassing van de wetgevingen van de lidstaten inzake elektromagnetische compatibiliteit

Richtlijn 2006/95/EG van het Europees Parlement en de Raad van 12 december 2006 betreffende de onderlinge aanpassing van de wettelijke voorschriften der lidstaten inzake elektrisch materiaal bestemd voor gebruik binnen bepaalde spanningsgrenzen

Richtlijn 2002/95/EG van het Europees Parlement en de Raad van 27 januari 2003 betreffende beperking van het gebruik van bepaalde gevaarlijke stoffen in elektrische en elektronische apparatuur

Verordening (EG) Nr. 278/2009 van de Commissie van 6 april 2009 houdende tenuitvoerlegging van Richtlijn 2005/32/EG van het Europees Parlement en de Raad, wat betreft voorschriften inzake ecologisch ontwerp voor het elektrisch opgenomen vermogen van externe stroomvoorzieningen in niet-belaste toestand en de gemiddelde actieve efficiëntie van externe stroomvoorzieningen

MARMITEK BV
P.O. BOX 4257
5604 EG EINDHOVEN
THE NETHERLANDS



Copyrights

Marmitek is a trademark of Pattitude B.V.
Audio Anywhere 625 is a trademark of Marmitek B.V.
Copyright and all other proprietary rights in the content (including but not limited to model numbers, software, audio, video, text and photographs) rests with Marmitek B.V. Any use of the Content, but without limitation, distribution, reproduction, modification, display or transmission without the prior written consent of Marmitek is strictly prohibited. All copyright and other proprietary notices shall be retained on all reproductions.

MARMITEK
www.marmitek.com

The logo graphic consists of a thick black horizontal bar that is slightly curved upwards at both ends, with a small vertical gap in the center.

MARMITEK®
www.marmitek.com