



LED Outdoor Spot / Flood Lights

15, 28 & 42 Watts – 30 or 60 Degree Beam – IP65 Rated – 3000K White – 100 to 277VAC – UL



FEATURES

- 5 Year LEDtronics Warranty
- Energy Savings of up to 60%
- Lumen Maintenance over 70% @ 50,000+ Hours
- Adjustable Wall Mounting, Swivels in Any Direction
- Suitable for Wet Locations
- Solid-State: High-Shock & Vibration Resistant
- No UV Radiation / No Toxic Mercury
- Wide Oper. Temp. Range: -4°F to ~+104°F
- UL/cUL Listed (E352127)
- Eco-Friendly: RoHS Compliant
- LM79 Report on File

APPLICATIONS

- Landscape Lighting
- Walkway & Pathway Lighting
- Amusement Park Lighting
- Architectural Wall Washing
- Signs & Billboards
- Recreation Areas

OPTIONS AVAILABLE

- Other Wattages
- Other CCTs: 4000K, 5000K & 5700K
- Black, White & Gray Powder-Coated Finishes
- Bolt-On Yoke Mount
- Low Voltages: 12-24VDC, 12-18VAC



Over 30 Years of LEDtronics Design, Engineering & Manufacturing Experience

RFL001-15W30D-XIW-101 (Medium Beam)
RFL001-15W60D-XIW-101 (Wide Beam)

	15W30D	15W60D
Input Power	15 Watts	
Input Voltage	100~277VAC (Tested @ 120VAC)	
Input Current	1.20A	1.26A
Power Factor	0.90	0.90
Max. Candela	5550 cd	5385 cd
Total Lumens	12730 lm	12910 lm
Efficacy	95 lm/W	90 lm/W
Emitted Color	Warm White	
Color Temperature	3000K	
CRI	80	
Illumination Angle	30°	60°
Oper. Temperature	-4°F ~+104°F / -20°C ~+40°C	
Heatsink	ADC12 Aluminum	
Housing	SUS Back Plate, Outdoor Powder Coating, Bronze Color	
Lens	Fire-Resistant Polycarbonate, Anti-UV, High Transmittance	
Protection Rating	IP65	
Dimensions (typ)	L4.25 x WØ3.03 x H5.00 inch L108 x WØ77 x H127 mm	
Weight	0.93 lbs / 0.99 kg	
UL/cUL Listing	E352127 (TLFLG15XYZZ)	

15 Watts, Replaces MH Lamps up to 50W



Adjustable Swivel, Knuckle-Stem Bracket Fits ½" NPT Outlet Boxes & Covers



LEDTRONICS
America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424
E-mail: info@ledtronics.com
Website: ledtronics.com



© 2017 LEDtronics, Inc.

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

WWW.LEDTRONICS.COM

LOG 705 / Rev 08-2017


Check LEDTRONICS.COM for latest data. Printed material may be outdated.

LED Outdoor Flood Luminaires – 28 & 42 Watts / Medium & Wide Beam

RFL002-28W30D-XIW-101 (Medium Beam)
RFL002-28W60D-XIW-101 (Wide Beam)

	28W30D	28W60D
Input Power	28 Watts	
Input Voltage	100~277VAC (Tested @ 120VAC)	
Input Current	-	-
Power Factor	0.91	0.90
Max. Candela	- cd	- cd
Total Lumens	3200 lm	
Efficacy	114.3 lm/W	
Emitted Color	Warm White	Warm White
Color Temperature	3000K	3000K
CRI	80	
Illumination Angle	30°	60°
Oper. Temperature	-4°F ~+104°F / -20°C ~+40°C	
Heatsink	ADC12 Aluminum	
Housing	SUS Back Plate, Outdoor Powder Coating, Bronze Color	
Lens	Fire-Resistant Polycarbonate, Anti-UV, High Transmittance	
Protection Rating	IP65	
Dimensions (typ)	L5.83 x WØ4.53 x H7.80 inch L148 x WØ115 x H198 mm	
Weight	2.18 lbs / 0.99 kg	
UL/cUL Listing	E352127 (TLFLG28XYZZ)	

28 Watts, Replaces MH Lamps up to 100W

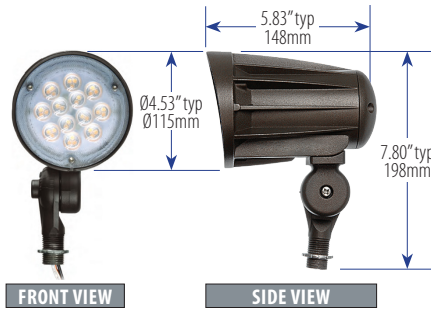

RFL003-42W60D-XIW-101

Input Power	42 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Input Current	-
Power Factor	0.89
Max. Candela	- cd
Total Lumens	4800 lm
Efficacy	114 lm/W
Emitted Color	Warm White
Color Temperature	3000K
CRI	80
Illumination Angle	60°
Oper. Temperature	-4°F ~+104°F / -20°C ~+40°C
Heatsink	ADC12 Aluminum
Housing	SUS Back Plate, Outdoor Powder Coating, Bronze Color
Lens	Fire-Resistant Polycarbonate, Anti-UV, High Transmittance
Protection Rating	IP65
Dimensions (typ)	L6.25 x WØ4.53 x H8.42 inch L159 x WØ115 x H214 mm
Weight	2.56 lbs / 1.16 kg
UL/cUL Listing	TLFLG42XYZZ)

42 Watts, Replaces MH Lamps up to 150W

