

interphone F5s




QUICK GUIDE EN





BEFORE USING, DOWNLOAD THE UPDATE FROM WEBSITE WWW.INTERPHONE.CELLULARLINE.COM

www.interphone.cellularline.com

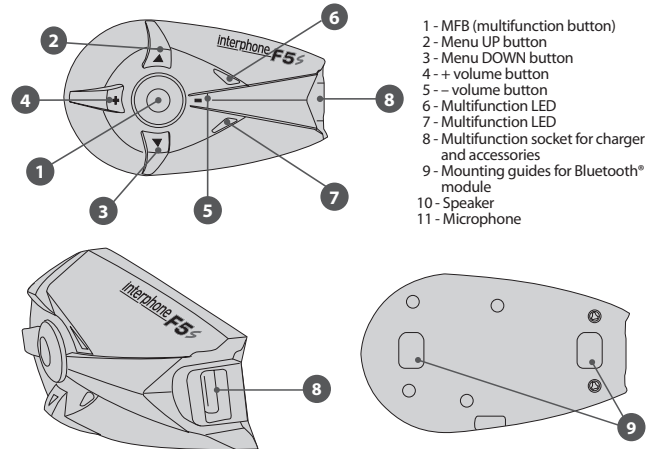


- 1 - MFB (multifunction button)
- 2 - Menu UP button
- 3 - Menu DOWN button
- 4 - + volume button
- 5 - - volume button
- 6 - Multifunction LED
- 7 - Multifunction LED
- 8 - Multifunction socket for charger and accessories
- 9 - Mounting guides for Bluetooth® module
- 10 - Speaker
- 11 - Microphone

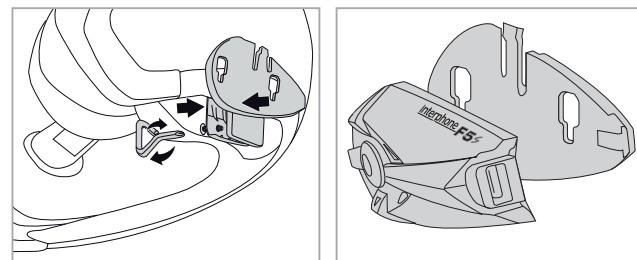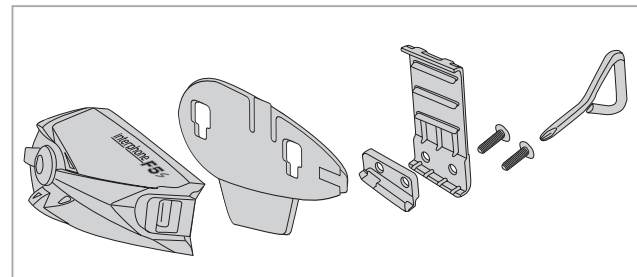

ASSEMBLY OF THE SLIDE SUPPORT WITH REMOVABLE CLIP


Take the support and note the best place to fasten it to the side of the helmet. Insert the rear part of the clip into the helmet and couple the other part on the outside. Insert the screws and tighten gently.

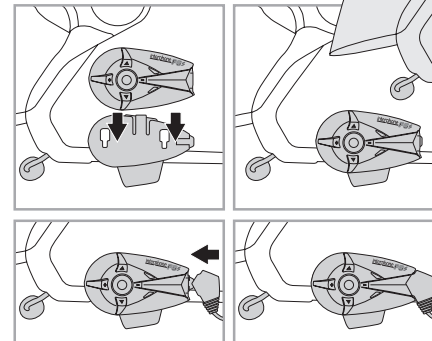

Check position and move the support if necessary, by sliding it along. Tighten the screws with the screwdriver supplied.


ASSEMBLY OF THE ADHESIVE SLIDE SUPPORT

Take the adhesive support and look for the best side and place to position it. Clean and de-grease the part of the helmet where you are going to stick the support (do not use any detergents that could damage the hel-

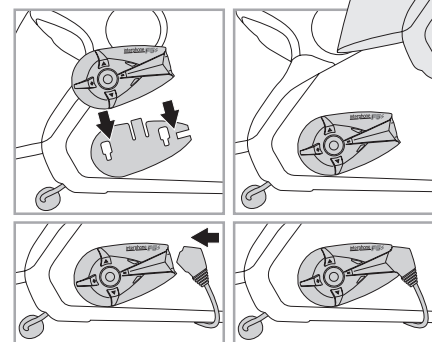

met's finish). Remove the protective film from the bi-adhesive, and apply the support to the helmet. As the support will not be able to be moved once stuck onto the helmet, take great care with its positioning, when applying.

for installation of audio kit refer to the help available www.interphone.cellularline.com

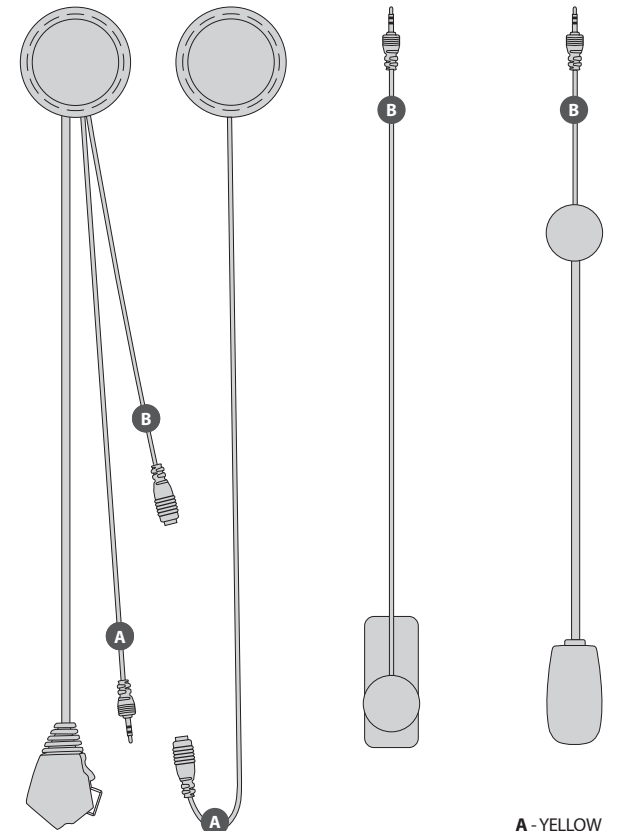

A - YELLOW
B - GREEN

Congratulations on your purchase of the Interphone F5S.
Before using this product, we recommend you carefully perform the operations outlined in this Quick Guide.

1 - Charging

Plug the battery charger into a 110/220 V socket.



With its dual output, the charger can charge two Interphone F5Ss at the same time. Insert the plug on the battery charger into the connector on the Interphone F5S. If you have another Interphone F5S, connect the second unit as well.




The LED lights up yellow/orange during charging.
The LED turns green when charging is complete.
When charging is complete, disconnect the units from the charger by pulling out the plug, and also pull out the charger from the mains socket.

2 - Setup

Insert the plug on one of the two audio kits contained in the package into the connector on the F5S.




Press and hold down the MFB button. After a few seconds, the blue LED will light up. Hold down the button for three more seconds. The red LED will also light up, and the two LEDs will flash with an alternating red/blue light. Now, release the button.

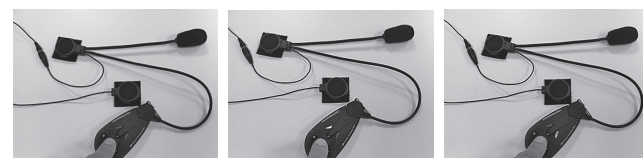

During this alternating flashing, listen to the Voice Wizard. Turn up the volume by pressing the + button, wait for the Voice Wizard to speak in your language and then press the MFB button to select that language. The two LEDs will continue to flash between red and blue. You can now connect to a phone or to another Interphone.

3 - Connecting to a phone

From the Bluetooth menu on your mobile phone (such as the sample iPhone menu shown below), search for a new device.

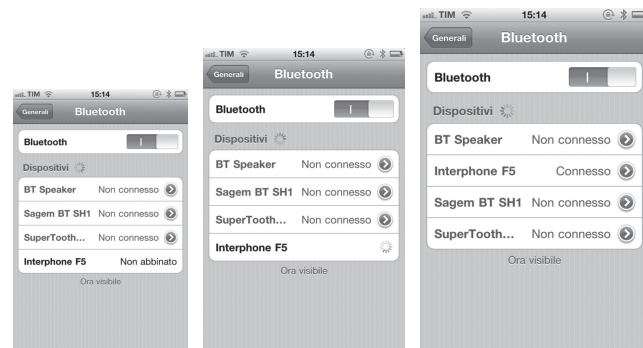

When the device is found, select Interphone F5S. Connection will take place automatically after a few seconds.
If a password is required, enter 0000.

4 - Connecting two Interphone F5Ss or an F5S + an F4S

To pair the two kits, repeat step 2* with the F4S. Press and hold down the MFB button until the LED begins to flash from red to blue. Now, press the UP button** once.
*on both units to be paired - **of one of the two F5S

When the UP button is pressed, the LEDs on the F5Ss will flash more quickly, which shows that a device search is in progress. After around 10 seconds, the devices will find each other and pair automatically. Now, the LEDs will light up a steady blue, which shows that intercom communication is established.
After connecting the two audio kits, place the headset on one of the two kits next to your ear and, using two fingers, rub the microphone on the other kit. You should hear the noise of the fingers through the headset. Next, invert the audio kits and repeat the test.
Press the MFB button once to switch off intercom communication.

5 - Connecting three Interphone F5Ss or one F5S + two F4Ss

To connect three F5Ss or one F5S and two F4Ss, shut off the two Interphones that have just been paired.
Turn on one F5S in the pairing mode (by pressing and holding down the MFB button). After three seconds, the blue LED will light up. Keep the button held down for three more seconds. The red LED will also light up, and the two LEDs will alternate from red to blue. Now, release the button.
Repeat this procedure for the third device (F5S or F4S).
Press the UP button on the first F5S. The LEDs will flash more quickly, which shows that a device search is in progress. After around 10 seconds, the devices will find each other and pair automatically. At this point, the respective LEDs will light up a steady blue, which shows that intercom communication is established.
To activate 3-way communication, turn on the three F5Ss and press the MFB button on the first unit until you hear a beep. Full duplex intercom communication is now established among the three Interphone F5Ss.

6 - Connecting four Interphone F5Ss or two F5Ss + two F4Ss

Two Interphones can be paired with each F5S.
After completing the procedure for pairing three Interphones, take the fourth kit (F5S or F4S) and set it to the pairing mode using the normal procedure.
Perform the same procedure with one of the two F5Ss that were previously paired with another unit.
Press the UP button on one of the two F5Ss. The LEDs will flash more rapidly, which shows a device search in progress. After around 10 seconds, the devices will find each other and pair automatically. At this point, the respective LEDs will light up a steady blue, which shows that intercom communication is established.
To establish communication with four users, press the MFB button on one of the two F5Ss until you hear a beep. Intercom communication between the three Interphone units is now established. To connect the fourth unit, press the MFB button.

INTERPHONEF5 ACCESSORIES

