



### Overview

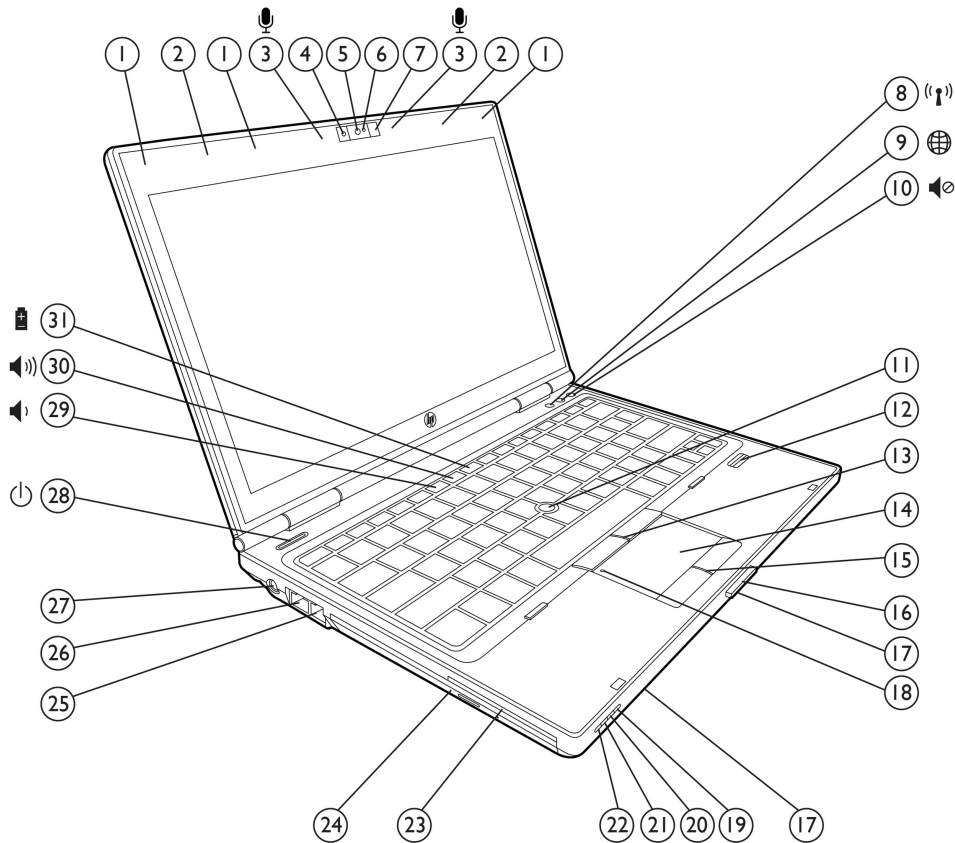


1. WLAN antennas (3)
2. WWAN antennas (2)
3. Dual-microphone array
4. Webcam LED indicator
5. Optional HD Webcam
6. HP Night Light button and ambient light sensor
7. HP Night Light
8. Wireless on/off button with LED indicator
9. HP QuickWeb button with LED indicator
10. Volume mute button with LED indicator
11. Pointstick
12. Optional HP Fingerprint Sensor
13. Pointstick buttons (2)
14. Touchpad with scroll zone
15. Touchpad buttons (2)
16. Display release button
17. Stereo Speakers
18. Touchpad on/off button with LED indicator
19. Drive activity/HP 3D DriveGuard LED indicator
20. Battery charging LED indicator
21. Power/standby LED indicator
22. Wireless on/off LED indicator
23. Integrated Smart Card Reader
24. Optical drive or weight saver
25. Optional RJ-11/modem port
26. RJ-45/Ethernet port
27. Power connector
28. Power button with LED indicator
29. Volume down function key
30. Volume up function key
31. HP Power Assistant function key

### Overview

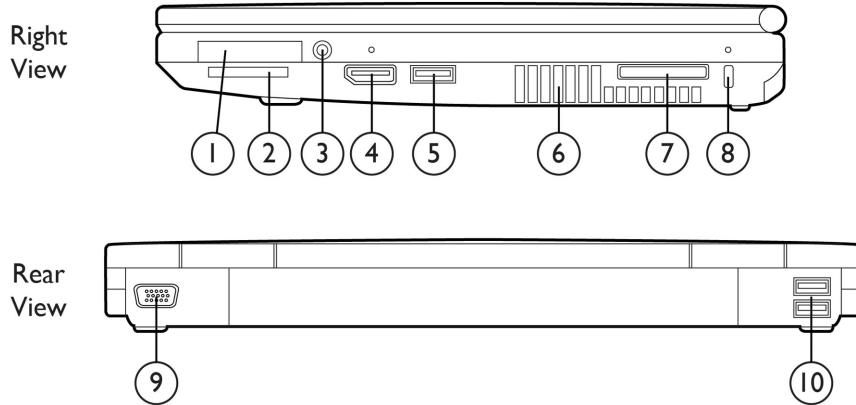

- 1. ExpressCard/34 slot
- 2. Secure Digital/MultiMediaCard slot
- 3. Combo headphone/microphone jack
- 4. DisplayPort
- 5. eSATA/USB 2.0 combo port
- 6. Vent
- 7. Docking connector
- 8. Kensington Lock slot
- 9. VGA connector (external monitor/projector)
- 10. 2 USB 2.0 ports

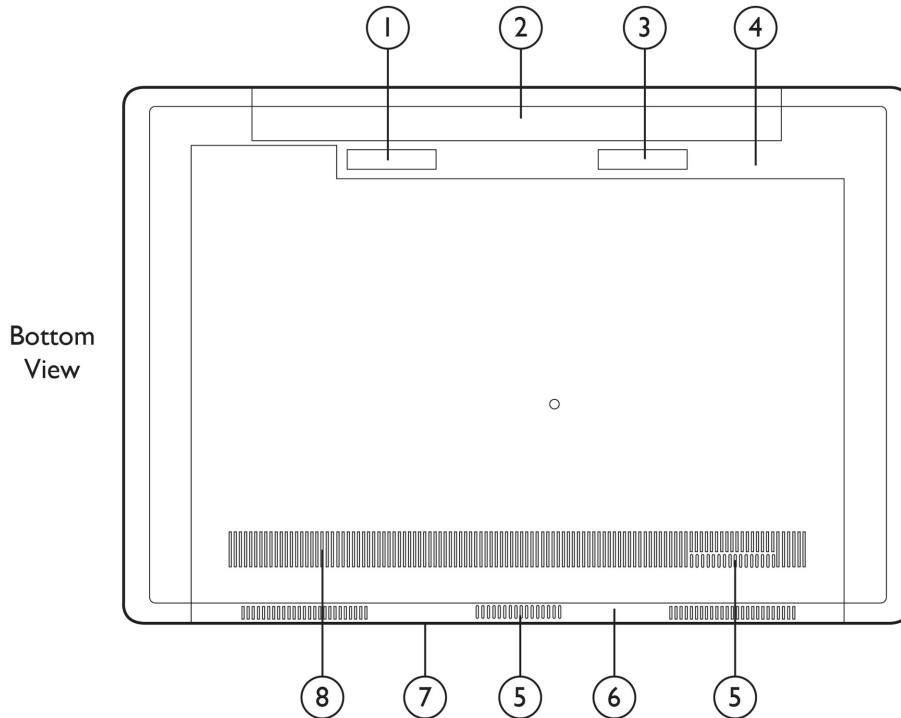

- 1. Bottom cover release latch
- 2. Battery bay
- 3. Battery release latch
- 4. SIM slot for WWAN (select models)
- 5. Stereo Speakers
- 6. Bluetooth compartment
- 7. Hard drive, memory, and wireless compartments under bottom cover

### Overview

inside battery bay

8. Vents

### At A Glance

- Genuine Windows® 7 versions or FreeDOS
- 12.5-inch diagonal LED-backlit HD display, ambient light sensor
- Industrial, business rugged HP DuraCase construction features a full magnesium alloy chassis, wear-resistant HP DuraFinish, precision aluminum-alloy hinges, and cast titanium-alloy display latches; designed to meet the military standard Mil-Std-810G for vibration, dust, altitude, and high temperature operation\*
- Spill-resistant keyboard with drains
- Choice of an Intel® Core™ i7 or Core i5 standard voltage processor for maximum performance
- Intel vPro technology (optional) enables you to remotely monitor, diagnose, and repair PCs over the network, even if a system's OS is inoperable or it is powered off
- Optional fixed optical drive or weight saver
- Choice of 7200 rpm 2.5-inch hard drive up to 500 GB, with HP 3D DriveGuard protection; or 128/160 GB Solid State Drive
- Flexible wireless connectivity options:
  - Integrated HP hs2340 HSPA+ Mobile Broadband module connects to both HSPA and HSPA+ (UMTS) networks and provides GPS functionality
  - Integrated HP un2430 EV-DO/HSPA Mobile Broadband module (Gobi 3000) provides GPS functionality (availability expected May, 2011)
  - Integrated Intel® Centrino® 802.11 a/b/g/n 2x2 or a/b/g/n 3x3, or Broadcom 802.11 a/b/g/n 2x2 or b/g/n 1x1 wireless LAN module
  - Bluetooth v2.1+EDR
- Choice of 9-cell or 6-cell battery, including HP Long Life battery, to customize weight, run-time, and battery life to your needs
- HP Power Assistant to conserve power, increase battery run-time, monitor power needs, and report workforce power consumption
- Integrated Intel HD Graphics 3000
- SRS Premium Sound optimized for high fidelity audio
- Security features including HP ProtectTools, with central management across HP and non-HP client PCs
- Separate launch buttons for easy access to the following features: wireless on/off, HP QuickWeb, and volume mute
- HP DayStarter for display of calendar information during Windows startup
- DisplayPort for high resolution support
- Optional HP 2560 Series Docking Station provides additional DisplayPort, eSATA port, four additional USB ports (one charging), audio in/out ports, RJ-45, VGA, power connector, and HP Docking Station Cable Lock
- Optional HD Webcam
- Dual pointing devices (touchpad with scroll zone and pointstick)
- HP Night Light
- ExpressCard/34 slot
- Secure Digital/MultiMediaCard slot
- BFR/PVC-free\*\*, ENERGY STAR qualified and EPEAT Gold Target registered in the U.S. EPEAT status varies by country- please see [epeat.net](http://epeat.net).

\* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

\*\* Meeting the industry definition of 'BFR/PVC-free' per the iNEMI Position Statement on "Low Halogen" Electronics. Plastic parts incorporated into the chassis generally contain < 1000 ppm (0.1%) of bromine or chlorine. Printed circuit board and substrate laminates generally contain < 1500 ppm (0.15%) of total bromine and chlorine. Service parts after purchase may not be BFR/PVC-free. External accessories, including power supplies, power cords, and peripherals as well as the following customer-configurable internal components: ATT SIM card are not BFR/PVC-free.

### Standard Features (availability may vary by country)

#### Processors

##### 2<sup>nd</sup> Generation Intel Core i7 Processors

Intel Core i7-2620M Processor (2.70 GHz, 4 MB L3 cache, 2 cores/4 threads, 35W)\*  
Up to 3.40 GHz with Intel Turbo Boost Technology

##### 2<sup>nd</sup> Generation Intel Core i5 Processors

Intel Core i5-2540M Processor (2.60 GHz, 3 MB L3 cache, 2 cores/4 threads, 35W)\*  
Up to 3.30 GHz with Intel Turbo Boost Technology

Intel Core i5-2520M Processor (2.50 GHz, 3 MB L3 cache, 2 cores/4 threads, 35W)\*  
Up to 3.20 GHz with Intel Turbo Boost Technology

Intel Core i5-2410M Processor (2.30 GHz, 3 MB L3 cache, 2 cores/4 threads, 35W)\* †  
Up to 2.90 GHz with Intel Turbo Boost Technology

\* Intel's numbering is not a measurement of higher performance.

† Not available with vPro.

**NOTE:** Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

---

#### Operating System

##### Preinstalled

Genuine Windows 7 Professional 32\*  
Genuine Windows 7 Professional 64\*  
Genuine Windows 7 Home Premium 64\*  
FreeDOS

##### Supported

Genuine Windows 7 Enterprise 32\*  
Genuine Windows 7 Enterprise 64\*  
Genuine Windows 7 Ultimate 32\*  
Genuine Windows 7 Ultimate 64\*  
Genuine Windows Vista Enterprise 32\*\*  
Genuine Windows Vista Enterprise 64\*\*  
Genuine Windows Vista Business 32\*\*  
Genuine Windows Vista Business 64\*\*  
Genuine Windows XP Professional 32

##### Certified

SuSE Linux Enterprise Desktop 11

\* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See: [www.microsoft.com/windows/windows-7/](http://www.microsoft.com/windows/windows-7/) for details.

---

#### Chipset

Mobile Intel QM67 Express Chipset

---

### Standard Features (availability may vary by country)

#### Intel Core i5 with vPro/Core i7 with vPro technology capable

Intel Core i5 processor with vPro and Core i7 processor with vPro technology is a selectable feature that is available on units configured with select processors, an Intel Centrino Advanced-N or Ultimate-N WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology 7.0 (iAMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off or when the operating system is inoperable\*. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.

\*Requires a Windows operating system, network hardware and software, connection to a power source, and a direct (non-VPN) corporate network connection, which is either through a cable or a wireless LAN.

**NOTE:** Some functionality of Intel Core i5 processor with vPro/Core i7 processor with vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for the Intel Core i5 processor with vPro/Core i7 processor with vPro technology is dependent on 3rd party software providers. Compatibility with future "virtual appliances" is yet to be determined.

#### Graphics

Intel HD Graphics 3000  
Microsoft DirectX 10.1 (Shader Model 4.1) and OpenGL 3.0 capable

#### Display

**Internal** 12.5-in. diagonal LED-backlit HD anti-glare (1366 x 768 resolution) Ambient Light Sensor  
HP Privacy Filter support

**External** Up to 32-bit per pixel color depth  
**DisplayPort** supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz  
**VGA** port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz  
**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

#### Memory

**Standard** PC3-10600 DDR3 SDRAM (1333 MHz)  
Two SODIMM slots supporting dual-channel memory  
2 GB, 4 GB, and 8 GB SODIMMs

**Maximum** Upgradeable to 16 GB with 8 GB SODIMMs in slots 1 and 2

**Dual-channel** Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory channels.

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

### Standard Features (availability may vary by country)

#### Communications

Integrated Intel 82579LM Gigabit\* Network Connection  
56K V.92 modem\*\*

\* The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

\*\* Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

#### Wireless Devices

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Mobile broadband (WWAN) requires a Windows operating system and is available in select countries as a standard, factory-configurable feature or as an option to be added later. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

##### Mobile Broadband options

Two 850/900/1575/1700/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.

**NOTE:** A separately purchased mobile network operator service is required.

##### HP hs2340 HSPA+ Mobile Broadband Module

Integrated mobile broadband module that provides connectivity to both HSPA and HSPA+ (UMTS) networks. It also provides standalone, Internet and network assisted GPS functionality for various mapping applications and security applications such as Computrace Pro for HP ProtectTools.

##### HP un2430 EV-DO/HSPA Mobile Broadband Module (availability expected May, 2011)

Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications such as Computrace LoJack Pro Premium for HP ProtectTools.

##### All 802.11 integrated wireless LAN options

Wi-Fi Certified\*

Cisco Compatible Extensions support

Wired Equivalent Privacy (WEP) support up to 128-bit keys

Wi-Fi Protected Access (WPA) and WPA2 support

802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP

Advanced Encryption Standard (AES) support

Dual antennas integrated in the display enclosure

##### Intel Centrino Ultimate-N 6300 (3x3)

Integrated support for 802.11a, b, g, and n\*

3 transmit, 3 receive antennas

Up to 450 mbps data rate

##### Intel Centrino Advanced-N 6205 (2x2)

Integrated support for 802.11a, b, g, and n\*

2 transmit, 2 receive antennas

Up to 300 mbps data rate

##### Broadcom 43224AGN 802.11a/b/g/n WiFi Adapter

Integrated support for 802.11 a, b, g, and n

2 transmit, 2 receive antennas

Up to 300 mbps data rate

##### Broadcom 4313GN 802.11b/g/n WiFi Adapter

Integrated support for 802.11 b, g, and n

1 transmit, 1 receive antenna

Up to 72 mbps data rate

### Standard Features (availability may vary by country)

**HP Integrated Module with Bluetooth 2.1+EDR Wireless Technology** Bluetooth Specification v2.1+EDR compliant  
Works with a wide range of Bluetooth devices

\* In countries where 802.11n is not allowed, this capability is not enabled (802.11a/b/g only).

#### Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101-/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. U.S. and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19 mm x 19 mm key pitch (center-to-center spacing), 2.0 mm stroke, and comfort-dished keycaps.

HP Night Light shines directly on keyboard for low-light conditions.

#### Launch Buttons and Function Keys

Separate launch buttons provide easy access to the following features: wireless on/off, HP QuickWeb, and volume mute. Function keys provide control of the following features, including: standby mode, external display, volume down, volume up, HP Power Assistant, and display brightness.

#### Dual Pointing devices

Touchpad with on/off button, two-way scroll, gestures, two pick buttons  
Pointstick with two additional pointstick buttons

#### Internal Storage

**Hard drives** 250/320/500 GB 7200 rpm SMART SATA II  
320 GB 7200 rpm SMART SATA II self encrypting drive (optional)

**NOTE:** These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 20 GB is reserved for the system recovery software.

**HP 3D DriveGuard** (Windows only) The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive from shock and vibration during normal use. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.

**Solid State Drive** 128/160 GB

#### Optical Drive

**9.5 mm SATA optical drive** DVD+/-RW SuperMulti DL Drive  
DVD-ROM Drive

-or-

**Weight Saver**

### Standard Features (availability may vary by country)

<b>Expansion card slots</b>	<b>ExpressCard/34 slot</b>	Supports ExpressCard/34
	<b>Integrated Smart Card Reader</b>	Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
	<b>Secure Digital/MultimediaCard slot</b>	Supports Secure Digital (SD), MultimediaCard

---

<b>Interfaces</b>	<b>External monitor</b>	Two - (1) DisplayPort, (1) VGA
	<b>Combo headphone/microphone jack</b>	One
	<b>Power connector</b>	One
	<b>RJ-11/modem</b>	One
	<b>RJ-45/Ethernet</b>	One
	<b>USB 2.0</b>	Two (including one charging port)
	<b>eSATA/USB 2.0 combo</b>	One
	<b>Docking connector</b>	For HP 2560 Series Docking Station

---

### Audio/Visual

SRS Premium Sound™  
Integrated stereo speakers  
Integrated dual-microphone array  
Button for volume mute; function keys for volume up and down  
Combo headphone/microphone jack

Optional HD webcam

- HD format (widescreen)
  - Supports web casting and still image capture
  - High quality fixed focus lens
  - Video capture at various resolutions up to 1280 x 720 resolution (720p) and up to 30fps
  - M-JPEG compression supports higher frame rates for video capture and videoconferencing
  - Improved low-light sensitivity
  - Improved dynamic range
-



### Standard Features (availability may vary by country)

#### Software

##### Preinstalled software with Windows operating system

HP Recovery Manager  
HP Support Assistant  
HP ProtectTools Security Manager  
HP ProtectTools for Central Management  
HP Hotkey Support  
HP QuickWeb  
HP Power Assistant  
HP Connection Manager  
HP DayStarter  
Microsoft Office 2010 preloaded; Purchase Key\*  
Norton Internet Security 2011\*\*  
PDF Complete Special Edition\*\*\*  
Intervideo WinDVD - DVD Player (select models)  
Roxio Secure Burn (select models)  
Roxio MyDVD 10 SE (select models)  
HP Webcam Software (select models)  
Skype

##### Additional software available from the web

HP SoftPaq Download Manager

\* Includes reduced functionality versions of Word and Excel. Purchase of a Product Key required to activate the full Office 2010 suite and is available at participating resellers/retailers and [www.office.com](http://www.office.com).

\*\* Norton Internet Security 2011 includes 60 days of complimentary live updates; a subscription is required for live updates thereafter. Internet access is required to receive updates.

\*\*\* PDF Complete Special Edition 60-day trial; a license must be purchased afterwards for full functionality.

#### HP Recovery Manager

Models shipped with Windows 7 include HP Recovery Manager, which enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 20 GB of the hard drive is reserved for the system recovery software.

#### Security

##### Standard Features

HP ProtectTools Security Manager (standard modules include)

- Credential Manager
- Computrace\* Pro
- Device Access Manager
- Drive Encryption
- Face Recognition (webcam configurations only)
- File Sanitizer
- Privacy Manager
- Embedded Security

Integrated Smart Card Reader  
Enhanced Pre-Boot Security (Multiuser/Multifactor)  
HP SpareKey  
One-Step Logon  
TPM 1.2 Embedded Security Chip\*\*  
HP Disk Sanitizer  
Security lock slot  
Support for Intel AT\*\*\*

### Standard Features (availability may vary by country)

<b>Optional Features</b>	<b>HP Fingerprint Sensor</b>	Enhanced sensor scans the fingerprint to uniquely identify and authenticate a person.
	<b>HP Privacy Filter</b>	Narrows viewing area so that screen data is visible only to persons directly in front of the monitor.
	<b>Computrace* Pro for HP ProtectTools with GPS Tracking</b>	Subscription-based security solution providing the ability to track, initiate physical recovery, conduct asset management, and perform remote data delete by utilizing GPS technology. GPS functionality requires HP Mobile Broadband Module.

\* The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription with terms ranging from one to five years.

\*\* The TPM module is disabled in locations where use is restricted by law, for example, Russia and China. For more information on HP security solutions refer to: [www.hp.com/products/security](http://www.hp.com/products/security).

\*\*\* Intel AT security requires a separately purchased Absolute Computrace service subscription and must be activated and configured. Check with Absolute for availability in your country. Intel and HP assume no liability for lost or stolen data and/or systems or any other damages resulting therefrom. See [www.intel.com/technology/anti-theft/](http://www.intel.com/technology/anti-theft/)

### HP ProtectTools Security Manager with Central Management

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The ProtectTools modules are available on the hard drive (also downloadable from the Web) and can be configured in Software Setup.

HP ProtectTools is centrally manageable and has the capability to manage notebooks from a single point. HP ProtectTools is management ready out of the box, in partnership with Digital Persona. Features address requirements that customers expect from a centrally managed security solution such as user provisioning, credential reset, and credential revocation.

HP ProtectTools provides two separate management solutions, targeted at the enterprise and the SMB:

- Digital Persona Pro AD: Designed for the enterprise customer, this solution integrates with Active Directory and gives IT managers the ability to provision users, create login policies based on passwords, biometrics, or smartcards. Management features also include remote credential recovery in case a user forgets their password, loses their smartcard or cannot use their fingerprint reader for any reason. In addition, advanced auditing capabilities are also built in. Digital Persona Pro AD is available now.
- Digital Persona Pro Workgroup: Designed for the small business customer. This solution provides features similar to the Active Directory version, but for workgroups. Workgroup activation is built into HP ProtectTools, and activation of up to five seats is completely free.

For more information on Central Management for HP ProtectTools, refer to: [www.hp.com/products/security](http://www.hp.com/products/security).

### Standard Features (availability may vary by country)

#### Power Supply

External HP 65 W Smart AC adapter  
Power cord included is 6 ft (1.8 m).  
Total length, including external AC adapter, is 12 ft (3.66 m).  
HP Fast Charge\*

\* HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge Technology does not apply to 9-cell primary batteries.

#### Battery

##### Primary Battery

HP 9-cell 100 WHr Lithium-ion primary battery  
HP 6-cell 62 WHr Lithium-ion primary battery  
HP Long Life 6-cell 55 WHr Lithium-ion primary battery

#### Battery Life

**HP 9-cell Primary Battery** Up to 14 hours and 15 minutes

**HP 6-cell Primary Battery** Up to 8 hours and 30 minutes

**NOTE:** Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark [www.bapco.com/products/mobilemark2007](http://www.bapco.com/products/mobilemark2007) for additional details.

#### System Standby Time

Up to 1 week

#### Power Conservation

Supports enhanced Intel SpeedStep technology (allows Battery-Optimized mode, Maximum Performance mode, or Automatic mode)

Intel Display Power Saving technology

Hibernation

Standby

ACPI compliance

#### Docking and Stands

HP 2560 Docking Station  
HP USB 2.0 Docking Station  
HP Essential USB 2.0 Port Replicator  
HP LAN and USB Travel Hub

**NOTE:** Some HP Docking stations may not support every feature of some HP Notebook models. Please refer to the individual docking station documentation for specific information about supported features.

#### Service and Support

HP Services offers limited 3-year and 1-year warranty options; 1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: [www.hp.com/go/lookuptool](http://www.hp.com/go/lookuptool). Additional HP Care Pack Services information by product is available at: [www.hp.com/services/carepack](http://www.hp.com/services/carepack).

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details: <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Options (availability may vary by country)

**NOTE:** Options/capabilities listed in the QuickSpecs represent those capabilities available through Base Units or Build to Order configurations. The various product features and capabilities will vary in terms of configurable vs. aftermarket options (AMOs). There may be options and capabilities available through CTO that are not available as AMOs.

<b>Memory</b>	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA#xxx
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA#xxx
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA#xxx
	HP 8 GB (DDR3 1333 MHz) SODIMM	QP013AA#xxx
	HP 2 GB PC3-12800 (DDR3 1600 MHz) SODIMM	H2P63AA
	HP 4 GB PC3-12800 (DDR3 1600 MHz) SODIMM	H2P64AA
	HP 8 GB PC3-12800 (DDR3 1600 MHz) SODIMM	H2P65AA

**NOTE:** Full availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements. Due to system limitations, DDR3-1600 MHz memory will only be supported at DDR3-1333 MHz.

---

<b>Storage</b>	HP 250GB Pocket Media Drive	FE477AA
	HP Mobile USB DVD	XQ543AA
	HP Mobile USB DVDRW	BU516AA

---

<b>Expansion Solutions</b>	HP 2560 Series Docking Station	LE877AA
	HP USB 2.0 Docking Station	AY052AA#xxx
	HP Essential USB 2.0 Port Replicator	AQ731AA#xxx
	HP LAN and USB Travel Hub	BM868AA#xxx

---

<b>Power</b>	HP 65W Smart AC Adapter	ED494AA#xxx
	HP 90W Smart AC/Auto/Air Combo Adapter	AJ652AA#xxx
	HP 65W Slim AC Adapter	AX727AA#xxx
	HP 90W Slim AC Adapter	BT796AA#XXX

---

<b>Carrying Cases</b>	HP Basic Carrying Case	AJ078AA
	HP Business Nylon Case	BP848AA
	HP Professional Slim Top Load Case	AY530AA

---

<b>Security</b>	HP Notebook Combo Lock	AY475AA#xxx
	HP Keyed Cable Lock	BV411AA
	HP 12.5-inch Display Privacy Filter	QA216AA

---

### Options (availability may vary by country)

<b>Input/Output Devices</b>	HP USB Optical Travel Mouse	RH304AA
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Keyboard & Mouse Bundle	RC465AA#xxx

### Technical Specifications

<b>System Unit</b>	<b>Dimensions (HxWxD)</b>	1.08 in (at front) x 12.02 in x 8.23 in 27.4 mm (at front) x 305.2 mm x 209.0 mm 1.29 in (32.8 mm) height at rear
	<b>Weight</b>	Starting at 4.02 lb (1.82 kg) with weight saver (no optical drive) Starting at 4.24 lb (1.92 kg) with optical drive
	<b>NOTE:</b> Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery and wireless LAN.	
	<b>Stand-Alone Power Requirements (AC Power)</b>	Nominal Operating Voltage 18.5 V Average Operating Power TBD W Max Operating Power < 65 W
	<b>Temperature</b>	Operating 32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical) Non-operating -4° to 140° F (-20° to 60° C)
	<b>Relative Humidity</b>	Operating 10% to 90%, non-condensing Non-operating 5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
	<b>Shock</b>	Operating 125 G, 2 ms, half-sine Non-operating 200 G, 2 ms, half-sine
	<b>Random Vibration</b>	Operating 0.75 grms Non-operating 1.50 grms
	<b>Altitude (unpressurized)</b>	Operating -50 to 10,000 ft (-15.24 to 3,048 m) Non-operating -50 to 40,000 ft (-15.24 to 12,192 m)
	<b>Industry Standard Certifications</b>	UL Yes CSA Yes FCC Compliance Yes ENERGY STAR® Select models* EPEAT Gold target** ICES Yes GS Yes Australia / NZ A-Tick Compliance Yes CCC Yes Japan VCCI Compliance Yes KCC Yes BSMI Yes CE Marking Compliance Yes BNCI or BELUS Yes CIT Yes GOST Yes Saudi Arabian Compliance (ICCP) Yes

### Technical Specifications

SABS	Yes
UKRSERTCOMPUTER	Yes

\* Configurations of the HP EliteBook 2560p that are ENERGY STAR qualified are identified as HP EliteBook 2560p ENERGY STAR on HP websites and on [www.energystar.gov](http://www.energystar.gov).

\*\* EPEAT TBD Registered in U.S. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.

**NOTE:** For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

---

#### Audio

#### SRS Premium Sound

---

<b>Hardware</b>	<b>Implementation</b>	IDT 92HD87 High Definition CODEC
	<b>Touch-Sensitive Volume Controls</b>	Volume up, volume down, and mute
	<b>Full Duplex</b>	Yes
	<b>Microphone In</b>	Stereo
	<b>Headphone/Line Out</b>	Stereo
	<b>Integrated Microphone</b>	Yes, dual digital microphone array when equipped with optional webcam

---

<b>Audio Output Quality</b>	<b>Frequency Response</b>	20 Hz – 20 kHz
	<b>Signal to Noise Ratio</b>	>85 dB
	<b>Total Harmonic Distortion</b>	0.01%
	<b>Noise Floor</b>	–110 dB
	<b>Play/Record Sampling Rate(s)</b>	8 kHz – 48kHz
	<b>DAC</b>	16, 20 or 24-bit
	<b>ADC</b>	16 or 20-bit

---

<b>Integrated Stereo Speakers</b>	<b>Power Rating</b>	2 Watts
	<b>Impedance</b>	4 Ohms

---

#### Power

---

### Technical Specifications

<b>HP 65W Smart AC Adapter</b>	<b>Dimensions</b>	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)		
	<b>Weight</b>	0.62 lb (280 g)		
	<b>Input</b>	100 to 240 VAC		
		Input Efficiency	87% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
	<b>Output</b>	Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC	
		Output power	65W	
		DC output	18.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
	<b>Connector</b>	3 pin/grounded, mates with interchangeable cords		
	<b>Environmental Design</b>	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)	
		Altitude	0 to 10,000 ft (0 to 3,048 m)	
		Humidity	20% to 80%	
<b>EMI and Safety Certifications</b>	Storage Humidity	10% to 90%		
	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.			

---

<b>6-cell 62 WHr Li-Ion Battery</b> <b>SX06062</b>	<b>Dimensions (H x W x L)</b>	0.8 x 2.0 x 8.1 in (2 x 5 x 20.5 cm)	
	<b>Weight (max)</b>	0.71 lb (0.32 kg)	
	<b>Cells/Type</b>	Lithium-Ion	
	<b>Energy</b>	Voltage	11.1V
		Amp-hour capacity	5.6Ah
		Watt-hour capacity	62Wh
	<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 122° F (-10° to 50° C)
		Non-operating	-4° to 122° F (-20° to 50° C)
	<b>Battery Re-Charge Time</b>	System in OFF or Standby Mode	2.5 hours
		System ON	3 to 5 hours
	<b>Fuel Gauge LED</b>	No	
	<b>Warranty</b>	1 year	
	<b>Optional Travel Battery Available</b>	No	

---



### Technical Specifications

<b>9-cell 100 WHr Li-Ion Battery</b> <b>SX09100</b>	<b>Dimensions (H x W x L)</b>	1.6 x 2.0 x 8.1 in (4 x 5 x 20.5 cm)		
	<b>Weight (max)</b>	1.06 lb (0.475 kg)		
	<b>Cells/Type</b>	Lithium-Ion		
	<b>Energy</b>	<b>Voltage</b>	11.25V	
		<b>Amp-hour capacity</b>	8.85Ah	
		<b>Watt-hour capacity</b>	100Wh	
	<b>Temperature</b>	<b>Operating (Charging)</b>	32° to 113° F (0° to 45° C)	
		<b>Operating (Discharging)</b>	14° to 122° F (-10° to 50° C)	
		<b>Non-operating</b>	-4° to 122° F (-20° to 50° C)	
	<b>Battery Re-Charge Time</b>	<b>System in OFF or Standby Mode</b>	3.5 to 5 hours	
		<b>System ON</b>	4 to 7 hours	
	<b>Fuel Gauge LED</b>	Yes		
	<b>Warranty</b>	1 year		
<b>Optional Travel Battery Available</b>	No			

### Displays

<b>12.5-inch LED-backlit HD anti-glare</b>	<b>Active Area (W x H)</b>	10.63 x 6.4 in (27.7 x 15.6 cm)		
	<b>Diagonal Size</b>	12.5 in (31.75 cm)		
	<b>Surface Treatment</b>	Anti-glare		
	<b>Contrast Ratio</b>	400:1 (typical)		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	200 nit (typical)		
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.2025 mm	
		<b>Format</b>	1366 x 768	
		<b>Configuration</b>	RGB Stripe	
	<b>Backlight</b>	LED		
	<b>PPI</b>	125		
	<b>Viewing Angle</b>	±30° Horizontal, ±10° Vertical (minimum) SVA 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)		

### Internal Storage

### Technical Specifications

<b>500 GB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.25 lbs (115g)	
	<b>Capacity</b>	500 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 300 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	<b>Rotational Speed</b>	7200 rpm	
	<b>Logical Blocks</b>	976,773,168	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

<b>320 GB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.25 lbs (115 g)	
	<b>Capacity</b>	320 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 300 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	<b>Rotational Speed</b>	7200 rpm	
	<b>Logical Blocks</b>	625,142,448	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

### Technical Specifications

#### 250 GB 7200 rpm SATA Hard Drive

<b>Drive Weight</b>	0.25 lbs (115g)
<b>Capacity</b>	250 GB
<b>Height</b>	0.37 in (9.5 mm)
<b>Width</b>	2.75 in (70 mm)
<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 300 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b> 1.5 ms
	<b>Average</b> 11 ms
	<b>Maximum</b> 22 ms
<b>Rotational Speed</b>	7200 rpm
<b>Logical Blocks</b>	488,397,168
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]
<b>Features</b>	ATA Security

#### 128 GB 2.5-inch SATA Solid State Drive

<b>Drive Weight</b>	75 Grams	
<b>Capacity</b>	128 GB	
<b>Height</b>	0.276 in (7 mm)	
<b>Width</b>	2.76 in (70 mm)	
<b>Interface</b>	SATA Gen 2	
<b>Performance</b>	<b>Maximum Sequential Read</b> 250 MB/s	<b>Maximum Sequential Write</b> 140 MB/s
	<b>Logical Blocks</b>	250,069,680
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [case temp]	
<b>Features</b>	ATA Security; ATA-7; SATA 2.6; DIPM; TRIM	

#### 160 GB 2.5-inch SATA Solid State Drive

<b>Drive Weight</b>	78 Grams	
<b>Capacity</b>	160 GB	
<b>Height</b>	0.276 in (7 mm)	
<b>Width</b>	2.76 in (70 mm)	
<b>Interface</b>	SATA Gen 2	
<b>Performance</b>	<b>Maximum Sequential Read</b> 250 MB/s	<b>Maximum Sequential Write</b> 100 MB/s
	<b>Logical Blocks</b>	312,581,808
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [case temp]	
<b>Features</b>	ATA Security; ATA-7; SATA 2.6; DIPM; TRIM	

### Optical Drives

### Technical Specifications

<b>DVD-ROM Drive</b>	<b>Access Times</b>	Random	< 140 ms CD (typical) < 160 ms DVD (typical)	
	<b>Max Data Transfer Rate</b>	24X CD-ROM 8X-DVD		
	<b>Transfer Mode</b>	UDMA Mode 5		
	<b>Interface</b>	Gen 1 SATA		
	<b>Supported Media (read)</b>	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM		
	<b>Supported Media (write)</b>	None		
	<b>Max Media Capacity (read)</b>	8.5GB		
	<b>Transport</b>	Tray Loading		
	<hr/>			
<b>DVD+/-RW SuperMulti DL Drive</b>	<b>Access Times</b>	Random	<140ms CD (typical) < 160 ms DVD (typical)	
	<b>Max Data Transfer Rate</b>	24X CD-ROM 8X DVD 24X CD-R 24X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 6X - DVD+R Dual Layer 6X - DVD-R Dual Layer 5X DVD-RAM		
	<b>Transfer Mode</b>	UDMA Mode 5		
	<b>Interface</b>	Gen 1 SATA		
	<b>Supported Media (read)</b>	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM		
	<b>Supported Media (write)</b>	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, DVD+R DL, DVD-R DL		
	<b>Max Media Capacity (read)</b>	8.5 GB		
	<b>Max Media Capacity (write)</b>	8.5 GB		
	<b>Transport</b>	Tray Loading		
	<hr/>			

### Technical Specifications

#### Security

---

<b>HP Fingerprint Sensor</b> (optional)	<b>Mobile Voltage Operation</b>	3.0V-3.6V Single Supply
	<b>Operating Temperature</b>	32° - 158°F (0° - 70°C)
	<b>Current Consumption @ 3.3V</b>	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	<b>High-Rate Image Capture</b>	Up to 240 image frames /sec
	<b>ESD Resistance</b>	IEC 61000-4-2 Level 4 (±15KV)
	<b>Detection Matrix</b>	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

---

#### Communications

---

<b>Intel® 82579LM Gigabit Network Connection</b>	<b>Ethernet Features</b>	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023. Clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE(Energy Efficient Ethernet) Jumbo Frame 9K Auto MDI/MDIX Crossover cable detection
	<b>Power Management</b>	ACPI compliant - multiple power modes Energy Detect Low Power Mode(Green Ethernet)
	<b>Performance Features</b>	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload( ARP & NS) Large send offload and Giant send offload Receiving Side Scaling MACSec Offload (802.3ae) Intel vPro iSCSI Boot
	<b>Manageability</b>	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status

---

### Technical Specifications

<b>Interface</b>	PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ. <b>NOTE:</b> Intel 82579 PCIe interface is not PCIe compliant. It operates at half of PCIe specification V1.1 (2.5GT/S) speed.
<b>NIC Device Driver Name</b>	Intel 82579LM/82579V Ethernet Network Connection

---

<b>V.92 56K Data/Fax Modem Form Factor</b>	MDC 1.5 Daughtercard
<b>Power Management Support</b>	APM Revision 1.2, ACPI
<b>Approvals/Certifications</b>	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
<b>Data Mode Capabilities</b>	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) <b>Optional symbol rates:</b> 2800, 3429 Asymmetric Symbol rates <b>Synchronous primary channel data signaling rates:</b> 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
<b>Fax Mode Capabilities</b>	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
<b>Command Set</b>	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

---

### Technical Specifications

<b>HP un2430 EV-DO/HSPA Mobile Broadband Module</b>	<b>Technology/Operating Bands</b>	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), AWS (UTRA FDD Band IV), 900MHz(UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
	<b>Wireless Protocol Standards</b>	GSM/GPRS/EDGE: Class A, Multi-slot class 10 operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-856, IS-2000
	<b>Wireless Parametric Standards</b>	Meets or exceeds TIA/EIA IS-98-D
	<b>Maximum Data Rates</b>	UMTS (HSPA) - 14.4 Mbps (Download ), 5.76Mbps (Upload) CDMA (EVDO Release A) - 3.1 Mbps (Download), 1.8Mbps (Upload)
	<b>GPS</b>	Standalone GPS enabled gpsOneXTRATM™
	<b>GPS Bands</b>	L1 - 1575.42 MHz
	<b>Maximum Output Power</b>	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+0.7/-2.3) CDMA: 24dBm (+0.7/-2)
	<b>Maximum Power Consumption</b>	2750mA (peak); 1100mA (average)
	<b>Power Consumption, Idle Not Connected</b>	20 mA
	<b>Power Management</b>	USB selective suspend Integrated notebook wireless button
	<b>Antenna Type</b>	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	<b>Form Factor</b>	PCI-Express MiniCard, USB 2.0 interface
	<b>Weight</b>	11.5 g
	<b>Dimensions</b> (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
	<b>Voltage, Operating</b>	3.3v +/- 10%
	<b>Temperature, Operating</b> (from TIA/EIA/IS-98-D)	-22° to 158° F (-30° to 70° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
	<b>Temperature, Non-operating, 96 hours</b> (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
	<b>Humidity, Non-operating</b>	95% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	<b>Configuration Utilities</b>	HP Connection Manager
	<b>LED Activity</b>	LED Off - Radio Off; Solid LED On - Radio On

### Technical Specifications

<b>HP hs2340 HSPA+ Mobile Broadband Module</b>	<b>Technology/Operating Bands</b>	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz(UTRA FDD Band VIII), 850 MHz (UTRA FDD Band V)
	<b>Wireless Protocol Standards</b>	GSM/GPRS/EDGE: Class B, Multi-slot class 10 operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 7 Advanced Receiver Type 3i
	<b>Wireless Parametric Standards</b>	Complies with 3GPP specifications
	<b>Maximum Data Rates</b>	UMTS (HSPA) - 21 Mbps (Download ), 5.76Mbps (Upload)
	<b>GPS</b>	Standalone, A-GPS (Internet- and Network assisted)
	<b>GPS Bands</b>	1575.42 MHz (± 1.023 MHz)
	<b>Maximum Output Power</b>	GSM/EDGE GSM850 & GSM900 bands GPRS: +33 dBm ± 2 dBm (class 4) EGPRS: +27 dBm ± 3 dBm (class E2)  DCS1800 & PCS1900 bands GPRS: +30 dBm ± 2 dBm (class 1) EGPRS: +26 dBm +4 / -3 dBm (class E2)  UMTS UTRA FDD Bands +24 dBm +4 / -3 dBm (class 3)
	<b>Maximum Power Consumption</b>	2000mA (peak); 600mA (average)
	<b>Power Consumption, Sleep Mode</b>	5 mA
	<b>Power Management</b>	USB selective suspend Integrated notebook wireless button
	<b>Antenna Type</b>	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	<b>Form Factor</b>	PCI-Express MiniCard, USB 2.0 interface
	<b>Weight</b>	< 12 g
	<b>Dimensions</b> (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
	<b>Voltage, Operating</b>	3.3v +/- 9%
	<b>Temperature, Operating</b>	14° to 149° F (-10° to 65° C) (full RF performance) 14° to 167° F (-10° to 75° C) (reduced RF performance)
	<b>Temperature, Non-operating, 96 hours</b> (from MIL-STD 202 Method 108)	-22° to 185° F (-30° to 85° C)
	<b>Humidity, Non-operating</b>	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	<b>Configuration Utilities</b>	HP Connection Manager



### Technical Specifications

**LED Activity** LED Off - Radio Off;  
Solid LED On - Radio On

**Intel Centrino Advanced-N Wireless LAN Standards 6205**

IEEE 802.11a  
IEEE 802.11b  
IEEE 802.11g  
IEEE 802.11n\*

\* In countries where 802.11n is not allowed, this capability is not enabled.

**Interoperability** Wi-Fi certified  
Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: <http://www.hp.com/go/notebooks/WLAN>)

**Frequency Band** 2.4 GHz and 5GHz

**Antenna Structure** 2 transmit; 2 receive (2x2)

**Data Rates** 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  
802.11b: 1, 2, 5.5, 11 Mbps  
802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  
802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification

**Modulation** Direct Sequence Spread Spectrum  
DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM

**Security<sup>1</sup>** Authentication: WPA and WPA2, 802.1x (EAP\_TLS, TTLS, PEAP, LEAP, EAP-FAST)  
  
Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2  
  
Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP  
  
Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.

**Sub-channels** Multinational support with frequency bands and channels compliant to local regulations.

**Media Access Protocol** CSMA/CA (Collision Avoidance) with ACK

**Network Architecture Models** Ad-hoc (Peer to Peer)  
Infrastructure (Access Point Required)

**Roaming** IEEE 802.11 compliant roaming between 2.4GHz band Access Points

**Output Power** (for CCK and OFDM)<sup>2</sup> 17 dBm max

**Power Consumption** Transmit: 2.3 Watts (max, with two spatial streams)  
Receive: 1 Watt (max with two spatial streams)  
Idle mode<sup>3</sup>: 35 mW (average)  
Radio off: 20 mW (max)

**Power Management** ACPI compliant power management  
802.11 compliant power saving mode

**Receiver Sensitivity<sup>4</sup>** 54 Mbps: -76 dBm, 6 Mbps: -92 dBm

### Technical Specifications

<b>Antenna Connections</b>	2 U.FL type connectors, 50 ohm nominal impedance	
<b>Form Factor</b>	PCI-Express Half-MiniCard	
<b>Weight</b>	0.0075 lb (3.4 g)	
<b>Dimensions</b>	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)	
<b>Operating Voltage</b>	3.3V +/- 9%	
<b>Temperature</b>	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
<b>Altitude</b>	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none"><li>1. Check latest software/driver release for updates on supported security features.</li><li>2. Maximum output power may vary by country according to local regulations.</li><li>3. In Power Save Polling mode and on battery power.</li><li>4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li><li>5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</li></ol>	

---

<b>Intel Centrino Ultimate-N 6300</b>	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n*  * In countries where 802.11n is not allowed, this capability is not enabled.
	<b>Interoperability</b>	Wi-Fi certified (802.11bgn only) Cisco Compatible Extensions Program compliant (802.11bgn only) with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
	<b>Frequency Band</b>	2.4 GHz and 5GHz
	<b>Antenna Structure</b>	3 transmit; 3 receive (3x3)
	<b>Data Rates</b>	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: many possible data rates, ranging from 6 Mbps to 450 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
	<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	<b>Security<sup>1</sup></b>	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST)  Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2

### Technical Specifications

	Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP
	Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between Access Points
<b>Output Power</b> (for CCK and OFDM) <sup>2</sup>	17 dBm max
<b>Power Consumption</b>	Transmit: 2.4 Watts (max, with three spatial streams) Receive: 1.4 Watts (max with three spatial streams) Idle mode <sup>3</sup> : 35 mW (average) Radio off: 20 mW (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity</b> <sup>4</sup>	54 Mbps: -76 dBm, 6 Mbps: -92 dBm
<b>Antenna Connections</b>	3 U.FL type connectors, 50 ohm nominal impedance
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Weight</b>	0.0075 lb (3.4 g)
<b>Dimensions</b>	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
<b>Operating Voltage</b>	3.3V +/- 9%
<b>Temperature</b>	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 90% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Broadcom 43224AGN  
802.11a/b/g/n

Wireless LAN Standards IEEE 802.11a  
IEEE 802.11b



### Technical Specifications

#### WiFi Adapter

	IEEE 802.11g IEEE 802.11n*
<b>Interoperability</b>	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
<b>Frequency Band</b>	2.4 GHz and 5 GHz
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps
<b>Frequency Support</b>	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz bands
<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
<b>Security<sup>1</sup></b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power (for CCK)<sup>2</sup></b>	17 dBm , nominal
<b>Output Power (for OFDM; power varies by data rate)<sup>2</sup></b>	15 dBm , nominal
<b>Power Consumption</b>	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>3</sup></b>	270 Mbps: -61dBm , 54 Mbps: -72 dBm , 11 Mbps: -85 dBm , 1 Mbps: -92 dBm
<b>Antenna type</b>	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Weight</b>	0.013 lb (6 g)
<b>Dimensions</b>	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
<b>Operating Voltage</b>	3.3v +/- 10%

### Technical Specifications

<b>Temperature</b>	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
<b>Altitude</b>	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</li> </ol>	

#### Broadcom 4313GN 802.11b/g/n WiFi Adapter

<b>Wireless LAN Standards</b>	IEEE 802.11b IEEE 802.11g IEEE 802.11n
<b>Interoperability</b>	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Win7, Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
<b>Frequency Band</b>	2.4 GHz
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6.5, 7.2, 13, 14.4, 19.5, 21.7, 26, 28.9, 39, 43.3, 52, 57.8, 58.5, 65, 72.2Mbps
<b>Frequency Support</b>	20 MHz: 2.4 GHz bands
<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
<b>Security<sup>1</sup></b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power (for CCK)<sup>2</sup></b>	17 dBm , nominal

### Technical Specifications

<b>Output Power</b> (for OFDM; power varies by data rate) <sup>2</sup>	15 dBm , nominal
<b>Power Consumption</b>	Idle associated: 250 mW avg (CLKREQ enabled) Idle unassociated: 425 mW avg Transmit/Receive 20 MHz channel: 5.5 W (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity</b> <sup>3</sup>	72.2 Mbps: -71 dBm
<b>Antenna type</b>	High efficiency dual band antenna with spatial diversity, usually mounted in the display enclosure
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Weight</b>	0.013 lb (6 g)
<b>Dimensions</b>	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
<b>Operating Voltage</b>	3.3v +/- 10%
<b>Temperature</b>	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista and Win7.

---

#### HP Integrated Module with Bluetooth 2.1+EDR Wireless Technology

<b>Bluetooth Specification</b>	2.1+EDR Compliant
<b>Dimensions</b>	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	79 (1 MHz) available channels
<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
<b>Transmit Power</b>	-6 dBm to 4 dBm (Bluetooth Class II)
<b>Receiver Sensitivity</b>	Better than -80 dBm at 0.1 % raw bit error rate

### Technical Specifications

<b>Power Consumption</b>	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
<b>Antenna</b>	Internally integrated within module
<b>Range</b>	Up 33 ft (10 m)
<b>Electrical Interface</b>	USB 2.0 compliant Microsoft Windows Plug and Play compliant
<b>Bluetooth Software Supported</b>	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves
<b>Security</b>	Full support of Bluetooth Security Provisions
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
<b>Certifications</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
<b>Temperature</b>	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% Non-operating 5% to 95%
<b>Altitude</b>	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
<b>Bluetooth Profiles Supported</b>	Serial Port Profile (SPP) <sup>1</sup> Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) <sup>1,2</sup> Generic Object Exchange Profile (GOEP) <sup>1,2</sup> Object Push Profile (OPP) <sup>1,2</sup> File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) <sup>1,2</sup> Personal Area Networking Profile (PAN) <sup>1,2</sup> Human Interface Device Profile (HID) <sup>1,2,3</sup> FAX Profile (FAX) Basic Imaging Profile (BIP) <sup>2</sup> Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

1. indicates the profile is supported by Microsoft Windows XP SP2

2. indicates the profile is part of Windows Vista

### Technical Specifications

<b>Environmental Data</b>	<b>Eco-Label Certifications</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>● US ENERGY STAR®</li> <li>● IT ECO declaration</li> <li>● EPEAT - Gold where HP registers commercial notebook products. See <a href="http://www.epeat.net">http://www.epeat.net</a> for registration status in your country.</li> </ul>		
	<b>System Configuration</b>	<p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"</p>		
	<b>Energy Consumption</b>	115 VAC	230 VAC	100 VAC
	Normal Operation	7.9 W	8.38 W	7.78 W
	Sleep (Energy Star low power mode)	0.71 W	0.87 W	0.7 W
	Off	0.65 W	0.81 W	0.65 W
	<b>Heat Dissipation*</b>	115 VAC	230 VAC	100 VAC
	Normal Operation	27 BTU/hr	29 BTU/hr	27 BTU/hr
	Sleep	2 BTU/hr	3 BTU/hr	2 BTU/hr
	Off	2 BTU/hr	3 BTU/hr	2 BTU/hr
		<p>* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p>		
	<b>Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)</b>			
	System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)	
	Idle	2.9	19.4	
	Fixed Disk (random writes)	2.9	20.3	
	System fan is usually off except when charging the battery			
	<b>Batteries</b>	<p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> <li>● Mercury greater the 5ppm by weight</li> <li>● Cadmium greater than 10ppm by weight</li> </ul> <p>The battery type and chemistry used in the product is:            CR2032 (coin cell), Li-ion            6-cell high capacity Lithium-Ion battery (optional 8 cell available)</p>		
	<b>Additional information</b>	<p>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.</p> <p>This HP product is designed to comply with the Waste Electrical and Electronic</p>		



### Technical Specifications

Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see [www.epeat.net](http://www.epeat.net)

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0.22% post consumer recycled plastic (by wt.)

This product is greater than 93.3% recycle-able when properly disposed of at end of life.

#### Packaging Materials

- External:
  - Corrugated 115 g
  - CANON bags - several layers 5 g
  - Corrugated Carton 360 g
- Internal:
  - Polyethylene low density 15 g
  - Molded Pulp 160 g
- The Corrugated packaging material is made from 80% recycled content.
- The CANON bags - several layers packaging material is made from 80% recycled content.
- The Corrugated Carton packaging material is made from 80% recycled content.
- The Polyethylene low density packaging material is made from 60% recycled content.
- The Molded Pulp packaging material is made from 60% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

### Technical Specifications

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment:

([http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Nickel finishes that release greater than 0.5 µgrams/cm<sup>2</sup>/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to:

<http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office.

Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment: Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/>

### Technical Specifications

[ecolabels.html](#)

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

---

Copyright © 2011 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and other countries. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.