

## Molded Case Circuit Breakers and Enclosures

<b>PowerPact™ Circuit Breakers</b>	<b>3-3</b>
PowerPact™ H- and J-Frame Circuit Breakers	3-2—3-3
PowerPact™ L-Frame Circuit Breakers	3-4
PowerPact™ D-Frame Circuit Breakers	3-5
<b>PowerPact™ Automatic Switches</b>	<b>3-6</b>
PowerPact™ D-frame Mission Critical Circuit Breakers	3-6
<b>Molded Case Circuit Breakers</b>	<b>3-7</b>
F-Frame Thermal-Magnetic Circuit Breakers	3-7—3-8
K- and Q4-Frame Thermal-Magnetic Circuit Breakers	3-9—3-10
L-Frame Thermal-Magnetic Circuit Breakers	3-11—3-12
L-Frame Micrologic™ Series B Trip Circuit Breakers	3-13—3-14
Mag-Gard™ Motor Circuit Protector	3-15
GJ-Frame MCP Selection	3-16
<b>Special Construction Circuit Breakers</b>	<b>3-17</b>
Special Terminal Connectors and Lugs	3-17
Special Calibration, Rear-Connected Studs, Visi-Blade, Moisture/Fungus Treatment, and Short LA/LH Handle	3-18
Special Calibration, Rear-Connected Studs, Visi-Blade, Moisture/Fungus Treatment, and Short LA/LH Handle	3-18
P-Frame Replacement Handles, Key Interlock Adapter Plate and Exchange Program	3-19
Special Terminations	3-20
Grounded BØ Systems	3-21
UL Marine Listed Circuit Breakers	3-22
<b>Circuit Breaker Accessories</b>	<b>3-23</b>
PowerPact™ Circuit Breakers Electrical Accessories	3-23
Factory-Installed Accessories	3-24
Field-Installable Accessories	3-25
Electrical Operators, Handle Accessories, Cylinder Locks, and Walking Beam Mechanical Interlocks	3-26
Locks, Installation Accessories, and Rear Connections	3-27
Mechanical Lug Information	3-28
Compression Lug and Power Distribution Connectors	3-29
PowerPact™ Circuit Breakers Miscellaneous Accessories	3-30
<b>Electronic Products</b>	<b>3-31</b>
Neutral Current Transformers and Micrologic™ Series B Trip Unit Accessories	3-31
Restraint Interface Module	3-32
<b>Circuit Breaker Dimensions</b>	<b>3-33</b>
<b>Enclosures</b>	<b>3-34</b>
Industrial Circuit Breaker Enclosures	3-34
Enclosed Switches and Enclosure Dimensions	3-35
Accessories	3-36
Key Interlock Systems—Factory Installed Only	3-37
Special Applications	3-38

**Table 3.1: H-Frame 150 A UL Current-Limiting▼ Circuit Breaker Frame with Field-Interchangeable Thermal-Magnetic Trip Units◆ (600 Vac, 250 Vdc)**

Ampere Rating	Fixed AC Magnetic Trip		Cat. No.■	D Interrupting		G Interrupting		J▼ Interrupting		L▼ Interrupting		Terminal Wire Range
	Hold	Trip		\$ Price								
				80% Rated	100% Rated	80% Rated	100% Rated	80% Rated	100% Rated	80% Rated	100% Rated	
3P, 600 Vac 50/60 Hz												
15 A	350 A	750 A	H(▲)L36015( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	AL150HD 14–3/0 AWG Al or Cu
20 A	350 A	750 A	H(▲)L36020( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	
25 A	350 A	750 A	H(▲)L36025( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	
30 A	350 A	750 A	H(▲)L36030( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	
35 A	400 A	850 A	H(▲)L36035( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	
40 A	400 A	850 A	H(▲)L36040( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	
45 A	400 A	850 A	H(▲)L36045( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	
50 A	400 A	850 A	H(▲)L36050( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	
60 A	800 A	1450 A	H(▲)L36060( )	1088.00	1305.00	1493.00	1791.00	1949.00	2339.00	2849.00	3419.00	
70 A	800 A	1450 A	H(▲)L36070( )	1328.00	1592.00	1701.00	2042.00	2099.00	2519.00	3149.00	3779.00	
80 A	800 A	1450 A	H(▲)L36080( )	1328.00	1592.00	1701.00	2042.00	2099.00	2519.00	3149.00	3779.00	
90 A	800 A	1450 A	H(▲)L36090( )	1328.00	1592.00	1701.00	2042.00	2099.00	2519.00	3149.00	3779.00	
100 A	900 A	1700 A	H(▲)L36100( )	1328.00	1592.00	1701.00	2042.00	2099.00	2519.00	3149.00	3779.00	
110 A	900 A	1700 A	H(▲)L36110( )	2600.00	3120.00	3599.00	4319.00	5174.00	6209.00	6749.00	8099.00	
125 A	900 A	1700 A	H(▲)L36125( )	2600.00	3120.00	3599.00	4319.00	5174.00	6209.00	6749.00	8099.00	
150 A	900 A	1700 A	H(▲)L36150( )	2600.00	3120.00	3599.00	4319.00	5174.00	6209.00	6749.00	8099.00	

**Table 3.2: J-Frame 250 A UL Current-Limiting▼ Circuit Breaker Frame with Field-Interchangeable Thermal-Magnetic Trip Units◆ (600 Vac, 250 Vdc)**

Ampere Rating	Adjustable AC Magnetic Trip		Cat. No.■	D Interrupting		G Interrupting		J▼ Interrupting		L▼ Interrupting		Terminal Wire Range
	Low	High		\$ Price								
				80% Rated	100% Rated	80% Rated	100% Rated	80% Rated	100% Rated	80% Rated	100% Rated	
3P, 600 Vac 50/60 Hz												
150 A	750 A	1500 A	J(▲)L36150( )	2730.00	3276.00	3779.00	4535.00	5432.00	6519.00	7086.00	8504.00	AL175JD 4–4/0 AWG Al or Cu
175 A	875 A	1750 A	J(▲)L36175( )	2730.00	3276.00	3779.00	4535.00	5432.00	6519.00	7086.00	8504.00	
200 A	1000 A	2000 A	J(▲)L36200( )	2730.00	3276.00	3779.00	4535.00	5432.00	6519.00	7086.00	8504.00	AL250JD 3/0 AWG–350 kcmil Al or Cu
225 A	1125 A	2250 A	J(▲)L36225( )	2730.00	3276.00	3779.00	4535.00	5432.00	6519.00	7086.00	8504.00	
250 A	1250 A	2500 A	J(▲)L36250( )	3749.00	4499.00	5001.00	6002.00	7238.00	8685.00	8993.00	10791.00	

- ▲ To complete catalog number, replace the blank with the appropriate rating (D, G, J, L)
- For 80% rated use "T" or for 100% rated use "R" in the 9th character place (for example, HDL36015T or HDL36015R). 100% rated H- and J-frame circuit breakers have copper lugs and can only be used with copper wire.
- ◆ Circuit breakers will be labeled with Line and Load markings and are not suitable for reverse connections. Only available on standard (80%) rated 3P unit-mount circuit breakers; not available with I-Line™ or Plug-In constructions.

**Table 3.3: H-Frame 150A and J-Frame 250 A 3P Basic UL Current-Limiting▼ Circuit Breaker Frame Without Terminations★ or Trip Unit (600 Vac, 250 Vdc)**

Circuit Breaker Frame	Ampere Rating	D Interrupting		G Interrupting		J▼ Interrupting		L▼ Interrupting	
		Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price
H-Frame	15–60 A	HDF36000F06	525.00	HGF36000F06	930.00	HJF36000F06	1386.00	HLF36000F06	2286.00
	70–150 A	HDF36000F15	585.00	HGF36000F15	1574.00	HJF36000F15	3149.00	HLF36000F15	4724.00
J-Frame	150–250 A	JDF36000F25	1538.00	JGF36000F25	2790.00	JJF36000F25	5027.00	JLF36000F25	6782.00

- ★ See Digest page 7-39–3-41 for lug and termination kits.
- ▼ J and L interrupts are UL Certified as current limiting.

**Table 3.4: H-Frame and J-Frame 3P Field-Installable Thermal-Magnetic Trip Unit**

15–60 A H-Frame			70–150 A H-Frame			150–250 A J-Frame		
Amperage	Cat. No.	\$ Price	Amperage	Cat. No.	\$ Price	Amperage	Cat. No.	\$ Price
15 A	HT3015	563.00	70 A	HT3070	743.00	150 A	JT3150	1193.00
20 A	HT3020	563.00	80 A	HT3080	743.00	175 A	JT3175	1193.00
25 A	HT3025	563.00	90 A	HT3090	743.00	200 A	JT3200	1193.00
30 A	HT3030	563.00	100 A	HT3100	743.00	225 A	JT3225	1193.00
35 A	HT3035	563.00	110 A	HT3110	2025.00	250 A	JT3250	2213.00
40 A	HT3040	563.00	125 A	HT3125	2025.00	—	—	—
45 A	HT3045	563.00	150 A	HT3150	2025.00	—	—	—
50 A	HT3050	563.00	—	—	—	—	—	—
60 A	HT3060	563.00	—	—	—	—	—	—

**Table 3.5: H- and J-Frame Interrupting Ratings**

Voltage	Interrupting Rating			
	D	G	J	L
240 Vac	25 kA	65 kA	100 kA	125 kA
480 Vac	18 kA	35 kA	65 kA	100 kA
600 Vac	14 kA	18 kA	25 kA	50 kA

**Table 3.6: H- and J-Frame Termination Options**

Termination Letter
A - I-Line (See Section 9)
F = No Lugs (includes terminal nut kit on both ends)△
L = Lugs both ends
M = Lugs ON end Terminal Nut Kit OFF end
P = Lugs OFF end Terminal Nut Kit ON end
N = Plug-in □
D = Drawout □
S = Rear Connected □


For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.

**H, D, L, 3, 6, 0, 1, 5, T**  
Termination Letter

- △ Add TS suffix for circuit breaker without terminal nut kit.
- For N and D pricing, add termination pricing on Digest page 7-41 to price. For S pricing, add termination pricing on Digest page 7-37 to price.

Accessories	.....	Digest Page 7-35
Optional Lugs	.....	Digest Page 7-38
Dimensions	.....	Digest Page 7-53
Enclosures	.....	Digest Page 7-54

**3 MOLDED CASE CIRCUIT BREAKERS**



**Table 3.7: H-Frame 150 A and J-Frame 250 A Circuit Breakers with Lugs and Field-Interchangeable Electronic Trip Units ♦♦**  
(600 Vac, 50/60 Hz, 3P) ♦♦

Electronic Trip Unit			Sensor Rating	Cat. No. ■	Interrupting Rating (2nd Letter of Catalog Number)								Terminal Wire Range
Type	Function	Trip Unit			D Interrupting		G Interrupting		J Interrupting		L Interrupting		
					\$ Price								
					80% Rated	100% Rated	80% Rated	100% Rated	80% Rated	100% Rated	80% Rated	100% Rated	
Micrologic Standard	LI	3.2	60 A	H(▲)L36060(U)U31X	1247.00	1455.00	1652.00	1928.00	2108.00	2460.00	3008.00	3510.00	AL150HD 14-3/0 AWG Al or Cu
			100 A	H(▲)L36100(U)U31X	1487.00	1735.00	1860.00	2171.00	2258.00	2635.00	3308.00	3860.00	
Micrologic Standard	LSI	3.2S	60 A	H(▲)L36060(U)U33X	1433.00	1641.00	1838.00	2113.00	2294.00	2646.00	3194.00	3696.00	AL150HD 14-3/0 AWG Al or Cu
			100 A	H(▲)L36100(U)U33X	1673.00	1921.00	2046.00	2356.00	2444.00	2821.00	3494.00	4046.00	
Micrologic Ammeter	LSI	5.2A	60 A	H(▲)L36060(U)U43X	2031.00	2240.00	2436.00	2712.00	2892.00	3244.00	3792.00	4295.00	AL150HD 14-3/0 AWG Al or Cu
			100 A	H(▲)L36100(U)U43X	2271.00	2520.00	2644.00	2955.00	3042.00	3419.00	4092.00	4645.00	
Micrologic Energy	LSI	5.2E	60 A	H(▲)L36060(U)U53X	2391.00	2599.00	2796.00	3072.00	3252.00	3604.00	4152.00	4654.00	AL150HD 14-3/0 AWG Al or Cu
			100 A	H(▲)L36100(U)U53X	2631.00	2879.00	3004.00	3314.00	3402.00	3779.00	4458.00	5004.00	
Micrologic Ammeter	LSIG	6.2A	60 A	H(▲)L36060(U)U44X	2751.00	2960.00	3156.00	3432.00	3612.00	3964.00	4512.00	5015.00	AL150HD 14-3/0 AWG Al or Cu
			100 A	H(▲)L36100(U)U44X	2991.00	3240.00	3364.00	3675.00	3762.00	4139.00	4812.00	5365.00	
Micrologic Energy	LSIG	6.2E	60 A	H(▲)L36060(U)U54X	3111.00	3319.00	3516.00	3792.00	3972.00	4324.00	4872.00	5374.00	AL150HD 14-3/0 AWG Al or Cu
			100 A	H(▲)L36100(U)U54X	3351.00	3599.00	3724.00	4034.00	4122.00	4499.00	5172.00	5724.00	
			150 A	H(▲)L36150(U)U44X	4263.00	4724.00	5262.00	5890.00	6837.00	7728.00	8412.00	9566.00	
			250 A	J(▲)L36250(U)U44X	5100.00	5594.00	6149.00	6818.00	7802.00	8747.00	9456.00	10678.00	
			60 A	H(▲)L36060(U)U53X	4588.00	5082.00	5637.00	6306.00	7290.00	8235.00	8944.00	10165.00	
			100 A	H(▲)L36100(U)U53X	4902.00	5496.00	6051.00	6720.00	7704.00	8649.00	9358.00	10579.00	
			150 A	H(▲)L36150(U)U53X	5903.00	6597.00	7291.00	8080.00	9064.00	10009.00	10954.00	12175.00	
			250 A	J(▲)L36250(U)U53X	6804.00	7598.00	8292.00	9081.00	10065.00	11010.00	12005.00	13226.00	

- ▲ To complete catalog number, replace the blank with the appropriate rating (D, G, J, L)
- For 80% rated use "T" or for 100% rated use "R" in the 9th character place (for example, HGL36015TU31X or HGL36015RU31X). 100% rated H- and J-frame circuit breakers have copper lugs and can only be used with copper wire.
- ♦ Circuit breakers will be labeled with Line and Load markings and are not suitable for reverse connections.
- ★ Only available on 3P unit-mount circuit breakers. Not available with I-Line™ or Plug-in constructions.
- ▼ For smaller wire (4-4/0 AWG Al or Cu), replace the lug wire binding screws with longer binding screws provided.

**Table 3.8: H-Frame 150A and J-Frame 250 A 3P Basic UL Current-Limiting □ Circuit Breaker Frame Without Terminations△ or Trip Unit (600 Vac, 250 Vdc)**

Circuit Breaker Frame	Ampere Rating	D Interrupting		G Interrupting		J □ Interrupting		L □ Interrupting	
		Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price
H-Frame	15-60 A	HDF36000F06	525.00	HGF36000F06	930.00	HJF36000F06	1386.00	HLF36000F06	2286.00
	70-150 A	HDF36000F15	585.00	HGF36000F15	1574.00	HJF36000F15	3149.00	HLF36000F15	4724.00
J-Frame	150-250 A	JDF36000F25	1538.00	JGF36000F25	2790.00	JJF36000F25	5027.00	JLF36000F25	6782.00

- △ See Digest page 7-38 for lug and termination kits.
- J and L interrupts are UL Certified as current limiting.

**Table 3.9: Micrologic Field-Installable Trip Unit**

Model	Trip Function	Trip Unit	Continuous Current	Trip Unit Cat. No.	\$ Price	Termination Letter
Micrologic Standard	LI	3.2	15-20-25-30-35-40-45-50-60	HE3060U31X	722.00	A - I-Line (See Section 9) F = No Lugs (includes terminal nut kit on both ends) ♦ L = Lugs both ends M = Lugs ON end Terminal Nut Kit OFF end P = Lugs OFF end Terminal Nut Kit ON end N = Plug-in ★ D = Drawout ✱ S = Rear Connected ✱
			35-40-45-50-60-70-80-90-100	HE3100U31X	902.00	
			50-60-70-80-90-100-110-125-150	HE3150U31X	2184.00	
	LSI	3.2S	15-20-25-30-35-40-45-50-60	HE3060U33X	908.00	
			35-40-45-50-60-70-80-90-100	HE3100U33X	1088.00	
			50-60-70-80-90-100-110-125-150	HE3150U33X	2370.00	
Micrologic Ammeter	LSI	5.2A	15-60	HE3060U43X	1506.00	
			35-100	HE3100U43X	1686.00	
			50-150	HE3150U43X	2968.00	
	LSIG	6.2A	70-250	JE3250U43X	2334.00	
			15-60	HE3060U44X	1866.00	
			35-100	HE3100U44X	2046.00	
Micrologic Energy	LSI	5.2E	50-150	HE3150U44X	3318.00	
			70-250	JE3250U44X	2847.00	
			15-60	HE3060U53X	2226.00	
	LSIG	6.2E	35-100	HE3100U53X	2406.00	
			50-150	HE3150U53X	4038.00	
			70-250	JE3250U53X	3359.00	
LSIG	6.2E	15-60	HE3060U54X	2586.00		
		35-100	HE3100U54X	2766.00		
		50-150	HE3150U54X	4038.00		
			70-250	JE3250U54X	3872.00	

**Table 3.10: H- and J-Frame Interrupting Ratings**

Voltage	Interrupting Rating			
	D	G	J	L
240 Vac	25 kA	65 kA	100 kA	125 kA
480 Vac	18 kA	35 kA	65 kA	100 kA
600 Vac	14 kA	18 kA	25 kA	50 kA

- Accessories ..... Digest page 7-36
- Optional Lugs ..... Digest page 7-39
- Dimensions ..... Digest page 7-55
- Enclosures ..... Digest page 7-56

**H, D, L, 3, 6, 0, 1, 5, T**

- ♦ Add TS suffix for circuit breaker without terminal nut kit.
- ★ For N and D pricing, add termination pricing on Digest page 7-42 to price. For S pricing, add termination pricing on Digest page 7-38 to price.

For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.

**Table 3.11: L-Frame 3 Pole, 600 A Circuit Breakers with Lugs and Field-Interchangeable Electronic Trip Units (600 Vac, 50/60 Hz)▲★**

Electronic Trip Unit			Sensor Rating	Cat. No. ■	D Interrupting		G Interrupting		J Interrupting		L Interrupting		Terminal Wire Range	
Type	Function	Trip Unit			\$ Price									
					80% Rated	100% Rated	80% Rated	100% Rated	80% Rated	100% Rated	80% Rated	100% Rated		
Micrologic Standard	LI	3.3	250 A	L(▲)L36250( )JU31	4287.00	5648.00	5081.00	5945.00	8487.00	9919.00	9918.00	11604.00	AL400L61K3D (1) 2 AWG–600 kcmil Cu (1) 2 AWG–500 kcmil Al	
			400 A 600 A	L(▲)L36400( )JU31X L(▲)L36600( )JU31X	4827.00 7109.00	5648.00 —	5081.00 7484.00	5945.00 —	8487.00 10541.00	9919.00 —	9918.00 11837.00	11604.00 —		
Micrologic Standard	LSI	3.3S	250 A	L(▲)L36250( )JU33X	5391.00	6211.00	5674.00	6538.00	9071.00	10513.00	10511.00	12198.00	AL400L61K3D (1) 2 AWG–600 kcmil Cu (1) 2 AWG–500 kcmil Al	
			400 A 600 A	L(▲)L36400( )JU33X L(▲)L36600( )JU33X	5391.00 7673.00	6211.00 —	5674.00 8077.00	6538.00 —	9071.00 11134.00	10513.00 —	10511.00 12430.00	12198.00 —		
Micrologic Ammeter	LSI	5.3A	400 A 600 A	L(▲)L36400( )JU43X L(▲)L36600( )JU43X	6253.00 8535.00	7073.00 —	6582.00 8984.00	7445.00 —	9979.00 12041.00	11420.00 —	11419.00 13337.00	13105.00	AL600S52K3 (2) 2/0 AWG–500 kcmil Al/Cu	
Micrologic Energy	LSI	5.3E	400 A 600 A	L(▲)L36400( )JU53X L(▲)L36600( )JU53X	7200.00 9483.00	8021.00 —	7579.00 9982.00	8443.00 —	10976.00 13039.00	12418.00 —	12416.00 14335.00	14103.00		
Micrologic Ammeter	LSIG	6.3A	400 A 600 A	L(▲)L36400( )JU44X L(▲)L36600( )JU44X	8149.00 10431.00	8969.00 —	8578.00 10980.00	9441.00 —	11975.00 14037.00	13416.00 —	13415.00 15333.00	15101.00		
Micrologic Energy	LSIG	6.3E	400 A 600 A	L(▲)L36400( )JU54X L(▲)L36600( )JU54X	9097.00 11379.00	9917.00 —	9575.00 11978.00	10439.00 —	12972.00 15035.00	14414.00 —	14412.00 16331.00	16099.00		

- ▲ To complete catalog number, replace the blank with the appropriate rating (D, G, J, L)
- For 80% rated use "T" or for 100% rated use "R" in the 9th character place (for example, LGL36400TU31X or LGL36400RU31X). 100% rated H- and J-frame circuit breakers have copper lugs and can only be used with copper wire.
- ◆ Circuit breakers will be labeled with Line and Load markings and are not suitable for reverse connections.
- ★ Only available on 3P unit-mount circuit breakers.

**Table 3.12: L-Frame 3 Pole, 600 A Circuit Breaker Breaker Frame without Trip Units (600 Vac, 50/60 Hz)**

Ampere Rating	D Interrupting		G Interrupting		J Interrupting		L Interrupting	
	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price
250 A (70–250 A)	LDF36000F25	1328.00	LGF36000F25	1480.00	LJF36000F25	4616.00	LLF36000F25	6069.00
400 A (125–400 A)	LDF36000F40	2628.00	LGF36000F40	2766.00	LJF36000F40	6164.00	LLF36000F40	7602.00
600 A (200–600 A)	LDF36000F60	5199.00	LGF36000F60	5472.00	LJF36000F60	8226.00	LLF36000F60	9522.00

**Table 3.13: L-Frame 3P Field-Installable Micrologic Electronic Trip Units**

Electronic Trip Unit			Continuous Current	Trip Unit Cat. No.	\$ Price
Type	Function	Code			
Micrologic Standard	LI	3.3	70-80-100-125-150-175-200-225-250	LE3250U31X	2315.00
			125-150-175-200-225-250-300-350-400	LE3400U31X	2315.00
			200-225-250-300-350-400-450-500-600	LE3600U31X	2315.00
Micrologic Ammeter	LSI	3.3S	70-80-100-125-150-175-200-225-250	LE3250U33X	2908.00
			125-150-175-200-225-250-300-350-400	LE3400U33X	2908.00
			200-225-250-300-350-400-450-500-600	LE3600U33X	2908.00
Micrologic Ammeter	LSIG	6.3A	125–400	LE3400U43X	3816.00
			200–600	LE3600U43X	3816.00
			125–400 200–600	LE3400U44X LE3600U44X	4813.00 4813.00
Micrologic Energy	LSI	5.3E	125–400 200–600	LE3400U53X LE3600U53X	5812.00 5812.00
			125–400	LE3400U54X	6809.00
			200–600	LE3600U54X	6809.00

**Table 3.14: Termination Options**

Termination Letter	Termination Option
A	I-Line (See Section 9)
F	No lugs (includes terminal nut kit on both ends)
L	Lugs both ends
M	Lugs ON end, terminal nut kit OFF end
P	Lugs OFF end, terminal nut kit ON end
N▼	Plug In
D▼	Drawout
S▼	Rear Connected

For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.

**M**G**L**3**6**4**0**0 or **L**G**L**3**6**6**0**0**U**4**X**  
 Termination Letter

- ▼ For N, D, and S pricing, add termination pricing to price. See Digest page 7-42.

**Table 3.15: L-Frame Interrupting Ratings**

Voltage	Interrupting Rating			
	D	G	J	L
240 Vac	25 kA	65 kA	100 kA	125 kA
480 Vac	18 kA	35 kA	65 kA	100 kA
600 Vac	14 kA	18 kA	25 kA	50 kA

- Accessories ..... Digest pages 7-36–7-45
- Optional Lugs ..... Digest pages 7-39–7-40
- Dimensions ..... Digest page 7-55

**Table 3.16: D-Frame (600 A 600 Vac) 3P 50/60 Hz Circuit Breaker with Lugs and Electronic Trip Units▲**

Electronic Trip Unit Type	Trip Function	Trip Unit	Continuous Current	G Interrupting		J Interrupting		L Interrupting		Terminal Wire Range (AWG/kcmil)
				Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	
Standard	LS	STR23SP	150 A	DGL36150E20	5081.00	DJL36150E20	8478.00	DLL36150E20	9918.00	(1) 2–600 Cu or (1) 2–500 Al
			250 A	DGL36250E20	5081.00	DJL36250E20	8478.00	DLL36250E20	9918.00	
			400 A	DGL36400E20	5081.00	DJL36400E20	8478.00	DLL36400E20	9918.00	
	LSI	SR53UP-F■	150 A	DGL36150E53	6200.00	DJL36150E53	9597.00	DLL36150E53	11037.00	(1) 2–600 Cu or (1) 2–500 Al
			250 A	DGL36250E53	6200.00	DJL36250E53	9597.00	DLL36250E53	11037.00	
			400 A	DGL36400E53	6200.00	DJL36400E53	9597.00	DLL36400E53	11037.00	
	LSIG	STR53UP-FT■	150 A	DGL36150E54	7527.00	DJL36150E54	10925.00	DLL36150E54	12365.00	(1) 2–600 Cu or (1) 2–500 Al
			250 A	DGL36250E54	7527.00	DJL36250E54	10925.00	DLL36250E54	12365.00	
			400 A	DGL36400E54	7527.00	DJL36400E54	10925.00	DLL36400E54	12365.00	
Ammeter	LSI	STR53UP-FI■	150 A	DGL36150E58	7661.00	DJL36150E58	11058.00	DLL36150E58	12498.00	(1) 2–600 Cu or (1) 2–500 Al
			250 A	DGL36250E58	7661.00	DJL36250E58	11058.00	DLL36250E58	12498.00	
			400 A	DGL36400E58	7661.00	DJL36400E58	11058.00	DLL36400E58	12498.00	
	LSIG	STR53UP-FTI■	150 A	DGL36600E58	9429.00	DJL36600E58	12813.00	DLL36600E58	14721.00	(2) 2/0–350 Cu or (2) 2/0–500 Al
			250 A	DGL36250E59	8990.00	DJL36250E59	12387.00	DLL36250E59	13827.00	
			400 A	DGL36400E59	8990.00	DJL36400E59	12387.00	DLL36400E59	13827.00	
	LSIG	STR53UP-FI■	150 A	DGL36150E59	8990.00	DJL36150E59	12387.00	DLL36150E59	13827.00	(1) 2–600 Cu or (1) 2–500 Al
			250 A	DGL36250E59	8990.00	DJL36250E59	12387.00	DLL36250E59	13827.00	
			400 A	DGL36400E59	8990.00	DJL36400E59	12387.00	DLL36400E59	13827.00	
LSIG	STR53UP-FI■	150 A	DGL36600E59	9434.00	DJL36600E59	15621.00	DLL36600E59	17061.00	(2) 2/0–350 Cu or (2) 2/0–500 Al	
		250 A	DGL36250E58	7661.00	DJL36250E58	11058.00	DLL36250E58	12498.00		
		400 A	DGL36400E58	7661.00	DJL36400E58	11058.00	DLL36400E58	12498.00		

▲ D-frame circuit breakers 400 A and below are 100% rated. 600 A is standard (80%) rated only.  
■ F = Fault indicator; T = Residual-type ground-fault protection; I = Ammeter  
◆ Available with lugs (L) or bus (F) connections only.

**Table 3.17: D-Frame 3P 600 A Circuit Breaker, Frame Only, and Field-Installable Trip Units**

Ampere Rating	Basic Frame Only (600 Vac)*						Field Installable D-Frame Electronic Trip Unit				
	G Interrupting		J Interrupting		L Interrupting		Long-time, Short-time and Instantaneous Protection				
	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Description	Factory Code	Trip Function	Cat. No.	\$ Price
150 A	DGL36150F40	2766.00	DJL36150F40	6164.00	DLL36150F40	7602.00	STR23SP	E20	LS	36940	2033.00
250 A	DGL36250F40	2766.00	DJL36250F40	6164.00	DLL36250F60	7602.00	STR53UP-F	E53	LSI	36942	3152.00
400 A	DGL36400F40	2766.00	DJL36400F40	6164.00	DLL36400F40	7602.00	STR53UP-FT	E54	LSIG	36943	4479.00
600 A	DGL36600F60	5904.00	DJL36600F60	9302.00	DLL36600F60	10740.00	STR53UP-FI	E58	LSI	36944	4613.00
							STR53UP-FTI	E59	LSIG	36945	5942.00

\* Available with lugs (L) or bus (F) connections only.

**Table 3.18: Plug-In and Drawout Mountings for D-Frame Circuit Breakers**

Description	Poles	Plug-in Mounting			Drawout Mounting			
		Factory Installed Cat. No.	Field-Installed Cat. No.	\$ Price	Factory Installed Cat. No.	Field-Installed Cat. No.	\$ Price	
Kit (stationary and moving parts)	3	N	32546	1542.00	D	32548	2466.00	
	4	N	M32547	2082.00	D	M32549	3281.00	
Stationary Part	Plug-in base	3	32514	1065.00		32514	1065.00	
		4	M32515	1439.00		M32515	1439.00	
	Fixed part of chassis					32532	693.00	
Moving Part	Moving part of chassis		HJ00	710.00		HJ00	710.00	
	Short terminal covers	3	32562	149.00		32562	149.00	
		4	32563	161.00		32563	161.00	
	Power connections	3		3x 32518▲	95.00		3x 32518▲	95.00
		4		4x 32518▲	95.00		4x 32518▲	95.00

▲ Price shown is for quantity of 1.

**Table 3.19: Plug-In and Drawout Accessories for D-Frame Circuit Breakers**

Description	Field-Installed Cat. No.	\$ Price		
Secondary Disconnecting Blocks	Fixed Part	9-wire connector	29273	95.00
	Moving Part	9-wire connector	32523	60.00
		Support for 3 moving connectors	32525	42.60
Shutters	Two shutters for plug-in base	32521	81.00	
Chassis Accessories	Extended escutcheon for toggle	32534	104.00	
	Locking device (key lock is not included)	29286	164.00	
	Two position indicating switches (connected/disconnected)	29287	207.00	

**Table 3.20: Termination Options**

Frame	Termination Letter	Termination Option
D-Frame	F	No Lugs (Includes terminal nut kit on both ends)
	L	Lugs both ends
	M	Lugs ON end Terminal Nut Kit Off end
	P	Lugs OFF end Terminal Nut Kit On end
	N ■	Plug-in
	D ■	Drawout
	S ■	Rear Connected

For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.

MGL36400 or DGL36400E20  
└ Termination Letter ─┘

■ For N, D, and S pricing, add termination pricing to price.

**Table 3.21: D-Frame Interrupting Ratings**

Voltage	Interrupting Rating		
	G	J	L
240 Vac	65 kA	100 kA	125 kA
480 Vac	35 kA	65 kA	100 kA
600 Vac	18 kA	25 kA	25 kA

Accessories ..... Page 3-24–3-27  
Optional Lugs ..... Page 3-28–3-29  
Dimensions ..... Page 3-33  
Enclosures ..... Digest Page 7-56



D-Frame Switch

Automatic molded case switches open instantaneously at a factory preset magnetic trip point, calibrated to protect only the molded case switch itself, when it is subjected to high fault currents. The trip point is nonadjustable and provides no overload or low level fault protection.

Molded case switches open when the handle is switched to the OFF position or in response to an auxiliary tripping device such as a shunt trip.

All molded case switches will accept the same lugs and accessories as equivalent thermal-magnetic circuit breakers, with the exception of Q-frame switches which do not have electrical accessories available.

Automatic molded case switches are UL Listed per UL 489 and are CSA Certified.

**Table 3.22: D-Frame (600 Vac) and Q-Frame (240 Vac) PowerPact™ Automatic Molded Case Switches**

Circuit Breaker	Poles	Ampere Rating	J Interrupting			Terminal	Wire Range
			Cat. No.	\$ Price	Trip Point		
D-Frame	3	400 A	DJL3600S40	4572.00	6000 A	S32508	2 AWG–500 kcmil Al or 2 AWG–600 kcmil Cu
		600 A	DJL3600S60	7484.00	6000 A	S32510	(2) 2/0 AWG–500 kcmil Al or (2) 2/0 AWG–350 kcmil Cu
Q-Frame	2	225 A	QBL2200S22★	440.00	4500 A		4 AWG–300 kcmil
	3	225 A	QBL3200S22★	1193.00	4500 A		

- ◆ Withstand rating of 10 kA at 240 Vac.
- ★ DE2A discount schedule.
- ▼ P-frame L-interrupting is available in 480 Vac only.
- △ UL magnetic trip tolerances are -20% / +30% from the nominal values shown.

**Table 3.23: D-Frame Withstand Ratings**

Voltage	Interrupting
	J
240 Vac	150 kA
480 Vac	100 kA
600 Vac	25 kA

□ The withstand rating is the fault current at rated voltage that the molded case switch will withstand without damage when protected by a circuit breaker with an equal continuous current rating.

**PowerPact™ D-frame Mission Critical Circuit Breakers**

When the D-frame Mission Critical circuit breaker is used as a main circuit breaker with QO branch circuit breakers, the D-frame MC will remain closed during any fault that occurs downstream of the QO circuit breaker up to 30kA at 208Y/120 Vac.

Ratings:

- UL 489 Listed
- CSA Certified
- Voltage: 208Y/120 V
- Handle ratings: 60–600 A
- AIR: 65 kA

Available Configurations:

- Four sizes: 150 A, 250 A, 400 A, and 600 A
- Main circuit breaker in NQ panelboards
- Unit mount for OEM users
- Plug-in base for OEM users
- Drawout base for OEM users

**Table 3.24: D-Frame Mission Critical Circuit Breakers**

Circuit Breaker Cat. No.▲	Continuous Current Rating	\$ Price	Terminal	
			Cat. No.	Wire Range (AWG/kcmil)
DJL32150W	150 A	10317.00	32508	#2-600 Cu or #2-500 Al
DJL32250W	250 A	10317.00		
DJL32400W	400 A	10317.00		
DJL32600W	600 A	13551.00	32510	(2) 2/0-350 Cu or (2) 2/0-500Al

▲ D-Frame circuit breakers 400 A and below are 100% rated.

**Table 3.25: Termination Options**

Frame	Termination Letter	Termination Option
D-Frame	F	No Lugs (Includes terminal nut kit on both ends)
	L	Lugs both ends
	M	Lugs ON end Terminal Nut Kit Off end
	P	Lugs OFF end Terminal Nut Kit On end
	N	Plug-in
	D	Drawout
	S	Rear Connected

For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.

**DJL36400E2Q**

Termination Letter

For N, D, and S pricing, add termination pricing to price. See page 7-45

Accessories ..... Page 3-24—3-27  
Optional Lugs ..... Page 3-28—3-29  
Dimensions ..... Page 3-33

FAL 1P 15-100 A  
FAL/FHL 2P 15-100 A



FAL/FHL 3P 15-100 A



### Molded Case Circuit Breakers

Thermal-magnetic molded case circuit breakers shown on pages 3-7 through 3-18 are permanent trip UL Listed, CSA® Certified, IEC rated, and also meet the requirements of Federal Specification W-C-375B/GEN as indicated on Digest pages 7-4 through 7-7.

### F-Frame Thermal-Magnetic Circuit Breakers

Class 650

**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories. See Digest Section 7 for more information.

**Table 3.26: F-Frame—100 A, Thermal-Magnetic, Individually-Mounted, Standard Interrupting, 240 Vac**

Ampere Rating	Fixed AC Magnetic Trip		1 P		2 P		3 P		Terminal Wire Range (AWG)
			120 Vac		240 Vac		240 Vac		
			Hold	Trip	Cat. No.	\$ Price	Cat. No.	\$ Price	
15 A	275 A	600 A	FAL12015	198.00	FAL22015	333.00	FAL32015	495.00	AL50FA 14-4 Cu or 12-4 Al
20 A	275 A	600 A	FAL12020	198.00	FAL22020	333.00	FAL32020	495.00	
25 A	275 A	600 A	FAL12025	198.00	FAL22025	333.00	FAL32025	495.00	
30 A	275 A	600 A	FAL12030	198.00	FAL22030	333.00	FAL32030	495.00	
35 A	400 A	850 A	FAL12035	198.00	FAL22035	333.00	FAL32035	495.00	
40 A	400 A	850 A	FAL12040	198.00	FAL22040	333.00	FAL32040	495.00	AL100FA 14-1/0 Cu or 12-1/0 Al
45 A	400 A	850 A	FAL12045	198.00	FAL22045	333.00	FAL32045	495.00	
50 A	400 A	850 A	FAL12050	198.00	FAL22050	333.00	FAL32050	495.00	
60 A	800 A	1450 A	FAL12060	198.00	FAL22060	333.00	FAL32060	495.00	
70 A	800 A	1450 A	FAL12070	261.00	FAL22070	543.00	FAL32070	704.00	
80 A	800 A	1450 A	FAL12080	261.00	FAL22080	543.00	FAL32080	704.00	
90 A	900 A	1700 A	FAL12090	261.00	FAL22090	543.00	FAL32090	704.00	
100 A	900 A	1700 A	FAL12100	261.00	FAL22100	543.00	FAL32100	704.00	

**Table 3.27: F-Frame—100 A, Thermal-Magnetic, Individually-Mounted, 480 Vac**

Ampere Rating	Fixed AC Magnetic Trip		Standard Interrupting						Terminal Wire Range (AWG)
			1P		2P		3P		
			277 Vac, 125 Vdc		480 Vac, 250 Vdc		480 Vac, 250 Vdc		
Hold	Trip	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	AL50FA (1) 14-4 Cu or (1) 12-4 Al  AL100FA (1) 14-1/0 Cu or (1) 12-1/0 Al	
15 A	275 A	600 A	FAL14015	251.00	FAL24015	609.00	FAL34015		782.00
20 A	275 A	600 A	FAL14020	251.00	FAL24020	609.00	FAL34020		782.00
25 A	275 A	600 A	FAL14025	251.00	FAL24025	609.00	FAL34025		782.00
30 A	275 A	600 A	FAL14030	251.00	FAL24030	609.00	FAL34030		782.00
35 A	400 A	850 A	FAL14035	251.00	FAL24035	609.00	FAL34035		782.00
40 A	400 A	850 A	FAL14040	251.00	FAL24040	609.00	FAL34040		782.00
45 A	400 A	850 A	FAL14045	251.00	FAL24045	609.00	FAL34045		782.00
50 A	400 A	850 A	FAL14050	251.00	FAL24050	609.00	FAL34050		782.00
60 A	800 A	1450 A	FAL14060	251.00	FAL24060	609.00	FAL34060		782.00
70 A	800 A	1450 A	FAL14070	312.00	FAL24070	788.00	FAL34070		924.00
80 A	800 A	1450 A	FAL14080	312.00	FAL24080	788.00	FAL34080		924.00
90 A	900 A	1700 A	FAL14090	312.00	FAL24090	788.00	FAL34090		924.00
100 A	900 A	1700 A	FAL14100	312.00	FAL24100	788.00	FAL34100		924.00

**Table 3.28: F-Frame—100 A, Thermal-Magnetic, Individually-Mounted, 600 Vac**

Ampere Rating	Fixed AC Magnetic Trip		Standard Interrupting				High Interrupting				Current Limiting				Terminal Wire Range (AWG)				
			2P		3P		1P		2P		3P		2P			3P			
			600 Vac, 250 Vdc		600 Vac, 250 Vdc		277 Vac, 125 Vdc		600 Vac, 250 Vdc		600 Vac, 250 Vdc		600 Vac, 250 Vdc			600 Vac, 250 Vdc			
Hold	Trip	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	AL50FA 14-4 Cu or 12-4 Al  AL100FA 14-1/0 Cu or 12-1/0 Al	
15 A	275 A	600 A	FAL26015	704.00	FAL36015	906.00	FHL16015	452.00	FHL26015	1163.00	FHL36015	1358.00	—	—	—	—	—		—
20 A	275 A	600 A	FAL26020	704.00	FAL36020	906.00	FHL16020	452.00	FHL26020	1163.00	FHL36020	1358.00	FIL26020	2633.00	FIL36020	3296.00	—		
25 A	275 A	600 A	FAL26025	704.00	FAL36025	906.00	FHL16025	452.00	FHL26025	1163.00	FHL36025	1358.00	FIL26025	2633.00	FIL36025	3296.00	—		
30 A	275 A	600 A	FAL26030	704.00	FAL36030	906.00	FHL16030	452.00	FHL26030	1163.00	FHL36030	1358.00	FIL26030	2633.00	FIL36030	3296.00	—		
35 A	400 A	850 A	FAL26035	704.00	FAL36035	906.00	FHL16035	452.00	FHL26035	1163.00	FHL36035	1358.00	FIL26035	2633.00	FIL36035	3296.00	—		
40 A	400 A	850 A	FAL26040	704.00	FAL36040	906.00	FHL16040	452.00	FHL26040	1163.00	FHL36040	1358.00	FIL26040	2633.00	FIL36040	3296.00	—		
45 A	400 A	850 A	FAL26045	704.00	FAL36045	906.00	FHL16045	452.00	FHL26045	1163.00	FHL36045	1358.00	FIL26045	2633.00	FIL36045	3296.00	—		
50 A	400 A	850 A	FAL26050	704.00	FAL36050	906.00	FHL16050	452.00	FHL26050	1163.00	FHL36050	1358.00	FIL26050	2633.00	FIL36050	3296.00	—		
60 A	800 A	1450 A	FAL26060	704.00	FAL36060	906.00	FHL16060	452.00	FHL26060	1163.00	FHL36060	1358.00	FIL26060	2633.00	FIL36060	3296.00	—		
70 A	800 A	1450 A	FAL26070	890.00	FAL36070	1115.00	FHL16070	509.00	FHL26070	1353.00	FHL36070	1541.00	FIL26070	2633.00	FIL36070	3296.00	—		
80 A	800 A	1450 A	FAL26080	890.00	FAL36080	1115.00	FHL16080	509.00	FHL26080	1353.00	FHL36080	1541.00	FIL26080	2633.00	FIL36080	3296.00	—		
90 A	900 A	1700 A	FAL26090	890.00	FAL36090	1115.00	FHL16090	509.00	FHL26090	1353.00	FHL36090	1541.00	FIL26090	2633.00	FIL36090	3296.00	—		
100 A	900 A	1700 A	FAL26100	890.00	FAL36100	1115.00	FHL16100	509.00	FHL26100	1353.00	FHL36100	1541.00	FIL26100	2633.00	FIL36100	3296.00	—		

**Table 3.29: Interrupting Ratings**

Voltage	FAL			FHL	FCL▲	FIL
	240 Vac	480 Vac	600 Vac			
240 Vac	10 kA	18 kA (1P), 25 kA (2P, 3P)	25 kA	25 kA (1P) 65 kA (2P, 3P)	100 kA	200 kA
480 Vac	—	18 kA	18 kA	25 kA (2P, 3P)	65 kA	200 kA
600 Vac	—	—	14 kA	18 kA (2P, 3P)	—	100 kA

▲ See Section 11

**Table 3.30: Termination Option**

Termination Letter	For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.
F = No Lugs	<b>F A L 3 6 1 0 0</b> └ Termination Letter
L = Lugs both ends	
P with MT Suffix = Lugs ON end	
P = Lugs OFF end	

Accessories ..... Page 3-24—3-27  
Optional Lugs ..... Page 3-28—3-29  
Dimensions ..... Page 3-33  
Enclosures: see Digest Section 7

FA 1P  
1.5 in. (38 mm)  
Mounting Height



FA 2P  
3 in. (76 mm)  
Mounting Height



FA 3P  
4.5 in. (114 mm)  
Mounting Height



**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories. See Digest Section 7 for more information.

**Table 3.31: F-Frame—100 A, Thermal-Magnetic, I-Line™ Construction, 240 Vac, Standard Interrupting**

Ampere Rating	Fixed AC Magnetic Trip		2 P▲		3 P		Terminal Wire Range (AWG)
	Hold	Trip	240 Vac		240 Vac		
			Cat. No.	\$ Price	Cat. No.	\$ Price	
15 A	275 A	600 A	FA22015( )	398.00	FA32015	572.00	AL50FA 14–4 Cu or 12–4 Al
20 A	275 A	600 A	FA22020( )	398.00	FA32020	572.00	
25 A	275 A	600 A	FA22025( )	398.00	FA32025	572.00	
30 A	275 A	600 A	FA22030( )	398.00	FA32030	572.00	
35 A	400 A	850 A	FA22035( )	398.00	FA32035	572.00	AL100FA 14–1/0 Cu or 12–1/0 Al
40 A	400 A	850 A	FA22040( )	398.00	FA32040	572.00	
45 A	400 A	850 A	FA22045( )	398.00	FA32045	572.00	
50 A	400 A	850 A	FA22050( )	398.00	FA32050	572.00	
60 A	800 A	1450 A	FA22060( )	398.00	FA32060	572.00	
70 A	800 A	1450 A	FA22070( )	617.00	FA32070	780.00	
80 A	800 A	1450 A	FA22080( )	617.00	FA32080	780.00	
90 A	900 A	1700 A	FA22090( )	617.00	FA32090	780.00	
100 A	900 A	1700 A	FA22100( )	617.00	FA32100	780.00	

**Table 3.32: F-Frame—100 A, Thermal-Magnetic, I-Line™ Construction, 480 Vac**

Ampere Rating	Fixed AC Magnetic Trip		Standard Interrupting						Terminal Wire Range (AWG)
	Hold	Trip	1P▲★		2P▲		3P		
			277 Vac, 125 Vdc	\$ Price	480 Vac, 250 Vdc	\$ Price	480 Vac, 250 Vdc	\$ Price	
			Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	
15 A	275 A	600 A	—	—	FA24015( )	651.00	FA34015	833.00	AL50FA (1) 14–4 Cu or (1) 12–4 Al
20 A	275 A	600 A	—	—	FA24020( )	651.00	FA34020	833.00	
25 A	275 A	600 A	—	—	FA24025( )	651.00	FA34025	833.00	
30 A	275 A	600 A	—	—	FA24030( )	651.00	FA34030	833.00	
35 A	400 A	850 A	FA14035( )	302.00	FA24035( )	651.00	FA34035	833.00	AL100FA (1) 14–1/0 Cu or (1) 12–1/0 Al
40 A	400 A	850 A	FA14040( )	302.00	FA24040( )	651.00	FA34040	833.00	
45 A	400 A	850 A	FA14045( )	302.00	FA24045( )	651.00	FA34045	833.00	
50 A	400 A	850 A	FA14050( )	302.00	FA24050( )	651.00	FA34050	833.00	
60 A	800 A	1450 A	FA14060( )	302.00	FA24060( )	651.00	FA34060	833.00	
70 A	800 A	1450 A	FA14070( )	332.00	FA24070( )	833.00	FA34070	996.00	
80 A	800 A	1450 A	FA14080( )	332.00	FA24080( )	833.00	FA34080	996.00	
90 A	900 A	1700 A	FA14090( )	332.00	FA24090( )	833.00	FA34090	996.00	
100 A	900 A	1700 A	FA14100( )	332.00	FA24100( )	833.00	FA34100	996.00	

**Table 3.33: F-Frame—100 A, Thermal-Magnetic, I-Line™ Construction, 600 Vac**

Ampere Rating	Fixed AC Magnetic Trip		Standard Interrupting			High Interrupting			Current Limiting			Terminal Wire Range (AWG)					
	Hold	Trip	2P▲		3P		1P▲★		2P▲		3P						
			600 Vac, 250 Vdc	\$ Price	600 Vac, 250 Vdc	\$ Price	277 Vac, 125 Vdc	\$ Price	600 Vac, 250 Vdc	\$ Price	600 Vac, 250 Vdc		\$ Price	600 Vac, 250 Vdc	\$ Price		
			Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price			
15 A	275 A	600 A	FA26015( )	780.00	FA36015	971.00	FH16015( )	507.00	FH26015( )	1214.00	FH36015	1446.00	—	—	AL50FA 14–4 Cu or 12–4 Al		
20 A	275 A	600 A	FA26020( )	780.00	FA36020	971.00	FH16020( )	507.00	FH26020( )	1214.00	FH36020	1446.00	FI26020( )	2763.00		FI36020	3296.00
25 A	275 A	600 A	FA26025( )	780.00	FA36025	971.00	FH16025( )	507.00	FH26025( )	1214.00	FH36025	1446.00	—	—		—	—
30 A	275 A	600 A	FA26030( )	780.00	FA36030	971.00	FH16030( )	507.00	FH26030( )	1214.00	FH36030	1446.00	FI26030( )	2763.00		FI36030	3296.00
35 A	400 A	850 A	FA26035( )	780.00	FA36035	971.00	FH16035( )	507.00	FH26035( )	1214.00	FH36035	1446.00	—	—	AL100FA 14–1/0 Cu or 12–1/0 Al		
40 A	400 A	850 A	FA26040( )	780.00	FA36040	971.00	FH16040( )	507.00	FH26040( )	1214.00	FH36040	1446.00	FI26040( )	2763.00		FI36040	3296.00
45 A	400 A	850 A	FA26045( )	780.00	FA36045	971.00	FH16045( )	507.00	FH26045( )	1214.00	FH36045	1446.00	—	—		—	—
50 A	400 A	850 A	FA26050( )	780.00	FA36050	971.00	FH16050( )	507.00	FH26050( )	1214.00	FH36050	1446.00	FI26050( )	2763.00		FI36050	3296.00
60 A	800 A	1450 A	FA26060( )	780.00	FA36060	971.00	FH16060( )	507.00	FH26060( )	1214.00	FH36060	1446.00	FI26060( )	2763.00		FI36060	3296.00
70 A	800 A	1450 A	FA26070( )	947.00	FA36070	1163.00	FH16070( )	563.00	FH26070( )	1452.00	FH36070	1632.00	FI26070( )	2763.00		FI36070	3296.00
80 A	800 A	1450 A	FA26080( )	947.00	FA36080	1163.00	FH16080( )	563.00	FH26080( )	1452.00	FH36080	1632.00	FI26080( )	2763.00		FI36080	3296.00
90 A	900 A	1700 A	FA26090( )	947.00	FA36090	1163.00	FH16090( )	563.00	FH26090( )	1452.00	FH36090	1632.00	FI26090( )	2763.00		FI36090	3296.00
100 A	900 A	1700 A	FA26100( )	947.00	FA36100	1163.00	FH16100( )	563.00	FH26100( )	1452.00	FH36100	1632.00	FI26100( )	2763.00		FI36100	3296.00

- ▲ 1P and 2P circuit breaker catalog numbers are completed by adding the required phase connection letters as a suffix. See Phase Option Table.
- FCL 2P circuit breakers are built using 3P module.
- ◆ FCL circuit breakers are not rated for 250 Vdc.
- ★ Rated 277 Vac, 125 Vdc. 15–30 A circuit breaker suitable for use with 60°C or 75 °C conductors. 35–100 A circuit breakers are suitable for use with 75°C conductors.

**Table 3.34: Phase Options**

Phase Option Letter	1P	2P	3P
A	FA14035A		
B	FA14035B		
C	FA14035C		
AB		FA24030AB	
AC		FA24030AC	
BC		FA24030BC	
ABC			FA34030
CBA			FA34030CBA

**Table 3.35: Interrupting Ratings**

Voltage	FA			FH	FC▼	FI
	240 Vac	480 Vac	600 Vac			
240 Vac	10 kA	18 kA (1P), 25 kA (2P, 3P)	25 kA	25 kA (1P) 65 kA (2P, 3P)	100 kA	200 kA
277 Vac	—	18 kA	—	—	65 kA	—
480 Vac	—	18 kA	18 kA	25 kA (2P, 3P)	65 kA	200 kA
600 Vac	—	—	14 kA	18 kA (2P, 3P)	—	100 kA

▼ See Section 11.

- Accessories ..... Page 3-24—3-27
- Optional Lugs ..... Page 3-28—3-29
- Dimensions ..... Page 3-33
- Enclosures: see Digest Section 7



**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories. See Digest Section 7 for more information.

KAL/KHL  
2P and 3P  
70–250 A



KIL36250



Q4L  
2P and 3P  
250–400 A



**Table 3.36: K-Frame—250 A, Thermal-Magnetic, Individually-Mounted, 600 Vac**

Ampere Rating	Adjustable AC Magnetic Trip▲		Current Limiting		Terminal Wire Range
	Low	High	Cat. No.	\$ Price	
<b>2P, 600 Vac, 250 Vdc</b>					
110	550 A	1100 A	KIL26110	6177.00	AL250KA (1) 4 AWG–350 kcmil Al
125	625 A	1250 A	KIL26125	6177.00	
150	750 A	1500 A	KIL26150	6177.00	
175	875 A	1750 A	KIL26175	6177.00	
200	1000 A	2000 A	KIL26200	6177.00	
225	1125 A	2250 A	KIL26225	6177.00	AL250KI (1) 1/0 AWG–350 kcmil Al
250	1250 A	2500 A	KIL26250	7223.00	
<b>3P, 600 Vac, 250 Vdc</b>					
110	550 A	1100 A	KIL36110	7754.00	AL250KA (1) 4 AWG–350 kcmil Al
125	625 A	1250 A	KIL36125	7754.00	
150	750 A	1500 A	KIL36150	7754.00	
175	875 A	1750 A	KIL36175	7754.00	
200	1000 A	2000 A	KIL36200	7754.00	AL250KI (1) 1/0 AWG–350 kcmil Al
225	1125 A	2250 A	KIL36225	7754.00	
250	1250 A	2500 A	KIL36250	9081.00	

**Table 3.37: Q4-Frame—400 A, Thermal-Magnetic, Individually-Mounted, 240 Vac**

Ampere Rating	Adjustable AC Magnetic Trip▲		Standard Interrupting		Terminal Wire Range
	Low	High	Cat. No.	\$ Price	
<b>2P, 240 Vac</b>					
250	1250 A	2500 A	Q4L2250	3171.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
300	1500 A	3000 A	Q4L2300	3171.00	
350	1750 A	3500 A	Q4L2350	3171.00	
400	2000 A	4000 A	Q4L2400	3171.00	
<b>3P, 240 Vac</b>					
250	1250 A	2500 A	Q4L3250	3831.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
300	1500 A	3000 A	Q4L3300	3831.00	
350	1750 A	3500 A	Q4L3350	3831.00	
400	2000 A	4000 A	Q4L3400	3831.00	

- ▲ UL magnetic trip setting tolerances are ±25% for low and ±20% for high from nominal value shown.
- KC circuit breakers are 480 Vac

**Table 3.38: Interrupting Ratings**

Voltage	KIL	Q4
240 Vac	200 kA	25 kA
480 Vac	200 kA	—
600 Vac	100 kA	—

Accessories ..... Page 3-25  
Optional Lugs ..... Page 3-28  
Dimensions ..... Page 3-33  
Enclosures: see Digest Section 7

**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories. See Digest Section 7 for more information.

KI 2P and 3P  
4.5 in. (114 mm)  
Mounting Height



**Table 3.39: K-Frame—250A, Thermal-Magnetic, I-Line™ Construction, 600 Vac**

Ampere Rating	Adjustable AC Magnetic Trip▲		Current Limiting		Terminal Wire Range
	Low	High	Cat. No.	\$ Price	
<b>2P, 600 Vac, 250 Vdc♦</b>					
110	550 A	1100 A	KI26110()	6633.00	AL250KA (1) 4 AWG–350 kcmil Al
125	625 A	1250 A	KI26125()	6633.00	
150	750 A	1500 A	KI26150()	6633.00	
175	875 A	1750 A	KI26175()	6633.00	
200	1000 A	2000 A	KI26200()	6633.00	AL250K1 (1) 1/0 AWG–350 kcmil Al
225	1125 A	2250 A	KI26225()	6633.00	
250	1250 A	2500 A	KI26250()	7704.00	
<b>3P, 600 Vac, 250 Vdc</b>					
110	550 A	1100 A	KI36110	8375.00	AL250KA (1) 4 AWG–350 kcmil Al
125	625 A	1250 A	KI36125	8375.00	
150	750 A	1500 A	KI36150	8375.00	
175	875 A	1750 A	KI36175	8375.00	
200	1000 A	2000 A	KI36200	8375.00	AL250K1 (1) 1/0 AWG–350 kcmil Al
225	1125 A	2250 A	KI36225	8375.00	
250	1250 A	2500 A	KI36250	9267.00	

Q4 2P and 3P  
6 in. (152 mm)  
Mounting Height



**Table 3.40: Q4-Frame—400 A, Thermal-Magnetic, I-Line™ Construction, 240 Vac**

Ampere Rating	Adjustable AC Magnetic Trip▲		Standard Interrupting		Terminal Wire Range
	Low	High	Cat. No.	\$ Price	
<b>2P, 240 Vac♦</b>					
250	1250 A	2500 A	Q422250()	3435.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
300	1500 A	3000 A	Q422300()	3435.00	
350	1750 A	3500 A	Q422350()	3435.00	
400	2000 A	4000 A	Q422400()	3435.00	
<b>3P, 240 Vac</b>					
250	1250 A	2500 A	Q43250	4313.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
300	1500 A	3000 A	Q43300	4313.00	
350	1750 A	3500 A	Q43350	4313.00	
400	2000 A	4000 A	Q43400	4313.00	

- ▲ UL magnetic trip setting tolerances are ±25% for low and ±20% for high from nominal value shown.
- KC circuit breakers are 480 Vac
- ♦ 2P and 3P circuit breaker catalog numbers are completed by adding the required phase connection letters as a suffix. See Phase Option Table.

**Table 3.41: Interrupting Ratings**

Voltage	KI	Q4
240 Vac	200 kA	25 kA
480 Vac	200 kA	—
600 Vac	100 kA	—

**Table 3.42: Phase Options**

Phase Option Letter	2P	3P
AB AC BC	KA26250AB KA26250AC KA26250BC	
ABC CBA		KA36250 KA36250CBA

Accessories ..... Page 3-25  
Optional Lugs ..... Page 3-28  
Dimensions ..... Page 3-33  
Enclosures: see Digest Section 7

**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories. See Digest Section 7 for more information.

LAL/LHL MC  
For Mission Critical  
Power Loads  
available in 200, 225, 250,  
and 400 A @ 480 Vac



LAL/LHL  
2P and 3P  
125–400 A



LIL36600  
2P and 3P 300–600 A



**Table 3.43: L-Frame—400 A, Thermal-Magnetic, Individually-Mounted, High Magnetic Withstand Circuit Breakers For Mission Critical Loads**

Ampere Rating	AC Magnetic Level Factory Set <sup>▲</sup>	Standard Interrupting		High Interrupting		Terminal Wire Range
		Cat. No.	\$ Price	Cat. No.	\$ Price	
<b>LA/LH MC Circuit Breaker, 3P, 480 Vac</b>						
200 A	4000 A	LAL34200MC	4962.00	LHL34200MC	7941.00	AL250LA (1) 4 AWG–350 kcmil Al
225 A	4500 A	LAL34225MC	4962.00	LHL34225MC	7941.00	
250 A	5000 A	LAL34250MC	5355.00	LHL34250MC	8336.00	
400 A	8000 A	LAL34400MC	6615.00	LHL34400MC	9596.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al

<sup>▲</sup> AC magnetic setting tolerances are +0–25% from max. value shown.

**Table 3.44: L-Frame—600 A, Thermal-Magnetic, Individually-Mounted Circuit Breakers, 600 Vac**

Ampere Rating	Adjustable AC Magnetic Trip		Standard Interrupting		High Interrupting		Terminal Wire Range
	Low	High	Cat. No.	\$ Price	Cat. No.	\$ Price	
<b>2P, 600 Vac, 250 Vdc</b>							
125 A	625 A	1250 A	LAL26125	3807.00	LHL26125	6362.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
150 A	750 A	1500 A	LAL26150	3807.00	LHL26150	6362.00	
175 A	875 A	1750 A	LAL26175	3807.00	LHL26175	6362.00	
200 A	1000 A	2000 A	LAL26200	3807.00	LHL26200	6362.00	
225 A	1125 A	2250 A	LAL26225	3807.00	LHL26225	6362.00	
250 A	1250 A	2500 A	LAL26250	3807.00	LHL26250	6362.00	
300 A	1500 A	3000 A	LAL26300	3807.00	LHL26300	6362.00	
350 A	1750 A	3500 A	LAL26350	3807.00	LHL26350	6362.00	
400 A	2000 A	4000 A	LAL26400	3807.00	LHL26400	6362.00	
<b>3P, 600 Vac, 250 Vdc</b>							
125 A	625 A	1250 A	LAL36125	4619.00	LHL36125	7598.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
150 A	750 A	1500 A	LAL36150	4619.00	LHL36150	7598.00	
175 A	875 A	1750 A	LAL36175	4619.00	LHL36175	7598.00	
200 A	1000 A	2000 A	LAL36200	4619.00	LHL36200	7598.00	
225 A	1125 A	2250 A	LAL36225	4619.00	LHL36225	7598.00	
250 A	1250 A	2500 A	LAL36250	4619.00	LHL36250	7598.00	
300 A	1500 A	3000 A	LAL36300	4619.00	LHL36300	7598.00	
350 A	1750 A	3500 A	LAL36350	4619.00	LHL36350	7598.00	
400 A	2000 A	4000 A	LAL36400	4619.00	LHL36400	7598.00	

**Table 3.45: L-Frame—600 A, Current-Limiting, Individually-Mounted Circuit Breakers, 600 Vac**

Ampere Rating	Adjustable AC Magnetic Trip		Extra-High Interrupting		Current Limiting		Terminal Wire Range
	Low	High	Cat. No.	\$ Price	Cat. No.	\$ Price	
<b>2P, 600 Vac</b>							
300 A	1500 A	3200 A	LCL26300	7479.00	LIL26300	8604.00	AL600LI5 (2) 4/0 AWG–500 kcmil Al
350 A	1750 A	3200 A	LCL26350	7479.00	LIL26350	8604.00	
400 A	2000 A	3200 A	LCL26400	7479.00	LIL26400	8604.00	
450 A	2250 A	4200 A	LCL26450	7823.00	LIL26450	12551.00	
500 A	2500 A	4200 A	LCL26500	7823.00	LIL26500	12551.00	
600 A	3000 A	4200 A	LCL26600	7823.00	LIL26600	12551.00	
<b>3P, 600 Vac</b>							
300 A	1500 A	3200 A	LCL36300	8312.00	LIL36300	9563.00	AL600LI5 (2) 4/0 AWG–500 kcmil Al
350 A	1750 A	3200 A	LCL36350	8312.00	LIL36350	9563.00	
400 A	2000 A	3200 A	LCL36400	8312.00	LIL36400	9563.00	
450 A	2250 A	4200 A	LCL36450	8691.00	LIL36450	13949.00	
500 A	2500 A	4200 A	LCL36500	8691.00	LIL36500	13949.00	
600 A	3000 A	4200 A	LCL36600	8691.00	LIL36600	13949.00	

**Table 3.46: Interrupting Ratings**

Voltage	LAL	LHL	LCL	LIL
240 Vac	42 kA	65 kA	100 kA	200 kA
480 Vac	30 kA	35 kA	65 kA	200 kA
600 Vac	22 kA	25 kA	35 kA	100 kA

Accessories ..... Page 3-24–3-27  
Optional Lugs ..... Page 3-28–3-29  
Dimensions ..... Page 3-33  
Enclosures: see Digest Section 7

**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories. See Digest Section 7 for more information.

LA / LH 2P and 3P  
6 in. (152 mm)  
Mounting Height



**Table 3.47: L-Frame—400 A, Thermal-Magnetic, I-Line™ Construction, High Magnetic Withstand Circuit Breakers For Mission Critical Loads**

Ampere Rating	AC Magnetic Level Factory Set▲	Standard Interrupting		High Interrupting		Terminal Wire Range
		Cat. No.	\$ Price	Cat. No.	\$ Price	
<b>LA/LH MC Circuit Breaker, 3P, 480 Vac</b>						
200 A	4000 A	LA34200MC	5571.00	LH34200MC	8771.00	AL250LA (1) 4 AWG–350 kcmil Al
225 A	4500 A	LA34225MC	5571.00	LH34225MC	8771.00	
250 A	5000 A	LA34250MC	5681.00	LH34250MC	8882.00	
400 A	8000 A	LA34400MC	7241.00	LH34400MC	10142.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al

▲ Factory set AC magnetic setting tolerances are +0–25% from max. value shown.

**Table 3.48: L-Frame—600 A, Thermal-Magnetic I-Line™ Construction Circuit Breakers, 600 Vac**

Ampere Rating	Adjustable AC Magnetic Trip■		Standard Interrupting		High Interrupting		Terminal Wire Range
	Low	High	Cat. No.	\$ Price	Cat. No.	\$ Price	
<b>2P, 600 Vac, 250 Vdc▲</b>							
125 A	625 A	1250 A	LA26125()	4053.00	LH26125()	6762.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
150 A	750 A	1500 A	LA26150()	4053.00	LH26150()	6762.00	
175 A	875 A	1750 A	LA26175()	4053.00	LH26175()	6762.00	
200 A	1000 A	2000 A	LA26200()	4053.00	LH26200()	6762.00	
225 A	1125 A	2250 A	LA26225()	4053.00	LH26225()	6762.00	
250 A	1250 A	2500 A	LA26250()	4053.00	LH26250()	6762.00	
300 A	1500 A	3000 A	LA26300()	4053.00	LH26300()	6762.00	
350 A	1750 A	3500 A	LA26350()	4053.00	LH26350()	6762.00	
400 A	2000 A	4000 A	LA26400()	4053.00	LH26400()	6762.00	
<b>3P, 600 Vac, 250 Vdc</b>							
125 A	625 A	1250 A	LA36125	4944.00	LH36125	8145.00	AL400LA (1) 1 AWG–600 kcmil Al or (2) 1 AWG–250 kcmil Al
150 A	750 A	1500 A	LA36150	4944.00	LH36150	8145.00	
175 A	875 A	1750 A	LA36175	4944.00	LH36175	8145.00	
200 A	1000 A	2000 A	LA36200	4944.00	LH36200	8145.00	
225 A	1125 A	2250 A	LA36225	4944.00	LH36225	8145.00	
250 A	1250 A	2500 A	LA36250	4944.00	LH36250	8145.00	
300 A	1500 A	3000 A	LA36300	4944.00	LH36300	8145.00	
350 A	1750 A	3500 A	LA36350	4944.00	LH36350	8145.00	
400 A	2000 A	4000 A	LA36400	4944.00	LH36400	8145.00	

LI 2P and 3P  
7.5 in. (190 mm)  
Mounting Height



**Table 3.49: L-Frame—600 A, Current-Limiting, I-Line™ Construction, Circuit Breakers, 600 Vac**

Ampere Rating	Adjustable AC Magnetic Trip■		Extra-High Interrupting		Current Limiting		Terminal Wire Range
	Low	High	Cat. No.	\$ Price	Cat. No.	\$ Price	
<b>2P, 600 Vac▲</b>							
300 A	1500 A	3200 A	LC26300()	8312.00	LI26300()	9563.00	AL600LI5 (2) 4/0 AWG–500 kcmil Al
350 A	1750 A	3200 A	LC26350()	8312.00	LI26350()	9563.00	
400 A	2000 A	3200 A	LC26400()	8312.00	LI26400()	9563.00	
450 A	2250 A	4200 A	LC26450()	8691.00	LI26450()	13949.00	
500 A	2500 A	4200 A	LC26500()	8691.00	LI26500()	13949.00	
600 A	3000 A	4200 A	LC26600()	8691.00	LI26600()	13949.00	
<b>3P, 600 Vac</b>							
300 A	1500 A	3200 A	LC36300	9234.00	LI36300	10673.00	AL600LI5 (2) 4/0 AWG–500 kcmil Al
350 A	1750 A	3200 A	LC36350	9234.00	LI36350	10673.00	
400 A	2000 A	3200 A	LC36400	9234.00	LI36400	10673.00	
450 A	2250 A	4200 A	LC36450	9657.00	LI36450	15498.00	
500 A	2500 A	4200 A	LC36500	9657.00	LI36500	15498.00	
600 A	3000 A	4200 A	LC36600	9657.00	LI36600	15498.00	

▲ 2P and 3P circuit breaker catalog numbers are completed by adding the required phase connection letters as a suffix. See Phase Option Table.  
■ UL magnetic trip setting tolerances are ±25% for low and ±20% for high from nominal value.

**Table 3.50: Interrupting Ratings**

Voltage	LA	LH	LC	LI
240 Vac	42 kA	65 kA	100 kA	200 kA
480 Vac	30 kA	35 kA	65 kA	200 kA
600 Vac	22 kA	25 kA	35 kA	100 kA

**Table 3.51: Phase Options**

Phase Option Letter	2P	3P
AB	LA26400AB	
AC	LA26400AC	
BC	LA26400BC	
ABC		LA36400
CBA		LA36400CBA

Accessories ..... Page 3-24—3-27  
Optional Lugs ..... Page 3-28—3-29  
Dimensions ..... Page 3-33  
Enclosures: see Digest Section 7

**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories. See Digest Section 7 for more information.

**Standard-Function Features:**

- 80% rated
- True RMS sensing
- Interchangeable rating plugs
- LSI, LS(I)G, trip configurations
- Short-time delay = I<sup>2</sup>t IN and ground-fault delay = I<sup>2</sup>t OUT
- Integral ground-fault testing
- LED long-time pickup indication
- Thermal & magnetic backup protection
- Long-time & ground-fault memory
- Optional local trip indicators—overload, short circuit, ground-fault
- Optional local ammeter/trip indicator
- Universal test set available
- Optional I-Line™ mounting (LX, LXI)
- Optional neutral current transformer for 4-wire systems

**Full-Function Features:**

- 100% rated (600 sensor LE/LEL) circuit breakers are 80% rated)
- True RMS sensing
- Interchangeable rating plugs
- PowerLogic™ compatible
- LI, LIG, LS(I), LS(I)G (instantaneous OFF) configurations
- Short-time delay = I<sup>2</sup>t IN & I<sup>2</sup>t OUT and ground-fault delay = I<sup>2</sup>t IN & I<sup>2</sup>t OUT
- Short-time withstand rating
- Integral ground-fault testing
- Optional ground-fault alarm (no trip) (Requires CIM3F with PowerLogic, see Bulletin 0502DB0001.)
- LED long-time pickup indication
- Zone-selective interlocking (short-time & ground-fault)
- Long-time & ground-fault memory
- Local Trip Indicators—overload, short circuit, ground-fault
- Local ammeter/trip indicator
- Universal test set available
- Optional I-Line™ mounting (LE)
- Optional neutral current transformer for 4-wire systems

**Table 3.52: L-Frame—600 A, Micrologic Series B Trip System, Individually-Mounted, 3P, 600 Vac**

	Sensor Size	Ampere Rating	Trip Function	Standard Function		Standard Function Current Limiting		100% Rated Full Function #		Installed Rating Plug	Terminal Wire Range
				Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price		
Micrologic Standard-Function Trip Systems (LXL, LXIL)	250	100	LI	—	—	—	—	LEL36100LI	7692.00	ARP040	AL600LI35 (2) 1 AWG–350 kcmil Al/Cu
			LSI	LXL36100	5616.00	LXIL36100	11262.00	LEL36100LS	13035.00		
			LIG	—	—	—	—	LEL36100LIG	9768.00		
			LSIG	LXL36100G	7692.00	LXIL36100G	13338.00	LEL36100LSG	15111.00		
		125	LI	—	—	—	—	LEL36125LI	7692.00		
		LSI	LXL36125	5616.00	LXIL36125	11262.00	LEL36125LS	13035.00			
	LIG	—	—	—	—	LEL36125LIG	9768.00				
	LSIG	LXL36125G	7692.00	LXIL36125G	13338.00	LEL36125LSG	15111.00				
	150	LI	—	—	—	—	LEL36150LI	7692.00			
	LSI	LXL36150	5616.00	LXIL36150	11262.00	LEL36150LS	13035.00				
	LIG	—	—	—	—	LEL36150LIG	9768.00				
	LSIG	LXL36150G	7692.00	LXIL36150G	13338.00	LEL36150LSG	15111.00				
Micrologic Full-Function Trip Systems (LEL)	250	175	LI	—	—	—	—	LEL36175LI	7692.00	ARP070	
			LSI	LXL36175	5616.00	LXIL36175	11262.00	LEL36175LS	13035.00		
			LIG	—	—	—	—	LEL36175LIG	9768.00		
			LSIG	LXL36175G	7692.00	LXIL36175G	13338.00	LEL36175LSG	15111.00		
		200	LI	—	—	—	—	LEL36200LI	7692.00		
		LSI	LXL36200	5616.00	LXIL36200	11262.00	LEL36200LS	13035.00			
LIG	—	—	—	—	LEL36200LIG	9768.00					
LSIG	LXL36200G	7692.00	LXIL36200G	13338.00	LEL36200LSG	15111.00					
225	LI	—	—	—	—	LEL36225LI	7692.00	ARP090			
LSI	LXL36225	5616.00	LXIL36225	11262.00	LEL36225LS	13035.00					
LIG	—	—	—	—	LEL36225LIG	9768.00					
LSIG	LXL36225G	7692.00	LXIL36225G	13338.00	LEL36225LSG	15111.00					
250	LI	—	—	—	—	LEL36250LI	7692.00				
LSI	LXL36250	5616.00	LXIL36250	11262.00	LEL36250LS	13035.00					
LIG	—	—	—	—	LEL36250LIG	9768.00					
LSIG	LXL36250G	7692.00	LXIL36250G	13338.00	LEL36250LSG	15111.00					
400	300	LI	—	—	—	—	LEL36300LI	10691.00	ARP075		
		LSI	LXL36300	8618.00	LXIL36300	16400.00	LEL36300LS	16034.00			
		LSIG	LXL36300G	10694.00	LXIL36300G	18476.00	LEL36300LSG	18110.00			
	350	LI	—	—	—	—	LEL36350LI	10691.00	ARP088		
		LSI	LXL36350	8618.00	LXIL36350	16400.00	LEL36350LS	16034.00			
		LSIG	LXL36350G	10694.00	LXIL36350G	18476.00	LEL36350LSG	18110.00			
	400	LI	—	—	—	—	LEL36400LI	10691.00	ARP100		
		LSI	LXL36400	8618.00	LXIL36400	16400.00	LEL36400LS	16034.00			
		LSIG	LXL36400G	10694.00	LXIL36400G	18476.00	LEL36400LSG	18110.00			
600	450	LI	—	—	—	—	LEL36450LI	14688.00	ARP075		
		LSI	LXL36450	12611.00	LXIL36450	23250.00	LEL36450LS	20031.00			
		LSIG	LXL36450G	14687.00	LXIL36450G	25326.00	LEL36450LSG	22107.00			
	500	LI	—	—	—	—	LEL36500LI	14688.00	ARP083		
		LSI	LXL36500	12611.00	LXIL36500	23250.00	LEL36500LS	20031.00			
		LSIG	LXL36500G	14687.00	LXIL36500G	25326.00	LEL36500LSG	22107.00			
600	LI	—	—	—	—	LEL36600LI	14688.00	ARP100			
	LSI	LXL36600	12611.00	LXIL36600	23250.00	LEL36600LS	20031.00				
	LSIG	LXL36600G	14687.00	LXIL36600G	25326.00	LEL36600LSG	22107.00				

- ▲ 600 A sensor is 80% rated
- Substitute (A) in place of (G) for ground-fault alarm (pickup indication only). Requires CIM3F and PowerLogic, or see Data Bulletin 0502DB0001. No instantaneous OFF position for LI or LIG trip function type circuit breakers.

**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories.

**Table 3.53: Interrupting Ratings**

Voltage	LXL	LEL	LXIL
240 V	100 kA	100 kA	200 kA
480 V	65 kA	65 kA	200 kA
600 V	35 kA	35 kA	100 kA

Accessories ..... Page 3-24—3-27  
 Optional Lugs ..... Page 3-28—3-29  
 Dimensions ..... Page 3-33

**NOTE:** Consider using PowerPact™ circuit breakers for situations requiring circuit breaker accessories. See Digest Section 7 for more information.

**Table 3.54: L-Frame—600 A, Micrologic Series B Trip System, I-Line™ Construction, 3P, 600 Vac ♦**

Ampere Rating	Trip Function	Standard Function		Standard Function Current Limiting		100% Rated Full Function ■		Installed Rating Plug	Terminal Wire Range
		Cat. No.	\$ Price	Catalog No.	\$ Price	Cat. No.	\$ Price		
100	LI	—	—	—	—	LE36100LI	8078.00	ARP040	AL600L135 (2) 1 AWG–350 kcmil Al/Cu
	LSI	LX36100	5898.00	LXI36100	11825.	LE36100LS	13421.00		
	LIG	—	—	—	—	LE36100LIG	10154.00		
	LSIG	LX36100G	7974.00	LXI36100G	13901.	LE36100LSG	15497.00		
125	LI	—	—	—	—	LE36125LI	8078.00	ARP050	
	LSI	LX36125	5898.00	LXI36125	11825.	LE36125LS	13421.00		
	LIG	—	—	—	—	LE36125LIG	10154.00		
	LSIG	LX36125G	7974.00	LXI36125G	13901.	LE36125LSG	15497.00		
150	LI	—	—	—	—	LE36150LI	8078.00	ARP060	
	LSI	LX36150	5898.00	LXI36150	11825.	LE36150LS	13421.00		
	LIG	—	—	—	—	LE36150LIG	10154.00		
	LSIG	LX36150G	7974.00	LXI36150G	13901.	LE36150LSG	15497.00		
175	LI	—	—	—	—	LE36175LI	8078.00	ARP070	
	LSI	LX36175	5898.00	LXI36175	11825.	LE36175LS	13421.00		
	LIG	—	—	—	—	LE36175LIG	10154.00		
	LSIG	LXL36175G	7974.00	LXI36175G	13901.	LE36175LSG	15497.00		
200	LI	—	—	—	—	LE36200LI	8078.00	ARP080	
	LSI	LX36200	5898.00	LXI36200	11825.	LE36200LS	13421.00		
	LIG	—	—	—	—	LE36200LIG	10154.00		
	LSIG	LX36200G	7974.00	LXI36200G	13901.	LE36200LSG	15497.00		
225	LI	—	—	—	—	LE36225LI	8078.00	ARP090	
	LSI	LX36225	5898.00	LXI36225	11825.	LE36225LS	13421.00		
	LIG	—	—	—	—	LE36225LIG	10154.00		
	LSIG	LX36225G	7974.00	LXI36225G	13901.	LE36225LSG	15497.00		
250	LI	—	—	—	—	LE36250LI	8078.00	ARP100	
	LSI	LX36250	5898.00	LXI36250	11825.	LE36250LS	13421.00		
	LIG	—	—	—	—	LE36250LIG	10154.00		
	LSIG	LX36250G	7974.00	LXI36250G	13901.	LE36250LSG	15497.00		
300	LI	—	—	—	—	LE36300LI	11223.00	ARP075	
	LSI	LX36300	9047.00	LXI36300	17222.	LE36300LS	16566.00		
	LIG	—	—	—	—	LE36300LIG	13299.00		
	LSIG	LX36300G	11123.00	LXI36300G	19298.	LE36300LSG	18642.00		
350	LI	—	—	—	—	LE36350LI	11223.00	ARP088	
	LSI	LX36350	9047.00	LXI36350	17222.	LE36350LS	16566.00		
	LIG	—	—	—	—	LE36350LIG	13299.00		
	LSIG	LX36350G	11123.00	LXI36350G	19298.	LE36350LSG	18642.00		
400	LI	—	—	—	—	LE36400LI	11223.00	ARP100	
	LSI	LX36400	9047.00	LXI36400	17222.	LE36400LS	16566.00		
	LIG	—	—	—	—	LE36400LIG	13299.00		
	LSIG	LX36400G	11123.00	LXI36400G	19298.	LE36400LSG	18642.00		
450	LI	—	—	—	—	LE36450LI	15422.00	ARP075	
	LSI	LX36450	13241.00	LXI36450	24413.	LE36450LS	20765.00		
	LIG	—	—	—	—	LE36450LIG	17498.00		
	LSIG	LX36450G	15317.00	LXI36450G	26489.	LE36450LSG	22841.00		
500	LI	—	—	—	—	LE36500LI	15422.00	ARP083	
	LSI	LX36500	13241.00	LXI36500	9413.	LE36500LS	20765.00		
	LIG	—	—	—	—	LE36500LIG	17498.00		
	LSIG	LX36500G	15317.00	LXI36500G	26489.	LE36500LSG	22841.00		
600▲	LI	—	—	—	—	LE36600LI	15422.00	ARP100	
	LSI	LX36600	13241.00	LXI36600	24413.	LE36600LS	20765.00		
	LIG	—	—	—	—	LE36600LIG	17498.00		
	LSIG	LX36600G	15317.00	LXI36600G	26489.	LE36600LSG	22841.00		

- ▲ 600 A Sensor is 80% rated.
- Substitute (A) in place of (G) for ground-fault alarm (pickup indication only). Requires CIM3F and Powerlogic, or see Data Bulletin 0502DB0001. No instantaneous OFF position for LI or LIG trip function type circuit breakers.
- ♦ Type LX, LXI and LE circuit breakers are NOT recommended for use on single motor branch circuits.

**Table 3.55: Interrupting Ratings**

Voltage	LX	LE	LXI
240 Vac	100 kA	100 kA	200 kA
480 Vac	65 kA	65 kA	200 kA
600 Vac	35 kA	35 kA	100 kA

Accessories ..... Page 3-25  
 Optional Lugs ..... Page 3-28  
 Dimensions ..... Page 3-33  
 Enclosures ..... Digest Page 7-56

**Mag-Gard™ Motor Circuit Protector**

Instantaneous trip magnetic only circuit breakers have a single adjustment which simultaneously sets the magnetic trip level of each individual pole. Mag-Gard circuit breakers comply with NEC® requirements for providing motor circuit protection when installed as part of a UL Listed combination controller having motor overload protection. Interrupting ratings are established for these UL Recognized Components only when they are used in combination with motor starters with properly sized overload relays and contactors.

Mag-Gard circuit breakers will accept the same lugs and accessories as equivalent thermal-magnetic circuit breakers.

**Table 3.56: Magnetic Only LAL Mag-Gard, 400 A, 600 Vac, 50/60 Hz ♦**

Ampere Rating	Adjustable ▲ Trip Range	3P only		
		Cat. No.	\$ Price	
GJL ■	3	9-33 A	GJL36003M01	1089.00
	7	21-77 A	GJL36007M02	1089.00
	15	45-165 A	GJL36015M03	1089.00
	30	90-330 A	GJL36030M04	1089.00
	50	150-550 A	GJL36050M05	1380.00
	75	225-825 A	GJL36075M06	1643.00

- ▲ UL magnetic trip setting tolerances are -20%/+30% from the nominal values shown.
- No GJL I-Line available.
- ♦ 250 Vdc ratings are available. No UL component recognition.
- ★ Each ampere rating can be ordered with any designated trip range for the frame by adding the proper suffix to the catalog numbers.

**Table 3.57: Special Magnetic Trip Settings for PowerPact H- and J-Frame Thermal Magnetic Circuit Breakers**

Amps	Special Low Mags		li on Label	Mag Suffix	Interrupting Rating							
	Hold ▼	Trip ▼			D		G		J		L	
					Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price
70	400	850	625	H83	HDL36070H83	1594.00	HGL36070H83	2041.00	HJL36070H83	2519.00	HLL36070H83	3779.00
80	400	850	625	H83	HDL36080H83	1594.00	HGL36080H83	2041.00	HJL36080H83	2519.00	HLL36080H83	3779.00
90	400	850	625	H83	HDL36090H83	1594.00	HGL36090H83	2041.00	HJL36090H83	2519.00	HLL36090H83	3779.00
100	400	850	625	H83	HDL36100H83	1594.00	HGL36100H83	2041.00	HJL36100H83	2519.00	HLL36100H83	3779.00
110	400	850	625	H83	HDL36110H83	3120.00	HGL36110H83	4319.00	HJL36110H83	6209.00	HLL36110H83	8099.00
125	800	1450	1125	H84	HDL36125H84	3120.00	HGL36125H84	4319.00	HJL36125H84	6209.00	HLL36125H84	8099.00
Amps	Special High Mags		li on Label	Mag Suffix	D		G		J		L	
	Hold ▼	Trip ▼			Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price
90	900	1700	1300	H85	HDL36090H85	1594.00	HGL36090H85	2041.00	HJL36090H85	2519.00	HLL36090H85	3779.00
Amps	Special Low Mags		li on Label	Mag Suffix	D		G		J		L	
	Low ▲	High ▲			Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price
150	875L	1750H		H29	JDL36150H29	3276.00	JGL36150H29	4535.00	JJL36150H29	6518.00	JLL36150H29	8503.00
200	1250L	2500H		H32	JDL36200H32	3276.00	JGL36200H32	4535.00	JJL36200H32	6518.00	JLL36200H32	8503.00

- ▼ Hold and Trip indicate fixed magnetic trip levels
- ▲ Low and High refer to adjustable mag level setting.

**Table 3.58: H- and J-Frame Interrupting Ratings**

Voltage	Interrupting Rating			
	D	G	J	L
240 Vac	25 kA	65 kA	100 kA	125 kA
480 Vac	18 kA	35 kA	65 kA	100 kA
600 Vac	14 kA	18 kA	25 kA	50 kA

Accessories ..... Page 11-30  
Optional Lugs ..... Page 11-25  
Dimensions ..... Page 11-4



Adjustable instantaneous-trip circuit breakers are intended for use in combination with motor starters with overload relays for the protection of motor circuits from short circuits. Other specific applications include rectifiers and resistance welders. These circuit breakers contain a magnetic trip element in each pole with the trip point adjustable from the front. Interrupting ratings are determined by testing the instantaneous-trip circuit breakers in combination with a contactor and overload relay.

Select instantaneous-trip circuit breakers as follows:

This selection table is suitable for motors, other than NEMA Design E, with locked-rotor indicating code letters per NEC® Table 430.7 (b) as follows:

**Table 3.59: Locked-Rotor Indicating Codes**

Horsepower	Motor Code letter
1/2 or less	A-L
3/4 to 1-1/2	A-K
2 to 3	A-J
5 to 25	A-H
30 to 125	A-G
150 or more	A-F

- For other motors order a special thermal-magnetic circuit breaker with magnetic trip settings for the specific motor—specify motor horsepower, voltage, frequency, full-load current and code letter or locked rotor current.

- Determine motor hp rating from the motor nameplate.
- Refer to the tables and select an instantaneous-trip circuit breaker with an ampere rating recommended for the hp and voltage involved.
- Select an adjustable trip setting of at least 800%, not to exceed 1300%, of the motor full-load amperes (FLA) for other than Design E motors. For Design E motors, select an adjustable trip setting of at least 1100% not to exceed 1700% of FLA.
- The NEC 1300% maximum setting may be inadequate for instantaneous-trip circuit breakers to withstand current surges typical of the magnetization current of autotransformer type reduced voltage starters, or open transition wye-delta starters during transfer from “start” to “run,” constant hp multi-speed motors, and motors labeled “high efficiency.” Select thermal-magnetic circuit breakers from Digest page 7-32 for those applications.
- Part-winding motors, per NEC 430.3, should have two circuit breakers selected from the above at not more than one half the allowable trip setting for the horsepower rating. The two circuit breakers should operate simultaneously as a disconnecting means per NEC 430.103.
- Based on NEC 430.52 and NEC Table 430.150. See Digest page 7-30 for a available Adjustable Instantaneous-Trip Circuit Breakers.

**Table 3.60: GJL Adjustable Instantaneous-Trip Circuit Breakers for Single Motor Circuit Protection**

Hp Ratings of Induction Type Squirrel-Cage and Wound Rotor Motors				Full Load Amperes <sup>▲</sup>	GJL Family Mag-Gard Circuit Breaker Cat. No.	Magnetic Trip Settings <sup>■</sup>		Hp Ratings of Induction Type Squirrel-Cage and Wound Rotor Motors				Full Load Amperes <sup>▲</sup>	GJL Family Mag-Gard Circuit Breaker Cat. No.	Magnetic Trip Settings <sup>■</sup>	
3Ø 60 Hz						MIN	MAX	3Ø 60 Hz						MIN	MAX
200 Vac	230 Vac	460 Vac	575 Vac					200 Vac	230 Vac	460 Vac	575 Vac				
1/2	3/4	1/2	1/2	0.8	GJL36003M01◆	1100%	4100%	7-1/2	7-1/2	10	9	GJL36015M03	500%	1800%	
			3/4	1.1	GJL36003M01◆	900%	3300%				9.6	GJL36015M03	500%	1700%	
		1	1-1/2	1	1.4	GJL36003M01◆	800%			3000%	11	GJL36015M03	400%	1500%	
				1-1/2	1.8	GJL36003M01◆	600%			2400%	14	GJL36030M04	600%	2400%	
			2	2	2	2.1	GJL36003M01◆			500%	1800%	15.2	GJL36030M04	600%	2200%
					2	2.3	GJL36003M01◆			500%	1700%	17	GJL36030M04	500%	1900%
	3/4	2	1-1/2	2	2.1	GJL36003M01◆	400%		1600%	17.5	GJL36030M04	500%	1900%		
				2	2.3	GJL36003M01◆	400%		1400%	21	GJL36030M04	400%	1600%		
				2	2.6	GJL36003M01◆	300%		1300%	22	GJL36030M04	400%	1500%		
		1	2	2	2.7	GJL36003M01★	300%		1200%	25.3	GJL36030M04	400%	1300%		
					2.8	GJL36003M01★	300%		1200%	27	GJL36050M05	600%	2000%		
					3.2	GJL36007M02	700%		2400%	28	GJL36050M05	500%	2000%		
1	1	3	3.4	GJL36007M02	600%	2300%	32	GJL36050M05	500%	1700%					
			3.6	GJL36007M02	600%	2100%	32.2	GJL36050M05	500%	1700%					
			3.9	GJL36007M02	500%	2000%	34	GJL36050M05	400%	1600%					
	1-1/2	3	3	4.1	GJL36007M02	500%	1900%	40	GJL36050M05	400%	1400%				
				4.8	GJL36007M02	400%	1600%	41	GJL36050M05	400%	1300%				
				5.2	GJL36007M02	400%	1500%	42	GJL36075M06	400%	1300%				
2	2	5	6	GJL36007M02	400%	1300%	48.3	GJL36075M06	500%	1700%					
			6.1	GJL36015M03	700%	2700%	52	GJL36075M06	400%	1600%					
			6.8	GJL36015M03	700%	2400%	54	GJL36075M06	400%	1500%					
	5	5	5	7.6	GJL36015M03	600%	2200%	62	GJL36075M06	400%	1300%				
				7.8	GJL36015M03	600%	2100%	65	GJL36075M06	300%	1300%				

▲ Motor full-load currents are taken from NEC Table 430.150. Select wire and circuit breakers on basis of horsepower rather than nameplate full-load current per NEC 430.6 (A) for general motor applications. Do not use these values to select overload relay thermal units. See Digest pages 14-129–14-152 for selection of thermal units when actual full load current is not known. The voltages listed are rated motor voltages. Corresponding nominal system voltages are 200–208, 220–240, 440–480 and 550–600 V.


■ Only MIN and MAX settings are shown, intermediate settings are available on all circuit breakers.

◆ See NEC 430.52(A) for circuit breaker settings above 800%.


★ If due to motor starting characteristics, trip settings at the 1300% maximum permitted level are needed, the next size Mag-Gard circuit breaker should be chosen.



Plug-on Connector



Bolted Connector



**Bolt-On I-Line™**

(20% Price Adder)

The standard I-Line circuit breaker is designed to provide a high quality, secure connection between the distribution bus and circuit breaker. I-Line circuit breakers use plug-on type line-side connectors. The parallel line-side connectors “clamp” around the bus bars. In case of a short circuit, the increased magnetic flux causes the connectors to grasp the bus bars even tighter. I-Line circuit breakers with bolted connections have clamp-on jaws that are bolted around the main bus, as shown. The bolt-on I-Line design is offered as an alternative in order to meet specifications requiring a bolted connection. Bolt-on I-Line construction is available on FY, QB, QD, QG, QJ, Q4, FA, FH, FI, KI, LA, and LH frame circuit breakers and molded case switches, and SL100, SL225 and SL400 sub-feed lugs.

To order on all products except QB, QD, QG and QJ, simply add the letter “B” in the catalog number prefix of the circuit breaker, e.g., FA36100 becomes FAB36100. For QB, QD, QG and QJ, insert the letter “E” in the third position, e.g., QBE, QDE, etc.

**NOTE:** Not available on PowerPact™ circuit breakers.

**Top-Feed I-Line**

(No Additional Charge)

I-Line panelboards may require the use of a top-feed I-Line circuit breaker in applications where a top-feed main circuit breaker is required. This involves having the I-Line jaw connectors on the OFF end of the circuit breaker, as opposed to the standard location on the ON end of the circuit breaker. To designate this construction, simply place the suffix “MT” at the end of the circuit breaker catalog number, e.g., FA36100 becomes FA36100MT. On LA or LH top-feed I-Line circuit breakers, accessories must be factory installed. This option is available in PowerPact™ H and J-frame by placing a “K” in the 4th position (termination indicator) of the circuit breaker catalog number, e.g., HGA36125 becomes HGK36125. This option is not available on L-frame (600 A only), M-frame, N-Frame or Powerpact M-, P- and R-frame.

**“CBA” I-Line Jaw Configuration (Non-PowerPact Circuit Breaker)**

(No Additional Charge)


Standard 1-pole and 2-pole I-Line circuit breakers are ordered by designating the required phase connection letters as a suffix to the circuit breaker catalog number. 3-pole circuit breakers do not require this phase designation and are supplied with an “ABC” phase jaw configuration as standard. In most applications this is acceptable since the phase loading is evenly distributed. In applications where the phases must be reversed it is possible to order a “CBA” jaw configuration by simply placing the letters “CBA” at the end of the standard catalog number, e.g., FA36100 becomes FA36100CBA.

**Control Wire Tap Lugs**


(No Additional Charge if Field Installed; 20% Price Adder if Factory Installed)

Control wire tap lugs are used in applications requiring connection to a small wire (22-14 AWG) for control circuits. This is accomplished by crimping the wire to a standard wire crimp terminal (not included) and fastening the terminal to the circuit breaker lug. On LA lugs, the lug is drilled to accept a 6-32 screw (included) to secure the crimp connector. On FA lugs, a flat slip-on crimp connector is used to attach to a shim-like connector placed under the circuit breaker lug.

**Note:** To order as a factory-installed device on FA, FH, FI, KI, Q4, LA, LH, LC, LI, LXI, LX or LC circuit breakers, add suffix number 8041 to circuit breaker catalog number, e.g., KIL362258041. To order as a factory-installed device on MG, MJ, PG, PJ, PL RG, RJ and RL use the product selector or the respective PowerPact catalog. Tapped lugs will be installed on the “ON” and “OFF” ends of the circuit breaker.

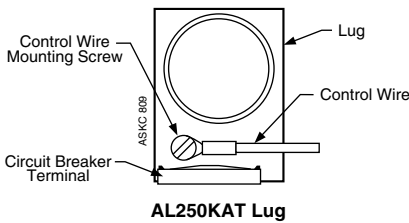

**AL250KAT Lug**

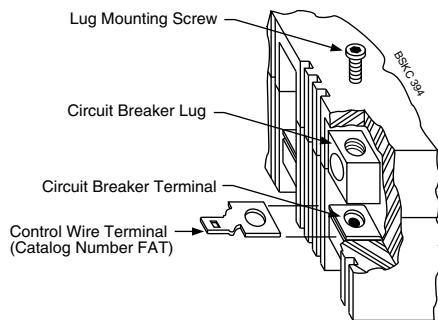

**Table 3.61: Control Wire Terminations for Circuit Breakers**

Circuit Breaker	Control Wire Termination Kits			
	Cat. No.	Standard Package Quantity	\$ Price Per Lug	Factory Installed \$ Price (Suffix 8041)
FA, FH, FI	FAT▲	1	8.40	Add 20% to price of circuit breaker
KI	AL250KIT	1	113.00	
Q4, LA, LH	AL400LAT	1	40.80	
LC, LI, LXI, LX, LE	AL600LI35T	1	53.00	
	AL600LI5T	1	44.60	
MA, MH, MX, ME	AL900MAT	1	111.00	
	AL1000MAT	1	111.00	
NA, NC, NX, NE	AL1200NE6T	1	228.00	

▲ Use fully-insulated 0.250 in slip-on connectors.

**Table 3.62: Tapped Lugs for PowerPact™ Circuit Breakers**

Circuit Breaker	Amperes Max.	Kit Cat. No.	Standard Package Qty.	\$ Price Per Kit
MG, MJ, PG, PJ, PL	800 A	AL800M23TK	3	312.00
		AL800P6TK	3	458.00
PG, PJ, PL	800 A	AL800M23TK4	4	414.00
		AL800P6TK4	4	608.00
		AL1200P24TK	1	138.00
	1200 A	AL1200P25TK	3	416.00
		AL1200P25TK4	4	555.00
		AL1200R53TK■	1	237.00
RG, RJ, RL	1200 A			

■ I-Line Only.

MOLDED CASE CIRCUIT BREAKERS

3

### Special Magnetic or Thermal Calibration

(20% Price Adder)

#### Magnetic

The magnetic trip ranges for standard circuit breakers are listed in the Square D Digest. Requirements outside this range are best accommodated by selecting another standard circuit breaker. In some cases where this is not practical, a circuit breaker may be ordered with special magnetic calibration. Special magnetic calibration is not possible in all cases. Circuit breakers with special magnetic calibration and an **adjustable** magnetic trip range are **not** UL Listed; those with a **fixed** magnetic trip setting are UL Listed. Consult Schneider Electric local sales office for more information.

#### 50 Degrees C

UL 489 Listed molded case circuit breakers are calibrated for 40 degree C ambient temperature. To meet requirements of higher ambient conditions, circuit breakers can be factory calibrated for a 50 degree C ambient temperature. Circuit breakers with special thermal calibration are not UL Listed. To order 50° calibration, add "35" suffix to FA/FH/LA/LH or CA to H or J thermal magnetic breakers and add 20% to the List price of the breaker. Consult local sales office for more information.

### Rear-Connected Studs

Rear-connected studs are designed to allow rear termination in applications such as control panels where wire gutter space may be limited. The studs may be bolted directly to the bus or lugs may be attached to the studs.

**NOTE:** Long and short studs must be alternated on adjacent poles to assure proper electrical clearance

Rear-Connected Studs



**Table 3.63: Rear-Connected Studs—Not UL Listed**

Circuit Breaker Cat. No. Prefix	Ampere Ratings	Stud Cat. No.	Dimensions				\$ Price Per Stud
			Overall Length	To Back of Circuit Breaker	Diameter	Threads/Inch	
FAL, FHL	15–100 A	FAS20	2-1/4 in.	2 in.	3/8 in.	16	70.00
FAL, FHL	15–100 A	FAS42	4-7/8 in.	4-1/4 in.	3/8 in.	16	92.00
LAL, LHL	125–400 A	LAS54	6-3/16 in.	5-1/2 in.	3/4 in.	16	243.00
LAL, LHL	125–400 A	LAS114	12-3/16 in.	11-1/2 in.	3/4 in.	16	360.00

Note: Use alternate size studs on adjacent poles to obtain proper electrical clearance.

Visi-Blade Circuit Breaker



### Visi-Blade™ Circuit Breakers

(20% Price Adder)

Visi-blade construction is a modification to the cover of a thermal-magnetic circuit breaker, a molded case switch, or a Mag-Gard™ circuit breaker which provides a "window" through which the position of the movable contacts can be verified. Luminescent paint is applied to the movable contact arms to clearly indicate their position. Gases produced during high level interruption may cause clouding of the Visi-blade window. Visi-Blade circuit breakers listed below are UL Listed except for FH circuit breakers. Visi-Blade construction is not available on circuit breakers not included in table below.

Add suffix letter "V" to the circuit breaker catalog number, i.e., FAL 36100V.

**Table 3.64: Available Visi-Blade Circuit Breakers**

Circuit Breaker Prefix	Amperes	\$ Price
FA, FH▲■	15–100 A	20% Price Adder
LA, LH	125–400 A	

- ▲ FH circuit breaker is not UL Listed.
- Not available on 1P FA/FH circuit breakers.

### Moisture and Fungus Resistant Treatment for Circuit Breakers

(20% Price Adder)

This treatment covers the application of moisture and fungus resistant varnish to circuit breakers and molded case switches.

- The varnish meets Military Specification MIL-V-173C VARNISH, MOISTURE AND FUNGUS RESISTANT.
- The treatment meets military Specification MIL-T-152E TREATMENT, MOISTURE AND FUNGUS-RESISTANT, OF COMMUNICATIONS, ELECTRONIC, AND ASSOCIATED ELECTRICAL EQUIPMENT.

The treatment of circuit breakers in accordance with said specifications is intended to protect them against the moisture and fungus condition encountered in service by retarding the absorption of moisture and inhibiting the growth of fungi.

To order for F- and L-frame circuit breakers, place the suffix "FT" at the end of the circuit breaker catalog number, e.g., FAL36100 becomes FAL36100FT. To order for QB, QD, and QG circuit breakers, place the suffix "YF" at the end of the circuit breaker catalog number, e.g., QDL32150 becomes QDL32150YF. ED, EG, EF, GJL, PowerPact™ D-, H-, J-, M-, P- and R-frame circuit breakers are inherently fungus resistant and need no further treatment.

### Short Handle for LA/LH Circuit Breakers (No Additional Charge)

Certain applications of the LA/LH circuit breakers (as mains in particular panelboards) require the use of a slightly shorter operating handle. For ordering information refer to the chart below.

**Table 3.65: Catalog Numbers for Short Handle LA/LH Circuit Breakers**

Lug Configuration Desired		Catalog "Prefix Indication"	Catalog "Suffix Indication"	Circuit Breaker Cat. No.
ON End	OFF End			
Lugs	Lugs	"L"	"MB"	LAL36400MB
No Lugs	Lugs	"P"	"MB"	LAP36400MB
Lugs	No Lugs	"P"	"MT"	LAP36400MT
No Lugs	No Lugs	"F"	"MB"	LAF36400MB

**P-Frame Replacement Handle**

Replacement handle assemblies for PA, PC, PE, PX and PH circuit breakers (produced after March 1975) are available.

**Table 3.66: P-Frame Replacement Handle**


Circuit Breaker Cat. No. Prefix	Replacement Handle Cat. No.	\$ Price
PAF, PAE, PHF, PHE, PCF, PEC, PEF, PXF	HRPA	111.00

**P-Frame Key Interlock Adapter Plate**

PAKK Kit – An adapter plate that is added under the circuit breaker handle to allow mechanical interlocking with a key interlock (not included). The kit includes all the necessary hardware to mount onto the circuit breaker handle.

**Table 3.67: P-Frame Key Interlock Adapter Plate**

Cat. No.	\$ Price
PAKK	185.00

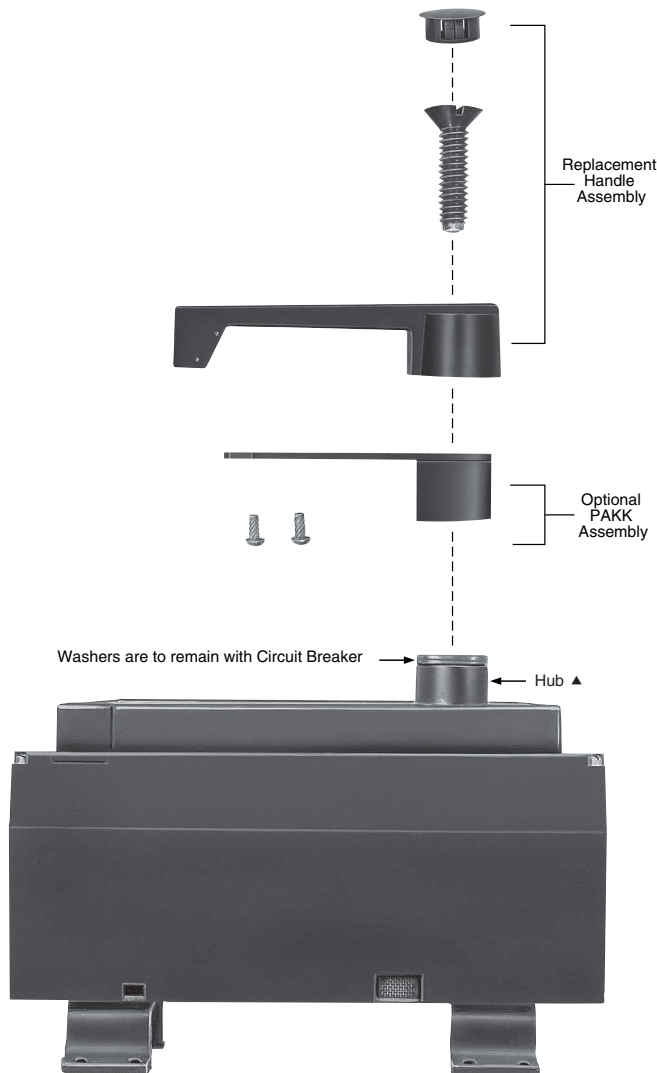

▲ The "hub" under normal conditions is insulated. When the phenolic handle is removed, a label is exposed warning of the hub being energized. That can only happen if a short circuit or severe overload occurs. The ionized gasses inside the circuit breaker could momentarily (1-2 cycles) put a high voltage potential on the hub.

**Exchange Guarantee Prices, Permanent Trip Molded  
Case Circuit Breakers**

When a Square D permanent trip circuit breaker is supplied to meet a specification requiring an interchangeable trip unit, it may be exchanged for another circuit breaker of the same type with a different trip setting.

When entering an order for the replacement circuit breaker:

1. Reference "Exchange Price Guarantee" as a line item marking on the replacement order. The replacement order will be billed at normal authorized selling net price.
2. Request Return Material Authorization referencing "Exchange Price Guarantee" and the replacement exchange price guarantee invoice number.

When the circuit breaker is returned to Cedar Rapids, credit will be issued for the difference between the replacement net price billed and the exchange list price (from the table below) times the same multiplier used on the replacement order. The list price used to determine credit will be based on the highest trip setting of the circuit breakers involved in the exchange.

Only those circuit breaker types below are eligible for this exchange guarantee program.

**Table 3.68: Exchange Guarantee Circuit Breakers**

Circuit Breaker Type	Trip Range	Exchange List \$ Price
LA	All	2465.00
LH	All	4055.00
LC	All	4434.00

### Lug Deletion (No Additional Charge)

In some applications, the circuit breaker does not require lugs on one or both ends. To meet this requirement, the circuit breaker should be ordered with the desired lug configuration as indicated below. If necessary, lugs may be removed in the field. However, if lugs are removed in the field, circuit breaker **Types** FH, FC, Q4 LA and LH must be secured with pan-mounting screws, or have "P" screws (cover screws and nuts) installed securing the base to the cover.

**Table 3.69: Lug Configuration▲**

ON End	OFF End	Circuit Breaker Prefix – Suffix
Lugs	Lugs	(e.g., FAL36100)
No Lugs	No Lugs	(e.g., FAE36100)
No Lugs	Lugs	(e.g., FAP36100)
Lugs	No Lugs	(e.g., FAP36100MT)


- ▲ See information on termination kits below
- MT suffix also required (except for PowerPact™).

### Termination Insert Kits

The standard lugs supplied with EDB, EGB, EJB, and FJA circuit breakers and molded case switches are secured by means of a screw fastened through the circuit breaker terminal into the lug body. If the standard lug is removed and a bolted connection to the circuit breaker terminal pad is desired, a threaded insert kit is required. The insert is installed below the terminal pad. For ordering information see chart below.


**Table 3.70: Termination Kit Inserts**

Kit Cat. No.	Inserts Per Kit	Circuit Breakers	\$ Price Per Kit
TIKFD	3	EDB, EGB, EJB, FJA	17.40

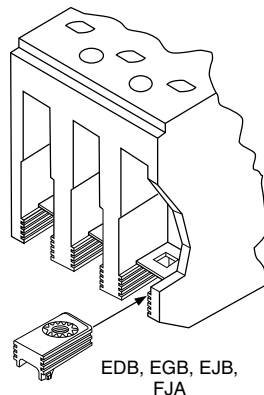

### LC, LI, LE, LX and LXI Circuit Breaker Termination Clip Kit

The standard lugs supplied with LC, LI, LE, LX and LXI circuit breakers are secured by means of a screw fastened through the circuit breaker terminal into the lug body. If the standard lug is removed and a bolted



**LC, LI, LE, LX and LXI Circuit Breakers**

connection to the circuit breaker terminal is desired, the AL600IN threaded terminal clip kit is required to make this connection. The AL600IN clip snaps onto the bottom of the terminal. For ordering information, see chart below.

**Table 3.71: Termination Clip Kit**

Kit Cat. No.	Clips Per Kit	Circuit Breakers	\$ Price Per Kit
AL600IN	3	LC, LI, LE, LX, LXI	65.00

### Electric Joint Compound

I-Line™ circuit breakers, I-Line busway plug-on units, I-Line panelboards and switchboards, QMB plug-on switches and motor control center plug-on units are supplied with factory applied joint compound on the plug-on connectors. The compound should not be removed because it contributes to the overall performance of the connection.



Whenever one of these units is removed and reinstalled, the joint compound should be reapplied. Catalog number PJC 7201 is a two-ounce container of compound specially formulated for the I-Line, QMB and motor control center connections.

No other type of commercially available joint compound should be used.


**Table 3.72: Electric Joint Compound**

Use With	Cat. No.	\$ Price
I-Line Circuit Breakers, QMB Plug-On Units, or Model-V MCC Units	PJC7201	19.80
SED Drawout Circuit Breakers	PJC8311	42.80


**Circuit Breakers for Grounded B-Phase (BØ)  
(Corner-Grounded Delta) Systems (No Additional  
Charge)**

**Ordering Information For Grounded BØ Circuit Breakers**

1. There is no additional charge for grounded BØ circuit breakers.
2. For use on 480 V systems, FH and LH type circuit breakers must be ordered as 600 V versions and with a 5861 suffix (i.e. FHL361005861).
3. For use on 240 V systems, FH type circuit breakers may be ordered as 480 V versions with a 5861 suffix (i.e. FHL341005861).
4. FA and LA type circuit breakers are not available with grounded B phase markings.
5. Two-pole 240 V grounded B-phase circuit breakers (except EDB, EGB, EJB, QB, QD, QG, and QJ) will be built using three-pole modules.
6. Two-pole grounded BØ circuit breakers will be labeled with 240 Vac interrupting ratings.
7. No self-certification is available for interrupting ratings greater than shown in the tables below.

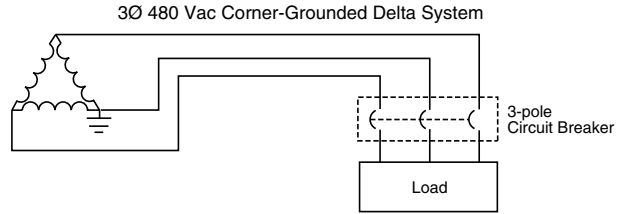

**NOTE:** Three-pole circuit breakers must be used on three-phase 480 V corner-grounded delta systems. The outside poles are to be connected to the ungrounded phase and the grounded conductor connected to the center pole. Connecting the circuit breaker in a manner other than that described or shown may result in an unsafe application of the circuit breaker.

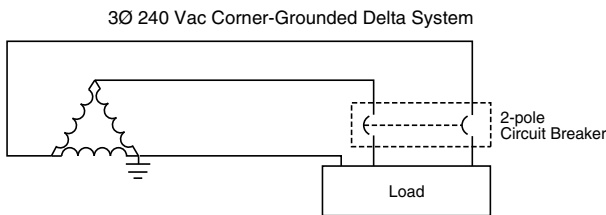

**Table 3.74: Application Data for 240 Vac 3Ø Corner-Grounded Delta System**

Cat. No. Prefix	Poles	UL Listed Interrupting Rating	
		Ampere Rating	240 Vac Interrupting Rating
QO-H, QOB-H	2	15–100 A	5 kA
QB, QD, QG, QJ	2▲	70–250 A	10 kA
EDB, EGB, EJB	2▲	15–125 A	18 kA, 35 kA, 65 kA
HD, HG, HJ, HL	2▲	15–150 A	42 kA, 42 kA, 65 kA, 100 kA
JD, JG, JJ, JL	2■	150–250 A	42 kA
FH, FHL	2■	15–100 A	30 kA
LH, LHL	2■	125–400 A	65 kA
MG, MJ Electronic Trip Unit	2◆■	300–800 A	65 kA
PG, PJ, PK, PL Electronic Trip Unit	2◆◆	600–1200 A	65 kA
RG, RK Electronic Trip Unit	2◆◆	1200–2500 A	35 kA, 65 kA
RJ Electronic Trip Unit	2◆◆	1200–2500 A	100 kA
RL Electronic Trip Unit	2◆◆	1200–2500 A	125 kA

- ▲ Standard labeling includes grounded B phase.
- Built using 3P module.
- ◆ Electronic = ET1.0 Electronic Trip System  
Micrologic = 3.0, 5.0, 3.0A, 5.0A, 6.0A, 5.0P, 6.0P, 5.0H and 6.0 H Micrologic Trip System.

**Table 3.73: 480 Vac 3Ø Corner-Grounded Delta System**

Cat. No. Prefix	Poles	UL Listed Interrupting Rating	
		Ampere Rating	480 Vac Interrupting Rating
HD, HG, HJ, HL	3	15–150 A	18 kA, 35 kA, 65 kA, 100 kA
JD, JG, JJ, JL	3	150–250 A	10 kA
FH, FHL	3	15–100 A	14 kA
LH, LHL	3	125–400 A	18 kA, 35 kA, 65 kA, 100 kA
LD, LG, LJ, LL Electronic Trip Unit	3	250–600 A	35 kA
MG, MJ Electronic Trip Unit	3★	300–800 A	65 kA, 100 kA
PG, PK Electronic Trip Unit	3★	600–1200 A	35 kA, 50 kA
PG, PK Micrologic Trip Unit	3★	250–1200 A	
PJ, PL Electronic Trip Unit	3★	600–1200 A	
PJ, PL Micrologic Trip Unit	3★	250–1200 A	
RG, RJ, RK, RL Electronic Trip Unit	3★	1200–2500 A	35 kA, 65 kA, 65 kA, 100 kA
RG, RJ, RK, RL Micrologic Trip Unit	3★	600–2500 A	100 kA
NT	3	800–1200	150 kA
NW	3	800–6000	

- ◆ The grounded phase should be connected through the center pole only.
- ★ Electronic = ET1.0 Electronic Trip System  
Micrologic = 3.0, 5.0, 3.0A, 5.0A, 6.0A, 5.0P, 6.0P, 5.0H and 6.0 H Micrologic Trip System.



For use on vessels over 65 ft. (19,8 m) in length

### UL Marine Listed/CSA Certified Circuit Breakers (UL 489 Supplement SA)

PowerPact H and J circuit breakers with thermal magnetic trip units meet the UL 489 SA requirements on vessels of any length under or over 65 ft. (19.8m). PowerPact H, J, and L circuit breakers with Micrologic trip units meet the UL 489 Supplement SA requirements for use on vessels over 65 ft. (19.8m) in length. Marine circuit breakers must not use aluminum or aluminum alloys for terminal connections and must be calibrated at an ambient temperature of 104°F (40°C). Standard circuit breakers should not be specified or used in place of marine rated circuit breakers.

Circuit breakers can be ordered with the Marine SA listing by adding the suffixes of "LC" (copper lugs) and "YA" (marine) to the catalog number.

**Table 3.75: Circuit Breakers for Marine Applications**

Cat. No. Prefix	Poles	Ampere Rating	Application	Cat. No.	\$ Price
FA, FAL	2 3	15-100 A	For use only on vessels over 65 feet (19.8 m) in length.	Add the number "9" after the catalog number prefix of the standard circuit breaker catalog number.  Example: Standard FAL36100 Marine FAL936100	There is a 20% adder to the price of the equivalent standard circuit breaker. All marine circuit breakers are supplied with copper lugs.
FH, FHL	2, 3	15-100 A			
FI, FIL	2, 3	20-100 A			
KI, KIL	2, 3	110-250 A			
LA, LAL	2, 3	125-400 A			
LH, LHL	2, 3	125-400 A			
PowerPact™ HD, HG, HJ, HL▲	2, 3	15-150 A	For use on vessels over and under 65 feet (19.8 m) in length.	Add suffix for Copper Lugs (LC) and "YA" after the standard circuit breaker catalog number.  Example: Standard HGL36100 Marine HGL36100LCYA	
PowerPact JD, JG, JJ, JL▲	2, 3	150-250 A	For use on vessels over 65 feet (19.8m) in length.		
PowerPact HD, HG, HJ, HL, HR■	2, 3	15-150 A			
PowerPact JD, JG, JJ, JL, JR■	2, 3	150-250 A	For use only on vessels over 65 feet (19.8 m) in length.		
PowerPact LD, LG, LJ, LL, LR	3, 4	250-600 A			
PowerPact MG, MJ	2, 3	300-800 A			
PowerPact PG, PJ, PL	2, 3, 4	100-1200 A	For use only on vessels over 65 feet (19.8 m) in length.		
PowerPact RG, RJ, RL	2, 3, 4	600-2500 A			

- ▲ Thermal-Magnetic trip units only.
- Micrologic trip units only.

### UL Naval Listed/CSA Certified Circuit Breakers (UL 489 Supplement SB)

PowerPact H, J, and L circuit breakers with Micrologic trip units meet the UL 489 Supplement SB requirements for naval vessels. These circuit breakers are subject to various vibration testing as described in UL 489 Supplement SB. Naval circuit breakers must not use aluminum or aluminum alloys for terminal connections and are calibrated at an ambient temperature of 122°F (50°C). Standard circuit breakers should not be specified or used in the place of naval rated circuit breakers.







Circuit breakers can be ordered with the Naval SB listing by adding the suffixes of "LC" (copper lugs) and "YA1" (naval) to the catalog number.

**Table 3.76: Circuit Breakers for Navel Applications**

Cat. No. Prefix	Poles	Ampere Rating	Application	Cat. No.	\$ Price
HD, HG, HJ, HL▲	2, 3	15-150 A	For use on non-combat and auxiliary naval ships of any length.	Add suffix for Copper Lugs (LC) and "YA1" after the standard circuit breaker catalog number.  Example: Standard HGL36100 Marine HGL36100LCYA1	There is a 20% adder to the price of the equivalent standard circuit breaker. All marine circuit breakers are supplied with copper lugs.
JD, JG, JJ, JL▲	2, 3	150-250 A			
LD, LG, LH, LL	3, 4	250-600 A			

- ▲ With Micrologic trip units only thermal-magnetic breakers not approved.

**Table 3.77: Electrical Accessories**

Accessory	Description	Rated Voltage	G-Frame		D-Frame		\$ Price	\$ Price	
			Field-Installable Cat. No.	\$ Price	Factory-Installed Cat. Suffix	Field-Installable Cat. No.			
<b>Auxiliary and Alarm Switches (OF, SD, SDE)</b>   D-Frame  G-Frame	Provides circuit breaker contact status.  Note: The location of the accessory in the circuit breaker determines its function.	Standard Min Load = 10mA with 24V	1 auxiliary switch (OF) 1a1b	AAC	297.00	AA	S29450	297.00	297.00
			2 auxiliary switch (OF) 2a2b	—	—	AB	2x S29450	594.00	594.00
			3 auxiliary switch (OF) 3a3b	—	—	AC	3x S29450	891.00	891.00
			Alarm Switch (SD) 1a1b	AAC	297.00	BC	S29450	297.00	297.00
			Overcurrent trip switch (SDE) 1a1b	—	—	BD	S29450	297.00	297.00
			Consisting of:	—	—	—	—	—	—
		OF Switch	—	—	—	—	—	—	
		SDE Adapter	—	—	—	—	—	—	
		Alarm switch and Overcurrent trip switch	—	—	BE	2x S29450	594.00	594.00	
		Consisting of:	—	—	—	—	—	—	
		OF Switch	—	—	—	—	—	—	
		SDE Adapter	—	—	—	—	—	—	
Auxiliary Switch/Alarm Switch/Adapter (OF/SD/SDE) Kit	—	—	—	—	—	—	297.00		
Low Level Min Load = 1mA with 24V	One auxiliary switch (OF) 1a1b	—	—	AE	S29452	372.00	372.00		
	Two auxiliary switches (OF) 2a2b	—	—	AF	2x S29452	744.00	744.00		
	3 auxiliary switches (OF) 3a3b	—	—	AG	3x S29452	1116.00	1116.00		
	Alarm Switch (SD) 1a1b	—	—	BH	S29452	372.00	372.00		
	Overcurrent trip switch (SDE) 1a1b	—	—	BJ	S29452	372.00	372.00		
	Consisting of:	—	—	—	—	—	—		
OF Switch	—	—	—	—	—	—			
SDE Adapter	—	—	—	—	—	—			
Alarm switch and Overcurrent trip switch	—	—	BK	2x S29452	744.00	744.00			
Consisting of:	—	—	—	—	—	—			
OF Switch	—	—	—	—	—	—			
SDE Adapter★	—	—	—	—	—	—			
<b>Shunt Trip (MX)</b>   D-Frame  G-Frame	Trips the circuit breaker from a remote location by means of a trip coil energized from a separate supply voltage circuit.	AC	24	—	—	SK	S29384	717.00	755.00
			48	—	—	SL	S29385		
			120	GSA	—	—	—		
			110/130	—	—	SA	S29386		
			208	GSB	—	—	—		
			240	GSC	—	—	—		
		200/250	—	—	—	—			
		277	GSD	—	—	—			
		208/277	—	—	SD	S29387			
		480	GSH	—	—	—			
		380/480	—	—	SH	S29388			
		525/600	—	—	SJ	S29389			
		DC	12	—	—	SN	S29382	717.00	755.00
			24	GSO	—	SO	S29390		
			30	—	—	SU	S29391		
			48	GSP	—	SP	S29392		
			60	—	—	SV	S29383		
			125	GSR	—	SR	S29393		
250	GSS	—	SS	S29394					
<b>Undervoltage Trip</b>   D-Frame  G-Frame	Instantaneously opens the circuit breaker when the under-voltage trip supply voltage drops to a value between 35% and 70% of its rated voltage. Closing is allowed when the supply voltage of the undervoltage trip reaches 85% of rated voltage.	AC	24	—	—	UK	S29404	717.00	755.00
			48	—	—	UL	S29405		
			120	GUA	—	—	—		
			110/130	—	—	UA	S29406		
			208	GUB	—	—	—		
			240	GUC	—	—	—		
		200/250	—	—	—	—			
		277	GUD	—	—	—			
		208/277	—	—	UD	S29407			
		480	GUH	—	—	—			
		380/480	—	—	UH	S29408			
		525/600	—	—	UJ	S29409			
DC	12	—	—	UN	S29402	717.00	755.00		
	24	GUO	—	UO	S29410				
	30	—	—	UU	S29411				
	48	GUP	—	UP	S29412				
	60	—	—	UV	S29403				
	125	GUR	—	UR	S29413				
250	GUS	—	US	S29414					

- ▲ Field-installable kit includes time delay module only. Order undervoltage trip separately.
- Discount schedule DE2F.
- ◆ P-frame drawout circuit breaker only.
- ★ SDE Adapter used for H- and J-frame only.

**3 MOLDED CASE CIRCUIT BREAKERS**


**Factory-Installed Electrical Accessories**

Electrical accessories are available on all molded case circuit breakers except FY and QOM1 circuit breakers.


- Alarm switch is the only accessory available for the 1-pole FA circuit breaker.
- Combination accessories may be ordered by description, i.e., 1021 and 1212.
- All AC electrical accessories shown below are rated for 50/60 Hz.
- Add 20% to accessory price for each field-installable accessory that is factory-installed.
- See page 3-25 for field-installable accessories. See Digest page 7-35 for PowerPact™ circuit breaker accessories.

**1A Alarm Switch Configuration**

Color Code: Red Leads




Circuit Breaker Open or Closed




Circuit Breaker Tripped

**1B Alarm Switch Configuration**

Color Code: Red Leads



Circuit Breaker Tripped




Circuit Breaker Open or Closed


**Auxiliary Switch Contact Configuration**

Color Code:  
"A" Contact - Yellow Leads  
"B" Contact - Blue Leads  
Common-Striped Leads

1A/1B



Circuit Breaker Closed




Circuit Breaker Open or Tripped

**Table 3.78: Factory-Installed Accessories for Thermal-Magnetic Circuit Breakers**

Accessory	Description	Rated Voltage	Coil Burden ▲	Suffix	\$ Price Adder						
Shunt Trip	Trips the circuit breaker from a remote location by means of a trip coil energized from a separate circuit. A 120 V shunt trip will operate at 55% or more of rated voltage. All other shunt trips will operate at 75% or more of rated voltage.  <b>Application</b> <ul style="list-style-type: none"> <li>• For use with momentary or maintained push button.</li> <li>• Sure Trip Capacitor Unit requires 48 Vdc shunt trip.</li> <li>• Leads: (2) Black 18 AWG Cu.</li> </ul>	24 Vac	21 VA	-1042■	755.00						
		120 Vac	24 VA	-1021♦	755.00						
		208 Vac	107 VA	-1021	755.00						
		240 Vac	154 VA	-1021	755.00						
		277 Vac	14 VA	-1037■	755.00						
		480 Vac	45 VA	-1037■	755.00						
		24 Vdc	36 VA	-1027	755.00						
		48 Vdc	36 VA	-1028	755.00						
		125 Vdc	44 VA	-1029	755.00						
		250 Vdc	15 VA	-1030★	755.00						
Ground-Fault Shunt Trip	Trips the circuit breaker electrically using the signal from a Micrologic™ Ground-Fault Module.  <b>Application</b> <ul style="list-style-type: none"> <li>• For use only with obsolete GP Ground-Censor™ system or add on ground-fault module.</li> <li>• Leads: (2) Orange 18 AWG Cu.</li> </ul>	—	—	-G★	755.00						
Undervoltage Trip (UVR)	Trips the circuit breaker electrically when a control circuit falls below 35 to 70% of nominal (not field adjustable). Picks up at 35–85% of nominal voltage.  <b>Application</b> <ul style="list-style-type: none"> <li>• UVR must be energized in order to close the circuit breaker.</li> <li>• Leads: (2) Brown 18 AWG Cu leads.</li> </ul>	24 Vac 120 Vac 240 Vac 24 Vdc 48 Vdc	5 VA 8 VA 8 VA 2 VA 3 VA	-1143★ -1121♦ -1124 -1127 -1128	755.00 755.00 755.00 755.00 755.00						
Time Delay Unit	Provides adjustable time delay for UVR of 0.1 to 0.6 second before circuit breaker trips.  <b>Application</b> <ul style="list-style-type: none"> <li>• For use only with -1121 UV trip.</li> <li>• Adjustable time delay (0.1 to 0.6 second).</li> <li>• I-Line unit requires 1.5 in. (38 mm) of mounting space.</li> <li>• Leads: (2) Brown 18 AWG Cu and (2) Black/White 18 AWG Cu.</li> </ul>	120 Vac		<table border="1"> <thead> <tr> <th colspan="2">Cat. No.</th> </tr> <tr> <th>Unit Mt.</th> <th>I-Line™</th> </tr> </thead> <tbody> <tr> <td>690UVTD</td> <td>690UVTDI</td> </tr> </tbody> </table>	Cat. No.		Unit Mt.	I-Line™	690UVTD	690UVTDI	1941.00
Cat. No.											
Unit Mt.	I-Line™										
690UVTD	690UVTDI										
Auxiliary Switches	Monitors circuit breaker contact status and provides a remote signal indicating the circuit breaker contacts are OPEN or CLOSED.  <b>Application</b> <ul style="list-style-type: none"> <li>• Max. Load = FA, FH, FI, LC, LE, LI, LX, LXI.</li> <li>• 10 A @ 125–250 Vac, ¼ hp @ 125–250 Vac, 5 A @ 30 Vdc</li> <li>• Leads: Yellow for "A", Blue for "B", Striped for common 18 AWG Cu.</li> </ul>	1A/1B 2A/2B 3A/3B	See load info. in App. text at left	-1212 -1352 -1364▼	312.00 623.00 800.00						
Alarm Switches	Used with control circuits and actuated only when the circuit breaker has tripped. Standard construction includes a normally-open contact.  <b>Application</b> <ul style="list-style-type: none"> <li>• Max. Load = 10 A @ 125–250 Vac</li> <li>• Max. Load = 15 A @ 30 Vdc</li> <li>• Leads: (2) Red 18 AWG Cu.</li> </ul>	1A 1A 1B 1B	250 Vac 28 Vdc 250 Vac 48 Vdc	See load info. in App. text at left	312.00 312.00 312.00 312.00						


- ▲ Coil burden values do not apply to LC, LE, LI, LX and LXI. Consult Field Sales office for more information.
- Not available on FI or KI circuit breakers.
- ♦ LC, LE, LI, LX, and LXI circuit breakers operate at 75% or more of rated voltage.
- ★ Not available on LC, LE, LI, LX, LXI circuit breakers.
- ▼ Not available in FA, FC, FH, FI and KI circuit breakers.

**Undervoltage Trip Wiring Diagram**



Brown Wires To Be Connected To Control Power

**Shunt Trip Wiring Diagram**





Black Wires To Be Connected To Control Power

690UVTD Wiring Diagram



**Auxiliary Switch Contact Configuration**

Color Code:  
"A" Contact - Yellow Leads  
"B" Contact - Blue Leads  
Common-Striped Leads



**1A Alarm Switch Configuration**

Color Code: Red Leads




**1B Alarm Switch Configuration**


Color Code: Red Leads



**Undervoltage Trip Wiring Diagram**



**Shunt Trip Wiring Diagram**



**Field-Installable Electrical Accessories**


Complete field-installable accessory catalog number by inserting suffix from 3-24 between the parentheses in the catalog numbers shown in the table below. (Example: LA11212) See 3-24 for accessory pricing; add 20% to factory-install field-installable devices.

**Table 3.79: Field-Installable Accessories for Thermal-Magnetic and Electronic Trip Circuit Breakers**

Circuit Breaker	Shunt Trip	Ground-Fault Shunt Trip <sup>▲</sup>	Undervoltage Trip	Auxiliary Switches	Alarm Switch
Miniature Circuit Breakers, EH and EH-PL	Factory-Installed Only	Not Available	Not Available	Factory-Installed Only	Factory-Installed Only
FA, FH, FI, KI	Factory-Installed Only	Factory-Installed Only	Factory-Installed Only	Factory-Installed Only	Factory-Installed Only
LA, LH Series 4 <sup>■</sup>	LA1( )	LA1G	LA1( )	LA1( )	Factory-Installed Only Right Pole
Q4	LA1( )	LA1G	LA1( )	LA1( )	Factory-Installed Only Right Pole
LC, LE, LI, LX, LXI	LC1( )	LC1G	LC1( )	LC1( )	Factory-Installed Only

- ▲ Used with obsolete GP Ground-Censor™ system or add-on ground-fault modules.
- With LA and LH top-feed circuit breakers (suffix MT, I-Line jaws on OFF end) all accessories must be factory installed.


**Table 3.80: Accessory Mounting Locations**



LA, LH, Q4 Series 4 circuit breakers or newer = Field-installable accessories  
 LC, LI, LX, LXI circuit breakers = Field-installable accessories  
 Both accessory ports will accept shunt trips, UVRs and auxiliary switches. Alarm switches are factory installable **only** (right pole). Maximum of one device per port.



KAMO2120AC  
With KAL Circuit Breaker



FAMO1 and FAMOP  
With FAL Circuit Breaker

**Electrical Operators**

Provides remote ON, OFF/RESET control of molded case circuit breakers.

- A complete line of field-installable electrical operators.
- Not applicable on LC/LI/LE/LX/LXI circuit breakers.
- Installing side mounted motor operators on non I-Line™ circuit breakers requires the use of a separate mounting pan.
- Side mounted electrical operators require an additional 4-1/2 in. (114 mm) of mounting space in I-Line installations.

When remote indication of circuit breaker status is required, order circuit breaker with 1A-1B auxiliary switch for ON-OFF Indication and alarm switch for TRIP Indication. Electrical operators require SPDT maintained contact switch. Refer to Class 9001 control unit listing for operators and pilot lights.

**NOTE:** Not available on Mag-Gard™ circuit breakers and molded case switches.

**Table 3.81: Electrical Operators**

Circuit Breaker Prefix	Top Mount			Side Mount			Mounting Pan	
	Voltage	Cat. No.	\$ Price	Voltage	Cat. No.	\$ Price	Cat. No.	\$ Price
FA, FH	—	—	—	120 Vac	FAMO1	1304.00	—	—
FAL, FHL	—	—	—	120 Vac	FAMO1	1304.00	FAMOP	108.00
FI, KI	—	—	—	120 Vac	KAMO1	3506.00	—	—
FIL, KIL	120 Vac	KAMO2120AC	3642.00	120 Vac	KAMO1	3506.00	KAMOP	134.00
	240 Vac	KAMO2240AC	3642.00					
	24 Vdc	KAMO224DC	3642.00					
	125 Vdc	KAMO2125DC	3642.00					
LA, LH, Q4	—	—	—	120 Vac	LAMO1	4518.00	—	—
LAL, LHL, Q4L	120 Vac	LAMO2120AC	4704.00	120 Vac	LAMO1	4518.00	LAMOP	185.00
	240 Vac	LAMO2240AC	4704.00					
	24 Vdc	LAMO224DC	4704.00					
	125 Vdc	LAMO2125DC	4704.00					
MAL, MHL	120 Vac	MAMO2120AC	4704.00	120 Vac	MAMO1	4518.00	MAMOP	1856.00
	240 Vac	MAMO2240AC	4704.00					
	24 Vdc	MAMO224DC	4704.00					
	125 Vdc	MAMO2125DC	4704.00					
PA, PH, PC, PE, PX	120 Vac	PAMO2	5544.00	—	—	—	—	—

**Handle Accessories**

**Table 3.82: Handle Accessories**

Circuit Breaker Prefix	Poles	Cat. No.	\$ Price
<b>Handle Tie</b>			
(2)FA	3	FKHT	215.00
(2)FI,(2)KI, or (1)FI + (1)KI	2,3	FKHT	215.00
(2)LA or (2)Q4	2,3	LAHT	497.00
<b>California Title 24 Comb. Handle Tie and Lock Off</b>			
FY	(3)1P	FY3HT	53.00
FA	(3)1P	FA3HT	53.00
<b>Handle Extension</b>			
LA, LH, LE, LI, LX, LXI, Q4	2,3	AHEXLI	95.00

▲ Locks OFF only.

Circuit Breaker Prefix	Poles	Cat. No.	\$ Price
<b>Handle Padlock Attachment (locks ON or OFF)</b>			
FY Series 1	1	HPAFYQ	19.80
FA, FH, FC, FI	1,2,3	HPAFK	24.20
FY Series 2,	2,3	HPAFK	24.20
KI	2,3	HPAFK▲	32.60
LA, LH, Q4	2,3	HPALM	26.00
		HPAXLM	27.60
LC, LE, LI, LX, LXI	2,3	AHPALI	25.20

**Cylinder Lock**

Used to lock the circuit breaker in the OFF position. Circuit breaker cannot be reset when locked OFF.

**Table 3.83: Cylinder Lock**

Circuit Breaker Prefix	Factory Installed Suffix	Field Installable Cat. No.	\$ Price
FA, FAL, FH, FHL	—CL	Factory-installed only	315.00
LA, LAL, LH, LHL, Q4	Field-installable only	LA1CL	315.00

■ Not available on Mag-Gard circuit breakers and molded case switches.

**Interlocks**

**Table 3.84: Walking Beam Mechanical Interlock Components ♦**




Walking Beam Mechanical Interlock  
Requires 2 circuit breakers with WB suffix,  
1 walking beam assembly and 1 mounting pan.


Circuit Breaker Prefix	Manually Operated						Electrically Operated					
	Operator Suffix	\$ Price Adder	Walking Beam Ass'y.		Mounting Pan		Operator Suffix	\$ Price Adder	Walking Beam Ass'y.		Mounting Pan	
			Cat. No.	\$ Price	Cat. No.	\$ Price			Cat. No.	\$ Price	Cat. No.	\$ Price
FAL, FHL	WB	246.00	FA4WB	134.00	FAWBP4	177.00	WBMO	246.00	FA9WB	200.00	FAWBP9	242.00
LAL, LHL	WB	246.00	LA6WB	179.00	LAWBP6	242.00	WBMO	246.00	LA10WB	213.00	LAWBP10	309.00

♦ Fully enclosed interlocked units are available in Type 1 and Type 3R enclosures, with two neutrals provided in each enclosure. The completely enclosed assembly is not UL Listed. Please consult your nearest Schneider Electric local sales office for more information.


Key Locking




Door Escutcheon




Handle Rubber Boot




Terminal Covers



Removable Padlock Attachment



Fixed Padlock Attachment



**Table 3.85: Locks, Interlocking**

Device	Description	G-Frame		D-Frame	
		Field-Installed Cat. No.	\$ Price	Field-Installed Cat. No.	\$ Price
Handle Padlocking Device	Removable (lock OFF only)	AHP	19.70	S29370	50.00
	Fixed (lock OFF or ON)	—	—	S32631	122.00
	Fixed (lock OFF only)	—	—	NJPAF	122.00
Interlocking (Not UL listed)	Mechanical for circuit breakers with rotary handles	—	—	32621	494.00
	Mechanical for circuit breakers with toggles	—	—	32614	494.00
Key Locking	Provision and 2 locks keyed alike	Ronis	—	41950	183.00
		Profalux	—	42878	183.00

**Table 3.86: Installation Accessories for G- and D-Frame Circuit Breakers**

Description	G-Frame		D-Frame	
	Field-Installed Cat. No.	\$ Price	Field-Installed Cat. No.	\$ Price
Front Panel Escutcheon for Toggle Breakers	—	—	32556	55.00
Front Panel Escutcheon for Rotary Handle, Motor Operator, or extended escutcheon	—	—	32558	74.00
Phase Barriers (set of 6)	—	—	32570	72.00
Handle Rubber Boot	—	—	32560	171.00
Sealing Accessories	ACS	18.50	29375	42.00
DIN rail adapter	GYR	93.00	—	—
Toggle Extensions (set of 10)	—	—	32553	33.20

**Table 3.87: Rear Connections**

Device	Description	D-Frame			
		Poles	Factory-Installed Termination No.	Field-Installed Cat. No.	\$ Price
Mixed Rear Connection Kit		3	S	32477	848.00
		4	S	32478	1122.00
Consisting of:	Short rear connections (set of 2)	3	—	2x 32475★	219.00
	Long rear connections (set of 2)	3	—	32476	261.00
	Short terminal cover (3P)	3	—	32562	149.00

★ Price shown is for quantity one.

AL50FA AL100FA




AL250KI  
AL250KA




AL400LA AL600LI5



AL400LH7



D-Frame Lugs



**Table 3.88: Mechanical Lug Kit Information**

Circuit Breaker Application				(Number of Wires Per Lug) Wire Range▲	Cat. No.	Lugs Per Kit	\$ Price Per Kit
Standard	Ampere Rating	Optional	Ampere Rating				
<b>Al Lugs for Use with Al or Cu Wire</b>							
FA, FH FI	15–30 A	FA, FH FI	35–100 A	(1) 14–4 AWG Cu or (1) 12–4 AWG Al	AL50FA	3	37.20
FC	35–100 A	FC	15–30 A	(1) 14–3 AWG Cu or (1) 12–1 AWG Al	AL100FA4	3	37.20
FA, FH FI	35–100 A	FA, FH FI	15–30 A	(1) 14–1/0 AWG Cu or (1) 12–1/0 AWG Al	AL100FA	3	37.20
—	—	FA, FH, FC	15–100 A	(1) 12–3 AWG Cu	AL100TF■	3	37.20
—	—	FA	150 A (only)	(1) 2–3/0 AWG	AL150FA	3	37.20
KI	110–175 A	—	—	(1) 4 AWG–350 kcmil	AL250KA	3	113.00
KI	200–250 A	KI	110–175 A	(1) 1/0 AWG–350 kcmil	AL250KI	3	107.00
Q4, LA, LH	125–400 A	—	—	(1) 1 AWG–600 kcmil or (2) 1 AWG–250 kcmil	AL400LA	1	35.70
—	—	Q4, LA, LH	125–400 A	(1) 350–750 kcmil	AL400LH7	1	47.10
LE, LX, LXI	100–250 A	LC, LI, LE, LX, LXI	300–600 A	(2) 1 AWG–350 kcmil	AL600LI35	1	49.60
LI, LE, LX, LXI	300–600 A	LE, LX, LXI	100–250 A	(2) 4/0 AWG–500 kcmil	AL600LI5	1	47.10
—	—	LC, LI, LE, LX, LXI	—	(1) 500–750 kcmil	AL600LI7	1	53.00
<b>Cu Lugs for Use with Cu Wire Only ♦</b>							
FC	15–30 A	—	—	(1) 14–10 AWG Cu	CU30FA4	3	37.20
—	—	FA, FH, FC, FI	15–100 A	(1) 14–1 AWG Cu	CU100FA	3	37.20
—	—	FA, FH, FC	15–100 A	(1) 12–3 AWG Cu	CU100TF■	3	62.00
—	—	KI	110–250 A	(1) 4 AWG–250 kcmil Cu	CU250KA	3	113.00
—	—	Q4, LA, LH	125–400 A	(1) 1 AWG–600 kcmil Cu or (2) 1 AWG–250 kcmil Cu	CU400LA	1	70.00
—	—	LI, LE, LX, LXI	—	(2) 1 AWG–350 kcmil Cu	CU600LI35	1	230.00
—	—	LI, LE, LX, LXI	—	(2) .4/0 AWG–500 kcmil Cu	CU600LI5	1	230.00
—	—	LI, LE, LX, LXI	—	(1) 500–750 kcmil Cu	CU600LI7	1	230.00

- ▲ Unless otherwise specified, wire sizes apply to both aluminum and copper conductors.
- For use in the OFF end only, when the OFF end is the load end.
- ♦ Use suffix 8002 for factory-installed Cu lugs. (20% adder.)


**Table 3.89: Mechanical Lug Kits for D-Frame Circuit Breakers**

Description	Poles	400 A Lugs		600 A Lugs	
		Cat. No.	\$ Price	Cat. No.	\$ Price
Field-Installable Lug Kit, Terminal Cover Included	3	32508	191.00	32510	347.00
Voltage Takeoffs (set of two)		29348	28.40	29348	28.40
Wire Range		(1) 2 AWG-600 kcmil stranded CU cable (1) 2 AWG-500 kcmil stranded AL cable		(2) 2/0 AWG-350 kcmil stranded CU cable (2) 2/0 AWG-500 kcmil stranded AL cable	

**Table 3.90: Terminal Shields and Phase Barriers**


Used With	Description	Cat. No.	Qty Per Kit	\$ Price	
D-Frame	Terminal Shield (3P)	PDC5DG2 PDC12DG2	36965	1	108.00

**Compression Lug Kits**

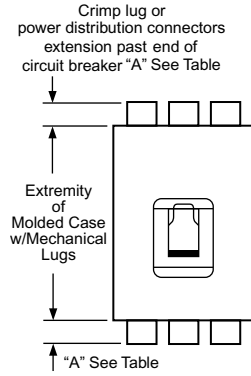

**Table 3.91: Field-installable Compression Lug Kits ▲**

Circuit Breaker Type	Wire Range ♦	Dimension A (In)	Max. Lugs Per Terminal	Cat. No.	Lug Qty. Per Kit	\$ Price Per Kit
<b>Aluminum Compression Lug Kits</b>						
FA, FH, FC, FI	8-1/0 AWG	1.3	1	VC100FA	3	175.00
KI	4 AWG-300 kcmil	1.5	1	VC250KA3	3	255.00
	250-350 kcmil	1.5	1	VC250KA35	3	194.00
LA, LH, Q4	250-350 kcmil	1.25	2	VC400LA35	2	194.00
	4 AWG-300 kcmil	1.0	2	VC400LA3	2	202.00
	2/0 AWG-500 kcmil	2.2	1	VC400LA5	1	166.00
LI, LE, LX, LXI ■	500-750 kcmil	2.5	1	VC400LA7	1	198.00
	4 AWG-300 kcmil	1.05	2	VC600L3	2	295.00
	2/0 AWG-500 kcmil	3.20	2	VC600L5	2	308.00
	500-750 kcmil	3.45	1	VC600L7	1	311.00
<b>Copper Compression Lug Kits</b>						
FA, FH, FC, FI	6-1/0 AWG Cu	1.4	1	CVC100FA	3	156.00
KI	2/0 AWG-300 kcmil Cu	1.5	1	CVC250KA3	3	301.00
	2/0 AWG-300 kcmil Cu	1.3	2	CVC400LA3	2	271.00
LA, LH, Q4	250-500 kcmil Cu	2.3	1	CVC400LA5	1	118.00
	250-500 kcmil Cu	3.20	2	CVC600L5	2	491.00
LI, LE, LX, LXI ■	250-500 kcmil Cu	3.20	2	CVC600L5	2	491.00
<b>Compression Lug Kits for D-Frame Circuit Breakers</b>						
Not Available						

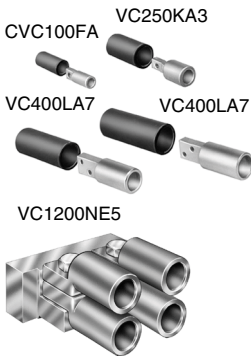

- ▲ See instruction bulletins for recommended tools.
- These lug kits cannot be used on I-Line™ circuit breakers.
- ♦ Unless otherwise specified, wire sizes apply to both aluminum and copper conductors.
- ★ All P-frame circuit breakers require terminal pads for mounting lugs of any type.

**Power Distribution Connectors (PDC) for Circuit Breakers—for Field Replacement of Mechanical Lugs**

Can be used for multiple load connections on one circuit breaker. Use in place of standard distribution blocks to save space and time.

Field-installable kits, including tin-plated aluminum connectors and all necessary mounting hardware are available for Square D FA, LA and Q4-frame molded case circuit breakers.

Connectors are UL Listed:

- For use on load end of circuit breaker only
- For use in UL508 Industrial Control applications only
- For use in UL 1995/CSA C22.2 No. 236 heating and cooling equipment
- For copper wire only

**Table 3.92: PDC Lugs**

Use With Circuit Breaker ▼	Circuit Breaker Ampere Rating	Wires Per Terminal & Wire Range△	Cat. No.	Lug Quantity Per Kit	Dimension A (In.)	\$ Price Per Kit
FAL, FHL, FCL □	15-100 A	(6) 14-6 AWG	PDC6FA6	3	1.0	92.00
		(3) 14-2 AWG	PDC3FA2	3	1.2	92.00
		(6) 12-2/0 AWG	PDC6LA20	1	2.25	182.00
LAL, LHL, Q4L	125-400 A	(12) 14-4 AWG	PDC12LA4	1	1.25	129.00
		(3) 14-2 AWG	PDC4LA250	1	2.0	129.00
		(1) 2 AWG-250 kcmil				

- ▼ Not for use with I-Line circuit breakers.
- △ When using fine stranded wire, increased cross sectional area may cause maximum wire size to be reduced.
- OFF end only when OFF end is the load end.



**Table 3.93: Power Distribution Connectors for D-Frame Circuit Breakers**

Use with Circuit Breaker Type	Circuit Breaker Ampere Rating	Wires Per Terminal & Wire Range	Dimension A (In.)	Cat. No.	Quantity Per Kit	\$ Price Per Kit
DG, DJ, DL	150-600	(3) 14-2 AWG and (2) 14-2/0 AWG	1.28 ♦	PDC5DG20	3	387.00
	150-600	(12) 14-4 AWG	1.31 ♦	PDC12DG4	3	387.00

♦ Kit includes long terminal shield, which adds 1.65 inches to standard lug with short terminal shield.

MOLDED CASE CIRCUIT BREAKERS

3

**Table 3.94: Bus Bar Connections Hardware for D-Frame Circuit Breakers**

Frame	Description	Term. No.	Poles	Cat. No.	\$ Price
D-Frame	Set of 3 terminal screws and washers for one side	F	3	36966	23.70
	Set of 4 terminal screws and washers for one side		4	36967	31.50

**Table 3.95: Terminal Shields and Phase Barriers**

Used With	Description			Dimension B (in.)	Cat. No.	Qty Per Kit	\$ Price
G-Frame	Terminal Shield (3P)	—	—	—	GYT	1	75.00
D-Frame	Terminal Shield (3P)	PDC5DG2	PDC12DG2	—	36965	1	108.00

- ▲ Short lug shields provide IP20 protection for mechanical lugs and are compatible with control wire terminals.
- J-frame terminal shield is not compatible with the YA250J35 compression terminal.

**Table 3.96: Miscellaneous D-Frame Circuit Breaker Accessories**

Accessory	Description	Field-Installed Cat. No.	\$ Price
External Neutral Sensor	150 A Neutral Sensor	36950	806.00
	250 A Neutral Sensor	36951	806.00
	400 A Neutral Sensor	36952	806.00
	600 A Neutral Sensor	36953	806.00
Spare Parts	100 Identification Labels	29314	119.00
Test Kits	Mini test kit (battery not included)	43362	884.00
	Portable test kit	55391 ♦	16365.00

♦ DE5A Discount Schedule

**Table 3.97: Motor Operators for D-Frame Circuit Breakers**

Description	Rated Voltage	Factory Installed Cat. No. Suffix	Field-Installed Cat. No.	\$ Price	
Standard motor for electrically-operated circuit breakers	AC	48/60	ML	32839	3395.00
		110/130	MA	32840	
		208/277	MD	22841	
		220/240	MC	—	
		380/415	MF	32842	
		380/485	MH	—	
	DC	440/480	MH	32847	3545.00
		24/30	MO	32843	
		48/60	MP	32844	
		110/130	MR	32845	
Locking Device	250	Mounting Hardware	—	32649	58.00
		Ronis lock	—	41940	146.00
		Profalux lock	—	42888	146.00
Operations Counter	—	—	32648	225.00	

Mini Test Kit



Portable Test Kit



Motor Operator



**Table 3.98: Neutral Current Transformers**

Cat. No.	\$ Price	Sensor	Where Used
LE25CT2	588.00	250 A	LXL, LEL, LXIL
LE4CT2	588.00	400 A	
LE6CT2	588.00	600 A	

Combination Local Current Meter  
and Trip Indicator



**Table 3.99: Electronic Trip Indicator and Current Meter Field-installable Kits**

Device	Cat. No.	Included With Circuit Breaker	Optional	\$ Price
Local Trip Indicator Kit	ALTI	—	LXL, LXIL	1461.00
Local Current Meter Kit/Trip Indicator	ALAM	LEL	LXL, LXIL	2286.00

**Table 3.100: Interchangeable Rating Plug Kits for all Circuit Breakers with Micrologic Series B Trip System**

Cat. No.	Sensor Multiplier Value	\$ Price
ARP040	0.400	297.00
ARP050	0.500	297.00
ARP056	0.563	297.00
ARP058	0.583	297.00
ARP060	0.600	297.00
ARP063	0.625	297.00
ARP067	0.667	297.00
ARP070	0.700	297.00
ARP075	0.750	297.00
ARP080	0.800	297.00
ARP083	0.833	297.00
ARP088	0.875	297.00
ARP090	0.900	297.00
ARP100	1.000	297.00

Electronic Trip Unit with Seals Installed  
to Restrict Access



**Complying with NEC®**

The National Electrical Code, Section 240-6(c) exception allows conductor ampere ratings equal to the selected long-time pick-up setting. Square D offers the seals below to restrict access to trip unit once settings are selected.

**Table 3.101: Trip Unit Seals**

Description	Cat. No.	Package Quantity	\$ Price
Trip Unit Seal	TUSEAL	100	102.00

CIM3F Communication Adapter



**Table 3.102: Communication Adapter**

Description	Cat. No.	\$ Price
Communication Adapter	CIM3F▲	465.00

▲ Required for Micrologic to communicate with PowerLogic™ system.

Universal Test Set



**Table 3.103: Test Equipment for Circuit Breakers with Micrologic Series B Trip Systems**

Description	Cat. No.	\$ Price
Universal Test Set (includes test module for Full-function and Standard-function LEL, LXL, LXIL)	UTS3	14022.00
Test Module for Full-function and Standard-function LEL, LXL, LXIL. (For use with existing CBTU1 or UTS3 test set.)	CBTMB	2349.00
Replacement ribbon cable and rating plug adapter for CBTMB	CBTMBRK	627.00
Long-time and ground-fault Memory Reset Module (Series B Electronics)	MTMB	381.00

MOLDED CASE CIRCUIT BREAKERS

3

S48890 and S48895 Restraint Interface Modules

Table 3.104: RIM Requirements

	Micrologic #.0x Trip Units	Square D Micrologic Series B Trip Units	Square D GC-100 Ground-Fault Relay for Equipment Protection	Square D GC-200 Ground-Fault Relay for Equipment Protection	Merlin Gerin STR58 Trip Units	Federal Pioneer USRC and USRCM Trip Units
Micrologic #.0x Trip Units	15	R	R	15	15	R
Square D Micrologic Series B Trip Units	R	26	R	R	R	15
Square D GC-100 Ground-Fault Relay for Equipment Protection	R	R	7	R	R	R
Square D GC-200 Ground-Fault Relay for Equipment Protection	15	R	R	15	15	R
Merlin Gerin STR58 Trip Units	15	R	R	15	15	R
Merlin Gerin STR53 Trip Units	15	R	R	15	15	R
Federal Pioneer USRC and USRCM Trip Units	R	15	R	R	R	15
Square D Add-on Ground-Fault Module for Equipment Protection	R	5	R	R	R	R

Note: R=RIM module is required to restrain any devices.  
Numerical References=Maximum number of upstream circuit breakers which can be restrained without requiring a RIM module.

The Restraint Interface Module (RIM) is used to allow zone-selective Interlocking communications between circuit breakers with Micrologic™ Series B trip units or Micrologic™ #.0x trip units, Compact™ STR53 trip units, Masterpact™ STR58 trip units, Federal Pioneer USRC and USRCM trip units, and Square D GC series ground-fault relays.

Upstream circuit breakers with Micrologic 3.0A, 5.0A 5.0P, 5.0H, 6.0A, 6.0P, and 6.0H trip units can receive up to 15 input signals without requiring a restraint interface module. If the number of input signals exceeds 15, then a RIM is required. Contact your local Sales Office for RIM requirements.


The restraint interface module operates on either 120 Vac/24 Vdc, or 240 Vac/24 Vdc, 50/50 Hz.

**NOTE:** The maximum distance between devices is 1000 ft. (305 m)

Table 3.105: Restrain Interface Module (RIM)


Cat. No.	Voltage	\$ Price
S48890	120 Vac/24 Vdc	1860.00
S48895	240 Vac/24 Vdc	1860.00







**Table 3.106: Circuit Breakers Dimensions**

Circuit Breaker Catalog No. Prefix	No. Poles	Fig. No.	Dimensions—Inches							
			A	B	C	D	E	F	G	H
FAL, FHL	1	21	6.00	1.50	3.16	4.13	0.44	5.13	1.50	—
	2	22	6.00	3.00	3.16	4.13	0.44	5.13	—	—
	3	23	6.00	4.50	3.16	4.13	0.44	5.13	1.50	0.75
KAL, KCL, KHL	2 & 3	23	8.00	4.50	3.66	4.75	0.44	7.13	1.50	0.75
FIL, KIL	2 & 3	23	8.00	4.50	3.66	4.75	0.44	7.13	1.50	0.75
GJ	3	32	3.54	4.72	2.76	3.94	2.20	—	—	—
DG, DJ, DL	3	28	13.38	5.51	3.75	6.61	2.22	8.93	1.77	—
LC, LI, LE, LX, LXI	2 & 3	23	11.86	7.50	5.48	6.74	0.55	10.75	2.50	—
Q4L, LAL, LHL	2 & 3	23	11.00	6.00	4.06	5.84	0.88	9.25	2.00	1.00
MAL, MHL	2 & 3	23	14.00	9.00	4.53	6.50	1.66	10.69	3.00	1.50



**Table 3.107: Shipping Weights**

Frame Size	Approx. Shipping Weight (Lbs.)
FAL FHL 2-pole FCL	3
FAL FHL 3-pole	5
FIL	8
KAL, KHL	7
KIL	9
Q4L	15
DG, DJ, DL	14
GJ	3
LAL LHL	15
LXL LEL LIL	25
MAL, MHL	34



Circuit breaker enclosures are UL Listed, CSA Certified and are suitable for use as service equipment except as footnoted.

- The short circuit rating of an enclosed circuit breaker is equal to the rating of the circuit breaker installed, except as footnoted.
- Circuit breakers are ordered and shipped separately for field installation.
- For enclosure accessories refer to page 3-36 . For enclosure dimensions refer to page 3-35.

**Table 3.108: Circuit Breaker Enclosures**

Circuit Breaker			Enclosure					
Cat. No. Prefix	Rating	Poles	Cat. No.	\$ Price	Cat. No.	\$ Price	Cat. No.	\$ Price
			NEMA 4, 4X, 5, 3, 3R Stainless Steel (Hubs—See page 3-9)		NEMA 12/3R, 12K (Hubs—See page 3-9)			
					With Knockouts (NEMA 12K)		Without Knockouts ♦ (NEMA 12/3R, 5)	
KIL★	110–250 A	2, 3	IK250DS	5238.00	—	—	IK250AWK	878.00
			NEMA 7 ■ Cast Aluminum		NEMA 9 ▼ Cast Aluminum			
FAL△	15–60 A	1, 2, 3	FA060X□◇	1620.00	FA060Y◇	1227.00		
	15–100 A	1, 2, 3	FA100X□◇	2006.00	FA100Y◇	1389.00		

- ▲ Enclosures with NRB or RB suffix have provisions for 3/4 in. through 2-1/2 in. bolt-on hubs in top endwall. Enclosures with R suffix have blank endwalls and require field cut opening. For details and hub catalog numbers see Digest Section 3.
- NEMA 7—Indoor Hazardous Locations—Division 1 and 2, Class I, Groups C and D; Class II, Groups E, F and G; Class III.
- ♦ Suitable for rainproof NEMA 3R application by removing drain screw from bottom endwall.
- ★ Short circuit rating is 100 k AIR at 480 Vac maximum.
- ▼ NEMA 9—Indoor Hazardous Locations—Division 1 and 2, Class II, Groups E, F and G; Class III
- △ Use 75°C Copper conductors only.
- Suitable for rainproof applications—includes PKDB1 breather and drain kit.
- ◇ cULus listed.



FA100X



FA100Y

**Enclosed Motor-Operated Molded Case Circuit Breakers**

**NOTE:** Contact local Field Office for catalog number prior to quoting or placing an order.

Motor-operated enclosed circuit breakers are utilized whenever it is desired to control the operation of an individually mounted circuit breaker from a remote location. Enclosed motor operated circuit breakers are available in either NEMA 1 or 3R construction. 120 Vac control circuit required for operation of motor operator. Sufficient space is included for field-installation of a terminal block for convenient end-user control circuit wiring. Not UL Listed.

Enclosed motor-operated circuit breaker with neutral

- Specify circuit breaker catalog number (ex: FAL36060)
- Specify side mounted operator only.
- Specify enclosure type (ex: NEMA 1, 3R, 12)
- Specify if neutrals are required (Same price)

**Table 3.109: Enclosed Motor-Operated Circuit Breakers**

Circuit Breaker Type	\$ Price ▲	
	NEMA 1	NEMA 3R
FAL—240 V	2915.00	3149.00
FAL—480 V	3131.00	3369.00
FAL—600 V	3308.00	3525.00
FHL—600 V	3725.00	3950.00
LAL—600 V	11187.00	11477.00
LHL—600 V	14147.00	14429.00

- ▲ Price includes 3P circuit breaker, motor operator, and neutral assembly factory assembled in specified enclosure.

**Enclosed Molded Case Switches**


Enclosed molded case switches are UL Listed devices supplied with factory-installed automatic molded case switch. Use the Cat. No. listed below and add the enclosure style suffix. An insulated groundable neutral, if required, must be ordered separately from Digest page 7-58. Enclosed molded case switches are manufactured on order only.

**Table 3.110: Enclosed Molded Case Switches**

System	Ampere Rating	Cat. No. Add Suffix	600 Vac Short Circuit Withstand Ratings	\$ Price			
				NEMA 1	NEMA 3R ▲	NEMA 4,4X,5	NEMA 12
				(F) or (S)	(RB) or (R)	(DS)	(AWK)
<b>FH—100 A Frame, 3P, 600 Vac Max.</b>							
2P	100	FHE26000()	18 kA	963.00	1277.00	2273.00	1083.00
3P	100	FHE36000()	18 kA	1187.00	1499.00	2432.00	1310.00
<b>LH—400 A Frame, 3P, 600 Vac Max.</b>							
2P	400	LHE26000()	25 kA	3915.00	5174.00	9264.00	4497.00
3P	400	LHE36000()	25 kA	4653.00	5982.00	9999.00	5232.00

▲ FHE and KHE devices accept bolt-on hubs and have a suffix RB. LHE, MHE and NCE devices have blank endwalls and have a suffix R. For details and hub catalog numbers see page 3-9.

**Enclosures FA060X, FA100X, FA060Y and FA100Y**




Dimensions: Refer to enclosed circuit breaker dimensions by NEMA type.

**Table 3.111: Enclosure Dimensions**


Cat. No.	Series	Approximate Dimension					
		H		W		D	
		in.	mm	in.	mm	in.	mm
FA060X▲	E1	16.00	406	9.88	251	7.00	178
FA060Y▲	E1	16.00	406	9.88	251	7.00	178
FA100X▲	E1	16.00	406	9.88	251	7.00	178
FA100Y▲	E1	16.00	406	9.88	251	7.00	178
IK250DS	E2	42.25	1073	13.88	353	7.50	191
IK250AWK	E2	42.25	1073	13.88	353	7.50	191

▲ Tapped conduit opening, top and bottom endwall: FA060X/Y—3/4", FA100X/Y—1-1/4"

**Enclosures for IK250DS and IK250AWK**



**Lock-On Provisions**

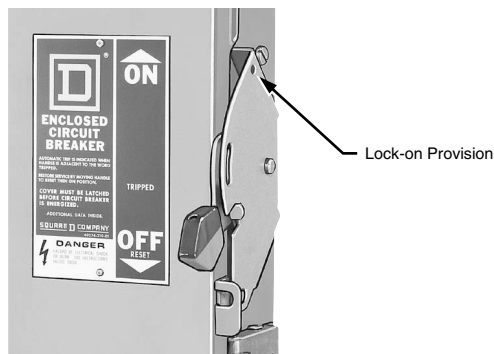

Lock-off provisions are standard on all NEMA Type 4-4X-5 stainless steel and NEMA Type 12, 12K circuit breaker enclosures. Provision for one inch hasp padlock is available factory installed. This modification will allow the circuit breaker to be locked in the ON position. When locked in the ON position, the external operator will not indicate if circuit breaker is tripped. UL Listed.

**Table 3.112: Price Adder Each Enclosure**

Enclosure Prefix	Suffix for Lock-On Provision	\$ Price
FA, J	SPLO	155.00
LA, M, P		234.00

**Pilot Light—Selector Switch—Push Button**

Pilot lights, push buttons or selector switches are available factory installed in the cover of NEMA Type 3R, (4-4X-5) stainless steel or 12 enclosures. Wiring to contact blocks is not available. Customer must furnish catalog number of device desired. Price = circuit breaker + enclosure + neutral + ground + pilot light, push button and/or selector switch + factory-installed adder. Order by description. Not UL Listed.

**Table 3.113: Price Adder**

Quantity	\$ Price Adder
For Each Device Installed	297.00

**Phenolic Legend Plate**

Available engraved and mounted on most circuit breaker enclosures. Legend engraved in 1/4-inch high white letters on black background. Customer must provide legend. UL Listed. Not available on NEMA Type 7 or 9 enclosures.

To order, add suffix NP to standard catalog number (i.e. LA400SNP). Price adder per legend plate: **\$167.00**

**Table 3.118: Insulated Groundable Neutral Assembly**

Circuit Breaker Cat. No. Prefix	Ampere Rating	Neutral Assembly For Use With				Terminal Lug Data—Total Available (Line plus Load) AWG/kcmil		
		NEMA 1 & 3R		NEMA 4, 4X, 5, 12 & 12K			NEMA 7 & 9	
		Cat. No.	\$ Price	Cat. No.	Price	Cat. No.	\$ Price	
KIL	225	—	—	SN225KA	201.00	—	—	(2) 4–300 Al/Cu, plus (2) 14–1/0 Al/Cu
KIL	250	—	—	SN400LA	251.00	—	—	(2) 1–600 or (4) 1–250 Al/Cu, plus (2) 4–300 Al/Cu

**Equipment Ground Kit**

Price adder includes price of ground bar kit.

**Table 3.119: Ground Kit Price Adder**

Enclosure Type	Enclosure Circuit Breaker Cat. No. Prefix	Number of Terminals per Kit	Conductors Per Terminal	Wire Range AWG/kcmil	Field-Installable		Factory-Installed★	
					Ground Bar Kit Cat. No.	\$ Price	Suffix	\$ Price
NEMA Type 1 and 3R	FAL, FHL, FIL KIL, LHL	2	1	10–2/0 Cu or 6–2/0 Al	PKOGTA2Δ	263.00	GL	191.00
NEMA Type 4-4X-5 stainless steel and NEMA Type 12	FAL, FHL, FIL KIL, LHL, Q4L							
	M, P▼	2	1	10–2/0 Cu or 6–2/0 Al		263.00		263.00

★ For factory installation of equipment ground lugs in these or any other enclosures, add suffix GL.  
▼ Use of PKOGTA2 with M, and P enclosure prefix not UL Listed  
Δ Quantity (2) may be required for some wire installation.

**Special Paint**

UL Listed circuit breaker enclosures are available painted with special safety colors. To order safety colored enclosures add suffixes as noted in Table 3.115 to the standard enclosure commercial reference number.

All colors comply with OSHA Standard 1910.144 and ANSI Specification Z535.1 for marking physical hazards.

A minimum quantity of ten is required. Order by description. Not available for NEMA Type 7/9 or stainless steel enclosures.

Shipment: 6 weeks

**Table 3.114: Price Adder Each Enclosure**

Enclosure Prefix			
FA \$ Price	J \$ Price	LA \$ Price	P \$ Price
113.00	180.00	327.00	513.00

**Table 3.115: Safety Colors**

Safety Color	Suffix
Black	SP0
Red	SP2
Orange	SP3
Yellow	SP4
Green	SP5
Blue	SP6
Purple	SP7
Gray	SP8
Gray ANSI61	SP861▲
White	SP9

▲ Standard Square D ANSI 49 grey paint, when selecting this suffix, switches will receive additional coat of paint.

**Stainless Steel Front**

The FA100F NEMA Type 1, flush-mount circuit breaker enclosure is available with a stainless steel front. This modification is desirable in food handling areas such as cafeterias and restaurants.

**Table 3.116: Price Each Enclosure**

Cat. No.	\$ Price
FA100FSS	1659.00

**Enclosed Ground-Fault Modules (GFM)**

Ground-fault modules (GFM) can be factory installed on FAL and FHL circuit breakers and enclosed in the next larger size NEMA 1 or 3R enclosure.


Enclosed circuit breaker with ground-fault module

- Specify circuit breaker catalog number
- Specify enclosure type (NEMA 1 or 3R)
- Ground-fault modules are available factory installed. See table below for pricing and availability.

**Table 3.117: Enclosed Circuit Breaker with Ground Fault Module♦**

Circuit Breaker Prefix	\$ Price ■	
	NEMA 1	NEMA 3R
FAL, 600 V, 15–60 A	6585.00	7091.00
FAL, 600 V, 70–100 A	6797.00	7307.00

■ Price includes 3P circuit breaker, GFM, neutral assembly and neutral CT factory assembled in specified enclosure  
♦ Not UL Listed

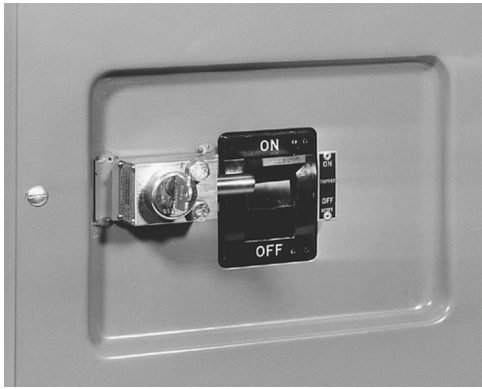








**Key Interlock Systems**

(Factory installed only)

Interlocks are used to prevent the authorized operator from making an unauthorized operation. Not available on hazardous location devices (NEMA 7/9.)

The key interlock system is a simple and easy method of applying individual key interlock units and assemblies to the above equipment so as to require operation in a predetermined sequence. UL Listed.

**Table 3.120: Locking Position Designations**

Locking Position	Designation
	Device locked open with key removed.
	Device locked closed with key removed.
	Device locked open or closed with key removed.
	Device locked open with key held.
	Device locked closed with key held.
	Device locked open or closed with key held.
	Multi-lock interlock. (More than one key per lock.)

**NOTE:** 1. Device locked open (circuit breaker in OFF position).  
2. Device locked closed (circuit breaker in ON position).

**Quoting:**

Contact local Field Sales office for catalog number, availability and pricing prior to quoting a job.

**Ordering:**


- Order cannot be released for production until the following information has been provided.
- End User—Company name, address
- Function of each lock (e.g., circuit breaker to be locked open with key removed, key held when circuit breaker is closed)
- Existing Equipment—if circuit breaker is to be interlocked with equipment already on site, provide brand of existing lock and key number
- Other New Equipment—if circuit breaker is to be interlocked with new equipment not yet installed at the site, then provide contact person and phone number so that locks may be coordinated
- Additional information may be required upon order entry
- Federal Pioneer locks supplied unless otherwise specified

**Table 3.121: Price Adder Per Lock, Each Complete Enclosed Device▲**

Device	\$ Price
Enclosed industrial circuit breaker	2055.00

▲ Prices do not apply when more than three devices are interlocked as these schemes normally require more than one key assembly per device.


**Diagram Symbols**

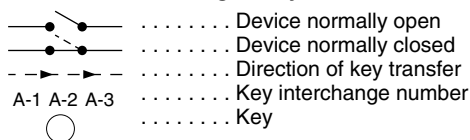

**Sample Application—1**

To prevent two devices from being closed simultaneously.

Figure 1

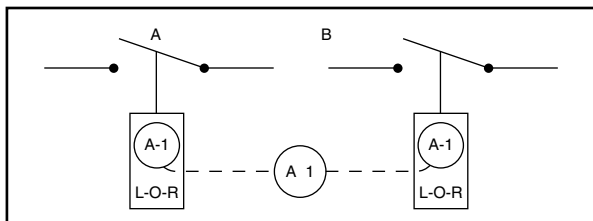


Two devices are shown in Figure 1. In operation they are not closed at the same time. With the interlocks arranged as shown only one key is required in the interlocking system. Both devices are shown open, therefore, the key is free. To close any one device the key is inserted and turned in that particular lock, the key is held in this lock until the device is again locked open. This simple interlocking sequence lends itself to a multitude of applications. The procedure is the same for two devices, neither of which is to be opened at the same time.

**Sample Application—2**

To prevent opening of switch A when circuit breaker B is closed.

Figure 2

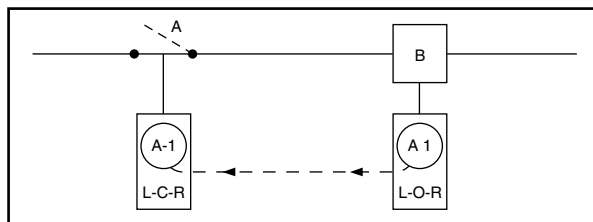


Switch A and circuit breaker B are in closed position. Key A-1 is held in circuit breaker B interlock.

1. Open circuit breaker.
2. Turn key A-1 in L-O-R interlock on circuit breaker B to lock open. Key A-1 is now free.
3. Insert key A-1 in L-C-R interlock on switch A and turn to unlock.
4. Open switch A. Key A-1 is now held. Reverse sequence to restore service.

**Sample Application—3**

To prevent operation of switch A when circuit breaker B is closed. Permits reclosing of circuit breaker for servicing when switch is locked open.

Figure 3

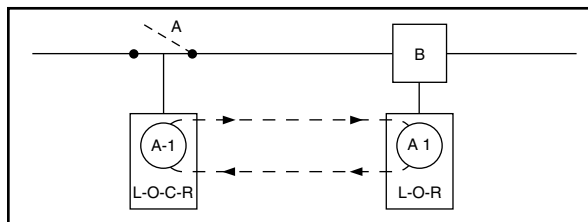

Switch A and circuit breaker B are in closed position. Key A-1 is held in circuit breaker interlock.


1. Open circuit breaker.
2. Turn key A-1 in L-O-R interlock on circuit breaker B to lock open. Key A-1 is now free.
3. Insert key A-1 in L-O-C-R interlock on switch A and turn to unlock.
4. Open switch A.
5. Turn key A-1 in L-O-C-R interlock on switch A to lock open. Key A-1 is now free.
6. Return key A-1 to circuit breaker interlock and unlock for operation during servicing period.

Reverse sequence to restore service.

**Sample Application—4 (Main-Tie-Main)**

To prevent paralleling of lines A and B.—Two loads, fed from either source.

Figure 4

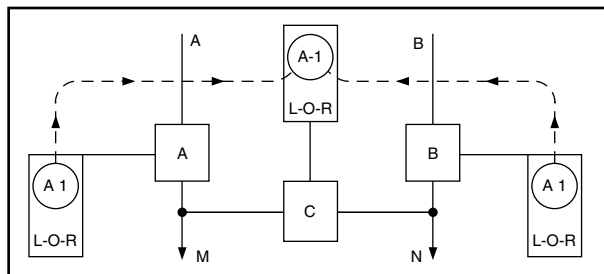

Circuit breaker A is closed to supply load M. Circuit breaker B is closed to supply load N. Tie-circuit breaker C is open. Keys A-1 are held in interlocks on both circuit breakers A and B. Tie-circuit breaker C cannot be closed unless either A or B is locked open.

To transfer load N to circuit breaker A, proceed as follows:

1. Open circuit breaker B.
2. Turn key A-1 in L-O-R interlock on circuit breaker B to lock open. Key A-1 is now free.
3. Insert Key A-1 in L-O-R interlock on tie-circuit breaker C and turn to unlock. Key A-1 is now held.
4. Close tie-circuit breaker C.

Reverse sequence to restore service.

Load M can be supplied through circuit breaker B in a similar manner.