TP-LINK®

54M Wireless USB Adapter TL-WN322G



Wireless Roaming, light and flexible, can move among different AP with no break

Provides AP Client Mode, supports PSP connection*

Up to 54Mbps wireless rate and fully compatible with 802.11b.







Description:

The TP-LINK TL-WN322G Wireless USB Adapter gives you the flexibility to install the PC or notebook PC in the most convenient location available, without the cost of running network cables.


Its auto-sensing capability allows high packet transfer up to 54Mbps for maximum throughput, or dynamic range shifting to lower speeds due to distance or operating limitations in an environment with a lot of electromagnetic interference. It can also interoperate with all the 11Mbps wireless (802.11b) products. Your wireless communications are protected by up to 152-bit encryption, so your data stays secure.

Additionally, TL-WN322G supports AP Client Mode, which supports PSP connection*, brings you joyful Onlinegaming experience.

Specifications:

Standards	IEEE 802.11g
	IEEE 802.11b
Interface	A-type USB 2.0 Connector
Wireless Signal Rates	11g: 54/48/36/24/12/9/6 Mbps (Auto -Sensing)
With Automatic Fallback	11b:11/5.5/2/1 Mbps (Auto -Sensing)
Frequency Range	2.4-2.4835GHz
Wireless Transmit Power	16dBm(typical)
Modulation Type	DBPSK, DQPSK,
	OFDM, CCK
Receiver Sensitivity	54M: -68dBm@10% PER
	11M: -85dBm@8% PER
	6M: -88dBm@10% PER
	1M: -90dBm@8% PER
Antenna Type	Internal Omni Directional (Antenna Power: 0dBi)
Wireless Security	64/128/152 bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK (TKIP/AES)
Media Access Control	CSMA/CA with ACK
Range	Indoors up to 100m, outdoors up to 300m.
	(Standard transmission distance, it is limited in different
	environment.)
Certifications	FCC, CE
Operating Temperature	0°C~40°C (32°F~104°F)
Storage Temperature	-40°C~70°C (-40°F~158°F)
Relative Humidity	10%~90%, non condensation
Storage Humidity	5%~95% non-condensing
Dimensions	86.5x24x10(mm) 3.4x0.9x0.4(in.)

Diagram:

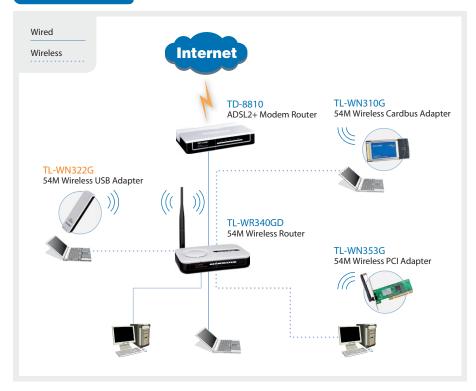

Features:

- USB 2.0, portable and flexible
- Supports Ad-Hoc/Infrastructure modes
- Supports 54/48/36/24/18/12/9/6Mbps or 11/5.5/2/1Mbps data transfer rates
- Provides soft AP Mode, and PSP connection*
- Supports 64/128/152 strength WEP encryptions, as well as WPA/WPA2 and WPA-PSK/WPA2-PSK encryptions and mechanisms
- Supports Windows 2000, XP, Vista
- Provides simple configuration and supervisor program
- * PSP connection is supported by Windows 2000, XP only.

Package:

- 54M Wireless USB Adapter TL-WN322G
- 100cm USB Extension Cable
- Quick Setup Guide
- Resource CD, including:
- •TL-WN322G Wireless Client Utility and Drivers
- · User Guide
- · Other Helpful Information

Related Products:

- 54M Wireless Router TL-WR340GD
- 54M Wireless Cardbus Adapter TL-WN353GD
- ADSL2+ Modem Router TD-8810

Specifications are subject to change without notice. TP-LINK is a registered trademark of IP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specificationsmay be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from IP-LINK Technologies Co., Ltd.