




K7S41GX

Socket A(462) for AMD processor
SiS 741GX chipset

Detail Specification <<<

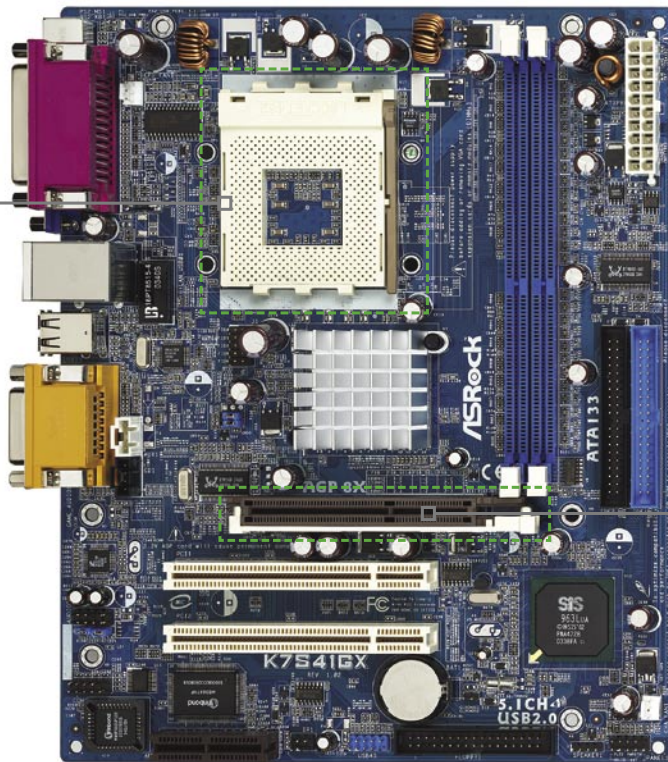

**The value K7 platform:
Real256E Graphics, AGP8X,
FSB333, DR333 and
10/100 Ethernet LAN**



**ASRock safe overclocking feature:
Hybrid Booster**

Product brief

1. For AMD Athlon XP FSB 333MHz processor
2. Supports high performance DDR333 memory
3. Hybrid Booster - ASRock safe overclocking
4. Integrated Real 256E Graphics
5. AGP8X, 5.1-Ch Audio, 10/100 Ethernet LAN
6. ASRock I/O : 4 ready-to-use USB2.0 ports

CPU	- Socket A (462) for AMD Athlon XP/Athlon/Duron processor - FSB 333/266 MHz
Chipset	- Northbridge: SiS 741GX - Southbridge: SiS 963L
Memory	- Supports DDR333/266 - DIMM slots: 2 - Max. capacity: 2GB
Hybrid Booster	- CPU Frequency Stepless control - CPU Multiplier - CPU Vcore Adjustment - ASRock U-COP - Boot Failure Guard (B.F.G)
Expansion Slot	- 1 x AGP8X/4X slot , 1.5V - 2 x PCI slots(PCI 2.2 compliance) - 1 x AMR slot
Graphics	- Integrated Real 256E graphics in SiS 741GX chipset
Audio	- CMedia CMI9739A 6 channel AC'97 audio codec
LAN	- Realtek RTL8201 10/100 Ethernet LAN PHY - 802.3u, WOL supported
Rear Panel I/O	ASRock I/O - 4 x USB2.0 ports - 1 x RJ45 LAN port - 1 x VGA port - 1 x PS2 Keyboard connector - 1 x PS2 Mouse connectors - 1 x Parallel port (LPT1) - 1 x Audio ports (Line In/Out, Mic In) - 1 x Game/MIDI port
Connector	- 2 x ATA 133/100/66 IDE connectors (supports 4 x IDE devices) - 1 x Floppy connector - CPU/Chassis FAN connectors - 20 pin ATX power connector - IDE LED connector - CD/AUX audio in header - Front panel audio connector - 1 x USB 2.0 port pin header - 1 x COM port pin header
BIOS Feature	- 2Mb AMI BIOS with ACPI, SM BIOS 3.0, PnP
Support CD	- Drivers, Utilities, PC-cillin 2002 OEM, ASRock PC DIY Demo
Accessories	- Quick Installation Guide, Support CD, I/O shield - Floppy/ATA 100 cables - 1 x COM port bracket
Form Factor	Micro ATX, 244mm x 198mm
Certifications	FCC, CE, MS WHQL

