

MPX-40DMP

Order No. 20.2710



Stereo DJ mixer with integrated MP3 player


Mixer:

- 4 stereo input channels, switchable 2 x line/phono, 1 x line/CD and 1 x line/USB (SD)
 - Input channels, each with gain control, 3-way equalizer and PFL push-button, with LED level display of the stereo master
 - 1 DJ microphone channel, adjustable, with 2-way tone control and manual talkover
 - Adjustable headphone output with pre-fader listening to the stereo input channels and the master output
 - Crossfader with assignment switches and switchable characteristic
 - Master output with stereo LED level display
 - Additional outputs booth and record
- MP3 player with USB interface and SD/MMC card slot:
- USB storage media can be connected directly (e.g. USB flash drive)
 - For SD/MMC cards up to 32 GB (FAT16/FAT 32), available at option



- Supports ID3 tags
- Pitch control: $\pm 16\%$
- Loop/reloop function
- Brake function and reverse function
- Safe operation also in darkness due to high-quality rubber buttons with colour illumination
- Blue backlit display

Model	MPX-40DMP
Mic input	4 mV, 1 x 3-pole XLR, bal.
Line input	300 mV, 4 x RCA L/R
CD input	300 mV, 1 x RCA L/R
Phono input	6 mV, 2 x RCA L/R
Master output	870 mV, 1 x 3-pole XLR L/R, 1 x RCA L/R
Record output	800 mV, 1 x RCA L/R
Booth output	950 mV, 1 x RCA L/R
Headphones	$\geq 8 \Omega$, 1 x 6.3 mm jack
Frequency range	20-20,000 Hz
THD	0.04%
S/N ratio	> 60 dB
Equalizer bass	+12 dB, -24 dB/30 Hz (channels 1-4) ± 12 dB/70 Hz (DJ mic)
Equalizer midrange	+12 dB, -24 dB/1.2 kHz (channels 1-4)
Equalizer treble	+12 dB, -24 dB/15 kHz (channels 1-4) ± 12 dB/7 kHz (DJ mic)
Talkover	-15 dB, manual
Power supply	~ 230 V/50 Hz/20 VA
Dimensions	482 x 190 x 115 mm
Weight	3.4 kg

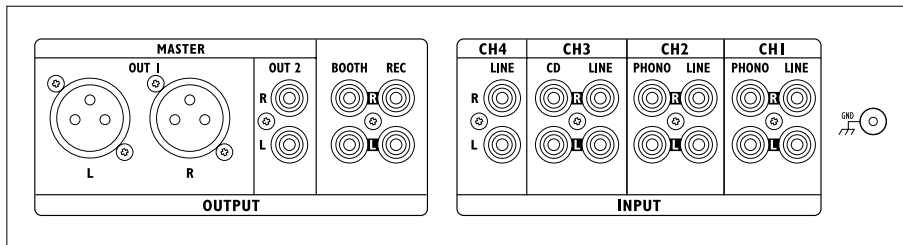

MPX-410DMP

Order No. 20.2850



Stereo DJ mixer with integrated MP3 player and Bluetooth receiver

Mixer:

- 4 stereo input channels, switchable MP3/phono/line (channel 1), aux/phono/line (channel 2) and aux/mic/line (channels 3-4)
- Input channels, each with gain control and 2-way tone control
- 1 DJ microphone channel, adjustable, with 2-way tone control
- Adjustable headphone output with pre-fader listening (PFL) to the stereo input channels and the master output
- Crossfader with assignment switches
- Master output with stereo LED level display
- Additional outputs booth and record



MP3 player with Bluetooth receiver, USB interface and SD/MMC card slot:

- Bluetooth receiver for wireless connection of laptops, smartphones or tablet PCs
- USB storage media can be connected directly (e.g. USB flash drive)
- For optional SD/MMC cards up to 32 GB (FAT16/FAT32)
- Alphanumeric display
- Repeat function
- Blue backlit display

Model	MPX-410DMP
Mic input	1.5 mV, 3 x 6.3 mm jack
Line input	200 mV, 4 x RCA L/R
Phono input	2 mV, 2 x RCA L/R
Aux input	200 mV, 3 x RCA L/R
Master output	1 V, 1 x 3-pole XLR (bal.), 1 x RCA L/R
Record output	400 mV, 1 x RCA L/R
Booth output	1 V, 1 x 6.3 mm jack L/R
Headphones	$\geq 8 \Omega$, 1 x 6.3 mm jack
Frequency range	20-20,000 Hz
THD	< 0.15%
S/N ratio	> 60 dB, unweighted
Equalizer bass	± 15 dB/50 Hz (channels 1-4) ± 12 dB/100 Hz (DJ mic)
Equalizer treble	± 15 dB/10 kHz (channels 1-4) ± 12 dB/7 kHz (DJ mic)
Power supply	~ 230 V/50 Hz/15 VA
Dimensions	482 x 88 x 125 mm, 2 RS
Weight	2.9 kg

