



PYLE[®]

2015

Pyleaudio.com

Complete Product Catalog



PYLE[®]
PyleAudio.com

2015 Product Catalog

With more than 40 years of consumer electronic industry experience, Pyle has established itself as the premier source for entertainment and electronic solutions. We provide a wide range of audio and video options for product categories including, but not limited to, Home & Office, Car & Truck, Sound & Recording, Marine & Watercraft, Sports & Outdoors and more! We provide practical and next-generation technologies that aim to enhance the overall experience. Come visit us and learn more!

Car & Truck

Headunits / Receivers	2
Video / Monitors	12
Backup Cameras	20
Power / Plug-in	31
FM Transmitters / Modulators	37
Amplifiers	38
Subwoofers	42
Subwoofer Enclosures	45
Speakers	49
Tweeters	55
Vehicle Wiring	56

Marine & Off-Road

Motorcycle / Off-Road Speakers	58
Headunits / Receivers	63
Waterproof Accessories	68
Speakers	70
Amplifiers	78
Subwoofers	79

Home, Office, Studio

Monitor Displays / DVD Players	80
Projectors	81
Projector Accessories	84
Mounts / Stands / Holders	86
Sound Dampening	108
Audio Cables & Wiring	110
Soundbars / Sound Towers	114
Amplifiers / Receivers	119
Component / In-Wall Speakers	136
Midbass Speakers	143
Tweeters / Horn Drivers	146
Megaphones	155
Portable PA Speakers	158
Molded Speaker Cabinets	163
Box Cabinet Speaker Systems	168
Studio / Stage Monitors	171
Bookshelf Speakers	176
Mixers / DJ Controllers	177
Stage-Powered Mixers	180
Turntables	182
Microphones	190
Microphone Systems	197
Steam Clean	258
Arts & Crafts	264

Musical Instruments

Guitars	207
Guitar Amps	209
Banjoes / Ukuleles	210
Drums	211
Sound Accessories / Reinforcement	212
Speaker Selectors	215
Audio Cable Testers	216

Sports & Gadgets

Bluetooth Adapters	217
Portable Speakers / Boom Boxes	218
Headphones	228
Headphone Accessories	232
Carry Cases / Portability	234
Fitness & Training Sensors	236
Watches	237
Metal Detectors	242
Cameras	243
Voice Recorders	247
Power Banks	247
Astro Tablet	248

Tools & Meters

Wall Plate / In-Wall Control	249
Power Supply / Converters	252
Testers & Meters	254
Steam Cleaners	258

Health


Health Scales	260
Blood Pressure Monitors	261
Thermometer	262
Toothbrushes	263

Armor Shield Covers

Protective Storage Covers	266
---------------------------	-----

Headunits Receivers

Headunit / Receiver Legend:

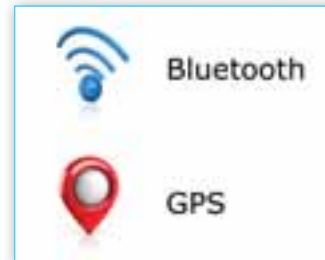

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

6.5" DOUBLE DIN IN-DASH TOUCH SCREEN TFT/LCD MONITOR w/MULTIMEDIA Disc/CD/MP3/MP4/CD-R/USB/SD-MMC CARD SLOT AM/FM, BLUETOOTH RECEIVER

PLDN65BT



- 6.5" 16:9 Wide Screen TFT LCD Display
- Touch Screen Control Operation
- Picture Control: Brightness/Contrast/Hue/Chrome
- USB Flash/SD Card Readers
- With Built-in Bluetooth Technology you can stream audio and take calls directly from your hand-held Bluetooth enabled device with crystal clear wireless performance
- Bluetooth Functions: Auto Muting & Hands Free Talking Capability
- AM/FM Stereo Receiver
- Electronic Anti-Shock
- AUX Rear and A/V Input - Parking Video Output
- Auto Memory Store/Preset Scan
- Support DVD/VCD/CD/CD-R/CD-RW/MP3
- 30 Preset Stations Memory
- MP4, JPEG,MP3,WMA File Format Playback
- Treble/Bass/Balance/Fader/Volume Controls
- Repeat/Program/Random/Intro Play Controls
- 4-Channel RCA Preamp Output plus Subwoofer Output
- Full Function Remote Control
- 320 Watts Total Output (4 x 80 Watts)

PLDN66I

6.5" DOUBLE DIN IN-DASH TOUCH SCREEN TFT/LCD MONITOR w/DVD/CD/MP3/MP4/CD-R/USB/SD-MMC CARD SLOT AM/FM

- 6.5" 16:9 Wide Screen TFT LCD Display
- Touch Screen Control Operation
- Picture Control: Brightness/Contrast/Hue/Chrome
- USB Flash/SD Card Readers
- AM/FM Stereo Receiver
- Electronic Anti-Shock
- AUX Rear and A/V Input - Parking Video Output
- Auto Memory Store/Preset Scan

- Support DVD/VCD/CD/CD-R/CD-RW/MP3
- 30 Preset Stations Memory
- MP4, JPEG,MP3,WMA File Format Playback
- Treble/Bass/Balance/Fader/Volume Controls
- Repeat/Program/Random/Intro Play Controls
- 4-Channel RCA Preamp Output plus Subwoofer Output
- Full Function Remote Control - 30-Pin iPod Connection Cable
- 320 Watts Total Output (4 x 80 Watts)



7" DOUBLE DIN TFT TOUCH SCREEN DVD/VCD/CD/MP3/MP4/CD-R/USB/SD-MMC CARD SLOT/AM/FM/iPOD CONNECTOR

PLDN73I



- DVD/VCD/MPEG4/MP3/CD/CD-RW Compatible
- Motorized Slide Down Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- PLL Synthesizer Tuner
- Auto Store/Preset Scan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory (18FM /12AM)
- Built-In 7"(16:9) TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440 x 234 Pixels: Brightness: 200 cd/m2
- On screen Display: Title, Time, Chapter, Subtitle
- Double-DIN Chassis
- PAL/NTSC Color System
- Anti-Shock Mechanism-ESP Function
- LO/DX & ST/MO Selector

- Repeat/Intro/Random
- Clock Function, Mute Control
- RCA Line Out, Preset EQ
- Subwoofer Output
- Selectable Viewing Angle
- A/V Input & A/V Output
- SD/MMC Card, USB Connector
- Direct iPod/iPhone Connection Cable
- Wireless Remote Control
- Rear Camera Output, Parking Video Input
- Last Position Memory
- 320 Watts (4 x 80W)
- Selectable USA/Europe Radio Frequency
- Dimensions: 7.26"H x 4.08"W x 6.36"D

PLDNV695B

7" DOUBLE DIN IN-DASH TOUCH SCREEN TFT/LCD MONITOR w/ MULTIMEDIA Disc/CD/MP3/MP4/USB /SD/AM/FM/BLUETOOTH & SCREEN DIAL PAD BUILT-IN GPS/TTS w/ USA/CANADA & MEXICO MAPS

- 7" 16:9 Wide Screen TFT LCD Display
- Touch Screen Operation
- With Built-in Bluetooth Technology you can stream audio directly from your hand-held bluetooth enabled device with crystal clear wireless performance(iPhone, Droid, Blackberry, iPads, Tablets, Etc.)
- 4G SD Card w/ USA/Canada/Mexico Maps
- Text to speech & Turn by Turn Voice Prompts
- Keep your Eyes on the Road While Navigating w/ Convenient Guidance
- Picture Control: Brightness/Contrast/Hue/Chrome
- USB/SD-MMC Card Reader MP4-JPEG/MP3 WMA Playback

- Repeat/Program/Random/Intro Play
- Treble/Bass/Balance/Fader/Volume Control
- AM/FM Stereo Receiver
- Electronic Anti-Shock
- AUX Rear Input
- Auto Memory Store/Preset Scan
- Support DVD/VCD/CD/CD-R/CD-RW/MP3
- Parking Video Output
- 30 Preset Stations Memory
- 320 Watts Total Output (4 x 80 Watts)
- Bluetooth Function Auto Muting Feature, Hands Free Talking Capabilities



**10.1" MOTORIZED TFT/LCD TOUCH SCREEN DETACHABLE DISPLAY MULTIMEDIA RECEIVER w/BLUETOOTH/AUX-IN
iPod CABLE/GPS w/USA/CANADA/MEXICO MAPS**

PLDNV105B



- Touch Screen Control Operation
- Built-In GPS Navigation System
- Text to Speech & Turn by Turn Voice Prompts
- Allows to Keep your Eyes on the road While Navigating with Convenient Voice Guidance
- 4G SD Card w/USA/Canada/Mexico Maps
- Motorized & Full Detachable 10.1 Front Touch Screen Panel
- With Built-In Bluetooth Technology you can stream Audio Directly from your hand-held Bluetooth Enabled Device with Crystal Clear Wireless Performance (iPhone, Android, Blackberry, iPads, Tablets, Etc)
- AM/FM-MPX 2 Band Radio
- 30 Station Memory (18FM/12am)
- 10.1 Inch (16:9) TFT Detachable Color Monitor
- Resolution: 1024 x 600 Pixels
- DVD/VCD/MPEG4/MP3/DIVX/CD/CD-RW Compatible
- On Screen Display Title, Time, Cheaper, Subtitle & Angle
- A/V input & A/V Output
- SD/MMC Card Slot
- Direct Connection of Alternate Audio/Video Aux Line Output Jack (MP3.iPod)
- Wireless Remote Control
- Rear Camera Output
- 320 Watts (4 x 80W)
- Detachable Panel Carry Case

PLDNV66B

**6.5" DOUBLE-DIN TOUCHSCREEN VIDEO MULTIMEDIA Disc/MP4/MP3/CD PLAYER WITH HANDS-FREE BLUETOOTH,
GPS w/USA/CANADA/MEXICO MAPS, USB/SD, AUX-IN**

- Touch Screen Operation
- Built-in Bluetooth
- 4G SD card w/USA/Canada/Mexico maps
- Text to speech & turn by turn voice prompts
- Keep your eyes on the road while navigating with convenient voice guidance
- Repeat/program/random/intro play
- Treble/bass/balance/fader/volume control
- AM/FM stereo receiver
- Electronic anti-shock
- Aux rear input

- Auto memory store/preset scan
- Support DVD/VCD/CD/CD-R/CD-RW/MP3
- Parking video output
- 30 preset stations memory
- 320 watts total output(4x80 watts)
- 4 channel RCA preamp output/subwoofer output
- Card-sized full function remote control
- Picture Control: Brightness/contrast/hue/chrome
- USB/SD-MMC card reader MP4-JPEG/MP3 WMA playback
- Dimensions: 7.24"D x 7.01"W x 3.94"H



**7" BLUETOOTH LCD DIGITAL TOUCH SCREEN RECEIVER WITH GPS MAPS, USB/SD MEMORY CARD READERS, AUX/
MP3 INPUT, DOUBLE DIN WITH REMOTE**

PLDNV77U



- Touch Screen Control Operations
- With Built-in Bluetooth Technology you can stream audio and take calls directly from your hand-held Bluetooth enabled device with crystal clear wireless performance
- Bluetooth Functions: Auto Muting & Hands Free Talking Capability
- Voice Guidance Helps You Keep Your Eyes on the Road
- 4G SD Card with USA/Canada/Mexico Maps
- Text to Speech & Turn by Turn Voice Prompts
- TFT LCD Display
- Selectable USA/Europe Radio Frequency
- 30 Station Memory (18 FM/12 AM)
- PAL/NTSC Color System
- LD/DX & ST/MD Selector
- Full Function Wireless Remote Control
- Rear Camera Output, Parking Video Input
- File Compatibility: MP4, JPEG, MP3, WMA and More
- Last Position Memory
- iPod Connection Cable Included
- Repeat/Intro/Random/Clock Function/Mute Control
- 4 Channel RCA Preamp Output/Subwoofer Output
- Picture Control: Brightness/Contrast/Hue/Chrome
- Treble/Bass/Balance/Fader/Volume/Control
- PLL Synthesizer Tuner
- Auto Store/Preset Scan
- AM/FM-MPX 2 Band Radio
- Selectable View Angle
- A/V Input & A/V Output
- 320 Watts (4 x 80W)
- Preset EQ
- Unit Dimensions: 7.24" D x 7.01" W x 3.94" H

PLDNB78I

**7" DOUBLE DIN IN-DASH MOTORIZED FOLD-DOWN TOUCH SCREEN TFT/LCD MONITOR w/ DVD/CD/MP3/
MP4/USB /SD/AMFM/RDS/BLUETOOTH & SCREEN DIAL PAD BUILT-IN GPS/TTS w/ USA/CANADA &
MEXICO MAPS**

- 7" 16:9 Wide Screen TFT LCD Display
- Touch Screen Operation
- Motorized Fold-Down Front Screen Panel
- With Built-in Bluetooth Technology you can stream audio directly from your hand-held bluetooth enabled device with crystal clear wireless performance (iPhone, Droid, Blackberry, iPads, Tablets, Etc.)
- 2G SD Card w/ USA/Canada/Mexico Maps
- Text to speech & Turn by Turn Voice Prompts
- Keep your Eyes on the Road While Navigating w/ Convenient Guidance
- Picture Control: Brightness/Contrast/Hue/Chrome
- USB/SD-MMC Card Reader MP4-JPEG/MP3 WMA Playback
- Repeat/Program/Random/Intro Play

- Treble/Bass/Balance/Fader/Volume Control
- AM/FM Stereo Receiver
- Electronic Anti-Shock
- AUX Rear Input
- Auto Memory Store/Preset Scan
- Support DVD/VCD/CD/CD-R/CD-RW/MP3
- Parking Video Output
- 30 Preset Stations Memory
- 320 Watts Total Output (4 x 80 Watts)
- Bluetooth Function Auto Muting Feature, Hands Free Talking Capabilities
- 4 Channel RCA Preamp Output/Subwoofer Output
- Direct iPod/iPhone Connection Cable (compatible with 30-pin dock connector only)
- Unit Dimensions: 7.24" (D) x 7.01" (W) x 3.94" (D)



7-INCH BLUETOOTH AND GPS NAVIGATION HEADUNIT RECEIVER WITH BUILT-IN MIC FOR HANDS-FREE CALL ANSWERING, TOUCH SCREEN, USB/SD CARD READERS, AM/FM RADIO, AUX INPUT

PLRNV71



- Hi-Resolution 7" HD Digital Display
- Built-in Bluetooth for Wireless Music Streaming
- Built-in Microphone for Hands-Free Calling
- Compatible with All of Your Favorite Bluetooth Devices
- Integrated GPS Navigation System
- Text to Speech & Turn-by-Turn Voice Prompts
- Includes SD Card with USA/Canada/Mexico Maps
- Touch Screen Control Operation
- User-Friendly Control Interface
- Fully Motorized & Detachable Screen
- Telescopes Out and Up with Tilt Adjustment
- USB Flash & SD Memory Card Readers
- 3.5mm (AUX) Input Connector Jack & RCA Line Out
- Inputs: AUX, Rear Camera, Parking Video Input
- Audio Line Input Jack (MP3/Digital Video Player)
- Direct Connection of Alternate Audio/ Video Source via AUX
- AM/FM Radio with 30 Station Memory
- Includes Remote Control
- Technical Specs: Single DIN Size Universal Standard
- Wide Screen TFT - LCD Display
- Aspect Ratio: 16:9 High Definition
- PAL/NTSC Color System - Brightness: 400 NITS
- AM/FM-MPX 2 Band Radio - Auto Store/Prescan
- PLL Synthesizer Tuner & Last Position Memory
- File Compatibility: Supports All of Your Favorite Files (MP3, MP4, WMA, AVI, JPEG, MPEG, BMP & More)
- Treble, Bass, Balance, Fader, Encoder, Volume Adjustment
- ESP (Electronic Shock Protection)
- Anti-Shock Mechanism

PLRNV63

6.5" BLUETOOTH LCD DIGITAL TOUCH SCREEN RECEIVER WITH GPS, WITH MAPS FOR USA/CANADA/MEXICO, USB/SD MEMORY CARD READERS, AUX/MP3 INPUT, BLUETOOTH, DOUBLE DIN WITH REMOTE

- Touch Screen Control Operations
- With Built-in Bluetooth Technology you can stream audio and take calls directly from your hand-held Bluetooth enabled device with crystal clear wireless performance
- Bluetooth Functions: Auto Muting & Hands Free Talking Capability
- Voice Guidance Helps You Keep Your Eyes on the Road
- 4G SD Card with USA/Canada/Mexico Maps
- Text to Speech & Turn by Turn Voice Prompts
- TFT LCD Display
- Selectable USA/Europe Radio Frequency
- 30 Station Memory (18 FM/12 AM)
- PAL/NTSC Color System
- LD/DX & ST/MD Selector
- Full Function Wireless Remote Control

- Rear Camera Output, Parking Video Input
- File Compatibility: MP4, JPEG, MP3, WMA and More
- Last Position Memory
- Repeat/Intro/Random/Clock Function/Mute Control
- 4 Channel RCA Preamp Output/Subwoofer Output
- Picture Control: Brightness/Contrast/Hue/Chrome
- Treble/Bass/Balance/Fader/Volume/Control
- PLL Synthesizer Tuner
- Auto Store/Prescan
- AM/FM-MPX 2 Band Radio
- Selectable View Angle
- A/V Input & A/V Output
- 320 Watts (4 x 80W)
- Preset EQ
- Unit Dimensions: 7.24" D x 7.01" W x 3.94" H



6.5" BLUETOOTH LCD DIGITAL TOUCH SCREEN RECEIVER WITH AM/FM, USB/SD MEMORY CARD READERS, AUX/MP3 INPUT, BLUETOOTH, DOUBLE DIN WITH REMOTE

PLRDN62BT



- Touch Screen Control Operations
- With Built-in Bluetooth Technology you can stream audio and take calls directly from your hand-held Bluetooth enabled device with crystal clear wireless performance
- Bluetooth Functions: Auto Muting & Hands Free Talking Capability
- TFT LCD Display
- Selectable USA/Europe Radio Frequency
- 30 Station Memory (18 FM/12 AM)
- PAL/NTSC Color System
- LD/DX & ST/MD Selector
- Full Function Wireless Remote Control

- Rear Camera Output, Parking Video Input
- File Compatibility: MP4, JPEG, MP3, WMA and More
- Last Position Memory
- Repeat/Intro/Random/Clock Function/Mute Control
- 4 Channel RCA Preamp Output/Subwoofer Output
- Picture Control: Brightness/Contrast/Hue/Chrome
- Treble/Bass/Balance/Fader/Volume/Control
- PLL Synthesizer Tuner
- Auto Store/Prescan
- AM/FM-MPX 2 Band Radio
- A/V Input & A/V Output

PLRM70BT

7" SINGLE DIN IN-DASH DETACHABLE MOTORIZED TOUCH SCREEN TFT/LCD MONITOR W/ MULTIMEDIA USB/SD/ AM/FM/ BLUETOOTH RECEIVER

- Hi-Resolution 7" HD Digital Display
- Built-in Bluetooth for Wireless Music Streaming
- Built-in Microphone for Hands-Free Calling
- Compatible with All of Your Favorite Bluetooth Devices
- Touch Screen Control Operation
- User-Friendly Control Interface
- Fully Motorized & Detachable Screen
- Telescopes Out and Up with Tilt Adjustment
- USB Flash & SD Memory Card Readers
- 3.5mm (AUX) Input Connector Jack & RCA Line Out
- Inputs AUX, Rear Camera, Parking Video Input
- Audio Line Input Jack (MP3/Digital Video Player)
- Direct Connection of Alternate Audio Video Source via AUX

- AM/FM Radio with 30 Station Memory
- Includes Remote Control
- Technical Specs: Single DIN Size Universal Standard
- Wide Screen TFT - LCD Display
- Aspect Ratio 16:9 High Definition
- AM/FM-MPX 2 Band Radio - Auto Store/Prescan
- PLL Synthesizer Tuner & Last Position Memory
- On Screen Display Title, Time, Chapter, Subtitle
- Treble, Bass, Balance, Fader, Encoder, Volume Adjustment
- Mute - Clock Function - Preset EQ
- ISO Connector - USB Compatible
- Dimensions 7.08" x 7.08" x 1.97" inches



PLD75MU

7" TOUCH SCREEN TFT/LCD MONITOR W/DIGITAL VIDEO PLAYER/ CD/MP3/USB/SD SLOT/AM/FM/RDS PLAYER

- Digital Video Player/VCD/MPEG4/MP3/CD/CD-R/CD-RW Compatible
- Detachable Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- PLL Synthesizer Tuner
- Auto Store/Preset Scan
- AM/FM-MPX 2 Band Radio
- 30 Stations Memory (18FM/12AM)
- Built-In 7 Inch (16:9)TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440 x 234 Pixels
- Brightness: 400NITS
- On Screen Display Title, Time, Chapter, Subtitle
- Anti-Shock Mechanism
- ESP Function
- LO/DX & ST MO Selector
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Subwoofer Output
- A/V Input & A/V Output
- USB Compatible
- SD Compatible
- Direct Connection of Alternate Audio Video Source Through AUX Line Input/Input Jack/MP3/Digital Video Player/CD
- PAL/NTSC Color System
- Remote Control
- Rear Camera Input
- Parking Video Input
- RDS-EON
- ISO Connector
- 320 Watts (4 x 80W)
- Last Position Memory
- Steering Wheel Interface For OEM Vehicles Equipped with Controls
- Million Color Changing on TFT
- Dimensions: 6.5"(W) x 5"(H) x 8.2"(D)



7" TOUCH SCREEN TFT/LCD MONITOR W/DIGITAL VIDEO PLAYER/CD/MP3/USB/SD SLOT/AM/FM/RDS PLAYER W/BLUETOOTH SYSTEM AND BUILT-IN AUX A/V INPUT FOR IPOD/SMART PHONES/MP3 PLAYERS

PLD77MUB



- Digital Video Player/VCD/MPEG4/MP3/CD/CD-R/CD-RW Compatible
- Detachable Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- PLL Synthesizer Tuner
- Auto Store/Preset Scan
- AM/FM-MPX 2 Band Radio
- 30 Stations Memory (18FM/12AM)
- Built-In 7 Inch (16:9)TFT Color Monitor
- Touch Screen Control Operation
- Resolution: 1440 x 234 Pixels
- Brightness: 400NITS
- On Screen Display Title, Time, Chapter, Subtitle
- Ani-Shock Mechanism
- ESP Function
- LO/DX & ST MO Selector
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Subwoofer Output
- A/V Input & A/V Output
- USB Compatible
- SD Compatible
- Direct Connection of Alternate Audio Video Source Through AUX Line Input/Input Jack/MP3/Digital Video Player/CD
- PAL/NTSC Color System
- Remote Control
- Rear Camera Input
- Parking Video Input
- RDS-EON
- ISO Connector
- 320 Watts (4 x 80W)
- Last Position Memory
- Steering Wheel Interface For OEM Vehicles Equipped with Controls

PLTD79BT

7" SINGLE DIN IN-DASH DETACHABLE MOTORIZED TOUCH SCREEN TFT/LCD MONITOR W/ DVD/CD/MP3/MP4/USB/SD/AM-FM BLUETOOTH RECEIVER

- Hi-Resolution 7" HD Digital Display
- Built-in Bluetooth for Wireless Music Streaming
- Built-in Microphone for Hands-Free Calling
- Compatible with All of Your Favorite Bluetooth Devices
- Touch Screen Control Operation
- User-Friendly Control Interface
- Fully Motorized & Detachable Screen
- Telescopes Out and Up with Tilt Adjustment
- USB Flash & SD Memory Card Readers
- Front-Loading CDDVD Player
- 3.5mm (AUX) Input Connector Jack & RCA Line Out
- Inputs AUX, Rear Camera, Parking Video Input
- Audio Line Input Jack (MP3/Digital Video Player)
- Direct Connection of Alternate Audio Video Source via AUX
- AMFM Radio with 30 Station Memory
- Includes Remote Control/Technical Specs/Single DIN Size Universal Standard
- Wide Screen TFT - LCD Display
- Aspect Ratio 16:9 High Definition
- PAL/NTSC Color System - Brightness 400 NITS
- AMFM-MPX 2 Band Radio - Auto Store/Preset Scan
- PLL Synthesizer Tuner & Last Position Memory
- On Screen Display Title, Time, Chapter, Subtitle
- File Compatibility Supports All of Your Favorite Files (DVD, VCD, MP3, MP4, WMA, AVI, JPEG, MPEG, BMP & More)
- Treble, Bass, Balance, Fader, Encoder, Volume Adjustment
- ESP (Electronic Shock Protection)



7" TFT TOUCH SCREEN DVD/CD/MP3/CD-R/USB/ AM/FM/RDS RECEIVER

PLD71MU



- Built-In 7 Inch(16:9) TFT Color Monitor
- Touch Screen Control Operation
- DVD/MPEG4/MP3/CD/CD-R/CD-RW Compatible
- Motorized Slide Down Detachable Front Panel
- Treble/Bass/Balance/Fader/Encoder Volume
- PLL Synthesizer Tuner - AM/FM-MPX 2 Band Radio
- Auto Store/Preset Scan
- 30 Station Memory(18FM/12AM)
- Resolution: 1440x234 Pixels
- Brightness: 400nits
- On Screen Title, Time, Chapter,Subtitle,Angle
- Dolby Digital Coaxial Outputs PAL/NTSC System Color
- ESP Function Anti-Shock Mechanism
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock - Mute Control - Preset EQ
- Subwoofer & RCA Line Output
- Selectable Viewing Angle
- A/V Input & A/V Output
- SD/MMC Card Slot / USB Input Jack
- Direct Connection Of Alternate
- Audio/Video Aux Line Input Jack(MP3/Ipod)
- Includes Remote Control - RDS-EON
- Rear Camera Output - Parking Video Input
- 11 Background Colors - Last Position Memory

7" SINGLE DIN IN-DASH MOTORIZED TOUCH SCREEN TFT/LCD DIGITAL MONITOR w/DVD/CD/MP4/USB/SD-SLOT CARD AM/FM/BLUETOOTH DIAL PAD BUILT-IN GPS/TTS w/USA/CANADA & MEXICO MAPS

PLBT72G



- In Dash 7" 16:9 High Definition Wide TFT LCD
- Touch Screen Control Operation
- Bluetooth Compatible A2DP & AVRCP Support
- Built-In GPS Navigation System
- Text to Speech & Turn by Turn Voice Prompts
- SD Card with USA/Canada/Mexico Maps
- Digital Video Player/VCD/MPGE4/MP3/CD/CD-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio - Auto Store/Preset Scan
- PLL Synthesizer Tuner - 30 Station Memory
- Full Motorized Screen Telescopes out and Up Including Front to Back Angling
- Detachable Front Panel - LCD Digital Display
- On Screen Display Title, Time, Chapter, Subtitle
- Treble, Bass, Balance, Fader, Encoder, Volume
- PAL/NTSC Color System - Brightness: 400 NITS
- Resolution: 1440 x 234 Pixels
- Last Position Memory
- ESP (Electronic Shock Protection)
- Anti-shock Mechanism
- LO/DX & ST/MO Selector
- Direct Connection of Alternate Audio/ Video Source Through AUX Line Input Jack (MP3/Digital Video Player/CD)
- Mute - Clock Function - Preset EQ
- RCA Line Out
- Subwoofer & Parking Video Input
- Includes Remote Control
- AUX Input & Rear Camera Input
- ISO Connector - USB Compatible
- 3 Colors Illumination
- Dimensions: 7.01"W x 1.98"H x 6.54"D

PLBT73G

7-INCH BLUETOOTH AND GPS NAVIGATION HEADUNIT RECEIVER WITH BUILT-IN MIC FOR HANDS-FREE CALL ANSWERING, TOUCH SCREEN, CD/DVD PLAYER, USB/SD CARD READERS, AM/FM RADIO, AUX INPUT

- Hi-Resolution 7" HD Digital Display
- Built-in Bluetooth for Wireless Music Streaming
- Built-in Microphone for Hands-Free Calling
- Compatible with All of Your Favorite Bluetooth Devices
- Integrated GPS Navigation System
- Text to Speech & Turn-by-Turn Voice Prompts
- Includes SD Card with USA/Canada/Mexico Maps
- Touch Screen Control Operation
- User-Friendly Control Interface
- Fully Motorized & Detachable Screen
- Telescopes Out and Up with Tilt Adjustment
- USB Flash & SD Memory Card Readers
- Front-Loading CD/DVD Player
- 3.5mm (AUX) Input Connector Jack & RCA Line Out
- Inputs: AUX, Rear Camera, Parking Video Input
- Audio Line Input Jack (MP3/Digital Video Player)
- Direct Connection of Alternate Audio/ Video Source via AUX

- AM/FM Radio with 30 Station Memory
- Includes Remote Control
- Technical Specs: Single DIN Size Universal Standard
- Wide Screen TFT - LCD Display
- Aspect Ratio: 16:9 High Definition
- PAL/NTSC Color System - Brightness: 400 NITS
- AM/FM-MPX 2 Band Radio - Auto Store/Preset Scan
- PLL Synthesizer Tuner & Last Position Memory
- On Screen Display Title, Time, Chapter, Subtitle
- File Compatibility: Supports All of Your Favorite Files (DVD, VCD, MP3, MP4, WMA, AVI, JPEG, MPEG, BMP & More)
- Treble, Bass, Balance, Fader, Encoder, Volume Adjustment
- ESP (Electronic Shock Protection)
- Anti-Shock Mechanism
- LO/DX & ST/MO Selector
- Mute - Clock Function - Preset EQ
- ISO Connector - USB Compatible



NEW

7" TOUCH SCREEN MOTORIZED DETACHABLE TFT/LCD MONITOR WITH DVD/CD/MP3/AM/FM RECEIVER

PLTS76DU



- DVD/VCD/MPGE4/MP3/CD-RW Compatible
- AM/FM-MPX 2 Band Radio
- PLL Synthesizer Tuner
- Auto Store/Preset Scan
- 30 Station Memory
- Touch Screen Control Operation
- Full Motorized Screen Telescopes Out And Up
- LCD Digital Display
- On Screen Display Title, Time, Chapter, Subtitle
- Treble/Bass/Balance/Fader/Encoder Volume
- PAL/NTSC Color System
- Relolution:1440x234 Pixels
- Brightness: 400 Nits
- Last Position Memory
- ESP (Electronic Shock Protection)
- Anti-Shock Mechanism
- LO/DX & St/Mo Selector
- Direct Connection Of Alternate
- Audio/Video Source Through Aux Line
- Input Jack(Mp3/Dvd/Cd)
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Sub-Woofer
- A/V Input & A/V Output
- Remote Control
- Rear Camera Input
- Parking Video Input
- USB Connector
- Iso Connector
- SD/MMC Card Slot
- 320 Watts Total Outputs (4 x 80 Watts)
- USA/Europe Frequency Switch
- Dimensions:7.01"W X 1.98"H X 6.54"D

PLTS73FX

7" SINGLE DIN IN-DASH MOTORIZED TOUCH SCREEN TFT/LCD MONITOR w/ DVD/CD/MP3/MP4/USB/SD/AM-FM PLAYER

- AM/FM-MPX 2 Band Radio
- PLL Synthesizer Tuner
- Auto Store/Preset Scan
- 30 Station Memory
- Touch Screen Control Operation
- Full Motorized Screen Telescopes Out And Up
- LCD Digital Display
- On Screen Display Title, Time, Chapter, Subtitle
- Treble/Bass/Balance/Fader/Encoder Volume
- Pal/NTSC Color System
- Relolution:1440x234 Pixels
- Brightness: 400 Nits
- Last Position Memory
- ESP (Electronic Shock Protection)
- Anti-Shock Mechanism
- Lo/DX & St/Mo Selector
- Direct Connection Of Alternate
- Audio/Video Source Through Aux line

- Input Jack(Mp3/Dvd/Cd)
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA line Out
- Preset EQ
- Sub-Woofer
- A/V Input & A/V Output
- Remote Control
- Rear Camera Input
- Parking Video Input
- Usb Connector
- Iso Connector
- Sd/Mmc Card Slot
- Dimensions: 7.01"W X 1.98"H X 6.54"D
- USA/Europe Frequency Switch
- Feather Touch Sensor Controls



PLD10BT

10.1" MOTORIZED TFT/LCD TOUCH SCREEN DETACHABLE DISPLAY DVD/VCD/CD/MP3/CD-R/USB/AM/FM/RDS RECEIVER W/ BLUETOOTH SYSTEM AND AUX A/V INPUT FOR IPOD/SMART PHONES/MP3 PLAYERS

- DVD/VCD/MPEG4/MP3/DIVX/CD/CD-RW Compaible
- Motorized & Full Detachable 10.1 Front Touch Screen Panel
- With Built-in Bluetooth Technology you can stream audio directly from your hand-held bluetooth enabled device with crystal clear wireless performance(iPhone, Droid, Blackberry, iPads, Tablets, Etc.)
- Treble/Bass/Balance/Fader/Encoder
- Volume PLL Synthesizer Tuner
- Auto Store/Preset Scan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory(18FM/12AM)
- 10.1 Inch(16:9) Tft Detachable Color Monitor
- Touch Screen Control Operation
- Resolution: 1024x600 Pixels
- Brightness: 400nits
- On Screen Display Title, Time, Chapter, Subtitle & Angle
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- Anti-Shock Mechanism
- ESP Function
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Subwoofer Output



10.1" BLUETOOTH HI-RES TOUCH SCREEN DIGITAL MULTIMEDIA RECEIVER HEADUNIT, MOTORIZED & DETACHABLE DISPLAY, USB FLASH DRIVE & MICRO SD CARD READERS, CD/DVD PLAYER

PLD11BT



- Built-in Bluetooth for Wireless Music Streaming
- Built-in Mic for Hands-Free Calling
- Compatible with All of Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphones, iPad, Tablet, etc.)
- 10.1 Inch LCD Color Monitor
- Touch Screen Control Operation
- Motorized & Detachable Display
- USB Flash & Micro SD Memory Card Readers
- Built-in CD Player Compatible with DVD, VCD, CD/CD-RW Discs
- Hi-Resolution: 1024 x 600 Pixels (16:9)
- AM/FM-MPX 2 Band Radio with 30 Station Memory
- Auto Store/Preset Scan
- A/V input & A/V Output
- Rear Camera Output
- Direct Connection of Alternate Audio/Video Aux Line Output Jack (MP3.iPod)
- On Screen Display Title, Time, Chapter, Subtitle & Angle
- Treble, Bass, Balance, Fader, Encoder Controls
- Play & Display Your Favorite Music, Pictures & Videos
- File Compatibility: AVI, MPEG4, MP3, DIVX, JPEG and More
- DVD, VCD, MPEG4, MP3, DIVX, CD/CD-RW Compatible
- Includes Wireless Remote Control & Detachable Screen

PLD101BT

10.1" MOTORIZED TFT/LCD TOUCH SCREEN DETACHABLE DISPLAY DVD/VCD/CD/MP3/CD-R/USB/AM/FM/RDS RECEIVER W/ BLUETOOTH SYSTEM AND AUX A/V INPUT FOR IPOD/SMART PHONES/MP3 PLAYERS

- DVD/VCD/MPEG4/MP3/DIVX/CD/CD-RW Compaible
- Motorized & Full Detachable 13.1 Front Touch Screen Panel
- With Built-in Bluetooth Technology you can stream audio directly from your hand-held bluetooth enabled device with crystal clear wireless performance(iPhone, Droid, Blackberry, iPads, Tablets, Etc.)
- Treble/Bass/Balance/Fader/Encoder
- Volume PLL Synthesizer Tuner
- Auto Store/Preset Scan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory(18FM/12AM)
- 10.1 Inch(16:9) Tft Detachable Color Monitor
- Touch Screen Control Operation
- Resolution: 1024x600 Pixels
- Brightness: 400nits
- On Screen Display Title, Time, Chapter, Subtitle & Angle
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- Anti-Shock Mechanism
- ESP Function
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Subwoofer Output
- Selectable View Angle
- A/V Input & A/V Output
- SD/MMC Card Slot
- Direct Connection Of Alternate Audio/Video Aux Line Input Jack (MP3/Ipod)



13.1" MOTORIZED TFT/LCD TOUCH SCREEN DETACHABLE DISPLAY DVD/VCD/CD/MP3/CD-R/USB/AM/FM/RDS RECEIVER W/ BLUETOOTH SYSTEM AND AUX A/V INPUT FOR IPOD/SMART PHONES/MP3 PLAYERS

PLSD131BT



- DVD/VCD/MPEG4/MP3/DIVX/CD/CD-RW Compaible
- Motorized & Full Detachable 13.1 Front Touch Screen Panel
- With Built-in Bluetooth Technology you can stream audio directly from your hand-held bluetooth enabled device with crystal clear wireless performance(iPhone, Droid, Blackberry, iPads, Tablets, Etc.)
- Treble/Bass/Balance/Fader/Encoder
- Volume PLL Synthesizer Tuner
- Auto Store/Preset Scan
- AM/FM-MPX 2 Band Radio
- 30 Station Memory(18FM/12AM)
- 13.1 Inch(16:9) Tft Detachable Color Monitor
- Touch Screen Control Operation
- Resolution: 1024x600 Pixels
- Brightness: 400nits
- On Screen Display Title, Time, Chapter, Subtitle & Angle
- Dolby Digital Coaxial Outputs
- PAL/NTSC Color System
- Anti-Shock Mechanism
- ESP Function
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock Function
- Mute Control
- RCA Line Out
- Preset EQ
- Subwoofer Output

NEW

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

BLUETOOTH IN-DASH DIGITAL RECEIVER HEADUNIT MEDIA PLAYER WITH 3" LCD MONITOR DISPLAY SCREEN, CD/DVD PLAYER, AM/FM RADIO, USB/SD CARD READERS, AUX (3.5MM) INPUT, SINGLE-DIN

PLD34MUB



NEW

- Built-in Bluetooth for Wireless Audio Streaming
- Built-in Mic for Hands-Free Call Answering Ability
- Works with all Your Favorite Devices
- (iPhone, Android, Smartphone, iPod, MP3 Player, iPad, Tablet)
- 3 Inch TFT/LCD Color Monitor Display Screen
- AUX (3.5mm) Input Connector Jack
- Direct Connection Of Alternate Audio/Video Source Through AUX Line
- File Compatibility: DVD, VCD, CD, MP3, MPEG-4, and More
- AM/FM-MPX 2 Band Radio - PLL Synthesizer Tuner
- Auto Store/Preset Scan - 30 Station Memory
- Hue, Brightness, Contrast, Saturation & Sharpness Adjustments
- On Screen Display Title, Time, Chapter, Subtitle
- Treble/Bass/Balance/Fader/Encoder Volume
- PAL/NTSC Color System
- Last Position Memory
- ESP (Electronic Shock Protection)
- Anti-Shock Mechanism
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Clock - Mute Control - Preset EQ
- A/V Input & A/V Output
- RCA Line Out

PLD40MU

4.3" TOUCH SCREEN TFT/LCD MONITOR W/ DIGITAL VIDEO PLAYER/CD/MP3/USB/SD/AM/FM/RDS PLAYER

- Built In 4.3 Inch Wide TFT Color Monitor
- Touch Screen Control Operation
- Digital Video Player/VCD/MPGE4/MP3/CD/CD-R/CD-RW Compatible
- AM/FM-MPX 2 Band Radio - PLL Synthesizer Tuner
- Auto Store/Preset Scan - 30 Station Memory
- Flip Down Detachable Front Panel
- On Screen Display Title, Time, Chapter, Subtitle
- Treble/Bass/Balance/Fader/Encoder Volume
- PAL/NTSC Color System
- Last Position Memory
- ESP (Electornic Shock Protection)
- Anti-Shock Mechanism
- LO/DX & ST/MO Selector
- Repeat/Intro/Random
- Direct Connection Of Alternate AUDIO/VIDEO Source Through AUX Line
- Input Jack(MP3/Digital Video Player/CD)
- Clock - Mute Control - Preset EQ
- RCA Line Out - Subwoofer Input
- A/V Input & A/V Output
- Remote Control - RDS-EON
- Rear Camera Input - Parking Video Input
- SD Memory Card Slot



3" TFT/LCD MONITOR MP3/MP4/SD/USB PLAYER & AM/FM RECEIVER

PL3MP4



- 3" Inch 16:9 Wide Screen TFT/LCD Display
- Full Detachable Front Panel
- Res. 400x240 Pixels/ Brightness: 400nits
- Treble/Bass/Balance/Fader/Encoder Volume Control
- USB/SD-MMC Card Reader MP4-JPEG/MP3 WMA-Playback
- Repeat Play
- AM/FM-MPX Stereo Radio
- Clock Function
- ESP Function Anti-Vibration/Shock Protection
- Auto Memory Store/Preset/Scan
- Parking Video Output
- DSP Equalizer Control-Rock-Classic-Pop
- 30 Preset Stations Memory (18FM/12AM)
- 2 Channel RCA Preamp Output
- Front Video/AUX Input (Ipod/MP3)
- Subwoofer Output
- Full Function Wireless Remote Control
- 240 Watts Total Output (4 X 60 Watts)
- Dimensions 7.09"W 1.97"H 6.14"D

PLR25BMPM

AM/FM RECEIVER MP3 PLAYBACK WITH USB/SD/AUX-IN AND BLUETOOTH CALL RECEIVE W/ MUSIC STREAMING

- AM/FM 2 Band Radio
- Built-in USB/SD Ports
- LCD Digital Display
- ID3 Tag Function
- Auto Seek and Store
- 30 Preset Memory Stations
- AUX-In Jack
- Remote Control
- Incoming/Outgoing Calls Capability
- Audio Streaming from Mobile Phone
- Last-Track Memory
- 10 Songs Skip Up/ 10 Songs Skip Down Function
- Preset EQ Function (Pop/Classic/Rock)
- Repeat and Random Functions
- RCA Line Out
- 4 Channel Output
- 240 Watt Total Power Output (4 x 60W)
- Dimensions: 7€ (W) x 1.96€ (H) x 4.3€ (D)



PLRDD19UB

BLUETOOTH DIGITAL RECEIVER WITH USB/SD CARD READERS, AM/FM RADIO, AUX INPUT, REMOTE CONTROL

- Built-in Bluetooth for Wireless Audio Streaming
- Works with Smartphones, MP3 Players, Tablets, etc.
- Built-in Mic for Hands-Free Call Answering
- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD Memory Card Readers
- MP3/WMA Music File Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710kHz
- 4 x 60 Watts Maximum Power Output
- Double DIN Headunit Receiver
- Dimensions (W x D x H): 7" x 4.5" x 3.92"



DIGITAL RECEIVER WITH USB/SD MEMORY CARD READERS, AM/FM RADIO, AUX INPUT, REMOTE CONTROL

PLRRR18U



- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD Memory Card Readers
- MP3/WMA Music File Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Includes Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- 4 x 60 Watts Maximum Power Output
- Double DIN Headunit Receiver
- Dimensions: 7" (W) x 4.5" (D) x 3.92" (H)

PLTR24U

IN-DASH DIGITAL RECEIVER HEADUNIT WITH USB/SD CARD READERS, MP3/AUX-INPUT, AM/FM RADIO, DC 12-24V DUAL VOLTAGE SYSTEM COMPATIBLE WITH CAR, BUS, TRUCK, RV, ETC.

- AM/FM MPX PLL Tuning Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB & SD Card Ports for Direct MP3/WMA Digital Music File Playback
- Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18 FM & 12 AM
- AUX-in: 3.5mm / 1/8" Auxiliary Audio Line Input
- Stereo RCA 2 Channel RCA Line Output
- Full Function Wireless Remote Control
- Illuminated Control Buttons
- Seek & Scan Radio Functions
- 240 Watts Max Output(4 x 60 Watts)
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- DC 12V-24V Dual Voltage Compatible
- Compatible with Car, Bus, Truck & RV Electric Systems
- Single DIN Headunit Receiver
- Dimensions (W x D x H): 7" x 4.72" x 1.96"



IN-DASH BLUETOOTH DIGITAL RECEIVER HEADUNIT WITH USB/SD CARD READERS, MP3/AUX-INPUT, AM/FM RADIO, DC 12-24V DUAL VOLTAGE SYSTEM COMPATIBLE WITH CAR, BUS, TRUCK, RV, ETC.

PLTR25UB



- Built-in Bluetooth for Wireless Audio Streaming
- Works with Smartphones, MP3 Players, Tablets, etc.
- Built-in Mic for Hands-Free Call Answering
- AM/FM MPX PLL Tuning Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB & SD Card Ports for Direct MP3/WMA Digital Music File Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18 FM & 12 AM
- AUX-in: 3.5mm / 1/8" Auxiliary Audio Line Input
- Stereo RCA 2 Channel RCA Line Output
- Full Function Wireless Remote Control
- Illuminated Control Buttons
- Seek & Scan Radio Functions
- 240 Watts Max Output (4 x 60 Watts)
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- DC 12V-24V Dual Voltage Compatible
- Compatible with Car, Bus, Truck & RV Electric Systems
- Single DIN Headunit Receiver

PLR14MPF

IN-DASH AM/FM-MPX MP3 SHAFT STYLE DUAL KNOB RADIO W/USB/SD CARD

- AM/FM-MPX/USB/SD MP3 Stereo
- Classic Car Audio Replacement Allows For Zero Dash Board Modification using Shaft Style Openings
- Built-In USB/ SD/ MMC MP3 Player (2 Gig Max)
- Volume/ Balance/ Tone Control
- 1.2 Volt RCA Line Out (Amplifier Line Output)
- 2 Channel Output 80W x 2 (160W Max)
- Adjustable Shaft Knobs from 4.65"-5.5"
- Mounting Hardware Included
- DC 12 Volt 3 Amp Power Consumption
- Unit Dimensions: 7"W x 4.72"D x 1.96"H



IN-DASH AM/FM-MPX RECEIVER MP3 PLAYBACK WITH USB/SD CARD

PLR16MUA

- AM/FM-MPX Stereo Tuning
- Digital LCD Display Panel
- USB/SD/MMC MP3 Player
- Auxiliary Input
- Volume Control
- AM Frequency Range: 520~1710kHz
- FM Frequency Range: 87.5~108MHz
- RCA Line Out (4Ch)
- 160 Watts Total Output(4 x 40 Watts)
- Dimensions: 7"W x 4.72"D x 1.96"H

PLR34M

IN-DASH AM/FM-MPX RECEIVER WITH MP3 PLAYBACK & USB/SD/AUX INPUTS

- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD/MMC Card Port For MP3/WMA Music Files Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7"W x 4.72"D x 1.96"H



AM/FM-MPX IN-DASH DETACHABLE FACE RADIO W/SD/MMC/USB PLAYER

PLR31MP



- AM/FM-MPX PLL Tuning Car Radio
- Red LCD Display MP3 ID3 Tag Digital
- Readout Compatible
- USB Slot & SD/MMC Card Port For MP3/WMA Music File Playback
- Detachable face Panel
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory: 18FM-12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Red Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530-1710 KHz
- FM Frequency Range: 87.5-107.9 MHz
- 4 X 40 Watts Maximum Power Output

PLR32MPB

IN-DASH AM/FM-MPX RADIO WITH SD/USB/MP3 PLAYBACK, 3.5MM AUX-IN, BLUETOOTH WIRELESS STREAMING

- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD/MMC Card Port for MP3/WMA Music File Playback
- Encoding Volume/Balance/Bass/Treble & Fader Control
- Front Auxiliary Input Jack - Connect Virtually Any Digital Music Player
- Stream Music From Your Bluetooth Device (iPhone/Android/BlackBerry etc.)
- 30 Radio Preset Station Memory 18FM -12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710KHz
- FM Frequency Range: 87.5~107.9MHz
- 4 X 60 watt Maximum Power Output
- Dimensions: 7" (W) x 4.72" (D) x 1.96" (H)



IN-DASH RECEIVER W/ MP3 PLAYBACK, AM/FM-MPX RADIO, CD PLAYER & USB/SD/AUX INPUTS

PLCD41MU



- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot and SD/MMC Card Port for MP3/WMA Music Files Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530-1710 KHz
- FM Frequency Range: 87.5-107.9 Mhz
- RDS-EON
- ISO Connector
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7.5" W x 7.2"D x 2.2"H

PLCD51BT

IN-DASH BLUETOOTH RECEIVER WITH USB/SD MEMORY SLOTS, AUX INPUT FOR MP3 PLAYBACK & AM/FM RADIO

- Bluetooth Compatible A2DP and AVRCP Support
- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot and SD/MMC Card Port for MP3/WMA Music Files Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530-1710 KHz
- FM Frequency Range: 87.5-107.9 MHz
- RDS-EON
- ISO Connector
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7.5" W x 7.2"D x 2.2"H



AM/FM/MP3/WMA DETACHABLE FACE PLAYER W/ USB/SD READER & IPOD INTERFACE

PLR38I

- AM/FM 2-Band Radio (USA)
- Semi-Detachable Faceplate
- Front Side IPOD Connector
- Built-In USB/SD Ports (Front)
- LCD Multi-Color Digital Display
- ID3 Tag Function
- Tone Control
- Rotary Tuning/Volume Control
- AUX-IN Jack (Front)
- Last-Track Memory
- 10 Songs Skip Up/ 10 Songs Skip Down
- Folder Up/Down Function
- Mute Function
- 2-Channel output 50W x 4 (200w Max)
- Unit Dimensions: 7"W x 5.5"D x 1.96"H

IN-DASH AM/FM-MPX DETACHABLE FACE RECEIVER WITH MP3 PLAYBACK & USB/SD/AUX INPUTS

PLR44MU



- AM/FM-MPX PLL Tuning Car Radio
- Dot Matrix White LCD Display
- Detachable Face Panel
- MP3 ID3 Tag Digital Readout Compatible
- USB Slot & SD/MMC Card Port For MP3/WMA Music Files Playback
- Encoding Volume, Balance, Bass, Treble & Fader Control
- 30 Radio Preset Station Memory 18FM-12AM
- Front Auxiliary Input Jack
- Stereo RCA Line Out Jack
- Full Function Remote Control
- Blue Button Illumination Controls
- Seek/Scan Function
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- 4 x 60 Watts Maximum Power Output
- Dimensions: 7"W x 4.72"D x 1.96"H

PLR17MPUA

IN-DASH AM/FM-MPX RECEIVER MP3 PLAYBACK W/ USB/SD CARD READERS & AUX INPUT FOR IPOD, MP3 PLAYERS, SMARTPHONES, ETC.

- AM/FM-MPX Stereo Tuning
- Digital LCD Display Panel
- USB/SD/MMC MP3 Player
- Auxiliary Input
- 30 Preset Stations (18FM/12AM)
- Volume/Balance Control

- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~108MHz
- RCA Line Out (4Ch)
- 200 Watts Total Output (4 x 50 Watts)
- Dimensions: 7"W x 4.72"D x 1.96"H



IN-DASH RECEIVER WITH AM/FM RADIO, AUX INPUT FOR IPOD/MP3 PLAYERS & SD/USB FLASH READERS

PLR26MPU



- AM/FM Tuner
- 30 Preset Station Memory
- USB/SD Compatible - Play Back Your Favorite Digital Music
- Front Auxiliary Input Jack - Connect Virtually Any Digital Music Player
- LCD Digital Display

- ID3 Tag Display
- Intro/Repeat/Random Playback Modes
- Clock/Mute Functions
- Blue Button Illumination
- RCA Line Output
- 4 x 60 Watt Output
- Treble/Bass Control

PLR27MPBU

AM/FM RADIO WITH SD/USB/MP3 PLAYBACK, 3.5MM AUX-IN, BLUETOOTH WIRELESS STREAMING

- AM/FM Tuner
- 30 Preset Station Memory
- USB/SD Compatible - Play Back Your Favorite Digital Music
- Front Auxiliary Input Jack - Connect Virtually Any Digital Music Player
- Stream Music From Your Bluetooth Device (iPhone, Android, BlackBerry, Etc.)

- LCD Digital Display
- ID3 Tag Display
- Intro/Repeat/Random Playback Modes
- Clock/Mute Functions
- Blue Button Illumination
- RCA Line Output
- 4 x 80 Watt Output
- Treble/Bass Control



IN-DASH AM/FM RADIO WITH USB/SD MEMORY CARD READERS, AUX-INPUT FOR IPOD, MP3 PLAYERS, SMARTPHONES, ETC.

PLR15MUA



- RCA Line Out
- Car MP3 Player
- Clock Function
- Built-In USB/SD
- Aux-In on Front
- 4-Channel Output
- ID3 TAG function

- LCD Digital Display
- Auto Seek
- Auto Store
- 30 Preset Memory Stations
- AM/FM 2-Band PLL Tuning Radio
- Preset EQ Function (Pop/Rock/Classic)



Automobile Video & Monitors



PLRD92

9" FLIP DOWN ROOF MOUNT MONITOR & DVD PLAYER WITH WIRELESS FM MODULATOR/ IR TRANSMITTER

- 9 16:9 Wide Screen TFT-LCD Monitor
- High Resolution: 640 x 234 Pixels
- Brightness: 450 Cd/ Sq.M
- Contrast Ratio: 500:1
- Viewing Angle: 140 degree (Left/Right) 120 degree(Top/Down)
- Overhead Console with Twin Dome Lights w/ LED
- IR transmitter Ready for Wireless Headphone
- Built-In FM Modulator
- Full Function Wireless Remote
- On Screen Menu System
- Front Push Buttons Controls
- Audio/ Video Inputs
- USB SD Card Inputs
- Mult System: NTSC PAL Auto Switching
- DVD/VCD/CD/CD-R/CDRW/MP3 Compatible
- Power Requirement: 12 DC
- DIN Cable w/ RCA Jacks for A/V Connections
- Dimensions: 8.46" (W) x 2.17" (D) x 9.45" (H)

PLRD94

9.4" FLIP ROOF MOUNT MONITOR & DVD PLAYER WITH WIRELESS FM MODULATOR, IR TRANSMITTER, USB FLASH & SD CARD COMPATIBLE

- Contrast Ratio 500:1
- PAL/NTSC Compatible
- Power Supply: DC 12V
- One Way Audio/Video Input
- One Way Audio/Video Output
- Built-In Dome LED Led Lights
- Built-In DUAL IR/FM Transmitter
- Full Function Wireless Remote Control
- Display Mode: 16:9 Wide View Screen
- Slot-In Disc Loading (Anti-Shock Mechanism)
- English OSD Menu with Multi-Language Support
- Dimensions: 11.8" W x 9.96" D x 2.13" H



PLVW1342R

13.4" TFT ROOF MOUNT MONITOR & IR TRANSMITTER

- 13.4 TFT Active Matrix Monitor
- Overhead Console w/Flip Bracket
- Wide Angle, Off Axis Visibility
- Resolution: 800x600
- 4:3 Display Format
- Front Panel Controls
- 2 Audio Video Inputs
- Swivel Bracket Permits 45° L/R Rotation
- NTSC/PAL System
- OSD English Menu
- Built-In IR Transmitter for Wireless IR Headphones
- Wireless Remote Control
- Power Supply: DC12V
- Dimension: 13.5 x 11.5 1.2"



PLVWR1440

14" HIGH RESOLUTION TFT ROOF MOUNT MONITOR & IR TRANSMITTER

- 14 TFT Active Matrix System
- English OSD Menu
- NTSC/ PAL Color System
- 4:3 Display Format
- 45˚ Swivel Screen
- High Resolution 1024 x 768
- 2 AV Input
- Built-In IR Transmitter for Use with IR Headphones
- Full Function Wireless Remote Control
- Dual Dome Light Universal Roof Mount Console
- Wireless Remote Control
- DC 12 Volt Power Supply
- Dimensions: 13.5 x 11.7 x 1.25



PLVWR1442

14.7" HIGH RESOLUTION TFT ROOF MOUNT MONITOR & IR TRANSMITTER

- 14.7 TFT Active Matrix System
- English OSD Menu
- NTSC/ PAL Color System
- 4:3 Display Format
- 45˚ Swivel Screen
- High Resolution 1024 x 768
- 2 AV Input
- Built-In IR Transmitter for Use with IR Headphones
- Full Function Wireless Remote Control
- Dual Dome Light Universal Roof Mount Console
- Wireless Remote Control
- DC 12 Volt Power Supply
- Dimensions: 13.5 x 11.7 x 1.25



PLVWR1755

17.5" FLIP ROOF MOUNT MONITOR W/ WIRELESS IR TRANSMITTER

- 1 Audio Input
- 2 Video Inputs
- Contrast: 400:1
- System: PAL/NTSC
- Power Supply: DC12V
- With build-in LED Light
- Power Consumption:<15 Watt
- Display Mode: 16:9 Wide View Angle
- Full Function Wireless Remote Control
- High Resolution: 1440 X (RGB) X 900 Pixel
- Image Bright, Contrast, Color, Tint Adjust
- 17.5 Flip Roof Mount Monitor with Wireless IR Transmitter
- Unit dimension: 19.4 x 15 x 16.8



PLVWR2400

25" WIDE SCREEN TFT-LCD ROOF MOUNT VIDEO MONITOR W/IR TRANSMITTER

- 25 TFT/ LCD Active Matrix System
- On Screen Video Display Menu
- 16:9 Wide Screen Aspect Ratio
- High Resolution: 1920 x 1080
- PAL/NTSC Compatible
- Two AV Inputs
- Built-in IR Transmitter for Wireless IR Headphones
- English OSD Menu
- Full Function Wireless Remote Control
- Dual Dome Lights
- Universal Roof Mount Console
- Power Input: DC 12V
- Dimensions: 23.5 (W) x 16.8 (H) x 1.8 (D)



PLRD104

10.4" FLIP ROOF MOUNT MONITOR & DVD PLAYER WITH WIRELESS FM MODULATOR, IR TRANSMITTER, USB FLASH & SD CARD COMPATIBLE

- Contrast Ratio 500:1
- PAL/NTSC Compatible
- Power Supply: DC 12V
- One Way Audio/Video Input
- One Way Audio/Video Output
- Built-in Dome LED Led Lights
- Built-In Dual IR/FM Transmitter
- Full Function Wireless Remote Control
- Display Mode: 16:9 Wide View Screen
- Slot-In Disc Loading (Anti-Shock Mechanism)
- English OSD Menu with Multi-Language Support
- Dimensions: 11.8" W x 9.96" D x 2.13" H



PLRD133F

12.1" ROOF MOUNT TFT LCD MONITOR W/ BUILT-IN DVD PLAYER

- 12.1 Wide Screen Hi Res TFT LCD Monitor
- Resolution: 1280 x 800
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console w/ Twin Dome Lights w/ LED
- IR Transmitter Ready for Wireless Headphone
- Front Push Bottoms Controls
- Audio Video Inputs/Outputs
- Multi- System: NTSC & PAL Auto Switching
- Slot-Loading DVD Player
- DVD CD/CD-R/CD-RW/MP3 Compatible
- Built-In Speaker
- Anti-Skip Mechanism
- Last Position memory
- Full Function Wirelss Remote Control
- Dimension: 16.06W x 13H x 2.7D



PLRD143IF

14.1" ROOF MOUNT TFT-LCD MONITOR W/ BUILT IN DVD PLAYER

- 14.1 Wide Screen Hi-Resolution TFT-LCD Monitor
- Flip-Down Roof Mount
- Resolution: 1280 x 800
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console w/ Twin Dome Lights w/ LED
- 90 degrees Swivel Left Right
- IR Transmitter Ready for Wireless Headphone
- Front Push Button Controls
- 1 Set Audio Video Inputs
- 1 Set Audio Video Outputs
- Multi-System: NTSC PAL Auto Switching
- Slot-Load DVD PLayer
- DVD/ CD/CD-R/CD-RW/MP3 Compatible
- Built-In Speaker
- Anti-Skip Mechanism
- Last Position Memory
- Full Function Wireless Remote Control
- Dimensions: 16.06W x 13H x 2.7D



PLRD145

13.3" ROOF MOUNT TFT LCD MONITOR BUILT IN DVD/USB/SD PLAYER W/ WIRELESS FM/IR TRANSMITTER'S & INCLUDED 3 COLOR SKINS (GRY/BLK/TAN)

- 13.3 Wide Screen Hi Resolution TFT-LCD Monitor
- Overhead Console with Dual LED Dome Lights
- Resolution: 1280 x 800
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- On Screen Menu Control
- Power Source: DC 12 Volt
- 140 degree viewing angle adjustment
- Full Function wireless remote control
- IR Transmitter Ready for Wireless Headphone
- Overhead Console with Dual LED Dome Lights
- Push button dual function front mounted controls
- 1 Set RCA Audio Video Inputs
- 1 Set RCA Audio Video Outputs
- Multi System: NTSC/PAL Auto Switch
- Side Mount Slot-Load DVD Player
- DVD CD/CD-R/CD-RW/MP3 Compatible
- Built in Speakers and audible button indicators
- Built in Anti-Skip Mechanism & Last position memory
- Dimensions: 16.25x W 13 D x 2.15 H Closed (9.75 Open)
- Wireless FM Transmitter to broadcast to a existing FM stereo (Portable/Car/Etc.)
- 3 sets of interchangeable 2pc snap-on color skins. Choose from Grey, Black, or Tan



PLRD153IF

15.1" FLIP DOWN MONITOR W/ BUILT IN DVD/SD/USB PLAYER W/ WIRELESS FM MODULATOR/ IR TRANSMITTER

- 15.1 Wide Screen Hi Re TFT-LCD Monitor
- Flip Down Roof Mount
- Resolution: 1440 x 900
- Brightness: 450 Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console w/Twin Dome Light w/LED
- 90 degrees Swivel Left/Right
- IR Transmitter Ready for Wireless Headphone
- Front Push Button Controls
- RCA Audio Video Inputs
- Multi System: NTSC PAL Auto Switching
- Slot-Load DVD Player
- DVD/CD/CD-R/CD-RW/MP3/MPEG4 Compatible
- USB SD Card Inputs
- Anti-Skip Mechanism
- Last Position Memory
- Full Function Wireless Remote Control
- Dimensions: 15.5(W) x 15.2(H) x 2.4(D)



PLRD175IF

17" FLIP DOWN MONITOR W/ BUILT IN DVD/ SD/ USB PLAYER W/ WIRELESS FM MODULATOR & IR TRANSMITTER

- 17 Wide Screen Hi-Resolution TFT-LCD Monitor
- Flip-Down Roof Mount
- Resolution: 1280 x 1024
- Brightness: 450 Cd/ Sq. M
- Contrast Ratio: 500:1
- Overhead Console w/ Twin Dome Light w/ LED
- IR Transmitter Ready for Wireless Headphone
- Front Push Button Controls
- RCA Audio Video Inputs
- Multi-System: NTSC PAL Auto Switching
- Slot-load DVD Player
- DVD/CD/CD-R/CD-RW/MP3 Compatible
- USB SD Card Inputs
- Anti-Skip Mechanism
- Last Position Memory
- Full Function Wireless Remote Control
- Dimensions: 21.4W x 16.7H x 2.7D



PLRD195IF

19" FLIP DOWN W/ BUILT IN DVD/SD/USB PLAYER W/ WIRELESS FM/ MODULATOR & IR TRANSMITTER

- 19 Wide Screen Hi-Resolution TFT-LCD Monitor
- Flip-Down Roof Mount
- Resolution: 1440 x 900
- Brightness: 450Cd/Sq.M
- Contrast Ratio: 500:1
- Overhead Console w/ Twin Dome Lights w/ LED
- IR transmitter Ready for Wireless Headphone
- Front Push Button Controls
- RCA Audio Video Inputs
- Multi-System: NTSC PAL Auto Switching
- Slot-Load DVD Player
- DVD/CD/CD-R/CD-RW/MP3 Compatible
- USB SD Card Inputs
- Anti-Skip Mechanism
- Last Position Memory
- Full Function Wireless Remote Control
- Dimensions: 21.4W x 16.7H x 2.7D



PL71PHB

ADJUSTABLE HEADREST PAIR WITH BUILT-IN 7" TFT-LCD MONITORS (BLACK)

- Headrest Package Includes Two 7 TFT Monitor
- Screen Size: 7 TFT-LCD Monitor
- Built-in Speaker
- Aspect Ratio: 16:9 Wide Screen
- 1440 x 234 Resolution
- Contrast: Ratio: 300:1
- Brightness: 350cd/m3
- Headphone Jack
- Up Down Tilting Feature
- Viewing Angle: U/D: 160° L/R: 160°
- Response Time: 25ms
- Video Input Systems: AV1,AV2
- PAL/NTSC Compatible
- Full Function Wireless Remote Control
- English OSD Menu
- IR Transmitter for Wireless IR Headphones
- Adjustable Mounting Posts From 4 3/4 - 7 1/2
- Dual Diameter Mounting Posts (1/2 3/8)
- Dimensions: 10W x 7.5H x 4.5D



PLD93BK PLD93GR

9" WIDE SCREEN HD MOBILE HEADREST CLIP-ON VIDEO DISPLAY MONITOR WITH BUILT-IN MULTIMEDIA DISC PLAYER, USB FLASH / SD MEMORY CARD READERS, HDMI INPUT PORT, WIRELESS FM/IR TRANSMITTERS, REMOTE CONTROL



- Audio & Video Vehicle Headrest Entertainment System
- 9" LCD Digital Wide Screen Display
- High Resolution Slim Design
- Built-in Top-Loading DVD/CD (Multimedia Disc) Player
- Includes Universal 'Clip-On' Headrest Mounting Hardware
- Versatile Mounting Options: Rotating Screen Display Settings
- Easily Removable Without Causing Damage to Interior
- Tilt/Angle Adjustable Monitor Display Screen
- User-Friendly Control Interface
- USB & SD Memory Card Readers
- USB Port Double as Device Charge Port
- Front Panel Button Controls
- RCA (L/R) Audio/Video Inputs/Outputs
- Ability to Connect to Additional Video Display Monitor
- AV Input Connector Jack
- HDMI Input Port
- Connect Smartphones & Compatible Devices to Instantly Stream Video
- Built-in Speakers and Headphone Jack
- Built-in IR Transmitter for Wireless IR Headphone Use
- Integrated FM Transmitter
- Full Function Wireless Remote Control
- Zoom/Volume/Subtitle/Source Selection Controls
- English OSD Menu
- Includes All Necessary Mounting Hardware & Cables/Wiring for Installation
- *Can be Hard-Wired or Powered via Included Plug-in Cigarette Lighter Power Cable
- Built-in Games and Remote Control Doubles as Joystick
-
- Video System: PAL / NTSC Compatible Auto Switching
- CD/DVD Player Compatible: CD-R, CD-RW, DVD, VCD, DIVX, DVDR+, SVCD, DVCD
- File Compatibility: MP3, MP4, MP5, JPG, MPEG4, WMA, AVI
- Maximum USB/SD Card Size: 8GB
- Aspect Ratio: 16:9
- Resolution: 800 x 480 Pixels
- Contrast Ratio: 300:1
- Brightness: 350 cd/m2
- Power Supply: DC 12V
- Dimensions (W x H x D): 10.2" x 8.6" x 2.3"

PLD93GR



PLD93BK



PL73

7" WIDE SCREEN HI-RES HEADREST VIDEO DISPLAY MONITOR WITH BUILT-IN MULTIMEDIA DISC PLAYER, USB FLASH & SD MEMORY CARD READERS, REMOTE CONTROL, ZIPPER COVER

- 7" LCD Digital Wide Screen Display
- Built-in DVD Player
- DVD/VCD/MP3/JPG/MP4/CD-R/CD-RW compatible
- Includes Headrest with Zipper Cover
- USB/SD/MMC Card Reader
- Built-in Game with Joystick
- Aspect Ratio: 16:9
- Resolution: 1440 x 234
- Contrast Ratio: 300:1
- Brightness: 350 cd/m2
- AV Inputs/Output
- PAL / NTSC Compatible
- Auto Switching
- Full Function Wireless Remote Control
- Built-in IR Transmitter for Wireless IR Headphone Use
- Built-in FM Transmitter
- English OSD Menu
- Power Supply DC12V
- Dimensions: 10.6"W X 7.9"H X 6.3"D

PL73GR
(GRAY)



PL73BK
(BLACK)



PL73TN
(TAN)



PL91HR

ADJUSTABLE HEADRESTS W/ BUILT-IN 9" TFT/LCD MONITOR W/IR TRANSMITTER

- 9" TFT monitor with pillow
- Full Function Wireless Remote Control
- Headrest with Zipper Hide-Away Cover
- Aspect Ratio: 16:9 Wide-Screen
- High Resolution: 1024 x 600
- Contrast Ratio: 300:1
- Brightness: 350cd/m2
- PAL/NTSC Compatible
- Front Panel Audio/Video Input
- Headphone jack
- English OSD menu
- Power Supply: Dc12v
- Built in IR Transmitter
- Adjustable Mounting Posts: 4.3" to 7.1"
- Dimensions: 11.5"W x 8.1"H x 4.7"D



PL91HRGR
(GRAY)



PL91HRTN
(TAN)



PL91HRBK
(BLACK)

PLVHR75

7" TFT WIDE SCREEN HEADREST MONITOR

- PAL/NTSC System
- Two Video Inputs
- Power Supply: DC 12V
- Resolution: 1440 x 234
- Full Function Remote Control
- 7" TFT Active Matrix Display
- Back Light: Cold Cathode Filament Tube
- Headrest Shroud & Universal Stand Mount
- Viewing Angles:(Left/Right)60°(Top)30°(Down)10°
- Dimension: 7.25W x 4.75 x 0.90



PLHR76

7" WIDESCREEN TFT/LCD VIDEO MONITOR W/HEADREST SHROUD

- 7 Widescreen TFT/LCD Active Matrix Monitor
- No Radiation
- Fashion Design
- PAL/ NTSC System
- High Resolution
- Low Power Consumption
- With Remote Control
- Earphone Jack Output
- 2 AV Inputs
- Headrest Shroud & Universal Stand Mount



PLHR77

7" WIDE SCREEN TFT LCD VIDEO MONITOR W/HEADREST SHROUD AND UNIVERSAL STAND

- 7Tft LCD Active Matrix Video Monitor
- 16:9 Wide Screen
- PAL/NTSC System
- High Resolution: 480 X 234
- Wireless Remote Control
- Earphone Jack (3.5mm) Audio Output
- Two RCA Video Inputs
- AV input jack(3.5mm)
- Power Supply: Dc12v
- Headrest Shroud & Universal Stand Mount
- Dimension: 7.60W X 5.24H X 0.98D



PLHR78W

7" WIDESCREEN TFT HEADREST MONITOR IN WHITE

- 7" TFT Active Matrix Display
- 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC / PAL System Compatible
- Wireless Remote Control
- Dual Video Input
- Reverse Imaging Left/Right Up/Down
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud and Universal Stand Mount
- On Screen Display
- Brightness, Contrast, Color
- DC 12 Volt Power
- Dimensions: 7.25 (W) x 5.65 (H) x 1.45 (D)



PLHR79

7" WIDESCREEN TFT HEADREST MONITOR

- 7" TFT Active Matrix Display
- 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC / PAL System Compatible
- Wireless Remote Control
- Dual Video Input
- Reverse Imaging Left/Right Up/Down
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud and Universal Stand Mount
- On Screen Display
- Brightness, Contrast, Color
- DC 12 Volt Power
- Dimensions: 7.25 (W) x 5.65 (H) x 1.45 (D)



PLHR95B

9.2" HI-RES WIDESCREEN HEADREST MONITOR, STAND & SHROUD - w/RCA CONNECTORS & REMOTE CONTROL (BLACK COLOR)

- 9.2 TFT/LCD Digital Monitor
- 16:9 Wide Screen Format
- High Resolution 800 x 480
- NTSC/ PAL System Compatible
- 2 Video Input, 1 Audio Input
- RCA Connectors
- Built-in IR Transmitter for Wireless Headphones
- Built with Speaker
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud & Universal Stand Mount
- Wireless Full Function Remote Control
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max
- Unit Dimensions: 8.7H x 5.7W x 0.8D



PLHR96

9" TFT LCD HEADREST MONITOR w/ STAND (BLACK)

- 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC/ PAL System Compatible
- Wireless Remote Control
- Dual Video Input
- Built-in IR Transmitter for Wireless Headphones
- Reverse Imaging Left/Right Up/Down
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud and Universal Stand Mount
- On Screen Display
- Brightness, Contrast, Color
- DC 12 Volt Power
- Dimensions: 9.8"W x 6.7H x 1.2D



PLHR97W

9" TFT LCD HEADREST MONITOR w/ STAND (WHITE)

- 9 TFT Active Matrix Display
- 16:9 Wide Screen Format
- Resolution: 1440 x 234 Dots
- NTSC/ PAL System Compatible
- Wireless Remote Control
- Dual Video Input
- Built-in IR Transmitter for Wireless Headphones
- Reverse Imaging Left/Right Up/Down
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud & Universal Stand Mount
- On Screen Display
- Brightness/ Contrast/ Color
- DC 12 Volt Power.



PLHR98W

9.2" HI-RES WIDESCREEN HEADREST MONITOR, STAND & SHROUD - w/ RCA CONNECTORS & REMOTE CONTROL (WHITE COLOR)

- 9.2 TFT/LCD Digital Monitor
- 16:9 Wide Screen Format
- High Resolution 800 x 480
- NTSC/ PAL System Compatible
- 2 Video Input, 1 Audio Input
- RCA Connectors
- Built-in IR Transmitter for Wireless Headphones
- Built with Speaker
- Brightness/ Contrast/ Color/ Tint Adjustments
- Headrest Shroud & Universal Stand Mount
- Wireless Full Function Remote Control
- Power Requirement: Dc 12V +/- 10%
- Power Consumption: 5W Max
- Unit Dimensions: 8.7H x 5.7W x 0.8D



PLMN7SU

7" UNIVERSAL MULTIMEDIA MONITOR WITH USB/SD CARD READERS, AV INPUT/ AV OUTPUT, HEADPHONE JACK & RECHARGEABLE BATTERY

- 7 Full Color TFT-LCD Monitor
- Headphone Jack
- On Screen Menu Control
- Built-in Stereo Speakers
- USB Flash Drive and SD Memory Card Readers
- AV Input Function for Connecting External Devices
- Built-In Rechargeable Battery - Up to 2 Hour Life
- Accessories Included: Headrest Mounting Bag, 12V Cigarette Lighter Plug & AC Adapter
- PAL/NTSC Compatible
- AC Adapter: 110-220V
- High Resolution: 480 x 234
- Electronic Shock Resistance
- Fold-Out Picture Frame Stand
- Compatibility: MP3, MP4, WMA, AVI, JPEG, DIVX & More
- Pre-Installed DOLBY Decoder for MPEG-4 Video Support
- Includes Multi-Function Remote Control
- Dimensions: 7.08 (W) x 5.9 (H) x 1.28 (D)



PLMN9SU 9" UNIVERSAL MULTIMEDIA MONITOR WITH USB/SD CARD READERS, AV INPUT/AV OUTPUT, HEADPHONE JACK & RECHARGEABLE BATTERY

- 9 Full Color TFT-LCD Monitor
- Headphone Jack
- On Screen Menu Control
- Built-in Stereo Speakers
- USB Flash Drive and SD Memory Card Readers
- AV Input Function for Connecting External Devices
- Built-In Rechargeable Battery - Up to 2 Hour Life
- Accessories Included: Headrest Mounting Bag, 12V Cigarette Lighter Plug & AC Adapter
- PAL/NTSC Compatible
- AC Adapter: 110-220V
- High Resolution: 480 x 234
- Electronic Shock Resistance
- Fold-Out Picture Frame Stand
- Compatibility: MP3, MP4, WMA, AVI, JPEG, DIVX & More
- Pre-Installed DOLBY Decoder for MPEG-4 Video Support
- Includes Multi-Function Remote Control
- Dimensions: 9.2 (W) x 5.9 (H) x 1.28 (D)



PHR105B 10" HI-RES WIDESCREEN DIGITAL MONITOR DISPLAY SCREEN, DUAL RCA VIDEO INPUT CONNECTORS, DETACHABLE SHROUD MOUNT HOUSING (BLACK COLOR)

- 10.0" inch LCD Digital Monitor Display Screen
- Dual RCA Video Input Connector Jacks (Video 1, Video 2)
- Connect up to 2 Video Sources
- Built-in IR Transmitter for Wireless Headphones
- Front Panel Touch-Button & Volume Controls
- Brightness, Contrast, Color & Tint Adjustments
- Shroud/Bracket Housing for Flush Mounting & Installation
- Monitor Easily Detaches from Shroud Mount
- Suitable for In-Vehicle or In-Home Use
- Perfect for Custom Security Surveillance Applications
- Reverse Image Function for Connecting Vehicle Backup Cameras
- RCA Audio Input Connector Jack
- Built-in Stereo Speaker
- Input Source Selection
- Accessories Included:
 - Monitor Detachable Headrest Shroud
 - Universal Stand Mount
 - Power & Wiring Harness
 - Remote Control
- Technical Specs:
 - TFT/LCD Screen Display
 - 16:9 Wide Screen Format
 - Active Matrix Video Monitor
 - Pixel Resolution: 1024 x 600 Pixels
 - Video Format System: PAL/NTSC Compatible
 - Power Requirement: DC 12V +/- 10%
 - Power Consumption: 5W Max
 - Monitor Dimensions (W x H x D): 9.7" x 6.5" x 0.8" inches



PHR108W 10" HI-RES WIDESCREEN DIGITAL MONITOR DISPLAY SCREEN, DUAL RCA VIDEO INPUT CONNECTORS, DETACHABLE SHROUD MOUNT HOUSING (WHITE COLOR)

- 10.0" inch LCD Digital Monitor Display Screen
- Dual RCA Video Input Connector Jacks (Video 1, Video 2)
- Connect up to 2 Video Sources
- Built-in IR Transmitter for Wireless Headphones
- Front Panel Touch-Button & Volume Controls
- Brightness, Contrast, Color & Tint Adjustments
- Shroud/Bracket Housing for Flush Mounting & Installation
- Monitor Easily Detaches from Shroud Mount
- Suitable for In-Vehicle or In-Home Use
- Perfect for Custom Security Surveillance Applications
- Reverse Image Function for Connecting Vehicle Backup Cameras
- RCA Audio Input Connector Jack
- Built-in Stereo Speaker
- Input Source Selection
- Accessories Included:
 - Monitor Detachable Headrest Shroud
 - Universal Stand Mount
 - Power & Wiring Harness
 - Remote Control
- Technical Specs:
 - TFT/LCD Screen Display
 - 16:9 Wide Screen Format
 - Active Matrix Video Monitor
 - Pixel Resolution: 1024 x 600 Pixels
 - Video Format System: PAL/NTSC Compatible
 - Power Requirement: DC 12V +/- 10%
 - Power Consumption: 5W Max
 - Monitor Dimensions (W x H x D): 9.7" x 6.5" x 0.8" inches



PLHRQD7B 7" VIDEO DISPLAY MONITOR, QUAD VIEW (4) SOURCE ZONE DISPLAY, MULTIPLE SOURCE INPUT, SELECTABLE VIEWING MODE, BACKUP CAMERA COMPATIBLE (BLACK)

- 7" Widescreen LCD Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- Displays One, Two or Four Video Connections On-Screen
- Multiple Source Safety & Security Display
- Reverse Image Function for Connecting Vehicle Backup Cameras
- Headrest Shroud for Flush Mounting & Installation
- (4) RCA Video Connector Jacks
- Connect up to Four Cameras
- Input Source Selection
- Front Panel Touch Button Controls
- Brightness, Color, Contrast Picture Adjustments
- AC Power Supply
- Accessories Included:
 - Monitor Detachable Headrest Shroud
 - Universal Stand Mount
 - Power & Wiring Harness
 - Remote Control
- Technical Specs:
 - TFT/LCD Screen Display
 - Active Matrix Video Monitor
 - Pixel Resolution: 480 x 234
 - Video Format System: PAL/NTSC Compatible
 - Operating Temperature: -20 to +65



PLHRQD7W 7" VIDEO DISPLAY MONITOR, QUAD VIEW (4) SOURCE ZONE DISPLAY, MULTIPLE SOURCE INPUT, SELECTABLE VIEWING MODE, BACKUP CAMERA COMPATIBLE (WHITE)

- 7" Widescreen LCD Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- Displays One, Two or Four Video Connections On-Screen
- Multiple Source Safety & Security Display
- Reverse Image Function for Connecting Vehicle Backup Cameras
- Headrest Shroud for Flush Mounting & Installation
- (4) RCA Video Connector Jacks
- Connect up to Four Cameras
- Input Source Selection
- Front Panel Touch Button Controls
- Brightness, Color, Contrast Picture Adjustments
- AC Power Supply
- Accessories Included:
 - Monitor Detachable Headrest Shroud
 - Universal Stand Mount
 - Power & Wiring Harness
 - Remote Control
- Technical Specs:
 - TFT/LCD Screen Display
 - Active Matrix Video Monitor
 - Pixel Resolution: 480 x 234
 - Video Format System: PAL/NTSC Compatible
 - Operating Temperature: -20 to +65



PLHRQD9B 9" VIDEO DISPLAY MONITOR, QUAD VIEW (4) SOURCE ZONE DISPLAY, MULTIPLE SOURCE INPUT, SELECTABLE VIEWING MODE, BACKUP CAMERA COMPATIBLE (BLACK)

- 9" Widescreen LCD Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- Displays One, Two or Four Video Connections On-Screen
- Multiple Source Safety & Security Display
- Reverse Image Function for Connecting Vehicle Backup Cameras
- Headrest Shroud for Flush Mounting & Installation
- (4) RCA Video Connector Jacks
- Connect up to Four Cameras
- Input Source Selection
- Front Panel Touch Button Controls
- Brightness, Color, Contrast Picture Adjustments
- AC Power Supply
- Monitor Detachable Headrest Shroud
- Universal Stand Mount
- Power & Wiring Harness
- Remote Control



PLHRQD9W 9" VIDEO DISPLAY MONITOR, QUAD VIEW (4) SOURCE ZONE DISPLAY, MULTIPLE SOURCE INPUT, SELECTABLE VIEWING MODE, BACKUP CAMERA COMPATIBLE (WHITE)

- 9" Widescreen LCD Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- Displays One, Two or Four Video Connections On-Screen
- Multiple Source Safety & Security Display
- Reverse Image Function for Connecting Vehicle Backup Cameras
- Headrest Shroud for Flush Mounting & Installation
- (4) RCA Video Connector Jacks
- Connect up to Four Cameras
- Input Source Selection
- Front Panel Touch Button Controls
- Brightness, Color, Contrast Picture Adjustments
- AC Power Supply
- Monitor Detachable Headrest Shroud
- Universal Stand Mount
- Power & Wiring Harness
- Remote Control



PLVWH1 IN-CAR INFRARED DUAL-CHANNEL WIRELESS STEREO HEADPHONES COMPATIBLE WITH IN-VEHICLE AV APPLICATIONS FOR KIDS AND ADULTS

- Light Weight Design For Comfortable Wearing
- Small Ear Size Fits Children Well
- Auto Mute On Headphone
- Auto Power Off Function On Headphone
- Personal Volume Control
- Dual Channel
- A Channel: Right Channel: 2.8mhz; Left Channel: 2.3mhz
- B Channel: Right Channel: 3.8mhz; Left Channel: 3.2mhz
- Speaker: 30mm Mylar
- Cone Impedance: About 32ohm
- Effective Range(Maximum): About 10 Meters
- S/N Ratio: 70db(Minimum)
- Channel Separation: 40db(Minimum)
- Frequency Response: 30-20000Hz
- Power Supply: 2*AAA Battery
- Battery Life: About 48 Hours



PLVWH3 IN-CAR DUAL-CHANNEL WIRELESS STEREO HEADPHONES COMPATIBLE WITH IN-VEHICLE AV APPLICATIONS

- Light Weight Design For Comfortable Wearing
- Auto Mute On Headphone
- Auto Power Off Function On Headphone
- Personal Volume Control
- Dual Channel
- A Channel: Right Channel: 2.8mhz; Left Channel: 2.3mhz
- B Channel: Right Channel: 3.8mhz; Left Channel: 3.2mhz
- Speaker: 30mm Mylar
- Cone Impedance: About 32ohm
- Effective Range(Maximum): About 10 Meters
- S/N Ratio: 70db(Minimum)
- Channel Separation: 40db(Minimum)
- Frequency Response: 30-20000Hz
- Power Supply: 2—AAA Battery
- Battery Life: About 48 Hours



PLVWH5 WIRELESS IR MOBILE VIDEO STEREO HEADPHONES

- Single Wireless Infrared Stereo Headphone
- Light Weight Adjustable Size Comfortable Headset
- Power On/Off With Auto Shutdown Feature
- Volume Adjust Knob
- Carrier Frequency: Right Channel 2.8MHz, Left Channel 2.3 MHz
- 8 Meter Effective Range 45 degree Left Right
- Operates Up To 48 Hours On (2) AAA Batteries (Not Included)



PLVWH6 DUAL WIRELESS IR MOBILE VIDEO STEREO HEADPHONES W/TRANSMITTER

- Studio Quality Headsets with Wide Angle Infrared Detection.
- Lightweight & Durable Construction
- Padded Ear Pieces For Long Term Listening
- High Quality Drivers for Excellent Frequency Response and Wired Performance.
- Headphones Feature Adjustable Fit Headsets That Can Accommodate A Child Or An Adult.
- Controls Conveniently Located On Headphone for Volume and Power.
- Auto Muting Switch On Receiver
- 12 Volt DC - 1 Amp Adapter Required To Power Transmitter(Not Included)
- Input: RCA Cable
- Power On/Off With Auto Shutdown Feature
- Carrier Frequency: Right Channel 2.8MHz, Left Channel 2.3 MHz
- 8 Meter Effective Range 45 degree Left Right
- Power Source: Transmitter DC 12VDC Hardwired, 2 AAA Batteries 1.5V For Each Headset (not included)
- Dimensions(Transmitter): 0.5 (H) X 3.75(W) X 2.5 (D)



Backup Cameras

Parking Assist



PORTABLE WIRELESS CAMERA SYSTEM

NEW

PLCMH5

- Camera: Night vision
- Magnetic base
- Built in video transmission
- Built in rechargeable battery
- Display:
 - Easy to use, single hand operation
 - Full color 2.5inch led screen
 - Select normal or reverse image
 - 4 hour rechargeable battery built in

PLCM10

REAR VIEW BACKUP CAMERA, LICENSE PLATE MOUNT, PARKING ASSIST SYSTEM, WEATHERPROOF, NIGHT VISION LOW LIGHT ILLUMINATION, DISTANCE SCALE LINES

- Color Camera Displays Distance Scale Lines
- Weatherproof Marine Grade Camera Housing
- Tilt View Adjustable Camera When Mounted
- Preferably Mounted in the Rear of Your Vehicle
- Slim Design for Convenient Mounting Above License Plates
- RCA Video Connector for a Wide Range of Display Compatibility
- Wide Angle Camera Lens
- Automatic White Balance Picture Output
- Includes Camera, Power and Video Connection Cables
- Technical Specs: Power Supply: DC 12 Volt
- Effective Pixels: 656 x 492 Pixels
- Output Standard: PAL/NTSC
- Resolution: 420 TV Lines
- Built in distance scale lines
- 7-LED IR Vision Sensors
- Image Sensor: OV 7910 Color CMOS
- Lens: 6mm, 135° Viewing Angle
- Low Light Illumination: 1.5 Lux/F1.2
- Video Output: RCA 1.0 Vpp
- Composite Video @ 75 Ohm
- Temperature: -10 - 50° Celsius
- Camera Dimensions (H x W x D): 1.3" x 8.0" x 1.26"



NEW

REAR VIEW BACKUP CAMERA WITH NIGHT VISION ILLUMINATION

PLCM12

- Compact Camera with Wide Angle Lens Ability
- Marine Grade Waterproof Camera
- Night Vision Illumination
- Built-in LEDs for Low Light Performance
- 17 Foot Male to Male RCA Video Cable
- Color Picture Output
- CMD Image Sensor
- TV System: PAL/NTSC
- Total Pixels: 512 x 492
- Video Output: 1.0V pp-77 Ohm
- Resolution: 420 TV Lines
- IP67 Marine Rating
- Auto Image Adjustment
- 18.5mm Camera Diameter
- Lens Angle: 170 Degree
- Flush Mountable Housing
- Power Supply: DC 12V
- Power Consumption (mA): 200 mA
- Includes Cut-Out Drill Bit & All Necessary Installation Cables/Wires

PLCM16BP

LICENSE PLATE FRAME REAR VIEW BACKUP CAMERA, PARKING ASSIST, LED NIGHT VISION, WATERPROOF

- Waterproof Marine Grade Construction, IP68
- Image Sensor: Color CMD
- TV System: NTSC/PAL
- Effective Pixels: 628 x 586
- Horizontal Resolution: 420 TVL
- Sensing Area: 4.08mm x 3.102mm
- Shutter Speed: 1/60
- Minimum Illumination: 0.1-0.5 Lux/F = 1.2 (0 Lux with IR on)
- Video Output: RCA Connector; 1.0cp-p,75
- Power Supply: 12V
- Operating Temperature: -20°-90° RH 95% Max
- Wide Angle Lens: 120°/170°

NEW



NEW

WATERPROOF LICENSE PLATE MOUNT REAR VIEW BACKUP COLOR CAMERA, PARKING ASSIST DISTANCE SCALE LINES, NIGHT VISION ILLUMINATION (BLACK)

PLCM17BC

- Night Vision Illumination
- Marine Grade Waterproof Construction
- Extra Wide Range Camera Lens
- Distance Scale Lines Display
- True Color Reproduction
- 0.2 LUX Low Lighting Performance
- Auto White Balance
- Total Pixels: 656 x 492
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree
- Water & Fog Resistant IP68 Rating
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V 200mA
- 17' Foot RCA Video Cable (Male to Male Connectors)
- Dimension: 8.03"W x 1.30"H x 1.26"D

PLCM18BC

LICENSE PLATE MOUNT REAR VIEW BACKUP PARKING ASSIST CAMERA, NIGHT VISION LEDs, BUILT-IN DISTANCE SCALE LINES, WATERPROOF, ZINC BLACK CHROME

- Marine Grade Camera Construction
- Waterproof & Fog Resistant (IP67 Rating)
- Night Vision Low Lighting Capable
- Low Lux Performance (0.2 LUX)
- Built-in Distance Scale Lines
- Preferably Mounted Above the Rear License Plate
- Tilt Adjustable Camera Angle
- 420 TVL Horizontal Resolution
- True Color Reproduction
- Total Pixels: 656 x 492
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree
- Auto White Balance
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V 200mA
- 17 Foot male to male RCA Video Cable
- Includes All Necessary Installation Cables/Wires
- Dimension: 10.0"W x 1.3"H x 1.26"D



LICENSE PLATE MOUNT REAR VIEW BACKUP PARKING ASSIST CAMERA, NIGHT VISION LEDs, BUILT-IN DISTANCE SCALE LINES, WATERPROOF, ZINC METAL CHROME

PLCM18SC



- Marine Grade Camera Construction
- Waterproof & Fog Resistant (IP67 Rating)
- Night Vision Low Lighting Capable
- Low Lux Performance (0.2 LUX)
- Built-in Distance Scale Lines
- Preferably Mounted Above the Rear License Plate
- Tilt Adjustable Camera Angle
- 420 TVL Horizontal Resolution
- True Color Reproduction
- Total Pixels: 656 x 492
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree
- Auto White Balance
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V 200mA
- 17 Foot male to male RCA Video Cable
- Includes All Necessary Installation Cables/Wires
- Dimension: 10.0"W x 1.3"H x 1.26"D

PLCM19

LOW LUX REAR CAMERA BLACK CHROME METAL LISENCE PLATE FRAME

- 420 TVL Horizontal Resolution
- Waterproof Rating : IP67
- Sensor Image: Color CMD Sensor
- Low Light Capable
- 17 Foot Male to Male RCA Video Cable
- TV System: PAL/NTSC
- Effective Pixels: 512 x 492
- Resolution (TV Lines) : 420
- Resolution (TV Lines) : 420
- Video Output: 1.0V pp-770hm
- Lens Angle: MAX 170°
- Power Supply: DC 12V
- Current Consumption (mA): 200mA
- Dimension: 312 x 162 mm
- Operating Temperature (Deg C): -20 - +75 (RH95%MAX.)
- Storage Temperature (Deg C): -40 - +85 (RH95%MAX)



LICENSE PLATE REAR VIEW BACKUP CCD COLOR CAMERA "ZINC METAL CHROME"

PLCM21



- 420 TVL Horizontal Resolution
- True Color Reproduction
- Low Lux Performance of 0.3 LUX at F2.0
- Total Pixels: 512 x 492
- Resolution: 420 TV Lines
- Auto White Balance
- Waterproof (IP67)
- Low Lighting Capable
- High Sensitive: 1/3" DSP Color CCD Built-In
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V 200mA
- 17 Foot male to male RCA Video Cable
- Dimension: 12.7"W x 6.6"H

PLCM22IR

FLUSH MOUNT REAR VIEW BACKUP PARKING ASSIST CAMERA, NIGHT VISION LEDs, BUILT-IN DISTANCE SCALE LINES, WATERPROOF

- Marine Grade Waterproof 1.25" Camera
- CMD Image Sensor: OV7959 Color
- Flush Mountable Housing
- 17 Foot Male to Male RCA Video Cable
- Total Pixels: 510 x 492
- Resolution: 420 TV Lines
- Night Vision Low Lighting Capable
- 8 IR LED Lights
- Min Illumination: 0.5 LUX
- Auto Image Adjustment
- Color Camera Output Display
- Video Output: 1.0V pp-75 Ohm
- Power Supply: DC 12V 200 mA
- Includes Cut-Out Drill Bit & All Necessary Installation Cables/Wires
- Dimensions: 1.25"(W) x 1.25"(H) x 1.77"(L)



Distance Scale Lines



UNIVERSAL MULTI-MOUNT REAR VIEW BACKUP CAMERA, BUILT-IN DISTANCE SCALE LINES, PARKING ASSIST, WATERPROOF

PLCM24IR

- Marine Grade Waterproof Camera
- Multi-Mount: Choose Between Flush or Hanging Mount
- 17 Foot Male to Male RCA Video Cable
- Easily Connects to Compatible Video Monitors
- Image Sensor: 1/3" Color CMD
- Total Pixels: 580 x 540
- Resolution: 420 TV Lines
- Min. Illumination: 1.0 LUX
- IP Rating: 68; Lens Angle: 170°
- Auto Image Adjustment
- Video Output: 1.0 Vpp - 75 Ohm
- Power Supply: DC 12V
- Includes Cut-Out Drill Bit & All Necessary Installation Cables/Wires
- Dimensions: 0.67" (W) x 0.67" (H) x 0.9" (L)

PLCM37FRV

UNIVERSAL MOUNT OPTIONAL FRONT VIEW & REAR VIEW BACKUP COLOR CMD CAMERA BUILT-IN DISTANCE SCALE LINE

- Water proof Front & Rear View Camera
- 17 Foot Male to Male RCA Video Cable
- Images Sensors: 1/3" Color CMD
- PAL/NTSC Compatible
- Total Pixels: 56- x 540
- Resolution: 420 TV Lines
- Min: Illumination: .05 LUX
- IP Rating 68; Lens Angle: 170°
- Auto Image Adjustment
- LED Light for Night Vision
- Video Output: 1.0 Vpp-75 Ohm
- Power Supply: DC 12V
- Dimensions: 0.78" (W) x 0.78" (H) x 0.78" (L)



UNIVERSAL MOUNT OPTIONAL FRONT VIEW & REAR VIEW BACKUP COLOR CMD DISTANCE SCALE LINE CAMERA

PLCM38FRV

- Water Proof Front & Rear View Camera
- 17 Foot Male TO Male RCA Video Cable
- Image Sensors 1.3" Color DVD
- PAL/NTSC Compatible
- Total Pixels: 580 x 540
- Reclusion 420 TV Lines
- min. Illumination 05 LUX
- Ip rating:68 Lens Angle: 170 degree
- Auto Image Adjustment
- LED Light For Night vision
- Distance Scale Line
- Video Output 1.0 Vpp-75 Ohm
- Power Supply: DC2v
- Dimensions: 3.18" (W) x 2.95"(H) x 2.17"(D)

PLCM39FRV

WATERPROOF UNIVERSAL MOUNT REAR & FRONT VIEW CAMERA WITH 420 LINES OF RESOLUTION, WIDE-ANGLE LENS, AND DISTANCE SCALE LINES

- Ip rating: Ip68
- Image Sensors: 1/4" color CMD
- TV system: PAL/NTSC
- Effective Pixels: 580X540
- Resolution(Tv lines): 420
- Lens Angle: 130 degree
- Water proof
- Power supply: DC 12V
- With Front view and Rear view optional function
- Distance Scale Line



Distance Scale Lines



REAR VIEW CAMERA - 0 LUX NIGHT VISION LED LIGHTS WITH DISTANCE SCALE LINES

PLCM4LED

- Mini Square Night Vision Camera Housing
- IP-67 Waterproof Rating - Fog Resistant
- 420 TVL Horizontal Resolution
- Distance Scale Line Projection
- 4 LED Lights
- True Color Reproduction
- Total Pixels: 656 x 492
- Resolution: 420 TV Lines
- Auto White Balance
- Video Output: 1.0VPP-75 Ohm
- Power Supply: DC 12V 200mA
- Camera Viewing Angle: 170 Degrees
- Low Lux Performance of 0.2 LUX Night Vision
- Camera Dimensions: 0.9"(W) x 0.9"(H) x 0.9"(D)

PLCMB20

UNIVERSAL MOUNT REAR VIEW BACKUP CAMERA, PARKING ASSIST ANGLE ADJUSTABLE, DISTANCE SCALE LINES, NIGHT VISION LEDs, WATERPROOF



- Marine Grade Waterproof Camera
- Integrated Night Vision LED Lights
- Low Light Illumination Ability
- Built-in Distance Scale Lines
- CMD (1/3") Image Sensor
- 17 Foot Male to Male RCA Video Cable
- PAL/NTSC Compatible
- Video Output: 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution (TV Lines): 420
- Lens Angle: 170 degree
- Min Illumination: 0.5 LUX
- Color Camera Output Display
- Auto Image Adjustment
- Anti-Glare Shield
- IP rating: IP68
- Power Supply: DC 12V
- Exterior Vehicle Mount Housing
- Includes All Necessary Installation Cables/Wires
- Camera Dimensions: 3.18" x 2.95" x 2.17"

LCD MONITOR AND REAR VIEW LICENSE PLATE BACK-UP CAMERA PARKING ASSIST SYSTEM, 3.5" SCREEN, NIGHT VISION, DISTANCE



- Camera and Monitor Rear View Parking Assist System
- Includes Camera, Monitor & All Necessary Cables and Wiring
- Monitor: Screen Size: 3.5 Inch TFT/LCD
- 2 Video Inputs (for Additional Monitor Connection)
- Dashboard Mountable with Double-Stick Adhesive Pad
- NTSC Video System
- Brightness: 200 cd/m2
- Contrast: 200:1
- Total Monitor Dimensions: 3.8" x 3.5" x 0.7"
- Camera: Multi-Mount: Flush or Hanging Mount Compatible
- Built-In Distance Scale Lines
- Marine Grade Waterproof Housing
- Night Vision / Low Light Capability
- Distance Scale Line Camera
- Image Sensors: 1/3" Color CMD
- Pixels: 580 x 540
- Resolution: 420 TV Lines
- Min. Illumination: 1.0LUX
- IP Rating: 68; Lens Angle: 170°
- Video Output: 1.0 Vpp-75 Ohm
- Auto Image Adjustment
- Power Supply: DC 12V
- 17 Foot Male to Male RCA Video Cable
- Dimensions: 0.67" (W) x 0.67" (H) x 0.9" (L)

PLCM32

PLCM35R

3.5" TFT LCD DIGITAL MONITOR/NIGHT VISION REAR-VIEW CAMERA

- 3.5" TFT LCD Stand Monitor
- two Video Inputs
- NTSC System
- Dimensions: 3.8" x 3.5" x 0.7"
- Brightness: 200 cd/m2
- Contrast: 200:1
- Camera: CMOS waterproof 1.25" Flush Mount Housing
- 17 foot male to male RCA Video Cable
- Required Drill Cutout Tool Included
- Image Sensor: OV7910 Color CMOS
- Total Pixels: 510 x 492
- Resolution: 380 TV Lines
- Night Vision Low Lighting Capable
- 10 IR LED Lights
- Min. Illumination: 0.5 LUX
- Auto Image Adjustment
- Video Output: 1.0Vpp-75?
- Power Supply: DC12V 200Ma
- Dimensions: 1.25" (W) x 1.25" (H) x 77" (L)



3.5" SLIM TFT LCD DIGITAL UNIVERSAL MOUNT MONITOR W/ LICENSE PLATE MOUNT REARVIEW NIGHT VISION BACKUP CAMERA

- Screen Description:
- 3.5" slim TFT LCD Stand Monitor
- Automatically Switched On When Reversing
- Two Video Inputs
- PAL/NTSC Compatible
- Auto Switching
- Brightness: 200CD/M2
- Contrast ratio: 200:1
- Dimensions: 3.7"W x 3.3"H x 0.67"D
- Camera Description:
- Output Standard: PAL/NTSC Compatible
- High Resolution: 380TV lines x 60 fields
- Image Sensor: OV7910 color CMOS
- Lens: 6MM 92 degree
- Low Light Illumination: 1.5LUX/ F1.2
- Video Output: RCA 1.0 VPP composite video @ 75OHM
- Power Supply: Dc12v
- Temperature: -10~ 50 Celsius
- Unit Dimensions: 1.3"H x 8"W x 1.26"D

PLCM36

PLCM44

REAR VIEW BACKUP CAMERA PARKING ASSIST SYSTEM, INCLUDES 4.3" DIGITAL LCD SCREEN AND UNIVERSAL MOUNT WATERPROOF CAMERA WITH DISTANCE SCALE LINES

- Suction Cup Windshield/Dashboard Mount Monitor & Camera Provides Backup & Parking Assistance Safety
- Monitor: Screen Size: 4.3" Inch
- TFT-LCD Color Monitor
- Suction Cup Windshield / Dash Mountable
- Video Sense Input: Automatic Power-On When in Reverse
- Reverse-View Camera Priority for Signal Sense
- Video Color System: NTSC / PAL
- Contrast: 350:1
- 420 Line Horizontal Resolution
- Power Supply: DC 12V
- Camera: Built-in Distance Scale Lines (for Tight Parking & Depth Perception)
- Marine Grade (IP68) Construction
- Waterproof & Fog Resistant Housing
- Dual Universal Mount: Flush or Hanging Mounting Options
- Rugged, Durable & Reliable
- Auto White Balance
- Low Lux Lighting Capable
- Night Vision Viewing
- Color Image Reproduction
- 170 Degree Wide Viewing Angle Lens
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V
- Sold as: Kit





LCD MONITOR AND REAR VIEW LICENSE PLATE BACK-UP CAMERA PARKING ASSIST SYSTEM, 4.3" SCREEN, NIGHT VISION, DISTANCE SCALE LINES

PLCM46

- Camera and Monitor Rear View Parking Assist System
- Includes Camera, Monitor & All Necessary Cables and Wiring
- Universal monitor back up camera screen system sits on your dash
- Video Sense Input: Turns on when video signal is received
- Reverse-View Camera Priority for signal sense
- TFT-LCD Color Monitor
- Contrast: 350:1
- Video Color System: NTSC / PAL
- Power Supply: DC12V
- Camera: Marine Grade (IP68) Construction
- Waterproof & Fog Resistant
- Exterior Mountable
- License Plate Mount Rear View Camera
- IR LED Night Vision Illumination (8 LEDs)
- 420 Line Horizontal Resolution
- Built-in Distance Scale Lines
- Low Lux Lighting Capable
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree
- Auto White Balance
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V



PLCM4340

REAR VIEW MIRROR BACKUP CAMERA PARKING ASSIST SYSTEM, INCLUDES MIRROR WITH BUILT-IN 4.3" DIGITAL LCD SCREEN AND UNIVERSAL MOUNT WATERPROOF CAMERA WITH DISTANCE SCALE LINES

- Rear View Mirror Monitor and Camera System
- Provides Backup & Parking Assistance
- Includes All Necessary Cables & Wiring
- Mirror Monitor: Screen Size: 4.3" Inch
- TFT-LCD Color Monitor
- Universal Windshield Mount Clip-On Style
- Video Sense Input: Automatic Power-On When in Reverse
- Reverse-View Camera Priority for Signal Sense
- Video Color System: NTSC / PAL
- Contrast: 350:1
- Power Supply: DC 12V
- Camera: Marine Grade (IP68) Construction
- Waterproof & Fog Resistant Housing
- Rubberized with Impact Resistance
- Rugged, Durable & Reliable
- Auto White Balance
- True Color Reproduction
- Low Lux Performance: 0.2 Lux
- Night Vision Viewing Capable
- 420 Line Horizontal Resolution
- Total Pixels: 656 x 492
- 170 Degree Wide Viewing Angle Lens
- Video Output: 1.0V PP-75 Ohm



UNIVERSAL 4.3" POP-UP STEALTH MONITOR & ALUMINUM BLACK CHROME LICENSE PLATE FOR REAR VIEW BACK UP CAMERA SYSTEM & BUILT IN DISTANCE SCALE LINES

PLCM4500

- Monitor: Screen Size: 4.3 Inches
- Universal monitor back up camera screen system sits on your dash, Monitor pop-ups out of enclosure and folds back in when not in use
- TFT-LCD Color Monitor
- Video Sense Input: Turns on when video signal is received
- Rear-View Camera Priority for signal sense
- Contrast: 350:1
- Video Color System: NTSC
- Power Supply: DC12V @ 115ma
- *Optional Power via Included Cigarette Lighter Cable
- Dimensions: 5.25"(W) x 1.25"(H) x 4.5"(D)
- Camera: 420 Line Horizontal Resolution
- Adjustable Angle Lens Pivot
- Built-in Distance Scale Line
- True Color Reproduction
- Low Lux Enhanced Night Viewing for Low Light Applications
- Resolution: 420 TV Lines
- Viewing Angle: 170 Degree
- Auto White Balance
- Waterproof (IP67), Fog Resistant
- Video Output: 1.0V PP-75 Ohm
- Includes All Necessary Wires and Cables: Power Supply: DC 12V 200mA
- Includes 17 Foot Male to Male RCA Video Cable

PLCM4700

4.7" WINDOW SUCTION MOUNT TFT/LCD MONITOR W/ DIE CAST LICENSE PLATE MOUNT REARVIEW BACKUP COLOR CAMERA W/ DISTANCE SCALE LINE

- Monitor: 4.7" TFT-LCD monitor
- Window suction mount
- 16:9 wide screen
- Pal/Ntsc system
- High resolution
- Two video inputs
- Power supply: DC12V
- Cigarette lighter plug
- Brightness: 300CD
- Contrast: 200:1
- Camera: License plate mount back up rearview color camera
- Black zinc aluminum die cast chrome
- Distance scale line
- True color reproduction
- Low luc performance of 0.2 lux night vision
- Total pixels: 656 x 492
- Resolution: 420 TV lines
- Viewing angle: 170 degree
- Auto white balance
- Water proof, fog resistant
- Low light capable
- Power supply: DC12V
- 17 foot male to male RCA video cable
- Dimension: 10"W x 1.3"H x 1.26"D



REAR VIEW BACKUP CAMERA AND MONITOR SYSTEM WITH 7" LCD DISPLAY SCREEN, WATERPROOF NIGHT VISION CAMERA, DISTANCE SCALE LINES, PARKING / REVERSE ASSIST

PLCM7700



- Universal Camera and Monitor Parking Assist System
- Compatible with a Wide Range of Automobiles
- Backup and Reverse Video System Safety Monitor: 7.0-Inch TFT-LCD Screen Monitor
- 16:9 Wide Screen
- Touch Button Controls
- Pixels: 646 x 540
- 420 TV Line Resolution
- Universal LCD Mount: Stand & Suction Cup Included
- PAL/NTSC System
- HD High Resolution Display
- Two video inputs
- Power supply: DC12V
- Dimensions (W x H x D): 7.60" x 5.24" x 0.98"
- Includes All Necessary Cables and Wiring Accessories Camera: Marine Grade Waterproof IP68 Rating
- Night Vision Low Light Capability
- Built-in Distance Scale Lines
- Universal Mount: Choose Flush or Hanging Mount
- 170 Degree Wide View Angle Lens
- Auto Image Adjustment & White Balance
- Video Output: 1.0Vpp-75Ohm
- Min. Illumination: 1.0 Lux Light
- Power Supply: DC 12 Volt
- Dimensions (L x W x H): 0.9" x 0.67" x 0.67"

PLCM7200

7" TFT MIRROR MONITOR W/ LICENSE PLATE MOUNT REAR VIEW NIGHT VISION CAMERA

- 7" TFT (16:9) Wide Screen
- Universal Clip on Existing Mirrors
- Wireless Remote Control
- Resolution: 480xRGBx234
- Contrast Ratio: 400 CD/M2
- Viewing Angle: U/D90° L/R120°
- Power Consumption: 6W

- Auto Switch PAL/NTSC
- Dual Video Input (DVD/CAMERA/GAME)
- Rearview Night Vision Camera
- License Plate Mount
- Anti Glare Mirror
- Screen Dimensions: 10.19" W x 4.25" H x 1.81" D
- Camera Dimensions: 8.46" W x 1.29" H x 1.37" D



7" TFT MIRROR MONITOR W/ REAR-VIEW NIGHT VISION CAMERA BUILT-IN BLUETOOTH

PLCM7300BT



- 7" TFT (16:9) Wide Screen
- Universal Clip On Existing Mirrors
- Wireless Remote Control
- Resolution: 480 X RGB X 234
- Contrast Ratio: 400 CD/M2
- Viewing Angle: U/D90° L/R120°
- Power Consumption: 6W
- Auto Switch PAL/NTSC

- Dual Video Input (DVD/CAMERA/GAME)
- Rearview Night Vision Camera
- Built-In Bluetooth System
- Display In-coming Calls
- License Plate Mount
- Anti Glare Mirror
- Screen Dimensions: 10.19" W X 4.25" H X 1.81" D
- Camera Dimensions: 8.46" W X 1.29" H X 1.37" D

PLCM7500

7" WINDOW SUCTION MOUNT TFT/LCD VIDEO MONITOR W/ UNIVERSAL MOUNT REARVIEW BACKUP COLOR CAMERA & DISTANCE SCALE LINE

- Monitor:
- 7" TFT-LCD monitor
- With window mount bracket
- 16:9 wide screen
- Pal/Ntsc system
- High resolution
- Wireless remote control
- Two video inputs
- Power supply: DC12V
- Dimension: 7.60" W x 5.24" H x 0.98" D Camera:
- License plate mount back up rearview color camera
- Black zinc aluminum die cast chrome

- Distance scale line
- True color reproduction
- Low lux performance of 0.2 lux night vision
- Total pixels: 656 x 492
- Resolution: 420 TV lines
- Viewing angle: 170 degree
- Auto white balance
- Water proof, fog resistant
- Low light capable
- Power supply: DC12V
- 17 foot male to male RCA video cable
- Dimension: 10" W x 1.3" H x 1.26" D



7" TFT/LCD MIRROR MONITOR WITH LICENSE PLATE MOUNT REARVIEW BACKUP COLOR CAMERA

PLCM7800



- Monitor: 7 inch TFT LCD (16:9) wide screen
- Universal clip on existing mirrors
- Wireless remote control
- Resolution: 800 x RGB x 480
- Power consumption: 7W
- Pal/Ntsc auto switch
- Dual video inputs
- Anti glare mirror Camera: License plate mount back up rearview color camera
- Black zinc aluminum die cast chrome
- Distance scale line
- True color reproduction

- Low lux performance of 0.2 lux night vision
- Total pixels: 656 x 492
- Resolution: 420 tv lines
- Viewing angle: 170 degree
- Auto white balance
- Water proof (IP67), fog resistant
- Low lighting capable
- Accessories:
- Video output: 1.0V PP, 75 Ohm
- Power supply: DC12V, 200mA
- 17 feet male to male RCA video cable
- Dimension: 10" (W) X 1.3" (H) X 1.26" (D)

8.1" TFT LCD MONITOR W/ DUAL UNIVERSAL MOUNT, REAR VIEW & BACKUP COLOR CMD DISTANCE SCALE LINE CAMERA

PLCM8200



- Monitor: 8.1" TFT LCD (16:9) Widescreen
- Universal Clip on Existing Mirrors
- Wireless Remote Control
- Resolution: 800 x RGB x 480
- Power Consumption: 7W
- PAL/NTSC Auto Switch
- Dual Video Inputs
- Anti Glare Mirror
- Dimension: 9.2"(W) x 3.7"(H) x 0.79"(D)
- Camera: Universal Dual-Mount Camera
- Backup CMD Camera 1/3"
- Water proof/ Night Vision
- Distance Scale Line
- RCA Video Cable
- Image Sensors: 580 x 540
- Resolution: 420 TV Lines
- Min. Illumination: 1.0 LUX
- IP Rating: 68; Lens Angle: 170°
- Auto Image Adjustment
- Built-In Distance Scale Line
- Video Output: 1.0V pp-74 Ohm
- Power Supply: DC12V, 200mA
- Drill Bit Included
- 17 Ft Male to Male RCA Video Cable
- Dimensions: 0.67"(W) x 0.67"(H) x 0.9"(L)

PLCM9200

9.2" TFT/LCD MIRROR MONITOR WITH LICENSE PLATE MOUNT REARVIEW BACKUP COLOR CAMERA

- Monitor:
- 9.2inch TFT LCD (16:9) wide screen
- Universal clip on existing mirrors
- Wireless remote control
- Resolution: 800 x RGB x 480
- Power consumption: 7W
- Pal/Ntsc auto switch
- Dual video inputs
- Anti glare mirror
- License plate mount back up rearview color camera
- Black zinc aluminum die cast chrome
- Distance scale line

- True color reproduction
- Low lux performance of 0.2 lux night vision
- Total pixels: 656 x 492
- Resolution: 420 tv lines
- Viewing angle: 170 degree
- Auto white balance
- Water proof(IP67), fog resistant
- Low lighting capable
- Video output: 1.0V PP, 75 Ohm
- Power supply: DC12V, 200mA
- 17 feet male to male RCA video cable
- Dimension: 10"(W) X 1.3"(H) X 1.26"(D)



WEATHERPROOF REARVIEW BACKUP CAMERA, IR NIGHT VISION CAMERA, WATERPROOF, DC 12-24V FOR BUS, TRUCK, TRAILER, VAN

PLCMTR5

- CMD Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP-68
- Min. Illumination: 0.2 Lux
- Auto Image Adjustment
- 18 LED Lights with IR Night Vision Illumination
- Designed for Car/Truck use with 12 & 24 Volt Systems
- Camera Dimensions: 3.18"W x 2.95"H x 2.17"D
- Includes 4-Pin 50 Foot (15 Meter) Connection Cable



PLCMTR26

DUAL WEATHERPROOF REARVIEW BACKUP CAMERA, IR NIGHT VISION, WATERPROOF, DC 12-24V FOR BUS, TRUCK, TRAILER, VAN

- Dual Camera Housing
- CMD Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP-68
- Min. Illumination: 0.2 Lux
- Auto Image Adjustment
- LED Lights with IR Night Vision Illumination
- Designed for Car/Truck use with 12 & 24 Volt Systems
- Includes 4-Pin 50 Foot (15 Meter) Connection Cable



For more detailed specifications, product-specific information and models visit www.PyleAudio.com

PLCMTR72

WEATHERPROOF REARVIEW BACKUP DUAL CAMERA SYSTEM KIT WITH 7" LCD COLOR MONITOR, (2) IR NIGHT VISION CAMERAS, DUAL DC VOLTAGE 12-24 FOR BUS, TRUCK, TRAILER, VAN

- Monitor: 7 inch TFT LCD Display
- Aspect Ratio: 16:9 Widescreen
- Resolution: 480 x 234
- Dual RCA Audio & Video Inputs
- System: Pal/NTSC Auto Switching
- OSD Menu Control
- Built-in Anti Glare Sun Shade
- Universal Stand Mount
- Built in Speaker System
- DC reverse 12-24 Volt Trigger with Auto Activation feature
- Designed for Car/Truck use 12 & 24 Volt Systems
- Screen Dimensions: 6.77" W x 4.52" H x 0.87"D
- Camera: Includes (2) Cameras
- CMD Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP-68
- Min. Illumination: 0.2 Lux
- Auto Image Adjustment
- 18 LED Lights with IR Night Vision Illumination
- Designed for Car/Truck use with 12 & 24 Volt Systems
- Camera Dimensions: 3.18" W x 2.95" H x 2.17" D
- Includes 4-Pin 50 Foot (15 Meter) Connection Cable



WEATHERPROOF REARVIEW BACKUP CAMERA SYSTEM KIT WITH 7" LCD COLOR MONITOR, IR NIGHT VISION CAMERA, DUAL DC VOLTAGE 12-24 FOR BUS, TRUCK, TRAILER, VAN

PLCMTR71



- Monitor: 7 inch TFT LCD Display
- Aspect Ratio: 16:9 Widescreen
- Resolution: 480 x 234
- Dual RCA Audio & Video Inputs
- System: Pal/NTSC Auto Switching
- OSD Menu Control
- Built-in Anti Glare Sun Shade
- Universal Stand Mount
- Built in Speaker System
- DC reverse 12-24 Volt Trigger with Auto Activation feature
- Designed for Car/Truck use 12 & 24 Volt Systems
- Screen Dimensions: 6.77" W x 4.52" H x 0.87"D
- Camera: CMD Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP-68
- Min. Illumination: 0.2 Lux
- Auto Image Adjustment
- 18 LED Lights with IR Night Vision Illumination
- Designed for Car/Truck use with 12 & 24 Volt Systems
- Camera Dimensions: 3.18" W x 2.95" H x 2.17" D
- Includes 4-Pin 50 Foot (15 Meter) Connection Cable

PLCMTR74

WEATHERPROOF REARVIEW BACKUP CAMERA SYSTEM WITH 7" LCD COLOR MONITOR, (4) IR NIGHT VISION CAMERAS, DUAL DC VOLTAGE 12-24 FOR BUS, TRUCK, TRAILER, VAN

- Monitor: 7" TFT/LCD Active Matrix Video Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Aspect Ratio: 16:9 Widescreen Format
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- PAL/NTSC Video Format Compatible
- Reverse Image Function Auto power switch to AV2 when reversing
- High Resolution: 480 x 234
- Operating Temperature: -20 to +65
- Universal Stand & Incorporated Anti-glare Sun Visor
- 4 Pin Video Connectors
- Power Requirement: Dc 12V-24V
- Dimensions (WxHxD): 6.77" x 4.53" x 0.87"
- Camera: Includes 4 Mountable Cameras
- CMD Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP68
- Min Illumination: 0.2Lux
- Auto Image Adjustment
- 18 LED IR Night Vision Illumination
- Distance Scale Line
- Designed for Car/Truck use 12 & 24 Volt Systems
- Camera Dimensions (WxHxD): 3.18" x 2.95" x 2.17"
- Included 4 pin 50 Foot (15 Meter) Communication Cable x 4



WEATHERPROOF REARVIEW BACKUP CAMERA SYSTEM WITH 10.1" LCD COLOR MONITOR, (4) IR NIGHT VISION CAMERAS, DUAL DC VOLTAGE 12-24 FOR BUS, TRUCK, TRAILER, VAN

PLCMTR104



- Monitor: 10.1" TFT/LCD Active Matrix Video Monitor
- Built-in Quad Control Box Screen Function
- Supports Four Video Camera Inputs (V1/V2/V3/V4)
- Aspect Ratio: 16:9 Widescreen Format
- Selectable Viewing Modes: Single Full View / Split Dual Video View / Quad Four Source View
- PAL/NTSC Video Format Compatible
- Reverse Image Function Auto power switch to AV2 when reversing
- High Resolution: 1024 x 800
- Operating Temperature: -20 to +145 F
- Universal Stand & Incorporated Anti-glare Sun Visor
- 4 Pin Video Connectors
- Power Requirement: Dc 12V-24V
- Dimensions: 11.22" w x 7.20" h x 2.91" d
- Camera: Includes 4 Mountable Cameras
- CMD Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: Pal/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP68
- Min Illumination: 0.2Lux
- Auto Image Adjustment
- 18 LED IR Night Vision Illumination
- Distance Scale Line
- Designed for Car/Truck use 12 & 24 Volt Systems
- Camera Dimensions: 3.18" W x 2.95" H x 2.17" D
- Included 4 pin 50 Foot (15 Meter) Communication Cable x 4

WIRELESS REARVIEW BACKUP CAMERA SYSTEM KIT WITH 7" LCD COLOR MONITOR, IR NIGHT VISION CAMERA, WEATHERPROOF, DUAL DC VOLTAGE 12-24 FOR BUS, TRUCK, TRAILER, VAN

PLCMTR82WIR

NEW



- liMonitor: 7 inch TFT LCD Display
- Aspect Ratio: 16:9 Widescreen
- System: PAL/NTSC Auto Switching
- OSD Menu Control
- Built-in Anti Glare Sun Shade
- Universal Stand Mount
- Built in Speaker System
- DC Reverse 12-24 Volt Trigger with Auto Activation
- Designed for Car/Truck use 12 & 24 Volt Systems- Camera:CMD
- Weatherproof Rearview Camera System
- Image sensor: Color CMD
- System: PAL/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- IP Rating: IP-68
- Min. Illumination: 0.2 Lux
- Auto Image Adjustment
- 18 LED Lights with IR Night Vision Illumination
- Designed for Car/Truck use with 12 & 24 Volt Systems
- Includes 4-Pin 50 Foot (15 Meter) Connection Cable, Wireless Transmitter/Receiver

PLCM34WIR

WIRELESS REAR VIEW MIRROR BACK-UP CAMERA AND MONITOR PARKING ASSIST SYSTEM, 3.5" MONITOR DISPLAY SCREEN, DISTANCE SCALE LINES, NIGHT VISION, WATERPROOF CAMERA

- Wireless Backup Camera & Monitor Parking Assist System
- Includes Camera, Monitor and All Necessary Cables & Wiring
- Wireless Adapters: 2.4G Transmitter and Receiver
- Instantly Sends Camera Video to the LCD Display
- Wireless Transmission Distance: 80 Feet Max.
- Reverse Camera Priority for Signal Sense
- Automatically Turns on When Video Signal is Received
- Monitor: 3.5" Slim TFT-LCD Stand Display Screen Monitor
- Brightness: 200 cd/m
- Contrast: 200:1
- RCA Video Inputs
- NTSC/PAL System Auto Switching
- Built-in 2.4Ghz Wireless Video Receiver
- Additional Video Monitor Connection Ability

- Dimensions (W x H x D): 4.13" x 3.35" x 0.87"
- Camera: Marine Grade Waterproof Construction
- Night Vision / Low Light Capability
- Image Sensor: OV7910 Color CMOS
- Total Pixels: 510 x 492
- Resolution: 380 TV Lines
- Min. Illumination: 0.5 Lux
- Video Output: 1.0 Vpp - 75 Ohm
- Preferable Mounting Just Above the License Plate
- *Installs with Wireless Adapters or Hard-Wired via Included Cables
- Power Supply: DC 12V, 200 mA
- Dimensions (H x W x D): 1.3" x 8.0" x 1.26"



WIRELESS REAR VIEW MIRROR BACK-UP CAMERA AND MONITOR PARKING ASSIST SYSTEM, 4.3"-INCH LCD DISPLAY, DISTANCE SCALE LINES, LOW LUX LIGHTING PERFORMANCE

PLCM4300WIR



- Rearview Backup Camera Parking Assist System
- Includes Camera, Monitor and All Necessary Cables & Wiring
- Wireless Adapters: 2.4G Transmitter and Receiver
- Instantly Sends Camera Video to the LCD Display
- Wireless Transmission Distance: 80 Feet Max.
- Reverse Camera Priority for Signal Sense
- Automatically Turns on When Video Signal is Received
- Camera: Marine Grade Exterior Mount Camera
- Waterproof IP68 Construction
- Preferably to be Mounted Above License Plate
- 170 Degree Wide Angle Cameras
- Low Lux Lighting Performance

- Power Supply: DC 12 Volt
- Camera Dimensions (Diameter x Depth): 0.59" x 0.82"
- LCD Screen Built into Rearview Mirror
- Designed to Clamp onto Existing Mirror Assembly
- Anti-Glare Mirror and LCD Screen Coating
- Digital Easy-Touch Button Controls
- Video Pixel Resolution: 480(H) x 271(V)
- Video System: NTSC/PAL/Auto Switch
- TFT-LCD Display Screen
- Contrast Ratio: 300:1
- 16:9 Wide Screen Video Format
- Mirror Dimensions (W x H x D): 10.78" x 3.03" x 0.98"

NEW

PLCM4350WIR

WIRELESS TRANSMISSION BACK-UP REARVIEW PARKING ASSIST SYSTEM KIT WITH LICENSE PLATE CAMERA, 4.3" MONITOR AND WIRELESS ADAPTERS

- Wireless Adapters: 2.4G Transmitter and Receiver
- Instantly Sends Camera Video to the LCD Display
- Wireless Transmission Distance: 60 Feet Max.
- Monitor: Screen Display Size: 4.3 Inches
- Universal Mount for Windshield or Dashboard
- Reverse Camera Priority for Signal Sense
- Video Sense Input Turns on When Video Signal is Received
- Color System: NTSC / PAL
- TFT-LCD Color Monitor
- Contrast: 350:1
- Power Supply: DC 12V
- Dimensions (L x W x H): 4.75" x 0.75" x 3.1"
- Camera: Slim Bar Style Camera
- Exterior Mountable (Above License Plate)

- IP68 Marine Grade Construction
- Waterproof and Fog Resistant
- 420 TV Line Horizontal Resolution
- Built-in Distance Scale Line
- Low Lux Light Performance
- Viewing Angle: 170 Degree
- Auto white Balance
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V
- Dimensions (L x W x H): 9.8" x 1.0" x 0.9"
- System Includes Monitor, License Plate Camera, Suction Cup Mount, Wireless Transmitter, Wireless Receiver and All Necessary Connection Cables and Wiring



PLCM4370WIR

WIRELESS REAR VIEW MIRROR BACKUP CAMERA PARKING ASSIST SYSTEM, INCLUDES MIRROR WITH BUILT-IN 4.3" DIGITAL LCD SCREEN AND UNIVERSAL MOUNT WATERPROOF CAMERA WITH DISTANCE SCALE LINES

- Rear View Mirror Monitor and Camera System
- Provides Wireless Backup & Parking Assistance
- Includes All Necessary Cables & WiringWireless Adapters2.4G Transmitter and Receiver
- Instantly Sends Camera Video to the LCD Display
- Wireless Transmission Distance: 60 Feet Max.
- Mirror Monitor:Screen Size: 4.3" Inch
- TFT-LCD Color Monitor
- Universal Windshield Mount Clip-On Style
- Video Sense Input: Automatic Power-On When in Reverse
- Reverse-View Camera Priority for Signal Sense
- Video Color System: NTSC / PAL
- Contrast: 350:1
- Power Supply: DC 12VCamera:Built-in Distance Scale Lines
- (for Tight Parking & Depth Perception)
- Marine Grade (IP68) Construction
- Waterproof & Fog Resistant Housing
- Rubberized with Impact Resistance
- Rugged, Durable & Reliable
- Auto White Balance
- True Color Reproduction
- Low Lux Performance: 0.2 Lux
- Night Vision Viewing Capable
- 420 Line Horizontal Resolution
- Total Pixels: 656 x 492
- 170 Degree Wide Viewing Angle Lens
- Video Output: 1.0V PP-75 Ohm
- Power Supply: DC 12V 200mA



HD REARVIEW MIRROR DVR IMAGE AND VIDEO RECORDING CAMERA PARKING ASSIST SYSTEM WITH (2) NIGHT VISION CAMERAS, DUAL CAMERA RECORDING, 4.3" LCD DISPLAY, DISTANCE SCALE LINES, MOTION IMPACT RECORDING & SD MEMORY CARD SLOT

PLCMDVR5



- Dual Cameras and Rearview Mirror with Built-in LCD Display Screen
- (2) Cameras: Rearview Mirror Mounted & License Plate Mountable
- Interior and Exterior Vehicle Camera Recording
- Save Pictures and Record Videos
- Quickly and Easily Share Image & Video Files
- Automatic Collision Detect & Record Function
- Built-in SD Memory Card Slot to Save Files
- Hi-Res 720p Video Recording up to (1280 x 1440) 30FPS
- IR LED Night Vision Illumination
- Built-in Microphone Also Records Audio
- Built-in Distance Line Scales (License Plate Camera)
- Waterproof IP68 Camera (License Plate Camera)
- Includes All Necessary Cables & Wiring
- Works for Windows & Mac
- System Clamps onto Current Rearview MirrorLCD Display:4.3" LCD Screen Built into Rearview Mirror
- PiP (Picture in Picture): See Both Camera's on the LCD Screen
- Easy Touch Button Controls
- Switch Between Camera, Video & Playback Modes
- Change LCD Monitor Camera Views (Interior/Exterior) Cameras:120 Degree Wide Angle Cameras
- Image Sensors: 1/4" CMOS 1.3MP
- Focal Length: f=2.6mm
- Standard Fixed Focusing
- Low Illumination Sensor
- Exterior Camera can be Hanging or Flush Mounted
- Interior Camera Built into Rearview Mirror
- Interior Camera Rotates/SwivelsSystem Technical Specs:Video: Choose Between 720p or VGA Recording
- Images: Choose Between 1M, 2M, 3M
- G Sensor (Impact) Sensitivity Adjustable
- Automatic White Balance & ISO Exposure
- Brightness, Exposure & Color Settings
- Image File Format: JPEG

PLCMDVR7

REARVIEW BACKUP CAMERA AND MONITOR SYSTEM

- 4.3" HD TFT LCD screen
- anti-glare glass
- universal ways to install, suitable for every cars.
- HD video recording
- 2 video input,one can connect with the reverse camera video
- 140° wide-angle lens
- Build-in light sensor,can adjust screen brightness according to in-car surroundings.
- Build-in G-sensor,can lock auto video of emergency application.
- More Video File Types for choose:480P/720P/1080P
- Compression format: H.264
- record continuously, avoid missing any data.
- Power on automatic startup system, guard your car every minute.
- can record continuously and set recording time.
- wide voltage input,DC9-28V
- Support TF card up to 32GB
- With extra rear camera
- can record front and back 2 ch



4-IN-1 GPS NAVIGATION, BLUETOOTH, DVR CAMERA AND MONITOR SYSTEM, HD REARVIEW MIRROR WITH HI-RES VIDEO RECORDING, NIGHT VISION ILLUMINATION & MOTION IMPACT RECORDING

PLCMDVR7G



- Rearview Mirror with Built-in Camera and LCD Display Screen
- Built-in GPS Navigation System
- Includes Pre-Loaded Micro SD Memory Card with Map Data
- Built-in Bluetooth and Microphone for Hands-Free Calling
- Works with All of Your Favorite iPhone and Android Mobile Devices
- USB Flash & Micro SD Card Slot Readers for MP3 Digital Streaming
- Loop & Automatic Record-Over Functions Ensure Video Saving
- Adjustable Swivel Camera Retracts and Rotates
- Aim the Camera Out of the Front or Rear Windshield
- Save Pictures and Record Videos via Micro SD Slot
- Automatic Collision Detect & Record Function
- Built-in SD Memory Card Slot to Save Files
- Quickly and Easily Share Image & Video Files
- Hi-Resolution 720p Video Recording
- IR LED Night Vision Illumination
- Built-in Microphone Also Records Audio
- Includes All Necessary Power Cables, Wiring, Mounting Arm, GPS Antenna and Stylus Touch Pen
- System Replaces Rearview Mirror AssemblyLCD Display:Safety and Convenience at Eye-Level
- 4.3" LCD Screen Built into Rearview Mirror
- Easy Touch Button Controls
- Switch Between Camera, Video & Playback ModesCameras:Wide Angle Camera View Lens
- Image Sensors: 1/4" CMOS 1.3MP
- Focal Length: f=2.6mm
- Standard Fixed Focusing
- Low Illumination Sensor
- Built into Rearview Mirror
- Interior Camera Rotates/Swivels
- Extend/Retracts from Rearview Mirror AssemblySystem Technical Specs:Record Video in 720p or VGA Resolution
- PiP: Picture in Picture Ability
- Line Inputs for External Reverse Rear Camera (Not Included)
- G Sensor (Impact) Sensitivity Adjustable
- Date Stamp: On/Off
- Bluetooth Version: 3.0
- Automatic White Balance Imaging
- Brightness, Exposure & Color Settings
- Image File Format: JPEG
- Video File Format: H.264 MOV
- Video Output: NTSC / PAL
- Ability to Add Date & Time Stamp
- Operating Voltage: 12V

PWD603RS

4-BUTTON REMOTE START/DOOR LOCK VEHICLE SECURITY SYSTEM

- Two 4-button extended range transmitters
- Four 30 amp relays for starter, ignition 1, ignition 2, (programmable), and accessories outputs
- 15 amp relay for parking lights
- Programmable door lock outputs
- Compatible with diesel and gasoline vehicles
- Programmable adjustable crank settings
- Tach or voltage sense
- Built-in LED/Valet switch into the remote receiver
- Parking light and LED diagnostics
- Ground while running output
- Hybrid Vehicle Mode
- Factory alarm arm & disarm outputs
- Panic Mode
- Programmable run time
- Programmable cold start 2, 3, 4 hours
- Comfort Closure
- Auxiliary output
- Horn output
- Car finder



4-BUTTON CAR REMOTE DOOR LOCK VEHICLE SECURITY SYSTEM

PWD701

- 2 Four Button Transmitters
- Status indicator LED
- Valet / override switch
- 120dB 6-tone siren
- Dual stage impact detector
- Remote panic mode
- Remote chirp mute
- Remote sensor bypass
- Passive or active arming
- Flashing parking lights
- Anti-carjack
- 2 Auxiliary outputs
- Limited Lifetime Warranty
- Starter defeat
- Horn honk output
- Remote keyless entry
- Illuminated entry
- Remote trunk release
- Hood and trunk protection
- Remote auto start
- Power window roll up
- Back up battery
- Glass break
- Microwave

PWD901

LCD 2-WAY REMOTE START SECURITY SYSTEM w/ADVANCED IMPACT SENSOR

- One 2-way LCD Transmitter
- One 4-Button Water Resistant Transmitter
- Extended Range Transceiver
- Encrypted Coded Transmission
- LED Status Indicator
- 125 db Siren
- Starter Defeat
- Remote Engine Start
- Electronic Impact Sensor with light Impact Response
- Remote Panic Mode
- Remote Valet Mode
- Auxiliary Output
- Remote Chirp Defeat
- Remote Sensor Bypass
- Passive or Active Arming
- Ignition controlled Door Lock/Unlock
- Automatic Sensor Bypass for Defective Zones
- Tamper Alert
- Non-Volatile Memory
- limited lifetime Warranty
- Remote Keyless Entry
- Remote Trunk Release
- Illuminated Entry
- Trunk/Hatch Release



NEW

PLMCWD15

WATCH DOG MOTORCYCLE VEHICLE ALARM SECURITY SYSTEM, INCLUDES (2) ECU CONTROL TRANSMITTERS, ANTI-HIJACK ENGINE IMMOBILIZATION, HIGH-POWER PIEZO SPEAKER

NEW

PLMCWD25

WATCH DOG MOTORCYCLE VEHICLE ALARM SECURITY SYSTEM, REMOTE AUTO-START, INCLUDES (2) ECU CONTROL TRANSMITTERS, ANTI-HIJACK ENGINE IMMOBILIZATION, HIGH-POWER PIEZO SPEAKER

NEW

PLMCWD75

WATCH DOG MOTORCYCLE VEHICLE ALARM SECURITY SYSTEM, REMOTE AUTO-START, AUTOMATIC RE-ARM, INCLUDES (2) ECU CONTROL TRANSMITTERS, ANTI-HIJACK ENGINE IMMOBILIZATION, HIGH-POWER PIEZO SPEAKER, MOUNTABLE LED INDICATOR



- Quickly and Easily, Arms and Disarms
- Simple Touch-Button Remote Controls
- Engine Will Not Start Once Alarm Activates
- Anti-Hijack: Button Activated Engine Shut-Down
- Safe and Reliable Engine Immobilization
- Includes Dual Mini E.C.U. Control Transmitters
- (5) Level Impact Sensor Sensitivity Adjustable
- Mute Alarm Mode (without Siren)
- Compact High-Powered Piezo Siren
- Water Resistant Power Module
- Remote Panic Siren Alarm Activation
- Panic: Siren Sounds and Lights Flash
- Remote Control Arming, Disarming, Locating
- System Includes Main Wiring Harness, (2) ECU Transmitters, Siren Speaker and Water Resistant DC Power Ignition Module
- Technical Specs: Voltage: 9-16V
- Low Power Consumption (<3.5mA)
- Static Current: =3.5mA
- Siren SPL: 105-125dB
- Frequency Range: 433.92MHz



PINV11



PINV3300

PINV11

PLUG IN CAR 50 WATT 12V DC TO 115 VOLT AC POWER INVERTER W/ MODIFIED SINE WAVE

- Output Voltage: 100V-120V
- Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave
- Input DC Voltage: 10-15 Volts
- Built-in Fuse: N/A
- Undervoltage Alarm: 10.4 - 11.0 Volts DC
- Off Low pressure: 9.7 - 10.3 Volts DC
- Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc
- No - Load Consumption: 12 Volts DC
- No - Load Current: <0.3 Amps
- Continuous Output Power: 50 Watts
- Surge Peak Output Power: 100 Watts
- Dimensions: 3.54"L x 3.14"W x 1.69"H
- Weight: 250G

PINV22

PLUG IN CAR 100 WATT 12V DC TO 115 VOLT AC POWER INVERTER W/ MODIFIED SINE WAVE & 5 VOLT USB OUTLET

- Output Voltage: 100V-120V
- Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave
- Input DC Voltage: 10-15 Volts
- 5 Volt USB Outlet Port
- Built-in Fuse: N/A
- Undervoltage Alarm: 10.4 - 11.0 Volts DC
- Off Low pressure: 9.7 - 10.3 Volts DC
- Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc
- No - Load Consumption: 12 Volts DC
- No - Load Current: <0.3 Amps
- Continuous Output Power: 100 Watts
- Surge Peak Output Power: 200 Watts
- Dimensions: 3.54"L x 3.14"W x 1.69"H
- Weight: 280G

PINV33

PLUG IN CAR 200 WATT 12V DC TO 115 VOLT AC POWER INVERTER W/ MODIFIED SINE WAVE & 5 VOLT USB OUTLET

- Output Voltage: 100V-120V
- Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave
- Input DC Voltage: 10-15 Volts
- 5 Volt USB Outlet Port
- Built-in Fuse: 40 Amp
- Undervoltage Alarm: 10.4 - 11.0 Volts DC
- Off Low pressure: 9.7 - 10.3 Volts DC
- Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc
- No - Load Consumption: 12 Volts DC
- No - Load Current: <0.3 Amps
- Continuous Output Power: 200 Watts
- Surge Peak Output Power: 400 Watts
- Dimensions: 4.13"L x 4.40"W x 2.04"H
- Weight: 350G

PINV44

PLUG IN CAR 300 WATT 12V DC TO 115 VOLT AC POWER INVERTER W/ MODIFIED SINE WAVE & 5 VOLT USB OUTLET

- Output Voltage: 100V-120V
- Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave
- Input DC Voltage: 10-15 Volts
- 5 Volt USB Outlet Port
- Built-in Fuse: 40 Amp
- Undervoltage Alarm: 10.4 - 11.0 Volts DC
- Off Low pressure: 9.7 - 10.3 Volts DC
- Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc
- No - Load Consumption: 12 Volts DC
- No - Load Current: <0.3 Amps
- Continuous Output Power: 300 Watts
- Surge Peak Output Power: 600 Watts
- Dimensions: 4.92"L x 4.40"W x 2.04"H
- Weight: 650G

PINV55

PLUG IN CAR 500 WATT 12V DC TO 115 VOLT AC POWER INVERTER W/ MODIFIED SINE WAVE & 5 VOLT USB OUTLET

- Output Voltage: 100V-120V
- Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave
- Input DC Voltage: 10-15 Volts
- 5 Volt USB Outlet Port
- Built-in Fuse: 40 Amp
- Undervoltage Alarm: 10.4 - 11.0 Volts DC
- Off Low pressure: 9.7 - 10.3 Volts DC
- Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc
- No - Load Consumption: 12 Volts DC
- No - Load Current: <0.3 Amps
- Continuous Output Power: 500 Watts
- Surge Peak Output Power: 1,000 Watts
- Dimensions: 5.70"L x 4.40"W x 2.04"H
- Weight: 700G

PINV66

PLUG IN CAR 600 WATT 12V DC TO 115 VOLT AC POWER INVERTER W/ MODIFIED SINE WAVE & 5 VOLT USB OUTLET

- Output Voltage: 100V-120V
- Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave
- Input DC Voltage: 10-15 Volts
- 5 Volt USB Outlet Port
- Built-in Fuse: 2 x 40 Amp
- Undervoltage Alarm: 10.4 - 11.0 Volts DC
- Off Low pressure: 9.7 - 10.3 Volts DC
- Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc
- No - Load Consumption: 12 Volts DC
- No - Load Current: <0.3 Amps
- Continuous Output Power: 600 Watts
- Surge Peak Output Power: 1,200 Watts
- Dimensions: 6.49"L x 4.40"W x 2.04"H
- Weight: 850G

PINV1500

PLUG IN CAR 1,500 WATT 12V DC TO 115 VOLT AC POWER INVERTER W/ MODIFIED SINE WAVE & 5 VOLT USB OUTLET

- Output Voltage: 100V-120V
- Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave
- Input DC Voltage: 10-15 Volts
- 5 Volt USB Outlet Port
- Built-in Fuse: 5 x 40 Amp
- Undervoltage Alarm: 10.4 - 11.0 Volts DC
- Off Low pressure: 9.7 - 10.3 Volts DC
- Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc
- No - Load Consumption: 12 Volts DC
- No - Load Current: <0.3 Amps
- Continuous Output Power: 1,500 Watts
- Surge Peak Output Power: 3,000 Watts
- Dimensions: 15.35"L x 7.08"W x 2.95"H
- Weight: 3800G

PINV3300

PLUG IN CAR 3,000 WATT 12V DC TO 115 VOLT AC POWER INVERTER W/ MODIFIED SINE WAVE & 5 VOLT USB OUTLET

- Output Voltage: 100V-120V
- Frequency: 60 +/- 2Hz Waveform: Modified Sine Wave
- Input DC Voltage: 10-15 Volts
- 5 Volt USB Outlet Port
- Built-in Fuse: 12 x 40 Amp
- Undervoltage Alarm: 10.4 - 11.0 Volts DC
- Off Low pressure: 9.7 - 10.3 Volts DC
- Shut Down Over- Voltage: 14.5 - 15.5 Volts Dc
- No - Load Consumption: 12 Volts DC
- No - Load Current: <0.3 Amps
- Continuous Output Power: 3,000 Watts
- Surge Peak Output Power: 6,000 Watts
- Dimensions: 15.35"L x 7.08"W x 5.90"H
- Weight: 8000 g

PSWNV120 24V DC TO 12V DC POWER STEP DOWN 120 WATT CONVERTER W/ PMW TECHNOLOGY

- PMW Power Technology
- Power Output 60W Continuous
- Power Output 120W Peak
- For Use in 24 Volt Vehicles Trucks, RV, Buses, Etc. Allows installation of 12 Volt Items Such as Car Stereos, CB Radios, Fog Lights, Etc.
- No load current draw:<0.2 Amp
- 4 Ways Protection (Short Circuit, Over Load, High Voltage & Low Voltage)
- Input Voltage:DC 24 Volt
- Output Voltage: DC 12.5v-12.8 Volt
- Fuse Rating:5A
- Converse Efficiency: 85%
- Dimensions: 1.96 x 4.72 x 1.88



PSWNV240 24V DC TO 12V DC POWER STEP DOWN 240 WATT CONVERTER W/ PMW TECHNOLOGY

- PMW Power Technology
- Power Output 120W Continuous
- Power Output 240W Peak
- For Use in 24 Volt Vehicles Trucks, RV, Buses, Etc. Allows installation of 12 Volt Items Such as Car Stereos, CB Radios, Fog Lights, Etc.
- No load current draw:<0.2 Amp
- 4 Ways Protection (Short Circuit, Over Load, High Voltage & Low Voltage)
- Input Voltage:DC 24 Volt
- Output Voltage: DC 12.5v-12.8 Volt
- Fuse Rating:10A
- Converse Efficiency: 85%
- Dimensions: 3.34 x 4.72 x 1.88



PSWNV480 24V DC TO 12V DC POWER STEP DOWN 480 WATT CONVERTER W/ PMW TECHNOLOGY

- PMW Power Technology
- Power Output 240W Continuous
- Power Output 480W Peak
- For Use in 24 Volt Vehicles Trucks, RV, Buses, Etc. Allows installation of 12 Volt Items Such as Car Stereos, CB Radios, Fog Lights, Etc.
- No load current draw:<0.2 Amp
- 4 Ways Protection (Short Circuit, Over Load, High Voltage & Low Voltage)
- Input Voltage:DC 24 Volt
- Output Voltage: DC 12.5v-12.8 Volt
- Fuse Rating:20A
- Converse Efficiency: 85%
- Dimensions: 4.72 x 4.72 x 1.88



PSWNV720 24V DC TO 12V DC POWER STEP DOWN 720 WATT CONVERTER W/ PMW TECHNOLOGY

- PMW Power Technology
- Power Output 360W Continuous
- Power Output 720W Peak
- For Use in 24 Volt Vehicles Trucks, RV, Buses, Etc. Allows installation of 12 Volt Items Such as Car Stereos, CB Radios, Fog Lights, Etc.
- No load current draw:<0.2 Amp
- 4 Ways Protection (Short Circuit, Over Load, High Voltage & Low Voltage)
- Input Voltage:DC 24 Volt
- Output Voltage: DC 12.5v-12.8 Volt
- Fuse Rating:30A
- Converse Efficiency: 85%
- Dimensions: 5.51 x 4.72 x 1.88



PNVU200 PLUG IN CAR COMPACT 160 WATT POWER INVERTER DC/AC

- Cigarette Lighter Powered With 1 Power Output
- 80 Watts Maximum Continuous AC Output Power
- 160 Watts Maximum AC Output Surge Power
- General Dual 115 Volts 60 Cycles as Power From Any 12 Volt
- USB Airplane Power Plug
- Replaceable Spade Fuse
- Use In Car, Truck, RV or Boat
- 90% Optimum Efficiency
- Use For Video Games
- 12.8-20 Amp Input Current
- Less Than 0.3A No Load Current Draw
- Electronic Over Load Protection w/Automatic Shutdown
- Low Battery Voltage Warning Followed By Automatic Shutdown
- High Input Voltage Protection
- Input Reverse Polarity Protection
- Dimensions: 3.10W x 0.75H x 5.5D



PBPK42

CAR JUMP START EMERGENCY SYSTEM AND POWER BANK, WITH CAR BATTERY CHARGER, SMARTPHONE AND DEVICE CHARGING, LED FLASH LIGHT, UNIVERSAL DEVICE ADAPTORS (WORKS WITH IPHONES, ANDROIDS, SMARTPHONES, LAPTOPS, IPAD, TABLET, ETC.)

- Versatile and Multi-Functional Jump Starter and Power Bank
- The Perfect Emergency Vehicle Power Accessory
- Lightweight, Compact and Powerful
- LED Charging and Power Indicator Lights
- Built-in Rechargeable Battery
- Recharges via Included Cigarette Lighter Cable
- Built-In Safety Circuits for Short Circuit, Over Current, Overload, Over Charge Protection
- Conveniently Fits in the Trunk or Glove Compartment
- Car Jump Starter:
- Easy-to-Use Emergency Car/Automobile Starter
- 12V Battery Jumper with Included Cable Clamps
- 400 Amp Peak Output Power
- Ability to 'Slow Charge' Your Vehicle's Battery
- Jump Starts Cars, Trucks, Motorcycles, Dirt Bikes, Jet Ski, etc.
- Can Jump Your Vehicle up to 20 Times on A Single Charge
- *No Additional Vehicle Required to Jump Start
- Power Bank Charging:
- Pocket-Sized, Portable Mobile Device Power Station
- Provides Hours of Charging for Your Devices
- Works with iPhones, Androids, Smartphones, Tablets, Laptops, etc.
- Includes Universal Charge Adapters for Laptop/ Smartphone Devices
- Significantly Increases Battery Life of a Wide Range of Electronics
- Battery Capacity: 12000 mAh
-
- Roadside Flash Light:
- Ultra-Bright LED Lighting Source
- 3 Selectable Flashlight Modes: Flash, Strobe, SOS Signal
- Flashlight lasts over 120 Hours
-
- Technical Specifications:
- Battery Life: 3000 Charge Cycles
- Auto Starter Current: 200A , Peak Current: 400A
- Operating Temperature: 0~85°C
- Input: CC/CV 14V 2A (Power Cable/Wall Charger Input)
- Four Outputs: USB (5V 2Amp), Devices (12V 2Amp, 19V 5Amp) Jump Start Clamps



PLMPA35

2 CHANNEL 300 WATT MINI AMPLIFIER W/3.5MM INPUT

- 2 Channel IC Mini Amplifier with 3.5mm Input Plug
- 2 x 15 Watts RMS @ 4 Ohms/ 2 x 150 Watts Peak
- 3 way Selectable Electronic Crossover Network
- Adjustable Gain Control
- 3.5mm / 1/8" Stereo Audio Inputs
- Power Protection Circuitry
- T.H.D. 1%
- 4 Ohm Stereo Stable
- Anti-Thump Turn On
- Soft Turn On/Off
- Dc: 12-14.8 Volt
- Size: 3.94L x 2.99W x 1.4H



PLIPG1

IPOD 3.5MM STEREO TO RCA ADAPTOR

- 3.5mm Stereo (Female) to RCA (Male) 3 Foot Adaptor
- Allows Direct Connection Of Any Headphone Equipped Audio Device To Your existing RCA Aux Input on the Head Unit
- Easily mounted under dash for convenience
- Stereo 3 Foot 3.5mm(Male) To 3.5mm(Male) Audio Cable Included



PLVHL60

2 CHANNEL SPEAKER TO RCA CONVERTER

- 2 Channel Hi/Low Level RCA Converter
- Level Adjustable
- Ground Loop Isolation and Noise Elimination
- Aluminum Housing
- Max Input: 50W
- 2 x Female RCA Outputs
- Dimensions: 3.6L x 2.6W x 1.08H



PLVHL70

2-CHANNEL HI LEVEL TO LOW LEVEL CONVERTER WITH 12V REMOTE TURN-ON

- Full DC Isolation
- Adjustable Attenuation
- Dual Channel
- MAX Input: 45 Watts per Channel
- Output Adjustment: 50%
- Freq Response : 20Hz-20KHz
- Gray: R(+)
- Gray/ White R(-)
- Green L(+)
- Green/ White L(-)
Trigger wire Connctions:
- Red +12V DC Constant Power
- Black Ground
- Blue +12V DC Output (when head unit is turned on)



PLV2

1 INTO 4 MOBILE VIDEO SIGNAL DISTRIBUTION AMPLIFIER

- 1 Into 4 Mobile Video Amplifier
- One Rca Video Gold Plated Input Jack
- Four Rca Video Gold Plated Output Jacks
- Individual Variable Video Level Controls
- Power On Indicator
- Video Input Level: 2.0Vp-p
- Output Level: 0.5-1.5Vp-p
- Output Impedance: 75 Ohm
- With 4 Mounting Tabs
- Dc 12V Power Input
- Dimensions: 1 X 4.1X 2.9 L





PL12V1



PL12V2AC



PL12V3US



PL12V2CP



PL12V3P



PL12V2

PL12V1

PLUG IN CAR CIGARETTE LIGHTER PORT EXTENSION

- Powers One DC 12 Volt Item
- Single Female Cigarette Lighter corded Power Port
- Single Rear Mount Male Cigarette Lighter Power Source
- Input 12~24 Volt DC

PL12V2AC

PLUG IN CAR 1 TO 2 CIGARETTE LIGHTER MULTIPLIER & ADJUSTABLE AC VOLTAGE TRANSFORMER

- Powers two 12 Volt Electronic Items
- Two Front Mount Corded Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Adjustable AC Voltage with 4 way Port
- Input 12~24 Volt DC

PL12V2CP

PLUG IN CAR 1 TO 2 CIGARETTE LIGHTER MULTIPLIER

- Powers Five 12 Volt Electronic Items
- Two Top Mount Female Cigarette Lighter Ports with Covers
- Single Corded Male Cigarette Lighter Power Source
- Input 12~24 Volt DC

PL12V3P

PLUG IN CAR 1 TO 3 CIGARETTE LIGHTER MULTIPLIER & POWER CONTROL STATION

- Powers Three 12 Volt Electronic Items
- Three Front Mount Corded Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Individual Power Control Stations
- Input 12~24 Volt DC

PL12V3US

PLUG IN CAR 1 TO 3 CIGARETTE LIGHTER MULTIPLIER WITH USB CHARGER

- Powers Three 12 Volt Electronic Items
- 5 Volt USB Fullsize Female Port
- Three Front Mount Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Ultra Bright LED Indicator
- Input 12~24 Volt DC

PLV12V2

1 TO 2 CIGARETTE LIGHTER MULTIPLIER

- Powers two 12 Volt Electronic Items
- Chrome Shafted Design
- Two Front Mount Female Cigarette Lighter Ports
- Single Rear Mount Male Cigarette Lighter Power Source
- Ultra Bright LED Indicator
- Input 12~24 Volt DC

PL12AT3C **PLUG IN CAR 1 TO 3 CIGARETTE LIGHTER MULTIPLIER ASHTRAY COMBO**

- Powers three 12 Volt Electronic Items
- Two Piece Unit Construction with Functional Ashtray
- Fits Securely in Most Cupholders
- Three Top Mount Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Input 12~24 Volt DC



PLFMT6 **FM RADIO TRANSMITTER SMARTPHONE CONNECTOR (CONNECTS YOUR SMARTPHONE TO YOUR CAR FOR HANDS-FREE CALL ANSWERING AND MUSIC PLAYING)**

- Enjoy Hands-Free Calls When You Connect to Your Smartphone
- One-Touch Button Control to Switch Between Answering Calls and Streaming Music
- Routes Phone Calls and Music from Smartphone to Car Stereo
- FM Transmitter Wirelessly Connects to Car Speakers
- USB Port Allows you to Charge Your Device
- Quick and Easy Setup
- Illuminated Display
- Magnetic Mount for Convenience
- 3.5mm Headphone Audio Connector
- No Need to Charge, Connects via Cigarette Lighter
- Works with Virtually Any Smartphone/Cell Phone with Headphone Jack
- Size (L x H x W): 1.8 x 3 x 0.5-Inches



PL12VP3C **PLUG IN CAR 1 TO 3 CIGARETTE LIGHTER MULTIPLIER CUPHOLDER DESIGN**

- Powers three 12 Volt Electronic Items
- Fits Securely in Most Cupholders
- Three Top Mount Female Cigarette Lighter Ports
- Single Corded Male Cigarette Lighter Power Source
- Input 12~24 Volt DC



PLDN35T **3.5MM / 1/8 TO 3.5MM / 1/8 STEREO AUDIO GROUND LOOP ISOLATOR/ AUDIO LINE DRIVER**

- 3.5mm / 1/8" Female Stereo (Left/Right) Audio Input
- 3.5mm / 1/8" Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with all audio players with 3.5mm / 1/8" audio outputs mp3, ipod, etc.



PLDN36I **IPOD DIRECT TO 3.5MM / 1/8 STEREO AUDIO GROUND LOOP ISOLATOR/ AUDIO LINE DRIVER**

- Ipod Direct Stereo (Left/Right) Audio Input
- 3.5mm / 1/8 Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with Ipod to devices with 3.5mm / 1/8" Stereo Aux input



PLDN37R **3.5MM FEMALE TO RCA STEREO MALE AUDIO GROUND LOOP ISOLATOR/ AUDIO LINE DRIVER**

- 3.5mm / 1/8" Female Stereo (Left/Right) Audio Input
- RCA Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with 3.5mm / 1/8" (mp3,iPod, Etc) into Radio/Source Unit With RCA Input jacks



PLDN38RI

iPOD DIRECT TO RCA STEREO AUDIO GROUND LOOP ISOLATOR/AUDIO LINE DRIVER (30-PIN IPOD CONNECTOR)

- iPod Direct Stereo (Left/Right) Audio Input
- RCA Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with Ipod to devices with RCA Stereo Aux input
- 30-Pin iPod Connector



PLGI35T

3.5MM / 1/8 STEREO AUDIO GROUND LOOP ISOLATOR

- 3.5mm / 1/8 Female Stereo (Left/Right) Audio Input
- 3.5mm / 1/8 Female Stereo (Left/Right) Audio Output
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with all audio players with 3.5mm /1/8 audio outputs mp3, Ipod, etc.



PLGI36R

3.5MM - 1/8 TO RCA STEREO AUDIO GROUND LOOP ISOLATOR

- RCA Male Stereo (Left/Right) Audio Output
- 3.5mm - 1/8 Female Stereo (Left/Right) Audio Input
- Breaks Ground Loops to Eliminate Engine Interference
- Filters out engine noise emitted from devices while on charge
- Designed for use with all audio players with 3.5mm /1/8(ipod, MP3 player, etc.) into Radio / Source units with RCA ports audio inputs



PLGI37I

IPOD DIRECT TO 3.5MM / 1/8 STEREO AUDIO GROUND LOOP ISOLATOR

- iPod Direct Stereo (Left/Right) Audio Input
- 3.5mm - 1/8 Male Stereo (Left/Right) Audio Output
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with Ipod to devices with 3.5mm / 1/8 Stereo Aux input



PLGI38RI

IPOD DIRECT TO RCA STEREO AUDIO GROUND LOOP ISOLATOR/ AUDIO LINE DRIVER

- Ipod Direct Stereo (Left/Right) Audio Input
- RCA Male Stereo (Left/Right) Audio Output
- 6 Volt Audio Line Driver
- Wide Input Signal Range 50mv-6v
- Designed to filter out engine noise emitted from devices while on charge
- Breaks Ground Loops to Eliminate Engine Interference.
- Designed for use with Ipod to devices with RCA Stereo Aux input



PLIPA2

2 CHANNEL 300 WATT MINI AMPLIFIER W/IPOD DIRECT INPUT

- 2 Channel IC Mini Amplifier with w/ipod Direct Input Plug
- 2 x 15 Watts RMS @ 4 Ohms/ 2 x 150 Watts Peak
- 3 way Selectible Electronic Crossover Network
- Adjustable Gain Control
- Ipod Direct Audio Inputs
- Power Protection Circuitry
- T.H.D. 1%
- 4 Ohm Stereo Stable
- Anti-Thump Turn On
- Soft Turn On/Off
- Dc: 12-14.8 Volt
- Size: 3.94L x 2.99W x 1.49H



PLMD56

7 CHANNEL FM STEREO MODULATOR W/RCA AUDIO OUTPUTS

- FM Modulator
- Antenna RF Input(Female) Output(Male) Jacks
- 7 Frequency Settings On Selectable DIP Switches
- 87.7MHz/87.9MHz/88.1MHz/88.3MHz/88.5MHz/88.7MHz/88.9MHz
- Input Impedance: 50k Ohm
- Channel Balance:+/- 2dB
- Maximum Channel Separation: 22dB
- Left Right Stereo RCA Female Input Jacks
- Left Right Stereo RCA Female Output Jacks
- Output Impedance: 50 Ohm
- DC 12 Volt 0.5W
- With 4 Mounting Tabs
- Dimensions: 0.90 (H) X 4.90(W) X 3.25 (L)



PLMP2A

FM RADIO TRANSMITTER WITH USB PORT FOR CHARGING YOUR DEVICES, 3.5MM AUX INPUT CAR LIGHTER ADAPTOR

- FM Transmitter
- USB Port for Device Charging Your Smartphone, MP3 Player, etc.
- Supports USB Flash Drive & Aux-In Function
- Supports MP3 and WMA Format Files
- Frequency range: 87.5-108.0 MHz
- LCD Display Screen
- Low Profile Design
- Connects to Car Cigarette Lighter
- Input Voltage: 12-24V - Output Power: 5V DC / 2.1A



PLMP3C21

PLUG IN CAR MP3/USB/SD/MMC/MP4/IPOD FM MODULATOR/TRANSMITTER W/USB CHARGING PORT AND REMOTE

- FM Transmitter with 206 channels: 87.5 - 108MHz
- USB Port for Memory Stick, Play MP3s From Your Computer!
- 1.4 Display for Song Titles & Menus
- Supports SD/MMC card, USB Memory Sticks
- Powered USB Port Lets You Charge Anything w/ USB Charger
- Supports All MP3 Files
- Browse Through Folders w/ Menu Functions
- Song / Folder / Repeat Modes
- Wireless Remote Control Included
- Powered by any 12-24V Car Accessory Outlet
- Line-in function supports other devices: Ipod, MP3 Player, CD Player, Computer, Mobile Phone, Etc.



PLMP3C31B

PLUG IN CAR MP3 USB/SD/MMC/IPOD FM MODULATOR/TRANSMITTER W/USB CHARGING PORT W/BLUETOOTH HANDS FREE KIT FOR ALL BLUETOOTH PHONES

- Acts as a Wireless Bluetooth Kit for your Mobile Phone!
- Pair your Bluetooth Enabled Phone w/ This FM Transmitter
- Speak and Listen Completely Hands-Free
- FM Transmitter with 206 channels: 87.5 - 108MHz
- USB Port for Memory Stick, Play MP3s From Your Computer
- 1.4 Display for Song Titles & Menus
- Supports SD/MMC card, USB Memory Sticks
- Powered USB Port Lets You Charge Anything w/ USB Charger
- Supports All MP3 Files
- Browse Through Folders w/ Menu Functions
- Song / Folder / Repeat Modes
- Wireless Remote Control Included
- Powered by any 12-24V Car Accessory Plug
- Line-in function supports other devices: Ipod, MP3 Player, CD Player, Computer, Mobile Phone, Etc.



PBT50

BLUETOOTH HANDS FREE FM RADIO TRANSMITTER WITH USB & MICRO SD CARD READERS FOR MP3/WMA PLAYING, USB CHARGING PORT & AUX

- Built-in Bluetooth Technology
- Built-in Microphone for Hands-Free Phone Calls
- Wirelessly Stream Audio or Internet Radio from Your Smartphone
- USB Flash and Micro SD Card Readers
- Quickly Plug-in and Play Your MP3/WMA Files
- AUX Input (3.5mm Jack) for Connecting Additional Devices
- Full Frequency FM Transmitter: 87.5-108MHZ
- Hands-Free Mode Automatically Switches To Incoming Calls When Playing Music
- Supports 4 Loop Modes: Repeat All, Random, Repeat One, Folder
- Selectable EQ Settings: Natural, Rock, Pop, Classic, Jazz
- Additional USB Port For Charging Your Devices (Output: DC 5V/2.1A)
- Supports 12-24V Via Car Cigarette Lighter
- LCD Display and Button Controls
- Flexible and Adjustable Gooseneck Arm
- Includes Remote Control and 3.5mm Cable



PBT94

BLUETOOTH HANDS FREE FM RADIO TRANSMITTER WITH USB FLASH AND MICRO SD CARD READERS FOR MP3/WMA PLAYING, USB CHARGING PORT & AUX INPUT

- Built-in Bluetooth Technology
- Built-in Microphone for Hands-Free Phone Calls
- Wirelessly Stream Audio or Internet Radio from Your Smartphone
- USB Flash and Micro SD Card Readers
- Quickly Plug-in and Play Your MP3/WMA Files
- AUX Input (3.5mm Jack) for Connecting Additional Devices
- Full Frequency FM Transmitter: 87.5-108MHZ
- Hands-Free Mode Automatically Switches To Incoming Calls When Playing Music
- Supports 4 Loop Modes: Repeat All, Random, Repeat One, Folder
- Selectable EQ Settings: Natural, Rock, Pop, Classic, Jazz
- USB Port For Charging Your Devices (Output: DC 5V/2.1A)
- Supports 12-24V Via Car Cigarette Lighter
- LCD Display and Button Controls
- Flexible and Adjustable Gooseneck Arm
- Includes Remote Control and 3.5mm Cable



Automobile Amplifiers



For more detailed specifications, product-specific information and models visit www.PyleAudio.com



PLA4120



PLA2200



PLA2220

PLA2200 2 CHANNEL 1400 WATT BRIDGEABLE MOSFET AMPLIFIER

- 700 Watts x 2 Output
- 1400 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power And Protection LED Indicators
- Low Level Inputs
- RCA Inputs Outputs
- Slim Size Amplifier Design For Easy Installation
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on - Soft Turn-On Circuit
- Remote Turn On/Off
- 2x10 Amp Maxi Type Fuse
- Freq. Response: 15Hz - 30KHz
- Dimensions: 10.63" H x 1.42" W x 8.75" L

PLA2210 2 CHANNEL 1800 WATT BRIDGEABLE MOSFET AMPLIFIER

- 900 Watts x 2 Output
- 1800 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power And Protection LED Indicators
- Low Level Inputs - RCA Inputs Outputs
- Slim Size Amplifier Design For Easy Installation
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on - Soft Turn-On Circuit
- Remote Turn On/Off
- S/N Ratio: 95db - T.H.D: 0.04%
- 2x15 Amp Maxi Type Fuse
- Freq. Response: 15Hz - 30KHz
- Dimensions: 10.63" H x 1.42" W x 12" L

PLA2220 2 CHANNEL 2400 WATT BRIDGEABLE MOSFET AMPLIFIER

- 1200 Watts x 2 Output
- 2400 watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Switchable Bass Boost
- Power And Protection LED Indicators
- Low Level Inputs - RCA Inputs Outputs
- Thermal / Overload / Short Circuit Protection
- Anti-Thump Turn-on - Soft Turn-On Circuit
- Remote Turn On/Off
- S/N Ratio: 95db - T.H.D: 0.04%
- 2x20 Amp Maxi Type Fuse
- Dimensions: 10.63" H x 1.42" W x 15.75" L

PLA2230 2 CHANNEL 3000 WATT HIGH POWER MOSFET AMPLIFIER

- 1500 Watts x 2 Output
- 3000 Watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Variable Bass Boost - Sub Sonic Filter
- Thermal / Overload / Short Circuit Protection
- MOSFET PWM Power Supply
- Power And Protection LED Indicators
- Low Level Inputs - RCA Inputs And Outputs
- Slim Size Amplifier Design For Easy Installation
- 2x25 Amp Maxi Type Fuse
- Dimensions: 10.63" W x 1.42" H x 17" L

PLA2260 2 CHANNEL 4000 WATT HIGH POWER MOSFET AMPLIFIER

- 2000 Watts x 2 Output
- 4000 Watts x 1 Bridged Output
- Variable Hi/ Lo Electronic Crossover Network
- Variable Input Level (Gain) Control
- Variable Bass Boost - Sub Sonic Filter
- Thermal/ Overload/ Short Circuit Protection
- MOSFET PWN Power Supply
- Power And Protection LED indicators
- Low Level Inputs - RCA Inputs And Outputs
- Slim Size Amplifier Design for Easy Installation
- 2x35 Amp Maxi Type Fuse
- Dimensions: 10.63" (W) x 1.42" (H) x 21" (L)

PLA4120 4 CHANNEL 1000 WATT HIGH POWER MOSFET AMPLIFIER

- 250 Watt x 4 Output
- 500 Watt x 2 Bridged Out (250Wx2 + 500W x 1)
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual Switchable Bass Boost
- Dual MOSFET PWM Power Supplies
- Dual Variable Input Level (Gain) Control
- Thermal / Overload / Short Circuit Protection
- Power And Protection LED Indicators
- Low Level Inputs
- RCA Inputs And Outputs
- Slim Size Amplifier Design For Easy Installation
- 2x10 Amp Maxi Type Fuse
- Dimensions: 10.63" W x 1.42" H x 13" L



PLAM3000



PLAM1000



PLAM3601D

PLAM1000 1000 WATT 2 CHANNEL BRIDGEABLE MOSFET AMPLIFIER

- Two Channel Bridgeable Amplification
- Tri-way Configuration:1/2 Channels
- 2 X 500Watts Total Output @ 4 Ohms
- 1000 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply
- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Built-In Variable Subwoofer Crossover
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD <0.04%
- Frequency Response:15Hz-30kHz
- Overload, Thermal & Short Circuit Protection
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions:7.28" L 9.76" W 2.26" H

PLAM1200 1200 WATT 2 CHANNEL BRIDGEABLE MOSFET AMPLIFIER

- Two Channel Bridgeable Amplification
- Tri-way Configuration:1/2 Channels
- 2 X 600 Watts Total Output @ 4 Ohms
- 1200 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply
- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Built-In Variable Subwoofer Crossover
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD <0.04%
- Frequency Response:15Hz-30kHz
- Overload, Thermal & Short Circuit Protection
- Power On LED Indicator - Variable Gain Control
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions:7.87" L 9.76" W 2.26" H

PLAM1600 1600 WATT 4 CHANNEL BRIDGEABLE MOSFET AMPLIFIER

- Four Channel Bridgeable Amplification
- Tri-way Configuration:4/3/2 Channels
- 4 X 400Watts Total Output @ 4 Ohms
- 1600 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply
- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Built-In Variable Subwoofer Crossover
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD <0.04%
- Frequency Response:15Hz-30kHz
- Overload, Thermal & Short Circuit Protection
- Power On LED Indicator - Variable Gain Control
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions: 11.02" L 9.76" W 2.26" H

PLAM2300 2300 WATT 2 CHANNEL BRIDGEABLE MOSFET AMPLIFIER

- Two Channel Bridgeable Amplification
- Tri-way Configuration:1/2 Channels
- 2 X 1150 Watts Total Output @ 4 Ohms
- 2300 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply
- Built-In Variable Subwoofer Crossover
- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD Less Than 0.04%
- Frequency Response:15Hz-30kHz
- Overload, Thermal & Short Circuit Protection
- Power On LED Indicator - Variable Gain Control
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions: 9.84" L 9.76" W 2.26" H

PLAM3000 3000 WATT 4 CHANNEL BRIDGEABLE MOSFET AMPLIFIER

- Four Channel Bridgeable Amplification
- Tri-way Configuration:4/3/2 Channels
- 4 X 750 Watts Total Output @ 4 Ohms
- 3000 Watts Total System Output @ 4 Ohms
- MOSFET Pulse Width Modulated Power Supply
- 2 Ohm Stereo Stable - RCA Low Level Inputs
- Built-In Variable Subwoofer Crossover
- Speaker Output Terminal Strip
- Signal/Noise Ratio 90dB - THD < 0.04%
- Frequency Response:15Hz-30kHz
- Overload, Thermal & Short Circuit Protection
- Power On LED Indicator - Variable Gain Control
- LED Diagnostic Condition Indicator
- Automotive Type Fuse Protection
- Dimensions:14.17" L 9.76" W 2.26" H

PLAM3601D CLASS D MONOBLOCK POWER AMPLIFIER

- Class D Monoblock Power Amplifier
- RMS Power @ 4 Ohms: 1x1000 W
- RMS Power @ 2 Ohms: 1x1500 W
- RMS Power @ 1.3 Ohms: 1x2000 W
- Maximum Power Output 3600W Mono
- Mono Block Sub woofer Amplifier
- Frequency Response 15 Hz-150 Hz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Variable Subsonic Filter (15Hz - 55Hz 24dB)
- Remote Bass Boost - S/N Ratio: >90dB
- Input Impedance: 10K Ohms
- Soft Turn On/ Off - 1 Ohm Stable
- Advanced Protection Circuitry

SUPER SLIM ACTIVE AMPLIFIED SUBWOOFER SYSTEMS

PLBASS2.8

- RCA Low Level Input
- High Level Input
- Green & Red LED Power Status Indicator
- Phase shift Switch: 0 or 180°
- Soft delay remote Turn-On
- Thermal, Short And Overload Protection
- Fuse: 2—15A
- RMS Power: 150W x 2 + 300W x 1
- MXA Power: 300W x 2 + 600W x 1
- Subwoofer Gain Control
- Subsonic Filter (20-50Hz)
- 0 to +12dB Variable Bass Boost (@45Hz)
- Low Pass Filter (50-150 Hz)
- Subwoofer Gain Remote Control
- CH 1/2 Gain Control
- High Pass Filter (50-150 Hz)
- Dimensions: 14.5(L) x 9.5(W) x 3(H)

PLBASS8

- Low Level RCA Input
- High Level Speaker Line Input
- Green LED Power Status Indicator
- Red LED Protection Status Indicator
- Remote Bass Boost Level Control
- Phase Shift Switch: 0 or 180°
- Adjustable Input Sensitivity: 0.2V-3V
- 0 to +12dB Variable Bass Boost (@45Hz)
- Low Pass Filter (50-150 Hz)
- Remote Turn-On Soft Start/Stop Delay
- Thermal, and Overload Protection Circuits
- Fuse: 2 x 15A
- Max Power: 600 Watt
- RMS Power: 300 Watt
- Dimension: 14. 5(D) x 9.5(W) x 3(H)
- Weight 10.5 Lbs

PLBASS10

- 10 Slim Woofer
- RCA Low Level Input
- High Level Input
- Green & Red LED Power Status Indicator
- Remote Level Control
- Phase Shift Switch: 0 or 180°
- Adjustable Input Sensitivity: 0.2V-3V
- 0 to +12dB Variable Bass Boost (@45Hz)
- Low Pass Filter (50-150 Hz)
- Soft Delay Remote Turn-On
- Thermal, Short And Overload Protection
- Fuse: 2 x 20A
- Max Power:1000 Watts
- RMS Power: Amplifier: 100Watt
- Slim woofer: 250Watt
- Dimension: 15 X 11.8 X 3
- Weight: 15.5 LBS.





PLA2678



PLA2378



PLA2978

PLA2378 2 CHANNEL 2000 WATT BRIDGEABLE MOSFET AMPLIFIER

- Maximum Power Output 2 x 1000W
- Bridgeable RMS Power @ 4 Ohms: 1x2000W
- 2 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions:10.24"W x 2.21"H x 11.02"L

PLA2678 2 CHANNEL 4000 WATT BRIDGEABLE MOSFET AMPLIFIER

- Maximum Power Output 2 x 2000W
- Bridgeable RMS Power @ 4 Ohms: 1x4000W
- 2 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB
- Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions:10.24"W x 2.21"H x 16.14"L

PLA2978 2 CHANNEL 5000 WATT BRIDGEABLE MOSFET AMPLIFIER

- Maximum Power Output 2 x 2500W
- Bridgeable RMS Power @ 4 Ohms: 1 x 5000 W
- 2 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions:10.24"W x 2.21"H x 18.90"L

PLA4278 4 CHANNEL 2000 WATT BRIDGEABLE MOSFET AMPLIFIER

- Maximum Power Output 4 x 500W
- Bridgeable RMS Power @ 4 Ohms: 2 x 1000W
- 4 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- MOSFET Power Supply
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Input Impedance: 47K Ohms
- Advanced Protection Circuitry
- S/N Ratio: >90dB
- Dimensions:10.24"W x 2.21"H x 14.58"L

PLA4478 4 CHANNEL 4000 WATT BRIDGEABLE MOSFET AMPLIFIER

- Maximum Power Output 4 x 1000W
- Bridgeable RMS Power @ 4 Ohms: 2 x 2000W
- 4 Channel Bridgeable MOSFET Amplifier
- Frequency Response 20 Hz-50kHz (±3dB)
- Output Power @ 14.4v DC, 50Hz
- 2 Ohm Stable - Soft Turn On/ Off
- PWM (Pulse-Width-Modulation) System
- Glass Epoxy PCB - Silver RCA Inputs
- Custom Terminal Block for Speaker Connection
- Thermal / Overload / Short Circuit Protection
- Advanced Protection Circuitry
- Dimensions:10.24"W x 2.21"H x 17.72"L

PDGA440 2000 WATT 4-CHANNEL SMD CLASS AB POWER AMPLIFIER

- 4 x 250 Watts RMS Power at 4 Ohms
- 4 x 500 Watts Peak Power at 4 Ohms
- 2 x 500 Watts RMS Power at 4 Ohms Bridged
- 2 x 1,000 Watts Peak Power at 4 Ohms Bridged
- Variable Low Pass Filter : 50Hz - 500Hz
- Variable High Pass Filter : 50Hz - 500Hz
- Input Sensitivity: 250mV-8V
- THD :<.05%
- S/N Ratio : >90dB
- Channel Separation : >60dB
- Frequency Response : 20Hz - 50KHz
- High Technology SMD Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Tri-mode Capable
- Double Side Epoxy PCB Circuit Board
- Nickel Plated RCA Inputs
- Low Pass Filter Controls
- High Pass Filter Controls
- Power & Protection LED Indicator
- Thermal, Over load & Speaker Short Protection
- Soft Turn-on/Turn-Off
- Fuse Rating: 30A x 1
- Dimensions: 6.88(W) x 2.02(H) x 7.17(L)

PDGA240 1000 WATT 2-CHANNEL SMD CLASS-AB POWER AMPLIFIER

- 2 x 250 Watts RMS Power at 4 Ohms
- 2 x 500 Watts Peak Power at 4 Ohm
- 1 x 500 Watts RMS Power at 4 Ohm Bridged
- 1 x 1,000 Watts Peak Power at 4 Ohm Bridged
- Variable Low Pass Filter : 50Hz - 500Hz
- Variable High Pass Filter : 50Hz - 500Hz
- Input Sensitivity: 250mV-8V
- THD :<.05%
- S/N Ratio : >90dB
- Channel Separation : >60dB
- Frequency Response : 20Hz - 50KHz
- High Technology SMD Circuit
- Bridgeable at 4 Ohms
- 2 Ohm Stereo Stable
- Double Side Epoxy PCB Circuit Board
- Nickel Plated RCA Inputs
- Low Pass Filter Controls
- High Pass Filter Controls
- Power & Protection LED Indicator
- Thermal, Over load & Speaker Short Protection
- Soft Turn-on/Turn-Off
- Fuse Rating: 20A x 1
- Dimensions: 6.89"(W) x 2.02"(H) 5.59"(L)





PLBA530FRD



PLBA330FRD



PLBA430FRD



PLBA330FRD 4400 WATT 3-CHANNEL COMPACT CLASS-D FULL RANGE HYBRID AMPLIFIER

- 2 x 300 Watt + 1 x 800 Watts RMS @ 4 Ohms
- 2 x 600 Watt + 1 x 1600 Watts MAX @ 4 Ohms
- 2 x 450 Watt + 1 x 1200 Watts RMS @ 2 Ohms
- 2 x 1200 Watt + 1 x 2000 Watts MAX @ 2 Ohms
- High Glossy Black Brushed accents Heat Sink
- New Compact Design Based Class-D
- Double Sided SMT Circuit Board
- 2 Ohms Stereo Stable
- LPF Variable Crossover : 30Hz-200Hz 24dB/Oct
- HPF Variable Crossover : 50Hz-180Hz 12dB/Oct
- Variable Bass Boost Frequency : 40Hz-100Hz dB(Variable)
- Variable Bass Boost:0-18dB - Soft Turn On/Off
- Phase Adjustable : 0° - 180°
- Dash Mount Remote Subwoofer Control
- Nickel Plated Low Level RCA Input
- Power Protection LED Indicators
- Advanced Protection Circuitry
- Frequency Response : 10 – 40K Hz
- S/N Ratio > 95 dB - Fuse : 25A x 2
- Dimension : 8.78”(L) x 7.40”(W) x 1.99”(H)

PLBA430FRD 3600 WATT 4-CHANNEL COMPACT CLASS-D FULL RANGE AMPLIFIER

- 4 x 300 Watts RMS @ 4 Ohms
- 4 x 600 Watts MAX @ 4 Ohms
- 4 x 450 Watts RMS @ 2 Ohms
- 4 x 900 Watts MAX @ 2 Ohms
- High Glossy Black Brushed accents Heat Sink
- New Compact Design Based on Class-D Tech
- Double Sided SMT Circuit Board
- 2 Ohms Stereo Stable - Soft Turn On/Off
- LPF Variable Crossover : 30Hz-200Hz 24dB/Oct
- HPF Variable Crossover : 50Hz-180Hz 12dB/Oct
- Variable Bass Boost : 0-18 dB at40Hz
- Phase Adjustable : 0° - 180°
- Nickel Plated Low Level RCA Input
- Power Protection LED Indicators
- Advanced Protection Circuitry
- Frequency Response : 10 – 40K Hz
- S/N Ratio > 95 dB - Fuse : 25A x 2
- Dimension : 7.20”(L) x 7.40”(W) x 1.99”(H)

PLBA530FRD 6800 WATT 5-CHANNEL COMPACT CLASS-D FULL RANGE HYBRID AMPLIFIER

- 4 x 300 Watt + 1 x 800 Watts RMS @ 4 Ohms
- 4 x 600 Watt + 1 x 1600 Watts MAX @ 4 Ohms
- 4 x 450 Watt + 1 x 1200 Watts RMS @ 2 Ohms
- 4 x 1200 Watt + 1 x 2000 Watts MAX @ 2 Ohms
- High Glossy Black Brushed accents Heat Sink
- New Compact Design Based on Class-D Tech
- Double Sided SMT Circuit Board
- 2 Ohms Stereo Stable - Soft Turn On/Off
- LPF Variable Crossover : 30Hz-200Hz 24dB/Oct
- HPF Variable Crossover : 50Hz-180Hz 12dB/Oct
- Variable Bass Boost Frequency : 40Hz-100Hz(Variable)
- Variable Bass Boost : 0-18 dB
- Phase Adjustable : 0° - 180°
- Dash Mount Remote Subwoofer Control
- Nickel Plated Low Level RCA Input
- Power Protection LED Indicators
- Advanced Protection Circuitry
- Frequency Response : 10 – 40K Hz
- S/N Ratio > 95 dB - Fuse : 25A x 3
- Dimension : 12.72”(L) x 7.40”(W) x 1.99”(H)



PLTA580



PLTA180



PLTA180 2-CHANNEL 800 WATT 24 VOLT TRUCK, BUS RV, BRIDGEABLE MOSFET

- 2 x 200W RMS at 4 Ohms
- 2 x 400W MAX at 4 Ohms
- 1 x 800W MAX at 4 Ohms Bridged
- 2 ohm Stereo Stable
- Line Out for Left & Right Channel
- Tri-mode operation, Bridgeable
- Nickel-plated RCA connectors & Screw terminals
- Thermal, Over load & Speaker short protection
- Air Induction FAN Cooled
- Power & Protection LED Indicators
- Soft Turn-on/Turn-off
- Channels/Class: 2ch. Class A/B
- Input Sensitivity: 100mV-4V
- THD 4ohm Power 0.04%
- Frequency Response: 10Hz-30KHz
- S/N Ratio (4 ohm): 90dB
- Stereo Separation: 65dB
- Sub Sonic Filter : 20Hz fixed
- Variable HPF: 50Hz~700Hz
- Variable LPF: 50Hz~150Hz
- Bass Boost: 0-18dB (60Hz fixed)
- DC 24-28 Voltage Input
- Fuse Rating: 15Ax4
- Dimensions : 11.42”(W) x 3.15”(H) x 15.74”(L)

PLTA580 2-CHANNEL 2000 WATT 24 VOLT TRUCK, BUS RV, BRIDGEABLE MOSFET

- 2 x 500W RMS at 4 Ohms
- 2 x 1000W MAX at 4 Ohms
- 1 x 2000W MAX at 4 Ohms Bridged
- 2 ohm Stereo Stable
- Line Out for Left & Right Channel
- Tri-mode operation, Bridgeable
- Nickel-plated RCA connectors & Screw terminals
- Thermal, Over load & Speaker short protection
- Air Induction FAN Cooled
- Power & Protection LED Indicators
- Soft Turn-on/Turn-off
- Channels/Class: 2ch. Class A/B
- Input Sensitivity: 100mV-4V
- THD 4ohm Power 0.04%
- Frequency Response: 10Hz-30KHz
- S/N Ratio (4 ohm): 90dB
- Stereo Separation: 65dB
- Sub Sonic Filter : 20Hz fixed
- Variable HPF: 50Hz~700Hz
- Variable LPF: 50Hz~150Hz
- Bass Boost: 0-18dB (60Hz fixed)
- DC 24-28 Voltage Input
- Fuse Rating: 25Ax4
- Dimensions : 11.42”(W) x 3.15”(H) x 21.65”(L)

Automobile Subwoofers



For more detailed specifications, product-specific information and models visit www.PyleAudio.com



PLPW6D



PYLE POWER SUBWOOFERS



PLPW6D 6.5" 600 WATT DUAL VOICE COIL 4 OHM SUBWOOFER

- Black Steel Basket
- Non-Press Paper Cone
- Specially Treated Foam Surround
- 1.5 4 Layer Dual Voice Coil
- Dual 4 Ohm Impedance
- 30 OZ Magnet
- 300 Watts RMS / 600 Watts Max Power
- SPL: 89 dB
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 6.6 (Diameter) x 2.9 (Depth)

PLPW8D 8" 800 WATT DUAL VOICE COIL 4 OHM SUBWOOFER

- SPL: 89dB
- 40 Oz. Magnet
- Black Steel Basket
- Non-Press Paper Cone
- Dual 4 Ohm Impedance
- 1.5" 4-Layer Dual Voice Coil
- Specially Treated Foam Surround
- 400 Watt RMS / 800 Watt Max Power
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 8.2" (Diameter) x 3.7" (Depth)

PLPW10D 10" 1000 WATT DUAL VOICE COIL 4 OHM SUBWOOFER

- SPL: 90dB
- 50 oz. Magnet
- Black Steel Basket
- Non-Press Paper Cone
- Dual 4 Ohm Impedance
- 2-Inch 4-Layer Dual Voice Coil
- Specially Treated Foam Surround
- 500 Watt RMS / 1,000 Watt Max Power
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 10" (Diameter) x 4.7" (Depth)

PLPW12D 12" 1600 WATT DUAL VOICE COIL 4 OHM SUBWOOFER

- SPL: 90dB
- 60 oz. Magnet
- Black Steel Basket
- Non-Press Paper Cone
- Dual 4 Ohm Impedance
- 2-Inch 4-Layer Dual Voice Coil
- Specially Treated Foam Surround
- 800 Watt RMS / 1,600 Watt Max Power
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 12.2" (Diameter) x 5.1" (Depth)

PLPW15D 15" 2000 WATT DUAL VOICE COIL 4 OHM SUBWOOFER

- SPL: 92dB
- 95 oz. Magnet
- Black Steel Basket
- Non-Press Paper Cone
- Dual 4 Ohm Impedance
- 2.5-Inch 4-Layer Dual Voice Coil
- Specially Treated Foam Surround
- 1,00 Watt RMS / 2,000 Watt Max Power
- Spring Loaded Push Down Speaker Terminals
- Dimensions: 15.3" (Diameter) x 6.3" (Depth)



PLW10BL

10" 600 WATT

- Blue CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped Vented Extended Pole Piece
- 1.5 High Temperature Kapton Voice Coil
- 4 Ohms Impedance
- 70 oz. Magnet Structure
- 600 Watts Peak Power
- Fs:35.9, Qms:5.72, Qes:0.83
- Qts:0.73, Vas (Cu ft)1.932
- SPL: 86.7dB
- Overall Diameter: 10.16
- Mounting Depth: 4.45

PLW12BL

12" 800 WATT SUBWOOFER

- Blue CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Blue steel Basket
- Bumped Vented Extended Pole Piece
- 2 High Temperature Kapton Voice Coil
- 4 Ohms Impedance
- 90 oz. Magnet Structure
- 800 Watts Peak Power
- Fs:26.2, Qms:5.81, Qes:0.90
- Qts:0.78, Vas (Cu ft)4.146
- SPL: 85.5dB
- Overall Diameter: 12.20
- Mounting Depth: 5.34

PLW15BL

15" 100 WATT SUBWOOFER

- Blue CD Wave Electro-Plated Polypropylene Cone
- Wide Butyl Rubber Surround with New Pattern
- Blue Steel Basket
- Bumped & Vented Extended Pole Piece
- 2.5" High Temperature Kapton Voice Coil
- 4 Ohm Impedance
- 70 Oz Magnet structure
- 1000 Watts Peak Power



PLW10RD

10" 600 WATT SUBWOOFER

- CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped Vented Extended Pole Piece
- 1.5 High Temperature Kapton Voice Coil
- 4 Ohms Impedance - SPL: 86.7dB
- 70 oz. Magnet Structure
- 600 Watts Peak Power
- Fs:35.9, Qms:5.72, Qes:0.83,
- Qts:0.73, Vas (Cu ft)1.932
- Overall Diameter: 10.16
- Mounting Depth: 4.45

PLW12RD

12" 800 WATT SUBWOOFER

- Red CD Wave Electro-Plated Cone
- Wide Butyl Rubber Surround w/New Pattern
- Red steel Basket
- Bumped Vented Extended Pole Piece
- 2 High Temperature Kapton Voice Coil
- 4 Ohms Impedance
- 90 oz. Magnet Structure
- 800 Watts Peak Power
- Fs:26.2, Qms:5.81, Qes:0.90
- Qts:0.78, Vas (Cu ft)4.146
- SPL: 85.5dB
- Overall Diameter: 12.20
- Mounting Depth: 5.08

PLW15RD

15" RED CONE HIGH WOOFER

- Red CD wave Electro-Plated Cone
- Wide Butyl Rubber Surround with New Pattern
- Red Steel Basket
- Bumped & Vented Extended Pole Piece
- 25" High Temperature Kapton Voice Coil
- 4 Ohm Impedance
- 70 Oz Magnet Structure
- 1000 Watts Peak Power



PLCHW10

10" 1400 WATT DVC SUBWOOFER

- Titanium Injected Polypropylene Cone
- Non-Fatiguing Big Rubber Suspension
- Chrome-Platted Dome Steel Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2" Dual Kapton Voice Coil
- 1400 Watts Peak Power
- Impedance: Dual 4 Ohm
- 50 + 50 oz. Magnet Structure
- Fs:26.9, Qms:5.23, Qes:0.89,
- Qts:0.76, Vas (Cu ft)2.394 - SPL: 83.5 dB
- Diameter: 10.16 - Mounting Depth: 6.20

PLCHW12

12" 2400 WATT DVC SUBWOOFER

- Titanium Injected Polypropylene Cone
- Non-Fatiguing Big Rubber Suspension
- Chrome-Platted Dome Steel Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2" Dual Kapton Voice Coil
- 2400 Watts Peak Power
- Impedance: Dual 4 Ohm
- 60 + 60 oz. Magnet Structure
- Fs:23.2, Qms:4.92, Qes:0.84,
- Qts:0.72, Vas (Cu ft)4.908 - SPL: 85 dB
- Diameter: 12.60 - Mounting Depth: 6.60

PLCHW15

15" 3600 WATT DVC SUBWOOFER

- Titanium Injected Polypropylene Cone
- Non-Fatiguing Big Rubber Suspension
- Chrome-Platted Dome Steel Basket
- Magnet Sealed Within Basket
- Allen Key Magnet Bolts
- 2.5" Dual Kapton Voice Coil
- 3600 Watts Peak Power
- Impedance: Dual 4 Ohm
- 70 + 70 oz. Magnet Structure
- Fs:21.2, Qms:5.0, Qes:0.90,
- Qts:0.75, Vas (Cu ft)5.204 - SPL: 84 dB
- Diameter: 15.84 - Mounting Depth: 8.52



PLSQ10D

10" 1200 WATT SQUARE DVC SUBWOOFER

- Silver Special Treated Polypropylene Cone
- Wide Rubber Surround
- Black Square Steel Basket
- Bumped Vanted Extended Pole Piece
- 2.5 High Temperature Kapton Dual Voice Coil
- 4 Ohm Impedance (Per Coil)
- 70 + 70 oz. Magnet Structure
- SPL: 88 dB
- 1200 Watts Peak Power
- Overall Diameter: 11.81
- Mounting Depth: 5.91

PLSQ12D

12" 1400 WATT SQUARE DVC SUBWOOFER

- Silver Special Treated Polypropylene Cone
- Wide Rubber Surround
- Black Square Steel Basket
- Bumped Vented Extended Pole Piece
- 3 High Temperature Kapton Dual Voice Coil
- 4 Ohm Impedance (Per Coil)
- 70 + 70 oz. Magnet Structure
- Fs:26, Qms:5.81, Qes:0.90,
- Qts:0.7, Vas (Cu ft)4.146
- 1400 Watts Peak Power - SPL: 90 dB
- Overall Diameter: 13 - Mounting Depth: 6.34

PLWCH10D

10" 1000 WATT ULTRA SLIM DVC

- 10 High Quality Poly Mica Cone
- Butyl Foam Surround
- Dual 2 High Temperature Kapton Voice Coil
- Independently Fused 20 Amp Speaker Terminals
- 60 Oz Magnet Structure
- Power Handling: 500Watts RMS/1000 Watts Peak
- Frequency Response: 30 Hz - 2.2K Hz
- Impedance (Per coil) : 4 Ohm
- Fs:31.7, Qms:4.07, Qes:0.46, Qts:0.41, Vas (L)49.69
- Efficiency: 90 dB
- Overall Diameter: 10.6
- Mounting Depth: 3.08
- Includes Installation Template

PLWCH12D

12" 1200 WATT ULTRA SLIM DVC

- 12 High Quality Poly Mica Cone
- Butyl Foam Surround
- Dual 2.5 High Temperature Kapton Voice Coil
- Independently Fused 20 Amp Speaker Terminals
- 75 Oz Magnet Structure
- Power Handling: 600Watts RMS/1200 Watts Peak
- Frequency Response:28 Hz - 2.2K Hz
- Impedance (Per coil) : 4 Ohm
- Fs:29.1, Qms:4.08, Qes:0.44, Qts:0.396, Vas (L)102.18
- Efficiency: 92 dB
- Overall Diameter: 12.6
- Mounting Depth: 3.28
- Includes Installation Template



PL1090BL

10 1000 WATT DVC

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 83.5dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x70 oz
- 1000 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs:26.9, Qms:5.23, Qes:0.89,
- Qts:0.76, Vas (Cu ft)2.394
- Overall Diameter: 10.16 - Mounting Depth: 6.20

PL1590BL

15 1400 WATT DVC SUBWOOFER

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 84dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x90 oz
- 1400 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs:21.2, Qms:5.0, Qes:0.90,
- Qts:0.75, Vas (Cu ft)5.204
- Overall Diameter: 15.84 - Mounting Depth: 8.52

Visit us on:



www.PyleAudio.com

PL1290BL

12 1200 WATT DVC SUBWOOFER

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 85dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x90 oz
- 1200 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs:23.2, Qms:4.92, Qes:0.84,
- Qts:0.72, Vas (Cu ft)4.908
- Overall Diameter: 12.20 - Mounting Depth: 6.52

PL1890BL

18 1800 WATT DVC

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 86dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 3 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 2x100 oz
- 1800 Watt Max Power Handling
- Impedance:4 Ohm (Per Coil)
- Fs:20, Qms:4.8, Qes:1.2,
- Qts:0.70, Vas (Cu ft)6.025
- Overall Diameter: 18.32 - Mounting Depth: 8.80

PLD12WD

12 3200 WATT DVC

- Custom Titanium Moulded Poly Cone
- Custom Grooved Specially Treated Rubber Surround
- Diamond Cut Aluminum Die-Cast Basket
- Dual Stacked Magnet Structure
- Chrome Mesh Magnet Vent
- 2.4 Layer Dual Voice Coil
- Moulded Plastic Gasket
- Spring Loaded Wire Connectors
- 3200 Watts Peak Power
- Magnet Weight: 2 x 100 oz.
- Nominal Impedance: Dual 4 Ohms
- Fs:25, Qms:2.68, Qes:0.90, Qts:0.68, Vas (Cu ft)2.730
- SPL: 92 dB
- Overall Diameter: 13.20
- Mounting Depth: 5.20

PLD15WD

15 4000 WATT DVC

- Custom Titanium Moulded Poly Cone
- Custom Grooved Specially Treated Rubber Surround
- Diamond Cut Aluminum Die-Cast Basket
- Dual Stacked Magnet Structure
- Chrome Mesh Magnet Vent
- 2.5 4 Layer Dual Voice Coil
- Moulded Plastic Gasket
- Spring Loaded Wire Connectors
- 4000 Watts Peak Power
- Magnet Weight: 2 x 100 oz.
- Nominal Impedance: Dual 4 Ohms
- Fs:20, Qms:5.03, Qes:0.89, Qts:0.66, Vas (Cu ft)8.689
- SPL: 92 dB
- Overall Diameter: 16
- Mounting Depth: 6.40





PLBW84

8" 600 WATT DVC

SUBWOOFER

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 83.5dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 1.5 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 60 oz
- 600 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs: 60, Qms: 5.23, Qes: 0.89,
- Qts: 0.76, Vas (Cu ft) 2.394
- Overall Diameter: 8.8 - Mounting Depth: 4.28

PLBW124

12" 1200 WATT DVC

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 84dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 70 oz
- 1200 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs: 40, Qms: 5.0, Qes: 0.90,
- Qts: 0.75, Vas (Cu ft) 5.204
- Overall Diameter: 12.8 - Mounting Depth: 5.76

PLBW104


10" 1000 WATT DVC SUBWOOFER

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 85dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 70 oz
- 1000 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs: 50, Qms: 4.92, Qes: 0.84,
- Qts: 0.72, Vas (Cu ft) 4.908
- Overall Diameter: 10.6 - Mounting Depth: 5.12

PLBW154

15" 1500 WATT DVC SUBWOOFER

- Blue Injection Molded Cone
- Non-Fatiguing Big Rubber Suspension
- Blue Chrome-Plated Steel Basket
- Bumped Vented Extended Pole Piece
- Silver Plated Terminal
- Flat Progressive Spider - SPL: 86dB
- New Wave-Like Rubber Gasket
- Rubber Magnet Boot
- 2.5 High Temperature Dual Kapton Voice Coil
- Magnet Weight: 80 oz
- 1500 Watt Max Power Handling
- Impedance: 4 Ohm (Per Coil)
- Fs: 30, Qms: 5.0, Qes: 0.91, Qts: 0.70, Vas (Cu ft) 5.100
- Overall Diameter: 15.8 - Mounting Depth: 6.84

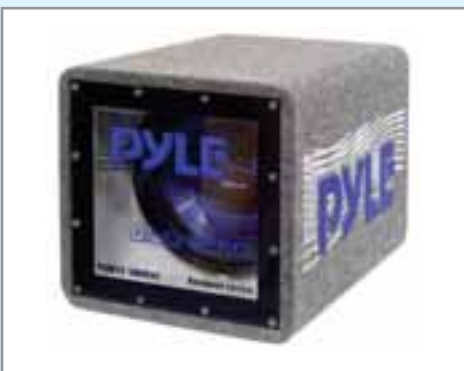

PLQB8

8" 400 WATT BANDPASS ENCLOSURE

- One 8 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 400 Watts Max Power Handling
- Frequency Response: 35Hz-800k Hz
- Dimensions: 10H x 10W x 17D

PLQB10

10" 500 WATT BANDPASS ENCLOSURE

- One 10 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 500 Watts Max Power Handling
- Frequency Response: 30Hz-700k Hz
- Dimensions: 12H x 12W x 17D

PLQB12

12" 600 WATT BANDPASS ENCLOSURE

- One 12 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 600 Watts Max Power Handling
- Frequency Response: 25Hz-600k Hz
- Dimensions: 14H x 14W x 17D



PLPR10A

10" SLIM DESIGN POWERED

- 10 High Power Subwoofer
- Black Poly Coated Cone
- 1.5 Voice Coil
- Vinyl Wrapped Amplified Enclosure
- 30 Oz Magnet Structure
- 4 Ohm Impedance
- 150 Watts RMS / 300 Watts Peak
- Frequency Response: 40Hz-400hz
- SPL: 90dB
- RCA/Speaker Line Input
- Dimensions: 16.8W x 13.6H x 10.8D

PLPR12A

12" SLIM DESIGN POWERED ENCLOSURE

- 12 High Power Subwoofer
- Black Poly Coated Cone
- 2 Voice Coil
- Vinyl Wrapped Amplified Enclosure
- 40 Oz Magnet Structure
- 4 Ohm Impedance
- 200 Watts RMS / 400 Watts Peak
- Frequency Response: 30Hz-300hz
- SPL: 91dB
- RCA/Speaker Line Input
- Dimensions: 19.2W x 15.6H x 11.2D



PLPR210A


DUAL 10" SLIM DESIGN ENCLOSURE

- Dual 10 High Power Subwoofer
- Black Poly Coated Cone
- 1.5 Voice Coil
- Vinyl Wrapped Amplified Enclosure
- 30 Oz Magnet Structure
- 4 Ohm Impedance
- 300 Watts RMS / 600 Watts Peak
- Frequency Response: 40Hz-400hz
- SPL: 90dB
- RCA/Speaker Line Input
- Dimensions: 28.8W x 13.6H x 10.8D

PLPR212A

DUAL 12" SLIM

- Dual 12 High Power Subwoofer
- Black Poly Coated Cone
- 2 Voice Coil
- Vinyl Wrapped Amplified Enclosure
- 40 Oz Magnet Structure
- 4 Ohm Impedance
- 400 Watts RMS / 800 Watts Peak
- Frequency Response: 30Hz-300hz
- SPL: 91dB
- RCA/Speaker Line Input
- Dimensions: 33.2W x 15.6H x 11.2D

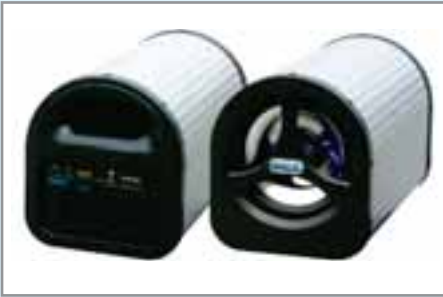

PLTA8N

8" 250 WATT AMPLIFIED SUBWOOFER

- One 8 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Silver Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 1.5 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 250 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions:10.4"H x 20"W x 9.6"D

PLTA10N

10" 500 WATT AMPLIFIED SUBWOOFER

- One 10 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Silver Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 1.5 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 500 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions:12"H x 19.8"W x 12"D

PLTA12N

12" 800 WATT AMPLIFIED SUBWOOFER

- One 12 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Silver Electroplated Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Vinyl Wrapped Construction
- 800 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions:15.4"H x 22.8"W x 13.8"D



PLTAB8

8" 250 WATT AMPLIFIED TUBE

- One 8 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Blue Polypropylene Cone
- Treated Black Rubber Edge Suspension
- 1.5 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- 250 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions:10.4"H x 20"W x 9.6"D

PLTAB10

10" 500 WATT AMPLIFIED TUBE

- One 10 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Blue Polypropylene Cone
- Treated Black Rubber Edge Suspension
- 1.5 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- 500 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions:12"H x 19.8"W x 12"D

PLTAB12

12" 800 WATT AMPLIFIED TUBE

- One 12 High Power 4 Ohm Subwoofer
- Built-In High Output Amplifier
- Blue LED Light Behind The Grill
- Blue Polypropylene Cone
- Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- 800 Watts Max Power Handling
- RCA/Speaker Line Input
- Dimensions:15.4"H x 22.8"W x 13.8"D



PLTB8

8" 400 WATT CARPETED SUBWOOFER

- One 8 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 400 Watts Max Power Handling
- Frequency Response: 30Hz-700k Hz
- Dimensions: 11.5 Diam. x 19.5 Length

PLTB10

10" 500 WATT CARPETED SUBWOOFER

- One 10 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 500 Watts Max Power Handling
- Frequency Response: 30Hz-700Hz
- Dimensions: 13.6 Diam. x 19.5 Length

PLTB12

12" 600 WATT CARPETED SUBWOOFER

- One 12 High Power 4 Ohm Subwoofer
- Blue Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bass Reflex Vent for Added Sub-Bass Response
- High Quality Carpeted Construction
- 600 Watts Max Power Handling
- Frequency Response: 25Hz-600k Hz
- Dimensions: 16.8 Diam. x 19.5 Length

PLSQBS102

DUAL 10 1000 WATTS SUBWOOFER

- Dual Square 10 High Power Subwoofer System
- 3 Aluminum Voice Coil
- 4 Ohm Subwoofer
- PP Cone With Large Rubber Edge
- Rear Vent Design
- 1000 Watts Max Power
- Dimension: 14H x 28w x 14D

PLSQBS122

DUAL 12 2000 WATTS SUBWOOFER ENCLOSURE

- Dual Square 12 High Power Subwoofer System
- 3 Aluminum Voice Coil
- 4 Ohm Subwoofer
- PP Cone With Large Rubber Edge
- Rear Vent Design
- 2000 Watts Max Power
- Dimension: 16 H x 32w x 16D



PLBS10

10 400 WATT BANDPASS SUBWOOFER

- One 10 High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Blue LED Lights
- Rear Vented Design
- 400 Watts Max Power Handling
- Dimensions: 13.6W x 12.2H x 12.8D

PLBS12

12 500 WATT BANDPASS SUBWOOFER

- One 12 High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Blue LED Lights
- Rear Vented Design
- 500 Watts Max Power Handling
- Dimensions: 15.6W x 14.2H x 14D



PLBS102

DUAL 10 800 WATT BASS BOX

- Two 10 High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Rear Vented Design
- Blue LED Lights
- 800 Watts Max Power Handling
- Dimensions: 26W x 12.2H x 12.8D

PLBS122

DUAL 12 1000 WATT BASS BOX

- Two 12 High Power 4 Ohm Subwoofers
- Blue Flame Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Rear Vented Design
- Blue LED Lights
- 1000 Watts Max Power Handling
- Dimensions: 30W x 14.2H x 14D



PLPPS110

SINGLE 10 SLIM DESIGN FORWARD FIRING VENTED ENCLOSURE

- 10 High Power Subwoofer
- Black Molded Polypropylene Cone
- 2 Voice Coil
- Forward Firing Slot Port
- 4 Ohm Impedance
- 200 Watts RMS / 400 Watts Peak
- Frequency Response: 40Hz-4Khz
- SPL: 90dB
- Dimensions: 18W x 14H x 13.6D

PLPPS112

SINGLE 12 SLIM DESIGN FORWARD FIRING VENTED ENCLOSURE

- 12 High Power Subwoofer
- Black Molded Polypropylene Cone
- 2 Voice Coil
- Forward Firing Slot Port
- 4 Ohm Impedance
- 250 Watts RMS / 500 Watts Peak
- Frequency Response: 30Hz-3Khz
- SPL: 91dB
- Dimensions: 20W x 15.6H x 14.4D



PLPPS210

DUAL 10 SLIM DESIGN FORWARD FIRING VENTED ENCLOSURE SYSTEM

- Dual 10 High Power Subwoofers
- Black Molded Polypropylene Cone
- Quick Connect Speaker Terminals
- 2 Voice Coil
- Forward Firing Slot Port
- 4 Ohm Impedance
- 400 Watts RMS / 800 Watts Peak
- Frequency Response: 40Hz-4Khz
- Magnet Weight: 30 oz.
- SPL: 90dB
- Dimensions: 30.4W x 14H x 13.6D

PLPPS212

DUAL 12 SLIM DESIGN FORWARD FIRING VENTED ENCLOSURE SYSTEM

- Dual 12 High Power Subwoofer
- Black Molded Polypropylene Cone
- Quick Connect Speaker Terminals
- 2 Voice Coil
- Forward Firing Slot Port
- 4 Ohm Impedance
- 500 Watts RMS / 1,000 Watts Peak
- Frequency Response: 30Hz-3Khz
- Magnet Weight: 40 oz.
- SPL: 91dB
- Dimensions: 32.4W x 15.6H x 14.4D



PL110SS

SINGLE 10 SLIM DESIGNED SUBWOOFER BASS BOX ENCLOSURE SYSTEM

- 10 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 2.0 Aluminum Voice Coil
- Rear Vented Design
- 1200 Watts MAX Power Handling
- Dimension: 19W x 13H x 1.2D

PL112SS

SINGLE 10 SLIM DESIGNED SUBWOOFER BASS BOX ENCLOSURE SYSTEM

- 10 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 2.0 Aluminum Voice Coil
- Rear Vented Design
- 1200 Watts MAX Power Handling
- Dimension: 19W x 13H x 1.2D



For more detailed specifications, product-specific information and models visit www.PyleAudio.com

PL210DS

DUAL 10" SLIM DESIGNED BASS BOX ENCLOSURE SYSTEM

- Double 10 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 1.5 Aluminum Voice Coil
- Rear Vented Design
- 2400 Watts MAX Power Handling
- Dimension: 29.8W x 13H x 11.2D

PL212DS

DUAL 12" SLIM DESIGNED SUBWOOFER BASS BOX ENCLOSURE SYSTEM

- Double 12 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 2.0 Aluminum Voice Coil
- Rear Vented Design
- 3000 Watts MAX Power Handling
- Dimension: 34W x 15H x 12D



PL310TS

TRIPLE 10" SLIM DESIGNED SUBWOOFER BASS BOX ENCLOSURE SYSTEM

- Three 10 High Power 4 Ohm Subwoofer
- Black Flame PP Cone with Foam Edge
- 2.0 Aluminum Voice Coil
- Rear Vented Design
- 3600 Watts MAX Power Handling
- Dimension: 41W x 13H x 1.2D



PLHB8

DUAL 8" 600 WATT HATCHBACK

- Two 8 High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Two 2 x 5 Piezo Tweeters
- Vented Design
- Two Handles for Easy Portability
- 600 Watts Max Power Handling
- Frequency Response: 35Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 12.25H x 28.25W x 12.25D

PLHB10

DUAL 10" 800 WATT HATCHBACK

- Two 10 High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Two 2 x 5 Piezo Tweeters
- Vented Design
- Two Handles for Easy Portability
- 800 Watts Max Power Handling
- Frequency Response: 25Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 14.25H x 32.5W x 14.25D

PLHB12

DUAL 12" 1000 WATT HATCHBACK

- Two 12 High Power 4 Ohm Subwoofer
- Non-Press Paper Cone with Rubber Edge
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Two 2 x 5 Piezo Tweeters
- Vented Design
- Two Handles for Easy Portability
- 1000 Watts Max Power Handling
- Frequency Response: 25Hz-20k Hz
- 2 Tuned Ports
- Dimensions: 16.5H x 36W x 16.5D



PLBWS210

DUAL 10" 1000 WATT BANDPASS WITH NEON WOOFER RINGS

- Two 10 High Power 4 Ohm Subwoofer
- Silver Polypropylene Cone
- 2 Aluminum Voice Coil
- Specially Treated Black Rubber Edge Suspension
- Blue Neon Speaker Ring
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 2 Tuned Ports
- 1000 Watts Max Power Handling
- Frequency Response: 35Hz-1k Hz
- Dimensions: 13H x 25.5W x 14D

PLBWS212

DUAL 12" 1200 WATT BANDPASS WITH NEON WOOFER RINGS

- Two 12 High Power 4 Ohm Subwoofer
- Silver Polypropylene Cone
- 2 Aluminum Voice Coil
- Specially Treated Black Rubber Edge Suspension
- Blue Neon Speaker Rings
- Bandpass Alignment For Extra Deep Bass
- Plexiglass Front Window
- 2 Tuned Ports
- 1000 Watts Max Power Handling
- Frequency Response: 35Hz-1k Hz
- Dimensions: 15.5H x 29.5W x 15.5D



PLBN102

DUAL 10" 2 WAY 1000 WATT BANDPASS W/BLEU WOOFER RINGS

- Two 10 High Power 4 Ohm Subwoofers
- Silver Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexi Glass Front Window
- Blue LED Woofer Rings
- 4 Tuned Ports
- 1000 Watts Max Power Handling
- Dimensions: 30W x 13.6H x 14.8D

PLBN122

DUAL 12" 2 WAY 1200 WATT BANDPASS W/BLEU WOOFER RINGS

- Two 12 High Power 4 Ohm Subwoofers
- Silver Polypropylene Cone
- Specially Treated Black Rubber Edge Suspension
- 2 Aluminum Voice Coil
- Bandpass Alignment For Extra Deep Bass
- Plexi Glass Front Window
- Blue LED Woofer Rings
- 4 Tuned Ports
- 1200 Watts Max Power Handling
- Dimensions: 31.8W x 15.6H x 16.8D

For more detailed specifications, product-specific information and models visit

www.PyleAudio.com

PYLE[®]

Automobile Speakers



PLSL650K



PLSL4602



PLSL6502

PLSL4602 4" X 6" WATT SLIM MOUNT 2-WAY COAXIAL SPEAKERS

- 4" x 6" Poly Mica Paper Cone -Foam Edge
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter
- Power 80 Watt RMS/160 Watt Peak Power
- Impedance: 4 Ohms
- Frequency Response: 110-20KHz
- Concealment Magnet
- Strong Capacitor for Excellent Performance
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-5/16"

PLSL502 5.25" 160 WATT SLIM MOUNT 2-WAY COAXIAL SPEAKERS

- 5.25" Poly Mica Coated Paper Cone -
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter
- Power 80 Watts RMS/160 Watt Peak Power
- Frequency Response: 95-20KHz
- Concealment Magnet - Impedance: 4 Ohms
- Strong Capacitor for Excellent Performance
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-5/8"

PLSL5702 5" x 7" / 6" x 8" 180 WATT SLIM MOUNT 2-WAY COAXIAL SPEAKERS

- 5" x 7"/6" x 8" Poly Mica Paper Cone
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter
- Power: 90 Watts RMS/180 Watts Peak Power
- Frequency Response: 75-20KHz
- Concealment Magnet - Impedance: 4 Ohms
- Strong Capacitor for Excellent Performance
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-5/8"

PLSL650K 6.5" 300 WATT SLIM MOUNT TWO-WAY COMPONENT SPEAKER SYSTEM

- This Custom Kit Contains:
- One Pair 6.5" Mid Bass Speakers
- 6.5" Poly Mica Paper Cone with Foam Edge
- 1" High Temperature Voice Coil
- Concealment Magnet
- Power: 150 Watts RMS / 300 Watts MAX
- Impedance: 4 Ohm
- Frequency response: 75Hz-8KHz
- Mounting Depth: 1-3/4"
- One Pair 3/4" Silk dome Tweeters:
- Neodymium Magnet
- 3 Mounting Options: Flush, Surface Angle
- 75 Watts RMS / 150 Watts peak
- One Pair Passive Crossover Network:
- Two - Way Passive Crossover
- 12 dB Octave Slope
- Includes Grills Wires Installation Hardware

PLSL6502 6.5" 200 WATT SLIM MOUNT TWO-WAY COAXIAL SPEAKERS

- 6.5" Poly Mica Coated Paper Cone
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter
- Power: 100 Watt RMS/200 Watts Peak Power
- Impedance: 4 Ohms
- Frequency Response: 85-20KHz
- Concealment Magnet
- Strong Capacitor for Excellent Performance
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-3/4"

PLSL6503 6.5" 200 WATT SLIM MOUNT THREE-WAY COAXIAL SPEAKERS

- 6.5" Poly Mica Coated Paper Cone
- 1" High Temperature Voice Coil
- 1/2" Neodymium PEI Dome Tweeter
- Power: 100 Watt RMS/200 Watts Peak Power
- Impedance: 4 Ohms
- Frequency Response: 85-20KHz
- Concealment Magnet
- Strong Capacitor for Excellent Performance
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 1-3/4"

PLSL6902 6" x 9" 240 WATT SLIM MOUNT TWO-WAY COAXIAL SPEAKERS

- 6" x 9" Poly Mica Coated Paper Cone
- 1" High Temperature Voice Coil
- 1" Neodymium PEI Dome Tweeter
- Power Handling: 120 Watts RMS/240 Watts
- Impedance: 4 Ohms
- Frequency Response: 65-20KHz
- Concealment Magnet
- Strong Capacitor for Excellent Performance
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2-1/8"



PL63BL



PL42BL



PL6984BL

PL42BL 4" 180 WATT 2-WAY SPEAKERS

- One Pair 4" Two-way Speaker Systems
- Power Handling: 90 Watts Rms / 180 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 3/4" High Temperature ASV Voice Coil
- Standard 4" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1/2" Neodymium Film Dome Tweeter
- Impedance: 4 Ohm
- Sensitivity: 88 dB
- Frequency Response: 110Hz - 20Khz
- Mounting Depth: 1.95"

PL463BL 4" x 6" 240 WATT 3-WAY SPEAKERS

- One Pair 4" x 6" Three-Way Triaxial Speaker Systems
- Power Handling: 120 Watts Rms / 240 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 4" X 6" Size Fits Oem Locations
- Blue Poly Injection Cone
- 20 Oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 dB
- Frequency Response: 95Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 1.75"

PL53BL 5.25" 200 WATT 3-WAY SPEAKERS

- One Pair 5.25" Three-Way Triaxial Speaker Systems
- Power Handling: 100 Watts Rms / 200 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 5.25" Size Fits Oem Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 dB
- Frequency Response: 100Hz - 20Khz

PL573BL 5" x 7" / 6" x 8" 300 WATT 3-WAY SPEAKERS

- One Pair 5" x 7" / 6" x 8" Three-Way Triaxial Speaker Systems
- Power Handling: 150 Watts Rms / 300 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 5" x 7" / 6" X 8" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- Frequency Response: 80Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 2.25"

PL63BL 6.5" 360 WATT 3-WAY SPEAKERS

- One Pair 6.5" Three-Way Triaxial Speakers
- Power Handling: 180 Watts Rms / 360 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 6.5" Size Fits OEM Locations
- Blue Poly Injection Cone
- 20 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 89 Db
- Frequency Response: 90Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 1.9"

PL683BL 6" x 8" 360 WATT 3-WAY SPEAKERS

- One Pair 6" x 8" Three-Way Triaxial Speakers
- Power Handling: 180 Watt Rms / 360 Watt Max
- Non-fatiguing Butyl Rubber Surround
- 1" High Temperature ASV Voice Coil
- Standard 6" x 8" Size Fits OEM Locations
- Blue Poly Injection Cone
- 40 oz Magnet Structure
- 1" Neodymium Film Dome Midrange
- 3/4" Piezo Tweeter
- Impedance: 4 Ohm
- Sensitivity: 91 Db
- Frequency Response: 70Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 2.35"

PL6984BL 6" x 9" 400 WATT 4-WAY SPEAKERS

- One Pair 6" x 9" Four-Way Quadriaxial Speakers
- Power Handling: 200 Watts Rms / 400 Watts Max
- Non-fatiguing Butyl Rubber Surround
- 1.25" High Temperature ASV Voice Coil
- Standard 6" X 9" Size Fits OEM Locations
- Blue Poly Injection Cone - 50 Oz Magnet Structure
- 1-1/2" Film Dome Midrange
- 1" Film Dome Tweeter - 3/4" Piezo Tweeter
- Impedance: 4 Ohm - Sensitivity: 92 Db
- Frequency Response: 50Hz - 20Khz
- Includes Grills, Wires And Mounting Hardware
- Mounting Depth: 3.65"



PLG4.2



PLG4.1.3



PLG54

PLG3.2 3.5" 120 WATT TWO-WAY SPEAKERS

- Standard 3.5" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 20 oz. Magnet Structure - Impedance: 4 Ohms
- Rubber Magnet Cover
- Power Handling: 60 Watts RMS /120 Watts Peak
- Frequency Response: 100-20KHz
- Includes Wires and Installation Hardware
- Mounting Depth: 1.65"

PLG4.2 4" 140 WATT TWO-WAY SPEAKERS

- Standard 4" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 20 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 90-20KHz
- Impedance: 4 Ohms
- Includes Grills, Wires Installation Hardware
- Mounting Depth: 1.85"

PLG41.3 4" x 10" 300 WATT THREE-WAY SPEAKERS

- Standard 4"x10" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - 45 oz. Magnet
- Rubber Magnet Cover
- Power Handling: 150 Watts RMS /300 Watts Peak
- Frequency Response: 60-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.45"

PLG46.2 4" x 6" 180 WATT TWO-WAY SPEAKERS

- Standard 4"x6" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 90 Watts RMS /180 Watts Peak
- Frequency Response: 70-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2"

PLG46.3 4" x 6" 180 WATT THREE-WAY SPEAKERS

- Standard 4"x6" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Midrange
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 90 Watts RMS /180 Watts Peak
- Frequency Response: 70-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2"

PLG5.2 5.25" 140 WATT TWO-WAY SPEAKERS

- Standard 5.25" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 80-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2"

PLG5.3 5.25" 140 WATT THREE-WAY SPEAKERS

- Standard 5.25" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Midrange
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 30 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 70 Watts RMS /140 Watts Peak
- Frequency Response: 80-20KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware
- Mounting Depth: 2"

PLG54 5" 200 WATT MID BASS WOOFER

- Yellow CD P.P. Cone
- Specially Treated Rubber Surround
- Edge Suspension
- 1.0" High Temperature Aluminum Voice Coil
- Magnet Weight: 30 Oz
- Impedance: 4 OHM
- 200 Watts Peak Power
- Mounting Depth: 2.20"
- Cut-out Size: Φ 113 mm

For more detailed specifications, product-specific information and models visit www.PyleAudio.com



PLG64



PLG6.4



PLG69.3

PLG57.2 5" x 7" / 6" x 8" 240 WATT TWO-WAY SPEAKERS

- Standard 5"x7"/6"x8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 120 Watt RMS /240 Watt Peak
- Frequency Response: 75-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.10"

PLG57.3 5" x 7"/6" x 8" 240 WATT THREE-WAY SPEAKERS

- Standard 5"x7"/6"x8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Midrange
- Super Film Tweeter - Mounting Depth: 2.10"
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 120 Watt RMS /240 Watt Peak
- Frequency Response: 75-22KHz
- Includes Grills, Wires and Installation Hardware

PLG6.2 6.5" 240 WATT TWO-WAY SPEAKERS

- Standard 6.5" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 30 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 120 Watt RMS /240 Watt Peak
- Frequency Response: 65-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.25"

PLG6.3 6.5" 280 WATT THREE-WAY SPEAKERS

- Standard 6.5" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 0.5" Neodymium Dome Midrange
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 40 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 140 Watt RMS /280 Watt Peak
- Frequency Response: 60-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.25"

PLG6.4 6.5" 300 WATT FOUR-WAY SPEAKERS

- Standard 6.5" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 1.75" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- Super Film Tweeter - Mounting Depth: 2.25"
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 40 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 150 Watt RMS /300 Watt Peak
- Frequency Response: 60-20KHz
- Includes Grills, Wires and Installation Hardware

PLG64 6.5" 300 WATT MID BASS WOOFER

- Yellow CD P.P. Cone
- Specially Treated Rubber Edge Suspension
- 1.0" High Temperature Voice Coil
- Aluminum Voice Coil - Magnet Weight: 30 Oz
- Rubber Magnet Boot Cover
- 300 Watts Peak Power - Impedance: 4 OHM
- Mounting Depth: 2.84" - Cut-out Size: Ø140 mm

PLG68.3 6" x 8" 280 WATT FOUR-WAY SPEAKERS

- Standard 6"x8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 1.75" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Rubber Magnet Cover
- 40 oz. Magnet Structure - Impedance: 4 Ohms
- Power Handling: 140 Watt RMS /280 Watt Peak
- Frequency Response: 65-20KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 2.45"

PLG69.3 6" x 9" 360 WATT THREE-WAY SPEAKERS

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 100 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 180 Watt RMS /360 Watt Peak
- Frequency Response: 45-22KHz
- Includes Grills, Wires and Installation Hardware



PLG8.3



PLG6C



PLG71.4

PLG69.4 6" x 9" 400 WATT FOUR-WAY SPEAKERS

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- Super Film Tweeter - Impedance: 4 Ohms
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Mounting Depth: 3.5"
- 100 oz Magnet - Rubber Magnet Cover
- Power Handling: 200 Watt RMS /400 Watt Peak
- Frequency Response: 45-22KHz
- Includes Grills, Wires and Installation Hardware

PLG69.5 6" x 9" 450 WATT FIVE-WAY SPEAKERS

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- 2 x Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 120 oz. Magnet Structure - Rubber Magnet Cover
- Power Handling: 225 Watt RMS /450 Watt Peak
- Frequency Response: 45-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 3.5"

PLG69.8 6" x 9" 500 WATT EIGHT-WAY SPEAKERS

- Standard 6"x9" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- 5 x Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Steel Basket - Impedance: 4 Ohms
- 120 oz. Magnet - Rubber Magnet Cover
- Power Handling: 250 Watt RMS /500 Watt Peak
- Frequency Response: 45-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 3.55"

PLG6C 6.5" 400 WATT 2-WAY CUSTOM COMPONENT SYSTEM

- This Custom Kit Contains
- One Pair 6.5" Mid Bass Speaker
- Standard 6.5" Size Fits OEM Locations
- Yellow Color Poly Injection Cone
- Non-Fatiguing Butyl Rubber Surround
- High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket
- 40 Oz. Magnet Structure
- Power Handling: 200 Watt RMS / 400 Watt MAX
- Impedance: 4 Ohm - Neodymium Magnet
- Frequency response: 50Hz-5KHz
- Mounting Depth: 2.65"
- One Pair 0.5" Tweeter: 0.5" Silk Dome Tweeter
- 3 Mounting Options: Flush, Surface or Angle
- 50 Watts RMS / 100 Watts peak
- Frequency response: 1.3-22KHz
- Impedance: 4 Ohm
- One Pair Passive Crossover Network:
- Two - Way Passive Crossover
- 12 dB Octave Slope
- Includes Grills Wires Installation Hardware
- Wiring Kit
- Wiring Diagram Template
- Cut-out Size: Φ142 mm

PLG71.4 7" x 10" 450 WATT FOUR-WAY SPEAKERS

- Standard 7"x10" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- Super Film Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket
- 120 oz. Magnet Structure
- Rubber Magnet Cover
- Power Handling: 225 Watts RMS /450 Watts Peak
- Frequency Response: 40-22KHz
- Impedance: 4 Ohms
- Includes Custom Grills, Wires and Installation Hardware
- Mounting Depth: 3.55"

PLG8.3 8" 400 WATT THREE-WAY SPEAKERS

- Standard 8" Size Fits OEM Locations
- Yellow Color Poly Injected Cone
- Non-Fatiguing Butyl Rubber Surround
- 2.5" Polymer Cone Midrange
- 0.5" Neodymium Dome Tweeter
- High Temperature Aluminum Voice Coil
- Strong Capacitor for Excellent Performance
- Yellow Coated Steel Basket - Rubber Magnet
- 120 oz. Magnet Structure - Impedance: 4 Ohms
- Power Handling: 200 Watt RMS /400 Watt Peak
- Frequency Response: 37-22KHz
- Includes Grills, Wires and Installation Hardware
- Mounting Depth: 3.25"

PLRL572 5" x 7" & 6" x 8" 200 WATT TWO-WAY SPEAKERS

- Pair 5x 7 Two-Way Speaker System
- Electroplated Red Polypropylene Cone Rubber Edge
- 1 High Temperature Ferro Fluid Enhanced Voice Coil
- 1 Mylar Dome Tweeter
- 100 Watts RMS/200 Watts Peak Power
- 4 Ohm Impedance
- Freq. Response: 50Hz - 20kHz
- Rubber Magnet Boot Cover
- Includes Grills, Wires Installation Hardware
- Mounting Depth: 2.25



PLX4102



PLX62



PLX42

PLX32 3.5" 100 WATT TWO-WAY SPEAKERS

- 3.5" Polypropylene Woofer Cone
- 0.75" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter
- 50 Watts RMS/100 Watts Max Power
- Frequency Response: 66 - 20k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Includes Wires and Mounting Hardware
- Mounting Depth: 1.5"

PLX4102 4" x 10" 300 WATT TWO-WAY SPEAKERS

- 4" x 10" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter
- 150 Watts RMS/300 Watts Max Power
- Frequency Response: 60 - 20k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2.5"

PLX42 4" 120 WATT TWO-WAY SPEAKERS

- 4" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter
- 60 Watts RMS/120 Watts Max Power
- Frequency Response: 66 - 20k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2"

PLX462 4" x 6" 160 WATT TWO-WAY SPEAKERS

- 4" x 6" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter
- 80 Watts RMS/160 Watts Max Power
- Frequency Response: 66 - 20k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 1.9"

PLX52 5.25" 120 WATT TWO-WAY SPEAKERS

- 5.25" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter
- 60 Watts RMS/120 Watts Max Power
- Frequency Response: 55 - 20k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2"

PLX572 5" x 7" / 6" x 8" 180 WATT TWO-WAY SPEAKERS

- 5" x 7" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter
- 90 Watts RMS/180 Watts Max Power
- Frequency Response: 50 - 20k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2.25"

PLX62 6.5" 160 WATT TWO-WAY SPEAKERS

- 6.5" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 1" Mylar Dome Tweeter
- 80 Watts RMS/160 Watts Max Power
- Frequency Response: 66 - 20k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2"

PLX63 6.5" 180 WATT THREE-WAY SPEAKERS

- 6.5" Polypropylene Woofer Cone
- 1" Hi-Temp Ferro Fluid Enhanced Voice Coil
- 2" Pole Mounted Aluminum Midrange
- 1" Mylar Dome Tweeter
- 90 Watts RMS/180 Watts Max Power
- Frequency Response: 50 - 22k hz
- 4 Ohms Impedance
- Rubber Boot Magnet Cover
- Includes Grills, Wires and Mounting Hardware
- Mounting Depth: 2"

PLCH52

5.25" 160 WATT 2-WAY SPEAKER SYSTEM

PLCH62

6.5" 240 WATT 2-WAY SPEAKER SYSTEM

- 2-Way Coaxial Speaker System With Concealed Magnet
- Standard 5.25 Size Fits OEM Locations
- Special Electroplated Poly Injection Cone
- 0.5" Neodymium Dome Tweeter
- 1" High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket
- Concealment Magnet
- 25 Oz. Magnet Structure
- Power Handling: 80 Watts RMS / 160 Watts MAX
- Impedance: 4 Ohm
- Sensitivity: 88 dB

- 2-Way Coaxial Speaker System With Concealed Magnet
- Standard 6.5 Size Fits OEM Locations
- Special Electroplated Poly Injection Cone
- 0.5" Neodymium Dome Tweeter
- 1" High Temperature Aluminum Voice Coil
- Special Electroplated Steel Basket
- Concealment Magnet
- 35 Oz. Magnet Structure
- Power Handling: 120 Watts RMS / 240 Watts MAX
- Impedance: 4 Ohm
- Sensitivity: 90 dB
- Frequency response: 75Hz-20KHz



PLVWCRK5

1/2" DIN 5.1 CENTER CHANNEL 7 WAY MONO AUDIO 50 WATT AMPLIFIER & SPEAKER ENCLOSURE SYSTEM

- High Power 50W Maximum Power Amplifier
- Five (5) 3/4" Forward Mount Full Range Audio
- Two (2) 1" Rear Mount Mid-Bass Response
- Mounting Brackets Hardware Included
- The Compact 1/2 Din Design Allows For In-dash or Universal Mounting
- 5.1 Surround Sound Audio Speaker Amplifier Specs:
- Continuous Power Output: 25W
- Peak Power Output: 50W

- Frequency Response: 200 Hz To 28K Hz.
- Power Supply Voltage: 10.8V To 15.6V
- Current Consumption: 3A
- Dimensions: 1.75 (H) X 3.5(W) X 5.75 (L)
- Weight: 1Lb Speaker Box Specs:
- Five (5) 3/4" ForwardMount Full Range Audio
- Two (2) 1" Rear Mount Mid-Bass Response
- Dimensions: 1.125 (H) X 6.75(W) X 6.5 (L)
- Weight: 0.55Lb



PLST6

1/2" 150 WATT MYLAR DOME TRI-MOUNT TWEETER

- 0.5" Mylar Dome
- High Density Neodymium Magnet
- Tri-Mounting System: Flush/Swivel/Surface
- Ferro Fluid Cooling
- 12Db Crossover Network

- Frequency Response: 1.3Khz-22khz
- Spl: 92db @ 1w/1m
- Power Handling: 75 Watts RMS/150 Watts Max
- Includes Custom Mounts, Wires and Installation Hardware



PLTWVS

6-WAY SUNVISOR MOUNT 200 WATT TWEETER SYSTEM

- Designed For Many Cars
- Over-All Height 14.5mm (0.57")
- 60mm Piezo-Type Midrange x 4
- 40mm Piezo -Type Tweeter x 2
- Power Handling:100 Watts RMS/200 Watts Max
- Impedance: 4 Ohm

- Sensitivity: 90 dB
- Frequency Response: 2.5KHz - 20KHz
- Includes Wires and Installation Hardware (Mounting Straps)
- Dimensions : 11.75(W) x 4.75(H) x 0.57(D)



PLWT3

1" 120 WATT MINI MYLAR DOME TRI-MOUNT TWEETER

- 1" Mylar Dome
- High Density Neodymium Magnet
- Tri-Mounting System: Pivot/Angle/Surface
- Ferro Fluid Cooling
- Integrated Crossover System

- Frequency Response: 2khz-24khz
- Spl: 100db @ 1w/1m
- Power Handling: 60 Watts RMS/120 Watts Max
- Includes Custom Mounts, Wires and Installation Hardware



PLWT4

1.5" 200 WATT SURFACE MOUNT PIEZO TWEETER

- Extended High Frequency 1.5" Piezo Driver
- Surface Mounting System
- Frequency Response: 3Khz-30Khz
- Sensitivity: 87db @ 1w/1m

- Power Handling:100 Watts RMS/200 Watts Max
- Includes Custom Mount, Wires and Installation Hardware



PLE780P

1/2 DIN 7 BAND PARAMETRIC EQUALIZER WITH BUILT-IN CROSSOVER & SUBWOOFER CONTROL

- DC 12 Volt
- Half Din Dash Mount
- Output Volume Control
- Input Gain Adjustments
- Frequency Gain Control
- 7-Band Graphic Equalizer
- Fully Adjustable crossover
- Illuminated Rotary Controls
- Full System Fader Adjustment
- Mounting Hardware Included
- Built in 6 hannel 7 Volt Line Driver
- 2-Channel RCA Source & AUX Input
- Selectable Source & AUX Input Selector
- 6-Channel 7 Volt RCA Outputs (Front/Rear/Subwoofer)
- Dimensions: 7W x 4.1D x 1.10H



PLE530PAI

1/2 DIN 5 BAND PARAMETRIC EQUALIZER WITH BUILT-IN CROSSOVER & SUBWOOFER CONTROL

- 5-Band Graphic Equalizer
- 6-Channel 8 Volt RCA Outputs (Front/Rear/Subwoofer)
- 2-Channel RCA Source & Front AUX Input
- Output Volume Control
- Input Gain Adjustments
- Frequency Gain Control
- Five Frequency Band with +/- 18dB Boost/Cut (45Hz, 150Hz, 400Hz, 2.5KHz, 15KHz)
- Built in 6 channel 8 Volt Line Driver
- Selectable Source & AUX Input Selector
- Full System Fader Adjustment
- Illuminated Rotary Controls
- Half Din Dash Mount
- Mounting Hardware Included
- DC 12 Volt
- Dimensions: 7W x 4.52D x 1.10H



PLAM14

20FT 8 GAUGE 1000 WATTS AMPLIFIER HOOKUP FOR BATTERY HEAD UNIT & SPEAKERS INSTALLATION KIT

- 20ft. 8 Gauge Red Power Wire
- 4ft. 8 Gauge Black Ground Wire
- 20ft. 16 Gauge Blue Remote Turn-On
- 20ft. 12 Gauge Stereo Speaker Wire
- 20ft. Stereo RCA Audio Cable (Male to Male)
- 6ft. Black Split Loom Cable Conduit
- AGU Type 60A Gold Plated Fuse
- In-Line Water Resistant Fuse Holder
- 2 Ring Terminals: 8G
- 2 Spade Terminals: 8G
- 5 Spade Terminals: 14-16G
- 3 Butt Connectors
- 20 Cable Ties
- 1 Black Grommet



PLAM20

4 GAUGE AMPLIFIER INSTALLATION KIT

- 21ft. 4 Gauge Red Power Cable
- 4ft. 4 AWG Clear Black Ground Cable
- In-Line Water Resistant Fuse Holder
- 80 Amp AGU Fuse Included
- 20ft. Clear Green Twisted Pair Stereo RCA Interconnect Cable
- 20ft. 16 AWG Clear Stereo Speaker Cable
- 17ft. Blue Remote Cable
- 6ft. Split Loom Cable Conduit
- Power Distribution Block, Gold
- 4 AGW Ring Terminal, 2 pcs
- 4 Spade Terminal, 2 pcs
- 2- 4 AWG Ring Terminals
- 16-14 AWG Spade Terminals 4 pcs
- 10- Cable Ties, 7



PLAM40

20FT 4 GAUGE 1600 WATT AMPLIFIER HOOKUP FOR BATTERY HEAD UNIT & SPEAKERS INSTALLATION KIT

- 20ft. 4 Gauge Red Power Wire
- 4ft. 4 Gauge Black Ground Wire
- 20ft. 16 Gauge Blue Remote Turn-On
- 20ft. 12 Gauge Stereo Speaker Wire
- 20ft. Stereo RCA Audio Cable (Male to Male)
- 6ft. Black Split Loom Cable Conduit
- AGU Type 60A Gold Plated Fuse
- In-Line Water Resistant Fuse Holder
- 2 Ring Terminals: 4G
- 2 Spade Terminals: 4G
- 5 Spade Terminals: 16-18G
- 3 Butt Connectors
- 20 Cable Ties
- 1 Black Grommet



PLDS20

DUAL 40 AMP IN-LINE CIRCUIT BREAKER/ POWER DISTRIBUTION BLOCK

- Power Distribution Block
- Built In Circuit Breaker
- 3 In (4 Gauge)
- 2 Out (8Gauge)
- Allen Screw Treminals
- 40 Amp Power Surge
- Dimensions: 3.60L x 3.10W x 1.15H



PLDS30

TRIPLE 40 AMP IN-LINE CIRCUIT BREAKER

PLMRAKT8 MARINE GRADE 8 GAUGE AMPLIFIER INSTALLATION KIT

- Marine Grade Cables and Wires
- Perfect for Installations in Boats and Outdoor
- High Resistance to Moisture
- 20ft. 8 Gauge Red Power Wire
- 4ft. 8 Gauge Black ground Wire
- 20ft. 18 Gauge Blue Remote Turn-On
- 20ft. 12 Gauge Stereo Speaker Wire
- 20ft. Right Angle/Standard Stereo RCA Audio Cable
- 6ft. Black Split Loom Cable Conduit
- AGU Type 60A Gold Plated Fuse
- Water Resistant In-line Fuse Holder
- 2 Ring Terminals: 8G
- 2 Spade Terminals: 8G
- 5 Spade Terminals: 14-16G
- 3 Butt Connectors 20 Cable Ties
- 1 Black Grommet






PSC - SPEAKER ZIP WIRE



Model	Gauge	Length (in feet)
PSC1250	12	50
PSC12100	12	100
PSC12250	12	250
PSC12500	12	500
PSC1450	14	50
PSC14100	14	100
PSC14250	14	250
PSC14500	14	500
PSC1650	16	50
PSC16100	16	100
PSC16250	16	250
PSC16500	16	500
PSC1850	18	50
PSC18100	18	100
PSC18250	18	250
PSC18500	18	500
PSC181000	18	1000

PLMRSW50 18 GAUGE 50 FT STEREO MARINE GRADE SPEAKER WIRE

- 18 AWG Stereo Wire
- Blue White Marine Grade Insulation
- Ideal for new Marine Installation
- 50ft Length Spool



PLMRIPWG iPod/MP3 WATERPROOF 3.5MM STEREO TO RCA ADAPTOR

- Waterproof 3.5mm Stereo To RCA 3 Foot Adaptor
- Allows Direct Connection Of Any Headphone Equipped Audio Device To Your Existing RCAs On The Head Unit
- Easily Mounted Under Dash For Convenience
- Stereo 3.5mm Audio Cable Male to Male 3 Foot
- Dimensions: 2"L x 2"W x 0.85"H



PLMRJPT iPod/MP3 WATERPROOF 3.5MM STEREO TO RCA ADAPTOR

- Waterproof 3.5mm Stereo To RCA Adaptor 12 Foot
- Allows Direct Connection Of Any Headphone Equipped Audio Device To Your Existing RCAs On The Head Unit
- Mounting Diagram For A Factory Finish Installation
- Stereo 3.5mm Audio Cable Male to Male 3 Foot
- 0.75" Diameter x 1.5" Length



PLMRNT1 MARINE WIRE ANTENNA

- Weather Resistant AM/FM Marine Antenna
- Provides excellent Radio reception
- 22" Braided Cable



PLCAPE18

1.8 FARAD DIGITAL POWER CAPACITOR

- 1.8 Farad Digital Display Power Capacitor
- Capacitance ± 5%. 20-24 Volt Surge, 105oC
- Blue Digital Display and blue LED flash
- Strong Finishing For A Better Installation Result
- 1 Pair Clear Brackets Included
- Chrome Plated Post Kits
- DC 12- 24 volt
- Electronic Polarity Protection Circuit
- Over Voltage Protection Circuit
- Includes Mounting Charging Hardware
- Aluminum Brushed Case
- Dimensions: 8.66H 2.99W



PLCAPE50

5.0 FARAD DIGITAL POWER CAPACITOR

- 5.0 Farad Digital Display Power Capacitor
- Capacitance ± 5%. 20-24 Volt Surge, 105oC
- Blue Digital Display and blue LED flash
- Strong Finishing For A Better Installation Result
- 1 Pair Clear Brackets Included
- Chrome Plated Post Kits
- DC 12- 24 volt
- Electronic Polarity Protection Circuit
- Over Voltage Protection Circuit
- Includes Mounting Charging Hardware
- Aluminum Brushed Case
- Dimensions: 8.86H 3.5W



Motorcycle Off-Road Speakers

PLATV520

500 WATTS ATV/UTV/JET SKI/SNOWMOBILE WATERPROOF POWERED SOUND SYSTEM W/ 6.5" 2-WAY STEREO MARINE SPEAKERS & 3.5MM AUX INPUT FOR MP3 PLAYERS, SMARTPHONES, ETC.

NEW



- Dual 6.5" 2-Way Stereo Marine Grade Speaker System
- Built-In 2 Channel Internally Mounted Amplifier
- 500 Watts (250w x 2) Max Power / 250 Watts (125w x 2) RMS Power
- 3.5mm / 1/8" Stereo Audio Input Jack (for use with MP3 Players, Smartphones, Cell phones, etc.)
- Easily Connect to the Audio Output of External Audio Device and Stream Music
- Waterproof Housing Speaker Housing
- Rugged Universal Heavy Duty Mounting System
- Leather Bag Included for Cell Phone/ MP3 Players
- Plug & Play For Easy Installation
- Speaker Housing Dimensions: 26.55" (W) x 10.35" (H) x 7.75" (L)

PLATV550BT

WITH **BLUETOOTH**

PLATVB84A

800 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT WITH DUAL HANDLE-BAR MOUNT CHROMED PLASTIC WEATHER-PROOF 3-INCH SPEAKERS W/AMPLIFIER BUILT-IN W/BLUETOOTH IN-LINE CONTROL FOR I-PHONE, I-PAD, I-PAD MINI, CELL PHONE ETC.

- 400 Watts X 2 channel micro amplifier built in the speaker enclosure with Wire harness
- Pair of handlebar Mounting clamps
- Chrome stainless universal handlebar audio mount
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Environment resistance and water proof Bluetooth and in-line volume control console with 3.5mm Stereo Input Jack, Easy Connection to the Output of Other Audio Devices
- Works with iPhone/Smartphones, iPod/MP3 Players, Cell Phones, etc.
- 3" Chromed Plastic Bullet Speaker with Supreme High Temperature Voice Coil
- Strontium Magnet Structure
- Bluetooth 3.0 technology
- Bluetooth auto connected while power on
- Bluetooth auto disconnected while Aux-in (3.5mm connector)
- Easy and quick installed handle-bar mount bracket is included
- Speaker Dimension: 4.21"(W) x 4.21"(H) x 4.61"(L)
- Bluetooth console Dimension: 2.09"(W) x 0.83"(H) x 3.17"(L)



NEW

2 CHANNEL WATERPROOF DUAL WAKEBOARD 4" UTV/ATV/SNOWMOBILE/MARINE AMPLIFIED SPEAKER SYSTEM INCLUDES (2) 4" MARINE GRADE SPEAKERS

PLUTVA102



- One Pair 4" 2-Way Marine Speaker:
- 4" High Quality Poly Injection Cone
- Butyl Rubber Surround
- Shiny Black Plastic Enclosure
- 1" High Temperature KEISV Voice Coil
- 1" PEI Neodymium Dome Tweeter
- 100 Watts RMS / 200 Watts Peak
- Frequency Response: 100-20KHz
- Impedance: 4 Ohms
 2 Channel Waterproof Marine Power Amplifier
- 2 x 100 Watts RMS at 4 Ohms
- 2 x 200 Watts Max at 4 Ohms
- Anti-Thump Turn-On
- Soft Turn On/Off
- RCA Line Input
- Volume Gain Remote Control
- T.H.D:<0.05%
- S/N Ratio: >95dB
- Channel Separation: >65dB
- Frequency Response: 10Hz- 30kHz
- Fuse : 1 x 10A
- Dimensions: 5.12"L x 4.29"W x 1.89"H
 Accessories:
- 1 Pod / MP3 Waterproof 3.5mm Stereo to RCA Adaptor
- Remote control for Volume Gain
- Mounting accessories are included

NEW

PLUTVA104BT

4 CHANNEL WATERPROOF BLUETOOTH WAKEBOARD 4" UTV/ATV/SNOWMOBILE/MARINE AMPLIFIED SPEAKER SYSTEM

- Two Pair 4" 2-Way Marine Speaker:
- 4" High Quality Poly Injection Cone
- Butyl Rubber Surround
- Shiny Black Plastic Enclosure
- 1" High Temperature KEISV Voice Coil
- 1" PEI Neodymium Dome Tweeter
- 100 Watts RMS / 200 Watts Peak
- Frequency Response: 100-20KHz
- Impedance: 4 Ohms
 4 Channel Waterproof Marine Power Amplifier
- 4 x 100 Watts RMS at 4 Ohms
- 4 x 200 Watts Max at 4 Ohms
- Anti-Thump Turn-On
- Soft Turn On/Off
- RCA Line Input
- Volume Gain Remote Control
- T.H.D:<0.05%
- S/N Ratio: >95dB
- Channel Separation: >65dB
- Frequency Response: 10Hz- 30kHz
- Fuse : 1 x 10A
- Bluetooth 3.0 Technology
- Bluetooth Auto Connected While Power on
- Bluetooth Auto Disconnected While Aux-in (3.5mm Connector)
- Easy and Quick Installed Handle-bar Mount Bracket is Included
- Bluetooth Console Dimension: 2.09"(W) x 0.83"(H) x 3.17"(L)
- Amplifier Dimensions: 5.9"L x 4.29"W x 1.89"H
 Accessories:

NEW



PLMCA10

100 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT MP3/IPOD AMPLIFIER WITH DUAL HANDLE-BAR MOUNT WEATHERPROOF SPEAKERS W/FM RADIO

- FM Radio/AUX/Clock Modes
- Built in FM Radio with Electric Tuning
- Up/Down Auto-scan Tuning System
- FM Coverage : 87.5-108.0MHZ
- FM Stereo/Mono Operation
- Dot Matrix LCD FM Frequency and Clock Time Display
- Volume/Treble/Bass Digital Control
- Mute Function
- POWER Switch and Indicator
- 3.5mm Stereo Input Jack, Easy Connection to the Output of Other Audio Devices Like CD/MD/Mp3/Ipod, etc
- Remote Control Unit
- Mini Amplifier Suitable for 12 Volts Motorcycles/Scooters/

- Boat/snowmobile/ATV/Waverunner
- 50 Watts— 2 @ 2 Ohm 10%THD
- Frequency Response 20Hz-20KHz
- S/N: >50dB
- 3 Dual weatherproof Speakers
- Channel Balance:<2dB
- FM Sensitivity:10V @ S/N 30dB
- Easy Mounting Brackets and Accessories included
- Amplifier Dimensions: 4.37H X 3.14W X 1.77D
- Speaker Dimensions: 4.46H X 4.09W X 4.09D



PLMCA20

100 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT AMPLIFIER WITH DUAL HANDLE-BAR MOUNT WEATHERPROOF SPEAKERS W/MP3/IPOD INPUT

- Mini Amplifier Suitable for 12 Volts Motorcycles/Scooters/ Boat/snowmobile/ATV/Waverunner
- 3 Dual weatherproof Speakers
- 3.5mm/RCA Stereo Input Jack, Easy Connection to the Output of Other Audio Devices Like CD/MD/Mp3/Ipod, etc
- Volume Control
- Mute Function
- POWER Switch and Indicator

- Easy Mounting Accessories included
- Remote Control Power on/off
- 50 Watts — 2 @ 2 Ohm 10%THD
- Frequency Response 20Hz-20KHz
- S/N: >50dB
- Channel Balance:<2dB
- FM Sensitivity:10V @ S/N 30dB
- Amplifier Dimensions: 3.74H X 3.14W X 1.57D
- Speaker Dimensions: 4.46H X 4.09W X 4.09D



PLMCA30

400 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT AMPLIFIER W/DUAL HANDLE-BAR MOUNT WEATHERPROOF SPEAKERS W/MP3/IPOD INPUT

- 200 Watts X 2 micro amplifier with Wire harness
- Dual 2.25 Bullet style Weatherproof speakers
- Universal handlebar mount rotary volume control
- 12 Volt T-TAP

- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3.75(L)
- Amplifier Dimensions : 3.25(W) x 1.25(H) x 2(L)



PLMCA40

300 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT MP3/IPOD/USB AMPLIFIER WITH DUAL HANDLE-BAR MOUNT WEATHERPROOF SPEAKERS W/FM RADIO

- FM Radio/AUX Modes
- Built in FM Radio Electric Auto-scan Tuning
- Up/Down Auto-scan Tuning System
- FM Coverage : 87.5-108.0MHZ
- Dot Matrix LCD FM Frequency
- Volume Digital Control
- Mute Function
- POWER On/Off Switch
- 3.5mm Stereo Input Jack, Easy Connection to the Output of Other Audio Devices Like CD/MD/Mp3/Ipod, etc
- Remote Control Unit
- Mini Amplifier Suitable for 12 Volts Motorcycles/Scooters/ Boat/snowmobile/ATV/Waverunner

- 50 Watts — 2 @ 2 Ohm 10%THD
- Frequency Response 20Hz-20KHz
- S/N: >50dB
- 3 Dual weatherproof Speakers
- Channel Balance:<2dB
- FM Sensitivity:10uV @ S/N 30dB
- USB port: support USB Flash Memory
- SD slot: support 128MB,256MB,512MB,1GB,2GB/4GB.
- Easy Mounting Brackets and Accessories included
- Amplifier Dimensions: 5.2H X 3.15W X 1.86D
- Speaker Dimensions: 4.8H X 4.13W X 4.13D



PLMCA60

300 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT AMPLIFIER W/DUAL HANDLE-BAR MOUNT ALUMINIUM DIACAST WEATHERPROOF SPEAKERS W/MP3/IPOD INPUT AND USB CHARGER

- 300 Watts Total Channel Micro Amplifier with wire harness
- 3.5mm Stereo Input Jack, Easy Connection to the Output of Other Audio Devices Like CD/MD/Mp3/Ipod, etc.
- Dual chrome aluminum bullet style 2.25" speakers
- Pair of clamps
- Universal handlebar mount rotary volume control
- Chrome Stainless Universal handlebar audio mount
- 12 Volt T-TAP

- USB charger & Satellite 5V plug
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3(L) li>Amplifier Dimensions : 3.25(W) x 1.5(H) x 2(L)



PLMCA31BT

400 WATT BLUETOOTH SOUND SYSTEM FOR MOTORCYCLE/ATV/SNOWMOBILE WITH WEATHERPROOF SPEAKERS, AMPLIFIER, 3.5MM INPUT FOR IPOD/MP3 PLAYERS, IPHONES, SMARTPHONES, DUAL HANDLE-BAR MOUNT AND USB CHARGER

- 200 Watts X 2 micro amplifier with Wire harness
- Dual 2.25 Bullet style Weatherproof speakers
- Universal handlebar mount rotary volume control
- 12 Volt T-TAP
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Environment resistance and water proof Bluetooth and in-line volume control console with 3.5mm Stereo Input Jack, Easy Connection to the Output of Other Audio Devices
- Works with iPhone/Smartphones, iPod/MP3 Players, Cell Phones, etc.
- Bluetooth 3.0 technology
- Bluetooth auto connected while power on
- Bluetooth auto disconnected while Aux-in (3.5mm connector)
- Bluetooth console Dimension: 1.65(W) x 0.87(H) x 2.36(L)
- Easy and quick installed handle-bar mount bracket is included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3.75(L)
- Amplifier Dimensions : 3.25(W) x 1.25(H) x 2(L)



PLMCA62BT

600 WATT BLUETOOTH SOUND SYSTEM FOR MOTORCYCLE/ATV/SNOWMOBILE WITH WEATHERPROOF SPEAKERS, AMPLIFIER, 3.5MM INPUT FOR IPOD/MP3 PLAYERS, IPHONES, SMARTPHONES, DUAL HANDLE-BAR MOUNT AND USB CHARGER

- 300 Watts x 2 Channel Micro Amplifier with wire harness
- Dual chrome aluminum bullet style 2.25" speakers
- Pair of clamps
- Universal handlebar mount rotary volume control
- Chrome Stainless Universal handlebar audio mount
- 12 Volt T-TAP
- USB charger & Satellite 5V plug
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Environment resistance and water proof Bluetooth and in-line volume control console with 3.5mm Stereo Input Jack, Easy Connection to the Output of Other Audio Devices
- Works with iPhone/Smartphones, iPod/MP3 Players, Cell Phones, etc.
- Bluetooth 3.0 technology
- Bluetooth auto connected while power on
- Bluetooth auto disconnected while Aux-in (3.5mm connector)
- Bluetooth console Dimension : 1.65(W) x 0.87(H) x 2.36(L)
- Easy and quick installed handle-bar mount bracket is included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3(L)
- Amplifier Dimensions : 3.25(W) x 1.5(H) x 2(L)



PLMCA61

600 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT AMPLIFIER W/DUAL HANDLE-BAR MOUNT ALUMINUM DIE -CAST WEATHERPROOF SPEAKERS W/MP3/IPOD INPUT AND USB CHARGER

- 300 Watts x 2 Channel Micro Amplifier with wire harness
- 3.5mm Stereo Input Jack, Easy Connection to the Output of Other Audio Devices Like CD/MP3/Ipod
- Dual Chrome Aluminum Die-Cast Bullet Style 2.25 Speakers / Strontium Magnet Structure
- Pair of Clamps
- Universal Handlebar Mount Rotary Volume Control
- Chrome Stainless Universal Handlebar Audio Mount
- 12 Volt T-TAP
- USB Charger & Satellite 5V Plug
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3(L)
- Amplifier Dimensions : 3.25(W) x 1.25(H) x 2(L)
- Sold as: Unit



PLMCA64

600 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT 2 CHANNEL AMPLIFIER W/ HANDLEBAR MOUNT ALUMINUM DIE-CAST WEATHERPROOF SPEAKERS W/MP3/IPOD INPUT, USB/SD CARD INSERTION AND USB CHARGER W/ FM RADIO

- Power On / Off Switch and Mute Function
- 3.5mm Stereo / AUX Input Jack Connector Cable
- Connects your iPod/MP3 Player for Direct Audio Playback
- Chrome Universal Handlebar Mount Rotary Volume Control
- Chrome Stainless Universal Handlebar Audio Mount
- Universal 12 Volt T-TAP and Wiring Harness Connection
- 12 Volt Direct Plug for Compatible Motorcycles
- Chrome USB Charger Accessory Cable
- Includes All Necessary Stainless Mounting Hardware and Accessories
- Amplifier Specifications 150 Watt x 2 @ 4 Ohms
- 2-Channel Micro Amplifier (300W Each Speaker Output)
- Built-in FM Frequency Radio with Auto-Scan Tuning
- SD Memory Card and USB Flash Readers
- Dot Matrix LCD Display
- Easy to use Touch Button Controls
- Secure Installation with Attached Mounting Brackets
- Amplifier Dimensions : 3.25(W) x 1.25(H) x 2(L) Speaker Specifications Includes (2) 2.25 Speakers
- Aluminum Die-cast Bullet Style Housings
- Kapton Voice Coils
- Comes Complete with Attached Speaker Connector Wires
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3(L)



PLMCA70

(4) SPEAKERS - 800 WATT WEATHERPROOF SPEAKER KIT FOR MOTORCYCLE, ATV, SNOWMOBILE - INCLUDES AMPLIFIER, HANDLE-BAR MOUNTS & IPOD/MP3 INPUT

- 12 Volt T-TAP
- iPod/MP3 Player Compatible
- Neodymium Magnet Structure
- 200 Watts X 4 Micro Amplifier with Wire Harness
- Universal Handlebar Mount Rotary Volume Control
- Easy Chrome Stainless Mounting Brackets and Accessories Included

- Quad Chrome 2.25 Bullet Style Weatherproof Speakers
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3.75(L)
- Amplifier Dimensions : 3.05(W) x 1.19(H) x 5.71(L)



PLMCA76

800 WATT WEATHERPROOF MOTORCYCLE/ATV/SNOWMOBILE AMPLIFIER SYSTEM W/DUAL HANDLE-BAR MOUNT, SPEAKERS & IPOD/MP3 INPUT

- 200 Watts X 4 Micro Amplifier with Wire Harness
- Quad Black Shiny 2.25 Bullet style Weatherproof speakers / Neodymium Magnet Structure
- Universal Handlebar Mount Rotary Volume Control
- 12 Volt T-TAP

- Easy Chrome Stainless Mounting Brackets and Accessories Included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3.75(L)
- Amplifier Dimensions : 3.05(W) x 1.19(H) x 5.71(L)
- Sold as: Unit



PLMCA90

1200 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT AMPLIFIER W/DUAL HANDLE-BAR MOUNT ALUMINUM DIECAST WEATHERPROOF SPEAKERS W/ IPOD/MP3 INPUT AND USB CHARGER

- Power On / Off Switch and Mute Function
- 3.5mm Stereo / AUX Input Jack Connector Cable
- Connects your iPod/MP3 Player for Direct Audio Playback
- Chrome Universal Handlebar Mount Rotary Volume Control
- Chrome Stainless Universal Handlebar Audio Mount
- Universal 12 Volt T-TAP and Wiring Harness Connection
- 12 Volt Direct Plug for Compatible Motorcycles
- Chrome USB Charger Satellite 5V Plug Accessory Cable
- Includes All Necessary Stainless Mounting Hardware and Accessories
- Amplifier Specifications 300 Watt x 4 @ 4 Ohms
- 4-Channel Micro Amplifier (300W Each Speaker Output)
- Secure Installation with Attached Mounting Bracket

- Amplifier Dimensions : 3.05(W) x 1.19(H) x 5.71(L)
- Speaker Specifications Includes (4) 3.25 Speakers
- Aluminum Die-cast Bullet Style Housings
- Neodymium Magnet Structure
- Kapton Voice Coils
- Come Complete with Attached Speaker Connector Wires
- Speaker Dimensions: 3.25(W) x 3.25(H) x 4.375(L)



PLMCA98

600 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT 4 CHANNEL AMPLIFIER W/ HANDLEBAR MOUNT ALUMINUM DIE-CAST WEATHERPROOF SPEAKERS W/MP3/IPOD INPUT, USB/SD CARD INSERTION AND USB CHARGER W/ FM RADIO

- FM Radio / AUX Input
- Built In FM Radio Electric Up/Down Auto-Scan Tuning System
- Dot Matrix LCD FM Frequency
- Digital Volume Control & Mute Function
- Power On / Off Switch
- 4 Channel Micro Amplifier (300W of each Speaker Output) with Wire Harness
- 300 Watts x 2 @ 4 ohms or 150 Watts x 4 @ 4 ohms
- 3.5mm Stereo Input Jack, Easy Connection to the Output of Other Audio Devices Like CD/MD/Mp3/Ipod, etc
- 3 Dual Aluminum Die-cast Bullet Speakers with Kapton Voice Coil

- Two Pairs of Chrome Handlebar Clamps
- Chrome Universal Handlebar Mount Rotary Volume Control
- Chrome Stainless Universal Handlebar Audio Mount
- 12 Volt T-TAP
- Chrome USB 5 Volt Charger
- Easy Chrome Stainless Mounting Brackets and Accessories Included
- Speaker Dimensions: 3.25(W) x 3.25(H) x 4.375(L)
- Amplifier Dimensions: 3.50(W) x 1.375(H) x 3(L)
- Sold as: Unit




For more detailed specifications, product-specific information and models visit www.PyleAudio.com

PLMCS32

400 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT W/DUAL HANDLE-BAR MOUNT WEATHERPROOF 2.25 SPEAKERS

- Chrome Bullet Style Cabinet
- 2.25 High Quality Poly Mica Cone
- Full Range Water Resistant Construction Design
- 3/4 High Temperature Voice Coil
- Neodymium Magnet Structure
- 400 Watts Rated Peak Power
- Frequency Response : 250-20K Hz
- 4 Ohm Impedance
- Pair of clamps
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3.75(L)

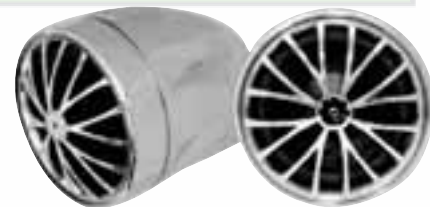

PLMCS36

400 WATTS MOTORCYCLE/ATV/SNOWMOBILE MOUNT W/DUAL HANDLE-BAR MOUNT WEATHERPROOF 2.25 SPEAKERS

- Black Shiny Bullet Style Cabinet
- 2.25 High Quality Poly Mica Cone
- Full Range Water Resistant Construction Design
- 3/4 High Temperature Voice Coil
- Neodymium Magnet Structure
- 400 Watts Rated Peak Power
- Frequency Response : 250-20K Hz
- 4 Ohm Impedance
- Pair of clamps
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3.75(L)
- Sold as: Pair



PLMCS62

600 WATT 2.25" SPEAKER PAIR WITH DUAL HANDLE-BAR MOUNTS - WEATHERPROOF, ALUMINUM DIE-CAST CABINETS & MOTORCYCLES, ATVs & SNOWMOBILE MOUNTABLE

- 4 Ohm Impedance
- Neodymium Magnet Structure
- Mounting Hardware Included
- Peak Power Output: 600 Watt
- 1 High Temperature Voice Coil
- 2.5 High Quality Poly Mica Cone
- Frequency Response: 200-20K Hz
- Aluminum Die-Cast Bullet-Style Cabinets
- Full Range Water Resistant Construction Design
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3(L)



PLMCS64

600 WATT 2.25" SPEAKER PAIR WITH DUAL HANDLE-BAR MOUNTS - WEATHERPROOF, ALUMINUM DIE-CAST CABINETS & MOTORCYCLES, ATVs & SNOWMOBILE MOUNTABLE

- 4 Ohm Impedance
- Strontium Magnet Structure
- Mounting Hardware Included
- Peak Power Output: 600 Watt
- 1 High Temperature Voice Coil
- 2.5 High Quality Poly Mica Cone
- Frequency Response: 200-20K Hz
- Aluminum Die-Cast Bullet-Style Cabinets
- Full Range Water Resistant Construction Design
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 2.5(W) x 2.5(H) x 3(L)



PLMCS92

800 WATT 3" SPEAKER PAIR WITH DUAL HANDLE-BAR MOUNTS - WEATHERPROOF, ALUMINUM DIE-CAST CABINETS & MOTORCYCLE, ATV & SNOWMOBILE MOUNTABLE (PAIR)

- 4 Ohm Impedance
- Neodymium Magnet Structure
- Mounting Hardware Included
- Peak Power Output: 800 Watt
- 1 High Temperature Voice Coil
- 3 High Quality Poly Mica Cone
- Frequency Response: 180-20K Hz
- Aluminum Die-Cast Bullet-Style Cabinets
- Full Range Water Resistant Construction Design
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 3.35(W) x 3.35(H) x 4.8(L)



PLMCS94

800 WATT 3" SPEAKER PAIR WITH DUAL HANDLE-BAR MOUNTS - WEATHERPROOF, ALUMINUM DIE-CAST CABINETS & MOTORCYCLE, ATV & SNOWMOBILE MOUNTABLE (PAIR)

- 4 Ohm Impedance
- Strontium Magnet Structure
- Mounting Hardware Included
- Peak Power Output: 800 Watt
- 1 High Temperature Voice Coil
- 3 High Quality Poly Mica Cone
- Frequency Response: 180-20K Hz
- Aluminum Die-Cast Bullet-Style Cabinets
- Full Range Water Resistant Construction Design
- Easy Chrome Stainless Mounting Brackets and Accessories included
- Speaker Dimensions : 3.35(W) x 3.35(H) x 4.8(L)



Marine Receivers

PLCD11MRKT

WATERPROOF MARINE CD/MP3 PLAYER RECEIVER W/5.25 SPEAKERS & SPLASH PROOF RADIO COVER

- In-Dash Marine CD/MP3 Player
- Anti-Theft Detachable Face
- AM/ FM/ MPX Tuning Receiver (USA)
- CD/ CDR/ CDRW/ MP3/WMA Compatible
- Full Function Wireless Remote Control
- 3 Beam Laser Tracking
- 8 x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxiliary Input on Face Plate
- Minute/ Second Track Display
- 24 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination Carrying Case
- Pair of 5.25 Waterproof Speakers
- Splash Proof Radio Housing
- Transparent Smoke Tint Face Cover
- 4 x 25 Watts Maximum Total Output
- Chassis Dimensions: 7 W x 7 D x 1.96 H



PLCD14MRKT

WATERPROOF MARINE CD/MP3 PLAYER RECEIVER W/ SPEAKER & SPLASH PROOF RADIO COVER

- In-Dash Marine CD/MP3 Player
- Anti-Theft Detachable Face
- AM/ FM/ MPX Electronic Tuning Receiver (USA)
- CD/ CDR/ CDRW/ MP3/WMA Compatible
- Full Function Wireless Remote Control
- 3 Beam Laser Tracking
- 8 x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Minute/ Second Track Display
- 25 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination Carrying Case
- Pair of 5.25 Waterproof Speakers
- Auxiliary Input on Face Plate
- Splash Proof Radio Housing
- Transparent Smoke Tint Face Cover
- 4 x 25 Watts Maximum Total Output
- Chassis Dimension: 7 W x 7 D x 1.96H



PLCD33MR

AM/FM-MPX IN-DASH MARINE CD/MP3 PLAYER/USB & SD CARD FUNCTION (BLACK COLOR)

- In-Dash Marine CD/MP3 Player
- PLL Synthesizer Stereo Radio
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wireless Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxiliary Input Function
- USB & SD Card Function
- Minute, Second Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness Mute Button
- Full Illumination Carrying Case
- 4 x 50 Watts Maximum Total Output
- Chassis Dimensions: 7W x 7D x 1.96H



PLMRKT12BK

IN-DASH MARINE AM/FM PLL TUNING RADIO W/ USB/SD/MMC READER

- AM/FM-MPX PLL Tuning Radio
- LCD Display
- Volume/Bass/Treble/Fader Control
- 30 Station Memory
- Power Output 4 x 50 Watts
- 2 Channel RCA Linea Out
- USB Interface (Decode MP3 WMA)
- SD/MMC Slot
- AUX Input
- Remote Control
- Marine Coating
- Blue Illumination
- Clock Function
- 5.25" Speaker System



PLMRKT14BK

IN-DASH MARINE AM/FM PLL TUNING RADIO W/ USB/SD/MMC READER

- AM/FM-MPX PLL Tuning Radio
- LCD Display
- Volume/Bass/Treble/Balance/Fader Control
- 30 Station Memory
- Power Output 4 x 50 Watts
- 2 Channel RCA Line Out
- USB Interface (Decode MP3 WMA)
- SD/MMC Slot
- Aux Input
- Remote Control Marine COating
- Blue Illumination
- Clock Function
- 2 Pairs of 6.5" Speakers System
- Weather Band Function



PLMR86B

AM/FM-MPX ELECTRONIC TUNNING RADIO W/USB/SD/MMC (BLACK COLOR UNIT)

- Electronic Volume/Bass/Treble/Fader/Balance Control
- Digital Green LCD Display Panel
- RCA Line Output
- Mute/Clock
- Seek/Scan Function
- 30 Radio Preset Station Memory 18FM-12AM
- EQ Preset (Flat,Classic,Rock,Pop)
- USB/SD/MMC MP3 Player
- Front Aux Input
- 160 Watts Total Output (4 X 40 Watts)
- One pair RCA Line out
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- Wireless Remote control
- Dimensions: 7W x 4.72D x 1.96H



PLMR87WB

AM/FM-MPX IN-DASH MARINE MP3 PLAYER/WEATHERBAND/ USB & SD CARD FUNCTION (BLACK)

PLCD35MR AM/FM-MPX IN-DASH MARINE CD/MP3 PLAYER/USB & SD CARD FUNCTION

- In-Dash Marine CD/MP3 Player
- PLL Synthesizer Stereo Radio
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wireless Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxiliary Input Function
- USB & SD Card Function
- Minute, Second Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness Mute Button
- Full Illumination Carrying Case
- 4 x 50 Watts Maximum Total Output
- Chassis Dimensions: 7W x 7D x 1.96H



PLCD36MRW AM/FM-MPX IN-DASH MARINE CD/MP3 PLAYER/WEATHERBAND/USB & SD CARD FUNCTION

- In-Dash Marine CD/MP3 Player
- PLL Synthesizer Stereo Radio
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Built-in Weatherband
- Full Function Wireless Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxiliary Input Function
- USB & SD Card Function
- Minute, Second Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness Mute Button
- Full Illumination Carrying Case
- 4 x 50 Watts Maximum Total Output
- Chassis Dimensions: 7W x 7D x 1.96H



PLCD3MR AM/FM-MPX IN -DASH MARINE CD/MP3 PLAYER/USB & SD CARD FUNCTION

- 8x Oversampling
- Bit D/A Converter
- Program CD Tracks
- Auto Power Loading
- Anti-Skip Mechanism
- Loudness Mute Button
- 3-Beam Laser Tracking
- Full Function LCD Display
- Digital Compact Disc Player
- PLL Synthesizer Stereo Radio
- Minute, Second Track Display
- Auto Station Memory Function
- CD-R & CD-RW Disc Compatible
- 30 Station Memory (18FM/12AM)
- USB, SD & Auxiliary Input Functions
- 4 x 40 Watts Maximum Total Output
- Full Function Wireless Remote Control
- AM/FM MPX Electronic Tuning Receiver
- Chassis Dimensions: 7.0 W x 7.0 D x 1.96 H



PLMR88W AM/FM-MPX IN-DASH MARINE MP3 PLAYER/USB & SD CARD FUNCTION

- Electronic Volume/Bass/Treble/Fader/Balance Control
- Digital Green LCD Display Panel
- RCA Line Output
- Mute/Clock
- Seek/Scan Function
- 30 Radio Preset Station Memory 18FM-12AM
- EQ Preset (Flat,Classic,Rock,Pop)
- USB/SD/MMC MP3 Player
- Front Aux Input
- 160 Watts Total Output (4 X 40 Watts)
- One pair RCA Line out
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- Wireless Remote control
- Dimensions: 7W x 4.72D x 1.96H



PLMR89WW AM/FM-MPX IN-DASH MARINE MP3 PLAYER/WEATHERBAND/USB & SD CARD FUNCTION

- Electronic Volume/Bass/Treble/Fader/Balance Control
- Digital Green LCD Display Panel
- Built-in Weatherband
- RCA Line Output
- Mute/Clock
- Seek/Scan Function
- 30 Radio Preset Station Memory 18FM-12AM
- EQ Preset (Flat,Classic,Rock,Pop)
- USB/SD/MMC MP3 Player
- Front Aux Input
- 160 Watts Total Output (4 X 40 Watts)
- One pair RCA Line out
- AM Frequency Range: 530~1710kHz
- FM Frequency Range: 87.5~107.9MHz
- Wireless Remote control
- Dimensions: 7W x 4.72D x 1.96H



PLCD4MRKT

COMPLETE MARINE WATER PROOF 4 SPEAKER CD/USB/MP3/COMBO W/ STEREO COVER (BLACK)

- In-Dash Marine CD/MP3 Player
- PLL Synthesizer Stereo Radio
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wireless Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxillary Input Function
- USB & SD Card Function
- Minute, Second Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness Mute Button
- Full Illumination Carrying Case
- 4 x 50 Watts Maximum Total Output
- Chassis Dimensions: 7W x 7D x 1.96H
- 2 Pairs 150 Watts 6.5 2 Way White Marine Speakers
- Complete with Wires Mounting Hardware
- White Water Resistant Radio Shield



PLCD5MRBTS

AM/FM MARINE IN-DASH FOLD DOWN DETACHABLE FACE RADIO W/CD/MP3/USB/SD/AUX INPUT WITH BLUETOOTH WIRELESS TECHNOLOGY

- With Built-in 2.0 Bluetooth Technology you can stream audio directly from your hand-held A2DP bluetooth enabled device with crystal clear wireless performance (iPhone, Droid, Blackberry, Tablets, Etc.)
- AM/FM MPX PLL Sythesizer Stereo Tuner
- CD/CDR/CD-RW Compatible
- Full Size USB Port & SD/MMC Card port for MP3/WMA Digital Music file playback
- Digital Volume/Balance/Bass/Treble & Fader Control
- 30 Station Pre-Set Memory 18FM/12AM
- Front Auxiliary 3.5mm / 1/8 Input jack (Direct headphone input from a portable MP3/CD/ipod/etc)
- Fold-Down Anti-Theft Detachable Face Plate
- Full Function Wireless Remote Control
- Seek/Scan Function
- Blue Illumination with LCD Digital Display & ID3 Tag
- 240 watt total output (60w x 4)
- Dimensions: 7W x 4.72D x 1.98H



PLCD6MRKT

WATERPROOF MARINE AM/FM/CD PLAYER RECEIVER W/ 4 X 5.25 SPEAKERS & SPLASH PROOF RADIO COVER (WHITE)

- In-Dash Marine CD Player
- Anti-Theft Detachable Face
- AM/FM/ MPX Tuning Receiver (USA)
- CD/CDR/CDRW/ Compatible
- Full Function Wireless Remote Control
- 3 Beam Laser Tracking
- 8 X Oversampling
- Ant-Skip Mechanism
- Auto Power Loading
- Auxillary Input On Face Plate
- Minute/ Second Track Display
- 24 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination Carrying Case
- 2 Pairs Of 5.25 Waterproof Speakers
- Splash Proof Radio Housing
- Transparent Smoke Tint Cover Face
- 4 X 50 Watts Maximum Total Output
- Chassis Dimensions: 7W X 7D X 1.96H



PLCD7MRKT

WATERPROOF MARINE AM/FM/CD PLAYER RECEIVER W/ 4 X 5.25 SPEAKERS & SPLASH PROOF RADIO COVER (BLACK)

- In-Dash Marine CD Player
- Anti-Theft Detachable Face
- AM/FM/ MPX Tuning Receiver (USA)
- CD/CDR/CDRW/WMA Compatible
- Full Function Wireless Remote Control
- 3 Beam Laser Tracking
- 8 X Oversampling
- Ant-Skip Mechanism
- Auto Power Loading
- Auxillary Input On Face Plate
- Minute/ Second Track Display
- 24 Station Memory
- Full Function LCD Display
- Auto Best Station Memory
- Full Illumination Carrying Case
- 2 Pairs Of 5.25 Waterproof Speakers
- Transparent Smoke Tint Cover Face
- 4 X 25 Watts Maximum Total Output
- Chassis Dimensions: 7W X 7D X 1.96H



PLCD8MRKT

COMPLETE MARINE WATER PROOF 4 SPEAKER CD/USB/MP3/COMBO W/ STEREO COVER (WHITE)

- In-Dash Marine CD/MP3 Player
- PLL Synthesizer Stereo Radio
- AM/FM MPX Electronic Tuning Receiver
- Program CD Tracks
- Full Function Wireless Remote Control
- Digital Compact Disc Player
- Bit D/A Converter
- 3-Beam Laser Tracking
- 8x Oversampling
- Anti-Skip Mechanism
- Auto Power Loading
- Auxillary Input Function
- USB & SD Card Function
- Minute, Second Track Display
- 30 Station Memory (18FM/12AM)
- Full Function LCD Display
- Auto Best Station Memory
- Loudness Mute Button
- Full Illumination Display
- 4 x 50 Watts Maximum Total Output
- Chassis Dimensions: 7W x 7D x 1.96H
- 2 Pairs 120 Watts 6.5 2 Way White Marine Speakers
- Complete with Wires Mounting Hardware
- Mounting Depth: 2.5
- White Water Resistant Radio Shield



PLDMR87

1.5-DIN AM/FM RECEIVER / CD/DVD/MP3/AM-FM MARINE GRADE PLAYER

- DVD-Video/DVD±R/DVD±RW/CD-DA/CD-R/RW
- MP3, WMA with ID3-TAG Display
- Splash-proof to IPX5 standards
- Watertight Flip-down Front panel
- AM/FM MPX Electronic Tuning Receiver
- USA - EURO Tuner
- Designed to withstand salt and UV exposure with conformal-coated PCB
- 18 FM/ 12 AM Presets Memory Station
- 24-Bit D/A Converter
- Digital Compact Disc Player
- 3-Beam Laser Tracking
- 8 x Over-sampling
- Anti-Skip Mechanism
- Auto Power Loading
- Minute, Second Track Display
- BBE MP for Compressed Audio Sound Improvement
- 4 x 90 Watts (360 watts total)
- 2 Channel 2 Volt RCA Line output
- RCA Video Output
- Full Function LCD Display
- Auto Best Station Memory
- Loudness Mute Button
- Built-in IR Eye
- Remote Included



PLCDMR97

1.5-DIN AM/FM RECEIVER / CD/CDR/MP3/AM-FM MARINE GRADE PLAYER

- CD-DA/CD-R/RW Ready
- MP3,WMA with ID3-TAG Display
- Splash-proof to IPX5 standards
- Watertight Flip-down Front panel
- AM/FM MPX Electronic Tuning Receiver
- USA - EURO Tuner
- Designed to withstand salt and UV exposure with conformal-coated PCB
- 18 FM/ 12 AM Presets Memory Station
- Digital Compact Disc Player
- 3-Beam Laser Tracking
- 8 x Over-sampling
- Anti-Skip Mechanism
- Auto Power Loading
- Minute, Second Track Display
- BBE MP for Compressed Audio Sound Improvement
- 4 x 90 Watts (360 watts total)
- 2 Channel 2 Volt RCA Line output
- Full Function LCD Display
- Auto Best Station Memory
- Loudness Mute Button
- Built-in IR Eye
- Remote Included



PLDMR3U

IN-DASH MARINE CD/DVD RECEIVER WITH 3 BUILT IN MONITOR

- DVD/VCD/MPEG4/CD/CD-R/CDRW Compatible
- Slide Down Detachable Face
- Treble/Bass/Balance/Fader/Encoder/Volume
- PLL Synthesizer Tuner
- Marine Coded
- Auto Store / Preset Scan
- AM/FM 2 Band Radio
- 30 Station Memory (18FM / 12AM)
- Built-In 3 (16:9) TFT Color Monitor
- PAL / NTSC Color
- On Screen Display Title/Time/Chapter/Subtitle Angle
- Anti-Shock Mechanism
- ESP Function
- Mute Control
- RCA Line Out
- Selectable View Angle
- A/V Input A/V Output
- Remote Control
- Rear Camera Output
- 240 Watts (4 x 60 W)
- Last Position Memory
- Dual Zone Function
- Telephone Mute Hands Free Function
- Full Function Remote Control
- Weather Band
- Digital Audio Output
- Marine Stereo Cover Included



PLMR17BTB

AM/FM-MPX IN-DASH MARINE DETACHABLE FACE RADIO w/SD/MMC/USB PLAYER & BLUETOOTH WIRELESS TECHNOLOGY

- AM/FM-MPX PLL Tuning
- USB Slot &SD/MMC Card Port For MP3/WMA Music File Playback
- Encoding,Volume,Balance,Bass,Treble&Fader Control
- 30 Station Memory:18FM/12AM
- Front Auxiliary Input Jack
- Fold-Down Detachable Panel
- Full Function Remote Control
- Seek/Scan Function
- ISO Connector
- ID3 Tag
- AM Frequency Ranges:350-1710 KHz
- FM Frequency Range:87.5-107.9 MHz
- 4X60 Watts Maximum Power Output
- Bluetooth Function
- Dimensions:7W x 4.72D x 1.96H



PLMR17BTS

AM/FM-MPX IN-DASH MARINE DETACHABLE FACE RADIO w/SD/MMC/USB PLAYER & BLUETOOTH WIRELESS TECHNOLOGY

- AM/FM-MPX PLL Tuning
- USB Slot &SD/MMC Card Port For MP3/WMA Music File Playback
- Encoding,Volume,Balance,Bass,Treble & Fader Control
- 30 Station Memory:18FM/12AM
- Front Auxiliary Input Jack
- Fold-Down Detachable Panel
- Full Function Remote Control
- Seek/Scan Function
- ISO Connector
- ID3 Tag
- AM Frequency Ranges:350-1710 KHz
- FM Frequency Range:87.5-107.9 MHz
- 4X60 Watts Max Power Output
- With Bluetooth
- Dimensions:7"(W) x 4.72"(D) x 1.96"(H)
- Color: Silver
- Bluetooth connection code 0000



PLMR18 AM/FM-MPX PLL TUNING RADIO w/SD/MMC & USB

- AM / FM -MPX PLL Tuning Radio
- 30 Station Memory
- Dot Matrix LCD Display
- Encoder Volume ,Bass ,Treble, Balance ,Fader Control
- Power output 4 x 50 Watts
- 2 Channel RCA Line Out
- USB Interface (Decode MP3 WMA)
- SD/MMC Slot
- Aux Input
- Remote Control
- Marine Coating
- Blue Illumination
- Dimensions: 7.0"W X 6.29"D X 1.9"H



PLMR19W AM/FM-MPX PLL TUNING RADIO w/SD/MMC/USB & WEATHER BAND

- AM / FM -MPX PLL Tuning Radio
- 30 Station Memory
- Dot Matrix LCD Display
- Volume ,Bass ,Treble, Balance ,Fader Control
- Power output 4 x 50 Watts
- 2 Channel RCA Line Out
- USB Interface (Decode MP3 WMA)
- SD/MMC Slot
- Aux Input
- Remote Control
- Marine Coating
- Blue Illumination
- Weather Band
- Dimensions: 7.0"W X 6.29"D X 1.9"H



PLMR20W MARINE IN-DASH RECEIVER WITH AM/FM RADIO, AUX INPUT FOR IPOD/MP3 PLAYERS & SD/USB MEMORY READERS

- AM/FM-MPX PLL Tuning Dual-Band Radio
- USB Slot & SD Card Port for MP3/WMA Music Files Playback
- Volume, Balance, Balance, Bass, Treble & Fader Control
- 30 Station Memory: 18FM/12AM
- ID3 Tag Readout with Relevant Track Info
- LCD Digital Backlit Display
- AM Frequency Ranges: 530-1710 KHz
- FM Frequency Range: 87.5-107.9 MHz
- 4 x 60 Watts Maximum Power Output
- ISO Connector
- Dimensions: 7(W) x 4.25(D) x 1.97(H)



PLMRKT32WT IN-DASH MARINE AM/FM PLL TUNING RADIO w/ USB/SD/MMC READER

- AM/FM-MPX PLL Tuning Radio
- LCD Display
- Volume/Bass/Treble/Balance/Fader Control
- 30 station Memory
- Power Output 4 x 50 Watts
- 2 Channel RCA Line Out
- USB Interbase (decode MP2 WMA)
- SD/MMC Slot
- AUX Input
- Remote Control
- Marine Coating
- Blue Illumination
- Clock Function
- 5.25" Speaker System



PLMRKT33WT IN-DASH MARINE AM/FM PLL TUNING RADIO w/ USB/SD/MMC READER

- AM/FM-MPX PLL Tuning Radio
- LCD Display
- Volume/Bass/Treble/Balance/Fader Control
- 30 Station Memory
- Power Output 4 x 50 Watts
- 2 Channel RCA Line Out
- USB Interface (Decode MP3 WMA)
- SD/MMC Slot
- AUX Input
- Remote Input
- Marine Coating
- Blue Illumination
- Clock Function
- 6.5" Speaker System
- Weather Band Function



PLMRKT34WT IN-DASH MARINE AM/FM PLL TUNING RADIO w/ USB/SD/MMC READER

- AM/FM-MPX PLL Tuning Radio
- LCD Display
- Volume/Bass/Treble/Balance/Fader Control
- 30 Station Memory
- Power Output 4 x 50 Watts
- 2 Channel RCA Line Out
- USB Interface (Decode MP3 WMA)
- SD/MMC Slot
- Aux Input
- Remote Control Marine COating
- Blue Illumination
- Clock Function
- 2 Pairs of 6.5" Speakers System
- Weather Band Function



PLMRCB1 BLACK WATER RESISTANT RADIO SHIELD

- Protects Your Stereo From The Elements
- Smoke Colored Housing Window
- Spring Loaded Flip-Up Door
- Support Shelf In Rear Of Housing For Radio
- UV Resistant Plastic
- Black Base Color
- Mounting Gasket Included
- Dimensions: 9" W x 1.95" D x 4.10"H



PLMRCB3 UNIVERSAL MARINE STEREO HOUSING W/FULL CHASSIS WIRED CASING (BLACK)

- Universal Marine Stereo Housing
- Protect your Stereo from Harsh Marine Environment
- Includes a 2 Position Hinged Front Door
- Sealed with a Neoprene Gasket
- Accommodate Dual Post/ Removable & DIN Style Stereos
- Fits Din Style or Removable Stereos
- U shaped Mounting Bracket for Deck or Overhead Installation
- Stainless Steel Mounting Hardware
- Polycarbonate Bracket
- Support Shelf for Radio in Rear of Housing
- Pre-Wired Power(3 Wire), Speaker (8 Wire), RCA (2 Wire), Antenna
- UV Resistant Plastic
- Dimensions: 4(H) x 9.1/8(W)x 1/2(D)



PLMRCW1 WHITE WATER RESISTANT RADIO SHIELD

- Protects Your Stereo From The Elements
- Smoke Colored Housing Window
- Spring Loaded Flip-Up Door
- Support Shelf In Rear Of Housing For Radio
- UV Resistant Plastic
- White Base Color
- Mounting Gasket Included
- Dimensions: 9" W x 1.95" D x 4.10"H



PLMRCW2 WHITE WATER RESISTANT RADIO SHIELD

- Protects Your Stereo From The Elements
- Smoke Colored Housing Window
- Spring Loaded Slide-up Door
- Support Shelf In Rear Of Housing For Radio
- UV Resistant Plastic
- White Base Color
- Mounting Gasket Included
- Dimensions: 9.5" W x 1"Outside(4.5Overall) D x 4H



PLMRCW3 UNIVERSAL MARINE STEREO HOUSING W/FULL CHASSIS WIRED CASING (WHITE)

- Universal Marine Stereo Housing
- Protect your Stereo from Harsh Marine Environment
- Includes a 2 Position Hinged Front Door
- Sealed with a Neoprene Gasket
- Accommodate Dual Post/ Removable & DIN Style Stereos
- Fits Din Style or Removable Stereos
- U shaped Mounting Bracket for Deck or Overhead Installation
- Stainless Steel Mounting Hardware
- Polycarbonate Bracket
- Support Shelf for Radio in Rear of Housing
- Pre-Wired Power(3 Wire), Speaker (8 Wire), RCA (2 Wire), Antenna
- UV Resistant Plastic
- Dimensions: 4(H) x 9.1/8(W)x 1/2(D)



PLMR20PA MARINE PUBLIC ADDRESS SYSTEM CONTROLLER

- Balanced Microphone Input
- Low Level (RCA Type) Inputs for CH1-4
- 4-Channel Output
- Variable Low Pass/Fixed High Pass Crossovers on CH1-4
- Variable 0-+18db Bass Boost on CH1/2 and CH3/4
- Input Sensitivity Selector
- Variable Input Gain On CH1-4
- Can Be Used with 2CH or 4CH Audio Input Source
- Waterproof, Hardwired Input/Output and Power Cables
- Dimensions: 8-5/8W x 6D x 2-1/8H



*Visit PyleAudio.com and search item model number for more detailed information and specifics



Hydra Series Waterproof iPod/MP3 Marine Power Amplifiers

Model	Total Watt Output	Channels	Compact Micro Amplifier	Color
PLMRMP1A	200	2	Yes	White
PLMRMP1B	200	2	Yes	Black
PLMRMP2A	400	4	Yes	White
PLMRMP2B	400	4	Yes	Black
PLMRMP3A	400	4	No	White
PLMRMP3B	400	4	No	Black

- All Models Include:
- iPod/MP3 Waterproof 3.5mm Stereo to RCA Connector
- iPod/MP3 Waterproof Poly Bag
- Adjustable High / Low Level Inputs
- Electronic Crossover Network
- Power Protection Circuitry
- 2 Ohm Stereo Stable
- Frequency Response: 10Hz - 40 kHz
- Volume Gain Remote Control
- Channel Separation: > 65 dB
- Anti-Thump Power-On
- Soft Turn On / Off
- S/N Ratio: >95 dB
- RCA Line Input
- Fuse: 10A

Hydra Series Waterproof iPod/MP3 Marine Power Amplifiers & Speaker Kits

Model	Total Watt Output	Channels	Compact Micro Amplifier	Speakers Included	Color
PLMRKT2A	200	2	Yes	2	White
PLMRKT2B	200	2	Yes	2	Black
PLMRKT4A	400	4	No	4	White
PLMRKT4B	400	4	No	4	Black

- All Models Include:
- iPod/MP3 Waterproof 3.5mm Stereo to RCA Connector
- iPod/MP3 Waterproof Poly Bag
- Adjustable High / Low Level Inputs
- Electronic Crossover Network
- Power Protection Circuitry
- 2 Ohm Stereo Stable
- Frequency Response: 10Hz - 40 kHz
- Volume Gain Remote Control
- Channel Separation: > 65 dB
- Anti-Thump Power-On
- Soft Turn On / Off
- S/N Ratio: >95 dB
- RCA Line Input
- Fuse: 10A
- 6.5" 2-Way Marine Speakers :
- 6.5" High Quality Polypropylene Cone
- Suspension Cloth Surround
- 2" Polymer Cone Tweeter
- 200 Watt RMS / 400 Watt Peak
- Frequency Response: 80-20kHz
- Impedance: 8 Ohm

PLMRMP4A

4 CHANNEL WATERPROOF MP3 / IPOD MARINE POWER AMPLIFIER

- 4 x 150 Watts RMS at 4 ohm
- 4 x 300 Watts MAX at 4 ohm
- 4 x 500 Watts RMS at 2 ohm
- Electronic Crossover Network
- 2 Ohm Stereo Stable
- Anti-Thump Turn- On
- Soft Turn On / Off
- Adjustable High / Low Level Inputs
- RCA Line Input
- Power Protection Circuitry
- Volume Gain Remote Control
- T.H.D S/N Ratio : >95 dB
- Channel Separation : >65 dB
- Frequency Response : 10 - 40K Hz
- Fuse : 10 A
- Dimensions : 6.18(L) x 3.50(W) x 2.05(H)
- Accessories:
- iPod / MP3 / Waterproof 3.5mm Stereo to RCA Adaptor
- Remote Control for Volume Gain



Marine Speakers



PLMR24 3.5" 200 WATT 3-WAY WEATHER PROOF MINI BOX SPEAKER SYSTEM (WHITE)

- Excellent for Use On Boats/Marine/Decks/Poolside/Outdoors
- Completely Water Proof
- 3.5" Aluminum Injection Cone Woofer
- 24 Oz. Magnet Structure
- 1.75" Wide Dispersion Cone Midrange
- 1" Super Dome Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response

- Heavy Duty ASB Construction
- Quick Connect / Disconnect Speaker Terminals
- Removable Rustproof of Mesh Grills
- Power: 100 Watts RMS / 200 Watts Peak
- Frequency Response: 70-21 KHz
- Impedance: 4 Ohms
- Complete Mounting Kit Wires
- Dimensions: 5.25"W x 3.75"H x 3.75"D



PLMR24B 3.5" 200 WATT 3-WAY WEATHER PROOF MINI BOX SPEAKER SYSTEM (BLACK)

- Excellent for Use On Boats/Marine/Decks/Poolside/Outdoors
- Completely Water Proof
- 3.5 Aluminum Injection Cone Woofer
- 24 Oz. Magnet Structure
- 1.75 Wide Dispersion Cone Midrange
- 1 Super Dome Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response

- Heavy Duty ASB Construction
- Quick Connect / Disconnect Speaker Terminals
- Removable Rustproof of Mesh Grills
- Power: 100 Watts RMS / 200 Watts Peak
- Frequency Response: 70-21 KHz
- Impedance: 4 Ohms
- Complete Mounting Kit Wires
- Dimensions: 5.25W x 3.75H x 3.75D



PLMR24S 3.5" 200 WATT 3-WAY WEATHER PROOF MINI BOX SPEAKER SYSTEM (SILVER COLOR)

- Excellent for Use On Boats/Marine/Decks/Poolside/Outdoors
- Completely Water Proof
- 3.5 Aluminum Injection Cone Woofer
- 24 Oz. Magnet Structure
- 1.75 Wide Dispersion Cone Midrange
- 1 Super Dome Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response

- Heavy Duty ASB Construction
- Quick Connect / Disconnect Speaker Terminals
- Removable Rustproof of Mesh Grills
- Power: 100 Watts RMS / 200 Watts Peak
- Frequency Response: 70-21 KHz
- Impedance: 4 Ohms
- Complete Mounting Kit Wires
- Dimensions: 5.25W x 3.75H x 3.75D



PLMR25 4" 300 WATT 3-WAY WEATHER PROOF MINI BOX SPEAKER SYSTEM (WHITE)

- Excellent for Use On Boats/Marines/Decks/Patios/Poolside/Outdoors
- Completely Water Proof
- 4P.P Injection Cone Woofer
- 30 Oz. Magnet Structure
- 1.75 Wide Dispersion Cone Midrange
- Super Dome Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response

- Heavy Duty ASB Construction
- Quick Connect/Disconnect Speaker Terminals
- Removable Rustproof Mesh Grills
- Power: 150Watts RMS/300Watts Peak
- Frequency Response: 60-21K Hz
- Impedance:4 Ohms
- Complete Mounting Kit & Wires
- Dimensions: 5.6(W) x 8.4(H) x 4.8(D)



PLMR26 5" 500 WATT 3-WAY WEATHER PROOF MINI BOX SYSTEM (WHITE)

- Excellent for Use On Boats/Marines/Decks/Patios/Poolside/Outdoors
- Completely Water Proof
- 5 P.P Injection Cone Woofer
- 40 Oz. Magnet Structure
- 1.75 Wide Dispersion Cone Midrange
- 1 Super Dome Tweeter
- Capacitor Crossover Network
- Bass Reflex Vent for Added Bass Response

- Heavy Duty ASB Construction
- Quick Connect/Disconnect Speaker Terminals
- Removable Rustproof Mesh Grills
- Power:250 Watts RMS/500Watts Peak
- Frequency Response:50-21K Hz
- Impedance:4 Ohms
- Complete Mounting Kit & Wires
- Dimensions:6(W) x 9(H) x 4.8(D)



PLMR34

3.5" 200 WATT TWO WAY SEALED SPEAKER SYSTEM

- Excellent for Monitor or Surround Sound Applications
- 3.5 Long Throw Woofer
- 1 Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 100Hz-20k Hz
- 8 Ohm Impedance
- Vented Design For High Power and Deep Bass Response
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 5.35W x 7.95H x 5D



PLMR44

4" 250 WATT TWO WAY SEALED SPEAKER SYSTEM

- Excellent for Monitor or Surround Sound Applications
- 4 Long Throw Woofer
- 1 Polymer Dome Tweeter
- 250 Watts Rated Peak Power
- Frequency Response: 90Hz-20k Hz
- 8 Ohm Impedance
- Vented Design For High Power and Deep Bass Response
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 6.95W x 10.15H x 6.15D



PLMR54

5.25" 300 WATT TWO WAY SEALED SPEAKER SYSTEM

- Excellent for Monitor or Surround Sound Applications
- 5.25 Long Throw Woofer
- 1 Polymer Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 75Hz-20k Hz
- 8 Ohm Impedance
- Vented Design For High Power and Deep Bass Response
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- Spring Loaded Mounting Bracket Included
- Dimensions: 7.35W x 10.65H x 6.5D



PLMR53

5.25" 150 WATT TWO-WAY SHIELDED MARINE WATER PROOF SPEAKERS

- 5.25 Shielded Two-Way Speakers
- Excellent For Monitor or Surround Sound Applications
- Water Resistant Construction Design
- 5.25" Poly Mica Woofer Cone With Butyl Rubber Surround
- 25oz Shielded Magnet Structure
- 1.0 Polymer Dome Tweeter
- 150 Watts Rated Peak Power
- Frequency Response: 80Hz - 20k Hz
- 4 Ohms Impedance
- For Marine or Car Use
- Built-in Molded Grill
- Gold Plated Plug Terminals
- Threaded Rear Mounting Pos
- Molded White ABS Plastic Basket
- Complete with Wires
- Dimensions: 6.25W x 6.25H x 4.15L



PLMR63

6.5" 200 WATT TWO-WAY SHIELDED MARINE WATER PROOF SPEAKERS

- 6.5 Shielded Two-Way Speakers
- Excellent For Monitor or Surround Sound Applications
- Water Resistant Construction Design
- 6.5" Poly Mica Woofer Cone With Butyl Rubber Surround
- 30oz Shielded Magnet Structure
- 1.0 Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz - 20k Hz
- 4 Ohms Impedance
- For Marine or Car Use
- Built-in Molded Grill
- Gold Plated Plug Terminals
- Built-In Spring Loaded Rear Mounting Hook
- Molded White ABS Plastic Basket
- Complete with Wires
- Dimensions: 7.35W x 7.35H x 5.35L



For more detailed specifications, product-specific information and models visit www.PyleAudio.com

PLMR64B 5" 3 WAY INDOOR/OUTDOOR WATER PROOF WALL MOUNT SPEAKER SYSTEM (BLACK)

- Wall Mount Speaker System Impact ABS Plastic Cabinet.
- 5" Woofer With Rubber Edge.
- 1" Aluminum Voice Coil.
- 3" Mid & High Quality Cone & Cloth Edge.
- 0.75" Aluminum Voice Coil.
- 500 Watts Max Power.
- Frequency Response: 60--16K HZ (+-3dB).
- Sensiivity:90dB@1W/M.
- 8 Ohms Impedance.



PLMR64W 5" 3 WAY INDOOR/OUTDOOR WATER PROOF WALL MOUNT SPEAKER SYSTEM (WHITE)

- Wall Mount Speaker System Impact ABS Plastic Cabinet.
- 5" Woofer With Rubber Edge.
- 1" Aluminum Voice Coil.
- 3" Mid & High Quality Cone & Cloth Edge.
- 0.75" Aluminum Voice Coil.
- 500 Watts Max Power.
- Frequency Response: 60--16K HZ (+-3dB).
- Sensiivity:90dB@1W/M.
- 8 Ohms Impedance.



PLMR66B 5" HIGH QUALITY PP CONE & PU EDGE 500 WATTS MARINE SPEAKERS (BLACK)

- Flush-mounted design for boat pre-cut opening
- 5" Woofer PP Cone
- High Impact ABS Ported Enclosure
- 1" Aluminum Voice Coil.
- 500 Watts Max Power.
- Frequency Response: 70--15K HZ (+-3dB).
- Sensiivity:88dB@1W/M.
- 4 Ohms Impedance.
- Unit Dimensions: 7.75"W x 12"H x 4.5"D



PLMR66W 5" HIGH QUALITY PP CONE & PU EDGE 500 WATTS MARINE SPEAKERS (WHITE)

- Flush-mounted design for boat pre-cut opening
- 5" Woofer PP Cone
- High Impact ABS Ported Enclosure
- 1" Aluminum Voice Coil.
- 500 Watts Max Power.
- Frequency Response: 70--15K HZ (+-3dB).
- Sensiivity:88dB@1W/M.
- 4 Ohms Impedance.
- Unit Dimensions: 7.75"W x 12"H x 4.5"D



PLMR51B 100 WATTS 5.25" 2 WAY BLACK MARINE SPEAKERS

- 5.25 Dual Cone Full-Range Speakers
- 100 Watts Rated Power
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone w/Cloth Surround
- Built-in Molded Grill
- Molded ABS Plastic Basket
- 20oz Circuit Magnet
- Frequency Response: 100Hz - 18k Hz
- 4 Ohms Impedance
- Slim Mounting Depth: 1.5
- Complete with Wires Mounting Hardware
- Cut-out Size: 122 mm



PLMR51W 100 WATTS 5.25" 2 WAY WHITE MARINE SPEAKERS

- 5.25 Dual Cone Full-Range Speakers
- 100 Watts Rated Power
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone w/Cloth Surround
- Built-in Molded Grill
- Molded ABS Plastic Basket
- 20oz Circuit Magnet
- Frequency Response: 100Hz - 18k Hz
- 4 Ohms Impedance
- Slim Mounting Depth: 1.5
- Complete with Wires Mounting Hardware
- Cut-out Size: 122 mm



PLMR52 150 WATTS 5.25" 2 WAY WHITE MARINE SPEAKERS

- 5-1/4 High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 1 High Temperature Voice Coil
- 1/2 Neodymium Dome Tweeter
- 150 Watts Rated Peak Power
- Frequency Response: 100Hz-20K Hz
- 4 Ohm Impedance
- Mounting Depth: 2.25
- Cut-out Size: 111 mm



PLMR57W 5 1/4" DUAL CONE WATERPROOF STEREO SPEAKER SYSTEM

- 5.25 Dual Cone Full Range Speakers
- 100 Watt Rated Peak Power
- Completely Waterproof
- For Marine or Car Door Use
- Polypropylene Cone w/ Cloth Surround
- Built-In Molded Grill
- Molded ABS Plastic Basket
- 20 Oz. Circuit Magnet
- Frequency Response: 100Hz-18KHz
- Cut-Out: 122 mm
- Impedance: 4 Ohms
- Mounting Depth: Only 2
- Complete Pair with Wire & Mounting Hardware



PLMR41B 4" DUAL CONE WATERPROOF STEREO SPEAKER SYSTEM

- 4 Dual Cone Full range Speakers
- Completely Water Proof
- For Marine or Car Door Use
- Polypropylene Cone with Cloth Surround
- Built-In Molded Grill
- Molded ABS Plastic Basket
- 15 Oz. Circuit magnet
- Frequency Response: 100 Hz-18 Khz
- Impedance: 4 Ohms
- Mounting Depth: Only 3
- Black Color Marine Speaker
- Complete Pair with wire & Mounting Hardware
- Cut-out Size: 97 mm



PLMR41W 4" DUAL CONE WATERPROOF STEREO SPEAKER SYSTEM

- 4 Dual Cone Full range Speakers
- Completely Water Proof
- For Marine or Car Door Use
- Polypropylene Cone with Cloth Surround
- Built-In Molded Grill
- Molded ABS Plastic Basket
- 15 Oz. Circuit magnet
- Frequency Response: 100 Hz-18 Khz
- Impedance: 4 Ohms
- Mounting Depth: Only 3
- White Color Marine Speaker
- Complete Pair with wire & Mounting Hardware
- Cut-out Size: 97 mm



For more detailed specifications, product-specific information and models visit www.PyleAudio.com

PLMR605B 6 1/2" DUAL CONE MARINE SPEAKERS (BLACK)

- 6.5 Dual Cone 2-way Full Range Speakers
- 400 Watts Peak Power/ 200 Watts RMS
- Marine Coated Completely Waterproof
- For Marine, RV, Automotive, & Motorcycle Use
- Polypropylene Cone with Butyl Rubber Surround
- 1 Aluminum Voice Coil
- 1/2 Neodymium Dome Tweeter
- Frequency Response: 85Hz-20Khz
- Sensitivity: 90dB
- 4 Ohm Impedance
- Complete Pair with Grill and Mounting Hardware



PLMR605W 6 1/2" DUAL CONE MARINE SPEAKERS (WHITE)

- 4 Ohm Impedance
- Sensitivity: 90dB
- 1 Aluminum Voice Coil
- 1/2 Neodymium Dome Tweeter
- Frequency Response: 85Hz-20Khz
- 400 Watts Peak Power/ 200 Watt RMS
- Marine Coated Completely Waterproof
- 6.5 Dual Cone 2-way Full Range Speakers
- Polypropylene Cone with Butyl Rubber Surround
- Complete Pair with Grill and Mounting Hardware
- For Marine, RV, ATV, Automotive, & Motorcycle Use



PLMR60B 6 1/2" DUAL CONE WATERPROOF STEREO SPEAKER SYSTEM

- 6.5" Dual Cone Full Range speakers
- Completely Waterproof
- For Marine or Car Door Use
- Cut-out Size: 135 mm
- Polypropylene Cone with Cloth Surround
- Built-In Molded Grill
- Molded ABS Basket
- 1" Aluminum Voice Coil
- 20 Oz. Circuit Magnet
- Power handling: 150 Watts Peak
- Frequency Response: 45-16KHz
- Impedance: 4 Ohms
- Mounting Depth: Only 1 1/2"



PLMR60W 150 WATTS 6.5" 2 WAY WHITE MARINE SPEAKERS

- 6.5 Dual Cone Full-Range Speakers
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone With Cloth Surround
- Built-in Molded Grill
- Cut-out Size: 135 mm
- Molded ABS Plastic Basket
- 1" Aluminum Voice Coil
- 20oz Circuit Magnet
- Power Handling: 150 Watts Peak
- Frequency Response: 45Hz - 16k Hz
- 4 Ohms Impedance
- Complete with Wires Mounting Hardware
- Mounting Depth: 2.5



PLMR60S 150 WATTS 6.5" 2 WAY MARINE SPEAKERS (SILVER COLOR)

- 6.5 Dual Cone Full-Range Speakers
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone With Cloth Surround
- Built-in Molded Grill
- Cut-out Size: F135 mm
- Molded ABS Plastic Basket
- 1 Aluminum Voice Coil
- 20oz Circuit Magnet
- Power Handling: 150 Watts Peak
- Frequency Response: 45Hz - 16k Hz
- 4 Ohms Impedance
- Complete with Wires Mounting Hardware
- Mounting Depth: 2.5
- Sold as Pair



PLMR61B 120 WATTS 6.5" DUAL CONE BLACK MARINE SPEAKERS

- 6.5 Dual Cone Full-Range Speakers
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone With Cloth Surround
- Built-in Molded Grill
- Molded ABS Plastic Basket
- 1" Aluminum Voice Coil
- 20oz Circuit Magnet
- Power Handling: 120 Watts Peak
- Frequency Response: 45Hz - 16k Hz
- 4 Ohms Impedance
- Slim Mounting Depth: 2.5
- Complete with Wires Mounting Hardware
- Cut-out Size: 135 mm



PLMR61W 120 WATTS 6.5" DUAL CONE WHITE MARINE SPEAKERS

- 6.5 Dual Cone Full-Range Speakers
- Completely Waterproof
- For Marine or Car Use
- Polypropylene Cone With Cloth Surround
- Built-in Molded Grill
- Molded ABS Plastic Basket
- 1" Aluminum Voice Coil
- 20oz Circuit Magnet
- Power Handling: 120 Watts Peak
- Frequency Response: 45Hz - 16k Hz
- 4 Ohms Impedance
- Slim Mounting Depth: 2.5
- Complete with Wires Mounting Hardware
- Cut-out Size: 135 mm



PLMR62 200 WATTS 6.5" 2 WAY WHITE MARINE SPEAKERS

- 6.5 High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 1 High Temperature Voice Coil
- 1/2 Neodymium Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 85Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 90dB
- Mounting Depth: 2.5
- Cut-out Size: 135 mm



PLMRS62 200 WATTS 6.5" 2 WAY MARINE SPEAKERS (SILVER COLOR)

- 6.5 High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 1 High Temperature Voice Coil
- 1/2 Neodymium Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 85Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 90dB
- Mounting Depth: 2.5
- Cut-out Size: F135 mm



PLMR67B 6 1/2" DUAL CONE WATERPROOF STEREO SPEAKER SYSTEM

- 6.5" Dual Cone Full Range Speakers
- Completely Waterproof
- For Marine or Car Door Use
- Polypropylene Cone with Cloth Surround
- Built-In Molded Grill
- Molded ABS BASKet
- 1" Aluminum Voice Coil
- 20 Oz. Circuit Magnet
- Cut-out Size: 135 mm
- Power Handling: 120 Watts Peak
- Frequency Response: 45-16 KHz
- Impedance: 4 Ohms
- Mounting Depth: Only 1 1/2"
- Complete Pair with Wire & Mounting Hardware



PLMR67W 6-1/2" DUAL CONE WATERPROOF STEREO SPEAKER SYSTEM

- 6-1/2 Dual Cone Full Range Speakers
- Completely Waterproof
- For Marine or Car Door Use
- Polypropylene Cone w/ Cloth Surround
- Built-In Molded Grill
- Molded ABS Plastic Basket
- 1 Aluminum Voice Coil
- 20 Oz. Circuit Magnet
- Frequency Response: 45-16KHz
- Impedance: 4 Ohms
- Mounting Depth: Only 2.5
- Cut-out: 135 mm
- Complete Pair with Wire & Mounting Hardware



For more detailed specifications, product-specific information and models visit www.PyleAudio.com

PLMR692 260 WATTS 6 x 9" 2 WAY WHITE MARINE SPEAKERS

- 6 x 9 High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 40 oz Magnet Structure
- 1.5 High Temperature Voice Coil
- 1/2 Neodymium Dome Tweeter
- 260 Watts Peak Power
- Frequency Response: 55-20 KHz
- 4 Ohm Impedance
- Sensitivity: 92 dB
- Mounting Depth: 3.45
- Cut-out Size: Ellipse, 225mmx152mm



PLMR82 300 WATTS 8" 2 WAY WHITE MARINE SPEAKERS

- 8 High Quality Poly Carbon Cone
- 2-Way Water Resistant Construction Design
- 1.5 High Temperature Voice Coil
- 0.5 Neodymium Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 60Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 91 dB
- Mounting Depth: 3.25
- Cut-out Size: 182 mm



PLMRX67 250 WATTS 6.5" 2 WAY MARINE SPEAKERS

- 6.5 High Quality White Polypropylene Cone
- Santoprene Surround
- Water-Resistant Construction
- 2 Way Attachable Grille Design
- 1 High Temperature Kapton Voice Coil
- .75 Neodymium Dome Tweeter
- 35 Oz Magnet Structure
- 250 Watts Rated Peak Power
- Frequency Response: 65Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 90dB
- Includes Custom Grills, Mounting Gasket, Installation Hardware
- Mounting Depth: 2.55"
- Cut-out Size: 142 mm



PLMRX69 300 WATTS 6 x 9" 2 WAY MARINE SPEAKERS

- 6 x 9" High Quality White Polypropylene Cone
- Santoprene Surround
- Water-Resistant Construction
- 2 Way Attachable Grille Design
- 1.25 High Temperature Kapton Voice Coil
- 1 Neodymium Dome Tweeter
- 70 Oz Magnet Structure
- 300 Watts Rated Peak Power
- Frequency Response: 50Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 93dB
- Includes Custom Grills, Mounting Gasket, Installation Hardware
- Mounting Depth: 3.35"



PLMRX77 280 WATTS 7.7" 2 WAY MARINE SPEAKERS

- 7.7 High Quality White Polypropylene Cone
- Santoprene Surround
- Water-Resistant Construction
- 2 Way Attachable Grille Design
- 1 High Temperature Kapton Voice Coil
- 0.75 Neodymium Dome Tweeter
- 50 Oz Magnet Structure
- 280 Watts Rated Peak Power
- Frequency Response: 60Hz-20K Hz
- 4 Ohm Impedance
- Sensitivity: 92dB
- Includes Custom Grills, Mounting Gasket, Installation Hardware
- Mounting Depth: 2.95"



PLMR5K

180 WATTS 5.25" 2-WAY MARINE COMPONENT SYSTEM

- This Custom Kit Contains:
- One Pair 5.25 Mid Bass Speaker
- One Pair 5.25 Mid Bass Speaker:
- 5.25 High Quality Poly Carbon Cone
- Water Resistant Construction Design
- 1 High Temperature Voice Coil
- 90 Watts RMS/180 Watts Peak Power
- Frequency Response: 100Hz-7K Hz
- 4 Ohm Impedance
- Mounting Depth: 2.15"
- One Pair 1" Tweeter:
- 1" PEI Dome Tweeter
- Neodymium Magnet
- 2 Mounting Options: Flush / Surface Mount
- 50 Watts RMS / 100 Watts Peak
- Frequency Response: 1.4-24KHz
- Impedance: 4 Ohms
- One Pair Passive Crossover Network:
- Two - Way Passive Crossover
- Water Proof ABS Protective Hosing
- Direct Connect Woofer and Tweeter Wiring
- 12dB Octave Slope
- Impedance: 4 Ohm Accessories
- Includes Grills Wires Installation Hardware
- Wiring Kit
- Wiring Diagram Template
- Cut-out Size: 111 mm



PLMRB65

6.5" 200 WATT TWO-WAY BLACK WAKE BOARD SPEAKERS

- Excellent For Monitor or Surround Sound Applications
- Water Resistant Construction Design
- 6-1/2 Poly Mica Woofer Cone
- Butyl Rubber Surround
- 25Oz. Magnet Structure
- 1 Polymer Dome Tweeter
- 200 Watts Rated Peak Power
- Frequency Response: 70Hz-20KHz
- 4 Ohm Impedance
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- 1.75" Mounting Bracket Included
- Dimensions: 8.5 D x 10 L



PLMRB85

8" 300 WATT TWO-WAY BLACK WAKE BOARD SPEAKERS

- Excellent For Monitor or Surround Sound Applications
- Water Resistant Construction Design
- 8 Poly Mica Woofer Cone
- Butyl Rubber Surround
- 30 Oz. Magnet Structure
- 1 Polymer Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 60Hz-20KHz
- 4 Ohm Impedance
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- 1.75" Mounting Bracket Included
- Dimensions: 10 D x 10 L



PLMRW65

6.5" 200 WATT TWO-WAY WHITE WAKE BOARD SPEAKERS

- 4 Ohm Impedance
- Butyl Rubber Surround
- 25Oz. Magnet Structure
- Gold Plated Plug Terminals
- White Bullet-Style Cabinets
- 6-1/2 Poly Mica Woofer Cone
- 1-Inch Polymer Dome Tweeter
- Frequency Response: 70Hz-20KHz
- 200 Watts Maximum Power Output
- 1.75" Mounting Bracket Included
- USB Charger & Satellite 5V Plug
- Water Resistant Construction Design
- Full Range Water Resistant Construction
- Excellent For Monitor or Surround Sound Applications
- Dimensions: 8.5 D x 10 L



PLMRW85

8" 300 WATT TWO-WAY WHITE WAKE BOARD MARINE SPEAKERS

- Excellent For Monitor or Surround Sound Applications
- Water Resistant Construction Design
- 8 Poly Mica Woofer Cone
- Butyl Rubber Surround
- 30Oz. Magnet Structure
- 1 Polymer Dome Tweeter
- 300 Watts Rated Peak Power
- Frequency Response: 60Hz-20KHz
- 4 Ohm Impedance
- Heavy Duty Plastic Cabinet
- Gold Plated Plug Terminals
- 1.75" Mounting Bracket Included
- Dimensions: 10 D x 10 L



Marine Amplifiers



PLMRA430BT

NEW



PLMRA630BT



PLMRA830BT

BLUETOOTH MARINE AMPLIFIERS

Model	Channels	Maximum Power Output	Bridge - Ability	Size (W x H x L)
PLMRA210BT	2	400	Yes	7.9'' x 2.0'' 8.0''
PLMRA410BT	4	400	-	7.9'' x 2.0'' 8.0''
PLMRA430BT	4	1000	Yes	10.9'' x 2.7'' 12.0''
PLMRA630BT	6	2000	Yes	10.9'' x 2.7'' 19.6''
PLMRA830BT	8	3000	Yes	10.9'' x 2.7'' 21.6''

PLMRA120 2 CHANNEL 240 WATT WATERPROOF MARINE AMPLIFIER

- IC Power 120 Watts x 2 Output
- Variable Input Gain Control
- Power ON LED Indicator
- High/Low Level Input
- Remote Turn On/Off
- Speaker Output Connector
- Gold Plated RCA Inputs
- Thermal / Overload / Short Circuit Protection
- Heavy Duty Aluminum Alloy Heatsink

PLMRA200 2 CHANNEL 400 WATT BRIDGEABLE WATERPROOF MARINE AMPLIFIER

- 200 Watts x 2 Output
- 400 Watts x 1 Bridged Output
- Variable Hi/Lo Electronic Crossover Network
- MOSFET Power Supply
- Variable Input Gain Control
- Power ON LED Indicator
- Protection LED Indicator
- High/Low Level Input
- Remote Turn On/Off

PLMRA400 4 CHANNEL 400 WATT WATERPROOF MARINE AMPLIFIER

- IC Power 100 Watts x 4 Output
- Variable Input Gain Control
- Power ON LED Indicator
- High/Low Level Input
- Remote Turn On/Off
- Speaker Output Connector
- Gold Plated RCA Inputs
- Thermal / Overload / Short Circuit Protection
- Heavy Duty Aluminum Alloy Heatsink

PLMRA420 4 CHANNEL 1000 WATT WATERPROOF MARINE BRIDGEABLE MOSFET AMPLIFIER

- 250 Watts x 4 Output
- 500 Watts x 2 Bridged Output (250W x 2 + 500W x 1)
- Dual Variable Hi/Lo Electronic Crossover Network
- Dual Variable Bass Boost
- Power On LED Indicator
- LED Protection Indicator
- Blue LED Level Display
- Tri-Mode Configurable
- Variable Input Level (Gain) Control

PLMRA620 6 CHANNEL 2000 WATT WATERPROOF MARINE BRIDGEABLE MOSFET AMPLIFIER

- 4 x 100W + 2 x 250W RMS @ 4 Ohms
- 4 x 250W + 2 x 500W MAX @ 4 Ohms
- 2 x 400W + 1 x 900W MAX @ 4 Ohms Bridged
- 4 x 175W + 1 x 400W RMS at 2 Ohms
- Variable Hi/Lo Electronic Crossover Network (CH1 / CH2 and CH3 / CH4)
- In-Line Low Pass Filter For Ch5 / CH6
- Variable Bass Boost (CH5 / CH6)
- 2 Ohm Stereo Stable

PLMRA820 HIGH PERFORMANCE 3000 WATT 8 CHANNEL BRIDGEABLE MOSFET AMPLIFIER

- 6 x 100W + 2 x 250W RMS @ 4 Ohms
- 6 x 250W + 2 x 500W MAX @ 4 Ohms
- 6 x 175W + 1 x 400W RMS @ 2 Ohms
- 6 x 350W + 1 x 800W MAX @ 2 Ohms
- Variable Hi/Lo Electronic Crossover Network (Ch1 / Ch2 and Ch3 / Ch4)
- Amplifier Class: AB
- In-Line Low Pass Filter For Ch5 / Ch6
- Variable Bass Boost (Ch7 / Ch8)

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

NEW



MARINE AM/FM RADIO BLUETOOTH TRANSMITTER

PLMR90U

- AM/FM Radio
- Rear USB for MP3
- BT for audio streaming
- IPX5
- Zero current draw
- Memory back up
- Low battery indicator
- LCD display

PLMR90UW
WHITE

PLMR90UB
BLACK

PLMR90US
SILVER

PLMRBS8

8" LOW-PROFILE SUPER SLIM ACTIVE AMPLIFIED MARINE/WATERPROOF SUBWOOFER SYSTEM

- 8" Slim marine woofer
- RCA low level input
- High level input
- Green & red LED power status indicator
- Remote level control
- Phase shift switch: 0 or 180°
- Adjustable input sensitivity: 0.2V-3V
- 0 to +12dB variable Bass Boost (@45Hz)
- Low pass filter (50-150 Hz)
- Soft delay remote turn-on
- Thermal, short and overload protection circuits
- Fuse: 2x15A
- Max power: 600 Watts
- Dimension: 14.5 X9.5 X 3
- Weight: 10.5 LBS.

PLMRBS10

10" 1000 WATTS LOW-PROFILE SUPER SLIM ACTIVE AMPLIFIED MARINE/WATERPROOF SUBWOOFER SYSTEM

- 10" Slim Marine Woofer
- RCA Low Level Input
- High Level Input
- Green and Red LED Power Status Indicator
- Remote Level Control
- Phase Shift Switch : 0 or 180°
- Adjustable Input Sensitivity : 0.2V-3V
- 0 to +12Db Variable Bass Boost (@ 45Hz)
- Low Pass Filter (50-150 Hz)
- Soft Delay Remote Turn-On
- Thermal , Short and Overload Protection Circuits
- Fuse : 2 x 20A
- Max Power : 1000 Watts
- RMS Power of Amplifier : 500 Watts
- Dimension : 15 (L) x 11.8(W) x 3(H)
- Weight : 15.5 LBS



PLMRW8

8" 400 WATT MARINE SUBWOOFER

- 8 High Quality Polypropylene Cone
- Water Resistant Construction Design
- 40 oz Magnet Structure
- 1.5 High Temperature Voice Coil
- 400 Watts Peak Power
- Frequency Response: 35-3.5K Hz
- 4 Ohm Impedance
- Sensitivity: 91 dB
- Overall Diameter: 8.5
- Mounting Depth: 3.60

PLMRW10

10" 500 WATT MARINE SUBWOOFER

- 10 High Quality Polypropylene Cone
- Water Resistant Construction Design
- 50 oz Magnet Structure
- 1.5 High Temperature Voice Coil
- 500 Watts Peak Power
- Frequency Response: 25-2.5K Hz
- 4 Ohm Impedance
- Sensitivity: 93 dB
- Overall Diameter: 10.6
- Mounting Depth: 4.60

PLMRW12

12" 600 WATT MARINE SUBWOOFER

- 12 High Quality Polypropylene Cone
- Water Resistant Construction Design
- 60 Oz Magnet Structure
- 2 High Temperature Voice Coil
- 600 Watts Peak Power
- Frequency Response: 20-2.2K Hz
- 4 Ohm Impedance
- Sensitivity: 95 dB
- Overall Diameter:12.7
- Mounting Depth: 5.25

PLMRDW124

12" 1000 WATT WHITE 4 OHM MARINE SUBWOOFER

- 12 High Quality White Polypropylene Cone
- Santoprene Surround
- Water-resistant Construction
- 2 Way Attachable Grille Design
- 2 High Temperature TIL Voice Coil
- 80 Oz Magnet Structure
- 1000 Watts Rated Peak Power

- Frequency Response: 28Hz-2.5K Hz
- 4 Ohm Impedance
- Fs:30, Qms:7.406, Qes:0.699, Qts:0.639,X-Max(mm):8.9
- Vas (Cu ft)2.53
- Sensitivity: 92dB
- Overall Diameter: 12 7/8
- Mounting Depth: 5 5/8



- BNC Connector
- 300:1 Contrast Ratio
- Power Supply: DC 12V
- PAL/NTSC Auto Color System
- Video Input: RCA, VGA & VESA
- TFT LCD Wall-Mountable Screen
- Viewing Angle: 40° Up - 70° Down - 70° Left & Right
- Wireless Remote Control and In-Wall Mounting Bracket Included



IN-WALL MOUNT LCD FLAT PANEL MONITORS (HOME & MOBILE USE)

Model	Size	Resolution
PLVW9IW	9.2"	640 x 234
PLVW10IW	10.4"	640 x 480
PLVW15IW	15"	1024 x 768
PLVW17IW	17"	1280 x 800
PLVW19IW	19"	1440 x 900

WIDESCREEN HIGH RESOLUTION PORTABLE MONITOR W/ BUILT-IN MULTIMEDIA DISC, MP3, MP4 PLAYERS, USB PORT & SD CARD SLOT READERS

- ID3 Tag Compatible
- High Resolution TFT LCD Screen Display
- Supports Multi Regional PAL/NTSC
- Support USB Key/SD Memory Card
- RCA Audio/Video Line Input & Output
- Includes Full Function Remote Control
- Built-In Rechargeable Battery
- Adjustable/Foldable Viewing Angle Screen with Rotation
- Compatible with DVD, DVD-R, DVD-RW, VCD, MP3, MP4 (720P & Under), CD-R, CD-RW, JPEG, JPG, DIVX, AVI, MPG, VOB, RMVB, MOV, FLV, OGG Vorbis, ASF, DAT



Model	Size	Resolution
PDH7	7"	480 x 234
PDH9	9"	600 x 234
PDH14	14"	1366 x 768

PLMRM71W

MARINE GRADE WATER PROOF IPX7 7" LCD WIDE-SCREEN MONITOR WITH ANTI-GLARE SHIELD & UNIVERSAL STAND (WHITE COLOR)

- 7" High Resolution Color TFT/LCD Monitor
- IPX-7 Waterproof Protection for Up To 3.3 Feet Deep
- Soft Touch Control Button Layout
- 3 Source Selectable (One Cable Included) RCA Video Input with Individual Source DC Triggered Activation
- Marine Grade Water Resistant White Colored Durable Coated Housing
- Intergraded Anti Glare Visor Designed For Maximum Visibility
- Universal "U" Shaped Stand with Rotatable
- Angle Adjustment & Position Tensioner
- PAL/NTSC Automatic Compatible
- Resolution: 800 x 400
- OSD Menu Control (Color, Contrast, & Brightness)
- Full Function Wireless IR Remote Control
- Power Source DC 12-24 Volt Compatible
- Monitor Dimension: 4.76" H x 7.08" W x 0.91" D
- Monitor & Visor Dimension: 5.53" H x 7.51" W x 5.19" D



PLMRM72B

BLACK



Projectors



PRJAND820

SMART MINI PROJECTOR, BUILT-IN ANDROID COMPUTER, 1080P SUPPORT, BLUETOOTH, WI-FI, USB/SD READERS, DUAL CORE, HEADPHONE JACK, BUILT-IN MEMORY, SPEAKERS, AIR-MOUSE, TOUCHPAD, PROJECTS UP TO 120"

- Versatile Next-Generation Technology & Features
- Built-In Android Computer Operating System
- Projects Audio, Video, Images and Document Files
- Quick, Easy & Instant Multimedia Projection
- Built-in Wi-Fi for High Speed Connectivity
- Download and Access to Your Favorite Apps
- Wireless Internet Access, Web Surfing, Movies, Games & Shopping
- Built-in Bluetooth for Wireless Streaming
- Works with all of Your Favorite Devices (Smartphone, Tablet, PC, etc.)
- Built-in Rechargeable Battery
- USB Flash Drive and SD Memory Card Readers
- USB Doubles as Charge Port
- Micro USB Port
- Full High Definition Support up to 1080p
- Projection Display Size: 5€ - 120€ inches
- Built-in Speakers and Headphone Jack
- Integrated Laptop-Style Mouse Touchpad
- Touch Button Controls
- Compact Pocket Size
- Picture Customization: Adjust Image Quality, Focus, Brightness, Zoom, & More
- Manual Adjusting Focus Control
- Works for PC & Mac
- Accessories Included: Wireless RF 2.4 GHz Air Mouse Remote Control, HDMI Cable, Composite Gender Cable Connector, AC/DC Power Adapter and USB Connection Cable
- Technical Specs: Android 4.4 OS
- Dual Core 1.3 GHz CPU Processor
- 1 GB DDR3 RAM
- Built-in Memory: 8GB (NAND Flash) ROM
- Bluetooth Version: 4.0
- Bluetooth Wireless Range: 32 Feet
- Wi-Fi 802.11 b/g/n, Support DLNA
- Battery Charge Time: 3 Hours
- Brightness: 100 Lumens
- Battery Type: 6000mah, Lithium (3.7V)
- Projection Lighting Source: LED Lamp
- Maximum Micro SD Card/USB Flash Support: 32GB
- Projection Display Source: 0.3" DMD Tech
- Maximum Output Resolution: 854 x 480
- Audio Output: 1W+1W
- Display Aspect: 16:9
- Contrast: 1000:1
- USB and Micro USB Power: 5V 0.5A
- Recommended Viewing Distance: Between 9 - 16ft
- File Compatibility Includes: AVI, MOV, MP4, DOC, XLS, PPT, PDF, MP3 and More
- Power: 110V AC - 220V AC with 113.5V DC 0.8A Power Supply



HD Mini Hi-Res Smart Projector with Built-in Android CPU, High Speed Wi-Fi Wireless Internet, 3D & Blu-ray Compatible, 1080p Support, Projection Size up to 115" Inches

PRJAND805



- Compact Size Projects Big Home Theater Video
- Project Your Favorite Audio, Video and Images Quickly and Easily
- High Speed Wi-Fi for Wireless Internet Access, Web Surfing, Movies, Games & Shopping
- Connect to TV, PC, Laptop, Gaming Console, DVD Player, Smartphone, etc.
- Built-In Android Operating System
- Project in 3D & Blu-ray 7.1 Compatible
- HD High Resolution Support up to 1920 x 1080 (1080p & 1080i)
- Input Sources: HDMI1, HDMI2, AV, RGB, YpBPr, Android Display
- Micro SD Memory Card & USB Flash Readers
- Aspect Ratio: Native 16:10 (Support 4:3)
- Projects Video from 1€™ - 10€™ Feet Away
- Projection Display Size: 20€ - 115€ inches
- Built-in Stereo Speakers and Headphone Jack
- Picture Customization: Adjust Image Quality, Focus, Brightness, Zoom, 3D Settings & More
- Includes Remote Control, RGB, HDMI Cable, AC-DC, Power and Composite Adaptor Cables
- Works for PC & Mac
- Technical Specs
- 1.2 GHz CPU Processor
- 512 MB DDR3, 4GB Flash Memory
- Android 4.0 OS
- Wi-Fi: 802.11 b/g/n
- USB Device: 5V 0.5A
- Contrast Ratio: 10000:1
- Audio Output: 1W+1W
- Upward Viewing Ratio: 100%
- Manual Adjusting Focus Ring
- Recommended Resolution: 1280x800
- Recommended Viewing Distance: Between 9€™ 16ft
- Ultra Bright 1200 Lumens LED 30,000 Hour Life Lamp

PRJAND615

HD Hi-Res Smart Projector with Built-in Dual Core Android CPU, High Speed Wi-Fi Wireless Internet, 1080p & Blu Ray Disc Support, Projection Size up to 120" Inches

- Built-in Dual Core Android Computer
- Compact Size Projects Big Home Theater Video
- Project Your Favorite Audio, Video and Images Quickly and Easily
- Wireless Internet Access, Web Surfing, Movies, Games & Shopping
- Connect to TV, PC, Laptop, Gaming Console, DVD Player, Smartphone, etc.
- High Speed Wi-Fi Connection
- Blu Ray Disc Support
- Hard-Wired: Connect via Ethernet and WLAN
- Inputs: Component Video (YpBPr), VGA (RGB), HDMI x 2, USB x 2, TV (Analog)
- Audio RCA (L/R) Input & Output Connector Jacks
- USB Flash Drive & SD Memory Card Slot Readers
- USB Slot Doubles as Charge Port
- Pictures Display Size: 60" - 120" inches (Adjustable)
- Dual Built-in Stereo Speakers
- Image Rotation Ability: 360 Degree
- Universal Threaded Mounting Inserts
- Standard & Upside-Down Mount Compatible
- User-Friendly Control & Navigation Interface
- HD High-Res 1080p Support
- Top Panel Button Control
- Manual Focus Lens
- Includes Lens Dust Cover, Cleaner, Remote Control, Spare Fuse, A/V & Power Cables
- Picture Settings: Brightness, Contrast, Hue, Sharpness, Temperature, Mode
- Technical Specs: Processor: A20 Dual Core
- Android O.S. Version: 4.2.2
- Memory: 1GB RAM (4GB NAND Flash)
- Wi-Fi: 2.4 GHz 802.11 b/g/n
- Wi-Fi Security: WPA, WPA2, WEP, IEEE & More
- LCD + LED Lamp Source Projection
- Native Resolution: 1280 x 780 Pixels
- Projection System: 5.8" inch LCD + LED Lamp
- Lamp Power: 200 Watt (20000+ Hour Life)
- Brightness: 3000 Lumens
- Contrast: 2000:1
- Refresh Rate: >75Hz
- 16.7 Million Full Color Picture Output
- Scale Ratio: 16:9 and 4:3
- Keystone: ±15 Degrees



WIDESCREEN PROJECTOR WITH UP TO 100" INCH VIEWING SCREEN, BUILT-IN SPEAKERS, 1080P HD SUPPORT, (2) HDMI INPUTS, PiP CAPABILITY

PRJLE33



- LED Lamp for Brightness and Clarity
 - Picture Projection Size: Adjustable from 60" to 100" Inches
 - Supports 720p and 1080p Inputs
 - Inputs: (2) x HDMI, Component Video (YpPr), VGA, S-Video
 - Audio Connector Jacks: RCA Inputs and Outputs
 - Connect External Audio and Video Devices
 - PiP (Picture-in-Picture Capability)
 - Built-In Dual Stereo Speakers
 - Trapezoidal Correction with Adjustable Keystone
 - Horizontal and Vertical Picture Flip for Wall/Ceiling Mounting
 - Projector User Interface Menu Screen
 - Touch Button Controls
 - Manual Focus Lens
- Includes Remote Control, Power Cable, AV Cable, VGA Cable, Spare Fuse
 - Up To 15 Degrees Trapezoidal Correction- Technical Specs: 5" TFT LCD Panel
 - Lamp Power: 100 Watt
 - Lamp Life: up to 20,000 Hours
 - Contrast Ratio 1000:1
 - Native Output Resolution: 800x600
 - TV Brightness: 2500 Lumens (ANSI)
 - Lens: Aperture 3.8, 185mm Focus
 - Power: 110-240V / 50-60Hz
 - Dimensions (L x W x H): 13.0" x 9.7" x 4.5"

PRJLE55

LED WIDESCREEN PROJECTOR WITH UP TO 100-INCH VIEWING SCREEN, BUILT-IN SPEAKERS & SUPPORTS 1080P

- Contrast: 800:1
 - Manual Focus Lens
 - Aspect Ratio: 16:9 or 4:3
 - Illumination Level: 1800 Lumen
 - Projection Lighting Source: LED
 - Display Source: 7" Single LCD Panel
 - Viewing Screen Size: 60"- 100" Inches
- Working Voltage: AC 110V - 220V 50/60HZ
 - Built-in Speaker & Earphone Audio Output
 - Supports International Signal Systems & Languages
 - Output Resolution: 800 x 480 Maximum Support 1080p
 - Interface: AV(RCA), HDMI, VGA, S-Video, Component Video, Audio Inputs & Outputs
 - Dimensions: 17.16"H x 11.25"W x 4.92"D



PYLE PRJLE78 HD HOME THEATER MULTIMEDIA DIGITAL LED PROJECTOR, 1080P SUPPORT, 2800 LUMEN BRIGHTNESS, USB FLASH READER, EREADER TEXT PROJECTION ABILITY

PRJLE78



- Hi-Resolution Multimedia Projector
 - High Definition HD 1080p Support
 - Projects Image Sizes: 50 to 200 inches
 - USB Flash Drive Memory Reader
 - Projects Images, Videos and Plays Music
 - e-Reader Ability: Project Books via Digital Text Files
 - Works with All of Your Favorite Media Files
 - Friendly Multimedia User Control Interface
 - Video Inputs: YpbPr, VGA, (2) x HDMI and (2) x USB
 - Audio Input: Stereo RCA
 - Audio Output: Stereo RCA
 - Built-in Dual Stereo Speakers
 - Easy Touch Button System Controls
 - Keystone Adjustment: + 15 degrees
 - Supports International Languages
 - Contrast, Brightness, Color, Sharpness Adjustable
 - Full Function Remote Control Included
 - Manual Focus Lens
- Technical Specs: Projection
- Source: LED Lamp, 5.8" TFT LCD Panel
 - Native Resolution 1280 x 800 Pixels
 - Brightness: 2800 Lumens
 - Contrast Ratio: 1500: 1
 - File Compatibility: .avi, .mpg, .mov, .mp3, .wma, .m4a, .jpg, .bmp, .png, .dat, .rmvb,
 - Aspect Ratio Selectable, 4:3 or 16:9
 - Lens Aperture: 3.8
 - Lens Focus: 185mm
 - Lamp Power: 150 Watts
 - LED Life: 50,000 hours
 - Speaker Power: 5 Watt x 2
 - Power Consumption: 180 Watts
 - Power: AC 110-240 Volts/50-60 Hz
 - Dimensions: 13.2 x 10.4 x 4.6 inches
 - Weight: 7.7 lbs.

PRJLE82H

HD LED PROJECTOR WITH 1080P SUPPORT BUILT-IN SPEAKERS & USB FLASH DRIVE READER

- Hi-Resolution Picture Output
 - Screen Size: Adjustable 60" - 120" Inches
 - LED Projection Lighting Source
 - Built-in Stereo Speakers
 - Supports up to 720p & 1080p
 - USB Flash Memory Drive Reader
 - Supports All Your Favorite Digital Video, Picture and Audio Files
 - Interface: AV(RCA), HDMI, USB, VGA, RCA
 - AV, YPbPr HD, USB Connector Jacks
 - Includes Remote Control, Lens Dust Cover, Power, VGA and RCA Cables
 - Supports International Signal Systems & Languages
- Technical Specs:
- Contrast: 1200:1
 - Lamp: LED 140 Watt
 - Aspect Ratio: 16:9 or 4:3
 - Native Resolution: 1280 x 768
 - Illumination Level: 2,700 Lumen
 - 3.8 x 190mm Manual Focus Lens
 - File Compatibility: MPG, MPG-1, MPG-2, MPG-4, AVI, MP4, DIV, TS, TRP, MKV, MOV, WMV, RM, RMVB, JPEG, BMP
 - Working Voltage: AC 110V/240V - 50/60Hz
 - Power Consumption: 160 Watt
 - Unit Dimensions: 13.7" x 10.8" x 5.5"
 - Weight: 6.6 lbs.



PRJD901

WIDESCREEN LED PROJECTOR WITH UP TO 140-INCH VIEWING SCREEN, BUILT-IN SPEAKERS, USB FLASH READER & SUPPORTS 1080P

- Contrast: 1,000:1
- 3.8 x 200mm Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Illumination Level: 2,200 Lumen
- Built-in USB Flash Drive Reader
- Screen Size: Adjustable 50" - 140" Inches
- LED Projection Lighting Source
- Built-in Stereo Speakers
- Native Resolution: 640 x 480 - Support 720p, 1080p
- Interface: AV(RCA), HDMI x 2, USB x 2, VGA, RCA AV, YPBPR HD, & Audio Line Output
- USB Support (Video/Picture/Audio): MPG, MPG-1, MPG-2, MPG-4, AVI, MP4, DIV, TS, TRP, MKV, MOV, WMV, RM, RMB, JPEG, BMP
- Lamp: LED 100 Watt, 50,000 Hour Life
- Includes Wireless Remote Control
- Supports International Signal Systems & Languages
- Working Voltage: AC 100V/240V 50/60HZ
- Includes Remote Control, Power Cable, VGA Cable, RCA Cable and Lens Dust Cover
- Power Consumption: 140 Watt
- Unit Dimensions: 12.99" x 10.12" x 4.13"



WIDESCREEN LED PROJECTOR WITH UP TO 140-INCH VIEWING SCREEN, BUILT-IN SPEAKERS, USB FLASH READER & SUPPORTS 1080P

PRJD907



- Built-in Speakers
- Projection Size: 50 - 140" inch
- Resolution: 800 x 480 (Supports 1080p)
- Inputs: Component Video (YpbPr), VGA, HDMI, USB, Audio (Stereo)
- Lens: 3.8 (200mm) Manual Focus
- LED Projection Lighting Source
- Lamp: 100 Watt (Color Temperature: 9300K)
- 50,000 + Hour Lamp Life
- Includes Remote Control, Power Cable, VGA Cable, RCA Cable and Lens Dust Cover
- Contrast Ratio: 1000:1
- Brightness: 2,000 Lumen
- Multi Language Support
- File Compatibility: (AVI, MPG, MOV, MKV, MP3, WMA, M4A, JPG, JPEG, PNG & more)
- Dimensions: 14.5 x 10.2 x 5.3" inches
- Voltage: AC 100-240V / 50-60Hz

PRJLE84H

HIGH-DEFINITION WIDESCREEN PROJECTOR WITH UP TO 120-INCH VIEWING SCREEN, BUILT-IN SPEAKERS, USB FLASH READER & ACCEPTS 1080P SIGNAL

- Contrast: 1200:1
- Manual Focus Lens
- Aspect Ratio: 16:9 or 4:3
- Illumination Level: 1800 Lumen
- Built-in USB Flash Drive Reader
- Screen Size: 60" - 120" Inches
- Single Panel Projection Lighting Source
- Built-in speaker & Earphone Audio Output
- Signal System: Supporting International System
- Supports International Signal Systems & Languages
- Output Resolution: 1280 x 800 - Maximum Support 1080p
- Interface: AV(RCA), HDMI, VGA, YPBPR, HD, USB, & AUDIO IN
- Working Voltage: AC 110V 50/60HZ



MULTIMEDIA HOME THEATER MINI PROJECTOR WITH HDMI, AV, VGA INPUTS, SD MEMORY CARD AND USB FLASH READERS, WORKS WITH LAPTOP, PC, DVD, GAMING CONSOLES, ETC.

PRJG45



- Small, Portable, Light Weight & Easy Operation Projector
- Perfect for All Your Home Theater Needs
- Connects Directly to Your PC Laptop, DVD, Gaming Console & More
- Multi-Function Interface: VGA, AV, HDMI Inputs
- SD Memory Card & USB Flash Drive Readers
- Bright & Long Lasting LED Lamp
- Picture Size Range: 17" - 67" inches
- Projection Distance: 3.3€™ - 12.5€™ feet
- Manual Adjusting Focus
- Native Resolution: 320 to 240
- Brightness: 40 Lumens
- Contrast Ratio: 300:1
- Headphone Jack
- AC Adapter Power: 12V, 2A
- Low Power Consumption: 41 Watts
- Powered By 12V DC or 110V - 220V AC
- 12V Vehicle Power Supply Supported
- Projector Size: 5.0" x 5.0" x 2.2" inches
- Weight: 1.01 lbs.



UNIVERSAL FLOOR STANDING PORTABLE FOLD-OUT ROLL-UP TRIPOD MANUAL PROJECTOR SCREEN

- Matte White Projector Screen
- Lightweight, Portable and Durable
- Premium Viewing Surface Matte Fabric
- Fold-Out Steel Tripod and Roll-Up Screen Style
- Perfect Design for Traveling / Mobile Presentations
- Black Masking Border for Optimum Image Focus and Alignment
- Allows for Clear and Vivid Image / Video Capture
- Simple Installation and Operation
- Aluminum Case Screen Housing
- Matte Fabric Thickness: 4.5mm
- Auto-Locking Pull Feature
- Quick and Easy Setup
- Perfect for the Home or Office

Model	Size	Screen Dimensions
<i>PRJTP72</i>	72''	43.3'' x 57.1''
<i>PRJTP84</i>	84''	50.0'' x 66.9''
<i>PRJTP100</i>	100''	59.8'' x 79.9''



UNIVERSAL 72-INCH ROLL-DOWN PULL-DOWN MANUAL PROJECTION SCREEN

- Matte White Projector Screen
- Auto-Locking Roll Down Feature
- Adjustable Screen Height: Screen can be Adjusted/Stopped at any Point
- Projection Viewing Surface Easily Pulls Down and Retracts
- Black Masking Border for Optimum Image Focus and Alignment
- Allows for Clear and Vivid Image and Video Capture
- (2) Top Loops that Hook onto Screws, Nails, Bolts etc.
- Easy Operation and Durable Construction
- Designed for Ceiling and Wall Mounting
- Premium Viewing Surface Matt Fabric
- Simple Installation and Operation
- Perfect for the Home or Office
- Pull-Down and Project
- Matte White Projection Fabric Thickness: 4.0mm

Model	Size	Screen Dimensions
<i>PRJSM7206</i>	72''	42.5'' x 56.6''
<i>PRJSM9406</i>	84''	50.3'' x 67.3''
<i>PRJSM1006</i>	100''	59.8'' x 79.9''



UNIVERSAL FLOOR STANDING PORTABLE ROLL-UP PULL-OUT MANUAL PROJECTOR SCREEN

- Matte White Projector Screen
- Lightweight, Portable and Durable
- Fold-Out and Roll-Up Screen Style
- Premium Viewing Surface Matte Fabric
- Perfect Design for Traveling / Mobile Presentations
- Black Masking Border for Optimum Image Focus and Alignment
- Allows for Clear and Vivid Image and Video Capture
- Double-Sided Viewing Screen Options
- Simple Installation and Operation
- Aluminum Case Screen Housing
- Auto-Locking Pull Feature
- Quick and Easy Setup
- Perfect for the Home or Office

Model	Size	Screen Dimensions
<i>PRJSF7208</i>	72''	42.9'' x 57.8''
<i>PRJSF1009</i>	100''	59.8'' x 79.9''



UNIVERSAL PROJECTOR CEILING MOUNT KIT WITH TELESCOPING HEIGHT AND ANGLE ADJUSTMENT (WHITE)

PRJCM3

- Compatible with virtually any standard projectors
- Versatile mount extension and angle adjustment configurations
- Securely holds devices up to 17.63 lbs. (8.0Kg)
- Telescoping Height Adjustment: 11.81€™™ - 25.60€™™
- Conceals and protects cables
- Perfect for the home or office
- Includes mounting hardware and accessories
- Size adjustable to ensure projector compatibility
- Designed not to interfere with ventilation or cooling fans
- Horizontal, vertical and height (angle and tilt) adjustments
- Durable and polished mounting assembly kit

PRJCM6

UNIVERSAL PROJECTOR CEILING MOUNT BRACKET WITH ROTATION & TILT ADJUSTMENTS ASSEMBLED & QUICK RELEASE MECHANISM (WHITE)

- Universal mounting patterns
- Compatible with virtually any standard projectors
- Securely holds projectors weighing up to 30 lbs. (13.6 Kg)
- Unique mounting mechanism allows for angled ceiling installations (up to 60 degrees)
- Quick release mechanism for easy installation and fast device release
- Internal cable management system conceals and protects wires
- Perfect for the home or office
- Pitch and Roll Adjustment: +/- 20 degrees
- Designed not to interfere with ventilation or cooling fans
- Durable and polished mounting assembly kit (Color: White)
- Unit Dimensions: 13.81" W x 13.81" D x 8.14" H



UNIVERSAL TAMPER-PROOF ANTI-THEFT SECURE PROJECTOR HOLDER AND CEILING MOUNT WITH ROTATION AND TILT ADJUSTMENTS

PRJCM12LK



- Universal Mounting Patterns
- Compatible with Virtually All Projectors
- Includes Anti-Theft Padlock Security
- Perfect for the Home, Office or Classroom
- Securely Hold Projectors up to 44 lbs. (20kg)
- Rotates 360° Degrees in All Directions
- Tilts 10° Degrees Up and Down
- Provides Safe, Durable & Reliable Projector Mounting
- Does not Interfere with Ventilation or Cooling Fans
- Includes All Necessary Mounting Hardware, Brackets and Padlock

PRJWM8

UNIVERSAL PROJECTOR HOLDER WALL MOUNT WITH TELESCOPING LENGTH, ANGLE AND TILT ADJUSTMENT

- Universal Mounting Patterns
- Compatible with Virtually All Projectors
- Securely Holds Devices up to 44 lbs. (20kg)
- Telescoping Length Adjustment
- Length Mounting Arm Extends from Wall: 16.9" €" 25.6" inches
- Safely Conceals and Protects Cables for a Clean Installation
- Perfect for the Home, Office or Classroom
- Horizontal, Vertical (Angle and Tilt) Adjustments
- Durable and Polished Mounting Assembly Kit
- Does not Interfere with Ventilation or Cooling Fans
- Provides Safe, Durable & Reliable Projector Mounting
- Includes All Necessary Mounting Hardware and Brackets



PHDMIKT1

HDTV AUDIO/VIDEO CABLE CONNECTION KIT COMPATIBLE W/ PLASMA, LCD/LED/DLP/ DVD AND AUDIO PLAYERS

- 1@6ft AV Cable (3r-3r), Gold Plated
- 1@6ft Component Cable(3r-3r), Gold Plated
- 1@6ft Audio Cable (2r-2r), Gold Plated
- 1@6ft HDMI Cable, Gold Plated
- 1@6ft Toslink Cable
- 1@6ft S-Video Cable, Gold Plated



PHDMIKT2

HDTV CLEANING KIT W/ 2 HHDMI HIGH DEFINITION CABLES/COMPONENT VIDEO HIGH DEFINITION CABLES/OPTICAL AUDIO HI-DEF CABLE

- 2@ 6ft Gold HDMI Cable, Gold Metal Plug, With Braids
- 1@ 6ft Gold Component Cable, Gold Metal Plugs, With Braids
- 1@6ft Toslink Cable, Gold Metal Plugs, With Braids
- 1@Screen Cleaner With Clothes




Mounts & Stands




PLEDTKIT1
PLEDTKIT2
PLEDTKIT3



PSPSW116S



PSW111



PSW101CM



PSW801T

PLEDTKIT1 SUPER SLIM LOW-PROFILE TV MOUNT FITS 26"-42" INCH TV, HDMI CABLE, AND SCREEN CLEANER KIT

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 12.8mm From The Wall
- Easy Lock and Release System
- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 400x400mm
- For 26 - 42 Flat Panel TV
- Supports Up To 80 Lbs.

PLEDTKIT2 LOW PROFILE TV WALL MOUNT FOR MOST 32" - 60" LCD, LED, PLASMA, HDTV FLAT PANEL TV , UNIVERSAL WALL MOUNTS BRACKET

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 0.5 Inches From The Wall
- Easy Lock and Release System
- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 600x400mm
- For 32 - 60 Flat Panel TV
- Supports Up To 125 Lbs.

PLEDTKIT3 SUPER SLIM PROFILE TV WALL MOUNT FIXED FOR 32" TO 60" INCH LED OR LCD TVs HDMI CABLE, AND SCREEN CLEANER INCLUDED

- HDMI Cable
- High Definition Screen Cleaner
- Super Slim Flat Panel TV Wall Mount
- Only 0.5 Inches From The Wall
- Easy Lock and Release System
- Including Integrated Bubble Level
- Fits VESA Size from 100x100mm to 800x600mm
- For 32 - 60 Flat Panel TV
- Supports Up To 150 Lbs.

PSPSW116S 23"-37" FLAT PANEL TV ARTICULATING WALL MOUNT

- Universal Flat Panel Flush Mount For 23" To 37" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 165.34 Pounds
- Interface Size: 18.90" X 13.70"
- Distance to the Wall: 3.74"-10.43"
- Dimensions: 20.79" X 13.70" 10.43"

PSW101CM 36" - 65" UNIVERSAL FLAT PANEL TILTING TV WALL MOUNT


- Universal mount fits virtually any 36 to 65 screen
- Compatible with LCD, LED, plasma & other flat panel screens
- One touch tilt for effortless positioning and screen adjustment
- Universal brackets easily hook onto wall plate for fast installation
- Up to 12 of horizontal adjustment after screen is mounted
- Mounts to wood, metal studs, concrete cinder blocks
- Mounting hardware included
- Weight Capacity: 132.27lbs (60kg)
- Interface size: 31 x 24
- Distance to the wall 3.2
- Viewing adjustment: 5°-15°

PSW111 31"-55" FLAT PANEL ARTICULATING TV WALL MOUNT

- Universal Design Fits Virtually Any 32-55 Display
- Universal Brackets Easily Hook onto the wall Plate for Fast Installation
- Built-In Bubble Level in Wall Plate
- Max Load: 150 Lbs
- 0-12° Tilt Adjustment

PSW801T 23" - 50" FLAT PANEL TILTING WALL MOUNT WITH BUILT IN LEVEL

- 23" to 50" Flat Panel Tilted Mount
- Universal Brackets Easily hook Onto the Wall Plate for Fast Installation
- Tilt and Leveling Adjustments
- Max Load:165 Pounds
- Vesa: 23.6" x 15.7"
- Distance To The Wall: 2.8"
- Gross/Net Weight: 12.3/9.0 Pounds
- Dimensions: 26.4" x 19.6" x 2.76"




PSW113




PSW117ET1




PSW701F



PSW228



PSW229



PSW320MF



PSW321MT



PSW701S

PSW113 32"-55" FLAT PANEL TILTING TV WALL MOUNT

- Universal Design Fit Virtually Any 32-55 Display
- Brackets Easily hook onto Wall Plate for Fast Installation
- Built-In Bubble Level in Wall Plate
- MAX Load: 150 Lbs
- 0-12 ° Tilt Adjustment

PSW117ET1 36" TO 65" FLAT PANEL TILTED TV WALL MOUNT

- Universal Mounts Fits Virtually Any 36To 65Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate For Fast Installation
- Tilt And Leveling Adjustments
- Built In Leveler System
- Max Load 132lbs
- Vesa: 31.5 X 23.6
- Distance To The Wall: 3.3
- Product Dimension: 33.3 X 24.8 X 3
- Package Dimension: 34.8 X 12.6 X 9.1
- Gross/Net Weight:39.7/30.9 lbs

PSW701F 23" - 50" FLAT PANEL FLUSH WALL MOUNT WITH BUILT IN LEVEL

- 23" to 50" Flat Panel Flush Mount
- Adjustable Pivot Points Provide Tension Control
- Pre-Assembled for Quik Intallation
- All Necessary Hardware Included
- Max Load: 165 Pounds
- Vesa: 23.6" x 15.7"
- Distance to the Wall: 1.2"
- Gross/Net Weight: 8.8/5.5 Pounds
- Dimensions: 26.4" x 16.9" x 1.2"

PSW228 23" TO 36" FLAT PANEL LCD/LED TV TILTING WALL MOUNT

- universal Mounts fits Virtually any 23 to 36 Plasma or LCD Flat Panel Screen
- Universal Brackets Easily Hook onto The Wall Plate
- For Fast Installation
- Tilt and Leveling Adjustments
- Max load:88Lbs
- Vesa: 19.7 x 15.7
- Distance to the Wall 3.3
- Product Dimension: 21.5 x 16.9 x 3.3

PSW229 36" TO 55" FLAT PANEL LCD/LED TV TILTING WALL MOUNT

- universal Mounts fits Virtually any 36 to 65 Plasma or LCD Flat Panel Screen
- Universal Brackets Easily Hook onto The Wall Plate
- For Fast Installation
- Tilt and Leveling Adjustments
- Max load:132 Lbs
- Vesa: 31.5 x 23.6-31.5 x 15.7
- Distance to the Wall 3.3
- Product Dimension: 33.3 x 24.8 x 3.3

PSW320MF UNIVERSAL FLAT PANEL LCD/LED Tv WALL MOUNT FLUSH FOR 42" TO 65" SCREENS

- Universal Flat Panel Flush Mount for Screens
- Universal Brackets easily hook onto Installation
- Laveling Adjustments
- Max Load: 132 Lbs
- Vesa: 31.5 x 23.6
- Distance to the Wall: 1.0
- Product Dimension: 37.6 x 24.8 x 1.0
- Package Dimension:38.5 x8.5 x6.7
- Gross/ Net Weight: 28.6/21.6Lbs

PSW321MT UNIVERSAL TILTING FLAT PANEL TV WALL MOUNT FLUSH FOR 42" TO 65" SCREENS


- Universal Tilting Flat Panel Flush Mount for 42 to 65 Screens
- Universal Brackets easily hook onto the Wall Plate for fast Installation
- Laveling Adjustments
- Max Load: 165 Lbs
- Vesa: 31.5 x 23.6
- Distance to the Wall: 3.3
- Product Dimension: 37.6 x 24.8 x 3.3

PSW710S 14" TO 37" FLAT PANEL TRIPLE ARM ARTICULATING TLIT & SWIVEL TV WALL MOUNT

- Universal mounts fits virtually any 14to 37 Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Max load:55 lbs
- Vesa: 7.8 X 7.8 / 7.8X 3.9
- Distance to the wall:2.8- 15.6
- Product dimension: 9.8x 9.8x 2.8
- Package dimension: 12 x 10.6x 3.1



PCTVM15



PSW323ST



PSW445T




PSW446F




PSW448F



PSW578UT



PSW588UT



PSW974S

PSW323ST UNIVERSAL TILTING FLAT TV PANEL FLUSH FOR WALL MOUNT 26" TO 42" SCREENS

- Universal Tilting Flat Panel Flush Mount Screens
- Universal Brackets easily hook onto the Installation
- Leveling Adjustments
- Max Load: 132 Lbs
- Vesa: 19.7 x 15.8
- Distance to the Wall: 3.3
- Product Dimension: 25.8 x 16.9 x 3.3
- Package Dimension: 26.8 x 8.5 x 2.0
- Gross/ Net Weight: 9.9/7.3 Lbs

PSW445T 14" TO 37" FLAT PANEL TILTABLE TV WALL MOUNT

- Universal mount fits virtually any 14 to 37TV
- Compatible with LCD, LED, plasma, and other flat panel screens
- Universal brackets easily hook onto the wall plate for fast installation
- Tilt and Leveling Adjustments
- Built In Leveler System
- Max Load: 77.2lbs
- Vesa: 7.87 x 7.87
- Distance To The Wall: 2.7
- Product Dimension: 9.4 X 9.1 X 2.7
- Package Dimension: 18.3 X 10.6 X 9.1

PSW446F 10" TO 32" FLAT PANEL TV WALL MOUNT

- Universal mount fits virtually any 10To 32 TV
- Compatible with LCD, LED, plasma and other flat panel screen
- Universal wishbone fixed mount
- Universal brackets easily hook onto the wall plate For fast installation
- Portrait or landscape viewing
- Built-in leveler system
- Max Load: 77lbs
- Vesa: 7.87 x 7.87
- Distance To The Wall: 1
- Product Dimension: 13.6 X 10.7 X 1

PSW448F 23" TO 36" FLAT PANEL TV WALL MOUNT

- Universal Mounts Fits Virtually Any 23To 36Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto the Wall Plate
- For Fast Installation
- Built In Leveler System
- Max Load: 132lbs
- Vesa: 15.7x11.8
- Distance To The Wall: 1
- Product Dimension: 17.3 X 13 X 1

PSW974S 26" TO 42" FLAT PANEL ARTICULATING TV WALL MOUNT

- Universal Mounts Fits Virtually Any 26 To 42 Plasma Or LCD Flat Panel Screen
- Universal Brackets Easily Hook Onto The Wall Plate
- For Fast Installation
- Tilt and Leveling Adjustments
- Built In Leveler System
- Max Load 88lbs Vesa: 15.7 X 11.8
- Distance To The Wall: 4.9-14.8
- Product Dimension: 17.3 X 13.2 X 4.9

PSW578UT 23" TO 37" FLAT PANEL ULTRA-THIN TV WALL MOUNT

- Universal Mount Fits Virtually any 23 To 37 Plasma or LCD Flat Panel Screen
- Universal Brackets easily hooks onto the wall plate
- for fast Installation
- Max Load: 77.21lbs
- Vesa: 15.7 x 11.8
- Distance to the wall: 0.6
- Product Dimension: 15.7 x 13.0 x 0.6
- Package Dimension: 19.2 x 8.2 x 1.8

PSW588UT 32" TO 50" FLAT PANEL ULTRA-THIN TV WALL MOUNT

- Universal mount fits virtually any 32 To 50 TVs
- Compatible with LCD, LED, plasma and other flat panel screens
- Universal Brackets easily hooks onto the wall plate for fast installation
- Max Load: 99 lbs
- Vesa: 23.6 x 15.7
- Distance to the wall: 0.6
- Product Dimension: 23.6 x 16.9 x 0.6

PCTVM15 UNIVERSAL TILT AND SWIVEL ADJUSTABLE TV CEILING MOUNT BRACKET FITS VIRTUALLY ALL 23" - 42" TVs (FLAT PANEL HDTV, LCD, LED, PLASMA AND SMART TVs)

- Fits Virtually Any 23" to 42" inch Television
- Universal VESA Mount Standard Compatibility
- Bracket Design Mounts to Ceilings
- Ceiling to TV Height: 19" to 33" inches
- Tilt Adjustable: from -20 to +20 Degrees
- Swivel Adjustable: 180 Degrees
- Provides Safe, Durable & Reliable TV Mounting
- Load Capacity: 66 lbs. (30 kg.)
- Includes All Necessary Mounting Hardware and Brackets



PCMTV25



PSXPT003M



PSWLB273



PSWLB371



PSWLB372



PSWLB243



PSWLE54



PSWLE59

PSXPT003M 36" - 55" FLAT PANEL TV TILTING WALL MOUNT

- Universal Mounts fits virtually any 36 to 55 plasma/ LCD flat Panel Screen
- One Touch tilt for effortless positioning and adjustment of the screen
- Up to 12 of horizontal adjustment after screen is mounted
- Mounts to wood/Metal studs, concrete cinder blocks
- Universal brackets easily hook onto wall plate for fast installation
- Weight Capacity: 165lbs (75kg)
- Interface size: 28 x 19
- Distance to the wall 2.95

PSWLB273 15"- 32" FLAT PANEL DUAL ARM CANTILEVER TV WALL MOUNT

- Universal Mounts Fits LCD Display up to 32
- Built-In Leveler System
- VESA Standard: 50 x 50 mm, 75 x 75mm, 100 x 100mm
- MAX Load: 44 Lbs
- 180° Swivel Left and Right

PSWLB371 10" - 24" UNIVERSAL TRIPLE ARM SWIVEL/ARTICULATING LCD TV WALL MOUNT

- Universal Flat TV Mount For 10" To 24" Screens
- Universal Brackets Easily Hook Onto Wall Plate
- Adjustable Pivot Points Provides Tension Control
- Pre-assembled For Quick Installation
- Weight Capacity 50Lbs
- Interface Size 4 x 4

PSWLB372 10"- 24" DUAL ARM FLAT PANEL TV ADJUSTABLE FULL MOTION ARM WALL MOUNT

- Universal Flat Panel Flush Mount For 10" To 24" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Distance to the Wall: 3.14" - 9.84"
- Dimensions: 9.8" X 7.09" X 3.94"

PSWLB243 10" TO 24" FLAT PANEL ARTICULATING TV WALL MOUNT

- Universal mounts fits virtually any 10To 24 Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Built in leveler system
- Max load: 33lbs
- Vesa: 3.94x3.94
- Distance to the wall: 3.1
- Product dimension: 4.53x4.92x3.07

PSWLE54 23"-46" FLAT PANEL LCD TV WALL MOUNT

- Universal mounts fits virtually any 23 To 46 Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall Plate for fast installation
- Steel construction keeps your television safe And secure
- Built in leveler system
- Max load:66 lbs
- Vesa: 15.75 — 15.75
- Distance to the wall: 0.98
- Product dimension: 17.52—16.93—0.98
- Package dimension: 19.09—5.12—12.21

PSWLE59 32"-55" FLAT PANEL LOW PROFILE TILT LED/LCD TV WALL MOUNT


- Extremely ultra-thin tilt mounts for LED or LCD TV
- Steel construction keeps your television safe And secure
- Space-saving design keeps your TV close to the Wall
- Max load:66 lbs
- Vesa: 23.63— 19.69 and 3.94—3.94
- Distance to the wall:1.10
- Product dimension: 29.33—20.87—1.10
- Package dimension: 31.89—8.27—10.36

PCMTV25 UNIVERSAL FOLDING HIDE-AWAY TV CEILING MOUNT BRACKET FITS VIRTUALLY ALL 17" - 37" TVs (FLAT PANEL HDTV, LCD, LED, PLASMA AND SMART TVs)

- Fits Virtually Any 17" to 37" inch Television
- Mount on Flat or Pitched Ceilings
- Universal VESA Mount Compatible
- Folds to Hide-Away Screen When Not in Use
- Folds: 0° - 90° Degrees
- Provides Safe, Durable & Reliable TV Mounting



PSXPT006



PSW521XLF




PSW531XLT




PSW611MUT



PSW651LT1



PSW658MF



PSW661LF1



PSW602AT

PSXPT006 14"- 37" FLAT PANEL TV TILTING WALL MOUNT

- Universal Flat Panel Flush Mount For 14" To 37" Screens
- Universal Brackets Easily Hook Onto Wall Plate for Fast installation
- Weight Capacity: 77.16 Pounds
- Interface Size: 9.84" x 11.81"

PSW521XLF UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 50" TO 80" TVs INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL TVs

- Universal brackets easily hook onto the wall plate for fast installation
- Built in leveler system
- Max load: 176lbs
- Vesa: 31.5x23.6
- Distance to the wall: 1.9

PSW531XLT UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 50" TO 80" TVs INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL TVs

- Universal brackets easily hook onto the wall plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 176lbs
- Vesa: 31.5x23.6
- Distance to the wall: 3.1
- Product dimension: 40.2x24.8x3.1
- Package dimension: 41.9x13.7x3.5

PSW611MUT UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 32" TO 47" TVs INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL TVs

- Universal mounts fits virtually any 32 To 47 Smart / 3D / Interactive TV
- Gas spring inside,providing fluid,light-touch adjustments
- Built in leveler system
- Max load: 22-55 lbs
- Vesa: 15.7x15.7
- Distance to the wall: 2.9 - 17.6
- Product dimension: 17.5 x 15.7 x 2.9

PSW651LT1 UNIVERSAL EASY TOUCH TV TILTING WALL MOUNT - FITS VIRTUALLY ANY 37" TO 55" TV INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL VERSIONS

- Smart/3D/Interactive TV Wall Mount
- Universal mounts fits virtually any 37 to 55 Smart/3D/Interactive TV.
- Gas spring inside, providing fluid, light-touch adjustments.
- Built in level system
- Max load: 44-77 lbs
- Vesa: 23.6 x 15.7
- Distance to the wall: 2.4

PSW658MF UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 32" TO 55" TVs INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL TVs




- Universal mounts fits virtually any 32 To 55 Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate
- fast installation
- Built in leveler system
- Max load: 77lbs
- Vesa: 23.6 x 15.7
- Distance to the wall: 1
- Product dimension: 25.5 x 16.5 x 1

PSW661LF1 UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 37" TO 55" TVs INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL TVs

- Universal mounts fits virtually any 37 To 55 Smart / 3D / Interactive TV
- Built in leveler system
- Max load: 44-77 lbs
- Vesa: 23.6 x 15.7
- Distance to the wall: 2.2

PSW602AT UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 42" TO 65" FLAT PANEL ARTICULATING TV WALL MOUNT

- Universal mounts fits virtually any 42" To 65" Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 132lbs
- Vesa: 31.50"x19.7"
- Distance to the wall: 5.83"-20.28"

PCTVM18**PSW678MT****PSW681MF1****PSW691MT1****PSW668ST****PSW601SUT****PSW648SF****PSW678MT** UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 32" TO 55" TVs INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL TVs

- Universal mounts fits virtually any 32 To 55 Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 77lbs
- Vesa: 23.6 x 15.7
- Distance to the wall: 1

PSW681MF1 UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 32" TO 47" TVs INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL TVs

- Universal mounts fits virtually any 32 To 47 Smart / 3D / Interactive TV
- Built in leveler system
- Max load: 26.4 - 55 lbs
- Vesa: 15.7 x 15.7
- Distance to the wall: 2.2

PSW691MT1 UNIVERSAL TV MOUNT - FITS VIRTUALLY ANY 32" TO 47" TVs INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL TVs

- Universal mounts fits virtually any 32 To 47 Smart / 3D / Interactive TV
- Gas spring inside, providing fluid, light-touch adjustments
- Built in leveler system
- Max load: 26.4-55 lbs
- Vesa: 15.7 x 15.7
- Distance to the wall: 2.4
- Product dimension: 23.0 x 17.2 x 2.4

PSW668ST UNIVERSAL TILTING TV MOUNT FOR 26-INCH TO 47-INCH PLASMA, LED, LCD, 3D TVs

- Universal mounts fits virtually any 26 To 47 Plasma or LCD flat panel screen
- Universal brackets easily hook onto the wall plate for fast installation
- Tilt and leveling adjustments
- Built in leveler system
- Max load: 66lbs
- Vesa: 15.7 x 15.7
- Distance to the wall: 1

PSW601SUT 37" TO 55" ALUMINUM FLAT PANEL ULTRA-THIN TV WALL MOUNT

- Smart Mount for LCD, LED, 3D, Smart TVs and other flat-panel TVs
- Fits virtually any 37" to 55" TV sold today
- Gas spring equipped, providing fluid height adjustments
- Swivel & Angle free tilting
- Position Locking system
- Cable management system
- Vesa Size: 200 x 200

PSW648SF UNIVERSAL TV FLUSH WALL MOUNT - FITS VIRTUALLY ANY 26" TO 47" TV INCLUDING THE LATEST PLASMA, LED, LCD, 3D, SMART & OTHER FLAT PANEL VERSIONS

- Smart/3D/Interactive TV Wall Mount
- Universal mounts fits virtually any 26 to 47
- Smart/3D/Interactive TV.
- Built in level system
- Max load: 66 lbs
- Vesa: 15.7 x 15.7

PCTVM18 UNIVERSAL TV CEILING MOUNT BRACKET WITH ADJUSTABLE HEIGHT AND TILT, FITS VIRTUALLY ALL 37.0" TO 70.0" TVs (FLAT PANEL HDTV, LCD, LED, PLASMA AND SMART TVs)

- Fits Virtually Any 37.0" to 70.0" inch Television
- Works with LCD, LED, Smart, 3D, Plasma, Flat Panel TVs, etc.
- Universal VESA Mount Compatible
- Ability to Mount on Flat or Pitched Ceilings
- Telescoping Arm Length: 41.3" to 61.4" (Adjustable)
- Tilt Adjustable: -15 Degrees
- Internal Cable Routing and Cable Management
- Provides Safe, Durable & Reliable TV Mounting
- Includes All Necessary Mounting Hardware and Brackets
- Maximum Weight Capacity: 110.0 lbs.



PSAPD12



PSAPDLK12



PSAPDLK45



PSAPDLK55



PSAPDLKW5

PSAPD12

UNIVERSAL SUCTION CUP DEVICE HOLDER WINDSHIELD MOUNT FITS IPAD, TABLETS & SMARTPHONES WITH SWIVEL ADJUSTMENT AND FLEXIBLE GOOSENECK (FITS TABLETS 8.9" – 10.1", SMARTPHONES 3.5" – 5.5")

- Includes (2) Adjustable Size Device Holders
- Universal Holder for Your Tablet, Cell Phone, Smartphone, MP3 Player, etc.
- Works with iPad, iPhone, Android, Smartphones, Kindle, Galaxy, Samsung, Android Tablets & More
- Holds Virtually All Tablets 8.9" €" 10.1"
- Holds Virtually All Smartphones 3.5" €" 5.5"
- Easily Position Your Device in the Desired Viewing Angle
- Quickly Mount & Un-Mount Your Device
- Suction Cup Quickly and Easily Attaches to Windshield or Dashboard
- 360 Degree Swivel Adjustment and Flexible Gooseneck
- Protective Pads to Prevent Damage or Scratches
- Sturdy and Durable Construction
- Provides Safe & Reliable Device Mounting
- No Sagging with Extra Support for Your Tablet
- No Tools Required
- Gooseneck Tube: 13.4" Inches Long

PSPADLK12

TAMPER-PROOF ANTI-THEFT IPAD KIOSK SAFE SECURITY DESK TABLE STAND, HOLDER, PUBLIC DISPLAY CASE WITH CABLE MANAGEMENT (COMPATIBLE WITH IPADS 2/3/4/AIR)

- Anti-Theft Countertop Table Kiosk For iPads
- Works with iPad 2, 3, 4 & iPad Air
- Secure Tamper-Proof iPad Security
- Home Button Accessible
- Tilt Adjustable Case
- Landscape or Portrait iPad Mounting
- Internal Cable Routing and Cable Management
- Foam Padding Inside to Prevent Damage and Scratches
- Includes Anchors & Screws to Properly Secure Base
- Rugged, Durable, Heavy-Duty Construction
- Perfect for Public or Office Installations
- Pole Height: 14.37 in
- Base Dimension: 12.42" x 9.33"

PSPADLK45

TAMPER-PROOF ANTI-THEFT IPAD KIOSK SAFE SECURITY PUBLIC FLOOR STAND, HOLDER, PUBLIC DISPLAY CASE WITH CABLE MANAGEMENT (COMPATIBLE WITH IPADS 2/3/4/AIR)

- Anti-Theft Floor Standing Kiosk For iPads
- Works with iPad 2, 3, 4 & iPad Air
- Secure Tamper-Proof iPad Security
- Home Button Accessible
- Internal Cable Routing and Cable Management
- Foam Padding Inside to Prevent Damage and Scratches
- Includes Anchors & Screws to Properly Secure Base
- Rugged, Durable, Heavy-Duty Construction
- Perfect for Public or Office Installations
- Pole Height: 37.80"
- Base Diameter: 11.81"

PSPADLK55

TAMPER-PROOF ANTI-THEFT IPAD KIOSK SAFE SECURITY PUBLIC FLOOR STAND, HOLDER, PUBLIC DISPLAY CASE WITH ADJUSTABLE HEIGHT & CABLE MANAGEMENT (COMPATIBLE WITH IPADS 2/3/4/AIR)

- Anti-Theft Floor Standing Kiosk for iPads
- Works with iPad 2, 3, 4 & iPad Air
- Secure Tamper-Proof iPad Security
- Home Button Accessible
- Tilt Adjustable iPad Holder Case
- Landscape or Portrait iPad Mounting
- Rugged, Durable, Heavy-Duty Construction
- Internal Cable Routing and Cable Management
- Foam Padding Inside to Prevent Damage and Scratches
- Includes Anchors & Screws to Properly Secure Base
- Vertically Adjustable By 90°
- Pole Height: 27.56" - 43.31"
- Base Dimension: 17.40" x 13.62"

PSPADLKW5

UNIVERSAL TAMPER-PROOF ANTI-THEFT IPAD KIOSK MULTI-MOUNT STAND HOLDER (FITS ALL 2ND, 3RD, 4TH AND AIR GENERATION IPADS) CAN BE MOUNTED ON WALLS, TABLES, DESKS, ETC.

- Made for All 2nd, 3rd, 4th and Air Generation iPads
- Safely & Securely Put Your Device on Display
- Multi-Mount: Mount it on any wall, flat surface, table, desk, etc.
- Secure Tamper-Proof iPad Security
- Includes Locking Mechanism and Key
- Home Button Accessible
- Landscape or Portrait iPad Mounting
- Internal Cable Routing & Cable Management
- Foam Padding Prevents Device Damage & Scratches
- Includes All Necessary Mounting Hardware and Brackets
- Perfect for Office, Lobby, Showroom, Conference Room, Front Desks, etc.
- Rugged & Durable Construction



PSAPDLK14

PSAPDLK38

PSAPDLK8

PSAPDLK60

PSPADLK14

UNIVERSAL TAMPER-PROOF ANTI-THEFT iPad TABLET KIOSK STAND HOLDER FOR PUBLIC DISPLAY, SIZE ADJUSTABLE, FITS TABLETS UP TO 10.2" TALL & 7.4" WIDE, MOUNTS TO TABLETOP, DESKTOPS, COUNTERS, ETC. (COMPATIBLE WITH iPad GENERATIONS 1, 2, 3, 4 AND iPad Air)

- Universal Compatibility, Fits Tablet
Sizes: Minimum Tablet Width: 4.7" (120mm)
- Maximum Tablet Width: 7.4" (188mm)
- Minimum Tablet Height: 7.8" (198mm)
- Maximum Tablet Height: 10.2" (258mm)
- Safely & Securely Put Your Device on Display
- Includes Locking Mechanism and Key
- Ultra-Strong Anti-Theft Housing
- (Works with iPads, Kindle, Galaxy, Samsung, Android Tablets, etc.)
- Compatible with iPad Generations 1, 2, 3, 4 and iPad Air
- Install it on Desktops, Countertops, Tables, Counters, etc.
- Tamper-Proof Tablet Security Display
- Rotates 90 Degrees (Landscape or Portrait Device Mounting)
- Rugged & Durable Construction
- Internal Cable Routing & Cable Management
- Includes All Necessary Mounting Hardware and Brackets

PSPADLK38

UNIVERSAL TAMPER-PROOF ANTI-THEFT iPad TABLET KIOSK FLOOR STAND HOLDER FOR PUBLIC DISPLAY WITH CABLE MANAGEMENT, SIZE ADJUSTABLE, FITS TABLETS UP TO 10.0" TALL & 7.2" WIDE (COMPATIBLE WITH iPad GENERATIONS 1, 2, 3, 4 AND iPad Air)

- Universal Compatibility, Fits Tablet
Sizes: Minimum Tablet Width: 6.4" (162mm)
- Maximum Tablet Width: 7.2" (182mm)
- Minimum Tablet Height: 8.7" (222mm)
- Maximum Tablet Height: 10.0" (255mm)
- Safely & Securely Put Your Device on Display
- Includes Locking Mechanism and Key
- (Works with iPads, Kindle, Galaxy, Samsung, Android Tablets, etc.)
- Compatible with iPad Generations 1, 2, 3, 4 and iPad Air
- Secure Tamper-Proof Tablet Security
- Rotates 90 degrees
- Landscape or Portrait Tablet Mounting
- Rugged & Durable Floor Standing Design
- Internal Cable Routing & Cable Management
- Includes All Necessary Mounting Hardware and Brackets
- Perfect for Office, Lobby, Showroom, Conference Room, Front Desks, etc.

PSPADLK8

UNIVERSAL TAMPER-PROOF ANTI-THEFT iPad TABLET KIOSK STAND HOLDER FOR PUBLIC DISPLAY WITH CABLE MANAGEMENT, FITS VIRTUALLY ALL TABLETS 7.9 – 10.1", SWIVEL, ROTATION AND TILT ADJUSTABLE AND INCLUDED WALL MOUNT (COMPATIBLE WITH iPADS MINI/1/2/3/4/AIR)

- Size Adjustable: Fits All Tablets 7.9" to 10.1"
- Safely & Securely Put Your Device on Display
- Compatible with iPads Mini, 1, 2, 3, 4 & Air
- Ultra-Strong Anti-Theft Laptop-Styled Lock Included
- Multi-Mount: Mount it on any wall, table, desk, etc.
- Install it on Desktops, Countertops, Tables, Counters, etc.
- (Works with All iPads, Kindle, Nexus, Galaxy, Samsung, Android Tablets, etc.)
- Perfect for the Office or Public Applications
- Swivel Adjustment: 330 Degree
- Tilt Adjustment: 140 Degree
- Rotation Adjustment: 360 Degrees
- Landscape or Portrait Device Mounting
- Rugged & Durable Construction
- Internal Cable Routing and Cable Management
- Includes All Necessary Mounting Hardware, Wall Mount, Brackets and Lock
- Pole Height: 8.4" inch
- Base Diameter: 3.4" inch

PSPADLK60

UNIVERSAL TAMPER-PROOF ANTI-THEFT iPad/TABLET KIOSK FLOOR STAND MOUNT HOLDER FOR PUBLIC DISPLAY WITH CABLE MANAGEMENT, FITS VIRTUALLY ALL TABLETS 7.9 – 10.1", TILT, ROTATION AND HEIGHT ADJUSTABLE (COMPATIBLE WITH iPADS MINI/1/2/3/4/AIR)

- Universal Compatibility, Fits Device
Sizes: Minimum Width: 5.27"
- Maximum Width: 7.75"
- Minimum Height: 7.71"
- Maximum Height: 10.62"
- Size Adjustable: Fits All Tablets 7.9" to 10.1"
- Safely & Securely Put Your Device on Display
- Compatible with iPads Mini, 1, 2, 3, 4 & Air
- Ultra-Strong Anti-Theft Laptop-Styled Lock Included
- Mounts to Virtually All Floor Surfaces
- Perfect for Office or Public Applications
- Rotation Adjustment: 360 Degree
- Tilt Adjustment: 90 Degrees
- Pole Height Adjustable Size: 24.8" to 42.5"
- Landscape or Portrait Device Mounting
- Rugged & Durable Construction
- Internal Cable Routing and Cable Management
- Includes All Necessary Mounting Hardware, Brackets and Lock
- Base Dimensions (L x W): 13.6" x 17.4"



PSPAD05



PSPAD08



PSPAD15



PSPAD25



PTPAD10

PSPAD05

UNIVERSAL TABLET HOLDER / WALL MOUNT WITH RETRACTABLE, ADJUSTABLE, EXTENDABLE AND ROTATING HOLDER ARM WITH PANEL & ARM TILT (WORKS WITH iPADS 1, 2, 3, 4 & iPad AIR)

- Works with virtually any tablet
- Fits Tablet Sizes from 8.9" - 10.4"
- Compatible with Apple, Galaxy, Kindle, Samsung, Androids, etc.
- Works with iPads 1, 2, 3, 4 & iPad Air
- Safely and Securely Position Your Device Where Needed
- Die-Cast Joint Connecting Aluminum Arms
- Does Not Interfere with Tablet Operation or Button Controls
- Soft Silicone Feet Hold Your Device without Causing Damage
- Easily Mount and Un-Mount Your Device Quickly and Easily
- 360° Rotation Allows for Portrait and Landscape Viewing
- Rugged, Durable and Secure Construction
- Includes Hardware Mounting Screws
- Panel Tilt: ±125°
- Arm Tilt: ±100°
- Perfect for the Home or Office

PSPAD08

UNIVERSAL iPad AND TABLET STAND / HOLDER WITH ADJUSTABLE, FLEXIBLE, BENDABLE GOOSENECK AND VICE GRIP CLAMP FOR ATTACHMENT (COMPATIBLE WITH iPADS 1/2/3/4/AIR)

- Works with virtually any tablet
- Fits Tablets from 8.9" - 10.4"
- Also Works with iPads 1/2/3/4/Air
- Safely and Securely Position Your Device Where You Want
- (Compatible with iPad 2nd, 3rd, & 4th Generations, Galaxy, Kindle, etc.)
- Stable Locking Clamp Base Attaches to Tables, Nightstands, Countertops, etc.
- Flexible Swivel Gooseneck Arm
- Easily Mount and Un-Mount Your Device Quickly and Easily
- 360° Rotation Allows for Portrait and Landscape Viewing
- Rugged, Durable and Secure Construction
- Perfect for the Home or Office

PSPAD15

GOOSENECK SEAT DESK BOLT CLAMP MOUNT BRACKET TABLET HOLDER FOR ALL iPADS, KINDLE, ANDROIDS, eREADERS, NEXUS, SAMSUNG GALAXY TABLE/SURFACE CLAMP, SWIVEL/ADJUSTABLE GOOSENECK ARM, LED LIGHTS, & USB CHARGE PORT

- Stand Securely Holds Your Device in Place
- Position and Adjust Device to Your Desired Location
- Adjustable and Swivel Gooseneck Arm Allows for Flexibility
- Fits Any Tablet From 8.0" to 10.1"
- Quickly and Easily Mount and un-Mount Your Device
- 300° Rotatable Tablet Holder with Rubber Grips
- Vice Grip Clamps Attaches to Tables, Desks, Night Stands, Headboards, End Tables, etc.
- Bright LED Lamps with Dimmer Adjustment Knob
- USB Port To Charge Your Device (DC 5V)
- Used for Reading, Instrument Apps, Note Taking, Presentations, etc.
- Allows for Vertical / Horizontal Tablet Positioning
- Perfect for the Home or Office
- Gooseneck Arm Extends up to 30.7"

PSPAD25

UNIVERSAL iPad, KINDLE, NEXUS, ASTRO, GALAXY TABLE eREADER DEVICE CAR MOUNT STAND AND CUP HOLDER ATTACHMENT WITH GOOSENECK ARM, ADJUSTABLE/ROTATING, (2) USB PORTS FOR CHARGING

- Universal Cup Holder Tablet Mount
- Quickly and Easily Mount and Un-Mount Your Device
- Works with iPad, Kindle Fire, Android Tablets, eReaders, etc.
- Solid Construction Securely holds your Device in Place
- Standard Size Cup Holder Attachment To Fit Most Vehicles
- Allows for 360° Rotation
- Flexible Gooseneck and Angle Adjustable
- (2) USB Ports Allow you to Charge Your Devices
- Use For GPS Navigation, Hands Free Functions On The Road
- Let Passengers Watch Movies, Read Directions, Play Music, etc.
- Plugs into Car Cigarette Lighter
- Securely Holds Devices as Tall or Wide as 9.1 Inches
- Gooseneck Arm Height Extends to 15.35"

PTPAD10

PORTABLE TABLET STAND / HOLDER ADJUSTABLE & HAND GRIP RECLINING FOR iPad, KINDLE, ANDROID, eREADER SAMSUNG GALAXY, GOOGLE NEXUS ETC.

- Quickly and Easily Mount and Un-Mount Your Device
- Safely and Securely Holds Your Device on Tables/Desks
- Provides Safe, Sturdy, Stable, & Comfortable Use
- Angle Adjustable and Reclining for Viewing & Typing: 110° Recline
- Use it for Reading, Books, Music, Instrument Apps, Note Taking, Presentations, etc.
- Ergonomically Designed, Rotatable Anti-Slip Handle
- Works For Both Landscape & Portrait Viewing
- Present Content Comfortably and On The Go
- Fits Any Tablet or Smartphone From 4.17" to 7.87" In Width
- Fits iPhone, iPad, Galaxy, Nook, etc.
- Perfect for the Home or Office
- Dimensions: 4.72" x 6.3"



PMKSPAD1

PMKSPAD2

PSMKSPAD35

PSPAD25

PTPAD10

PTPAD10

PMKSPAD1

MULTIMEDIA IPAD AND MICROPHONE STAND - ADJUSTABLE TO FIT ALL IPAD MODELS

- Sturdy, Durable Construction With Sure-Grip Touch Points €" Securely Holds Your iPad Without Scratching Or Marring It
- Universal Stand Clip Securely Attaches To Virtually Any Microphone Stand
- Multi-Angle Adjustment Allows Precise Positioning For Optimal Stage Or Studio Viewing
- Quick-Snap Clips Provide Fast, Secure Ipad Insertion
- Fast Installation €" On Your Mic Stand In Seconds With The Twist Of A Knob
- All Controls, Buttons And Connectors Are Accessible When Your Ipad Is Clipped On
- Multi-Mount Design Provides Both Horizontal And Vertical Orientation Of Your Ipad
- Can Be Mounted On The Vertical Part Of A Mic Stand, Or On A Horizontal Boom For Limitless
- Also Compatible With The iPad 1 -- Requires Adjustment

PMKSPAD2

UNIVERSAL TABLET PC/ANDROID/KINDLE/IPAD FLOOR STAND FOR MUSIC, READING, BEDSIDE USE, FITNESS USE

- Fits Any Tablet From 8.0 To 10.1 Inches In Size
- Use With Reading Apps, Music Apps, Internet Browsing, Watching Video
- Height Adjustability: 3.6 - 4.9 Feet
- 360° Rotatable Flexible Metal Hose
- 300° Rotatable Tablet Gripper
- High Brightness LED Lamp With Dimmer
- Also Holds Your iPhone/Android Phone
- USB Port To Charge Your Phone with Your USB Charger
- DC 5 Volt

PMKSPAD35

UNIVERSAL TABLET IPAD, KINDLE, ANDROID, EREADER, SAMSUNG GALAXY NEXUS FLOOR STAND HOLDER WITH ADJUSTABLE/BENDABLE SWIVEL GOOSENECK AND STURDY BASE

- Metal Construction with Sturdy, Stable Tempered Glass Base for Maximum Stability
- Securely Holds Any Tablet From 8.0 to 10.1 Inches
- Position Your Device Exactly Where You Want
- Adjustable, Bendable, Flexible Goose-neck Arm
- Quickly Mount and Un-Mount Your Device
- 300° Rotating Tablet Holder with Rubber Grips
- Also Includes iPhone/Smartphone, MP3 Player Holder
- Allows for Horizontal / Vertical Tablet Positioning
- Used for Reading, Books, Music, Instrument
- Apps, Note Taking, Presentations, etc.
- Perfect for the Home or Office
- Height Adjustable: 3.28 - 4.53 Feet
- Base Dimensions: 1.15 x 1.15 Feet - 4.53 Feet Tall

PMKSPAD5

2-IN-1 MICROPHONE AND TABLET STAND WITH ADJUSTABLE HEIGHT FOR ALL TABLETS 4.7" TO 8.7" TALL

- Universal Mic Stand with Tablet Holder
- Holds Any Tablet or Device from 4.7" to 8.7" Tall (Works with iPad, Kindle, Nexus, Samsung, Androids, etc.)
- Telescoping Column for Height Adjustment
- Slim Construction with Cable Management
- Rotates Freely Between Portrait and Landscape Orientation
- Easily Adjustable Viewing Angle
- Stable Tri-Pod Base
- Microphone Arm Length: 32€
- Height Adjustment: 40€ to 69€
- Black Finish

PMKSPAD6LK

SECURE & ANTI-THEFT KEY LOCK TABLET FLOOR STAND HOLDER WITH ADJUSTABLE, BENDABLE, ROTATING SWIVEL GOOSENECK, USB CHARGE PORT & STURDY TEMPERED GLASS BASE FOR IPAD, KINDLE, ANDROID, EREADER, SAMSUNG GALAXY, NEXUS, ETC.

- Fits All Tablets from 8.0 to 10.1€ inches
- Securely Holds iPad, Kindle, Android, Samsung, Nexus Tablets & More!
- Innovative Anti-Theft Lock Design with Keys Included
- Adjustable, Bendable, Rotating Swivel Goose-neck
- Built-in USB Charge Port
- Height Adjustment, from 43.5€ to 58.5€ inches
- 300 Degree Rotation Allows for Portrait and Landscape Orientation
- Tempered Glass Base for Stability and Durability
- Smartphone/MP3 Player Holder Included
- 4.53 Feet Tall - Base: 1.15" x 1.15" x 0.05"

PMKSPAD4LK

SECURE & ANTI-THEFT KEY LOCK TABLET TRIPOD FLOOR STAND HOLDER WITH ADJUSTABLE, BENDABLE, ROTATING SWIVEL GOOSENECK, USB CHARGE PORT & STURDY TEMPERED GLASS BASE FOR IPAD, KINDLE, ANDROID, EREADER, SAMSUNG GALAXY, NEXUS, ETC.

- Fits All Tablets from 8.0 to 10.1€ inches
- Innovative Anti-Theft Lock Design with Keys Included
- Adjustable, Bendable, Rotating Swivel Goose-neck
- Built-in USB Charge Port
- Telescoping Column for Height Adjustment, from 43.5€ to 58.5€ inches
- 300 Degree Rotation Allows for Portrait and Landscape Orientation
- Securely Holds iPad, Kindle, Android, Samsung, Nexus Tablets & More!
- Tripod Leg Base for Stability and Durability
- Smartphone/MP3 Player Holder Included



PLPTS2

PRO DJ LAPTOP TRIPOD ADJUSTABLE STAND FOR NOTEBOOK COMPUTER

- Portable Laptop/Notebook Desk/Workstation
- Easily Adjustable Height
- Stand For Musicians, DJs, Based Performances
- Set-up Height From 16" To 28"
- Black High Gloss Finish
- Steel Frame Construction

PLPTS3

PRO DJ LAPTOP TRIPOD ADJUSTABLE STAND FOR NOTEBOOK COMPUTER

- Portable Laptop/Notebook Desk/Workstation
- Easily Adjustable Height
- Set-up Height From 28" To 41"
- Wood Material Counter Construction
- Black High Gloss Finish
- Stand For Musicians, DJs, Based Performances

PLPTS4

PRO DJ LAPTOP TRIPOD ADJUSTABLE STAND FOR NOTEBOOK COMPUTER

- Portable Laptop/Notebook Desk/Workstation
- Easily Adjustable Height
- Set-up Height From 28" To 46"
- Stand For Musicians, DJs, Based Performances
- Wood Material Counter Construction
- Black High Gloss Finish
- Steel Frame Construction
- Dimensions: 28"L x 16"W x 5"H

PLPTS25

LAPTOP COMPUTER STAND FOR DJ

- Ideal For Holding Your Laptop, CD Player/Controller, EFX Machine Or Lighting Controller
- This Versatile Stand Can Stand Alone On Any Flat Surface For Quick And Easy Set-Up
- Features 4 Easy Line-It-Up Height Adjustments
- Platform Dimensions: 9.25(w) x 10.8(d) Inches

PLPTS26

LAPTOP COMPUTER STAND FOR DJ W/STORAGE SHELF

- Ideal For Holding Your Laptop, CD Player/Controller, EFX Machine Or Lighting Controller
- Includes a Storage Shelf
- This Versatile Stand Can Stand Alone On Any Flat Surface For Quick And Easy Set-Up
- Features 4 Easy Line-It-Up Height Adjustments

PLPTS30

LAPTOP COMPUTER STAND FOR DJ WITH FLAT BOTTOM LEGS

- Ideal For Holding Your Laptop, CD Player/Controller, EFX Machine Or Lighting Controller
- This Versatile Stand Can Stand Alone On Any Flat Surface For Quick And Easy Set-Up
- Features 4 Easy Line-It-Up Height Adjustments
- Platform Dimensions: 9.25" (w) x 10.8" (d)

PLPTS35

UNIVERSAL PORTABLE FOLDABLE PROFESSIONAL DJ LAPTOP STAND WITH SECOND ACCESSORY TRAY

- This Stand Will Securely and Dependably Hold All Sizes of Laptop, iPad and Tablets
- Convenient Accessory Tray Holds a Sound Card, Hard Drives, Small Mixer and Any Other Device
- Light Weight Sturdy Unit Folds Flat to be Convenient and Portable
- Unit Fits in Backpack or Handy Carrying Bag Included
- Manufactured for Use in Home, Studio or on the Road
- Double Peg Holding Tray Keeps Laptop Secure in Demanding Environments
- Just Slide in the Sturdy Steel Rod Accessory Tray and Ready to Use



PLPTS45



PLPTS47



PLPTS55



PLPPADMT20

PLPTS45

LAPTOP, MIXER & STUDIO EQUIPMENT STAND HOLDER TABLETOP MOUNT, UNIVERSAL DUAL DEVICE PLACEMENT, HEIGHT ADJUSTABLE, SWIVEL, ROTATION, TILT

- Includes (2) Universal Device Holding Bracket Arms
- Provides Convenient Access to Two Separate Devices
- Holds Laptops, Mixers, Turntables, Sound Equipment, etc.
- Quickly and Easily Make Height, Rotation and Tilt Adjustments
- Both Bracket Arms Feature Width, Depth and Height Adjustment
- Rotary Clamp-Style Locking Mechanisms
- Fully Rotational, 360° Swivel Ability
- Device Tilting Adjustment: 0° - 75°
- Can Hold up to 17.0" Laptops
- Low-Profile Heavy Duty Base
- Safe & Secure Device Placement
- Rugged & Reliable Steel Construction
- Can Be Placed On Top or Under Other Equipment
- Perfect for On Stage and In-Studio Use
- For Beginner and Professional Applications
- Used by Musicians, Instrument Players, Performers, Sound Engineers, DJ, MC, etc.
- Assembly Instructions Included
- Can Hold Devices as Small as 2.0" Wide
- Weight: 9.0 lbs. Size/Dimensions: Tabletop Base (L x W x H): 15.0" x 9.8" x 0.2" inches
- Adjustable Height (Device Holding Arms): 3.5" to 15.7" inches
- Total Unit: 24.5" x 11.0" x 16.0" inches

PLPTS47

UNIVERSAL AUDIO DEVICE STUDIO EQUIPMENT TABLETOP STAND HOLDER MOUNT, DJ SOUND SYSTEM WORKSTATION, TWO-TIER SHELVES, LIGHTWEIGHT, RUGGED

- Safe & Secure DJ Equipment Placement
- Tabletop Style Provides Convenient Device Access
- Universal: Holds All of Your Favorite Devices
- Perfect for Turntables, Mixer, Laptop and Other Equipment
- Dual Shelf Two-Tier Stand System
- Both Shelves Feature Angle/Tilt Adjustments
- Perforated Back-Plate for Cable Arrangement
- Cushion-Padded Shelves to Protect Your Equipment
- Rugged & Reliable Steel Construction
- Suitable for On Stage and In-Studio Use
- For Beginner and Professional Applications
- Used by Musicians, Instrument Players, Performers, Sound Engineers, DJ, MC, etc.
- Top Shelf Tilt Adjustment: 0°, 20°, 40°
- Bottom Shelf Tilt Adjustment: 0°, 5°, 10°, 15°, 20°
- Includes Protective Dust Cover
- Assembly Instructions Included
- Weight: 32.3 lbs. Dimensions: Top Shelf (W x L): 45.2" x 15.2" inches
- Bottom Shelf (W x L): 17.7" x 17.0" inches
- Total Unit Size (W x L): 45.2" x 18.5" inches

PLPTS55

UNIVERSAL PORTABLE FOLDABLE TELESCOPING HEIGHT PROFESSIONAL DJ LAPTOP STAND

- This Stand Will Securely and Dependably Hold All Sizes of Laptop, iPad and Tablets
- Light Weight Sturdy Unit Folds Flat to be Convenient and Portable, No Loose Parts
- Manufactured for Use in Home, Studio or on the Road
- Telescoping Height Adjustment With Rotating Tray Fits All Needs
- Four Prong Anti-Slip Tray Holds Laptop Securely in Demanding Environments
- Unit Comes Fully Assembled and Ready to Use
- Folding Instructions Included
- Dimensions Folded: 10.6" x 12.6" x 1" inch
- Dimensions Unfolded: 10.6" x 9.4" x 12.6" - 15.7" inch
- Telescoping Adjustable Length: 12.6" - 16.7" inch
- Laptop Shelf Dimensions: 8.6" x 9" inch

PLPPADMT20

DUAL DEVICE HOLDER UNIVERSAL STAND FOR LAPTOPS AND TABLETS, CONVENIENTLY HOLDS 2 DEVICES WITH SWIVEL, TILT AND ROTATION ADJUSTMENTS, FITS VIRTUALLY ALL LAPTOPS 10" TO 15.6", FITS VIRTUALLY ALL TABLETS 7" TO 10.1"

- Perfect for Studio Use €" Dual Holding Arms: Holds (1) Laptop and (1) Tablet
- Safely and Securely Position Both Devices Exactly Where You Want Them
- Padded Clamp Holds on Tightly Without Causing Damage
- Compatible with All Laptops 10" €" 15.6"
- Compatible with All Tablets 7" €" 10.1"
- Works with iPad, Androids, Galaxy, Kindle, Samsungs etc.
- Quickly Mount & Un-Mount Your Device
- Flexible Swivel Base and Movable Swinging Arms
- Securely Holds onto Devices with Padded Clamping Brackets
- Durable and Rugged Construction
- Provides Durable, Reliable & Convenient Device Control
- Tablet Holders Swivel 180° and Tilts 80° degrees
- Laptop Holder Tilts ±25° and Rotates 360° degrees

NEW



PMKSH01



PMKSH04



PSM05



PEPF20



PEPF30

PEPF40

PMKSH01

SUSPENSION BOOM SCISSOR MICROPHONE STAND STUDIO RADIO SHOCK MOUNT HOLDER, ADJUSTABLE AND EXTENDABLE ARM, ANGLE AND TILT POSITIONING, UNIVERSAL TABLE CLAMP MOUNT STYLE

- Boom Arm Shootout Mic Holder Mount Stand
- Position Your Mic Exactly Where Needed
- Helps Achieve Optimal Sound Performance
- Rugged and Sturdy Double-Braced Steel Construction
- Quick and Reliable Microphone Placement
- Easy Adjustment Controls
- Extends, Angles and Tilts
- Dual Suspension Springs
- Dual Metal Extension Support Arms
- Convenient Table Clamp Mount Attachment
- Universal Mounting Clamp: Attaches to Tables, Desks, Shelves, Counters, etc.
- System Easily Mounts and Un-Mounts
- Connector Cable Length: 9.8' Feet (3 Meters)
- For Professional or Beginner Applications
- Perfect for Studio Use, Podcast, Recording, Announcing, Broadcasting, etc.
- Includes Shock Mount, Universal Threading Microphone Holder Clip, Clamp Style Support Base, XLR Connector Cable
- Internal Cable Management Concealed Wiring

PMKSH04

SUSPENSION BOOM SCISSOR MICROPHONE STAND STUDIO RADIO PRO SHOCK MOUNT HOLDER, ADJUSTABLE AND EXTENDABLE ARM, ANGLE AND TILT POSITIONING, UNIVERSAL TABLE CLAMP MOUNT STYLE

- Boom Arm Shootout Mic Holder Mount Stand
- Position Your Mic Exactly Where Needed
- Helps Achieve Optimal Sound Performance
- Rugged and Sturdy Double-Braced Steel Construction
- Quick and Reliable Microphone Placement
- Easy Adjustment Controls
- Extends, Angles and Tilts
- Dual Suspension Springs
- Triple Metal Extension Support Arms
- Convenient Table Clamp Mount Attachment
- Universal Mounting Clamp: Attaches to Tables, Desks, Shelves, Counters, etc.
- System Easily Mounts and Un-Mounts
- Connector Cable Length: 9.8' Feet (3 Meters)
- For Professional or Beginner Applications
- Perfect for Studio Use, Podcast, Recording, Announcing, Broadcasting, etc.
- Includes Metal Shock Mount, Microphone Holder

PSM05

ANTI-VIBRATION STUDIO MICROPHONE SHOCK MOUNT, MIC ANGLE/TILT ADJUSTABLE

- Universal Standard Mic Size
- Compatible with Large-Diaphragm Condenser Microphones
- Padded Mic Clamp to Prevent Damage & Scratches
- Quick Angle Adjustment
- Easily Locks into Position
- Die-Cast Steel Adapter
- 5/8" Standard (27 Thread) Attaches to Microphone Boom

PEPF20

6-INCH CLAMP ON MICROPHONE POP FILTER

- Pop Filter For Vocal Microphones
- Designed For Professional Vocal Recording Environments
- Stops Plosives And Protects Your Microphone
- Includes Boom And Microphone Stand Clamp
- Swivel Mount For Easy Positioning; Flexible Gooseneck Holder
- Reduces Plosives And P-Pops During Vocal Performance

PEPF30

STUDIO MICROPHONE WIND SCREEN MIC POP FILTER STUDIO RADIO GUARD SHIELD, ADJUSTABLE SWIVEL BENDABLE ROTATING FLEXIBLE GOOSENECK

- Helps Achieve Optimal Sound Performance
- Improves Vocal Recording Sound
- Versatile Studio Voice Equipment Tool
- Flexible Goosenecks Adjusts for Exact Placement
- Easily Adjustable
- 4-Layer Mesh Screen Filtration
- Helps Reduce and Eliminate Unwanted Noise
- Non-Damaging Clamp-Style Fastening Mount
- Quickly Mounts and Un-Mounts
- For Professional or Beginner Applications
- Perfect for Studio Use, Podcast, Recording, Announcing, Broadcasting, etc.
- Gooseneck Length: 16" inches (40cm)
- Filter Diameter: 6.3" inches

PEPF40

STUDIO MICROPHONE WIND SCREEN MIC POP FILTER STUDIO RADIO PRO GUARD SHIELD, REINFORCED WITH STEEL MESH LAYERS, ADJUSTABLE SWIVEL BENDABLE ROTATING FLEXIBLE GOOSENECK

- Helps Achieve Optimal Sound Performance
- Improves Vocal Recording Sound
- Versatile Studio Voice Equipment Tool
- Flexible Goosenecks Adjusts for Exact Placement
- Easily Adjustable
- 6-Layer Mesh Screen Filtration, Dual Steel Layers
- Helps Reduce and Eliminate Unwanted Noise
- Non-Damaging Clamp-Style Fastening Mount
- Quickly Mounts and Un-Mounts
- For Professional or Beginner Applications
- Perfect for Studio Use, Podcast, Recording, Announcing, Broadcasting, etc.
- Gooseneck Length: 16" inches (40cm)
- Filter Diameter: 6.3" inches



PMKS2



PMKS3



PMKS5



PMKS7



PMKS8



PMKS9

PMKS2

TRIPOD MICROPHONE STAND W/BOOM

- Telescopes to Boom From 36" to 65"
- Boom Extends To 28"
- Fast & Smooth Boom and Height Adjustments
- Vise Boom Adjustment
- Matt Black Finish
- Comes with Microphone Clip

PMKS3

TRIPOD MICROPHONE STAND W/ EXTENDING BOOM

- Telescopes To 5.5 Feet
- Boom Extends To 28"
- Fast & Smooth Boom And Height Adjustments
- Knob Boom Adjustment
- Gloss Black Finish
- Constructed With Strong, Lightweight Tubing
- MIC Holder Included
- Dimensions: L3.5"X W3.5"X H38"
- WEIGHT : 3.7 lbs

PMKS5

COMPACT BASE BLACK MICROPHONE STAND

- Die-Cast And Steel Construction
- Sleek Black Finish
- Ultra-Light For Easy Transport
- MIC Holder Included
- Height Adjustment From 33.5" to 60.24"
- Length Of Boom: 33.46"
- External Thread Size: 5/8 x27
- Base Diameter: 235mm (9.25 in.)
- Weight: 9.92lbs

PMKS7

COMPACT BASE MICROPHONE STAND

- Height Adjustment From 19" To 26"
- Boom Length: 16"
- Compact Weighted Base
- Perfect For Base Drums And Guitar Amp Milking
- Iron Die-Casting
- Clutch And T-Bar Adjustment Points
- Black Finish
- Base Weight : 3.3lbs
- Base Dimensions: 6"X 5"X 2"H
- Dimensions:19"L X 6"W X 5"H

PMKS8

U-BASE GOOSENECK DESKTOP MICROPHONE STAND

- Die Casting Iron U Shape Stand
- Adjustable Positioning
- Mic Holder Included
- Base Spread: 5.6 in. x 6.75 in
- Weight: 2.6lbs
- Dimensions: L 5.5" X W 7" X H 11.8

PMKS9

HEAVY DUTY COMPACT BASE BOOM MICROPHONE STAND

- Boom Microphone Stand Perfect For The Studio And Concerts
- Height Adjustment From 37.5€™€™ - 59.0€™€™
- Boom Length: 31.5€™€™
- Compact Weighted Base
- Clutch And T-Bar Adjustment Points
- Silver And Black Finish
- Base Dimensions: 9.25"
- Folded Height: 38.6"
- Product Weight:11.0Lbs



PMKS15



PMKS18



PMKS19



PMKSM20



PMKS22



PMKS26



PMKS25

PMKS15

UNIVERSAL COMPACT BASE MICROPHONE STAND - ADJUSTABLE & EXTENDABLE BOOM

- Black Glossy Finish
- Lock-Tight Pivot Knob
- Round Metal Base Plate
- Easy Adjust Extending Arm
- M-6 Microphone Holder Included
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 27.5-Inches to 51-Inches
- USA Standard 5/8-Inch Microphone Adaptor and Threading
- Total Weight: 9.5 Lbs.
- Color: Black

PMKS18

UNIVERSAL DUAL-HOLDING MICROPHONE STAND - HEIGHT ADJUSTABLE

- Glossy Black Finish
- Round Metal Base Plate
- Lock-Tight Tension Knob
- (2) M-6 Microphone Holders Included
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 37.5-Inches to 65-Inches
- USA Standard 5/8-Inch Microphone Adaptor and Threading
- Total Weight: 9.4 Lbs.
- Color: Black

PMKS19

UNIVERSAL TRIPOD MICROPHONE STAND - HEIGHT ADJUSTABLE

- Glossy Black Finish
- Anti-Slip Tripod Legs
- Lock-Tight Tension Knob
- M-6 Microphone Holder Included
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 27.5-Inches to 52-Inches
- USA Standard 5/8-Inch Microphone Adaptor and Threading

PMKSM20

MICROPHONE AND TRIPOD STAND WITH EXTENDING BOOM & MIC CABLE PACKAGE

- Includes a Handheld Dynamic Microphone
- Dynamic vocal microphone with smooth mid-frequency presence rise for excellent voice projection
- Ultra-wide frequency response for a brilliant and transparent sound
- Shock mount system to cut down handling noise
- Includes Microphone Stand and Mic Holder With Boom
- Glossy Black Finish - Constructed with Strong Lightweight Tubing

PMKS22

UNIVERSAL ROLLING WHEELS TRIPOD MICROPHONE STAND - ADJUSTABLE HEIGHT & EXTENDABLE

- Lock-Tight Tension Clamp
- Polished Easy-Clean Finish
- M-6 Microphone Holder Included
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 27.5-Inches to 52-Inches
- Rugged Roller-Wheels Legs with Locking Mechanism
- USA Standard 5/8-Inch Microphone Adaptor and Threading
- Total Weight: 4.7 Lbs.
- Color: White

PMKS26

ADJUSTABLE DESKTOP TRIPOD MICROPHONE STAND

- Convenient Desk Tripod Microphone Stand
- Ideal For Recording Podcasts Or
- Other Desktop Applications
- Adjustable Height From 10.6" to 12.6"
- Support Weight: 5 Lbs.

PMKS25

ADJUSTABLE DESKTOP TRIPOD MICROPHONE STAND

- Convenient Desk Tripod Microphone Stand
- Ideal For Recording Podcasts Or
- Other Desktop Applications
- Adjustable Height From 4.7" to 8.7"
- Support Weight: 5 Lbs.



PMKS32



PMKS38



PMKS40



PMKS45



PMKS35



PMKS56

PMKS32

UNIVERSAL COMPACT BASE MICROPHONE STAND WITH ADJUSTABLE & PIVOTABLE GOOSENECK

- Glossy Black Finish
- Round Metal Base Plate
- Lock-Tight Tension Knob
- M-6 Microphone Clip Included
- Adjustable & Pivotal Gooseneck
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 31.5-Inches to 60-Inches
- USA Standard 5/8-Inch Microphone Adaptor and Threading
- Total Weight: 9.2 Lbs.
- Color: Black

PMKS38

UNIVERSAL TRIPOD MICROPHONE STAND - EASY GRIP PUSH HEIGHT ADJUSTABLE & EXTENDABLE

- Glossy Black Finish
- Anti-Slip Tripod Legs
- Lock-Tight Tension Knob
- M-6 Microphone Holder Included
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 37.5-Inches to 63-Inches
- USA Standard 5/8-Inch Microphone Adaptor and Threading
- Total Weight: 4.4 Lbs.
- Color: Black

PMKS40

UNIVERSAL MICROPHONE STAND - HEIGHT

- Black Glossy Finish
- Lock-Tight Pivot Knob
- Round Metal Base Plate
- Easy Adjust Extending Arm
- M-6 Microphone Holder Included
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 27.5-Inches to 57-Inches
- USA Standard 5/8-Inch Microphone Adaptor and Threading
- Total Weight: 9.7 Lbs.
- Color: Black

PMKS45

UNIVERSAL TRIPOD MICROPHONE STAND WITH WHEELS - EASY GRIP HEIGHT ADJUSTABLE & EXTENDABLE

- Glossy Black Finish
- Lock-Tight Tension Knob
- Fold-Out True-Grip Tripod Legs
- M-6 Microphone Holder Included
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 37.5-Inches to 63-Inches
- Rugged Roller-Wheels Legs with Locking Mechanism
- USA Standard 5/8-Inch Microphone Adaptor and Threading
- Total Weight: 5.5 Lbs.
- Color: Black

PMKS35

UNIVERSAL TRIPOD MICROPHONE STANDS - ADJUSTABLE & EXTENDABLE SET OF 2

- Glossy Black Finish
- Anti-Slip Tripod Legs
- Comes with 2 Mic Stands
- Lock-Tight Tension Knob
- (2) M-6 Microphone Holder Included
- Reinforced Engineered Plastic Joints
- Strong, Durable & Lightweight Construction
- Height Adjustable from 27.5-Inches to 52-Inches
- USA Standard 5/8-Inch Microphone Adaptor and Threading
- Boom Length: 24-Inches
- Total Weight: 6.4 Lbs.
- Carry Bag Included
- Color: Black

PMKS56

HEAVY-DUTY TRI-POD BOOM MICROPHONE MIC STAND, HEIGHT ADJUSTABLE, BOOM EXTENDABLE

- Designed for the Professional, Holds Microphone Securely
- Boom Microphone Stand Perfect for the Studio and Concerts
- Enlarged Tubing for Durability and Structural Support
- Height and T-Bar Adjustment Points
- Can Be Used With or Without Boom
- Includes Universal USA Standard 5/8" Mic Adapter
- Height Adjustment From 51.2" to 78.75"
- Boom Arm Length: 29.5"
- Stable Tri-Pod Base
- Black Finish
- Weight: 6.5 lbs.



PMDK101



PMDK102



PSTK103



PSTK105



PSTND1



PSTND2

PMDK101

HEAVY-DUTY ALUMINUM ANODIZING DUAL SPEAKER STAND & 21FT SPEAKON CABLE KIT

- Two Speaker Stands
- Set Up Height From 3.6 To 6.8 Feet
- Black Aluminum Anodized Stand w/Metal Lock
- Tube Diameter: 35mm (1.375")
- Loading Capacity: 100 lbs.
- Constructed with Strong, Lightweight Tubing
- Safety Pin for Maximum Strength and Security
- Individual Drawstring Stand Gig Bag
- Two 21 ft. 12 Gauge Speakon Cables

PMDK102

HEAVY-DUTY ALUMINUM ANODIZING DUAL SPEAKER STAND & 1/4" PHONO CABLE KIT

- Two Speaker Stands
- Set Up Height from 3.6 To 6.8 FT
- Black Aluminum Anodized Stand w/Metal Lock
- Tube Diameter: 35mm (1.375")
- Loading Capacity: 100 lbs.
- Constructed with Strong, Lightweight Tubing
- Safety Pin for Maximum Strength and Security
- Individual Drawstring Speaker Stand Gig Bag
- Two 21 ft. 12 Gauge 1/4" to 1/4" Speaker Cables

PSTK103

HEAVY-DUTY ALUMINUM ANODIZING DUAL SPEAKER STAND WITH TRAVELING BAG KIT

- Two Speaker Stands
- Set Up Height From 5 Feet To 8 Feet
- Black Aluminum Anodized Stand w/Metal Lock
- Tube Diameter: ̂ 35mm/ ̂ 40mm(1.375"/1.575")
- Loading Capacity: 100 lbs.
- Constructed with Strong, Lightweight Tubing
- Safety Pin for Maximum Strength and Security
- Pyle Pro Speaker Stand Gig Bag
- Dimensions: 44" L X 11" W X 11" H
- Weight: 50 lbs.

PSTK105

HEAVY-DUTY DUAL SPEAKER STAND WITH TRAVELING BAG KIT

- Two Speaker Stands
- Set Up Height From 3.3 Feet To 6 Feet
- Black Steel Anodized Stand
- Tube Diameter: 35mm / 40mm (1.375"/1.575")
- Loading Capacity: 110 Lbs.
- Constructed with Strong, Lightweight Tubing
- Safety Pin for Maximum Strength and Security
- Pyle Pro Speaker Stand Gig Bag
- Dimensions: 40.35" L X 12.2" W X 11.2" H
- Weight: 40 lbs

PSTND1

TRIPOD SPEAKER STAND HOLDER MOUNT, EXTENDING HEIGHT ADJUSTABLE, RUGGED STEEL CONSTRUCTION

- Effectively Elevates Speakers for Optimum Sound Performance
- Easy Setup and Quick Adjustment Control
- Reinforced Steel Support Construction
- Speaker Support Arm Extension
- Rugged and Reliable
- Safety Lock-in Pin
- Foldable for Quick Storage and Transport
- Rubber Capped Tripod Feet Base
- Perfect for On-Stage or Studio Use
- For Professional or Beginner Applications
- Speaker Height Adjustable: 59.1" to 82.7"

PSTND2

6 FT. TRIPOD SPEAKER STAND

- Telescopes to 6 Feet
- Tube Diameter: 35mm (1.375")
- Loading Capacity: 132 lbs.
- Constructed with Strong, Lightweight Tubing
- Safety Pin for Maximum Strength and Security



PSTND3

PSTND4

PSTND5

PSTND25

PSTND6

PSTND7

PSTND3

HEIGHT ADJUSTABLE ANODIZED ALUMINUM SUB-WOOFER MOUNTED SPEAKER POLE

- Telescopes to 58"
- For use with a Subwoofer Cabinet w/Top Mounting Hole
- Black Anodized Aluminum Stand
- Tube Diameter: 35mm (1.375")
- Loading Capacity: 100 lbs.
- Constructed with Strong, Lightweight Tubing

PSTND4

6.5 FEET 2-WAY ANODIZED ALUMINUM TRIPOD SPEAKER STAND

- Set Up Height From 3.6 To 6.6 Feet
- Black Anodized Aluminum Stand w/Metal Lock
- Reversible Tube Provides Industry Standard Diameters
- Tube Diameter: 35mm/38mm (1.375"/1.5")
- Loading Capacity: 100 lbs.
- Constructed with Strong, Lightweight Tubing

PSTND5

6.0 FEET 2-WAY ANODIZED ALUMINUM TRIPOD SPEAKER STAND

- Set Up Height From 3.9 To 6.0 Feet
- Black Anodized Aluminum Stand w/Metal Lock
- Larger Diameter Tubing And Metal Reinforced Clamps
- Securely Support More Weight Than Other Stands
- Reversible Tube Provides Industry Standard Diameters
- Tube Diameter: 35mm/38mm (1.375"/1.5")
- Loading Capacity: 150 lbs.
- Constructed with Strong, Lightweight Tubing
- Safety Pin for Maximum Strength And Security

PSTND25

6 FT. TRIPOD SPEAKER STAND

- Set Up Height From 3.28 To 6 Feet
- Black Anodized Aluminum Stand w/Metal Lock
- Reversible Tube Provides Industry Standard Diameters
- Tube Diameter: 35mm/38mm (1.375"/1.5")
- Loading Capacity: 110 lbs.
- Constructed with Strong, Lightweight Tubing
- Safety Pin for Maximum Strength and Security

PSTND6

WALL MOUNT SPEAKER BRACKET (PAIR)

- Holds Speakers That Are Equipped With Standard 35mm (1.375") Pole Mounts
- Made Of Heavy Duty Welded Steel
- Mount to wall with screws and toggle bolts
- Maximum Load Capacity: 77lbs
- Measures 13.80" From Center Of Pole
- Mount To Mounting Plate
- L 16.54" X W 4.53" X H 9.06"
- Color: Black

PSTND7

PAIR OF WALL MOUNT SPEAKER BRACKET WITH ADJUSTABLE LOCK

- Adjustable Plate To Secure All Size Speakers
- Holds Speakers That Are Equipped with Standard 35mm (1.375") Pole Mounts
- Made of Heavy Duty Welded Steel
- Mount To Wall With Screws And Toggle Bolts
- Maximum Load Capacity : 77 lbs.
- Measures 13.80" From Center Of Pole
- Mount To Mounting Plate
- 16.45" L X 4.53" W X 9.06" H
- Color : Black



PSTNDW15

DUAL UNIVERSAL ADJUSTABLE WALL MOUNT SPEAKER BRACKET STANDS WITH ANGLE, TILT, ROTATION ADJUSTMENT

- Durable, Rugged & Reliable
- Safely Hangs Speakers on Flat Wall Surfaces
- Includes (2) Universal Speaker Bracket Wall Mounts
- Heavy Duty Reinforced Solid Formed Steel
- Mounts Permanently and Securely in Most Environments
- Universal Standard 1-3/8" Insert Fits Most Speaker Cabinets
- Added Solid-Steel Pin Serves as Safety-Stop

PSTND18

HEAVY-DUTY STEEL QUAD SUPPORT BOOKSHELF / MONITOR SPEAKER STANDS

- One Pair of Speaker Stand For A Large Bookshelf Speaker
- Perfect For Home, Project Or Professional Recording Studios
- Steel, Attractive Design Incorporating Cable Management
- Vertical Columns May Be Sand Loaded To Deaden Sound And Increase Stability
- Heavy-Duty Steel Construction With Black Finish
- Conceals Cables For A Great Looking Setup
- Quad-Support Provides Security And Strength With Style

PSTND14

DUAL HEAVY-DUTY STEEL SUPPORT BOOKSHELF / MONITOR SPEAKER STAND MOUNTS (PAIR)

- Includes (2) Speaker Stand Mounts
- Rugged, Durable and Reliable
- Heavy-Duty Steel Construction with Black Finish
- Universal Size Fits Small and Larger Bookshelf Speakers
- Perfect for Home, Project or Professional Recording Studios
- Reinforced Column Support Tubes
- Support Tubes May Be Sand-Loaded for Additional Safety and Performance

PSTND35

HEAVY DUTY TELESCOPING HEIGHT ADJUSTMENT MONITOR SPEAKER STANDS

- Pair of Monitor Speaker Stands for Large Heavy-Duty Speakers
- Telescoping Column for Height Adjustment
- Metal Speaker Platform
- Solid Seam Arc-Welded Construction
- Stable, Three-Point Triangle Base with Floor Spikes
- Safety Support Pin Assures Structural Stability
- Attractive Design Incorporating Cable Clip
- Height Adjustment: 26"- 52"
- Weight Capacity: 90lbs.
- Platform: 9" Square Platform with 2mm Thick Non-Slip Pad

PSTND19

DUAL UNIVERSAL HEAVY DUTY SPEAKER BRACKET STANDS WITH ADJUSTABLE HEIGHT

- Includes (2) Speaker Bracket Mount Stands
- Quickly and Easily Adjust the Height of Mounted Speakers
- Height Adjustable from 26.8" to 43.3" inches
- Versatile Stands: Perfect for Beginner & Professional Applications
- Position Speakers for Optimum Sound Performance
- Includes Universal Speaker Mounting Bracket
- Works with All Speakers with Threaded Insert

PHSTD1

ADJUSTABLE HEIGHT HOME THEATER SPEAKER STANDS

- Universal Speaker Stands
- Heavy Duty Iron Cast Construction For Durability and Stability. Adjustable Height from 29" to 50" to Ensure Perfect and Customized Sound
- 2 Sizes of Mounting Brackets and Double-Tape Ensure Correct Installation
- Concealed Wire Path Provides The Ultimate Wire Management Solution
- Easy Assembly and Installation of Speakers



PMS1



PMSM9



PMS55



PPLS203



PPLS206



PKS30

PMS1

HEAVY DUTY TRIPOD MUSIC NOTE STAND

- Adjustable Height Leveling
- Long-Lasting Steel Construction
- Folds Compactly For Convenient Transport
- Desk Size: 19" L X 14 "W
- Height Adjustable From 26" To 55"
- Weight: 8 lbs.

PMSM9

HEAVY DUTY TRIPOD MICROPHONE AND MUSIC NOTE STAND

- Adjustable Height Leveling
- Microphone Boom With Mic Holder
- Music Notes Holder
- Long-Lasting Steel Construction
- Folds Compactly For Convenient Transport
- Desk Size: 19" L X 14 "W
- Height Adjustable: From 39" To 63"
- Weight: 9 lbs.

PMS55

LIGHTWEIGHT SHEET MUSIC STAND

- Adjustable Height Leveling
- Long-Lasting Steel Construction
- Folds Compactly For Convenient Transport
- Height Adjustable 20.4€™™™™ to 51.5€™™™™
- Folded height: 23.2€™™™™
- Weight: 2.5Lbs

PPLS203

DJ LIGHTING TRIPOD STAND W/T-BAR/DUAL SIDE BAR

- Heavy Duty Steel Construction
- Tripod with 1 T-bar & 2 side bars
- Black High Gloss Finish
- Setup Height From 7.5 Feet to 15 Feet
- Safety Pin Lockers
- 8 Hanging Point Bolts
- Load Capacity :100lbs.
- Ideal for mobile DJs and bands
- Collapses down for easy transport
- Unit Dimensions: 59" H x 7" W x 6" D

PPLS206

DJ LIGHTING TRIPOD STAND W/T-BAR

- Heavy Duty Steel Construction
- Black High Gloss Finish
- Tripod with 1 T-bar
- Black High Gloss Finish
- Setup Height From 5 Feet to 15 Feet
- Safety Pin Lockers
- 4 Hanging Point Bolts
- Ideal For Mobile DJ™™s And Bands
- Collapses down for easy transport
- Load Capacity :80lbs.
- Unit Dimensions: 59" H x 7" W x 6" D

PKS30

KEYBOARD STAND WITH MUSIC STAND AND MICROPHONE BOOM

- X Braced Design For Maximum Stability
- Secure-Lock Center Clutch Height Adjustment System
- Adjustable From 20" To 63" Playing Height For Seated To Standing Positions
- Full Close Position For Easy Storage
- Welded, Heavy-Duty 1-Inch Square And Round Steel Construction
- Stable 16' Long Steel Base Supports With Non-Marking Rubber End Caps
- Weight Capacity: 80 lbs.
- Collapsible Music Holder
- Microphone Stand
- Music Stand And Microphone Stand Removable



PK312



PK20



PK60



PK50



PK60



PK70

PK312

FOLDING TRIPOD GUITAR STAND

- Holds Virtually Any Acoustic Or Electric Guitar Or Bass
- Flush End Caps To Protect Your Instrument
- Security Strap
- Black Velveteen Rubber
- Matte Black Powder Coat Finish
- 17mm Tubing (Top Section)
- Stepped Yoke For Gravity-Assisted Stability
- Rolled Edge Of Bottom Section For Easy Setup
- Non-Scratching Height Adjustment Knob
- 22mm Tubing (Bottom Section)
- Solid Steel Rod With Keyway
- Heavy-Duty Sheet Metal Leg Housing
- Non-Slip End Cap Feet
- Dimension :6'L X 6"W X 34"H

PK20

DOUBLE X BRACED HEAVY DUTY KEYBOARD STAND

- Double X Braced Design For Maximum Stability
- Secure-Lock Center Clutch Height Adjustment System
- Adjustable From 19.7" X 39.4" Playing Height
- For Seated To Standing Positions
- Full Close Position For Easy Storage
- Welded With Heavy-Duty Steel Construction
- Steel Base Supports With Non-Marking Rubber End Caps
- Height: 39.5"
- Weight Capacity: 198 lbs

PK60

TWO TIER DOUBLE X BRACED HEAVY-DUTY DJ COFFIN / KEYBOARD STAND

- Double X 2 Tier Steel Braced Heavy Duty Keyboard Stand
- Secure-Lock Center Clutch Height Adjustment System
- For Use Of Keyboards and DJ Players
- Adjustable From 39 1/4" X 51 1/4" Playing
- Height For Seated To Standing Positions
- Adjustable Width : From 14" To 38"
- Full Close Position For Easy Storage
- Long Steel Base Supports With
- Non-Marking Rubber End Caps
- Height: 51"
- Load Capacity: 220 lbs

PK50

DOUBLE BRACED FOLDING PADDED DRUM THRONE - KEYBOARD BENCH - GUITAR STOOL

- Construction: Steel
- Legs fold flat for storage
- 6 Convenient Height Positions
- Height: From 17" To 24"
- Cushion Thickness: 2"
- Bench Seat Size: 12" X 12"
- Load capacity: 275Lbs
- Seat thickness :2"
- Weight: 8 lbs.

PK60

ADJUSTABLE X-STYLE KEYBOARD BENCH

- Steel Construction
- Legs Fold Flat For Storage
- 3 Convenient Height Positions
- Height Adjustment From 16" To 24"
- Cushion Thickness: 1.5"
- Bench Seat Size: 21" X 9"W
- Load Capacity: 275lbs.
- Seat Thickness:1.5"
- Weight: 9 lbs.

PK70

MUSICIAN & PERFORMER CHAIR SEAT STOOL, ADJUSTABLE FOOTREST, SEAT & BACKREST, DURABLE, PORTABLE, FOLD-AWAY DESIGN

- Padded Seat & Backrest Cushion for Comfort
- Provides Back and Foot Rest Support
- Foldable Design for Portability and Storage
- Durable Construction with the Professional in Mind
- Height Adjustable Foot Rest, Seat, & Backrest
- Perfect for On Stage and In-Studio Use
- For Beginner and Professional Applications
- Used by Musicians, Instrument Players, Performers,
- Sound Engineers, Drummers, Pianists, Guitarists, etc.
- Assembly Instructions Included
- Weight: 26.8 lbs. Dimensions: Unit Size: 16.5" x 24" x 43.3" inches



PSCRIM2W

2-SIDED SPEAKER SCRIM



PSCRIM2B

2-SIDED SPEAKER SCRIM



PSCRIM3W

3-SIDED SPEAKER SCRIM



PSCRIM3B

3-SIDED SPEAKER SCRIM



PGST20



PGS304



PGS313



PSBGLS



PSBGMSC

PGST20

GUITAR FOOT STOOL

- Height Adjustable From 5" To 10"
- Durable Black Anodized Finish
- Ridged Non-slip Rubber Tread
- Support Bar Locks Into Sturdy Brackets
- Adjustment Levels
- Folds Flat For Compact Storage
- Height: 10"
- WEIGHT: 0.4 lbs.

PGS304

FOLDING GUITAR STAND

- Depth: 13"
- Set-up Width Positions
- Set-up Height: 17"
- Fold-up Height: 18"
- Cradle Depth Opening: 13"
- Square Steel Tube Size: 1" L X 0.6" W X 16" H
- Round Steel tube Size: 1" X 11"
- Weight: 0.8 lbs.

PGS313

GUITAR WALL HANGER

- Depth From Mounting Source : 6"
- Weight Capacity : 35 lbs
- Made For All Regular-Size Necked Instruments

PSBGLS

HEAVY DUTY LIGHTING STAND BAG

- Professional DJ Tripod Lighting Stand Bag
- Durable Vinyl Construction
- Dimensions: 60" L X 10" W X 12" H.

PSBGMSC

HEAVY DUTY VINYL MICROPHONE STAND BAG

- Professional Microphone Stand Bag
- Durable Vinyl Construction
- Dimensions: 7" L x 5" W x 2"



PSMRS11



PSi01



PSi03



PSi04



PSi06



PSi08



PSMRS11

MICROPHONE ISOLATION SHIELD WITH SOUND DAMPENING FOAM

- Isolates Your Microphone Recording from Unwanted Outside Audio Interference
- Reduces Excessive Room Ambience and Off Axis Sound During Vocal Recording.
- Isolates Directional Microphones from Off Axis Coloration.
- Limits External Bleed from Unintended Sound Sources.
- Provides Vocal Booth Style Recordings with Minimal Footprint.
- Heavy-Duty Shell Panels
- Affordable and Professional - Perfect for Any Level of Recording Studio
- Portable and Rugged, Great for "On the Go" Usage
- 2 inch Thick High Density Acoustic Foam for the Best Noise Reflection Reduction

PSi01

DUAL RECOIL STABILIZER ACOUSTIC SOUND ISOLATION FOAM PAD FEET PLATFORM BASES, SELECTABLE SPEAKER ANGLE MOUNTING, ELIMINATES AUDIO VIBRATIONS (FOR STUDIO MONITOR, SUBWOOFER, LOUSPEAKERS, SHELF SPEAKERS, ETC.)

- Includes (2) Universal Recoil Stabilizers
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Speaker Sound Projection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates Speakers
- Effectively Absorbs Bass Recoil
- Made of High-Density, Engineered Durable Foam
- Effectively Absorbs Bass Recoil
- Made of High-Density, Engineered Durable Foam
- Ability to Mount Your Speakers in (3) Different Angles
- Made of High-Density, Engineered Durable Foam
- Ability to Mount Your Speakers in (3) Different Angles

PSi03

DUAL RECOIL STABILIZER ACOUSTIC SOUND ISOLATION FOAM PAD FEET PLATFORM BASES, SELECTABLE SPEAKER ANGLE MOUNTING, ELIMINATES AUDIO VIBRATIONS (FOR STUDIO MONITOR, SUBWOOFER, LOUSPEAKERS, SHELF SPEAKERS, ETC.)

- Includes (2) Universal Recoil Stabilizers
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Speaker Sound Projection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates Speakers
- Effectively Absorbs Bass Recoil
- Made of High-Density, Engineered Durable Foam
- Ability to Mount Your Speakers in (3) Different Angles
- (Add or Remove the Top Pad to Set Speaker Angles)
- Speaker Angle Mounting Selectable: 0°, 5° or 10°
- Reversible: 'Upward' or 'Downward'

PSi04

RECOIL STABILIZER ACOUSTIC SOUND ISOLATION FOAM PAD PLATFORM BASE, ANGLED SPEAKER MOUNTING, ELIMINATES AUDIO VIBRATIONS (FOR STUDIO MONITOR, SUBWOOFER, LOUSPEAKERS, SHELF SPEAKERS, ETC.)

- Includes (1) Universal Speaker Recoil Stabilizer
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Speaker Sound Projection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates the Speaker
- Effectively Absorbs Bass Recoil
- Made of High-Density, Engineered Durable Foam
- Simply Place Your Speaker on the Pad Platform
- 'CNC' Machined Thick Steel Top-Plate
- Anti-Slip Rubber Speaker Base Pad
- Suitable for On Stage or In-Studio Use

PSi06

RECOIL STABILIZER ACOUSTIC SOUND ISOLATION FOAM PAD PLATFORM BASE, ANGLED SPEAKER MOUNTING, ELIMINATES AUDIO VIBRATIONS (FOR STUDIO MONITOR, SUBWOOFER, LOUSPEAKERS, SHELF SPEAKERS, ETC.)

- Includes (1) Universal Speaker Recoil Stabilizer
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Speaker Sound Projection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates the Speaker
- Effectively Absorbs Bass Recoil
- Made of High-Density, Engineered Durable Foam
- Simply Place Your Speaker on the Pad Platform
- 'CNC' Machined Thick Steel Top-Plate
- Anti-Slip Rubber Speaker Base Pad
- Suitable for On Stage or In-Studio Use

PSi08

RECOIL STABILIZER ACOUSTIC SOUND ISOLATION FOAM PAD PLATFORM BASE, ANGLED SPEAKER MOUNTING, ELIMINATES AUDIO VIBRATIONS (FOR STUDIO MONITOR, SUBWOOFER, LOUSPEAKERS, SHELF SPEAKERS, ETC.)

- Includes (1) Universal Speaker Recoil Stabilizer
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Speaker Sound Projection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates the Speaker
- Effectively Absorbs Bass Recoil
- Made of High-Density, Engineered Durable Foam
- Simply Place Your Speaker on the Pad Platform
- 'CNC' Machined Thick Steel Top-Plate
- Anti-Slip Rubber Speaker Base Pad
- Suitable for On Stage or In-Studio Use
- For Beginner and Professional Acoustical Applications
- Universal Compatibility with Virtually All Speaker Types
- Works with Studio Monitors, Subwoof-



PSi12

RECOIL STABILIZER ACOUSTIC SOUND ISOLATION FOAM PAD PLATFORM BASE, ELIMINATES AUDIO VIBRATIONS (FOR STUDIO MONITOR, SUBWOOFER, LOUSPEAKERS, SHELF SPEAKERS, ETC.)

- Includes (1) Universal Speaker Recoil Stabilizer
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Speaker Sound Projection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates the Speaker
- Effectively Absorbs Bass Recoil
- Made of High-Density, Engineered Durable Foam
- Simply Place Your Speaker on the Pad Platform
- Anti-Slip Rubber Speaker Base Pad
- Suitable for On Stage or In-Studio Use
- For Beginner and Professional Acoustical Applications
- Universal Compatibility with Virtually All Speaker Types
- Works with Studio Monitors, Subwoofers, Louspeakers, Shelf Speakers, etc.
- Used by Musicians, Instrument Players, Performers, Sound Engineers, DJ, MC, etc.
- Maximum Speaker Weight Limit: 111.0 lbs.

PSi15

RECOIL STABILIZER ACOUSTIC SOUND ISOLATION FOAM PAD PLATFORM BASE, ELIMINATES AUDIO VIBRATIONS (FOR STUDIO MONITOR, SUBWOOFER, LOUSPEAKERS, SHELF SPEAKERS, ETC.)

- Includes (1) Universal Speaker Recoil Stabilizer
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Speaker Sound Projection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates the Speaker
- Effectively Absorbs Bass Recoil
- Made of High-Density, Engineered Durable Foam
- Simply Place Your Speaker on the Pad Platform
- Anti-Slip Rubber Speaker Base Pad
- Suitable for On Stage or In-Studio Use
- For Beginner and Professional Acoustical Applications
- Universal Compatibility with Virtually All Speaker Types
- Works with Studio Monitors, Subwoofers, Louspeakers, Shelf Speakers, etc.
- Used by Musicians, Instrument Players, Performers, Sound Engineers, DJ, MC, etc.
- Maximum Speaker Weight Limit: 90 lbs.

PSi18

SOUND PANEL STUDIO FOAM ACOUSTIC RECORDING WEDGE PANELS, ISOLATION, ABSORPTION, AUDIO DAMPENING WALL TILES, PYRAMID STYLE, 24 PIECE PANEL KIT, SOUNDPROOFING

- Includes (24) Pieces of Acoustic Studio Foam Paneling
- Angled Surface Area for Greater Exposure to Sound Waves
- Wedgie Style Sound Absorption
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Sound Projection
- Tested to Reduce Unwanted Noise & Sound Reflection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates Sound When Recording
- Universal Standard 12" x 12" inch Squares
- (12) Angled CNC Machined Wedges on Each Panel
- 2" -inch Thick Engineered Noise-Reducing Foam

PSi21

RECOIL STABILIZER ACOUSTIC SOUND ISOLATION FOAM PAD PLATFORM BASE, ELIMINATES AUDIO VIBRATIONS (FOR STUDIO MONITOR, SUBWOOFER, LOUSPEAKERS, SHELF SPEAKERS, ETC.)

- Includes (1) Universal Speaker Recoil Stabilizer
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Speaker Sound Projection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates the Speaker
- Effectively Absorbs Bass Recoil
- Made of Thick, High-Density, Engineered Durable Foam
- Carpet Covered Wooden Platform Base
- Simply Place Your Speaker on the Pad Platform
- Anti-Slip Rubber Speaker Base Pad
- Suitable for On Stage or In-Studio Use
- For Beginner and Professional Acoustical Applications
- Universal Compatibility with Virtually All Speaker Types
- Works with Studio Monitors, Subwoofers, Louspeakers, Shelf Speakers, etc.
- Used by Musicians, Instrument Players, Performers, Sound Engineers, DJ, MC, etc.

PSiP24

SOUND WALL PANEL STUDIO FOAM ACOUSTIC RECORDING WEDGE WITH STAND MOUNT, ISOLATION, ABSORPTION, AUDIO DAMPENING WALL TILE PAD, PYRAMID STYLE, SOUNDPROOFING, TRI-POD BASE

- Quick and Easy Sound Isolation Setup
- Lightweight & Portable Acoustical Sound Panel
- Wedgie Wall-Pad Style Studio Sound Absorption
- Assists in Achieving Optimal Audio Performance
- Helps Promote the Flow of 'Clean' Sound Projection
- Tested to Reduce Unwanted Noise & Sound Reflection
- Reduces Vibration & Unwanted Audio Resonance
- Stabilizes and Isolates Sound When Recording
- Effective Noise-Reducing and Sound Dampening
- Tripod Mounted Absorber Shield for Added Stability
- 2" -inch Thick Engineered Noise-Reducing Foam
- Extra Large Machined Pyramid-Style Wedge Panel

Cables

Wiring



PCBL10F1

12 Gauge 1Ft RCA Male To 3-Pin XLR Male Audio Cable



PCBL1F12

Premium Quality 12 Ft 1/4" To 1/4" Guitar/Instrument/Amp Cable W/Fabric Shielding



PCBL1F25

Premium Quality 25 Ft 1/4" To 1/4" Guitar/Amp/Instrument Cable W/Fabric Shielding



PCBL2F15

Premium Quality 15 Ft Dual 1/4" Male To 1/4" Male Jack



PCBL2F3

Premium Quality 3 Ft Dual 1/4" Male To 1/4" Male Jack



PCBL2F6

Premium Quality 6 Ft Dual 1/4" Male To 1/4" Male Jack



PCBL34

12 Gauge 1/4" Female To Dual Banana Plug Cable



PCBL38FT6

6 Ft 12 Gauge 3.5mm Male To Dual XLR Female Cable



PCBL3F1

1 Ft 1/4" Stereo Male To 1 XLR Male And XLR Female Y-Cable



PCBL3F3

3 Ft 1/4" Stereo Male To 1 XLR Male And XLR Female Y-Cable



PCBL41

12 Gauge Compatible With Speakon Connector Male To 1/4" Female Cable



PCBL42FT6

12 Gauge 6Ft RCA Male To 3.5mm" Male Cable



PCBL43FT3

12 Gauge 3Ft 3.5mm Male Stereo To Dual 1/4" Male Mono Y-Cable Adapter



PCBL43FT6

12 Gauge 3.5mm 6Ft Male Stereo To Dual 1/4" Male Mono Y-Cable Adapter



PCBL4F12

12 Gauge 12Ft 1/4" Male To Right Angle 1/4" Male Phono Instrument/Amp



PCBL4F25

Gauge 25Ft 1/4" Male To Right Angle 1/4" Male Speaker Amp Cable



PCBL4F6

6 Ft 1/4" Male To Right Angle 1/4" Male Phono Cable



PCBL9F1

12 Gauge 1Ft RCA Male To 3-Pin XLR Female Audio Cable



PCBLG6

12 Gauge Right Angle Metal 1/4 To 1/4 Guitar Patch Cable 6 Inch



PCBLG7F1

12 Gauge 1Ft 1/4" Male To 1/4" Male Phono Speaker Cable



PCBLG7F3

12 Gauge 3Ft 1/4" Male To 1/4" Male Speaker Cable



PCBLG7I06

12 Gauge 6 Inches 1/4" Male To 1/4" Male Speaker Cable



PCBLGF12

Coiled 12Ft 1/4" Male To 1/4" Right Angle Male Guitar/Instrument/Speaker Phono Cable



PCBLGF25

Coiled 25Ft 1/4" Male To 1/4" Right Angle Male Speaker Cable



PCBLGF6

Coiled 6Ft 1/4" Male To 1/4" Right Angle Male Guitar/Instrument/Amp Cable



PCBLGF100

100Ft 12 AWG Spool Speaker cable With Rubber Jacket



PCBLGF300

300Ft 12 AWG Spool Speaker cable With Rubber Jacket



PCBLGF500

500Ft 12 AWG Spool Speaker cable



PPBB15

15 Feet 12 Gauge Banana Plug To Banana Plug Speaker Cable



PPBB30

30 Feet 12 Gauge Banana Plug To Banana Plug Speaker Cable



PPFMXLR01

12 Gauge 6 Inch 1/4" To XLR Female Cable



PPFMXLR15

15ft. XLR Male to XLR Female Microphone Cable



PPJU15

15ft. 12 Gauge Professional Speaker Cable 1/4" to 1/4"

**PPJU30**

30ft. 12 Gauge Professional Speaker Cable 1/4" to 1/4"

**PPJU50**

50ft. 12 Gauge Professional Speaker Cable 1/4" to 1/4"

**PPJX20**

20 Feet 12 Gauge Professional 1/4" Phono To XLR Male

**PPJX50**

50 Feet 12 Gauge Professional Speaker Cable 1/4" to XLR Male

**PPMGL15**

15ft. Symmetric Microphone Cable XLR Female to XLR Male

**PPMGL30**

30ft. Symmetric Microphone Cable XLR Female to XLR Male

**PPMGL50**

50ft. Symmetric Microphone Cable XLR Female to XLR Male

**PPMJL15**

15ft. Professional Microphone Cable 1/4" Male to XLR Female

**PPMJL30**

30ft. Professional Microphone Cable 1/4" Male to XLR Female

**PPMJL50**

50ft. Professional Microphone Cable 1/4" Male to XLR Female

**PPRCJ05**

Dual 5ft. Professional Audio Link Cable 1/4" Male to RCA Male

**PPRCX05**

Dual 5ft. Professional Audio Link Cable XLR Female to RCA Male

**PPSJ15**

15ft. 12 Gauge Professional Speaker Cable Compatible With Speakon Connector to 1/4"

**PPSJ30**

30ft. 12 Gauge Professional Speaker Cable Compatible With Speakon Connector to 1/4"

**PPSJ50**

50ft. 12 Gauge Professional Speaker Cable Compatible With Speakon Connector to 1/4"



PPSS15

15' Foot Professional Speaker Cable Male Compatible With Speakon Connector to Male Compatible With Speakon Connector

**PPSS30**

30' Foot Professional Speaker Cable Male Compatible With Speakon Connector to Male Compatible With Speakon Connector

**PPSS50**

50' Foot Professional Speaker Cable Male Compatible With Speakon Connector to Male Compatible With Speakon Connector

**PPSN811**

10 Ft. 8 Channel XLR Male to XLR Female Snake Cable

**PPSN813**

10 Ft. 8 Channel XLR Male to 1/4" Male Unbalanced Snake Cable

**PPSN814**

10 Ft. 8 Channel Unbalanced 1/4" Male to 1/4" Male Snake Cable

**PPSN815**

10 Ft. 8 Channel RCA Male to RCA Male Snake Cable

**PPSN817**

10 Ft. 8 Channel RCA Male to 1/4" Male Unbalanced Snake Cable

**PPSN817**

10 Ft. 8 Channel Balanced (Stereo) 1/4" Male to 1/4" Male Snake Cable

**PPSN821**

20 Ft. 8 Channel XLR Male to XLR Female Snake Cable

**PPSN823**

20 Ft. 8 Channel XLR Male to 1/4" Male Unbalanced Snake Cable

**PPSN827**

20 Ft. 8 Channel RCA Male to RCA Male Snake Cable



For more detailed specifications, product-specific information and models visit www.PyleAudio.com

Soundbars

Sound Towers



300 WATT BLUETOOTH SOUNDBAR W/USB/SD/FM RADIO & WIRELESS REMOTE

PSBV200BT



- Piano-Black Finish Wooden Case & Front Panel Blue Backlight LCD Display
- Bluetooth Wireless Audio Streaming capability from Most Bluetooth enabled devices
- USB 2.0 Host & SD/MMC for external moving Harddrive/Flashdrive. Plays MP3, & WMA Music Formats
- Aux1, Aux2, PC/MP3 Audio Inputs
- Source Selection, Play/Pause/ Bluetooth/ Standby/ Volume +/- On board Control
- 5 Speaker Total: 1 x 5.25" Mid Woofer, 2 x 3" Full Range Speaker, & 2 x 1" Vocal Tweeter
- Wireless Handheld Remote Control

- Frequency Response: 20Hz-20KHz
- Input Sensitivity: 800mV
- S/N Ratio:>70dB
- Channel Separation Rate (1kHz):>40dB
- Power Output: 300 Watts Peak / 150 Watts RMS
- Woofer Impedance: 8 Ohm
- Tweeter & Full Range Speakers: 4 Ohm THD (1kHz,1W,8Ohm):<0.5%
- Bluetooth Version 2.0+EDR
- Power Supply: DC 18V/2.5A
- Unit Dimensions: H: 4.7" x W: 9.8" x L: 23.8"
- Unit Weight: 11.7 LBS

PSBV250BT

AUDIO LEVEL BLUETOOTH STEREO SOUNDBAR DIGITAL SPEAKER SYSTEM, 2-CHANNEL, REMOTE CONTROL AND AUX (3.5MM), RCA & OPTICAL INPUTS

- Powerful and Compact Speaker Sound Bar System
- Built-in Bluetooth for Instant Wireless Music Streaming
- Works with All of Your Favorite Bluetooth-Enabled Devices (iPhone, Smartphone, iPod, MP3 Player, iPad, Tablet, PC, MP3 player, etc.)
- Inputs: 3.5mm (AUX), RCA and Digital Optical Audio (Connect to TV, Mac, PC, Laptop, Home Theater, Receiver, etc.)
- Includes (2) 2" Full Range Stereo Speakers
- 2-Channel Digital System
- Efficient Stereo Sound Reproduction
- Impressive Bass Response
- Easy Touch Button Controls
- Lightweight and Sleek Speaker Design
- Glossy Black Finish

- Equalizer (EQ) Preset Sound Effects
- Convenient Source Selection with LED Indicators
- Includes Wall Mount Brackets, Remote Control and RCA to RCA Audio Cable>><Technical Specs:</>
- Max Power Output: 20 Watt x 2
- Bluetooth Version: 3.0
- Bluetooth Wireless Range: 30 Feet
- Impedance: 8 Ohm
- Power Supply: AC~120V, 60Hz
- Frequency Response: 40Hz - 20kHz (+/-6dB)
- Input Sensitivity: 700mV
- S/N: 60dB
- THD: 10%
- Remote Battery Required: CR2025 Dimensions: 31.7" x 2.3" x 2.5" Weight : 3.2 lbs.



BLUETOOTH SOUNDBAR DIGITAL SPEAKER SYSTEM, 200 WATT, FM RADIO, WIRELESS REMOTE, SUBWOOFER OUTPUT, STEREO INPUT

PSBV320BT



- Powerful and Compact Sound Bar Speaker
- Built-in Bluetooth for Instant Wireless Music Streaming
- Works with All of Your Favorite Bluetooth-Enabled Devices (iPhone, Smartphone, iPod, MP3 Player, iPad, Tablet, PC, MP3 player, etc.)
- (2) x 3.5 inch Speakers and Classic Dome Tweeter
- Soft Touch Digital Control Panel with LCD Display
- Digital LED Front Panel Indicators with Input Selection
- Bass, Treble, Volume, Input, Mute, Sleep Controls
- FM Radio Receiver with 10 Memory Presets
- MP3 / External Device Input Connector Jack
- Optical & Coaxial Digital Audio Inputs
- Line Output for Active Subwoofer

- Impressive Bass Response
- Effectively Reproduces Full Range Stereo Sound (L) and (R) Channel System
- Includes Remote ControlTechnical Specs:Power Output: 200 Watts Peak / 100 Watts RMS
- Bluetooth Version V2.1 + EDR with A2DP
- Frequency Response: 350Hz - 20kHz
- Impedance: 4 Ohm
- S/N Ratio:>90 dB
- Weight: 11 lbs.
- Power Supply: DC 15V 1.5A
- Dimensions: 39.3 x 3.7" x 6.1" inches

PSBV600BT

WAVE BASE BLUETOOTH TABLETOP SOUNDBAR DIGITAL SPEAKER SYSTEM WITH REMOTE CONTROL, AUX (3.5MM) & RCA INPUT JACKS

- Designed to Sit Under Your Television
- Home Theater Tabletop TV Stand Mount
- Powerful and Compact Speaker Sound Bar System
- Built-in Bluetooth for Instant Wireless Music Streaming
- Works with All of Your Favorite Bluetooth-Enabled Devices (iPhone, Smartphone, iPod, MP3 Player, iPad, Tablet, PC, MP3 Player, etc.)
- System Doubles as TV Speaker Base Entertainment System
- Ported Tube Design for Extended Bass Performance
- Full-Range Audio Spectrum Stereo Sound Reproduction
- Convenient Source Selection with LED Indicators
- Easy Touch Button Audio Select Control Center
- Aux (3.5mm) Input Connector Jack
- Easy-to-Use and Easy-to-Setup
- Includes Remote Control, Power Supply and RCA to RCA Audio Cables >><Technical Specs:</>

- Max Power Output: 30 Watt (15 x 2)
- Bluetooth Version: 3.0
- Bluetooth Wireless Range: 30 Feet
- Speaker Impedance: 6 Ohm
- 3-Way Sound: (4) x 1.5" Full Ranges and (1) x 3.5" Woofer
- Inputs: 3.5mm (AUX), RCA and Digital Optical Audio Connector Jacks (Connect to TV, Mac, PC, Laptop, Home Theater, Receiver, etc.)
- Power Supply: AC~120V, 60Hz
- Frequency Response: 50Hz - 20kHz (+/- 6dB)
- Input Sensitivity: 700mV
- S/N: 60dB
- THD: 10%
- Maximum TV Holding Capacity: 110 lbs.
- Dimensions: 20.6" x 12.0" x 3.0"



SMART SOUNDBAR HD DIGITAL SPEAKER SYSTEM WITH BUILT-IN ANDROID COMPUTER, WI-FI, BLUETOOTH, MICROPHONE, USB & SD CARD READERS, 300 WATT

PSBVWF300B



- Built-in Android Computer and Speaker System
- Surf the Web, Download Apps, Get Connected
- WiFi: High Speed Wireless Internet Connectivity
- Bluetooth: Wirelessly Stream Audio and Video Files
- Built-in Microphone for Hands-Free Call Answering
- Gives Your TV and Home Theater Computer Functionality
- Also Connects to PC, DVD, Blu-ray Player, Gaming Console, PC, Laptop etc.
- 1080p High Definition Resolution Display
- USB Flash and SD Memory Card Readers
- Multi-Function Interface: RCA, AUX Input, HDMI, SPDIF & CVBS Video Output
- 3 in 1 Wireless Remote with Keyboard and Air Mouse
- File Compatibility: Works with your favorite audio, video & image files(WMV, MP3, MP4, AVI, MPEG, WAV, MIDI, M4A, JPG, and more)
- Includes Remote, HDMI, PC Power, RCA and Power Adapter Cables
- Includes Wall Mount Brackets and Hardware
- Technical Specs:
 - 300 Watt Output Power
 - Android 4.2 Operating System
 - Dual Core CPU, Built-in 8GB DDR3 RAM
 - Input Sensitivity: 450mV ±50mV
 - S/N: = 70dB
 - Speaker Impedance: 4 Ohm
 - Total Harmonic Distortion (THD): = 0.2%
 - Channel Separation Rate: (1 kHz) = 45dB
 - Woofer Frequency Response: 50Hz - 400Hz
 - Speaker Frequency Response: 200Hz - 20kHz
 - Power Supply: AC/DC 100 - 240V/50Hz-60Hz
 - Dimensions: 39.37" x 6.3" x 2.75"

PSB90I

IPHONE/iPOD 2.1 SOUNDBAR DOCKING SYSTEM WITH AUX-IN AND VIDEO OUTPUT

- Play and Charge Your iPod or iPhone
- RCA L/R Audio-In Jacks for Stereo Connection
- 3.5mm Aux-In Jack for MP3 Player Connection
- Full Function Remote Control
- Composite Video Output For Playing Videos on TV
- 2x10W Output + 30W Subwoofer
- Bass Control
- Unit Dimensions: 4.75"H x 7"D x 40"L



5.1 CHANNEL 350 WATT DIGITAL HOME THEATER AM/FM RECEIVER SURROUND SOUND PACKAGE W/ SUBWOOFER/CENTER CHANNEL & 4 x TWO WAY DIRECTIONAL SATELLITE SPEAKERS

PT598AS

- 5.1 Channel Amplifier
- Built-In AM/FM Radio
- 2 MIC Input, Treble & Bass of MIC Adjustable, Independent MIC Volume Control
- Over Current Protection, Short Circuit Protection & Over Voltage Protection
- 12 Preset Radio Station
- Full Remote Control
- VFD Display
- Power Input: AC 115V 60Hz/230V 50Hz
- Power Output: 300W L,R Channel (4 Ohm); 50W for Center, Surround L & Surround R (4 Ohm)
- In-Out Selector: 3 Stereo RCA Inputs, AM/FM Radio, 1 DVD Input, 2 Microphone Inputs
- Output: 5 Channel Speaker Output Terminal for Left, Right, Center, Front Left, Front Right & Subwoofer
- Net Weight: 40.0 Lbs
- Gross Weight: 46.3 Lbs
- Dimensions: 25.2" x 20.3" x 16.5"

PT628A

400-WATT 5.1 CHANNEL HOME THEATER SYSTEM WITH AM/FM TUNER, CD, DVD & MP3 PLAYER COMPATIBLE

- THD: 0.1%
- S/N Ratio: 85dB
- Digital VFD Display
- DVD & CD Compatible
- MP3 & MP4 Compatible
- 400 Watts Total Power
- Gold Capped A/V Cables & Wires
- Subwoofer: 150 Watts, 10" Long Throw Driver
- Control EQ, All Functions From Remote Control
- Receiver Includes Amplifier, Pre-Amp, AM/FM Tuner
- Satellites and Center Speaker: 250 Watts (5x50 W), 3" Drivers
- Frequency Response: Satellite 150Hz-20kHz, Subwoofer 50Hz-330Hz
- Satellite Speaker Dimensions: 5.89" x 2.75" x 8.84"
- Center Channel Dimensions: 5.89" x 2.75" x 14.14"
- Subwoofer Dimensions (DxWxH): 16.50" x 14.54" x 11.00"



400 WATTS 5.1 CHANNEL HDMI HOME THEATER SYSTEM WITH BLUETOOTH AUDIO PLAYBACK, AM/FM TUNER

PT678HBA

- 2 HDMI Digital Inputs, 1 Digital HDMI Output
- 3D Pass-Thru HDMI Technology
- Bluetooth Audio Playback - Stream From Your iPhone, iPad, iPod, Android
- Receiver Includes Amplifier, Pre-Amp, AM/FM Tuner
- 400 Watts Total Power
- Subwoofer: 150 Watts, 10" Long Throw Driver
- Satellites and Center Speaker: 250 Watts (5x50 W), 3" Drivers
- Control EQ, All Functions From Remote Control
- Digital VFD Display
- Gold Capped A/V Cables & Wires
- MP3 & MP4 Compatible
- DVD & CD Compatible
- Frequency Response: Satellite 150Hz-20kHz, Subwoofer 50Hz-330Hz
- S/N Ratio: 85dB
- THD: 0.1%
- Subwoofer Dimensions: 16.50"D

PT798SBA

7.1 CHANNEL HOME THEATER SYSTEM WITH SATELLITE SPEAKERS, CENTER CHANNEL, SUBWOOFER, BLUETOOTH, FM TUNER



- THD: 0.1%
- S/N Ratio: 85dB
- Digital VFD Display
- DVD & CD Compatible
- MP3 & MP4 Compatible
- 500 Watts Total Power
- Gold Capped A/V Cables & Wires
- Subwoofer: 150 Watts, 10" Long Throw Driver
- Control EQ, All Functions From Remote Control

- Receiver Includes Amplifier, Pre-Amp, FM Tuner
- Bluetooth Audio Playback - Connect To iPhone, iPod, Android
- Satellites and Center Speaker: 350 Watts (7x50 W), 3" Drivers
- Frequency Response: Satellite 150Hz-20kHz, Subwoofer 50Hz -330Hz
- Subwoofer Dimensions (DxWxH): 16.50" x 14.93" x 10.22"



5.1 HOME THEATER PASSIVE AUDIO SPEAKERS W/ FOUR SATELLITE, CENTER CHANNEL & 10" SUBWOOFER

PHS51P

- 200 Watt Subwoofer with Built-in Crossover Network
- 10" Long Throw Subwoofer Driver Subwoofer
- Efficiency: 88db Speaker
- Impedance (Satellite/Center/Sub): 8 Ohm Magnetically
- Shielded Center Channel Satellite/Center
- Frequency Response: 150Hz - 20KHz Subwoofer
- Frequency Response: 50Hz - 330Hz Satellite/Center Speaker Size: 3"

- Subwoofer Speaker Size: 10"
- Piano Black ABS Plastic Satellite & Center Channel
- Piano Black Wooden Subwoofer Enclosure Satellite Speaker
- Dimensions: 6.3"H x 4.7"W x 3"D Center Channel
- Speaker Dimensions: 3"H x 9.2"W x 4.7"D
- Subwoofer Speaker Dimensions: 14.3"H x 7.87"W x 20.6"D Piano Black Finish

PHSA5

5.1 HOME THEATER SPEAKER SYSTEM WITH ACTIVE SUBWOOFER AND FIVE SATELLITE SPEAKERS



- 100 Watt Active Subwoofer
- 10" Long Throw Driver
- Includes 5 Speakers (1 Center Channel, 4 Satellite)
- Built-In Auto-Gain Control
- Subwoofer High Cut and Phase Switch
- Stereo RCA Line-In Input
- Stereo RCA Line-Out
- Crossover Slope Adjusted to 80Hz
- Impedance: 4-8 Ohms
- Magnetically Shielded Center Speaker
- S/N Ratio: 85dB

- THD: 0.1%
- Frequency Range: Satellites - 150Hz-20kHz, Subwoofer - 50Hz-330Hz
- Drive Unit: Satellites - 3 Inch, Subwoofer - 10 Inch
- Subwoofer Dimensions (DxWxH): 7.9" x 20.7" x 14.4"
- L,R Channel Dimensions: 3.1" x 4.7" x 6.3"
- Surround Channel Dimensions: 3.1" x 4.7" x 6.3"
- Center Channel Dimensions: 9.3" x 4.7" x 3.1"
- Color: Piano Black Lacquer Finish
- Weight: 35.3 lbs

2.1 MULTI-MEDIA AUDIO SYSTEM SYSTEM POWER (MAX):100 WATTS



PSB6AI

- atellite:
- 2-way Hi-Fi speaker system
- 4" midwoofer with shielded magnet design
- 13mm mylar dome tweeter with shielded magnet design
- 6 dB/Oct Crossover for Hi-pass
- Frequency range: 100~21KHz
- MDF with PVC striffen finish enclosure
- Fast-On spring terminal
- 5.3"(W)x4.92"(D)x7.87"(H) Subwoofer:
- 6.5" High Power subwoofer, 8 Ohms, with Shielded Woofer Magnet: 11 Oz Ferrite
- Frequency range: 30~120KHz

- MDF with PVC striffen .nish enclosure
- 5.3"(W)x4.92"(D)x7.87"(H) Amplifier:
- 10 Watts x 2 RMS @ 8 Ohms (20Wx2 dynamic power) for satellite
- 30 Watts RMS @ 8 Ohm (60W dynamic power) for subwoofer
- Total Harmonic Distortion< 0.5%
- Signal to Noise Ratio >84dB
- Standby Power:~1W
- Source: iPod / DVD RCA / TV RCA / Game RCA / Video
- Power supply: +19VDC, 3.2A, 100V-239V AC
- Remote: IR Card Remote Control
- System Weight:14.33 lbs



BLUETOOTH 2.1 CHANNEL SOUND TOWER SPEAKER SYSTEM WITH USB FLASH DRIVE READER, AUX (3.5MM) & RCA INPUT CONNECTORS, FM RADIO

PHITB65BK

- 2.1 Channel Digital Stereo Home Theater
- Play and Stream Your Music Wireless via Bluetooth
- Works with All of Your Favorite Bluetooth Devices (iPod, MP3 Players, iPhone, Smartphones, Tablets, PCs, etc.)
- 3.5mm (Aux-In) Jack for Connecting Additional External Devices
- FM Radio PLL Tuner with 30 Station Memory Presets
- RCA (L/R) Audio-Input Connector Jacks
- USB Flash Drive Reader for Audio Playback
- USB Port Also Charges Your Mobile Device
- LCD Digital Display with Clock
- LED Backlight with Adjustable Dimmer Controls
- Full Range Stereo Sound Reproduction
- Impressive Bass Output
- Easy Touch Button Controls
- Wireless Remote Control & 3.5mm Connection Cable Included
- Technical Specs: Bluetooth-SSC, A2DP with Auto Pairing
- Bluetooth Wireless Range: 33' Feet
- USB File Compatibility: .wav
- Includes 3.5" Subwoofer & 3.5" Mid-Range Speakers
- Max. USB Flash Drive Size Supported: 32GB
- FM Frequency: 87.5-108MHz
- Dimensions (L x W x H): 5.8" x 5.8" x 38.9"
- Base Dimensions (L x W x H): 9.4" x 7.8" x 0.4"

PHBT97PB

BLUETOOTH 600 WATT 2.1-CHANNEL DIGITAL HOME THEATER SOUND TOWER



- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Enabled Device (iPhone, Android, Smartphones, Tablet, MP3 player, TV, PC etc.)
- 2.1 Channel Digital Amplifier
- RCA AUX Input to Connect Additional Devices
- Built-in FM Radio with Memory Presets
- Touch Button Control Panel & Digital LCD Display
- 600 Watt Maximum Output Power
- Wide Range Stereo Sound Reproduction
- Remote Control & Power Adapter Included
- Speaker System: Dual 3.5" Mid-Range Drivers
- Dual 3.5" Tweeters
- 8" Subwoofer-Technical Specs: System Power: DC 21V (110V Adapter)
- Power: Subwoofer: 300W, L: 150W, R: 150W
- Bluetooth Version 2.1 +EDR
- Frequency: L/R 150Hz-20kHz, Subwoofer 50Hz-180Hz
- S/N: 85dB
- THD: 0.1%
- Gross Weight: 35.3 Lbs
- Dimensions (W x L x H): 11.4" x 15.2" x 41.8"



2.1 CHANNEL SOUND TOWER SYSTEM - WORKS WITH ALL IPODS, IPADS & IPHONES

PHST80IP

- THD: 0.1%
- Alarm/Clock Control
- 2.1 Channel Amplifier
- 600 Watts Output Power
- Component Video Output
- 85 dB Signal Ratio Range
- Full Function Remote Control
- Independent Channel Control
- Dimensions (WxDxH): 9.4" x 11.4" x 39.4"
- Output Power: L/R - 12W, Subwoofer - 26W
- Drive Unit: L/R Channel - 2 x 3", Subwoofer - 5"
- Frequency: L/R - 150Hz-20kHz, Subwoofer - 50Hz-280Hz

PHST90ICW

600 WATT DIGITAL 2.1 CHANNEL HOME THEATER TOWER W/ IPOD/IPHONE DOCKING STATION - CHERRY WOOD FINISH



- iPod/iPhone/MP3/AUX Input
- Built-in FM Radio With Memory
- Alarm Clock Control and Time
- 2.1 Channel amplifier
- Real 2.1 Channel output
- Full Function Remote Control
- Independent Control of Each Channel
- iPod/iPhone Can be Controlled Through Remote
- iPod/iPhone Charged Automatically
- Touch Key Control System
- LCD display
- Output power: 600 Watts
- L (150Watts x 1) R (150Watts x 1) Subwoofer (300Watts x 1)
- Frequency: L, R 150Hz-20kHz Subwoofer 50Hz-180Hz
- Mid Range Driver: Dual 3.5 Inch
- Tweeter: Dual 3.5 inch
- Subwoofer: 8 inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Power: DC 21 Volts w/ 110V Adapter
- Dimensions: 5.43"D x 17.3"W x 40.15"H
- iPod not included



BLUETOOTH 600 WATT 2.1 CHANNEL DIGITAL HOME THEATER TOWER WITH IPOD, IPAD, IPHONE DOCKING STATION, FM RADIO & ALARM CLOCK

PHBT98PBK

- 30-Pin Docking Station for iPod, iPhone, iPad
- Built-in Bluetooth Enabled Compatibility
- Connect External Devices via AUX Input
- Built-in FM Radio with Integrated Memory
- Alarm Clock Control and Time Display
- 2.1 Channel Digital Amplifier
- Fully Functional Remote Control
- Independent Control of Each Channel
- iPod Can be Controlled with Remote Control
- Docking Station Charges Your Device Automatically
- Touch Key Control Console with LCD Display
- Output Power: 600 Watts
- Frequency: L, R 150Hz-20kHz, Subwoofer 50Hz-180Hz
- Mid Range Drier: Dual 3.5 Inch
- Tweeter: Dual 3.5 inch
- Subwoofer: 8 inch
- S/N: 85Db
- THD: 0.1%

PHST92IBK

600 WATT DIGITAL 2.1 CHANNEL HOME THEATER TOWER W/ IPOD & IPHONE DOCKING STATION - BLACK WOOD FINISH

PHST92IBGL

GLOSSY BLACK FINISH

- iPod/iPhone/MP3/AUX Input
- Built-in FM Radio With Memory
- Alarm Clock Control and Time
- 2.1 Channel amplifier
- Real 2.1 Channel output
- Full Function Remote Control
- Independent Control of Each Channel
- iPod Can be Controlled Through Remote
- iPod Charged Automatically
- Touch Key Control System
- LCD display
- Output power:600 Watts
- L (150Watts x 1) R (150Watts x 1) Subwoofer (300Watts x 1)
- Frequency: L,R 150Hz-20kHz Subwoofer 50Hz-180Hz
- Mid Range Driver: Dual 3.5 Inch
- Tweeter: Dual 3.5 inch
- Subwoofer: 8 inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Power: DC 21 Volts w/ 110V Adapter
- Dimensions: 11.5"D x 15.2"W x 41.75"H
- iPod not included



600 WATT DIGITAL 2.1 CHANNEL HOME THEATER TOWER W/ DOCKING STATION FOR IPOD/IPHONE/IPAD (BLACK COLOR)

PHST94IPBK

CHERRY WOOD FINISH

PHST94IPCW



- iPod/iPhone/iPad/MP3 AUX Input
- S-Video Output
- Built-In FM Radio with Memory
- Alarm Clock Control and Time
- 2.1 Channel Amplifier
- Real 2.1 Channel Output
- Full Function Remote Control
- Independent Control of Each Channel
- iPod/iPhone/iPad can be Controlled Through Remote
- iPod/iPhone/iPad Charged Automatically
- Touch Key Control System
- LCD Display
- Output Power 600 Watts
- L (150W x 1) R (150W x 1) Subwoofer (300W x 1)
- Frequency: L,R 150Hz - 20kHz Subwoofer 50Hz - 280Hz
- Mid Range Driver: dual 3.5 Inch
- Tweeter: DUal 1.0 inch
- Subwoofer: 8 inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Dimensions: 43" x 20.3" x 11"
- Weight: 41.9 Lbs

PHST96IPBK

600 WATT DIGITAL 2.1 CHANNEL HOME THEATER TOWER W/ DOCKING STATION FOR IPOD/IPHONE/IPAD (BLACK COLOR)

PHST96IPCW

CHERRY WOOD FINISH

- iPod/iPhone/iPad/MP3 AUX Input
- S-Video Output
- Built-In FM Radio with Memory
- Alarm Clock Control & Time
- 2.1 Channel Amplifier
- Real 2.1 Channel Output
- Full Function Remote Control
- Independent Control of Each Channel
- iPod/iPhone/iPad Can Be Controlled Through Remote
- iPod/iPhone/iPad Charged Automatically
- Touch Key Control System
- LCD Display
- Output Power: 600Watts
- L (150W x 1) R (150W x 1) Subwoofer (300W X 1)
- Frequency: L, R 150Hz-20KHz Subwoofer 50Hz-280Hz
- Mid Range Driver: Dual 3.5 Inch
- Tweeter: Dual 1.0 Inch
- Subwoofer: 8 Inch
- S/N: 85dB
- THD: 0.1%
- Wood Construction w/ Beautiful Exterior
- Dimensions: 15.2" x 11.4" x 42.1"
- Net Weight: 35.8 Lbs
- Note: iPod Touch does not work with this tower



Amplifiers

Receivers



PCA1



PCA3



PCA4



PCA2



PTA2



PTA4

PCA1

MINI 2X15 W STEREO POWER AMPLIFIER

- 2X15W Peak At 4-Ohm
- Power On Led Indicator
- Master Volume Control
- RCA Cable L/R Input
- Four Push Type Speaker L/R Terminals
- Compatible With Any Audio/Computerize Devices
- (MP3) Via 3.5mm To RCA Converter.
- 110/220 Voltage Selector
- Dimensions:5.61"(W) X 2.17"(H) X 4.21"(D)

PCA2

STEREO POWER AMPLIFIER - 2 x 40 WATT POWER WITH RCA INPUTS AND PUSH TYPE SPEAKER OUTPUTS

- Harmonic Distortion: 0.3%
- 2 x 40 Watt Peak at 4-Ohm
- Blue LED Output Level Display
- Frequency Respose: 20Hz-40kHz
- Power Fuse: 1.5 A, 250V Fast-Acting (5 x 20mm)
- Power Requirement: 120V AC 50Hz/230V AC 50Hz
- Tone Controls: Bass & Treble: +/-10dB (100Hz/10kHz)
- Dimensions: 6.3"; W x 2.72"; D x 4.7"; H (190 x 70 x 137mm)

PCA3

STEREO POWER AMPLIFIER - 2 x 75 WATT POWER WITH RCA INPUTS AND PUSH TYPE SPEAKER TERMINALS

- RCA Jack Input
- 2 x 75 Watt MAX Power
- Push Type Speaker Outputs
- Blue LED Output Level Display
- Power On/Off Switch and LED Indicator
- Treble, Bass and Master Volume Controls
- Compatible With Audio/Computerize Devices (MP3 Players) Via 3.5mm To RCA Converter
- Dimensions: 7.48"W x 2.87"H x 5.39"D

PCA4

MINI 2x120 WATT STEREO POWER AMPLIFIER

- 2x120W at 4 Ohm
- Blue LED Output Level Display
- Power on LED Indicator
- 3.5mm Aux CD/MP3 Input Jack
- Treble and Bass Control
- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 8.27"W x 2.72"H x 5.39"D

PTA1

MINI 2 X 15 WATT STEREO POWER AMPLIFIER WITH AUX, CD & Mic INPUTS

- Headphone Output
- 2 x 15 Watt MAX Power
- 115/230 Voltage Selector
- AUX/CD Input and Selector
- Push Type Speaker Outputs
- Total Harmonic Distortion: 0.3%
- Master Volume and Balance Controls
- Power On/Off Switch and LED Indicator
- MIC 1/4" Jack Input and Volume Control
- Switchable Mic Payer and Mixing (Karaoke) Modes
- Dimensions: 7.48"W x 2.76"H x 5.39"D

PTA2

MINI STEREO POWER AMPLIFIER - 2 x 40 WATT WITH AUX, CD & Mic INPUTS

PTA4

MINI STEREO POWER AMPLIFIER - 2 x 120 WATT WITH AUX, CD & Mic INPUTS



PVA3U



PCAU15A



PCAU22

PVA3U

60 WATTS/ HI-FI MINI AMPLIFIER USB/SD CARD PLAYER

- USB-SD-/MMC-Card Slot Player
- Compatible With MP3/WMA Files With Shuffle Function
- ID3 Tag Display
- USB/Card, CD, Tuner, AUX Audio Input Selector
- Separate Bass And Treble Controls
- Surround Sound Switch
- Output Power: 2 X 15w (Rms) At 8ohm
- Power Output: 2 X 30w (Rms) At 4 Ohms
- Power Output: 60watts Max Peak And 1% Distortion
- Signal-To-Noise Ratio: 76dB Thd: 0.2%
- Sensitivity: 340mv
- Frequency Response: 100-10kHz +/-2
- (Size 4 X 2cm) With Remote Control
- With Shuffle Function
- Power Supply: 110v

PCAU15A

MINI 2X15 WATT STEREO POWER AMPLIFIER WITH USB/SD READERS, AUX, CD INPUTS & LED DISPLAY

- Blue LED Display for Media Playback Information
- Double Decoder Digital Media Function with Remote Control
- Built-in USB & SD Card Readers
- Compatible with MP3/WMA Files
- Power On LED Indicator
- Master Volume Control
- RCA Cable L/R Input
- 3.5mm/1/8" AUX Input Jack for iPod/iPhone/iPad/CD/MP3 Players
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector

PCAU22

MINI 2X40 WATT STEREO POWER AMPLIFIER W/ USB INPUT

- 2x40W Peak at 4 Ohm
- Compatible w/ USB Memory Sticks & MP3 Files
- Power on LED Indicator
- Treble and Bass Control
- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 6.30"W x 2.72"H x 4.72"D

PCAU25A

MINI 2X40 WATT STEREO POWER AMPLIFIER WITH USB/SD CARD READERS, AUX/CD INPUTS & LED DISPLAY

- Blue LED Screen for Media Playback Information
- Double Decoder Digital Media Function with Remote Control
- Compatible with MP3/WMA Files
- Built-in USB & SD Card Readers
- Power on Blue LED Circle Indicator
- Treble & Bass Control
- Master Volume Control
- RCA Cable L/R Input
- 3.5mm/1/8" AUX Input Jack for iPod/iPhone/iPad/CD/MP3 Players
- Four Push Type Speaker L/R Terminals

PCAU35A

MINI 2X75 WATT STEREO POWER AMPLIFIER WITH USB/SD CARD READERS, AUX, CD INPUTS & LED DISPLAY

- Blue LED Screen for Media Playback Information
- Double Decoder Digital Media Function with Remote Control
- Built-in USB/SD Memory Card Readers
- Compatible with MP3/WMA Files
- Power on Blue LED Circle Indicator
- Blue LED Output Level Indicators
- Treble, Bass, and Master Volume Controls
- RCA Cable L/R Input
- 3.5mm/1/8" AUX Input Jack for iPod, iPhone, iPad, CD/MP3 Player
- Four Push Type Speaker L/R Terminals
- Compatible with More Audio/Computer Devices via 3.5mm To RCA Converter
- 110/220 Voltage Selector

PCAU44

MINI 2X120 WATT STEREO POWER AMPLIFIER W/ USB & CD INPUT

- 2x120W Peak at 4 Ohm
- Compatible w/ USB Memory Sticks & MP3 Files
- Blue LED Output Level Display
- Power on LED Indicator
- 3.5mm Aux CD/MP3 Input Jack
- Treble and Bass Controls
- Master Volume Control
- RCA L/R Input
- Four Push Type Speaker L/R Terminals
- 110/220 Voltage Selector
- Dimensions: 8.27"W x 2.72"H x 5.39"D



PCAU35A



PTAU45



PTAU55

PCAU46A

MINI 2x120 WATT STEREO POWER AMPLIFIER WITH USB/SD CARD READERS, AUX, CD INPUTS & LED DISPLAY

- Blue LED Display for Media Playback Information
- Double Decoder Digital Media Function with Remote Control
- Built-in USB/SD Memory Card Readers
- Compatible with MP3/WMA Files
- Blue LED Output Level Indicators
- Power On/Off Switch LED Indicator
- Treble, Bass, and Master Volume Controls
- 3.5mm/1/8" AUX Input Jack for iPod/iPhone/iPad/CD/MP3 Players
- Connect More Audio/Computer Devices Via 3.5mm to RCA Converter
- Four Push Type Speaker L/R Terminals
- RCA Cable L/R Input
- Dimensions: 7.48"W x 2.87"H x 5.39"D
- 110/220 Voltage Selector

PTAU23

MINI STEREO POWER AMPLIFIER - 2 x 40 WATT WITH USB, AUX, CD & Mic INPUTS

- RCA REC Output
- 1/4" Phone Jack
- 1/4" MIC Input Jack
- USB Reader Function
- Power On LED Indicator
- 110/220 Voltage Selector
- AUX1, AUX2, CD & RCA Inputs
- 2 x 40 Watt Peak at 4-Ohm
- Four Push Type Speaker L/R Terminals
- Switchable MIC Pager and Mixing Modes
- Switchable AUX1, AUX2, CD, USB Inputs
- Bass, Treble, Balance, Master & Mic Volume Controls
- Dimensions: 7.48"W x 2.72"H x 5.39"D

PTAU45

STEREO POWER AMPLIFIER - 2 x 120 WATT WITH USB, AUX, CD & Mic INPUTS

- RCA REC Output
- 1/4" MIC Input Jack
- 1/4" Headphone Jack
- USB Reader Function
- Power ON LED Indicator
- 2 x 120 Watt MAX Power
- 110/220 Voltage Selector
- AUX1, AUX2, CD, RCA Input
- Blue LED Output Level Display
- 3.5mm Aux CD/MP3 Input Jack
- Switchable AUX1, AUX2, CD/USB Input
- Four Push Type Speaker L/R Terminals
- Bass, Treble, Balance, Master Volume & MIC Controls
- Dimensions: 8.27"W x 2.72"H x 5.39"D

PTAU55

STEREO POWER AMPLIFIER - 2 x 120 WATT WITH BLUE LED DISPLAY, USB/SD/MMC CARD, AUX, CD & Mic INPUTS

- Blue LED display
- Double-decoder MP3 function compatible
- USB flash memory reader MP3/WMA file compatibility
- RCA REC output
- 1/4" MIC input jack
- 1/4" Headphone output jack
- Power ON/OFF & output LED indicators
- Balance, treble, bass and master volume controls
- Mic volume control
- 3.5mm Aux CD/MP3 input jack
- Switchable AUX1, AUX2, CD/USB inputs
- Four push-type speaker L/R terminals
- 110/220 voltage selector
- Dimensions: 8.27"W x 2.72"H x 5.39"D

PCM20A

40 WATT POWER AMPLIFIER W/ 25 & 70 VOLT OUTPUT

- Power On/Off Switch & LED Indicator
- MIC 1 Output Level Control
- MIC 2 Output Level Control
- AUX Output Level Control
- Bass and Treble Tone Controls
- MIC 1 Front Located 1/4" Input Jack
- MIC 2 Front Located 1/4" Input Jack
- AUX Front Located 1/4" Input Jack
- MIC 1 Auto Talkover
- Speaker Terminals (COM/8-Ohm/25V/70V)
- Replaceable Fuse
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: 7.87"W x 3.15"H x 5.9"D

PCM30A

60 WATT POWER AMPLIFIER W/ 25 & 70 VOLT OUTPUT

- Power On/Off Switch & LED Indicator
- MIC 1 Output Level Control
- MIC 2/AUX Output Level Control
- Bass and Treble Tone Controls
- AUX RCA Input
- MIC 2/AUX Input Selector Switch
- MIC 1/MIC 2 Terminals (MIC 1 Auto Talkover)
- Mute Terminals
- Monitor 600-Ohm 1V Terminals (Music On Hold)
- Monitor 1W 8-Ohm Terminals (Music On Hold)
- Monitor Output Level Control (Music On Hold)
- TEL/PAGING Terminals
- Paging Output Level Control
- MIC/TEL VOX Level Control (Internal)
- Speaker Terminals (COM/4-ohm/8-Ohm/16-Ohm/25V/70V)
- Replaceable Fuse
- Unswitched 500W Max AC Outlet
- 110/220 Voltage Selector
- Detachable AC Power Input
- Dimensions: WxHxD: 10.7"W x 3.46"H x 8.86"D



PCM60



PFA200



PFA300



PFA400

PCM60A

100 WATT POWER AMPLIFIER W/ 25 & 70 VOLT OUTPUT

- Power On/Off Switch & LED Indicator
- AUX 1/MIC 1 Output Level Control
- AUX 2/MIC 2 Output Level Control
- AUX 3/MIC 3 Output Level Control
- Bass and Treble Tone Controls
- Contour Control on/off Loudness Switch
- AUX RCA Output
- AUX 1/AUX2/AUX 3 RCA Input
- AUX/MIC Input Selector Switch
- Mute Terminals
- MIC 1/MIC 2/MIC 3 Terminals (MIC 1 Auto Talkover)
- TEL/PAGING Terminals
- Paging Output Level Control
- MIC/TEL VOX Level Control (Internal)
- MIC 1 XLR Connector
- MIC 1 VOX (Auto-Talkover) Switch
- Monitor 600-Ohm 1V Terminals (Music On Hold)
- Monitor 1W 8-Ohm Terminals (Music On Hold)
- Monitor Output Level Control (Music On Hold)
- Speaker Terminals (COM/4-ohm/8-Ohm/16-Ohm/25V/70V)
- Replaceable Fuse
- Unswitched 500W Max AC Outlet
- 110/220 Voltage Selector

PFA200

60 WATT CLASS-T HI-FI AUDIO AMPLIFIER WITH AC ADAPTER INCLUDED

- 12V AC/DC Adapter
- Class-T Circuit Design
- Microphone Input Jack
- Speaker Impedance: 2-8 Ω
- 3.5mm iPod/MP3 Input Jack
- Signal to Noise Ratio: >80dB
- Total Output Power: 60 Watt
- Input Power: DC 9 ~ 14.4V 2A
- Total harmonic distortion:<0.4%
- Frequency response: 20Hz-20kHz
- Short Cut, Overload & Overheat Protection
- Dimensions: 5.51" x 4.80" x 1.81"

PFA300

90 WATT CLASS-T HI-FI STEREO AMPLIFIER WITH AC ADAPTER INCLUDED

- 12V AC/DC Adapter
- Class-T Circuit Design
- Microphone Input Jack
- Speaker Impedance: 2-8 Ω
- 3.5mm iPod/MP3 Input Jack
- Signal to Noise Ratio: >80dB
- Total Output Power: 90 Watt
- Input Power: DC 9 ~ 14.4V 2A
- Total harmonic distortion:<0.4%
- Frequency response: 20Hz-20kHz
- Short Cut, Overload & Overheat Protection
- Dimensions: 6.02" x 4.96" x 1.5"

PFA400U

100 WATT CLASS-T HI-FI AUDIO AMPLIFIER WITH USB FLASH AND SD MEMORY CARD READERS - AC ADAPTER INCLUDED

- 12V AC/DC Adapter
- LCD Control Display
- USB/SD Compatibility
- Class-T Circuit Design
- Microphone Input Jack
- Speaker Impedance: 2-8 Ω
- Signal to Noise Ratio: >80dB
- Total Output Power: 100 Watt
- Input Power: DC 9 ~ 14.4V 2A
- Total harmonic distortion:<0.4%
- Frequency response: 20Hz-20kHz
- Short Cut, Overload & Overheat Protection
- RCA Input can be used with iPod/MP3 Players
- Wireless Remote Control for Playback Configuration
- Dimensions: 6.97" x 4.84" x 1.69"

PFA220BT

BLUETOOTH MINI BLUE SERIES COMPACT CLASS-T AMPLIFIER, 120 WATT, USB FLASH DRIVE & SD MEMORY CARD READERS, LCD DISPLAY, REMOTE CONTROL

- Compact and Powerful Mini Amp System
- Built-in Bluetooth for Wireless Audio Streaming
- Compatible with All Your Favorite Bluetooth Devices
- (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- SD Memory Card & USB Flash Drive Readers
- USB Charge Port Also Provides Device Charging
- Digital LCD Display Panel with Touch Button Controls
- AUX (3.5mm) Input Connector Jack

PFA320BT

BLUETOOTH MINI BLUE SERIES COMPACT CLASS-T AMPLIFIER, 180 WATT MAX POWER, AUX (3.5MM) INPUT, PUSH-TYPE SPEAKER TERMINALS

- Compact and Powerful Mini Amp System
- Built-in Bluetooth for Wireless Audio Streaming
- Compatible with All Your Favorite Bluetooth Devices
- (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- 1/4" Microphone Input Connector Jack
- Aux (3.5mm) iPod/MP3 Input Connector Jack
- RCA (L/R) Audio Input Connector Jacks
- Four Push Type Speaker Terminals
- Rotary Treble, Bass, Master Volume Adjustable Controls
- Short Cut, Overload & Overheat Protection
- Source Input Selection



PCA12BT



PCA48BT



PTA22BT



PCA48BT

PCA12BT

BLUETOOTH MINI BLUE SERIES STEREO POWER AMPLIFIER, 2 x 25 WATT, USB CHARGE PORT, RCA AND AUX (3.5MM) INPUT CONNECTOR JACKS

- Compact and Powerful Mini Amp System
- Built-in Bluetooth for Wireless Audio Streaming
- Compatible with All Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- USB Charge Port for Device Charging
- Bluetooth/Line Input Switch Selector
- RCA L/R Audio Input
- AUX (3.5mm) Input Connector Jack (Connect Devices like Smartphones, Tablets, MP3 Players, etc.)
- Four Push Type Speaker L/R Terminals
- Compatible with Audio/Computerized Devices
- Built-in Short Circuit and Power Surge Protection
- Rotary Master Volume Control
- LED Indicator Lights
- Power Output: 25 Watt x 2
- 10% RMS at 4-Ohm Impedance
- Signal-to-Noise Ratio: 75dB
- Frequency Response: 20Hz - 40kHz
- Input Sensitivity: 150mV
- T.H.D.: 0.3%
- 110V/220 Voltage Selector, 50/60Hz
- Dimension (W x H x D): 5.61" x 2.71" x 4.21"

PTA22BT

BLUETOOTH MINI BLUE SERIES STEREO POWER AMPLIFIER, 2 x 40 WATT, PAGER & MIXING/KARAOKE FUNCTIONS, MICROPHONE INPUT, USB CHARGE PORT, RCA AND AUX (3.5MM) INPUT CONNECTOR JACKS

- Compact and Powerful Mini Amp System
- Built-in Bluetooth for Wireless Audio Streaming
- Compatible with All Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- USB Charge Port for Device Charging
- Switchable Mic Pager and Mixing/Karaoke Modes
- Page Mode: Allows Voice Transmission via Mic
- Mix Mode: Allows Both Voice & Music Transmission
- RCA Audio Input (AUX 1, AUX 2, CD)
- AUX (3.5mm) Input Connector Jack (Connect Devices like Smartphones, Tablets, MP3 Players, etc.)
- Treble, Bass, Balance, Master Volume Adjustable
- Four Push Type Speaker L/R Terminals
- Input Selector Switch
- RCA Record Output
- 1/4" Headphone Output
- 1/4" Mic Input Jack
- Built-in Short Circuit and Power Surge Protection
- Compatible with Audio/Computerized Devices

PCA48BT

BLUETOOTH MINI BLUE SERIES STEREO POWER AMPLIFIER, 2 x 120 WATT, USB CHARGE PORT, USB/SD MEMORY CARD READERS, RCA AND AUX (3.5MM) INPUT CONNECTOR JACKS, REMOTE CONTROL

- Compact and Powerful Mini Amp System
- Built-in Bluetooth for Wireless Audio Streaming
- Compatible with All Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- SD Memory Card & USB Flash Drive Readers
- Digital LCD Display Panel with Touch Button Controls
- USB Charge Port for Device Charging
- RCA Audio Input (L/R)
- AUX (3.5mm) Input Connector Jack (Connect Devices like Smartphones, Tablets, MP3 Players, etc.)
- Compatible with Audio/Computerized Devices
- Treble, Bass, Balance, Master Volume Adjustable
- Four Push Type Speaker L/R Terminals
- 1/4" Headphone Output
- Built-in Short Circuit and Power Surge Protection
- Rotary Master Volume Control
- Front Facing Control Panel
- LED Indicator Lights with Output Level Display
- Includes Remote Control
- Technical Specs: Peak Power Output: 120 Watt x 2
- 10% RMS at 4-Ohm Impedance
- Signal-to-Noise Ratio: 75dB

PDA5BU

BLUETOOTH STEREO AMPLIFIER RECEIVER, AM/FM RADIO, USB FLASH DRIVE READER, USB PORT DEVICE CHARGING, AM/FM RADIO, AUX (3.5MM) INPUT, DIGITAL LCD DISPLAY, 200 WATT

- Built-in Bluetooth for Wireless Music Streaming
- Works with All of Your Favorite Bluetooth Devices (Works with iPhones, Androids, Smartphones, iPad, Tablet, PC, etc.)
- Aux (3.5mm) Input Connector Jack for External Devices
- RCA (L/R) Input and Output Connector Jacks
- (2) Pairs of Banana Plug Speaker Output Connectors
- (2) 1/4" Microphone Input Connector Jacks
- AM/FM Stereo Receiver with LCD Digital Display
- Auto Station Scan with 60 Radio Station Memory Presets
- USB Flash Drive Reader for Digital Audio Files
- USB Doubles as Device Charge Port
- Treble, Bass, Master & Microphone Volume Adjustable
- Includes Remote Control and Antenna
- Front-Facing Control Center
- Switchable Audio Input Selection
- Touch Button Controls
- Technical Specs: Maximum Power Output: 200 Watt @ 4 Ohm
- Bluetooth Wireless Operation Range: Up to 65' Feet
- Tone Control: Bass, f=100Hz +/-8dB
- Frequency Response: 20Hz - 20kHz
- Signal to Noise Ratio: >71dB
- T.H.D.: <0.1%
- Power Supply: 110V/220V
- Dimensions: 10.5" x 8.8" x 2.8" inch



PT110



PT210



PT510



PT710

PT110

80 WATT AC/DC MICROPHONE PA MONO AMPLIFIER W/ 70V OUTPUT & MIC TALKOVER

- 1/4" Phone Jack
- LED Level Display
- Master Volume Control
- Tone Control
- Mix Bus Jacks
- Front 3.5mm AUX CD Input Jack
- MIC 1/MIC 2 Talkover
- DC 12V Inlet
- Phono/Aux Volume Control
- Mic 1 Mic 2 Volume Controls
- Mic 1 Mic 2 6.35mm Connectors
- Voltage Selector 110/220V
- Removable AC Cord
- Unswitched AC Outlet
- Phono/Aux/RCA Input Jacks

PT210

120 WATT MICROPHONE PA MONO AMPLIFIER W/70V OUTPUT & MIC TALKOVER

- Power On/Off with LED Indicator
- 1/4" Phone Jack
- LED Level Display
- Master Volume Control
- High/Mid/Low Tone Controls
- Front 3.5mm AUX CD Input Jack
- MIC 1 Talkover
- Phono/Aux Volume Control
- Mic 1 Mic 2 Volume Controls
- Mic 1 Mic 2 6.35mm Connectors
- Voltage Selector 110/220V
- Removable AC Cord

PT510

240 WATT PUBLIC ADDRESS POWER AMPLIFIER WITH 70V OUTPUT & MIC TALKOVER, USB/SD CARD MP3 PLAYER, BUILT-IN FM RADIO & LED DISPLAY

- Built-in USB/SD Card Readers
- FM Tuner with EQ/Volume Control
- Media Mode Selector Function
- 40hm/80hm - 70 Volt/100 Volt Speaker Outputs Terminals
- Tuner Down/Up/Scan Button Functions
- Power On/Off with Red LED Indicator
- Master Volume Rotary Control
- High/Mid/Low Tone Level Controls
- Illuminated VU Output Level Meter
- Front 3.5mm AUX Input Jack for iPod/MP3 Players
- MIC 1 Talk-Over Feature
- Phono/AUX Volume Input Control
- Mic 1/Mic 2 Volume Controls
- Mic 1 /Mic 2/AUX-IN 6.35mm/ ¼" Input Connectors
- AUX-IN RCA Input Jack

PT610

19" RACK MOUNT 600 WATT POWER AMPLIFIER/MIXER W/ 70V OUTPUT & MIC TALKOVER

- 5 Channel Mixer
- 4 Mic Inputs XLR & 1/4" Combo Jack
- 2 Line Inputs RCA
- CH4 Mic/Line Switchable
- Effects Loop RCA In/Out
- Front 3.5mm AUX CD Input Jack
- 4 ohm, 8 ohm, 16 ohm & 70V Screw Terminals
- 8 ohm 1/4" and Binding Post Outputs
- Illuminated VU Output Level Meter
- Feedback Filter with Rotary Control
- MIC 1 Talkover
- Headphone Output
- Rotary Channel & Master Level Controls
- Thermal Overload Protection w/ Indicator
- Clip LED Indicator

PT710

19" RACK MOUNT 2000 WATT PA AMPLIFIER WITH 3 WAY FREQUENCY SELECTORS

- Three XLR Microphone Input Jack with Sensitivity Selector (25dB, 35dB, 45dB) and Frequency Selector (200, 300, 400)
- Three Line Input (RCA / ¼" TPS Balanced Jack / 3.5mm Input Jack) with Frequency Selector (50Hz, 100Hz, 200Hz)
- Three Output (one RCA, two ¼" TPS Balanced Jack)
- 80 Watts RMS @ 8 Ohms
- 120 Watts RMS @ 4 Ohms
- 2000 Watts Peak @ 4 Ohms
- S/N: 102dB
- Master Volume/Low/High Control for main Channel
- MIC Volume Control with Frequency Selector (500, 1K, 3K, 7K, 10K) +-15dB Special Frequency Volume Provider Selector



PT450A



PT600A



PT720A



PPA200

PD450A

PROFESSIONAL PA AMPLIFIER W/BUILT IN DVD/CD/MP3/USB/70V OUTPUT

- With USB Port, DVD Player (Anti-Shock)
- Compatibility with DVD/CD/CD-R/CD-RW/MP3
- Output Regulation: Less than 2dB no Load to Full Load
- Speaker Output: 4 Ohm(20V) 8 Ohm(28.3V) 16 Ohm(40V) 70V Line Out: 1V±0.3V
- Frequency Response: 20Hz a 20Khz
- Harmonic Distortion: 1%
- S/N Rotie:< 75dB
- 2 Mic Input with Volume Control
- 1 AUX Input with Volume Control
- DVD/AUX Volume Control
- 400 Watts
- Indicator: LED Output Level Master
- AC Power Supply: 110-127/220-240 AC 50/60 Hz
- DC Power Supply: 12V or 24V Battery

PD750A

PROFESSIONAL PA AMPLIFIER W/BUILT IN DVD/CD/MP3/USB/70V OUTPUT

- With USB Port, DVD Player (Anti-Shock)
- Compatibility with DVD/CD/CD-R/CD-RW/MP3
- Output Regulation: Less than 2dB no Load to Full Load
- Speaker Output: 4 Ohm(20V) 8 Ohm(28.3V) 16 Ohm(40V) 70V Line Out: 1V±0.3V
- Frequency Response: 20Hz a 20Khz
- Harmonic Distortion: 1%
- S/N Rotie:≤75dB
- 2 Mic Input with Volume Control
- 1 AUX Input with Volume Control
- DVD/AUX Volume Control
- 700 Watts
- Tone Controls: ± 10dB at 100Hz Treble ±10dB at 10KHz
- Indicator: LED Output Level Master
- AC Power Supply: 110-127/220-240 AC 50/60 Hz

PT600A

300W STEREO RECEIVER / AMPLIFIER

- 6 Inputs Tuner, Tape, CD, Aux, AV1, AV2
- Mic Input with Level Control
- Multifunction Remote Control
- Preset EQ Pop, Rock, Classic, Flat
- Bass Treble Controls
- Front Panel Headphone Jack
- Data Link Ports Interfaces with Compatible Components
- Binding Post Speaker Connections
- External EQ Send/Return Loop
- Frequency Response: 20 to 20 KHz
- Rack Mounting Hardware Included
- 110V/220V Switchable

PT720A

1000 WATTS AM/FM/ TUNER HYBRID AMPLIFIER W/ 70V OUTPUT

- 1000 Watts Peak Power
- 450 watts @ 2 ohms
- 360 watts @ 4 ohms
- 200 watts @ 8 ohms
- IPOD/MP3 Input With 3.5MM Cable
- 110-220V Switchable
- Digital Fluorescent Output Display Meter
- AM/FM Quartz Synthesized Tuner
- Auto Scan, PRE/NEXT/MEMORY/STORE For Radio Stations, 50 Stations Storage
- Removable Rack-Mount Brackets
- Separate Level Control
- All Blue LED™s /Lights Gain Control Through LED DIMMER
- Remote Control Included

PPA200

19" RACK 2000 WATT PROFESSIONAL DJ POWER AMPLIFIER

- 1000 Watts x 2 Power Amplifier
- Dual Output Level Controls and Illumination
- Protection Indicator
- Power On/Off Switch
- Stereo/Mono Selector
- Stereo or Bridged Power Into 4 or 8 Ohms
- Dual RCA Combo Inputs
- Binding Post Outputs
- Blue Color LED Display
- Ground Lift Switch
- AC Accessory Inlet
- Heavy Duty Fan Cooled Aluminum Heatsink

PPA300

19" RACK 3000 WATT PROFESSIONAL DJ POWER AMPLIFIER

- 1500 Watts x 2 Power Amplifier
- Dual Output Level Controls and Illumination
- Protection Indicator
- Power On/Off Switch
- Stereo/Mono Selector
- Stereo or Bridged Power Into 4 or 8 Ohms
- Dual RCA Combo Inputs
- Binding Post Outputs
- Blue Color LED Display
- Ground Lift Switch
- AC Accessory Inlet
- Heavy Duty Fan Cooled Aluminum Heatsink



PPA450



PQA2100

PPA450

19" RACK 4500 WATT PROFESSIONAL DJ POWER AMPLIFIER

- 2250 Watts x 2 Power Amplifier
- Dual Output Level Controls and Illumination
- Protection Indicator
- Power On/Off Switch
- Stereo/Mono Selector
- Stereo or Bridged Power Into 4 or 8 Ohms
- Dual RCA Combo Inputs
- Binding Post Outputs
- Blue Color LED Display
- Ground Lift Switch
- AC Accessory Inlet
- Heavy Duty Fan Cooled Aluminum Heatsink

PQA2100

19" RACK MOUNT 2100 WATT POWER AMPLIFIER WITH SPEAKON, SPEAKER TERMINAL BINDING POSTS, 1/4" OUTPUTS AND RCA AND 1/4" INPUTS

- Dual Channel (A/B) Power Amplifier
- Maximum Power Output: 2100 Watt
- (2) SpeakON (L/R) Output Cable Connector Jacks
- Speaker Terminal Binding Post Connectors Output Jacks (A/B)
- Dual 1/4" Connector Output Jacks
- Dual 1/4" and RCA Connector Input Jacks
- Stereo Mono Parallel Selector
- Stereo Power Conversion into 4 or 8 Ohms
- Independent Channel Rotary Controls
- LED and Power Protection Indicators
- Fortified Aluminum Heat Sink
- Integrated Circuitry and Electronic Protection
- Soft Start limiter
- Built-in Cooling Fan
- Power ON/OFF Switch
- Technical Specs: Max Power Output: 1050 Watts x 2
- RMS Power Output: 525 Watts x 2
- 230 + 230 Watts @ 8 Ohms
- 460 + 460 Watts @ 4 Ohms
- 920 + 920 Watts @ 2 Ohms

PQA3100

19" RACK MOUNT 3100 WATT PROFESSIONAL POWER AMPLIFIER WITH SPEAKON, SPEAKER TERMINAL BINDING POSTS, 1/4" CONNECTOR OUTPUTS AND RCA AND 1/4" CONNECTOR INPUTS

- Dual Channel (A/B) Power Amplifier
- Maximum Power Output: 3100 Watt
- (2) SpeakON (L/R) Output Cable Connector Jacks
- Speaker Terminal Binding Post Connector Output Jacks (A/B)
- Dual 1/4" Connector Output Jacks
- Dual 1/4" and RCA Connector Input Jacks
- Bridge Mode Ability (Ch. A +, Ch. B -)
- Stereo Mono Parallel Selector
- Stereo Power Conversion into 4 or 8 Ohms
- Independent Channel Rotary Controls
- LED and Power Protection Indicators
- Fortified Aluminum Heat Sink
- Integrated Circuitry and Electronic Protection
- Soft Start limiter
- Built-in Cooling Fan
- Power ON/OFF Switch
- Technical Specs: Max Power Output: 1550 Watts x 2
- RMS Power Output: 775 Watts x 2
- 380 + 380 Watts @ 8 Ohms
- 760 + 760 Watts @ 4 Ohms

PQA4100

19" RACK MOUNT 4100 WATT PROFESSIONAL POWER AMPLIFIER WITH SPEAKON, SPEAKER TERMINAL BINDING POSTS, 1/4" CONNECTOR OUTPUTS AND RCA AND 1/4" CONNECTOR INPUTS

- Dual Channel (A/B) Power Amplifier
- Maximum Power Output: 4100 Watt
- (2) SpeakON (L/R) Output Cable Connector Jacks
- Speaker Terminal Binding Post Connector Output Jacks (A/B)
- Dual 1/4" Connector Output Jacks
- Dual 1/4" and RCA Connector Input Jacks
- Bridge Mode Ability (Ch. A +, Ch. B -)
- Stereo Mono Parallel Selector
- Stereo Power Conversion into 4 or 8 Ohms
- Independent Channel Rotary Controls
- LED and Power Protection Indicators
- Fortified Aluminum Heat Sink
- Integrated Circuitry and Electronic Protection
- Soft Start limiter
- Built-in Cooling Fan
- Power ON/OFF Switch
- Technical Specs: Max Power Output: 2050 Watts x 2
- RMS Power Output: 1025 Watts x 2
- 500 + 500 @ 8 Ohms
- 1000 + 1000 @ 4 Ohms

PQA5100

19" RACK MOUNT 5100 WATT PROFESSIONAL POWER AMPLIFIER WITH SPEAKON, SPEAKER TERMINAL BINDING POST BANANA PLUGS, 1/4" CONNECTOR OUTPUTS AND RCA AND 1/4" CONNECTOR INPUTS

- Dual Channel (A/B) Power Amplifier
- Maximum Power Output: 5100 Watt
- (2) SpeakON (L/R) Output Cable Connector Jacks
- Speaker Terminal Binding Post Banana Plug Connectors (A/B)
- Dual 1/4" Connector Output Jacks
- Dual 1/4" and RCA Connector Input Jacks
- Bridge Mode Ability (Ch. A +, Ch. B -)
- Stereo Mono Parallel Selector
- Stereo Power Conversion into 4 or 8 Ohms
- Independent Channel Rotary Controls
- LED and Power Protection Indicators
- Fortified Aluminum Heat Sink
- Integrated Circuitry and Electronic Protection
- Soft Start limiter
- Built-in Cooling Fan
- Power ON/OFF Switch
- Technical Specs: Max Power Output: 2550 Watts x 2
- RMS Power Output: 1275 Watts x 2
- 600 + 600 @ 8 Ohms
- 1200 + 1200 @ 4 Ohms



PSA2000



PTA1000

PSA2000

1U RACK MOUNT 2000 WATTS POWER STEREO AMPLIFIER

- Independent Volume Control For Each Channel
- Power Output: 100W X 2 RMS (8 Ohms)
- Power Output: 200W X 2 RMS (4 Ohms)
- Power Output: 400W (Bridge, 8 Ohms)
- Power Output: 2000W Max Peak
- Total Harmonic Distortion: Less Than 0.1%
- Input Sensitivity & Impedance: 0.775V RMS, 10K Ohms
- Signal-To-Noise Ratio: More Than 100dB
- Frequency Response: +/-0.5dB, 20Hz-20 KHz
- Balanced XLR And ¼ €€TRS Inputs
- High Speed Cooling Fan
- Lowest Noise -Smooth Operation
- Signal And Clip Led Indicators For Protection And Performance
- Binding Post Speaker Terminals
- Thermal And Overload Protection
- Power Supply: 115V-60Hz / 230V-50Hz (Switchable)

PTA1000

1000 WATTS PROFESSIONAL POWER AMPLIFIERS

- Two Channels A/B- Bridgeable
- Inputs: Electronic Balanced; Barrier Strip ,XLR,TRS 1/4"
- Speaker Terminal: Speakons for Ch A, Ch B and Bridge; Binding post
- Cooling Fan Two-speed DC fan, air Flow back to front
- 110/220 Volt Switchable
- 2x5 LED Indicator Red ,DDT / Clipping; Yellow, signal; Green ,power
- Overload and Protection Indicator
- Signal/Noise ratio: =102dB
- Distortion: =1.0%
- Frequency response: 20Hz-20 KHz >±0.5dB
- input impedance: balance 20Khz
- Input level:+4dB
- Total Power 1000 Watts

PTA1200

1200 WATTS PROFESSIONAL POWER AMPLIFIER

- Two Channels A/B- Bridgeable
- Inputs: Electronic Balanced; Barrier Strip ,XLR,TRS 1/4"
- Speaker Terminal: Speakons for Ch A, Ch B and Bridge; Binding post
- Cooling Fan Two-speed DC fan, air Flow back to front
- 110/220 Volt Switchable
- 2x5 LED Indicator Red ,DDT / Clipping; Yellow, signal; Green ,power
- Overload and Protection Indicator
- Signal/Noise ratio: = 102dB
- Distortion: = 1.0%
- Frequency response: 20Hz-20 KHz >± 0.5dB
- input impedance: balance 20Khz
- Input level:+4dB
- Max Power 1200 Watts

PTA1400

1400 WATTS PROFESSIONAL POWER AMPLIFIERS

- Two Channels A/B- Bridgeable
- Inputs: Electronic Balanced; Barrier Strip ,XLR,TRS 1/4"
- Speaker Terminal: Speakons for Ch A, Ch B and Bridge; Binding post
- Cooling Fan Two -speed DC fan, air Flow back to front
- 110/220 Volt Switchable
- 2x5 LED Indicator Red ,DDT / Clipping; Yellow, signal; Green ,power
- Overload and Protection Indicator
- Signal/Noise ratio: =102dB
- Distortion: =1.0%
- Frequency response: 20Hz-20 KHz >±0.5dB
- input impedance: balance 20Khz
- Input level:+4dB
- Total Power 1400 Watts

PTA3000

3000 WATTS PROFESSIONAL POWER AMPLIFIER WITH BUILT IN CROSSOVER

- Two Channels
- Speakon Connectors
- Dual Binding Post Speaker Output
- Two Way Crossover
- Low cut switch
- Crossover switch (150Hz X over)
- Thru/Low Out jacks
- High out jacks
- Three Speakon Connectors (CH A/CH B/Bridge)
- Sub- Sonic (Low Cut) Filter
- Two-Speed Fan
- 2 Ohm Load Per Channel
- 4 Ohm In Bridge Mode
- Combo Inputs Connector Xlr/1/4" Phone Jack Connector.
- Thru/Low Out And High Out ¼" Jacks
- 110/220 Volt Switchable
- 2x5 Led Input Level Indicator
- Overload And Protection Indicator
- Signal/Noise Ratio:=102db
- Distortion:=1.0%
- Frequency Response:20hz-20khz Less Than±0.5db



PEA4000



PEXA3000



PTA1004U

PTA1004U

1000 WATT POWER AMPLIFIER WITH USB/SD READERS, LCD DIGITAL DISPLAY W/ BUILT-IN CROSSOVER

- Total Power: 1000 Watt
- Input Level: +4dB
- SD Memory Card & USB Flash Drive Readers
- 3.5mm Aux CD/MP3 Input Jack
- Two Channels A/B - Bridgeable
- Overload and Protection Indicator
- Signal/Noise Ratio: 102dB
- Distortion: 1.0%
- Frequency Response: 20Hz - 20kHz $\geq \pm 0.5\text{dB}$
- Input Impedance: Balance 20kHz
- Digital LCD Display
- Cooling Fan: Two-speed DC Fan
- Inputs: Electronic Balanced; Barrier Strip, XLR, TRS 1/4"
- Speaker Terminal: Speakons for Ch A, Ch B and Bridge; Binding Post
- 2x5 LED Indicator Red, DDT / Clipping; Yellow, signal; Green, power
- Double-Decoder MP3 Function

PTA3004U

3000 WATT POWER AMPLIFIER WITH USB/SD READERS, LCD DIGITAL DISPLAY & BUILT-IN CROSSOVER

- Total Power: 3000 Watt
- SD Memory Card & USB Flash Drive Readers
- Two-Speed Fan
- Two Channels
- High-Out Jacks
- Low Cut Switch
- Input Level: +4dB
- Distortion: 1.0%
- Two Way Crossover
- Speakon Connectors
- Thru/Low Out Jacks
- 4 Ohm in Bridge Mode
- 2 Ohm Load Per Channel
- Signal/Noise Ratio: 102dB
- 3.5mm Aux CD/MP3 Input Jack
- Sub-Sonic (Low Cut) Filter
- 2x5 LED Input Level Indicator
- Input Impedance: Balance 20k
- Crossover Switch (150Hz X over)
- Dual Binding Post Speaker Output
- Overload And Protection Indicator
- Thru/Low Out And High Out 1/4" Jacks
- Digital LCD Display for MP3 Function
- Three Speakon Connectors (CH A/CH B/Bridge)
- Frequency Response: 20Hz-20kHz Less Than $\pm 0.5\text{db}$
- Combo Inputs Connector Xlr/1/4" Phone Jack Connector
- Double-Decoder MP3 Function

PEA4000

PROFESSIONAL 4000 WATTS STEREO POWER AMPLIFIER

- 4000 Watts Max Peak Power Amplifier
- Two Channels Stereo Or Bridge (Mono) Output
- Independent Volume Control For Each Channel
- Balanced XLR And 1/4" TRS Inputs
- High Speed Cooling Fan
- Lowest Noise -Smooth Operation
- Signal And Clip Led Indicators For Protection And Performance
- Speakon-Binding Post Speaker Terminals
- Thermal And Overload Protection
- Power Output: 260W (RMS, Stereo, 8 OHM)
- Power Output: 400W (RMS, Stereo, 4OHM)
- Power Output: 800W (Bridged, 8 OHM)
- Power Output: 4000W (Max Peak)
- Distortion (Typical): <0.08%

PEXA3000

19" RACK MOUNT 3000 WATT PROFESSIONAL POWER AMPLIFIER W/ DIGITAL SMT TECHNOLOGY

- 3000 Watts Peak Power
- 1500 Watts x 2 @ 2 Ohms
- 750 Watts x 2 @ 4 Ohms
- 375 Watts x 2 @ 8 Ohms
- LCD Display - Power, Level, Temperature, Protection, Working Mode, Limiter
- SMT Technology Circuitry
- Switchable Stereo & Bridged Modes
- Dual Output Level Controls
- High Performance Ring Transformer
- Soft Start Limiter
- Ground Lift Switch

PEXA5000

19" RACK MOUNT 5000 WATTS PROFESSIONAL DIGITAL POWER AMPLIFIER W/SMT TECHNOLOGY

- 5000 Watts Peak Power
- 2500 Watts x 2 @ 2 Ohms
- 1250 Watts x 2 @ 4 Ohms
- 625 Watts x 2 @ 8 Ohms
- LCD Display - Power, Level, Temperature, Protection, Working Mode, Limiter
- SMT Technology Circuitry
- Switchable Stereo & Bridged Modes
- Dual Output Level Controls
- High Performance Ring Transformer
- Soft Start Limiter
- Ground Lift Switch

PEXA8000

19" RACK MOUNT 8000 WATTS PROFESSIONAL POWER AMPLIFIER W/ DIGITAL SMT TECHNOLOGY

- 8000 Watts Peak Power
- 4000 Watts x 2 @ 2 Ohms
- 2000 Watts x 2 @ 4 Ohms
- 1000 Watts x 2 @ 8 Ohms
- LCD Display - Power, Level, Temperature, Protection, Working Mode, Limiter
- SMT Technology Circuitry
- Switchable Stereo & Bridged Modes
- Dual Output Level Controls



P2001AT



P1001AT

1000 WATTS HYBRID HOME STEREO RECEIVER AMPLIFIER W/AM/FM TUNER

- 450 Watts @ 2 Ohms
- 360 Watts @ 4 Ohms
- 200 Watts @ 8 Ohms
- 110-220V Switchable
- 1000 Watt Peak Power
- Auto Radio Station Seek
- Inputs: RCA (2 Audio Sources)
- AM/FM Quartz Synthesized Tuner
- Digital Fluorescent Output Display
- iPod / MP3 Player Input with Cable
- 1 RCA Dedicated for Preamp Output
- 1 RCA Dedicated for Record Line Output
- Outputs: Banana Binding Post (to Speakers)
- 2 Mono RCA Dedicated for Subwoofer Output
- Separate Gain Controls for Preamp and Subwoofer

P2001AT

2,000 WATT HYBRID HYBRID HOME STEREO RECEIVER AMPLIFIER WITH AM/FM TUNER - AUDIO INPUTS & OUTPUTS

- 600 Watt @ 2 Ohms
- 450 Watt @ 4 Ohms
- 240 Watt @ 8 Ohms
- Auto Seek and Store
- 110-220V Switchable
- Digital Karaoke System
- 2000 Watt Peak Power
- Weight: 14.3 lbs (6.5 kg)
- Mounts into 19-Inch Rack
- Auto Station Seek Function
- Digital Fluorescent Output Display
- 1 RCA Dedicated for Preamp Output
- 1 RCA Dedicated for Record Line Output
- 2 Mono RCA Dedicated for Subwoofer Output
- Separate Gain Control of Pre-Amp & Subwoofer
- Dimensions: 19" W x 3.1" H x 13" D (483 x 80 x 330mm)
- AM/FM Quartz Synthesized Tuner with 50 Station Presets

P3001AT

3,000 WATT HYBRID HOME STEREO RECEIVER AMPLIFIER WITH AM/FM TUNER - AUDIO INPUTS & OUTPUTS

- 850 Watt @ 2 Ohms
- 550 Watt @ 4 Ohms
- 300 Watt @ 8 Ohms
- Auto Seek and Store
- 110-220V Switchable
- Digital Karaoke System
- 3,000 Watt Peak Power
- Weight: 14.3 lbs (6.5 kg)
- Mounts into 19-Inch Rack
- Auto Station Seek Function
- Digital Fluorescent Output Display
- 1 RCA Dedicated for Preamp Output
- 1 RCA Dedicated for Record Line Output
- 2 Mono RCA Dedicated for Subwoofer Output
- Separate Gain Control of Pre-Amp & Subwoofer

P1002AI

1000 WATTS HYBRID RECEIVER & PRE-AMPLIFIER W/AM-FM TUNER/IPOD DOCKING STATION

- Ipod docking station (Ipod not included)
- Powers 4 loudspeakers
- Separate gain control for preamp and subwoofer
- 1000 watts peak power
- 450 watts @ 2 ohms
- 360 watts @ 4 ohms
- 200 watts @ 8 ohms
- Inputs: RCA (2 audio sources)
- Outputs: Banana binding post (to speakers)
- 1 RCA dedicated for record line output
- 2 mono RCA dedicated for subwoofer output
- 1 RCA dedicated for preamp output
- Digital fluorescent output display meter
- iPod / MP3 input with cable
- 110-220V Switchable

P2002ABTI

2000 WATTS HYBRID RECEIVER & PRE-AMPLIFIER W/AM-FM TUNER/IPOD DOCKING STATION & BLUETOOTH

- Ipod docking station (Ipod not included)
- Bluetooth function
- Powers 4 loudspeakers
- Separate gain control for preamp and subwoofer
- 2000 watts peak power
- 600 watts @ 2 ohms
- 460 watts @ 4 ohms
- 240 watts @ 8 ohms
- Inputs: RCA (2 audio sources)
- Outputs: Banana binding post (to speakers)
- 1 RCA dedicated for record line output
- 2 mono RCA dedicated for subwoofer output
- 1 RCA dedicated for preamp output
- Digital fluorescent output display meter
- iPod / MP3 input with cable

P3002AI

3000 WATTS HYBRID RECEIVER & PRE-AMPLIFIER W/AM-FM TUNER/IPOD DOCKING STATION

- Ipod docking station (Ipod not included)
- Powers 4 loudspeakers
- Separate gain control for preamp and subwoofer
- 3000 watts peak power
- 800 watts @ 2 ohms
- 550 watts @ 4 ohms
- 300 watts @ 8 ohms
- Inputs: RCA (2 audio sources)
- Outputs: Banana binding post (to speakers)
- 1 RCA dedicated for record line output
- 2 mono RCA dedicated for subwoofer output
- 1 RCA dedicated for preamp output
- Digital fluorescent output display meter
- iPod / MP3 input with cable
- 110-220V Switchable



PWMA1003T



PT730U

PWMA1003T

1000 WATTS HYBRID HOME STEREO RECEIVER AMPLIFIER W/AM-FM TUNER/USB/DUAL WIRELESS MIC

- Dual VHF High Band Wireless Microphones
- 1000 Watts Peak Power
- 450 Watts @ 2 Ohms
- 360 Watts @ 4 Ohms
- 200 Watts @ 8 Ohms
- Inputs: RCA (2 Audio Sources)
- Outputs: Banana Binding Post
- 1 RCA Dedicated For Record Line Output
- 2 Mono RCA Dedicated For Subwoofer Output
- 1 RCA Dedicated For Preamp Output
- Separate Gain Control For Preamp And Subwoofer
- Digital Fluorescent Output Display Meter
- Ipod / MP3 Input With Cable
- USB Reader Function
- Removable Rack-Mount Brackets

PWMA2003T

2000 WATTS HYBRID HOME STEREO RECEIVER AMPLIFIER W/AM-FM TUNER/USB/DUAL WIRELESS MIC

- Dual VHF High Band Wireless Microphones
- 2000 Watts Peak Power
- 600 Watts @ 2 Ohms
- 460 Watts @ 4 Ohms
- 240 Watts @ 8 Ohms
- Inputs: RCA (2 Audio Sources)
- Outputs: Banana Binding Post
- 1 RCA Dedicated For Record Line Output
- 2 Mono RCA Dedicated For Subwoofer Output
- 1 RCA Dedicated For Preamp Output
- Separate Gain Control For Preamp And Subwoofer
- Digital Fluorescent Output Display Meter
- iPod / MP3 Input With Cable
- USB Reader Function: Plays MP3 & WAV Files
- Compatible with USB Drives up to 32GB

PWMA3003T

3000 WATTS HYBRID HOME STEREO RECEIVER AMPLIFIER W/AM-FM TUNER/USB/DUAL WIRELESS MIC

- Dual VHF High Band Wireless Microphones
- 3000 Watts Peak Power
- 800 Watts @ 2 Ohms
- 550 Watts @ 4 Ohms
- 300 Watts @ 8 Ohms
- Inputs: RCA (2 Audio Sources)
- Outputs: Banana Binding Post
- 1 RCA Dedicated For Record Line Output
- 2 Mono RCA Dedicated For Subwoofer Output
- 1 RCA Dedicated For Preamp Output
- Separate Gain Control For Preamp And Subwoofer
- Digital Fluorescent Output Display Meter
- iPod / MP3 Input With Cable
- USB Reader Function: Plays MP3 & WAV Files
- Compatible with USB Drives up to 32GB

PT330U

150 WATT PA AMPLIFIER WITH 70V OUTPUT & MIC TALKOVER, USB/MICRO SD CARD READERS, AUX INPUT, FM RADIO

- Mic Talk-Over: Allows you to talk over MP3s and FM Radio, Karaoke Style
- Automatic Talk-Over Function: Quiets Music When Speaking into Mic
- USB Flash, Micro SD Memory Card Readers, FM Radio
- Play of Your Favorite MP3 Files and Radio Stations
- Mic 1, Mic 2, AUX, 1/4", CD, Phono Inputs with Independent Gain Control
- AUX Input, 3.55mm Connector for iPod/MP3 Players
- Built-in EQ Functions and Master Volume Control
- Front Panel Control Center for Bass, Mid, Treble, & Tone Adjustments
- Previous, Next, Play, Pause Song Selection Control for MP3 & Radio
- Mix Audio RCA Output
- Blue LED Digital Display
- Rear Panel Telescoping FM Antenna
- Perfect for Office Paging, Public Gatherings, Live DJ

PT730U

375 WATT PA AMPLIFIER WITH 5 MIC INPUTS, MIC TALK-OVER FUNCTION, USB & MICRO SD CARD READERS, AUX INPUT & 4 OHM, 8 OHM, 70V, 100V OUTPUTS

- Mic Talk-Over: Allows you to Talk Over Music, Karaoke Style
- Automatic Talk-Over Function: Quiets Music When Speaking into Mic
- USB Flash & SD Memory Card Readers
- Digital LCD Display with ID3 TAG Information
- AUX Input, 3.5mm Connector for iPod/MP3 Players
- Perfect for Office Paging, Public Gatherings, Live DJ
- Provides Convenient Music and Voice System Control
- (5) Microphone Inputs & Switchable 3-Channel Stereo AUX-IN
- Front Panel Control Center for Bass, Mid, Treble, & Tone Adjustments
- Announcement Chime and Siren Functions
- Output Level Indicator
- 4 Ohm, 8 Ohm, 70 Volt and 100 Volt Speaker Outputs with Zone Selector
- Maximum Power Output: 375 Watt

PT930U

750 WATT PA AMPLIFIER WITH 5 MIC INPUTS, MIC TALK-OVER FUNCTION, USB FLASH & MICRO SD CARD READERS, AUX INPUT & 4 OHM, 8 OHM, 70V, 100V OUTPUTS

- Mic Talk-Over: Allows you to Talk Over Music, Karaoke Style
- Automatic Talk-Over Function: Quiets Music When Speaking into Mic
- USB Flash & Micro SD Memory Card Readers
- Digital LCD Display with ID3 TAG Information
- AUX Input, 3.5mm Connector for iPod/MP3 Players
- Perfect for Office Paging, Public Gatherings, Live DJ
- Provides Convenient Music and Voice System Control
- (5) Microphone Inputs & Switchable 3-Channel Stereo AUX-IN
- Front Panel Control Center for Bass, Mid, Treble, & Tone Adjustments
- Announcement Chime and Siren Functions
- Output Level Indicator
- 4 Ohm, 8 Ohm, 70 Volt and 100 Volt Speaker Outputs with Zone Selector
- Maximum Power Output: 750 Watt



PAMP1000



PT3300



PT8000CH



PT1100

PAMP1000

160 WATT HOME STEREO POWER AMPLIFIER

- Power On/Off Switch & LED Indicator
- Speaker A/B Channel Selectors & LED Indicators
- Balance Control
- Volume Control
- Auto On Switch
- Auto Input Switching
- 2 Stereo Line Inputs
- 1 Stereo Line Output
- Stereo/Bridged Mode Selector
- Speaker A/B Binding Post Terminals
- Bridgeable Output
- Replaceable Fuse
- Unswitched 200W Max AC Outlet
- 110/220 Voltage Selector
- Detachable Power AC Input
- Dimensions: 16.5"W x 2.36"H x 8.2"D

PT1100

1000 WATT POWER AMPLIFIER

- 1000 watts peak power
- 450 watts @ 2 ohms
- 360 watts @ 4 ohms
- 200 watts @ 8 ohms
- Inputs: RCA (4 audio sources)
- 1 RCA dedicated for record line output
- Two Microphones Input Jacks
- Master Volume Controls w/Blue LED
- Heavy Duty Fan Cooling
- A/B Speaker Selector
- Removable rack-mount brackets
- 3U Height w/ Remote
- 110-220V Switchable
- Dimensions: 19"W x 5.1"H x 12.1"D
- Weight: 14.3 lbs (6.5 kg)

PT3300

3000 WATT POWER AMPLIFIER

- 3000 watts peak power
- 800 watts @ 2 ohms
- 550 watts @ 4 ohms
- 300 watts @ 8 ohms
- Inputs: RCA (4 audio sources)
- 1 RCA dedicated for record line output
- Two Microphones Input Jacks
- Master Volume Controls w/Blue LED
- Heavy Duty Fan Cooling
- A/B Speaker Selector
- Removable rack-mount brackets
- 3U Height w/Remote
- 110-220V Switchable
- Dimensions: 19"W x 5.1"H x 12.1"D
- Weight: 15.4 lbs (7 kg)

PT8000CH

19" RACK MOUNT 8000 WATT 8 CHANNEL STEREO/MONO AMPLIFIER

- 1000 Watts Peak x 8 Channel Output
- Five Color LED Display Graphic Volume Display
- 4 Channel Capable Bridgeable Amplifier
- Independent Channel Level Controls
- Each Channel can be set as a Left/Right/Mono of the Bus/AUX Input
- Adjoining Channels are Bridgeable
- Individual Channel protection circuitry.
- Pass Through Output Allows Linking(Daisy-Chaining) of Additional Amplifiers
- 5 Way Speaker Binding Posts (Banana Plug) Outputs
- 4U Rack Space
- Dimension: 19"W x 19.3"D x 7.1"H
- Weight: 48.5 LBS



PT260A



PT380AU



PT530A

PT260A

200 WATTS DIGITAL AM/FM STEREO RECEIVER

- Stereo Amplifier
- Power Main: 50W x 2 @ 8 Ohm, 100W x 2 @ 4 Ohm
- Audio Inputs with A/B Speaker Outputs
- AM/FM Radio with Digital Display Screen
- Auto Scan, Memory, Radio Station PREVIOUS/NEXT control
- 50 Radio Station Pre-Set Memory
- Main Channel Volume, Balance, Treble, Bass & Gain Controls
- Microphone Volume, Bass, Treble & Echo Controls
- Two Microphone Input Jacks
- Three RCA Input Source
- 110/220V Power Switch
- AM/FM Antenna and Remote Control Included
- Dimension: 17" x 11.5" x 4.7"
- Weight: 14.3 LBS

PT380AU

200 WATT DIGITAL HOME STEREO RECEIVER SYSTEM WITH USB FLASH READER/ MP3

- Powers 4 loudspeakers
- USB reader function
- AM/FM radio with digital display screen
- Auto scan, radio station PRE/NEXT control
- Remote control included
- 50 radio station pre-set memory
- Volume/balance/treble/bass gain control for main channel
- Volume/bass/treble/echo control for microphone
- Two microphone input jacks
- Two RCA input source
- 110V/220V power switch
- AM/FM antenna included

PT390AU

300 WATT DIGITAL HOME STEREO RECEIVER SYSTEM WITH USB/SD MEMORY READERS FOR MP3

- Powers 4 loudspeakers
- USB flash reader
- AM/FM radio with digital display screen
- Auto scan, radio station PRE/NEXT control
- Remote control included
- 50 radio station pre-set memory
- Volume/balance/treble/bass gain control for main channel
- Volume/bass/treble/echo control for microphone
- Two microphone input jacks
- Two RCA input source
- 110V/220V power switch
- AM/FM antenna included

PT560AU

300 WATTS DIGITAL AM/FM/USB STEREO RECEIVER

- Power main: 150W x 2 @ 8 ohm; 300W x 2 @ 4 ohm
- AM/FM Tuner W/Digital Display Screen
- AUTO SCAN, MEMORY, Radio Stations Pre/Next control
- Play/Pause/PRE/Next/Stop Control for USB Function
- Volume/Bass/Treble/Balance control for Main Channel
- Volume/Bass/Treble/Echo Control for Microphone
- Stereo Receiver Amplifier With four Speaker
- Output (A/B) binding post terminals
- Stereo Amplifier With A/B Speaker Output
- AM/FM Radio With Digital Display Screen
- 50 Radio Station Pre-Set Memory
- USB flash drive Reader function
- Control For Main Channel
- TWO RCA Input Source
- Three RCA Input Source
- Control For Microphone
- Two Microphone input Jack
- Remote Control Included
- 110V/220V Power Switch
- Dimension: 19" x 11.4" x 4.7"
- Weight: 11.5 LBS

PT530A

TWO CHANNEL 350 WATTS BUILT-IN AM/FM RADIO AMPLIFIER RECEIVER

- 2 Channel Amplifier
- Built-In AM/FM Radio
- 2 MIC Input, Treble and Bass of MIC Adjustable, Independent MIC Volume Control
- Over Current Protection, Short Circuit Protection And Over Voltage Protection
- 12 Preset Radio Station
- Full Remote Control
- VFD Display
- Power Output: 350W for L, R Channel (4 Ohms)
- Input Selector: 3 Stereo RCA Selector, 1AM/FM Radio, 2 Microphone Input
- Output: 2 Channel Speaker Output Terminal for L, R
- Dimensions: 19.7" x 15.7" x 7.7"



PT570AU



PT588AB



PT590AU

PT570AU

5.1 CHANNEL 350 WATT AMPLIFIER RECEIVER WITH BUILT-IN AM/FM RADIO, USB FLASH & SD CARD READERS

- VFD Display
- 2 Microphone Inputs
- Built-In AM/FM Radio
- 5.1 Channel Amplifier
- 12 Preset Radio Station
- Wireless Remote Control
- Built-In USB and SD Audio
- Total Power Output: 350 Watt
- Treble/Bass & Independent MIC Volume Controls
- Over Current, Short Circuit, & Over Voltage Protection
- Input Selectors: 3 Stereo RCA Selector, 1 AM/FM Radio, 1 USB port & 1 SD Memory Card Slot
- Output: 5 Channel Speaker Output Terminals for L, R, Center, SL, SR, And 1 Line Out for Subwoofer

PT980AUH

7.1 CHANNEL 350 WATTS BUILD-IN AM/FM RADIO /USB/SD CARD HDMI AMPLIFIER RECEIVER

- 7.1 Channel Amplifier.
- 4 HDMI Input Port and 1 HDMI Output Port for HDMI Receiver and HDMI Switcher (With 3D Pass Through).
- One Key Switch Function Between HDMI Receiver and HDMI Switcher.
- Built-In AM/FM Radio.
- Built-In USB and SD Audio.
- 2 MIC Input, Treble and Bass of MIC Adjustable, Independent MIC Volume Control.
- Over Current Protection, Short Circuit Protection And Over Voltage Protection.
- 12 Preset Radio Station.
- Full Remote Control.
- VFD Display.
- Power Output: 300W for L,R Channel (4 Ohm) 50W for Center, Surround L and Surround R(4 Ohm) ,side Surround L and side Surround R(4 Ohm).
- Inout Selector: 4 in 1 out HDMI Selector, 3 Stereo RCA Selector, 1AM/FM Radio, 1 USB/SD, 2 Microphone Input.
- Output: 7 Channel Speaker Output Terminal for L, R,

PT588AB

5.1 CHANNEL HOME RECEIVER WITH AM/FM, HDMI AND BLUETOOTH

- 5.1 Channel Amplifier
- Bluetooth Compatible - Play Music From a Digital Music Player or Phone
- 4 HDMI Inputs, 1 HDMI Output
- 3D Passthru Compatible
- One Key Switch Function Between HDMI Receiver and HDMI Switcher
- Built-In AM/FM Radio with 12 Presets
- Built-In Bluetooth Receiver
- 2 Mic Inputs With Volume, Treble, Bass, Delay and Echo Controls - Perfect for Karaoke
- Over Current, Short Circuit, and Over Voltage Protection
- Wireless Remote Control Included
- VFD Display
- Dimensions (WxDxH): 16.9" x 13.0" x 4.92"
- Color: Black

PT590AU

5.1 CHANNEL 350 WATTS BUILT-IN AM/FM RADIO/USB/SD CARD HDMI AMPLIFIER RECEIVER W/3D PASS-THRU

- 5.1 Channel Amplifier
- 4 HDMI Input Port and 1 HDMI Output Port for HDMI Receiver and HDMI Switcher (With 3D Pass Through)
- One Key Switch Function Between HDMI Receiver and HDMI Switcher
- Built-In AM/FM Radio
- Built-In USB and SD Audio
- 2 MIC Input, Treble and Bass of MIC Adjustable, Independent MIC Volume Control
- Over Current Protection, Short Circuit Protection And Over Voltage Protection
- 12 Preset Radio Station
- Full Remote Control
- VFD Display
- Total Power Output: 350 Watts
- 300 Watts L/R Channel (4ohm) 50W for Center, Surround L and Surround R(4Ohm)
- Inout Selector: 4 in 1 out HDMI Selector, 3 Stereo RCA Selector, 1AM/FM Radio, 1 USB/SD 2 Microphone Input
- 3D Pass Thru
- Output: 5 Channel Speaker Output Terminal for L,R,Center, SL, SR, And 1 line Out for Subwoofer
- Dimensions: 16.9" x 6" x 12.9"
- Total Power Consumption: 300W
- 110v Power

For more detailed specifications, product-specific information and models visit www.PyleAudio.com



PT265BT



PT595AUBT



PT270AIU



PT592A



PT265BT

200 WATT BLUETOOTH DIGITAL RECEIVER AMPLIFIER WITH AM/FM RADIO & TWO MICROPHONE INPUTS FOR KARAOKE MIXING

- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Enabled Device (iPhone, Android, Smartphones, Tablet, MP3 player, TV, PC, etc.)
- Mix Two Microphones with Music from Bluetooth, AM/FM or Aux In for Karaoke Fun
- AM/FM Radio Receiver with 50 Station Memory Presets
- Digital LCD Display Screen
- Main Channel Full Volume, Balance, Treble and Bass Level Controls
- Separate Volume, Bass, Treble and Echo Controls for the Microphone Inputs
- Two Microphone Inputs Combined with Three Stereo RCA Input Sources
- Full Function Remote Control Included
- Two Pairs of Left and Right Stereo Speaker Outputs with A/B Speaker Selector Switch
- Main Channel Peak Power Output 100 Watts x 2
- Normal Load Impedance: 8 Ohm
- S/N Ratio, Amplifier: >76dB, Amplifier with Microphone: >71dB
- Frequency Response: (40Hz-15kHz) 2dB
- Power Compatibility: 110 Volts 60 Hz/ 220 Volts 50 Hz
- Dimensions: 19"(W) 11.4"(D) 4.7"(H)

PT592A

BLUETOOTH 5.1 CHANNEL HDMI DIGITAL STEREO RECEIVER AMPLIFIER WITH AM/FM RADIO, 4 HDMI INPUTS, 2 MIC INPUTS, 300 WATT OUTPUT

- 5.1 Channel Home Theater Amplifier
- Built-in Bluetooth for Wireless Audio Streaming
- Compatible with Virtually All Bluetooth Devices (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- (2) MIC Inputs - Treble, Bass and Independent Volume Mic Controls
- AM/FM Radio - 20 Station Memory Presets
- VFD Digital Display Panel with Input Selector
- Front-Facing Easy Touch Digital Control Center
- (4) HDMI Inputs & (1) HDMI Output
- (3) Pairs of RCA Audio Input Connector Jacks
- Output Terminals: Front (L) and (R), Center, Surround (L) and (R), Subwoofer (Works with Video Game Consoles, DVD, Blu-ray Players, TV, PC, etc.)
- Full Function Remote Control Included
- Headphone Jack
- Technical Specs: 2160p HDMI V 1.4 with 3D Pass Through Technology
- Bluetooth Profile Support: V2.1 and A2DP
- Total Output Power: 300 Watt (4 Ohm)
- Over Current, Voltage & Speaker Short Protection
- Power: AC 115V 60Hz/230V 50Hz
- Dimensions: 17.0" (W) x 12.5" (D) x 4.5" (H)

PT595AUBT

BLUETOOTH 5.1 CHANNEL HDMI DIGITAL AMPLIFIER RECEIVER, 350 WATT, USB/SD READERS, AM/FM RADIO

- 5.1 Channel Home Theater Amplifier
- Built-in Bluetooth for Wireless Audio Streaming (Compatible with Any Bluetooth Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.))
- (4) HDMI Inputs & (1) HDMI Output (Works with Video Game Consoles, DVD, Blu-ray Players, TV, PC, etc.)
- Total Output Power: 350 Watt (4 Ohm)
- SD Memory Card & USB Flash Drive Readers
- AM/FM Radio - 12 Station Memory Presets
- (2) Microphone Inputs
- VFD Digital Display Panel with Input Selector
- Headphone Jack
- Remote Control Included
- Output Terminals: Front (L), Front (R), Center, Side (L), Side (R), Subwoofer
- Mic Volume, Echo, Treble, Bass, Master Volume Controls
- Over Current, Voltage & Speaker Short Protection
- HDMI V 1.4 with 3D Pass Through Technology
- Bluetooth V2.1+EDR Module
- Power: AC 115V 60Hz/230V 50Hz
- Weight: 17.6 lbs.
- Dimensions (W x D x H): 16.9" x 12.9" x 5.1" inches

PT270AIU

300 WATT STEREO RECEIVER WITH BUILT-IN IPOD DOCKING STATION -AM-FM TUNER, USB FLASH & SD CARD READERS & SUBWOOFER CONTROL

- Auto Station Seek
- A/B Speaker Output
- 110-220V Switchable
- USB/SD Card MP3 Player
- 50 Radio Station Memory
- Inputs: RCA (1 Audio Source)
- Total Power Output: 600 Watt
- AM/FM Quartz Synthesized Tuner
- Separate Subwoofer Gain Controls
- Digital Fluorescent Output Display Meter
- Microphone Volume, Tone & Echo Controls
- 2 Mono RCA Dedicated for Subwoofer Output
- Outputs: Banana Binding Post (to Speakers)
- iPod / MP3 Input with Included Connection Cable
- iPod Docking Station, Suitable for All iPod & iPhone Models (USB, SD Memory & iPod Not Included)
- 150 Watt x 2 @ 8 Ohms
- 175 Watt x 2 @ 4 Ohms



PZR30XA



PT4601AIU



PD1000A

PT4601AIU

500 WATT STEREO RECEIVER AM-FM TUNER/USB/SD/IPOD DOCKING STATION & SUBWOOFER CONTROL

- Ipod docking station, suitable for all iPod & iPhone (Ipod not included)
- USB/SD Card MP3 Player
- A/B Speaker Output
- Separate gain control for subwoofer
- 50 Radio Station Memory
- Microphone Volume/Tone/Echo Control
- 500 watt peak power
- 200 watts x 2 @ 8 ohms RMS
- 100 watts x 2 @ 4 ohms RMS
- Inputs: RCA (2 audio sources)
- Outputs: Banana binding post (to speakers)
- 2 mono RCA dedicated for subwoofer output
- Digital fluorescent output display meter
- iPod / MP3 input with cable
- 110-220V Switchable
- AM/FM Quartz Synthesized Tuner
- Auto Station Seek

PZR30XA

4400 WATT PROFESSIONAL DJ POWER AMPLIFIER

- 2200 Watts x 2 Power Amplifier
- Dual Output Level Controls and Illumination
- Signal Indicators
- Protection and Clip Indicators
- Power On/Off Switch
- Dual Color LED Output Level Display
- Stereo/Mono Selector
- Dual RCA and XLR-1/4" Combo Inputs
- Power Supply: AC 110V
- Stereo or Bridged Power Into 4 or 8 Ohms
- 2 Speaker Connections via Banana Plugs and 1/4" Jacks
- Heavy Duty Fan Cooling and Aluminum Heatsink
- Ground Lift Switch
- Dimensions: 5.19"H x 19"W x 15.38"D

PD1000A

1000 WATT AM-FM RECEIVER W/ BUILT-IN DVD/MP3/USB

- Powers 4 Loud Speakers
- Separate Gain Control for DVD/ Tuner/ USB/ MP3
- Multi Media Disc Formats Compatible (DVD/CD/VCD/CD-R/CD-RW/MP4)
- Digital Colorful Fluorescent Display
- 50 Stations AM/FM Memory Presets,
- Auto Station Seek/Store
- AUX Input (iPod/MP3 w/ Cable)
- USB Reader Function (For Use w/ Portable USB Drives)
- A/B Audio Switch
- AM/FM Quartz Synthesized Radio Tuner
- Visual Power Level DB Display
- Subwoofer Line Audio Output
- RGB/RCA/S-Video Outputs
- 1000 Watts Peak Power
- 200 Watts x 2 @ 8 Ohms
- 360 Watts x 2 @ 4 Ohms
- 450 Watts x 2 @ 2 Ohms

PD3000A

3000 WATT AM-FM RECEIVER W/ BUILT-IN DVD/MP3/USB

- Powers 4 Loud Speakers
- Separate Gain Control for DVD/ Tuner/ USB/ MP3
- Multi Media Disc Formats Compatible (DVD/CD/VCD/CD-R/CD-RW/MP4)
- Digital Colorful Fluorescent Display
- 50 Stations AM/FM Memory Presets,
- Auto Station Seek/Store
- AUX Input (iPod/MP3 w/ Cable)
- USB Reader Function (For Use w/ Portable USB Drives)
- AM/FM Quartz Synthesized Radio Tuner
- Visual Power Level DB Display
- Subwoofer Line Audio Output
- A/B Audio Switch
- RGB/RCA/S-Video Outputs
- 3000 Watts Peak Power
- 300 Watts x 2 @ 8 Ohms
- 550 Watts x 2 @ 4 Ohms
- 800 Watts x 2 @ 2 Ohms

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

Component Speakers



PDIC81RD



PDIC81RDBK



PDIC81RDSL

IN-WALL / IN-CEILING FLUSH MOUNT ROUND / CIRCLE 2-WAY SPEAKERS

Model	Size	Color	Peak Watt Power	Speaker Type	Sold As
PDIC51RD	5.25"	White	150	2-Way	Pair
PDIC51RDBK	5.25"	Black	150	2-Way	Pair
PDIC51RDSL	5.25"	Silver	150	2-Way	Pair
PDIC61RD	6.5"	White	200	2-Way	Pair
PDIC61RDBK	6.5"	Black	200	2-Way	Pair
PDIC61RDSL	6.5"	Silver	200	2-Way	Pair
PDIC81RD	8"	White	250	2-Way	Pair
PDIC81RDBK	8"	Black	250	2-Way	Pair
PDIC81RDSL	8"	Silver	250	2-Way	Pair
PDIC60	6.5"	White	250	2-Way	Pair
PDIC60T*	6.5"	White	250	2-Way	Pair
PDIC80	8"	White	300	2-Way	Pair
PDIC80T*	8"	White	300	2-Way	Pair
PDICS54*	5"	White	100	2-Way	Single
PDICS64*	6.5"	White	150	2-Way	Single
PDICS82	8"	White	150	2-Way	Single
PDICS6*	6.5"	White	120	2-Way	Single
PDICS8*	8"	White	200	2-Way	Single

* Symbol indicate speakers including built-in 70 Volt transformers.

PDIC56

5.25" IN-WALL / IN-CEILING DUAL STEREO SPEAKERS, 150 WATT, 2-WAY, FLUSH MOUNT, WHITE

PDIC66

6.5"

PDIC86

8.0"

PDIC106

10.0"

- In-Wall / In-Ceiling System
- 2-Way Stereo Sound Speakers
- Includes (2) Speakers
- High Compliance Polymer Tweeter
- Polypropylene Cone with Rubber Edge
- Mounts Flush on Walls or Ceilings
- Built-in Electronic Crossover Network
- Environmentally Friendly ABS Construction
- Perfect for Custom Installations & Applications
- Includes Changeable Round & Square Stain Resistant Grills
- Cut-Out Template for Easy Installation



CEILING HANGING PENDANT SPEAKER W/ 70V TRANSFORMERS

Model	Size	Watt Power	Color
PRJS56W	5"	20	White
PRJS66W	6.5"	40	White
PRJS66B	6.5"	40	Black



100 WATTS CEILING HANGING MOUNT 5" BALL PENDENT SPEAKER (BLACK COLOR)

PBS50B

- 5" Speaker Indoor Ceiling Hanging Mount
- Power/Load Rating: 100Watts
- Nominal Impedance: 8 Ohms
- Frequency Range: 180 Hz - 15 KHz
- SPL(@ 1W/1m): 90db
- Mounting Bracket & Hardware Included
- Dimensions: 7"H X 7"W

WIRING COMBO SPEAKER SYSTEMS - IN-CEILING SPEAKER /VOLUME CONTROL/SPEAKER WALL PLATE KITS

- One Pair of In-Ceiling Speakers
- Co-axial Speakers w/ Mylar Tweeter
- 50 Feet of Specially Rated 16 Gauge/ 4 Conductor Speaker Cable
- Stereo In-Wall Mounted Rotary Volume Control
- Enables the User to Control the Volume of the Room They are Located
- Provides Clean Wall Jack
- Connections for One Pair of Speakers to Your Audio System

Model	Size	Watt Power
PHSKIT5	5.25"	200
PHSKIT6	6.5"	250
PHSKIT8	8.0"	300



PCSB5

PAIR OF 5 1/4 PRE-CONSTRUCTION SPEAKER BRACKETS

- 5 1/4 inch In-Ceiling Speaker bracket
- For Uses in a New Construction Projects
- Serves as Place Holder
- Metal Wings Easy to Mount at Any Framing Situation





PDPC5T




PIC6E

IN-WALL / IN-CEILING FLUSH MOUNT ROUND / CIRCLE SPEAKERS


Model	Size	Peak Watt Power	Feature	Sold As	Color
PWRC51	5.25"	200	Weather-Proof	Pair	White
PWRC61	6.5"	300	Weather-Proof	Pair	White
PWRC81	8"	400	Weather-Proof	Pair	White
PWRC52	5.25"	200	Dual Channel/Voice Coil	Single	White
PWRC62	6.5"	300	Dual Channel/Voice Coil	Single	White
PWRC82	8"	400	Dual Channel/Voice Coil	Single	White
PDPC52	5.25"	150	Dome Tweeter	Pair	White
PDPC62	6.5"	200	Dome Tweeter	Pair	White
PDPC82	5"	250	Dome Tweeter	Pair	White
PDPC5T*	5"	200	Long Throw Woofer	Single	White
PDPC6T*	6.5"	250	Long Throw Woofer	Single	White
PDPC8T*	8"	300	Long Throw Woofer	Single	White
PIC62A+	6.5"	250	High Performance	Pair	White
PIC6E+	6.5"	250	High Performance	Pair	White
PIC8E+	8"	300	High Performance	Pair	White

“+” Symbol indicate speakers including built-in adjustable treble control.
 “*” Symbol indicate speakers including built-in 70 Volt transformers.

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

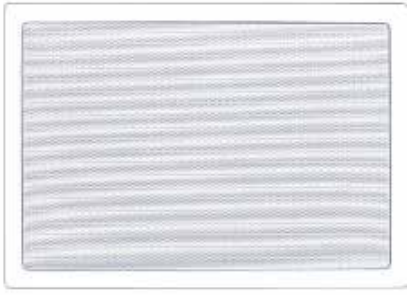

PDIW65

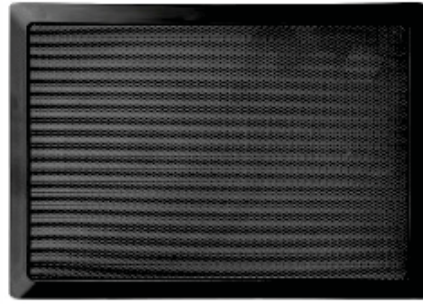

PDIW65BK



PDIW65SL

IN-WALL / IN-CEILING FLUSH MOUNT SQUARE / RECTANGLE SPEAKERS / SUBWOOFERS

Model	Size	Peak Watt Power	Feature	Sold As	Color
PDIW52	5.25"	200	Dome Tweeter	Pair	White
PDIW62	6.5"	250	Dome Tweeter	Pair	White
PDIW55	5.25"	150	Dome Tweeter	Pair	White
PDIW55BK	5.25"	150	Dome Tweeter	Pair	Black
PDIW55SL	5.25"	150	Dome Tweeter	Pair	Silver
PDIW65	6.5"	200	Polymer Tweeter	Pair	White
PDIW65BK	6.5"	200	Polymer Tweeter	Pair	Black
PDIW65SL	6.5"	200	Polymer Tweeter	Pair	Silver
PDIWCS56	5.25"	300	Long Throw Woofer	Single	White
56BKCS-	5.25"	300	Long Throw Woofer	Single	Black
S56SLC-	5.25"	300	Long Throw Woofer	Single	Silver
PDIW57	5"	300	Long Throw Woofer	Pair	White
PDIW67	6.5"	360	Long Throw Woofer	Pair	White
PDIW87	8"	400	Long Throw Woofer	Pair	White
PDIWCS62	6.5"	360	Electronic Crossover	Single	White
PDIC65SQ	6.5"	200	Dome Tweeter	Pair	White
PDIWS8	8"	300	Subwoofer	Single	White
PDIWS10	10"	360	Subwoofer	Single	White
PDIWS12	12"	400	Subwoofer	Single	White
PDIWS28	8" x 2	600	Dual Subwoofers	Single	White

Wall Mount Speakers



PDMN58



PCB4BK



PCB4WT

BOOKSHELF / WALL MOUNT SPEAKERS

Model	Size	Peak Watt Power	Feature	Sold As	Color
PCB3BK	3"	100	Mini Speakers	Pair	Black
PCB3WT	3"	100	Mini Speakers	Pair	White
PCB4BK	4"	200	Full Range	Pair	Black
PCB4WT	4"	200	Full Range	Pair	White
PDMN38	3.5"	300	Long Throw Woofer	Pair	Black
PDMN48	5"	400	Long Throw Woofer	Pair	Black
PDMN58	6.5"	500	Long Throw Woofer	Pair	Black
PDMN68	8"	400	Long Throw Woofer	Pair	Black
PDWT5*	5.25"	35	PA Speaker	Single	White
PDWT6*	6.5"	50	PA Speaker	Single	White

* Symbol indicate speakers including built-in 70 Volt transformers.



PDWR30W



PDWR50B



PDWP5WT



PDWP5BK

WEATHER PROOF INDOOR / OUTDOOR WALL MOUNTABLE SPEAKERS

Model	Size	Peak Watt Power	Feature	Sold As	Color
PDWP5BK	5"	150	Crossover Network	Pair	Black
PDWP5WT	5"	150	Crossover Network	Pair	White
PDWR30B	3.5"	300	Long Throw Woofer	Pair	Black
PDWR30W	3.5"	300	Long Throw Woofer	Pair	White
PDWR40B	5.25"	400	Long Throw Woofer	Pair	Black
PDWR40W	5.25"	400	Long Throw Woofer	Pair	White
PDWR50B	6.5"	500	Long Throw Woofer	Pair	Black
PDWR50W	6.5"	500	Long Throw Woofer	Pair	White
PDWR33	3.5"	200	Dome Tweeter	Pair	White
PDWR53	5.25"	250	Dome Tweeter	Pair	White
PDWR63	6.5"	350	Dome Tweeter	Pair	White
PDWR3T*	3.5"	200	Long Throw Woofer	Pair	White
PDWR5T*	5.25"	250	Long Throw Woofer	Pair	White
PDWR6T*	6.5"	350	Long Throw Woofer	Pair	White
PDWR68B	3" x 3	500	Wide Angle Sound	Pair	Black
PDWR68W	3" x 3	500	Wide Angle Sound	Pair	White

* Symbol indicate speakers including built-in 70 Volt transformers.



PHSP6K



PHSP4



PHSP30TA



PHSP20

INDOOR / OUTDOOR PA HORN SPEAKERS

Model	Size	Watt Power	Ohms	Transformer	Color
PHSP10TA	5.6"	10	8	70V	White
PHSP4	6"	50	8	-	White
PHSP5	8"	65	8	-	White
PHSP6K	6.3"	25	8	-	Grey
PHSP8K	8.1"	50	8	-	Grey
PHSP30TA	9.4"	30	8	70V	White
PHSP101T	9.7"	20	8	70V	Grey
PHSP121T	11"	30	8	70V	Grey
PHSP12	12.7"	60	16	70-100V	Grey
PHSP131T	13.5"	50	8	70V	Grey
PHSP16	16"	80	16	70-100V	Grey
PHSP20	19.5"	100	16	70-100V	Grey



PBW8S
PBW10S



PCW8S
PCW10S



PDW158
PDW188



PDW18125
PDW21250

PBW8S 8 HIGH POWER HIGH PERFORMANCE MIDBASS

- 8 Paper Cone
- Oversize 1.5 High Temperature Ccar Voice Coil, Til Bobbin
- Linear Phase Plug
- 80 OZ Magnet Structure
- 280 Watts Rms / 560 Watts Peak Power
- 3 OHM Impedance
- Sensitivity : 96db
- Frequency Response: 95-5KHZ

PBW10S 10 HIGH POWER HIGH PERFORMANCE MIDBASS

- 10 Paper Cone
- 2 High Temperature CCAR Voice Coil, TIL Bobbin
- Linear Phase Plug
- 100 Oz Magnet Structure
- 500 Watts Rms / 1000 Watts Peak Power
- 3 Ohm Impedance
- Sensitivity : 100DB
- Frequency Response: 65-4KHZ
- Mounting Depth: 3.15

PCW8S 8 HIGH POWER HIGH PERFORMANCE MIDBASS

- 8 Paper Cone
- Oversize 1.5 High Temperature CCAR Voice Coil, TIL Bobbin
- 80 Oz Magnet Structure
- 280 Watts RMS / 560 Watts Peak Power
- 3 OHM Impedance
- Sensitivity : 96db
- Frequency Response: 95-5KHZ
- Mounting Depth: 2.87

PCW10S 10 HIGH POWER HIGH PERFORMANCE MIDBASS

- 10 Paper Cone
- 2 High Temperature CCAR Voice Coil, TIL Bobbin
- 100 OZ Magnet Structure
- 500 Watts RMS / 1000 Watts Peak Power
- 3 OHM Impedance
- Sensitivity : 100db
- Frequency Response: 65-4khz
- Mounting Depth: 3.15

PDW158 15 1600 WATT PROFESSIONAL 8 OHM REPLACEMENT SUBWOOFER

- Excellent Replacement PA Woofer
- Paper Cone Reinforcement System
- 125Oz Ferrite Magnet
- 4" Voice coil
- 8 Ohm Impedance
- 800 Watts Rms/1600 Watts Peak
- Frequency Response:FO-2.5kHz
- Sensitivity:99db 1W/1M
- Net Weight::12.5Kg

PDW188 18 2000 WATT PROFESSIONAL 8 OHM REPLACEMENT SUBWOOFER

- Excellent Replacement PA Woofer
- Paper Cone Reinforcement System
- 125Oz Ferrite Magnet
- 4" Voice coil
- 8 Ohm Impedance
- 1000 Watts Rms/2000 Watts Peak
- Frequency Response:FO-2kHz
- Sensitivity:100db 1W/1M
- Net Weight::12.6KG

PDW18125 18 PERFORMANCE OPTIMIZED HIGH POWER SUBWOOFER

- 18 High Power Subwoofer
- 8 Ohm Impedance
- 800W RMS/1600W Peak Power
- 33 Hz Resonance
- Frequency Response: 33 Hz - 4K Hz
- Sensitivity: 1W@1M: 101 dB
- Magnet Weight: 200 Oz
- 4 Aluminum Voice Coil
- Diameter: 19
- Mounting Depth: 8.3
- Die-Cast Aluminum Frame LJD

PDW21250 21 PERFORMANCE OPTIMIZED HIGH POWER SUBWOOFER

- 21 High Power Subwoofer
- 8 Ohm Impedance
- 1000W RMS/2000W Peak Power
- 22 Hz Resonance
- Frequency Response: 22 Hz - 4K Hz
- Sensitivity: 1W@1M: 107 dB
- Magnet Weight: 250 Oz
- 4 Aluminum Voice Coil
- Diameter: 21.8
- Mounting Depth: 10.2
- Die-Cast Aluminum Frame LJD



**PMW8A
PMW12A**



**PPA6
PPA8
PPA10
PPA15
PPA18**

PMW8A 8 PAPER CONE MID-WOOFER

- 8 Paper Cone
- 1.5 High Temperature KAPTON Voice Coil
- 45 Oz Magnet Structure
- 220 Watts RMS / 440 Watts Peak Power
- 8 Ohm Impedance
- Sensitivity: 98dB
- Frequency Response: 100-10KHz
- Mounting Depth: 3.43

PMW12A 12" HIGH POWER HIGH PERFORMANCE MIDBASS

- 12 Paper Coating Cone
- 2 High Temperature KAPTON Voice Coil
- 80 Oz Magnet Structure
- Sealed Back Design
- 500 Watts RMS/ 1000 Watts Peak
- Power
- 8 Ohm impedance
- Sensitivity: 94 dB
- Frequency Response: 200-5KHz
- Monting Depth: 3.03

PPA6 400 WATT PROFESSIONAL PREMIUM PA 6 WOOFER

- 150 Watts RMS/400 Watt Peak
- Sensitivity (1W @ 1M): 88.5 dB
- Frequency Response: 60-7 KHz
- 30 oz Magnet
- 1 Kapton Voice Coil
- Stamped Steel Basket
- Strong Black Paper Cone
- Cloth Edge Suspension
- Bumped & Vented Pole Piece
- 8 Ohms Impedance

PPA8 500 WATT PROFESSIONAL PREMIUM PA 8 WOOFER

- 200 Watts RMS/500 Watt Peak
- Sensitivity (1W @ 1M): 89.2 dB
- Frequency Response: 55-6 KHz
- 40 oz Magnet
- 1.5 Kapton Voice Coil
- Stamped Steel Basket
- Strong Black Paper Cone
- Cloth Edge Suspension
- Bumped & Vented Pole Piece
- 8 Ohms Impedance

PPA10 600 WATT PROFESSIONAL PREMIUM PA 10 WOOFER

- 200 Watts RMS/600 Watt Peak
- Sensitivity (1W @ 1M): 89.2 dB
- Frequency Response: 50-5 KHz
- 50 oz Magnet
- 1.5 Kapton Voice Coil
- Stamped Steel Basket
- Strong Black Paper Cone
- Cloth Edge Suspension
- Bumped & Vented Pole Piece
- 8 Ohms Impedance

PPA12 700 WATT PROFESSIONAL PREMIUM PA 12 WOOFER

- 200 Watts RMS/700 Watt Peak
- Sensitivity (1W @ 1M): 90 dB
- Frequency Response: 35-4 KHz
- 60 oz Magnet
- 2 Kapton Voice Coil
- Stamped Steel Basket
- Strong Black Paper Cone
- Cloth Edge Suspension
- Bumped & Vented Pole Piece
- 8 Ohms Impedance

PPA15 800 WATT PROFESSIONAL PREMIUM PA 15 WOOFER

- 250 Watts RMS/800 Watt Peak
- Sensitivity (1W @ 1M): 90.2 dB
- Frequency Response: 30-3 KHz
- 70 oz Magnet
- 2.5 Kapton Voice Coil
- Stamped Steel Basket
- Strong Black Paper Cone
- Cloth Edge Suspension
- Bumped & Vented Pole Piece
- 8 Ohms Impedance

PPA18 1000 WATT PROFESSIONAL PREMIUM PA 18 WOOFER

- 300 Watts RMS/1000 Watt Peak
- Sensitivity (1W @ 1M): 94 dB
- Frequency Response: 25-3 KHz
- 100 oz Magnet
- 3 Kapton Voice Coil
- Stamped Steel Basket
- Strong Black Paper Cone
- Cloth Edge Suspension
- Bumped & Vented Pole Piece
- 8 Ohms Impedance

**PDMW5
PDMW6**



PDMR9



PM8DC



PDMW5 5 HIGH PERFORMANCE MID-RANGE DRIVER

- 100 Watts RMS/200 Watts Peak
- 5 Paper Coating Cone
- 1 High Temperature Kapton Voice Coil
- 15 oz Magnet Structure
- Sensitivity: 90dB
- Frequency Response: 80Hz - 7kHz
- 8 Ohm Impedance
- Mounting Depth: 2

PDMW6 6.5 HIGH PERFORMANCE MID-BASS WOOFER

- 125 Watts RMS/250 Watts Peak
- 6.5 Paper Coating Cone
- 1 High Temperature Aluminum Voice Coil
- 25 oz Magnet Structure
- Sensitivity: 92dB
- Frequency Response: 70Hz - 9kHz
- 8 Ohm Impedance
- Mounting Depth: 2.75

PDMR5 5 HIGH PERFORMANCE MID-BASS MID-RANGE WOOFER DRIVER

- 100 Watts RMS/200 Watts Peak
- 5 Paper Coating Cone
- 1 High Temperature Aluminum Voice Coil
- 15 oz Magnet Structure
- Sensitivity: 92dB
- Frequency Response: 450Hz - 7kHz
- Sealed Back Design
- 8 Ohm Impedance
- Mounting Depth: 2
- Minimum Cutout Diameter: 110mm
- Overall Diameter: 5.15

PDMR6 6.5 HIGH POWER HIGH PERFORMANCE MIDRANGE DRIVER

- 6.5 Paper Coating Cone
- 1 High Temperature KAPTON Voice Coil
- 25 Oz Magnet Structure
- Sealed Back Design
- 150 Watts RMS / 300 Watts Peak Power
- 8 Ohm Impedance
- Sensitivity : 93dB
- Frequency Response: 200-5KHz
- Mounting Depth: 2.76

PDMR8 8 360 WATT HIGH POWER HIGH PERFORMANCE MIDRANGE DRIVER

- 8 Paper Coating Cone
- 1.5 High Temperature KAPTON Voice Coil
- 35 Oz Magnet Structure
- Sealed Back Design
- 180 Watts RMS/ 360 Watts Peak Power
- 8 Ohm impedance
- Sensitivity: 94 dB
- Frequency Response: 200-5KHz
- Monting Depth: 3.03

PDMR9 5 DOME TYPE MIDRANGE SPEAKER

- 2 Glass Fiber Diaphragm Butyl Rubber Surround
- 2 High Temperature Voice Coil
- 25 oz Magnet Structure
- 100 Watts RMS/200 Watts Peak Power
- 4-8 Ohm Impedance
- Sensitivity: 95dB
- Frequency Response: 400Hz - 6k Hz
- Mounting Depth: 1 1/2

PM8DC 8 HIGH POWER HIGH PERFORMANCE MIDBASS

- 8 Paper Cone/2 Voice Coil
- Steel Frame/Dust Cup
- 40 Oz Magnet Structure
- 400 Watts Rms/800 Watts Peak Power
- 4 Ohm Impedance
- Sensitivity: 96dB
- Frequency Response:F0-8KHz

Tweeters

Horn Drivers

For more detailed specifications,
product-specific information and models visit
www.PyleAudio.com

PDS111 1 NEODYMIUM/TITANIUM SCREW ON HORN DRIVER 8 OHM 1-3/8 x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Neodymium Magnet /Titanium Diaphragm
- 1 (44.4mm) Flat Aluminum Voice Coil
- 21 oz Magnet Structure
- Frequency Response:2000Hz-20KHz
- Sensitivity:99db 1W/1M
- 8 Ohm Impedance
- 100 Watts RMS/200 Watts Peak
- Terminals 205 Type
- Fits Horns with 1 3/8 x 18 TPI Threads



PDS122 1.5" ALUMINUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Driver
- 1.5(35mm) Flat Aluminum Voice Coil
- 30 Oz. Magnet Structure
- Frequency Resp: 1.5K-20KHz
- Sensitivity: 95dB SPL !W 1M
- 8 Ohm Impedance
- 250 Watts RMS/500Watts Peak Power
- Fits Horns with 1 3/8" x 18 TPI Threads



PDS182 1.5 TITANIUM SCREW ON HORN DRIVER 8 OHM 1-3/8 x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 1.5 (44.4mm) Flat Aluminum Voice Coil
- 13.5 oz Magnet Structure
- Frequency Response:1500Hz-20KHz
- Sensitivity:103db 1W/1M
- 8 Ohm Impedance
- 120 Watts RMS/240 Watts Peak
- Terminals 205 Type
- Fits Horns with 1 3/8 x 18 TPI Threads



PDS221 1.12" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 1.12 (28.6mm) Flat Aluminum Voice Coil
- 20 Oz Magnet Structure
- Frequency Response: 800Hz-20KHz
- Sensitivity: 102dB @ 1W/ 1M
- 8 Ohm Impedance
- 150 Watts RMS /300 Watts Peak Power
- Fits Horns With 1-3/8 x 18 TPI Threads
- Overall Dimensions: 3.2 Diameter x 3 Depth



PDS222 1 SCREW ON NEODYMIUM HORN DRIVER

- Throat Diameter: 25.4mm(1 in)
- Mounting Screw: 1-3/8-18TPI
- Nominal Impedance: 8 OHM
- Rated Power: 100W (RMS)
- MAX Power: 200 W
- Sensitivity(1W/1M): 101dB/w/m
- Frequency Response: 1-20 kHz
- Voice Coil Diameter: 25.4mm(1 in)
- Diaphragm Material: Polyester
- Magnet: Neodymium
- Outside Diameter: 2.91 in.
- Net Weight: 0.5 lbs.



PDS322 1.35 SCREW ON NEODYMIUM HORN DRIVER

- Throat Diameter: 25.4mm(1 in)
- Mounting Screw: 1-3/8-18TPI
- Nominal Impedance: 8 OHM
- Rated Power: 200 W (RMS)
- MAX Power: 300W
- Sensitivity(1W/1M): 103dB/w/m
- Frequency Response: 1.2-20 kHz
- Voice Coil Diameter: 34.4mm(1.35 in)
- Diaphragm Material: Titanium
- Magnet: Ceramic
- Outside Diameter: 3.68 in.
- Net Weight: 2.03 lbs.



PDS333 1.35 SCREW ON NEODYMIUM/TITANIUM HORN DRIVER

- Throat Diameter: 25.4mm(1 in)
- Mounting Screw: 1-3/8-18TPI
- Nominal Impedance: 8 OHM
- Rated Power:200 W (RMS) MAX 400w
- Sensitivity(1W/1M): 103dB/w/m
- Frequency Response: 1.2-20 kHz
- Voice Coil Diameter: 34.4mm(1.35 in)
- Diaphragm Material: Titanium
- Magnet: Neodymium
- Outside Diameter: 3.34 in.
- Net Weight: 0.55 lbs.



PDS341 1.35" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 1.35 (34.4mm) Flat Aluminum Voice Coil
- 12 oz Magnet Structure
- Frequency Response: 1kHz - 20kHz
- Sensitivity: 102dB @ 1W/1M
- 8 Ohm Impedance
- 200 Watts RMS/400 Watts Peak
- Terminals 250 Type
- Fits Horns with 1 3/8 x 18 TPI Threads



PDS342 1.35" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 1.35 (34.4mm) Flat Aluminum Voice Coil
- 20 oz Magnet Structure
- Frequency Response: 1kHz - 20kHz
- Sensitivity: 104dB @ 1W/1M
- 8 Ohm Impedance
- 200 Watts RMS/400 Watts Peak
- Terminals 250 Type
- Fits Horns with 1 3/8 x 18 TPI Threads



PDS344 1.35" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 1.35 (34.4mm) Flat Aluminum Voice Coil
- 25 Oz Magnet Structure
- Frequency Response: 800Hz-20KHz
- Sensitivity: 103dB @ 1W/ 1M
- 8 Ohm Impedance
- 200 Watts RMS /400 Watts Peak Power
- Fits Horns With 1-3/8 x 18 TPI Threads
- Overall Dimensions: 4 Diameter x 3.3 Depth



PDS345 1.35 TITANIUM CERAMIC SCREW ON HORN DRIVER AT 8 OHMS

- Throat Diameter: 25.4mm(1 in)
- Mounting Screw: 1-3/8-18TPI
- Nominal Impedance: 8 OHM
- Rated Power: 200 W RMS, 400 W MAX
- Sensitivity(1W/1M): 103dB/w/m
- Frequency Response: 1-20 kHz
- Voice Coil Diameter: 34.4mm(1.35 in)
- Diaphragm Material: Titanium
- Magnet: Ceramic
- Outside Diameter: 3.93 in.
- Net Weight: 2.91 lbs.



PDS351 1.35 TITANIUM NEODYMIUM SCREW ON HORN DRIVER AT 8 OHMS

- Throat Diameter: 25.4mm(1 in)
- Mounting Screw: 1-3/8-18TPI
- Nominal Impedance: 8 OHM
- Rated Power: 200 W (RMS), 400 W MAX
- Sensitivity(1W/1M): 104dB/w/m
- Frequency Response: 1.2-20 kHz
- Voice Coil Diameter: 34.4mm(1.35 in)
- Diaphragm Material: Titanium
- Magnet: Neodymium
- Net Weight: 0.88 lbs.



PDS382 1.75 TITANIUM SCREW ON HORN DRIVER 8 OHM 1-3/8 x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 1.75 (44.4mm) Flat Aluminum Voice Coil
- 21 oz Magnet Structure
- Frequency Response:1000Hz-20KHz
- Sensitivity: 104dB @ 1W/1M
- 8 Ohm Impedance
- 200 Watts RMS/400 Watts Peak
- Terminals 205 Type
- Fits Horns with 1 3/8 x 18 TPI Threads



PDS432 HIGH POWER TWEETER COMPRESSION HORN DRIVER

- 2 Cloth Diaphragm
- 30 oz. Magnet
- 2 High-Temperature Voice Coil
- 8 Ohm Impedance
- 500 Watts Max.
- Frequency Response: 400 Hz - 9000 Hz
- SPL: 102dB (1W/1M)



PDS442 1.75" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 1.75 (44.4mm) Flat Aluminum Voice Coil
- 30 oz Magnet Structure
- Frequency Response: 1kHz - 20kHz
- Sensitivity: 105dB @ 1W/1M
- 8 Ohm Impedance
- 250 Watts RMS/500 Watts Peak
- Terminals 205 Type
- Fits Horns with 1 3/8 x 18 TPI Threads



PDS444 1.75" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 1.75 (44.4mm) Flat Aluminum Voice Coil
- 40 Oz Magnet Structure
- Frequency Response: 800Hz-20KHz
- Sensitivity: 105dB @ 1W/ 1M
- 8 Ohm Impedance
- 250 Watts RMS/500 Watts Peak Power
- Fits Horns with 1-3/8 x 18 TPI Threads
- Overall Dimensions: 5.3 Diameter x 3.43 Depth



PDS445 1.75 TITANIUM CERAMIC SCREW ON HORN DRIVER AT 8 OHMS

- Throat Diameter: 25.4mm(1 in)
- Mounting Screw: 1-3/8-18TPI
- Nominal Impedance: 8 OHM
- Rated Power: 300 W RMS, 600 W MAX
- Sensitivity(1W/1M): 103dB/w/m
- Frequency Response: 1-20 kHz
- Voice Coil Diameter: 44.4mm(1.75 in)
- Diaphragm Material: Titanium
- Magnet: Ceramic
- Outside Diameter: 4.72 in.
- Net Weight: 2.31 lbs.



PDS521 2.02" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 2.02 (51.2mm) Flat Aluminum Voice Coil
- 30 oz Magnet Structure
- Frequency Response: 500Hz - 18kHz
- Sensitivity: 107dB @ 1W/1M
- 8 Ohm Impedance
- 300 Watts RMS/600 Watts Peak
- Terminals 205 Type
- Fits Horns with 1 3/8 x 18 TPI Threads



PDS541 2" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 2 Flat Aluminum Voice Coil
- 60 oz. Magnet Structure
- Frequency Response: 1.5kHz-18kHz
- Sensitivity: 102dB
- 8 Ohm Impedance
- 300 Watts RMS/600 Watts Peak Power
- Terminals 205-Type
- Fits Horns with 1 3 /8 x 18 TPI Threads



PDS682 3 TITANIUM 8 OHM HORN BOLT ON DRIVER

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 3 (50.8mm) Flat Aluminum Voice Coil
- 50oz Magnet Structure
- Frequency Response:600Hz-18KHz
- Sensitivity:105db 1W/1M
- 8 Ohm Impedance
- 300 Watts Watts Rms /600 Watts Peak Power Handling
- Fits Horns With Four M6 Threaded Holes 90 Apart on 4 (102mm) Diameter Circle
- Overall Dimensions: 7 Diameter x 3.2 Depth



PDS741 2" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 2 (50.8mm) Flat Aluminum Voice Coil
- 60 Oz Magnet Structure
- Frequency Response: 800Hz-20KHz
- Sensitivity: 106dB @ 1W/ 1M
- 8 Ohm Impedance
- 300 Watts RMS /600 Watts Peak Power
- Fits Horns With 1-3/8 x 18 TPI Threads
- Overall Dimensions: 5.5 Diameter x 3.8 Depth



PDS772 2.84" TITANIUM HORN DRIVER 8 OHM 1-3/8" x 18 TPI

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 2.84 (72.2mm) Flat Aluminum Voice Coil
- 50 oz Magnet Structure
- Frequency Response: 500Hz - 18kHz
- Sensitivity: 107dB @ 1W/1M
- 8 Ohm Impedance
- 300 Watts RMS/600 Watts Peak
- Terminals 205 Type
- Fits Horns with 1 3/8 x 18 TPI Threads



PKD480 1 DYNAMIC HORN MIDRANGE/TWEETER

- Max Power Rating: 200 Watts
- Sensitivity: 96 dB (1W/1M)
- Frequency Response: 2K-22kHz
- Aluminum Die-Cast Cooler
- Neodymium Magnet System
- Removable Chrome Fronting
- 4 Ohm Impedance
- Hi-Tech & Clean Look



PDB252 1.5" ALUMINUM HORN DRIVER 8 OHM 4-BOLT

- Midrange/Tweeter
- Compression Driver
- 1.5(35mm) Flat Aluminum Voice Coil
- 30 Oz. Magnet Structure
- Frequency Resp: 1.5K-20KHz
- Sensitivity: 95dB SPL 1W 1M
- 8 Ohm Impedance
- 250 Watts RMS/500Watts Peak Power
- Fits Horns with Four M6 Threaded Holes 90
- Apart on 3 (76mm) Diameter Circle



PDB352 1.35" TITANIUM HORN DRIVER 8 OHM 4-BOLT

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 1.35 (34.4mm) Flat Aluminum Voice Coil
- 25 Oz Magnet Structure
- Frequency Response: 800Hz-20KHz
- Sensitivity: 103dB @ 1W/ 1M
- 8 Ohm Impedance
- 200 Watts RMS /400 Watts Peak Power
- Fits Horns with Fou M6 Threaded Holes 90 Apart on 2.36 (60mm) Diameter Circle
- Overall Dimensions: 4 Diameter x 2.5 Depth



PDB512 2.02" TITANIUM HORN DRIVER 8 OHM 5-BOLT

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 2.02 (51.2mm) Flat Aluminum Voice Coil
- 30 oz Magnet Structure
- Frequency Response: 500Hz - 18kHz
- Sensitivity: 107dB @ 1W/1M
- 8 Ohm Impedance
- 250 Watts RMS/500 Watts Peak
- Terminals 205 Type
- Fits Horns with Three M6 Threaded Holes 120;ba Apart on 2.24 (57mm) Diameter Circle
- Two M6 Threaded Holes 180;ba Apart on 3 (76.2mm) Diameter Circle



PDB552 1.75" TITANIUM HORN DRIVER 8 OHM 4-BOLT

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 1.75 (44.4mm) Flat Aluminum Voice Coil
- 40 Oz Magneture Structure
- Frequency Response: 800Hz-20KHz
- Sensitivity: 105dB @ 1W/ 1M
- 8 Ohm Impedance
- 250 Watts RMS /500 Watts Peak Power
- Fits Horns with Fou M6 Threaded Holes 90 Apart on 3 (76mm) Diameter Circle
- Overall Dimensions: 5.3 Diameter x 2.6 Depth



PDB658 2.5 BOLT ON TITANIUM CERAMIC HORN DRIVER

- Throat Diameter: 35.5mm(1.4 in)
- Mounting Screw: 4-M6-F102
- Nominal Impedance: 8 OHM
- Rated Power: 350 W RMS, 700 W Max
- Sensitivity(1W/1M): 105dB/w/m
- Frequency Reponse: 800-17KHz
- Voice Coil Diameter: 63.8mm(2.5 in)
- Diaphragm Material: Titanium
- Magnet: Ceramic
- Net Weight: 8.8 lbs.



PDB752 3" TITANIUM HORN DRIVER 8 OHM 4-BOLT

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- 3 (76.2mm) Flat Aluminum Voice Coil
- 50 oz Magnet Structure
- Frequency Response: 1kHz - 20kHz
- Sensitivity: 107dB @ 1W/1M
- 8 Ohm Impedance
- 400 Watts RMS/800 Watts Peak
- Terminals 205 Type
- Fits Horns with Four M6 Threaded Holes
- 90 Apart on 4 (102mm) Diameter Circle



PDB758 3 TITANIUM BOLT ON HORN DRIVER

- Throat Diameter: 35.5mm(1.4 in)
- Mounting Screw: 4-M6-Φ102
- Nominal Impedance: 8 OHM
- Rated Power: 400 W RMS, 800 W MAX
- Sensitivity(1W/1M): 105dB/w/m
- Frequency Response: 500Hz - 17 kHz
- Voice Coil Diameter: 74.8mm(3 in)
- Diaphragm Material: Titanium
- Magnet: Ceramic
- Outside Diameter: 6.69 in.
- Net Weight: 11.5 lbs.
- Shorting copper cap for extended HF response



PDB782 2" TITANIUM HORN DRIVER 8 OHM 4-BOLT

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 2 (50.8mm) Flat Aluminum Voice Coil
- 60 Oz Magnet Structure
- Frequency Response: 800Hz-20KHz
- Sensitivity: 106dB @ 1W/ 1M
- 8 Ohm Impedance
- 300 Watts RMS /600 Watts Peak Power
- Fits Horns With Four M6 Threaded Holes 90 Apart on 3 (76mm) Diameter Circle
- Overall Dimensions: 5.5 Diameter x 3 Depth



PDB832 2" TITANIUM HORN DRIVER 8 OHM 4-BOLT

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 2 (50.8mm) Flat Aluminum Voice Coil
- 90 Oz Magnet Structure
- Frequency Response: 800Hz-20KHz
- Sensitivity: 106dB @ 1W/ 1M
- 8 Ohm Impedance
- 500 Watts RMS /1000 Watts Peak Power
- Fits Horns With Four M6 Threaded Holes 90 Apart on 4 (102mm) Diameter Circle
- Overall Dimensions: 7 Diameter x 3.2 Depth



PDB952 4 TITANIUM 8 OHM HORN BOLT ON DRIVER

- Midrange/Tweeter Compression Horn Driver
- Titanium Diaphragm
- Terminals 205-Type
- 4 (50.8mm) Flat Aluminum Voice Coil
- 116oz Magnet Structure
- Frequency Response: 400Hz-15KHz
- Sensitivity: 99db 1W/1M
- 8 Ohm Impedance
- 1200 Watts Watts Rms /600 Watts Peak Power Handing
- Fits Horns With Four M6 Threaded Holes 90 Apart on 4 (102mm) Diameter Circle
- Overall Dimensions: 7 Diameter x 3.2 Depth



PDB958 4 BOLT ON TITANIUM NEODYMIUM HORN DRIVER

- Throat Diameter 50.8mm(2 in)
- Mounting Screw 4-M6-F102
- Nominal Impedance 8 OHM
- Rated Power 500 W RMS, 1000 W MAX
- Sensitivity(1W1M) 107dBwm
- Frequency Response 450 Hz - 13 kHz
- Voice Coil Diameter 99.2mm(4 in)
- Diaphragm Material Titanium
- Magnet Neodymium
- Outside Diameter 6.35 in.
- Net Weight 9.0 lbs.
- Shorting copper cap for extended HF response



PDBT13 3.75" SUPER BULLET HORN TWEETER

- 3.75 Aluminum Die-Cast Bullet Horn
- 1 Titanium Diaphragm
- 20 oz. Magnet
- 1 High-Temperature Voice Coil
- 4 Ohm Impedance
- 350 Watts Max.
- Frequency Repsonse: 3.5 kHz - 23 kHz
- SPL: 98dB (1W/1M)



PDBT18 3.75 ALUMINUM BULLET TITANIUM HORN TWEETER

- 3.75 Aluminum Horn
- 1 Super Tweeter
- 20 oz Magnet Structure
- 1 High Temperature Kapton Voice Coil
- Diamond Chrome Cutting Finish
- Ferro Fluid Enhanced Voice Coil
- 150 Watts RMS/300 Watts Peak
- Sensitivity: 99dB
- Frequency Response: 2kHz - 25kHz
- Mylar Crossover Capacitor Included
- 3.75 Diameter - 2 Mounting Depth



PDBT19 3.75 ALUMINUM BULLET TITANIUM HORN TWEETER

- 3.75 Aluminum Horn
- 1 Super Tweeter
- 20 oz Magnet Structure
- 1 High Temperature Kapton Voice Coil
- Ferro Fluid Enhanced Voice Coil
- 150 Watts RMS/300 Watts Peak
- Sensitivity: 98dB
- Frequency Response: 2 kHz - 25 kHz
- Mylar Crossover Capacitor Included
- 4-8 Ohms Impedance
- 3.75 Diameter - 2 Mounting Depth



PDBT21F 1.75 HEAVY DUTY ALUMINUM DIE-CAST TITANIUM SUPER TWEETER

- 1.75 Titanium Super Tweeter
- Die Cast Aluminum Frame
- Crossover capacitor Included
- 300 Watts RMS
- 600 Watts Max. Power
- 30 Oz. Magnet Structure
- Sensitivity: 106dB/w/m
- Impedance: 4-8 Ohm
- Freq. Resp.: 2,000Hz - 25,000Hz



PDBT23 1.75" DIE-CAST TITANIUM SUPER TWEETER

- Die Cast Plastic Frame
- 180 Watts RMS/360 Watts Max
- 4 Ohm Impedance
- Frequency Response: 3 KHz-18 KHz
- Sensitivity: 98 dB/w/m
- Number of bolt holes: 4
- Bolt hole dimension: 4.5mm—6mm(4—)
- Diameter: F120mm
- Mounting depth: 53mm
- Total depth: 61 mm



PDBT28 1 HEAVY DUTY TITANIUM SUPER TWEETER

- 1 Titanium Super Tweeter
- Diamond Chrome Cutting Finish
- Die-Cast Aluminum Frame
- 1 High Temperature Kapton Voice Coil
- 30 oz Magnet Structure
- 150 Watts RMS/300 Watts Peak
- 4-8 Ohms Impedance
- Ferro Fluid Enhanced Voice Coil
- Sensitivity: 104dB
- Frequency Response: 2kHz - 20kHz
- Mylar Crossover Capacitor Included
- 3.125 Diameter - 2 Mounting Depth



PDBT29 1 ALUMINUM HOUSING SUPER BULLET TWEETER WITH TITANIUM VOICE COIL

- Diaphragm Material: Titanium
- Voice Coil Size: 1(25.4mm)
- Impedance: 4 Ohm
- Sensitivity: 100db/W/M
- Frequency Response: 3-20 kHz
- Rated Power Input (RMS): 150w
- MAX Power Handling: 300w
- Magnet Weight/Type: 12 Oz. Ferrite Magnet
- Baffle Material: ABS + PSF



PDBT31 1.5" HEAVY DUTY TITANIUM SUPER TWEETER

- 1.5 Titanium Super Tweeter
- Die-Cast Aluminum Frame
- 250 Watts RMS/500 Watts Max.
- 4 Ohm Impedance
- Frequency Response: 2 kHz - 25 kHz
- Sensitivity: 106dB/w/m
- 30 oz. Magnet Structure



PDBT35 1 TITANIUM SUPER TWEETER

- 1 Titanium Super Tweeter
- Die Cast Aluminum Frame
- 500 Watts Max
- 4-8 Ohms Impedance
- Frequency Response: 2kHz-22kHz
- Sensitivity: 108dB/w/m
- Dimensions: 2.25 Diameter, 2.75 Depth



PDBT37 1 TITANIUM SUPER TWEETER

- 1 Titanium Super Tweeter
- Die Cast Aluminum Frame
- 500 Watts Max
- 4-8 Ohms Impedance
- Frequency Response: 2kHz-25kHz
- Sensitivity: 110dB/w/m
- Crossover Capacitor Included



PDBT38 1.5 HEAVY DUTY TITANIUM SUPER TWEETER

- 1.5 Titanium Super Tweeter
- Diamond Chrome Cutting Finish
- 1.5 High Temperature Kapton Voice Coil
- 30 oz Magnet Structure
- 150 Watts RMS/300 Watts Peak
- 4-8 Ohms Impedance
- Die-Cast Aluminum Frame
- Ferro Fluid Enhanced Voice Coil
- Sensitivity: 104dB
- Frequency Response: 2kHz - 20kHz
- Mylar Crossover Capacitor Included
- 3.9 Diameter - 2.6 Mounting Depth



PDBT39 1.5 ALUMINUM HOUSING SUPER BULLET TWEETER WITH TITANIUM VOICE COIL

- Diaphragm Material: Titanium
- Voice Coil Size: 1.5 (37.6mm)
- Impedance: 4 Ohm
- Sensitivity: 102db/W/M
- Frequency Response: 2.5-20 kHz
- Rated Power Input (RMS): 200w
- MAX Power Handling: 400w
- Magnet Weight/Type: 18 Oz Ferrite Magnet
- Baffle Material: ABS + PSF



PDBT43 1.75 DIE-CAST TITANIUM SUPER TWEETER

- Die Cast Plastic Frame
- 400 Watts RMS/800 Watts Max
- 4 Ohm Impedance
- Frequency Response: 2.5 KHz-20 KHz
- Sensitivity: 102 dB/w/m
- Number of bolt holes: 4
- Bolt hole dimension: F5.3mm(4—)
- Diameter: F131.2mm
- Mounting depth: 82mm
- Total depth: 102 mm



PDBT45 EXTRA HEAVY DUTY TITANIUM SUPER BULLET TWEETER

- Cloth Diaphragm
- 400 Watts Max./ 1.75" Voice Coil
- 15 Oz Magnet/ 4~16 Ohm
- 4.45 Diameter - 3.25 Mounting Depth
- 1500-20,000Hz/ 104dB



PDBT48 2 HEAVY DUTY ALUMINUM DIE-CAST TITANIUM SUPER TWEETER

- 2" Titanium Super Tweeter
- Die Cast Aluminum Frame
- 600 Watts Max./ 4~8 Ohm
- Freq. Resp: 2000-25,000 Hz
- Sensitivity: 106 dB/ w/ m
- Crossover Capacitor Included
- 3 1/8" Diameter/ 2" Mounting Depth



PDBT49 2 TITANIUM SUPER TWEETER

- 2 Titanium Super Tweeter
- Die Cast Aluminum Fram
- Crossover Capacitor Included
- 40oz Magnet Structure
- 300 Watts RMS/600 Watts Peak
- Sensitivity:106 dB/w/m
- Impedance:4-8 Ohm
- Freq.Resp.:2,000HZ-25,000HZ



PDBT53 1 DIE-CAST TITANIUM SUPER TWEETER

- Die Cast Plastic Frame
- 150 Watts RMS/300 Watts Max
- 4 Ohm Impedance
- Frequency Response: 2.5 KHz-20 KHz
- Sensitivity: 100 dB/w/m
- Number of bolt holes: 4
- Bolt hole dimension: F5mm (4—)
- Diameter: F91mm
- Mounting depth: 55.5mm
- Total depth: 61 mm



PDBT58 3 EXTRA HEAVY DUTY TITANIUM SUPER BULLET TWEETER

- 3 Titanium Super Tweeter
- Die-Cast Aluminum Frame
- Diamond Chrome Cutting Finish
- 3 High Temperature Kapton Voice Coil
- 100 oz Magnet Structure
- 500 Watts RMS/1000 Watts Peak
- 4-8 Ohms Impedance
- Ferro Fluid Enhanced Voice Coil
- Sensitivity: 109dB
- Frequency Response: 2kHz - 25kHz
- Mylar Crossover Capacitor Included
- 5 Diameter - 2 Mounting Depth



PDBT59 1.75 ALUMINUM HOUSING SUPER BULLET TWEETER WITH TITANIUM VOICE COIL

- Diaphragm Material: Titanium
- Voice Coil Size: 1.75(44.4mm)
- Impedance: 4 Ohm
- Sensitivity: 102db/W/M
- Frequency Response: 2-20 kHz
- Rated Power Input (RMS): 500w
- MAX Power Handling: 1000w
- Magnet Weight/Type: 16 Oz Ferrite Magnet
- Baffle Material: ABS + PSF



PDBT63 1.8 DIE-CAST CLOTH SUPER TWEETER

- Die Cast Plastic Frame
- 360 Watts RMS/720 Watts Max
- 4 Ohm Impedance
- Power: 40W
- Frequency Response: 2 KHz-25 KHz
- Sensitivity: 105 dB/w/m
- Number of bolt holes: 4
- Bolt hole dimension: 4.5mm—6mm(4—)
- Diameter: F124.5mm
- Mounting depth: 83mm
- Total depth: 91 mm



PDBT68 3 HEAVY DUTY ALUMINUM DIE-CAST TITANIUM SUPER TWEETER

- 3" Titanium Super Tweeter
- Die Cast Aluminum Frame
- 1200 Watts Max./ 4~8 Ohm
- Freq. Resp: 2000-25,000 Hz
- Sensitivity: 114 dB/ w/ m
- Crossover Capacitor Included
- 5" Diameter/ 2" Mounting Depth



PH25 3 x 3 HORN TWEETER

- Max Power Rating: 120 Watts
- 15 oz Magnet
- Sensitivity: 100dB @ 1W/1M
- Frequency Response: 1kHz - 15kHz
- 25mm Voice Coil Size
- 8 Ohm Impedance
- Dimensions: 3.35" h x 3.35" w x 2.75" d



PH391 4 x 10 HORN TWEETER

- Max Power Rating: 200 Watts
- 20 oz Magnet
- Sensitivity: 102dB @ 1W/1M
- Frequency Response: 1kHz - 15kHz
- 25mm Voice Coil Size
- 8 Ohm Impedance
- Dimensions: 4.3" h x 10.6" w x 8.25" d



PH44 4 x 4 HORN TWEETER

- Max Power Rating: 150 Watts
- 15 oz Magnet
- Sensitivity: 105dB @ 1W/1M
- Frequency Response: 1kHz - 18kHz
- 25mm Voice Coil Size
- 8 Ohm Impedance
- Dimensions: 4.5" h x 4.5" w x 4.45" d



PSN1165 4.35 DISPERSION HORN PIEZO TWEETER

- 4.35 Square Super Horn Tweeters
- Frequency Response: 1.8kHz - 30kHz
- SPL: 93dB @ 1W/1M
- Excellent Transient Response
- Low Distortion
- Typical Impedance Appears as .3 UF Capacitor
- Light Weight Highly Reliable
- 200 Watts RMS/400 Watts Peak
- Complete Pair In Gift Box
- Suited 4-8 Ohm Impedance Applications
- A 30 Ohm Series Resistor is Recommended to Assure Stability of Extended Range Amplifiers Preclude Hazard of Amplifier Burn-Out



400 WATT 3.5 DISPERSION HORN PIEZO TWEETER

PSN1167

- 3.5 Square Piezo Horn Tweeter
- Frequency Response: 3.5kHz-20kHz
- SPL: 93dB @ 1W/1M
- Excellent Transient Response
- Low Distortion
- Typical Impedance Appears as .12 UF Capacitor
- Light Weight Highly Reliable
- 200 Watts RMS/400 Watts Peak
- Complete Pair In Gift Box
- Suited 4-8 Ohm Impedance Applications
- A 30 Ohm Series Resistor is Recommended to Assure Stability of Extended Range Amplifiers Preclude Hazard of Amplifier Burn-Out
- Overall Dimensions: 3.5 x 3.5
- Cutout Dimensions: 2.75 x 2.75
- Screw Holes: 2.8



400 WATT 3 x 7.5 DISPERSION HORN PIEZO TWEETER

PSN1176

- 3" x 7.5" Square Piezo Horn Tweeter
- Frequency Response: 3.5kHz-20kHz
- SPL: 94dB @ 1W/1M
- Excellent Transient Response
- Low Distortion
- Typical Impedance Appears as .1 UF Capacitor
- Light Weight Highly Reliable
- 200 Watts RMS/400 Watts Peak
- Complete Pair In Gift Box
- Suited 4-8 Ohm Impedance Applications
- A 30 Ohm Series Resistor is Recommended to Assure Stability of Extended Range Amplifiers Preclude Hazard of Amplifier Burn-Out





For more detailed specifications,
product-specific information and models visit
www.PyleAudio.com

PDBT78 2 TITANIUM SUPER TWEETER

- Die Cast Aluminum Frame
- Diamond Chrome Cutting Finish
- 2 High Temperature Kapton Voice Coil
- 20oz Magnet Structure
- 350 Watts RMS/700 Watts Peak
- 4-8 Ohms Impedance
- Sensitivity: 112 dB/W/M
- Frequency Response: 2kHz - 25kHz
- Mylar Crossover Capacitor Included
- Dimensions: 4 x 5 / 3 Mounting Depth



PH12S SCREW-ON TYPE CONSTANT RADIATION HORN

- Material: ABS Resin
- Nominal Coverage Angle (HxV)-6 dB:90°x40°
- Cut Off Frequency: 1000 Hz
- Throat Diameter: 26mm
- Mounting Type: Zinc Screw Insert 1 3/8- 18 UNEF
- Dimensions: 11.6"H x 11.6"W x 9.8"D



PH515 SCREW-ON TYPE CONSTANT DIRECTIVITY HORN

- Material: ABS Glass Fiber
- Nominal Coverage Angle (HxV)-6 dB: 90-ba x 40-ba
- Cut Off Frequency: 800 Hz
- Throat Diameter: 25.40mm (1)
- Mounting Flange Diameter: 76mm
- Mounting Hole Diameter: 5.6mm
- Dimensions: 7 7/8H x 12 1/2W x 10D



PH612 SCREW-ON TYPE CONSTANT RADIATION HORN

- Material: ABS Resin
- Nominal Coverage Angle (HxV)-6 dB:90°x40°
- Cut Off Frequency: 1000 Hz
- Throat Diameter: 26mm
- Mounting Type: Zinc Screw Insert 1 3/8- 18 UNEF
- Dimensions: 6.4"h x 11.9"w x 4.4"d



PH714 SCREW-ON TYPE CONSTANT RADIATION HORN

- Material: ABS Resin
- Nominal Coverage Angle (HxV)-6 dB:90°x40°
- Cut Off Frequency: 1000 Hz
- Throat Diameter: 26mm
- Mounting Type: Zinc Screw Insert 1 3/8 - 18 UNEF
- Dimensions: 6.25"h x 16.5"w x 8.65"d



Megaphones



PMP20



PMP38R



PMP40



PMP43IN

PMP20

MEGAPHONE / BULLHORN - COMPACT, LIGHTWEIGHT AND BATTERY OPERATED

- For Indoor/Outdoor Use
- Over 400 Yard Range
- Used by U.S. Armed Forces
- Maximum Power Output: 20 Watt
- 2 Audio Functions: Voice & Siren Modes
- Compact & Durable with Foldable Handle
- Ergonomic Pistol Grip and Light-Weight Chassis
- Voice Mode: Amplifies Your Voice as Spoken into the Microphone
- Alarm Mode: Amplifies Alert/Siren Tone Through the Megaphone Speaker
- Battery Powered by 4 x "C" Batteries, Not Included

PMP30

MEGAPHONE PA BULLHORN WITH BUILT-IN SIREN, ADJUSTABLE VOLUME CONTROL AND 800 YARD RANGE

- For Indoor/Outdoor Use
- Over 800 Yard Range
- Adjustable Volume Control
- Used By U.S. Armed Forces
- Maximum Power Output: 30 Watt
- 2 Audio Functions: Voice & Alarm Modes
- Voice Mode: Amplifies Your Voice as Spoken into the Microphone
- Alarm Mode: Amplifies Alert/Siren Tone Through the Speaker
- Ergonomic Pistol Grip & Lightweight Chassis
- Compact & Durable with Foldable Handle

PMP35R

MEGAPHONE PA BULLHORN WITH BUILT-IN SIREN, RECORD FUNCTION WITH 10 SECOND MEMORY, ADJUSTABLE VOLUME CONTROL AND 800 YARD RANGE

- For Indoor/Outdoor Use
- Over 800 Yard Range
- Adjustable Volume Control
- Used By U.S. Armed Forces
- Maximum Power Output: 30 Watt
- 2 Audio Functions: Voice & Alarm Modes
- Ergonomic Pistol Grip & Lightweight Chassis
- Voice Mode: Amplifies Your Voice as Spoken into the Microphone
- Siren Mode: Amplifies Alert/Siren Tone Through the Speaker
- 10 Second Integrated Audio Memory
- Record Your Voice and Repeat the Message
- Battery Powered: Requires 4 x 'D' Batteries (not included)
- Dimensions: Diameter 6.25" x 10.0" Length

PMP38R

MEGAPHONE BULLHORN, BUILT-IN RECHARGEABLE BATTERY, 30 WATT, SIREN AND RECORD FUNCTIONS

- 800 Yard Range
- 30 Watts Power Output
- For Indoor/Outdoor Use
- Used by U.S. Armed Forces
- Record and Replay Audio Function
- 10 Seconds Integrated Audio Memory
- Built-in Rechargeable Battery
- Lithium Battery and Charger Included
- (or Battery Powered by 4 x 'D' Batteries, Not Included)
- 3 Audio Modes: Record, Siren, and Talk
- Ergonomic Pistol Grip and Light-Weight Chassis
- 220-240V Compatible

PMP40

MEGAPHONE / BULLHORN WITH PLUG-IN HANDHELD MIC, AUTOMATIC SIREN AND ADJUSTABLE VOLUME CONTROL

- Plug-in Handheld Microphone
- Built-In Automatic Siren Function
- 1,000 Feet Range
- For Indoor/Outdoor Use
- Used by U.S. Armed Forces
- Adjustable Volume Control
- Compact, Portable and Durable
- Maximum Power Output: 40 Watt
- Ergonomic Pistol Grip and Light-Weight Chassis

PMP43IN

40 WATTS PROFESSIONAL MEGAPHONE / BULLHORN W/SIREN AND 3.5MM AUX-IN FOR DIGITAL MUSIC/IPOD

- Up to 40 Watts Power
- 1000 Yard Range
- Used By U.S. Army, Schools, And More
- For Indoor/Outdoor Use
- Variable Volume Control
- Tough Housing
- Built-In Siren
- Plug In Any External Source With 3.5mm Aux-In Jack -- Perfect for iPod/iPhone



PMP45R



PMP53IN



PMP57LIA



PMP58U

PMP45R

MEGAPHONE / BULLHORN WITH BUILT-IN RECHARGEABLE BATTERY, RECORDING FUNCTION, 10 SECOND BUILT-IN MEMORY AND DETACHABLE MICROPHONE

- Plug-in Handheld Microphone
- Siren Mode: Button Activated Automatic Siren Function
- Record Mode: 10 Second Integrated Audio Memory
- Instantly Replay Your Recorded Messages
- 1,000 Yard Range
- For Indoor/Outdoor Use
- Used by U.S. Armed Forces
- Adjustable Volume Control
- Compact, Portable and Durable
- Maximum Power Output: 40 Watt
- Ergonomic Pistol Grip and Light-Weight Chassis
- Built-in Rechargeable Battery (Charges via Wall Outlet) (or Battery Operated by 6 x 'D' Batteries, Not Included)
- Dimensions: Diameter 8.0" X Length 13.12"

PMP48IR

40 WATT PROFESSIONAL RECHARGEABLE BATTERIES MEGAPHONE/BULLHORN W/HANDHELD MIC /SIREN AND AUX IN FOR IPOD/MP3 DEVICES

- Power 40 Watts Peak Plug In Any External Source w/ 3.5mm Aux-In Jack
- Rechargeable Lithium Battery (Charger Included)
- Battery powered by 6 x D Batteries, Not Included
- 10 Seconds Integrated Audio Memory
- Record and Replay Audio Function
- 3 Audio Modes: Record, Siren, and Talk
- Ergonomic Pistol Grip and Light-Weight Chassis
- Used by U.S. Armed Forces
- For Indoor/Outdoor Use
- 1,000 Yard Range
- 220-240V Compatible
- Dimensions: Diameter 8" x Length 13 1/8"

PMP53IN

50 WATTS PROFESSIONAL PIEZO DYNAMIC MEGAPHONE W/3.5MM AUX-IN FOR DIGITAL MUSIC/IPOD

- Powerfull Piezo Driver And Large Bell Diameter For Projection Range Up To One Mile
- 2 Modes: Talk And Siren
- For Indoor/Outdoor Use
- Variable Volume Control
- Plug In Any External Source With 3.5mm Aux-In Jack -- Perfect for iPod/iPhone
- Ergonomic Pistol Grip And Lightweight Chassis
- Powered By 8 x C Batteries - Not Included
- Runs On DC 9v Power Supply - Not Included
- Dimensions: Diameter 9" x Length 13 3/4"

PMP57LIA

MEGAPHONE BULLHORN WITH USB FLASH DRIVE & SD MEMORY CARD READERS, AUX (3.5MM) INPUT CONNECTOR JACK, BUILT-IN RECHARGEABLE BATTERY, SIREN MODE

- 1,200 Yard Range
- Used by U.S. Armed Forces
- For Indoor/Outdoor Use
- Remote Handheld Microphone
- Maximum Power Output: 50 Watt
- Built-in USB Flash & SD Memory Card Readers
- Ergonomic Pistol Grip and Light-Weight Chassis
- Built-in Rechargeable Lithium Battery (or Battery Powered by 8 x "C" Type Batteries, Not Included)
- Audio Function Modes Including Talk, Siren & USB/SD Modes
- Aux (3.5mm) Input Connector Jack, Connect External Devices
- Works with iPod, MP3 Players, iPhones, Smartphones, Tablets, etc.
- Includes Battery Charger
- Dimensions: Diameter 9.44" x Length 13.77"

PMP58U

PROFESSIONAL PIEZO DYNAMIC 50 WATTS MEGAPHONE WITH USB FUNCTION

- Powerful Piezo Driver and Large Bell Diameter For Projection Range Up To One Mile
- 2 Modes Talk And Siren
- For Indoor/Outdoor Use
- Variable Volume Control
- Ergonomic Pistol Grip And Light Weight Chasis
- USB Input to Play Your Music And Recordings From Flash Drive up to 6GB
- Power Output 50 Watts
- Powered By 8 X C Batteries, Not Included
- Dc 12v 2.5Amp please check the polarity of the plug the center and the outside contacts Power Supply (Not Included)
- Dimensions: Diameter 9" X Length 13 3/4"
- Weight: 2.86 Lbs



PMP37LED

MINI COMPACT MEGAPHONE BULLHORN WITH SIREN ALARM AND LED LIGHTS

- 800 Yard Range
- Power Output 30 Watts
- For Indoor/Outdoor Use
- Adjustable Volume Control
- Used By U.S. Armed Forces
- Button Activated LED Light Mode
- Button Activated Siren Alarm Mode
- Lightweight, Portable & Powerful
- Battery Powered by 4 x 'D' Batteries, Not Included

PMP42BT

BLUETOOTH MEGAPHONE BULLHORN WITH AUX (3.5MM) INPUT BUILT-IN USB FLASH & SD MEMORY CARD READERS

- Built-in Bluetooth for Wireless Music Streaming
- Works with Virtually Any Bluetooth Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- 1,200 Yard Range
- For Indoor/Outdoor Use
- Used by U.S. Armed Forces
- Maximum Power Output: 40 Watt
- SD Card & USB Flash Memory Readers
- Aux-Input (3.5mm) Jack to Connect External Devices

PMP50

MEGAPHONE PA BULLHORN WITH BUILT-IN SIREN, ADJUSTABLE VOLUME CONTROL AND 1,200 YARD RANGE

- 2 Modes: Talk and Siren Alarm
- Powerful Piezo Driver and Large Bell Diameter
- Ergonomic Pistol Grip & Lightweight Chassis
- Detachable Handheld Microphone
- 1,200 Yard Range
- 50 Watt Max Power Output
- Adjustable Volume Control
- DC 12V Power Supply Connector Jack
- Indoor/Outdoor Use

PMP52BT

BLUETOOTH MEGAPHONE BULLHORN WITH AUX (3.5MM) INPUT BUILT-IN USB FLASH & SD MEMORY CARD READERS AND SIREN

- Built-in Bluetooth for Wireless Music Streaming
- Works with Virtually Any Bluetooth Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- 1,200 Yard Range
- For Indoor/Outdoor Use
- Used by U.S. Armed Forces
- Maximum Power Output: 50 Watt
- SD Card & USB Flash Memory Readers
- Ergonomic Pistol Grip and Light-Weight Chassis
- Batteries Required: 8 x "C" Batteries, Not Included
- Battery Life: Up to 16 Hours
- 6 Audio Functions Including Talk, Siren & USB/SD Modes
- Aux-Input (3.5mm) Jack to Connect External Devices
- Dimensions: Diameter 9.44" x Length 13.77"

PMP591R

MEGAPHONE BULLHORN, 50 WATT, BUILT-IN RECHARGEABLE BATTERY, PIEZO DYNAMIC, AUX (3.5MM) AUX INPUT CONNECTOR, RECORD, SIREN AND TALK MODES

- 50 Watt Power
- 1,200 Yard Range
- For Indoor/Outdoor Use
- Used by U.S. Armed Forces
- Plug-in Handheld Microphone
- Record and Replay Audio Function
- 10 Seconds Integrated Audio Memory
- 3 Audio Modes: Record, Siren, and Talk
- Built-in Rechargeable Battery (Charger Included) (or Battery Powered by 8 x 'D' Batteries, Not Included)
- Aux (3.5mm) Input Connector Jack
- Connects to Any External Audio Source via Aux Input
- Works with iPod, MP3 Players, iPhone, Smartphones, etc.
- Ergonomic Pistol Grip and Light-Weight Chassis
- Dimensions: Diameter 9.0" x Length 13.7"
- 220-240V Compatible

Portable PA Speakers



PWMA50



PWMA60U



PWMA80UFM



PWMA100

PWMA50

50 WATTS PORTABLE, WAIST-BAND PORTABLE PA SYSTEM WITH A HEADSET MICROPHONE W/BUILT IN RECHARGEABLE BATTERIES

PWMA50B

BLACK

PWMA50S

SILVER

PWMA50W

WHITE

- Small Super Powerful Voice Amplifier
- Used by Teachers, Coaches, Tour Guides, Presentations, US Army
- Built In Rechargeable Lithium Batteries That Last Up To 12 Hours Of Continuous Use Before Needing A Charge
- Projection Range Up To 1/2 Mile

- Includes Headset Microphone
- AUX Input For MP3 Player Or Ipod
- Frequency Response: 100hz ± 13db1khz ± 1db
- Current Consumption: 150ma
- Charging Time: 6 Hours
- Speaker Sensitivity: 53 Dbv/A +- 3 Db

- Unit Includes Charger Belt Clip, Adjustable Waist Band Strap,
- Rechargeable 7.4 Volt Lithium Battery
- Color Black
- Speaker Dimensions 3.86" X 3.62" X 1.85"
- Weight: 0.88Lbs

PWMA60U

50 WATTS PORTABLE, USB WAIST-BAND PORTABLE PA SYSTEM WITH A HEADSET MICROPHONE W/BUILT IN RECHARGEABLE BATTERIES (COLOR WHITE)

PWMA60UB

BLACK

PWMA60US

SILVER

PWMA60UW

WHITE

- Listen to Your Music or your recordings With the USB Input
- Small Super Powerful Voice Amplifier
- Used by Teachers, Coaches, Tour Guides, Presentations, US Army
- Built In Rechargeable Lithium Batteries That Last Up To

- 12 Hours Of Continuous Use Before Needing A Charge
- Projection Range Up To 1/2 Mile
- Includes Headset Microphone
- AUX Input For MP3 Player Or Ipod
- Frequency Response: 100hz ± 13db1khz ± 1db
- Current Consumption: 150ma

- Charging Time: 6 Hours
- Speaker Sensitivity: 53 Dbv/A +- 3 Db
- Unit Includes Charger Belt Clip, Adjustable Waist Band Strap
- Rechargeable 7.4 Volt Lithium Battery
- Color White

PWMA80UFM

100 W PORTABLE PA SYSTEM WITH INCLUDED WIRELESS LAVALIER MICROPHONE, FM RADIO, MP3/USB/SD, AND AUX-IN/OUT

- Wireless Lavalier Microphone With Belt Clip Included
- Charges In 4 Hours
- Works For 8 Hours On A Full Charge
- Plays MP3s From Micro SD Card or USB Stick
- FM Radio
- 3.5mm Aux-In Jack For Digital Music

- Player, iPod, iPhone, etc.
- 3.5mm Aux-Out Jack - Connect To A More Powerful Amp
- Max Output: 100 W
- Frequency Response: 200 Hz-15 KHz
- Power Consumption: 150 mA

- Battery Capacity: 1800 mA Lithium
- Material: ABS Plastic
- Dimensions: 6.5" x 4.5" x 2.8"
- Weight: 1.5 lbs

PWMA100

RECHARGEABLE PORTABLE PA SYSTEM WITH WIRELESS MIC

- Built-In 12 V 1.2A Rechargeable batteries
- Built-In one Channel VHF Wireless Receiver
- Wireless Handheld Mic
- 1 MIC Input
- Separate Wired MIC & Wireless MIC Volume Controls
- REC Out

- Power, RF & Charge LED Indicators
- Power ON/OFF Switch
- AC 120V / 60HZ/
- DC12~15V For Car Plug Charger(Adapter Not Included)
- Power Output: 80 Watts
- Available Frequencies (Hz): Set 1 - 201.15, 180.8 / Set 2 -

- 212.6, 190.1 / Set 3 - 214.2, 193.0 / Set 4 - 215.5, 174.8
- Operating Range: Up to 100Ft
- Color: White
- Dimensions: 6.9"W x 4.3"D x 9.7"H
- Weight: 9.7lb



PWMA160



PWMA200



PWMA170



PWMA230



PWMA260

PWMA160

DUAL CHANNEL 400 WATT WIRELESS PA SYSTEM W/USB/SD AND 2 VHF WIRELESS MICROPHONES (1 LAVALIER, 1 HANDHELD)

- 8 Ohm Impedance
- Dual Channel System
- 3.5mm Aux Input Jack For iPod MP3 Players
- USB, SD MMC Memory Card Readers
- 6-Inch Full Range Speaker
- Internal Rechargeable Battery
- Total Power Output: 400 Watt
- Battery Indicator Lights
- Mics Included:1 Handheld,1 Headset/Lavalier

PWMA170

DUAL CHANNEL 400 WATT WIRELESS PA SYSTEM W/USB/SD/MP3, 2 VHF WIRELESS MICROPHONES (1 LAVALIER, 1 HANDHELD)

- 6" Full Range Speaker
- 400 Watts Peak Power
- 8 Ohm Impedance
- USB/SD/MMC Card Reader Function
- Internal Rechargeable Battery
- 3.5mm Input Jack With Cable
- 1 Mic Inputs and 1 Guitar Input
- Bass/Treble/Echo Control on Main Channel
- Includes Two Wireless Microphones: VHF Handheld Mic and Lavalier/Headset Mic
- Mic, MP3, Power, and Charging Indicator LEDs
- DC 12V Input For Car Use

PWMA200

RECHARGEABLE PORTABLE PA SYSTEM WITH WIRELESS LAVALIER/HEADSET MIC AND 1 WIRED MIC

- Built-in 12 V 1.2A Rechargeable batteries
- Built-in One Channel VHF Wireless Receiver
- Wireless Lavalier/Headset MIC
- 1 Bonus Wired Microphone Included
- FM Radio
- 1 Microphone Input
- Separate Wired MIC & Wireless MIC Volume Controls
- REC Line Out
- Power, RF & Charge LED Indicators
- Power ON/OFF Switch
- AC 120V / 60HZ/
- DC12~15V For Car Plug Charger(Adapter Not Included)
- Power Output: 80 Watts
- Frequency Range: 160 ~ 270 MHz
- Operating Range: Up to 100Ft
- Color:Black
- Dimensions: 7.1"W x 4.3"D x 11.8 H
- Weight: 9.7lb

PWMA230

200W VHF WIRELESS BATTERY POWERED PA SYSTEM

- Unit Powered by Internal Rechargeable Battery Pack
- 2 Mic, 1 Guitar, and 1 Audio 1/4" Inputs
- Echo, Bass and Treble Controls
- RF, Charge, Low Batt & Power LED Indicators
- Dynamic Wireless Mic w/ 3 Position Power Switch & LED
- Operation range: 100 ft.
- 8" Full range Speaker
- 100W RMS, 200W Peak Power
- Unit Battery Life: Approx. 5 Hours
- Mic Battery Life: Approx. 45 Hours
- Ported Enclosure for Increased Bass Response
- Telescoping Handle & Caster Wheels
- 35mm Speaker Stand Mount
- Operating Frequency: 177-205 MHz
- 110/220 Voltage Switchable
- Weight: 26.5 lbs.
- Dimensions: 14.7"L x 10.6"W x 11.2"H

PWMA260

300 WATT WIRELESS RECHARGEABLE PORTABLE PA SYSTEM WITH LAVALIER MICROPHONE

- 8" Full Range Woofer
- 300 Watts Peak Power
- Includes Wireless Lavalier Microphone
- 2 Mic Input and 1 Guitar Input
- 1 Audio Input For Any External Audio Device
- Stereo RCA Output On Rear Panel
- 1/4" Output On Front Panel
- Portable Enclosure with Telescoping Handle and Caster Wheels
- 35mm Speaker Stand Mount Hole
- RF, Charge, Low Battery, and Power LED Indicators
- Dimensions:10.6" x 9.3" x 14.6"



PWMA330



PWMA370



PWMA430U



PWMA600



PWMA860I



PWMA330

300 WATT VHF WIRELESS BATTERY POWERED PA SYSTEM W/ECHO

- Unit Powered By Internal Rechargeable Battery Pack
- One VHF Wireless Mic With FCC Certificate
- 2 Mic, 1 Guitar And 1 Audio 1/4" Input
- One 6.35mm Male To 3.5mm Stereo Female Adaptor
- Echo, Bass And Treble Controls
- RF, Rechargeable, Low Batt And Power LED Indicator
- Handheld Wireless Mic With 3 Position Power Switch & LED
- Operation Range: 100ft
- 8" Full Range Speaker
- 150W RMS, 300W Peak Power
- Unit Battery Life: Approx. 5 Hours
- Mic Battery Life: Approx. 45 Hours
- Ported Enclosure For Increased Bass Response
- Telescoping Handle & Caster Wheels
- Operating Frequency: 169-216mhz
- 110/220 Voltage Switchable
- Dimension: 14.6"L x 10.6"W x 9.3"H

PWMA370

300 WATT DUAL CHANNEL WIRELESS RECHARGEABLE PORTABLE PA SYSTEM WITH HANDHELD MIC AND LAVALIER/HEADSET MIC

- 8" Full Range Woofer
- 300 Watts Peak Power
- Includes 1 Wireless VHF Handheld Microphone and 1 Lavalier/Headset Microphone
- 2 Mic Inputs/ 1 Guitar Input
- 1 Audio Input For Any External Audio Device
- Stereo RCA Output
- 1/4" Output On Front Panel
- 35mm Speaker Stand Mount Hole
- Portable Enclosure with Telescoping Handle and Caster Wheels
- RF, Charge, Low Battery, and Power LED Indicators
- Dimensions: 10.6" x 9.3" x 14.6"
- 110V/220V Switchable

PWMA430U

300 WATT WIRELESS RECHARGEABLE PORTABLE PA SYSTEM WITH FM/USB/SD W/HANDHELD MICROPHONE IS THERE 3.5MM HOLE TO PUT ON SPEAKER STAND

- 8" Full Range Woofer
- 300 Watts Peak Power
- USB/SD Card Reader
- LCD Card Reader Display For Number of song & Play Time
- FM Radio With Frequency Display, Auto Scan, Presets
- Portable Enclosure with Telescoping Handle and Caster Wheels
- 2 Microphone Inputs & Guitar Inputs
- Audio 1/4" Input For Ipod/Mp3 Player
- Bass and Treble Controls
- Stereo RCA Output On Rear Panel
- 35mm Speaker Stand Mount Hole
- 1/4" Output On Front Panel
- RF, Charge, Low Battery, and Power LED Indicators
- Dimensions: 10.6" x 9.3" x 14.6"

PWMA600

100 WATT WIRELESS BATTERY POWERED PA SYSTEM

- Unit Powered by Internal Rechargeable Battery Pack
- XLR 1/4" Combo Mic Input
- Stereo RCA Aux Input and Output
- Built In Recharger for 9V Mic Battery
- Independent Volume Gain for Each Input
- Bass and Treble Controls
- On Air, Charge & Power LED Indicators
- Wired and Wireless Handheld Mics Included
- 6.5" Full-Range Speaker
- 50W RMS, 100W Peak Power
- Unit Battery Life: >4 Hours
- Mic Battery Life: >5 Hours
- Operation Range: 100 Feet
- Ported Enclosure for Increased Bass Response
- Carry Handle For Easy Transport
- Operating Frequency: 228.10 MHz
- 110/220 Voltage Switchable

PWMA860I

WIRELESS AND PORTABLE PA SPEAKER SOUND SYSTEM WITH 30-PIN IPOD/IPHONE DOCK, BUILT-IN RECHARGEABLE BATTERY, INCLUDES WIRELESS HANDHELD MICROPHONE, 500 WATT

- Portable & Powerful PA Sound System
- 8" Subwoofer and 3" Compression Tweeter
- 30-Pin iPod/iPhone Dock: Charge Your Device and Play Music
- Docking System Suitable For iPod Nano & Classic iPods
- Built-in Rechargeable Battery (with Up to 3 Hour Battery Life)
- Ported Enclosure For Increased Bass Response
- Front-Facing Control Center
- Echo, Bass and Treble Adjustable
- Easy-to-Use Rotary Knobs and Push Button Controls
- Portable Enclosure with Telescoping Handle and Caster Wheels
- Connect up to (2) Microphones and (1) Guitar
- (3) 1/4" Mic/Guitar Inputs & (1) 1/4" Audio Input Connector Jack
- (1) 1/4" Audio Output Connector Jack
- Independent Volume Control for Mic1, Mic2, Guitar, iPod/MP3
- 35mm Speaker Stand Mount Hole
- Battery & Power LED Indicator Lights
- System Includes Wireless VHF Handheld Microphone, Power/Charging Cable & 1/4" to 3.5mm Stereo Female Adaptor



PWMA890UI



PWMA930I



PWMA940BTI



PWMA970



PWMA1050

PWMA890UI

500 WATT DUAL CHANNEL WIRELESS RECHARGEABLE PORTABLE PA SYSTEM WITH IPOD/IPHONE DOCK, FM/USB/SD, HANDHELD MICROPHONE, AND LAVALIER MICROPHONE

- 8" Woofer With Tweeter
- 500 Watts Peak Power
- Includes 1 Wireless VHF Handheld Microphone and 1 Wireless Lavalier/Headset Microphone
- iPod/iPhone Dock Charges Your Device and Plays Music
- USB/SD Card Reader For Digital Music
- LCD Card Reader Display For Number of song & Play Time
- 2 Microphone Inputs and 1 Guitar Inputs
- 1 Audio Inputs 1/4" For Any External Audio Device
- Stereo RCA Output on Rear Panel
- 1/4" Output On Front Panel
- 3.5mm Retractable Cable for Auxillary Input Compatible With Any Digital Music Player
- Portable Enclosure with Telescoping Handle and Caster Wheels
- 35mm Speaker Stand Mount Hole
- RF, Charge, Low Battery, and Power LED Indicators

PWMA930I

600 WATT VHF WIRELESS PORTABLE PA SYSTEM/ECHO W/IPOD DOCK

- Docking System Suitable For Nano & Classic Ipad
- Unit Powered By Internal Rechargeable Battery Pack
- One VHF Wireless Mic With FCC Certificate
- 2 Mic, 1 Guitar And 1 Audio 1/4" Input
- One 6.35mm Male To 3.5mm Stereo Female Adaptor
- Echo, Bass And Treble Controls
- RF, Rechargeable, Low Batt And Power LED Indicator
- Handheld Wireless Mic With 3 Position Power Switch & LED
- Operation Range: 100ft
- 8" Woofer
- 300W RMS, 600W Peak Power
- Unit Battery Life: Approx. 5 Hours
- Mic Battery Life: Approx. 45 Hours
- Ported Enclosure For Increased Bass Response
- Telescoping Handle & Caster Wheels
- Operating Frequency: 169-216mhz
- 110/220 Voltage Switchable

PWMA940BTI

600 WATTS VHF WIRELESS PORTABLE PA SYSTEM W/MICROPHONE, I-POD DOCK & BLUETOOTH

- Docking System Suitable for Most Ipods
- Bluetooth Audio Connectivity For All Phones
- Unit Powered by Internal Rechargeable Battery Pack
- One VHF wireless Mic with FCC Certificate
- 2 Mic, 1 Guitar and 1 Audio 1/4" Input
- One 6.35mm Male to 3.5mm Stereo Female Adaptor
- Echo, Bass and Treble Controls
- RF, Recharge, Low Batt and Power LED Indicators
- Handheld Wireless Mic with 3 Position Power Switch & LED
- Operation Range: 100ft
- 8" Woofer and 3 Compression Tweeters
- 300W RMS, 600W Peak Power
- Unit Battery Life: Approx. 5 Hours
- Mic Battery Life: Approx. 45 Hours
- Ported Enclosure for Increased Bass Response
- Telescoping Handle & Caster Wheels
- Operating Frequency: 169-216MHz

PWMA970

300 WATT DUAL CHANNEL WIRELESS RECHARGEABLE PORTABLE PA SYSTEM WITH IPOD/IPHONE DOCK, FM RADIO / USB/SD, AND 2 HANDHELD MICROPHONES

- 8" Full Range Woofer
- 300 Watts Peak Power
- Includes 2 Wireless VHF Handheld Microphones
- iPod/iPhone Dock Charges Your Device and Plays Music
- USB/SD Card Reader For Digital Music
- FM Radio With Auto Scan and Presets
- LCD Card Reader Display For Number of song & Play Time
- 2 Mic Inputs/1 Guitar Input
- 1 Audio Input For any External audio Device
- Stereo RCA Output
- 1/4" Output On Front Panel
- 3.5mm Retractable Cable for Auxillary Input Compatible With Any Digital Music Player
- 35mm Speaker Stand Mount Hole
- Portable Enclosure with Telescoping Handle and Caster Wheels
- RF, Charge, Low Battery, and Power LED Indicators

PWMA1050

800 WATT VHF WIRELESS BATTERY POWERED PA SYSTEM W/ECHO/IPOD/MP3 INPUT JACK

- Ipad/Mp3 Input Jack With A 3.5mm Cable
- Unit Powered By Internal Rechargeable Battery Pack
- One Vhf Wireless Mic With Fcc Certificate
- 2 Mic, 1 Guitar And 1 Audio 1/4" Input
- One 6.35mm Male To 3.5mm Stereo Female Adaptor
- Echo, Bass And Treble Controls
- Rf, Rechargeable, Low Batt And Power Led Indicator
- Handheld Wireless Mic With 3 Position Power Switch & Led
- Operation Range: 100ft
- 10" 3 Way Woofer, Mid And Tweeter
- 400w Rms, 800w Peak Power
- Unit Battery Life: Approx. 5 Hours
- Mic Battery Life: Approx. 45 Hours
- Ported Enclosure for Increased Bass Response
- Telescoping Handle & Caster Wheels
- Operating Frequency: 169-216MHz
- 110/220 Voltage Switchable



PWMA1080I



PWMA1090UI



PSUFM1049A



PWMA3600

PWMA1080I

800 WATT VHF WIRELESS PORTABLE PA SYSTEM/ECHO w/iPod Dock

- iPod/MP3 Input Jack with a 3.5mm Cable
- Docking System Suitable for Nano & Classic iPod
- Unit Powered by Internal Rechargeable Battery Pack
- One VHF Wireless Mic with FCC Certificate
- 2 Mic, 1 Guitar and 1 Audio 1/4" Input
- One 6.35mm Male to 3.5mm Stereo Female Adaptor
- Echo, Bass and Treble Controls
- RF, Rechargeable, Low Batt and Power LED Indicator
- Handheld Wireless Mic with 3 Position Power Switch & LED
- Operation Range: 100ft
- 10" Woofer and Mid and Tweeter
- 400W RMS, 800W Peak Power
- Unit Battery Life: Approx. 5 Hours
- Mic Battery Life: Approx. 45 Hours
- Ported Enclosure for Increased Bass Response
- Telescoping Handle & Caster Wheels
- Operating Frequency: 169-216MHz
- 110/220 Voltage Switchable
- Dimension: 12.2" x 10.2" x 22.3"
- Weight: 37.5 LBS

PWMA1090UI

WIRELESS AND PORTABLE PA SPEAKER SOUND SYSTEM WITH 30-PIN IPOD/IPHONE DOCK, BUILT-IN RECHARGEABLE BATTERY, USB/SD MEMORY CARD READERS, FM RADIO, 800 WATT (INCLUDES REMOTE CONTROL, HANDHELD AND LAVALIER MICROPHONES)

- 10" 3-Way Speaker System (Woofer, Mid-Range, Tweeter)
- 30-Pin iPod/iPhone Dock: Charge Your Device and Play Music
- USB Flash & SD Memory Card Readers
- Retractable AUX (3.5mm) Input Cable (Connects to External Devices like MP3/Digital Music Players)
- Built-in Rechargeable Battery (with Up to 3 Hour Battery Life)
- LCD Digital Display
- FM Radio with Auto Scan and Presets
- Front-Facing Control Center
- Easy-to-Use Rotary Knobs and Push Button Controls
- Portable Enclosure with Telescoping Handle and Caster Wheels
- Connect up to (2) Microphones and (1) Guitar
- Inputs: (1/4") Mic1, Mic2, Guitar, Audio, iPod/MP3, Balanced Connector Jacks
- Outputs: (RCA) Audio Out, (1/4") Audio Out
- Independent Volume Controls for Mic1, Mic2, Guitar, iPod/MP3, Input
- Echo, Bass and Treble Adjustments
- RF, Charge, Low Battery, and Power LED Indicators
- 35mm Speaker Stand Mount Hole
- System Includes Remote Control, Wireless VHF Handheld Mic and Lavalier Headset
- Technical Specs: Power Output: 800 Watt MAX - 400 Watt RMS
- Frequency Response: 35Hz - 20kHz
- Transmitter Frequency: 170 - 216MHz
- SPL: 94dB (1W/M)
- T.H.D.: <1%
- Input Wired Mic: -58dB V600
- Dimensions (L x W x H): 12.4" x 13.0" x 26.0"
- 110/220V Switchable

PSUFM1049A

600 WATT DISCO JAM BLUETOOTH 2-WAY PA SPEAKER SYSTEM w/ USB & SD CARD READERS, FM RADIO, 3.5 MM INPUT & FLASHING DJ LIGHTS

- Bluetooth Wireless Streaming Audio Compatible with iPhones, Androids, Tablets, PC, etc.
- 10" Woofer and (3) 5" Piezo Tweeters
- USB Flash and SD Card Readers with FM Radio
- USB Provides 5v 1A Charge For Smart Phones and Other Devices
- Display Screen Shows Number Of Songs, Play Time and FM Radio Frequency
- Portable Carrying Handles and Wheels For Easy Transport
- Disco Ball Lights With ON/OFF Control
- Two 1/4" Microphone Inputs
- RCA Output for Connecting Passive Speakers
- One 3.5mm AUX Line Input (Compatible With All MP3 Players And Devices With Headphone Outputs)
- RCA Stereo Input And Output
- One 1/4" Lo-Z Guitar Input Jack With Volume Control
- 7 Band EQ With EQ On/Off Control
- 600 Watt Peak / 300 Watt RMS Power @ 4 Ohm
- Sensitivity (1W/1M): 90dB
- Ported Enclosure For Added Bass Response
- Built In Crossover Network
- Frequency Response: 20Hz-20kHz
- Crossover Frequency: 3.5kHz
- Woofer Magnet Weight: 25 oz.
- 35mm Speaker Stand Mount
- AC 110/220V Power Switch
- Dimensions: 27.2" (H) X 15.4" (W) X 13.8" (D)

PWMA3600

200 WATT WIRELESS BATTERY POWERED PA SYSTEM

- Unit Powered by Internal Rechargeable Battery Pack
- 3 Channel Mixer
- Two XLR 1/4" Combo Mic Inputs
- Stereo RCA Aux Input and Output
- Binding Post Output for External Speaker
- Independent Volume Gain for Each Input
- Master Volume, Bass and Treble Controls
- On Air, Charge & Power LED Indicators
- Wireless Handheld Mic Included
- 8" Woofer with 2.5" Compression Tweeter
- 100W RMS, 200W Peak Power
- Unit Battery Life: >4 Hours
- Mic Battery Life: >5 Hours
- Operation Range: 90 Feet
- Ported Enclosure for Increased Bass Response
- Carry Handle
- 35mm Speaker Stand Mount
- Frequency Response: 100Hz-15KHz
- 110/220 Voltage Switchable
- Dimensions: 23.8" x 10.24" x 13.39"
- Weight: 30.54

Molded Speaker Systems



PPHP885A



**PPHP893
PPHP898A
PPHP1098A**



PPHP1085A

PPHP885A

400 WATTS 8" POWERED 2 WAY PLASTIC MOLDED SPEAKER SYSTEM

- 8" Woofer
- 1" Titanium Compression Driver
- Xlr Mic Input
- Xlr & Stereo Rca Line Input
- Xlr Line Output
- Master & Mic Volume Control
- Frequency Response: 45HZ-20KHZ
- Power Output: 200Watts Rms, 400Watts Peak
- Crossover Frequency: 3.0KHZ
- 35MM Speaker Stand Mount
- AC 115V-230V
- Dimensions: 13.8" x 11.8" x 19.3"
- Woofer Frequency Response: 45Hz-20kHz
- Tweeter Frequency Response: 800Hz-20kHz
- S/N Ratio: 112dB
- Sensitivity: 95dB (1W/1M)
- T.H.D:<0.01% 1kHz
- Crossover Frequency: 2.5kHz

PPHP893

400 WATT 8" 2-WAY PLASTIC MOLDED LOUDSPEAKER SYSTEM

- 8" Subwoofer
- 1" Titanium Compression Driver
- Dual 1/4" and Speak-on Jacks input
- 2-Way Ported Enclosure For Extra Bass Response
- PTC Driver Protect
- Output: 400 Watts Peak/ 200 RMS
- Impedance: 8ohm +/- 20%
- Sensitivity: 95 +/- 3Db
- Frequency Response: 45Hz-20KHz
- Metal Grill to protect the woofer / Plastic Cabinet
- Crossover Frequency: 3.0KHz
- 35mm Speaker Stand Mount

PPHP898A

400 WATTS 8" 2-WAY PLASTIC MOLDED POWERED/AMPLIFIED SPEAKER SYSTEM

- 8" Subwoofer
- 1" Titanium Compression Driver
- XLR Mic Input
- XLR & Stereo RCA Line Input
- XLR Line Output
- Master Volume, Bass & Treble Control
- Output: 400 Watts Peak/ 200 RMS
- Frequency Response: 45Hz-20KHz
- Metal Grill to protect the woofer / Plastic Cabinet
- Crossover Frequency: 3.0KHz
- 35mm Speaker Stand Mount
- Power: AC 115- 220 Voltage Selectable

PPHP1098A

600 WATT 10" 2-WAY PLASTIC MOLDED POWERED PA SPEAKER SYSTEM

PPHP1085A

600 WATTS 10" POWERED 2 WAY PLASTIC MOLDED SPEAKER SYSTEM

- 10" Woofer
- 1" Titanium Compression Driver
- Xlr Mic Input
- Xlr & Stereo Rca Line Input
- Xlr Line Output
- Master Volume, Bass & Treble Control
- Frequency Response: 45HZ-20KHZ
- Power Output: 300Watts Rms, 600Watts Peak
- Crossover Frequency: 3.0KHZ



PPHP106A
PPHP126A



PPHP1299AI
PPHP1599AI



PPHP1259



PPHP1559

PPHP106A

600 WATTS 10" POWERED 2 WAY PA SPEAKER

- 10" Woofer
- 1" Titanium Compression Driver
- 3.5mm iPod Input
- XLR Mic Input
- XLR & Stereo Rca Line Input
- XLR Line Output
- Master Volume, Bass & Treble Control
- Frequency Response: 45HZ-20KHZ
- Power Output: 300Watts Rms, 600Watts Peak

PPHP126A

1000 WATTS 12" POWERED 2 WAY PLASTIC MOLDED PA SPEAKER WITH WHEELS FOR EASY TRANSPORT

- 12" Woofer
- 1.34" Titanium Compression Driver
- 3.5mm iPod Input
- XLR Mic Input
- XLR & Stereo Rca Line Input
- XLR Line Output
- Master Volume, Bass & Treble Control
- Frequency Response: 45Hz - 20Khz
- Power Output: 1000 Watts Peak and 500 Watts RMS
- Crossover Frequency: 3.0 KHz
- 35mm Speaker Stand Mount
- Wheels and Carrying Handle For easy Transport

PPHP1299AI

12" 1000 WATT 2-WAY FULL RANGE LOUD SPEAKER SYSTEM WITH IPOD DOCK, USB READER & MP3/AUX INPUT

- 12" Subwoofer
- Power Output: 1000 Watt
- Power Switch and Digital Amplifier
- Built-in Ipod Docking Station
- USB Flash Drive Reader
- 1.4" Titanium Compression Driver
- MP3 Control with LCD display
- XLR and 1/4" Mic Inputs
- XLR Stereo RCA Line Input
- XLR and 1/4" Line Outputs
- Volume, Bass Treble Controls
- 2-Way, 2-Speaker Professional speaker
- High Efficiency Mid-Low Woofer
- 35mm Titanium Dome Horn Driver
- PTC Driver Protect
- Impedance: 8 Ohm $\pm 20\%$
- Sensitivity: 101 ± 3 dB
- Frequency Response: 50Hz-20 KHz (-3dB)
- Metal Grill Guard Protection
- Crossover Frequency: 3.5K Hz
- 35mm Speaker Stand Mount

PPHP1599AI

15" 1600 WATT 2-WAY FULL RANGE LOUD SPEAKER SYSTEM WITH IPOD DOCK, USB READER & MP3/AUX INPUT

- 15" Subwoofer
- Power Output: 1600 Watt
- Built-in Ipod Docking Station
- Power Switch and Digital Amplifier
- 1.75" Titanium Compression Driver
- MP3 control with LCD display
- XLR and 1/4" Mic Inputs
- XLR Stereo RCA Line Input
- XLR and 1/4" Line Outputs
- Master Volume, Bass Treble Controls
- 2-Way, 2-Speaker Professional Speaker System
- High Efficiency Mid-Low Woofer
- 35mm Titanium Dome Horn Driver
- PTC Driver Protect
- Impedance: 8 Ohm $\pm 20\%$
- Sensitivity: 101 ± 3 dB
- Frequency Response: 40Hz-22 KHz (-3dB)
- Metal Grill Guard Protection
- Crossover Frequency: 3.5K Hz
- 35mm Speaker Stand Mount
- 110/220 AC

PPHP1259

500 WATT 12" 2 WAY FULL RANGE LOUD PA SPEAKER

- 12" Woofer
- 1.5" Titanium Compression Driver
- Frequency Range (-10 dB): 47Hz - 18KHz
- 2-Way Ported Enclosure for Extra Bass Response
- 1/4" and Speakon Jacks
- Power Max: 500 Watts
- Power RMS: 250 Watts
- Sensitivity: 92dB 1W/1M
- Nominal Impedance: 8 Ohm
- 35mm Speaker Stand Mount
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover Frequency: 3.0K Hz

PPHP1559

700 WATT 15" TWO-WAY PLASTIC MOLDED SPEAKER CABINET

- 15" Woofer
- 1.75" Titanium Compression Driver
- Frequency Range (-10 dB): 35Hz - 20KHz
- 2-Way Ported Enclosure for Extra Bass Response
- 1/4" and Speakon Jacks
- Power Max: 700 Watts
- Power RMS: 350 Watts
- Sensitivity: 97dB 1W/1M
- Nominal Impedance: 8 Ohm
- Integrated 35mm Speaker Stand Mount
- Crossover Frequency: 3.0K Hz
- 35mm Speaker Stand Mount



PPHP127AI
PPHP157AI



PPHP128AI
PPHP158AI



PPHP803MU **PPHP123MU**
PPHP103MU **PPHP153MU**

PPHP127AI

12" 1200 WATT POWERED 2-WAY FULL RANGE PA LOUDSPEAKER SYSTEM WITH BUILT-IN 30-PIN IPOD DOCK, USB FLASH & SD MEMORY CARD READERS, LCD DISPLAY, MIC INPUT, REMOTE CONTROL

- Rugged, Portable and Durable PA Loudspeaker System
- High-Power & High-Efficiency Digital Amplifier
- Built-in 30-Pin iPod Dock
- USB Flash and SD Memory Card Readers
- Play MP3 Digital Music Files Direct from USB/SD
- MP3 Audio File Functions: Shuffle, Repeat and Loop Songs
- 2-Way Wide Range Audio Spectrum Sound
- Independent Adjustable Rotary Controls, 3-Channel Mixer
- Bass, Treble and Microphone, Input & Main Volume Controls
- 12" inch Subwoofer
- 1.35" Titanium Compression Driver
- 1.35" Titanium Dome Horn Driver
- XLR Combo (Microphone) Input Connector
- XLR (3-Pin) Input Connector
- RCA Line Input (L/R) Connector
- (Connect External Devices like Computer, Laptop, MP3 Player, Tablet, Smartphone, etc.)
- XLR and 1/4" Line Outputs

PPHP157AI

15" 1400 WATT POWERED 2-WAY FULL RANGE PA LOUDSPEAKER SYSTEM WITH BUILT-IN 30-PIN IPOD DOCK, USB FLASH & SD MEMORY CARD READERS, LCD DISPLAY, MIC INPUT, REMOTE CONTROL

PPHP128AI

12" 1200 WATT POWERED 2 WAY FULL RANGE PA SPEAKER W/BUILT-IN IPOD DOCK USB SD AND REMOTE CONTROL/ MICROPHONE INCLUDED

- 12" Subwoofer
- Power Switch and Digital Amplifier
- Built-in iPod Docking Station
- Play MP3 Music From USB/SD Card
- Remote Control For USB/SD Functions
- 1.34" Titanium Compression Driver
- XLR and 1/4" Mic Inputs
- XLR Stereo RCA Line Input
- XLR and 1/4" Line Outputs
- Volume, Bass Treble Controls
- 2-Way Professional speaker
- High Efficiency Mid-Low Woofer
- 35mm Titanium Dome Horn Driver
- Carrying Handle For Easy Transport
- PTC Driver Protect
- Power Output: 700 Watts RMS 1400 Watts Peak
- Impedance: 8 Ohm ±20%
- Sensitivity: 101±3dB
- Frequency Response: 50Hz-20 KHz (-3dB)
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Carrying wheels included for easy transport
- 35mm Speaker Stand Mount
- Microphone and Mic Cable Included
- Remote Control Included

PPHP158AI

15" 1400 WATT PORTABLE POWERED 2 WAY FULL RANGE PA SPEAKER W/BUILT-IN IPOD DOCK USB SD AND REMOTE CONTROL/ MICROPHONE INCLUDED

PPHP803MU

8" 600 WATT POWERED TWO-WAY PA SPEAKER WITH MP3/USB/3.5MM INPUT

- 8" Woofer
- Compression Driver with 1" Titanium Diaphragm
- 3 Separate Volume Controls
- 1/4" Mic Inputs
- RCA Line Input
- 1/4" Line Outputs
- Master Volume
- Plays MP3s / USB Stick
- Frequency Response: 45 Hz-20 KHz
- Power Output: 300 Watts RMS, 600 Watts Peak
- Crossover Frequency: 3.0 KHz
- Integrated 35mm Speaker Stand Mount

PPHP103MU

10" 600 WATT POWERED TWO-WAY PA SPEAKER WITH MP3/USB/SD PLAYBACK

PPHP123MU

12" 1000 WATT POWERED TWO-WAY PA SPEAKER WITH MP3/USB/SD/3.5MM INPUT

PPHP153MU

15" 1000 WATT POWERED TWO-WAY PA SPEAKER WITH MP3/USB/SD PLAYBACK



PPHP129WMU
PPHP159WMU



PPHP837UB **PPHP1237UB**
PPHP1037UB **PPHP1537UB**

PPHP129WMU

12" 1000 WATT BLUETOOTH MUSIC STREAMING PORTABLE LOUDSPEAKER SYSTEM - BUILT-IN RECHARGEABLE BATTERY, 2 WIRELESS MICS, FM RADIO, LCD READOUT, USB & SD CARD READERS

- Bluetooth Wireless Music Streaming Ability
- Works with Bluetooth Compatible Phones, MP3 Players, Tablets, etc.
- Active 2-Way Full Range Sound
- USB Flash & SD Memory Card Readers
- 2 Wireless Microphones Included
- LCD Digital Readout Display
- FM Radio
- Built-in Rechargeable Battery with 4 Hour Battery Life
- Microphone/Guitar Inputs
- Power Output: 500 Watt RMS - 1000 Watt Peak Power
- Sensitivity: 93dB(+/-2dB)
- 1/4" Mic/Guitar Input & 1/4" Mic Input
- RCA Line In & Line Out
- Remote Control Included
- Frequency Response: 55-18kHz
- Wired Microphone Compatible
- Tweeter: 1.34"
- Subwoofer: 12"
- Driver 12.5oz. 8 Ohm
- Impedance: 4 Ohm
- Frequency Range: 55Hz-18kHz
- Rolling Wheels and Extendable Carry Handle
- 12 Volt Inlet for Car / RV Use
- 35mm Speaker Stand Mount
- 110-220 Volt Switchable
- Dimensions (WxDxH): 13.4" x 12.2" x 22.6"

PPHP159WMU

15" 1600 WATT BLUETOOTH MUSIC STREAMING PORTABLE LOUDSPEAKER SYSTEM - BUILT-IN RECHARGEABLE BATTERY, 2 WIRELESS MICS, FM RADIO, LCD READOUT, USB & SD CARD READERS

PPHP837UB

8" 600 WATT BLUETOOTH POWERED SPEAKER SYSTEM WITH USB FLASH READER, AUX/MP3 INPUT AND INCLUDED REMOTE CONTROL

- Bluetooth Music Streaming Ability
- Works with Bluetooth Compatible Phones, MP3 Players, Tablets, etc.
- 8" Woofer and Compression Driver with 1" Titanium Diaphragm
- 3.5mm Aux-Input Compatible with Digital Music Players Including iPhones, Androids, etc.
- Master Volume and Mic Level Controls
- Plays Music via USB Flash Drive
- Includes Remote Control
- Integrated 35mm Speaker Stand Mount
- Carrying Handle for Easy Transport
- 6.35mm Mic Input and RCA Line input
- 6.35mm Line Output
- Technical Specs Power Output: 300 Watts RMS, 600 Watts Peak
- Sensitivity: 94dB
- Frequency: 45Hz-20kHz
- Voice Coil: 38mm, 1.5inch
- Magnet: 30oz, 120mm
- Impedance: 8 Ohm
- Sensitivity: 110dB/m.w
- Frequency Range: 600Hz-20kHz
- Diaphragm Material: Titanium
- Frequency Response: 30-22kHz

PPHP1037UB

10" 700 WATT POWERED TWO-WAY SPEAKER WITH MP3/USB/SD/BLUETOOTH STREAMING & RECORD FUNCTION W/REMOTE CONTROL

PPHP1237UB

12" 900 WATT POWERED TWO-WAY SPEAKER WITH MP3/USB/SD/ BLUETOOTH MUSIC STREAMING & RECORD FUNCTION W/REMOTE CONTROL

PPHP1537UB

15" 1200 WATT POWERED TWO-WAY SPEAKER WITH MP3/USB/SD/ BLUETOOTH MUSIC STREAMING & RECORD MUSIC FUNCTION W/REMOTE CONTROL



PPHP1247UIB
PPHP1547UIB

PPHP122BMU
PPHP152BMU

PPHP1247UIB

BLUETOOTH 1200 WATT 12" PA SPEAKER SYSTEM, BI-AMP, 2-WAY FULL RANGE, CLASS-D, BUILT-IN 30 PIN IPOD DOCK, USB FLASH/SD MEMORY CARD READERS, REMOTE CONTROL

- 12" Subwoofer
- Bluetooth Streaming Music Function
- Wirelessly Stream Music from Bluetooth-Enabled Devices
- Works with iPhones, Androids, Smartphones, MP3 Players, iPads, etc.
- Built-in 30 Pin iPod Dock
- USB Flash & SD Memory Card Readers
- Quick Plug-and-Play MP3 Music Files
- Includes Remote Control
- Power Switch and Digital Amplifier
- 1.35" Titanium Compression Driver
- XLR and 1/4" Mic Input
- XLR Stereo RCA Line Input
- XLR and 1/4" Line Outputs
- Master Volume, Bass, Treble Controls
- 2-Way Professional Speaker
- High Efficiency Mid-Low Woofer
- 34.4mm Titanium Dome Horn Driver
- PTC Driver Protect
- Power Output: 600 Watts RMS, 1200 Watts Peak
- Impedance: 4 Ohm \pm 20%
- Sensitivity: 101 \pm 3dB
- Frequency Response: 50Hz-20kHz(-3dB)
- Rugged Construction & Front Protective Metal Grill
- Crossover Frequency: 3.5kHz
- 35mm Speaker Stand Mount
- 110/220 AC

PPHP1547UIB

BLUETOOTH 1400 WATT 15" PA SPEAKER SYSTEM, BI-AMP, 2-WAY FULL RANGE, CLASS-D, BUILT-IN 30 PIN IPOD DOCK, USB FLASH/SD MEMORY CARD READERS, REMOTE CONTROL

PPHP122BMU

PORTABLE BLUETOOTH PA LOUDSPEAKER MOLDED CABINET SPEAKER SYSTEM, 12" SUBWOOFER, 1" TWEETER, USB/SD CARD READERS, GUITAR & MIC INPUTS, FM RADIO, 800 WATT

- Portable PA Loudspeaker Molded Cabinet System
- Built-in Bluetooth for Wireless Music Streaming
- Works with All of Your Favorite Bluetooth-Enabled Devices
- (iPhone, Smartphones, iPad, Tablet, iPod, MP3 Player, PC, etc.
- Includes 12" Subwoofer and 5" Tweeter
- USB Flash and SD Memory Card Readers
- 5 Band Music Channel EQ with Blue LEDs
- Touch Button Audio Controls
- Digital Display Screen with FM Radio
- Displays Song Number and Play Time
- Auto Scan and Store for Radio Stations
- Built-in Rechargeable Battery
- Battery Life up to 3 Hours, Non-Stop Play
- 1/4" Microphone and Guitar Input Connector Jacks
- RCA (L/R) Input and Output Connector Jacks
- Master, Mic, Echo, Guitar Volume Controls
- Wired Handheld Microphone Included
- Retractable Handles and Castor Wheels for Easy Transport
- Heavy Duty Handles for Portability
- Rugged, Durable and Reliable Housing
- 35mm Speaker Stand Mountable Insert
- Accessories Included: Wireless Remote, Wireless Handheld Microphone, RCA-to-3.5mm Connection Cable

PPHP152BMU

PORTABLE BLUETOOTH PA LOUDSPEAKER MOLDED CABINET SPEAKER SYSTEM, 15" SUBWOOFER, 5" TWEETER, USB/SD CARD READERS, GUITAR & MIC INPUTS, FM RADIO, 1000 WATT

Box - Cabinet Speaker Systems

NEW

Accessories Included:



PKRK8



PKRK210



PKRK10



PKRK212

PKRK8

KARAOKE VIBE BLUETOOTH MULTIMEDIA PA SYSTEM WITH 8" WOOFER, 3" TWEETER, 7" SCREEN, DVD PLAYER, VHF WIRELESS MICROPHONE, 300 WATT

- All-in-One Audio & Video Karaoke Entertainment System
- Built-in Bluetooth for Wireless Audio Streaming (Works with iPhones, Androids, Smartphones, iPads, Tablets, PC, etc.)
- 7" Digital LCD Screen with Button Controls
- (1) 8" Woofer & (2) 3" Piezo Tweeters
- Built-in DVD Player, USB Flash Drive & SD Memory Card Readers
- Includes (1) VHF Wireless Microphone
- Built-in Rechargeable Battery (3 Hour Battery Life)
- 300 Watt Peak Power / 150 Watt RMS @ 4 Ohm
- Volume, Bass, Treble, Echo, Mic Volume Controls
- RCA Input and Output, Video Output
- 1/4" Mic Input and 3.5mm Aux Input
- Retractable Handle & Wheels for Convenience & Portability
- Bluetooth Operation Range: 70 feet
- Full Function Remote Control
- 35mm Speaker Stand Insert
- Built-in Crossover Network
- Crossover Frequency: 3.5kHz
- Frequency Response: 20-20kHz
- 110V/220V Switchable power
- DVD/CD/CD-G/CD-R/DVD-G/DVD-R/

PKRK210

KARAOKE VIBE BLUETOOTH MULTIMEDIA PA SYSTEM WITH 10" WOOFER, 7" SCREEN, DVD PLAYER, VHF WIRELESS MICROPHONE, 1000 WATT

- All-in-One Audio & Video Karaoke Entertainment System
- Built-in Bluetooth for Wireless Audio Streaming (Works with iPhones, Androids, Smartphones, iPads, Tablets, PC, etc.)
- 7" Digital LCD Screen with Button Controls
- 10" Woofer & 3" Piezo Tweeter
- Built-in DVD Player, USB Flash Drive & SD Memory Card Readers
- Includes (1) VHF Wireless Microphone
- Built-in Rechargeable Battery (3 Hour Battery Life)
- 1000 Watt Peak Power / 500 Watt RMS @ 4 Ohm
- Volume, Bass, Treble, Echo, Controls
- RCA Input and Output, Video Output
- 1/4" Mic Input and 3.5mm Aux Input
- Retractable Handle & Wheels for Convenience & Portability
- Bluetooth Operation Range: 70 feet
- Full Function Remote Control
- 35mm Speaker Stand Insert
- Built-in Crossover Network
- Crossover Frequency: 3.5kHz
- Frequency Response: 20-20kHz
- 110V/220V Switchable power
- DVD/CD/CD-G/CD-R/DVD-G/DVD-R/

PKRK10

KARAOKE VIBE BLUETOOTH MULTIMEDIA PA SYSTEM WITH 10" WOOFER, 7" SCREEN, DVD PLAYER, VHF WIRELESS MICROPHONE, 400 WATT

- All-in-One Audio & Video Karaoke Entertainment System
- Built-in Bluetooth for Wireless Audio Streaming (Works with iPhones, Androids, Smartphones, iPads, Tablets, PC, etc.)
- 7" Digital LCD Screen with Button Controls
- 10" Woofer & 3" Piezo Tweeter
- Built-in DVD Player, USB Flash Drive & SD Memory Card Readers
- Includes (1) VHF Wireless Microphone
- Built-in Rechargeable Battery (3 Hour Battery Life)
- 400 Watt Peak Power / 200 Watt RMS @ 4 Ohm
- Volume, Bass, Treble, Echo, Controls
- RCA Input and Output, Video Output
- 1/4" Mic Input and 3.5mm Aux Input
- Retractable Handle & Wheels for Convenience & Portability
- Bluetooth Operation Range: 70 feet
- Full Function Remote Control
- 35mm Speaker Stand Insert
- Built In Crossover Network
- Crossover Frequency: 3.5kHz

PKRK212

KARAOKE VIBE BLUETOOTH MULTIMEDIA PA SYSTEM WITH DUAL 12" WOOFERS, DUAL 3" TWEETERS, 7" SCREEN, DVD PLAYER, VHF WIRELESS MICROPHONE, 1000 WATT

- All-in-One Audio & Video Karaoke Entertainment System
- Built-in Bluetooth for Wireless Audio Streaming (Works with iPhones, Androids, Smartphones, iPads, Tablets, PC, etc.)
- 7" Digital LCD Screen with Button Controls
- (2) 12" Woofers & (2) 3" Piezo Tweeters
- Built-in DVD Player, USB Flash Drive & SD Memory Card Readers
- Includes (1) VHF Wireless Microphone
- Built-in Rechargeable Battery (3 Hour Battery Life)
- 1000 Watt Peak Power / 500 Watt RMS @ 4 Ohm
- Volume, Bass, Treble, Echo, Controls
- RCA Input and Output, Video Output
- 1/4" Mic Input and 3.5mm Aux Input
- Retractable Handle & Wheels for Convenience & Portability
- Bluetooth Operation Range: 70 feet
- Full Function Remote Control
- 35MM Speaker Stand Insert
- Built-in Crossover Network
- Crossover Frequency: 3.5kHz
- Frequency Response: 20-20kHz
- 110V/220V Switchable power
- DVD/CD/CD-G/CD-R/DVD-G/DVD-R/



PSUFM1030P
PSUFM1035A



PSUFM1040P
PSUFM1240P



PSUFM1045A
PSUFM1245A

PSUFM1030P

1000 WATT DISCO JAM 2-WAY PASSIVE DJ SPEAKER W/ DUAL 10" SUBWOOFERS, DUAL TWEETERS & FLASHING DJ LIGHTS (FOR USE W/ PSUFM1035A)

- Two 10" Woofers and Two 3" Piezo Tweeters
- Heavy Duty Handles for Easy Portability
- Three Color Flashing Lights On Front Panel
- LED Sound Level Indicators
- Speaker Spring Terminals
- Ported Enclosure For Added Bass Response
- Power Handling: 1000 Watt peak / 500 Watt RMS @ 4 Ohm
- Woofer Magnet Weight: 25 oz.
- Sensitivity (1w/1m): 90dB
- Built In Crossover Network: 3.2k Hz
- Frequency Response: 20 Hz - 20 kHz
- 35mm Speaker Stand Mount
- Dimensions: 36.8"(H) x 15.2" (W) x13.6" (D)

PSUFM1035A

1000 WATT DISCO JAM POWERED TWO-WAY BLUETOOTH SPEAKER SYSTEM W/ FLASHING DJ LIGHTS, USB/SD CARD READERS, FM RADIO, 3.5MM AUX INPUT, GRAPHIC EQ & USB CHARGE PORT

- Bluetooth Wireless Streaming Audio Compatible for iPhones, Androids, Tablets, PC, etc.
- Dual 10" Woofer and Two 3" Piezo Tweeters
- USB Flash and SD Memory Card Readers with FM Radio
- USB Charging Port for Smart Phones and Other Devices
- Display Screen Shows Number of Songs, Play Time, and FM Radio Frequency
- RCA Output for Connecting to Passive Speakers (Matches with Model PSUFM1030P)
- Three Flashing DJ Lights With On/Off and Gain Control
- Two 1/4" Microphone Inputs
- 3.5mm AUX Line Input with Cable (Compatible With All MP3 Players and Devices With Headphone Outputs)
- RCA Stereo Input And Output
- 7 Band EQ With EQ ON/OFF Control
- 1000 Watts Peak / 500 Watt RMS Power @ 4Ohm
- Speaker Output Clips For Optional Passive Speaker
- Sensitivity (1w/1m): 90dB
- Ported Enclosure for Added Bass Response
- Built In Crossover Network
- Frequency Response: 20Hz-20kHz
- Crossover Frequency: 3.2kHz
- Woofer Magnet Weight: 25 Oz
- 35mm Speaker Stand Mount
- Portable Speaker System with Carrying Handles
- AC 110/220V Power Switch
- Dimensions: 36.8"H X 15.2"W X 13.6"D

PSUFM1040P

1000 WATTS DISCO JAM PASSIVE DUAL 10" DJ SPEAKER SYSTEM WITH FLASHING DJ LIGHTS (FOR USE WITH MODEL PSUFM1045A)

- Dual 10" Woofers and Two 3" Piezo Tweeters
- Heavy Duty Handles for Easy Portability
- Three Color Flashing DJ Lights on Tweeters and Woofers
- LED Sound Level Indicators
- Works with Most Amplifiers or With
- The Disco Jam Active Models
- Speaker Spring Terminals
- Ported Enclosure for Added Bass Response
- Power Handling: 1000 watts peak / 500 Watt RMS @ 4 Ohms
- Woofer Magnet Weight: 25 oz.
- Sensitivity (1w/1m): 90dB
- Built In Crossover Network: 3.5 kHz
- Frequency Response: 20 Hz - 20 kHz
- 35mm Speaker Stand Mount

PSUFM1240P

1400 WATT DISCO JAM DUAL PASSIVE DJ SPEAKER SYSTEM WITH FLASHING DJ LIGHTS (FOR USE W/ MODEL PSUFM1245A)

PSUFM1045A

1000 WATT DISCO JAM 2-WAY POWERED SPEAKER SYSTEM WITH FLASHING DJ LIGHTS, USB/SD CARD READERS, FM RADIO, 3.5MM AUX INPUT, USB CHARGE PORT & GRAPHIC EQ

- Dual 10" Woofers and Two 3" Piezo Tweeters
- USB Flash and SD Memory Card Readers with FM Radio
- USB Charging Port for Smart Phones, MP3 Players and Other Devices
- Display Screen Shows Number of Songs, Play Time and FM Radio Frequency
- Portable Carrying Handles For Easy Transport
- Disco Lights With On/Off Control
- Two 1/4" Microphone Inputs
- 3.5mm AUX Line Input (Compatible With All MP3 Players and Devices With Headphone Outputs)
- RCA Stereo Input And Output
- 7 Band EQ With ON/OFF Control
- RCA Output for Connection with Passive Speakers (Matches Model PSUFM1040P)
- Ported Enclosure For Added Bass Response
- 1000 Watt Peak / 500 Watt RMS Power @ 4 Ohm
- Woofer Magnet Weight: 25 oz.
- Sensitivity (1W/1M): 90dB
- Built In Crossover Network
- Crossover Frequency: 3.5kHz
- Frequency Response: 20Hz-20kHz
- 35mm Speaker Stand Mount
- AC 110/220V Power Switch

PSUFM1245A

1400 WATT DISCO JAM POWERED TWO-WAY PA SPEAKER SYSTEM W/ USB & SD READERS, FM RADIO, 3.5MM AUX INPUT & DJ FLASHING LIGHTS



PSUFM1230A



**PSUFM1065P
PSUFM1070P**



**PSUFM1068BT
PSUFM1072BT**

PSUFM1230A

1000 WATT PEAK / 500 WATT RMS DISCO JAM POWERED TWO-WAY PA SPEAKER SYSTEM WITH USB/SD READERS, FM RADIO, 3.5 MM AUX INPUT, MICROPHONE INPUTS AND FLASHING DJ LIGHTS

- 12" Subwoofer and (3) 5" Piezo Tweeters
- USB Flash and SD Memory Card Readers with FM Radio
- USB Provides 5V 1A Charge for Smart Phones and Other Devices
- Display Screen Shows Number of Songs, Play Time and FM Radio Frequency
- Disco Lights with On/Off Control
- Two 1/4" Microphone Inputs
- One 3.5mm Aux Line Input (Compatible With All MP3 Players And Devices With Headphone Outputs)
- RCA Stereo Input And Output
- One 1/4" Lo-Z Guitar Input Jack With Volume Control
- 7 Band EQ with EQ On/Off Control
- Ported Enclosure for Added Bass Response
- RCA Output for Connecting Passive Speakers
- 1000 Watt Peak / 500 Watt RMS Power @ 40hm
- Woofer Magnet Weight: 30 oz.
- Sensitivity (1W/1M): 90dB
- Built In Crossover Network
- Frequency Response: 20Hz-20kHz
- Crossover Frequency: 3.5kHz
- 35mm Speaker Stand Mount
- AC 110/220V Power Switch
- Portable Carrying Handles

PSUFM1065P

DISCO JAM 2 BLUETOOTH PASSIVE POWERED SPEAKER SYSTEM, FLASHING DJ LIGHTS, DUAL 10-INCH WOOFERS, QUAD 3-INCH TWEETERS, 1200 WATT (WORKS WITH ACTIVE SPEAKER MODEL: PSUFM1068BT)

- Includes (2) 10" Subwoofers and (4) 3" Piezo Tweeters
- Flashing and Strobing Color Lights Pulse While Music Plays
- 35mm Speaker Stand Mountable Insert
- Heavy Duty Handles for Easy Portability
- SpeakOn Audio Output Speaker Connector Jack
- ON/OFF Light Switch
- Power Cable Included
- *Pairs with Active Speaker Model: PSUFM1068BT
- Technical Specs:
- Maximum Power Output: 1200 Watt
- RMS Power Output: 600 Watt @ 4 Ohm
- Power: 110/220V Switch
- Magnet: 25 Oz.
- Tweeter Type: Peizo
- Impedance: 4 Ohm
- Sensitivity:90 dB

PSUFM1070P

DISCO JAM 2 BLUETOOTH PASSIVE POWERED SPEAKER SYSTEM, FLASHING DJ LIGHTS, DUAL 10-INCH WOOFERS, QUAD 3-INCH TWEETERS, 1500 WATT (WORKS WITH ACTIVE SPEAKER MODEL: PSUFM1072BT)

PSUFM1068BT

DISCO JAM 2 BLUETOOTH ACTIVE POWERED SPEAKER SYSTEM, FLASHING DJ LIGHTS, DUAL 10-INCH WOOFERS, QUAD 3-INCH TWEETERS, USB/SD MEMORY CARD READERS, AUX (3.5MM) INPUT, 1200 WATT (WORKS WITH PASSIVE SPEAKER MODEL: PSUFM1065P)

- Built-in Bluetooth for Wireless Music Streaming
- Works with All of Your Favorite Bluetooth-Enabled Devices
- (iPhone, Smartphones, iPad, Tablet, iPod, MP3 Player, PC, etc.
- Includes (2) 10" Subwoofers and (4) 3" Piezo Tweeters
- Flashing and Strobing Color Lights Pulse While Music Plays
- USB Flash Drive and SD Memory Card Readers
- USB Port Doubles as Device Charging Port
- FM Radio with Digital Display Screen
- Auto Scan and Store for Radio Stations
- Displays Radio Frequency, Song Number, Play Time
- Ported Enclosure For Added Bass Response
- Full Range Stereo Sound Reproduction
- Flashing Light Control: ON/OFF
- 7 Band EQ Music Channel with Audio Decibel Level Display
- Dual 1/4" Microphone or Guitar Input Connector Jacks
- RCA (L/R) Input Connector Jacks
- Aux (3.5mm) Input Connector Jack
- (Used for Connecting Additional External Devices)
- Master Volume, Bass, Treble, Mic, Echo Controls
- Touch Button Controls

PSUFM1072BT

DISCO JAM 2 BLUETOOTH ACTIVE POWERED SPEAKER SYSTEM, FLASHING DJ LIGHTS, DUAL 10-INCH WOOFERS, QUAD 3-INCH TWEETERS, USB/SD MEMORY CARD READERS, AUX (3.5MM) INPUT, 1500 WATT (WORKS WITH PASSIVE SPEAKER MODEL: PSUFM1070P)

Studio & Stage

Monitors



PADH121
PADH151



PADH181



PADH124
PADH153
PADH183

PADH121

600 WATT 12" 2 - WAY PA SPEAKER CABINET

- Heavy Duty MDF Construction w/Reinforced Corners
- 12"x 14" Super Horn Midrange/Tweeter
- 12" Subwoofer 2" Kapton VC
- Woofer Magnet Weight: 80 oz
- Compression Tweeter Magnet Weight: 20 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built in Crossover Network
- Power Handling: 300 Watts RMS/600 Watts Peak
- Frequency Response: 50-20K HZ
- Sensitivity (1w/1m): 98 dB
- Impedance: 8 Ohms
- 35mm Speaker Stand Mount

PADH151

15 INCH 800 WATT 2 WAY PA SPEAKER CABINET

PADH181

1000 WATT 18" 2 - WAY PA SPEAKER CABINET

- Heavy Duty MDF Construction w/Reinforced Corners
- 16"x 20" Super Horn Midrange/Tweeter
- 18" Subwoofer 3" Kapton VC
- Woofer Magnet Weight: 120 oz
- Compression Tweeter Magnet Weight: 40 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built in Crossover Network
- Power Handling: 500 Watts RMS/1000 Watts Peak
- Frequency Response: 50-20K HZ
- Sensitivity (1w/1m): 98 dB
- Impedance: 8 Ohms
- 35mm Speaker Stand Mount

PADH124

1200 WATT DUAL 12" 3 WAY PA SPEAKER CABINET

- Heavy Duty MDF Construction w/Reinforced Corners
- 12"x 14" Super Horn Midrange/Tweeter
- Dual 12" Subwoofer 2" Kapton VC
- Woofer Magnet Weight: 80 oz
- Compression Tweeter Magnet Weight: 20 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built in Crossover Network
- Power Handling: 600 Watts RMS/1200 Watts Peak
- Frequency Response: 50-20K HZ
- Sensitivity (1w/1m): 98 dB
- Impedance: 8 Ohms
- 35mm Speaker Stand Mount

PADH153

1600 WATT DUAL 15" 3 WAY PA SPEAKER CABINET

PADH183

2000 WATT DUAL 18" 3 WAY PA SPEAKER CABINET



PADH152



PADH1549



PADH1569



PADH879 **PADH1279**
PADH1079 **PADH1579**

PADH152

1200 WATT DUAL 15" 8-WAY STAGE SPEAKER CABINET

- Heavy Duty MDF Construction w/Reinforced Corners
- 5"x15" Super Horn Midrange/Tweeter
- 1" Titanium Compression Driver Loaded in Horn
- Five 3" Piezo Tweeters
- Two 15" Subwoofers 2.5" Kapton VC
- Woofer Magnet Weight: 90 oz
- Compression Tweeter Magnet Weight: 20 oz
- Quad Ports for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Caster Wheels Included
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built In Crossover Network 2KHz/5KHz
- Power Handling: 600 Watts RMS/1200 Watts Peak
- Frequency Response: 30-20K HZ
- Sensitivity (1w/1m): 108 dB
- Impedance: 8 Ohms
- Dimensions: 21.25"W x 17.5"D x 47"H

PADH1549

15" 1000 WATTS 2-WAY SPEAKER CABINET

- Subwoofer 2.5" Kapton VC
- 12"x 18" Super Horn Midrange/Tweeter
- Tweeter: 1.75" Titanium Compression Driver
- Woofer Magnet:90oz
- Tweeter Magnet:24oz
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Build-in Crossover:
- Frequency Response:30Hz-20KHz
- Impedance:8 Ohm
- Max Power:1000W
- Power RMS:500W

PADH1569

1000 HEAVY DUTY 2 WAY PA LOUD-SPEAKER CABINET

- Heavy Duty MDF Construction w/ Reinforced Corners
- 6" x 17" Super Horn Midrange/ Tweeter
- 1.5" Titanium Compression Driver Loaded in Horn
- Five Piezo Tweeters
- 15" Subwoofer 2.5" Kapton VC
- Woofer Magnet Weight: 90 oz
- Compression Tweeter Magnet Weight: 20 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon Dual 1/4" Jacks
- Binding Post Terminals
- Built in Crossover Network
- Power Handling: 500Watts RMS/ 1000 Watts Peak
- Frequency Response: 35-20K HZ
- Sensitivity (1w/1m): 107dB

PADH879

300 WATT 8" TWO-WAY SPEAKER CABINET

- Heavy Duty MDF Construction w/Reinforced Corners
- 3"x7" Super Horn Midrange/Tweeter
- 1" Titanium Compression Driver Loaded in Horn
- 8" Subwoofer 1.5" Kapton VC
- Woofer Magnet Weight: 40 oz
- Compression Tweeter Magnet Weight: 20 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built In Crossover Network 5KHz
- Power Handling: 150 Watts RMS/300 Watts Peak
- Frequency Response: 50-20K HZ
- Sensitivity (1w/1m): 96 dB
- Impedance: 8 Ohms

PADH1079

500 WATT 10" TWO-WAY SPEAKER CABINET

PADH1279

600 WATT 12" TWO-WAY SPEAKER CABINET

PADH1579

800 WATT 15" TWO-WAY SPEAKER CABINET



For more detailed specifications,
product-specific information and models visit

www.PyleAudio.com



PADH1289
PADH1589
PADH1889



PADH212
PPADH215



PADH21580

PADH1289

600 WATT 12" FIVE-WAY PA SPEAKER CABINET

- Heavy Duty MDF Construction w/Reinforced Corners
- 5" x 12" Super Horn Midrange/Tweeter
- 1" Titanium Compression Driver Loaded in Horn
- Three Piezo Tweeters
- 12" Subwoofer 2" Kapton VC
- Woofer Magnet Weight: 80 oz
- Compression Tweeter Magnet Weight: 20 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built in Crossover Network
- Power Handling: 300 Watts RMS/600 Watts Peak
- Frequency Response: 50-20K HZ
- Sensitivity (1w/1m): 98 dB
- Impedance: 8 Ohms
- 35mm Speaker Stand Mount
- Dimensions: 18"W x 14"D x 27.5"H

PADH1589

800 WATT 15" SIX-WAY SPEAKER CABINET

PADH1889

1000 WATT 18" SEVEN-WAY SPEAKER CABINET

PADH212

1600W HEAVY DUTY 7 WAY PA LOUD-SPEAKER CABINET

- Heavy Duty MDF Construction w/ Reinforced Corners
- 5" x 12" Super Horn Midrange/ Tweeter
- 1.5" Titanium Compression Driver Loaded in Horn
- Four Piezo Tweeters
- 2 x 12" Subwoofer 2" Kapton VC
- Woofer Magnet Weight: 80 oz
- Compression Tweeter Magnet Weight: 20 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon Dual 1/4" Jacks
- Binding Post Terminals
- Built in Crossover Network
- Power Handling: 800Watts RMS/ 1600 Watts Peak
- Frequency Response: 50-20K Hz
- Sensitivity (1w/1m): 98dB

PADH215

15" 2000 WATTS PA SPEAKER CABINET

PADH21580

1400 WATT DUAL 15" 3-WAY STAGE SPEAKER CABINET

- Heavy Duty MDF Construction w/Reinforced Corners
- 10"x18" Super Horn Midrange/Tweeter
- 1.5" Titanium Compression Driver Loaded in Horn
- Two 15" Subwoofers 2.5" Kapton VC
- Woofer Magnet Weight: 90 oz
- Compression Tweeter Magnet Weight: 20 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Metal Handles for Easy Portability
- Caster Wheels Included
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built In Crossover Network 2KHz
- Power Handling: 700 Watts RMS/1400 Watts Peak
- Frequency Response: 20-20K HZ
- Sensitivity (1w/1m): 100 dB



PAHT4



PAHT5



PAHT6



PAHT7



PAHT8



PAHT9

PAHT4

4 WAY DJ TWEETER SYSTEM

- Four 3" Horn Piezo Tweeters
- Quick Connect Terminals
- Power Handling: 150 Watts RMS/300 Watts Peak
- Frequency Response: 4kHz-27kHz
- Sensitivity (1w/1m): 97 dB
- Impedance: 8 Ohms
- Dimensions: 20.84"W x 6"H x 9.85"D
- Weight: 11 lbs

PAHT5

5-WAY DJ TWEETER SYSTEM

- Four 3.5" Horn Piezo Tweeters
- 4" x 14" Super Horn Midrange/Tweeter
- Quick Connect Terminals
- Built In Crossover Network
- Power Handling: 150 Watts RMS/300 Watts Peak
- Frequency Response: 800Hz-20kHz
- Sensitivity (1w/1m): 91 dB
- Impedance: 8 Ohms
- Dimensions: 17.4"W x 10.2"H x 12"D

PAHT6

6 WAY DJ TWEETER SYSTEM

- Six 2.5" Horn Piezo Tweeters
- Quick Connect Terminals
- Power Handling: 150 Watts RMS/300 Watts Peak
- Frequency Response: 4kHz-27kHz
- Sensitivity (1w/1m): 97 dB
- Impedance: 8 Ohms
- Dimensions: 19.5"W x 5.5"H x 10"D
- Weight: 9 lbs

PAHT7

6-WAY DJ TWEETER SYSTEM

- Four 3.4" Horn Piezo Tweeters
- Dual 4" x 7" Super Horn Midrange/Tweeter
- Quick Connect Terminals
- Built In Crossover Network
- Power Handling: 150 Watts RMS/300 Watts Peak
- Frequency Response: 800Hz-20kHz
- Sensitivity (1w/1m): 92 dB
- Impedance: 8 Ohms
- Dimensions: 17.4"W x 9.4"H x 12"D

PAHT8

8 WAY DJ TWEETER SYSTEM

- Eight 3.4" Super Horn Tweeters
- PVC Finish
- Sensitivity (1w/1m): 97 dB
- Power Handling: 150W RMS / 300W Peak
- Frequency Response: 4K-27K Hz
- Impedance: 8 Ohms
- Dimensions: 16.8"W x 9.2"H x 12"D
- Weight: 15 Lbs

PAHT9

5 WAY DJ TWEETER SYSTEM

- Four 2.5" Horn Piezo Tweeters
- 7.5" x 6.125" Super Horn Midrange/Tweeter
- Titanium Compression Driver 1" VC Loaded in Horn
- Compression Tweeter Magnet Weight: 20 oz
- Heavy-Duty Carrying Strap for Easy Portability
- Quick Connect Terminals
- Built In Crossover Network 5kHz
- Power Handling: 150 Watts RMS/300 Watts Peak
- Frequency Response: 1kHz-27kHz
- Sensitivity (1w/1m): 94 dB
- Impedance: 8 Ohms
- Dimensions: 23.2"W x 13"H x 17.2"D



PASC12
PASC15



PASW15
PASW18



PSTUDIO06

PASC12

600 WATT 12" TWO-WAY STAGE MONITOR SPEAKER SYSTEM

- Heavy Duty MDF Construction w/Reinforced Corners
- 10"x18" Super Horn Midrange/Tweeter
- 1" Titanium Compression Driver Loaded in Horn
- 12" Subwoofer 2" Kapton VC
- Non-Press Paper Cone w/Cloth Edge
- Woofer Magnet Weight: 75 oz
- Compression Tweeter Magnet Weight: 20 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built in Crossover Network 3KHz
- Power Handling: 300 Watts RMS/600 Watts Peak
- Frequency Response: 40-20K HZ
- Sensitivity (1w/1m): 101 dB
- Impedance: 8 Ohms
- Dimensions: 25.6"W x 17.3"H x 13"D
- Weight: 37.5 lbs

PASC15

800 WATT 15" TWO-WAY STAGE MONITOR SPEAKER SYSTEM

PASW15

800 WATT 15" STAGE PA SUBWOOFER CABINET

- Heavy Duty MDF Construction w/Reinforced Corners
- Black PVC Finish
- 15" Subwoofer 2.5" Kapton VC
- Woofer Magnet Weight: 90 oz
- Ported Enclosure for Added Bass Response
- Heavy Duty Handles for Easy Portability
- Dual Speakon & Dual 1/4" Jacks
- Binding Post Terminals
- Built in Crossover Network 800 Hz
- Power Handling: 400 Watts RMS/800 Watts Peak
- Frequency Response: 20-500HZ
- Sensitivity (1w/1m): 95 dB
- Impedance: 8 Ohms
- 35mm Speaker Stand Mount (Top)
- Dimensions: 18"W x 15.8"D x 23"H

PASW18

1000 WATT 18" STAGE PA SUBWOOFER CABINET

PSTUDIO06

6.5" 350 WATT 2-WAY BASS REFLEX AMPLIFIED STUDIO MONITOR SPEAKER

- Two-Way Stereo Desktop Monitor
- Built in High Amplifier/High Freq. Filter and Low Freq. Filter Select
- 6" Diameter Glass Fiber Cone, Magnetically Shielded
- High Temperature Voice Coil
- 1" Diameter, Magnetically Shielded Silk Dome Tweeter
- Frequency Response: 50Hz - 20KHz
- Crossover Frequency: 5kHz
- RMS SPL: 101.5dB at 1 Meter
- Input Connectors: RCA Unbalanced, XLR-F & TRS (1/4") Balanced
- Dynamic Power: 175 Watts RMS / 350 Peak
- Protection: RF Interference, Thermal Protection
- Subsonic Filter, Output Current Limiting
- Indicator: Blue Power LED on Front Panel
- Power Requirements: 110V / 220V w/ Detachable 2 Conductor Cord
- Cabinet: High Quality Vinyl Laminated High Density MDF
- 4-8 Ohm Impedance
- Dimensions: 12.6"H x 10.2"W x 8.5"D
- Net weight: 5.6 Kg



PCB4WT

4" 200 WATT WHITE MINI CUBE BOOKSHELF SPEAKER IN WHITE (PAIR)

- Full Range Mini Speaker System
- Great for Home Theater Applications
- Video Shield
- 4" Paper Cone Driver
- Power Handling: 200 Watts Peak
- Frequency Response: 80 Hz - 18 KHz
- 8 Ohms Impedance
- Dimensions: 4.8" (H) x 4.8" (W) x 5.2" (D)

PCB4BK

BLACK



PCB3BK

3" 100 WATT BLACK MINI CUBE BOOKSHELF SPEAKER IN BLACK (PAIR)

- Full Range Mini Speaker System
- Great for Home Theater Applications
- Video Shield
- 3" Paper Cone Driver
- Power Handling: 100 Watts Peak
- Frequency Response: 90 Hz - 18 KHz
- 8 Ohms Impedance
- Dimensions: 3.6" (H) x 3.6" (W) x 4.6" (D)

PCB3WT

WHITE

Bookshelf Speakers

NEW



PWMAB250BK



PWMAB250RD



PWMAB250OR

PWMAB250

300 WATT BLUETOOTH 6.5" PORTABLE PA SPEAKER SYSTEM WITH BUILT-IN RECHARGEABLE BATTERY, WIRED MICROPHONE & FM RADIO

- Built-in Bluetooth for Wireless Audio Streaming
- Works with All of Your Favorite Bluetooth Devices (iPhones, Androids, Smartphones, iPads, Tablets, PC, etc.)
- Instant Karaoke: Includes Microphone & 1/4" Mic Input
- USB Flash Drive & SD Memory Card Readers
- AUX (3.5mm) Input for Connecting External Devices
- Built-in Rechargeable Battery (3 Hour Battery Life)
- FM Radio with LCD Digital Display Screen
- 6.5" Woofer and 1" Tweeter System
- 300 Watt Peak Power - 150 Watt RMS @ 4 Ohm
- Volume, Mic Volume, Tone Controls
- Frequency Response: 20-20kHz
- Bluetooth Operation Range: 65 Feet
- Convenient Carry Handle
- 110V/220V Switchable
- Accessories Included: Remote Control, Wired Handheld Microphone, 10' ft Microphone Cable, RCA to 3.5mm & Power Adapter Cables



PWMAB210OR



PWMAB210BK



PWMAB210BZ

PWMAB210RD

NEW



PWMAB210

BOOM ROCK BLUETOOTH KARAOKE SPEAKER AND RECORDING SYSTEM, BUILT-IN RECHARGEABLE BATTERY, WIRELESS MICROPHONE, USB/SD CARD READERS, FM RADIO AND REMOTE CONTROL

- All-in-One Karaoke Speaker System
- Records Your Voice and the Music at the Same Time
- Built-in Bluetooth for Wireless Audio Streaming
- Works with All of Your Favorite Bluetooth Devices (iPhone, Android, Smartphone, Tablet, etc.)
- USB Flash and SD Memory Card Readers
- FM Radio and LCD Digital Display
- Built-in Rechargeable Battery (3 Hour Life)
- 1/4" Mic Input - 1/4" Audio Output - AUX (3.5mm) Input
- Includes VHF Wireless Handheld Microphone and Remote Control
- Volume, Bass, Treble, Echo, Mic Volume & Gain Controls
- Portable and Powerful
Technical Specs: 200 Watt Max Power Output
- 4 Ohm, Class-D Circuit Design

NEW



PSUFM625

DUAL 600 WATT DISCO JAM POWERED TWO-WAY PA SPEAKER SYSTEM W/ USB/SD READERS, FM RADIO, 3.5MM AUX INPUT FOR IPOD/MP3 PLAYERS

- Dual Speaker Towers (One Active, One Passive)
- 6.5" Woofer and 3" Piezo Tweeter
- Full Featured 3-Channel Mixer
- Two 1/4" Microphone Inputs
- 3.5mm AUX Line Input (Compatible With All MP3 Players And Devices With Headphone Outputs)
- RCA Stereo Input And Output
- USB/SD Flash and Card Readers
- with Built-In FM Radio
- USB Allows Charging for Smart Phones and Other Devices
- Display Screen Shows Number of Songs And Play Time And FM Radio Frequency
- Master Volume Controller
- Ported Enclosure For Added Bass Response
- 35mm Speaker Stand Mount

PSUFM835A

DUAL 800 WATT DISCO JAM POWERED TWO-WAY PA SPEAKER SYSTEM W/ USB/SD CARD READERS, FM RADIO, 3.5 MM AUX INPUT

PSUFM837BT

DUAL 800 WATT DISCO JAM POWERED TWO-WAY PA BLUETOOTH SPEAKER SYSTEM W/ USB/SD CARD READERS, FM RADIO, 3.5 MM AUX INPUT (ACTIVE & PASSIVE SPEAKERS)

DJ Control Mixers

PYD1964B

BLUETOOTH 6-CHANNEL DJ MIXER 19" 5U RACK MOUNT SYSTEM DIGITAL LED ILLUMINATED CONTROLS

- Built-in Bluetooth for Wireless Music Streaming
- Compatible with All of Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Mix 2 Phono, 8 Line Level and 2 Microphone Input Signals
- 10-Band Graphic Equalizer for (R) and (L) Channels
- Two Balanced or 1/4" Mono Microphone Inputs
- Separate Mic 1 and Mic 2 Level Controls
- Microphone High, Mid, Bass Tone Controls with Mic Talk-over and Mic Frequency Kill Switch
- Separate Switchable Channel 1, 2, 3, 4, Master and Zone Gain Controls with Cross Fader
- Headphone Volume Control with Channel Cue
- Echo, Delay and Repeat Level Controls
- 6 Added Digital Sound Effects
- Digital LED Illuminated Controls
- Separate Zone, Record and Master Outputs<Technical Specifications:CUE-PGM control
- Phono: 3 mV, 47 KOhm
- Line: 50 mV, 27 KOhm
- MIC 1, 2, & 3: 2mV, 2 K Ohm Balanced
- Frequency Response: 20 Hz - 20 KHz +/- 2 dB



4-CHANNEL BLUETOOTH DJ MIXER WITH USB FLASH, SD MEMORY CARD READERS & LCD DIGITAL DISPLAY

PYD1962BU



- Built-in Bluetooth for Wireless Music Streaming
- Compatible with All of Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- USB Flash Drive & SD Memory Card Readers
- Connect and Instantly Stream Your Favorite MP3 Files
- LCD MP3 Display Center with ID3 Tag Song Readout Info
- MP3 & Digital Audio File Playback Button Controls
- Digital Graphic Display Meter
- (3) Mic Inputs: 1/4" Mono and (2) XLR Balanced Connector Jacks
- Microphone Tone Adjustments & Volume Control
- Mic Talkover Control: Ability to Speak Over Audio, Karaoke Style
- 1/4" Headphone Jack with Volume Control Cue
- Independent Channel Level Controls and Cross Fader
- Output Connectors: Booth, Balanced, RCA Jacks for Connecting Amplifier
- RCA Master Output Jacks (L/R)
- Input Connectors: RCA Line & Phono Jacks
- High, Mid, Low & Gain Adjustment Settings
- 19" (5U) Rack Mountable System<Technical Specs:Frequency Response: 20 Hz - 20 kHz +/- 2 dB
- Distortion: 0.02%
- S/N Ratio: Better Than 80 dB
- Talk-over Attenuation: -16 dB
- Headphone Impedance: 16 Ohm
- Power Source: AC 90V-240V, 60/50 Hz
- Power consumption (MAX): 26W
- Unit Dimensions: W x H x D (19.0" x 3.4" x 7.0" inches)

PMX7BU

BLUETOOTH 3-CHANNEL DJ MP3 MIXER, MIC-TALKOVER, USB FLASH READER, DUAL RCA & MICROPHONE INPUTS, HEADPHONE JACK

- Built-in Bluetooth for Wireless Music Streaming
- Compatible with All of Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Combine & Mix (2) Aux Input Sources with Bluetooth Audio or MP3s
- Aux Inputs Switchable Between Line Level and Phono Input
- (2) Phono RCA Audio Line Inputs for Connecting External Devices
- (2) 1/4" Balanced TRS Microphone Input Jacks
- Microphone 1 and 2 Level Gain and Talk Over Control
- Mic Talkover: Ability to Speak Over Audio, Karaoke Style
- 1/4" Headphone Jack with Volume Control
- Amp Master Output (L/R)
- USB Flash Drive Reader
- Independent Channel Controls and Cross Fader
- Easily Mix & Control MP3 and Bluetooth Connected Devices
- (L) and (R) RCA Master Output with Stereo/Mono Switch
- ULN (Ultra Low-Noise) Frequency Operation Design<Technical Specs:Phono Inputs 1 and 2: 15mv 1kHz, Unbalanced
- Line Inputs 1 and 2: 0.8V, Unbalanced
- Mic Input: 20mv, unbalanced
- Headphones: 300mW @ 1% THD
- Signal-to-Noise Ratio (S/N): >80dB (Line in)
- Crosstalk: >50dB (Line in)
- Distortion (THD) :< 0.025%
- Frequency Response: 20Hz - 20kHz
- USA/Canada: 120V - 60Hz



PYD2808

19" RACK MOUNT 4 CHANNEL PROFESSIONAL MIXER WITH DIGITAL ECHO AND SFX

- 2 Turntable/8 Line Level (CD, Cassette Deck, Minidisk, Etc)/ 2 Mic Inputs
- 7-Band Graphic Equalizer for Right and Left Channels
- ECHO on/off Switch
- ECHO Delay/Repeat/Level Controls
- Six Digital Sound Effects
- Sound Effect SPEED and VOLUME Controls
- Dual Color LED Level Display
- Blue Light Illuminated Channel and Master Volume Controls
- Top Mounted 12V BNC Connector for Goose-neck Lamp (not included)
- Dual Mic Inputs with Talkover
- Mic 1 XLR-1/4" Combo Input Jack
- Individual Rotary Controls for Mic Bass and Treble
- CUE Switch for CH1/2/3/4 and Mic
- Master and Booth Volume Controls
- Master Stereo/Mono and EQ on/off Switches
- Assignable AB Crossfader
- User Replaceable Dual Railed Crossfader
- CUE Level Control
- Headphone CUE/PGM Control
- 1/4" Headphone Jack
- Turntable Inputs convertible to accept Line Level Inputs
- Booth Output



PMX5U

PROFESSIONAL 2-STEREO CHANNEL DJ MIXER W/ USB SD CARD PLAYER

- Professional 2-Stereo Channel DJ Mixer
- Super-Smooth Ultra Slide Fades
- Dual MIC Input
- The MIC Bal. Control Two MIC Level Balance Or Close One MIC Input
- The Phono/Line Switch Selects One Of The Input Pairs On The Respective Channel
- Single Cd Input Channel
- Mono/Stereo Output Switch
- Output Meter: Indicate The Levels Of The Left And Right Master Channels
- MIC Talkover
- Power Supply With Adaptor: 110V AC
- Input Sensitivity Impedance
- MIC1-2: 22m /v600 OHMS
- Phono1-2: 17mV/50k Ohms
- Line1-2: 175mV/50k Ohms
- CD:1v/50k Ohms
- Output Level: Amp: 2.0V/10-KOHm
- Frequency Response: 20HZ - 20KHZ +/-2dB
- Talk over attenuation: -16dB
- S/N: Ratio (at 1KHZ)
- MIC: >75dB/22mV Input
- Phono:>55dB/17mV Input
- Line:>80dB/175mV Input
- CD: >80dB/1V Input
- Dimensions: (H)2" X (W)9.3" X(D)4.9"



rack Mount Professional Dual DJ Controller with Scratch, Loop, Mixer, USB, and SD Card Player

PDJ480UM



- Dual RCA Outputs
- Rack-Mount Design
- XLR Microphone Input
- Continuous Loop Mode
- USB and SD Card Player
- 10+ Track-Folder Search
- Dual Pitch Slide Control
- Search-Single Time Button
- Jog Wheel With Scratch Mode
- LCD Display & Blue Backlight
- Dual RCA Inputs (Phono & Line)
- ID3 Tags for Track Information
- 3-Band EQ on Multiple Channels
- Pitch Bend Adjustment Range: 12%
- Anti-Shock Buffer Memory: 40 Seconds
- Dual Professional USB DJ MP3 & SD Card Player
- Dimensions: 18.98" W x 3.54" D x 3.14" H
- Power Supply: 100-240 V, 60/50 Hz

PYD6070

6-CHANNEL 2-BUS CONSOLE MIXER

- 2 Mono Input Channels (CH 1, 2)
- 2 Stereo Input Channels (CH 3/4, 5/6)
- Master & Phones/Control Room Level Controls
- EFX Return Level Control
- Stereo Headphones Jack
- Main & Control Room Out Jacks 1/4"
- Mono Effects Send, Stereo Return 1/4"
- Stereo Tape In & Out Jacks RCA
- Tape Input Routing to Control Room and/or Mix
- 5 Segment Dual LED Level Meters
- Mono Channel Section
- Gain, Pan, Aux Send & Level Controls
- 3 Band EQ
- Peak Indicator
- +48V Phantom Power Switchable
- XLR Balanced Mic Input
- 1/4" TRS Balanced/Unbalanced Line Input Stereo Channel Section
- 3 Band EQ
- Balance, Aux Send & Level Controls
- 1/4" TRS Balanced/Unbalanced Line Inputs
- AC Adapter Included: 110V
- Dimensions: 8.4"W x 1.6"H x 8.9"D



NEW

1000 WATT BLUETOOTH KARAOKE MIXER AMPLIFIER WITH TWO MICROPHONE INPUTS, RCA AUDIO & VIDEO, RACK MOUNTABLE

PMXAKB1000



- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Enabled Device (iPhone, Android, Smartphones, Tablet, MP3 player, TV, PC etc.)
- Mix Two Microphones with Music from Bluetooth or RCA Inputs for Karaoke Fun
- Two Switchable RCA Audio and Video Inputs
- Three RCA Audio Outputs (Record, Line and Microphone)
- Two RCA Video Inputs/Outputs to Connect
- Video Display, TV or Monitor
- Master Volume, Balance and Low/Mid/High Frequency Controls
- Master Hi/Lo Frequency, Repeat and Delay Echo Controls
- Master Microphone Volume Controls
- Remote Control for Key Sound Effects
- 110V -220V Compatible
- Dimensions: 16.5" (W) 13.5" (L) 5.5" (H)

PMIDI100

PROFESSIONAL DIGITAL MIDI CONTROLLER W/VIRTUAL DJ SOFTWARE INCLUDED

- Play/Pause
- Cue/Play
- Sync
- Seamless Loop/ Loop Trim
- Fast Search Forward or backward
- Scratch
- VIRTUAL DJ Software
- Effect Select and Parameter Adjust(DEPTH, DELAY, LFO)
- Pitch Control
- Channel Fader
- Channel Gain
- Effect and Sample Control
- 3 Band EQ (Hi, Mid, Low knob)
- Track Select
- Channel Cue Monitor
- Headphone Output and Volume Control
- Master Tempo
- USB Bus Powered



10 CHANNEL BALANCED STUDIO GRADE IMP AUDIO MIXER WITH PRE-AMP

PEXM801



- 2 new state-of-the-art, studio-grade IMP "Invisible" Mic Preamps
- 130 dB dynamic range for 24-bit, 192 kHz sampling rate inputs Ultra-wide 60 dB gain range
- Lowest possible distortion 0.0007% (20 Hz - 20 kHz)
- Integrated 24-bit digital stereo FX processor with 100 awesome
- Effective, 3-band EQ plus switchable low-cut filter
- Clip LEDs on all mono channels
- 10 balanced high-headroom line inputs
- with +4/-10 level selection
- FX send control per channel
- Main mix outputs plus separate control room, phones and stereo CD/tape outputs
- CD/tape inputs assignable
- Switchable +48 V phantom power
- Dimensions: 4" x (W) 9.3" x (D) 13.2"
- 110v Power Supply

PEXM810

8 CHANNEL PROFESSIONAL AUDIO MIXER WITH PHANTOM POWER

- Low noise 8 channel Mic/Line-mixer
- 4 mono inputs with COMBO-sockets, +48v Phantom-power and balanced line inputs
- Stereo inputs can also be operated mono
- 3-band EQ for all input
- Aux-Send per channel for controlling external effectors
- Stereo Aux-Return with balanced jack sockets
- Separate Main Mix, Booth and headphones outputs
- Tape inputs assignable to master, Booth / headphones
- Precise 10-LED meter
- Power Supply: 110v
- Dimensions: 4"(H) x 11"(W) x 13"(D)



12 CHANNEL PROFESSIONAL AUDIO MIXER WITH 3 BAND EQ

PEXM1202



- 3-band EQs for warm and musical sound
- 4 state-of-the-art Mic Preamps comparable to stand-alone boutique preamps
- Premium ultra low-noise, high headroom analog mixer
- 1 post fader FX send per channel for external FX devices
- CD/tape inputs assignable to main mix or control room/phones outputs
- Main mix outputs plus separate control room, phones and stereo CD/tape outputs
- FX to control room function helps to monitor effect signal via headphones and control room output
- Long-wearing 60-mm master fader and sealed rotary controls
- Power: 110V
- Dimensions: 4"(H) x 11.125"(W) x 13.25"(D)

PEXM1204

STUDIO GRADE 24 BIT 12 CHANNEL STEREO MIXER w/BUILT-IN FX PROCESSOR/DIGITAL EFFECTS

- 3-band EQs for warm and musical sound
- Studio-grade 24-bit stereo FX processor with 99 awesome presets including reverb, chorus, flanger, delay, pitch shifter and various multi-effects
- 4/6/8/10 Mic Preamps comparable to stand-alone boutique preamps
- 2 aux sends per channel: 1 pre/post fader switchable for monitoring/FX applications, 1 post fader (for internal FX or as external send)
- Peak LEDs, mute/alt 3-4, solo and PFL functions on all channels
- 2 subgroups with separate outputs for added routing flexibility
- 2 multi-functional stereo aux returns with flexible routing
- Balanced main mix outputs with gold-plated XLR connectors plus separate control room, headphones and stereo tape outputs
- Control room/phones outputs with multi-input source matrix
- Tape inputs assignable to main mix or control room/phones outputs
- 60-mm faders and sealed rotary controls
- Internal autorange power supply for maximum flexibility (100 - 240 V~) audio, superior transient response/low power consumption for energy saving
- High-quality components and exceptionally fine finishing ensure long life



2 CHANNEL MINI MIXER WITH USB AUDIO INTERFACE

PAD10MXU



- Combo Input Connector Female/XLR And 1/4" Phone Jack For MIC/Line Inputs.
- Line 3/2 Stereo Line Inputs RCA Plugs, To Connect Cd, Mp3 Tape Deck, Players.
- Main Out RCA Plugs To Connect The Mixer, Receiver Or Amplifier.
- Signal Output Thru The Headphones
- Line/INSTR SW Input Select Switch Set
- Line 2/3 Level This Control Adjusts The Volume Of Signal Input Of Line 2/3.
- Peak Led It Lights Up Went The Input Signal Of Ch1 Is Too High.
- Ch 1 Gain This Control Adjust The Volume Of Signal Input Of Ch1.
- Phantom Power Supply On The XLR Connector Of Ch1.
- Phantom Led Indicates That Phantom Power Is On.
- USB Audio Interface
- Master Lets You Control Mixer's Overall Volume Level
- Clip Led Lights Up Went The Main Output Signal Is Too High
- Monitor To Control Volume Output Of The Monitor Jack.
- Power Led Indicates That The Unit Is In On Position.

PAD20MXU

5 CHANNEL PROFESSIONAL COMPACT AUDIO MIXER WITH USB INTERFACE

- Ultra-Low Noise Design With High Headroom
- Integrated USB Audio Interface - Record Music On Your Computer
- Smooth Rotary-Style Faders For Mic/USB/Line/Master Controls
- Extremely Musical 2-Band EQ & Pan On Each Channel
- Clipping LED Indicators For Left And Right Channel
- 1 XLR / 1/4" Jack Combo Mic Input
- 2 RCA Stereo Inputs
- 2 1/8" (3.5mm) Stereo Output and Monitor Jacks
- Integrated Rechargeable Lithium Ion Battery
- 18V Phantom Power



Stage Powered Mixers



PMX401



PMX602M



PMX802M

PMX401

4-CHANNEL POWERED PA MIXER / AMPLIFIER, 150 WATT, AUX (3.5MM) AND RCA INPUT CONNECTOR JACKS, GRAPHIC EQ

- (4) Balanced Microphone Inputs
- (4) 1/4" Line/High Impedance Inputs
- RCA Audio Input & RCA Audio Output
- Aux (3.5mm) Input Connector Jack
- Audio Line-In: Connect Devices like Smartphones & MP3 Players
- 1/4" Send/Return Jacks & (2) Conductor 1/4" Speaker Outputs
- Built-In Reverb with Individual Channel Controls
- Master Effects Controls with Echo, Delay & Effects Volume
- Equalizer Control For Each Input
- Convenient Carry Handle
- Built-in Cooling Fan
- Technical Specs: Maximum Power Output: 150 Watt / 4 Ohm
- Frequency Response: 20Hz - 20kHz +1dB
- (Lo-Z) Mic Impedance: 1K Ohm
- (Hi-Z) Mic/Line Impedance: 33K Ohm
- Impedance Gain
- Gain Range: +10 to +60dB
- Master EQ Control Ranges: +/- 12dB
- Channel Tone Adjustment: +/-15dB
- S/N Ratio: 110dB / 112dB A-Weighted
- Max. Input Level +12dBu @ +10dB Gain
- Distortion (THD+ N): 0.005% / 0.004%
- Power: 110/220 Voltage Switchable
- Dimensions: 12.9"W x 8.3"H x 10.5"D

PMX601

6-CHANNEL POWERED PA MIXER / AMPLIFIER, 150 WATT, AUX (3.5MM) AND RCA INPUT CONNECTOR JACKS, GRAPHIC EQ

PMX402M

4-CHANNEL 400 WATT POWERED MIXER, AUX (3.5MM) INPUT, SD MEMORY CARD & USB FLASH DRIVE READERS, LCD DISPLAY

- 4-Channel System Power Mixer
- (4) Balanced 3-Pin Microphone Inputs
- (4) 1/4" High Impedance Inputs
- Aux (3.5mm) Input Connector Jack
- Connect iPod, MP3 Players, iPhone, Smartphones, Tablets, etc.
- Master System EFX, EQ & Volume Controls
- 5-Band Graphic Equalizer
- USB Flash & SD Memory Card Readers
- LCD Digital Display Screen with Touch Button Controls
- Independent Channel EQ, Treble, Bass, Reverb Controls
- 1/4" Send/Return Jacks & (2) Conductor 1/4" Speaker Outputs
- RCA (L/R) Record Connector Jacks
- Convenient Carry Handle
- Built-in Cooling Fan
- Technical Specs: Maximum Power Output: 400 Watts 4-Ohms
- Frequency Response: <10Hz - 150Hz (-1dB)
- Max. Input Level +12dBu @ +10dB Gain
- S/N Ratio: 110dB / 112dB A-Weighted
- Channel Tone Adjust (+/-15dB)
- Gain Range: +10 to +60dB
- Master EQ Control Ranges: +/- 12dB
- Distortion (THD+ N): 0.005% / 0.004%
- Power: 110/220 Voltage Switchable
- Dimension: 15.75" x 12.01" x 7.87"

PMX602M

6-CHANNEL 600 WATT POWERED MIXER, AUX (3.5MM) INPUT, SD MEMORY CARD & USB FLASH DRIVE READERS, LCD DISPLAY, HEADPHONE JACK

PMX802M

8-CHANNEL 800 WATT POWERED MIXER, AUX (3.5MM) INPUT, SD MEMORY CARD & USB FLASH DRIVE READERS, LCD DISPLAY, HEADPHONE JACK



PMX830i



PMX640BT



PMX840BT



PMX630i

6-CHANNEL 600 WATT PROFESSIONAL MIXER - BUILT-IN 30 PIN IPOD DOCK, MP3 PLAYER INPUT, SD MEMORY CARD AND USB FLASH READERS

- 6-Channel System Power Mixer
- (6) Balanced 3-Pin Microphone Inputs
- (6) 1/4" High Impedance Inputs
- Built-in 30-Pin iPod Dock
- Aux (3.5mm) Input Connector Jack
- Connect iPod, MP3 Players, iPhone, Smartphones, Tablets, etc.
- Master System EFX, EQ & Volume Controls
- 5-Band Graphic Equalizer
- Effects Control & Send
- USB Flash & SD Memory Card Readers
- File Compatibility: MP3 & WMA Formats
- LCD Digital Display Screen with Touch Button Controls
- Independent Channel EQ, Treble, Bass, Reverb Controls
- 1/4" Send/Return Jacks & (2) Conductor 1/4" Speaker Outputs
- RCA (L/R) Record Connector Jacks
- Convenient Carry Handle
- Built-in Cooling Fan
- Technical Specs: Maximum Power Output: 600 Watts 4-Ohms
- Frequency Response: <10Hz - 150Hz (-1dB)
- Max. Input Level: +12dBu @ +10dB Gain
- S/N Ratio: 110dB / 112dB A-Weighted
- Channel Tone Adjust (+/-15dB)
- Gain Range: +10 to +60dB
- Master EQ Control Ranges: +/- 12dB
- Distortion (THD+N): 0.005% / 0.004%
- Power: 110/220 Voltage Switchable
- Dimension: 17.91" x 12.79" x 9.64"

PMX830i

8-CHANNEL 600 WATT PROFESSIONAL MIXER - BUILT-IN 30 PIN IPOD DOCK, MP3 PLAYER INPUT, SD AND USB FLASH MEMORY READERS

PMX640BT

6-CHANNEL 600 WATT BLUETOOTH MIXER WITH BALANCED MIC & LINE INPUTS, USB & SD CARD READERS

- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Enabled Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Digital LCD Display & Front Facing Control Center
- USB Flash Drive & SD Memory Card Readers
- 3-Pin Low Impedance Balanced Microphone Inputs
- 1/4" Line/ High Impedance Balanced Inputs
- Independent Channel Volume, EQ & EFX Controls
- Master 5 Band Graphic Equalizer
- EQ & Master EFX Control of Level, Echo & Reverb Controls
- Aux (3.5mm) Input Jack for Connecting External Devices
- Headphone Output: 1/4" TRS Stereo Connector
- RCA & 1/4" Effects Loop Connectors
- Additional RCA Inputs: Tape Play (L/R), Tape Record (L/R)
- Technical Specs: 600 Watt Output Power
- 8 Ohm Impedance Each Channel
- Line Level Impedance 10K Ohms @ -10dB
- Mono Microphone Inputs (XENYX Mic Pre-Amp)
- XLR: Electronically Balanced Discrete Input Circuit
- Frequency Response: <10Hz @ 150kHz (-1dB), <10Hz @ 200kHz (-3dB)
- Gain Range: +10 - +60dB
- Max. Input Level: +12dBu @ +10dB Gain
- Impedance: Approx. 2.6k @ Balanced
- Signal-to-Noise Ratio: 110dB / 112dB A-Weighted
- Distortion: (THD+N): 0.005% / 0.004% A-Weighted
- Channel Equalization: Control Range High @ 10K +/-15dB, Low @ 60K +/-15dB
- Master EQ Frequency Hz: 60, 250, 1K, 4K, 12K
- Boost/Cut Control: +/-12dB
- Effects Loop & Send: 1/4" TS Connectors Unbalanced
- Impedance: Approx 1k Ohm -10dB

PMX840BT

8-CHANNEL 800 WATT BLUETOOTH MIXER WITH BALANCED MIC & LINE INPUTS, USB & SD CARD READERS

Modern Style Turntables

PLTTB3U

BELT DRIVE USB TURNTABLE WITH DIGITAL RECORDING SOFTWARE

- Belt Drive Turntable
- +/-10% Variable Pitch Slider
- USB Connection For Conversion of Vinyl to Digital Media
- Internal Stereo Phono Pre Amplifier
- Plug Directly to Computer (PC)
- Audacity Recording Software Included
- Line Level RCA Outputs with Built-in Preamp
- Fully Adjustable Counter Weight & Anti-Skating Controls
- 33-1.3-45 RPM Speed Selector
- Soft Touch Start/Stop Buttons
- Removable Stroboscope Light (Not included)
- Headshell, Dust Cover & 45 Adapter Included
- Power Supply: 110V - 220V
- Dimensions: 3.86" H x 16.5" W x 13.4" D



PLTTB1

PROFESSIONAL BELT-DRIVE TURNTABLE

- Pitch Control: +/- 16%
- Strobe Light Illumination
- Weighted Tone Arm
- Cartridge and Stylus Included
- Dust Cover Included
- Start/Stop Button
- 33/45 RPM
- Dimensions: 16.93" W x 4.73" H x 14.57" D
- 110/220 V Auto Switching



MULTIFUNCTION TURNTABLE WITH MP3 RECORDING, USB-TO-PC, CASSETTE PLAYBACK, RECHARGEABLE BATTERY

- Three Speed Belt-Driven Turntable Fit For 33, 45, and 78 RPM
- Jewel Stylus with Ceramic Stereo Cartridge
- 45 RPM Adapter
- Automatic and Manual Stop Selection
- USB Port For Converting Vinyl and Cassette to MP3 via Your PC
- One Key Cassette Player Deck
- Two Built-In Stereo Speakers
- Stereo RCA Output
- Power On/Off With Rotary Volume Control
- 3.5mm Aux-In Jack
- Rechargeable Battery
- USB Cable and Free Audacity Software Included For Vinyl-to-MP3
- Dimensions: 12.72" x 11.97" x 6.30"

PTTC4U

PTTCDS7U

VINTAGE STYLED TURNTABLE - PLAYS AM/FM RADIO, CASSETTES, CDs, AND MP3s - USB/SD DIRECT RECORD AND AUX INPUT FOR iPOD/MP3 PLAYERS (MAHOGANY)

- AM/FM Radio
- Built-in Speakers
- RCA Line Outputs
- Front-Loading CD Tray
- Read-Out Analog Radio
- 45 RPM Adaptor Included
- Power Source: AC 110/220V
- LCD Display with Blue Backlight
- Direct USB/SD Turntable Encoding
- Cassette Playback with Single Key Slot-in Design
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Three speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records





CLASSIC RETRO STYLE TURNTABLE - PLAYS AM/FM RADIO, CASSETTES & MP3s - USB/SD DIRECT RECORD FUNCTION & AUX INPUT FOR IPOD/MP3 PLAYERS

PTTCS9U

- AM/FM Radio
- RCA Line Outputs
- Built-in Speakers
- 45 RPM Adaptor Included
- Digital Read-Out Analog Radio
- LCD Display with Blue Backlight
- Direct USB/SD Turntable Encoding
- Cassette Playback with Single Key Slot-in Design
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Three Speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records
- Power Source: AC 110

PLTTB9U

USB TURNTABLE WITH DIRECT-TO-DIGITAL USB/SD CARD ENCODER & BUILT-IN AM/FM RADIO CONVERSION

- Turn your Records Into MP3s
- 3 speed (33 1/3/45 and 78 RPM) turntables
- Built-in adapter for 45 RPM LP included
- ceramic cartridge with diamond needle
- Two built-in full range speakers 4 OHMS,30 Watts
- USB/SD encoder that can easily record old vinyl or other Aux in audio onto flash drive or SD/MMC card through USB/SD sockets in MP3 formats
- play your music (mp3 and wma)pre-stored on SD/MMC card ,USB drive or M3 player through USB/SD host.
- AM/FM stereo radio
- Strong strengthened semi-transparent dust cover
- AC 110V 60HZ
- Dimensions: 15.5" x 11" x 4.7"



TURNTABLE BOOMBOX MULTIMEDIA SYSTEM - PLAYS AM/FM RADIO, CDs, CASSETTES, MP3s, - USB/SD MEMORY PORTS & VINYL-TO-MP3 ENCODING

PTTCSM60



- 150 Watt Output
- RCA Line Outputs
- 45 RPM Adaptor Included
- Analogue Tuning Radio (FM)
- Bookshelf Speakers Included
- Direct USB/SD Turntable Encoding
- Compatible with CD-R/CD-RW Discs
- Wireless Remote Control Playback Configuration
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Front-Loading, Single CD Drawer and Dual Cassette Decks
- Three Speeds (33-1/3, 45, and 78 RPM) Record Playing Speeds
- Dimensions (Main Unit): 12.49" x 11.39" x 10.53"
- Dimensions (Speaker): 5.73" x 6.28" x 8.84"

PTTCSM70BT

WITH BLUETOOTH

BLUETOOTH CLASSIC VINTAGE STYLE RECORD PLAYER TURNTABLE PHONOGRAPH WITH VINYL TO MP3 RECORDING, USB/SD CARD READERS, AM/FM RADIO, AUX (3.5MM) INPUT, BUILT-IN SPEAKERS & RECHARGEABLE BATTERY

PTT25UBT



- Classic Style with Modern Technology
- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Enabled Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Ability to Convert Vinyl into MP3 Files
- Turns Your Records into Digital Music Files
- Save your Music onto USB Flash
- Ability to Record Music from Devices Connected via Aux Input
- Plays Music via USB Flash Drive Port & SD Memory Cards
- Ceramic Stereo Cartridge with Built-in Stereo Speakers
- AM/FM Radio
- Full Function Remote Control
- 3 Speed Turntable: 33-1/3, 45, 78 RPM
- Auto Return Feature
- Dimensions: 17.8€ x 16.9€ x 6.9€

Classic Style Turntables

BLUETOOTH WIRELESS STREAMING CLASSIC RETRO STYLE RECORD PLAYER TURNTABLE WITH CD PLAYER, CASSETTE DECK, AM/FM RADIO, HEADPHONE JACK & BUILT-IN SPEAKERS

PTCD4BT

- Classic Style with Modern Technology
- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Enabled Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Built-in CD Player, Slot-in Cassette Deck & AM/FM Radio
- Front Face Located Control Panel
- Aux Input Jack for Connecting External Devices
- Built-in Stereo Speakers
- Belt-Driven Turntable System
- Line Output
- Headphone Jack
- Digital LCD Display
- Radio Dial Scale with Rotary Controls
- 3 Speed Turntable: 33-1/3, 45, 78 RPM
- Includes 45 RPM Adaptor, AUX & RCA Cables
- Power: AC 120V /60Hz
- Weight: 15.8 lbs.



VINTAGE CLASSIC STYLE TURNTABLE HORN PHONOGRAPH WITH BLUETOOTH, AM/FM RADIO, CD PLAYER & USB READER

PVNP30BT



- Classic Style Turntable with Modern Technology
- Built-in Bluetooth for Wireless Music Streaming
- Compatible with All of Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Built-in CD Player & AM/FM Radio with Tuning Knob
- Built-in Stereo Speakers
- 3 Speed Turntable: 33, 45, 78 RPM
- Front Panel Control Center with Rotary Controls
- Connect USB Flash Drive and Play MP3 Files
- Includes 45 RPM Adaptor and Detachable Horn
- Auto Stop Vinyl Record Function
- Headphone Jack & Audio (3.5mm) Input
- RCA Line Out Jack
- Dimensions (L x W x H): 12.9" x 10.8 x 10.0"
- Dimensions with Horn (L x W x H): 12.9" x 14.8" x 20.4"

PTCD54UB

BLUETOOTH VINTAGE STYLE TURNTABLE WITH AM/FM RADIO, CD & CASSETTE PLAYERS, USB FLASH RECORDING & SLIDE-OUT IPOD/MP3 DOCK

- Classic Style Turntable with Modern Technology
- Built-in Bluetooth for Wireless Music Streaming
- Compatible with All of Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Pop-Out iPod/MP3 Dock with 3.5mm Connector Cable
- Front Loading Single CD Tray & Slot-in Cassette Deck
- USB Record Function: Saves Vinyl Record, CD, Cassette or Connected Device Recordings to Your Connected USB Flash Drive
- Ability to Play MP3 Files via USB Flash Drive
- Compatible with CD/MP3/CD-R/CD-RW Discs
- Collapsible Lid Reveals Vinyl Record Player
- AM/FM Radio with Rotary Tuner
- 3 Speed Turntable 33-1/3, 45, 78 RPM
- Auto-Stop Function Increases Life of the Needle
- Built-in Stereo Speakers
- Ceramic Cartridge
- Weight: 22 Pounds
- Unit Dimensions: 20.08" x 13.39" x 8.86"
- Color: Brown Wood (Maple Burst)

NEW



BLUETOOTH VINTAGE CLASSIC STYLE TURNTABLE WIRELESS MUSIC STREAMING, AM/FM RADIO, USB RECORD ABILITY, AUX (3.5MM) INPUT

PTT30BK

NEW



PTT30WD

WOOD COLOR FINISH

- Classic Style Turntable with Modern Technology
- Built-in Bluetooth 3.0 for Wireless Music Streaming
- Compatible with All of Your Favorite Bluetooth Devices (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Aux (3.5mm) Input Connector Jack
- AM/FM Radio
- Easy-to-Use with Rotary Controls
- USB Record Ability: Connect to PC (Save and Edit Music)
- Auto-Stop Function Increases Life of the Needle
- Variable Speed Selector: 33-1/3, 45, 78 RPM
- Built-in Stereo Speakers
- RCA Output Connector Jacks
- Ceramic Cartridge with Collapsible Lid Case Design
- Includes: USB Connection Cable, RCA to 3.5mm Connection Cable and AC Power Adaptor
- Unit Dimensions: 20.08" x 13.39" x 8.86"
- Color: Black Wood
- AC Power 120V

PVTTBT6

BLUETOOTH CLASSIC VINYL RECORD PLAYER TURNTABLE WITH VINYL TO MP3 RECORDING, AUX INPUT, RCA OUTPUT, BUILT-IN RECHARGEABLE BATTERY & SPEAKERS

- Classic Style with Modern Technology
- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Enabled Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Ability to Convert Vinyl into MP3 Files
- Turns Your Records into Digital Music Files
- Includes Free Music Editing Software Included
- 3 Speed Turntable: 33, 45 and 78 RPM
- Aux (3.5mm) Line-in Jack and Stereo RCA Output
- Built-in Rechargeable Battery for Portability
- Built-in Stereo Speakers
- AC Power Adapter Included
- Durable Handmade Wooden Cabinet
- Ceramic Stereo Cartridge
- Works with Mac & PC
- Dimensions: 14.0" x 10.8" x 5.2"



PVTTBT6OR



PVTTBT6BK



PVTTBT6BR

PVTTBT8

BLUETOOTH CLASSIC VINYL RECORD PLAYER TURNTABLE WITH VINYL TO MP3 RECORDING, AUX INPUT, RCA OUTPUT, BUILT-IN RECHARGEABLE BATTERY & FOLD-OUT SPEAKERS

- Classic Style with Modern Technology
- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Enabled Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Ability to Convert Vinyl into MP3 Files
- Includes Free Music Editing Software Included
- 2 Speed Turntable: 33 and 45 RPM
- Aux (3.5mm) Line-in Jack and Stereo RCA Output
- Built-in Rechargeable Battery for Portability
- Fold-Out Stereo Speakers
- AC Power Adaptor Included
- Durable Handmade Wooden Cabinet
- Ceramic Stereo Cartridge
- Works with Mac & PC
- Dimensions: 17.3" x 10.8" x 4.3"



PVTTBT8BK



PVTTBT8OR

NEW



PVTTBT8BR

PVTT2U

RETRO BELT-DRIVE TURNTABLE WITH USB-TO-PC CONNECTION, RECHARGEABLE BATTERY (ORANGE COLOR)

- 3 Speed Turntable: 33, 45, 78 RPM
- Ceramic Stereo Cartridge
- 45 RPM Adapter Included
- Two Built-in Stereo Anti-Magnetic Speakers
- USB Port For Connection to PC
 - Convert Vinyl to MP3
- Audacity Audio Editing and Conversion Software
- Stereo RCA Output
- Built-in Rechargeable Battery
- Dimensions: 10.63" x 13.78" x 4.33"



PVTT2UOR



PVTT2UGR



PVTT2UBK



PVTT2UWD

PTDCS3UIP

CLASSICAL TRUMPET HORN TURNTABLE/PHONOGRAPH WITH AM/FM RADIO CD/CASSETTE/USB PLAYERS & DIRECT TO USB RECORDING

- Acoustic Classic-Style Trumpet Horn
- Phono, CD, Cassette & AM/FM Radio
- Belt Driven Turntable
- (2) USB Functions:
 - USB Record Function: Turns Vinyl into MP3s
 - Play Music Files via USB Flash
- Built-in Stereo Speakers
- 3 Speed Turntable 33-1/3, 45, 78 RPM
- Play Your Favorite MP3 Song from USB Flash Drives
- CD, MP3, CD-R/CD-RW Disc Compatible
- Front-Loading Single CD Drawer
- Ceramic Stereo Cartridge
- Headphone Jack
- RCA Line IN
- 110 Volt AC Power
- Includes Wireless Remote Control & 45 RPM Adaptor
- Dimensions: 15.55" X 11.81" X 31.49"



PVNP4CD

VINTAGE PHONOGRAPH HORN TURNTABLE WITH CD, CASSETTE, AM/FM, AUX-IN, USB-TO-PC RECORDING

- Handmade High Quality Wood Veneer Cabinet
- Speaker: Full Size Brass Horn
- 3 Speed Turntable: 33, 45, 78 RPM
- USB Jack For PC Connection - Record Your Vinyl to MP3
- Drawer CD Player
- Analog AM/FM Tuner
- Slot-in Cassette
- Front Panel 3.5mm Aux-In Jack
- 3.5mm Headphone Jack
- Stereo RCA Output
- USB Cable and Free Audacity Software Included For Vinyl-to-MP3
- Dimensions: 31.49" x 21.65" x 19.69"



PTCD8UB

RETRO STYLE TURNTABLE PLAYS AM/FM RADIO, MP3/WMA VIA USB/SD CARD READERS, AND VINYL-TO-MP3 ENCODING FUNCTION (BLACK)

- Two Speed (33/45 RPM) Turntable
- 3" Built-In Speaker
- Plays CDs and MP3s from USB/SD
- AM/FM Radio (FM 88 - 108 Mhz, AM 540 - 1600 kHz)
- USB/SD Card Slots - Play MP3s or Encode Vinyl to MP3
- Converts Vinyl, Direct to USB/SD Card
- X-Bass Control System
- Radio Dial Scale With Amber Backlight
- Rotary Volume Control
- RCA Line Out
- 3.5mm Headphone Jack
- Wireless Remote Control
- LCD Display With Blue Backlight
- Power Source: AC 110
- Dimensions: 12.24" (W) x 12.36" (D) 6.61" (H)





PTR8UR



PTCDS1U



PTR8UB



PNGTT1R

PTR8UR

RETRO TURNTABLE WITH VINYL-TO-MP3 ENCODING, USB & SD MEMORY CARD READERS, AM/FM RADIO, AUX (3.5MM) INPUT, MP3 DIGITAL AUDIO FILE PLAYBACK (RED)

- Classic Style Turntable with Modern Technology
- Vinyl-to-MP3 Recording Function
- Turn Your Vinyl Records into Digital Music Files
- 3 Speed Selectable: 33, 45 & 78 RPM
- USB & SD Memory Card Readers
- MP3 Playback: Play Your Favorite Digital Music Files
- Dual Built-in 3" Stereo Speakers
- AM/FM Radio
- Bass Boost Control System
- Radio Dial Scale with Amber Backlight
- Simple Button & Rotary Volume Controls
- RCA (L/R) Line Output Connector Jack
- Aux (3.5mm) Input Connector Jack
- Headphone Jack (3.5mm)
- LCD Digital Display with Blue Backlight
- Includes 45 RPM Adaptor
- Radio Frequency: FM 88 - 108 MHz, AM 540 - 1600 kHz
- Dimensions: 15.98" (W) x 13.62" (D) x 8.66" (H)
- Power 110/220V, AC
- Color: Red

PTR8UB

RETRO TURNTABLE WITH VINYL-TO-MP3 ENCODING, USB & SD MEMORY CARD READERS, AM/FM RADIO, AUX (3.5MM) INPUT, MP3 DIGITAL AUDIO FILE PLAYBACK (BLACK)

PTCDS1U

CLASSICAL TURNTABLE WITH AM/FM RADIO CD/CASSETTE & USB RECORDING

- Phono/Radio/CD player/USB record/Cassette
- AM/FM Radio
- Front loading, single CD, drawer type
- CD/MP3/CD-R/CD-RW discs compatible
- USB record
- USB encoder that can easily record old vinyl or other Aux in audio onto Flash Drive
- Through USB Socket in MP3 Formats play Your Music (mp3 and wma)Pre-stored on ,USB Drive or MP3 Player Through USB Port
- 3 speed turntable 33-1/3, 45, 78 RPM
- Ceramic stereo cartridge
- Auto return
- Audio output power: 2.5W(max)
- 3.5mm Aux in jack
- Remote control for CD/USB
- 2 speaker
- AC Power
- Dimensions: 20.08"x13.39"x8.86"

PTCDS2UI

CLASSICAL TURNTABLE WITH AM/FM RADIO/ CD/ CASSETTE/ USB RECORDING & IPOD PLAYER DOCK

PNGTT1R

CLASSIC HORN PHONOGRAPH/TURNTABLE WITH USB-TO-PC CONNECTION AND AUX-IN (MAHOGANY)

- Classic Turntable With PC Recording Function
- USB Connection to Enable Recording to PC or MAC
- Files Can Be Saved In MP3, WAV, OGG, WMA, etc. Formats
- Auto Return
- Auto Stop
- RCA Stereo Audio Out
- RCA Stereo Audio In
- Ceramic Cartridge
- Belt Drive
- AC Power: 120 V 60 Hz
- 2 Mid-range/Bass Speakers, 1 Treble Speaker For Full Sound
- Color: Mahogany



PTCD7UIW



PVNTT6UMT



PTCD7UIB



PVNTR22



PVNTT6UMR

PTCD7UIW

RETRO VINTAGE TURNTABLE SYSTEM WITH BUILT-IN SPEAKERS - PLAYS AM/FM RADIO, CD, CASSETTE & MP3s - USB CARD & SD MEMORY SLOTS, VINYL-TO-MP3 ENCODING & BUILT-IN SLIDE-OUT IPOD/MP3 PLAYER COMPARTMENT (WOOD FINISH)

- AM/FM Radio
- 45 RPM Adaptor Included
- Power Source: AC 110/220V
- Front-Loading Single CD Drawer
- Illuminated Front Dial Display
- LCD Display with Blue Backlight
- Compatible with CD-R/CD-RW Discs
- Wireless Remote Control Playback Configuration
- 3.5mm AUX Input Jack & 3.5mm Headphone Jack
- Cassette Playback with Single Key Slot-in Design
- Three speeds (33-1/3, 45, and 78 RPM) to Ensure You Enjoy All Your Favorite Vinyl Records
- Dimensions: 15.98" (W) x 13.62" (D) x 8.66" (H)

PTCD7UIB

RETRO VINTAGE TURNTABLE SYSTEM WITH BUILT-IN SPEAKERS - PLAYS AM/FM RADIO, CD, CASSETTE & MP3s - USB CARD & SD MEMORY SLOTS, VINYL-TO-MP3 ENCODING & BUILT-IN SLIDE-OUT IPOD/MP3 PLAYER COMPARTMENT (BLACK)

PVNTT6UMT

VINTAGE STYLE PHONOGRAPH/TURNTABLE WITH USB-TO-PC CONNECTION (DARK MAPLE)

- 3 Speeds (33, 45, 72 RPM)
- Music Can Be Transferred to PC or Mac via USB Connection
- Files Can Be Saved In MP3, WAV, OGG, WMA, etc. Formats
- Handcrafted Wooden Cabinet
- High Quality Sounds
- Auto Stop Phonograph
- Ceramic Cartridge
- Belt Drive
- AC Power: 120 V 60 Hz
- RCA Line-Out for Audio Amplifier
- RCA Line-In for Auxillary Input
- Color: Dark Maple

PVNTT6UMR

VINTAGE STYLE PHONOGRAPH/TURNTABLE WITH USB-TO-PC CONNECTION (MAHOGANY)

PVNTR22

RETRO BELT-DRIVE TURNTABLE WITH THREE SPEEDS AND AM/FM RADIO

- 3 Speed Turntable: 33, 45, 78 RPM
- Ceramic Stereo Cartridge
- 45 RPM Adapter
- Two Built-in Stereo Speakers
- AM/FM Radio
- 3.5mm Aux-In Jack
- Stereo RCA Output
- AC Power Supply
- Dimensions: 12.60" x 10.63" x 4.72"



PVNT7U



PTCDS5U



PLTTB8UI

PVNT7U

CLASSIC VINTAGE RETRO STYLE TURNTABLE WITH VINYL-TO-MP3 RECORDING, CONNECT TO COMPUTER AND CREATE DIGITAL AUDIO FILES

- Classic Vintage Style Turntable with Modern Technology
- Vinyl-to-MP3 Conversion
- Converts Records into Digital MP3 Files
- Easy Transfer and Connection to Your Computer
- Three Speed Vinyl Compatibility: 33, 45, 78 RPM
- Adjustable Rotary Volume Control
- Two Built-in Full Range Speakers
- Automatic and Manual Stop Functions
- Ceramic Stereo Cartridge
- Wooden Cabinet Construction
- Stereo RCA (L/R) Output Connector Jacks
- Protective Dust Cover
- Ability to Connect to External Speakers
- Dimensions: 12.60" x 11.02" x 3.54" >Weight: 6.34 lbs. Accessories Included Audacity Audio/Music Editing Software
- USB Connection Cable
- 45 RPM Vinyl Record Adapter

PTCDS5U

VINTAGE TURNTABLE WITH CD/CASSETTE/RADIO/AUX-IN/USB/SD/MP3 AND VINYL-TO-MP3 ENCODING

- Two Speed (33/45 RPM) Turntable
- Plays CDs and MP3s from USB/SD
- AM/FM Radio (FM 88 - 108 Mhz, AM 540 - 1600 kHz)
- Cassette Playback With Single Key Design
- USB/SD Card Slots - Play MP3s or Encode Vinyl to MP3
- Converts Vinyl, Cassette Direct to USB/SD Card
- 3.5mm Auxillary Input Jack
- Extra Bass Control System
- Dial Scale With Illumination
- Rotary Volume Control
- Remote Control for CD with 12 Buttons
- 3.5mm Headphone Jack
- LCD Display With Blue Backlight
- Power Source: AC 110 / 220 V
- Dimensions: 15.98" (W) x 13.62" (D) x 8.66" (H)

PLTTB8UI

CLASSICAL VINYL TURNTABLE RECORD PLAYER WITH PC ENCODING/IPOD PLAYER/AUX INPUT & DUAL FOLD-OUT SPEAKER SYSTEM

- Rugged suitcase with Dual fold-out speakerS
- USB connection to enable recording with PC
- Can be saved with MP3/WAV and OGG VORBIS in the computer
- Auto return
- Auto Stop Phonograph
- Headphone output
- 110 Volt AC power
- 45 rpm adaptor included Software, USB cable & Aux in cable & AC adapter
- Dimensions: 20.62" x 13.14" x 7.24"



AUTHENTIC CLASSICAL THEMED HOME TELEPHONE SYSTEM - INTEGRATED SPEAKER & 3.5MM AUDIO INPUT JACK FOR USE WITH IPHONES, ANDROIDS, BLACKBERRY AND ANY AUDIO DEVICE

PRT35I

- Tone/Pulse Switch
- Built-in iPhone Dock
- Last Number Redial & Flash Function
- Classic Design with Modern Technology
- Ringer High/Low Ringer Volume Selection
- Transfer Between Landline And Mobile Phones
- Eliminate up to 99% of Wireless Device Radiation
- Compatible with Mobile/Smartphones with 3.5mm Jacks
- Handcrafted Real Wood Base With Brushed Copper Accents
- One Button Pick-Up/Hang-Up Landline And Mobile Phone, Directly From Dial Pad



RETRO THEMED COUNTRY-STYLE RETRO ANTIQUE WALL-MOUNT PHONE

PRT45

- Tone/Pulse Switch
- Touch-Tone Buttons
- Last Number Redial Function
- Classic Design with Modern Technology
- Ringer High/Low Ringer Volume Selection
- Functional Crank Handle And Box, As Introduced In The 1920s
- Handcrafted Wood and Veneer Construction With Brushed Bronze-Plated Hardware
- Country Wall Phone with Classic Design: Authentic Reproduction of Early American Heritage Telephones

Microphones



PPMIK



PDMIK1



PDMIK2



PDMIK4



PDMIC58



PDMIC78

PPMIK

DYNAMIC MICROPHONE

- Unidirectional Pickup Pattern
- Durable Metal Construction
- Clear, Transparent Sound
- Frequency Response: 50Hz-12kHz
- Impedance: 600 Ohms
- Sensitivity: -74 +/- 3dB
- On/Off Switch for Onstage Control
- 15 Foot XLR (F) - 1/4" (M) Microphone cable

PDMIK1

PROFESSIONAL MOVING COIL DYNAMIC HANDHELD MICROPHONE

- Moving Coil Dynamic Uni-Directional Element
- Steel Mesh Ball Shaped Grill
- Frequency Response: 50Hz~15KHz
- 600 Ohm Output Impedance (+/-)30%
- Microphone Sensitivity: -54db (+/-)3db(0dB=1V/Pa @ 1KHz)
- On/Off Broadcasting Switch
- 6.5 Foot XLR (F) - 1/4" (M) Microphone cable with 300 Ohms Outputs
- Microphone Dimensions: 6.7" x 1.7" x 0.3"

PDMIK2

PROFESSIONAL MOVING COIL DYNAMIC HANDHELD MICROPHONE

- Moving Coil Dynamic Uni-Directional Element
- Durable Zinc Alloy Metal Construction
- Steel Mesh Ball Shaped Grill
- Frequency Response: 50Hz~15KHz
- 600 Ohm Output Impedance (+/-)30%
- Microphone Sensitivity: -54db (+/-)3db(0dB=1V/Pa @ 1KHz)
- On/Off Broadcasting Switch
- 15 Foot XLR (F) - 1/4" (M) Microphone cable with 600 Ohms Outputs
- Microphone Dimensions : 7.7" x 0.8" x 1.0"

PDMIK4

DYNAMIC MICROPHONE WITH CARRY CASE

- Unidirectional Pickup Pattern
- Durable Metal Construction
- Clear, Transparent Sound
- Frequency Response: 50Hz~15000Hz
- Neodymium Magnet Designed for High Output
- Sensitivity: -73 +/- 3dB
- Mic Body Material: Zinc Alloy
- Impedance: 600 Ohms
- On/Off Switch for Onstage Control
- Rugged Carrying Case
- 15 Foot XLR (F) - 1/4" (M) Microphone cable

PDMIC58

PROFESSIONAL MOVING COIL DYNAMIC HANDHELD MICROPHONE

- Moving Coil Dynamic Uni-Directional Element
- Durable Zinc Alloy Metal Construction
- Steel Mesh Ball Shaped Grill
- Frequency Response: 50Hz~15KHz
- 600 Ohm Output Impedance (+/-)30%
- Microphone Sensitivity: -54dB
- (+/-)3db(0dB=1V/Pa @ 1KHz)
- 15 Foot XLR (F) - 1/4" (M) Microphone cable with 600 Ohms Outputs

PDMIC78

PROFESSIONAL MOVING COIL DYNAMIC HANDHELD MICROPHONE

- Moving Coil Dynamic Uni-Directional Element
- Durable Zinc Alloy Metal Construction
- Steel Mesh Ball Shaped Grill
- Frequency Response: 50Hz~15KHz
- 600 Ohm Output Impedance (+/-)30%
- Microphone Sensitivity: -54dB
- (+/-)3db(0dB=1V/Pa @ 1KHz)
- 15 Foot XLR (F) - 1/4" (M) Microphone cable with 600 Ohms Outputs



PDMI KC45BK



PDMI KC20SL



PDMI C45



PDMI KC20BK



PDMI C35



PDMI KC5

PMIKC45BK

HANDHELD VOCAL CONDENSER MICROPHONE W/ 15FT XLR-TO-1/8" CABLE & 1/4" ADAPTOR

- Element: Electret Condenser
- Polar Pattern: Cardioid
- Live condenser vocal Microphone
- Heavy Duty Metal Body
- Frequency Response: 30Hz-20kHz
- Sensitivity: -41dB \pm 1dB (0dB = 1V/Pa @ 1kHz)
- Max SPL Level: 125dB SPL (@ 1 kHz 0dB THD = 1%)
- Signal-to-Noise Ratio: =22dB (1 EC 581-5)
- Output Impedance: 350 Ω (\pm 30%)
- Power Supply:DC 1.5 V AA Battery
- Powered or Phantom Power
- Includes: 15ft XLR-to-3.5mm Cable, 3.5mm-to-1/4" Adaptor, 1 AA Battery
- Dimension: 2" x 7.5"

PMIKC20BK

VOCAL CONDENSER MICROPHONE FOR COMPUTER , CONDENSER KARAOKE MICROPHONE , OR PA AMPLIFIER (BLACK COLOR)

- Element: Electret Condenser
- Polar Pattern: Cardioid
- Frequency Response: 30Hz-18kHz
- Sensitivity: -41dB \pm 1dB (0dB = 1V/Pa @ 1kHz)
- Signal-to-Noise Ratio: =66 dB
- Max SPL levels: 120dB SPL
- Output Impedance: 3500 (\pm 30%)
- On/Off Switch, 8ft Cable W/ 3.5mm Jack
- Dimension: 2" x 7.5"
- Weight: 146g
- Note: Requires External Power Source From Computer PA Amplifier

PMIKC20SL

VOCAL CONDENSER MICROPHONE FOR COMPUTER , CONDENSER KARAOKE MICROPHONE , OR PA AMPLIFIER (SILVER COLOR)

- Element: Electret Condenser
- Polar Pattern: Cardioid
- Frequency Response: 30Hz-18kHz
- Sensitivity: -41dB \pm 1dB (0dB = 1V/Pa @ 1kHz)
- Signal-to-Noise Ratio: =66 dB
- Max SPL levels: 120dB SPL
- Output Impedance: 3500 (\pm 30%)
- On/Off Switch, 8ft Cable W/ 3.5mm Jack
- Dimension: 2" x 7.5"
- Note: Requires External Power Source From Computer PA Amplifier

PDMIC35

ELECTRET CONDENSER SHOTGUN MICROPHONE WITH 16 FT. XLR TO 1/4" CABLE & WINDSCREEN

- Element: Electret Condenser
- Polar Pattern: Super Cardioid
- Low noise circuitry
- Frequency Response: 20Hz~20kHz
- Short Range Sensitivity: -45dB (0 dB = 1V/Pa @ 1kHz)
- Long Range Sensitivity: -38dB (0 dB = 1V/Pa @ 1kHz)
- Max SPL Level: 132dB SPL (1kHz THD 1%)
- Signal-to-Noise Ratio: 77dB (1kHz @ 1 Pa)
- Output Impedance: 75 Ω
- Power Supply: +48V Phantom Power
- Features: On/Off Switch, Long Distance Range, Side Rejection

PDMIC45

SMALL DIAPHRAGM ELECTRET CONDENSER MICROPHONE WITH 20 FT XLR TO 1/4" CABLE

- Element: Electret Condenser
- Polar Pattern: Cardioid
- Frequency Response: 20Hz~16kHz
- Short Range Sensitivity: -45dB (0 dB = 1V/Pa @ 1kHz)
- Long Range Sensitivity: -38dB (0 dB = 1V/Pa @ 1kHz)
- Max SPL Level: 149dB SPL (1kHz THD 1%)
- Signal-to-Noise Ratio: 85dB (1kHz @ 1 Pa)
- Output Impedance: 1K \sim 2.3K Ω
- Power Supply: DC 1.5V AA Battery Powered Or Phantom Power
- Includes: 20ft XLR to 1/4" Cable, Mic Stand Clip Included

PDMIKC5

PROFESSIONAL TABLE TOP CONDENSER MICROPHONE

- Adjustable Gooseneck Type Mast
- Cardioid Pickup Rejects Off-Axis Sound
- Durable Metal Tube And Bottom Base And PVC Plastic Construction
- Frequency Response: 40Hz~16kHz
- 200 Ohm Output Impedance
- Microphone Sensitivity: -40dB (+/-)2dB
- Reference Sound Receiving Distance: 20~80cm
- Power Supply: Dc 9 Volt
- On/Off Broadcasting Switch
- 26.2 foot XLR (F) - 1/4" (M) Microphone cable with 600 Ohms Outputs



PDMICKT80



PDKM7



PMKSTR1

NEW



PMKSF32



PMSAX1

PDMICKT80

DYNAMIC CARDIOID VOCAL MICROPHONES WITH CLIPS, 3-PACK

- Includes 3 microphones and clips
- Impedance: 600 Ohms outputs
- Easy transport carrying case
- Steel mesh, ball-shaped grill
- Frequency Response: 50Hz ~ 12kHz
- Sensitivity(0dB=1vpa@1kHz): -55±dB
- Durable zinc alloy metal construction
- Moving coil, dynamic Uni-directional element
- High signal output lets your voice cut through
- Dedicated vocal and instrument mic
- delivers unbelievable quality
- High-quality components and exceptionally rugged construction ensure long life
- Dynamic vocal and instrument microphone with on/off switch for excellent studio and live performance

PDKM7

7 MICROPHONE WIRED DRUM KIT WITH CARRY CASE & MOUNTING ACCESSORIES

- S/N Ratio: 70dB
- Connector: Standard XLR
- Power Supply: Phantom 24-48V
- Polar Pattern: Uni-Directional
- Max Input SPL: NA/NA/130dB(@1kHz<1%T.H.D.)
- Output Impedance: 400Ω@±30%/500Ω@±30%/200Ω@±30%
- Sensitivity: -58dB(+/-)3dB/-53dB(+/-)3dB/-45dB(+/-)3dB
- Frequency Response: 50Hz-15kHz/50Hz-14kHz/50Hz-18kHz
- Compact Drum Microphones for Close & Precise Recording
- Universal Drum Mounts (Can be used on most standard drum rims)
- Element: Moving Coil Dynamic// Back Electret Condenser
- High-Performance Microphones Tuned to Capture Everything From Low-End Punch to Sensitive/Flat Sound
- Accessories: Windscreens, Carry Case, Mounting Brackets, Mic Holders
- Dimensions: 17.5' x 12' x 3.7'

PMKSTR1

UNIVERSAL MUSICAL INSTRUMENT SAXOPHONE VIOLIN GUITARS TRUMPET PIANO MICROPHONE WITH XLR PHANTOM POWER ADAPTER 48 VOLT WORKS FOR MOST INSTRUMENTS

- Adjustable Gooseneck Design
- Element: Back Electret Condenser
- Connector: Shure Connector
- Polar Pattern: Uni-Directional
- Frequency Response: 50Hz - 18kHz
- S/N Ratio: >70dB
- Sensitivity: -45dB +/- 3dB
- Output Impedance: 2K +/- 30%
- Max. Input SPL: 130dB
- Power Supply: 48V Phantom Power
- Accessories: Windscreen and Universal Instrument Clips
- Clips Included: Bass, Cello, Flute, Guitar,
- Piano, Sax, Violin, Universal
- Includes 48V XLR Phantom Power Adapter
- Works with Shure Systems
- Color: Black

PMKSF32

VIDEO/CAMERA CONDENSER SHOTGUN MICROPHONE WITH 3.5MM CONNECTOR

- Connector: Standard 3.5mm Plug
- Element: Back Electret Condenser
- Polar Pattern: Line and Gradient
- Frequency Response: 50Hz - 18kHz
- S/N Ratio: >70dB
- Sensitivity: -42dB +/- 3dB
- Output Impedance: 1K +/- 30%
- Max. Input SPL: 130dB
- Battery Powered: (4) 377 Button Cell (SR626SW) Included
- Accessories Included: Windscreen and Mic Holder
- Color: Dark Gray

PMSAX1

INSTRUMENT/SAXOPHONE XLR CONDENSER MICROPHONE

- Trumpet Saxophone Silent Brass And Most Wind Instrument
- Element: Back Electret Condenser
- Polar Pattern: Uni-directional
- Frequency Response: 50Hz- 16KHz
- Sensitivity: -46dB± 3dB
- Output Impedance: 250Ω± 30%
- Max.Input SPL: 130dB
- Power Supply: Phantom 48V
- Cable: Φ2*3.0M
- Weight: 56g
- Dimension: 15mm
- Connector: XLR Plug
- Color: Black
- Accessories: Windscreen Clip, Adaptor for Phantom 48V



PCMLVC33



PLM3



PLMSH45



PLMC15



PLMS30

PCMLVC33

LAVALIER OMNIDIRECTIONAL CONDENSER MICROPHONE

- 1/4" Plug for Pro Audio Devices
- High-quality condenser miniature lavalier microphone
- Great for video use, also ideal for
- aerobics/dance/sports instructors
- 3.5mm mini-plug Adapter Included for use with most cameras and home recording systems
- Integrated 6-foot cable
- Condenser element
- frequency response:30Hz- 20Hz

PLMC15

LAVALIER ELECTRET OMNIDIRECTIONAL CONDENSER MICROPHONE

- Element; Condenser
- Polar Pattern; Omnidirectional
- Full, 360-Degree Coverage. Clip It On And Go, Without Worrying To Much About Where It's Pointing
- Professional Performance Microphone
- 6m Shielded Low Noise Cable
- Fixed Tie-Clip
- Sensitivity: 3.5mv/Pa
- Impedance: 1000 ohm
- Frequency Response: (100-15000) Hz
- Powered By AA Battery (Not Included)

PLM3

WIRED LAVALIER 3.5MM/ 1/4" UNI-DIRECTIONAL MICROPHONE

- Element: Back Electret Condenser
- Polar Pattern: Uni-directional
- Frequency Response: 50Hz- 16KHz
- Sensitivity: -46dB± 3dB
- Output Impedance: 1kΩ± 30%
- Max.Input SPL: 130dB
- Power Supply: DC 1.5V-10V
- Cable: 2 x 1.0M
- Weight: 21g/18g
- Dimension: 12.2mm
- Connector: Standard 3.5mm + 1/4" Adaptor
- Color: Black
- Accessories: Windscreen,Clip

PLMS30

WIRED LAVALIER MINI XLR UNI-DIRECTIONAL MICROPHONE (WORKS WITH SHURE SYSTEM)

- Color: Black
- Weight: 21g/18g
- Dimension: 12.2mm
- Max.Input SPL: 130dB
- Sensitivity: -46dB± 3dB
- Connector: 4pin Mini XLR
- Power Supply: DC 1.5V-10V
- Output Impedance: 1kΩ± 30%
- Accessories: Windscreen,Clip
- Polar Pattern: Uni-directional
- Frequency Response: 50Hz- 16KHz
- Element: Back Electret Condenser

PLM43

DUAL ELECTRET CONDENSER CARDIOID LAVALIER MICROPHONE W/ WINDSCREENS & CLIP FOR STANDARD 3.5MM SYSTEM

- Element: Back Electret Condenser
- Polar Pattern: Cardioid
- Frequency Response: 50Hz-16kHz
- S/N Ratio: >70dB
- Sensitivity: -45dB (±3dB)
- Output Impedance: 2.2KO (±30%)
- Maximum SPL: 130dB
- Power Supply: External DC 1.5V-9V
- Power Supply (Bodypack Transmitter or PLMC15 In-line Battery Supply)
- Cable: 3ft
- Weight: 50g
- Dimension: 6 mm
- Connector: Standard 1/8" (3.5mm) plug (Includes 1/4" Adapter)
- Color: Black
- Accessories: Windscreen, clip

PLMSH45

DUAL ELECTRET CONDENSER CARDIOID LAVALIER MICROPHONES W/ WINDSCREENS & CLIP FOR SENNHEISER BELT PACK SYSTEM

PLMS48

DUAL ELECTRET CONDENSER CARDIOID LAVALIER MICROPHONE W/ WINDSCREENS & CLIP FOR SHURE SYSTEM



PMEM1



PMEMS13



PMHMS20



PMEMKT5

PMEM1

HEADWORN OMNI-DIRECTIONAL MICROPHONE (3.5MM / 1/4")

- Color: Beige
- Wired Boom
- Cable Length: 1.2M
- Max. Input SPL: 130dB
- Sensitivity: -44dB± 3dB
- Power Supply: DC 1.5V-10V
- Output Impedance: 1kΩ± 30%
- Polar Pattern: Omni-directional
- Frequency Response: 20Hz- 20KHz
- Element: Back Electret Condenser
- Weight: 10g (not including Adaptor)
- Connector: Standard 3.5mm Plug (or 1/4" Adaptor)
- Accessories: 2 Windscreens & 1/8" Stereo Jack to 1/4" Adaptor

PMEMS10

IN EAR MINI XLR OMNI-DIRECTIONAL MICROPHONE (FOR SHURE SYSTEM)

PMEMSN12

EAR-HANGING OMNI-DIRECTIONAL MICROPHONE, OMNI-DIRECTIONAL (FOR SENNHEISER SYSTEMS)

- Wired Boom
- Connector: Sennheiser Plug
- Element: Back Electret Condenser
- Polar Pattern: Omni-Directional
- Frequency Response: 20Hz - 20kHz
- S/N Ratio: >70dB
- Sensitivity: -42dB +/- 3dB
- Output Impedance: 2K +/- 30%
- Max. Input SPL: 130dB
- Power Supply: DC 1.5 - 9V
- Works with Sennheiser Systems
- Windscreen Included

PMEMS13

4-PIN XLR EAR-HANGING OMNI-DIRECTIONAL MICROPHONE, OMNI-DIRECTIONAL (FOR SHURE SYSTEMS)

PMEM14

EAR-HANGING OMNI-DIRECTIONAL MICROPHONE, OMNI-DIRECTIONAL (FOR STANDARD 3.5MM SYSTEMS)

PMHMS20

WIRED HEADSET BOOM MINI XLR OMNI-DIRECTIONAL MICROPHONE

- Weight: 15g
- Max. Input SPL: 130dB
- Cable Length: 1.2Meters
- Sensitivity: -45dB± 3dB
- Connector: 4 Pin Mini XLR
- Power Supply: DC 1.5V-10V
- Output Impedance: 1kΩ± 30%
- Polar Pattern: Omni-directional
- Frequency Response: 20Hz- 20KHz
- Element: Back Electret Condenser
- Color: Beige/Matches Various Skin Types
- Accessories: 2 Windscreens

PMHM2

OMNI-DIRECTIONAL HEAD WORN MICROPHONE (3.5MM / 1/4" CONNECTORS)

PMEMKT5

WIRED HEADWORN BOOM OMNIDIRECTIONAL MINI CONDENSER MICROPHONE WITH ADAPTERS FOR SENNHEISER, AUDIO TECHNICA AKG-TYPE, SHURE AND PYLE PLUGS

- Detachable cable
- Color: Beige (tan)
- Cable Length: 48 inches
- Headset can fit over either ear
- Micro-miniature condenser with 2.5mm capsule
- Adjustable drip ring helps protect mic element from sweat
- Fits left or right ear and retaining band holds mic in place
- Includes Two windscreens, clothing cable clip and carry case
- Omnidirectional pickup pattern, off-axis linear frequency response
- Four cable adapters for compatibility with most popular wireless transmitters
- Includes adapters for Sennheiser type 3.5mm plug, Samson, Audiotechnica, AKG type 3pin Mini XLR, Shure type 4pin Mini XLR, Pyle 3.5mm Plug, beltpack systems (Audiotechnica 4pin not included) Available by emailing: parts@pyleaudio.com



PMICR42SL

PMICR42BK

PMICR42RD



PMICR68SL

PMICR68BK

PDMICR42SL

CLASSIC RETRO VINTAGE STYLE DYNAMIC VOCAL MICROPHONE WITH 16FT XLR CABLE (SILVER)

- Element: Moving Coil Dynamic
- Polar Pattern: Cardioid
- Frequency Response: 30Hz-15kHz
- Sensitivity: -50dB (± 3dB @ 1kHz)
- Output Impedance: 6000 (± 15%)
- Vintage Retro Design
- Self-Tensioning Swivel Mount
- On/Off Switch
- Includes: 16ft XLR Cable, Built-in Mic Stand Adaptor
- Dimension: 2.2" x 3.1" x 7.4"

PDMICR42BK

BLACK

PDMICR42R

RED

PDMICR68SL

CLASSIC RETRO DIE CAST METAL VINTAGE STYLE DYNAMIC VOCAL MICROPHONE WITH 16FT XLR CABLE (SILVER)

- Element: Moving Coil Dynamic
- Polar Pattern: Cardioid
- Frequency Response: 50Hz-15kHz
- Sensitivity: -51dB (±3dB @ 1kHz)
- Output Impedance: 6000 (±15%)
- Rugged die-cast casing for reliability under rigorous conditions
- Metal Construction and Vintage Design
- On/Off Switch,
- Mesh Metal Grill
- Internal Cartridge Shock Mount
- Self-tensioning Swivel Mount
- Includes: Carrying Case, 16ftXLR Cable, Built-in Mic Stand Adaptor
- Dimension: 2.2" x 3.1" x 7.4"

PDMICR68BK

BLACK



PMEM8



PLM31



PMKWR4

NEW



PMKWPR8

PMEM8

CARDIOID CONDENSER HEADSET MICROPHONE, FLEXIBLE WIRED BOOM (FOR STANDARD 3.5MM WIRELESS MIC SYSTEMS)

- Wired Boom
- Element: Back Electret Condenser
- Polar Pattern: Cardioid
- Frequency Response: 50Hz-16kHz
- S/N Ratio: >70dB
- Sensitivity: -45dB (±3dB)
- Output Impedance: 2.2KO (±30%)
- Maximum Input SPL: 130dB
- Power Supply: External DC 1.5V-9V Power Supply (Bodypack Transmitter or PLMC15 In-Line Battery Supply)
- Requires Phantom Power Supply

PMEMSH15

(SCREW LOCK 3.5MM CONNECTOR JACK) FOR SENNHEISER MIC SYSTEMS

PMEMS23

(4-PIN MINI XLR CONNECTOR JACK) FOR SHURE MIC SYSTEMS

PLM31

CARDIOID CONDENSER HEADSET MICROPHONE, FLEXIBLE WIRED BOOM (STANDARD 3.5MM CONNECTOR JACK) FOR BELT PACK MIC SYSTEMS

- Comfort Designed Wire Frame & Wired Boom For Secure Fit
- Element: Back Electret Condenser
- Polar Pattern: Cardioid
- Frequency Response: 50Hz-16kHz
- S/N Ratio: >70dB
- Sensitivity: -45dB (±3dB)
- Output Impedance: 2.2KO (±30%)
- Maximum SPL: 130dB
- Power Supply: External DC 1.5V-9V (Bodypack Transmitter or PLMC15 In-line Battery Supply)

PLMSH34

(SCREW LOCK 3.5MM CONNECTOR JACK) FOR SENNHEISER MIC SYSTEMS

PLMS40

(4-PIN MINI XLR CONNECTOR JACK) FOR SHURE MIC SYSTEMS

PMKWR4

FLEXIBLE WATERPROOF/SWEATPROOF HEADSET MICROPHONE FOR EXERCISE AND FITNESS, CONDENSOR, OMNI-DIRECTIONAL, STANDARD 3.5MM CONNECTOR JACK, FITNESS +

- Flexible Wrap-Around Style for All Shapes & Sizes
- Perfect for Fitness Training, Aerobics and Exercise
- Marine Grade Construction for Water Resistance
- Waterproof and Sweatproof for Active Performances
- Wired Boom
- Connector: Standard 3.5mm plug and 1/4" Adapter
- Element: Back Electret Condenser
- Polar Pattern: Omni-Directional
- Frequency Response: 20Hz - 20kHz
- S/N Ratio: >70dB
- Sensitivity: -42dB +/- 3dB
- Output Impedance: 2K +/- 30%

PMKWP2

(SCREW LOCK 3.5MM CONNECTOR JACK) FOR SENNHEISER MIC SYSTEMS

PMKWS3

(4-PIN MINI XLR CONNECTOR JACK) FOR SHURE MIC SYSTEMS

PMKWPR8

FLEXIBLE WATERPROOF/SWEATPROOF HEADSET MICROPHONE FOR EXERCISE AND FITNESS, CONDENSOR, OMNI-DIRECTIONAL, STANDARD 3.5MM CONNECTOR JACK, TRAINER +

- Flexible Wrap-Around Style for All Shapes & Sizes
- Perfect for Fitness Training, Aerobics and Exercise
- Marine Grade Construction for Water Resistance
- Waterproof and Sweatproof for Active Performances
- Wired Boom
- Connector: 3.5mm Plug and 1/4" Adapter
- Element: Back Electret Condenser
- Polar Pattern: Omni-Directional
- Frequency Response: 20Hz - 20kHz
- S/N Ratio: >70dB
- Sensitivity: -42dB +/- 3dB
- Output Impedance: 2K +/- 30%

PMKWP6

(SCREW LOCK 3.5MM CONNECTOR JACK) FOR SENNHEISER MIC SYSTEMS

PMKWS7

(4-PIN MINI XLR CONNECTOR JACK) FOR SHURE MIC SYSTEMS

Microphone Systems

PDWM94

DUAL FUNCTION WIRELESS OR WIRED MICROPHONE SYSTEM

- Complete Wireless System
- Microphone Directivity: Unidirectional
- Can also be used as a Wired Mic
- 3 Position Mic Switch
- Operation range: Up To 45 ft.
- 12 Foot XLR (F) - 1/4" (M) Microphone cable included
- Batteries Included



PDWM96

LAVALIER WIRELESS MICROPHONE SYSTEM

- Bodypack Transmitter w/Clip-on Lavalier Microphone
- Receiver w/ 1/4" Plug
- Volume Control
- Super Compact Design
- Operation range: Up To 60 ft.
- Batteries Included



DUAL FUNCTION WIRELESS/WIRED MICROPHONE SYSTEM

- Can also be used as a Wired Mic
- Microphone Directivity: Unidirectional
- 3 Position Mic Switch
- Detachable Mic Antenna
- Operation range: 45-90 ft.
- Signal LED Indicator
- Telescoping Receiver Antenna
- 12 ft. XLR to 1/4" Mic Cable included
- 4 ft. 1/8" to 1/4" Audio Cable included
- Dimensions: 4.72" x 3.15" x 1.10"

PDWM100

PDWM1800

PREMIER SERIES PROFESSIONAL UHF WIRELESS HANDHELD MICROPHONE SYSTEM

- LED Power Indicator
- Operation Range: Up to 164 ft.
- Audio Level Indicator for wireless system audio signal level
- RF Signal Indicator for transmitter signal strength
- UHF Signal for wider range and less obstruction
- Adjustable volume control
- 1/4" audio output jack
- XLR balanced output jack
- AC/DC adapter power jack
- Power Supply: 110/220V
Receiver Specifications</
- Image & Spurious Rejection: >70 dB
- Receiving Sensitivity: -105 dB
- Signal / Noise Ratio: -105dB
- Border Upon Channel Rejection: >70 dB
- T.H.D.: < 1%
- Audio Output Level: 0-300 mV
- Power Requirements: 13-15V DC nominal 300 mA
- Dimensions 6.8" x 5.3" x 1.7"
Hand-held Transmitter Specifications</
- RF Output: >10 dBm
- Modulation Type: FM
- Max Deviation: ± 40 KHz



PREMIER SERIES PROFESSIONAL UHF WIRELESS HANDHELD MICROPHONE SYSTEM WITH SELECTABLE FREQUENCIES

- LED Power Indicator & Channel Display
- Operation Range: Up to 164 ft.
- Audio Level Indicator for wireless system audio signal level
- Includes one handheld wireless dynamic microphone
- RF Signal Indicator for transmitter signal strength
- UHF Signal for wider range and less obstruction
- SET function for channel selection
- 8 separate channels to choose from
- Adjustable volume control
- 1/4" audio output jack
- XLR balanced output jack
- AC/DC adapter power jack
- Power Supply: 110/220V
Receiver Specifications</
- Image & Spurious Rejection: >70 dB
- Receiving Sensitivity: -105 dB
- Signal / Noise Ratio: -105dB
- Border Upon Channel Rejection: >70 dB
- T.H.D.: < 1%
- Audio Output Level: 0-300 mV
- Power Requirements: 13-15V DC nominal 300 mA
- Dimensions: 6.8 x 5.3 x 1.7 in
Hand-held Transmitter Specifications</
- Displays channel and selection data
- RF Output: >10 dBm
- Modulation Type: FM
- Max Deviation: ± 40 KHz

PDWM1902



- LED Power Indicator & Channel Display
- Operation Range: Up to 164 ft.
- UHF signal system for wider range and less obstruction
- Audio Level Indicator for wireless system audio signal level
- RF Signal Indicator for transmitter signal strength
- SET function for channel selection
- Adjustable volume control
- 1/4" audio output jack
- XLR balanced output jack
- AC/DC adapter power jack
- Power Supply: 110/220V Receiver Specifications</
- Image & Spurious Rejection: >70 dB
- Receiving Sensitivity: -105 dB
- Signal / Noise Ratio: -105dB
- Border Upon Channel Rejection: >70 dB
- T.H.D.:< 1%
- Audio Output Level: 0-300 mV
- Power Requirements: 13-15V DC nominal 300 mA
- Dimensions 6.8 x 5.3 x 1.7 in Body-Pack Transmitter Specifications</
- Includes wireless body-pack transmitter, headset & lavalier microphones
- RF Output: >10 dBm
- Modulation Type: FM
- Max Deviation: ± 40 KHz
- Spurious Emission: >55 dBc
- Nominal Current Drain:< 40mA
- Power Requirements: 2 x 1.5V AA

PDWM2000

DUAL VHF WIRELESS MICROPHONE SYSTEM

- Professional VHF Wireless System
- Two Microphones Included
- Power On/Standby/Off Switch
- Red/Green LED to Identify Mics
- Dual Telescoping Receiver Antennas
- Dual AF Level Meters
- Channel Signal Indicators
- Dual Volume Controls

- 1/4" and XLR Mixed Outputs
- Operation range: Up To 90 ft.
- 110V/220V selectable
- Batteries and 1/4" Output Cables Included
- Dimensions: 16.54" W x 1.77"H x 8.66"D
- Wireless Frequencies: 210.15 MHz 215.50 MHz 174.80 MHz 180.80 MHz 212.60 MHz 190.10 MHz 214.20 MHz 193.00 MHz



PROFESSIONAL DUAL VHF WIRELESS HANDHELD MICROPHONE SYSTEM

PDWM2100

- Professional VHF 2 Channel Wireless System
- Dual Handheld Microphones Included
- Dual Telescoping Receiver Antennas
- Rotary Volume Controls with Digital Readout
- On/Off Broadcasting Switch
- Mixed ¼" Outputs
- Dynamic Range: 80dB
- Total Harmonic Distortion: 0.5%

- Frequency Response: 60Hz~12KHz
- Operation Range: 50-150 Meters
- Signal to Noise Ratio: 80dB
- Receiver Power Supply: AC 110V
- Microphone Power Source: 9 Volt
- Receiver Dimensions: 1.0" x 7.9" x 11.4"
- Microphone Dimensions: 9.6" x 1.9" x 1.3"

PDWM2115

VHF WIRELESS MICROPHONE RECEIVER SYSTEM WITH INDEPENDENT VOLUME CONTROL INCLUDES HANDHELD MICROPHONE AND BELT PACK TRANSMITTER WITH LAVALIER MICROPHONE

- VHF Narrow Band Receiver
- Dual Frequency Design (Channel A/B)
- High Signal/Noise Ratio Performance
- Broad Frequency Response Range & Low Distortion
- Independent Adjustable Volume Control
- Volume Control Indicators and Status Signals
- Audio Output Jacks
- Dual Independent Channel Antennas
- RF Signal and AF Signal LED Indicators
- Radio Frequency and Audio Frequency
- Includes Wireless Belt Pack Transmitter, Handheld & Lavalier Mics
RECEIVER SPECIFICATIONS
- Channel Frequency: 170-260MHz
- Frequency Stability: ±0.002%
- Sensitivity: -95dBm (S/N:12dB)
- S/N Ratio: >70dB
- RF Image Rejection:-75dB

- Neighboring Channel / Interference: >70dB
- Audio Dynamic Range:95dB
- Frequency Response: 50Hz-15KHz±3dB
- T.H.D.:<1%
- Operating Range: >50 meters
- Power Source: AC 220V / 50Hz
- Dimensions: 12.7€ x 8.5€ x 1.9€
-
TRANSMITTER SPECIFICATIONS
- Carrier Frequency:170-260MHz
- Frequency Stability: ±0.002%
- RF Power Output: >13dBm
- Harmonic at higher Degree:<60dB
- Modulation Degree: >30KHz
- Modulation Pattern: FM
- Power Current:<110mA
- Battery Type: DC 3V



FM WIRELESS MICROPHONE RECEIVER SYSTEM DUAL FREQUENCY WITH 2 HANDHELD MICS

PDWM2130

- Dual Frequency Design (Channel A/B)
- High Signal/Noise Ratio Performance
- Broad Frequency Response Range & Low Distortion
- LED Status Signal Indicators
- Dual Independent Channel Antennas
- On/Off Power Switch
- Includes 2 Handheld Microphones
- Receiver Specifications:
- Channel Frequency: 109~113MHz
- RF Sensitivity: 20dBm/î¼V
- S/N Ratio: 50dB

- Frequency Response:50~15KHz
- Audio Output Level: 10mV
- Power Supply Type: 9V DC/AC 110V or 220V
- Transmitter Specifications:
- Carrier Frequency:109~113MHz
- Tx Output Power: 10mW
- S/N Ratio: 75dB
- Modulation Mode: FM
- Maximum Deviation: 30KHz
- Battery Type: 3V

VHF FIXED FREQUENCY WIRELESS MICROPHONE SYSTEM, 2 HANDHELD MICS, INDEPENDENT ADJUSTABLE VOLUME CONTROLS



PDWM2135



- VHF Narrow Band Receiver System
- Dual Frequency Design (Channel A/B)
- High Signal/Noise Ratio Performance
- Broad Frequency Response Range & Low Distortion
- Independent Adjustable Volume Control
- Dual Independent Channel Antennas
- RF Signal and AF Signal LED Indicators
- Radio Frequency and Audio Frequency
- Includes (2) Handheld Microphones System Receiver: Channel Frequency: 174~216MHz
- Sensitivity: -95dBm (S/N:12dB)
- RF Image Rejection: -75dB
- Audio Dynamic Range: 95dB
- T.H.D.: <1%
- Frequency Stability: ±0.002%
- S/N Ratio: >70dB
- Neighboring Channel / Interference: >70dB--
- Frequency Response: 50Hz~15KHz ±3dB
- Power: AC 120V, 60Hz
- Receiver Dimensions (L x W x H): 8.07" x 5.75" x 1.64" Microphones: Carrier Frequency: 174~216MHz
- RF Power Output: >13dBm
- Modulation Degree: >30KHz
- Power Current: <110mA
- Frequency Stability: ±0.002%
- Harmonic at Higher Degree: <60dB
- Modulation Pattern: FM
- Battery Powered: Requires 2 x 'AA' Batteries

PDWM2140

VHF FIXED FREQUENCY WIRELESS MICROPHONE SYSTEM, HANDHELD MIC, BODY PACK TRANSMITTER, LAVALIER, HEADSET, INDEPENDENT ADJUSTABLE VOLUME CONTROLS



- VHF Narrow Band Receiver System
- Dual Frequency Design (Channel A/B)
- High Signal/Noise Ratio Performance
- Broad Frequency Response Range & Low Distortion
- Independent Adjustable Volume Control
- Dual Independent Channel Antennas
- RF Signal and AF Signal LED Indicators
- Radio Frequency and Audio Frequency
- Includes Handheld Microphone, Body-Pack Transmitter, Lavalier & Headset Mics System Receiver: Channel Frequency: 174~216MHz

- Sensitivity: -95dBm (S/N:12dB)
- RF Image Rejection: -75dB
- Audio Dynamic Range: 95dB
- T.H.D.: <1%
- Frequency Stability: ±0.002%
- S/N Ratio: >70dB
- Neighboring Channel / Interference: >70dB--
- Frequency Response: 50Hz~15KHz ±3dB
- Power: AC 120V, 60Hz
- Receiver Dimensions (L x W x H): 8.07" x 5.75" x 1.64" Transmitters: Carrier Frequency: 174~216MHz



VHF FIXED FREQUENCY WIRELESS MICROPHONE SYSTEM, 2 BODY PACK TRANSMITTERS, 2 LAVALIER MICS, 2 HEADSET MICS, INDEPENDENT ADJUSTABLE VOLUME CONTROLS

PDWM2145

- VHF Narrow Band Receiver System
- Dual Frequency Design (Channel A/B)
- High Signal/Noise Ratio Performance
- Broad Frequency Response Range & Low Distortion
- Independent Adjustable Volume Control
- Dual Independent Channel Antennas
- RF Signal and AF Signal LED Indicators
- Radio Frequency and Audio Frequency
- Includes (2) Body-Pack Transmitter, (2) Lavalier & (2) Headset Mics System Receiver: Channel Frequency: 174~216MHz
- Sensitivity: -95dBm (S/N:12dB)
- RF Image Rejection: -75dB
- Audio Dynamic Range: 95dB
- T.H.D.: <1%
- Frequency Stability: ±0.002%
- S/N Ratio: >70dB
- Neighboring Channel / Interference: >70dB
- Frequency Response: 50Hz~15KHz ±3dB
- Power: AC 120V, 60Hz
- Receiver Dimensions (L x W x H): 8.07" x 5.75" x 1.64" Transmitters: Carrier Frequency: 174~216MHz
- RF Power Output: >13dBm

PDWM2150

PROFESSIONAL DUAL TABLE TOP VHF WIRELESS MICROPHONE SYSTEM

- Professional VHF 2 Channel Wireless System
- Dual Table Top Microphones Included
- Dual Telescoping Receiver Antennas
- Dual Volume Controls
- On/Off Broadcasting Switch
- Mixed 1/4" Outputs
- Dynamic Range: 92dB
- Total Harmonic Distortion: 0.5%

- Frequency Response: 50Hz~16KHz
- Operation Range: 50-180 Meters
- Signal to Noise Ratio: 90dB
- Receiver Power Supply: AC 110/240V
- Microphone Power Source: 9 Volt (Battery Not Included)
- Receiver Dimensions: 1.7" x 16.5" x 7.3"
- Microphone Dimensions: 12.7" L x 4.9" W x 5.9" D



WIRELESS DUAL CHANNEL UHF MICROPHONE SYSTEM WITH 2 MICROPHONES

PDWM2400



- Receiver: </br>UHF system is perfect for large Events
- Foldable antennas
- Independent volume control for each microphone
- Power indicators for each microphone
- Sensitivity: < 2UV (12dB SINAD)
- Dynamic Range: >80dB
- Signal-to-Noise: >80 dB
- Image Rejection: >50dB
- Audio Frequency Response: 80-12000HZ
- System Distortion: < 1%
- Audio Output Level: 700mV(6000)
- Power supply: DC12V~17V/400MA
- Current Consumption: < 400mA
Microphone </br>Mute switch lets you cut the power at the Touch of a button
- Maximum Deviation Range: 35 KHz (Max)
- Frequency Stability: ±0.005%
- RF Output Power: <30mW
- RF Rejection: >40dB
- Current Consumption: <50mA
- Operate Range: 160 - 200 ft.
- Battery: 9V*2

PDWM2450

WIRELESS 2 CHANNEL VHF MICROPHONE SYSTEM WITH 2 MICROPHONES

- Receiver-/
- Rack mountable VHF system is perfect for large Events
- Telescoping antennas
- Independent volume control for each microphone
- LCD display with level indicators for each Microphone
- Sensitivity:<2UV (12dB SINAD)
- Dynamic Range: >60dB
- Signal-to-Noise: >60 dB
- Image Rejection: >50dB
- Audio Frequency Response: 85-12000HZ
- System Distortion:<1%
- Audio Output Level: 500mV(6000)
- Power supply: 110V/60Hz
- Current Consumption:< 500mA
- On/off switch for simple operation
- Ergonomic design fits the hand perfectly
- Maximum Deviation Range: 30 KHz (Max)
- Frequency Stability: $\pm 0.005\%$
- RF Output Power:<35mW
- RF Rejection: >35dB
- Current Consumption:<30mA
- Operate Range: 130 - 200 ft.
- Battery: 9V*2



DUAL VHF WIRELESS MICROPHONE SYSTEM

- Professional Dual VHF System
- Two Handheld Microphones Included
- Power On/Off Switch
- Mute Switch
- Power and Low Battery LED Indicators
- Dual RF Indicators
- Dual AF Level Meters
- Dual Volume Controls
- 1/4" Individual and 1/4" Mixed Output
- Operation Range: Up To 240 ft.
- 2 x 9V Batteries and 1/4" Audio Cable Included
- Dimensions: 1.5"H x 7.75"W x 5.30"D

PDWM2500

PDWM2550

19" RACK MOUNT DUAL VHF WIRELESS RECHARGEABLE HANDHELD MICROPHONE SYSTEM

- Professional VHF 2 Channel Wireless System
- Dual Handheld Microphones Included
- Dual Telescoping Receiver Antennas
- Dual Volume Controls With Digital Readout
- Dual Charging System
- On/Off Broadcasting Switch
- XLR Individual line outputs & Mixed 1/4" Output
- Dynamic Range: 100dB
- Total Harmonic Distortion: 0.5%
- Frequency Response: 40Hz~18KHz
- Operation Range: 50-180 Meters
- Signal to Noise Ratio: 105dB
- Receiver Power Supply: AC 110
- Microphone Power Source: 8.4 Volt Rechargeable
- Receiver Dimensions: 1.8" X 18.9" X 1.3"
- Microphone Dimensions: 9.6" X 7.7" X 0.5"



PREMIER SERIES UHF WIRELESS MICROPHONE SYSTEM WITH (2) HANDHELD MICS, DUAL RECHARGEABLE DOCK, SELECTABLE FREQUENCY, LCD DISPLAY, RACK MOUNTABLE



- UHF Band Receiver System
- Dual Microphone Charging Docks
- 16 Channel Frequency Design
- PLL-Synthesized Control Technique
- Broad Frequency Response Range & Low Distortion
- Up to 175' Feet Wireless Communication Range
- Integrated Noise Filtration System
- High Signal/Noise Ratio Performance
- AF Signal LED Indicators
- Independent Channel Adjustable Volume Controls
- LCD Digital Display with Channel & Frequency Readout
- Easy-to-Use Touch Button Controls
- Detachable Dual Antennas
- Rack Mountable System
- 1/4" XLR Unbalanced Audio Output Jack Connector
- (2) Mixed Balanced Output Jack Connectors
- System Receiver:• Audio Frequency Response: 100-18kHz
- T.H.D.:<1%
- Mobile State Range: 100dB
- Receiving Sensitivity: -105dBm
- Signal/Noise Ratio: >85dB
- Image & Spurious Rejection: >70dB
- Audio Output Level: +/- 300mV
- Frequency Stability: +/- 0.005%
- Maximum Deviation: +/- 15kHz
- Receiver Dimensions: 8.5" x 6.7" x 2.0" inches
- Power Supply: DC 13-15V
- Includes (2) Wireless Handheld Mics
- LCD Display
- Built-in (2) 'AA' Rechargeable Batteries: 1000mAh
- Nominal Current Drain:<100mA
- Modulation Type: FM
- RF Output: >10dB,
- Max. Deviation: +/- 70kHz
- Spurious Emission: >55dB
- Power On/Off Switch

PDWM2560

PDWM2600

DUAL UHF WIRELESS MICROPHONE SYSTEM

- Professional Dual UHF
- Two Microphones Included
- Power On/Standby/Off Switch
- Audio Mute Circuitry For Quiet Operation
- Advanced Companding Circuitry
- Dual RF Indicators
- Dual AF Level Meters
- Dual Volume Controls
- (2) Balanced XLR Connector Jacks
- (1) 1/4" Mixed Output Connector Jack
- Operation range: Up To 150 ft.
- 1/4" Audio Cable Included
- 110V/220V selectable
- Half Space Rack Mountable
- Rack Ears Included
- Dimensions: 8.4" x 5.3" x 1.8"
- Microphone Runs On AA Batteries





TWO CHANNEL VHF WIRELESS MICROPHONE SYSTEM, HANDHELD MICROPHONE, HEADSET MICROPHONE AND BELT PACK TRANSMITTER

PDWM2700

- One Handheld Microphone
- One Belt Pack Transmitter with Headset MIC
- Power On/Standby/ Off Switch
- 2 x 9V Batteries, AC/DC Adapter & 1/4" Audio Cable Included
- RF, AF & Power Indicators
- Individual Volume Controls
- 1/4" & XLR Mixed Unbalanced Outputs
- Rack Mountable
- Available Frequencies (Hz): Set 1 - 201.15, 180.8 / Set 2 - 212.6, 190.1 / Set 3 - 214.2, 193.0 / Set 4 - 215.5, 174.8
- Operating Range: Up to 150ft
- Dimensions: 8.73"W x 5.51"D x 1.8"H

PDWM2800

PROFESSIONAL UHF WIRELESS MICROPHONE SYSTEM WITH 2 MICROPHONES

- Receiver
- Rack mountable UHF system is perfect for large Events
- Foldable antennas
- Independent volume control for each microphone
- LCD display shows frequency of each microphone
- Sensitivity: <2UV (12dB SINAD)
- Dynamic Range: >80dB
- Signal-to-Noise: >80 dB
- Image Rejection: >60dB
- Audio Frequency Response: 80-12500HZ
- System Distortion: <1%
- Audio Output Level: 700mV(6000)
- Power supply: DC12V~17V/600MA
- Current Consumption: < 400mA
- On/off switch for simple operation
- Ergonomic design fits the hand perfectly
- Color-coded mics for easy identification
- Maximum Deviation Range: 50 KHz (Max)
- Frequency Stability: ±0.005%
- RF Output Power: <40mW
- RF Rejection: >40dB
- Current Consumption: <100mA
- Operate Range: 200 - 260 ft.
- Battery: 1.5V*2 AA



DUAL VHF RECHARGEABLE WIRELESS MICROPHONE SYSTEM

PDWM3000

- Built-In Chargers for both Microphones
- Charger LED Indicator
- Professional VHF Wireless System
- Two Microphones Included
- Detachable Mic Antenna
- Audio Mute Circuitry For Quiet Operation
- Multi-Function 2 Color Display
- Dual Volume Controls
- XLR and 1/4" Mixed Outputs
- Operation Range: Up To 90 ft.
- Batteries and 1/4" Audio Cable Included
- Dimensions: 2.08"H x 12.83"W x 7.87"D
- 110V/220V Selectable

PDWM3300

WIRELESS PROFESSIONAL UHF DUAL CHANNEL MICROPHONE SYSTEM WITH 2 MICROPHONES AND ADJUSTABLE FREQUENCY

- Receiver
- Rack mountable UHF system is perfect for large Events
- Voltage: 110-240
- Foldable antennas
- Independent volume control for each microphone
- LCD display with relevant information
- Frequency Range: 614-698MHz
- Adjustable frequency For adding more Mic's
- Sensitivity: <2UV (12dB SINAD)
- Dynamic Range: >90dB
- Signal-to-Noise: >90 dB
- Image Rejection: >80dB
- Audio Frequency Response: 75-14500HZ
- System Distortion: <1%
- Audio Output Level: 800mV(6000)
- Power supply: DC12V~17V/600MA
- Current Consumption: < 400mA
- Voltage: 110-240
- On/off switch for simple operation
- Ergonomic design fits the hand perfectly
- Maximum Deviation Range: 60 KHz (Max)
- Frequency Stability: ±0.005%
- RF Output Power: <40mW
- RF Rejection: >40dB
- Current Consumption: <100mA
- Operate Range: 200 - 260 ft.
- Battery: 1.5V*2 AA



PREMIER SERIES UHF WIRELESS MICROPHONE SYSTEM WITH (2) HANDHELD MICS, DUAL CHARGE DOCKS, SELECTABLE FREQUENCY, LCD DISPLAY, RACK MOUNTABLE

NEW

PDWM3360



- UHF Band Receiver System
- Dual Microphone Charging Docks
- 8 Channel Frequency Design
- PLL-Synthesized Control Technique
- Double Noise Squelch Operation Circuitry
- Up to 165' Feet Wireless Communication Range
- Broad Frequency Response Range & Low Distortion
- Integrated Noise Filtration System
- High Signal/Noise Ratio Performance
- AF and RF Signal LED Indicators
- Independent Channel Adjustable Volume Controls
- LCD Digital Display with Channel & Frequency Readout
- Easy-to-Use Touch Button Controls
- Detachable Dual Antennas
- Rack Mountable System
- 1/4" XLR Unbalanced Audio Output Jack Connector
- 2) Mixed Balanced Output Jack Connectors
- System Receiver
- Audio Frequency Response: 100-18kHz
- T.H.D.: <1%
- Mobile State Range: 100dB
- Receiving Sensitivity: -105dBm
- Signal/Noise Ratio: >85dB
- Image & Spurious Rejection: >70dB
- Audio Output Level: +/- 300mV
- Frequency Stability: +/- 0.005%
- Maximum Deviation: +/- 15kHz
- Receiver Dimensions: 8.5" x 6.7" x 2.0" inches
- Power Supply: DC 13-15V
- Microphone
- LCD Display
- Includes (2) Wireless Handheld Mics
- Power Requirements: (2) 'AA' Batteries

PDWM3365

PREMIER SERIES RACK MOUNT UHF WIRELESS MICROPHONE SYSTEM WITH (2) BODY-PACK TRANSMITTERS, (2) HEADSET & (2) LAVALIER MICS SELECTABLE FREQUENCY, LCD DISPLAY

- UHF Band Receiver System
- 8 Channel Frequency Design
- PLL-Synthesized Control Technique
- Double Noise Squelch Operation Circuitry
- Up to 165' Feet Wireless Communication Range
- Broad Frequency Response Range & Low Distortion
- Integrated Noise Filtration System
- High Signal/Noise Ratio Performance
- AF and RF Signal LED Indicators
- Independent Channel Adjustable Volume Controls
- LCD Digital Display with Channel & Frequency Readout
- Easy-to-Use Touch Button Controls
- Detachable Dual Antennas
- Rack Mountable System
- (2) Mixed Balanced Output Jack Connectors
- 1/4" XLR Unbalanced Audio Output Jack Connector
- Receiver Dimensions: 8.5" x 6.7" x 2.0" inches
- Power Supply: DC 13-15V
Bodypack Transmitters: Includes (2) Bodypack Transmitters
- RF Output: 10dBm
- Modulation Type: FM
- Max Deviation: ±70KHz
- Spurious Emission: >55dB
- Power Requirements: (2) 'AA' Batteries
- Dimensions (L x W x H): 4.0" x 2.5" x 1.0"



PREMIER SERIES PROFESSIONAL 2-CHANNEL UHF WIRELESS HANDHELD MICROPHONE SYSTEM WITH SELECTABLE FREQUENCIES

- LED Power Indicator & Channel Display
- Operation Range: Up to 164 ft.
- Audio Level Indicator for wireless system audio signal level
- RF Signal Indicator for transmitter signal strength
- Independent & adjustable channel volume controls
- UHF Signal for wider range and less obstruction
- Up to eight separate channels to choose from
- 1/4" audio output jack
- XLR balanced output jack
- AC/DC adapter power jack
- Power Supply: 110/220V
Receiver Specifications</>
- Image & Spurious Rejection: >70 dB
- Receiving Sensitivity: -105 dB
- Signal / Noise Ratio: -105dB
- Border Upon Channel Rejection: >70 dB
- T.H.D.: < 1%
- Audio Output Level: 0-300 mV
- Power Requirements: 13-15V DC nominal 500 mA+
- Dimensions 6.8 x 5.3 x 1.7 in
Handheld Transmitter Specifications</>
- Includes (2) wireless Dynamic microphones
- RF Output: >10 dBm
- Modulation Type: FM
- Max Deviation: ± 40 KHz
- Spurious Emission: >55 dBc
- Nominal Current Drain: < 40mA
- Power Requirements: 2 x 1.5V AA
- Dimensions: 9.25 x 1.9 x 1.9 in

PDWM3375

PDWM3400

PREMIER SERIES PROFESSIONAL UHF MICROPHONE SYSTEM WITH (2) BODY-PACK TRANSMITTERS, (2) HEADSET & (2) LAVALIER MICROPHONES WITH SELECTABLE FREQUENCIES

- LED Power Indicator & Channel Display
- Operation Range: Up to 164 ft.
- Audio Level Indicator for wireless system audio signal level
- Includes two handheld wireless dynamic microphones
- Independent & adjustable channel volume controls
- RF Signal Indicator for transmitter signal strength
- UHF Signal for wider range and less obstruction
- Up to eight separate channels to choose from
- 1/4" audio output jack
- XLR balanced output jack
- AC/DC adapter power jack
- Power Supply: 110/220V
Receiver Specifications</>
- Image & Spurious Rejection: >70 dB
- Receiving Sensitivity: -105 dB
- Signal / Noise Ratio: -105dB
- Border Upon Channel Rejection: >70 dB
- T.H.D.: < 1%
- Audio Output Level: 0-300 mV
- Power Requirements: 13-15V DC nominal 500 mA+
- Dimensions 6.8" x 5.3" x 1.7"
Body-Pack Transmitter Specifications</>
- Includes (2) wireless body-pack transmitters, headsets & lavaliers
- RF Output: >10 dBm
- Modulation Type: FM
- Max Deviation: ± 40 KHz
- Spurious Emission: >55 dBc
- Nominal Current Drain: < 40mA
- Power Requirements: 2 x 1.5V AA (Not Included)
- Dimensions: 9.25" x 1.9" x 1.9"



PREMIER SERIES PROFESSIONAL UHF MICROPHONE RACK MOUNTABLE SYSTEM WITH (2) PLUG-IN XLR WIRELESS TRANSMITTERS AND SELECTABLE FREQUENCIES



- LED Power Indicator & Channel Display
- Operation Range: Up to 164 ft.
- Audio Level Indicator for wireless system audio signal level
- Independent & adjustable channel volume controls
- RF Signal Indicator for transmitter signal strength
- Up to sixteen separate channels to choose from
- Includes two plug-in XLR wireless transmitters
- 1/4" Mixed audio output jack
- (2) Individual XLR balanced output jacks
- Individual Squelch controls
- AC/DC adapter power jack
- Power Supply: 110/220V
- Rack mountable system
Receiver Specifications</>
- Individual Balanced XLR Output
- Mixed 1/4" Inch Output
- 16 operational wireless channels
- Individual Squelch controls for each channel
- RF Image Spurious Rejection >80 dB
- Receiving Sensitivity: -105 dB
- Signal/Noise Ratio: -90 dB
- Border Upon Channel Rejection: >80 dB
- Power Requirements: 13-15V
- DC nominal 800 mA
- Dimensions: 19 in X 8.4 in X 1.7 in
- Fits in to standard 1 RU space
Plug-In Transmitter Specifications</>
- High/Low Gain Switch
- 16 operational wireless channels
- RF Output: >10 dBm
- Modulation Type: FM
- Max Deviation: ± 68 kHz
- Spurious Emission: >55 dBc
- Nominal Current Drain: < 100 mA
- +5.85 V Phantom power supply
- Power Requirements: 1 x 1.5 V AA
- Dimensions: 4.4 in X 1.15 in X 1.1 in

PDWM3450

**PROFESSIONAL UHF DUAL CHANNEL WIRELESS MICROPHONE SYSTEM
WITH ADJUSTABLE FREQUENCY 1 HAND HELD MICROPHONE & 1
HEADSET/LAVALIER MIC'S**

PDWM3500



- brReceiverSystem Distortion:<1%
- Voltage: 110-240
- Image Rejection: >80dB
- Frequency Range: 614-698MHz
- Current Consumption:<400mA
- Power supply: DC12V~17V/600MA
- Sensitivity:<2UV (12dB SINAD)
- Audio Output Level: 800mV(6000)
- Audio Frequency Response: 75-14500HZ
- LCD display with relevant information
- Adjustable frequency FO adding more Mic's
- Dynamic Range: >90dB
- 1/4" Mixed Outputs and Individual XLR Outputs
- Signal-to-Noise: >90 dB
- This UHF system is perfect for large Events
- Foldable antennas
- Independent volume control for each microphone
MicrophoneOn/off switch for simple operation
- Ergonomic design fits the hand perfectly
- Maximum Deviation Range: 60 KHz (Max)
- Frequency Stability: ±0.005%
- RF Output Power:<40mW
- RF Rejection: >40dB
- Current Consumption:<100mA

PDWM3700

**PROFESSIONAL UHF DUAL CHANNEL WIRELESS MICROPHONE SYSTEM
WITH 2 ADJUSTABLE FREQUENCY BODY PACK TRANSMITTERS & 2
HEADSET/LAVALIER MICS**

- brReceiver</
- Voltage: 110-240
- System Distortion:<1%
- Image Rejection: >80dB
- Current Consumption:<400mA
- Power supply: DC12V~17V/600MA
- 1/4" Mixed Outputs and Individual XLR Outputs
- Sensitivity:<2UV (12dB SINAD)
- Audio Output Level: 800mV(6000)

- Audio Frequency Response: 75-14500HZ
- LCD display with relevant information
- Adjustable frequency FO adding more Mic's
- Dynamic Range: >90dB
- Signal-to-Noise: >90 dB
- This UHF system is perfect for large Events
- Foldable antennas
- Independent volume control for each microphone



**VHF WIRELESS RACK MOUNT MICROPHONE SYSTEM WITH (2)
HANDHELD MICS, (2) BELT PACK TRANSMITTERS, (2) LAVALIER &
(2) HEADSET MICS**

PDWM4300

- Professional VHF Wireless System
- Two Handheld Microphones
- Two Belt Pack Transmitters
- Two Clip on Lavalier Microphones
- Two Headset Microphones
- Power On/Standby/Off Switch
- 4 x 9V Batteries and 1/4" Audio Cable Included

- RF Indicators
- AF Level Meters
- Individual Volume Controls
- 1/4" Individual and 1/4" & XLR Mixed Output
- Operation Range: Up to 240 ft.
- Power Supply:110/220 V
- Dimensions: 16.5" x 8.2" x 1.8"

PDWM4310

**PREMIER RACK MOUNT SERIES VHF WIRELESS MICROPHONE SYSTEM,
4-CHANNEL WITH (2) WIRELESS HANDHELD MICROPHONES, (2)
BODY-PACK TRANSMITTERS, (2) HEADSET & (2) LAVALIER MICS**

- VHF High-Band Receiver System
- Quad Fixed Frequency Channel Design (Channel 1, 2, 3, 4)
- Broad Frequency Response Range & Low Distortion
- Up to 150' Feet Wireless Communication Range
- Integrated Triple Noise Filtration System
- High Signal/Noise Ratio Performance
- RF Signal & AF Signal LED Indicators
- LCD Digital Display with Channel & Frequency Readout
- Independent Channel Adjustable Volume Controls
- Easy-to-Use Touch Button Controls
- Detachable Dual Antennas
- Rack Mountable System
System Receiver:
- 1/4" XLR Unbalanced Audio Output Jack Connector
- Mixed Balanced Output Jack Connectors
- Carrier Frequency Range: 170-270MHz

- Frequency Stability: +/- 0.005%
- Modulation Mode: FM
- Maximum Deviation: +/- 15kHz
- Frequency Response: 40Hz-20kHz
- Signal/Noise Ratio: >100dB
- Audio Dynamic Range: >100dB
- T.H.D.:<0.5%
- Receiving Sensitivity: 60dB (12 dBU)
- Power Supply: DC 13-15V
- Dimensions (L x W x H): 15.5" x 9.5" x 2.2"
Handheld Transmitters:
- Includes (2) Wireless Handheld Mics
- RF Output: 10dBm
- Modulation Type: FM
- Max Deviation: ±40KHz



**UHF WIRELESS MICROPHONE SYSTEM WITH (2) HANDHELD MICS, (2) BELT PACK TRANSMITTERS, (2)
LAVALIER MICS AND (2) HEADSET MICS, ADJUSTABLE FREQUENCIES**

PDWM4350U



- UHF Band Receiver System
- Quad Frequency Channel Design (Channel 1, 2, 3, 4)
- Broad Frequency Response Range & Low Distortion
- High Signal/Noise Ratio Performance
- RF Signal & AF Signal LED Indicators
- LCD Digital Display with Channel & Frequency Readout
- Independent Channel Adjustable Volume Controls
- Easy-to-Use Touch Button Controls
- Detachable Dual Antennas
- Rack Mountable System
- System Includes 8 'AA' Batteries
RECEIVER SPECI-
- FICATIONSRF Frequency Range: 673-698MHz
- Image & Spurious Rejection: >70dB
- Receiving Sensitivity: -105dBm
- Signal/Noise Ratio: >85dB
- Border Upon Channel Rejection: >70dB
- T.H.D.:<0.5%

- Audio Output Level: 0-300mV
- Power Requirements: 13-15V DC nominal 1000mA
- Dimensions: 39.4 x 20.5 x 5.2cm
HANDHELD TRANSMIT-
- TER SPECIFICATIONSFrequency Range: 673-698MHz
- RF Output: 10dBm
- Modulation Type: FM
- Max Deviation: ±40KHz
- Spurious Emission: >55dBc
- Power Requirements: 2 x € "AA€™ (1.5V)
- Dimensions: 23.8 x 5 x 5cm
BODYPACK TRANSMIT-
- TER SPECIFICATIONSFrequency Range: 673-698MHz
- RF Output: 10dBm
- Modulation Type: FM
- Max Deviation: ±40KHz
- Spurious Emission: >53dBc
- Power Requirements: 2 x € "AA€™ (1.5V)
- Dimensions: 10.5 x 6.5 x 3cm

PDWM4360U

WIRELESS MICROPHONE SYSTEM, UHF QUAD CHANNEL, 4 HANDHELD MICROPHONES, RACK MOUNTABLE



NEW

- UHF Band Receiver System
- Quad Frequency Channel Design (Channel 1, 2, 3, 4)
- Broad Frequency Response Range & Low Distortion
- High Signal/Noise Ratio Performance
- RF Signal & AF Signal LED Indicators
- Radio Frequency and Audio Frequency
- LCD Digital Display with Channel & Frequency Readout
- Independent Channel Adjustable Volume Controls
- Easy-to-Use Touch Button Controls
- Detachable Dual Antennas
- Rack Mountable System
- Includes (4) Handheld Microphones & 8 'AA' Batteries>><System Receiver:</> RF Frequency Range: 673 - 697.975MHz
- Image & Spurious Rejection: >70dB
- Receiving Sensitivity: -105dBm
- Signal/Noise Ratio: >85dB
- Border Upon Channel Rejection: >70dB
- T.H.D.:<0.5%
- Audio Output Level: 0-300mV
- Power Requirements: 13-15V DC nominal 1000mA
- Dimensions (L x W x H): 15.51" x 8.07" x 2.04">><Microphones:</> RF Power Output: >13dBm
- Modulation Degree: >30KHz
- Power Current:<110mA
- Frequency Stability: ±0.002%
- Harmonic at Higher Degree:<60dB



RACK MOUNT 4 Mic VHF RACK MOUNT WIRELESS LAVALIE/ HEADSET SYSTEM

PDWM4400

- Professional VHF Wireless System
- 4 Belt Pack Transmitters w/ Lavalier and Headset Mics
- Power On/Standby/Off Switch
- 4 x 9V Batteries and 1/4" Audio Cable Included
- RF Indicators
- AF Level Meters
- Individual Volume Controls
- 1/4" Individual and 1/4" & XLR Mixed Output
- Frequency Range: VHF 160-270MHz
- Operation Frequencies (Hz): 177.6 / 201.6 / 238.6 / 262.7
- Operation Range: Up to 240 ft.
- Power Supply:110/220 V
- Dimensions: 1.8"H x 16.5"W x 8.2"D

PDWM4520

WIRELESS MICROPHONE SYSTEM, UHF QUAD CHANNEL FIXED FREQUENCY, 4 HANDHELD MICROPHONES, RACK MOUNTABLE



NEW

- UHF Band Receiver System
- Quad Frequency Channel Design (Channel 1, 2, 3, 4)
- Broad Frequency Response Range & Low Distortion
- High Signal/Noise Ratio Performance
- RF Signal & AF Signal LED Indicators
- Radio Frequency and Audio Frequency
- Independent Channel Adjustable Volume Controls
- Detachable Dual Antennas
- Rack Mountable System
- Includes (4) Handheld Microphones & 8 'AA' Batteries
- 4 XLR Output Connector JacksSystem Receiver:RF Frequency Range: 673 - 697.975MHz
- Image & Spurious Rejection: >70dB
- Receiving Sensitivity: -105dBm
- Signal/Noise Ratio: >85dB
- Border Upon Channel Rejection: >70dB
- T.H.D.:<0.5%
- Audio Output Level: 0-300mV
- Power Requirements: 13-15V DC nominal 1000mA
- Dimensions (L x W x H): 15.51" x 9.25" x 2.16"Microphones:RF Power Output: >10dBm
- Modulation Type: FM
- Max. Deviation: +/- 40kHz
- Nominal Power Current:<40mA
- Spurious Emission: >55dBc
- Battery Powered: Requires 2 x 'AA' Batteries



NEW

WIRELESS MICROPHONE SYSTEM, UHF QUAD CHANNEL FIXED FREQUENCY, 2 HANDHELD MICROPHONES, 2 BODY-PACK TRANSMITTERS, 2 HEADSET & 2 LAVALIER MICS, RACK MOUNTABLE

PDWM4540



- UHF Band Receiver System
- Quad Frequency Channel Design (Channel 1, 2, 3, 4)
- Broad Frequency Response Range & Low Distortion
- High Signal/Noise Ratio Performance
- RF Signal & AF Signal LED Indicators
- Radio Frequency and Audio Frequency
- Independent Channel Adjustable Volume Controls
- Detachable Dual Antennas
- Rack Mountable System
- Includes (2) Handheld Microphones, (2) Body-Pack Transmitters, (2) Headset & (2) Lavalier Mics
- Includes 8 x 'AA' Batteries
- 4 XLR Output Connector JacksSystem
- Receiver:Image & Spurious Rejection: >70dB
- Receiving Sensitivity: -105dBm
- Signal/Noise Ratio: >105dB
- Border Upon Channel Rejection: >70dB
- T.H.D.:<1%
- Audio Output Level: 0-300mV
- Power Requirements: 13-15V DC nominal 1000mA
- Dimensions (L x W x H): 15.51" x 9.25" x 2.16"Microphones:RF Power Output: >10dBm
- Modulation Type: FM
- Max. Deviation: +/- 40kHz
- Nominal Power Current:<55mA
- Spurious Emission: >55dBc

PDWM4560

WIRELESS MICROPHONE SYSTEM, UHF QUAD CHANNEL FIXED FREQUENCY, 4 BODY-PACK TRANSMITTERS, 4 HEADSET & 4 LAVALIER MICS, RACK MOUNTABLE



NEW

- UHF Band Receiver System
- Quad Frequency Channel Design (Channel 1, 2, 3, 4)
- Broad Frequency Response Range & Low Distortion
- High Signal/Noise Ratio Performance
- RF Signal & AF Signal LED Indicators
- Radio Frequency and Audio Frequency
- Independent Channel Adjustable Volume Controls
- Detachable Dual Antennas
- Rack Mountable System
- Includes (4) Body-Pack Transmitters, (4) Headset & (4) Lavalier Mics
- Includes 8 x 'AA' Batteries
- 4 XLR Output Connector JacksSystem
- Receiver:Image & Spurious Rejection: >70dB
- Receiving Sensitivity: -105dBm
- Signal/Noise Ratio: >105dB
- Border Upon Channel Rejection: >70dB
- T.H.D.:<1%
- Audio Output Level: 0-300mV
- Power Requirements: 13-15V DC nominal 1000mA
- Dimensions (L x W x H): 15.51" x 9.25" x 2.16"Transmitters:RF Power Output: >10dBm
- Modulation Type: FM
- Max. Deviation: +/- 40kHz





**PROFESSIONAL RACK MOUNT 4 CHANNEL DESKTOP UHF SELECTABLE
FREQUENCY WIRELESS MICROPHONE SYSTEM**

PDWM4700

- Individual Volume Control
- On/Off Broadcasting Switch
- Two LCD screens on receiver
- Frequency Stability: $\pm 0.005\%$
- Working Distance: 50-100 Meters
- LCD screen on meeting microphone
- Mobile Anti-Interference Cartridge
- Input Sensitivity: -12dB (80dB S/N)
- IR SYNC UHF Selectable Wireless Microphone
- 1/4" individual outputs, 1 XLR mixed balanced output
- Carrier Frequency: 470-608 or 614-698 MHz (FCC range)
- Selectable Channels: 200 channels per microphone
- S/Noise Ratio: ≈ 110 dB
- Power supply: 110V/220V
- Battery requirement: 2 X 1.5V (AA size)

PDWM5000

4 Mic VHF WIRELESS MICROPHONE SYSTEM

- Professional VHF Wireless System
- Quartz Lock for Drift-Free Operation
- Four Microphones Included
- Power On/Standby/Off Switch
- Audio Mute Circuitry For Quiet Operation
- Advanced Companding Circuitry
- AF Signal LED Segment Meter On Each Channel
- Individual Channel Volume Controls
- Individual 1/4" Unbalanced Outputs
- 1/4" Unbalanced Mixed Output
- Operation Range: Up To 240 ft.
- Battery Life: Approx. 12 Hours
- Batteries and 1/4" Audio Cables Included
- 110V/220V Selectable



4 Mic VHF WIRELESS MICROPHONE SYSTEM

PDWM5500

- Professional VHF Wireless System
- Quartz Lock for Drift-Free Operation
- Four Microphones Included
- Power On/Standby/Off Switch
- Power LED Indicates Status
- Audio Mute Circuitry For Quiet Operation
- Advanced Companding Circuitry
- AF Signal LED Segment Meter On Each Channel
- Individual Channel Volume Controls w/ LED Display
- Individual 1/4" Unbalanced Outputs
- XLR Balanced and 1/4" Unbalanced Mixed Output
- Operation Range: Up To 240 ft.
- Each Mic Powered by 3 'AA' Batteries
- System Includes 1/4" Audio Cable, Power Adapter & Batteries
- 110V/220V Selectable
- Rack Hardware Included

PDWM7300

**RACK MOUNT PROFESSIONAL 4 MIC WIRELESS UHF MICROPHONE
SYSTEM WITH 2 LAVALIER AND 2 HANDHELD MICROPHONE**

- brReceiver</
- Rack mountable UHF system is perfect for large Events
- Foldable antennas
- Independent volume control for each microphone
- LCD display shows frequency of each microphone
- Frequency Range: 480-560MHz
- Sensitivity: <2UV (12dB SINAD)
- Dynamic Range: >80dB
- Signal-to-Noise: >80 dB
- Image Rejection: >70dB
- Audio Frequency Responce: 80-12500HZ
- System Distortion: <1%
- Audio Output Level: 700mV(6000)
- Power supply: DC15V~17V/800MA
- Current Consumption: < 400mA <brMicrophones</
- Set includes 2 color coded hand micro-phones and 2 Lavalier belt-clip mics
- On/off switch for simple operation
- Ergonomic design fits the hand perfectly
- Maximum Deviation Range: 55 KHz (Max)
- Frequency Stability: $\pm 0.005\%$
- RF Output Power: <40mW



**PROFESSIONAL CONFERENCE DESKTOP VHF
WIRELESS MICROPHONE SYSTEM**

NEW

PDWM8300

- Professional VHF 8 Channel Wireless System
- Eight Table Top Microphones Included
- Dual Telescoping Receiver Antennas
- Eight Volume Controls
- On/Off Broadcasting Switch
- One mixed microphone output 1/4" and XLR jacks
- Dynamic Range: 92dB
- Total Harmonic Distortion: 0.5%
- Frequency Response: 50Hz~16KHz
- Operation Range: 50-180 Meters
- Signal to Noise Ratio: 90dB
- Receiver Power Supply: AC 110/240V
- Microphone Power Source: 9 Volt
- Receiver Dimensions Without Rack Mount: 1.8" x 16.5" x 8.7"
- Receiver Dimensions With Rack Mount 1.8" x 18.9" x 8.7"
- Microphone Dimensions: 12.7" X 4.9" X 5.9"

PDWM8400

8 Mic PROFESSIONAL HANDHELD VHF WIRELESS MICROPHONE SYSTEM

- Professional VHF 8 Channel Wireless System
- Eight Hand held Microphones Included
- Dual Telescoping Receiver Antennas
- Eight Volume Controls
- On/Off Broadcasting Switch
- Mixed 1/4" Outputs
- Dynamic Range: 92dB
- Total Harmonic Distortion: 0.5%
- Frequency Response: 50Hz~16KHz
- Operation Range: 50-180 Meters
- Signal to Noise Ratio: 90dB
- Receiver Power Supply: AC 110/240V
- Microphone Power Source: 9 Volt
- Receiver Dimensions Without Rack Mount: 1.8" x 16.5" x 8.7"
- Receiver Dimensions With Rack Mount 1.8" x 18.9" x 8.7"



PDWM8700

8 CHANNEL WIRELESS MICROPHONE SYSTEM - RACK MOUNTABLE WITH 4 LAVALIER MICS, 4 HEADSETS, & 4 HANDHELD MICS



- 4 Belt Packs
- 4 Lavalier Mics
- 4 Headset Mics
- 4 Handheld Mics
- Mixed 1/4" XLR Outputs
- Signal to Noise Ratio: 90 dB
- Operation Range: 150 - 600 ft
- Total Harmonic Distortion: 0.5%
- Four Telescoping Receiver Antennas
- Frequency Response: 50 Hz - 16 kHz
- 8 Volume Controls (1 for Each Channel)
- Receiver Dimensions With Rack Mount: 1.8" x 18.9" x 8.7"
- Receiver Dimensions Without Rack Mount: 1.8" x 16.5" x 8.7"



8 CHANNEL WIRELESS MICROPHONE SYSTEM - RACK MOUNTABLE WITH 8 CLIP-ON LAVALIER MICS & 8 HEADSETS

PDWM8900

- 8 Belt Packs
- 8 Lavalier Mics
- 8 Headset Mics
- Mixed 1/4" XLR Outputs
- Signal to Noise Ratio: 90 dB
- Operation Range: 150 - 200 ft
- Total Harmonic Distortion: 0.5%
- Dual Telescoping Receiver Antennas
- Frequency Response: 50 Hz - 16 kHz
- 8 Volume Controls (1 for Each Channel)
- Receiver Dimensions With Rack Mount: 1.8" x 18.9" x 8.7"
- Receiver Dimensions Without Rack Mount: 1.8" x 16.5" x 8.7"

PDWMG46

PREMIER SERIES UHF WIRELESS GUITAR/INSTRUMENT BUG TRANSMITTER RECEIVER SYSTEM, ADDS WIRELESS FUNCTIONALITY

- Swivel-Jack Transmitter, Universal Standard
- Fits All Guitar Connectors
- Quickly & Easily Adds Wireless Instrument Functionality
- Extended Frequency Response
- Optimized for Guitar & Bass
- Provides Two Different UHF Frequencies
- Includes Free-Standing Receiver & Transmitter
- Up to 150' Feet Wireless Communication Range
- 1/4" Output (Unbalanced High Z) Audio Connector Jack
- Fits Angles, Straight or Edge-Mounted Connector Jacks
- Swivel-Jack Transmitter, Universal Standard
- Can be Used Without Mains Supply
- Squelch Control Function
- Rotary Volume/Gain Control
- LED Antenna, Audio and Power Indicators
- Lightweight & Compact Design
- Receiver can be Battery or DC Plug Powered
- Batteries Required: (2) 'AA' Batteries
- Dimensions: 5.1" x 3.1" x 1.4"
- 1/4" (6.35mm) Audio Plug Connector
- Batteries Required: (1) 'AAA' Battery
- Power On/Off Switch
- Dimensions: 3.0 x 1.0"
- Audio Bandwidth: 40-20kHz
- Modulation: FM
- T.H.D.: <1%
- Signal/Noise Ratio: >103dB
- Power Requirement: 9V DC 150mA
- Transmitter Current: 80mA



For more detailed specifications, product-specific information and models visit www.PyleAudio.com

Musical Instruments

PGA20

PROFESSIONAL FULL SIZE ACOUSTIC GUITAR PACKAGE W/ ACCESSORIES

- Rosette Linden Laminate
- Ebonized Maple Bridge And Fingerboard
- Linden Laminate Top, Back, & Sides
- 42" 25.5 Scale Full Size Guitar
- Heavy Duty Gig Bag
- Nylon Guitar Strap
- Chrome Tuning Machines
- Durable ABS Binding
- Black Plastic Pickguard
- Guitar Pitch Pipe Tuner Included
- Complete Set of Extra Strings
- Attached Pickguard
- 3 Pearlloid Picks



PGA30



PGA39



PGA40N

PGA30

30" INCH BEGINNER JAMMER, ACOUSTIC GUITAR W/ CARRYING CASE & ACCESSORIES

- | | | |
|--|--|---|
| <ul style="list-style-type: none"> • 30 inch children guitar • Body type--Classic • Specification: 30" • Top: Linden plywood | <ul style="list-style-type: none"> • Back & Sides: Linden plywood • Neck: Nanmu • Fingerboard: Maple wood • Bridge: Maple wood | <ul style="list-style-type: none"> • Machine Head: Chrome Open • Number of frets: 19 • Binding type: common style • Nut width/type: 4.1CM |
|--|--|---|

PGA39

39" INCH BEGINNER JAMMER, ACOUSTIC GUITAR W/ CARRYING CASE & ACCESSORIES

- | | | |
|---|--|--|
| <ul style="list-style-type: none"> • 39 inch acoustic guitar • Body type: acoustic cutaway • Specification: 39" • Top: Linden plywood | <ul style="list-style-type: none"> • Back & Sides: Linden plywood • Neck: Nanmu • Fingerboard: Maple wood • Bridge: Maple wood | <ul style="list-style-type: none"> • Machine Head: Chrome Open • Number of frets: 21 • Binding type: single plastic binding • Nut width/type: -4.2CM |
|---|--|--|

PGA40N

41" ACOUSTIC-ELECTRIC GUITAR PACKAGE WITH GIG BAG, STRAP, PICKS, TUNER, AND STRINGS (NATURAL COLOR)

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> • Electronics: Pre-amp With Treble, Mid, and Bass Controls • Scale Length: 650mm/41" • Body Top: Spruce Laminate • Body Back & Side: Linden Laminate • Fretboard Material: Rosewood | <ul style="list-style-type: none"> • Bridge Material: Rosewood • Nut Width: 43mm • Number of Frets: 20 • Binding: ABS • Rosette Style: Decal | <ul style="list-style-type: none"> • Color: Natural • Gig Bag, Strap, Picks, Pitch Pipe, and Spare Strings Included |
|---|---|---|



PGAKT40SB



PGEKT46



PEGKT15SB



PEGKT15R



PEGKT15GS



PEGKT15B

PGAKT40SB

41" ACOUSTIC-ELECTRIC GUITAR PACKAGE WITH GIG BAG, STRAP, PICKS, TUNER, AND STRINGS (SUNBURST COLOR)

- Electronics: Pre-amp With Treble, Mid, and Bass Controls
- Scale Length: 650mm/41"
- Body Top: Spruce Laminate
- Body Back & Side: Linden Laminate
- Fretboard Material: Rosewood
- Bridge Material: Rosewood
- Nut Width: 43mm
- Number of Frets: 20
- Binding: ABS
- Rosette Style: Decal
- Color: Sunburst
- Gig Bag, Strap, Picks, Pitch Pipe, and Spare Strings Included

PGEKT46

42" ELECTRIC 6-STRING GUITAR AND AMPLIFIER KIT

- Sunburst Style Guitar Finish. 6-String Single Cutaway Electric Guitar
- Rosewood Fretboard, Basswood Body, Maple Neck
- Chrome Die-Cast Machine Head
- Scale Length (Nut to Bridge): 24.75"
- (2) Volume & (2) Tone Rotary Controls
- (2) Humbuck Pickups and 3-Way Selector Switch
- Set-in Neck, 22 Frets
- Included Accessories: KGT-200 Digital Tuner, 10€™ Foot 1/4" Guitar Cable, Spare Steel Strings, 3
- Picks, Shoulder Strap and Nylon Gig Bag
- Amplifier Specifications:
 - 15 Watt Power Output, 6.5" Speaker
 - Gain, Volume, Treble, Middle & Bass Controls
 - Connectors (Input/Output): 1/4" Guitar Cable, Phones

PEGKT15SB

BEGINNER ELECTRIC GUITAR PACKAGE - SUN BURST

- brElectric Guitar Features:Color: Sun-Burst
- Body type: Basswood
- Controls: 1 volume, 2 tone
- Number of pickups: 3
- Type of pickups: Single pickups
- String type: Metal
- Fretboard material: Rosewood
- Neck material: Maplewood
- Nut width: 1.7"
- Scale length: 25.5"
- Amplifier Specifications:Rated power output: 10 watts
- Nominal input level<700mV (RMS)
- Speaker size: 6.5"
- Controls: Volume, channel select, switch, gain, treble, middle, bass
- Power supply: 110V @ 50 Hz
- Power consumption: 0.012 W/h

PEGKT15R

RED

PEGKT15GS

GREY SILVER

PEGKT15B

BLACK

PGEKT50

PROFESSIONAL FULL SIZE ELECTRIC BASS GUITAR PACKAGE W/ AMPLIFIER

- Double Cutaway Basswood Body
- Maple Fretboard
- Maple Neck
- Two Piece Construction w/ Bolt on Neck
- Three Magnetic Pickups
- Tone and Volume Control w/ Chrome knobs
- Chrome Plated Tuning Machines
- Warranty Card
- Pyle Pro 15B Bass Amplifier w/ 4 Channel Equalizer, Headphone Output, and 6.5" Woofer
- Nylon Guitar Strap
- Full Set of Replacement Strings
- 3 Pearloid Guitar Picks
- 10 Foot ¼" patch cord
- 44" Full Size Scale
- Grey Sunburst and Black Finish
- Hex Key for Neck Adjustments
- Warranty Card - One Year Warranty



PGEKT18

UNFINISHED STRAT ELECTRIC GUITAR KIT - YOU BUILD THE GUITAR

- Kit Includes All Parts And Instructions To Build A Complete Playable Guitar
- All Holes Are Pre-Drilled, Complete With Strings And Electric Cord; Available In Right-Handed Versions Only
- Basswood Body With Sanding Sealer
- Maple Neck, Rosewood Fretboard With Sanding Sealer
- All Chrome Hardware
- Pickguard With Pickups And Electronics Prewired
- Solid Select Maple Neck With A Fretted Rosewood Fingerboard, Body Made Of All-Select
- Basswood, Headstock Is A Blank Peghead Shape With Tuning Machine Holes Pre-Drilled
- Adjustable Truss Rod All Hardware Is Heavily Nickel Plated
- Electronic Parts Are Mounted To The Pickguard And Ready For Installation
- Solid Select Maple Neck With A Fretted Rosewood Fingerboard, Body Made Of All-Select Basswood
- Headstock Is A Blank Peghead Shape With Tuning Machine Holes Pre-Drilled.



PVAMP20



PVAMP30



PVAMP60



PPG260A

PVAMP20

20 WATT VAMP-SERIES AMPLIFIER WITH 3-BAND EQ

- 6" Speaker
- Two Channels: Clean and Overdrive For a Crunchy, Powerful Sound
- Gain Control for Overdrive
- Rated Power: 20 Watts
- 3-Band EQ: Control Treble, Mid-Range, and Bass
- Volume Control
- 1/4" Headphone Jack for Silent Rehearsing
- Frequency Response: 20 Hz to 15 kHz
- Dimensions: 10" x 6.1" x 11.4"
- Weight: 7.7 lbs.

PVAMP30

30 WATT VAMP-SERIES AMPLIFIER WITH 3-BAND EQ AND OVERDRIVE

- 6" Speaker
- Two Channels: Clean and Overdrive For a Crunchy, Powerful Sound
- Gain Control for Overdrive
- Rated Power: 30 Watts
- 3-Band EQ: Control Treble, Mid-range, and Bass
- Volume Control
- 1/4" Headphone Jack for Silent Rehearsing
- 1/4" Output Jack for Hooking Up External Speakers

PVAMP60

60 WATT VAMP-SERIES AMPLIFIER WITH 3-BAND EQ, OVERDRIVE, AND DIGITAL DELAY

- 8" Speaker
- High and Low Level Inputs
- Two Channels: Clean and Overdrive For a Crunchy, Powerful Sound
- Gain Control for Overdrive
- Rated Power: 60 Watts
- 3-Band EQ: Control Treble, Mid-range, and Bass
- Volume Control
- 1/4" Headphone Jack for Silent Rehearsing
- 1/4" Output Jack for Hooking Up External Speakers
- Frequency Response: 20 Hz to 15 kHz
- Dimensions: 15.75" x 8.27" x 13.58"

PPG260A

80 WATTS PORTABLE GUITAR AMPLIFIER

- Heavy Duty Wood Construction
- 20 Watts RMS/80 Watts Peak
- 6.5" High Definition Speaker
- Volume, Bass and Treble Controls
- 1/4" Phone Jack Input
- 1/4" Headphone Jack
- Carry Handle
- Power On/Off Switch w/LED Indicator
- AC110/220 Voltage Switchable



PBJ20

NEW



PBJ60



PGAKT10BL



PGAKT10PK



PUKT12BR



PUKT15NT



PUKT15BR

PBJ20

8-STRING MANDOLIN-BANJO HYBRID WITH WHITE JADE TUNER PEGS, ROSEWOOD FRETBOARD, 23" TOTAL LENGTH

- Combines Banjo Body with Mandolin Neck and Tuning
- Coated and Polished Rich Wood Finish
- (8) White Jade Machine Head Tuner Key Pegs
- Classic Traditional Style Binding Design
- (18) Frets on Fretboard
- Fretboard Length: 9.3"
- Fretboard Material: Rosewood
- Violin-Style String Tuning (GDAE)
- Movable Bridge Stand
- Universal Adjustable Truss Rod
- Banjo Body Material: Sapele Wood
- Headstock/Neck Material: Mahogany
- Remo M1 Banjo Head (8" Diameter)
- Head Collar Type: Medium (10mm Height)
- Head Collar Material: Polyester Film
- Drum Width: 8.5"
- Drum Height: 2.9"
- Total Instrument Length: 23"
- Accessories Included: Drum Head Collar and Truss Rod Adjustment Tools

PBJ60

5 STRING BANJO WITH CHROME PLATED HARDWARE

- Top Material: REMO Drumhead
- Mahogany Neck, Back, and Side
- Rosewood Fingerboard
- Maplewood Bridge
- Chrome Plated Hardware

PGAKT10BL

SOPRANO UKULELE MINI GUITAR STARTER PACKAGE ALL AGES - BLUE

- 4 String Ukulele in Blue
- Color Matched Fingerboard and Bridge
- Painted Laminate Top, Back, & Sides
- Gig Bag with Backpack Style Straps
- High Quality Tuning Machines
- Soprano Ukulele Tuner Included
- 3 Picks
- Nylon Strings w/ Tie Down Bridge
- 22" Total Length

PGAKT10PK

SOPRANO UKULELE MINI GUITAR STARTER PACKAGE ALL AGES - PINK

- 4 String Ukulele in Pink
- Color Matched Fingerboard and Bridge
- Painted Laminate Top, Back, & Sides
- Gig Bag with Backpack Style Straps
- High Quality Tuning Machines
- Soprano Ukulele Tuner Included
- 3 Picks
- Nylon Strings w/ Tie Down Bridge
- 22" Total Length

PUKT12BR

26" TENOR UKULELE KIT WITH BAG, PICKS, PITCH PIPE, STRAPS, MAPLE/BROWN COLOR

- Beautiful Tenor-Style Ukulele
- Includes Black Gigbag For Storage And Transport
- Easily Tunable
- Fretboard: Linden Plywood, 16 Frets
- Scale Length: 17 Inches
- Neck: Hardwood
- Top, Back, Sides, Fingerboard: Linden Plywood
- Bridge: Hard Wood

PUKT15NT

21" SOPRANO UKULELE GUITAR PACKAGE WITH BAG, PICKS, FOR BEGINNERS AND PROFESSIONALS (NATURAL COLOR)

- Beautiful Soprano-Style Ukulele
- Includes Black Gigbag For Storage And Transport
- Easily Tuneable
- Fretboard: Linden Plywood, 12 Frets
- Scale Length: 14 Inches
- Neck: Hardwood
- Top, Back, Sides, Fingerboard: Linden Plywood
- Bridge: Hard Wood

PUKT15BR

21" SOPRANO UKULELE WITH BAG, PICKS, MAPLE/BROWN COLOR

- Beautiful Soprano-Style Ukulele
- Includes Black Gigbag For Storage And Transport
- Easily Tuneable
- Fretboard: Linden Plywood, 12 Frets
- Scale Length: 14 Inches
- Neck: Hardwood
- Top, Back, Sides, Fingerboard: Linden Plywood
- Bridge: Hard Wood



PED02M



PED04



PED03



PTED01

PED02M

ELECTRIC THUNDER DRUM KIT WITH MP3 RECORDER

- MIDI In/Out
- Headphone Jack
- Instruction DVD
- Built-in Metronome
- Built-in Reverb Switch
- Fully Adjustable Drum Rack
- A-B Looping Learning Feature

- Built-in MP3 Player/Recorder
- Compact, All-in-One Drum Solution
- Stereo Line-in for Portable MP3 Device
- 110V~220V Auto Switch Power Adapter
- 11 Pre-set Drum Kit with up to 4 Variations
- Sound Generator: 16-bit/44.1 kHz 3D Sound Quality
- Natural Motion Cymbal Pads and

- Cymbal Choke Capabilities
- Natural Response Drum Head with 128 Level Force Velocities Sensor
- Include: 5 Drum Pads, 2 Cymbal Pads, 2 Drum Sticks, Hi-Hat Pedal, Bass Drum Pedal, Digital Sound Module, Necessary Connection Cables, Drum Rack & User Manual

PED03

ELECTRONIC DRUM SET WITH NATURAL RESPONSE DRUMS - INCLUDES 5 DRUM PADS AND FULLY ADJUSTABLE DRUM RACK

- Drum Sticks Included
- Natural Response Pads
- 3.5mm Headphone Jack

- Fully Adjustable Drum Rack
- Runs on AC 110/220 Auto-Switching
- Built-In Reverb Switch & Metronome

- 11 Pre-Set Drum Kit with up to 4 Variations
- 2 Pedals Included: Hi-Hat Pedal and Bass Pedal

PED04

PROFESSIONAL ELECTRIC DRUM KIT

- MIDI In/Out
- Stereo Line-in
- Headphone Jack
- Built-in Metronome
- Cables and Drum Lock
- Built-in Reverb Switch
- Fully Adjustable Drum Rack
- Natural Response Drum Heads

- 128 Level Force Velocities Sensor
- Compact, All-in-one Drum Kit Solution
- 110V~220V Auto Switch Power Adapter
- 11 Pre-set Drum Kit with up to 4 Variations
- Sound Generator: 16-bit/44.1 kHz 3D Sound Quality
- ROCK Drum Include:
- Digital Sound Module
- Bass Drum Pedal

- Hi-Hat Pedal
- 2 Drum Sticks
- 5 Drum Pads
- User Manual
- Drum Rack
- Assembled Dimensions (L x W x H) Approx.: 16" x 35" x 41"

PED07

PROFESSIONAL ELECTRONIC DRUM KIT - ALL-IN-ONE DRUMMING SYSTEM WITH DRUMS FOR DUMMIES INSTRUCTIONAL CD & BOOK

PTED01

ELECTRONIC TABLE DIGITAL DRUM KIT TOP W/ 7 PAD DIGITAL DRUM KIT

- LED Control Display
- Headphone & USB Outputs
- Kick, Hi-Hat & DC Power Inputs

- USB Port Doubles as MIDI In/Out
- 7 Drum Pads with Touch Sensitivity
- 2 Different Voice Metronome System

- 215 Percussion Voices & 128 GM Voices
- 25 Preset Drum Kits & 5 User Drum Kits
- Dimensions: 19.65" (L) x 14.5" (W) x 6.2" (D)

PTED05

ELECTRONIC TABLETOP DIGITAL DRUM KIT W/7 PAD DIGITAL DRUM KIT & INSTRUCTIONAL DRUM FOR DUMMIES CD & BOOK



HUM/NOISE ELIMINATOR 2-CHANNEL BOX WITH XLR JACKS

PHE400

- 60 Hz Noise Removal
- Removes AC Hum Noise
- Breaks Ground Loops Safely
- Maintains Highest Sonic Quality
- Passive Device: No Power Required
- High-Performance Ultra-Compact Design
- 1/4-Inch TRS Phone and XLR Inputs and Outputs on 2-Channels
- Audiophile High-Quality Components and
- Exceptionally Rugged Construction
- Automatically Converts Unbalanced to Balanced Signal Without Any Signal Loss
- Uses 11:1 Isolation Transformers to Break Loop Antenna and Balance Audio Lines
- Automatically Translates Signal Voltages to Match Difference in Ground Potentials



2-CHANNEL HUM/NOISE DESTROYER

PHE300

- Removes AC Hum Noise
- Breaks Ground Loops Safely
- Maintains Highest Sonic Quality
- High-Performance Ultra-Compact Design
- High-Quality Components and Exceptionally Rugged Construction
- (2) 1/4-Inch TRS Inputs and Outputs for 2-Mono or 1 Stereo Signal
- Automatically Converts Unbalanced to Balanced Signal Without Any Signal Loss



ULTRA COMPACT PHONO TURNTABLE PREAMP

PP444

- Converts Phono Signals to Line Level Signals
- State-of-the-Art Circuitry Accommodates Magnetic Pickups
- Ultra-Low Noise Operation Improves Sound Performance
- Connects to Turntables and Other Studio Equipment
- Input Sensitivity: 3mV at 50K Ohms (Phono)
- Dedicated RCA and 1/4" Output Connectors
- Output: 2V max (P-P) at 10K Ohms
- DC 12-Volt Power Adapter Included
- Frequency Response: 20 Hz ~ 20 KHz ±2dB
- S/N Ratio (A-WTD): 70 dB - Output Level: 2V
- THD: 0.08% @ 1KHz and 3mV Input | S/N Ratio: 70dB
- Input Sensitivity/Impedance/Phono 3 mV / 50K Ohms
- Load Impedance: 10K Ohms - Reference Voltage: 1V d
- Dimensions (W x H x D): 3.54" x 2.13" x 1.02"
- Weight: 0.88 Lbs



ULTRA COMPACT PHONO TURNTABLE PRE-AMPLIFIER W/ 9 V BATTERY COMPARTMENT

PP555

- Converts phono signals to line level signals
- Connects to turntable output bring phono level up to line level
- State-of-the-art circuitry to accommodate magnetic pickups
- Ultra-low noise audio operation improves sound performance
- Connects to turntables and other studio equipment
- DC 12-Volt adapter included
- S/N Ratio: 70dB
- 9-Volt battery compartment
- THD: 0.08% @ 1kHz and 3mV
- Output: 2V max (P-P) at 10K Ohms
- Dedicated RCA and 1/4" output connectors
- Frequency Response: 20Hz to 20kHz @ 2dB
- Input Sensitivity: 3mV at 50K Ohms (Phono)
- Power Adapter Included: 110 Volt to 12-V DC
- Load Impedance: 10K Ohms - Reference Voltage: 1V d
- Dimensions (W x H x D): 3.54" x 2.13" X 1.02"



COMPACT ULTRA-LOW NOISE PHONO TURNTABLE PREAMP WITH 12-VOLT ADAPTOR - PREAMPLIFIER

PP999


- Converts Phono Signals to Line Level Signals
- 12-Volt DC 110V Adaptor Included
- Dedicated RCA Connectors
- Output Level: 2V
- Reference Voltage: 1V
- Load Impedance: 10K Ohms
- S/N Ratio (with A-WTD): 70 dB
- T.H.D. : 0.08 for 1 KHz 3 mV Input
- Frequency Response: 20 Hz ~ 20 KHz ±2dB
- Input Sensitivity / Impedance / Phono - 3 mV / 50K Ohms
- Dimensions (W x H x D): 3.54" x 2.13" x 1.02"
- Weight : 0.88 Lbs



COMPACT 1-CHANNEL 48V PHANTOM POWER SUPPLY

PS430


- DC 12-Volt Adapter Included
- Ultra Low-Noise Audio Performance
- Selectable +12 / +48 V Power Supply
- On/off Power Switch and LED Indicator
- Quality Components and Rugged Construction
- Provides 48V DC Phantom Power Supply for Any Condenser Microphone



1/4" INSTRUMENT TO BALANCED & UNBALANCED (1/4"/XLR) DIRECT BOX

PDC21

- Construction: All Steel Chassis
- Ground Lift: Switch-Able Ground Lift
- Balanced Output: 600 Balanced XLR Jack
- Instrument Input: 50K Unbalanced TS Jack
- Parallel (Link) Out: 50K Unbalanced TS Jack
- Input Attenuation: Switch-Able (0db, -20db, -40db)
- Dimension: 4.72" X 3.01" X 1.77"
- The DC-21 Is One Of The Most Useful and Versatile Tools Available Indispensable in Enabling Easy Interfacing and Connection Between Various Audio Gear in Numerous Applications.



DUAL 1/4" INSTRUMENT TO BALANCED & UNBALANCED (1/4" XLR) DIRECT BOX

PDC22

- Construction: All Steel Chassis
- Ground Lift: Switch-Able Ground Lift
- Balanced Output: 600 Balanced XLR Jack
- Instrument Input: 50K Unbalanced TS Jack
- Parallel (Link) Out: 50K Unbalanced TS Jack
- Input Attenuation: Switch-Able (0db, -20db, -40db)
- Two High-Quality Direct Boxes In One Convenient Enclosure
- Dimension: 5.5" x 4.72 x 1.57 "



DC PEDAL BOARD POWER SUPPLY FOR UP TO 10 GUITAR EFFECTS PEDALS AT 9 VOLTS

PPDLP02

- A Universal Power Supply For All Battery-Operated Guitar Pedal Effect
- Comes Complete With Cables And A Detachable AC Power Cord
- Powers Up To 10 Effects Pedals @ 9 V Each
- One Unit Replaces 10 Power Adapters - Great For Saving Space And Electricity
- Input: AC 110-240V, 15VA, 50/60Hz
- Output: 10 X 9V DC 100mA
- Enclosed In A Robust ABS Plastic Case
- Includes 10 Cables To Connect Each Pedal



ACOUSTIC KEYBOARD/PIANO SUSTAIN PEDAL

PPDLS1

- Piano Style Acoustic Sustain Pedal
- Specially Designed Rubber Bottom Floor Grips
- Works with all 1/4" Input Keyboards



WAH-WAH ELECTRIC GUITAR PEDAL

PPDLWW1

- Wah-Wah Effects Pedal
- Designed for Electric Guitars
- True Bypass Switch
- Specially Designed Rubber Bottom Floor Grips
- Instrument & Amplifier 1/4" Ports



PEDAL BOARD ORGANIZER MOUNT STAND HOLDER BASE, FOR DIGITAL, GUITAR, CONTROLLER, STANDARD, MINI, PEDALBOARD & EFFECTS PEDALS

PGPB22

- Works On Stage or in the Studio
- Made of Aircraft Grade Aluminum Alloy Construction
- Durable Industrial Black Powder-Coated Finish
- Adjustable to Universally Fit all Pedals and Controllers
- Three Bars to Accommodate Different Sizes of Pedals and Controllers
- Manufactured with Industrial Hook and Loop Velcro Already Attached to the Pedal Boards
- Hook Side of Velcro Included to Attach to the Bottom of Pedals
- Elastic Strap Power Supply Storage and Wire Management
- Includes Durable Padded Nylon Carrying Bag that Stores Board Pedals and Controls
- Anti Slip Rubber Legs
- Weight: 3.6 lbs. (Base: 2.2 lbs. / Bag: 1.4 lbs.)
- Dimensions: Pedal Board Base: 20.0" x 6.8" x 1.5" inches
- Each bar depth: 2.0" x 2.0" x 0.75" inches
- Bag: Dimensions: 21" x 8.5" x 6.0"
- Zipped Pocket Size: 12.5" x 6.0" x 2.0"

NEW



PYLE PS900 AUDIO/VIDEO AC POWER CONDITIONER, VOLTAGE FILTER, NOISE/INTERFERENCE ELIMINATION, PROCESSOR SEQUENCER WITH 3-PRONG OUTLET PLUGS

PS900

- Supplies Clean Filtered AC Power with Two-Stage High Inert Dissipation
- High Performance Micro-Controller Unit Ensures High Level Precise Timing
- Built-in Two Stage EMI Filter for Each Output (On Rear Panel)
- AC Voltage, Ambient Temperature and Step Time Display
- Able to Series Link More than 100 Units with Automatic Master Unit Display
- Selectable Step Time and Real Time Display
- Output Cut Switch for All Nine Channels
- Monitors AC Voltage in Real Time
- Display Shows Wiring and Ground Status
- LED Displays: Output Cut, Master, Bypass, Power, AC Voltage and Temperature
- Step Time Display in 7 Segment LED
- Sequence Switch LED
- Monitors Ambient Temperature in Real Time
- One Constant Power Jack Output Un-switched on Front Panel



PPEQ150

19" RACK MOUNT DUAL 10 BAND STEREO GRAPHIC EQUALIZER

19" RACK MOUNT DUAL 10 BAND 4 SOURCE INPUT STEREO SPECTRUM GRAPHIC EQUALIZER

PPEQ100

- Dual 10 Bands Eq With Blue Leds
- Four Audio Source Line Input
- 4 RCA line input
- 2 RCA line Output
- Removable Rack Mount Brackets
- VFD Spectrum Graphic Display Screen
- 110v/220v Switchable Power Source
- Dimensions: 16.9" x 9.3" x 2"

PPEQ200

DUAL 10 BAND STEREO GRAPHIC EQUALIZER W/SPECTRUM DISPLAY

RACK MOUNT AM/FM DIGITAL TUNER W/AUTO START FEATURE

PT504



- 60 (AM+FM) radio station storage
- Tuning/Pre/Next /Auto scan/Store and
- 1-10+ select keys for tuner
- Rack mount brackets
- 110/220V Switchable
- Clock display(am/pm),can start or off at a set time
- Remote control
- Dimensions: 19" w x 9.4" h x 1.6" d
- Weight: 3.5 lbs

DIGITAL PLL QUARTZ RADIO TUNER

PT652T



- AM/FM Quartz Synthesized Tuner
- 20 Station Memory Presets 10 FM / 10 AM
- Auto Station Scanning
- Digital Fluorescent Display
- Mono/Stereo Selector
- Digital Link Interface for Connecting to PT600A
- RCA Preamp Output
- External FM & AM Antennas Included
- Frequency Response: 40 to 14 KHz
- Dimensions: 16.53"W x 3.66"D x 10.03"H
- Rack Mounting Hardware Included
- 110V/220V Switchable

DUAL STEREO CASSETTE DECK W/TAPE USB TO MP3 CONVERTER

PT659DU



- Normal/High Speed copy function (Direct-dubbing from Cassette in two speeds)
- Dynamic Noise Suppression
- Supports CrO2 tapes
- Auto-stop function
- Quickly transfer music on your tapes to MP3 format on your computer
- CrO2 tape selector
- RCA inputs and outputs
- PC and Mac compatible
- Power supply voltage: 110V~60Hz
- Dimensions:16.54"(W) x 8.46"(D)x 5.32"(H)



4 CHANNEL HIGH POWER STEREO SPEAKER SELECTOR W/VOLUME CONTROL

PSPVC4

- Up to 4 Separate Speaker Pairs to your Stereo System
- Accepts Speaker Wires Up to 14- Gauge
- Handles 100Watts Per Channel with Speaker Systems that have a Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps it Running Smoothly
- Individual Speaker Volume Control
- Support Two Stereo Amplifiers
- Frequency Response: 20Hz-20KHz
- Dimensions: 16.92"(W) x 3.03"(H) x 6.29"(D)



6 CHANNEL HIGH POWER STEREO SPEAKER SELECTOR W/VOLUME CONTROL

PSPVC6

- Up to 6 Separate Speaker Pairs to your Stereo System
- Accepts Speaker Wires Up to 14- Gauge
- Handles 100Watts Per Channel with Speaker Systems that have a Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps it Running Smoothly
- Individual Speaker Volume Control
- Support Two Stereo Amplifiers
- Frequency Response: 20Hz-20KHz
- Dimensions: 16.92"(W) x 3.03"(H) x 6.29"(D)



4 CHANNEL HIGH POWER STEREO SPEAKER SELECTOR

PSS4

- Up to 4 Separate Speaker Pairs to Your Stereo System
- Accepts Speaker Wires up to 14-Gauge
- Handles 100Watts per Channel w/ Speaker Systems That Have Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions: 7.48"(W) x 1.97"(H) x 4.72"(D)



6 CHANNEL HIGH POWER STEREO SPEAKER SELECTOR

PSS6

- Up to 6 Separate Speaker Pairs to Your Stereo System
- Accepts Speaker Wires up to 14-Gauge
- Handles 100Watts per Channel w/ Speaker Systems That Have Minimum Impedance of 8 Ohms
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions: 9.05"(W) x 1.85"(H) x 5.90"(D)



8 CHANNEL HIGH POWER STEREO SPEAKER SELECTOR

PSS8

- Up To 8 Separate Speakers Pair To Your Stereo System.
- Accepts Speaker Wires Up To 14-Gauge.
- Handles 100 Watts Per Channel With Speaker Systems That Have A Minimum Impedance Of 8 Ohms.
- Protection Circuitry Keeps It Running Smoothly
- Frequency Response: 20Hz-20KHz
- Dimensions 12.8" X 2.04" X 6.12"



USB AUDIO INTERFACE & RECORDER & SD CARD

PAD6

- Offer 2 Kinds Power (5V) Ways Supply
- DC In Battery (with LED Indication)
- 4 Signal Input: SD Card, USB, PHONO & Line
- Common Play & Control Function (MP3/WMA Formats)
- With Recording Function & Adjustable Value of Record Volume
- Common EQ Function
- With One 1/8" Microphone Input jack
- With One 1/8" Headphone Output jack
- With One 1/8" Phono /Line Input jack
- Dimensions: 6.2"W x 1.2"D x 5.2"H



8 PLUG PRO AUDIO CABLE TESTER

PCT10

- Enables quick convenient continuity cable testing for all type of cables
- LED's confirm each conductor continuity and connection
- 6-Way Switch for selecting connections to be tested
- Includes internal battery and ground connection status check
- Rugged, compact, metal construction for long life and reliability
- Tests cables with all types combinations of the following connections
- 3.5mm TRS Jack
- 1/4" TRS Jacks
- 3 Pin XLR Male
- 3 Pin XLR Female
- RCA Phono
- 4 Pin Speakon
- Banana Plugs
- 9V Batter (Not Included)



12 PLUG PRO AUDIO CABLE TESTER

PCT40

- Enables quick convenient continuity cable testing for all type of cables
- LED's confirm each conductor continuity and connection
- 6-Way Switch for selecting connections to be tested
- Includes internal battery and ground connection status check
- Rugged, compact, metal construction for long life and reliability
- Tests cables with all types combinations of the following connections
- USB
- 1/4" TRS Jacks
- 3 Pin XLR Male
- 3 Pin XLR Female
- 5 pin XLR
- RCA Phono
- 4 Pin Speakon
- 4 Pin S Type Jack
- Banana Plugs
- 4 pin s Type Jack
- 3-Pin Din
- 5-Pin Din
- 8-Pin Din
- Rj45
- 9v Battery (Not Included)



13 IN 1 AUDIO CABLE TESTER (TESTS 1/4" (TRS) /1/8" (3.5MM)/ XLR (3-PIN)/XLR (5-PIN)/SPEAKON (4-PIN)/SPEAKON (8-PIN)/ RCA/TT/BANTAM/RJ45/USB-A/USB-B/DIN (3-PIN, 5-PIN, 7-PIN, OR 8-PIN)/DIN (4-PIN)

PCT60

- Enables Quick Convenient Continuity Cable Testing For All Type Of Cables
- LED'S Confirm Each Conductor's Continuity and Connection
- Switch for Selecting Connections to Be Tested
- Includes Internal Battery and Ground Connection Status Check
- Rugged, Compact, Metal Construction for Long life and Reliability
- Tests Cables with All Types Combinations of the Following Connections
- 1/4" (TRS) /1/8" (3.5mm)/XLR (3-pin)/XLR (5-pin)/Speakon (4-pin)/Speakon (8-Pin)/RCA/TT/Bantam/RJ45/USB-A/USB-B/DIN (3-pin, 5-pin, 7-pin, or 8-pin)/DIN (4-Pin)

For more detailed specifications, product-specific information and models visit:



Bluetooth Adapters



BLUETOOTH TRANSMITTER, ADDS WIRELESS AUDIO STREAMING TO BLUETOOTH RECEIVERS, SPEAKERS & HEADPHONES, CONNECTS TO ALL DEVICE WITH AUX OR RCA AUDIO INPUTS

PBTR20

- Broadcast Bluetooth Wireless Audio from Devices That Do Not Have Bluetooth
- Sends Audio to Any Bluetooth Enabled Receivers, Headphones or Speakers
- Connects to All Your Favorite Devices (TV, PC, Mac, Laptop, iPod, MP3 Player, iPhone, Smartphone, Tablet, etc.)
- Works with any Device with Headphone or RCA Audio Inputs
- Automatically Searches for Bluetooth Connection and Establishes Connection
- When Powered ON, Automatically Connects to Last Paired Device
- Includes Charging Cable, 3.5mm & AUX RCA Adapter Cables
- Built-in Rechargeable Battery
- Auto Power Off Feature
- Technical Specs:
 - Bluetooth Broadcast Range: up to 32' feet
 - Bluetooth Version 2.1
 - Battery: Lithium-ion
 - Working Time: 5-7 Hours
 - Charging Time: 2-3 Hours
 - Standby Time: 168-240 Hours
 - Dimensions: 2.13" x 0.98" x 0.43" inches



PBTR30

BLUETOOTH RECEIVER ADAPTER WITH STREAMING AUDIO AND BUILT-IN MICROPHONE FOR CALL ANSWERING, 3.5MM JACK, AND RECHARGEABLE BATTERY



WIRELESS BLUETOOTH 30-PIN IPOD DOCKING RECEIVER ADAPTER AND CALL ANSWERING BUILT-IN MICROPHONE, 3.5MM JACK AND RECHARGEABLE BATTERY

PBTR60

- Connect to Any 30-Pin Apple Dock to Enable Wireless Audio Streaming
- Play and Control Music Wirelessly from Your iPod/MP3 Player, iPhone/Smartphone, iPad etc.
- AUX Jack Allows Connection to Car Stereos, Headphones, Amplifiers, Home Theater Systems, etc.
- Can be Controlled with All Bluetooth Enabled Devices
- Connects to All 30-Pin iPhone, iPod, iPad Docking/Audio Systems
- Built-in Mic for Hands-Free Calls
- Excellent Wireless Signal Range
- Supports A2DP Stereo Bluetooth for Superior Music Quality
- Ability to Pair with 2 Mobile/Smartphones at the Same Time
- Built-In Rechargeable Battery
- AUX 3.5mm Cable (Included)
- 3.5mm AUX Line Out Jack
- LED Indicator Light
- Technical Specs:
 - Bluetooth Version: Bluetooth V3.0
 - Working Range Up To: 35 Feet
 - Standby Time: 144-192 Hours
 - Working Time: 6 - 8 Hours
 - Charging Time: 1-2 Hours
 - Dimension: 2.12" x .98" x .43"



BLUETOOTH A2DP STREAMING AUDIO INTERFACE (MUSIC/AUDIO) RECEIVER ADAPTER FOR 30-PIN APPLE IPOD/IPHONE/IPAD DOCKING STATION WITH LED STATUS INDICATOR & 3.5 MM STEREO AUX INPUT

PBTR70

- Easily add Bluetooth wireless streaming to your speakers, stereo system or docking station
- Works with and enables Bluetooth for devices like iPads, iPods, iPhones, Androids, Blackberry, PCs, Video game consoles, Bluetooth Cell Phones & much more
- Extends the range from which you can play music via Bluetooth connection
- 3.5mm/1/8" Aux input allows the connection of additional devices
- Connects to Apple 30 Pin Docks
- 3 Level LED illumination to confirm visual Bluetooth Interface (Red/Blue/Flashing Blue)
- Control your music wirelessly throughout your home
- Transmission distance: up to 10 meters (33 feet)
- Unit Dimensions: 2.15" H x 2.15" W x 0.45" D



BLUETOOTH MUSIC STREAMING DIGITAL ALARM CLOCK AND RECEIVER SYSTEM WITH FM RADIO, WIRELESS STREAMING AUDIO, 30-PIN IPOD DOCK & LCD DISPLAY

PLBACS

- Clock Radio Specifications:
 - Backlit Illuminated LCD Display
 - Apple 30 Pin Connector Compatible with iPhones & iPods
 - Set Wake Up Alarm to Play Your iPod/iPhone, Radio, Buzzer
 - 4 Level Brightness Adjustable LED Nightlight
 - FM Stereo Radio with PLL Digital Tuning System
 - Easy Push Button Controls
 - Play, Pause, Stop, Forward, Backward, Skip, Search, Volume +/-
 - 3.5mm AUX-IN Jack for Connecting External Devices
 - 12/24 Hour Clock Display
 - 2.25" Full Range Speaker
 - Enjoy up to 20 Station Presets
 - Clock Back Up Battery (1 x CR2025 Battery Included)
 - 120 Minute Sleep Mode/ Snooze 9 Minute with level Dimmer
 - Includes Remote Control & AC/DC Adaptor 100~240V (12V1.5A)
 - Apple 30 Pin Connector (SV1A) Compatible with 30-Pin Devices: iPhone(3G/3GS/4G/4GS) iPod(2Gen/3Gen/4Gen)
- Dimensions: 5.51" L x 7.40" H x 3.44" W
- Bluetooth Receiver Specifications:
 - Easily add Bluetooth wireless streaming to your speakers, stereo system or docking station
 - Works with and enables Bluetooth for devices like iPads, iPods, iPhones, Androids, Blackberry, PCs, Video game consoles, Bluetooth Cell Phones & much more
 - Extends the range from which you can play music via Bluetooth connection
 - 3.5mm/1/8" Aux input allows the connection of additional devices
 - Connects to Apple 30 Pin Docks
 - 3 Level LED illumination to confirm visual Bluetooth Interface (Red/Blue/Flashing Blue)
 - Control your music wirelessly throughout your home
 - Bluetooth Signal Range: 10 meters (33 feet)
 - Unit Dimensions: 2.15" H x 2.15" W x 0.45" D

Portable Speakers

Boom Boxes



NEW



PBMSPG50

STREET VIBE BLUETOOTH PORTABLE BOOM BOX SPEAKER SYSTEM, 2-CHANNEL, WIRELESS NFC PAIRING, USB FLASH AND MICRO SD MEMORY CARD READERS, FM RADIO, AUX INPUT

- Lightweight, Portable & Compact Boom Box System
- (2) Wireless Streaming Options: Bluetooth & NFC Pairing
- Bluetooth Allows Instant Wireless Music Streaming
- Works with All of Your Favorite Bluetooth-Enabled Devices (iPhone, Smartphone, iPod, MP3 Player, iPad, Tablet, PC, MP3 player, etc.)
- NFC (Near Field Communication): Easily pairs to Android devices
- USB Flash & Micro SD Memory Card Readers
- Includes (2) 2.5" Stereo Speakers
- Aux (3.5mm) Input Connector Jack
- Ported Tube Design for Extended Bass Performance
- Full Range Stereo Sound Reproduction
- Built-in Rechargeable Battery (2200 mAh)
- FM Radio & Sleep Timer Function
- EQ Presets: Classic, Bass, Flat, Hip Hop, Jazz, Rock
- Digital LCD Display with Adjustable Brightness
- Easy Touch Button Controls
- Bluetooth Version: 3.0
- Bluetooth Range: 28 Feet
- Full Charge Battery Duration: 4.5 Hours
- Frequency Response: 40Hz - 20kHz
- Input Sensitivity: 500mV
- Battery Voltage: 3.7V



PBMSPG100

NEW



PBMSPG200



PBMSPG100

PYLE STREET BLASTER 1000 WATT RUGGED & PORTABLE BLUETOOTH WIRELESS BOOMBOX WITH NFC, BUILT-IN AMPLIFIER, RECHARGEABLE BATTERY, AUX-INPUT, MIC AND GUITAR INPUTS

- High Output 1000 Watt Full Range Stereo Speaker System
- (2) Wireless Audio Streaming Options: Bluetooth & NFC Technology
- Bluetooth Allows Direct Wireless Audio Streaming
- Bluetooth Works with Enabled iPods, MP3 Players, Tablets, PCs, etc.
- NFC (Near Field Communication) Easily Pairs to Android Devices
- Built-in Digital Amplifier & Rechargeable Battery
- Rugged, Portable and High-Powered Speaker Housing
- Smart Engineered Design for Maximum Bass Response and Performance
- Audio Configuration Settings: Adjust Treble, Bass, Echo, Volume, Mic & Guitar Levels
- Inputs: Microphone, Guitar, AUX-Input & DC Power Jack
- 3.5mm AUX-Input for Connecting iPod, MP3 Players, Tablets, etc.
- Stream Your Favorite Internet Radio Services like Pandora or Spotify via Bluetooth
- Blinking/Strobing Illuminating LED Lights Pulse to Music
- Power, Charge and Battery Level Indicators
- Approximate Charge Time: 4 Hours
- DC Charging/Power Adaptor Cable Included
- Power: 100V-220V AC, 50/60Hz
- Dimensions: 24.5" (W) x 10.0" (D) x 10.0" (H)

PBMSPG200

STREET BLASTER X HIGH-POWERED RUGGED & PORTABLE BOOMBOX SPEAKER SYSTEM WITH BLUETOOTH & NFC WIRELESS STREAMING, USB RECORDING, BUILT-IN RECHARGEABLE BATTERY, AUX-INPUT, FM RADIO, MIC & GUITAR INPUTS, 1000 WATT



SUNBLAST 2-IN-1 PORTABLE BLUETOOTH SOLAR POWER WIRELESS WATER-RESISTANT SPEAKER SYSTEM WITH BUILT-IN MIC FOR HANDS-FREE CALL ANSWERING

PBTSN50

- Bluetooth Allows Wireless Music Streaming and Call Answering
- Built-in microphone and speakers lets you use the SunBlast like a phone!
- Compatible with any Bluetooth Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Hands-Free Speaker Phone Accepts Incoming Calls with a Push of a Button
- Music Automatically Fades During Phone Use and Calling
- Solar Power Panel Recharges the Built-in Battery with Sunlight
- Marine Grade IP44 Water Resistant & Rugged Construction
- Superior Full Range Stereo Sound Performance
- Digital Battery Level LED Display and Indicators
- Li-FePO Clean Battery Technology - Made from Non-Toxic Naturally Abundant Minerals
- Includes USB Charging Cable for when the Sun is not Shining
- Speaker Impedance: 4 Ohm
- USB Charging Power: 5V -1A
- Bluetooth Version: 2.1
- Bluetooth Range: >32 feet
- Frequency Range: 100Hz - 20kHz
- Dimensions: 8.5" x 7.6" x 7.8"

NEW



NEW

PWPBT405BK

PWPBT405OR

PWPBT405SL

PWPBT405

FLEXBOX RUGGED AND PORTABLE BLUETOOTH BOOM BOX SPEAKER SYSTEM, BUILT-IN RECHARGEABLE BATTERY, WIRELESS MUSIC STREAMING, USB/SD MEMORY CARD READERS, AM/FM RADIO, 400 WATT

- Rugged, Durable and Powerful Speaker System
- Built-in Bluetooth for Wireless Audio Streaming
- Compatible with All Your Favorite Bluetooth Devices (iPhones, Androids, Smartphones, iPads, Tablets, PC, etc.)
- Chrome-Plated Reinforced Steel Handles & Frame
- Metal Speaker Grill Covers
- Speakers: 8" Subwoofer and 1" Silk Dome Tweeter
- Built-in Rechargeable Battery (Up to 8 Hour Battery Life)
- Full Range Stereo Sound Production
- Impressive Bass Response
- Aux (3.5mm) Input Connector Jack
- USB Flash Drive and SD Memory Card Readers
- USB Device Charging Port (MP3 Players/Smartphones)
- Microphone (3.5mm) Input Connector Jack
- Bass, Treble, Echo Microphone and Master Volume Control
- Audio Output (3.5mm) Connector Jack
- Connect Additional External Devices
- AM/FM Radio with PPL Tuner and Auto Station Scan
- 10 Memory Button Preset Radio Stations
- LED Digital Display Screen
- Easy Touch Button Controls
- Battery Level LED Indicator Lights
- 35mm Speaker Stand Mountable Insert
- Includes 3.5mm to RCA Connector Cable
- 120V AC Power Output for Lights, Small Tools & Appliances, etc.



PWPBT250BK

PWPBT250OR

PWPBT250YL

PWPBT250

RUGGED AND PORTABLE BLUETOOTH SPEAKER WITH DURABLE CONSTRUCTION, THICK RUBBER CASING, FM RADIO, USB/SD CARD READERS, AUX INPUT & BUILT-IN RECHARGEABLE BATTERY (BLACK)

- Built-in Bluetooth for Wireless Audio Streaming
- Compatible with All Your Favorite Bluetooth Devices (Works with iPhones, Androids, Smartphones, iPads, Tablets, PC, etc.)
- USB Flash & SD Memory Card Readers
- USB Slot Can Also Charge Your Device
- FM Radio with 20 Station Memory
- AUX-in (3.5mm) Jack to Connect External Devices
- Built-in Rechargeable Battery
- or Plug it in with the Included Adapter (13V DC)
- Can be Powered from Other 12V Power Sources
- Rugged Design with Heavy Duty Protective Rubber Frame Casing
- Digital LCD Display
- Dimensions: (H) 14.5" x (W) 7.25" x (D) 5.75"

PSBT25

GATOR SOUND WATERPROOF BLUETOOTH SHOWER SPEAKER AND SPEAKERPHONE WITH BUILT-IN MICROPHONE FOR CALL ANSWERING



PSBT25BK

PSBT25BL

PSBT25WT

- Bluetooth V2.1 Technology
- Wireless Music Streaming and Call Answering in the Shower
- Compatible with Any Bluetooth Device
- Built-in Rechargeable Battery and Charging Cable Included
- Works with Smartphones, MP3 Players, Tablets including iPhones, Androids, Samsungs, Blackberry, iPads, etc.
- Waterproof Marine Grade IPX6 Rating
- Stream Internet Radio Services like Pandora or Spotify via Bluetooth
- Stereo Sound Speakers and Built-in Microphone for Call Answering
- Convenient Hook Attaches and Hangs from Shower Head
- 25 Hour Battery Life
- Includes Charging Cable

NEW



PWPBTA70BK




PWPBTA70BL



PWPBTA70GN



PWPBTA70OR



PWPBTA70WT

PWPBTA70BK

SOUND BOX SPLASH RUGGED AND SPLASH-PROOF BLUETOOTH MARINE GRADE PORTABLE WIRELESS SPEAKER (BLACK)

- Adds Bluetooth wireless streaming audio
- Works with virtually any Bluetooth enabled device (Smartphone, Tablet, PC, MP3 player, etc.)
- Marine-Grade IPX4 splash proof & shock resistant design
- 3.5mm Aux Input to play music from additional devices
- Built-in rechargeable battery
- Easy-push button controls
- Impressive bass output
- Battery Life: 6 Hours
- Battery: Lithium 1400mA
- Includes USB charging cable
- Battery Life Average: 6 Hours
- Metal hook loop for easy attachment to karabiner, chain, or wire
- Dedicated full-ranged stereo speakers
- Effectively recreates Lows, Mids and Highs
- Frequency Response: 60 - 20,000Hz
- Impedance: 4 Ohm

NEW



PWPBT75BK



PWPBT75BL



PWPBT75GN



PWPBT75OR



PWPBT75WT

PWPBT75BK

SOUND BOX SPLASH 2 BLUETOOTH RUGGED AND SPLASH-PROOF SPEAKER SYSTEM WITH BUILT-IN LED FLASHLIGHT, HAND CRANK TURBINE CHARGER AND AUX INPUT (BLACK COLOR)

- Bluetooth Wireless Music Streaming
- Works with Virtually Any Bluetooth Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Hand Crank Turbine Charger: Crank to Charge (or Charges via Included USB Charging Cable)
- Rugged and Splash-Proof Marine Grade Construction
- Built-in Energy-Efficient and Eco-Friendly LED Flashlight
- Built-in Rechargeable Battery
- 3.5mm AUX-in Jack for Connecting External Devices
- Impressive Bass Output
- Dedicated Full-Range Stereo Speakers
- Easy-Push Touch Button Controls
- For Outdoor and Indoor Use
- Technical Specs:
- Bluetooth Range: >32 feet
- Output Power: 3.0 Watts
- Impedance: 4 Ohm
- Voltage 3.7V
- Capacity: 1400mA
- Charge power: 5V 500mA
- Frequency Response: 60 - 20,000 Hz

NEW



PWPBTN65BK



PWPBTN65BL



PWPBTN65GN



PWPBTN65OR



PWPBTN65WT

PWPBTN65

SOUND BOX SPLASH RUGGED & SPLASH-PROOF BLUETOOTH MARINE GRADE PORTABLE WIRELESS SPEAKER WITH NFC PAIRING AND AUX INPUT (BLUE COLOR)

- Bluetooth wireless streaming audio
- Works with virtually any Bluetooth enabled device (Smartphone, Tablet, PC, MP3 player, etc.)
- NFC (Near Field Communication): Easily pairs to Android devices
- Marine-Grade IPX4 splash proof & shock resistant design
- 3.5mm (Aux Input) Jack: Connect & play music from additional devices
- Built-in rechargeable battery
- Easy-push button controls
- Impressive bass output
- Dedicated full-ranged stereo speakers
- Includes USB charging cable
- Metal hook loop for easy attachment to karabiner, chain, or wire
- Technical Specifications:
- Battery Life: 6 Hours
- Battery Type: Lithium 1400mA
- Frequency Response: 60 - 20,000Hz
- Impedance: 4 Ohm
- Dimensions (L x W x H): 8.3" x 2.5" x 2.7"
- Weight: 1.9 lbs.



PWPBT05PU



PWPBT05BK



PWPBT05BL



PWPBT05GR

PWPBT05

BLUETOOTH WATERPROOF SHOWER SPEAKER & HANDS FREE SPEAKER-PHONE WITH BUILT-IN MICROPHONE & FM RADIO

- Bluetooth Wireless Music Streaming & Call Answering
- Built-in Microphone Allows you to take Calls Hands-Free
- Works with All Your Favorite Bluetooth Devices (iPhone, Android, Smartphone, iPad, Tablet, MP3 Player, PC, etc.)
- Waterproof Marine Grade Construction
- Built-in Rechargeable Battery and USB Charging Cable Included
- FM Radio with Auto Search Tuning
- Easy Hang Hook for Listening Anywhere
- Easy to Use Button Controls
- Full Range Stereo Sound
- Battery: Lithium 3.7V 500mah
- Charge Power: 5V 500mA
- Bluetooth Range: >32 feet
- Bluetooth Version: V2.1+EDR
- Supported Bluetooth Profile: HSP, HFP, A2DP, AVRCP



PWPBT15BK



PWPBT15BL



PWPBT15GN



PWPBT15OR



PWPBT15WT

PWPBT15

JAM TUNES BOX RUGGED & SPLASH PROOF BLUETOOTH SPEAKER AND HANDS FREE SPEAKER-PHONE WITH AUX IN

- Bluetooth Wireless Music Streaming & Call Answering
- Built-in Microphone Allows you to take Calls Hands-Free
- Works with All Your Favorite Bluetooth Devices (iPhone, Android, Smartphone, iPad, Tablet, MP3 Player, PC, etc.)
- Aux-In (3.5mm) Jack: Connect Additional Audio Devices
- Rubberized, Water & Shock Resistant Design
- Easy-Push Button Controls
- Full Range Stereo Sound & Bass Output
- Built-in Rechargeable Battery with 6 Hour Average Life
- Battery: Lithium 3.7 Volts 400mA
- Includes USB Charging Cable
- Metal Hook Loop for Easy Hanging
- Bluetooth Version: 3.0+EDR
- Supports Bluetooth Profiles: HSP, HFP, A2DP and AVRCP
- Bluetooth Range: 33 feet
- Frequency Response: 60 - 20,000Hz
- Impedance: 4 Ohm
- Dimensions (W x L x H): 2.3" x 7.3" x 2.7"



PWPBT30BK



PWPBT30BL



PWPBT30OR



PWPBT30GN



PWPBT30RD

PWPBT30

BLUETOOTH WATER RESISTANT FLASHLIGHT SPEAKER WITH CALL ANSWERING MICROPHONE, FM RADIO, MICRO SD CARD READER, AUX-INPUT (BLACK)

- Built-in Bluetooth for Wireless Music Streaming
- Works with Virtually Any Bluetooth Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Built-in Mic for Hands-Free Phone Calls
- Marine Grade Splash Proof Construction
- Plays MP3 Music Files via Micro SD Card Slot
- Play More Audio from External Devices with 3.5mm AUX-IN Jack
- FM Radio - Full Range Stereo Speakers
- Built-in Rechargeable Battery - Charges via USB Port
- Super Bright Energy-Efficient LED Light
- Easy Touch Button Controls
- Play/Pause, Scan Through Tracks, Adjust Volume and Answer or Reject Calls<Technical Specs>Battery: Lithium
- Charge power: 5V 500mAh
- Bluetooth range: >32 feet
- Speaker Power: 4 Ohm 3W
- Signal-Noise Ratio:<70dB



PWR90DBK



PWR90DBL



PWR90DWT



PWR90DGN



PWR90D

AQUA BLAST BLUETOOTH FLOATING POOL SPEAKER SYSTEM WITH BUILT-IN RECHARGEABLE BATTERY AND WIRELESS MUSIC STREAMING (BLACK COLOR)



- Built-in Bluetooth
- Wirelessly Streams Music from Your Bluetooth Enabled Device (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Waterproof Marine Grade Construction: It Floats!
- Built-in Rechargeable Battery and Charging Cable
- (4) Built-in Full Range Stereo Sound Speakers
- Impressive Bass Response
- LED Indicator for Bluetooth Pairing and Charging
- Battery Life: 4 Hours (Charge Time: 8 Hours)
- Easy Push Button Controls
- Bluetooth Range: 32 Feet



PWR95SWT



PWR95SBL



PWR95SBK

PWR95S

AQUA SUNBLAST FLOATING BLUETOOTH WATERPROOF POOL SPEAKER SYSTEM WITH BUILT-IN SOLAR PANEL RECHARGEABLE BATTERY, (4) BUILT-IN SPEAKERS, FM RADIO, MICRO SD MEMORY CARD READER (BLACK COLOR)

- Built-in Bluetooth
- Wirelessly Streams Music from Your Bluetooth Enabled Device
- (Works with iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Waterproof Marine Grade Construction: It Floats!
- Solar Panel Rechargeable Design: Charges in the Sun
- Micro SD Memory Card Slot Reader
- Play MP3 Files via Micro SD Card (not included)
- Built-in FM Radio with Auto Station Scan
- (4) Built-in Full Range Stereo Sound Speakers
- Impressive Bass Response
- LED Indicator for Bluetooth Pairing and Charging
- Includes USB Charging Cable
- Built-in Rechargeable Battery (Lithium 3.7V)
- Battery Life: 4 Hours
- Charge Time (USB): 4 Hours, (Solar Charge: 12 Hours)
- Easy Push Button Controls



PLBSKBT55OR



PLBSKBT55BK



PLBSKBT55BL

PLBSKBT55

PEDAL SOUND 3-IN-1 WATERPROOF BLUETOOTH BICYCLE SPEAKER, WITH BUILT-IN MIC FOR CALL ANSWERING, POWER BANK & FLASHLIGHT (ORANGE)

- Bluetooth 3.0
- Lightweight, Portable & Multi-Functional Accessory
- Includes Wireless Speaker, Call Answering, Flashlight & Power Bank Charger
- Stream Wireless Music with Built-in Speaker via Bluetooth
- Works with all Bluetooth-Enabled Devices (iPhone, Smartphone, iPad, Tablet, MP3 Player, Laptop, PC, etc.)
- Enjoy Hands-Free Calls with Built-in Microphone
- Power Bank Function Charges Your Device
- Built-in Rechargeable Battery (2300mah)
- 4 Flash Light Modes: Dim, Bright, Slow Flash, Strobe Flash
- IPX4 Splash-Proof Rating
- Bright LED Flashlight
- Battery Life: 10 Hours of Music Playing



PSRB8WT



PSRB8BK



PSRB8BL

PSRB8

TRI-WAY CLEAR SOUND BLUETOOTH WIRELESS WATERPROOF SHOWER SPEAKER & HANDS FREE SPEAKER-PHONE W/ AUX IN (BLACK COLOR)

- Bluetooth Allows Wireless Music Streaming and Call Answering in the Shower
- Compatible with Any Bluetooth Media, (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Waterproof Protected Against Water Splashing from Any Angle
- Unique Tri-Angle Aluminum Metal
- Housing with Sturdy Metal Hook
- Hands Free Speaker Phone
- Accept Calls while Showering With Built In Microphone
- Easy to Use Controls for Music Play Back and Answering Phone Calls
- AUX: 3.5mm jack
- Double Full range speakers Excellent Clear Sound Quality
- Rechargeable Through USB Cable Charger
- Power Rating: 2W
- Speaker: 4ohm 3W
- Noise-signal Ratio: >80dB
- AUX IN: 3.5mm jack
- Battery: built-in Lithium battery
- Charge power: 5V 500mA



PWPBT10GN



PWPBT10BK



PWPBT10BL

PWPBT10

BLUETOOTH WIRELESS SHOWER SPEAKER & HANDS FREE SPEAKER-PHONE W/ AUX IN (BLUE COLOR)

- Bluetooth Allows Wireless Music and Call Answering in the Shower
- Compatible with Any Bluetooth Media, MP3 Player or Smart Phone
- Waterproof Protected Against Water Splashing from Any Angle
- Hands Free Speaker Phone
- Accept Calls while Showering With Its Built In Microphone
- Large Easy to Use Controls for Music Play Back and Answering Phone Calls
- AUX: 3.5mm jack
- Full range speaker
- Rechargeable Through USB Cable Charger
- Power source: DC 3.7V , 400mA
- Impedence of speakers: 3W , 4 Ohm
- Battery parameter: 3.7V 50mA
- SNR: >60dB
- Accessories: 1 x User manual

PBTW20 SURF SOUND PARTY WATERPROOF BLUETOOTH STEREO SPEAKER AND BUILT-IN MIC



- Bluetooth V2.1 + EDR A2DP, AVRCP
- Enjoy Hands-Free Calls with Built-in Microphone
- Compatible with Bluetooth-Enabled devices (smartphones, tablets, PCs etc.)
- Connect and Stream Audio from MP3 Players, smartphones, tablets etc.
- 10 Meter Maximum Distance Bluetooth Streaming Range
- Connector: 3.5mm AUX-in function optional
- IP-47 Waterproof & Dustproof Construction
- Stereo Speaker Sound & Boom Bass Output
- Battery Life Provides Up to 15 Hour Playing Time
- Control Volume & Song Selection Wirelessly
- Optional Power: DC 5V Cable Optional
- Bluetooth V2.1 + EDR, A2DP, AVRCP
- Glossy UV Surface Treatment Finish
- Fold-Out Stand and Carry Handle
- Powered by 4 x 'AA' Batteries (not included)
- Dimensions: 7.8" L x 1.8" W x 3.5" H



PBTW20WT



PBTW20BK



PBTW20BL

PBTWP24 SURF SOUND TALK 2-IN-1 WATERPROOF BLUETOOTH SPEAKER AND BUILT-IN MIC

- Bluetooth V2.1 + EDR A2DP, AVRCP
- 2 Telephone Modes: Handset & Speaker
- IP-47 Waterproof & Dustproof Construction
- Enjoy Hands-Free Calls with Built-in Microphone
- 10 Meter Maximum Distance Bluetooth Streaming Range
- Compatible with Bluetooth-Enabled Devices (Smartphones, Tablets, PCs etc.)
- Connect and Stream Audio from MP3 Players, Smartphones, Tablets etc.
- Built-in Li-Polymer Rechargeable Battery with Low Voltage Reminder Light
- Control Volume & Song Selection Wirelessly via Connected Device
- Attach or Hang Device Using the Convenient Hook
- Speaker Impedance (Output): 4-Ohm / 2 Watt
- Glossy UV Surface Treatment Finish
- Register up to 8 Bluetooth Devices
- Battery Life: 8 hours
- Includes USB Charging Cable
- Battery Capacity: 3.7V / 800mAh
- Continuous Standby Time: 180 hours
- Battery Charging Time: 1.5 Hours
- Dimensions: 2.55" (W) x .6" (H) x 1.5" (D)



PBTWP24BK



PBTWP24BL



PBTWP24WT



PWPS63 SURF SOUND PLAY UNIVERSAL WATERPROOF SPEAKER AND CASE - WORKS WITH IPODS, MP3 PLAYERS AND SMARTPHONES



- Waterproof, Portable and Protective Case with Built-in Speaker
- Insert your Device and Play Videos and Music
- IP-47 Grade Waterproof & Dustproof Construction
- Enjoy Full Functionality of your Device While is Inside
- Engineered Clear Plastic is Responsive and Allows Touchscreen Use
- 3.5mm Jack Compatible with Smartphones and MP3 Players
- Works with the Latest Smartphones like the Galaxy S, Sony Xperia S
- HTC One XL, Nokia Lumina 900, all iPhones, and more!
- Requires 3 x AAA Batteries (not included)
- Glossy UV Surface Treatment Finish
- Stereo Speaker Sound
- Dimensions: 3.85" (W) x 7.95" (H) x 1.37" (D)
- Fits Devices up to: 2.77" (W) x 5.37" (H) x 0.46" (D)



PWPS63BK



PWPS63BL



PWPS63WT

PIWPD3

iPOD iPHONE4 4S DOCK WITH WIRELESS SPEAKERS WITH AUX INPUT FOR ALL OTHER MP3 PLAYERS / ANDROID PHONES AND iPHONE 5



- Compatible player and charger for iPod/iPhone
- 2 Wireless Speakers with Built-In Rechargeable Lithium Batteries
- 3 Transmission Channels for Low Interference
- Speaker Power: 2x3 Watts
- 30 Meters (100 Feet) Transmission Range
- Volume Control Button on Each Speaker
- Changable Color Light on Each Speaker
- 3.5mm Aux-In Jack
- Video Out
- Automatic Tuning On Speakers
- Remote Control and 110-240V AC Adaptor Included



FM RECEIVER RADIO W/ IPOD/iPAD/iPHONE DOCKING STATION & ALARM CLOCK

PIPDK78

- Negative LCD Display with Back-light
- Play, Pause, Stop, Forward & Backward skip or search
- Apple 30 Pin Connector(5V2.1A) Compatible Ipad (1Gen/2Gen/3Gen) iPhone(3G/3GS/4G/4GS) iTouch(2Gen/3Gen)
- FM PLL Stereo Radio
- PLL Digital Tuning System
- 20 preset stations memory
- Electric Volume +/- Control
- 12/24 hour Clock Display
- Single Alarm Wake To FM/Buzzer/iPod/iPad/iPhone
- 3" Full Range Speaker
- Clock Back Up Battery 2 x AAA (Battery Not Included)
- 90 Minute Sleep Mode
- 3.5mm AUX-IN Jack
- Composite Video Output
- Wireless Remote Control
- AC/DC Adaptor 100~240V (12V2A)
- Dimensions: 14.44"W x 6.77"H x 5.78"H

PIP711

DIGITAL 2-WAY STEREO SPEAKER SYSTEM FOR IPODS, iPADS & iPHONES, 300 WATT POWER, REMOTE CONTROL & LINE-IN

- Charges Your Apple Device When Docked
- Fully Functional Wireless Remote Control
- Output Power: 300 Watt Max, 150 Watt RMS
- Connect Any Digital Music Player Via 3.5mm Jack
- Compatible with Most iPad, iPod & iPhone Models
- Use Component Video Output to Play Video on Your TV
- Full-Range Sound: Dual 5" Woofers & Dual 3/4" Tweeters
- Frequency Response: 150 Hz - 20 kHz. S/N Ratio: 85 dB
- THD: 0.1%. Weight: 13 Lbs.



iPOD iPHONE DOCK CLOCK RADIO WITH FM RADIO, LED NIGHTLIGHT, DUAL ALARM CLOCK & AUX INPUT FOR SAMSUNG GALAXY, iPHONE 5 AND OTHER DEVICES

PICL36B

- Backlit Illuminated LCD Display
- Apple 30 Pin Connector Compatible with iPhones & iPods
- Set Wake Up Alarm to Play Your iPod/iPhone, Radio, Buzzer
- 4 Level Brightness Adjustable LED Nightlight
- FM Stereo Radio with PLL Digital Tuning System
- Easy Push Button Controls
- Play, Pause, Stop, Forward, Backward, Skip, Search, Volume +/-
- 3.5mm AUX-IN Jack for Connecting External Devices
- 12/24 Hour Clock Display
- 2.25" Full Range Speaker
- Enjoy up to 20 Station Presets
- Clock Back Up Battery (1 x CR2025 Battery Included)
- 120 Minute Sleep Mode/ Snooze 9 Minute with level Dimmer
- Includes Remote Control & AC/DC Adaptor 100~240V (12V1.5A)
- Apple 30 Pin Connector(5V1A) Compatible with 30-Pin Devices: iPhone(3G/3GS/4G/4GS) iTouch(2Gen/3Gen/4Gen) Nano(1Gen/2Gen/3Gen/4Gen/5Gen/6Gen)
- Dimensions: 5.51"L x 7.40"H x 3.44"W

PIPDSP20

iPOD/iTOUCH/iPHONE AUDIO DOCKING PORTABLE SPEAKER SYSTEM

- High Grade Speaker and Digital Amplifier for Superior Sound Quality
- Side Air Vent for Optimal Bass
- Elegant Cloth with Aluminum Trim Panel Design
- Slide Out Rear Stand for Added Support and Comfortable Use
- Side Up Back Support for Extra Safe Device Docking/Support
- Plays and Charges most iPods, iPod Touch and iPhone
- Fast 1A Charging for iPhone
- AC Operation using Separate AC-Adaptor (Included)
- Top Panel Electronic Volume Controls
- Low Power Consumption with Smart Auto-Off/On Power
- Total Power Output: 15 Watts



UNIVERSAL IPOD/iPHONE DOCKING STATION FOR AUDIO OUTPUT CHARGING - SYNC W/iTUNES AND REMOTE CONTROL

PIDOCK1

- Dock Station With Remote For iPods
- Listen To Your Music On Your Home Stereo System
- Synchronize With iTunes On Your Personal Computer
- Stereo Audio Out
- Remote Control System
- Includes Audio and Charging Cables!>Power Source Voltage: 100-240v 5V Output

PIPADK1

UNIVERSAL IPOD/IPAD/IPHONE DOCKING STATION FOR AUDIO OUTPUT CHARGING - SYNC W/I TUNES AND REMOTE CONTROL

- Conveniently dock & charge your iPhone, iPad, or iPod
- Using the USB port, sync with iTunes while your device is connected
- Stereo audio out (3.5mm jack)
- Control the music with the included wireless remote control
- Construction material: Plastic
- Power Source Voltage: 100-240v 5V Output
- Dimensions: 3.77" x 2.13" x 0.83"



PIPADK2

UNIVERSAL IPOD/IPAD/IPHONE DOCKING STATION FOR AUDIO & VIDEO OUTPUT CHARGING - SYNC W/I TUNES AND REMOTE CONTROL

- Conveniently dock & charge your iPhone, iPad, or iPod
- Using the USB port, sync with iTunes while your device is connected
- Stereo audio out (3.5mm jack)
- Control the music with the included wireless remote control
- Component video output
- Construction material: Plastic
- Voltage: 100-240 5 Volt Output
- Dimensions: 3.77" x 2.13" x 0.83"



PBS2SL

BLUETOOTH MINI SPEAKER WITH HANDS-FREE CALL ANSWERING AND MUSIC STREAMING, AUX-IN, 8 HOUR PLAYBACK (SILVER)

- Built-in Bluetooth Technology
- Enjoy Call Answering, Hands-Free Talking or Stream Music
- Compatible with all Bluetooth-Enabled Devices
- Works with iPhone, iPad, Android, BlackBerry, MP3 Players, Tablets, etc.
- Connect to Virtually Any Audio Device via AUX 3.5mm Input
- Integrated Stereo Sound with Rich Bass Response
- Includes USB Charging Cable
- Rechargeable Lithium-Ion Battery
- Battery Life: 8 Hours
- Control Song Selection and Volume Wirelessly
- Durable Aluminum Alloy Body
- Dimensions (H x W x D): 2.4€™ x 2.4€™ x 2.3€™



PBS9BK

BLUETOOTH MINI CUBE SPEAKER WITH HANDSFREE PHONE FUNCTION, AUX-IN, 8 HOURS OF PLAYBACK

- Bluetooth Wireless Module Compatible With Many Smartphones
- iPhone, iPad, Android, BlackBerry, All Bluetooth-Enabled Music Players
- Supports Bluetooth Stereo For Rich Sound And Superb Bass Response
- Rechargeable Lithium-Ion Battery Lasts Up To 8 Hours, Charges Via USB
- Answer Calls With Bluetooth Hands Free Function
- Play, Pause, Previous, Next Functions Over Bluetooth
- Connect Virtually Any Audio Device Via 3.5mm Aux-In Jack
- Constructed From Durable Aluminum Alloy
- Bluetooth Profiles Supported: A2DP, AVRCP
- Color: Black
- Dimensions: 2.4" H x 2.4" W x 3.2" D



PMS2B

MINI CAPSULE RECHARGEABLE SPEAKER FOR IPOD/ MP3/MP4/COMPUTER/ LAPTOP/NOTEBOOK/AUDIO/GAMING-DEVICES/PDA (BLACK)

- Plays all iPod/iPhone models and other audio devices with 3.5-mm audio jack
- Perfect replacement for laptop speakers
- Unique vacuum bass design for surprising volume and bass response
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Frequency response 100HZ-20KHZ
- Battery Charge time: DC 5V 200MAH-300 MAH around 2.5 hours; USB 4 hours
- Plays On Fully Charged 8 hours
- Dimensions: 2€™ D x 1.4€™ W x 2.2€™ H
- Color: Black



PMS2W

WHITE



PMS5DB

BASS EXPANDING RECHARGEABLE MINI SPEAKERS PAIR FOR IPOD/MP3/COMPUTERS (BLACK)

- Plays all iPod/iPhone models and other audio devices with 3.5-mm audio jack
- Perfect replacement for laptop speakers
- Unique vacuum bass design for surprising volume and bass response
- Fits in your Hand / Pocket for ultimate portability
- Built in li-ion rechargeable batteries
- Frequency response 100HZ-20KHZ
- Battery Charge time:DC 5V 200MAH-300 MAH around 2.5 hours;USB 4 hours
- Plays On Fully Charged 8 hours
- Dimensions:2.6"™ D x 1.4"™ W x 2.2"™ H
- Color: Black



PSPFM1B

PORTABLE MP3 SPEAKER PLAYER WITH LITHIUM RECHARGEABLE BATTERY, LED DISPLAY, MP3/MICRO SD/USB/LAPTOP, FM RADIO, AUX INPUT (BLACK COLOR)

- LED Screen Display Track Information
- Supports Micro SD Cards and USB Sticks (MP3 Format) To Play Back Your Favorite Music
- FM Radio Function with Auto Search
- Line-In for Any Digital Music Player (iPod, iPhone, iPad, Android, MP3 Player)
- Headphone Jack for Private Listening
- Built-In Rechargeable Lithium Battery
- Material: Plastic
- Dimension: 5" X 3.2" X 1.6"
- Speaker Power: 20 Watts
- Frequency Response: 90 Hz-20 KHz
- Battery Capacity: 600mah



PSPFM1BL

BLUE



2-IN-1 WATERPROOF 4GB MP3 PLAYER WITH Pedometer and LAP COUNTER, INCLUDES 2 PAIRS OF WATERPROOF HEADPHONES

PSLPWMP5

- Built-in MP3 Player with 4GB of Music Storage
- Pedometer Measures: Distance, Time, Steps Walked & Calories Burned
- Lap Counter Measures: Laps Completed, Distance and Time Swimming
- IPX8 Waterproof Rating for Headphones and MP3 Player/Pedometer
- Worry-Free Submersion in Water up to 3 Meters Deep
- Includes 2 Pairs of Over-the-Ear™ Waterproof Earphones
- LCD Display with ID3 Track and Song Read-Out Information
- Supports MP3, WMA, WAV Audio Formats
- Rear Located Clip Attaches to Goggles, Belts, Swim Suits, etc.
- Comes with Spare Water-Resistant Earbud Tips and USB Charging/Data Transfer Cable
- The Ideal Indoor/Outdoor Sports Training and Music Accessory
- Designed to Resist Water, Dust, Snow and Other Debris



For more detailed specifications, product-specific information and models visit:



NEW



FLEXIBLE SPORTS WRAP AROUND BLUETOOTH HEADPHONE- SUPPORTS WIRELESS MUSIC STREAMING AND HANDS-FREE CALLING

PHBT3E

- Built-in Bluetooth for Wireless Music Streaming
- Built-in Microphone for Wireless Calling
- Serves as Both a Wireless Music Headset and Bluetooth Phone Headset for Hands Free Calling
- Compatible with Bluetooth Enabled Music Players & A2DP Enabled Devices Such as iPad, iPhone, iPod Touch, Android Smart Phones, Tablets etc.
- Play/Pause and Answer or Reject Calls with a Simple Press of a Button
- Scan Through Tracks, Adjust the Volume Up or Down with One Finger
- Made to Wrap Comfortably Around the User's Head
- Unique Wrap Around Design Stays on During Active Sports Play
- Stereo High Fidelity Bass Response and Crystal Clear Sound
- Built with CVC5.0 Noise and Echo Reduction
- Bluetooth Version 2.1+EDR Support- sA2DP1.2/AVRCP1.0/HSP1.0/HFP1.5
- Wireless Bluetooth Reception Range of 32 feet
- Built in Rechargeable Li-ion polymer battery 200mAh
- Charges by micro-USB Port in 2.5 hours
- Music playback time: 10 hours
- Talking time: 10 hours
- Standby time: 30 days
- Speaker Frequency Response: 110Hz €" 20,000 Hz
- Speaker diameter: 1.18" inch
- Speaker impedance: 16 Ohm
- Speaker rated power: 15mW
- Weight:1.58 oz.
- Dimension(L*W*H) Approx.: 4.25" x 0.86" x 3.70"



PHBT6B



PHBT6BL



PHBT6G



PHBT6R



PHBT6Y

PHBT6

SOUND 6 BLUETOOTH 2-IN-1 STEREO HEADPHONES WITH BUILT-IN MIC FOR CALL ANSWERING AND EASY-TOUCH DIGITAL CONTROLS

- Built-in Bluetooth for Wireless Music Streaming
- Works with Virtually Any Bluetooth Device (iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Built-in Mic for Call Answering
- Button-Free, Easy-to-Use Digital Touch Controls
- Play/Pause, Scan Through Tracks, Adjust Volume and Answer or Reject Calls with a Simple Touch
- Slide Your Finger Up/Down the Ear Piece to Raise/Lower Volume
- Slide Your Finger Left/Right to Browse Between Tracks
- Stereo Sound High Fidelity Bass Response and Crystal Clear Sound
- Automatically Connects to the Last Paired Bluetooth Device
- Low Battery Level Indication - Also
- Appears on Your Paired Device
- Fully Adjustable Headband With Comfortable Ear Pads
- Digital APT-X Audio Coding Technology
- 1.57" Inch Mylar Speakers
- Battery Life: 10-13 Hours (Music Play Time) 15-20 Hours (Talk Time)
- Battery Duration on Standby: 350 hours
- Charging Time: 3.0 hours
- Frequency: 2.4GHz Spectrum
- Audio Impedance: 32 ohm
- Wireless Operating Range: 33 feet
- Includes USB Charging Cable
- Dimension: 7" x 6" x 1.1" inches

NEW



PHBT5B



PHBT5S



PHBT5G



PHBT5R



PHBT5P



PHBT5O

STEREO BLUETOOTH STREAMING WIRELESS HEADPHONES WITH BUILT-IN MICROPHONE - WORKS WITH ALL BLUETOOTH-ENABLED PHONES & DEVICES

PHBT5

- Take Calls with Built-in Microphone
- Talk Time: Up to 10 hours
- Standby time: Up to 180 hours
- Frequency: 2400.0 - 2483.5MHZ
- Average Charging Time: 2-3 hours
- Music Playing Time: Up to 8 hours
- Noise-canceling stereo sound drivers
- Built-in Version 3.0 Bluetooth technology
- Listen to your favorite music from Bluetooth-enabled devices
- Unlock more possibilities - Can be paired with 2 mobile phones
- Bluetooth profiles supported: headset, hands-free, A2DP & AVRCP
- With built-in Bluetooth technology you can stream audio directly from your Bluetooth enabled device with crystal clear wireless performance -- Works with iPhone, Blackberry, Droid, iPads, Tablets and much more!
- Dimensions: 5.9" (L) Å— 4.3" (W) Å— 2.95" (H)





NEW



PWBH18BK



PWBH18BL



PWBH18SL



PWBH18WT

PWBH18

BLUETOOTH WATER RESISTANT HEADPHONES WITH BUILT-IN MIC FOR HANDS-FREE CALL ANSWERING (BLACK)

- Built-in Bluetooth and Microphone
- Enjoy Wireless Music Streaming and Call Answering
- Works with all of Your Favorite Bluetooth-Enabled Devices (iPhone, Android, Smartphones, iPad, Tablets, MP3 Players, etc.)
- Marine Grade IP64 Water Resistant Construction
- Built-in Rechargeable Battery (7 Hour Average Life)
- Unlock more possibilities: Can be Paired with 2 Mobile Phones
- High-Fidelity Sound Reproduction
- Includes Additional EarbudsTechnical Specs:Bluetooth Range: 10 Meters
- Bluetooth V4.0 +EDR A2DP, AVRCP
- Continuous standby time: 180 hours
- Continuous transmission time: 8 hours
- Continuous talk/Listening time: 5 hours
- Distortion:<0.1%
- Battery: Li-Polymer 3.7V / 80mAh<0.1uA
- Signal-to-Noise Ratio: >70 dB
- Frequency Response: 20Hz-20KHz



PSWP4BK



PSWB4BL



PSWP4WT

WATERPROOF NECKBAND HEADPHONES WITH BUILT-IN MP3 PLAYER FOR SWIMMING & WATER SPORTS

PSWP4

- 4-GB Memory Storage
- High-Fidelity Sound Reproduction
- Supports MP3 and WMA Music Formats
- USB 2.0 Compatible For High-Speed File Transfer
- Rechargeable Battery Provides Up To 10 Hours of Play
- Includes 6 Pairs of Earbuds (3 Sizes for Water & 3 for Land Use)
- Waterproof Rating IPX-8 For Submersion Up To 1 Meter (3.3 Feet)
<Technical Specs</
- Distortion:<0.1%
- Lithium Battery: 190 mAh
- Signal-to-Noise Ratio: >70 dB
- MP3 Bite Rate: 8kbps ~ 320kbps
- WMA Bite Rate: 32kbps ~ 192kbps
- Frequency Response: 20Hz-20KHz
- Earphone Output Power: 5mW + 5mW
- Operating Temperature: 41°F - 104°F (-5°C - 50°C)



PSWP25BK



PSWP25BL



PSWP25GN

PSWP25

4GB WATERPROOF MP3 PLAYER/FM RADIO WITH PEDOMETER, STOP WATCH, LCD DISPLAY AND INCLUDED WATERPROOF HEADPHONES

- Measures Distance, Steps, Calories Burned
- Built-In Pedometer, Stop Watch, Swim Fitness Function Modes
- IPX-8 Waterproof Rating for Use in 3.3 Feet Water Depth
- 4 GB Music Storage Capacity USB 2.0 File Transfer Interface
- High-Fidelity Sound Reproduction
- Supports MP3 and WMA Music Formats
- ID Tag Readout on LCD Display Showing Song/Track Information
- Built-in Rechargeable Li-polymer Battery For up to 10 Hour Playing Time
- Includes Sets of Waterproof and Dry-Use Ear Bud Tips
- Stereo FM Frequency Range: 87.5MHz - 108MHz
- Safe Operating Temperature: -23° F - 104° F
- EQ Settings: Nature, Rock, Pop, Classic, Soft, Jazz
- Frequency Response: 20Hz - 20kHz



SURF SOUND WATERPROOF MP3 PLAYER WITH HEADPHONES FOR SWIMMING & WATER SPORTS (BLUE)

PSWP20BL



- Attachable MP3 Player with Button Controls
- 4-GB Memory Audio Storage
- High-Fidelity Sound Reproduction
- Supports MP3 and WMA Music Formats
- USB 2.0 Compatible for High-Speed File Transfer
- Waterproof Rating IPX-8 For Submersion Up To 1 Meter (3.3 Feet)
- Rechargeable Battery for up to 15 Hour Play Time
- Charge Time: 2.5 - 3 Hours
- Technical Specs:
- Distortion:<0.1%
- Lithium Battery: 180 mAh
- Signal-to-Noise Ratio: >70 dB
- MP3 Bite Rate: 8kbps ~ 320kbps
- WMA Bite Rate: 32kbps ~ 192kbps
- Frequency Response: 20Hz - 20kHz
- Frequency Response: 20Hz-20kHzW
- Operating Temperature: 41°F - 104°F (5°C - 40°C)



PSWB7PN



PSWB7BK



PSWB7BL

PSWB7

ACTIVE SPORT WATER RESISTANT BLUETOOTH HANDS FREE WIRELESS STEREO HEADPHONES AND HEADSET WITH BUILT IN MICROPHONE FOR CALL ANSWERING (PINK)

- Built-in Bluetooth: Stream Music Wirelessly
- Built-in Microphone: Answer Calls Hands-Free
- Works with Smartphones, MP3 players, tablets & other Bluetooth-enabled devices
- IPX8 Marine Grade Water Resistant Construction
- Easy to Use Push Button Controls
- MP3 Control Unit Detaches for Charging
- Rechargeable Battery Charges via USB Port
- Ideal for Active Sports
- One Size Fits All Headband Style
- LED Light Indicators
- Up to 6 hour Battery Life
- Standby Time: 20 hours
- Bluetooth Version 2.1+ EDR
- Bluetooth Operation Range: 33 Feet
- Temperature Range: 32° F - 176° F
- Charges via Mac/PC USB Port or 5V 1A USB Charger
- Dimensions (W x H): 4.9" x 1.0"

SURF SOUND WATERPROOF MARINE HEADPHONES EARBUDS COMPATIBLE W/ MP3 PLAYERS & IPODS



PWP15W



PWP20B



PWP20W



PWP25W



PWPE10B



PWPE10W



PHPMC2



PHPDJ1



PIH20



PHPMCU10



PHPDJ2

PHPMC2

STEREO PC MULTIMEDIA HEADSET/MICROPHONE

- Speech Recognition Headset And Boom Microphone
- Direct Noise Canceling Microphone Technology
- Adjustable Headband; Adjustable Boom Arm
- Full-Range Stereo Sound
- Convenient In-Line Volume Control
- Frequency Response: 20-22,000Hz /
- Impedance Headset: 32ohms
- Impedance Microphone: 1.5k Ohms, Sensitivity Microphone: -58db±2db

PHPMCU10

MULTIMEDIA/GAMING USB HEADSET WITH NOISE-CANCELING MICROPHONE

- Gives Unique 3-D,360 Sound Experience
- Eliminates the Need for A Sound Card
- Windows/Mac Compatible
- With In-Line Mute/Volume Control
- Adjustable Headband for Perfect Fit
- Adjustable, Bendable and Pivotal Microphone
- In-Line Volume Control
- Plug Type: USB 2.0
- Cable Length: 6Ft
- Speaker Driver Diameter: 40mm
- Sensitivity (S.P.L): 105db±3db/Mw / Impedance: 32 Ohms ± 15%

PHPDJ1

PROFESSIONAL DJ TURBO HEADPHONES

- Plug: Gold Plated 1/8" (3.5 Mm) Stereo Plug With 1/4" Adaptor
- Wide Frequency Range Delivers Full Bass And Detailed Highs
- Optimized Performance For Use With Most Pro And Consumer Audio Devices
- Closed-Back, Circumaural Design Rests Comfortably Over The Ears And Reduces Background Noise
- Single-Sided Cord With Oxygen-Free Copper Wires
- Driver Size: 50mm
- Sensitivity (S.P.L): 115db±3db/mW(at 1KHz)
- Impedance: 32 Ohms ± 15%

PHPDJ2

PROFESSIONAL DJ TURBO HEADPHONES

- Plug: Golden-Plated 1/8" (3.5 Mm) Stereo Plug With 1/4" Adaptor
- Wide Frequency Range Delivers Full Bass And Detailed Highs
- Optimized Performance For Use With Most Pro And Consumer Audio Devices
- Closed-Back, Circumaural Design Rests Comfortably Over The Ears And Reduces Background Noise
- Single-Sided Cord With Oxygen-Free Copper Wires
- Driver Size: 50mm
- Sensitivity (S.P.L): 115db±3db/mW (at 1 KHz)
- Impedance: 32 Ohms ± 15%

PIH20

UHF 900MHZ WIRELESS STEREO HEADPHONES FOR TV IPOD MUSIC W/AUX INPUT

- Universal iPod Dock Plays And Charges All Docking iPod Models
- Auxiliary Connection Lets You Listen To Non-Docking iPod Models, TV/CD/DVD/MP3 Or Any Audio Systems
- Several Headphones Can Be Used Simultaneously With One iPod Transmitter
- Working Distance Up To 150 Feet With Our Latest RF Wireless Technology
- Auto Mute And Auto Running Function Available For Headphones
- Double PLL System For Ultimate Frequency Stability
- Active Noise Reduction System For Crystal Clear Sound
- System: UHF/RF
- Carrier Frequency: 915mhz
- S/N Ratio: 75db(Minimum)
- Channel Separation: 35db (Minimum)
- Distortion: 1% (Maximum)
- Frequency Response: 30 - 20,000Hz



PHPNC15



PHPNC45



PHBT35

PHPNC15

FOLDING NOISE-CANCELING HEADPHONES

- Noise Canceling Feature Reduces Background Noise In Any Environment
- Ideal for Airplane, Train And Bus Use
- Closed-Style, Dynamic Headphone with 40mm Driver
- Foldable Headband Allows Phones to Fold Down To A Small Size For Convenient Storage
- Active Noise Canceling Headphones Reduce Outside Ambient Noise By 83.4%
- Noise Cancellation Can Be Switched On/Of
- Frequency Response: 20~20K Hz, Impedance: 32 Ohms, Sensitivity: 110db ± 2db/Mw
- Cable Length: 1.5m

PHPNC45

HIGH-FIDELITY NOISE-CANCELING HEADPHONES WITH CARRYING CASE

- Reduces Ambient Noise By 95%
- Ergonomically Designed For Maximum Comfortable Listening Experience
- Up To 20dB Of Noise Cancellation; Effectively
- Reduces Aircraft Or Subway Engine Noise
- Larger 40mm Driver With Clear Sound And Well Defined Bass
- Frequency Response: 30 - 20000 Hz
- Speaker Type: 40mm Mylar
- Cone Impedance: 32ohm
- Noise Reduced Over Frequencies 70 - 1200 Hz
- 2 X AAA Batteries Required

PHBT35

STEREO BLUETOOTH STREAMING WIRELESS HEADPHONES WITH BUILT-IN MICROPHONE - WORKS WITH ALL BLUETOOTH-ENABLED PHONES & DEVICES

- Built-in Bluetooth technology you can stream audio directly from your Bluetooth enabled device with Crystal clear wireless performance - Works with iPhone, Blackberry, Droid, iPads, Tablets and more
- Take Calls with Built-in Microphone
- Talk Time: Up to 7 hours
- Standby time: Up to 180 hours
- Frequency: 2400.0 - 2483.5MHZ
- Music Playing Time: Up to 6 hours
- Noise-Canceling Stereo Sound Drivers
- Built-in Version 3.0 Bluetooth technology
- Listen to your favorite music from Bluetooth-enabled devices
- Unlock more possibilities - Can be paired with 2 mobile phones
- Bluetooth Profiles Supported: Headset, Hands-Free, A2DP & AVRCP
- Average Charging Time: Up to 6 hours



PHA15



PHA25



PHA15

3.5MM / 1/8" 150 WATT MONO AUDIO AMPLIFIER

- 3.5mm / 1/8" Male Audio Input
- 1 Channel Speaker Audio Output
- 15W x 1 RMS Audio Output 150W x 1 Peak Audio Output
- 4 Ohm Stable
- Designed for use with all audio players with 3.5mm /1/8" audio outputs mp3, Ipod, etc.

PHA25

3.5MM / 1/8" 2 CHANNEL 300 WATT STEREO AUDIO AMPLIFIER

- 3.5mm / 1/8" Male Audio Input
- 2 Channel Speaker Audio Output
- 15w x 2 RMS Audio Output /150w x 2 Peak Audio Output
- 4 Ohm Stable
- Designed for use with all audio players with 3.5mm /1/8" audio outputs mp3, Ipod, etc.



PHE1AB



PHE1AW



PHE5AB



PHPW2



PHPW5

PHE1AB

iPOD/iPHONE HEADPHONE AMPLIFIER

- Designed for iPod/iPhone,
- Improves the sound quality with the line out from the dock
- Build in high quality Texas Instruments™s headphone amplifier Intergrated Circuit
- High power output to drive high impedance or low sensitivity headphones or earphones
- Easy control of the playback of the iPod/iPhone
- while the player stays securely in your pocket
- Compatible with iPod Nano, iPod Video, iPod Touch, iPhone, all generations & all versions
- Easy & simple to use, plug and play
- Powered by the iPod/iPhone (no charging or battery needed)
- With a built-in clip, you can clip it onto anything
- Output Power: 100mW (16 ohms Loaded),
- 12mW (300 ohms Loaded)
- Signal to Noise Ratio: =98dB (A weight)
- Distortion:<0.009% (10mW)
- Frequency Response: 10Hz ~ 80KHz
- Suitable Headphone Impedance: 16 ohms ~ 300 ohms
- Power Supply: Use iPod/iPhone power 3.3V
- Line control dimesions: 48mmx14mmx10.7mm
- AMP dock: 33.8mmx30.8mmx7.8mm

PHE1AW

WHITE

PHE5AB

BASS BOOSTING PORTABLE HEADPHONE AMPLIFIER (BLACK COLOR)

- Designed for High Impedance and Low Sensitivity Headphones
- Easy to Carry and Use In The Outdoors
- Increases Your Headphone's Bass & Sound
- New Amplifier IC with Higher S/N and Lower Distortion
- Portable Headphone Amp for iPod, MP3 Player, Laptop or Mobile Phone
- Boost Volume and Reduce Battery Drain of Portable Players
- Built-In Rechargeable Battery (Charged Via USB)
- Robust Metal Casing For Everyday Use
- Ultra Low Signal to Noise and Distortion Specification

PHE5AS

SILVER

PHPW2

FM HI-FI WIRELESS HEADPHONES WITH EXTREME BASS

- Wireless Reception from TV
- Wired Reception to Mp3 Player
- FM Radio and Wired Reception from PC, CD, DVD Players
- Reception Frequency Range: 85MHz~108MHz
- Driver Size: 40mm
- Sensitivity (S.P.L): 105dB±3dB/MW (at 1 KHz)
- Impedance: 32 Ohms ± 15%
- Frequency Response: 20~20,000Hz
- Signal/Noise Ratio: >50dB
- Headphone: DC 3V (2x1.5V AAA batteries)
- Transmitter: DC 3V (2x1.5V AAA batteries)
- Maximum operation distance: 100FT, 360°

PHPW5

PROFESSIONAL 5 IN 1 WIRELESS HEADPHONE SYSTEM

- Wireless Headphone Suitable for Listening to Any Device with an Audio Output
- Wireless Monitor for Monitoring Sound from Any Room (e.g., Monitoring Baby)
- High Powered Signal with Effective Long Range
- Built in Microphone for Web Chat
- Hi-Fi & Bass Effect for Superior Sound Performance
- Built in FM Radio
- Product Dimensions:6.8 x 3.3 x 8.4
- Weight .63Lbs

PHA40

4 CHANNEL STEREO HEADPHONE AMPLIFIER

- Power On LED Indicator
- Stereo Headphone Output Level Controls
- Stereo Headphone 1/4" TRS Output Jacks
- Stereo 1/4" TRS Source Input Jack
- 12V/150mA DC Power Supply Included
- Dimensions: 4.07"W x 1.18"H x 2.24"D



PWSIC25

NEW



- Quickly and Easily Add Waterproof Protection
- Fits All Electronic Devices up to 7.0" Wide, 10.3" Tall, 0.4" Thick (iPads, Kindles, Tablets, iPhones, Androids, Smartphones, MP3 Players, etc.)
- Works with Tablets, Smartphones & MP3 Players
- Marine Grade IPX7 Waterproof & Dustproof Bag
- Safe in Water Depths up to 1 Meter/3.3 Feet
- Built-in 3.5mm Headphone Jack
- Engineered Plastic Allows Use of Touch Screen While Inside
- Includes Shoulder Strap for Easy Carrying
- Built-in Fold-Out Table Stand
- Overall Dimensions (W x H x D): 8.5" x 13.0" x 0.8" inches

PWSIC10

- Universal Waterproof Sports Case for iPhone, Android & Other Portable Devices with IPX-8 Protection



PWSIC20

- Universal Waterproof Sport Case for iPhone, Android & Other Portable Devices with IPX-7 Standard Protection



PWSIC30

- Universal Waterproof Sport Case with Headphone Jack - Fits all iPads and Many Other Tablet PCs and eReaders



PSIC40

- Universal Waterproof Sport Case with Headphone Jack Fits iPhone4 4s iPod Touch and Some Other Smartphones and Media Players - Clamp Mountable to Bicycle, Motorcycle, Jetski, ATV



PSIC55

- Ultimate Protection Waterproof Universal Sport Case
- With Bike/Motorcycle/Jetski Clamp for iPhone 4 4s
- iPod Touch, Some Android & Other Portable Devices



PCIC45

- Ultimate Protection Waterproof Universal Sport Case With Carabiner Clip for iPhone 4 4s
- iPod Touch, Some Android & Other Portable Devices





PHRM84



PHRM36



PHRM38PN



PHRM26



PHRM24

WATER-RESISTANT HEART RATE MONITORING WATCH AND SENSORS FOR RUNNING / WALKING / TRAINING

Model	Calorie Counter	Step Counter	Feature	Color
PHRM20	x	x	100 Lap Memory	Black / Silver
PHRM22	x	x	4 Training Modes	Black / Silver
PHRM24	x	x	Extra Large LED Screen	Red / Black
PHRM26	x	x	Included PC Software	Black / Silver
PHRM28	x		Chronograph	Black / Silver
PHRM30	x		Chronograph	Black / Silver
PHRM32	x		Current Speed Readout	Black / Silver
PHRM34	x		Current Speed Readout	Orange / Black
PHRM36	x		Stopwatch	Orange / Black
PHRM38BK	x		Stopwatch	Black / Black
PHRM38SL	x		Stopwatch	Black / Silver
PHRM38PN	x		Stopwatch	Black / Pink
PHRM38GR	x		Stopwatch	Black / Neon Green
PHRM40	x		Target Training Zones	Black / Silver
PHRM56	x		Target Training Zones	Black / Silver
PHRM84	x	x	Intelligent Step Filter	Black / Silver

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

PSBTHR70

BLUETOOTH FITNESS HEART RATE MONITORING WATCH WITH WIRELESS DATA TRANSMISSION AND SENSOR

- Bluetooth SMART Technology
- Wirelessly sends heart rate data directly to your Bluetooth device
- Use with downloadable fitness apps to take your training to the next level
- Compatible with ios Bluetooth Smart Ready devices

- like iPhones and iPads
- Smart watch displays time and tracks your heart rate, average speed, distance, steps taken, lap speeds and calorie consumption
- Provides instant and accurate heart rate monitoring levels



PSBTHR70G



PSBTHR70BL



PSBTHR70BK



PSBTHR60



MINI BLUETOOTH FITNESS / TRAINING SENSORS

Model	Feature
PSBTC30	2-piece system measures bicycle speed and cadence (RPM)
PSBTFS40	Running / walking / step cadence footpod mini sensor
PSBTHR60	Chest Strap and sensor effectively track and monitor heart rates



PSNKW300



PSWDV60BK

DIGITAL MULTI-FUNCTION DIVING / SNORKELING / WATER SPORT WATCHES

Model	Feature 1	Feature 2	Feature 3	Color
PSNKW30BK	Dive Depth / Duration	Water Temperature	Dive History Recall	Blue / Black
PSNKW30GN	Dive Depth / Duration	Water Temperature	Dive History Recall	Green / Black
PSNKW300	Dive Depth / Duration	Water Temperature	Dive History Recall	Orange / Black
PSNKW30P	Dive Depth / Duration	Water Temperature	Dive History Recall	Red / Silver
PSWDV60BK	Diving Log	Water Temperature	Dive Elapsed Time	Black / Silver
PSWDV60GN	Diving Log	Water Temperature	Dive Elapsed Time	Green / Silver
PSWDV60R	Diving Log	Water Temperature	Dive Elapsed Time	Orange / Silver
PSWDV60Y	Diving Log	Water Temperature	Dive Elapsed Time	Yellow / Silver

Watches

NEW



PHRM76BK



PSWLMR30P



PHRTMW1

NEW



PAST44SL



PSWMR40BK



PSWGM64S

DIGITAL MULTI-FUNCTION MARATHON / RUNNING / FITNESS WATCHES

Model	Feature 1	Feature 2	Feature 3	Color
PECGW2	Heart Rate Monitor	Pacer Function	Chronograph	Black / Silver
PHRTMW1	Heart Rate Monitor	Water Resistant	Target Training Zones	Black / Silver
PSWHRL34	Heart Rate Monitor	Calorie Counter	50 Lap Chronograph	Black / Silver
PSWHRP58	Heart Rate Monitor	Step Counter	50 Lap Chronograph	Silver / Black
PSWLMR30P	Water Resistant	Target Time Setting	150 Lap Chronograph	Pink / Silver
PSWLMR30BK	Water Resistant	Target Time Setting	150 Lap Chronograph	Black / Silver
PSWMR40GY	Count-Down / Up Timer	Target Time Setting	150 Lap Chronograph	Gray / Silver
PSWMR40BK	Count-Down / Up Timer	Target Time Setting	150 Lap Chronograph	Black / Silver
PSWGM64S	Pacer Function	Countdown Timer	50 Lap Chronograph	Silver / Black
PSWGM64BK	Pacer Function	Countdown Timer	50 Lap Chronograph	Black / Black
PAST44SL	Sleep Monitor	Pedometer	Displays Calories Burnt	Black / Silver
PAST44PN	Sleep Monitor	Pedometer	Displays Calories Burnt	Black / Pink
PAST44GN	Sleep Monitor	Pedometer	Displays Calories Burnt	Black / Green
PHRM76BK	Heart Rate Monitor	Distance Traveled	Displays Calories Burnt	Black / Black
PHRM76GN	Heart Rate Monitor	Distance Traveled	Displays Calories Burnt	Black / Green
PHRM76PN	Heart Rate Monitor	Distance Traveled	Displays Calories Burnt	Black / Pink



PPDM1



PPDM2



PPDM3



PPDM5

DIGITAL MULTI-FUNCTION WEATHER PROOF BICYCLING / FITNESS WATCHES

Model	Feature 1	Feature 2	Feature 3	Color
PPDM1	Heart Rate Monitor	Chronograph	Pedometer	Black / Silver
PPDM2	Heart Rate Monitor	Stopwatch / Countdown	Bicycling Sensor	Black / Silver
PPDM3	Speed / Distance	Altimeter / Barometer	Pedometer	Silver / Black
PPDM5	Target Training	Chronograph	Odometer	Silver / Black

PSKIW25

SKI MASTER V PROFESSIONAL SKI WATCH w/ MAX. 20 SKI LOGBOOK, WEATHER FORECAST, ALTIMETER, BAROMETER



PSKIW25GN



PSKIW25BL



PSKIW25O



- Time Keeping
- Hour, minute, second, am, pm, month, date, and day of week -12 / 24 hour format -Auto Calendar
- Dual Time Alarm
- Daily alarm and Date alarm
- Hourly chime Chronograph
- Resolution: 1/100 second
- Range: 23hours 59minutes 59.99seconds
- 10 lap memories Timer
- Resolution: 1 second
- Range: 23hours 59minutes 59seconds
- single count down and repeat count down
- Quick set values (3, 5, 10, 15 and 45 minutes)
- Resolution: 1m (1ft)
- Range: -703m to 9164m (-2036ft to 30065ft)
- Past 12 hours altitude tendency
- Altitude logbook: Altitude gain, Altitude loss and Maximum altitude reading Barometer
- Resolution: 0.1 hPa/mbar (0.01 inHg, 0.01 mmHg)
- Range: 300hPa/mbar to 1100 hPa/mbar (8.84 inHg to

- 32.44 inHg, 224.73 to 824.01 mmHg)
- Past 12 hours barometric pressure tendency
- Resolution: 0.1C (0.1F)
- Range: -10.0C to 60.0C (14F to 140F)
- Weather Forecast: 4 symbols to indicate the predicated weather Compass
- Resolution: 1 degree display
- Range: 0 - 359 degree (digital)
- 16 cardinal points: N, E, S, W and NW, NNW etc
- Magnetic North pole pointer Ski
- Auto mode and Manual mode
- Ski Slope setting and auto mode sensitivity setting
- Current Descent Speed
- Current elapsed time Ski logbook
- Ski Date stamp
- Maximum Descent Speed
- Total ski lap elapsed time
- Maximum altitude reached
- Maximum lap speed - Descent speed tendency
- Water Resistant

PSKI2

SKIING DIGITAL WATCH WITH CLOCK, SKI MODE, ALTIMETER, BAROMETER, COMPASS, TIDE, THERMOMETER, TIMER

- Current Altitude With Resolution 1M Or FT (-999 To 9999M Or -2999 To 29999 FT With Resolution 1m Or 1ft)
- Total Altitude Gain And Loss
- Max/Min Altitude
- Number Of Hill Counter
- Altitude History & Graphical Display (Up To 8 Hours Record) Barometer
- Barometer Range (300 To 1099 Mbar/9.00 To 31.99 Inhg)
- Resolution 1mbar/0.01inhg
- Max/Min Barometer And Temperature Memory
- Weather Forecast (Sunny, Slightly Cloudy, Cloudy, Rainy) Compass
- Electronic Compass With 2 Mode Display With Numeric And 8 Cardinal Readouts
- High Accuracy Of +/- 5°
- Resolution +/- 1°
- Automatic Shut-Off Ski Mode

- Ski Trip Timer
- Show Altitude Graphical Display After The Trip End Tide
- Tide Graph With Time Data
- Tide Calculation Through Year 2039
- Moon Phase And Moon Age Display Thermometer
- Range (-50 To 70 C / -58 To 158F)
- Temperature Display In Altimeter Or Barometer Mode Professional Stop Watch
- 1/100 Second Precision Stopwatch
- Up To 99.5959'99 Total Time And Max 9.5959'99 Lap Time
- 99 Lap Memories
- Fastest Lap Calculation In Record Mode Timer
- Single/Repeat/Up Count Timer Clock
- Perpetual Calendar With Day Of Week
- 12/24 Hour Format - Dual Time Clock
- Sunrise/Sunset Time - EL Back Light
- Water Resistant



PSGP310 MULTI-FUNCTION DIGITAL LED SPORTS TRAINING WATCH WITH GPS NAVIGATION

- Global Positioning System Maps Your Route and Records It
- GPS-Enabled to Measure Pace, Speed & Distance
- Import & Export Performance Records to Your Computer
- Included Computer Software with Detailed Maps and Graphs
- Remembers Your Past Routes with Corresponding Times
- Tracks Training Sessions and Retains Them for Comparison and Improvement
- Ghost feature Allows You to Challenge Your Best Time & Distance
- Creates New Routes Automatically with GPS Technology
- Create and Record Various New Interval Training Methods
- Alarms Tells You When Heart Rate, Speed, Time, Distance and Power Ranges are Reached
- Improves Your Training Performance
- Watch Comes Complete with USB Charger and Cable



PSGP310OR
PSGP410OR

PSGP410 WITH BUILT-IN ANT+ SUPPORT



PSGP310BK
PSGP410BK



PSGP310BL
PSGP410BL



PSGP310PN
PSGP410PN



PSGP310GN
PSGP410GN

PSWGP405BL GPS WATCH W/ CODED HEART RATE TRANSMISSION, NAVIGATION, SPEED, DISTANCE, WORKOUT MEMORY, COMPASS, PC LINK (BLACK COLOR)

- Workout Function: 5 fully customized profiles for fast workout setup
- Profile can be configured from the watch or through PC software.
- 3 configurable Views (screens) for each Profile
- 3 programmable fields for each view
- 3 Navigation Modes: Waypoint, Forward, Backward
- Heading pointer
- Current speed, distance to waypoint and destination, estimated time of arrival
- Manual and automatic waypoint marking (Smart Lap)
- Heart Rate Monitor Digitally coded 2.4GHz wireless chest strap
- 4 target heart rate zone
- Above/In/Below zone timer
- Audio Above/In/Below zone alert
- Electronic Compass
- North Pole pointer
- 1 degree resolution with 16 cardinals
- Water Resistant



PGSPW5 GPS NAVIGATION SPORTING UNIT WITH BUILT-IN MP3 PLAYER, PEDOMETER, SPEEDOMETER, ALTIMETER, BAROMETER, COMPASS, WEATHER FORECASTING, LCD TOUCHSCREEN DISPLAY FLASH MEMORY

- 2.2" Digital LCD TouchScreen Display
- Supports Google Maps and Google Earth
- Trip Features and Info. Include GPS tracking, Odometer, Weather Prediction and More!
- Functions Measured: Distance, Speed, Elapsed Time, Altitude, Calories Burned, Average Speed, Air Pressure and More!
- Guided By Preloaded Route Plan, Multi-Point Destination, Multi-Path Navigation
- 3D E-Compass
- 4 GB Flash Memory
- IPX-7 Waterproof Rating
- Fishing Evaluation Function
- MP3 And MP4 Playback Supported
- ANT+ 2.4GHz Rx +Wireless Communication Protocol
- USB 2.0 Interface (High Speed) Data Transfer Connection
- GPS Destination Accuracy Within 10 Meters In Normal GPS Mode
- 1600 mad Li-Polymer Battery for 8 -10 Hours Continuous Tracking
- Windows XP, Vista, 7 Operating Systems Supported
- Non-Stop Track Recording for at Least 100 km.
- Operating Temperature 14° F - 113° F
- Track File Format: KML, GPX, RTE
- Display Resolution: 320 x 320
- Multiple Language Support



PACT1 MULTIFUNCTION HANDHELD ALTIMETER WITH BAROMETER, THERMOMETER, HYGROMETER, AND TIMEKEEPING FUNCTIONS

- Altimeter: -500 to 9000M, Resolution of 1 M/3 feet
- Max/Min Memory for Altimeter
- Altitude History & Graphical Display for Last 12 Hr history
- Altimeter Alarm
- Stop Watch up to 9hr 59min 59.9 sec.
- Barometer: 300 to 1100hPa/mbar (8.84 to 32.44inHg)
- Resolution of 0.1Pha/mbar (0.01inHg)
- Max/Min Memory for Barometer Pressure
- Altitude History & Graphical display for last 12 Hr.
- History
- Electronic Barometer Weather Forecast
- Pressure Trend Indicators
- Thermometer: °F & °C selectable (-20 to +50 °C)
- Max/Min Memory for Thermometer
- Hygrometer: 20% to 95%
- Max/Min Memory for Hygrometer
- Time Keeping: Time (Hour, Min, Sec.)
- Auto Calendar
- Daily Alarm
- Low Battery Display



PGFPD5 GPS SPEEDOMETER NAVIGATOR DEVICE

- PEED MODE AND MEASUREMENT OF DISTANCE
- Current speed
- Average speed (AVS)
- Maximum speed (MXS)
- Daily distance (DST)
- Speed comparator (+/-)
- Odometer (ODO)
- Trip time (TM)
- Travelling direction ALTITUDE MODE
- Altimeter (-2000~14000 meter or -6560~45920 feet)
- Total gain (TG)
- Total fall (TL)
- Vertical speed (VTS) STOPWATCH MODE
- Chronograph (1/100 sec. precision stopwatch)
- Chronograph distance
- Chronograph average speed DATA RECORD / DOWNLOAD MODE
- Recording of GPS data.

- The maximum memory for GPS data is 351 hours
- Transmission data to computer by USB cable with docking station
- Route downloadable from PC NAVIGATION MODE
- Current position indicated by Latitude/Longitude
- Graphical compass resolution 5°
- Home navigation
- Route navigation
- 4096 points route memory TIME MODE
- Time (GMT)
- Date
- Satellite synchronized Clock
- UTC format with user define time zone
- EL backlight
- Battery level indication



PSBCG90 MULTI-FUNCTION DIGITAL LED SPORTS BICYCLING COMPUTER DEVICE WITH GPS NAVIGATION & ANT+ TECHNOLOGY

- ANT+ Sensor Networking for Wireless Data Transmission
- Global Positioning System Maps Your Route and Records It
- GPS-Enabled to Measure Pace, Speed & Distance
- Map Orientation with Zoom IN/OUT
- Import & Export Performance Records to Your Computer
- Included Computer Software with Detailed Maps and Graphs
- Barometer Parameter for Accurate GPS Altitude Measurement
- ANT+ Technology Enables Heart Rate, Speed, RPM, Time & Power Monitoring
- Works With Performance Sensors Made by Garmin

- and Motorola
- Computer Device Wirelessly Records Your Progress with this ANT+ Enabled Device
- Remembers Your Past Routes with Corresponding Times
- Tracks Bicycling Sessions and Retains Them for Comparison and Improvement
- Ghost feature Allows You to Challenge Your Best Time & Distance
- Creates New Routes Automatically with GPS Technology
- Alarms Sound When Heart Rate, Speed, RPM, Time, Distance and Power Ranges are Reached
- Improves Your Bicycle Training Performance
- Computer Device Comes Complete with USB Charger



PSBCG90BK



PSBCG90GN



PSBCG90OR



PSBCG90PN

PSBCG90BL

PSGF605 PERSONAL GPS GOLF WATCH WITH AUTOMATIC COURSE RECOGNITION (PRELOADED USA GOLF COURSES)

- Pre-Loaded with Golf Course Information
- Finds and Detects Closest Golf Course
- Uses Space-Based GPS Satellite Positioning Technology
- Calculates Shot Distance and Distance Front/Center/Back of Green
- Detects and Records Players Information and Golf Score
- Input Stroke and Save Your Progress
- Easily Pull up and Check Your Total Round Score

- Provides Location and Time Information
- Automatically Recognizes Golf Course (With Preloaded USA Golf Courses)
- Clearly Displays Hole No., Par & Shot Information
- Watch Comes Complete with USB Charger and Cable
- Connects to Your PC for Easy Firmware Update and Charging
- Has All Standard Watch Functions



PSGF605BK



PSGF605WT



PSGF605BL



PSGF605WT

PBKCM3W WIRED CYCLE COMPUTER



PBKCM4WL WIRELESS CYCLE COMPUTER



PPDE60 PEDOMETER - ECG FINGER TOUCH



PPD71 PEDOMETER





PSWWM90Y



PSWWM82BK



PFSH1



PAW1

DIGITAL MULTI-FUNCTION OUTDOOR WATER RESISTANT WATCHES

Model	Feature 1	Feature 2	Feature 3	Color
PSWTHM15BK	Thermometer	Chronograph	Countdown Timer	Black / Silver
PSWTHM15BL	Thermometer	Chronograph	Countdown Timer	Blue / Silver
PSWWM82BK	Altimeter / Barometer	Chronograph	Weather Forecast	Black / Black
PSWWM82GN	Altimeter / Barometer	Chronograph	Weather Forecast	Green / Black
PSWWM82PN	Altimeter / Barometer	Chronograph	Weather Forecast	Pink / Black
PSWWM82YL	Altimeter / Barometer	Chronograph	Weather Forecast	Yellow / Black
PSWWM90BK	Altimeter / Barometer	Wind Speed	Compass	Black / Black
PSWWM90BL	Altimeter / Barometer	Wind Speed	Compass	Blue / Black
PSWWM90Y	Altimeter / Barometer	Wind Speed	Compass	Yellow / Black
PAW1	Altimeter / Barometer	Stop Watch	Compass	Black / Silver
PFSH1	Moon Phases / Tides	Sunrise Time	Water Resistant	Black / Black
PSWRM70	Regatta Timer	Memory Recall	Digital Compass	Black / Silver

For more detailed specifications, product-specific information and models visit www.PyleAudio.com



PDCT3



PAH1



PSHWM22BK



PSHTM24

DIGITAL HANDHELD MULTI-FUNCTION OUTDOOR / TRAINING DEVICES

Model	Feature 1	Feature 2	Feature 3	Color
PAH1	Altimeter / Barometer	Thermometer	Stop Watch	Silver
PDCT3	Digital Compass	Thermometer	Stop Watch	Silver / Black
PFSH2	Altimeter / Barometer	Weather Forecast	Hygrometer	Gray / Black
PCLRMU2	Calorie Counter	Distance / Step Count	PC Uplink	Black
PSHTM24	Digital Compass	Chronograph	Pacer / Memory Recall	Blue / Silver
PSHWM22BK	Weather Station	Altimeter / Barometer	Temperature / Humidity	Gray / Black



PHMD1



PHMD3



PHMD4

TREASURE HUNTER METAL DETECTORS

Model	Control Housing View Meter	Search Coil Size	Waterproof Search Coil	Power Supply	Included Headphones
PHMD1	Yes	6.7"	Yes	6 x 'AA'	-
PHMD2	Yes	6.5"	Yes	6 x 'AA'	-
PHMD3	Yes	7.8"	Yes	6 x 'AA'	-
PHMD4	-	7.8"	Yes	9V	Yes



NEW

Available in 2 Color:



PSCHD90SL



PSCHD90BK



PSCHD90

PYLE eXPO HI-RES ACTION CAM WITH FULL HD 1080P VIDEO, 20 MEGA PIXEL CAMERA, 2" LCD SCREEN, WI-FI REMOTE

- 2.0" Digital LCD Display
- Record Hi-Res 1080p Video
- Capture Crisp 20 Mega Pixel Images
- Download the 'Pyle eXpo' App: Snap Pics and Record with Your Smartphone
- Micro SD Card Slot (Supports up to 32GB)
- Motion Detector Recording Function
- HDMI Mini Connection Port
- Built-in Rechargeable Battery
- Connect to PC and Share via USB
- Includes Wi-Fi Remote: Wirelessly Snap Pics & Record Video
- Marine Grade Waterproof Case: Safe for Depths up to 190 Feet
- Includes (2) Removable Case Doors (Waterproof & Noise-Reducing)
- Also includes USB charging cable, removable battery, Wi-Fi remote charging dock, bicycle mount and other fasteners/clip accessories
- Self Timer, Burst Shots & Auto Shoot Features
- 180 Degree Display Rotation for Upside-Down Mounting
- Snap Pictures While Recording Video
- Works with Mac and PC

Technical Specs/Configuration:

- Video Resolutions, Choose 1080p, 1080i, 960p, 720p or 480p
- Video Frames Per Second: 60, 50, 30 or 25
- Image Resolution up to 4283 x 3288 pixels
- Choose Between 20, 14, 5 Mega Pixel Images
- Light Frequency Options: 50Hz, 60Hz
- Exposure Metering: Spot, Center and Multi
- ISO Settings: 100, 200, 400, 800, 1600 and Auto
- White Balance: Auto / Incandescent / Daylight / Cloudy
- Color Settings: Rich (0~3 m), Natural/Dividing (3~15 m), Deep Sea (15m+)
- Multi-Language Support: English, French, German, Spanish, Italian
- Built-in Rechargeable Battery (1050mAh)
- Battery Life: Approximately 1.5 Hours Recording Time
- Wide Angle G-View Lens (f/2.4, Fixed Focus Glass Lens)
- EV Setting: -2.0 -1.7 -1.3 -1.0 -0.7 -0.3 0.0 +0.3 +0.7 +1.0 +1.3 +1.7 +2.0
- Auto Screen Turn Off & Shutdown
- Dimensions (L x W x H): 2.25" x 1.5" x 1.9"

The 'Pyle eXpo' App:

- Download the App & Capture the Action Like Never Before!
- Record Video and take Images with your Smartphone
- Works with Android and Apple Devices
- Works with iPhone, iPod, iPad (Compatible with iOS 4.0 & Later)
- Also Works with Androids, Samsung, Galaxy, Nexus, etc. (Compatible with Android 4.0 & Later)

- Get ready to enjoy HD Hi-speed action with the Pyle eXpo! It features today's latest ground-breaking technologies designed to capture all of your breathtaking and jaw-dropping action! You'll be able to do it all - capture images, record video, download the app and share. Give everyone a front row seat and put on a show with the eXpo!



- Don't be fooled by the size! The eXpo packs some serious power. Enjoy plenty of image and video customization settings as well as media playback in the palm of your hand. You'll be surprised by the versatility of this lightweight pocket-sized wonder. You can mount it in a convenient location where it won't interfere.
- (Dimensions (L x W x H): 2.25" x 1.5" x 1.9")



- The eXpo features 2.0" inch Digital LCD Display so you can preview and playback your images & videos. Right after you capture some action, you can go back and watch the video or see the image right on the screen. Quickly scroll through all of your footage to see what makes the cut. You'll also be able to delete files instantly so you can keep memory space available.



- Use the Marine Grade Waterproof Case and record underwater in depths up to 190' feet.



- Kit includes (2) removable case doors (Waterproof & Noise-Reducing), USB charging cable, removable battery, Wi-Fi remote, Wi-Fi remote charging dock, bicycle mount and other fasteners/clip accessories.

PSCHD60

HI-SPEED HD 1080P ACTION CAMERA HI-RES DIGITAL CAMERA/CAMCORDER
WITH FULL HD VIDEO, 12.0 MEGA PIXEL CAMERA & 2.4" TOUCH SCREEN



Models: PSCHD60BK, PSCH60BL, PSCHD60GR, PSCHD60OR, PSCHD60SL, PSCHD60RD

- Mini HD Camera/Camcorder for Image and/or Video Recording
- 12.0 Mega Pixel Camera
- 2.4" Touch Screen Display Panel
- Video Recording: Choose 1080P, 720p or VGA
- Video Resolutions up to 1920 x 1280 Pixels
- Video Frame Rates: Choose 120, 60 or 30 FPS
- Picture Taking: Choose 12, 10, 8 or 5 Mega Pixels
- Picture Resolutions up to 4000 x 3000 Pixels

- 4X Digital Zoom Function
- Micro SD Card Slot (Supports up to 32GB)
- HDMI Mini Connection Port
- Remote Control Included
- Wirelessly Snaps Pictures & Records Video
- Invertible Digital Screen Display
- Battery Life: More than 2 Hours
- Connect to PC and Share via USB
- Works for Windows and Mac

- Battery: Lithium 1500mAh
- CMOS Image Sensor Technology
- 10 Second Picture Timer Delay Function
- IPX8 Waterproof Case for Depths up to 3 Meters
- Includes: USB Cable, Car Charger, Splash-Proof Case, Remote, Mounting Clips
- OSD Languages: English, French, German, Spanish, Italian, Portuguese
- Dimensions: 2.6" (W) x 1.9" (H) x 1.3" (D)

PSCHD30

HIGH DEFINITION 720P ACTION CAMERA HI-RES DIGITAL CAMERA/CAMCORDER
WITH 5.0 MEGA PIXEL CAMERA & 2.0" TOUCH SCREEN



Models: PSCHD30BK, PSCHD30BL, PSCHD30OR, PSCHD30PN, PSCHD30RD, PSCHD30SL



- Mini HD Camcorder for Image and/or Video Recording
- 2 Inch Touch Screen For Video Playback and Settings Configuration
- Easy Uploading and Sharing via PC
- Built-in Rechargeable Battery
- Micro SD Memory Card Slot
- 4 X Digital Zoom
- High-Speed USB 2.0 Interface
- 3 Modes: Picture, Video and Vehicle
- 3 Image Capture Modes: 5.0 MP, 3.0 MP, 1.3 MP

- Image Resolutions: (2592 x 1944), (2048 x 1536), (1280 x 960)
- Captures Images in JPEG (.jpeg) Format
- 2 Video Capture Modes: 720p & VGA
- Video Capture Resolutions: (1280 x 720) & (640 x 480)
- Records Sound and Captures Video in AVI (.avi) Format
- Includes Waterproof/Shockproof Case
- Mounts Included: Suction Cup (Cars or Boats), Handlebar (Bike, Motorcycle), Helmet, Waist Harness, Shield & Car Charger
- Camera Dimensions (L x W x H): 2.59" x 1.77" x 0.98"



WATERPROOF DIGITAL ACTION CAMERA VIDEO RECORDER

PSAC4G

- P3 player
- Supports MP3/WMA/MP4 Formats
- Shockproof & Waterproof Up to 3 Meters (IPx)
- Li-ion Battery (300mAh)
- Built-In 4GB Flash Memory
- Low Light Capabilities
- Waterproof Earphone
- Compact Tube Design Weighing Only 40 Grams
- Digital Still Camera (DSC)
- 1.3 Megapixel Lens Digital Video Recorder (DVR)
- VGA Video Resolution (640 x 480)
- Video Encoding in Motion JPEG Format
- Video Playback Frame Rate is 25-30 FPS
- Sound Recording in WAV Format
- Dimensions: 3.25"(L) x 1"(W) x 1"(D)



WATER RESISTANT NIGHT VISION WILD GAME TRAIL SCOUTING CAMERA, RECORD VIDEO, TAKE PICTURES, INVISIBLE FLASH

PHTCM28

- Hybrid System: Record Video and Capture Images
- Night Vision Image Capture up to 45' Feet Away
- Invisible Flash Sees in Complete Darkness for 24-Hour Game Scouting
- PIR (Passive Infrared) Motion Detector Sensor
- Water Resistant Marine Grade Construction
- 2 Image Modes: Choose 8 or 5 Mega Pixel Images
- Camouflage Design Pattern
- SD Memory Card Slot
- Quickly Transfer Files to PC and Share
- USB & TV Interface: Connects to Laptop, PC, TV
- Supports up to 32GB SD Memory Cards
- 30 IR LED Night Vision Illuminating Lights
- Automatic IR Filter, White Balance & Exposure Settings
- Date/Time, Moon Phase & Temperature Image Imprint
- Batteries: 4 x 'AA' (Not Included)
- Low Battery Indicator
- Weight: 1.24 lbs. Camera: Image Resolution: Choose 8.1 or 5 MP
- Burst Photos: Snaps 3 Images
- Programmable Photo Delay: 5 seconds - 60 minutes
- Image File Format: .jpeg
- Trigger Speed: 1.6s
- Lens Aperture: F/3.0
- Effective Focal Length: 7.45 mm



PHTCM38

WATER RESISTANT NIGHT VISION WILD GAME TRAIL SCOUTING CAMERA, RECORD VIDEO, TAKE PICTURES, INVISIBLE FLASH, TIME LAPSE FUNCTION

HANDHELD NIGHT VISION CAMERA, NIGHT VISION VIEWING UP TO 700 FEET AWAY, RECORD VIDEO, SNAP IMAGES, LCD DISPLAY FOR PICTURE PREVIEW AND INSTANT PLAYBACK, RECHARGEABLE BATTERY

PSHTCM88



- Hybrid System: Record Video and Capture Images
- Enjoy Hi-Resolution Capture Day or Night
- Night Vision Viewing up to 700' Feet Away
- Invisible Flash Sees in Complete Darkness
- Up to 8X Optical Digital Zoom
- Built-in 4GB Memory
- Quickly Transfer Files to PC and Share
- USB & TV Interface: Connects to Laptop, PC, TV
- LCD Display: Preview Your Shot & Instant Playback
- Built-in Rechargeable Lithium Battery
- USB Port for Charging & File Transfer
- Brightness & High Beam Adjustable Picture
- Universal Tripod Mount Threading
- Built-in LED Illumination Light
- Perfect for Camping, Exploring, Wildlife Research or Hunting
- Dimensions: 7.7" x 3.1" x 2.0" inches
- Technical Specs: Video File Format: .avi
- Video Resolution: 640 x 480 (VGA)
- Image File Format: .jpeg
- Image Resolution: 3 or 5 Mega Pixels
- Manual Focus Lens
- Date and Time Stamp
- USB 2.0 Interface
- Auto Power Off: 6 Minutes
- Objective Lens: 40mm
- Field of View: 5 Degrees
- Eye Relief: 30mm
- Exit Pupil: 8mm
- Diopter Adjustment: +or- 0.5D
- Close Focus: 5m
- Night Vision Distance: 700 Feet
- Sensor: Color Low Light CCD 1/3"
- LCD Display Size: 1.44"
- Lighting Device: LED (long dist) + LED (near)
- 2 LED Lighting (wave length): 940 nm
- Battery: 750mAh, 3.7V (Model 14500)

NEW



UNDERWATER WATERPROOF FISHING CAMERA AND VIDEO RECORD SYSTEM WITH NIGHT VISION SENSORS, 30 MEGA PIXELS AND 3.5" INCH LCD DISPLAY

PFSHCMR1

- Take Pictures and Record Videos Underwater in Color
- Drop the Camera in the Water and See Where the Fish are Hiding
- Waterproof Marine Grade Camera
- 3.5" inch Digital LCD Display
- Instantly Preview your Videos and Picture on the LCD Monitor
- Durable, Reinforced & Submersible Wired Camera
- Infrared LED Night Vision Sensors Illuminate Dark Environments
- Camera Cable Sinks up to 15 Meters Deep
- Micro SD Memory Card Slot
- Easily Save Files and Transfer to PC or Mac
- System Includes Wired Camera, LCD Display, Display Holder, Pole Mounting Brackets and Charging Cable
- Conveniently Mounts to Your Fishing Rod
- Brightness, Contrast & Color Display Adjustments
- Built-in Rechargeable Battery: 3000mAh (3.7V Lithium)
- Up to 8 Hour Battery Life
- Observe Underwater Fish Behavior and Environments
- Camera: 30 Mega Pixel Wide Angle Lens
- Built-in IR LED Night Vision Illumination
- Resolution: 640 x 380
- Image Sensor: 1/4" inch
- Size: 0.8" x 1.0" inches
- Weight: 0.35 g
- Operating Temperature: -10 to 40 Celsius
- LCD Display: Screen Size: 3.5 inches
- 4X Digital Zoom Function
- Resolution: 960 x 240
- Backlight Brightness: 300cd
- Protective Flip-Open Cover
- Universal Threaded Mounting Insert
- Easy Operation Touch Button Controls
- Display Housing (L x W x H): 4.2" x 3.0" x 1.9" inches



'PIPCAM' IP Camera Systems

NEW



PIPCAM5



PIPCAM8



PIPCAM15

PIPCAM5

IP CAMERA SURVEILLANCE SECURITY MONITOR WITH WI-FI, P2P NETWORK, IMAGE CAPTURE, VIDEO RECORDING, BUILT-IN WEB SERVER, SOFTWARE INCLUDED, DOWNLOADABLE APP

- Smart Digital Camera System for Surveillance and Monitoring
- Wirelessly Connects to the Internet via Wireless (Wi-Fi) or Wired (Ethernet) Connection
- View and Control your Cameras Anywhere: Built-in Web Server
- Control the System Remotely with Your PC or Smartphone
- Capture, Record and Adjust Camera Positioning Remotely
- Setup Alarm and Email Alerts, Triggered by Built-in Motion Sensor
- Wireless Pan/Tilt Controls and Video Through Website or the Free Mobile App
- Includes Camera Customization and Management Software
- Software Supports PC Recording and Monitoring for Multiple Cameras
- Create Multiple User Accounts and Passwords
- Schedule (Set Time) or Round the Clock Surveillance
- 16 IR-LED Lights for Low Light Situations
- High Resolution Capability (300K Pixels) Day or Night
- Video Resolution: 640 x 480 (VGA), 320 x 240 (QVGA)
- Ability to Connect Alarm Outputs to Wired Alarm Input Sensors and Alarm Output Devices
- High-Speed Video Processor with Optimized Video Compression
- Viewing Angle: 90° Diagonally, 68° Horizontally
- Pan Adjustment: 270° - Tilt Adjustment: 120°
- MJPEG Video Compression
- Supported Protocols: TCP/IP, DHCP, SMTP, HTTP, DDNS, UPNP, PPPoE, FTP, DNS, UDP, GPRS
- Supports 3G, iPhone, iPad, Android, Smart Phone, Tablet, PC Control and Surveillance
- Supports IE, Firefox, Safari, and Google Chrome Browsers
- Supports Dynamic IP (DDNS) and UPNP LAN and Internet (ADSL, Cable Modem)
- Supports WEP/WPA/WPA2 Encryption
- Sensor: 1/4" Color CMOS Sensor
- IR Lens: F 2.0 6mm/ 3.6mm
- Video Frame Rate: 15fps (VGA), 30fps (QVGA)
- Flip Mirror Images: Vertical / Horizontal
- Light Frequency: 50Hz, 60Hz or Outdoor

PIPCAM8

IP CAMERA SURVEILLANCE SECURITY MONITOR WITH WI-FI, H.264 VIDEO, P2P NETWORK, IMAGE CAPTURE, VIDEO RECORDING, BUILT-IN MICROPHONE AND SPEAKER FOR 2-WAY COMMUNICATION, BUILT-IN WEB SERVER, SOFTWARE INCLUDED, DOWNLOADABLE APP

- Smart Camera System for Surveillance and Monitoring
- Wirelessly Connects to the Internet via Wireless (Wi-Fi) or Wired (Ethernet) Connection
- View and Control your Cameras Anywhere: Built-in Web Server
- Control the System Remotely with Your PC or Smartphone
- Capture, Record and Adjust Camera Positioning Remotely
- Save Recordings: Built-in SD Memory Card Slot
- Setup Alarm and Email Alerts, Triggered by Built-in Motion Sensor
- Wireless Pan/Tilt Controls and Video Through Website or the Free Mobile App
- Includes Camera Customization and Management Software
- Software Supports PC Recording and Monitoring for Multiple Cameras
- Create Multiple User Accounts and Passwords
- Schedule (Set Time) or Round the Clock Surveillance
- 16 IR-LED Lighting (Night Visibility 60 Feet)
- Image Resolution: 1280 x 720 Pixels Day or Night
- Video Resolution: 1280 x 720 (VGA), 640 x 368 (VGA), 320 x 208 (QVGA)
- 1 Channel Audio Input and Output w/ ADPCM (Audio Compression)
- Built-in Speaker and Microphone Allow Two-Way Audio Communication
- Ability to Connect Alarm Outputs to Wired Alarm Input Sensors and Alarm Output Devices
- Powerful High-Speed Video Protocol Processor with Optimized Video Compression
- Pan Adjustment: 270° - Tilt Adjustment: 120°
- Adjustable Viewing Angle: 60°
- H.264 MJPEG Video Compression
- Supported Protocols: TCP/IP, HTTP, DNS, DHCP, PPPoE, SMTP, FTP, SSL, TFTP, NTP, ARP/RARP, NFS, RTSP, RTP, RTCP
- Supports 3G, iPhone, iPad, Android, Smart Phone, Tablet, PC Control and Surveillance
- Supports IE, Firefox, Safari, and Google Chrome Browsers
- Supports Dynamic IP (DDNS) and UPNP LAN and Internet (ADSL, Cable Modem)
- Supports WEP/WPA/WPA2 Encryption

PIPCAM15

WEATHERPROOF IP CAMERA SURVEILLANCE SECURITY MONITOR WITH WI-FI, P2P NETWORK, IMAGE CAPTURE, VIDEO RECORDING, BUILT-IN WEB SERVER, SOFTWARE INCLUDED, DOWNLOADABLE APP

- Smart Digital Camera System for Surveillance and Monitoring
- Heavy Duty Marine Grade All-Weather Housing
- Wirelessly Connects to the Internet via Wireless (Wi-Fi) or Wired (Ethernet) Connection
- View and Control your Cameras Anywhere: Built-in Web Server
- Control the System Remotely with Your PC or Smartphone
- Capture, Record and Observe Camera From Another Location
- Setup Alarm and Email Alerts, Triggered by Built-in Motion Sensor
- View Video Through Website or the Free Mobile App
- Includes Camera Customization and Management Software
- Software Supports PC Recording and Monitoring for Multiple Cameras
- Create Multiple User Accounts and Passwords
- Schedule (Set Time) or Round the Clock Surveillance
- 24 IR-LED Lights for Low Light and Night Time
- High Resolution Capability (300K Pixels) Day or Night
- Video Resolution: 640 x 480 (VGA), 320 x 240 (QVGA)
- High-Speed Video Processor with Optimized Video Compression
- Viewing Angle: 90° Diagonally, 68° Horizontally
- MJPEG Video Compression
- Supported Protocols: TCP/IP, DHCP, SMTP, HTTP, DDNS, UPNP, PPPoE, FTP, DNS, UDP, GPRS
- Supports 3G, iPhone, iPad, Android, Smart Phone, Tablet, PC Control and Surveillance
- Supports IE, Firefox, Safari, and Google Chrome Browsers
- Supports Dynamic IP (DDNS) and UPNP LAN and Internet (ADSL, Cable Modem)
- Supports WEP, WPA, WPA2 Encryption
- Sensor: 1/5" Color CMOS Sensor
- IR Lens: F 2.0 6mm/ 6mm
- Video Frame Rate: 15fps (VGA), 30fps (QVGA)
- Flip Mirror Images: Vertical / Horizontal
- Light Frequency: 50Hz, 60Hz or Outdoor
- Wireless LAN: Supports wireless networks (Wi-Fi, 802.11/b/g)

PLCMHD70

7" HD VIDEO ON-CAMERA FIELD MONITOR WITH HDMI, YPbPr, AV, AUDIO INPUTS FOR DIGITAL CAMERAS, VIDEO CAMERAS AND DSLR CAMERAS

- 7-inch Hi-Res TFT LCD Display
 - Application for Full HD Video Cameras
 - Adds Sub-Monitor for CCTV Monitoring or Making Movies
 - Image Adjustment: Brightness, Contrast, Saturation, Tint, Temperature
 - Inputs: HDMI, YPbPr, AV1, AV2, Audio
 - High Brightness/Contrast Display
 - High Capacity Rechargeable Li-ion Battery
 - Front Panel Touch Button Controls
 - Various Mounting Methods for Multi-Angle Viewing
 - Power Options: Battery Control Switch & DC Input
- Accessories Included: Remote, Rechargeable Battery, Shoe Mount Camera Bracket, Power Adapter & Detachable Sun Shade
 - Works with Digital Cameras, Video Cameras and DSLR Cameras
 - Extra Wide Viewing Angle
 - Technical Specs:
 - Max Pixel Resolution: 1920 x 1080
 - Brightness: 450 cd/m
 - Contrast 500:1
 - Input Voltage: DC 12V
 - Aspect Ratio: 16:9 or 4:3
 - Rechargeable Battery: 2200mAh / 7.4V Li-ion
 - Dimensions (L x W x D): 7.4 x 4.9 x 1.3 inches



DIGITAL VOICE RECORDER WITH 4GB BUILT-IN MEMORY, HEADPHONE JACK, LCD DISPLAY & BUILT-IN SPEAKER

PVR200

- 4GB Built-in Flash Memory €" Up to 272 hours recording time
 - Recording Mode Selectable (SP/LP)
 - Records files in (.wav) format
 - Voice-Activated-System €" Recording stops when sound stops
 - Storage up to 99 Files
 - Easy to Search / Scroll File folders & Hold Feature
 - Display €" Multi-functional Full Function LCD
 - Built-in Speaker, & Built-in Microphone
- Low battery indicator, & Batteries level indicator
 - Headphone Jack (3.5mm / 1/8")
 - Includes USB Data Transfer Cable
 - Powered by €" 2 x AAA Batteries (not included)
 - Battery Life: Record 13.5 Hours / Playback Headphone 9 Hours / Playback Speaker 3.5 Hours
 - Unit size: 4.25"H x 1.18"W x 0.59"D



RECHARGEABLE DIGITAL VOICE RECORDER WITH USB & PC INTERFACE, BUILT-IN RECHARGEABLE BATTERY, MICRO SD SLOT, 4GB BUILT-IN MEMORY & HEADPHONE JACK

PVR300

- Micro SD card Slot (Supports up to 8GB)
 - 4GB Built-in Flash Memory €" Up to 580 hours recording time (LP)
 - Recording Mode Selectable (SHQ/HG/SP/LP)
 - USB Interface €" USB Connector Slides Out for Data Transfer and Charging
 - Wave Encoding/Playback €" Records files in Wave format.
 - Voice-Activated-System - Recording stops when sound stops.
 - 3 File folder Storage (A/B/C) Each folder can store up To 999 Files (2,997 Total)
- Easy to Search / Scroll File folders & Hold Feature
 - Display €" Multi-functional Full Function LCD
 - Built-in speaker, & Built-in microphone
 - Low battery indicator, & Batteries level indicator
 - Headphone Jack (3.5mm / 1/8")
 - Mini USB 5 Pin PC Interface
 - Built-in Rechargeable Battery (Polymer 3.7V 320mAh)
 - Battery Life: Record 12 Hours / Playback Headphone 11 Hours / Playback Speaker 4 Hours
 - Unit size: 3.62"H x 1.18"W x 0.51"D



PBC5200



PBC6600



PBC5300



PBC5100



PBC5000

Model	Battery Power (mAh)	Universal Adapters Included
PBC5200	5,200	Yes
PBC6600	6,600	-
PBC5300	5,200	-
PBC5100	5,200	-
PBC5000	5,000	Yes
PBC3000	3,000	Yes

NEW



PYLE ASTRO ANDROID TOUCH SCREEN DIGITAL 3D GRAPHICS WI-FI TABLETS

- Processor Chips with 3D Graphic Acceleration
- Multi-Touch Capacitive Screen with 4-Direction Gravity Sensing
- High-Speed Wireless Network: 802.11 b/g/n
- Micro SD Port (Supports up to 32GB)
- Integrated Flash Player
- Built-In Storage Capacity
- Built-in DDR3 RAM
- Compatible with the Latest Android Apps - Download & Install
- Select Models Have Up to 8-Hour Battery Life
- Headphone Jack & Side-Button Volume Control
- Enjoy your favorite music, videos and pictures
- File Compatibility: MP3, MP4, WMA, WAV, AVI, WMV, MOV, JPG, JPEG and much more

For more detailed specifications, product-specific information and models visit www.PyleAudio.com

Model	Size	Processor	Operating System	Storage Capacity	Bluetooth
PTBL7C	7"	1.2 GHz	Android 4.0	4GB	-
PTBL72BC	7"	1.2 GHz	Android 4.0	4GB	Yes
PTBL73BCD	7"	1.2 GHz Dual Core	Android 4.2	4GB	Yes
PTBL9C	9"	1.2 GHz	Android 4.0	8GB	-
PTBL92BC	9"	1.2 GHz	Android 4.0	8GB	Yes
PTBL93BCD	9"	1.2 GHz Dual Core	Android 4.2	8GB	Yes
PTBL10C	10"	1.2 GHz	Android 4.1	8GB	-
PTBL102BCD	10"	1.2 GHz Dual Core	Android 4.2	8GB	Yes
PTBLKD7BL	7"	1.2 GHz Dual Core	Android 4.2	4GB	-
PTBLKD7PN	7"	1.2 GHz Dual Core	Android 4.2	4GB	-

PYLE ASTRO CHILDREN'S TABLETS:



PTBLKD7BL



PTBLKD7PN

Wall Plates / In-Wall Control

PVC1

WALL MOUNT ROTARY VOLUME CONTROL KNOB



PVCKT5

WALL MOUNT ROTARY VOLUME CONTROL KNOB (3 COLOR WALL PLATE)



PVCD15

IN-WALL RIGHT AND LEFT SPEAKER DUAL KNOB INDEPENDENT VOLUME CONTROL PLATE



PWA12

IN-WALL AUDIO CONTROL AMPLIFIER RECEIVER, MICROPHONE PAGING AND SPEAKER CONTROL



PWA15BT

BLUETOOTH IN-WALL AUDIO CONTROL AMPLIFIER RECEIVER, MICROPHONE PAGING AND SPEAKER CONTROL



PVC2

WALL MOUNT IMPEDANCE MATCHING VERTICAL SLIDING VOLUME CONTROL



PVCS2

IN-WALL A/B SOURCE SELECTOR SWITCH



PHRCA2

DUAL STEREO RCA WALL PLATE



PHWP1

DUAL POST BINDING/BANANA PLUG WALL PLATE WHITE (2 POSTS/ POLARITY FOR 1 SPEAKER)



PHDK9

2 PORT HDMI WALLPLATE W/BACK
BUILT-IN FLEXIBLE CABLE



PHDMIW1

SINGLE HDMI WALL PLATE 90
DEGREE EXIT PORT



PHDK8

SINGLE PORT HDMI WHITE WALL
PLATE W/BACK BUILT-IN FLEXIBLE
CABLE



PWPBT57

IN-WALL BLUETOOTH AUDIO
CONTROL RECEIVER SOURCE &
OUTPUT DUAL HOME THEATER
WALL PLATE AMPLIFIED SYSTEM



PWPBT67

IN-WALL BLUETOOTH AUDIO
CONTROL RECEIVER SOURCE &
OUTPUT DUAL HOME THEATER
WALL PLATE AMPLIFIED SYSTEM
WITH DUAL USB DEVICE CHARGE



PHDMF2

DUAL HDMI WALL PLATE



PHDMRB2

DUAL HDMI WALL PLATE 90
DEGREE EXIT PORTS



PHDM2RJRF1

HDMI /MONO RCA AUDIO /
COAXIAL /DUAL ETHERNET COMBO
WALL PLATE



PHDM2RB2

HDMI /MONO RCA AUDIO/
COAXIAL / DUAL ETHERNET



PHDMRCF3

**HDMI / 3 (RGB/RCA) COMPONENT
COMBO WALL PLATE**



PHDMRBC3

**HDMI / 3 (RGB/RCA) COMPONENT
COMBO WALL PLATE**



PHDMRBC2

**HDMI / STEREO (DUAL) RCA AUDIO
COMBO WALL PLATE**



PHIW71

**7.1 HOME THEATER FOURTEEN POST
BINDING/BANANA PLUG WITH
DUAL RCA SUBWOOFER POSTS
WALL PLATE WHITE (14 POSTS)**



PDA35BT

NEW

BLUETOOTH AUDIO CONTROL



PVBOR15

**HI-RES DIGITAL WIRELESS BORESCOPE INSPECTION CAMERA & VIDEO MONITOR SYSTEM, SNAP
PICTURES & RECORD VIDEO, COMPACT & PORTABLE**

- All-in-One Camera & Monitor System
- Multi-Functional & Versatile Visual Inspection System
- Compact, Portable & Reliable
- Snap Hi-Resolution Pictures & Record HD Video
- Detachable 3.5" Color Monitor for Remote Viewing
- Built-in High-Powered (6) LED Flashlight
- Low Light and Dark Environment Illumination
- Micro SD Card Slot for Quick File Transfer and Sharing
- Simple Operation Button Controls
- User-Friendly Interface Display
- 360° Degree Monitor Rotation
- Battery Operated for Wireless Performance
- Low Battery Indication
- Menu Languages: English, German, Spanish, French, Russian, Chinese and Japanese
- System Includes Pick-Up Hook, Magnet and Video Output Cable
- Connector Ports: Remote, AV-out, USB
- Perfect for Repairs, Inspection, Plumbing, Construction, Restoration, etc. Technical Specs: Battery Life: 4 - 5 hours
- Digital Zoom: 4X
- Extending Probe Diameter: .3"
- Choose Between Color or Black & White Modes
- Battery Powered: Requires 4 x 'AA' Batteries (not included)
- Operating Temperature: 32° to 113°F
- Maximum SD Card Support: 32GB
- Certifications: CE RoHS
- Date Stamp: ON/OFF Monitor / Video: 720p High-Definition Recording
- Video File Format: .avi
- Recording Resolutions: 320 x 240, 640 x 480, 1280 x 720 (Pixels)
- Display Screen Type: TFT/LCD Camera / Images: Image Capture Modes: VGA, 2 or 3 Mega Pixels
- Resolution Selectable: 640 x 480, 1600 x 1200, 2048 x 1536 (Pixels)
- Image File Format: .jpg
- Shaft Diameter: 0.27" inch
- Shaft Cable Length: 40" inch
- Resolution: 300K pixels VGA
- Depth of Field: 3" inch to infinity
- Viewing Angle: 60°

NEW





PCO800



PCO820



PCO850



PDBC10



PDBC50



PDBC70

PCO800

19" RACK MOUNT 1800 WATT POWER CONDITIONER W/ 8 OUTLETS

- Triple Mode Varistor Surge And Spike Protection
- Eight Rear Outlets (With Room For 4 "Wall Warts") Controlled By A Front Panel Switch
- 15 Amp Rating (1800 W) With Rear Panel Circuit Breaker (UL)
- Rugged Single Rack Space Metal Housing For Maximum Reliability
- Power:110V-60Hz
- Dimensions: 19" W X 1 3/4" H X 7 3/4" D
- Weight: 5.20 Lbs

PCO820

19" RACK MOUNT 8 OUTLETS 1800 WATT POWER CONDITIONER W/VOLTAGE METER

- Triple Mode Varistor Surge And Spike Protection
- Eight Rear Outlets (With Room For 4 "Wall Warts") Controlled By A Front Panel Switch
- 15 Amp Rating (1800 W) With Rear Panel Circuit Breaker (UL)
- Two Added Front Panel Slide-Out, Swiveling Lights For Rack Illumination And Dimmer Controls To Adjust Lamp Brightness
- Large LED Numeric Meter That Displays Incoming AC Line Voltage And 2 Voltage Condition Indicators Standard Voltage And Over Voltage
- Rugged Single Rack Space Metal Housing For Maximum Reliability
- Dimensions: 19" W X 1 3/4" H X 8 3/4" D
- Weight: 6 Lbs
- Power: 110V-60Hz

PCO850

15 AMP POWER SUPPLY CONDITIONER RACK MOUNTABLE POWER STRIP SURGE PROTECTOR WITH 9 OUTLETS

- Safely Provides Surge Protection Control
- 9 Total Outlets (8) Rear and (1) Front
- Built-in AC Noise Filter
- 15 Amp Rating with Circuit Breaker
- Eliminates Unwanted Radio Frequency Interference(RFI) and Electromagnetic Interference (EMI)
- Spike and Surge Protection
- 1U Rack Mountable
- Aluminum Front Panel and Steel Chassis
- Push to Reset
- 6 Foot Power Cord (3x14 AWG)
- Energy Dissipation: 150 Joules
- Peak Impulse Current: 1200 Amps
- Operating Voltage: 115V - 60Hz
- Dimensions (L x D x H): 19.0 x 3.9 x 1.8 inches
- Weight: 3.5 Lbs.

PDBC10

8 OUTLET RACK MOUNT POWER SUPPLY CENTER W/EACH OUTLET SWITCH

- Can offer 8 power supply for other units
- Built-In Switch For Each Outlet
- Rack mount brackets
- 110/220V compatible
- 19" L X 3.1" W X 1.7" H

PDBC50

15 AMP POWER SUPPLY PDU POWER STRIP WITH 9 OUTLETS 1800VA RACK MOUNTABLE

- Safely Provides Surge Protection Control
- 9 Total Outlets (6) Rear and (3) Front
- Built-in AC Noise Filter
- 15 Amp Rating with Circuit Breaker
- Eliminates Unwanted Radio Frequency (RFI) and Electromagnetic Interference (EMI)
- Spike and Surge Protection
- 1U Rack Mountable
- Steel Chassis and Front Panel
- Push to Reset
- 6 Foot Power Cord (3x14 AWG)
- Energy Dissipation: 150 Joules

PDBC70

15 AMP POWER SUPPLY POWER STRIP WITH 1800VA RACK MOUNTABLE 9 OUTLETS

- Perfect Solution for Controlling Power to Your Equipment
- Safely Provides Surge Protection Control
- 9 Total Rear Outlets
- 9 Front Panel Blue Illumination Power Switches
- Built-in AC Noise Filter
- 15 Amp Rating with Circuit Breaker
- Eliminates Unwanted Radio Frequency (RFI) and Electromagnetic Interference (EMI)
- Spike and Surge Protection
- 1U Rack Mountable
- Steel Chassis and Front Panel
- Push to Reset
- 6 Foot Power Cord (3x14 AWG)
- Energy Dissipation: 150 Joules
- Peak Impulse Current: 1200 Amps
- Operating Voltage: 115 V ~ 230V/50 ~ 60Hz
- Dimensions (L x D x H): 19.0 x 3.8 x 1.8 inches

PVTC STEP UP / STEP DOWN - VOLTAGE CONVERTERS / TRANSFORMERS



PVTC120U



PVTC2020U



PVTC5000U

Model	Maximum Rating
PVTC120U	100 Watt
PVTC300U	300 Watt
PVTC320U	500 Watt
PVTC1000U	1000 Watt
PVTC2020U	2000 Watt
PVTC3000U	3000 Watt
PVTC5000U	5000 Watt



Going abroad ? Plan on using your computer, cell phone, hair dryer, other gadget or appliance? The PVTC series step up/down voltage transformers offer you a safe, dependable, cost-effective and easy solution to converting voltages from 110-120 volts up to 220-240 volts or from 220-240 volts down to 110-120 volts for both home use and commercial applications. The PVTC series come available with efficient and high-power handling ratings, heavy-duty power cord, standard US 3-prong plug, and an American to European outlet adaptor. Additional features include 5V standard USB jack for easy charging smaller devices, ability for outputs to be used simultaneously & continuously and fuse protection. Visit PyleAudio.com and search the model number to learn more!

PVAR2000 2000 WATT STEP UP AND STEP DOWN VOLTAGE CONVERTER TRANSFORMER - AC 110/220V

- Converts 110/120 V to 220/240V OR Converts 220/240V to 110/120 V
- On/Off switch with indicator lam
- Analog voltage meter
- Integrated automatic protection circuit
- Easy to carry with attached handled
- Dimensions: 8"H X 14"L X 13"W
- Product Weight: 26 Lbs



PVAR5000 5000 WATT STEP UP AND STEP DOWN VOLTAGE CONVERTER TRANSFORMER - AC 110/220V

- Converts 110/120V to 220/240V OR converts 220/240V to 110/120V
- 5 outlets located on front (outlets accept 3 or 2 prong US plugs and 2 prong Euro/Asian plugs)
- Voltage Converter/Transformer with Stabilizer, good for countries with unstable voltage supply
- Heavy duty metal casing and durable design, Easy to carry with attached handle
- On/Off switch with indicator lamp
- Dimensions: 14.76"H x 15.55"L x 10.43"W



PVKT130 TRAVEL VOLTAGE CONVERTER TRANSFORMER 50-1600 WATT KIT WITH WORLDWIDE SOCKET PLUG ADAPTERS STEP DOWN 220/240V TO 110/120V

- Use your appliances worldwide
- Lets you use U.S. 110/120 Volt appliances in 220/240 Volt outlets
- Allows your electronic devices to be plugged into outlets in other countries
- Includes (1) selectable watt converter with 6 adapter plugs
- Adapters are compatible in over 150 countries worldwide
- Includes travel case with color-coded map to show each adaptor's compatibility locations
- Perfect for vacations, business trips, traveling, etc.



PDMT28**PDMT29****PLTM35**

DIGITAL MULTIMETERS

Model	Description
PDMT28	Digital Backlit LCD Multimeter, AC, DC, Volt, Current, Resistance, Transistor and Range - Protective Rubber Case
PDMT29	Digital LCD Multimeter, AC, DC, Volt, Current, Resistance, and Range - Rubber Case And Stand
PDMT38	Digital LCD AC, DC, Volt, Current, Resistance, and Range Multimeter - Rubber Case, Test Leads And Stand
PLTM35	Mini Digital LCD Multimeter Measures DC Voltage, AC Voltage, DC Current, Resistance and Diode Levels
PLTM40	Digital Backlit LCD Multimeter for AC, DC, Volt, Current, Resistance, Transistor and Range Measurement
PCMT20	Digital AC/DC Auto-Ranging Clamp Meter

**PHCT65****PHCT55****PHCT205****PHCT85**

NETWORK / CABLE / TELEPHONE LINE / HDMI TESTERS

Model	Description
PHCT45	Network Cable Tester
PHCT55	Telephone Wire Cable Tester For Testing Continuity with Sender and Receiver
PHCT65	LAN/Ethernet/Telephone Cable Tracker & Tester
PHCT70	Network Cable Tester for UTP, STP, BNC Coaxial, Telephone Continuity, Short Circuit, Open Connection
PHCT85	HDMI High Definition Cable Tester
PHCT205	Network Cable Tester for UTP, FTP, BNC Coaxial, Telephone Continuity, Short Circuit, Open Connection



PMD24



PMD43



PTV17



PDT35

VOLTAGE / METAL / STUD DETECTORS AND ELECTRICAL TESTERS

Model	Description
PMD24	Handheld Stud / Metal/ Voltage Detector W/ Sensitivity Adjustment, Center Location, LED & Audible Alerts
PMD43	Handheld Metal/Voltage Detector W/ LED And Sound Alert, Sensitivity Adjustment
PTV17	Voltage Detector W/ LED And Sound Alert, 90 ~ 1000V AC, IP54 and IEX1010 Rated
PDT35	Electrical Tester For Voltage and Continuity



PIRT30



PTHM15



PTHM20



PHHT15



PCTL01



PTHDL160



PTHDL170

DIGITAL TEMPERATURE / HUMIDITY METERS AND THERMOMETERS

Model	Description
PIRT25	Compact Infrared Thermometer With Laser Targeting
PIRT30	High Temperature Infrared Thermometer with Type K Input
PMIR15	Mini Infrared Thermometer with Laser Pointer
PTHM15	Mini Temperature and Humidity Meter With Dew Point and Wet Bulb Temperature
PTHM20	Temperature and Humidity Meter With Dew Point and Wet Bulb Temperature
PHHT15	Indoor Digital Hygro-Thermometer
PCTL01	Pipe Clamp Temperature Lead
PTHDL160	Temperature and Humidity USB Data-Logger
PTHDL170	Barometric Pressure, Temperature and Humidity USB Data-Logger





PMA82



PMA85



PMA90

DIGITAL ANEMOMETERS

Model	Description
PMA82	Digital Anemometer & Thermometer - For Measuring Wind Speed
PMA85	Digital Anemometer - Measures Wind And Temperature
PMA90	Digital Anemometer / Thermometer - Air Velocity, Air Flow, Temperature



PLMT21



PLMT15

DIGITAL LUX / LIGHT METERS

Model	Description
PLMT12	Handheld Lux Light Meter Photometer - 20,000 Lux range, 2x Per Second Sampling
PLMT15	Handheld Lux Light Meter Photometer - 200,000 Lux Range, 2X Per Second Sampling
PLMT21	Handheld Lux Light Meter Photometer - 20,000 Lux range, 2x Per Second Sampling



PLT26



PST30



PST43

DIGITAL TACHOMETERS

Model	Description
PLT26	Professional Digital Non Contact Laser Tachometer - LCD Display, 99,999 RPM Range
PST30	Digital LED Non Contact Stroboscope Tachometer - Backlit LCD Display, 19,999 RPM Range
PST43	Precision Non-Contact Laser Tachometer - Extended RPM Range, Digital LCD Screen

PCMM05



PMD74



PDMM15



MANOMETERS / CARBON MONOXIDE / MICROWAVE LEAKAGE

Model	Description
PCMM05	Carbon Monoxide Meter
PMD74	Microwave Leakage Detector
PDMM01	Digital Manometer with 11 Units of Measure
PDMM15	Digital Manometer - Pressure Measuring

PSPL01



PSPL03



PSPL25



DIGITAL SOUND LEVEL METERS

Model	Description
PSPL01	Mini Digital Sound Level Meter
PSPL03	Mini Sound Level Meter with A Frequency Weighting
PSPL25	Sound Level Meter with A and C Frequency Weighting

PLDM18
PLDM22



PLDM120
PLDM180
PLDM300



DIGITAL LASER DISTANCE METERS

Model	Description
PLDM18	130 Ft. Range - Backlit LCD Display, Direct / Indirect, Volume, Area Measuring
PLDM22	195 Ft. Range - Backlit LCD Display, Direct / Indirect, Volume, Area Measuring
PLDM120	120 Ft. Range - Calculation, Tool Backlit LCD Display, Direct / Indirect, Volume & Area Measuring
PLDM180	180 Ft. Range - Calculation, Tool Backlit LCD Display, Direct / Indirect, Volume & Area Measuring
PLDM300	300 Ft. Range - Calculation, Tool Backlit LCD Display, Direct / Indirect, Volume & Area Measuring



PSTMH10

PURE CLEAN HANDHELD STEAMER MULTIPURPOSE STEAM CLEANER FOR SANITIZING, DEODORIZING AND DISINFECTING

- Naturally Cleans with Hot Steam Vapor
- Deodorizes and Sanitizes While you Clean
- Quickly Disinfects - Removes Dirt & Grime
- Produces Superheated Steam
- Lightweight, Portable and Easy to Use
- Tested to Kill 99.9% of Germs and Bacteria
- Simple Operation Single-Touch Steam Activation
- Uses Tap Water - No Chemicals or Cleaning Solutions Required
- Includes Garment Attachment for Use on Clothing
- Comes with (9) Piece Accessory Kit Including Jet Nozzle Attachment
- Built-in 1500 Watt Heating Element
- Perfect for Your Home, Car or Boat
- Dimensions: 11.0 x 6.1 x 10.0 Inches

PSTM40

PURE CLEAN STEAM VIBRATING FLOOR MOP DEODORIZER AND SANITIZER WITH VIBRATION FOR DEEP CLEANING OF HARD FLOOR SURFACES AND CARPETS

- Vibration Function to Lift Dirt & Stains
- Naturally Cleans with Hot Steam Vapor
- Deodorizes and Sanitizes While you Clean
- Works on All Sealed Hard Floor Surfaces
- Quickly Sanitizes and Disinfects
- Produces Superheated Steam
- Simple Operation Single-Touch Steam Activation
- Triangular Design for Easy Cleaning in Tight Corners
- Includes Heavy-Duty Microfiber Cleaning Pads
- Tested to Kill 99.9% of Germs and Bacteria
- Uses Tap Water - No Chemicals or Cleaning Solutions Required
- Removable 19 oz. Refillable Water Tank
- Built-in 1500 Watt Heating Element
- Works on Wood, Vinyl, Tile and Carpet
- Comes with Carpet Glider Cleaning Attachment
- Accessory and Reusable Microfiber Cleaning Pads
- Foldable Handle for Convenient Storage
- Power Cord Length: 16.5 ft
- *Additional Cleaning Pads & Accessories Available - Email or Call

PSTM50

PURE CLEAN STEAM FLOOR MOP & SWEEPER DEODORIZER AND SANITIZER FOR DEEP CLEANING OF HARD FLOOR SURFACES AND CARPETS

- Naturally Cleans with Hot Steam Vapor
- Deodorizes and Sanitizes While you Clean
- Works on All Sealed Hard Floor Surfaces
- Quickly Sanitizes and Disinfects
- Produces Superheated Steam
- Simple Operation Single-Touch Steam Activation
- Includes Heavy-Duty Microfiber Cleaning Pads
- Tested to Kill 99.9% of Germs and Bacteria
- Uses Tap Water - No Chemicals or Cleaning Solutions Required
- Removable 19 oz. Refillable Water Tank
- Built-in 1500 Watt Heating Element
- Easy to Clean and Removable Dirt Container
- Simple Toe-Touch Activated Sweeper
- Works on Wood, Vinyl, Tile and Carpet
- Comes with Carpet Glider Cleaning Attachment
- Accessory and Microfiber Cleaning Pads
- *Additional Cleaning Pads & Accessories Available - Email or Call
- Power Cord Length: 16.5 ft
- Dimensions (W x H): 47.0" x 10.5" (Folded: 31.5" x 11.0")

PSTM60

PURE CLEAN STEAM DUAL FLOOR MOP & SWEEPER DEODORIZER AND SANITIZER FOR DEEP CLEANING OF HARD FLOOR SURFACES AND CARPETS

- Naturally Cleans with Hot Steam Vapor
- Deodorizes and Sanitizes While you Clean
- Works on All Sealed Hard Floor Surfaces
- Quickly Sanitizes and Disinfects
- Adjustable Steam Controls
- Produces Superheated Steam
- Simple Operation Single-Touch Steam Activation
- Includes Heavy-Duty Microfiber Cleaning Pads
- Tested to Kill 99.9% of Germs and Bacteria
- Uses Tap Water - No Chemicals or Cleaning Solutions Required
- Removable 19 oz. Refillable Water Tank & Dirt Container
- Digital Steam Control Settings
- Built-in 1500 Watt Heating Element
- Easy to Clean Removable Dirt Container
- 180 Degree Low-Profile Swivel Head
- Simple Toe-Touch Activated Sweeper
- Foldable Handle for Convenient Storage
- Works on Wood, Vinyl, Tile and Carpet
- Comes with Carpet Glider Cleaning Attachment
- Accessory and Microfiber Cleaning Pads
- *Additional Cleaning Pads & Accessories Available - Email or Call
- Power Cord Length: 16.5 ft

PSTMP90

PURE CLEAN TABLE TOP STEAM PRESS WITH STEAM BURST FUNCTION, LARGE IRONING SURFACE & ADJUSTABLE TEMPERATURE SELECTION

- 50% Faster Than Traditional Ironing
- Safe for Nylon, Silk Rayon, Wool, Cotton, Linen, etc.
- Non-Stick and Anti-Shine Ironing Surface Coating
- Even Pressure Ensures Sharp, Long-Lasting Creases
- Quickly Steam Press and Remove Wrinkles
- Variable Temperature Selection
- Multiple Dry-Heat & Steam Settings for Different Fabrics
- Easy-to-Use and Safe One-Hand Operation
- Extra Gentle Against Fabrics Like Silk
- 'Steam Burst' Function Blasts Away Wrinkles
- (5) Times the Size of Regular Irons
- Iron Surface Size: 22" x 9"
- Ready Indicator Lights
- Auto Shut-Off Safety Feature
- 10 oz. Refillable Water Tank
- 1350 Watt Power
- Accessory Kit Includes Spray Bottle, Pressing Cushion and Water Fill Cup

PSTMP95

TABLE TOP STEAM PRESS WITH DIGITAL CONTROLS



PSTHH05



PSTMH15



PSTMH02



PSTMP20

PSTHH05

HANDHELD STEAMER BIRDIE MULTIPURPOSE PRESSURIZED STEAM CLEANER

- Naturally Cleans with Hot Steam Vapor
- Deodorizes and Sanitizes While you Clean
- Quickly Disinfects - Removes Dirt & Grime
- Produces Superheated Steam
- Lightweight, Portable and Easy to Use
- Tested to Kill 99.9% of Germs and Bacteria
- Simple Operation Single-Touch Steam Activation
- Uses Tap Water - No Chemicals or Cleaning Solutions Required
- Includes Garment Attachment for Use on Clothing
- Comes with (9) Piece Accessory Kit Including Jet Nozzle Attachment
- Built-in 900 Watt Heating Element
- Perfect for Your Home, Car or Boat
- Power 110V Compatible
- Main Unit Dimensions: 11.6" X 7" X 10.4" inches
- Main Unit Weight: 3.8 lbs.

PSTMH02

HANDHELD STEAMER BIRDIE MULTIPURPOSE PRESSURIZED STEAM CLEANER

- Naturally Cleans with Hot Steam Vapor
- Deodorizes and Sanitizes While you Clean
- Quickly Disinfects - Removes Dirt & Grime
- Produces Superheated Steam
- Lightweight, Portable and Easy to Use
- Tested to Kill 99.9% of Germs and Bacteria
- Simple Operation Single-Touch Steam Activation
- Uses Tap Water - No Chemicals or Cleaning Solutions Required
- Includes Garment Attachment for Use on Clothing
- Comes with (9) Piece Accessory Kit Including Jet Nozzle Attachment
- Built-in 800 Watt Heating Element
- Perfect for Your Home, Car or Boat
- Power 110V Compatible
- Dimensions: 9.44" x 5.9" x 8.46"
- Weight: 2.2 lbs

PSTMH15

STEAM CLEANER AND HANDHELD BIRDIE, MULTI-PURPOSE & MULTI-SURFACE DISINFECTING DEEP CLEANING FOR HOME, CLOTHING, FLOORS, CARPETS & VEHICLES

- Versatile Steam Cleaner for your Home and Clothing
- Anti-Wrinkle: Freshens Garments and Removes Wrinkles & Creases
- Naturally Cleans with Hot Steam Vapor
- Deodorizes and Sanitizes While you Clean
- Quickly Disinfects - Removes Dirt & Grime
- Use for Clothing, Furniture, Fabric and More
- Produces Superheated Steam
- Portable and Easy to Use
- Includes Attachable Garment Hanger for Use with Clothing
- Tested to Kill 99.9% of Germs and Bacteria
- Simple Operation Single-Touch Steam Activation
- Uses Tap Water - No Chemicals or Cleaning Solutions Required
- Comes with (15) Piece Accessory Kit Including Jet Nozzle Attachment
- Perfect for Home, Office and Travel
- Built-in 900 Watt Heating Element
- Removable 11oz. Refillable Water Tank
- Power 110V Compatible
- Main Unit Dimensions: 11.6" x 10.7" x 6.4" inches
- Main Unit Weight: 3.4 lbs.
- Complete Unit Weight: 8.1 lbs

PSTMP20

MULTI-PURPOSE AND MULTI-SURFACE STEAM FLOOR MOP AND DETACHABLE HANDHELD STEAMER

- Hybrid Steamer: 2 Steamers in 1
- Handheld Steamer Detaches from Mop to Clean Your Entire Home
- Naturally Cleans with Hot Steam Vapor
- Includes Extension Hose for Handheld Steamer
- Deodorizes and Sanitizes While you Clean
- Works on All Sealed Hard Floor Surfaces
- Quickly Sanitizes and Disinfects Clothing, Furniture, Fabric and More
- Produces Superheated Steam
- Simple Operation Single-Touch Steam Activation
- Triangular Mop Design for Easy Cleaning in Tight Corners
- Includes Heavy-Duty Microfiber Cleaning Pads
- Tested to Kill 99.9% of Germs and Bacteria
- Uses Tap Water - No Chemicals or Cleaning Solutions Required
- Removable 16 oz. Refillable Water Tank
- Built-in 1500 Watt Heating Element
- Perfect for Your Home, Car or Boat
- Power 110V Compatible
- Main Unit Dimensions: 10.6" x 8.7" x 47.2" inches
- Main Unit Weight: 5.3 lbs.

PSB1

NEW

- Measures steps, calories burned, distance, sleep quality and duration
- Bluetooth wireless syncing with iPhone/ Android "Fitmotion" app
- No charge design. Convenient changeable CR2032 battery allows constant monitoring day and night.
- 12 LEDs display time and progress towards user set daily goal

- **Technical Specs:**
- Material: Aluminum
- Dimensions: 34.9 x 34.9 x 8.7 mm (L x W x D)
- Sensor: 3-axis accelerometer
- Weight: 9.8g
- Waterproof: Immersion up to 1 meter
- **Compatibility:**
- Bluetooth 4.0 and higher
- Apple IOS version 6.1+
- Android 4.3+

FITMOTION ACTIVITY TRACKER, WRIST WATCH BRACELET STYLE



PSB1BK



PSB1SL



PSB1GL



NEW



PHLSCBT2SL



PHLSCBT2BK



PHLSCBT2WT

PHLSCBT2

BLUETOOTH DIGITAL WEIGHT SCALE AND 'PLYLE HEALTH' APP

- Bluetooth SMART Technology
- Measures Weight and Wirelessly Sends Data to Your Device
- Download the 'Pyle Health' Application to your Smartphone and Track Your Weight
- LCD Digital Display Data Readout
- Choose Your Measurement Unit: Pounds, Kilograms, or Stones
- High Precision Strain Gauge Sensory System for Accurate Results
- Tempered Glass Surface Effectively Handles and Distributes Weight Evenly

- Auto Turn On and Auto Off
- Battery Requirements: 4 x 'AAA' Batteries (Included)
- Weight Capacity: 4.4 Lbs. - 330.7 Lbs.
- Division: 0.22 Lbs.
- Application Supports iPhones 5, iPads, and iPad Mini (Compatible with iOS 6 & Later)
- Also Supports Android Samsung Galaxy S4, Nexus 7 (Compatible with Android 4.3 & Later) Must have Bluetooth 4.0 or later
- The 'Pyle Health' App Free to Download
- Bluetooth Wireless Data Transfer
- Save Your Weight Readings into the App

- View Your History and Recall Measurements from Past Days
- Integrated Calendar and Chart System Help you Keep Track
- Easily Send & Share Your Data with Family, Friends or Doctor
- Works with iPhones and iPads (Compatible with iOS 6 & Later)
- Also Works with Androids (Compatible with Android 4.3 & Later)
- Bluetooth 4.0 (Compatible with Devices Bluetooth V4.0 & Later)



PHLSCBT4BK



PHLSCBT4SL



PHLSCBT4WT



PHLSCBT4PN



PHLSCBT4OR



PHLSCBT4GN

PHLSCBT4

BLUETOOTH DIGITAL WEIGHT AND PERSONAL HEALTH SCALE WITH WIRELESS IPHONE, ANDROID, SMARTPHONE DATA TRANSFER AND PYLE HEALTH APP FITNESS TRACKER (WHITE)

- Bluetooth SMART Technology
- Measures Body Fat, Hydration Levels, Muscle and Bone Level Percentages
- Scale Wirelessly Sends Data to Your Device
- Download the 'Pyle Health' Application to your Smartphone and Track Your Health
- Your Bluetooth device must have Bluetooth version 4.0 or better
- Application Supports iPhones, iPads, and iPad

- Mini (Compatible with iOS 6 & Later)
- Also Supports Android Samsung Galaxy S4, Nexus 7 (Compatible with Android 4.3 & Later)
- LCD Digital Display Data Readout
- Choose Your Measurement Unit: Pounds, Kilograms, or Stones
- BIA Technology Incorporation (Bioelectrical Impedance Analysis)
- High Precision Strain Gauge Sensory

- System for Accurate Results
- Tempered Glass Surface Effectively Handles and Distributes Weight Evenly
- Up to 10 Person Memory Information Function
- Low Battery and Overload Indication
- Auto Turn On and Auto Off
- Battery Requirements: 4 x 'AAA' Batteries (Included)
- Weight Capacity: 4.4 Lbs. - 330.7 Lbs.
- Division: 0.22 Lbs.



NEW



PHBPB16TL

PHBPBW40BK



PYLE Health

PHBPB20



PHBPBW40BL



PHBPBW40PN

PHBPB16TL

BLUETOOTH WIRELESS BLOOD PRESSURE MONITOR WITH ARM CUFF AND DOWNLOADABLE APP

- Wirelessly Measure and Record Your Blood Pressure
- Easy to Use: Insert Your Arm and Press the Button
- Bluetooth 4.0 Smart Low Energy Technology
- Download the Pyle Health™ App & Connect with Your Smartphone/Tablet
- Clearly Displays Pulse Rate, Systolic and Diastolic Pressures
- Simple Button Operation and One Touch Inflation
- Alarm Clock Reminder for Before or After Meals or Medication Times
- Internal Memory Can Hold up to 90 Readings
- Easy to Read Digital LCD Display
- Auto Turn Off Power Saving Feature
- Requires: 4 x 'AAA' Batteries (Not Included)
- Or Power By AC 6V Adaptor (Not Included)
- The Pyle Health™ App Keeps Track, Saves and Charts Your Blood Pressure Readings
- Quickly Recall or Create New Measurement Readings
- Share Results with Family, Friends or Doctor
- Works with iPhones, Androids, Smartphones, iPads, Tablets, etc.
- App Compatible with all iOS Versions & Android 4.3 & Later
- App Requires Bluetooth Version 4.0 or Later

PHBPB20

BLUETOOTH BLOOD PRESSURE MONITOR WITH DOWNLOADABLE HEALTH TRACKING APP

- Wirelessly Measure and Record Your Blood Pressure
- Easy to Use: Insert Your Arm and Press the Button
- Bluetooth 4.0 Smart Low Energy Technology
- Download the Pyle Health™ App & Connect with Your Smartphone/Tablet
- Clearly Displays Pulse Rate, Systolic and Diastolic Pressures
- Simple Button Operation and One Touch Inflation
- Full Date, Time Setting and 4 Person Memory
- Store and View up to 99 Blood Pressure Readings Per User
- View Average Daily, Weekly & Monthly Blood Pressure Readings
- Alarm Clock Reminder
- Irregular Heartbeat Detection
- Easy to Read Digital LCD Display
- Auto Turn Off Power Saving Feature & Low Battery Indicator
- Battery Requirements: 4 x 'AA' Batteries (Included)
- Or Power By AC 6V Adaptor (Not Included)
- The Pyle Health™ App: Free to Download
- App Keeps Track, Saves and Charts Your Blood Pressure Readings
- Easily Share Your Results via Text Message or Email
- Share with Family, Friends, or your Doctor
- Quickly Recall Past Readings & Record New Readings
- Compatible with iPhones, iPads & iPods (Works with iOS 6 & Later)
- Compatible with Android Smartphones & Tablets (Works with Android 4.3 and Later)
- Requires Bluetooth Version 4.0 or Later for Compatibility with Your Device

PHBPBW40BK

BLUETOOTH SMART WRIST BLOOD PRESSURE MONITOR WITH FREE DOWNLOADABLE HEALTH TRACKING APP AND ADJUSTABLE STRAP, SAFE FOR ALL AGES (BLACK COLOR)

- Wirelessly Measure and Record Your Blood Pressure
- Accurate, Instant and Reliable Readings
- Easy to Use: Wrap it Around Your Wrist and Press the Button
- Adjustable Strap is Safe and Works for All Ages
- Bluetooth 4.0 Smart Low Energy Technology
- Download the 'Pyle Health' App & Connect with Your Smartphone/Tablet
- The App Keeps Track, Saves and Charts Your Blood Pressure Readings
- Clearly Displays Pulse Rate, Systolic and Diastolic Pressures
- Simple Button Operation and One Touch Inflation
- Store and View up to 99 Blood Pressure Readings Per User
- Easy to Read Digital LCD Display
- Auto Turn Off Power Saving Feature & Low Battery Indicator
- The 'Pyle Health' Free Downloadable App:
- Compatible with Apple iPhones, iPads & iPods (Works with iOS 6 & Later)
- Works with iPhone 4S & Newer, iPad 4th Generation & Newer, iPod Touch 5th Generation & Newer, etc.
- Compatible with Android Devices (Works with Android 4.3 & Later)
- Works with Samsung Galaxy S4, Note 2, Note 3, HTC 1, Nexus 5, Nexus 7, etc.
- Requires Bluetooth Version 4.0 or Later for Compatibility with Your Device
- Battery Requirements: 2 x 'AAA' Batteries
- Dimensions: 3.15"(L) x 2.35"(W) x 2.96"(H)
- Weight: 4.5 oz (batteries excluded)

PHBPBW40BL

BLUE

PHBPBW40PN

PINK



PHTM10BTBL



PHTM10BTPN



PHTM10BTBL



PHTM20BTGR



PHTM20BTPN



PHTM20BTBL



PHTM60BTBL



PHTM60BTGR

PHTM10BTBL

BLUETOOTH INFRARED EAR THERMOMETER WITH DIGITAL LCD DISPLAY READOUT

- Quickly and Easily Displays Body Temperature
- Download the €™ Pyle Health€™ Application and Connect via Bluetooth
- Uses Infrared Technology for Accurate Readings
- Designed for Measuring Body Temperature through the Eardrum
- Safe for Children and Adult Use
- Built-in Memory Function That Saves Last 8 Readings
- Easy to Read Digital LCD Display Readout
- Battery Saving: Automatically Turns Off 60 Seconds of Non-Use
- Degrees Switchable Between Celsius and Fahrenheit
- Battery Required: 2 x 'AAA' Batteries
- Dimensions: 5.8" x 1.4" x 1.2" inch
- Weight: 1.73 oz. (without batteries)
- The €™ Pyle Health€™ Thermometer App: Free to Download
- Bluetooth Wireless Data Transfer
- Save Your Temperature Readings into the App
- View Your History and Recall Temperatures from Past Days
- Integrated Calendar and Chart System Help you Keep Track
- Easily Send & Share Your Data with Family, Friends or Doctor
- Works with iPhones and iPads (Compatible with iOS 6 & Later)
- Also Works with Androids (Compatible with Android 4.3 & Later)
- Bluetooth 4.0 (Compatible with Devices Bluetooth V4.0 & Later)

PHTM10BTGR

GRAY

PHTM10BTPN

PINK

PHTM20BTBL

BLUETOOTH INFRARED EAR & BODY DIGITAL THERMOMETER WITH DOWNLOADABLE 'PYLE HEALTH' APPLICATION, LCD DISPLAY AND SAFE FOR ALL AGES

- Quickly and Easily Displays Body Temperature
- Download the €™ Pyle Health€™ Application and Connect via Bluetooth
- Uses Infrared Technology for Accurate Readings
- Can be Used in Ear Cavity or On the Forehead
- Safe for All Ages: Infant, Child and Adult
- Built-in Memory Function That Saves Last 10 Readings
- Easy to Read Digital LCD Display Readout
- Battery Saving: Automatically Turns Off 60 Seconds of Non-Use
- Choose Between Celsius and Fahrenheit Measurements
- Battery Required: (CR2032) 3V Battery
- The €™ Pyle Health€™ Thermometer App: Free to Download
- Bluetooth Wireless Data Transfer
- Save Your Temperature Readings into the App
- View Your History and Recall Temperatures from Past Days
- Integrated Calendar and Chart System Help you Keep Track
- Easily Send & Share Your Data with Family, Friends or Doctor
- Works with iPhones and iPads (Compatible with iOS 6 & Later)
- Also Works with Androids (Compatible with Android 4.3 & Later)
- Bluetooth 4.0 (Compatible with Devices Bluetooth V4.0 & Later)

PHTM20BTGR

GRAY

PHTM20BTPN

PINK

PHTM60BTBL

BLUETOOTH NON-CONTACT INFRARED HANDHELD THERMOMETER WITH DIGITAL LCD DISPLAY READOUT

- Quickly and Easily Displays Body or Surface Area Temperature
- Download the €™ Pyle Health€™ Application and Connect via Bluetooth
- Uses Infrared Technology for Accurate Readings
- Measures Body Temperature and Surface Temperature of Objects
- Safe for All Ages Including Children and Babies
- Built-in Memory Function That Saves Past 50 Readings
- Easy to Read Digital LCD Display
- Battery Saving: Automatically Turns Off 60 Seconds of Non-Use
- Degrees Switchable Between Celsius and Fahrenheit
- Battery Required: 2 x 'AAA' Batteries
- Dimensions: 6.3" Å— 3.4" Å— 1.5" inch
- Weight: 3.2 oz. (Not including batteries)
- The €™ Pyle Health€™ Thermometer App: Free to Download
- Bluetooth Wireless Data Transfer
- Save Your Temperature Readings into the App
- View Your History and Recall Temperatures from Past Days
- Integrated Calendar and Chart System Help you Keep Track
- Easily Send & Share Your Data with Family, Friends or Doctor
- Works with iPhones and iPads (Compatible with iOS 6 & Later)
- Also Works with Androids (Compatible with Android 4.3 & Later)
- Bluetooth 4.0 (Compatible with Devices Bluetooth V4.0 & Later)

PHTM60BTGR

GRAY



PHLTB41BK



PHLTB41WT

PYLE Health

NEW



PHLTBS51BK



PHLTBS51WT

PYLE HEALTH ULTRASONIC WAVE RECHARGEABLE ELECTRIC TOOTHBRUSH WITH AUTOMATIC CHARGING DOCK BASE, ULTRA QUIET OPERATION (BLACK)

PHLTB41BK

- Lab Tested and Proven to Improve Oral Hygiene Health
- Significantly Better Than Normal Brushing
- Easy-to-Use with Deep Clean Ability
- Safe for All Ages: Children, Teens and Adults
- Removes Food Particles and Destroys Plaque Below the Gum Line
- (3) Selectable Brush Intensity Modes: Normal, Whitening and Massage
- Proven to Reduce Plaque by 97% in a Single Brushing
- Reduces Bleeding by 60% and Gingivitis by 28% in 30 days
- 41,000 Ultrasonic Pulse Vibrations Per Minute
- Cleans and Stimulates Live Tissue for Healthy Gums
- Includes 2 Individually Colored Brush Heads (6-Month Supply)
- Built-in Rechargeable Battery
- Battery Lasts up to 6 full Weeks with Regular Brushing
- Marine Grade Waterproof IPX7 Design
- 2 Minute Timer with 30 Second Alert
- for Each Mouth Quadrant
- Automatic Power Off In-Between Brushing
- Easy Single-Push Button Controls
- Perfect for Travel & Portability
- Ultra Quiet Operation While Brushing
- Charge Docking Stand Base Included
- Weight: Wand 3.5 oz. (Base 5.1 oz.)
- Dimensions: Wand 7.2" x 1.2" x 1.1" (Base 1.1" x 3.3" x 3.1")
- Power: 110 and 220 Volts AC

PHLTB41WT

WHITE

PYLE HEALTH ULTRASONIC WAVE RECHARGEABLE ELECTRIC TOOTHBRUSH WITH AUTOMATIC CHARGING DOCK BASE, ULTRAVIOLET BRUSH HEAD SANITIZER AND ULTRA QUIET OPERATION (BLACK)

PHLTBS51BK

- Lab Tested and Proven to Improve Oral Hygiene Health
- Significantly Better Than Normal Brushing
- Easy-to-Use with Deep Clean Ability
- Safe for All Ages: Children, Teens and Adults
- Removes Food Particles and Destroys Plaque Below the Gum Line
- (3) Selectable Brush Intensity Modes: Normal, Whitening and Massage
- Proven to Reduce Plaque by 97% in a Single Brushing
- Reduces Bleeding by 60% and Gingivitis by 28% in 30 days
- Ultraviolet Light Eliminates Germs and Bacteria on Your Toothbrush
- UV Light Cover Doubles as a Rinse Cup
- 41,000 Ultrasonic Pulse Vibrations Per Minute
- Cleans and Stimulates Live Tissue for Healthy Gums
- Includes 2 Individually Colored Brush Heads (6-Month Supply)
- Built-in Rechargeable Battery
- Battery Lasts up to 6 full Weeks with Regular Brushing
- Marine Grade Waterproof IPX7 Design
- 2 Minute Timer with 30 Second Alert for Each Mouth Quadrant
- Automatic Power Off In-Between Brushing
- Easy Single-Push Button Controls
- Perfect for Travel & Portability
- Ultra Quiet Operation While Brushing
- Charge Docking Stand Base Included

PHLTBS51WT

WHITE

PHLTB1BK

REPLACEMENT BRUSH HEAD (BLACK)



PHLTB1WT

REPLACEMENT BRUSH HEAD (WHITE)





PLWB2030



PLWB3040



Accessories Included

PLWB2030

ERASABLE DESKTOP ILLUMINATED LED WRITING BOARD W/ REMOTE CONTROL AND 8 FLUORESCENT MARKERS

- Erasable and Rewritable Sign Board that Lights up Your Messages
- LED Board with Bright Programmable Colored Lights
- Flashing Modes For Multi-Color Combinations
- Designed for Hanging or Stand-
- ing to Fit Any Display Need
- Includes Control Box and Remote to Set Flashing Modes for Multi-Color Combinations
- Comes with Control Box and Remote Control
- Colored Pens Included: white/orange/ purple/pink/green/blue/yellow/red
- Easily Erases by Wiping with Damp or Dry Clean Cloth
- Dimensions of Board: 16"x12" inches
- Weight of Board: 21 oz.
- Power Adapter (220V/12V, 1A)

PLWB3040

ERASABLE ILLUMINATED LED WRITING BOARD W/ REMOTE CONTROL AND 8 FLUORESCENT MARKERS, 16" x 12"

- Erasable and Rewritable Sign Board that Lights up Your Messages like a Neon Sign
- LED Board with Bright Programmable Colored Lights
- Flashing Modes For Multi-Color Combinations
- Designed for Vertical or Horizontal Display to Fit all Presentation Needs
- Includes Control Box and Remote to Set Flashing Modes for Multi-Color Combinations
- Easy Hang Suspension Loops to Hang and Display the Sign Virtually Everywhere
- Comes with Control Box and Remote Control
- 6mm Size Marker Pen has a Removable Point
- to Change from Bullet or Chisel Tip
- Easily Erases by Wiping with Damp or Dry Clean Cloth
- 16" x 12" Acrylic Panel LED Writing Board
- Power Adapter (220V/12V, 1A)

PLWB6080

32" x 24"

PLWB6090

35" x 24"

For more detailed specifications, product-specific information and models visit:



Coming Soon:

PKFP50

FOOD PROCESSOR



PKJC40

FOOD JUICER PROCESSOR



PKSJ30

FOOD JUICER



PKFD12

MULTI-TIER COUNTERTOP FOOD DEHYDRATOR



PKHBK12

HANDHELD FOOD BLENDER



PKRT15

VERTICAL COUNTERTOP
ROTISSERIE ROTATING
OVEN



**PCVTB****PCVHB****PCVSPB****PCVHP**

Model	Cover Type	Length (feet)	Beam Width (inches)
PCVTB110	Boat (V-Hull)	12'-14'	68''
PCVTB111	Boat (V-Hull)	14'-16'	75''
PCVTB112	Boat (V-Hull)	14'-16'	90''
PCVTB113	Boat (V-Hull)	16'-18.5'	98''
PCVTB114	Boat (V-Hull)	17'-19'	102''
PCVTB115	Boat (V-Hull)	20'-22'	106''
PCVHB220	Boat (V-Hull)	14'-16'	75''
PCVHB221	Boat (V-Hull)	14'-16'	90''
PCVHB222	Boat (V-Hull)	16'-18.5'	98''
PCVHB223	Boat (V-Hull)	17'-19'	102''
PCVHB224	Boat (V-Hull)	20'-22'	106''
PCVHB225	Boat (V-Hull)	22'-24'	116''
PCVSPB330	Boat (V-Hull)	14'-16'	75''
PCVSPB331	Boat (V-Hull)	14'-16'	90''
PCVSPB332	Boat (V-Hull)	16'-18.5'	98''
PCVSPB333	Boat (V-Hull)	17'-19'	102''
PCVSPB334	Boat (V-Hull)	20'-22'	106''
PCVSPB335	Boat (V-Hull)	22'-24'	116''
PCVHP440	Pontoon	17'-20'	96''
PCVHP441	Pontoon	21'-24'	96''
PCVHP442	Pontoon	25'-28'	96''



PCVCAR

PCVSUV

PCVM



Model	Cover Type	Length (feet)	Fits Sizes Up to
PCVCAR12	Car	12'	-
PCVCAR13	Car	13.1'	-
PCVCAR14	Car	14.3'	-
PCVCAR15	Car	15'	-
PCVCAR16	Car	16.5'	-
PCVCAR17	Car	17.8'	-
PCVCAR19	Car	19'	-
PCVCAR22	Car	22'	-
PCVSUV136	SUV	13.6'	-
PCVSUV152	SUV	15.2'	-
PCVSUV162	SUV	16.2'	-
PCVSUV172	SUV	17.2'	-
PCVSUV182	SUV	18.2'	-
PCVSUV192	SUV	19'	-
PCVSUV202	SUV	20'	-
PCVMC10	Motorcycle	-	1100cc
PCVMC12	Motorcycle	-	1500cc
PCVMC20	Motorcycle	-	1100cc
PCVMC22	Motorcycle	-	1500cc
PCVMC30	Motorcycle	-	500-1400cc
PCVMC32	Motorcycle	-	500-1100cc
PCVM34	Motorcycle	-	1500cc



PCVGFCT



PCVGFCSO



PCVGCE



PCVGFCP



Model	Cover Type	Color
PCVGFCT60	2 Passenger	Olive
PCVGFCT61	4 Passenger	Olive
PCVGFCT62	2 Passenger	Camo
PCVGFCT63	4 Passenger	Camo
PCVGFCT64	2 Passenger	Tan
PCVGFCT65	4 Passenger	Tan
PCVGFCSO20	2 Passenger	Olive
PCVGFCSO21	4 Passenger	Olive
PCVGFCSO22	2 Passenger	Camo
PCVGFCSO23	4 Passenger	Camo
PCVGFCSO24	2 Passenger	Tan
PCVGFCSO25	4 Passenger	Tan
PCVGCE30	2 Passenger	Tan
PCVGCE31	4 Passenger	Tan
PCVGCE33	2 Passenger	Camo
PCVGCE34	4 Passenger	Camo
PCVGCE36	2 Passenger	Olive
PCVGCE37	4 Passenger	Olive
PCVGFYM70	Yamaha™ Models	Tan
PCVGFYM71	Yamaha™ Models	Camo
PCVGF90	Precedent™ Club Car	Tan
PCVGF91	Precedent™ Club Car	Camo



PCVATV



PCVSC



PCVUTV



PCVLM



Model	Cover Type	Size / Fits Up To	Color
PCVATV20	ATV	82"L x 48"W x 31.5"H	Olive
PCVATV22	ATV	86.5"L x 49"W x 33.5"H	Olive
PCVATC30	ATV	82"L x 48"W x 31.5"H	Camo
PCVATC32	ATV	86.5"L x 49"W x 33.5"H	Camo
PCVSC40	Scooter / Vespa	48"L x 22"W x 44"H	Silver
PCVSC42	Scooter / Vespa	60"L x 32"W x 44"H	Silver
PCVSC44	Scooter / Vespa	81"L x 38"W x 55"H	Silver
PCVUTV10	UTV	Universal (without Cabin)	Olive
PCVUTV12	UTV	Universal (with Cabin)	Olive
PCVUTV13	UTV	Universal (without Cabin)	Camo
PCVUTV14	UTV	Universal (with Cabin)	Camo
PCVSNB30	Snow Blower	Universal	Black
PCVDT45	Lawn Tractor	Universal	Black
PCVLTR11	Lawn Tractor	Universal	Olive
PCVLM36	Lawn Mower	Universal	Black
PCVAC1	Air Compressor	Universal	Black
PCVPW3	Pressure Washer	Universal	Black
PCVGNM6	Generator	Medium	Black
PCVGNL8	Generator	Large	Black
PCVGNLXL9	Generator	Extra Large	Black
PCVACM20	Air Conditioner	Medium	Black
PCVACL22	Air Conditioner	Large	Black
PCVACXL24	Air Conditioner	Extra Large	Black



Model	Cover Type	Size / Fits Up To
PCVUMB11	Umbrella	Diameter: 13"
PCVUMB22	Umbrella	Diameter: 10"
PVCCH18	Chair	28.5"L x 25.5"W x 26"H
PVCCH20	Chair	32.5"L x 25.5"W x 34"H
PVCCH22	Stack of Chairs	33.5"L x 25.5"W x 45"H
PVCCH24	Adirondack Chair	33.5"L x 31.5"W x 36"H
PVCCH26	Chair	33.5"L x 38"W x 31"H
PVCCH28	Rocker Chairs	32.5"L x 27.5"W x 39"H
PVCCH30	Lounge / ChaiseChairs	66"L x 28"W x 27.5"H
PVCCH32	Lounge / ChaiseChairs	66"L x 33.5"W x 33"H
PVCCH34	Lounge / ChaiseChairs	78"L x 33.5"W x 33"H
PVCTBLCH40	Table & Chairs	78"L x 58"W x 23"H
PVCTBLCH42	Table & Chairs	108"L x 58"W x 23"H
PVCTBLCH44	Table & Chairs	128"L x 82"W x 23"H
PVCTBLCH46	Table & Chairs	70" Diameter x 23"H
PVCTBLCH48	Table & Chairs	94" Diameter x 23"H
PVCTBLCH50	Table & Chairs	54" Diameter x 23"H
PVCTBLCH52	Table & Chairs	60" Diameter x 23"H
PVCTBLCH54	Table & Chairs	60" Diameter x 29"H
PVCTBL60	Table	72"L x 44"W x 23"H
PVCTBL62	Table	50" Diameter x 23"H
PVCTBN70	Loveseat & Sofa	58"L x 35.5"W x 31"H
PVCTBN72	Loveseat & Sofa	76"L x 32.5"W x 33"H
PVCTBN74	Loveseat & Sofa	88"L x 32.5"W x 33"H
PVCTBN76	Bench	50"L x 28.5"W x 30"H
PVCCB68	Bench & Chair	45.5"L x 13.75"W x 20"H
PVCOT78	Table / Ottoman	21"L x 21"W x 17"H
PVCOT80	Table / Ottoman	26"L x 26"W x 17"H
PVCOT82	Table / Ottoman	32"L x 22"W x 17"H
PVCOT84	Table / Ottoman	38"L x 28"W x 17"H
PVCSN86	Canopy Swings	78"L x 60"W x 72"H
PVICGT88	Island Grill	37"L x 27"W x 24"H
PVICGT90	Island Grill	45"L x 29"W x 26"H
PVICGT92	Island Grill	57"L x 29"W x 26"H
PVCFP93	Fire Pit	Diameter: 44"
PVCFP94	Fire Pit	Diameter: 60"
PVCFP95	Fire Pit	40"W x 40"W
PVCFP96	Fire Pit	35.5"H
PVCFP97	Fire Pit	28.5"H
PVCLG81	Log Rack	48"L x 24"W x 42"H
PVCLG83	Log Rack	96"L x 24"W x 42"H
PVCLG85	Log Rack Bag	40"L x 25"

PVCCH



PVCTBLCH



PVCTBL



PVCOT



PVICGT



PYLE®
PyleAudio.com

SOUND



PYLE
PyleAudio.com



Karaoke

SOUND 6



PYLE[®]

audio.com



STREET
Blaster

1600 63rd Street . Brooklyn . NY 11204 . 718 535-1800 . Fax: 718 236-2400

Pyleaudio.com

Follow us

