

# PLC COMMUNICATIONS

---



# CHAPTER 6

## In This Chapter...

<b>Introduction</b> .....	6-2
<b>DirectLOGIC PLCs Password Protection</b> .....	6-2
PLC Protocols .....	6-3
<b>PLC Communication Cables &amp; Wiring Diagrams</b> .....	6-5
AutomationDirect PLCs RS-232C Serial.....	6-7
AutomationDirect PLCs RS-422A/RS-485A.....	6-10
<b>DirectLOGIC Universal Isolated Network Adapter, p/n FA-ISOCAN:</b> .....	6-16
<b>DirectLOGIC Universal Converter, p/n F2-UNICAN:</b> .....	6-17
RS-422A/RS-485A Multi-Drop Wiring Diagram Examples .....	6-18
Allen-Bradley .....	6-22
GE.....	6-27
GE VersaMax Micro .....	6-27
Mitsubishi.....	6-28
Omron .....	6-30
Modicon Modbus RS-232.....	6-31
Modicon Micro Series.....	6-31
Modicon Modbus with RJ45.....	6-31
Siemens.....	6-32

# Introduction


The **C-more** family of touch panels is capable of communicating with a wide variety of Programmable Logic Controllers. **C-more** is capable of communicating over RS232, RS422 and RS485 serial networks as well as Ethernet networks. It communicates with all AutomationDirect PLC's utilizing various protocols. **C-more** also communicates with other brands of PLCs by their different protocols. The table on the next page lists all of the various PLCs and protocols that can be configured. The page after the protocol table lists the various serial communication cables that are available to purchase. The rest of this chapter is devoted to showing the pin to pin connections of all the available cables plus wiring diagrams that the user can refer to in order to construct their own cables, along with wiring diagrams of cables that are not available for purchase. To simplify RS422/RS485 wiring schemes, we have included wiring diagrams showing connections for available terminal connectors such as our ZIPLink Communication Adapter Module, p/n ZL-CMA15, used for example with our DL-06 and D2-260 PLCs.

If you have difficulty determining whether the particular PLC and/or protocol you are using will work with the **C-more** series of touch panels, please contact our technical support group at 770-844-4200

## DirectLOGIC PLCs Password Protection



**NOTE:** Many **DirectLogic** PLCs support multi-level password protection of the ladder program. This allows password protection while not locking the communication port to an operator interface. The multilevel password can be invoked by creating a password with an upper case "A" followed by seven numeric characters (e.g. A1234567). Please refer to the specific PLC user manual for further details.

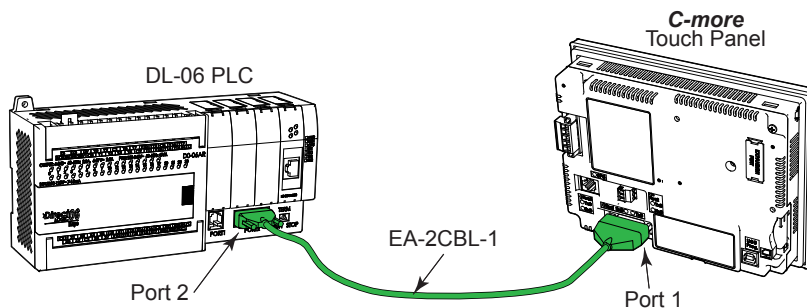

PLC Protocols

PLC Protocol Table			
Model		Protocols	
AutomationDirect	Productivity Series		Productivity Serial
			Productivity Ethernet
	Do-more (BRX)	all	Do-more Serial
			Do-more Ethernet
	CLICK	All	CLICK Serial
		C0-1x series	CLICK Ethernet
	CLICK PLUS	C2-01CPU-x, C2-03CPU-x, All with C2-DCM	CLICK Serial
		All	CLICK Ethernet
	DL05/DL06	all	K-Sequence
			DirectNET
			Modbus (Koyo addressing)
		H0-ECOM/H0-ECOM100	DirectLOGIC Ethernet
	DL105	all	K-Sequence
		D2-230	K-Sequence
		D2-240	K-Sequence
			DirectNET
	DL205	D2-250/D2-250-1/D2-260/D2-262	K-Sequence
			DirectNET
			Modbus (Koyo addressing)
			DirectNET
			Modbus (Koyo addressing)
		D2-240/D2-250-1/D2-260 Using DCM	DirectNET
			Modbus (Koyo addressing)
		H2-ECOM/H2-ECOM100	DirectLOGIC Ethernet
	DL305	D3-330/330P (Requires the use of a Data Communications Unit)	DirectNET
			DirectNET
			K-Sequence
			DirectNET
			Modbus (Koyo addressing)
		D3-350	DirectNET
		Modbus (Koyo addressing)	
	D3-350 DCM	DirectNET	
		Modbus (Koyo addressing)	
DL405	D4-430	K-Sequence	
		DirectNET	
		K-Sequence	
		DirectNET	
		K-Sequence	
	D4-440	DirectNET	
		Modbus (Koyo addressing)	
	D4-450/D4-454	DirectNET	
		Modbus (Koyo addressing)	
	All with DCM	DirectNET	
		Modbus (Koyo addressing)	
	H4-ECOM/H4-ECOM100	DirectLOGIC Ethernet	
	H2-WinPLC (Think & Do) Live V5.2 or later and Studio any version	Think & Do Modbus RTU (serial port)	
	H2-WinPLC (Think & Do) Live V5.5.1 or later and Studio V7.2.1 or later	Think & Do Modbus TCP/IP (Ethernet port)	
	GS Drives	GS Drives Serial	
		GS Drives TCP/IP (GS-EDRV)	
	SOLO Temperature Controllers (models with serial communications)	SOLO Temperature Controller	

PLC Protocols

PLC Protocol Table (cont'd)


Model		Protocols
Allen-Bradley	MicroLogix 1000, 1100, 1200, 1400, 1500, SLC 5-01/02/03	DH485/AIC/AIC+
	MicroLogix 1000, 1100, 1200, 1400 and 1500	DF1 Half Duplex; DF1 Full Duplex
	SLC 5-03/04/05	
	ControlLogix™, CompactLogix™, FlexLogix™	
	PLC-5	DF1 Full Duplex
	ControlLogix, CompactLogix, FlexLogix - Tag Based	DF1 Half Duplex; DF1 Full Duplex
	ControlLogix, CompactLogix, FlexLogix - Generic I/O Messaging	EtherNet/IP Server
	ControlLogix, CompactLogix, FlexLogix - Tag Based	EtherNet/IP Client
	MicroLogix 1100, 1400 and SLC 5/05, via native Ethernet port	
	MicroLogix 1000, 1100, 1200, 1400, 1500, SLC 5-03/04/05, all via ENI adapter	
	Micro 800 Series	Modbus RTU
		Modbus TCP
Micro 800 Series - Tag Based	DF1 Full Duplex	
	EtherNet/IP Client	
<b>Modbus RTU</b>	Modbus RTU devices	Modbus RTU
<b>Modbus TCP/IP</b>	Modbus TCP/IP devices	Modbus TCP/IP
GE	90/30, 90/70, Micro 90, VersaMax Micro	SNPX
	90/30, Rx3i	SRTP Ethernet
Mitsubishi	FX Series	FX Direct
	Q02, Q02H, Q06H, Q12H, Q25H	Q CPU
	Q, QnA Serial	QnA Serial
	Q, QnA Ethernet	QnA Ethernet
Modicon	984 CPU, Quantum 113 CPU, AEG Modicon Micro Series 110 CPU: 311-xx, 411-xx, 512-xx, 612-xx	Modbus RTU
	Other devices using Modicon Modbus addressing	Modbus RTU TUModbus TCP/IP
Omron	C200 Adapter, C500	Host Link
	CJ1/CS1 Serial	FINS
	CJ1/CS1 Ethernet	
Siemens	S7-200 CPU, RS-485 Serial	PPI
	S7-200 CPU, S7-300 CPU, S7-400, S7-1200, S7-1500 CPU Ethernet	Ethernet ISO over TCP

# PLC Communication Cables & Wiring Diagrams


Cable Description	Cable Part No.
<b>Cables used with 15-pin RS-232/422/485 serial Port1</b>	
AutomationDirect Productivity Series, Do-more, CLICK, <b>Direct</b> LOGIC PLC RJ-12 port, DL05, DL06, DL105, DL205, D3-350, D4-450 & H2-WinPLC (RS-232C) 3m (9.8 ft) cable length	<b>EA-2CBL</b>
<b>Direct</b> LOGIC (VGA Style) 15-pin port, DL06, D2-250 (250-1), D2-260 (RS-232C) 3m (9.8 ft) cable length	<b>EA-2CBL-1</b>
<b>Direct</b> LOGIC PLC RJ-11 port, D3-340 (RS-232C) 3m (9.8 ft) cable length	<b>EA-3CBL</b>
<b>Direct</b> LOGIC DL405 PLC 15-pin D-sub port, DL405 (RS-232C) 3m (9.8 ft) cable length	<b>EA-4CBL-1</b>
<b>Direct</b> LOGIC PLC 25-pin D-sub port, DL405, D3-350, DL305 DCU and all DCM's (RS-232C) 3m (9.8 ft) cable length	<b>EA-4CBL-2</b>
Allen-Bradley MicroLogix 1000, 1100, 1200, 1400 & 1500 (RS-232C) 3m (9.8 ft) cable length	<b>EA-MLOGIX-CBL</b>
Allen-Bradley SLC 5-03/04/05, ControlLogix, CompactLogix, FlexLogix DF1 port (RS-232C)	<b>EA-SLC-232-CBL</b>
Allen-Bradley PLC-5 DF1 port (RS-232C) 3m (9.8 ft) cable length	<b>EA-PLC5-232-CBL</b>
Allen-Bradley SLC 5-01/02/03, PLC5 DH485 port 3m (9.8 ft) cable length	<b>EA-DH485-CBL</b>
GE 90/30, 90/70, Micro 90, Versamax Micro (Port2) 15-pin D-sub port (RS-422A) 3m (9.8 ft) cable length	<b>EA-90-30-CBL</b>
mitsubishi FX Series 25-pin port (RS-422A) 3m (9.8 ft) cable length	<b>EA-MITSU-CBL</b>
mitsubishi FX Series 8-pin mini-DIN (RS-422A) 3m (9.8 ft) cable length	<b>EA-MITSU-CBL-1</b>
OMRON Host Link (C200 Adapter, C500) (RS-232C) 3m (9.8 ft) cable length	<b>EA-OMRON-CBL</b>

Cable Description	Cable Part No.
<b>Cables used with RJ12 RS-232 serial Port3</b>	
AutomationDirect Productivity Series, Do-more, CLICK, <b>Direct</b> LOGIC PLC RJ-12 port, DL05, DL06, DL105, DL205, D3-350, D4-450 & H2-WinPLC (RS-232C) 3.66m (12ft) cable length	<b>D0-CBL</b>
<b>Direct</b> LOGIC (VGA Style) 15-pin port, DL06, D2-250 (250-1), D2-260 (RS-232C). Use with D0-CBL cable.	<b>FA-15HD</b>
<b>Direct</b> LOGIC PLC 15-pin D-sub port, DL405 (RS-232C). Use with D0-CBL cable.	<b>FA-CABKIT</b>
<b>Direct</b> LOGIC PLC RJ-11 port, D3-340 (RS-232C) 2m (6.56 ft) cable length	<b>OP-3CBL-1</b>


6



**D-Sub 15-pin female on rear of touch panel**



**RS-485 Serial Communications**



**RJ12 RS-232 Serial Communications**



**\*NOTE:** All cables for connections at Port 2 are user constructed. Refer to the specifications of the connected device port to construct the cable properly. The connector for Port2, EA9-3TB, is included with your C-more panel.

## Cables from *AutomationDirect* (cont'd)



Part No. D0-CBL



Part No. OP-3CBL-1



Part No. FA-15HD



Part No. EA-2CBL



Part No. EA-2CBL-1



Part No. FA-CABKIT



Part No. EA-4CBL-1



Part No. EA-4CBL-2



Part No. EA-3CBL



Part No. EA-MLOGIX-CBL



Part No. EA-SLC-232-CBL



Part No. EA-PLC5-232-CBL



Part No. EA-90-30-CBL



Part No. EA-MITSU-CBL



Part No. EA-MITSU-CBL-1




Part No. EA-OMRON-CBL

# PLC Communication Cables & Wiring Diagrams (cont'd)


The following series of wiring diagrams show the connectors and wiring details for the communication cables that are used between the **C-more** touch panels and various PLC controllers. Part numbers are included with the **pre-made cables** that can be purchased from **AutomationDirect**. The information presented will allow the user to construct their own cables if so desired.

## AutomationDirect PLCs RS-232C Serial

### EA-2CBL

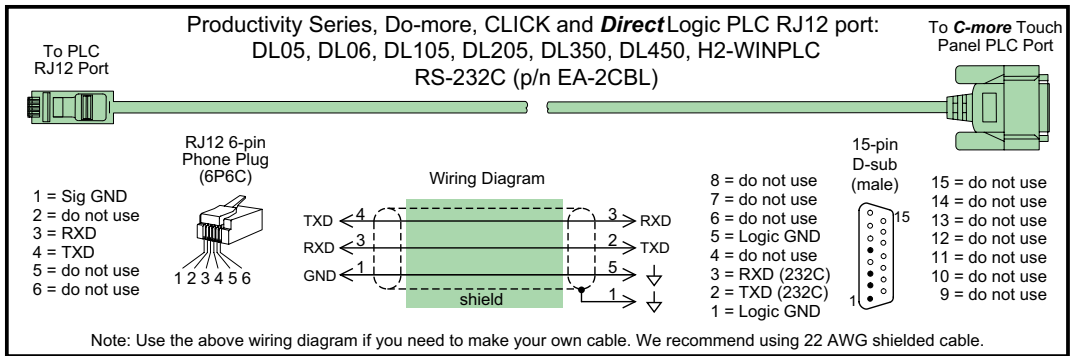


### EA-2CBL-1

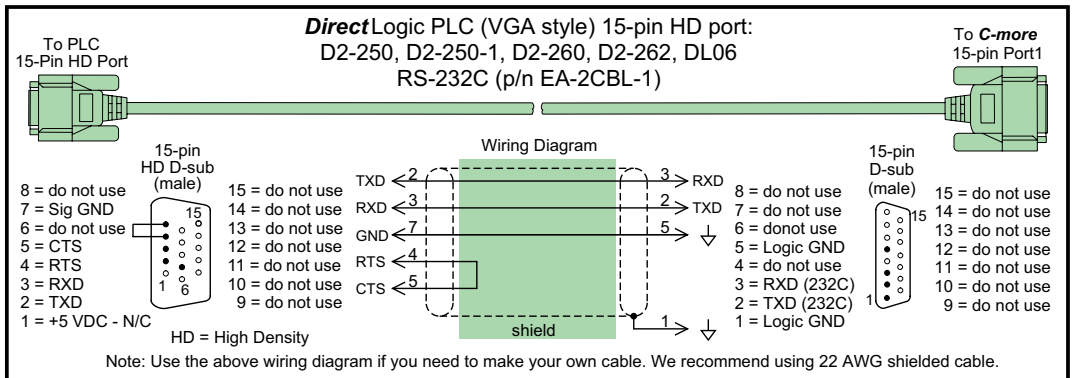


AutomationDirect PLCs RS-232C Serial (cont'd)

**EA-3CBL**

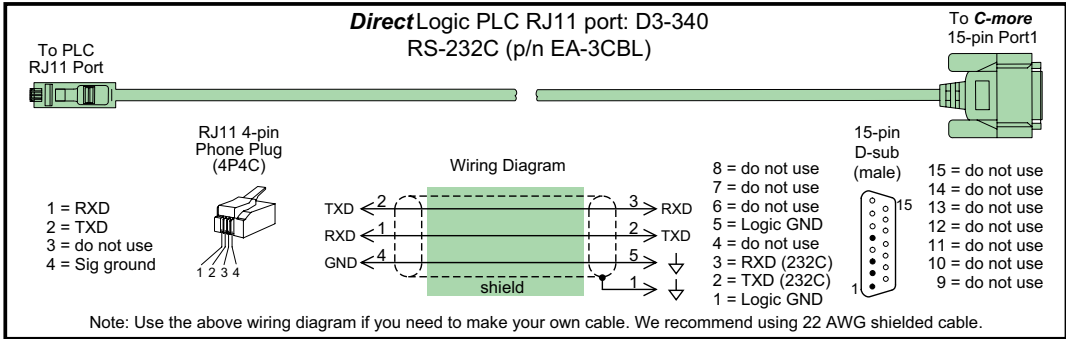

6


**EA-4CBL-1**

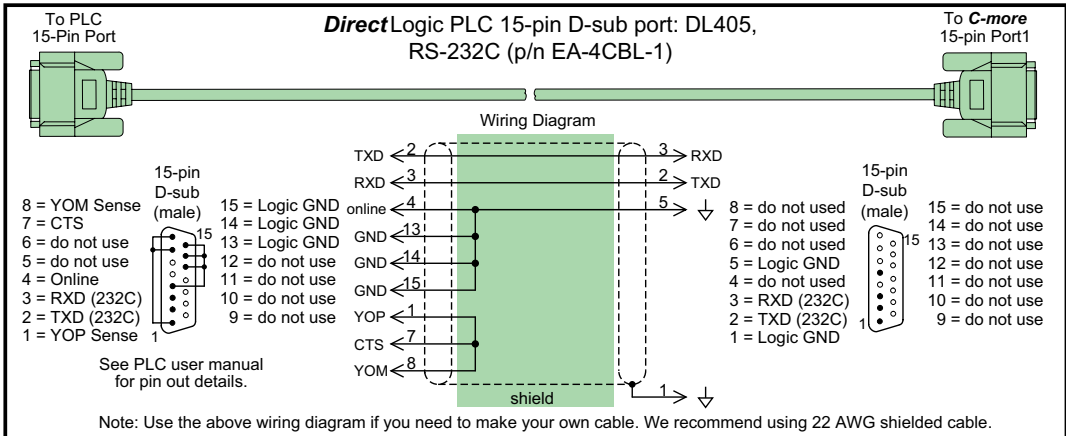




AutomationDirect PLCs RS-232C Serial (cont'd)

**EA-4CBL-2**

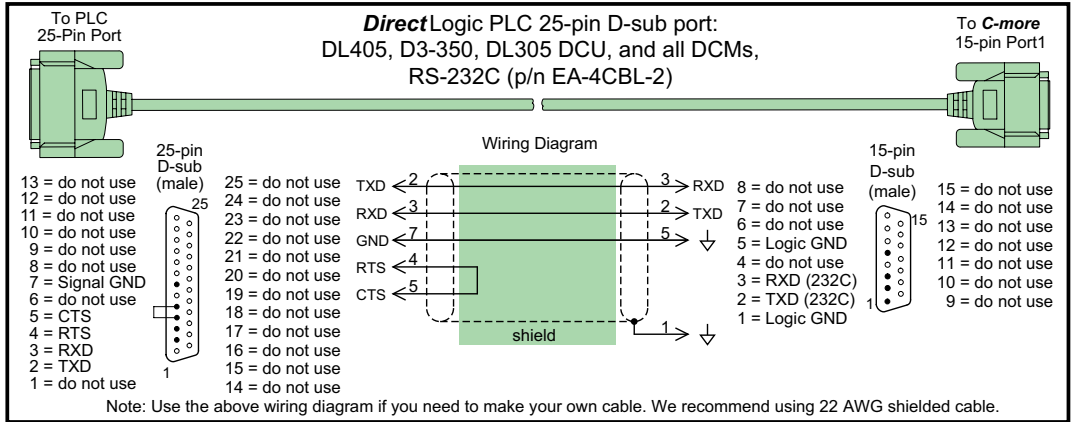


6

**D0-CBL**

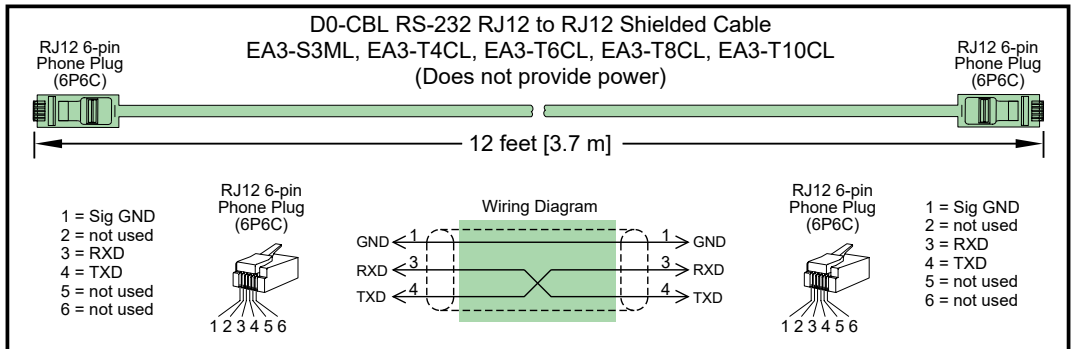


**OP-3CBL-1**

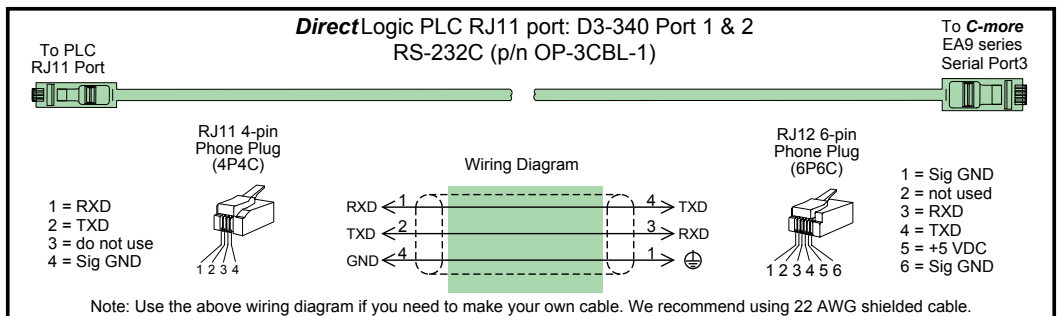


### AutomationDirect PLCs RS-422A/RS-485A

When using the RS-422A/RS-485A capabilities of the *C-more* 15-pin PLC communications Port1, the termination resistor is placed between the **RXD-** and **RXD+** terminals on the PLC side of the connection between the touch panel and PLC. The Termination Resistor value is based on the characteristic impedance of the cable being used. To enable the built-in 120 Ohm Termination Resistor, jumper pin **13** to pin **9** (**RXD+**) on the *C-more* 15-pin PLC communications Port1.

### User Constructed

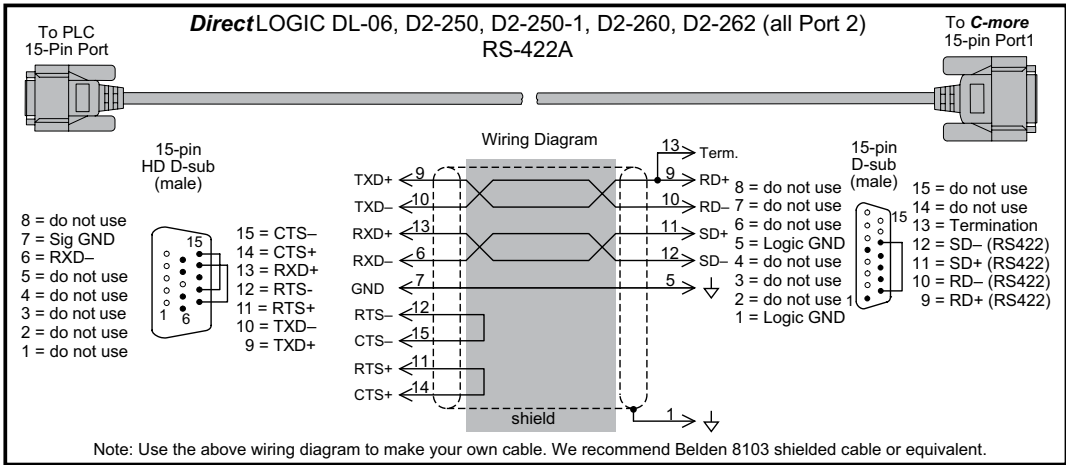


### User Constructed

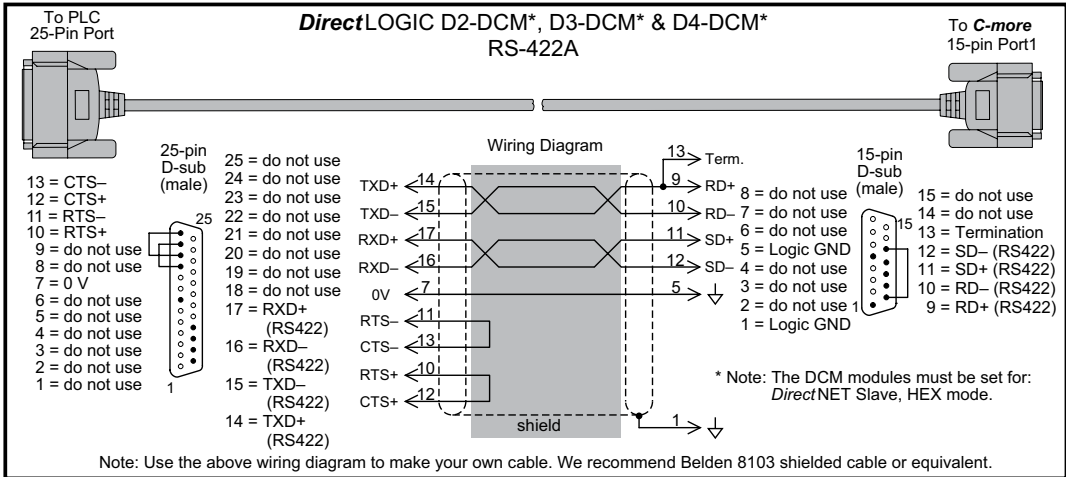

**NOTE:** The RS-422 wiring diagrams shown above are not for multi-drop networks involving connecting more than one PLC to a panel. Refer to the multi-drop wiring diagram examples later in this chapter if more than one PLC will be connected to a panel.


AutomationDirect PLCs RS-422A/RS-485A (cont'd)

User Constructed

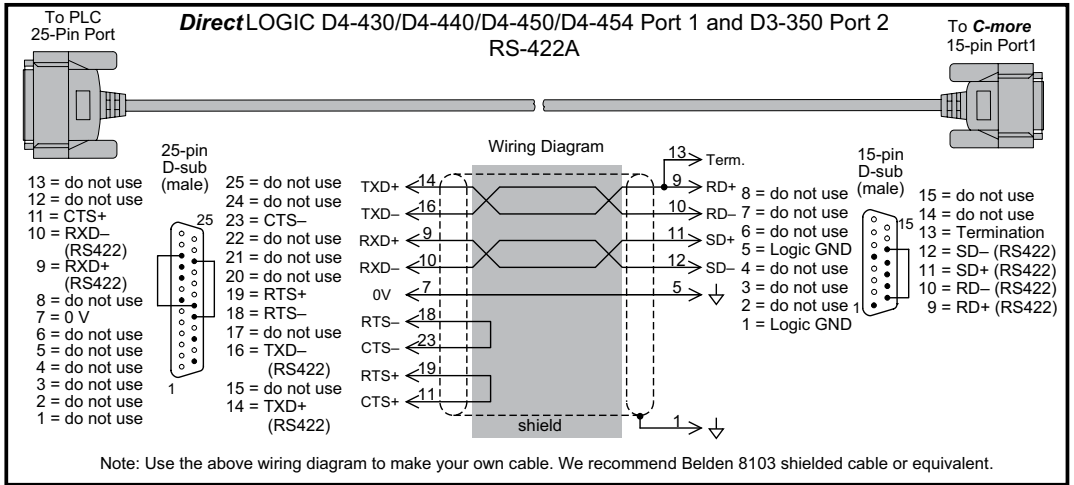

6


User Constructed

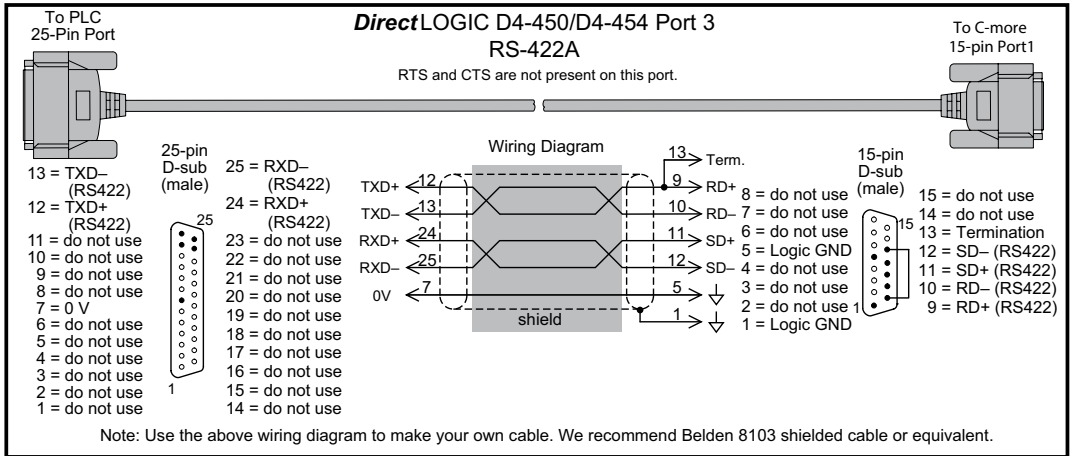

**NOTE:** The RS-422 wiring diagrams shown above are not for multi-drop networks involving connecting more than one PLC to a panel. Refer to the multi-drop wiring diagram examples later in this chapter if more than one PLC will be connected to a panel.

AutomationDirect PLCs RS-422A/RS-485A (cont'd)

User Constructed

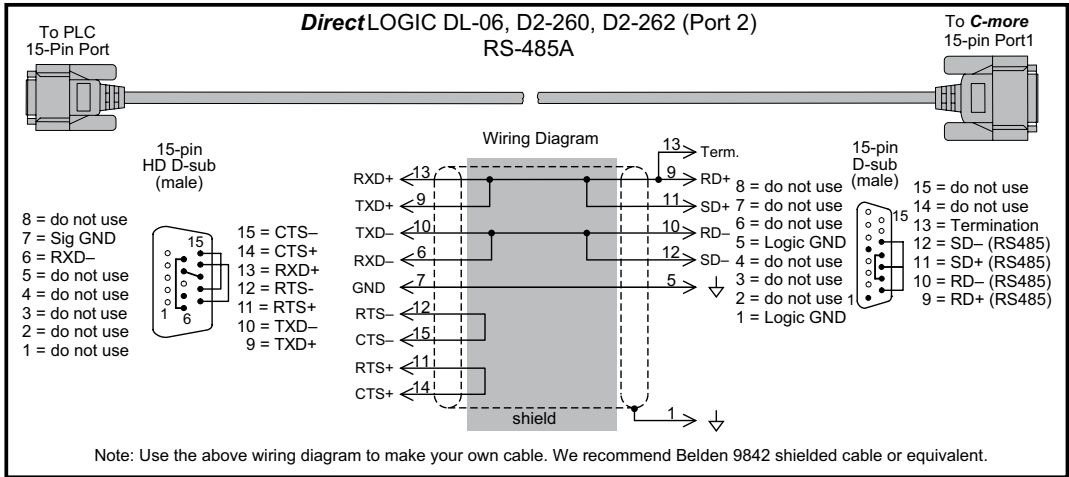


6



**NOTE:** The RS-485 wiring diagram shown above is not for multi-drop networks involving connecting more than one PLC to a panel. Refer to the multi-drop wiring diagram examples later in this chapter if more than one PLC will be connected to a panel.


AutomationDirect PLCs RS-422A/RS-485A (cont'd)

User Constructed

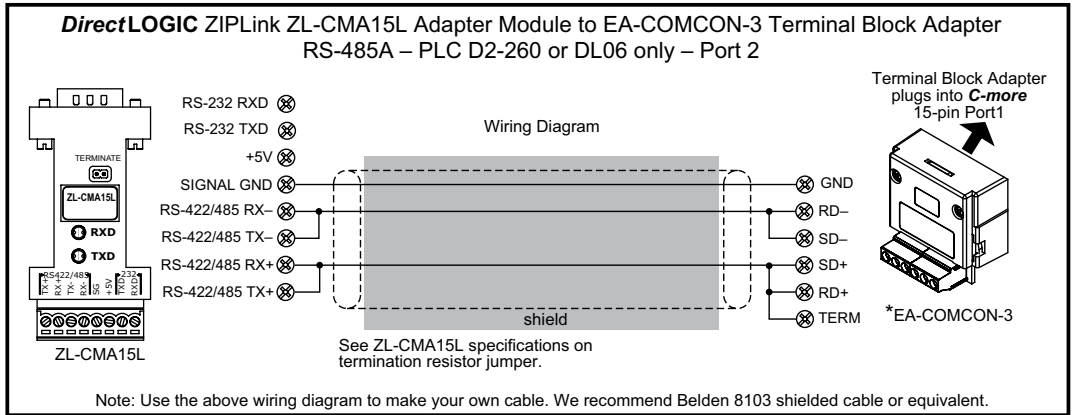

6

User Constructed

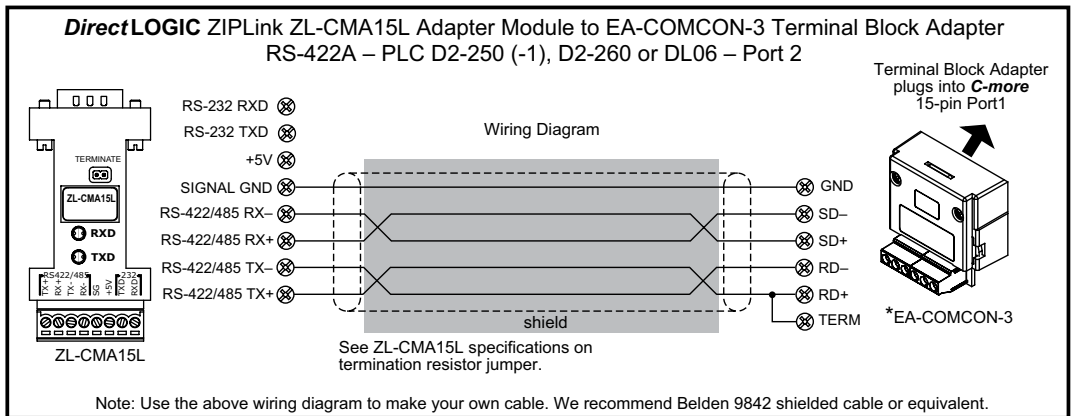


**NOTE:** The RS-422 and RS-485 wiring diagrams shown above are not for multi-drop networks involving connecting more than one PLC to a panel. Refer to the multi-drop wiring diagram examples later in this chapter if more than one PLC will be connected to a panel.



\* **NOTE:** EA-COMCON-3 will install only on EA9-T6CL, EA9-T6CL-R, EA9-T7CL and EA9-T7CL-R panels


AutomationDirect PLCs RS-422A/RS-485 (cont'd)

User Constructed

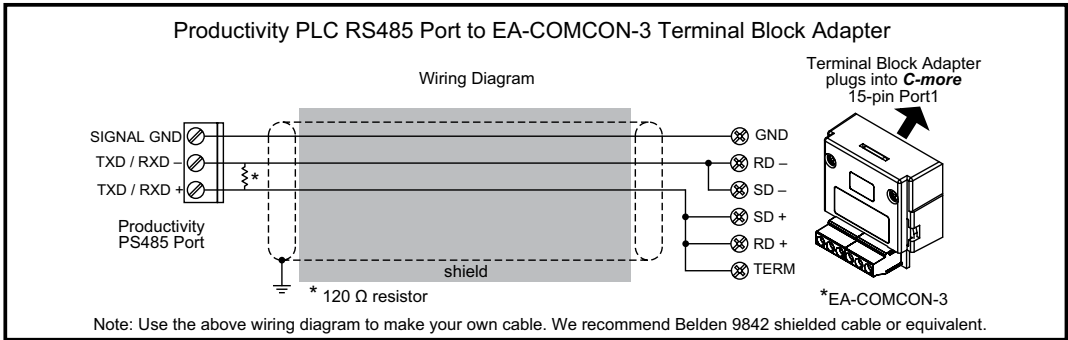

6

User Constructed

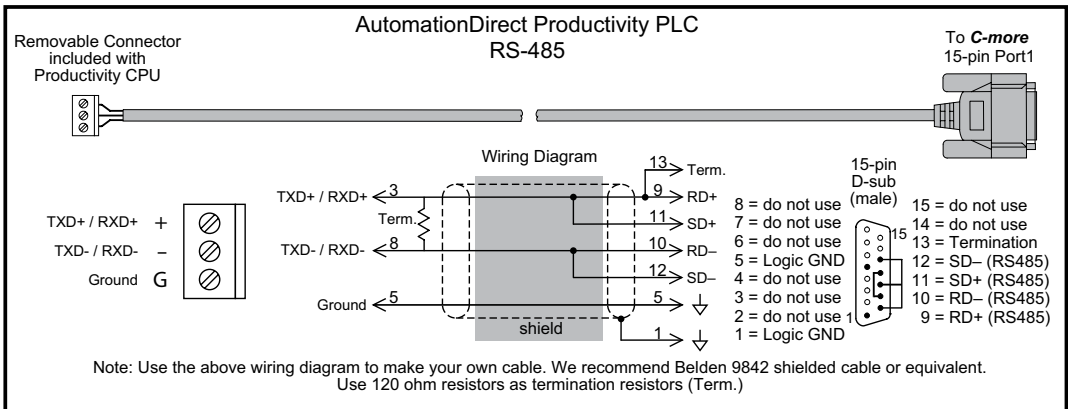


**NOTE:** The RS-422 and RS-485 wiring diagrams shown above are not for multi-drop networks involving connecting more than one PLC to a panel. Refer to the multi-drop wiring diagram examples later in this chapter if more than one PLC will be connected to a panel.



**\* NOTE:** EA-COMCON-3 will install only on EA9-T6CL, EA9-T6CL-R, EA9-T7CL and EA9-T7CL-R panels

AutomationDirect PLCs RS-422A/RS-485 (cont'd)

User Constructed

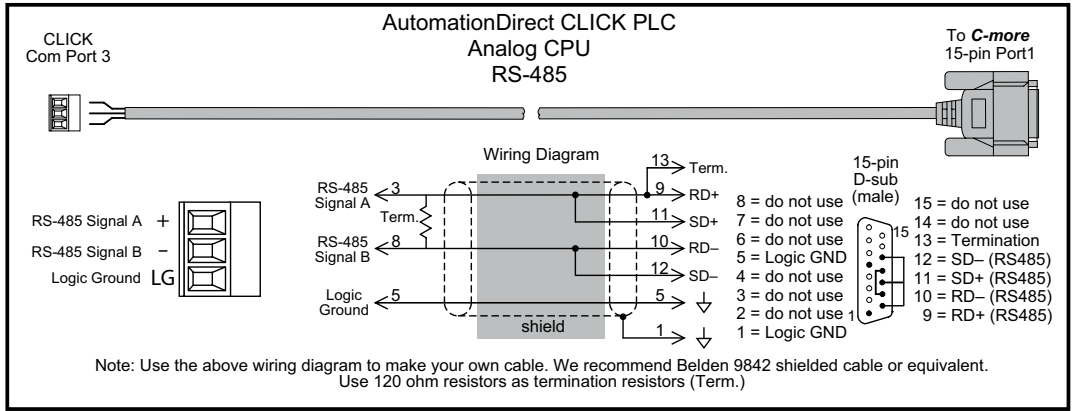


6



**NOTE:** The RS-485 wiring diagram shown above is not for multi-drop networks involving connecting more than one PLC to a panel. Refer to the multi-drop wiring diagram examples later in this chapter if more than one PLC will be connected to a panel.

**DirectLOGIC Universal Isolated Network Adapter, p/n FA-ISOCON:**

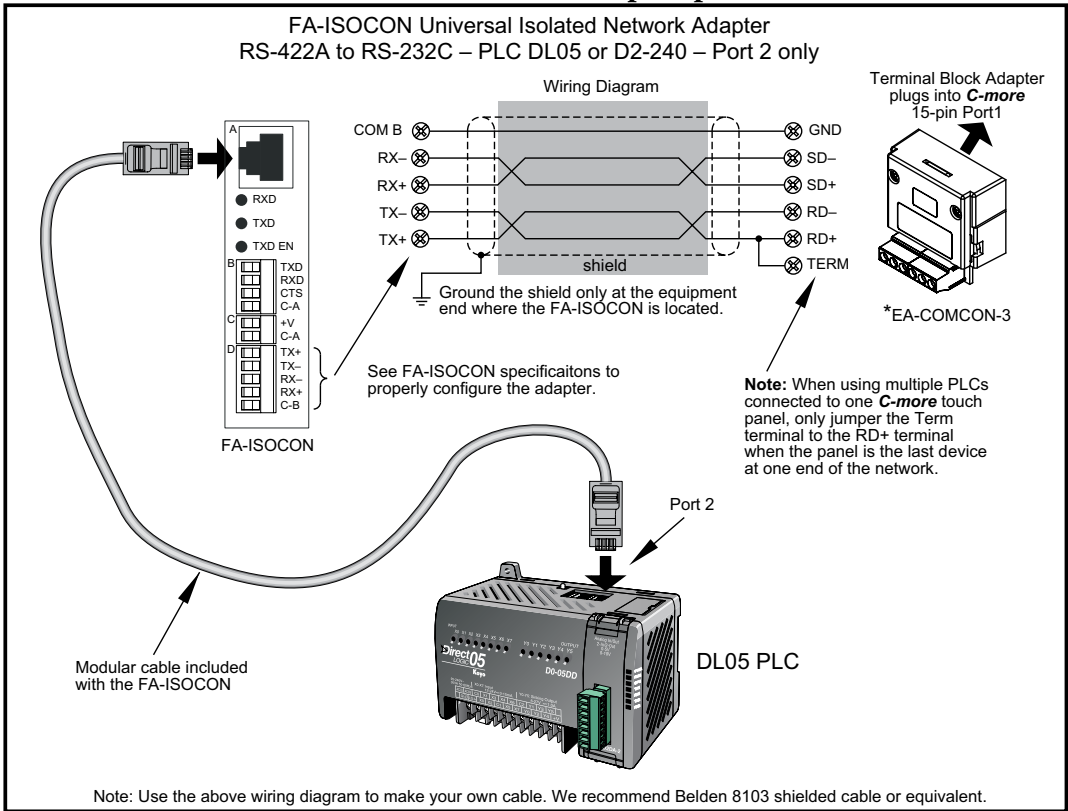


6



**\*\* NOTE:** EA-COMCON-3 will install only on EA9-T6CL, EA9-T6CL-R, EA9-T7CL and EA9-T7CL-R panels




**DirectLOGIC Universal Converter, p/n F2-UNICON:**

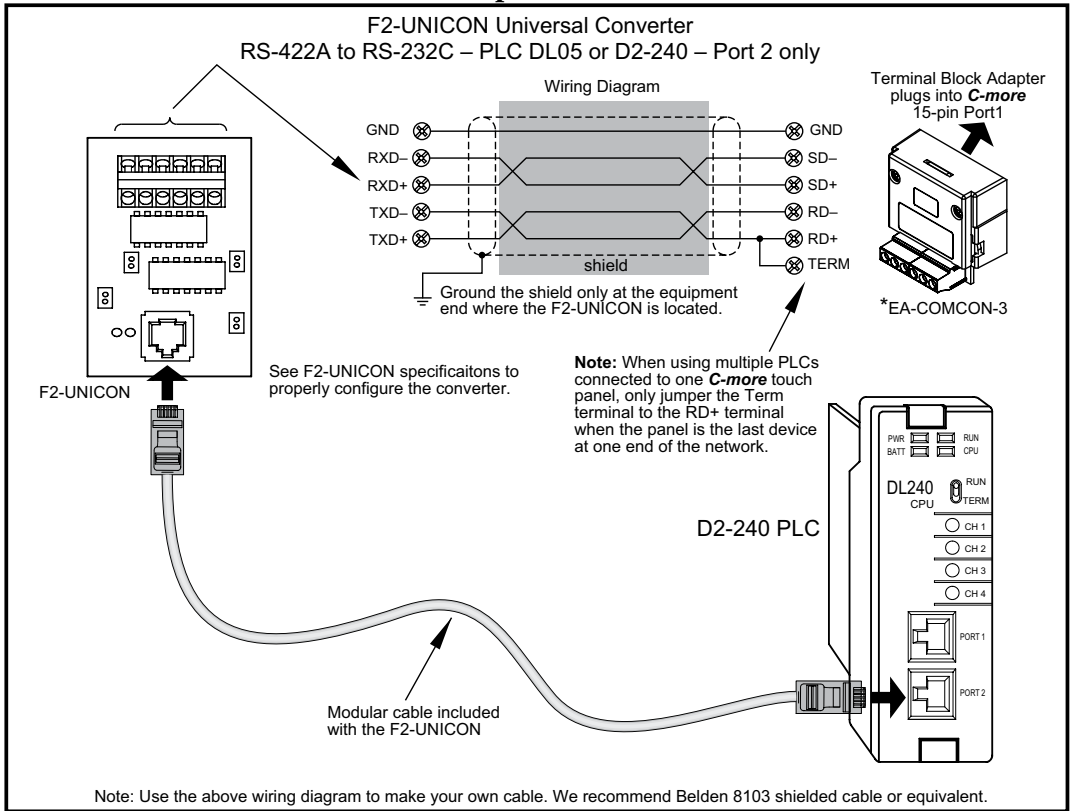


**\* NOTE:** EA-COMCON-3 will install only on EA9-T6CL, EA9-T6CL-R, EA9-T7CL and EA9-T7CL-R panels

## RS-422A/RS-485A Multi-Drop Wiring Diagram Examples

DL06 and DL205 used for illustration purposes

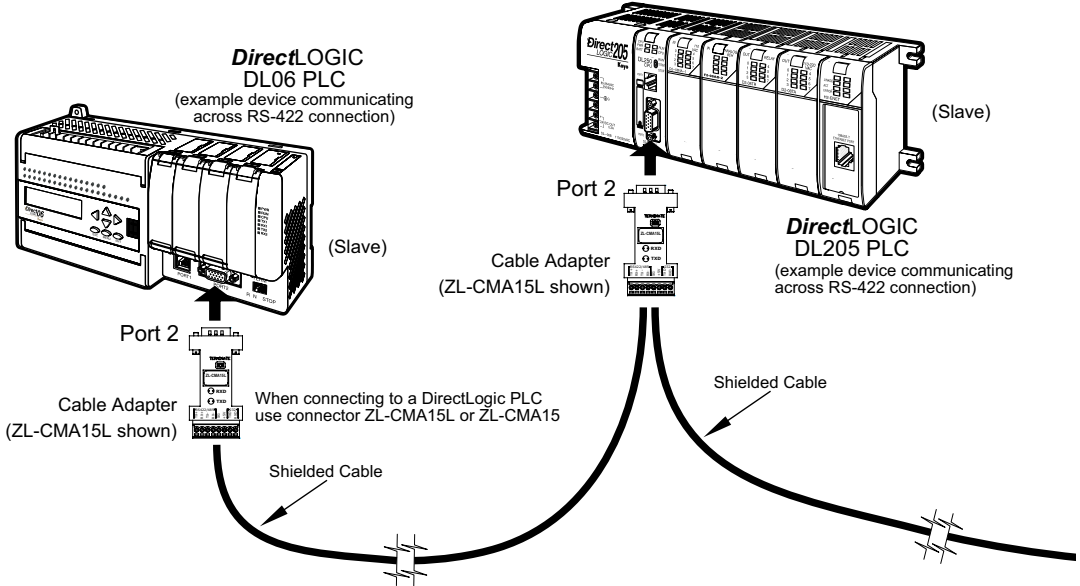

- Notes: 1. We recommend Belden 8103 shielded cable or equivalent.  
 2. Wiring Diagram for this example, ZL-CMA15(L)

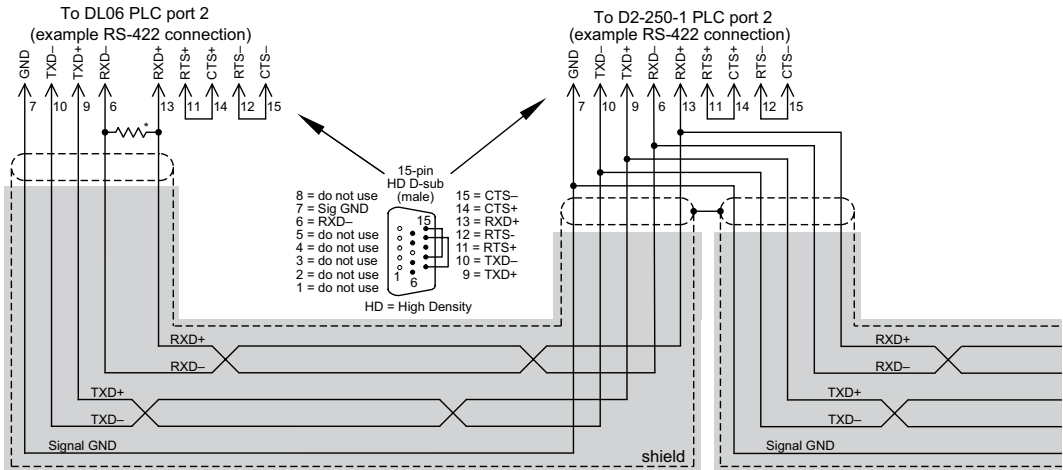


\* Termination resistors required at both ends of the network receive data signals to match the impedance of the cable (between 100 and 500 ohms).

### Typical RS-422 Multi-Drop Wiring Diagram


using DirectLogic pin numbers to illustrate

## RS-422A/RS-485A Multi-Drop Wiring Diagram Examples (cont'd)

DL06 and DL205 used for illustration purposes

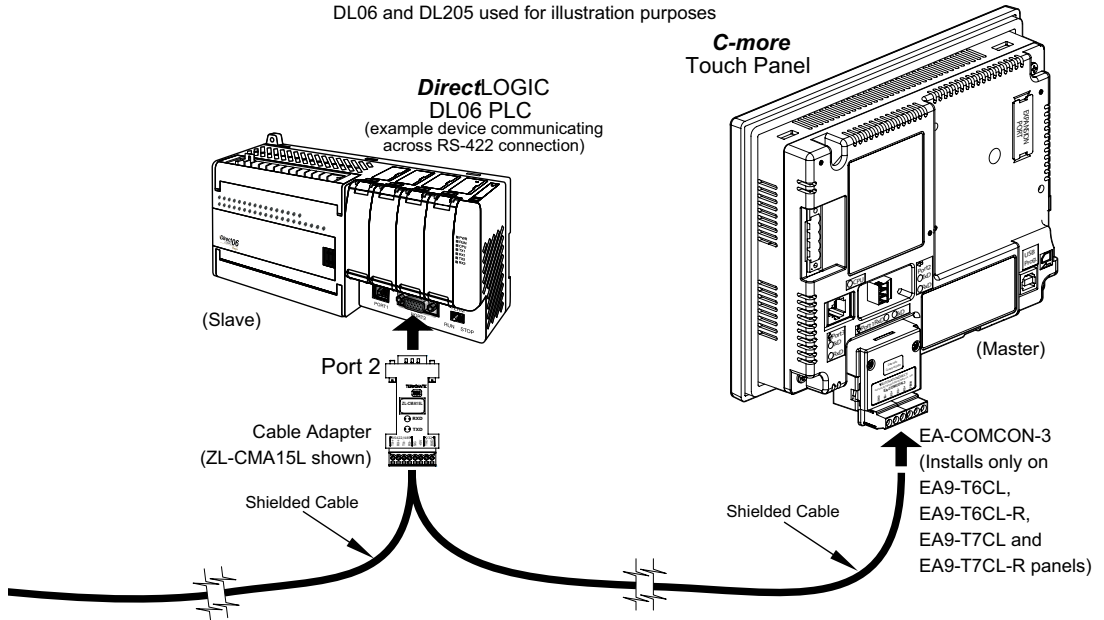

- Notes: 1. We recommend Belden 8103 shielded cable or equivalent.  
 2. Wiring Diagram for this example, ZL-CMA15(L)

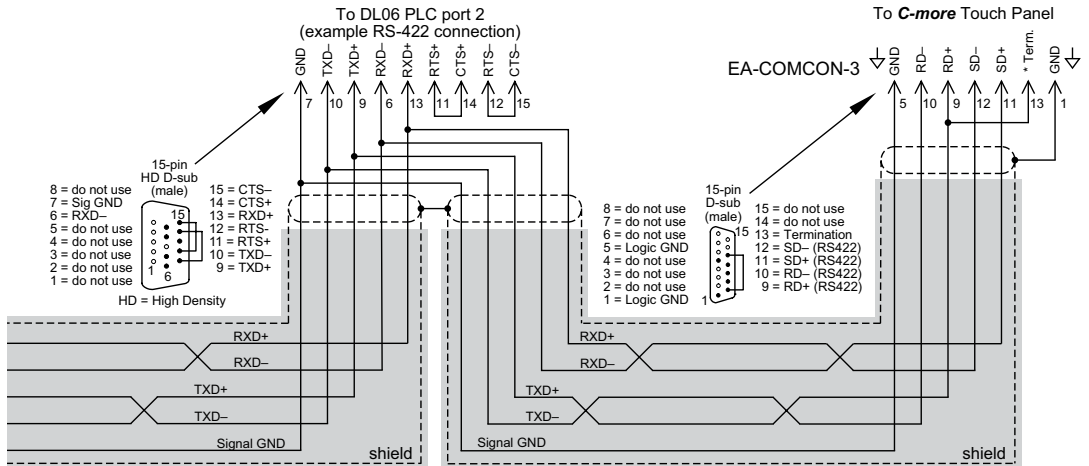


### Typical RS-422 Multi-Drop Wiring Diagram (cont-d)

using DirectLogic pin numbers to illustrate


\* Termination resistors required at both ends of the network receive data signals to match the impedance of the cable (between 100 and 500 ohms). Jumper pin 13 to 9 on the C-more Touch Panel 15-pin connector to place the 120 $\Omega$  internal resistor into the network. If the cable impedance is different, then use an external resistor matched to the cable impedance.

## RS-422A/RS-485 Multi-Drop Wiring Diagram Examples (cont'd)

DL06 and DL205 used for illustration purposes

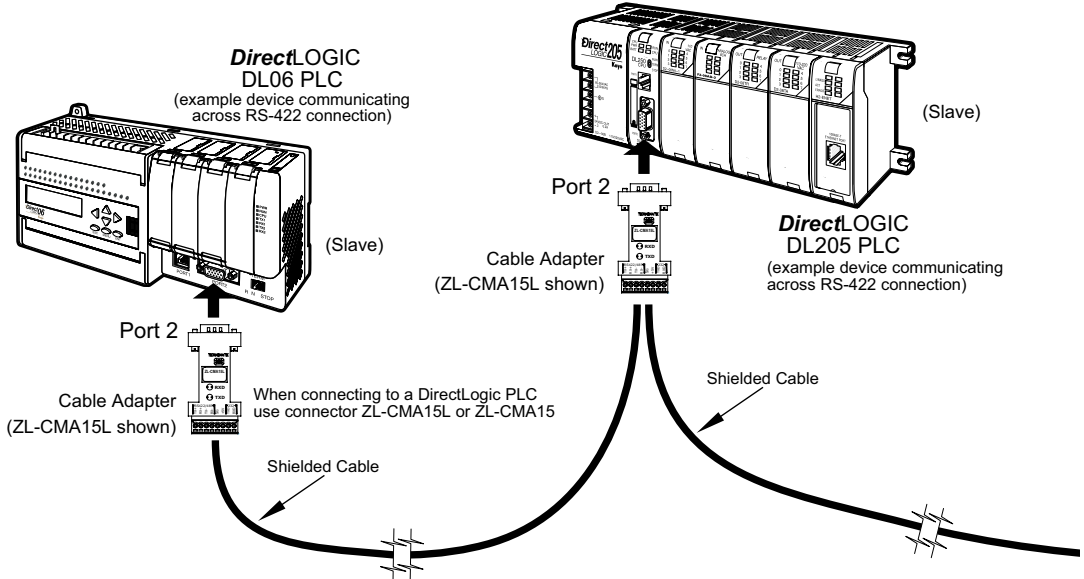

- Notes: 1. We recommend Belden 9842 shielded cable or equivalent.  
2. Wiring Diagram for this example, ZL-CMA15(L)

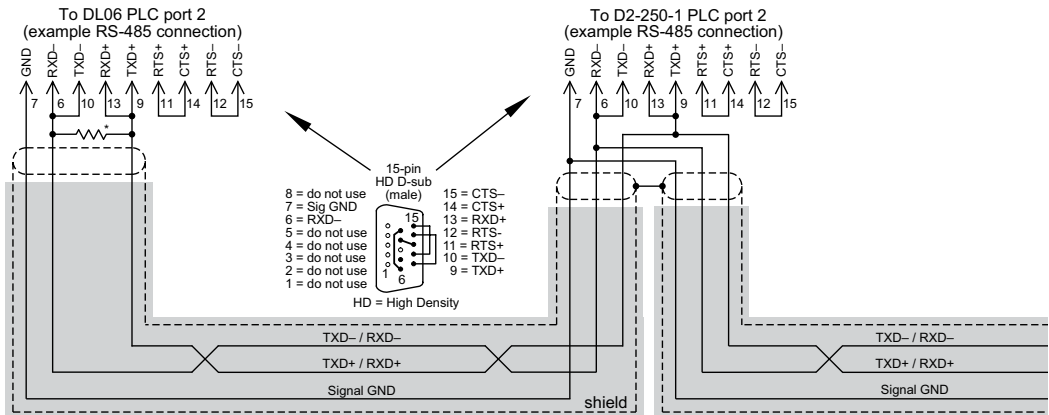


\* Termination resistors required at both ends of the network to match the impedance of the cable (between 100 and 500 ohms).

### Typical RS-485 Multi-Drop Wiring Diagram

using DirectLogic pin numbers to illustrate


## RS-422A/RS-485A Multi-Drop Wiring Diagram Examples (cont'd)

DL06 and DL205 used for illustration purposes

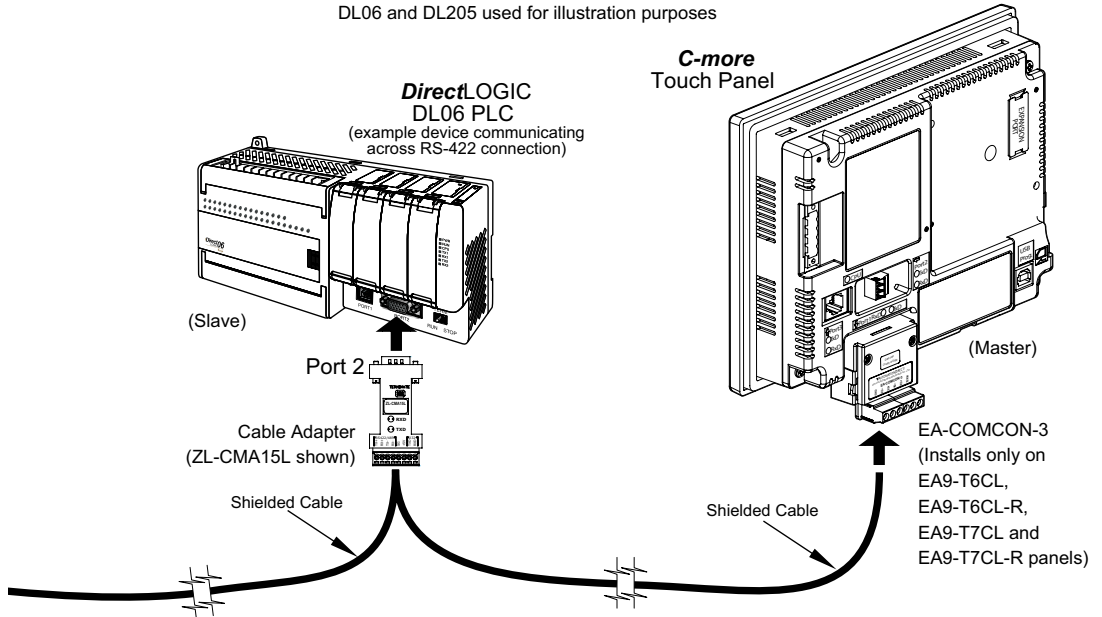

6

- Notes: 1. We recommend Belden 9842 shielded cable or equivalent.  
 2. Wiring Diagram for this example, ZL-CMA15(L)

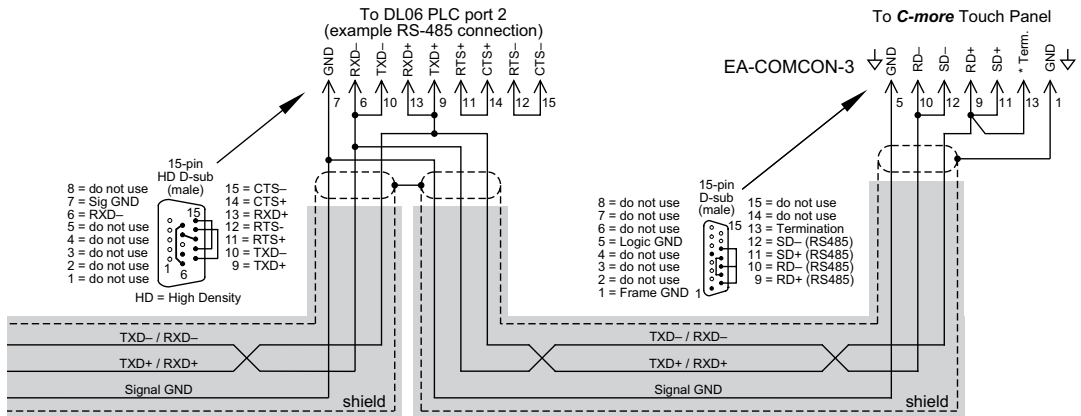


### Typical RS-485 Multi-Drop Wiring Diagram (cont'd)

using DirectLogic pin numbers to illustrate

\* Termination resistors required at both ends of the network receive data signals to match the impedance of the cable (between 100 and 500 ohms). Jumper pin 13 to 9 on the C-more touch panel 15-pin connector to place the 120Ω internal resistor into the network. If the cable impedance is different, then use an external resistor matched to the cable impedance.


Allen-Bradley

EA-MLOGIX-CBL

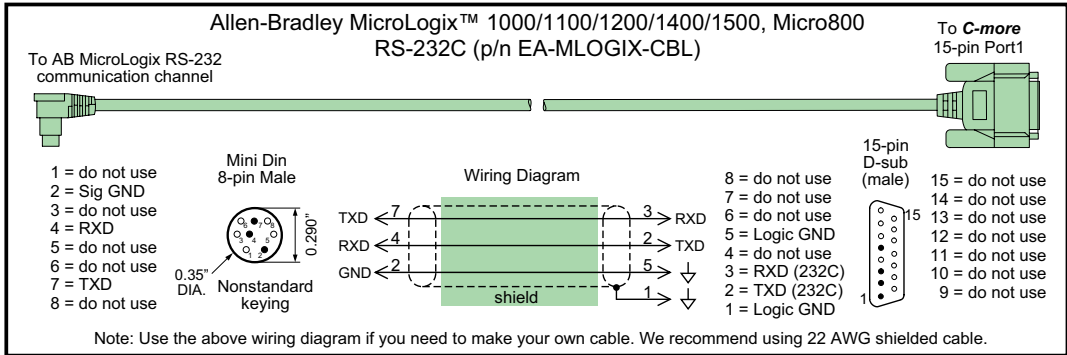


6

EA-SLC-232-CBL

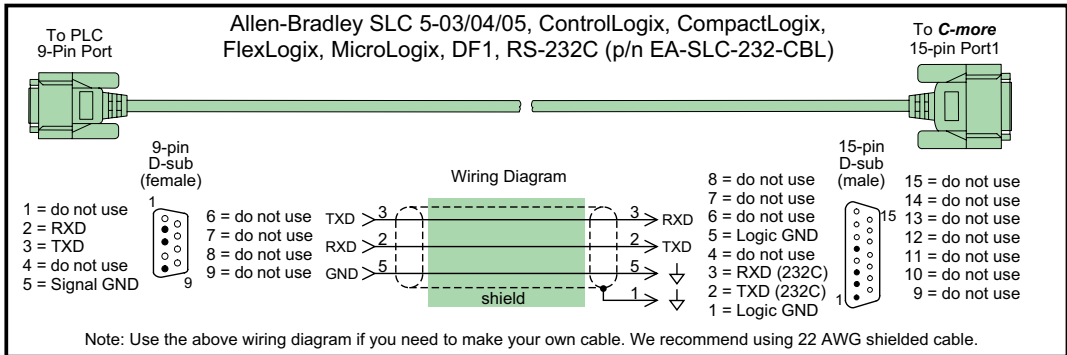


EA-PLC5-232-CBL

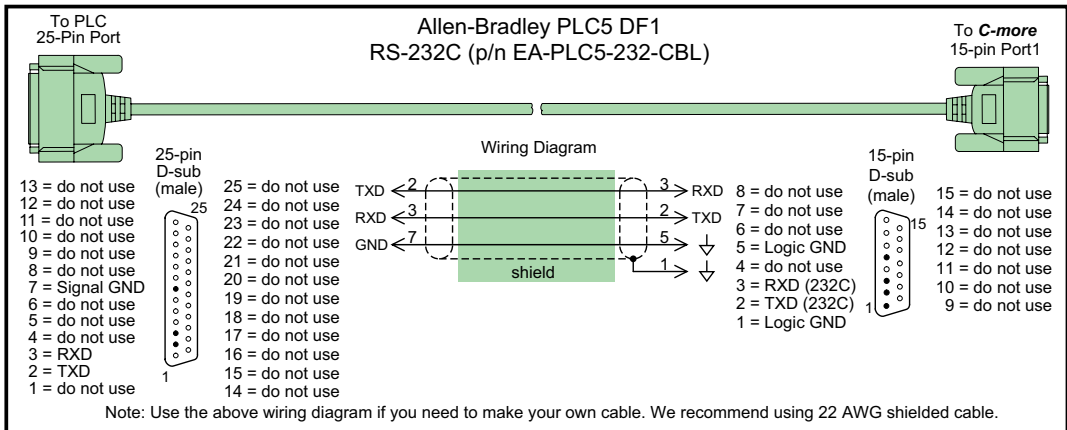


Allen-Bradley (cont'd)

EA-DH485-CBL

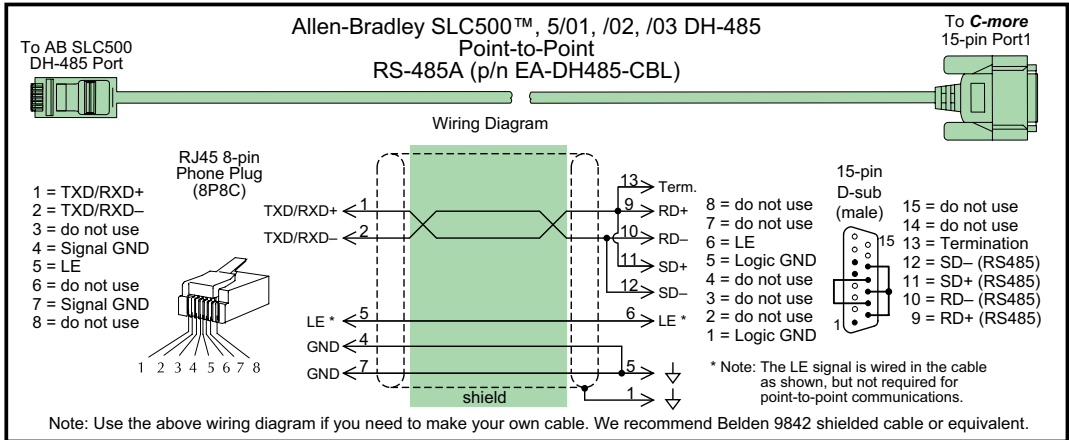


6

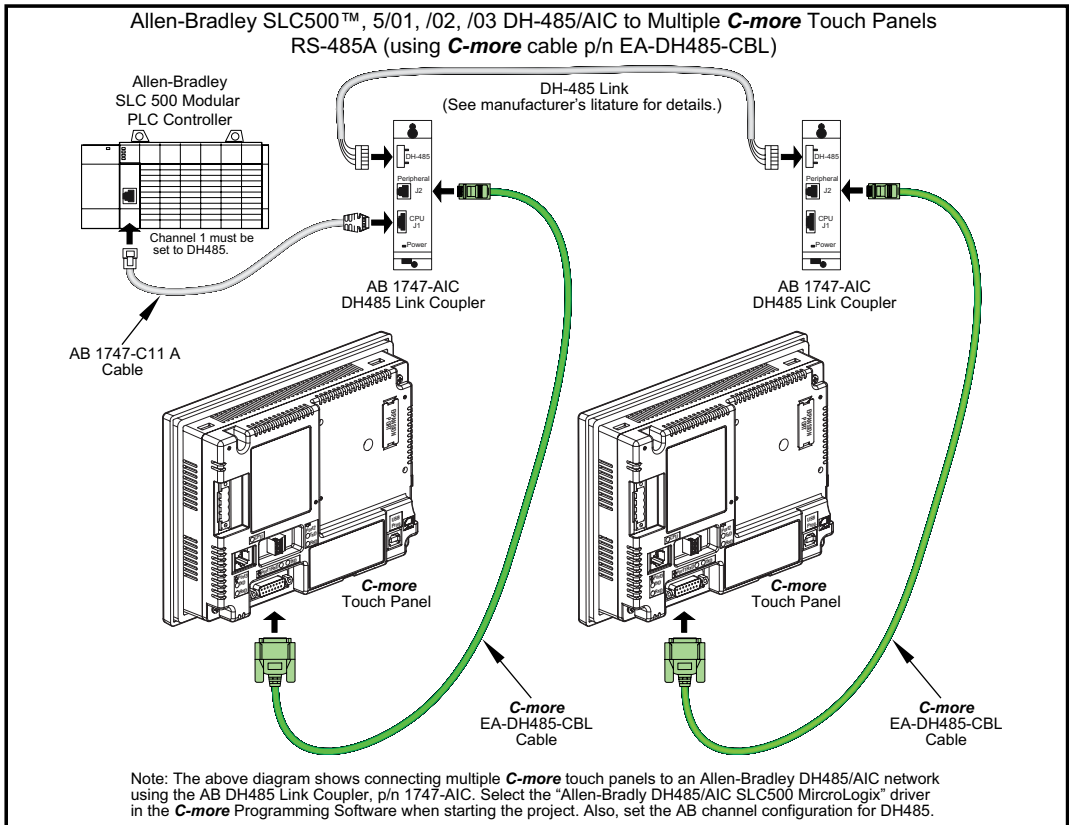

Allen-Bradley (cont'd)

Allen-Bradley SLC500™ 5/03 DH-485/AIC to Multiple **C-more** Touch Panels  
(using **C-more** cables p/n EA-MLOGIX-CBL, EA-SLC-232-CBL)

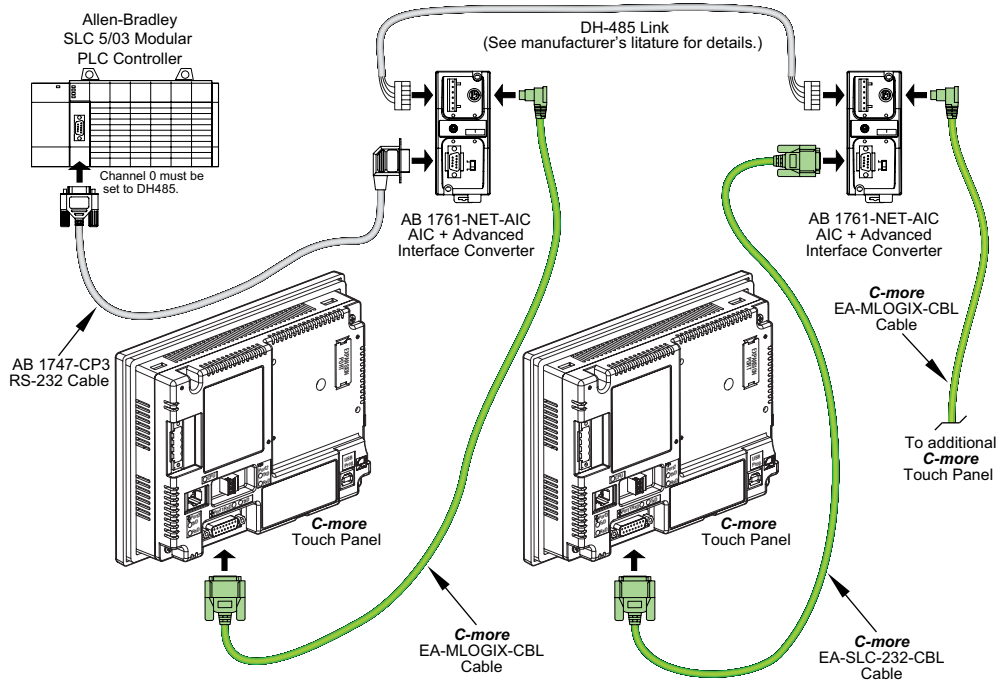


Note: The above diagram shows connecting multiple **C-more** touch panels to an Allen-Bradley DH485/AIC network using the AB AIC+ Advanced Interface Converter, p/n 1761-NET-AIC. Select the "Allen-Bradly DH485/AIC SLC500 MicroLogix" driver in the **C-more** Programming Software when starting the project. Also, set the AB channel configuration for DH485.

6




Allen-Bradley (cont'd)

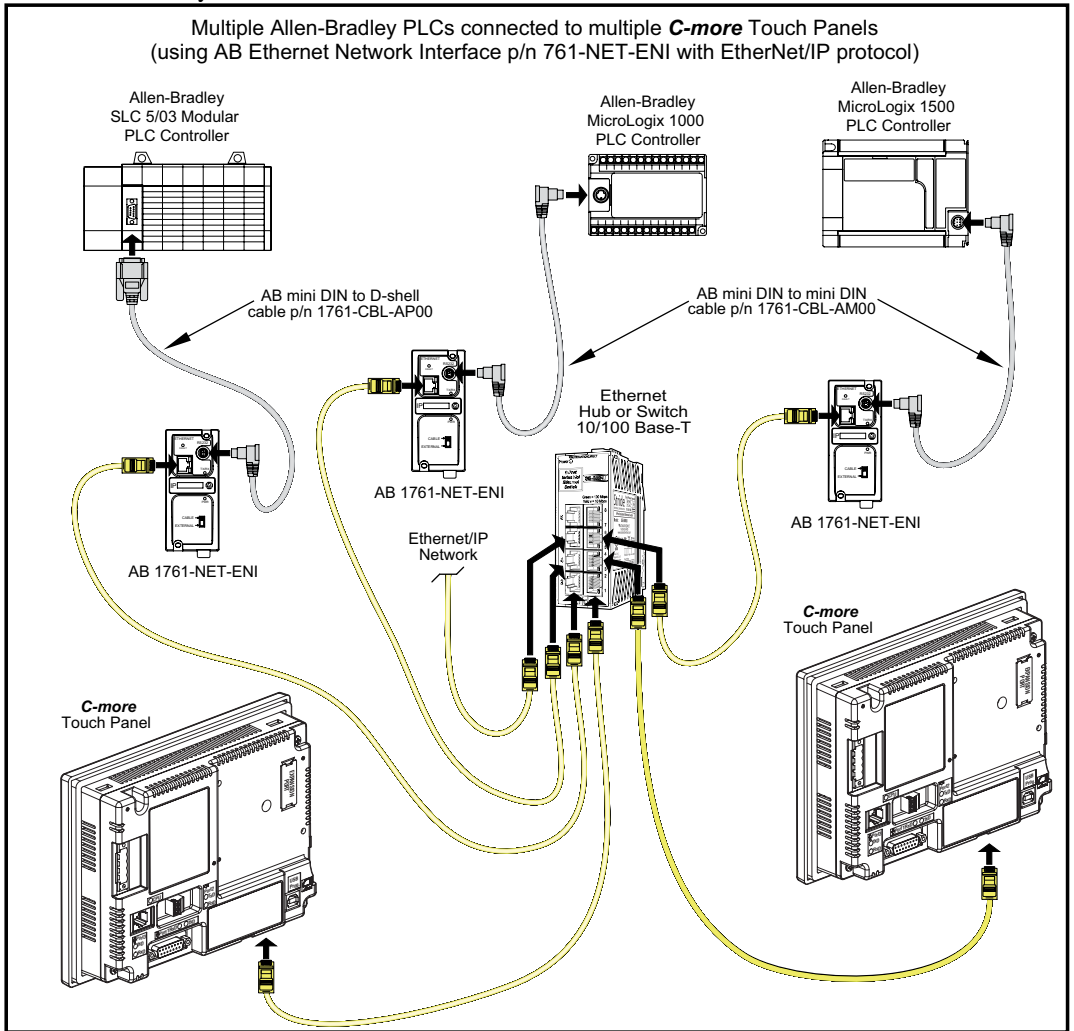

Allen-Bradley (cont'd)


User Constructed

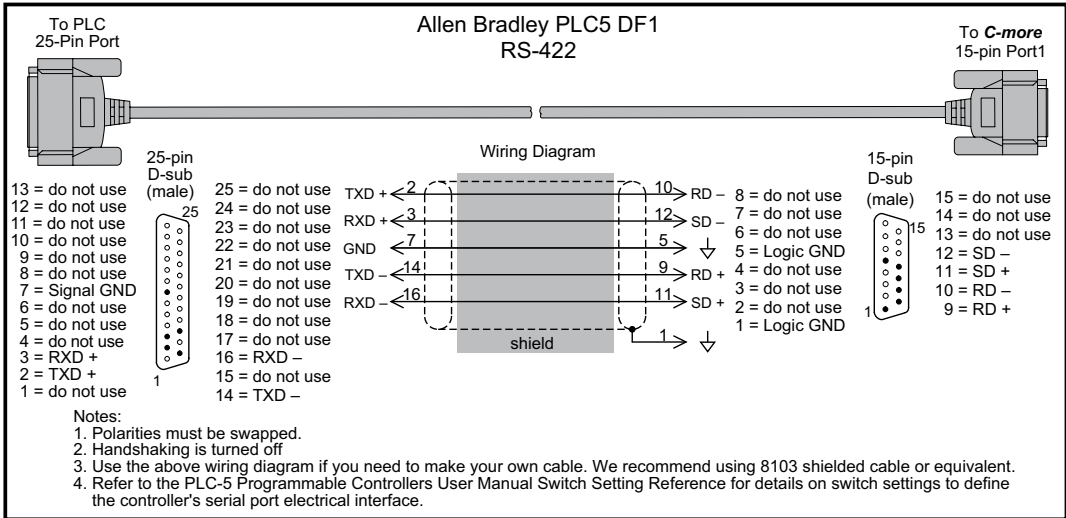

6

GE


**EA-90-30-CBL**

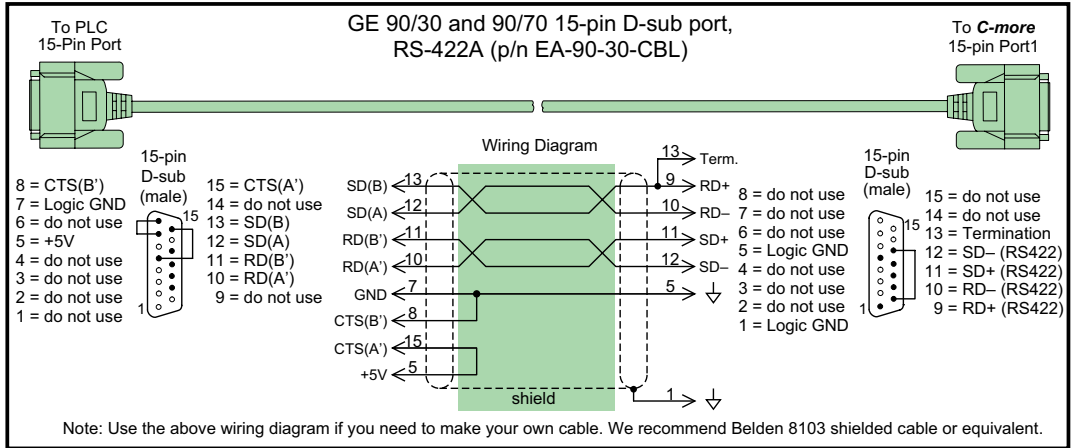

6


GE VersaMax Micro

**User Constructed**

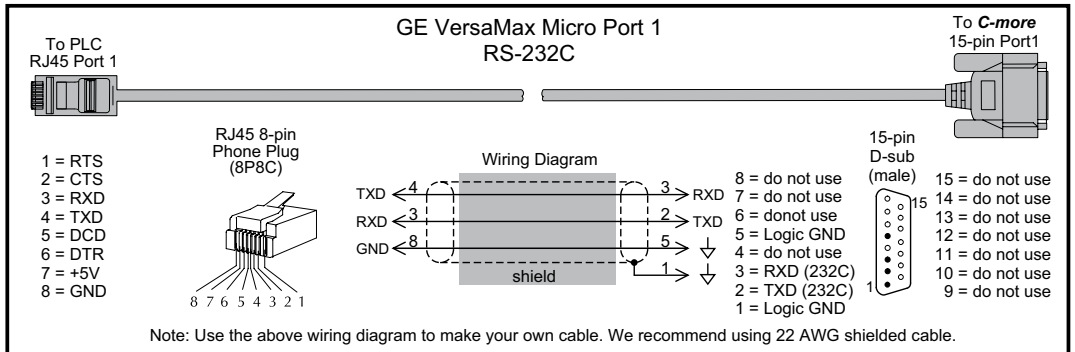


Mitsubishi

EA-MITSU-CBL

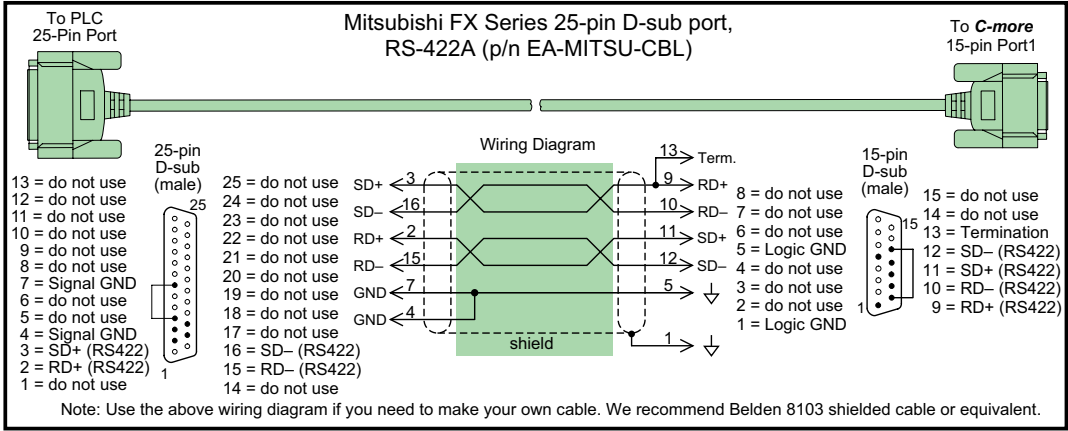


6

EA-MITSU-CBL-1

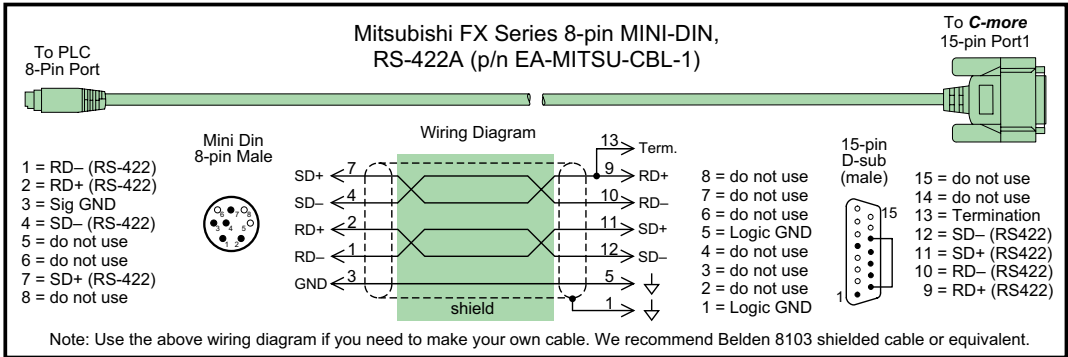


User Constructed

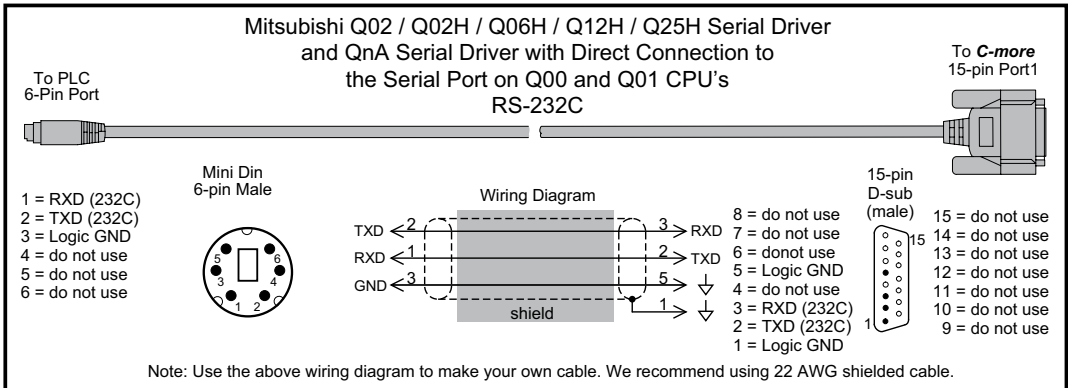


Mitsubishi (cont'd)

User Constructed

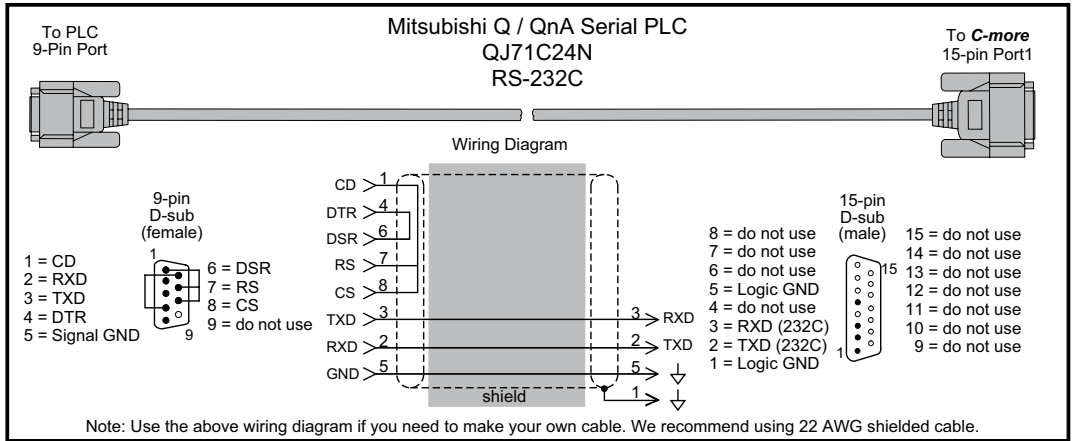


Omron

EA-OMRON-CBL

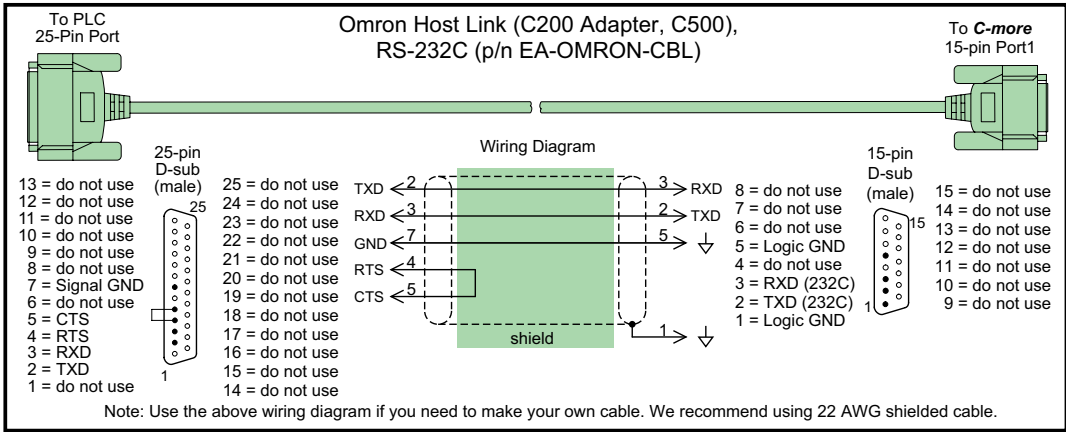


6

User Constructed

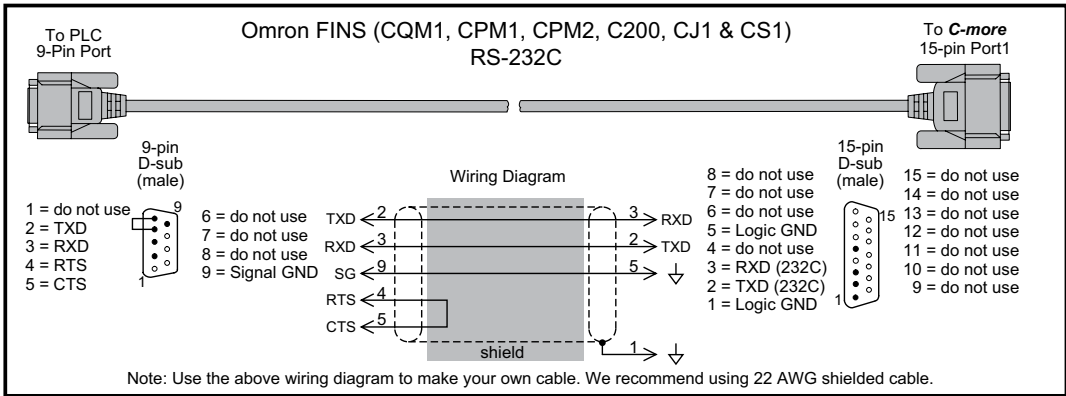


User Constructed

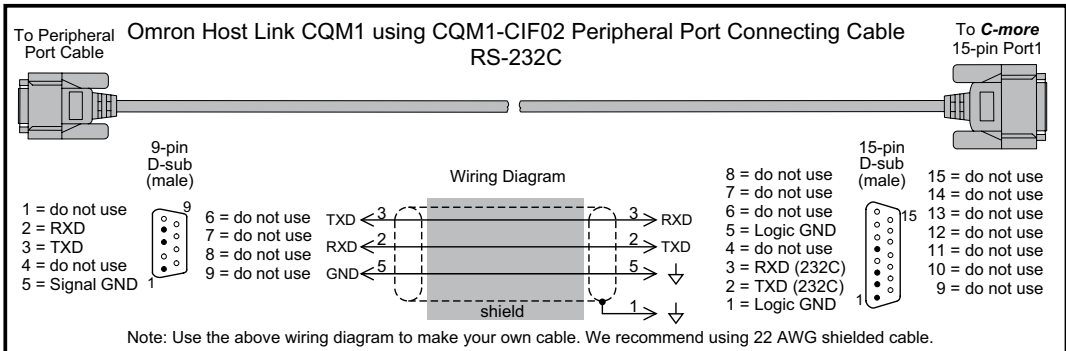


### Modicon Modbus RS-232

### User Constructed

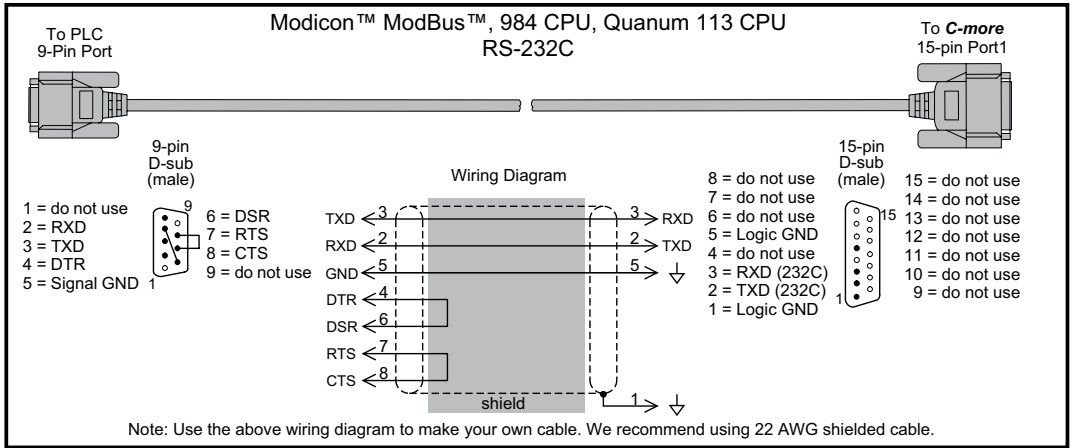


### Modicon Micro Series

### User Constructed

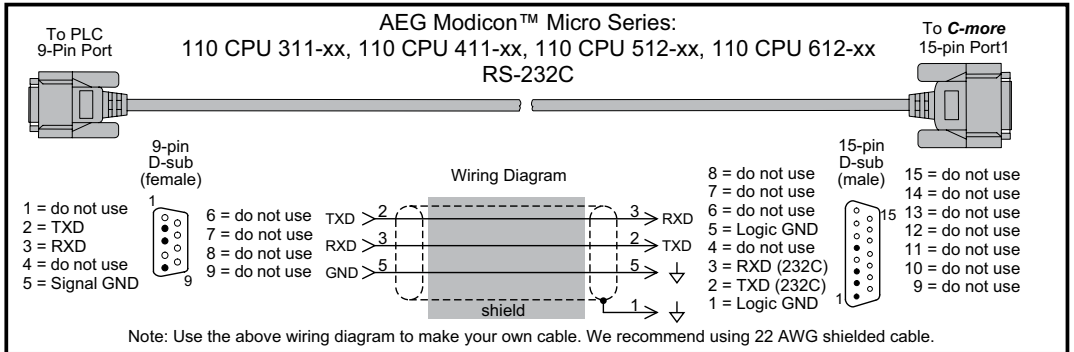


### Modicon Modbus with RJ45

### User Constructed

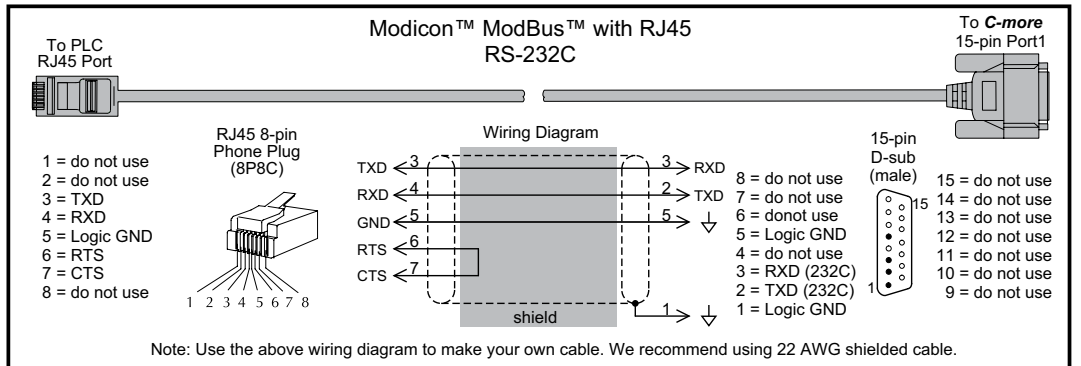

Siemens

User Constructed

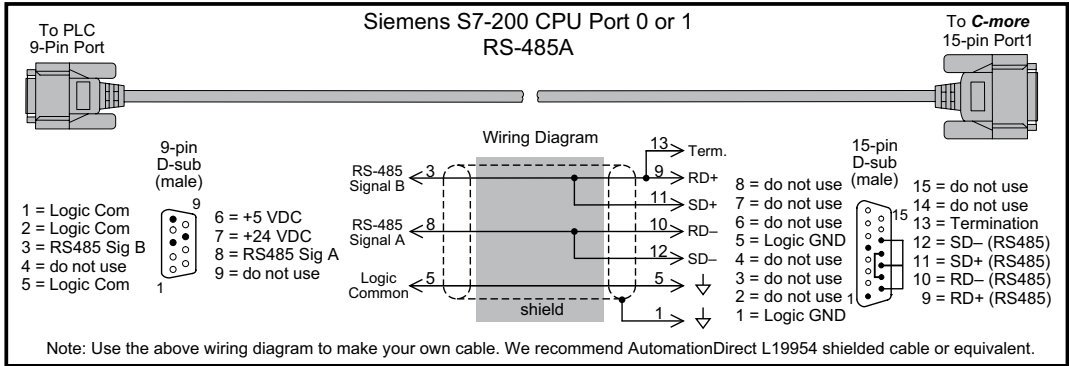

6