
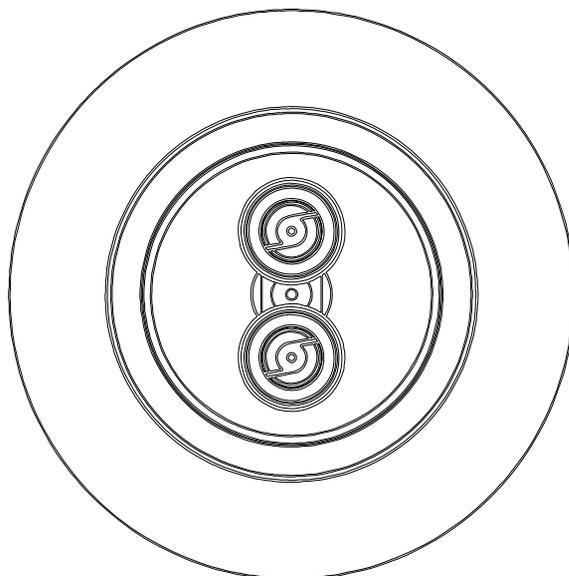


TAGGA[®]

CHARMONY

To Achieve Glorious Acoustics

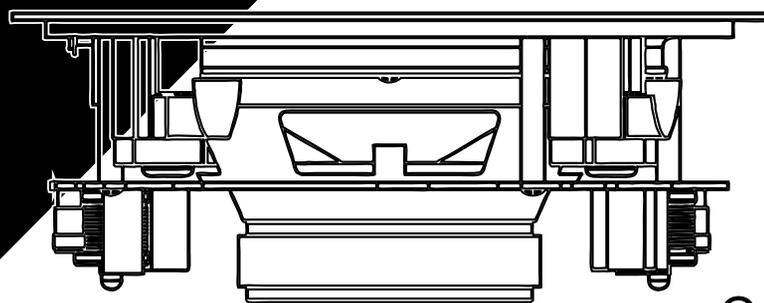

Custom
Installations

Speakers

Electronics

Cables
Accessories

2017



Wherever you install our excellent products, in your home, garden, terrace, restaurant, office or shop you will always enjoy the highest quality sound.

Advanced materials, state-of-the-art engineering and innovative design by an international team of professional designers make us as one of the leaders in the audiophile CI industry.



TAGA Harmony

The TAGA Harmony story

The European founders of the TAGA Harmony brand Mr. Kokocinski from Poland and Mr. Richard from Germany started their involvement in the audio business in the early years of 1990.

They were recognized music lovers and specialists in the high-end audio and were dealing with repair and sales of high-end audio equipment.

They found out that most speaker brands that boasted top sound performance, offered their products at extremely high prices, but they did not really provide good sound quality.

This prompted them to establish their own TAGA Harmony brand.

At the beginning the company was operating in the field of sound engineering services and audio products enhancement.

It took almost 2 years to develop first loudspeaker prototypes which met enthusiastic reception of audiophiles.

Nowadays TAGA Harmony brand is offering high quality products for the hi-fi and audio-video market.

Main types of products are: high-end, hi-fi and home theatre speakers, in-wall/in-ceiling and outdoor speakers, multimedia speakers, hi-fi electronics and accessories for speakers.

“TAGA Harmony” logo decrypted

The meaning of TAGA logo is **To Achieve Glorious Acoustics** and it says everything about people behind the brand, their passion, devotion, philosophy and constant striving to perfection – it is TAGA Harmony’s DNA.

It means that everything what TAGA Harmony designs, engineers or builds has one goal in mind: to provide the best sound and joy to music lovers around the World.



A strong basis for the logo was added: **“HARMONY”** to emphasize that on every step all products are created in harmony with nature.

Przemek Kokocinski - TAGA Harmony CEO and co-founder



SOUND CRITERIA – TAGA Harmony MISSION

The main criteria TAGA Harmony has defined for sound performance of their products is:

- Accurate and perfect localization;
- Spacious soundstage;
- Low distortions;
- Flat midrange response;
- Extra wide sound dispersion;
- Powerful and deep bass;
- Impressive dynamics;
- Superior overall balance.

TAGA Harmony is committed to this mission from the very beginning.

The result is that TAGA Harmony loudspeakers and electronics can boast the finest music and home theatre performance with great dispersion and spaciousness, a low bass and stunning dynamics, adding sonic accuracy, precise location and ultra-low distortions.

PASSION, ENGINEERING & EUROPEAN PERFECTION

Passion, love of music and European know-how behind all the products!

Advanced materials, state of the art engineering and innovate design by a team of professional designers position TAGA Harmony as one of the leaders in the industry. TAGA Harmony spends hundreds of hours on developing each and single product. During repeated listening tests and multiplied advanced measuring research carried by TAGA Harmony’s R&D department, all potential weaknesses of the final product are adjusted and corrected to perfection.

Combined with the large scale of production all these features make TAGA Harmony product offer unbeatable value and sound performance!

STRONG GROUND ON BOTH CONTINENTS

Nowadays TAGA Harmony is developing its worldwide activities in the high-end audio field through divisions located in Europe and Asia.

TAGA Harmony owns and operates an advanced production facility which consists of modern R&D department and production lines with independent quality inspection checkpoints.

That is why almost all TAGA Harmony products and used components are designed and manufactured in-house.



TCI Platinum SE Series

TCI Platinum Series

Our valued customers and professional installers insisted on us to design high class in-ceiling speakers, which would be able to provide the similar level of sound quality as could be found in our high-end Platinum Special Edition and premium Platinum series .

Our engineers had taken up this challenge and after many months of intense testing and measurements created two new high-end series : Taga Custom Installations Platinum Special Edition (TCI Platinum SE) and Platinum (TCI Platinum).

Their sound can be compared to high-end regular home speakers and they provide clear, natural and dynamic performance hardly to be met in any other CI speakers.

Our specialized horn-like, **TWG** TAGA Waveguide design of tweeter faceplate mounted on a transverse rib and which is known from our home products is now available in our in-ceiling speakers – it supports equal and flat dispersion of sound in and off the axis of the driver providing exceptionally wide dispersion throughout a listening area. The result is spacious, crystal clear and rich sound performance even at highest volumes.

Our high-end bass-midrange drivers (**TWCD** Woolen Cone Driver in the TCI Platinum SE and **TPACD** Pure Aluminum Cone Driver in the TCI Platinum) deliver natural, live and rich mids and extremely deep, articulate bass with superior timing and pitch.



The proper design facilitates installations thanks to many specialized features:

- Very slim chassis to allow installations even in shallow places;
- The ABS clamps (**TEI** brackets) are in a visible blue color to ease installation in dark places.
- Magnetically mounted, aesthetic and virtually disappearing in the ceiling **TBF** TAGA Bezel-Free grills;
- High-End banana binding posts;
- High 8 ohm impedance.



Platinum-100R SE



Platinum-60R SE



Platinum-100R



Platinum-60R

Speaker Type	In-Wall / In-Ceiling Speaker	In-Wall / In-Ceiling Speaker	In-Wall / In-Ceiling Speaker	In-Wall / In-Ceiling Speaker
Design	2-way TBF magnet mounted grill TEI mounting bracket TIMPC enclosure	2-way TBF magnet mounted grill TEI mounting bracket TIMPC enclosure	2-way TBF magnet mounted grill TEI mounting bracket TIMPC enclosure	2-way TBF magnet mounted grill TEI mounting bracket TIMPC enclosure
Drivers Configuration	Tweeter 25mm (1") TPTTD TWG faceplate Bass / Midrange 165mm (6.5") TWCD	Tweeter 25mm (1") TPTTD TWG faceplate Bass / Midrange 133mm (5.25") TWCD	Tweeter 25mm (1") TPTTD TWG faceplate Bass / Midrange 165mm (6.5") TPACD	Tweeter 25mm (1") TPTTD TWG faceplate Bass / Midrange 133mm (5.25") TPACD
Maximum Power	150W	115W	150W	115W
Frequency Response	28Hz - 40kHz	33Hz - 40kHz	30Hz - 40kHz	35Hz - 40kHz
Dimensions (Dia x D)	23.8 x 9.2 cm	20.3 x 8.8 cm	23.8 x 9.2 cm	20.3 x 8.8 cm
Minimum Mounting Depth	89 mm	85 mm	89 mm	85 mm
Cutout Dimensions (Dia)	200 mm	170 mm	200 mm	170 mm
Net Weight	2 kg / pc	1.6 kg / pc	1.85 kg / pc	1.5 kg / pc
Finishes	White, Paintable (with grill on)			

GTCS v.2 Series

These bezel-free in-ceiling speakers were created based on our award-winning TAV-606F SE technology. Their sound can be compared to high-end regular home speakers and they provide clear, natural and dynamic performance hardly to be met in any CI speakers. Our specialized horn-like, **TWG** TAGA Waveguide design of tweeter faceplate mounted on a transverse rib and which is known from our home products is now available in our in-ceiling speakers – it supports equal and flat dispersion of sound in and off the axis of the driver providing exceptionally wide dispersion throughout a listening area. The result is spacious, crystal clear and rich sound performance even at highest volumes.

The proper design facilitates installations thanks to many specialized features:

- Very slim chassis to allow installations even in shallow places;
- The ABS clamps (TEI brackets) are in a visible blue color to ease installation in dark places;
- Magnet mounted, aesthetic and virtually disappearing in the ceiling **TBF** TAGA Bezel-Free grills;
- **TEC** easy to use push-in banana binding posts;
- High 8 ohm impedance.



GTCS-606-6R SE

GTCS-606-5R SE



	GTCS-606-6R SE	GTCS-606-5R SE
Speaker Type	In-Wall / In-Ceiling Speaker	In-Wall / In-Ceiling Speaker
Design	2-way TBF magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts	2-way TBF magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts
Drivers Configuration	Tweeter 25mm (1") Silk dome TWG faceplate	Tweeter 25mm (1") Silk dome TWG faceplate
Maximum Power	130W	100W
Frequency Response	30Hz - 25kHz	35Hz - 25kHz
Dimensions (Dia x D)	23.8 x 9.2 cm	20.3 x 8.8 cm
Minimum Mounting Depth	89 mm	85 mm
Cutout Dimensions (Dia)	200 mm	170 mm
Net Weight	1.9 kg / pc	1.45 kg / pc
Finishes		White, Paintable (with grill on)

Reduced Bezel Series

The RB (Reduced Bezel) series of in-ceiling speakers has low-profile or super low-profile bezels to allow speakers almost disappear in a room. Nowadays the expectation from modern in-ceiling speakers is not only the great sound but less visibility at the same time. With the RB series you can have both! The sound is clear, natural, dynamic and provides wide dispersion throughout a listening area, and thanks to slim bezels you are hard to see speakers mounted in your ceiling!

The top models in this series utilizes high-end **TPTTD** Taga Pure Titanium Tweeter Dome, which can bear high power and its performance is very accurate, clear, smooth and detailed. We pay special attention to equal and flat dispersion of sound in and off the axis of all our in-ceiling speakers.

The proper design facilitates installations thanks to many specialized features:

- Very rigid and strong **TIMPC** - TAGA Injection-Molded Polymer Chassis minimizes distortions, vibrations or resonances;
- The ABS clamps (**TEI** brackets) are in a visible blue or red color (selected models) to ease installation in dark places;
- Low-profile or **TSLB** TAGA Super Low-profile Bezel (selected models) are magnet mounted and paintable;
- **+/- 3dB Environmental Equalizer** (treble switch) in selected models compensates for speaker positioning and room anomalies;
- Easy to use push-in banana binding posts;
- High 8 ohm impedance.



RB-850 v.2

RB-650

RB-550 SG

Speaker Type	In-Wall / In-Ceiling Speaker	In-Wall / In-Ceiling Speaker	In-Wall / In-Ceiling Speaker
Design	2-way 13° driver orientation TSLB magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts	2-way Reduced Bezel Magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts	2-way Reduced Bezel Magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts
Drivers Configuration	Tweeter 25mm (1") TPTTD Swivel mount +/-3 dB Treble Switch	Tweeter 25mm (1") Silk dome	Tweeter 25mm (1") Silk dome
Maximum Power	130W	100W	120W
Frequency Response	37Hz - 25kHz	40Hz - 25kHz	45Hz - 25kHz
Dimensions (Dia x D)	26 x 12 cm	25 x 14.4 cm	23.5 x 9.2 cm
Minimum Mounting Depth	112 mm	135 mm	90 mm
Cutout Dimensions (Dia)	245 mm	210 mm	209 mm
Net Weight	1.8 kg / pc	1.5 kg / pc	1.5 kg / pc
Finishes		White, Paintable (with grill on)	

TLCR Series

The TLCR series speakers provide superior sound performance at amazing price levels. They are multi-purpose speakers and can be used as Left, Center or Right channel. Now you are able to build a multi-channel system based on the same kind of speakers, which is a perfect solution to keep all channels integrity and sound style.




TLCR-580



TLCR-525

Speaker Type	In-Wall / In-Ceiling LCR	In-Wall / In-Ceiling LCR
Design	2-way TSLB magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts	2-way TEI mounting bracket TIMPC enclosure TEC binding posts
Drivers Configuration	Tweeter 25 mm (1") TPTTD pure titanium dome Swivel mount +/-3 dB Treble switch	Tweeter 25mm (1") TPTTD pure titanium dome Swivel mount
	Bass / Midrange 2 x 133mm (5.25") Kevlar®	Bass / Midrange 2 x 133mm (5.25") Kevlar®
Maximum Power	100W	90W
Impedance	8ohm	8ohm
Frequency Response	50Hz - 20kHz	58Hz - 22kHz
Dimensions (H x W x D)	17.5 x 38.6 x 8.2 cm	22.2 x 45 x 8.8 cm
Minimum Mounting Depth	78 mm	76 mm
Cutout Dimensions (H x W)	155 x 365 mm	188 x 415 mm
Net Weight	2.75 kg / pc	2.93 kg / pc
Finishes	White, Paintable (with grill on)	

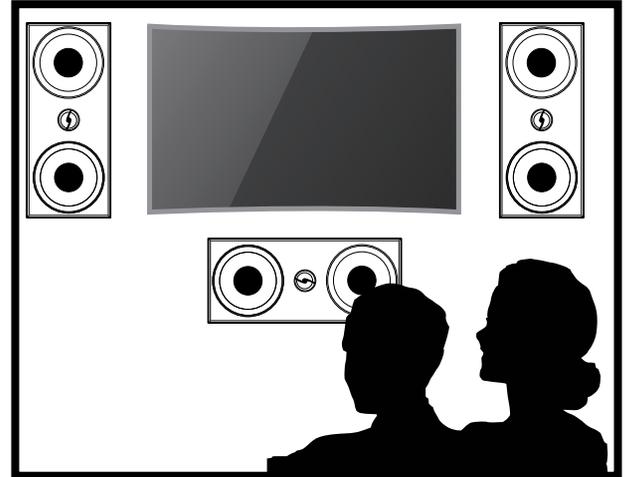

TCP Series

The TCP series in-wall / in-ceiling subwoofers provide superior, rich and powerful sound performance of bass at amazing price levels. If you look to upgrade your sound either in multi-room, stereo or home theatre installations, with strong, well defined and fast bass, our subwoofers are the perfect choice, without occupying your valuable floor space!



TCP-1000



TCP-500R



TCP-300

Speaker Type	In-Wall / In-Ceiling Subwoofer	In-Wall / In-Ceiling Subwoofer	In-Wall / In-Ceiling Subwoofer
Design	1-way TEI mounting bracket TIMPC enclosure TEC binding posts	1-way TBF magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts	2-way TEI mounting bracket TIMPC enclosure TEC binding posts
Drivers Configuration	Bass 255mm (10") Kevlar®	Bass 203mm (8") Polypropylene	Bass 2 x 203mm (8") Polypropylene carbon reinforced
Maximum Power	250W	150W	80W
Impedance	8ohm	8ohm	8ohm
Frequency Response	35Hz - 500Hz	45Hz - 500Hz	45Hz - 500Hz
Dimensions (Dia x D) or (H x W x D)	30.3 x 30.3 x 8.8 cm	28.4 x 9.9 cm	48 x 29 x 10.3 cm
Minimum Mounting Depth	118 mm	115 mm	91 mm
Cutout Dimensions (Dia or H x W)	269 mm	241 mm	450 x 260 mm
Net Weight	2.75 kg / pc	3 kg / pc	4 kg / pc
Finishes	White, Paintable (with grill on)		

TCW Series

The TCW series speakers provide superior sound performance at amazing price levels. They utilize very stiff and strong injection-molded polymer chassis, which minimize distortion, vibrations or resonances and specialized mounting brackets that make installations very easy. All speakers are designed to be used both in music and home theatre systems in any area of your home or commercial applications. If you want your sound system to “disappear” in the room TAGA Harmony in-wall and in-ceiling speakers are the best choice! They are the choice that can provide unbelievably perfect performance similar to big regular speakers, allowing to keep your room space free.



TCW-880R SM



TCW-600R v.2



TCW-500R v.4



TCW-380R



TCW-300R SM

Speaker Type	In-Wall / In-Ceiling Speaker Stereo/Mono	In-Wall / In-Ceiling Speaker Stereo/Mono	In-Wall / In-Ceiling Speaker	In-Wall / In-Ceiling Speaker	In-Wall / In-Ceiling Speaker Stereo/Mono
Design	2-way TSLB magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts	2-way TEI mounting bracket TIMPC enclosure TEC binding posts	2-way TEI mounting bracket TIMPC enclosure TEC binding posts	2-way TSLB magnet mounted grill TEI mounting bracket TIMPC enclosure TEC binding posts	2-way TEI mounting bracket TIMPC enclosure TEC binding posts
Drivers Configuration	Tweeter 2 x 19mm (0.75") TPTTD dome +/-3 dB Treble switch	Tweeter 2 x 19mm (0.75") Silk dome	Tweeter 19mm (0.75") Silk dome Swivel mount +/- 2dB Treble switch	Tweeter 25mm (1") Mylar® dome	Tweeter 2 x 13mm (0.5") Mylar® dome
Maximum Power	160W	100W	100W	150W	100W
Frequency Response	35Hz - 20kHz	40Hz - 20kHz	30Hz - 20kHz	37Hz - 20kHz	43Hz - 20kHz
Dimensions (Dia x D) or (H x W x D)	27.7 x 10.5 cm	23.4 x 7.4 cm	23.5 x 89 cm	27.7 x 10.5 cm	22.8 x 8.5 cm
Minimum Mounting Depth	105 mm	70 mm	90 mm	105 mm	90 mm
Cutout Dimensions (Dia or H x W)	255 mm	208 mm	199 mm	255 mm	198 mm
Net Weight	2.3 kg / pc	1.8 kg / pc	1.5 kg / pc	2.25 kg / pc	1.25 kg / pc
Finishes			White, Paintable (with grill on)		

TCW Series

Unique features in TCW-x80 models:

- The upgraded **TIMPC** - TAGA Injection-Molded Polymer Chassis with a honeycomb structure is even more rigid and strong. Additional rubber coating in certain models further stiffens chassis and improves sound performance;
- Magnetically mounted, aesthetic and virtually disappearing in the ceiling **TSLB** TAGA Super Low-profile Bezel grills;
- The ABS clamps (**TEI** brackets) are in a visible blue color to ease installation in dark places;
- The revised **+/- 3dB Environmental Equalizer** (treble switch) in selected models compensates for speaker positioning and room anomalies.

The proper design facilitates installations thanks to many specialized features:

- Very rigid and strong **TIMPC** - TAGA Injection-Molded Polymer Chassis minimizes distortions, vibrations or resonances;
- **TEI** - TAGA Easy Install mounting brackets are very easy and safe to install;
- Low-profile bezel grills are magnet mounted (selected models) and paintable;
- Easy to use push-in banana binding posts;
- High 8 ohm impedance.



TCW-280R | TCW-180R



TCW-100R v.3



TCW-80R



TCW-900



TCW-880



TCW-780 | TCW-680

In-Wall / In-Ceiling Speaker

2-way
TSLB magnet mounted grill
TEI mounting bracket
TIMPC enclosure
TEC binding posts

2-way
TEI mounting bracket
TIMPC enclosure
TEC binding posts

2-way
Reduced Bezel
TEI mounting bracket
TIMPC enclosure
TEC binding posts

2-way
Reduced Bezel
Magnet mounted grill
TEI mounting bracket
TIMPC enclosure
TEC binding posts

2-way
TSLB magnet mounted grill
TEI mounting bracket
TIMPC enclosure
TEC binding posts

2-way
TSLB magnet mounted grill
TEI mounting bracket
TIMPC enclosure
TEC binding posts

Tweeter
25mm (1") | 19mm (0.75")
Silk dome

Tweeter 19mm (0.75")
Silk dome
Swivel mount

76 mm (3") Polypropylene
Full-range driver

Tweeter 25mm (1")
Silk dome
Swivel mount
+/-3 dB Treble switch

Tweeter 25mm (1")
TPPTD pure titanium dome
Swivel mount
+/-3 dB Treble switch

Tweeter 25mm (1")
TPPTD pure titanium dome
Swivel mount
+/-3 dB Treble switch

Bass / Midrange Polypropylene
165 mm (6.5") | 133mm (5.25")
100W | 80W

Bass / Midrange 133mm
(5.25") Polypropylene
70W

40W

Bass / Midrange 203mm
(8") Polypropylene
240W

Bass / Midrange 203mm
(8") Kevlar®
100W

Bass / Midrange Kevlar®
165 mm (6.5") | 133mm (5.25")
130W | 100W

42Hz - 20kHz | 46Hz - 20kHz

48Hz - 20kHz

80Hz - 20kHz

30Hz - 20kHz

35Hz - 20kHz

40Hz - 20kHz | 42Hz - 20kHz

22.7 x 8.7 cm [TCW-280R]
19.6 x 7.5 cm

20.2 x 7.3 cm

10 x 5.2 cm

35.5 x 26.2 x 9.15 cm

36.2 x 24.2 x 10.5 cm

30 x 20.5 x 8.7 cm [TCW-780]
26.7 x 17.5 x 7.5 cm

83 mm [TCW-280R]
75 mm

73 mm

55 mm

88 mm

100 mm

90 mm [TCW-780]
75 mm

210 mm [TCW-280R]
179 mm

168 mm

88 mm

329 x 236 mm

340 x 218 mm

280 x 185 mm [TCW-780]
245 x 153 mm

1 kg / pc | 0.88 kg / pc

1 kg / pc

0.4 kg / pc

2.8 kg / pc

2.13 kg / pc

1.7 kg / pc | 1.25 kg / pc

White, Paintable (with grill on)

TOS Active Series

The TOS Active speakers are the ideal solution for affordable indoor and outdoor (only in locations where speakers are not directly exposed to moisture, water, snow and other severe weather conditions) sound systems.

The TOS-A400IR has a built-in High Power Class D Amplifier (**HPCDA**) and a stereo RCA input what makes this model almost a standalone audio system – you just have to connect an audio source (CD player, laptop or smartphone).

The supplied mounting brackets make installation very easy as well as speakers can be mounted horizontally or vertically. The fully functional remote controller helps to operate the speakers while they are mounted on walls, ceiling or other hardly accessible localizations.

Thanks to the dedicated amplifier specially crafted to match drivers and cabinet the TOS-A400IR can provide clean, natural, dynamic and powerful sound performance.

This model is an efficient, cost-effective choice for home hi-fi systems and installation applications as well as for commercial facilities like restaurants, pubs and shops for both background music and voice playback.



Speaker Type	Active Speakers, 2-way, U mounting brackets, 1 speaker with built-in stereo amplifier + 1 passive speaker, ABS enclosure
Drivers Configuration	Tweeter 25mm (1") PEA dome Bass / Midrange 115mm (4.5") Polypropylene
Built-in Amplifier Power	2 x 40W RMS / 145W Dynamic Peak, HPCDA Class D, S/N >= 85dB, THD (@1kHz 10W) less than 0.08%
Frequency Response	60Hz - 20kHz
Sensitivity	89dB / Input Sensitivity: 600mV(1m,1w)
Connectivity Wired	RCA stereo
Control Features	Input, Volume, Treble, Bass, Status LED, Full remote controller
Dimensions (H x W x D)	21.5 x 16.5 x 14 cm
Net Weight	Active: 1.85 kg / Passive 1.7 kg
Finish	White, Black

TOS Platinum SE / TOS Platinum / TOS Series



Most models in this series are weather, UV and water resistant. Stylish, eye-catching appearance and high-performance sound make this series perfect solution for outdoors and indoors usage. Mounting brackets make installation very easy as well as speakers can be mounted horizontally and vertically.

TOS Platinum SE and TOS Platinum technology (drivers and fine-tuning) is based on our high-end Platinum SE and premium Platinum home speaker series. Now you can enjoy the similar audiophile level of sound quality everywhere!

- The proper design facilitates installations thanks to many specialized features:**
- Very rigid and strong polymer cabinets to minimize distortion, vibrations or resonances;
 - Solid brass and rustproof hardware, aluminum grill (selected models) make all TOS series completely weather and rustproof;
 - Easy to use push-in banana binding posts;
 - High 8 or 6 ohm impedance (excl. TOS Platinum SE and TOS Platinum models).

TOS Platinum SE / TOS Platinum / TOS Series



Speaker Type	Outdoor / Indoor Speaker			
Drivers Configuration	Tweeter 25mm (1") TPTTD pure titanium dome			
Maximum Power	180W	140W	240W	180W 120W
Impedance	4ohm (8ohm compatible)	4ohm (8ohm compatible)	8ohm	8ohm
Frequency Response	38Hz – 40kHz	48Hz – 40kHz	30Hz - 20kHz	40Hz - 20kHz 50Hz - 20kHz
Dimensions (H x W x D)	30 x 22.6 x 21.7 cm	25.7 x 19.6 x 19 cm	43.5 x 30 x 26.5 cm	28.7 x 19.6 x 19.5 cm [TOS-600 v.2] 23.9 x 16.3 x 16 cm
Net Weight	4.5 kg / pc	3.5 kg / pc	5.7 kg / pc	3 kg / pc 1.9 kg / pc
Finishes			White, Black	



TOS-515 SM



TOS-415 v.2



TOS-315



TOS-215

Speaker Type	Outdoor / Indoor Speaker Stereo/Mono	Outdoor / Indoor Speaker	Outdoor / Indoor Speaker	Outdoor / Indoor Speaker
Drivers Configuration	Tweeter Dual 25mm (1") PEI dome	Tweeter 25mm (1") Silk dome	Tweeter 25mm (1") Silk dome	Tweeter 13mm (0.5") Silk dome
Maximum Power	150W	180W	100W	60W
Impedance	8ohm	6 ohm	8ohm	8ohm
Frequency Response	40Hz - 20kHz	58Hz - 20kHz	68Hz - 20kHz	75Hz - 20kHz
Dimensions (H x W x D)	28.7 x 19.6 x 19.5 cm	24.4 x 18.5 x 16.3 cm	20.3 x 13.6 x 13.5 cm	15.3 x 10.6 x 10.6 cm
Net Weight	2.8 kg / pc	2.9 kg / pc	1.3 kg / pc	0.8 kg / pc
Finishes			White, Black	

TOW Series

The TOW series flat on-wall speakers are ideal solution for public address and background music systems in schools, halls, conference rooms, restaurants as well as at home. They provide clean, natural, dynamic and powerful sound performance with enhanced dispersion. The installation has never been easier – just hang them on a hook mounted in a wall!

The proper design facilitates installations thanks to many specialized features:

- Very slim cabinet for discreet wall mounting (depth only 3.5cm);
- Easy to use spring clips terminals accepting bare speaker cables;
- High 8 ohm impedance.

Drivers Configuration	Tweeter 13mm (0.5") Mylar® dome
Maximum Power	60W
Frequency Response	75Hz - 20kHz
Dimensions (H x W x D)	27.5 x 18.5 x 3.5 cm
Net Weight	0.53 kg / pc
Finishes	White, Black



TOW-180F

TRS Series

The TRS series garden speakers are designed for installation in places such as gardens, patios, terraces and outdoor open spaces. Fully sealed fiberglass cabinets with aluminum grilles are water, weather and UV-resistant and can withstand very severe weather conditions. Their stone-like look perfectly matches with the architecture of any outdoor environment.



TRS-5L key features:

- **Variety of installation options:**
 In-Ground (Ground Stake incl.).
 On ceilings and walls (Ceiling-Wall mount incl.).
 On horizontal and vertical surfaces like floors, decks or garden structure (Surface Mount incl.).
- **Vertical angle regulation** to adjust the sound dispersion.



TRS-30SM v.2



TRS-20 v.3



TRS-15



TRS-10



TRS-5L

Speaker Type	Garden Speaker Stereo/Mono	Garden Speaker Mono	Garden Speaker Mono	Garden Speaker Mono	Garden Speaker Mono
Drivers Configuration	Tweeter 2 x 19mm (07.5") PEI Soft Domes	Tweeter 25mm (1") PET Soft Dome	Tweeter 25mm (1") PET Soft Dome	Tweeter 25mm (1") PET Soft Dome	63mm (2.5") Treated Paper Full-range driver
Maximum Power	200W	200W	100W	60W	30W
Impedance	8ohm	8ohm	8ohm	8ohm	8ohm
Frequency Response	30Hz - 20kHz	30Hz - 20kHz	45Hz - 20kHz	70Hz - 20kHz	80Hz - 20kHz
Dimensions (H x W x D)	32.5 x 38 x 49 cm	29 x 34 x 38 cm	23 x 32 x 24 cm	23.2 x 23 x 19.5 cm	14 x 9.5 x 13.9 cm (incl. surface mount) 31.5 x 9.5 x 13.9 cm (incl. ground stake) 13 x 9.5 x 20.3 cm (incl. ceiling mount)
Net Weight	7 kg / pc	5.8 kg / pc	2.7 kg / pc	2.6 kg / pc	0.4 kg / pc
Finishes	Granite, Sandstone	Sandstone, White Granite	Granite, White Granite	White Granite	Grey, Ivory

TVR Series

The TVR volume regulators are high quality stereo controllers designed for wide range frequency response at all volume levels. They feature high power handling 11 or 12-step - „make before break“ switching, incorporate selectable impedance matching to connect up to 8 speaker pairs and employ detachable connectors for quick and easy installation. Each volume regulator (except 100V versions) includes a matching knob, Decora® style insert, cover plate and all screws. Note that some of the above data do not apply to 100V model.



TVR-10IR



TVR-10



TVR-7



TVR-7SL



TVR-400V

Type	Rotary Volume Regulator with IR Receiver	Rotary Volume Regulator	Rotary Volume Regulator	Slide Volume Regulator	100V Rotary Volume Regulator
Features	100 watts per channel Impedance matching (1X, 2X, 4X, and 8X) 12-step, high quality autoformer switch Decora® insert	100 watts per channel Impedance matching (1X, 2X, 4X, and 8X) 12-step, high quality autoformer switch Decora® insert	75 watts per channel Impedance matching (1X, 2X, 4X, and 8X) 12-step, high quality autoformer switch Decora® insert	75 watts per channel Impedance matching (1X, 2X, 4X, and 8X) 12-step, high quality autoformer switch Decora® insert	50W (100V) per channel 11-Step rotary switch, with 24V DC Relay Bold Spacing 60mm
Cutout Dimensions (H x W)	70 x 41 mm	70 x 41 mm	75 x 41 mm	72 x 37 mm	53 x 55 mm
Minimum Mounting Depth	71 mm	71 mm	67 mm	62 mm	47 mm
Plate Dimensions (H x W):	113 x 70 mm	113 x 70 mm	113 x 70 mm	113 x 70 mm	86 x 86 mm
Finishes			White, Paintable		

ELECTRONICS Series

The TA integrated amplifiers are a perfect and cost-efficient solution for residential as well as commercial installations in restaurants, pubs, shops, conferencing rooms, fitness clubs for both background music and voice playback systems. They deliver pure and distortion-limited power as well as rich sound performance with stunning accuracy, soundstage and sensational dynamics.

Features	600MULTI	400MIC	250MIC v.2	25Mini
MP3 (3.5mm stereo jack) input on the front panel (rear in the TA-25Mini): to quickly connect a smartphone, tablet or laptop.	✓	✓	✓	✓
Oversized, audiophile grade toroidal transformer .	✓	✓	✓	
Microphone input with a mixing and echo control: perfect for voice broadcasting.	✓	✓	✓	
USB input: almost endless music playback.	✓	✓		
2 stereo speaker outputs: simple and cost-effective 2-zone sound system.		✓	✓	
Multi-room sound: 4-zone stereo amp to drive 4 pairs of speakers. Easily deliver sound to many rooms. Each zone with independent: source, volume and sound regulations.	✓			
Headphone output: for discrete listening.		✓		
Limiters to prevent clipping of the power amplifier.				✓



TA-400MIC



TA-250MIC v.2



TA-25Mini



TA-600MULTI

TA-600 MULTI

TA-400MIC

TA-250MIC v.2

TA-25Mini

Type	TA-600 MULTI	TA-400MIC	TA-250MIC v.2	TA-25Mini
Type	CI 4-zone stereo amplifier	CI A/B speaker stereo amplifier	CI A/B speaker stereo amplifier	CI mini stereo amplifier
Power Output	All zones driven: 2 x 15W RMS / 8ohm / zone 2 x 18W RMS / 4ohm / zone One zone driven: 2 x 20W RMS / 8ohm 2 x 30W RMS / 4ohm	2 x 60W RMS / 8ohm 2 x 90W RMS / 4ohm	2 x 40W RMS / 8ohm 2 x 50W RMS / 4ohm	2 x 25W / 8ohm Class D
Frequency Response	20Hz – 20kHz	30Hz – 20kHz	30Hz – 20kHz	30Hz – 18kHz
Inputs	USB* RCA stereo CD, AUX MP3 (3.5mm)	USB* RCA stereo CD, AUX MP3 (3.5mm)	RCA stereo CD, AUX1, AUX2 MP3 (3.5mm)	Balanced, 3.5mm unbalanced
Output	-	RCA stereo REC	-	-
Microphone Input	Sensitivity 10mV ; THD 10%	Sensitivity 7mV ; THD 1%	Sensitivity 10mV ; THD 2%	-
Headphone Output	-	20mW(32ohm) ; THD 0.5%	-	-
AC Power, Power Consumption	220-230V 50/60Hz, 200W	220-240V 50/60Hz, 250W	220-240V 50/60Hz, 120W	DC 24V, max. 60W
Dimensions (H x W x D)	10 x 43 x 31.2 cm	9.1 x 42 x 31.7 cm	9.7 x 42 x 32.3 cm	3.2 x 15.8 x 11 cm
Net Weight	6.15 kg / pc	6.3 kg / pc	6.2 kg / pc	0.42 kg / pc
Finishes			Black	

*Supported file formats: MP3 / WMA / WAV / APE

TVS / TS Series

The TVS and TS speaker selectors are an efficient, affordable way of expanding your audio system at home, office and other places and can be used for many different applications. Our highest model can transmit audio signal from 2 independent sources to 4 different zones and you can select each of 2 sources for each of 4 zones and even independently regulate volume level in each zone. Our speaker selector is a device that allows the user to transform one audio input source into multiple rooms – it is the easiest and cost-effective way to build a multi-room sound system!



TVS-4



TS-8

TS-4

Type	Speaker Selector with Volume Control	Speaker Selector	Speaker Selector
Features	<ul style="list-style-type: none"> • 4-Zone, Dual Source • Impedance Matching • A/B Source Amplifiers • On/Off for each zone • Volume for each zone • A/B Selector for each zone • Aluminum front and Volume Knobs • Removable, Solder-less Terminals • Accepts up to 14AWG Cables • 200W max / 100W RMS per channel 	<ul style="list-style-type: none"> • 8-Zone • Protecting Circuit • On/Off for each zone • Removable, Solder-less Terminals • Accepts up to 14AWG Cables • 200W max / 100W RMS per channel 	<ul style="list-style-type: none"> • 4-Zone • Protecting Circuit • On/Off for each zone • Removable, Solder-less Terminals • Accepts up to 14AWG Cables • 140W max / 70W RMS per channel
Dimensions (H x W x D)	6.3 x 43.2 x 16 cm	4.9 x 43.2 x 11.2 cm	4.9 x 21.6 x 11.2 cm
Finishes		Black	

V Series

The V series 100V line speakers with built-in transformers are ideal solutions for public address and background music systems in halls, conference rooms, restaurants and other applications. They can provide clean, natural, dynamic and powerful sound performance with enhanced dispersion. They utilize specialized brackets to make installation very simple and quick.



TCW-66RV



TCW-64RV



TCW-55V



TOW-65V




TBS-100

Speaker Type	70V/100V In-Wall / In-Ceiling Speaker	70V/100V In-Wall / In-Ceiling Speaker	70V/100V In-Wall / In-Ceiling Speaker	70V/100V On-Wall Speaker	70V/100V Ball Speaker
Drivers Configuration	Bass / Midrange 165mm (6.5")	Bass / Midrange 102mm (4")	Bass / Midrange 133mm (5.25")	Bass / Midrange 165mm (6.5")	Bass / Midrange 165mm (6.5")
Power	100V/10W 70V/6W	100V/6W 70V/3W	100V/10W 70V/6W	100V/6W 70V/3W	100V/10W 70V/5W
Impedance	8ohm	8ohm	8ohm	8ohm	8ohm
Frequency Response	120Hz - 15kHz	150Hz - 15kHz	150Hz - 15kHz	120Hz - 15kHz	100Hz - 20kHz
Dimensions (H x W)	22 x 10 cm	13.5 x 8.1 cm	26 x 19.5 x 8 cm	26 x 18 x 12 cm	21 cm
Minimum Mounting Depth	97 mm	120 mm	77 mm	97 mm	
Cutout Dimensions (Dia)	190 mm	120 mm	230 x 170 mm		
Net Weight	1 kg / pc	0.6 kg / pc	1.9 kg / pc	1.2 kg / pc	2 kg / pc
Finishes		White, Paintable (with grill on, excl. TOW-65V, TBS-100)			

Cables & Accessories

TAGA Harmony offers top build quality Audio-Video cables with superb performance dedicated for demanding customers and installers. Although quality of our cables is high our prices are not! - now everybody can enjoy the best sound!

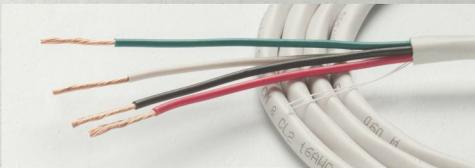

Installers' friendly packaging (pull out box).



CM/CL-2 Rated, UL Approved

4-conductor, 14 AWG (TCL-414W) or 16 AWG (TCL-416W)

2-conductor, 14 AWG (TCL-214W) or 16 AWG (TCL-216W)

Multi-stranded, ultra-high purity 99.99%
Oxygen Free Copper wires

Low friction insulation for conductors (Black & Red)
Low friction, easy-to-pull outer PVC jacket (White)

Sequentially numbered per meter

TCL Series

High-Performance 99.99% OFC Contractor Grade CM , CL2 IN-WALL SPEAKER CABLES

The TCL in-wall speaker cables are designed for use in demanding installations both for hi-fi, home theatre and background music applications. Multi-stranded ultra-high purity 99.99% Oxygen Free Copper wiring offers very transparent and natural sound in higher and mid frequencies as well as dynamic and extended bass.

Easy-to-handle pull-out box, sequentially numbered length per each meter and easy-to-pull White PVC jacket - everything to make custom integrator job easy and pleasant.



To Achieve Glorious Acoustics



TAGA Harmony

Al. Jerozolimskie 333A
05-816 Reguly/Warsaw
Poland

Phone: +48-22-353-14-14
Email: Sales@taga-audio.com

Distributor / Dealer



www.taga-audio.com

Find TagaHarmony on social media



We reserve the right to amend details of the specifications or designs without notice in line with technical developments. All other brands and product names are trademark of their respective owners.