

DIGITUS®



2016 KATALOG
CATALOG



PREVIEW

please do not share!

INHALT // CONTENT



DIGITUS®
The Brand // The Packaging

6 - 7



PRESENTATION SOLUTIONS
Video & Digital Signage // Monitor & TV Mounts

10 - 43



SECURITY SOLUTIONS
DIGITUS® Plug&View // Professional IP Cameras // Analogue HD Video // Video Server & Network Video Recorder // Power Supplies & PoE

46 - 69



COMPUTER ACCESSORIES & COMPONENTS
Home Network // I/O Cards // Serial & Parallel Adapters // USB Hubs // Card Reader // USB Accessories // USB Harddisk Drives & Adapters // Graphic Adapters // Mounting Frames & Accessories // Notebook Accessories

72 - 143



MONITOR // TV // VIDEO
Monitor Mounts // TV Mounts // Video

146 - 161



CABLES
HDMI // Display Port // VGA // DVI // USB 2.0 // USB 3.0 // USB Type-C // MHL // Printer // Parallel // PS/2 // Gender Changer // SATA // Firewire // Internal PC Cables // Phone Cords // Power Cords // Device Connection Cables // Audio-/ Video // Network Outlets // Connection Modules // Modular Adapters // Tools // Twisted Pair Installation Cables // Patch Cables Category 6, S-FTP // Patch Cables Category 6, SF-UTP

166 - 185

STICHWORTVERZEICHNIS // INDEX

PRESENTATION SOLUTIONS

| | |
|--|----|
| VIDEO & DIGITAL SIGNAGE.....SITE | |
| 4K HDMI Matrix Switch 4x2..... | 10 |
| 4K HDMI Switch 5x1..... | 11 |
| 4K HDMI Switch 3x1..... | 11 |
| 4K HDMI Switch, 3x1..... | 11 |
| HDMI Switch, 5x1..... | 12 |
| HDMI Automatic Switch, 2 Port..... | 12 |
| HDMI Automatic Switch, 2 Port..... | 12 |
| HDMI Switch, 3 Port..... | 13 |
| HDMI Switch, 5 Port..... | 13 |
| HDMI Video Switch With Integrated PC Connection..... | 13 |
| HDMI Matrix Switch, 4x2..... | 14 |
| VGA Switch 250MHz, 2x Input, 1x Output..... | 15 |
| VGA Switch 250MHz, 4x Input, 1x Output..... | 15 |
| Video Switch 250MHz, 8x Input, 1x Output..... | 15 |
| 4K HDMI Splitter 1x2..... | 16 |
| 4K HDMI Splitter 1x4..... | 16 |
| 4K HDMI Splitter, 1x4..... | 17 |
| Pocket HDMI splitter, 2 Port..... | 17 |
| HDMI Splitter, 2 Port..... | 18 |
| HDMI Splitter, 4 Port..... | 18 |
| 8 Port HDMI Video Splitter..... | 19 |
| DisplayPort auf HDMI Splitter (1x2)..... | 20 |
| DisplayPort to DisplayPort Splitter (1x2)..... | 20 |
| VGA Splitter 500 MHz, 2 Port..... | 21 |
| VGA Splitter 350 MHz, 4 Port..... | 21 |
| VGA Splitter 350 MHz, 4 Port..... | 21 |
| VGA Splitter 500 MHz, 4-Port..... | 22 |
| VGA Splitter 350 MHz, 8-Port..... | 22 |
| VGA Splitter 500 MHz, 8-Port..... | 22 |
| VGA Splitter 250 MHz, 16-Port..... | 23 |
| VGA Video Matrix, 2x Input, 2x Output..... | 23 |
| VGA Video Matrix, 2x Input, 4x Output..... | 23 |
| Video/Audio Matrix 2x2..... | 23 |
| VGA Video/Audio Matrix Switch 4x4..... | 24 |
| DVI Video/Audio Splitter, 2-Port..... | 24 |
| DVI Video/Audio Splitter, 4-Port..... | 24 |
| DVI Video/Audio Splitter, 8-Port..... | 24 |
| VGA UTP Extender 2-Port..... | 25 |
| VGA UTP Extender 2-Port..... | 25 |
| VGA UTP Extender, Receiver Unit..... | 25 |
| VGA UTP Extender Set..... | 26 |
| VGA Repeater, 65m..... | 26 |
| VGA Over IP Extender (SET)..... | 27 |
| VGA Over IP Extender, Receiver Unit..... | 27 |
| DIGITUS® HDMI Video Extender, Cat5/6..... | 28 |
| DIGITUS® HDMI Video Extender, Cat5/6..... | 29 |
| DIGITUS® HDMI Video Extender over Cat5, Receiver Unit..... | 29 |
| HDMI Video Extender, Cat5/6..... | 30 |
| HDMI Over IP Extender (SET)..... | 31 |
| HDMI Over IP Extender (Receiver)..... | 31 |
| HDMI Video Wall Over IP, Transmitter Unit..... | 32 |
| HDMI Video Wall Over IP, Receiver Unit..... | 32 |
| HDMI 4K HDMI Repeater..... | 33 |
| Professional HDMI Repeater..... | 33 |
| DVI Extender Over CAT5, Single Port..... | 34 |
| DVI Repeater, 50 m..... | 34 |
| Multimedia DVI/Audio to HDMI Converter..... | 34 |
| VGA to HDMI Converter incl. Audio Transmission (3.5 mm Audio Jack)..... | 35 |
| VGA to HDMI Converter incl. Audio Transmission (RCA)..... | 35 |
| Full HD HDMI to VGA Converter incl. Audio Transmission..... | 35 |
| VGA to HDMI Converter incl. Audio Transmission (3.5 mm Audio Jack)..... | 35 |
| Full HD HDMI to VGA Converter incl. Audio Transmission..... | 35 |
| Micro-HDMI to VGA converter..... | 36 |
| HDMI A to VGA Converter..... | 36 |
| Cat5 Audio Extender, up to 600 m..... | 37 |
| RS232 Extender over CAT5, up to 2.000 m..... | 37 |
| MONITOR MOUNTS.....SITE | |
| Single Monitor Stand up to 24"..... | 38 |
| Dual LCD Display Stand up to 32"..... | 38 |
| Twin Monitor Mount, 24", for the DA-90342..... | 38 |

| | |
|---|----|
| Dual LCD Desktop Monitor Stand with Desk Mount..... | 39 |
| win Monitor Mount, 24" to 32" for the DA-90321..... | 39 |
| Triple Monitor Stand up to 24"..... | 40 |
| Triple Monitor Mount, 24", for the DA-90315..... | 40 |
| Triple Monitor Stand..... | 41 |
| Triple Monitor Mounts, 26"-30", for DA-90333..... | 41 |
| Wall mount for TFT displays..... | 42 |
| Wall mount for TFT displays..... | 42 |
| Wall mount for LCD/TFT TV up to 70kg..... | 42 |

| | |
|---|----|
| TV MOUNTS.....SITE | |
| TFT display swivel arm for table mounting up to 10kg..... | 43 |
| Wall mount for LCD/TFT TV up to 32kg..... | 43 |
| LCD/Plasma wall mount for up to 165cm (65") TV..... | 43 |

SECURITY SOLUTIONS

| | |
|-------------------------------|----|
| PLUG&VIEW.....SITE | |
| OptiVision Pro..... | 54 |
| OptiView Pro..... | 54 |
| OptiPan, Network Camera..... | 55 |
| OptiDome..... | 55 |
| OptiGuard..... | 56 |
| OptiVario..... | 56 |
| OptiDome Pro..... | 57 |
| OptiZoom Pro..... | 57 |
| NVR..... | 58 |
| NVR, 1TB HDD..... | 58 |
| NVR, 2TB HDD..... | 58 |

| | |
|--|----|
| PROFESSIONAL IP CAMERAS.....SITE | |
| Full HD WDR IP Network Indoor fixed Dome Camera..... | 59 |
| Full HD WDR IP Outdoor Mini Bullet Camera..... | 59 |
| Full HD WDR Mini IP fixed Dome Camera..... | 59 |

| | |
|---|----|
| ANALOG HD VIDEO.....SITE | |
| AHD Digital Video Recorder kit with 4 outdoor cameras, fixed lens..... | 60 |

| | |
|---|----|
| VIDEO SERVER & NETWORK VIDEO RECORDER.....SITE | |
| H.264 Video Server..... | 61 |
| 4 channel Full HD Network Video Recorder..... | 61 |
| 8 channel Full HD Network Video Recorder..... | 61 |
| 16 channel Full HD Network Video Recorder..... | 61 |

| | |
|---|----|
| POWER SUPPLIES/PoE.....SITE | |
| 4 Port PoE Fast Ethernet Switch with VLAN configuration, 60W..... | 62 |
| 8 Port PoE Fast Ethernet Switch with VLAN configuration, 120W..... | 62 |
| 8 Port PoE Fast Ethernet Switch with VLAN configuration, 120W..... | 62 |
| 8 x 10/100BaseTX ports with PoE support..... | 63 |
| 8-Port PoE Web Smart Fast Ethernet Switch..... | 63 |
| 8-port PoE Midspan, 802.3af, 130W..... | 64 |
| 16-port PoE Midspan, 802.3af, 260W..... | 64 |
| 16-Port PoE Web Smart Fast Ethernet Switch, 260W..... | 64 |
| D24-Port PoE Web Smart Fast Ethernet Switch, Full Power, 2x SFP, 390W..... | 64 |
| 24-Port PoE Web Smart Fast Ethernet Switch, Full Power, 2x SFP, 390W..... | 64 |
| Passive PoE cable kit..... | 65 |
| Passive PoE wall mount box..... | 65 |
| PoE Injector, 802.3af..... | 66 |
| PoE Injector, 802.3at..... | 66 |
| PoE + Injector, 802.3at, 30 Watt..... | 67 |
| PoE + Injector, 802.3at, 60 Watt..... | 67 |
| PoE Splitter, 802.3af..... | 68 |
| PoE Splitter, 802.3at..... | 68 |
| Fast Ethernet PoE+ Repeater with 1 Port 10/100 Mbps in and 2 Port 10/100 Mbps out..... | 69 |

STICHWORTVERZEICHNIS // INDEX

COMPUTER ACCESSORIES & COMPONENTS

HOME NETWORKSITE

| | |
|--|----|
| 300 Mbps Wireless-N Repeater..... | 72 |
| Wireless-N Broadband Router..... | 72 |
| DIGITUS® GreyRapid N, 150N Router..... | 72 |
| Wireless 150N Client Adapter, 150 Mbps..... | 73 |
| Wireless Streaming Box..... | 73 |
| Wireless Streaming Box..... | 73 |
| Wireless 150N USB Adapter..... | 74 |
| USB 2.0 Adapter Tiny Wireless 300N..... | 74 |
| Tiny USB Wireless 11ac Adapter..... | 74 |
| Wireless 150N USB antenna adapter..... | 75 |
| Wireless 300N USB 2.0 Adapter..... | 75 |
| USB 2.0 Adapter Wireless AC 433Mbps Dual Band..... | 75 |
| Wireless LAN rod antenna, 5 dBi..... | 76 |
| Wireless LAN rod antenna, 7 dBi..... | 76 |
| Wireless LAN rod antenna, 9 dBi..... | 76 |
| Magnetic stand for Wireless LAN antennas..... | 77 |
| Stand for Wireless LAN antennas..... | 77 |
| USB 2.0 4-port gigabit network hub..... | 78 |
| USB 2.0 4-port fast ethernet network hub..... | 78 |
| 4-Port USB 2.0 Wireless Multifunction Network Server..... | 78 |
| 1-Port USB 2.0 Multifunction Network Server..... | 79 |
| Fast Ethernet print server, 2-port USB, 1-port parallel..... | 79 |
| Fast Ethernet print server, USB 2.0..... | 79 |
| Fast Ethernet print server, parallel..... | 80 |
| NAS server for external USB HDD..... | 80 |
| Fast Ethernet N-Way 5-port desktop switch..... | 80 |
| Fast Ethernet N-Way 8-port desktop switch..... | 80 |
| 5-Port Fast Ethernet BlackRapid 100 Switch..... | 81 |
| 8-Port Fast Ethernet BlackRapid 100 Switch..... | 81 |
| Gigabit Switch N-Way 5-port..... | 81 |
| Gigabit Switch N-Way 8-port..... | 81 |
| 10/100M Network USB Adapter..... | 82 |
| Gigabit Ethernet USB 3.0 Adapter..... | 82 |

I/O CARDS.....SITE

| | |
|--|----|
| Fast Ethernet PCI network card..... | 83 |
| Gigabit Ethernet PCI network card..... | 83 |
| Gigabit Ethernet PCI Express network card..... | 83 |
| PCI, Serial Interface Card, 2 x DSUB 9..... | 84 |
| PCI, Serial interface card, 2x DSUB 9..... | 84 |
| PCI, Parallel interface card 1x DSUB 25..... | 85 |
| PCI express, Parallel interface card 1x DSUB 25..... | 85 |
| PCI, Serial interface card, 4x DSUB 9..... | 86 |
| PCI Express Parallel Card, 2/1-port..... | 86 |
| RS 232 ExpressCard 1 port..... | 86 |
| eSATA II 300 ExpressCard, slim version..... | 87 |
| SATA II PCI Express card, 2-port..... | 87 |
| SATA PCI Controller, 2-port..... | 87 |
| SATA III / PATA PCI Express combo card..... | 88 |
| SATA III PCI Express card, 4-port..... | 88 |
| IEEE 1394a / FireWire PCI Express card..... | 89 |
| PCIe, FireWire 800 interface card, 2/1-ports..... | 89 |
| Firewire A Add-on PCI Card..... | 89 |
| PCI, USB 2.0 card, 3+1-ports..... | 90 |
| PCI, USB 2.0 card, 4+1-ports..... | 90 |
| PCI, USB 2.0 card, 4+1-ports..... | 90 |
| USB 2.0 ExpressCard 4 ports..... | 90 |
| USB 3.0 PCI Express Add-on Card, 2-Port..... | 91 |
| USB 3.0 PCI Express Add-on Card, 4-Port..... | 91 |
| SATA to IDE adapter..... | 92 |
| IDE to SATA Adapter..... | 92 |
| 7.1 PCI Sound Card..... | 92 |
| USB printer cable, grey..... | 93 |
| PCIe, Serial Interface Card, 2x DSUB 9..... | 93 |
| PCI, 2 ser. / 1 par. interface card..... | 93 |

SERIAL & PARALLEL ADAPTERSSITE

| | |
|--|----|
| USB to serial RS 232 adapter, USB 2.0, FTDI-Chipset..... | 94 |
| USB to serial RS 485 adapter, USB 2.0, FTDI-Chipset..... | 94 |
| USB to serial RS 232 adaptor, USB 1.1, Prolific-Chipset..... | 95 |
| RS-232 to RS-485 Adapter..... | 95 |
| RS-232 to TTL Adapter..... | 96 |
| Galvanic separator for RS-232 interfaces..... | 96 |
| USB to serial adapter, USB 2.0, 2-fold..... | 97 |
| USB to serial adapter, USB 2.0, 4-fold..... | 97 |
| Android - RS232 cable, 1,0 m..... | 97 |

USB HUBSSITE

| | |
|--|-----|
| USB 3.0 Hub, 4-Port..... | 98 |
| USB 3.0 Hub, 7-Port..... | 98 |
| USB 2.0 hub, 10-port..... | 99 |
| USB 3.0 Hub, 4-port black..... | 100 |
| USB 3.0 Hub, 4-port..... | 100 |
| 4-Port USB Hub „Slim Spider“..... | 101 |
| Tiny USB 4-port hub, USB 2.0, black..... | 101 |
| USB 2.0 4port hub..... | 101 |
| USB 3.0, 3-port HUB & Gigabit LAN adapter..... | 102 |

CARD READER.....SITE

| | |
|--|-----|
| USB 3.0 Business Card Reader, 6 Ports..... | 103 |
| Card Reader, USB 3.0, All-in-one..... | 104 |
| Card Reader, USB 2.0, All-in-one, black..... | 104 |
| USB2.0 multi card reader..... | 104 |

USB ACCESSORIESSITE

| | |
|---|-----|
| USB Port Blocker, black..... | 105 |
| USB Port Blocker, silver..... | 105 |
| Bluetooth® 4.0 Tiny USB Adapter..... | 106 |
| Bluetooth® EDR tiny USB 2.0 adapter..... | 106 |
| USB 2.0 repeater cable 5m..... | 107 |
| USB 2.0 repeater cable 10m..... | 107 |
| USB 2.0 Repeater Cable 15m..... | 107 |
| USB 2.0 Repeater Cable 20m..... | 107 |
| USB 2.0 Repeater Cable 25m..... | 107 |
| USB 3.0 Data Link Cable..... | 107 |
| USB 3.0 Data Link Cable..... | 108 |
| USB extender..... | 108 |
| USB -> PS/2 Adapter..... | 109 |
| USB 3.0 Sharing Switch, 2 PCs - 1 device..... | 109 |
| USB 2.0 Sharing Switch, 2 PC - 1 Device..... | 110 |
| USB 2.0 Sharing Switch, 4 PC - 1 Device..... | 110 |

USB HARDDISK & DRIVESSITE

| | |
|---|-----|
| SATA to IDE, SSD/HDD mounting frame for notebooks..... | 111 |
| 9,5 mm SATA to IDE, SSD/HDD Mounting Frame..... | 111 |
| SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 12.7 mm installation height..... | 111 |
| SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 9.5 mm installation height..... | 111 |
| External HDD enclosure 2.5, SATA to USB 2.0..... | 112 |
| External HDD enclosure 2.5, IDE to USB 2.0..... | 112 |
| External SSD/ HDD enclosure 2.5", SATA to USB 3.0..... | 113 |
| External HDD Enclosure 3.5, SATA to USB 3.0..... | 113 |
| External HDD enclosure 3.5, IDE to USB 2.0..... | 114 |
| External HDD Enclosure 3.5, SATA to USB 2.0..... | 114 |
| USB 2.0 IDE & SATA cable..... | 115 |
| USB 3.0 IDE & SATA cable..... | 115 |
| USB 3.0 to SATA III Adapter Cable..... | 115 |
| USB2.0 to IDE and SATA Adapter Cable (without PSU)..... | 116 |
| USB 2.0 IDE/SATA Cable..... | 116 |
| USB 3.0 to SATA II Adapter cable..... | 116 |
| 3.5 Hard Disk IDE to SATA Interface Converter..... | 117 |
| Serial ATA HDD removable frame, black..... | 117 |
| Premium SATA HDD removable frame metal, black..... | 117 |
| NAS server for external USB HDD..... | 118 |
| LockGuard USB 3.0 Docking Station..... | 119 |
| USB 3.0 Docking Station for 2,5"/ 3,5", 2-Port..... | 119 |
| IDE HDD removable frame, grey..... | 120 |
| Serial ATA HDD removable frame, gray..... | 120 |
| IDE HDD removable frame, grey..... | 120 |

GRAPHIC ADAPTERSSITE

| | |
|--|-----|
| USB 3.0 to VGA adapter..... | 121 |
| USB 3.0 to DVI Adapter..... | 121 |
| USB 3.0 to HDMI Adapter..... | 121 |
| Display Adapter, USB 3.0 to DisplayPort..... | 121 |
| USB 3.0 to VGA Graphic Adapter..... | 122 |
| USB 3.0 Docking Adapter, 3 in 1..... | 122 |
| USB to HDMI video adapter..... | 123 |
| Graphic adapter, USB 2.0 to VGA..... | 123 |
| Graphic adapter, USB 2.0 to DVI..... | 123 |
| USB Micro B to HDMI MHL adapter, black, 0,15m..... | 124 |
| Mounting KIT: Dual HDD/SSD 2.5 -> one 3.5 BAY..... | 125 |

STICHWORTVERZEICHNIS // INDEX

| | |
|--|-------------|
| MOUNTING FRAMES & ACCESSORIES | SITE |
| Mounting Frame, Metal, Set = 2 Pcs. black..... | 126 |
| Mounting Frame, Plastic, black..... | 126 |
| HDD and SSD installation kit 2.5 => 3.5..... | 126 |
| Metal Mounting Brackets, Set = 2 Pcs..... | 126 |
| Network tool suitcase..... | 127 |
| THERMAL PASTE, White..... | 127 |
| THERMAL PASTE, 10% Silver..... | 127 |
| Line-Interactive UPS, 600 VA/360 W..... | 128 |
| Line-Interactive UPS, 1000 VA/600 W..... | 128 |
| Line-Interactive UPS, 1500 VA/900 W..... | 128 |
| Line-Interactive UPS, 2000 VA/1200 W..... | 128 |
| PC ATX power supply tester with LCD..... | 129 |
| USB Power Monitor..... | 129 |

| | |
|---|-------------|
| NOTEBOOK ACCESSORIES | SITE |
| 7.1 USB Sound Box..... | 130 |
| Stereo headset w. volume control..... | 131 |
| Stereo headset w. volume control..... | 131 |
| USB telephone handset..... | 131 |
| Universal Notebook Power Adapter, 70W..... | 132 |
| Universal Notebook Power Adapter, 90W..... | 132 |
| Universal Travel Notebook Power Adapter, 90W..... | 132 |
| SATA to IDE, SSD/HDD mounting frame for notebooks..... | 133 |
| 9,5 mm SATA to IDE, SSD/HDD Mounting Frame..... | 133 |
| SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 12.7 mm installation height..... | 133 |
| SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 9.5 mm installation height..... | 133 |
| USB 10 LEDs Lamp for notebook, Silver..... | 134 |
| Universal mobility charging cable for iPad/iPhone/iPod incl. USB hub..... | 134 |
| Android - RS232 cable, 1,0 m..... | 134 |
| USB 3.0 Hub, 4-Port..... | 135 |
| USB 3.0 Business Card Reader, 6 Ports..... | 135 |
| USB 3.0 Hub, 7-Port..... | 136 |
| Wireless Optical Scroll Mouse..... | 137 |
| Wireless Optical Notebook Scroll Mouse..... | 137 |
| DUSB 3.0 to VGA adapter..... | 138 |
| USB 3.0 to DVI Adapter..... | 138 |
| USB 3.0 to HDMI Adapter..... | 138 |
| Display Adapter, USB 3.0 to DisplayPort..... | 138 |
| USB 3.0 to DVI Adapter..... | 139 |
| USB 3.0 to HDMI Adapter..... | 139 |
| Display Adapter, USB 3.0 to DisplayPort..... | 139 |
| USB 3.0 to VGA Graphic Adapter..... | 140 |
| USB to HDMI video adapter..... | 140 |
| USB 3.0 Docking Adapter, 3 in 1..... | 141 |
| Graphic adapter, USB 2.0 to VGA..... | 141 |
| Graphic adapter, USB 2.0 to DVI..... | 142 |
| USB Micro B to HDMI MHL adapter, black, 0,15m..... | 142 |
| USB Port Blocker, black..... | 143 |
| USB Port Blocker, silver..... | 143 |
| External HDD enclosure 2.5, SATA to USB 2.0..... | 143 |

MONITOR // TV // VIDEO

| | |
|--|-------------|
| MONITOR MOUNTS | SITE |
| Single Monitor Stand up to 24"..... | 146 |
| Dual LCD Display Stand up to 32"..... | 146 |
| Twin Monitor Mount, 24", for the DA-90342..... | 146 |
| Dual LCD Desktop Monitor Stand with Desk Mount..... | 147 |
| Twin Monitor Mount, 24" to 32" for the DA-90321..... | 147 |
| Triple Monitor Stand up to 24"..... | 148 |
| Triple Monitor Mount, 24", for the DA-90315..... | 148 |
| Triple Monitor Stand..... | 149 |
| Triple Monitor Mounts, 26"-30", for DA-90333..... | 149 |
| Wall mount for TFT displays..... | 150 |
| Wall mount for TFT displays..... | 150 |
| Wall mount for LCD/TFT TV up to 70kg..... | 150 |

| | |
|---|-------------|
| TV MOUNTS | SITE |
| TFT display swivel arm for table mounting up to 10kg..... | 151 |
| Wall mount for LCD/TFT TV up to 32kg..... | 151 |
| LCD/Plasma wall mount for up to 165cm (65") TV..... | 151 |

| | |
|--|-------------|
| VIDEO | SITE |
| Wireless Streaming Box..... | 152 |
| Android TV Box..... | 152 |
| 4K HDMI Matrix Switch 4x2..... | 153 |
| 4K HDMI Switch 5x1..... | 154 |
| 4K HDMI Switch 3x1..... | 154 |
| 4K HDMI Switch, 3x1..... | 154 |
| K HDMI Switch, 5x1..... | 155 |
| HDMI Automatic Switch, 2 Port..... | 155 |
| HDMI Switch, 3 Port..... | 155 |
| HDMI Switch, 5 Port..... | 156 |
| HDMI Video Switch with integrated PC connection..... | 156 |
| HDMI Matrix Switch, 4x2 Port..... | 157 |
| 4K HDMI Splitter 1x2..... | 158 |
| 4K HDMI Splitter 1x4..... | 158 |
| 4K HDMI Splitter, 1x4..... | 158 |
| Pocket HDMI Splitter, 2 Port..... | 159 |
| HDMI Splitter, 2 Port..... | 159 |
| HDMI Splitter, 4-Port..... | 160 |
| 8-Port HDMI Video Splitter..... | 161 |

CABLES

| | |
|-------------------------------|-----|
| HDMI..... | 166 |
| Display Port..... | 167 |
| VGA..... | 168 |
| DVI..... | 168 |
| USB 2.0..... | 169 |
| USB 3.0..... | 170 |
| USB Type-C™..... | 170 |
| MHL..... | 171 |
| SERIAL..... | 171 |
| Printer..... | 171 |
| Parallel..... | 171 |
| PS/2..... | 172 |
| Gender Changer..... | 172 |
| SATA..... | 172 |
| Firewire..... | 173 |
| Internal Power..... | 173 |
| Phone Cords..... | 173 |
| Power Cords..... | 174 |
| Device Connection Cables..... | 174 |
| Audio-/Video Cables..... | 174 |

| | |
|-----------------------------------|-------------|
| NETWORK OUTLETS | SITE |
| CAT 6 Outlet, flush mount..... | 176 |
| CAT 6 outlet, surface mount..... | 176 |
| CAT 5e outlet, flush mount..... | 177 |
| CAT 5e outlet, surface mount..... | 177 |

| | |
|---|-------------|
| CONNECTION MODULES | SITE |
| CAT 6 Connection Module for Twisted Pair Cables..... | 178 |
| CAT 5e Connection module for Twisted Pair Cables..... | 178 |

| | |
|---------------------------------------|-------------|
| MODULAR ADAPTERS | SITE |
| CAT 6, modular coupler, shielded..... | 179 |
| CAT 5e RJ45 Modular Coupler..... | 179 |

| | |
|--|-------------|
| TOOLS | SITE |
| Velcro tape, 10 m roll, color black..... | 180 |
| Network tool set, bag incl. various tools..... | 181 |
| Pliers, compact & ergonomic design..... | 181 |
| LSA punch down tool..... | 181 |

| | |
|--|-------------|
| TWISTED PAIR INSTALLATION CABLES | SITE |
| Professional CAT 7 S-FTP twisted pair installation cable..... | 182 |
| Professional CAT 7 S-FTP twisted pair installation cable..... | 182 |
| Professional CAT 6A U-FTP twisted pair installation cable..... | 183 |
| Professional CAT 6A U-FTP twisted pair installation cable..... | 183 |

| | |
|-------------------------------|-------------|
| PATCH CABLES | SITE |
| CAT 6 S-FTP Patchkabel..... | 184 |
| CAT 5e SF-UTP Patchkabel..... | 185 |

DIE MARKE // THE BRAND



Die Marke DIGITUS®

Die Marke DIGITUS® wurde 1994 gegründet und ist damit seit über 20 Jahren mit einer umfangreichen Produktpalette aus den Bereichen Smart Home Solutions, Sicherheit und Überwachung, Video Distribution, Computer Connectivity sowie Kabel und Adapter auf dem Weltmarkt vertreten.

Die Produkte der Marke werden insbesondere von technisch versierten und interessierten Konsumenten genutzt und für das gute Preis-Leistungsverhältnis der Produkte geschätzt.

Die DIGITUS® Produkte werden in über 50 Ländern vertrieben. Produktion und Vertrieb unterliegen regelmäßigen Kontrollen und sind nach aktuellen Standards zertifiziert.

Unter der Marke DIGITUS® wurde auch das innovative IP-Kamerasystem „Plug&View“ entwickelt, welches bereits 2013 mit dem Innovationspreis IT der Initiative Mittelstand als Landessieger NRW ausgezeichnet wurde.



Die Auswahl der benutzerfreundlichen und zuverlässigen DIGITUS® Produkte orientiert sich grundlegend an aktuellen Marktentwicklungen. Besonders auffällig ist der Trend, dass Wohn- und Arbeitsräume technisch immer mehr verschmelzen.

Dies stellt völlig neue Ansprüche an die Produkte und insbesondere an das Design. Deswegen werden erfahrene Produktdesigner regelmäßig mit der Entwicklung und Gestaltung von DIGITUS® Produkten betraut. Daher ist es kein Zufall, dass sich die Produkte nahtlos in das moderne Wohnambiente einfügen.

Lorem ipsum dolor sit amet,

consectetur adipiscing elit. Aenean commodo ligula eget dolor. Aenean massa. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Donec quam felis, ultricies nec, pellentesque eu, pretium quis, sem. Nulla consequat massa quis enim.

Donec pede justo, fringilla vel, aliquet nec, vulputate eget, arcu. n enim justo, rhoncus ut, imperdiet a, venenatis vitae, justo. Nullam dictum felis eu pede mollis pretium.

Integer tincidunt. Cras dapibus. Vivamus elementum semper nisi. Aenean vulputate eleifend tellus. Aenean leo ligula, porttitor eu, consequat vitae, eleifend ac, enim. Aliquam lorem ante.

dapibus in, viverra quis, feugiat a, tellus. Phasellus viverra nulla ut metus varius laoreet.

Quisque rutrum. Aenean imperdiet. Etiam ultricies nisi vel augue. Curabitur ullamcorper ultricies nisi.

Nam eget dui. Etiam rhoncus. Maecenas tempus, tellus eget condimentum rhoncus, sem quam semper.

Llibero, sit amet adipiscing sem neque sed ipsum. Nam quam nunc, blandit vel, luctus pulvinar, hendrerit id delores. uam nunc, blandit vel, luctus pulvinar, hendrerit id delores.

dolor. Aenean massa. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Donec quam felis, ultricies nec, pellentesque eu, pretium quis, sem. Nulla consequat massa quis enim.

Donec pede justo, fringilla vel, aliquet nec, vulputate eget, arcu. n enim justo, rhoncus ut, imperdiet a, venenatis vitae, justo. Nullam dictum felis eu pede mollis pretium.

Integer tincidunt. Cras dapibus. Vivamus elementum semper nisi. Aenean vulputate eleifend tellus. Aenean leo ligula, porttitor eu, consequat vitae, eleifend ac, enim. Aliquam lorem ante.

DIE VERPACKUNG // THE PACKAGING

Die Verpackung

Dezent und auffällig zugleich, fügt sich die Verpackung perfekt in jedes Verkaufsregal ein. Das einheitliche Erscheinungsbild, schafft einen hohen Wiedererkennungswert und trägt zur Markenidentifikation am POS bei.

The Packaging

consectetur adipiscing elit. Aenean commodo ligula eget dolor. Aenean massa. Cum sociis natoque penatibus et magnis dis parturient montes.nascetur ridiculus mus. Donec quam felis, ultricies nec, pellentesque eu.



CARTON

Die stabile Pappverpackung macht auch weite Transportwege problemlos mit, hält hohen Anforderungen der Warenpräsentationen im Verkaufsregal stand und ist zudem einfach in der Enduser-Handhabung.

So ist sie vielseitig und flexibel an unterschiedlichen Verkaufsflächen platzierbar und bietet dem Kunden viel Raum für Produktinformationen und damit Entscheidungshilfen am POS in verschiedenen Sprachen.



CARTON

consectetur adipiscing elit. Aenean commodo ligula eget dolor. Aenean massa. Cum sociis natoque penatibus et magnis dis parturient montes.nascetur ridiculus mus. Donec quam felis, ultricies nec, pellentesque eu, pretium quis, sem. Nulla consequat massa quis enim. consectetur adipiscing elit. Aenean commodo ligula eget dolor. Afelis, ultricies nec, pellentesque eu, pretium quis, sem. Nulla consequat massa quis enim.



BLISTER

Blister haben den Vorteil, dass der Kunde das Produkt am POS gut erkennen und begutachten kann. Das Produkt steht hier im Vordergrund.

Die stabile, transparente Ausführung macht Produktdetails sichtbar und sorgt gleichzeitig dafür, dass das Produkt diebstahlgesichert ist und bleibt. Dank Euro-Lochung sind die Blister hervorragend für die Blisterwand geeignet



BLISTER

consectetur adipiscing elit. Aenean commodo ligula eget dolor. Aenean massa. Cum sociis natoque penatibus et magnis dis parturient montes.nascetur ridiculus mus. Donec quam felis, ultricies nec, pelleAenean commodo ligula eget dolor. Afelis, ultricies nec, pellentesque eu, pretium quis, sem. Nulla consequat massa quis enim, pelleAenean commodo ligula eget dolor. Afelis, ultricies nec, pellentesque.



BLISTER BAG

Die strapazierfähigen Blisterbag-Verpackungen, in denen DIGITUS® Classic Kabel ausgeliefert werden, sind mit einem sicheren Klebeverschluss versehen und schützen so die Ware vor Staub und Verschmutzung.



Ein Aufkleber zeigt den Produktnamen in 10 Sprachen und die Artikelnummer auf. Dank Euro-Lochung und hoher Reißfestigkeit sind die Blisterbags ideal für die Blisterwand geeignet.



BLISTER BAG

consectetur adipiscing elit. Aenean commodo ligula eget dolor. Aenean massa. Cum sociis natoque penatibus et magnis dis parturient montes.nascetur ridiculus mus. Donec quam felis, us enim. consectetur adipiscing elit. Aenean commodo ligula eget dolor. Afelis, ultricies nec, pellentesque eu, pretium quis, sem. Nulla consequat massa quis enim, consectetur adipiscing elit.





PRESENTATION SOLUTIONS

| | |
|-------------------------------|---------|
| Video & Digital Signage | 10 - 37 |
| Monitor Mounts..... | 38 - 42 |
| TV Mounts | 42 |

DIGITUS® 4K HDMI Matrix Switch, 4x2

- **Bequemes Wechseln zwischen bis zu 4 HDMI-Quellen und 2 Wiedergabegeräten (Fernsehern, Monitoren oder Beamern) unabhängig von einander, ohne lästiges Umstecken von Kabeln**
- **Zeigen Sie verschiedene Medieninhalte von bis zu 4 HDMI-Quellen auf bis zu 2 Wiedergabegeräten (Fernsehern, Monitoren oder Beamer) zeitgleich und unabhängig von einander**
- **Wechseln zwischen den HDMI-Geräten sowie den Wiedergabe- bzw. Aufnahmegeräten bequem per Fernbedienung, über intelligente automatische Erkennung oder alternativ per Schalter am Switch selbst**
- **Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung**
- **Unterstützt Full HD, Full 3D, 4K2K Video**

DIGITUS® 4K HDMI Matrix Switch, 4x2

- **Switch comfortably between up to four HDMI sources and two playback devices (televisions, monitors, projectors) independently of each other, without having to swap cables**
- **Display different media content from up to four HDMI sources on up to two playback devices (televisions, monitors, projectors) simultaneously and independently of each other**
- **Covenient switching between the HDMI devices as well as between playback or recording devices via remote control, intelligent automatic detection or by using a button on the switch itself**
- **Supports 4K Ultra HD, 4096 x 2160 pixel resolution**
- **Supports Full HD, Full 3D, 4K2K video**

Technical Features

- HDMI connections: 4 inputs, 2 outputs
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection
- Supports Deep Color: 12 bits per channel, in total 36 bits
- Status LEDs (connection status)
- Complies with Standard HDMI / High Speed HDMI
- Supports digital audio: Stereo Toslink, Coaxial
- Supports compressed audio formats, e.g., DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Supports standard audio, for example, DSD audio, HD (HBR) audio
- Complies with HDCP Ver. 1.3
- Supports HDCP repeaters
- Frequency range/data transmission rate: 25 MHz-340 MHz, up to 3.4 Gbps per channel
- Includes remote control
- Power supply unit (5V/2A)
- Dimensions: L 12.0 x W 27.0 x H 3.2 cm
- Weight: 773 g
- Color: black



DIGITUS® 4K HDMI Switch, 5x1

- Bequemes Wechsel zwischen bis zu 5 HDMI-Quellen, ohne lästiges Umstecken
- Wechseln zwischen den HDMI-Geräten bequem per Fernbedienung, über intelligente automatische Erkennung oder alternativ per Schalter am Switch selbst
- Integrierter HDMI-Signalverstärker - Zusätzliche Kabellänge von 5 m (Standard HDMI) bzw. bis zu 15 m (High Speed HDMI) möglich
- Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung
- Unterstützt Full HD, Full 3D, 4K2K Video

Technical Features

- HDMI connections: 5 inputs, 1 output
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection

DIGITUS® 4K HDMI Switch, 5x1

- Switch comfortably between up to five HDMI sources, without having to swap cables every time
- Convenient switching between the HDMI devices via remote control, intelligent automatic detection or by using a button on the switch itself
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Supports 4K Ultra HD, 4096 x 2160 pixel resolution
- Supports Full HD, Full 3D, 4K2K video

- Complies with HDCP Ver. 1.3
- Supports HDCP repeaters
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)



DS-49304 366256 | 4K HDMI Switch 5x1

DIGITUS® 4K HDMI Switch 3x1

- Bequemes Wechsel zwischen bis zu 3 HDMI-Quellen, ohne lästiges Umstecken
- Wechseln zwischen den HDMI-Geräten bequem per Fernbedienung, über intelligente automatische Erkennung oder alternativ per Schalter am Switch selbst
- Integrierter HDMI-Signalverstärker - Zusätzliche Kabellänge von 5 m (Standard HDMI) bzw. bis zu 15 m (High Speed HDMI) möglich
- Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung
- Unterstützt Full HD, Full 3D, 4K2K Video

Technical Features

- HDMI connections: 3 inputs, 1 output
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection

DIGITUS® 4K HDMI Switch, 3x1

- Switch comfortably between up to three HDMI sources, without having to swap cables every time
- Convenient switching between the HDMI devices via remote control, intelligent automatic detection or by using a button on the switch itself
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Supports 4K Ultra HD, 4096 x 2160 pixel resolution
- Supports Full HD, Full 3D, 4K2K video

- Complies with HDCP Ver. 1.3
- Supports HDCP repeaters
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)



DS-48304 366249 | 4K HDMI Switch 3x1

DIGITUS® 4K HDMI Switch, 3x1

- Unterstützt Ultra HD, 4096x2160p Auflösung
- Unterstützt 12-bit Full HD, Full 3D, 4K2K video
- Bequemes Umschalten zwischen bis zu 3 HDMI Quellen
- Kompatibel mit High Speed HDMI Spezifikation bis zu 3.0 Gbps
- Wechseln zwischen den HDMI-Quellen durch Switch-Taste

Technical Features

- Supports Ultra HD, 4096x2160p resolution
- 1x HDMI output and 3x HDMI inputs
- Compliant with High Speed HDMI specification up to 3.0 Gbps
- Supports 12-bit Full HD, Full 3D, 4K2K video

DIGITUS® 4K HDMI Switch, 3x1

- Supports Ultra HD, 4096x2160p resolution
- Supports 12-bit Full HD, Full 3D, 4K2K video
- Convenient switching between up to 3 HDMI sources
- Compliant with High Speed HDMI specification up to 3.0 Gbps
- Switching between HDMI sources by pressing switch button

- Integrated HDCP decryption/encryption engines which are compliant with HDCP rev 1.3
- Switching between HDMI sources by pressing switch button
- Compliant to HDCP Rev. 1.3



DS-44304 358299 | 4K HDMI Switch, 3x1



DIGITUS® 4K HDMI Switch, 5x1

- Unterstützt Ultra HD, 4096x2160p Auflösung
- Unterstützt 12-bit Full HD, Full 3D, 4K2K video
- Bequemes Umschalten zwischen bis zu 5 HDMI-Quellen
- Kompatibel mit High Speed HDMI Spezifikation bis zu 3.0 Gbps
- Wechseln zwischen den HDMI-Quellen durch Switch-Taste

Technical Features

- Supports Ultra HD, 4096x2160p resolution
- 1x HDMI output and 5x HDMI inputs
- Compliant with High Speed HDMI specification up to 3.0 Gbps
- Convenient switching between up to 5 HDMI sources
- Supports Deep Color, 30/36 bit
- Intergrated HDCP decryption/encryption engines

DIGITUS® 4K HDMI Switch, 5x1

- Supports Ultra HD, 4096x2160p resolution
- Supports 12-bit Full HD, Full 3D, 4K2K video
- Convenient switching between up to 5 HDMI sources
- Compliant with High Speed HDMI specification up to 3.0 Gbps
- Switching between HDMI sources by pressing switch button

- which are compliant with HDCP rev 1.3
- Switching between HDMI sources by pressing switch button
- Compliant to HDCP Rev. 1.3



DS-45304 358305 | 4K HDMI Switch, 5x1



DIGITUS® Automatischer HDMI Switch, 2-Port

- Einfache Installation und Nutzung - automatische Umschaltung
- Plug and Play - Keine Software erforderlich
- Kompatibel zur HDMI und HDCP Spezifikation

Technical Features

- 2 inputs, 1 output
- Easy to install and simple to operate - automatic switching
- Plug and Play - No software required
- HDCP compliant
- Compatible with HDTV 480i, 480p, 720i, 720p, 1080i and 1080p

DIGITUS® Automatic HDMI Switch, 2 Port

- Easy to install and simple to operate - automatic switching
- Plug and Play - No software required
- Compliant with HDMI and HDCP specification

- Supports VGA, SVGA, XGA and UXGA
- HDMI High Speed compatible
- Supports for 8bit, and 12bit deep color per channel



DS-44302 271581 | HDMI Automatic Switch, 2 Port



DIGITUS® Automatischer HDMI Switch, 2-Port

- Nie mehr umständliches Umstecken Ihrer HDMI-Geräte am TV (z.B. Blu-ray-Player, Spielekonsolen etc.)
- Automatischer Betrieb - schaltet auf die aktive HDMI Signalquelle um
- Manuelle Auswahl der Signalquelle per Taster
- Integrierte Stromversorgung über das HDMI Kabel - benötigt keine Steckdose und reduziert das Kabelgewirr

Technical Features

- 2 HDMI inputs, 1 HDMI output
- Supported resolutions: 480 p/i, 576 p/i, 720 p, 1080 p/i
- Video bandwidth: 2.5 Gbps/ 250 MHz

DIGITUS® Automatic HDMI Switch, 2 Port

- You no longer have to connect and disconnect your HDMI devices (for example, Blu-ray players, video game consoles, etc.) each time
- Automatically switches to the active HDMI signal source
- Manual selection of signal source at the click of a button
- Power supply integrated via the HDMI cable - no power outlet required, fewer chances of tangled wires

- Supports 3D
- HDCP passthrough
- CEC passthrough



DS-45302 371618 | HDMI Automatic Switch, 2 Port

DIGITUS® HDMI Switch, 3-Port

- **Bequemes Umschalten zwischen verschiedenen HDMI Quellen ohne Umstecken und Kabelgewirr**
- **Mehrere Schaltmethoden: intelligente automatische Auswahl, IR Fernbedienung, Berührungssensor**
- **Höchste unterstützte Videoauflösung 1080p**

Technical Features

- Select one HDMI video source out of several different to display it on one display
- Multi-switching methods: intelligent automatic, IR remote control or by touch button
- IR remote control included
- Highest supported video resolution 1080p
- Bandwidth: 250MHz/2.5Gbps per channel (7.5Gbps all channel)
- Supports 12bit per channel (36bit all channel) deep color

DIGITUS® HDMI Switch, 3 Port

- **Convenient switching between different HDMI sources without cable clutter**
- **Multi-switching methods: intelligent automatic, IR remote control or by touch button**
- **Highest supported video resolution 1080p**

- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (LxWxH; Weight): 80x58x18mm; 55g



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE



DS-44300 271550 | HDMI Switch, 3 Port

DIGITUS® HDMI Switch, 5-Port

- **Anschluss für bis zu fünf HDMI Geräte (Blu-Ray-Player, Gamingkonsole, Digital Receiver, etc.)**
- **Bequemes Wechseln der HDMI-Kanäle per Fernbedienung**
- **Full HD Auflösung bis zu 1080p**

Technical Features

- Select one HDMI video source out of several different to display it on one display
- Multi-switching methods: intelligent automatic, IR remote control or by touch button
- IR remote control included
- Highest supported video resolution 1080p
- Bandwidth: 250MHz/2.5Gbps per channel (7.5Gbps all channel)
- Supports 12bit per channel (36bit all channel) deep color

DIGITUS® HDMI Switch, 5 Port

- **Ports for up to five HDMI devices (Blu-Ray player, gaming console, digital receiver, and so on)**
- **Convenient switching of HDMI channels by remote control**
- **Full HD resolution of up to 1080 p**

- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (LxWxH; Weight): 220x128x25mm; 350g



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE



DS-45300 271567 | HDMI Switch, 5 Port

DIGITUS® HDMI Video Switch mit integrierter PC Verbindung

- **Anschluss für bis zu vier HDMI-Geräte (Blu-Ray-Player, Gamingkonsole, Digital Receiver, etc.)**
- **Zusätzlicher USB-Port ermöglicht das Navigieren über Notebook oder PC**
- **Hohe Auflösung bis zu 1080p (Full HD)**

Technical Features

- The ideal solution for comprehensively equipped home cinema and entertainment systems with blue-ray player, mediaplayer, play station, receiver etc.
- The integrated Plug & Play USB 2.0 graphic adapter displays the picture of the PC on the connected television or monitor and therefore facilitates direct monitoring of the replayed videos (up to HD resolution)
- Four HDMI inputs, one USB 2.0 input and HDMI output

DIGITUS® HDMI Video Switch with integrated PC connection

- **Ports for up to four HDMI devices (Blu-Ray player, gaming console, digital receiver, and so on)**
- **Additional USB port enables navigation via notebook or PC**
- **High resolution of up to 1080p (Full HD)**

- Reduces the installation's wire mess and avoids replugging while switching between the different devices
- Share full HD video and audio from the computer on an HDTV
- 225MHz/2.25Gbps per channel (6.75Gbps all channels) bandwidth
- 12bit per channel (36bit all channels) deep color
- 3D all formats, including 1080p@24Hz, 720p@60Hz/50Hz



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE



DS-45310 306085 | HDMI Video Switch With Integrated PC Connection

DIGITUS® HDMI Matrix Switch, 4x2

- **Bequemes Wechseln zwischen bis zu 4 HDMI-Quellen und 2 Wiedergabegeräten (Fernsehern, Monitoren oder Beamern) unabhängig von einander, ohne lästiges Umstecken von Kabeln**
- **Zeigen Sie verschiedene Medieninhalte von bis zu 4 HDMI-Quellen auf bis zu 2 Wiedergabegeräten (Fernsehern, Monitoren oder Beamer) zeitgleich und unabhängig von einander**
- **Mehrere Schaltmethoden: intelligente automatische Auswahl, IR Fernbedienung, Berührungssensor**
- **Höchste unterstützte Videoauflösung 1080p**


DIGITUS® HDMI Matrix Switch, 4x2

- **Switch comfortably between up to four HDMI sources and two playback devices (televisions, monitors, projectors) independently of each other, without having to swap cables**
- **Display different media content from up to four HDMI sources on up to two playback devices (televisions, monitors, projectors) simultaneously and independently of each other**
- **Multi-switching methods: intelligent automatic, IR remote control or by touch button**
- **Highest supported video resolution 1080p**

Technical Features

- Switch easily between any of up to four HDMI sources
- Distributes any of the four inputs to any or any combination of the two HDMI output displays
- Multi-switching methods: intelligent automatic, IR remote control or by touch button
- Highest supported video resolution 1080p
- Compatible to High Speed HDMI
- Bandwidth: 225MHz/2.25Gbps per channel(6.75Gbps all channel)

- Supports 12bit per channel (36bit all channel) deep color
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions LxWxH: 128x220x25 mm
- Weight: 350 g

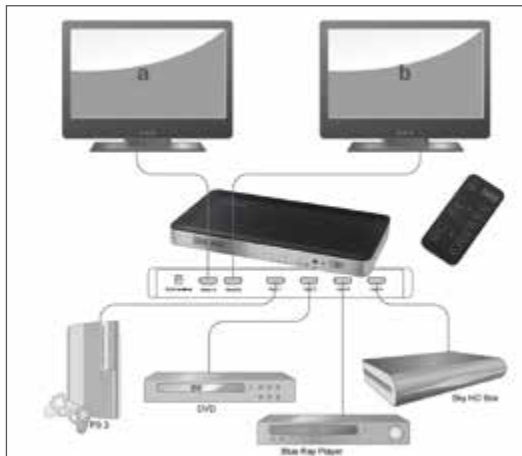

DIGITUS® VGA Switch 2 PCs, 1 Monitor

- Anschluss für bis zu zwei PCs über einen Monitor
- Hohe Bildauflösung bis zu 1920 x 1080 (Full HD)
- Einfache Auswahl der Geräte per Taster

Technical Features

- Ideal for school classes, workshops, training rooms, etc.
- 2 inputs (PC), 1 output (monitor, beamer, etc.)
- Max. resolution: 1920x1080p @60Hz
- Video bandwidth 250MHz
- DDC, DDC2, DDC2B support
- Video input connections: HDSUB15/female
- Video output connections: HDSUB15/female

DIGITUS® VGA Switch 2 PCs, 1 Monitor

- Ports for up to two PCs, one monitor
- High resolution of up to 1920 x 1080 (Full HD)
- Simple device selection using a button



DS-44100-1 323532 | VGA Switch 250MHz, 2x Input, 1x Output

DIGITUS® VGA Switch 4 PCs, 1 Monitor

- Anschluss für bis zu vier PCs über einen Monitor
- Hohe Bildauflösungen von bis zu 1920 x 1080 (Full HD)
- Einfache Auswahl der Geräte per Taster

Technical Features

- Ideal for school classes, workshops, training rooms, etc.
- 4 inputs (PC), 1 output (monitor, beamer, etc.)
- Video bandwidth 250MHz
- Max. resolution: 1920x1080p @60Hz
- DDC, DDC2, DDC2B support
- Video input connections: HDSUB15/female
- Video output connections: HDSUB15/female

DIGITUS® VGA Switch 4 PCs, 1 Monitor

- Ports for up to four PCs, one monitor
- High resolutions of up to 1920 x 1080 (Full HD)
- Simple device selection using a button



DS-45100-1 323549 | VGA Switch 250MHz, 4x Input, 1x Output

DIGITUS® VGA Switch 250MHz, 8-Port


- Darstellung von bis zu acht PCs über einen Monitor – ideal für Großraumprojekte, Schulungen, etc.
- Erreicht hohe Auflösung bis zu 1920 x 1440
- Fernbedienung schaltet bequem zwischen den VGA-Kanälen

Technical Features

- 8 inputs (PC), 1 output (monitor, beamer, etc.)
- Ideal for school classes, workshops, training rooms, etc.
- Maximum resolution 1920x1440 pixels at 60Hz
- Video bandwidth: 250MHz
- DDC, DDC2, DDC2B support
- OSD and remote control allow easy selection of PC

DIGITUS® VGA Switch 250MHz, 8 Port

- Selection of one of eight PCs as the video source and display via one monitor – ideal for large group meetings, training, and so on
- High resolution of up to 1920 x 1440
- Convenient switching between the VGA channels via remote control

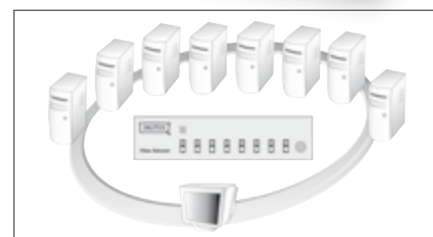

DS-46100 258254 | Video Switch 250MHz, 8x Input, 1x Output



DIGITUS® 4K HDMI Splitter, 1x2

- Einfacher Anschluss von 2 Geräten (Fernseher, Monitor, Beamer) an 1 HDMI-Eingangsquelle
- Integrierter HDMI-Signalverstärker - Zusätzliche Kabellänge von 5 m (Standard HDMI) bzw. bis zu 15 m (High Speed HDMI) möglich
- Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung
- Unterstützt Full HD, Full 3D, 4K2K Video

Technical Features

- HDMI connections: 1 input, 2 outputs
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection
- Supports Deep Color, 30/36-bit
- Status LEDs (connection status)
- Supports compressed audio formats, e.g., DTS

DIGITUS® 4K HDMI Splitter, 1x2

- Easily connect two devices (televisions, monitors, projectors) to one HDMI input source
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Supports 4K Ultra HD, 4096 x 2160 pixel resolution
- Supports Full HD, Full 3D, 4K2K video

- Cascades up to 3 splitters (max. 8 displays)
- Supports HDCP repeaters
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Frequency range/data transmission rate: 25 MHz-340 MHz, up to 3.0 Gbps per channel



DS-46304 366225 | 4K HDMI Splitter 1x2



DIGITUS® 4K HDMI Splitter, 1x4

- Einfacher Anschluss von 4 Geräten (Fernseher, Monitor, Beamer) an 1 HDMI-Eingangsquelle
- Integrierter HDMI-Signalverstärker - Zusätzliche Kabellänge von 5 m (Standard HDMI) bzw. bis zu 15 m (High Speed HDMI) möglich
- Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung
- Unterstützt Full HD, Full 3D, 4K2K Video

Technical Features

- HDMI connections: 1 input, 4 outputs
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection
- Supports Deep Color, 30/36-bit
- Status LEDs (connection status)
- Complies with Standard HDMI / High Speed HDMI

DIGITUS® 4K HDMI Splitter, 1x4

- Easily connect four devices (televisions, monitors, projectors) to one HDMI input source
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Supports 4K Ultra HD, 4096 x 2160 pixel resolution
- Supports Full HD, Full 3D, 4K2K video

- Supports compressed audio formats, e.g., DTS
- Cascades up to 3 splitters (max. 64 displays)
- Supports HDCP repeaters
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Frequency range/data transmission rate: 25 MHz-340 MHz, up to 3.0 Gbps per channel



DS-47304 366232 | 4K HDMI Splitter 1x4

DIGITUS® 4K HDMI Splitter, 1x4

- Zeigen Sie Ihre Inhalte in Ultra HD auf bis zu 4 Monitoren oder Fernsehern
- Unterstützt Ultra HD, 4096x2160p Auflösung
- Full 3D Unterstützung
- High Speed HDMI kompatibel
- Unterstützt HDCP Repeater

Technical Features

- Supports 12-bit Full HD, Full 3D, 4K2K video
- Supports Ultra HD, 4096x2160p resolution
- Supports Deep Color, 30/36 bit
- High Speed HDMI compliant
- Supports Standard audio, DSD audio, HD (HBR) audio
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Supports HDCP Repeater
- Frequency range: 25 MHz - 340 MHz
- 1x HDMI input and 4x HDMI outputs
- Built in HDMI booster
- Compliant to HDCP Rev. 1.3
- Product dimensions: 168 x 66 x 20 mm
- Color: black

DIGITUS® 4K HDMI Splitter, 1x4

- Show your content in Ultra HD on up to 4 Monitors or TVs
- Supports Ultra HD, 4096x2160p resolution
- Full 3D support
- High Speed HDMI compliant
- Supports HDCP Repeater



DS-42304 358282 | 4K HDMI Splitter, 1x4

DIGITUS® HDMI Pocket Video Splitter , 2-port


- Einer der kleinsten HDMI Video Splitter! Gibt ein Videosignal gleichzeitig auf zwei verschiedenen HDTV Bildschirmen wieder!
- Geeignet für Distanzen bis 15m
- High Speed HDMI und HDCP kompatibel
- Kompatibel mit HDTV 480i, 480p, 720i, 720p, 1080i und 1080p

Technical Features

- 1 input, 2 outputs
- Easy to install and simple to operate
- Supports a distance of up to 15m
- Compatible with HDTV 480i, 480p, 720i, 720p, 1080i and 1080p
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Supports VGA, SVGA, XGA and UXGA
- High Speed HDMI and HDCP compatible
- Operation pixel frequency range: 25-225MHz

DIGITUS® HDMI Pocket Video Splitter , 2 Port

- One of the smallest HDMI Video Splitter! Display one video signal on two different HDTV monitors!
- Supports a distance of up to 15m
- High Speed HDMI and HDCP compatible
- Compatible with HDTV 480i, 480p, 720i, 720p, 1080i and 1080p

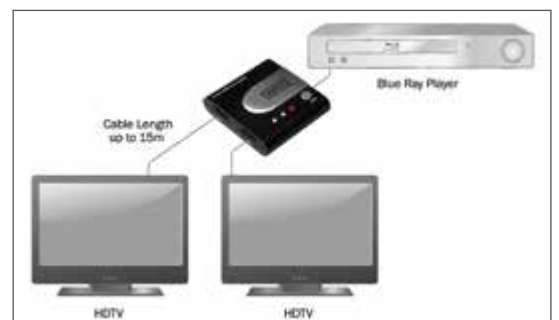

DS-41302 276586 | Pocket HDMI splitter, 2 Port

DIGITUS® HDMI Splitter, 2-Port

- Gleichzeitige Wiedergabe eines HDMI Videosignals auf mehreren Ausgabegeräten
- Optimal zum Anschluss mehrerer Fernseher und Monitore an eine HDMI Quelle
- Kaskadierbar: erweiterte Verteilung über Kaskadierung mehrerer HDMI Splitter
- Höchste unterstützte Videoauflösung 1080p



Technical Features

- Simultaneous display of one HDMI video signal on different output devices
- Easy to Use: Install in seconds, no need of setting
- Cascadeable: Large distribution achieved by cascading the HDMI Amplifier Splitter
- Highest supported video resolution 1080p
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Bandwidth: 225MHz/2.25Gbps per channel(6.75Gbps all channel)

DIGITUS® HDMI Splitter, 2 Port

- Simultaneous display of one HDMI video signal on different output devices
- The best choice for carrying and splitting the HDMI signal to more than one display
- Cascadeable: Large distribution achieved by cascading the HDMI Amplifier Splitter
- Highest supported video resolution 1080p

- Supports 12bit per channel (36bit all channel) deep color
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (LxWxH; Weight): 155×70×23 mm
- Weight: 260 g



DS-41300 271536 | HDMI Splitter, 2 Port

DIGITUS® HDMI Splitter, 4-Port

- Gleichzeitige Wiedergabe eines HDMI Videosignals auf mehreren Ausgabegeräten
- Parallele Verteilung von Videosignalen auf bis zu 4 Monitore
- Kaskadierbar: erweiterte Verteilung über Kaskadierung mehrerer HDMI Splitter
- Full HD Auflösung bis zu 1080p



Technical Features

- Simultaneous display of one HDMI video signal on different output devices
- Easy to Use: Install in seconds, no need of setting
- Cascadeable: Large distribution achieved by cascading the HDMI Amplifier Splitter
- Highest supported video resolution 1080p
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Bandwidth: 225MHz/2.25Gbps per channel(6.75Gbps all channel)

DIGITUS® HDMI Splitter, 4 Port

- Simultaneous display of one HDMI video signal on different output devices
- Parallel splitting of video signals to up to four monitors
- Cascadeable: Large distribution achieved by cascading the HDMI Amplifier Splitter
- Full HD resolution of up to 1080 p

- Supports 12bit per channel (36bit all channel) deep color
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (LxWxH; Weight): 270×180×40mm;
- Weight: 385 g



DS-42300 271543 | HDMI Splitter, 4 Port

DIGITUS® 8-Port HDMI Video Splitter

- **Optimal zum Anschluss mehrerer Fernseher und Monitore an eine HDMI Quelle**
- **Verteilt HDMI Signale auf bis zu acht Monitore**
- **Erreicht Full HD Auflösung bis zu 1080p**
- **Unterstützt HDMI High Speed**

Technical Features

- Splits one HDMI video input signal to eight outputs
- Easy to install and simple to operate
- Supports HDMI High Speed
- Video resolution 1920x1080 pixel, supports 480i, 576i, 1080i, 480p, 576p, 720p, 1080p
- Support 3D all format, including 1080p@24Hz, 720p@60Hz/50Hz
- Bandwidth 225MHz/2.25Gbps per channel(6.75Gbps all channel)
- Deep color 12bit per channel (36bit all channel)
- HDCP Support
- Supports uncompressed audio such as LPCM, DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)

DIGITUS® 8 Port HDMI Video Splitter

- The best choice for carrying and splitting the HDMI signal to more than one display
- Splits HDMI signals to up to eight monitors
- Achieves Full HD resolution of up to 1080p
- Supports HDMI High Speed





DIGITUS® DisplayPort auf HDMI Splitter (1x2)

- Geben Sie ein DisplayPort-Signal an zwei HDMI Bildschirme gleichzeitig aus
- Unterstützt bis zu 4K-Auflösungen für eine exzellente Bildqualität
- Ideale Lösung für Video-Wand-Präsentationen oder Grafikanwendungen
- Schnelle und einfache Installation ohne Software und Treiber
- Kompaktes Gehäuse - perfekt für eine dezente Platzierung

Technical Features

- DisplayPort 1.2a compatible
- Resolution: up to 4K Ultra HD, 4096 x 2160p resolution
- HDMI bandwidth: 3Gbps per channel
- Supports Deep Color, 30/36 bit
- Supports digital audio transmission
- Status LEDs (connection status)
- Power supply unit input voltage: 5 V/1 A

DIGITUS® DisplayPort to HDMI Splitter (1x2)

- Output one DisplayPort signal to two HDMI monitors simultaneously
- Supports resolutions of up to 4K for excellent image quality
- Perfect solution for video wall presentations or graphical applications
- Quick, simple installation without software or drivers
- Compact housing – can be discreetly placed anyway

- Compact housing – can be discreetly placed anyway
- Low power consumption (standby mode: 25 mW)
- Supports HDCP 2.0
- Compatible with all commonly used DisplayPort cables
- MST (Multi-Stream Transport) support – display different content on each of the two HDMI monitors



DS-45400 374923 | DisplayPort auf HDMI Splitter (1x2)



DIGITUS® DisplayPort auf DisplayPort Splitter (1x2)

- Geben Sie ein DisplayPort-Signal an zwei DisplayPort Bildschirme gleichzeitig aus
- Unterstützt bis zu 4K-Auflösungen für eine exzellente Bildqualität
- Ideale Lösung für Video-Wand-Präsentationen oder Grafikanwendungen
- Schnelle und einfache Installation ohne Software und Treiber
- Kompaktes Gehäuse - perfekt für eine dezente Platzierung

Technical Features

- DisplayPort 1.2a compatible
- Resolution: up to 4K Ultra HD, 4096 x 2160p resolution
- DisplayPort bandwidth: 5,4 Gbps per channel
- Supports Deep Color, 30/36 bit
- Status LEDs (connection status)
- Power supply unit input voltage: 5 V/1 A
- Compact housing – can be discreetly placed anyway

DIGITUS® DisplayPort to DisplayPort Splitter (1x2)

- Output one DisplayPort signal to two DisplayPort monitors simultaneously
- Supports resolutions of up to 4K for excellent image quality
- Perfect solution for video wall presentations or graphical applications
- Quick, simple installation without software or drivers
- Compact housing – can be discreetly placed anyway

- Low power consumption (standby mode: 25 mW)
- Supports HDCP 2.0
- Compatible with all commonly used DisplayPort cables
- MST (Multi-Stream Transport) support – display different content on each of the two HDMI monitors



DS-45401 374978 | DisplayPort to DisplayPort Splitter (1x2)

DIGITUS® VGA Splitter 500 MHz, 2-Port

- Verteilt das Video-Signal auf zwei Monitore - Perfekt z.B. für Schulungen, Messeveranstaltungen und Werbung
- Videoeingang und -ausgänge: HD DSUB, 15-pin, Buchsen
- Max. Übertragungs-Distanz: 75 m

Technical Features

- Enables to split a video-signal from a PC onto 2 monitors, or other video output devices
- Video bandwidth: 500MHz
- Max. resolution: 2048x1536p @60Hz
- Max. transmission distance: 75 m

DIGITUS® VGA Splitter 500 MHz, 2 Port

- Provides simultaneous display on two different monitors - Perfect for classrooms, tradeshows, or in-store displays
- Video IN/OUT: HD DSUB, 15-pin, jacks
- Max. transmission distance: 75 m

- Cascadable (max. 64)
- Metal housing for better EMI shielding
- DDC, DDC2, DDC2B support
- Video IN/OUT: HD DSUB, 15-pin, jacks



DS-41110 323808 | VGA Splitter 500 MHz, 2 Port

DIGITUS® VGA Splitter 350 MHz, 4-Port

- Verteilt das Video-Signal auf vier Monitore - Perfekt z.B. für Schulungen, Messeveranstaltungen und Werbung!
- Videoeingang und -ausgänge: HD DSUB, 15-pin, Buchsen
- Max. Übertragungs-Distanz: 75 m

Technical Features

- Plastic housing
- Video bandwidth: 350MHz
- Max. resolution: 1920x1080p
- DDC, DDC2, DDC2B support

DIGITUS® VGA Splitter 350 MHz, 4-Port

- Provides simultaneous display on four different monitors - Perfect for classrooms, tradeshows, or in-store displays!
- Video IN/OUT: HD DSUB, 15-pin, jacks
- Max. transmission distance: 75 m

- Cascadable (max. 64)
- Max. transmission distance: 75m
- Video IN/OUT: HD DSUB, 15-pin, jacks



DS-42120-1 323853 | VGA Splitter 350 MHz, 4 Port

DIGITUS® VGA Splitter 350 MHz, 4-Port

- Verteilt das Video-Signal auf vier Monitore - Perfekt z.B. für Schulungen, Messeveranstaltungen und Werbung!
- Videoeingang und -ausgänge: HD DSUB, 15-pin, Buchsen
- Max. Übertragungs-Distanz: 75 m

Technical Features

- Video bandwidth: 350MHz
- Max. resolution: 2048x1536p @60Hz
- DDC, DDC2, DDC2B support
- Cascadable (max. 64)

DIGITUS® VGA Splitter 350 MHz, 4-Port

- Provides simultaneous display on four different monitors - Perfect for classrooms, tradeshows, or in-store displays!
- Video IN/OUT: HD DSUB, 15-pin, jacks
- Max. transmission distance: 75 m

- Metal housing for better EMI shielding
- Max. transmission distance: 75m
- Video IN/OUT: HD DSUB, 15-pin, jacks



DS-42100 323785 | VGA Splitter 350 MHz, 4 Port



**DIGITUS® VGA Splitter 500 MHz,
4-Port**

- Verteilt das Video-Signal auf vier Monitore - Perfekt z.B. für Schulungen, Messeveranstaltungen und Werbung!
- Videoeingang und -ausgänge: HD DSUB, 15-pin, Buchsen
- Max. Übertragungs-Distanz: 75 m

Technical Features

- Enables to split a video-signal from a PC onto 4 monitors, or other video output devices
- Video bandwidth: 500MHz
- Max. resolution: 2048x1536p @60Hz
- Max. transmission distance: 75 m

**DIGITUS® VGA Splitter 500 MHz,
4-Port**

- Provides simultaneous display on four different monitors - Perfect for classrooms, tradeshows, or in-store displays!
- Video IN/OUT: HD DSUB, 15-pin, jacks
- Max. transmission distance: 75 m

- Cascadable (max. 64)
- Metal housing for better EMI shielding
- DDC, DDC2, DDC2B support
- Video IN/OUT: HD DSUB, 15-pin, jacks

DS-42110 323815 | VGA Splitter 500 MHz, 4-Port



**DIGITUS® VGA Splitter 350 MHz,
8-Port**

- Verteilt das Video-Signal auf acht Monitore - Perfekt z.B. für Schulungen, Messeveranstaltungen und Werbung
- Videoeingang und -ausgänge: HD DSUB, 15-pin, Buchsen
- Max. Übertragungs-Distanz: 75 m

Technical Features

- Video bandwidth: 350MHz
- DDC, DDC2, DDC2B support
- Cascadable (max. 64)
- Metal housing for better EMI shielding

**DIGITUS® VGA Splitter 350 MHz,
8-Port**

- Provides simultaneous display on eight different monitors - Perfect for classrooms, tradeshows, or in-store displays
- Video IN/OUT: HD DSUB, 15-pin, jacks
- Max. transmission distance: 75 m

- Max. transmission distance: 75m
- Video IN/OUT: HD DSUB, 15-pin, jacks
- Max. resolution: 2048x1536p @60Hz

DS-43100 323792 | VGA Splitter 350 MHz, 8-Port



**DIGITUS® VGA Splitter 500 MHz,
8-Port**

- Verteilt das Video-Signal auf acht Monitore - Perfekt z.B. für Schulungen, Messeveranstaltungen und Werbung
- Videoeingang und -ausgänge: HD DSUB, 15-pin, Buchsen
- Max. Übertragungs-Distanz: 75 m

Technical Features

- Enables to split a video-signal from a PC onto 8 monitors, or other video output devices
- Video bandwidth: 500MHz
- Max. resolution: 2048x1536p @60Hz
- Max. transmission distance: 75 m

**DIGITUS® VGA Splitter 500 MHz,
8-Port**

- Provides simultaneous display on eight different monitors - Perfect for classrooms, tradeshows, or in-store displays
- Video IN/OUT: HD DSUB, 15-pin, jacks
- Max. transmission distance: 75 m

- Cascadable (max. 64)
- Metal housing for better EMI shielding
- DDC, DDC2, DDC2B support
- Video IN/OUT: HD DSUB, 15-pin, jacks

DS-42130 323822 | VGA Splitter 500 MHz, 8-Port

DIGITUS® VGA Splitter 250 MHz, 16-Port

- Verteilt das Video-Signal auf 16 Monitore - Perfekt z.B. für Schulungen, Messeveranstaltungen und Werbung!
- Videoeingang und -ausgänge: HD DSUB, 15-pin, Buchsen
- Max. Übertragungs-Distanz: 75 m

Technical Features

- Enables to split a video-signal from a PC onto 16 monitors, or other video output devices
- Video bandwidth: 250MHz
- Max. resolution: 1920x1080p @60Hz
- Max. transmission distance: 75m
- Cascadable (max. 64)
- Metal housing for better EMI shielding

DIGITUS® VGA Splitter 250 MHz, 16-Port

- Provides simultaneous display on 16 different monitors - Perfect for classrooms, tradeshows, or in-store displays!
- Video IN/OUT: HD DSUB, 15-pin, jacks
- Max. transmission distance: 75 m



DS-42140 323846 | VGA Splitter 250 MHz, 16-Port

DIGITUS® VGA Matrix-Splitter, 250 MHz

- Die bequeme und komplette Lösung zur Auswahl und Verteilung von Video Signalen
- Eingebauter Leistungsverstärker, bis 65m
- 2 wählbare Eingänge (PC), 2 Ausgänge (Monitor)

Technical Features

- 2 switchable inputs (PC), 2 outputs (monitor)
- Built-in line amplifier, up to 65m
- Maximum resolution 1920x1440 pixels at 60Hz
- Video bandwidth: 250MHz
- DDC, DDC2, DDC2B support
- Cascadable
- Video input connections: HDSUB15/female

DIGITUS® VGA Matrix splitter, 250 MHz

- The convenient and complete video signal distributing solution
- Built-in line amplifier, up to 65m
- 2 switchable inputs (PC), 2 outputs (monitor)



- Video output connections: HDSUB15/female
- Dimensions (L x W x H, weight): 130mm x 75mm x 42mm, 420g
- Package contents: 1 x video matrix splitter; 1 x user manual; 1 x power adaptor AC 7.5V 800mA



DS-47110-1 279327 | VGA Video Matrix, 2x Input, 2x Output

DS-48110-1 279334 | VGA Video Matrix, 2x Input, 4x Output

DIGITUS® Video/Audio Matrix

- Ideal zur Verteilung von Videosignalen für z.B. Schulungen, Messeveranstaltungen und Werbung
- Videosignalverstärkung für Reichweiten bis zu 65 Meter
- Mit Hilfe der Druckschalter auf der Frontseite können sowohl die Videoquellen als auch die einzelnen oder alle (Out/All) Wiedergabegeräte ausgewählt werden

Technical Features

- Intelligent functionality
- Can be cascaded
- Featuring 250MHz video bandwidth, suitable for DDC, DDC2, DDC2B
- Supports VGA, SVGA, UXGA, QXGA resolutions
- Can be used for Multi-Sync video types, including RGBHV, RGsB, RGsB

DIGITUS® Video/Audio Matrix

- Ideal for distributing video in classrooms, at exhibits, trade shows, demonstrations, and for multi-media presentations
- Extends video signal up to 65 meters (213 feet)
- Using the switches on the front side you can turn on/off video signal sources and output signals (Out/All)



- Supports synchronizations, positive & negative; TTL or 1Vpp level
- VGA outputs compatible with standard VGA cards
- Extends video signal up to 65 meters (213 feet)
- Audio Frequency Response 20Hz~20KHz
- Package contents: 1x video/audio matrix, 1x user manual, 1x power adaptor DC 12V, 600mA



DC-47100 255697 | Video/Audio Matrix 2x2

DIGITUS® VGA Video/Audio Matrix Switch

DIGITUS® VGA Video/Audio Matrix Switch



- **Ideal zur Verteilung von Videosignalen für z.B. Schulungen, Messeveranstaltungen und Werbung**
- **Unterstützt Synchronisierungen inkl. positive, negative; TTL oder 1Vpp Level**
- **Die VGA-Ausgänge sind kompatibel zu Standard-VGA Karten**

- **Ideal for distributing video in classrooms, at exhibits, trade shows, demonstrations, and for multi-media presentations**
- **Support synchronous Include positive, negative; TTL or 1Vpp level**
- **The output is compatible with standard VGA card**

Technical Features



- Intelligent functionality
- Can be cascaded
- With 350 MHz pixel frequency, supports DDC, DDC2, DDC2B
- Supports VGA, SVGA, UXGA, QXGA resolutions
- Support Multi-Sync video type include RGBHV, RGSB, RGBS
- Support synchronous Include positive, negative; TTL

- or 1Vpp level
- Four sets of 7-Segment LED can indicate the input setting status of input port quickly
- The output is compatible with standard VGA card
- Extends the video signal up to 65 meter (213 feet)
- The switches on panel can select PC signal source 1 ~ 4 as OUT 1 ~ 4 or turning off any signal I/O port / all I/O ports



DC-48101 233350 | VGA Video/Audio Matrix Switch 4x4

DIGITUS® DVI Video/Audio Splitter

DIGITUS® DVI Video/Audio Splitter




- **Unterstützt eine max. Auflösung von bis zu 1920x1200 Pixel**
- **Automatischer Power-Save, wenn das Video Signal verloren geht**
- **Video Ein- und Ausgangsanschlüsse : DVI Buchse**

- **Supports max. resolution up to 1920x1200 pixels**
- **Automatic power-save when Video input is lost**
- **Input and Output connections: DVI-Female**

Technical Features

- DVI video/audio splitter, 2-port
- Supports max. resolution up to 1920x1200 pixels and Full HD 1080p
- Automatic power-save when Video input is lost
- Crisp clear video images

- LED indicators for signal activity monitoring
- Support EDID. HDCP and is Blu-ray ready
- Cascadable
- Input and Output connections: DVI-Female
- Dimension (DxWxH; Weight): 20x180x85mm; 600g

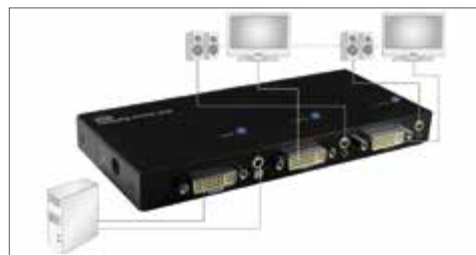

DS-41211 286356 | DVI Video/Audio Splitter, 2-Port
DS-42211 286363 | DVI Video/Audio Splitter, 4-Port
DS-43211 286370 | DVI Video/Audio Splitter, 8-Port

DIGITUS® VGA UTP Extender 2/4-Port, Sendeeinheit

- Hohe Auflösungen bis 1920 x 1200 Pixel möglich
- Extender- & Splitter-Funktion, 2/4 UTP-Ausgänge
- Bietet einfache und schnelle Verteilung für VGA-Video-Signale bis zu einer Distanz von 300 m

Technical Features

- Cable lengths up to 300 m with CAT5 UTP cables (when using CAT5 Reach)
- Supports stereo audio extension
- Extender & splitter function, 2/4 UTP outputs
- High resolution possible up to 1920 x 1200 pixels
- Dimensions (L x W x H): 154 x 69 x 23 mm
- Power input: 5 V @ 2 A, max. 10 W

DIGITUS® VGA UTP Extender 2/4-Port, Transmitter

- High resolution possible up to 1920 x 1200 pixels
- Extender & splitter function, 2/4 UTP outputs
- Easy and convenient distribution for VGA signals up to 300 m



Additional Receiver Unit needed DS-53450



DS-53420 361961 | VGA UTP Extender 2-Port

DS-53420 361978 | VGA UTP Extender 2-Port

DIGITUS® VGA UTP Extender, Empfängerinheit

- Hohe Auflösungen bis 1920 x 1200 Pixel möglich

Technical Features

- Cable lengths up to 300 m with CAT5 UTP cables (when using CAT5 Reach)
- Supports stereo audio extension
- High resolution possible up to 1920 x 1200 pixels
- Dimensions (L x W x H): 110 x 75 x 25 mm
- Power input: 5 V @ 2 A, max. 5 W

DIGITUS® VGA UTP Extender, Receiver Unit

- High resolution possible up to 1920 x 1200 pixels



DS-53450 361985 | VGA UTP Extender, Receiver Unit

DIGITUS® VGA-UTP-Extender Set

- Bietet einfache und schnelle Verteilung für VGA-Video-Signale bis zu einer Distanz von 300 m
- Hohe Auflösungen bis 1920 x 1200 Pixel möglich

DIGITUS® VGA UTP Extender Set

- Easy and convenient distribution for VGA signals up to 300 m
- High resolution possible up to 1920 x 1200 pixels



Technical Features

- Cat 5 VGA extender consisting of transmitter and receiver unit
- High resolution possible up to 1920 x 1200 pixels
- Supports stereo audio extension
- Dimensions (L x W x H): 110 mm x 75 mm x 25 mm
- Weight: 213 g (transmitter), 208 g (receiver)
- Power input: 5 V @ 1 A, max 5 W



DS-53400 356721 | VGA UTP Extender Set

DIGITUS® VGA Repeater, 65 m

- Verlängert das VGA Signal auf bis zu 65 m
- Maximale Auflösung 1920x1440 Pixel bei 60Hz
- Videobandbreite 300MHz
- Unterstützt DDC, DDCB, DDC2B

DIGITUS® VGA Repeater, 65 m

- Extend the VGA signal up to 65 m
- Maximum resolution 1920x1440 pixels at 60Hz
- Video bandwidth 300 MHz
- DDC, DDCB, DDC2B support



Technical Features

- VGA line amplifier, up to 65m
- Maximum resolution 1920x1440 pixels at 60Hz
- Video bandwidth 300 MHz
- DDC, DDCB, DDC2B support
- Cascadable
- Video IN: HDSUB15/Male
- Video OUT: HDSUB15/Female
- Incl. power supply
- Dimensions (LxWxH; Weight): 97x56x26mm; 80g



DS-53900-1 285366 | VGA Repeater, 65m

**DIGITUS® VGA über IP
Extender (Set)**



- Erweitert das VGA-Signal über Cat.5 oder einer bestehenden Netzwerkinfrastruktur
- Mischbetrieb mit HDMI / DisplayPort-Sender / Empfänger
- 1080p Full HD Unterstützung

**DIGITUS® VGA over IP
Extender (SET)**

- Extend VGA signal over Cat.5 or existing network infrastructure
- Mixed environment with HDMI / DisplayPort transmitter / receiver
- Supports 1080p Full HD

Technical Features

- VGA transmitter / receiver set
- Easy installation with inexpensive Cat.5/6 cables
- Network infrastructure used for signal transmission
- Each pair (transmitter & receiver) extends the signal up to 100 m (330 feet)
- Supports 1080p Full HD
- HDTV compatible (720p, 1080i, 1080p)
- Supports stereo 2.0
- Cascade-chainable receiver up to 10 layers
- Console connection (RS-232 port) for remote management
- Optional support for Infrared Remote (IR) control
- VGA interface for local live view
- Rack mountable

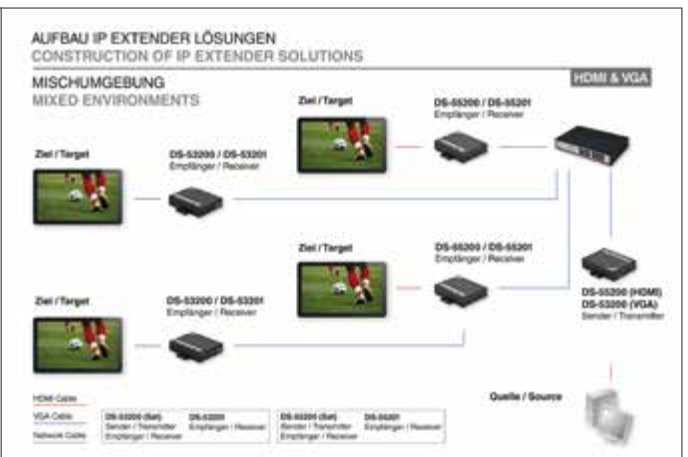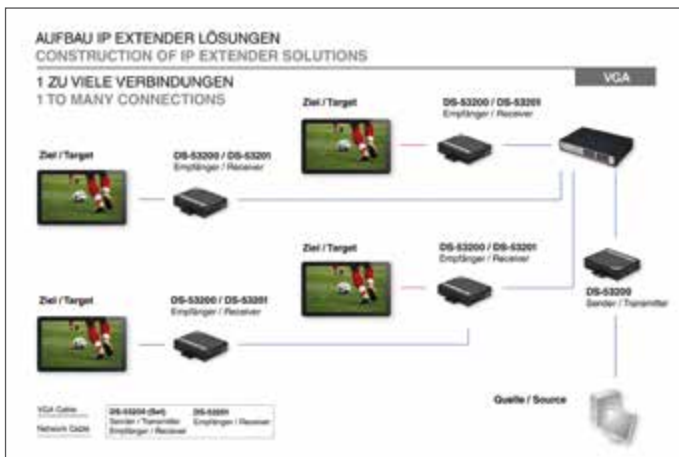

**DIGITUS® HDMI Video Extender
(Set)**

- Bietet einfache und schnelle Verteilung für HDMI-Video-Signale - Platzieren Sie Ihre Bildschirme, wo immer Sie möchten
- Für Verlängerungen von bis zu 50 Metern

**DIGITUS® HDMI Video extender
(Set)**

- Easy and convenient distribution for HDMI signals
- Place your displays wherever you want without HDMI cable limitations
- For extension up to 50 meter

Technical Features

- Cat 5 HDMI extender consisting of transmitter and receiver unit
- Video resolution up to 1080p
- Supports 3D
- For extension up to 50 meter
- Follow the standard of IEEE-568B
- Bandwidth 165MHz/1.65Gbps per channel
- (4.95Gbps all channel)
- Deep color 8bit per channel (24bit all channel)
- HDCP pass through
- Auto-adjustment of feedback, equalization and amplify
- Support uncompressed audio such as LPCM



DIGITUS® HDMI Video Extender über Cat5/IP mit IR Funktion

- Bietet einfache und schnelle Verteilung für HDMI-Video-Signale - Platzieren Sie Ihre Bildschirme, wo immer Sie möchten
- Für Verlängerung bis zu 120 m (1 zu 1 Verbindung)
- Zeigen Sie Ihre Video-Inhalte mit Hilfe von zusätzlichen Empfängereinheiten (DS-55121) und Ihrer bestehenden Netzwerkinfrastruktur auf bis zu 253 Bildschirmen (über IP-Verbindung)


DIGITUS® HDMI Video Extender over Cat5/IP with IR function

- Easy and convenient distribution for HDMI signals
- Place your displays wherever you want without HDMI cable limitations
- For extension up to 120 m (1 to 1 connection)
- Display your video content to up to 253 screens by using additional receiver units and your existing network infrastructure (over IP connection)



Technical Features

- Cat 5 HDMI extender consisting of transmitter and receiver unit
- Video resolutions up to 1080p (Full HD)
- Integrated bidirectional IR-Interface - Easy control of the input source with a remote control
- Supports 3D
- Bandwidth 165MHz/1.65Gbps per channel (4.95Gbps all channel)
- CAT5e/6 - Follow the standard of IEEE-568B
- Operating temperature: 0 to 55°C

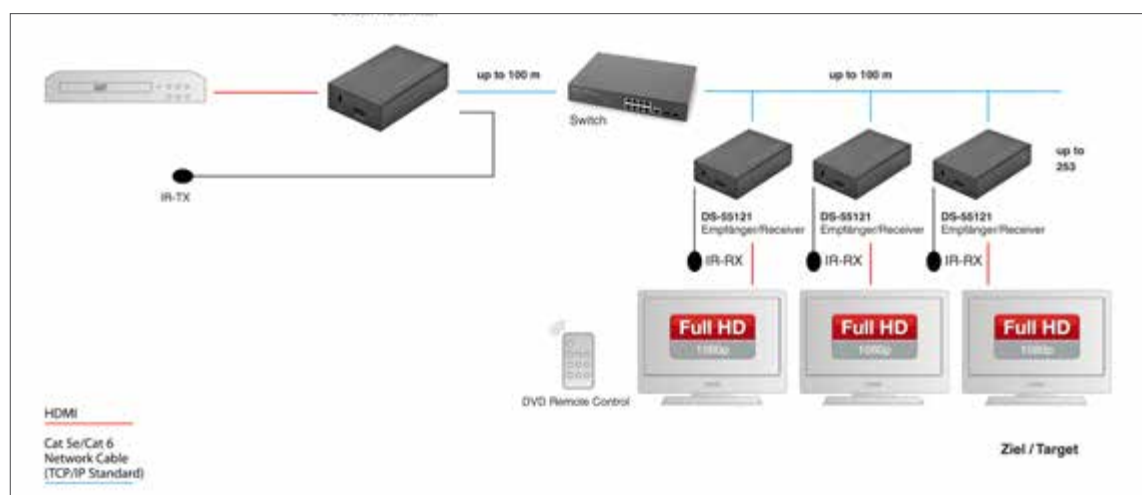

**DIGITUS® HDMI HDBaseT Video
Extender mit PoE und 4K Funktion**


- **Verlängert 4K-Video-Inhalte bis zu 60 Meter**
- **Verlängert unkomprimierte Videosignale bis zu 100 Meter - ohne Datenverlust**
- **Optionale Unterstützung für eine Infrarot-Fernbedienung (IR)-Steuerung**

**DIGITUS® HDMI HDBaseT Video
Extender with PoE and 4K function**

- **Extend a 4K video content up to 60 meters**
- **Extend uncompressed video signals up to 100 meter - without data loss**
- **Optional support for Infrared Remote (IR) control**

Technical Features

- Extends the max. length of HDMI cable up to 100 m (Full HD) by using a simple network cable between a transmitter and a receiver unit.
- Extend a 4K video content up to 60 m
- Cat 5 HDMI extender consisting of transmitter and receiver unit
- Supports resolutions up to 4K
- Extend uncompressed video signals up to 100 m - without data loss
- Support PoE Function - no power supply needed for the receiver unit
- Optional support for Infrared Remote (IR) control
- Deep color 12bit per channel (36bit all channel)
- Bandwidth 340MHz/3.4Gbps per channel (10.2Gbps all channel)
- HDCP pass through
- 3D pass through
- CEC pass through
- Support uncompressed audio such as LPCM
- Support compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Powered from a single power supply
- Follow the standard of IEEE-568B

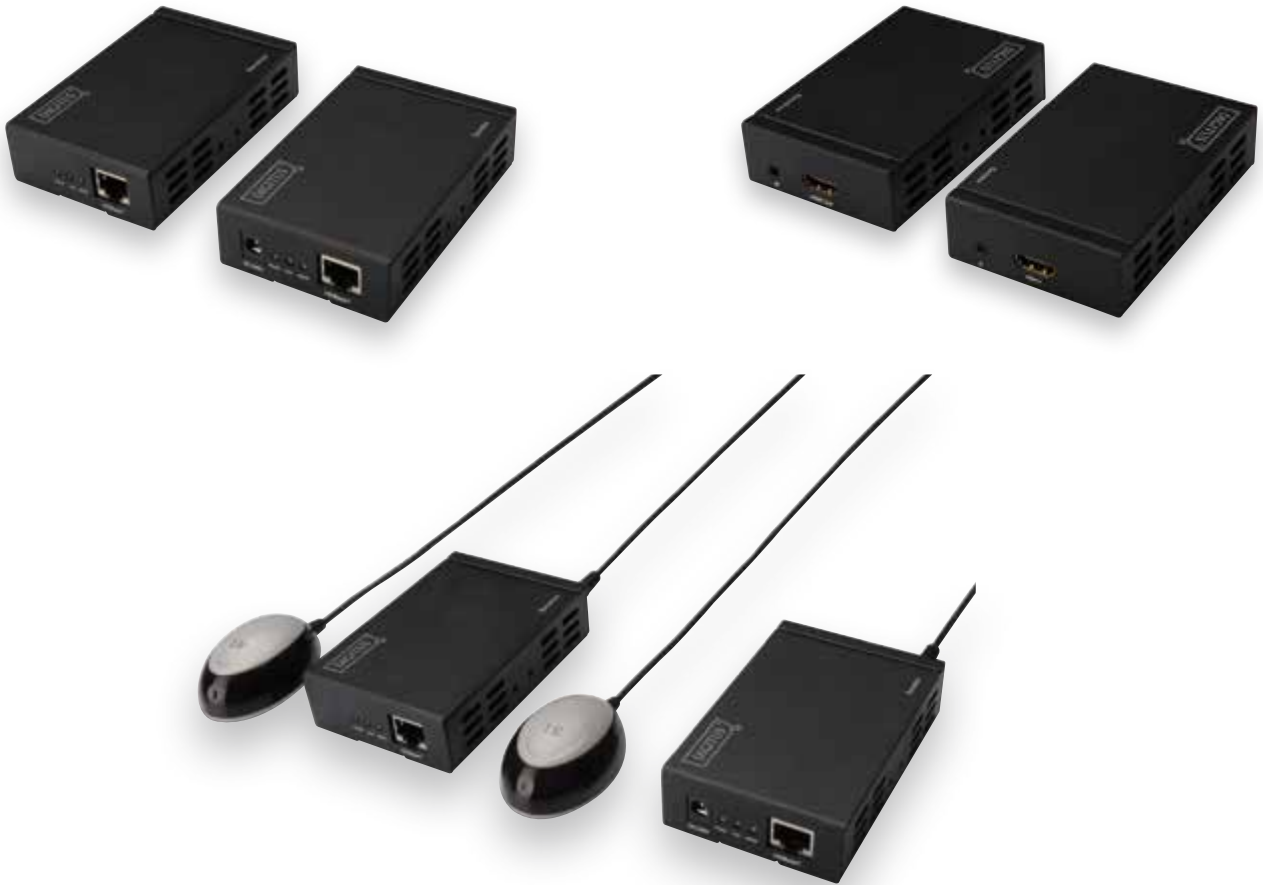

DIGITUS® HDMI über IP Extender (Set)

- Erweitert das HDMI-Signal über Cat.5 oder bestehende Netzwerkinfrastruktur
- Mischbetrieb mit VGA / Display Port Sender / Empfänger möglich
- 1080p Full HD Unterstützung


DIGITUS® HDMI over IP Extender (SET)

- Extend HDMI signal over Cat.5 or existing network infrastructure
- Mixed environment with VGA / Display Port transmitter / receiver
- Supports 1080p Full HD

Technical Features

- HDMI transmitter / receiver set
- Easy installation with inexpensive Cat.5/6 cables
- Network infrastructure used for signal transmission
- Each pair (transmitter & receiver) extends the signal up to 100 m (330 feet)
- Supports 1080p Full HD
- HDTV compatible (720p, 1080i, 1080p)
- Supports stereo 2.0
- Cascade-chainable receiver up to 10 layers

- Console connection (RS-232 port) for remote management
- Optional support for Infrared Remote (IR) control
- HDMI interface for local live view
- Rack mountable
- Dimensions (L x W x H): 115 x 91 x 28 mm
- Weight: 340 g (transmitter), 380 g (receiver)
- Operating temperature: 0 to 50 °C

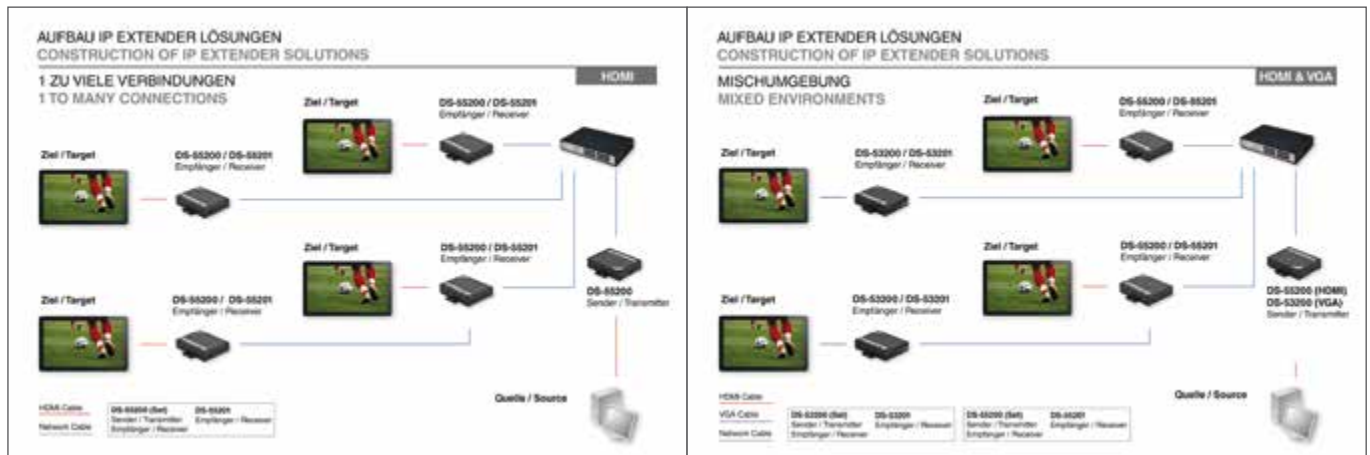

**DIGITUS® HDMI Video Wall über IP,
Sendeeinheit**


- **Kostengünstiger Aufbau einer Video Wall Lösung, ohne in teure Video Wall Systeme investieren zu müssen**
- **Video Wall / Matrix mit Unterstützung von bis zu 8x8 Displays**
- **Integrierte Glasfaserschnittstelle mit Unterstützung von bis zu 30 km**

**DIGITUS® HDMI Video Wall over IP,
Transmitter Unit**

- **Economical set up Video Wall solution without having to invest in expensive video wall systems.**
- **Video Wall / Matrix with up to 8x8 displays supported**
- **Integrated fiber optic interface supports up to 30 km**

Technical Features

- Video Wall transmitter
- Network infrastructure used for signal transmission
- Supports 1080p Full HD
- Automatic Display mode detection
- Supports Interlaced and Progressive Display mode
- Supports DDC, DDC2, and DDC2B.
- Bandwidth: 60 ~ 80Mbps
- HDCP compliant
- Supports default EDID and selected EDID modes
- Uncompressed audio stream transmission and receiving
- Supports High Definition Audio (HD), 5.1/6.1/7.1 Surround Sound
- Maße (H x W x D) 145 x 110 x 28 mm
- Weight: 373 g
- Operating temperature: 0 to 50 °C

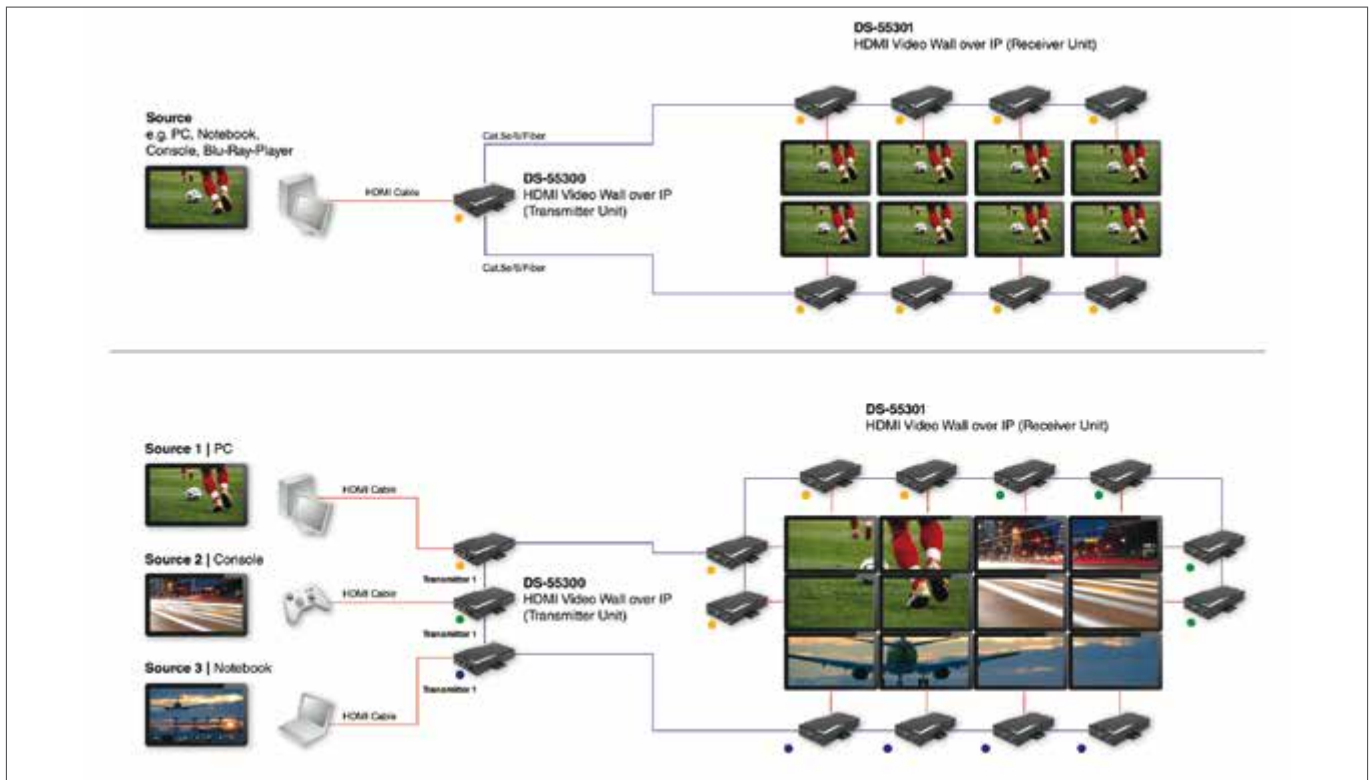

DIGITUS® HDMI 4K Repeater

- **Verlängert HDMI-Signale in optimaler Qualität bis zu 30 m**
- **Unterstützt 4K-Auflösungen für eine exzellente Bildqualität**
- **Kleines und kompaktes Gehäuse - perfekt für eine dezente Platzierung**
- **Keine externe Stromzufuhr benötigt**

Technical Features

- HDMI booster for up to 30 m
- Extends HDMI signals without any loss in quality and transmission
- Supports 4K resolutions for excellent image quality
- Small, compact housing – can be discreetly placed anywhere
- No external power supply required

DIGITUS® HDMI 4K Repeater

- Extends HDMI signals by up to 30 m with optimum quality
- Supports 4K resolutions for excellent image quality
- Small, compact housing – can be discreetly placed anywhere
- No external power supply required

- Video resolution up to 4K (4K2K@24Hz)
- Supports 3D
- Bandwidth: 3.4 Gbps (10.2 Gbps in total)
- Color depth: up to 16-bit at a resolution of 1080 pixels
- Color: black



DS-55900-1 370871 | DIGITUS® HDMI 4K HDMI Repeater

DIGITUS® HDMI Repeater

- **Verlängert das HDMI Signal bis zu 35 m - ideal für HDMI Signalverteilung und Digital Signage Anwendungen**
- **Unterstützt die 3D-Funktion in allen Formaten, 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz**
- **Bandbreite 225MHz/2,25Gbps pro Kanal (6,75Gbps über alle Kanäle)**

Technical Features

- HDMI High Speed Repeater for up to 35m
- Video resolution up to 1080p
- Supports 3D all format, including 1080p @ 23.98/24Hz, 720p @ 59.94/60Hz/50Hz
- Bandwidth 225MHz/2.25Gbps per channel (6.75Gbps all channel)
- Deep color 12bit per channel (36bit all channel)
- HDCP pass through
- Supports uncompressed audio such as LPCM, DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- 8 levels of equalization settable by turning EQ from 0 to 7, so that support different length of HDMI cable between 1m to 35m

DIGITUS® HDMI Repeater

- Extends the HDMI signals up to 35 m - ideal for HDMI signal distribution and digital signage
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Bandwidth 225MHz/2.25Gbps per channel (6.75Gbps all channel)



DS-55901 269014 | DIGITUS® Professional HDMI Repeater

DIGITUS® DVI Extender über CAT5

- Erweitert ein DVI-Signal auf bis zu 70 Meter
- Unterstützt eine max. Auflösung von 1920x1200 Pixeln bei einer Distanz von 50m
- Keine externe Stromversorgung erforderlich



DIGITUS® DVI Extender over CAT5

- Extension of DVI signal up to 70 meter
- Supports max. resolution up to 1920x1200 pixels at a distance of 50m
- No external power supply needed

Technical Features

- DVI-D extension over Cat5 cable
- Supports max. resolution up to 1920x1200 pixels at a distance of 50 m

- Supports max. distance up to 70m at a resolution of 800x600 pixels
- No external power supply needed



DS-54101 285694 | DIGITUS® DVI Extender Over CAT5, Single Port

DIGITUS® DVI Repeater, 50 m

- Vertärkt ein DVI Signal für Distanzen bis zu 50 m
- Unterstützt High-Definition Auflösungen bis zu 1080p oder 1920 x 1200 Pixel
- Videobandbreite: 1.65Gbps/165MHz



DIGITUS® DVI repeater, 50 m

- Boosts your DVI video signal up to a distance of 50 m
- Maintains multiple high definition resolutions up to 1080p or 1920 x 1200 for computers
- Video bandwidth 1.65Gbps/165MHz

Technical Features

- DVI line amplifier extends digital video up to 50 m
- Maintains multiple high definition resolutions up to 1080p or 1920 x 1200 for computers

- Video bandwidth 1.65Gbps/165MHz
- INPUT/OUTPUT connector: DVI-D female
- Easy to use, just Plug and Play



DS-54901 285687 | DIGITUS® DVI Repeater, 50 m

DIGITUS® Multimedia DVI/Audio zu HDMI Converter

- Kombiniert ein digitales Video- und ein analoges Audiosignal zu einem einzigen HDMI Signal
- Konvertiert die DVI und Audiosignale in ein komplettes HDMI-Signal
- High Speed HDMI



DIGITUS® Multimedia DVI/Audio to HDMI Converter

- Combines digital video (DVI) and analog audio into one HDMI signal
- Converts DVI video and R/L audio into complete HDMI
- High Speed HDMI

Technical Features

- Converts DVI video and R/L audio into complete HDMI
- Video resolutions up to 1080p
- Bandwidth 225MHz/2.25Gbps per channel (6.75Gbps all channel)
- Deep color 12bit per channel (36bit all channel)
- HDCP 1.2 compatible
- Dimensions (LxWxH; Weight): 88x68x25.5mm; 68g



DS-40230 287346 | DIGITUS® Multimedia DVI/Audio to HDMI Converter

DIGITUS® VGA zu HDMI Konverter inkl. Audioübertragung

- Konvertiert Video- und Audio-Signale von VGA auf HDMI
- Verbinden Sie ältere Geräte mit VGA Port an z.B. Fernseher, Monitore oder Beamer
- Keine Software- oder Treiberinstallation notwendig
- Stromzufuhr: USB

Technical Features

- Small compact housing
- Input: VGA + Stereo Audio or RCA Audio
- Output: HDMI
- HDMI transfer rate: 6.75 Gbps



DIGITUS® VGA to HDMI Converter incl. Audio Transmission

- Converts video and audio signals from VGA to HDMI
- Connect your older devices with just a VGA port to TV's, displays or projectors
- No software or driver installation required
- Power supply: USB

- Bandwidth 225 MHz/ 1.65 Gbps per channel (6.75 Gbps total)
- The usable converter resolutions are depending on your device or graphic card



DS-40131 365686 | DIGITUS® VGA to HDMI Converter incl. Audio Transmission (3.5 mm Audio Jack)

DS-40130-1 365662 | DIGITUS® VGA to HDMI Converter incl. Audio Transmission (RCA)

DIGITUS® Full HD HDMI zu VGA Konverter inkl. Audioübertragung

- Konvertiert Video- und Audio-Signale von HDMI auf VGA
- Nutzen Sie moderne Geräte auch mit älteren analogen VGA-Bildschirmen
- Keine Software- oder Treiberinstallation notwendig
- Stromzufuhr: USB

Technical Features

- Small compact housing
- Input: HDMI
- Output: VGA + 3.5 mm Audio
- Bandwidth 165 MHz/ 1.65 Gbps per channel (6.95 Gbps total)



DIGITUS® Full HD HDMI to VGA Converter incl. audio transmission

- Converts video and audio signals from HDMI to VGA
- Use your modern devices with older VGA displays as well
- No software or driver installation required
- Power supply: USB

- Possible HDMI resolutions: 480P 60 Hz, 720P 50/60 Hz, 1080P 60Hz, 800 x 600 60 Hz
- Possible VGA resolutions: 640 x 480 60 Hz, 1280 x 720 60 Hz, 1920 x 1080 60 Hz, 800 x 600 60 Hz, 1024 x 768 60 Hz



DS-40310-1 365679 | DIGITUS® Full HD HDMI to VGA Converter incl. Audio Transmission



DIGITUS® Micro-HDMI auf VGA Konverter

- **Konvertiert Video- & Audiosignale von Micro-HDMI auf VGA**
- **Verbindet Geräte mit Micro-HDMI Anschluss mit älteren VGA-Geräten (TFT-Monitore, TV, Beamer, etc.)**
- **VGA-Ausgang mit allen gängigen Monitoren, Beamern LCD-Tvs kompatibel**
- **Plug & Play - keine Installation benötigt**
- **Kein Netzteil erforderlich**

Technical Features

- Input: Micro-HDMI and 3.5 mm audio
- Output: VGA
- Converts video signals from HDMI to VGA
- Connect your devices with Micro-HDMI ports to VGA monitors or projectors
- Offers you an ideal option for viewing your images, videos or presentations in large format
- VGA port compatible with all conventional monitors, projectors and LCD TVs

DIGITUS® Micro-HDMI to VGA converter

- Converts video and audio signals from Micro-HDMI to VGA
- Connects devices with Micro-HDMI port to older VGA devices (TFT monitors, TV, projectors, etc.)
- VGA port compatible with all conventional monitors, projectors and LCD TVs
- Plug & Play – no installation necessary
- No power supply unit required

- Compatible with many common Ultrabooks with Micro-HDMI port
- Compatible with common tablets with Micro-HDMI port (Samsung, Google, Asus, etc.)
- Resolution of up to 1,080 pixels
- No software or driver installation required
- Compact size



DA-70460 368014 | Micro-HDMI to VGA converter



DIGITUS® HDMI A auf VGA Converter

- **Konvertiert Video- und Audio-Signale von HDMI auf VGA**
- **Verbinden Sie Ihre moderne Wiedergabegeräte mit älteren VGA-Bildschirmen oder Beamern**
- **Keine Software- oder Treiberinstallation notwendig**
- **Kein Netzteil erforderlich**

Technical Features

- Input: HDMI Type A and 3.5 mm audio
- Output: VGA
- Converts video and audio signals from HDMI to VGA
- Use modern devices with older analog VGA monitors
- No software or driver installation required
- VGA resolution: 10 bit resolution with up to 165 MHz

DIGITUS® HDMI A to VGA Converter

- Converts video and audio signals from HDMI to VGA
- Connect your modern playback devices with older VGA monitors or projectors
- No software or driver installation required
- No power supply unit required

- pixel rate (1,080 pixels and UXGA)
- Compatible with HDMI 1.4a
- Color: Black
- Weight: 30 g
- Dimensions: 180 x 45 x 15 mm (L x W x H)



DA-70461 368007 | HDMI A to VGA Converter

DIGITUS® Cat5 Audio Extender, bis zu 600 m

- Nutzen Sie ein einfaches Netzwerkkabel zur Verlängerung Ihres Audiosignals - bis zu 600 m
- Platzieren Sie Ihre Audiogeräte, wo immer Sie möchten
- Einfaches wechseln zwischen Cinch und 3.5mm Klinke via Umschalter möglich


DIGITUS® Cat5 Audio Extender, up to 600 m

- Use a simple network cable to extend the audio signal - up to 600 m
- Place your audio devices wherever you want without audio cable limitations
- Switch between RCA and audio stereo by dip switch



Technical Features

- Place your audio devices wherever you want without audio cable limitations
- Extension of audio signals up to 600m
- Switch between RCA and audio stereo by dip switch
- Gold-plated RCA contacts
- 1x 3.5mm stereo output
- 1x RCA output
- 1x RJ45
- No power supply needed

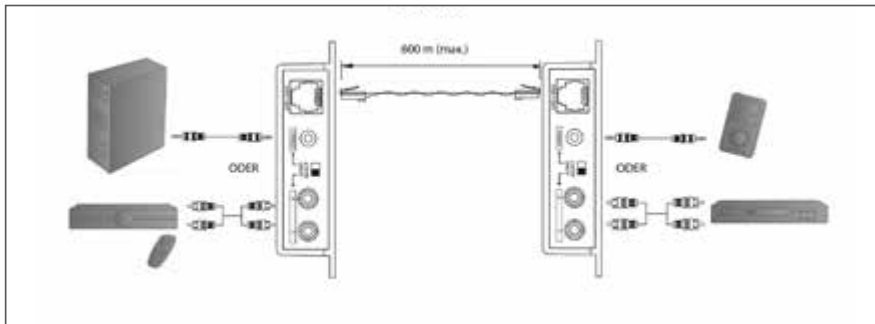

DS-56100 366997 | DIGITUS® Cat5 Audio Extender, up to 600 m

DIGITUS® RS232 Extender über CAT5, bis zu 2.000 m

- Sendet serielle Daten bis zu 2.000 m
- Verlängerung erfolgt über kostengünstige CAT 5 Kabel
- Kompatibel mit allen RS232-Protokollen


DIGITUS® RS232 extender over CAT5, up to 2.000 m

- Sends serial data up to 2.000 m
- Extension possible via cost-effective CAT 5 cable
- Compatible with all RS232 protocols



Technical Features

- Extension via CAT 5 cable
- Sends RS232 data at 115,200 bps up to 2.000 m
- Compatible with all RS232 protocols
- Full-duplex transmission
- Pure hardware solution - real time data transfer, no software conflicts
- Data transmission between computers and other devices
- Connections at local and remote site: 1x DB-9 jack; 1x RJ45 jack; power supply connector

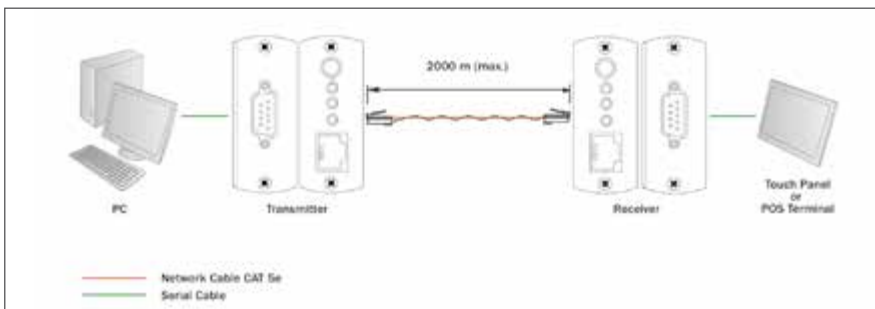

DS-52101 367000 | DIGITUS® RS232 Extender over CAT5, up to 2.000 m

DIGITUS® Single Desktop Monitorhalter



- **Perfekte Lösung wenn Sie beides wünschen, Höhen und Lagen Flexibilität**
- **Digitus Einzel-Monitor Tischständer, schwarz, 20° schwenkbar, 20° neigbar, rotierbar 90°, 15" - 24" TFT, max gew.12Kg**

Technical Features

- Material: Steel / Aluminium Alloy
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Support flat panel size: 15" - 24"
- Support max. weight for each hinge: 12Kg (17.64 lbs)
- Swivel for each hinge: + / - 20 °

DIGITUS® Single Desktop Monitor Holder

- **Perfect solution when you want both, height and location flexibility**
- **Digitus Single-monitor stand, table stand, black, 20°, swivel, 20°, swivel, rotation 90°, 15" to 24" TFT, max weight 12Kg**

- Tilt for each hinge: + / - 20 °
- Rotate for each hinge: 90 °
- Dimension (W x D x H): 422.5x240x370mm (16.63x9.46x14.57")
- Weight: 1.91 Kg (4.2 lbs)
- Cable Management



DA-90317 314158 | Single Monitor Stand up to 24"

DIGITUS® Dual LCD Display Stand



- **Optimaler Halt für bis zu 2 Monitore mit 15" - 24"**
- **Hält bis zu 15 kg (pro Gelenk) Belastung aus, dank stabilen Standfuß**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

Technical Features

- Support flat panel size: 15" - 24"
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Material: Steel / Aluminium Alloy
- Support max. weight for each hinge: 15Kg (33lbs)
- Swivel for each hinge: + / - 20 °

DIGITUS® Dual LCD Display Stand

- **Optimal support for up to two monitors measuring 15" to 24"**
- **Supports a maximum weight of up to 15 kg (per arm) thanks to a sturdy base stand**
- **Higher inclination angle and height adjustability enable you to work flexibly**

- Tilt for each hinge: + / - 15°
- Dimension (W x D x H): 672x370x240mm (26.46x14.57x9.45")
- Weight: 3.3 Kg (7.26lbs)
- Cable Management
- Screw Type: M4,M6



DA-90322 314233 | Dual LCD Display Stand up to 32"

DIGITUS® Monitoreerweiterungsset für DA-90322



- **Erweiterung Ihres Monitorhalters auf bis zu 4 Monitore mit 15" - 24"**
- **Unterstützt ein Maximalgewicht von bis zu 8 kg pro Gelenk**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

Technical Features

- Expand by up to four monitors
- Extension for DA-90322
- Supports VESA standards: 100 x 100 mm/75 x 75 mm
- Maximum load: 8 kg per arm (in combination with the DA-90322)
- Swivel angle: +/-15°

DIGITUS® Monitor Mount Extension for DA-90322

- **Expand your monitor mount for up to four monitors measuring 15" to 24"**
- **Supports a maximum weight of up to 8 kg per arm**
- **Higher inclination angle and height adjustability enable you to work flexibly**

- Inclination angle: +/-20°
- 360° rotatable
- Screw Type: M4
- Material: Aluminium
- Dimensions: 13.8 x 36 x 71.5 cm
- Weight: 2.65 kg
- Color: Black



DA-90342 366416 | Twin Monitor Mount, 24", for the DA-90342

DIGITUS® Dual LCD Desktop Monitorhalter mit Tischhalterung

- **Erweitern Sie Ihre Produktivität!**
- **Unterstützt Flachbildschirm Größe: 24" - 32"**
- **Tischhalterung mit Schraubverschluss, für eine einfache Installation**

Technical Features

- Material: Steel / Aluminium Alloy
- Supports flat panel size: 24" - 32"
- Tilt for each hinge: + / - 15 °
- Swivel for each hinge: + / - 20 °
- Rotate for each hinge: 90 °
- Desk Mount, for easy installation
- Screw Type: M4, M6
- weight: 5.7 Kg (12.57 lbs)
- Cable Management
- Support max. weight for each hinge: 15Kg (33 lbs)
- Dimensions (W x D x H): 924x570x144mm (36.38x22.44x5.67")

DIGITUS® Dual LCD Desktop Monitor Stand with Desk Mount

- Expand your Field of View in productivity, gaming and entertainment
- Supports flat panel size: 24" - 32"
- Desk Mount with screw clamp, for easy installation



DA-90321 314219 | Dual LCD Desktop Monitor Stand with Desk Mount

DIGITUS® Monitoreerweiterungsset für DA-90321


- **Erweiterung Ihres Monitorhalters auf bis zu 4 Monitore mit 24" - 32"**
- **Unterstützt ein Maximalgewicht von bis zu 12 kg pro Gelenk**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

Technical Features

- Extension for DA-90321
- Expand by up to four monitors
- Supports VESA standards: 200 x 100 mm/100 x 100 mm/75 x 75 mm
- Maximum load: 12 kg per arm (in combination with the DA-90321)
- Swivel angle: +/-20°
- Inclination angle: +/-15°
- 360° rotatable
- Screw Type: M4
- Material: Aluminum
- Dimensions: 30.7 x 47 x 92.4 cm
- Weight: 5.1 kg
- Color: Black

DIGITUS® Monitor Mount Extension for DA-90321

- Expand your monitor mount for up to four monitors measuring 24" to 32"
- Supports a maximum weight of up to 12 kg per arm
- Higher inclination angle and height adjustability enable you to work flexibly

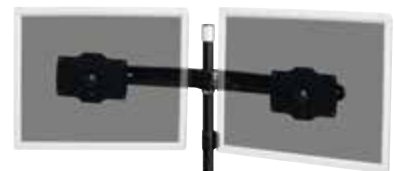

DA-90341 366768 | Twin Monitor Mount, 24" to 32" for the DA-90321

DIGITUS® Triple Desktop Monitorhalter

DIGITUS® Triple Desktop Monitor Stand



- **Optimaler Halt für bis zu 3 Monitore mit 15" - 24"**
- **Hält bis zu 8 kg (pro Gelenk) Belastung aus, dank stabilen Standfuß**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

- **Optimal support for up to three monitors measuring 15" to 24"**
- **Supports a maximum weight of up to 8 kg (per arm) thanks to a sturdy base stand**
- **Higher inclination angle and height adjustability enable you to work flexibly**

Technical Features


- Material: Steel / Aluminium Alloy
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Support flat panel size: 15" - 24"
- Support max. weight for each hinge: 8Kg (17.64 lbs)
- Swivel for each hinge: + / - 20 °
- Tilt for each hinge: + / - 20 °
- Rotate for each hinge: 90 °
- Dimension (W x D x H): 1280x349x370mm (50.39x13.74x14.57")
- Weight: 5.3 Kg (11.63 lbs)
- Cable Management
- Screw Type: M4



DA-90315 314127 | Triple Monitor Stand up to 24"

DIGITUS® Monitoreerweiterungsset für DA-90315

DIGITUS® Monitor Mount Extension for DA-90315

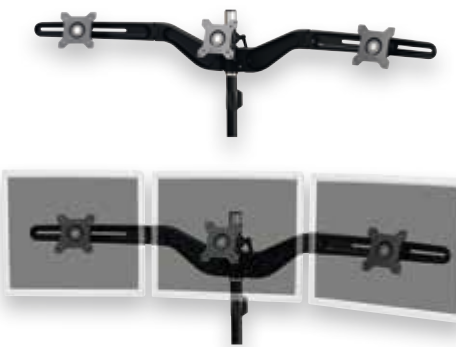

- **Erweiterung Ihres Monitorhalters auf bis zu 6 Monitore mit 26" - 32"**
- **Unterstützt ein Maximalgewicht von bis zu 6 kg pro Gelenk**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

- **Expand your monitor mount for up to six monitors measuring 26" to 32"**
- **Supports a maximum weight of up to 6 kg per arm**
- **Higher inclination angle and height adjustability enable you to work flexibly**

Technical Features

- Extension for DA-90315
- Supports VESA standards: 100 x 100 mm / 75 x 75 mm
- Maximum load: 6 kg per arm (in combination with the DA-90315)
- Swivel angle: +/-20°
- Inclination angle: +/-20°
- 360° rotatable
- Screw type: M4
- Material: Aluminum
- Dimensions: 14.4 x 36 x 130 cm
- Weight: 4.24 kg
- Color: Black



DA-90345 366447 | Triple Monitor Mount, 24", for the DA-90315

DIGITUS® 3-Fach Monitorhalter

- **Optimaler Halt für bis zu 3 Monitore mit 26" - 32"**
- **Hält bis zu 8 kg (pro Gelenk) Belastung aus, dank stabilen Standfuß**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

Technical Features

- Supports VESA standards: 200 x 100 mm/100 x 100 mm/75 x 75 mm
- Swivel angle: +/-15°
- Inclination angle: +/-15°
- 360° rotatable
- Screw type: M4
- Material: Aluminium / Grey
- Dimensions: 13.5 x 50.4 x 169.6 cm
- Weight: 6.2 kg
- Color: Black

DIGITUS® Triple Monitor Stand

- **Optimal support for up to three monitors measuring 26" to 32"**
- **Supports a maximum weight of up to 8 kg (per arm) thanks to a sturdy base stand**
- **Higher inclination angle and height adjustability enable you to work flexibly**



DA-90333 366423 | Triple Monitor Stand

DIGITUS® Monitoreerweiterungsset für DA-90333

- **Erweiterung Ihres Monitorhalters auf bis zu 6 Monitore**
- **Unterstützt ein Maximalgewicht von bis zu 8 kg pro Gelenk**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

Technical Features

- Extension for DA-90333
- Supports VESA standards: 200 x 100 mm/100 x 100 mm/75 x 75 mm
- Maximum load: 8 kg per arm (in combination with the DA-90333)
- Swivel angle: +/-15°
- Inclination angle: +/-15°
- 360° rotatable
- Screw Type: M4
- Material: Aluminum
- Dimensions: 13.5 x 46 x 169.6 cm
- Weight: 5.18 kg
- Color: Black

DIGITUS® Monitor Mount Extension for DA-90333

- **Expand your monitor mount for up to six monitors**
- **Supports a maximum weight of up to 8 kg per arm**
- **Higher inclination angle and height adjustability enable you to work flexibly**



DA-90343 366430 | Triple Monitor Mounts, 26"-30", for DA-90333



DIGITUS® Wandbefestigung für TFT Displays

- Unterstützt VESA Standard - Maße (75x75mm und 100x100mm)
- Eigengewicht: 0.8kg; Gesamtlänge 80mm;
- Maximale Belastbarkeit 15kg
- Monitor drehbar um: 180°

DIGITUS® Wall mount for TFT displays

- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 0.8kg; overall length 80mm; max. load capacity 15kg
- Monitor can be turned: 180°

Technical Features

- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 0.8kg; overall length 80mm; max. load capacity 15kg
- Monitor can be turned: 180°



DA-90307 239376 | Wall mount for TFT displays



DIGITUS® Wandbefestigung für TFT Displays

- Komfortabler Sehgenuß für das perfekte Multimedia Erlebnis
- Kleine Hakenbefestigung für Wandmontage
- Maximale Belastbarkeit: 30kg

DIGITUS® Wall mount for TFT displays

- Brings viewing comfort to your living room
- Small hook attachment for wall mounting
- Maximum loading: 30kg

Technical Features

- Small hook attachment for wall mounting
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 0.5kg Dimensions 114x114x21.5mm
- Maximum loading: 30kg



DA-90303 239369 | Wall mount for TFT displays



DIGITUS® Wandbefestigung für LCD/TFT TV

- Kleine Wandbefestigung für LCD/TFT Fernsehgeräte bis zu 110cm (42")
- Unterstützt VESA Standard - Maße (100x200mm und 200x200mm)
- Maximale Belastbarkeit: 70kg

DIGITUS® Wall mount for LCD/TFT TV

- Small wall mounting for up to 110cm (42") LCD/TFT TV's
- Supports VESA standard dimensions (100x200mm and 200x200mm)
- Maximum loading: 70kg

Technical Features

- Small wall mounting for up to 110cm (42") LCD/TFT TV's
- Supports VESA standard dimensions (100x200mm and 200x200mm)

- Net weight: 1.7kg Dimensions 230x230x25.3mm
- Maximum loading: 70kg
- Projection: 25mm



DA-90310 239383 | Wall mount for LCD/TFT TV up to 70kg

DIGITUS® TFT Display Schwenkarm für Tischmontage

- Unterstützt ein Maximalgewicht von bis zu 10 kg
- In alle Richtungen schwenkbar – unterstützt flexibles Arbeiten
- Einfache Installation am Schreibtisch dank Tischklemme

Technical Features

- Easy to install by means of special table clamp
- Can be moved in any direction
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 2.0kg
- Overall length: 520mm
- Maximum height: 315mm
- Max. load capacity: 10kg
- Maximum thickness of the tabletop: 75mm
- LCD monitor can be turned: 180 degrees
- Excellent way of saving space

DIGITUS® TFT display swivel arm for table mounting

- Supports a maximum weight of 10 kg
- Flexible positioning – can be swiveled in all directions
- Desk clamp allows easy installation



DA-90306-1 259671 | TFT display swivel arm for table mounting up to 10kg

DIGITUS® Wandbefestigung für LCD/TFT TV

- Schwenkbare Wandbefestigung für bis zu 82cm (32") LCD/TFT TV
- Unterstützt VESA Standard - Maße (75x75mm, 200x100mm, 100x100mm und 200x200mm)
- Maximale Belastung: 32kg

Technical Features

- Articulating wall mount for up to 82cm (32") LCD/TFT TV
- Easy installation and strong combination both
- Supports VESA standard dimensions (75x75mm, 200x100mm, 100x100mm and 200x200mm)
- Maximum loading: 32kg
- Swivel left & right: 20, 180 degrees
- Pivot upwards & downwards: 20 degrees

DIGITUS® Wall mount for LCD/TFT TV

- Articulating wall mount for up to 82cm (32") LCD/TFT TV
- Supports VESA standard dimensions (75x75mm, 200x100mm, 100x100mm and 200x200mm)
- Maximum loading: 32kg



DA-90312 239406 | Wall mount for LCD/TFT TV up to 32kg

DIGITUS® Wandbefestigung für LCD/Plasma TV

- Universell verstellbare Wandbefestigung für bis zu 165cm (65") LCD/Plasma TV
- Sowohl einfache Befestigung als auch Anbringung des Fernsehgerätes
- Maximale Belastung: 80kg

Technical Features

- Universal adjustable wall mount and tilting for up to 165cm (65") LCD/Plasma TV
- Easy installation
- Weight: 4.9kg, 760x800x520mm (LxWxH)
- Maximum loading: 80kg
- Pivot upwards and downwards: 26°
- Universal adjustable wall mount and tilting for up to 165cm (65") LCD/Plasma TV
- Easy installation
- Maximum loading: 80kg

DIGITUS® Wall mount for LCD/Plasma TV

- Universal adjustable wall mount and tilting for up to 165cm (65") LCD/Plasma TV
- Easy installation
- Maximum loading: 80kg



DA-90313 239413 | LCD/Plasma wall mount for up to 165cm (65") TV



SECURITY SOLUTIONS

| | |
|---|---------|
| DIGITUS® Plug&View..... | 46 - 58 |
| Professional IP Cameras..... | 59 |
| Analogue HD Video..... | 60 |
| Video Server & Network Video Recorder..... | 61 |
| Power Supplies / PoE | 62 - 69 |



Jederzeit wissen, was zu Hause los ist.
IP-Kameras für Ihre Sicherheit
Always know what's going on at home.
IP Cameras for your safety





Das Plug&View System

Haben Sie alles stets im Blick, was Ihnen wichtig ist!
So funktioniert DIGITUS® Plug&View

The Plug&View system

Always keep an eye on what's important to you
– this is how DIGITUS® Plug&View works

Anwendungsgebiete

Die Anwendungsgebiete der Sicherheitskameras sind vielfältig: Das Konzept der Plug&View-Kameras erlaubt die visuelle und akustische Kommunikation mit der Familie, wenn Sie unterwegs sind. Dank der 2-Wege-Audiofunktion können Sie Ihr Baby oder Ihre Kinder beaufsichtigen oder nach Ihren alleine lebenden Großeltern schauen.

Applications

The applications of security cameras are varied: The concept of the Plug&View cameras enables you to stay in touch with the family when you're out, visually and acoustically, thanks to a 2-way audio function, or to check up on babies and children, or to look after your grandparents who are living alone.

Kompatibel mit:
Compatible with:



APP verfügbar unter:
APP available on:

















Vorteile und Eigenschaften

Nutzen Sie mehrere Kameras mit nur einem System,
jederzeit und überall.

Advantages and details

Use several cameras with only one system,
at all places and all times.

-  **Einfache Installation**
Durch Scannen des QR-Codes in nur drei Schritten via App
-  **Easy installation**
Using QR Code scanning in three steps
-  **Direkte, verschlüsselte Verbindung**
zwischen Kamera und Endgerät
-  **Direct encrypted connection**
between camera and device
-  **Höchste Sicherheit**
durch Anmeldung per HTTPS
-  **Highest safety**
using HTWTPS
-  **Ereignisbenachrichtigung und -aufzeichnung**
Sofortige Benachrichtigung auf Smartphone / Tablet
-  **Event notification and event recording**
Immediate event notification on smartphone / tablet
-  **Kein Ereignis verpassen**
Speicherung der Daten 5 Sek. vor und 25 Sek. nach dem Ereignis
-  **Don't miss any event**
Video storage 5 sec. before and 25 sec. after event
-  **Cloud-Sicherung**
Synchronisation der Videodaten auf Google Drive
-  **Cloud Backup**
Sync video to Google Drive
-  **Automatische Firmware-Aktualisierung**
per Smartphone/Tablet mit iOS und Android und per Webportal
-  **Automatic firmware updates**
for smartphone/tablet with iOS/Android and Web portal



HAUS SICHERHEIT
HOME SECURITY



BABY BEAUFSICHTIGUNG
BABY SUPERVISION



HAUSTIER ÜBERWACHUNG
PET MONITORING



GESCHÄFTS SICHERHEIT
BUSINESS SECURITY



SENIOREN BETREUUNG
ELDERLY CARE



FERIENHAUS ÜBERWACHUNG
HOLIDAY HOME SECURITY

Einfache Installation in nur 3 Schritten via App Easy installation in just 3 steps via App


Die DIGITUS® Plug&View-Kameras verwenden einen neuen und innovativen Weg bei der Installation:

Über den Online-Dienst „my-DIGITUS“ und den individuellen Code jeder Kamera wird automatisch eine Verbindung zwischen Nutzer und Kamera hergestellt. Eine zeitraubende und aufwändige Installation ist somit nicht mehr notwendig.

DIGITUS® Plug&View cameras feature a new and innovative installation method:

The connection between the user and camera is established automatically by way of each camera's individual code and the online service „my-DIGITUS“. No time-consuming and work-intensive installation procedures are required.

- 1** Netzwerkverbindung herstellen.
Establish network connection



- 2** QR Code scannen oder Kamera registrieren unter login.myDigitus.net
Scan QR Code or register camera on login.myDigitus.net



- 3** Fertig!
Ready to go!



Bewegungserkennung und Pre-Recording Motion Detection & Pre-Recording

Verpassen Sie nichts mehr.

Alle DIGITUS® Plug&View-Kameras bieten Ihnen die Möglichkeit, bei Ereignissen direkt von der Kamera benachrichtigt zu werden. Das gibt Ihnen ein maximales Sicherheitsgefühl.

Don't miss any event.

All DIGITUS® Plug&View cameras give you the option to be alerted directly if there is an event. This will provide you with a maximum feeling of security.




Sehen Sie was vor dem Ereignis passiert.

Durch den internen Speicher der Kamera ermöglicht die Pre-Recording Funktion bis zu 5 Sekunden vor der eigentlichen Bewegung aufzuzeichnen. Hierdurch können z.B. Personen, die in Richtung Kamera laufen, schon aufgezeichnet werden, bevor diese von der Bewegungserkennung erfasst werden.

See details of the event before it happens.

Through the camera's internal memory a pre-recording of 5 sec. is possible, before the movement is recognized by the camera. This is helpful for recording people's approach to the camera before they are detected by its motion detection, for example.



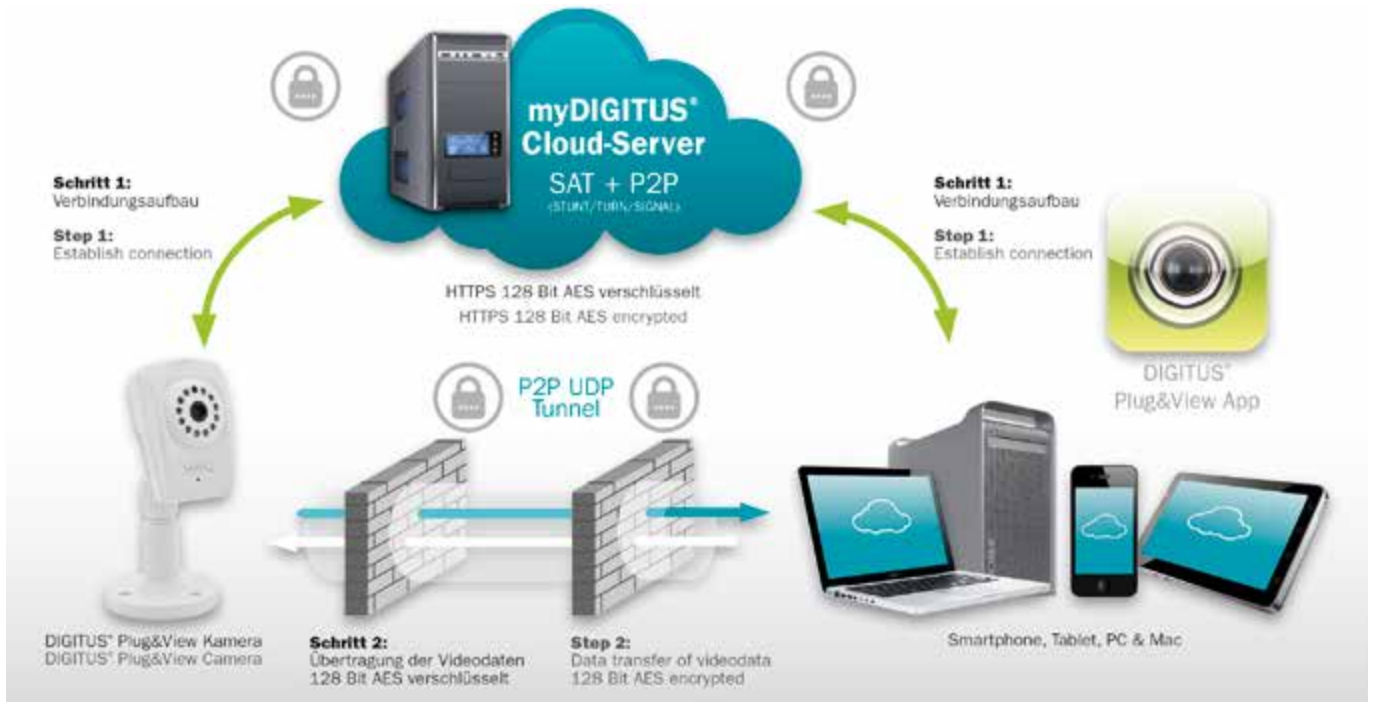

P2P Tunnel

Garantiert eine sichere Verbindung

Der myDIGITUS®-Server, der durch seine fünf weltweiten Server Ausfallschutz garantiert, bietet dem Nutzer einen Dienst, durch den die Kamera von außen steuerbar wird. Die Account Informationen der App bzw. des Web Portals sowie der Kamera werden verschlüsselt über https an den Server gesendet - somit müssen keine Kongurationseinstellungen für das Netzwerk oder die Kamera vorgenommen werden.

Die Übertragung der Videoinhalte zwischen der Kamera und dem Endgerät (Smartphone, Tablet, PC) erfolgt dann über einen verschlüsselten P2P-Tunnel. Somit werden keine Videoinhalte über den Server gesendet und sind dadurch auch nicht von Dritten einsehbar.

Sicherheit mit gutem Gefühl

5 Server - Weltweit

Safety with good feeling

Five servers around the world

-  Deutschland
Germany
-  Irland
Ireland
-  Niederlande
Netherlands
-  USA (2 Einheiten)
USA (2 Units)



P2P Tunnel

A secure connection guaranteed

The myDIGITUS server, whose fail safety is guaranteed by its servers around the world, offers the user a service that makes the camera accessible from the outside. The account ID of the app, web portal and camera is sent to the server in an encrypted form using https, without needing conguration settings for the network or camera.

The video contents are then relayed between the camera and the device (smartphone, tablet, PC) by way of an encrypted P2P tunnel. This means that video contents are not sent by way of the server and are therefore also not accessible to third parties.



Es ist gut zu wissen...
It is good to know...

... wer mein Haus betritt.
... who comes into my house.

...dass mein Baby zufrieden schläft.
...that my baby sleeps contentedly.

...dass im Geschäft alles läuft.
...that everything is running fine in the business.

Zukunftssicher

Integrieren Sie Ihre DIGITUS® Plug&View-Kameras ganz einfach in bestehende Smarthome-Umgebungen.

Future-proof


Integrate your DIGITUS® Plug&View cameras in existing smart home environments very easily.

Durch die Integration der DIGITUS® Plug&View-Kameras in Smarthome- und NAS-Systeme haben Sie die Möglichkeit, neben der Steuerung Ihres Smarthomes auch das gesamte System zu überwachen. Das gibt Ihnen ein maximales Sicherheitsgefühl.

Integrating the DIGITUS® Plug & View cameras in smart home and NAS systems not only enables you to control your smart home, but also to keep the entire system under surveillance. This will give you a maximum feeling of security.

DIGITUS® Plug&View-Kameras können sehr einfach mit den folgenden Smarthome-Systemen genutzt werden:

DIGITUS® Plug&View cameras are very easy to use with the following smart home systems:



Netzwerkspeicher

Sie können das IP-Kamerasystem sehr einfach in Ihre bestehende Netzwerk-Infrastruktur integrieren.

Network Storage

You can integrate the IP camera system in your existing network infrastructure very easily.

Speichern Sie Ihre Videos direkt auf dem Gerät (NAS) in Ihrem Netzwerk. Store your videos directly on the (NAS) device in your network.

Damit Sie zentral auf Ihre Videos im Netzwerk zugreifen können, unterstützt das Plug&View-System die folgenden NAS-Speichersysteme:

The Plug&View system supports the following NAS storage systems to provide you with central access to your videos in your network:





Sharing-Funktion



Geben Sie Ihren Großeltern die Möglichkeit, einen Blick auf ihre geliebten Enkelkinder zu werfen. Dank der Plug&View Sharing-Funktion können Sie den Live-Stream der Kamera z.B. mit Ihren Nachbarn teilen, damit diese ein wachsames Auge auf Ihr Heim haben können, während Sie im Urlaub sind. Dazu ist keine Weitergabe Ihres Passworts notwendig.

Put your parents in a position to cast a gaze on their beloved grandchildren. With the Plug&View sharing function, you can share the live stream of the camera with your neighbours, for example, to keep a watchful eye on your home while you are away on holiday, all without giving them your password. them your password.

Cloud-Speicherung

Sobald das Video in der Cloud ist, haben Sie Zugriff darauf.

Cloud Storage

If desired, all camera recordings can be synchronized centrally with Google Drive.

Falls gewünscht, können Ihre Aufnahmen zentral mit Google Drive synchronisiert werden. So haben Sie die Möglichkeit, später auf Ihre Aufnahmen zuzugreifen.

If desired, your recordings can be centrally synchronized with Google Drive. This enables you to access your recordings later.

Lokale Speicherung

Speichert Ihre Videos auf einem integrierten Speicher oder einer separaten Speicherkarte.

Local Storage


Store your videos on a integrated memory or seperated SD-Card

Eine weitere Videospeicheroption ist die lokale Speicherung. entweder auf dem internen Speicher oder auf einer externen Speicherkarte. Bitte prüfen Sie die verschiedenen Modelle auf mögliche Speicheroptionen.

Another video storage option is local storage. Plug&View cameras also feature local video storage options, either in the integrated memory or on an external memory card. Please check the various models for storage options.




Integrierter Speicher
(Alle Kameras für den Außenbereich)



Integrated memory
(All outdoor cameras)


Seperate Speicherkarte
(Alle Kameras für den Innenbereich)





Seperate SD-Card
(All indoor cameras)






// PRODUKTÜBERSICHT

|  KAMERAS FÜR DEN INNENBEREICH | DN-16047 | DN-16046 | DN-16029 | DN-16038 |
|--|---|--------------------------------------|---|---|
| Beschreibung: | OptiVision Pro kompakte & portable Mini IP-Kamera | OptiView Pro Weitwinkel IP-Kamera | OptiPan IP-Kamera mit Schwenk- und Neigefunktion | OptiDome IP-Deckenkamera |
| Geeignet für: | Kinderzimmer Bücherregal Schrank | Wohnzimmer Bücherregal Kommode | Terrasseneingang Große Wohnbereiche Büroräume | Hausflur Praxen Offener Wohnbereich |
| Technische Details: | | | | |
| Auflösung | HD Auflösung | HD Auflösung | Full HD Auflösung | Full HD Auflösung |
| Einsatzbereich | Inneneinsatz | Inneneinsatz | Inneneinsatz | Inneneinsatz |
| Tag / Nacht Unterstützung | Tag / Nacht | Tag / Nacht | Tag / Nacht | Tag / Nacht |
| Netzwerk Anschluss | Wireless LAN | LAN / Wireless LAN | LAN / Wireless LAN | LAN / Wireless LAN |
| Audio (Lautsprecher/ Mikrofon) (+/-) | (✓ / ✓) | (✓ / ✓) | (✓ / ✓) | - |
| Schwenk- und Neigefunktion | - | - | ✓ | - |
| Zoomfunktion | - | - | - | - |
| Speicher | über SD-Karte möglich | über SD-Karte möglich | über SD-Karte möglich | integrierter Speicher |
| Bewegungserkennung | ✓ | ✓ | ✓ | ✓ |
| Cloud Speicherung | ✓ | ✓ | ✓ | ✓ |
| Wetterschutzgehäuse | - | - | - | - |
| Vandalismusschutz | - | - | - | - |
| Power over Ethernet | - | - | - | - |

|  KAMERAS FÜR DEN AUSSENBEREICH | DN-16049 | DN-16039 | DN-16043 | DN-16048 |
|---|---|--|---|---|
| Beschreibung: | OptiGuard IP-Kamera mit IP66 Wetterschutz | OptiVario IP Kamera mit manuell einstellbarem Betrachtungswinkel | OptiDome Pro Vandalismusschutz IP-Deckenkamera mit manuell einstellbarem Betrachtungswinkel | OptiZoom Pro Vandalismusschutz IP-Kamera mit Schwenk- und Neigefunktion und 4-fach optischem Zoom |
| Geeignet für: | Einfahrt Hauswand Garage | Hauseingang Carport Halle | Hauseingang Carport Firmen- & Privatgelände | Geländeauffahrt Fuhrpark Firmengelände |
| Technische Details: | | | | |
| Auflösung | Full HD Auflösung | Full HD Auflösung | Full HD Auflösung | Full HD Auflösung |
| Einsatzbereich | Außeneinsatz | Außeneinsatz | Außeneinsatz | Außeneinsatz |
| Tag / Nacht Unterstützung | Tag / Nacht | Tag / Nacht | Tag / Nacht | Tag / Nacht |
| Netzwerk Anschluss | LAN / Wireless LAN | LAN / Wireless LAN | LAN / Wireless LAN | LAN / Wireless LAN |
| Audio (Lautsprecher/ Mikrofon) (+/-) | - | - | - | - |
| Schwenk- und Neigefunktion | - | - | - | ✓ |
| Zoomfunktion | - | manueller 4-fach Zoom | manueller 4-fach Zoom | 4-fach Zoom |
| Speicher | integrierter Speicher | integrierter Speicher | integrierter Speicher | integrierter Speicher |
| Bewegungserkennung | ✓ | ✓ | ✓ | ✓ |
| Cloud Speicherung | ✓ | ✓ | ✓ | ✓ |
| Wetterschutzgehäuse | ✓ | ✓ | ✓ | ✓ |
| Vandalismusschutz | - | - | ✓ | ✓ |
| Power over Ethernet | - | ✓ | ✓ | ✓ |

// PRODUCT OVERVIEW

|  INDOOR CAMERAS | DN-16047  | DN-16046  | DN-16029  | DN-16038  |
|--|---|---|---|---|
| Description: | OptiVision Pro compact portable mini IP camera | OptiView Pro wide angle cube IP camera | OptiPan IP camera with pan and tilt function | OptiDome IP Dome camera |
| Suitable for: | Children's room Bookshelf Cabinet | Living room Bookshelf Commode | Terrace entrance Larger living area Office area | Corridor Medical practice Open living areas |
| Technical details: | | | | |
| Resolution | HD resolution | HD resolution | Full HD resolution | Full HD resolution |
| Operating range | Indoor use | Indoor use | Indoor use | Indoor use |
| Day / Night support | Day / Night | Day / Night | Day / Night | Day / Night |
| LAN connection | Wireless LAN | LAN / Wireless LAN | LAN / Wireless LAN | LAN / Wireless LAN |
| Audio (Speaker/ Microphone) (+/-) | (✓/ ✓) | (✓/ ✓) | (✓/ ✓) | - |
| Pan / Tilt function | - | - | ✓ | - |
| Zoomfunction | - | - | - | - |
| Memory | possible via SD card | possible via SD card | possible via SD card | integrated |
| Motion detection | ✓ | ✓ | ✓ | ✓ |
| Cloud Storage | ✓ | ✓ | ✓ | ✓ |
| Weatherproof housing | - | - | - | - |
| Vandal resistant | - | - | - | - |
| Power over Ethernet | - | - | - | - |

|  OUTDOOR CAMERAS | DN-16049  | DN-16039  | DN-16043  | DN-16048  |
|---|---|---|--|---|
| Description: | OptiGuard IP cam with IP66 weather protection | OptiVario IP camera with manual adjustable viewing angle | OptiDome Pro vandal-proof IP camera with manual adjustable viewing angle | OptiZoom Pro vandal-proof IP camera with pan and tilt function and 4x optical zoom |
| Suitable for: | Entrance Wall Garage | Entrance Carport Hall | Entrance Carport Outdoor area | Entrance Fleet Outdoor area |
| Technical details: | | | | |
| Resolution | Full HD resolution | Full HD resolution | Full HD resolution | Full HD resolution |
| Operating range | Outdoor use | Outdoor use | Outdoor use | Outdoor use |
| Day / Night support | Day / Night | Day / Night | Day / Night | Day / Night |
| LAN connection | LAN / Wireless LAN | LAN / Wireless LAN | LAN / Wireless LAN | LAN / Wireless LAN |
| Audio (Speaker/ Microphone) (+/-) | - | - | - | - |
| Pan / Tilt function | - | - | - | ✓ |
| Zoomfunction | - | manual 4x zoom | manual 4x zoom | 4x zoom |
| Memory | integrated | integrated | integrated | integrated |
| Motion detection | ✓ | ✓ | ✓ | ✓ |
| Cloud Storage | ✓ | ✓ | ✓ | ✓ |
| Weatherproof housing | ✓ | ✓ | ✓ | ✓ |
| Vandal resistant | - | - | ✓ | ✓ |
| Power over Ethernet | - | ✓ | ✓ | ✓ |



DIGITUS® Plug&View OptiVision Pro

DIGITUS® Plug&View OptiVision Pro

• **Kompakte, portable Mini IP Kamera**

• **Compact, portable Mini IP camera**

Technical Features

- 1 megapixel HD video resolution (1280x720 pixel)
- Designed for indoor surveillance
- Built-in infrared LEDs for day and night use
- Wireless LAN interface
- 2-way audio communication
- Supports 32 GB microSD card for local storage
- Powerful motion detection – automatically records and saves videos to local storage
- Cloud storage, sync records from local storage to Google drive



DN-16047 356943 | Plug&View OptiVision Pro



DIGITUS® Plug&View OptiView Pro

DIGITUS® Plug&View OptiView Pro

• **Weitwinkel Cube IP Kamera**

• **Wide angle Cube IP camera**

Technical Features

- 1 megapixel HD video resolution (1280x720 pixel)
- Designed for indoor surveillance
- Built-in infrared LEDs for day and night use
- LAN / Wireless LAN interface
- 2-way audio communication
- Supports 32 GB microSD card for local storage
- Powerful motion detection – automatically records and saves videos to local storage
- Cloud storage, sync records from local storage to Google drive



DN-16046 342526 | Plug&View OptiView Pro

DIGITUS® Plug&View OptiPan

• IP Kamera mit Schwenk- und Neigefunktion

Technical Features

- 2 megapixel Full HD video resolution (1920x1080 pixel)
- Designed for indoor surveillance
- Built-in infrared LEDs for day and night use
- LAN / Wireless LAN interface
- 2-way audio communication
- Supports 32 GB microSD card for local storage
- Powerful motion detection – automatically records and saves videos to local storage
- Cloud storage, sync records from local storage to Google drive

DIGITUS® Plug&View OptiPan

• Pan and tilt IP camera



DN-16029 362937 | DIGITUS® Plug&View OptiPan, Network Camera

DIGITUS® Plug&View OptiDome

• Dekorationsfreundliche, kugelförmige IP Kamera

Technical Features

- 2 megapixel Full HD video resolution (1920x1080 pixel)
- Designed for indoor surveillance
- Built-in infrared LEDs for day and night use
- LAN / Wireless LAN interface
- Internal storage for local recording
- Powerful motion detection – automatically records and saves videos to local storage
- Cloud storage, sync records from local storage to Google drive

DIGITUS® Plug&View OptiDome

• Decoration friendly dome shape IP camera



DN-16038 336396 | Plug&View OptiDome

DIGITUS® Plug&View OptiGuard

DIGITUS® Plug&View OptiGuard

· IP Kamera mit IP66 Wetterschutz

· IP66 weatherproof bullet IP camera



Technical Features

- 2 megapixel Full HD video resolution (1920x1080 pixel)
- Designed for outdoor surveillance
- Built-in infrared LEDs for day and night use
- LAN / Wireless LAN interface
- Internal storage for local recordings
- Powerful motion detection – automatically records and saves videos to local storage
- Cloud storage, sync records from local storage to Google drive



DN-16049 362944 | DIGITUS® Plug&View OptiGuard

DIGITUS® Plug&View OptiVario

DIGITUS® Plug&View OptiVario

· IP Kamera mit manuell einstellbarem Betrachtungswinkel

· IP camera with manual adjustable zoom lens



Technical Features

- 2 megapixel Full HD video resolution (1920x1080 pixel)
- Designed for outdoor surveillance
- Built-in infrared LEDs for day and night use
- LAN / Wireless LAN interface
- Internal storage for local recordings
- Power over Ethernet for easy installation
- Powerful motion detection – automatically records and saves videos to local storage
- Cloud storage, sync records from local storage to Google drive



DN-16039 336402 | Plug&View OptiVario

DIGITUS® Plug&View OptiDome Pro

• **Vandalismus geschützte IP Deckenkamera mit manuell einstellbarem Betrachtungswinkel**

DIGITUS® Plug&View OptiDome Pro

• **Vandal-proof IP dome camera with manual adjustable zoom lens**

Technical Features

- 2 megapixel Full HD video resolution (1920x1080 pixel)
- Designed for outdoor surveillance
- Built-in infrared LEDs for day and night use
- LAN / Wireless LAN interface
- Internal storage for local recordings
- Power over Ethernet for easy installation
- Powerful motion detection – automatically records and saves videos to local storage
- Cloud storage, sync records from local storage to Google drive



DN-16043 337348 | Plug&View OptiDome Pro

DIGITUS® Plug&View OptiZoom Pro


• **Vandalismus geschützte IP Kamera mit Schwenk- und Neigefunktion und 4-fach optischem Zoom**

DIGITUS® Plug&View OptiZoom Pro

• **Vandal-proof IP dome camera with pan, tilt and 4 times optical zoom**

Technical Features

- 2 megapixel Full HD video resolution (1920x1080 pixel)
- Designed for outdoor surveillance
- Built-in infrared LEDs for day and night use
- LAN / Wireless LAN interface
- Internal storage for local recordings
- Power over Ethernet for easy installation
- Powerful motion detection – automatically records and saves videos to local storage
- Cloud storage, sync records from local storage to Google drive

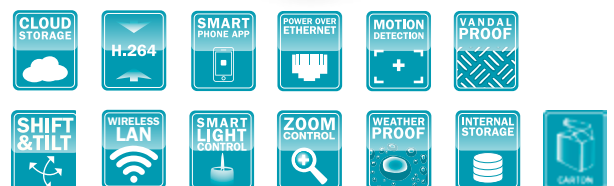

DN-16048 356950 | Plug&View OptiZoom Pro

DIGITUS® Plug&View NVR, Festplatte

- **Live-Bilder von bis zu 4 DIGITUS® Plug&View Kameras 24 Stunden am Tag am eigenen TV anschauen**
- **Aufzeichnung von bis zu 4 Kameras bei 25fps @ 720p**
- **Die perfekte Ergänzung zu Ihren Plug&View-Kameras!**
- **Ihr Plug&View Netzwerkvideorekorder mit einfacher Installation durch einfaches Scannen des QR-Codes**

Technical Features

- Full HD audio/video transmission (1080p)
- 4 channel live view at local display with 1080p Full HD HDMI output
- Record of up to 4 cameras with 25fps @ 720p
- Local user interface supported for liveview, playback and configuration setup via VGA or HDMI monitor
- LAN Speed: 10/100/1000Base-T Gigabit Ethernet
- Video compression format: H.264
- Recording: scheduled recording

DIGITUS® Plug&View NVR, HDD

- **Watch live images from up to 4 DIGITUS® Plug&View cameras 24 hours a day on your own TV**
- **Record of up to 4 cameras with 25fps @ 720p**
- **The perfect addition to your Plug&View cameras!**
- **Your Plug&View NVR with easy installation by simply scanning the QR code**

- Watch live stream via free of charge app from everywhere
- The NVR is particularly tuned to the Plug&View system and can only be used with the Plug&View cameras.
- Operating temperature: -10 °C ~+50 °C
- Power source (±10 %): DC12 V / 2 A
- DN-16150_1 comes with 1TB HDD local storage
- DN-16150_2 comes with 2TB HDD local storage



- DN-16150 329886 | Plug&View NVR**
- DN-16150_1 378150 | Plug&View NVR, 1TB HDD**
- DN-16150_2 378167 | Plug&View NVR, 2TB HDD**

DIGITUS® Full HD WDR IP Netzwerk fixed Dome Innenkamera

- **Eingebaute LEDs für Überwachung im Dunkeln**
- **Integrierter digitaler Eingang/Ausgang (DI/DO) für Alarm und Sensor**
- **Integrierter MicroSD/SDHC-Kartenslot für lokale Speicherung**
- **ONVIF-kompatibel**

Technical Features

- Image Sensor: 1/3" Progressive CMOS
- Effective Pixels: 4 Megapixel (2688 x 1520)
- Minimum Illumination: 0.1 lux (color)
- Focal Length: 2.3mm
- F Number: F2.0
- FOV: 127°
- Wide Dynamic Range: Shutter WDR (96dB)
- Built in LED´s for night surveillance up to 30 m

DIGITUS® Full HD WDR IP Network Indoor fixed Dome Camera

- **Built-in LEDs for better night surveillance**
- **Built-in digital input/output (DI/DO) for alarm and sensor**
- **Built-in microSD/SDHC card slot for local storage**
- **ONVIF compliant**

- Supports Motion Detection, Privacy Mask, Tampering Alarm
- Interface: RJ-45, 10/100/1000 Mbps Ethernet (Gigabit Ethernet)
- Operating Temperatur: -10°C to + 50°C
- Power Source: DC 12V / AC 24V / PoE
- Power Consumption: 13 Watt



DN-16081-1 369011 | Full HD WDR IP Network Indoor fixed Dome Camera

DIGITUS® Full HD WDR IP Mini Bullet Außenkamera

- **Eingebaute LEDs für Überwachung im Dunkeln**
- **Integrierter MicroSD/SDHC-Kartenslot für lokale Speicherung**
- **ONVIF-kompatibel**

Technical Features

- Image Sensor: 1/2.8 „ Sony Progressive CMOS
- Effective Pixels: 2 Megapixel (1920 x 1080)
- Minimum Illumination: 0.1 lux (color)
- Focal Length: 3-10.5mm Vario-focal lens
- F Number: F1.4
- FOV: Wide 92.2° / Tele 31.9°
- Wide Dynamic Range: Shutter WDR (96dB)
- Built in LED´s for night surveillance up to 25 m

DIGITUS® Full HD WDR IP Outdoor Mini Bullet Camera

- **Built-in LEDs for better night surveillance**
- **Built-in microSD/SDHC card slot for local storage**
- **ONVIF compliant**

- Supports Motion Detection, Privacy Mask, Tampering Alarm
- Interface: RJ-45, 10/100/1000 Mbps Ethernet (Gigabit Ethernet)
- Operating Temperatur: -10°C to + 50°C
- IP66 housing design for outdoor use
- Power Source: PoE
- Power Consumption: 6.5 Watt



DN-16083-1 368984 | Full HD WDR IP Outdoor Mini Bullet Camera

DIGITUS® Full HD WDR Mini IP fixed Dome Camera

- **Kleines und kompaktes Gehäuse**
- **Integrierter MicroSD/SDHC-Kartenslot für lokale Speicherung**
- **ONVIF-kompatibel**

Technical Features

- Image Sensor: 1/2.8 „ Sony Progressive CMOS
- Effective Pixels: 2 Megapixel (1920 x 1080)
- Minimum Illumination: 0.05 lux (color)
- Focal Length: 3.6 mm
- F Number: 1.8
- FOV: 78°
- Wide Dynamic Range: Shutter WDR (96dB)
- Supports Motion Detection, Privacy Mask, Tampering Alarm

DIGITUS® Full HD WDR Mini IP fixed Dome Camera

- **Small and compact housing**
- **Built-in microSD/SDHC card slot for local storage**
- **ONVIF compliant**

- Interface: RJ-45, 10/100/1000 Mbps Ethernet (Gigabit Ethernet)
- Operating Temperatur: -10°C to + 50°C
- Power Source: PoE (Power over Ethernet)
- Power Consumption: 4.2 Watt



DN-16086 339229 | Full HD WDR Mini IP fixed Dome Camera

DIGITUS® Analog High Definition CCTV NVR Kit

- **Digitale Videorekorder inklusive 4 x 720P Tag/Nacht Außenkameras**
- **Wetterfestes IPP66-Kameragehäuse mit erweitertem Temperaturbereich, somit ideal für den Außeneinsatz**
- **Lokales Display über VGA oder HDMI anbindbar**
- **Mobile Überwachung mit Unterstützung für iOS- und Android-Geräte**

Technical Features

Recorder:

- Supports VGA, HDMI, CVBS Syn output
- Resolution 1920 x 1080
- Supports AHD and 960H cameras
- Supports zoom, preview and playback
- Support "One Key" recording
- Supports event search, picture search, playback and backup
- Support fast playback
- Image encoding: H.264
- Display image: PAL (625TVL, 50fps) / NTSC (525TVL, 60fps)
- Display mode: 4 CH 720p real time recording, 1 CH playback @30fps, 4 CH playback @15fps
- Motion detecton: each channel up to 192 (16x12) detection areas, sensitivity: 1-6
- Supports area mask
- Audio encoding: ADPCM, G711
- Recording mode: motion detection, alarm, time recording, manual
- Local playback: 4 CH playback
- Video output: VGA, HDMI, BNC
- Audio input: 4 channel
- Audio output: 1 channel

DIGITUS® Analog High Definition CCTV NVR Kit

- **A complete surveillance kit with 4x 720P Outdoor Day and Night cameras and an AHD video recorder**
- **Cameras support IP66 waterproof at extended temperature range**
- **Local user interface supported for liveview, playback and configuration setup via VGA or HDMI monitor**
- **Supports mobile surveillance on Android and iOS smart phones**

- Network: 1x 10/100Mbps RJ45 interface
- Control: standard RS485 interface
- HDD Interface: 1 x 3.5" SATA port, max. 4TB
- Power: DC 12V / 2A
- Power consumption: 12W
- Operating temperature: 0°C - 55°C
- Operate Humidity: 10%~90%
- Humidity: 10% - 90%

Camera:

- CMOS sensor
- Low illumination 0.01 Lux (F1.2, AGC ON), 0 Lux with IR
- Supports ICR, day & night function
- Supports automatic white balance, high color reduction, clear image
- Supports back light compensation
- Supports automatic electronic shutter
- Supports automatic electronic gain function
- IP66 housing design for outdoor use
- Operating temperature cameras: -20°C - +55°C
- Dimensions: 252 x 213 x 42 mm



DIGITUS® H.264 Video Server

- Analog auf IP (H.264/MJPEG), PoE, ONVIF,
- Integrierter digitaler Eingang/Ausgang (DI/DO) für Alarm und Sensor
- ONVIF-kompatibel

DIGITUS® H.264 Video Server

- Analog to IP (H.264/MJPEG), PoE, ONVIF,
- Built-in digital input/output (DI/DO) for alarm and sensor
- ONVIF compliant

Technical Features

- Video Input/Output: 1x BNC In, 1x BNC Out
- 1 x RJ45 10Mbps / 100Mbps network connector
- Two-way audio
- Video compression: H.264 / MJPEG
- Video Resolution: H.264 - D1/ VGA / CIF
- Supported protocols: ARP, IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, QoS, ONVIF
- Security: HTTPS, IP Filter, IEEE 802.1X
- External alarm output and input
- Event Notification: HTTP / FTP / SMTP
- Storage: Supports microSD up to 32GB
- User Accounts: up to 20
- Password Levels: User and Administrator
- Supports RS485 serial interface
- Operating temperature: -10°C ~ 50°C
- Dimension (LxWxH): 137 x 99 x 28 mm
- Weight: 200g
- Power source: PoE / DC 12V - 48V / AC 24V
- Power Consumption: 4.0W



DN-16100-1 369035 | H.264 Video Server

**DIGITUS® 4/8/16 Kanal Full HD
Netzwerk Video Rekorder**

- Aufnahme und Wiedergabe von Kameras in Full HD auf lokalem Monitor
- Smart Kamera Suche
- 2 HDD Anschlüsse für lokale Speicherung

**DIGITUS® 4/8/16 channel Full HD
Network Video Recorder**

- Record and display cameras in Full HD on local monitor
- Smart camera search
- 2 HDD ports for local storage

Technical Features

- Connect up to 4/8/16 network cameras
- 2 HDD ports for local storage
- Exports playback videos to AVI
- Two-way audio
- Smart camera search
- Mobile Devices Remote Monitoring
- Remote WEB-based management
- Controlled by USB mouse, keyboard or joystick
- 10/100Mbps Ethernet
- Supports DHCP-Client

- Max. 4 TB capacity for each HDD
- VGA/ HDMI video interface
- LED indicator for power, alarm, record, network
- 12V DC/ 3.3A power supply
- Supported video resolutions: 3 MP, 5 MP, 720p, 1080p
- Video snapshot in JPEG format
- Supported protocols: HTTP/ HTTPS/ SMTP/ DHCP/ ARP/ NTP/ DNS/ UPnP/ FTP
- Supported split screen: 1/ 4/ 9/ 16



DN-16111 369189 | 4 channel Full HD Network Video Recorder

DN-16112 369196 | 8 channel Full HD Network Video Recorder

DN-16113 369219 | 16 channel Full HD Network Video Recorder

DIGITUS® 4/8-Port PoE Fast Ethernet Switch mit VLAN Funktion

- Dank der PoE Funktion ist ein zusätzliches Netzteil für die angeschlossenen Geräte nicht erforderlich
- Der VLAN Modus sorgt für eine optimale und schnelle Identifikation der angeschlossenen Geräte
- Der Switch kann Betriebssystemunabhängig eingesetzt werden

DIGITUS® 4/8-Port PoE Fast Ethernet Switch with VLAN configuration

- Thanks to the PoE function is an additional power supply for the connected devices not required
- The VLAN mode ensures optimal and quick identification of connected devices
- The switch can be used independent of operating system




Technical Features

- 4/8-Port 10/100Mbps Fast Ethernet Switch with Power over Ethernet (PoE)
- Ethernet IEEE802.3 / 802.3u / 802.3x / 802.1p / 802.1q / IEEE802.3 af/at
- Ethernet Speed: 10/100Mbps Fast Ethernet
- Power over Ethernet (PoE) - You only need one cable for power and data transfer
- With integrated DIP switch to enable the VLAN Mode
- Maximum power: up to 120 Watt (with power supply)



DN-95323

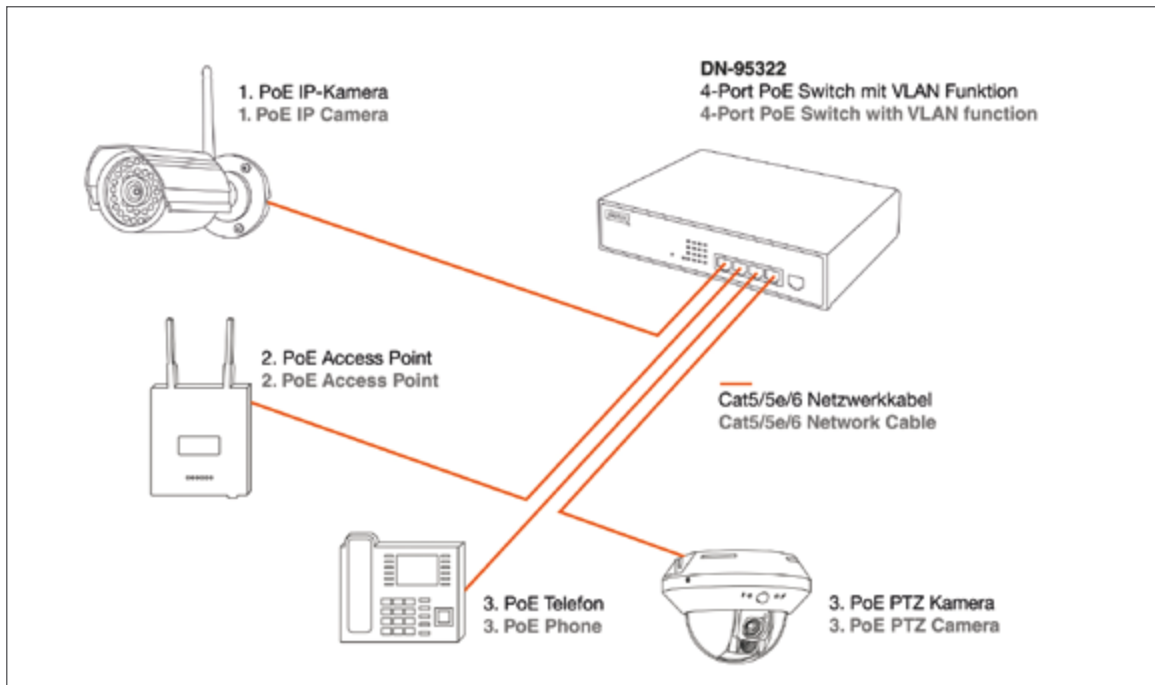

DN-95322 365303 | 4 Port PoE Fast Ethernet Switch with VLAN configuration, 60W
DN-95323 365310 | 8 Port PoE Fast Ethernet Switch with VLAN configuration, 120W

DIGITUS® 8-Port PoE Fast Ethernet Switch

- 8 x 10/100BaseTX Ports mit PoE - Unterstützung
- Unterstützte Standards: IEEE 802.3x Flow Control, IEEE 802.3af Power over Ethernet (PoE)
- Der Switch kann Betriebssystemunabhängig eingesetzt werden

Technical Features

- 8-Port 10/100BaseTX with 8-Port PoE
- PoE power output 48 V/DC, max. 15.4 W per port
- Maximum power consumption: 150 W
- Supported standards: IEEE 802.3x Flow Control, IEEE 802.3af Power over Ethernet (PoE)
- Store and forward technology
- Inclusive mounting accessories for rack installation
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun

DIGITUS® 8-Port PoE Fast Ethernet Switch

- 8 x 10/100BaseTX ports with PoE support
- Supported standards: IEEE 802.3x Flow Control, IEEE 802.3af Power over Ethernet (PoE)
- The switch can be used independent of operating system



DN-95321 291947 | 8 x 10/100BaseTX ports with PoE support

DIGITUS® 8-Port PoE Web Smart Fast Ethernet Switch

- 8-Port 10/100BaseTX mit PoE - Unterstützung
- Unterstützt Port-Konfiguration, Port-Mirroring, Bandbreitenkontrolle, Broadcast-Sturm-Kontrolle
- Trunk-Einstellungen in 2 Gruppen (1 - 4 Ports für jede Gruppe)

Technical Features

- 8-Port 10/100BaseTX with PoE
- PoE power output 48 V/DC, max. 15.4 W per port
- Supported Standards: IEEE 802.3x Full-duplex and Flow Control, IEEE 802.3ad Trunk (Link Aggregation), IEEE 802.3at Power over Ethernet (PoE), IEEE 802.1Q VLAN, IEEE 802.1p Class of Service, IEEE 802.1x Port Based Network Access Control, IEEE 802.1d Spanning Tree Protocol, IEEE 802.1w Rapid Spanning Tree Protocol
- Store and forward technology
- Supports port configuration, port mirroring, bandwidth control, broadcast storm control
- PoE on/off setting via Web management
- VLAN setting port-based 8 groups / tag-based: 20 groups
- Trunk setting 2 groups (1 - 4 port for each group)
- QoS setting: up to 4 queues
- Supports MAC address filtering, TCP/UDP filtering

DIGITUS® 8-Port PoE Web Smart Fast Ethernet Switch

- 8-Port 10 / 100BaseTX with PoE - Support
- Supports port configuration, port mirroring, bandwidth control, broadcast storm control
- Trunk settings in 2 groups (1 - 4 ports for each group)



DN-95311-1 324683 | 8-Port PoE Web Smart Fast Ethernet Switch

DIGITUS® 8/16-Port PoE Midspan, 802.3af

- Maximale Leistung von bis zu 260 Watt garantiert volle Power für jeden Anschluss
- Jeder Ausgang verfügt über eine Strombegrenzung, einer Kurzschlussicherung sowie automatischer Endgeräteerkennung und Klassifizierung
- Der Switch kann Betriebssystemunabhängig eingesetzt werden

DIGITUS® 8/16-port PoE Midspan, 802.3af

- Maximum Power Consumption of up to 260 Watt ensures full power for every connection
- Each output port has output current limited, short-circuit protection, complete Powered Device (PD) detection and classification
- The switch can be used independent of operating system



Technical Features

- Maximum Power Consumption of up to 260 Watt ensures full power for every connection
- Complies with the 802.3af PoE standard
- Input: 8/16x RJ45 ports with 10/100 Mbps
- Output: 8/16x RJ45 ports with 10/100 Mbps + PoE (15.4 Watt per port)
- Each output port has output current limited, short-circuit protection, complete Powered Device (PD) detection and classification
- Inclusive mounting accessories for rack installation



DN-95111 291961 | 8-port PoE Midspan, 802.3af, 130W

DN-95113 291978 | 16-port PoE Midspan, 802.3af, 260W

DIGITUS® 16/24-Port PoE Web Smart Fast Ethernet Switch

- 16/24 x 10/100BaseTX Ports mit PoE - Funktion
- Web Smart Switch
- Der Switch kann Betriebssystemunabhängig eingesetzt werden

DIGITUS® 16/24-Port PoE Web Smart Fast Ethernet Switch

- 16/24 x 10/100BaseTX ports with PoE function
- Web smart switch
- The switch can be used independent of operating system



Technical Features

- 16/24-Port 10/100BaseTX with PoE
- PoE power output 48 V/DC, max. 15.4 W per port
- Supported standards: IEEE 802.3x Full-duplex and Flow Control, IEEE 802.3ad Trunk (Link Aggregation), IEEE 802.3af Power over Ethernet (PoE), IEEE 802.1Q VLAN, IEEE 802.1p Class of Service, IEEE 802.1x Port Based Network Access Control, IEEE 802.1d Spanning Tree Protocol, IEEE 802.1w Rapid Spanning Tree Protocol
- Store and forward technology
- Supports port configuration, port mirroring,

- bandwidth control, broadcast storm control
- PoE on/off setting via Web management
- VLAN setting port-based 8 groups / tag-based: 20 groups
- Trunk setting 2 groups (1 - 4 port for each group)
- QoS setting: up to 4 queues
- Supports MAC address filtering, TCP/UDP filtering
- Backup/ recovery configuration
- Inclusive mounting accessories for rack installation

DN-95313



DN-95312 279556 | 16-Port PoE Web Smart Fast Ethernet Switch, 260W

DN-95313 291909 | 24-Port PoE Web Smart Fast Ethernet Switch, Full Power, 2x SFP, 390W

DIGITUS® Passiv PoE Kabelset

- Einfaches zusammenführen von Strom- und Datenkabel zu einem einzigen Kabel
- Kabelverbindung: 10/100 Mbit/s
- Pinbelegung: 1/2/3/6 für Datenübertragung, 4/5/7/8 für die Stromversorgung


Technical Features

- 1x Incoming cable, featuring RJ45 plug, DC jack and RJ45 jack
- 1x Outgoing cable for the device, featuring RJ45 plug, DC plug and RJ45 jack
- Suitable for 5.5mm DC plugs

DIGITUS® Passive PoE cable kit

- Easily merge of power and data cables into a single cable
- Connection: 10/100 Mbit/s
- Assignment: 1/2/3/6 for data transfer, 4/5/7/8 for power supply

- Connection speed: 10/100 Mbit/s
- PVC coating
- RJ45 plug
- Assignment: 1/2/3/6 for data transfer, 4/5/7/8 for power supply

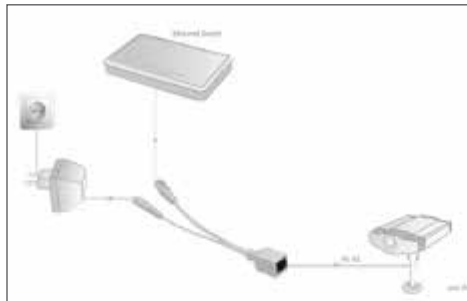

DN-95001 260240 | Passive PoE cable kit

DIGITUS® Passiv PoE Wandbefestigungsdose


- Einfaches zusammenführen von Strom- und Datenkabel zu einem einzigen Kabel
- Kabelverbindung: 10/100 Mbit/s
- Pinbelegung: 1/2/3/6 für Datenübertragung, 4/5/7/8 für die Stromversorgung

Technical Features

- RJ45 LAN jack
- DC jack
- PoE (RJ45) jack
- Suitable for 5.5mm DC plugs
- Connection speed: 10/100 Mbit/s
- Pin Assignment: 1/2/3/6 for Network, 4/5/7/8 for Power Supply

DIGITUS® Passive PoE wall mount box

- Easily merge of power and data cables into a single cable
- Connection: 10/100 Mbit/s
- Assignment: 1/2/3/6 for data transfer, 4/5/7/8 for power supply

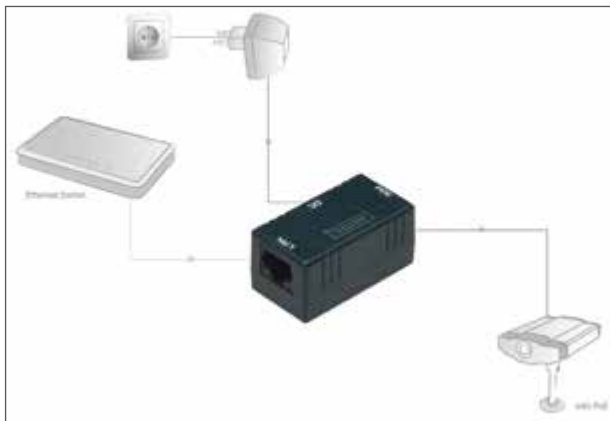

DN-95002 260257 | Passive PoE wall mount box

DIGITUS® PoE Injector, 802.3af

DIGITUS® PoE Injector, 802.3af



- Einfaches zusammenführen von Strom- und Datenkabel zu einem einzigen Kabel
- Jeder Ausgang verfügt über eine Strombegrenzung, einer Kurzschlussicherung sowie automatischer Endgeräterkennung und Klassifizierung
- Der Injector kann Betriebssystemunabhängig eingesetzt werden

- Easily merge of power and data cables into a single cable
- Each output port has output current limited, short-circuit protection, complete Powered Device (PD) detection and classification
- The Injector can be used independent of operating system

Technical Features

- Complies with the 802.3af PoE standard
- 48V output voltage, 15.4 Watt
- LAN(RJ45) input jack
- LAN(RJ45) output jack
- Connection: 10/100 Mbit/s
- Each output port has output current limited, short-circuit protection, complete Powered Device (PD)

- detection and classification
- Own consumption: 1,6W max
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun
- Operating Temperature: 0 to 40°C
- Storage temperatur: -20 to 85°C



DN-95102 279303 | PoE Injector, 802.3af

DIGITUS® PoE Injector, 802.3at

DIGITUS® PoE Injector, 802.3at



- Ermöglicht die Nutzung von Power over Ethernet mit älteren Netzwerkgeräten
- Entspricht dem 802.3at PoE+ und dem 802.3af PoE Standard
- Der Injector kann Betriebssystemunabhängig eingesetzt werden

- Integrates Power over Ethernet technology to legacy network devices
- Complies with the 802.3at PoE+ and the 802.3af PoE standard
- The Injector can be used independent of operating system

Technical Features

- Complies with the 802.3at PoE+ and the 802.3af PoE standard
- 48V output voltage, 27 Watt
- LAN(RJ45) input jack
- LAN(RJ45) output jack
- Connection: 10/100 Mbit/s
- Each output port has output current limited, short-circuit protection, complete Powered Device (PD) detection and classification
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun



DN-95103-1 283676 | PoE Injector, 802.3at

DIGITUS® PoE+ Injector, 802.3at, 30 Watt

- Entspricht dem 802.3at PoE+ und dem 802.3af PoE Standard
- Einfaches zusammenführen von Strom- und Datenkabel zu einem einzigen Kabel
- Erweitern Sie ihr Netzwerk dort, wo keine Stromleitungen oder Steckdosen vorhanden sind
- Keine Konfiguration erforderlich
- Der Ausgang verfügt über eine Strombegrenzung, einer Kurzschlussicherung sowie automatischer Endgerätererkennung und Klassifizierung

Technical Features

- Complies with the 802.3at PoE+ and the 802.3af PoE standard
- Easily merge of power and data cables into a single cable
- Extend your network to places where there are no power supply cables or sockets available
- no setup needed
- The output is equipped with a current limit, a short-circuit fuse, and automatic terminal device recognition and classification.
- Supports all IEEE 802.3at-compliant PoE devices (such as access points, VoIP telephones, and IP cameras)

DIGITUS® PoE+ Injector, 802.3at, 30 Watt

- Complies with the 802.3at PoE+ and the 802.3af PoE standard
- Easily merge of power and data cables into a single cable
- Extend your network to places where there are no power supply cables or sockets available
- no setup needed
- The output is equipped with a current limit, a short-circuit fuse, and automatic terminal device recognition and classification.

- Transmission range of up to 100 m - with an additional PoE extender, this can be increased to up to 400 m
- Internal consumption (full loaded): 7.0 W max.
- Input: 1x RJ-45 (data)
- Output: 1x RJ-45 (power and data)
- Data output: 100/100/1000 Mbps Gigabit
- Power output: 30 W
- Output voltage: 48 V DC
- Operating temperature range: -5 °C to +40 °C
- Dimensions: 140 mm x 63 mm x 32.5 mm
- Weight: 200g

DN-95103-2



DN-95103-2 375951 | PoE + Injector, 802.3at, 30 Watt

DIGITUS® PoE Ultra Injektor, 802.3at, 60 Watt

- Entspricht dem 802.3at Ultra PoE und dem 802.3af PoE Standard
- Einfaches zusammenführen von Strom- und Datenkabel zu einem einzigen Kabel
- Erweitern Sie ihr Netzwerk dort, wo keine Stromleitungen oder Steckdosen vorhanden sind
- Keine Konfiguration erforderlich
- Der Ausgang verfügt über eine Strombegrenzung, einer Kurzschlussicherung sowie automatischer Endgerätererkennung und Klassifizierung

Technical Features

- Complies with the 802.3at Ultra PoE and 802.3af PoE standards
- Easily merge of power and data cables into a single cable
- Extend your network to places where there are no power supply cables or sockets available
- no setup needed
- The output is equipped with a current limit, a short-circuit fuse, and automatic terminal device recognition and classification.
- Supports all IEEE 802.3at-compliant PoE devices (such as access points, VoIP telephones, and IP cameras)

DIGITUS® PoE Ultra Injector, 802.3at, 60 Watt

- Complies with the 802.3at Ultra PoE and 802.3af PoE standards
- Easily merge of power and data cables into a single cable
- Extend your network to places where there are no power supply cables or sockets available
- no setup needed
- The output is equipped with a current limit, a short-circuit fuse, and automatic terminal device recognition and classification.

- Transmission range of up to 100 m - with an additional PoE extender, this can be increased to up to 400 m
- Own consumption: 1,6W max
- Internal consumption (full loaded): 10 W max.
- Input: 1x RJ-45 (data)
- Output: 1x RJ-45 (power and data)
- Data output: 100/100/1000 Mbps Gigabit
- Power output: 60 W
- Output voltage: 55 V DC
- Operating temperature range: -10 °C to +45 °C
- Dimensions: 193 mm x 85 mm x 41 mm
- Weight: 380 g

DN-95104



DN-95104 375944 | PoE + Injector, 802.3at, 60 Watt

DIGITUS® PoE Splitter, 802.3af

- Ermöglicht die Nutzung von Power over Ethernet mit älteren Netzwerkgeräten
- Ausgangsseite wählbar zwischen 5 Volt 2 Ampère, 7,5 Volt 1,4 Ampère, 9 Volt 1,2 Ampère und 12 Volt 0,9 Ampère
- Der Splitter kann Betriebssystemunabhängig eingesetzt werden



Technical Features

- Complies with the 802.3af PoE standard
- PoE(RJ45) input jack
- Selectable output voltages: 5V 2A, 7.5V 1.4A, 9V 1.2A and 12V 0.9A
- LAN(RJ45) output jack
- DC output jack, 2.5mm (plug / plug cable included in delivery)
- Connection: 10/100 Mbit/s
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun

DIGITUS® PoE Splitter, 802.3af

- Integrates Power over Ethernet technology to legacy network devices
- Selectable output voltages: 5V 2A, 7.5V 1.4A, 9V 1.2A and 12V 0.9A
- The splitter can be used independent of operating system



DN-95202 279396 | PoE Splitter, 802.3af

DIGITUS® PoE Splitter, 802.3at

- Ermöglicht die Nutzung von Power over Ethernet mit älteren Netzwerkgeräten
- Kabelverbindung: 10/100/1000 Mbit/s
- Der Splitter kann Betriebssystemunabhängig eingesetzt werden



Technical Features

- Complies with the 802.3at PoE+ and the 802.3af PoE standard
- PoE(RJ45) input jack
- Selectable output voltages: 5V 4A, 7.5V 2.7A, 9V 2.3A and 12V 1.8A
- LAN(RJ45) output jack
- DC output jack, 2.5mm (plug / plug cable included in delivery)
- Connection: 10/100/1000 Mbit/s
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun

DIGITUS® PoE Splitter, 802.3at

- Integrates Power over Ethernet technology to legacy network devices
- Connection: 10/100/1000 Mbit/s
- The splitter can be used independent of operating system



DN-95203 279402 | PoE Splitter, 802.3at

**Fast Ethernet PoE+ Verstärker mit
1-port 10/100Mbps Eingang und
2-port 10/100Mbps Ausgang**

- **Verlängern Sie Ihr 100 m Ethernet Signal auf bis zu 300 M**
- **Erweitern Sie die Reichweite Ihrer PoE-Geräte**
- **Einfache Plug & Play- Installation**
- **Keine Stromversorgung erforderlich (PoE betrieben)**


**Fast Ethernet PoE+ Repeater with
1-port 10/100Mbps in and 2-port
10/100Mbps out**

- **Extend your 100 m Ethernet signal up to 300 m**
- **Extend the reach of your PoE devices**
- **Simple Plug & Play Solution**
- **No external power supply needed (PoE self powered)**



Technical Features

- Ethernet IEEE802.3 / 802.3u / IEEE802.3 af/at
- Ethernet Speed: 10/100Mbps Fast Ethernet
- Transmission distance up to 300m
- PoE - Power over Ethernet
- No additional power supply necessary
- Operating Temperature: -40°C to 75°C
- Dimensions (L x W x H): 103 x 82 x 25mm
- Weight: 195 g

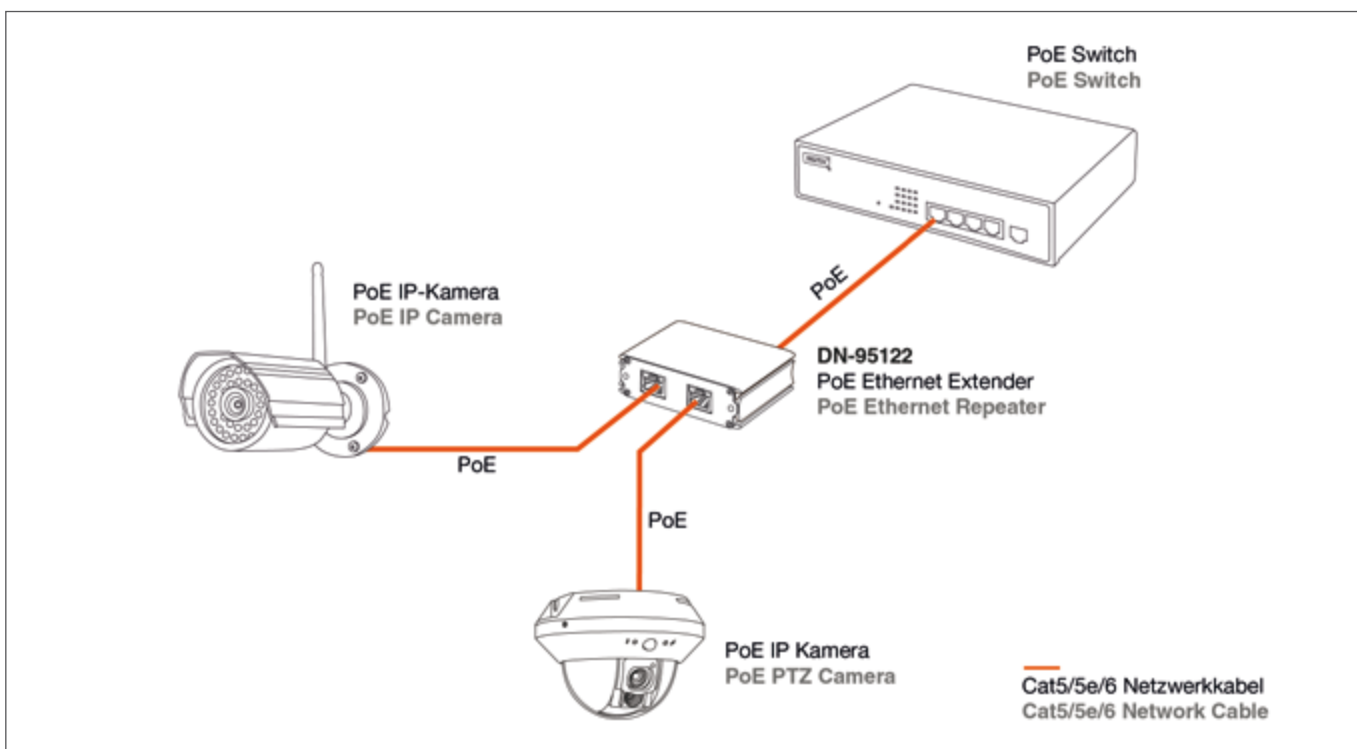



COMPUTER ACCESSORIES & COMPONENTS

| | |
|------------------------------------|-----------|
| Home Network | 72 - 82 |
| I/O Cards | 83 - 93 |
| Serial & Parallel Adapters | 94 - 97 |
| USB Hubs..... | 98 - 102 |
| Card Reader | 103 - 104 |
| USB Accessories..... | 105 - 110 |
| USB Harddisk Drives & Adapters ... | 111 - 120 |
| Graphic Adapters | 121 - 124 |
| Mounting Frames & Accessories.... | 125 - 129 |
| Notebook Accessories | 130 - 143 |



DIGITUS® 300 Mbps Wireless-N Repeater

- **Sichere Verbindung per Knopfdruck – dank WPS-Button**
- **Verstärkt das WLAN-Signal mit bis zu 300 Mbps**
- **Kleines, kompaktes Gehäuse – ideal für den Einsatz in Zuhause & Büro**
- **Erhöht das Signal Ihres WLAN-Netzwerkes**

DIGITUS® 300 Mbps Wireless-N Repeater

- **WPS button allows easy securing of connections**
- **Boosts your wireless network signal with speeds of up to 300 Mbps**
- **Small, compact housing – ideal for home and office**
- **Increases the signal of your wireless network**

Technical Features

- Wireless LAN 802.11n (Draft 2.0) for wireless high-speed access
- Supports up to 300 Mbit/s (11n)
- Downward compatible with 802.11g (54Mbit/s) and 802.11b (11Mbit/s) standard
- Supports 2.4GHz Wireless LAN networks
- Supports Wireless Repeater mode and AP mode
- Maximum Wireless LAN security with WPA2, WPA and

- WEP(128/64)
- Supports WPS (Wireless Protected Setup) - Push button for auto connection to the network
- RJ-45 port for easy connect your networkable devices like TV, Printer or BluRay-Player
- Antennas integrated
- Software wizard for simple installation
- Operating system independent, supports e.g.



DN-70182 361459 | 300 Mbps Wireless-N Repeater



DIGITUS® Wireless-N Breitband Router

- **High Speed Datenübertragung mit bis zu 300 Mbps**
- **WEP, WPA und WPA 2 Verschlüsselung schützen Ihr Netzwerk vor unerlaubtem Zugriff**
- **Zwei Antennen garantieren eine stabile und zuverlässige Verbindung**

DIGITUS® Wireless-N Broadband Router

- **High-speed data transfer rates of up to 300 Mbps**
- **WEP, WPA, and WPA2 encryption protect your network from unauthorized access**
- **Two antennas guarantee a stable and reliable connection**

Technical Features

- Wireless standards: IEEE 802.11n, IEEE 802.11g, IEEE 802.11b
- Frequency Range: 2.4 - 2.4835 GHz
- Wireless security: 64/ 128/ 152-bit WEP/ WPA/ WPA2/ WPA-PSK/ WPA2-PSK
- DHCP: Server, client, address reservation
- 4x 10/100 Mbps LAN ports

- 1x 10/100 Mbps WAN port
- WAN type: Dynamic IP, Static IP, PPPoE, PPTP, L2TP
- Port Forwarding: Virtual Server, Port Triggering, DMZ, UPnP
- Supports DDNS to allow automatic updates of dynamic domains
- VPN Pass-Through: PPTP, L2TP, IPSec



DN-70591 355823 | Wireless-N Broadband Router



DIGITUS® GreyRapid N Wireless Access Point / Router

- **Übernimmt die duale Funktion als Access Point und Repeater**
- **Geschwindigkeiten über WLAN von bis zu 150 Mbps**
- **WEP, WPA und WPA 2 Verschlüsselung schützt Netzwerke gegen unerlaubte Zugriffe**

DIGITUS® GreyRapid N Wireless Access Point / Router

- **Serves a dual function as both an access point and a repeater**
- **Wireless network speeds of up to 150 Mbps**
- **WEP, WPA, and WPA2 encryption protects networks from unauthorized access**

Technical Features

- Supported Standards 802.11b/g/n Wireless LAN
- Transmission in the 2.4GHz frequency band
- Offers Access Point, Client Mode, Universal Repeater and WDS functions
- Supports WPS (Wireless Protected Setup) - Push button for auto connection to a wireless adapter (adapter must support this feature)

- 1 detachable antenna with RP-SMA connector
- A hardware switch offers switching on/off of the Wireless LAN
- Integrated Router
- Connection: 4x RJ45 LAN, 1x RJ45 WAN
- Additional Features: PPPoE, Static IP, PPTP, DHCP, NAT



DN-7049-1 262206 | DIGITUS® GreyRapid N, 150N Router

DIGITUS® Wireless 150N Client Adapter, 150 Mbps


- Multifunktionaler Einsatz als Repeater oder Access Point
- Einfache Sicherung Ihres Netzwerkes dank WPS Button
- Einbindung aller nicht WLAN fähigen Geräte in Ihr WLAN Netzwerk

Technical Features

- DIGITUS Portable Wireless 150N Access Point
- Supported Standards 802.11b/g/n Wireless LAN
- Transmission in the 2.4GHz frequency band
- Offers Access Point and Repeater functions
- Advanced Security Features with WPA2/WPA/WEP Encryption
- Supports WPS (Wireless Protected Setup) - Push button for auto connection to a wireless adapter (adapter must support this feature)
- Connection: 1x RJ45 LAN
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun

DIGITUS® Wireless 150N Client Adapter, 150 Mbps

- Multifunctional use as a repeater or access point
- WPS button allows easy securing of your network
- Integration of all your non WIFI devices into your WIFI network

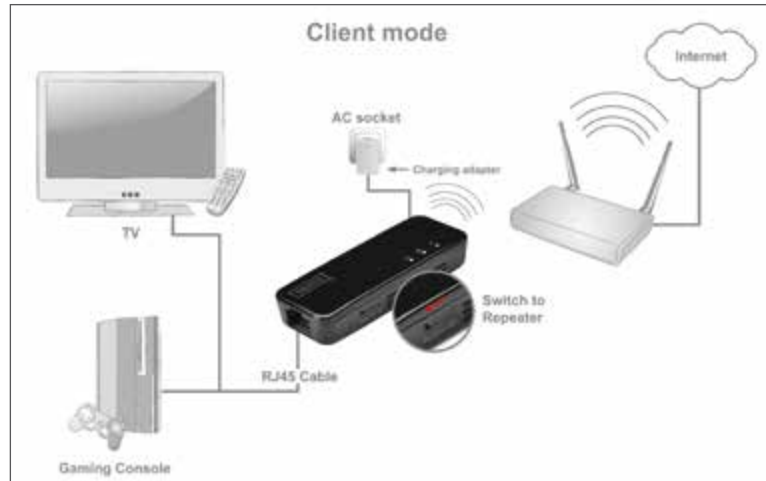

DN-70495 314578 | Wireless 150N Client Adapter, 150 Mbps

DIGITUS® Wireless Streaming Box

- Drahtlose Wiedergabe Ihrer Videos/ Bilder über Smartphone, Tablet, PC und Notebook auf Ihren Fernseher
- Zeigt Inhalte in Full-HD an (1080p)
- Kleines und kompaktes Gehäuse – ideal für den Einsatz unterwegs

Technical Features

- Wireless LAN Standard: IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
- Supported video format: MPEG 1/2, MPEG TS, MP4, AVI, 3GP, WMV, MOV, DVR-MW
- Supported audio format: MP3, AAC, WMA, WAV, OGG, PDM, LPCM, MP4
- Supported picture format: GIF, PNG, BMP, JPEG

DIGITUS® Wireless Streaming Box

- Wireless playback of your videos/images on your television via smartphone, tablet, pc and notebook
- Displays contents in Full HD (1080 p)
- Small, compact housing – ideal for on-the-go use



DN-70310 356585 | Wireless Streaming Box



DIGITUS® Wireless 150N USB Adapter

- Nano-Gehäuse eignet sich für dauerhaften Einsatz am PC/ Notebook
- WEP, WPA und WPA 2 Verschlüsselung schützt Netzwerke gegen unerlaubte Zugriffe
- Schnelle Datenübertragungen mit bis zu 150 Mbps

DIGITUS® Wireless 150N USB Adapter

- Nano housing – suitable for long-term use with a PC/ notebook
- WEP, WPA, and WPA2 encryption protects networks from unauthorized access
- Fast data transfer rates of up to 150 Mbps

Technical Features

- High speed data rate with up to 150Mbps
- Complies with 2.4GHz 802.11n and downwards compatible with IEEE 802.11g/b standards
- Supports 64/128-bit WEP, WPA and WPA2 encryption
- Suitable for all common network environments
- Product dimensions: (W x D x H): 1.4cm x 1.8cm x

- 0.6cm
- Compatible to USB 1.1 and USB 2.0 interface
- Status LEDs for link and data transfer
- 1 Antenna (1T1R)
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



W 301691 | Wireless 150N USB Adapter



DIGITUS® USB 2.0 Adapter Tiny Wireless 300N

- Bequeme Verbindung zwischen Geräte und Netzwerk, dank WPS Button
- Klein und kompakt für den dauerhaften Einsatz
- Übertragungen der Daten in High Speed Geschwindigkeit (300 Mbps)

DIGITUS® USB 2.0 Adapter Tiny Wireless 300N

- WPS button allows convenient connection of devices to the network
- Small and compact for long-term use
- High-speed data transfer rates (300 Mbps)

Technical Features

- Complies with 2.4GHz 802.11n and downwards compatible with IEEE 802.11g/b standards
- Standards: IEEE 802.11n, IEEE 802.11g, IEEE 802.11b
- Frequency Range: 2.4-2.4835GHz
- WPS (Wireless Protected Setup) function
- Wireless Transmit Power: 18dBm (EIRP)

- Wireless Security WPS, 64/128bit WEP, WPA/ WPA2, PA-PSK/ WPA2-PSK (TKIP/ AES)
- Supported operating systems: Windows XP/ VISTA/ Win7/ Win8/ Linux/ Macintosh®
- USB 2.0
- Antenna Type: Internal Omni-directional Antenna



DN-70542 316978 | USB 2.0 Adapter Tiny Wireless 300N



DIGITUS® Tiny USB Wireless 11ac Adapter

- High Speed Datenübertragung mit bis zu 300 Mbps
- Nano Design – optimal für dauerhaften Einsatz am PC/ Notebook
- WEP, WPA und WPA 2 Verschlüsselung schützen Ihr Netzwerk vor unerlaubtem Zugriff

DIGITUS® Tiny USB Wireless 11ac Adapter

- High-speed data transfer rates of up to 300 Mbps
- Nano design – optimum for long-term use with a PC/ notebook
- WEP, WPA, and WPA2 encryption protect your network from unauthorized access

Technical Features

- High speed data transfer rate with up to 433 Mbps
- Complies with 2.4GHz/5GHz 802.11ac and downwards compatible with IEEE 802.11a/b/g/n standards
- Dual Band - optionally using of 5GHz frequency band for less interferences and a stable connection

- Supports 64/128-bit WEP, WPA and WPA2 encryption with IEEE 802.1x functions
- Chipset: RTL8811AU
- Software WPS
- Supports Windows 8, 7, Vista, XP, Mac OS X and Linux



DN-70565 362951 | Tiny USB Wireless 11ac Adapter

DIGITUS® Wireless 150N USB 2.0 Antennenadapter

- **Schnelle Datenübertragungen mit bis zu 150 Mbps**
- **Antenne garantiert stabile Netzwerkverbindung in jeder Umgebung**
- **Übergreifende Verschlüsselung mit WEP, WPA, WPA 2 gegen unzulässige Netzwerkzugriffe**

Technical Features

- High speed data rate with up to 150Mbps
- Complies with 2.4GHz 802.11n and downwards compatible with IEEE 802.11g/b standards
- Detachable 3dBi antenna with RP-SMA connector
- Chipset: Ralink RT7601
- Advanced Security Features with WPA2/WPA/WEP

DIGITUS® Wireless 150N USB 2.0 antenna adapter

- **Fast data transfer rates of up to 150 Mbps**
- **Antenna guarantees a stable network connection in any environment**
- **Comprehensive encryption with WEP, WPA, and WPA2 to protect against unauthorized network access**

- Encryption
- Suitable for all common network environments
- Supports WPS (Wireless Protected Setup)
- Supports Windows 8, 7, Vista, XP, Mac OS X and Linux



DN-70440-1 329510 | Wireless 150N USB antenna adapter

DIGITUS® 300Mbps USB Wireless Adapter

- **Verstärkt Ihr Netzwerksignal für Computer, Notebook, PSPs, Blu-Ray-Player, etc.**
- **Antenne ermöglicht eine zuverlässige Netzwerkverbindung**
- **Schnelle Datenübertragungen mit bis zu 300 Mbps**

Technical Features

- High-speed data rate with up to 300Mbps
- Complies with 2.4GHz 802.11n and downwards compatible with IEEE 802.11g/b standards
- Standards: IEEE 802.11n, IEEE 802.11g, IEEE 802.11b
- Wireless Transmit Power: 18dBm (EIRP)
- Wireless Security WPS, 64/128bit WEP, WPA/

DIGITUS® 300Mbps USB Wireless Adapter

- **Boosts your network signal for computers, notebooks, PSPs, Blu-Ray players, and so on**
- **Antenna enables a reliable network connection**
- **Fast data transfer rates of up to 300 Mbps**

- WPA2, PA-PSK/WPA2-PSK(TKIP/AES)
- USB 2.0
- WPS (Wireless Protected Setup) function
- Status LEDs for link and data transfer
- Antenna Type: 1x detachable antenna and 1x internal PIFA antenna
- Chipset: Realtek 8192 2T/2R



DN-70543 316985 | Wireless 300N USB 2.0 Adapter

DIGITUS® 433Mbps Dual Band USB Wireless Adapter

- **High Speed Datenübertragungen mit bis zu 433 Mbps**
- **Dual Band ermöglicht das Wählen zwischen 2,4 GHz- und 5 GHz-WLAN-Netzwerke**
- **WEP, WPA und WPA 2 Verschlüsselung schützen Ihr Netzwerk vor unerlaubtem Zugriff**

Technical Features

- High speed data transfer rate with up to 433 Mbps
- Complies with 2.4GHz/5GHz 802.11ac and downwards compatible with IEEE 802.11a/b/g/n standards
- Dual Band - optionally using of 5GHz frequency band for less interferences and a stable connection
- Supports 64/128-bit WEP, WPA and WPA2 encryption

DIGITUS® 433Mbps Dual Band USB Wireless Adapter

- **High-speed data transfer rates of up to 433 Mbps**
- **Dual band enables selection between 2.4-GHz and 5-GHz wireless networks**
- **WEP, WPA, and WPA2 encryption protect your network from unauthorized access**

- with IEEE 802.1x functions
- Chipset: RTL8811AU
- 3 dBi detachable antenna
- Software WPS
- Supports Windows 8, 7, Vista, XP, Mac OS X and Linux



DN-70560 343325 | USB 2.0 Adapter Wireless AC 433Mbps Dual Band

DIGITUS® Wireless LAN Stabantenne

- **Verstärkt das WLAN-Signal und erhöht die Reichweite auf bis zu 5 dBi**
- **2,4 GHz Frequenz unterstützt auch ältere WLAN-Router, Access Points und WLAN-Karten**
- **Bietet 5 dBi Empfangsgewinn**

Technical Features

- Wireless LAN high performance rod antenna
- Frequency range: 2.4GHz - 2.4835GHz
- Gain: 5dBi (reception)
- Omnidirectional
- Suitable for 2.4GHz Wireless LAN

DIGITUS® Wireless LAN Rod Antenna

- **Boosts the wireless network signal and increases the range to up to 5 dBi**
- **2.4-GHz frequency also supports older wireless network routers, access points, and wireless network cards**
- **Offers a reception gain of 5 dBi**

- Connection via RP-SMA socket
- Length: 19.7cm, diameter: 12mm
- Suitable for all DIGITUS® Wireless LAN products
- Suitable stands for antenna: DN-70101 or DN-70106



DN-70100 179221 | Wireless LAN rod antenna, 5 dBi

DIGITUS® Wireless LAN Stabantenne

- **Verstärkt das WLAN-Signal und erhöht die Reichweite auf bis zu 7 dBi**
- **2,4 GHz Frequenz unterstützt auch ältere WLAN-Router, Access Points und WLAN-Karten**
- **Bietet 7 dBi Empfangsgewinn**

Technical Features

- Wireless LAN high performance rod antenna
- Frequency range: 2.4GHz - 2.4835GHz
- Gain: 7 dBi (reception)
- Omnidirectional
- Suitable for 2.4GHz Wireless LAN

DIGITUS® Wireless LAN Rod Antenna

- **Boosts the wireless network signal and increases the range to up to 7 dBi**
- **2.4-GHz frequency also supports older wireless network routers, access points, and wireless network cards**
- **Offers a reception gain of 7 dBi**

- Connected via RP-SMA socket
- Length: 30cm
- Diameter: 1.3cm
- Suitable for all DIGITUS® Wireless LAN products
- Suitable stand: DN-70106



DN-70104 200550 | Wireless LAN rod antenna, 7 dBi

DIGITUS® Wireless LAN Stabantenne

- **Verstärkt das WLAN-Signal und erhöht die Reichweite auf bis zu 9 dBi**
- **2,4 GHz Frequenz unterstützt auch ältere WLAN-Router, Access Points und WLAN-Karten**
- **Bietet 9 dBi Empfangsgewinn**

Technical Features

- Wireless LAN high performance rod antenna
- Frequency range: 2.4GHz - 2.4835GHz
- Omnidirectional
- Gain: 9 dBi (reception)
- Suitable for 2.4GHz Wireless LAN

DIGITUS® Wireless LAN Rod Antenna

- **Boosts the wireless network signal and increases the range to up to 9 dBi**
- **2.4-GHz frequency also supports older wireless network routers, access points, and wireless network cards**
- **Offers a reception gain of 9 dBi**

- Connected via RP-SMA socket
- Length: 38.5cm
- Diameter: 1.3cm
- Suitable for all DIGITUS® Wireless LAN products
- Suitable stand: DN-70106



DN-70105 200567 | Wireless LAN rod antenna, 9 dBi

DIGITUS® Magnetfuß für Wireless LAN Antennen

- Antennenfuß für Wireless LAN Stabantennen
- RP-SMA Buchse/Stecker
- Einsetzbar für 2,4 GHz und 5 GHz Wireless LAN - für alle DIGITUS® Wireless LAN Produkte

Technical Features

- Suitable for 2.4 GHz Wireless LAN - for all DIGITUS® Wireless LAN Products
- RP-SMA connectors
- Strong magnetic metal stand
- Cable length 1.50m
- Low loss cable

DIGITUS® Magnetic Stand for Wireless LAN Antennas

- Antenna stand for using with Wireless LAN rod antennas
- RP-SMA connectors
- Suitable for 2.4 GHz and 5 GHz Wireless LAN - for all DIGITUS® Wireless LAN products



DN-70101-1 271192 | Magnetic stand for Wireless LAN antennas

DIGITUS® Standfuß für Wireless LAN Antennen

- Antennenfuß für Wireless LAN Stabantennen
- RP-SMA Buchse/Stecker
- Einsetzbar für 2,4 GHz und 5 GHz Wireless LAN - für alle DIGITUS® Wireless LAN Produkte
- 0,75 m Anschlusskabel

Technical Features

- Suitable for 2.4 GHz and 5 GHz Wireless LAN - for all DIGITUS® Wireless LAN products
- RP-SMA connectors
- Cable length: 0.75 m
- Low loss cable

DIGITUS® Stand for Wireless LAN Antennas

- Antenna stand for using with Wireless LAN rod antennas
- RP-SMA connectors
- Suitable for 2.4 GHz and 5 GHz Wireless LAN - for all DIGITUS® Wireless LAN products
- Connection cable length 0.75 m



DN-70106 200574 | Stand for Wireless LAN antennas



DIGITUS® USB 2.0 4-Port Gigabit Netzwerk Hub

- **Erweitert Ihr Netzwerk um bis zu 4 weitere USB-Geräte (Drucker, Festplatten, Scanner, etc.)**
- **Erreicht LAN-Geschwindigkeiten von bis zu 1000 Mbps**
- **Plug & Play – benötigt keine zusätzliche Installation von Treibern**

Technical Features

- Integrates 4 USB 2.0 high speed devices in the network
- No differences compared to directly connected USB-devices
- Supports printers, USB-speakers, hard drives, flash memory drives, card readers as well as a lot of other devices
- Monitoring the connected USB-devices over a web

DIGITUS® USB 2.0 4-port Gigabit Network Hub

- **Adds up to four more USB devices to your network (printers, hard drives, scanners, and so on)**
- **LAN speeds of up to 1000 Mbps**
- **Plug & Play – does not require additional installation of drivers**

- browser or the included software
- Use the connected USB-devices with any computer in the network, whether the connection is done via cable or wireless
- 4 USB 2.0 ports
- Downwards compatible to legacy USB-devices
- DHCP-client for easy network configuration

DA-70252 329923 | USB 2.0 4-port gigabit network hub



DIGITUS® USB 2.0 4-Port Fast Ethernet Netzwerk Hub

- **Erweitert Ihr Netzwerk um bis zu 4 weitere USB-Geräte (Drucker, Festplatten, Scanner, etc.)**
- **High Speed Datenübertragungen dank USB 2.0 (480 Mbps)**
- **Plug & Play – Keine Installation von weiteren Treibern notwendig**

Technical Features

- Integrates 4 USB 2.0 high speed devices in the network
- No differences compared to directly connected USB-devices
- Supports printers, USB-speakers, hard drives, flash memory drives, card readers as well as a lot of other devices
- Monitoring the connected USB-devices over a web browser or the included software

DIGITUS® USB 2.0 4-port Fast Ethernet Network Hub

- **Adds up to four more USB devices to your network (printers, hard drives, scanners, and so on)**
- **USB 2.0 High-Speed data transfer rates (480 Mbps)**
- **Plug & Play – no installation of further drivers necessary**

- Use the connected USB-devices with any computer in the network, whether the connection is done via cable or wireless
- 4 USB 2.0 ports
- Downwards compatible to legacy USB-devices
- LAN: 10/100 Mbps
- DHCP-client for easy network configuration
- Supports Windows 7, Vista, XP

DA-70251 329916 | USB 2.0 4-port fast ethernet network hub



DIGITUS® 4-Port USB 2.0 Wireless Multifunction Network Server

- **Kabellose Verbindung zwischen Drucker und mehreren Netzwerknutzern**
- **Bietet Platz für bis zu 4 USB-Geräte (Festplatten, Scanner, etc.)**
- **LAN-Port erreicht Übertragungsraten von bis zu 100 Mbps**

Technical Features

- Print server - ideal for multifunction printers
- NAS - connect your storage drives and turn it into a Network Attached Storage. Access your data over the network and internet. Wherever you want!
- Network USB hub - connect and use USB devices over the network. No more cable hassle for mobile users!
- Supports all kind of printers, scanners, DVD drives,

DIGITUS® 4-Port USB 2.0 Wireless Multifunction Network Server

- **Wireless connection between printer and several network users**
- **Offers space for up to 4 USB devices (hard drives, scanners, and so on)**
- **LAN port achieves transfer rates of up to 100 Mbps**

- storages, cameras, webcams, digital TV tuners, iPods®, iPads®, iPhones® and many more...
- Offers FTP, SMB and CIFS server
- Provides 4 USB 2.0 Port, extension by USB Hub supported
- Wireless-LAN: up to 150Mbps, 11n-Standard
- Secure 64/128-bit WEP, WPA or WPA2 Encryption

DN-13023 292944 | 4-Port USB 2.0 Wireless Multifunction Network Server

DIGITUS® 1-Port USB 2.0 Multifunction Network Server

- Mehrere Netzwerknutzer können auf ein USB Gerät zugreifen (Drucker, Scanner, Festplatte, etc.)
- LAN-Port erreicht Übertragungsraten von bis zu 100 Mbps
- NAS-Speichermedien können als Netzwerkspeicher genutzt werden

Technical Features

- Print server - ideal for multifunction printers
- NAS - connect your storage drives and turn it into a Network Attached Storage. Access your data over the network and internet. Wherever you want!
- Network USB hub - connect and use USB devices over the network. No more cable hassle for mobile users!

DIGITUS® 1-Port USB 2.0 Multifunction Network Server

- Several network users can access one USB device (printer, scanner, hard drive, and so on)
- LAN port achieves transfer rates of up to 100 Mbps
- NAS storage media can be used as network storage

- Supports all kind of printers, scanners, DVD drives, storages, cameras, webcams, digital TV tuners, iPods®, iPads®, iPhones® and many more...
- Offers FTP, SMB and CIFS server
- Provides 1 USB 2.0 port, extension by USB Hub supported
- LAN: 10/100Mbps



DN-13020 292913 | 1-Port USB 2.0 Multifunction Network Server

DIGITUS® 2+1 Port Printserver

- Bietet Anschluss für 2 USB- und 1 Parallel-Drucker
- High Speed Datenübertragungen von bis zu 480 Mbps

Technical Features

- 1 Bi-directional parallel port (IEEE 1284) for port 1 (PID1)
- 2 USB 2.0 High Speed ports for port 2, 3 (PID2, 3)
- Fast Ethernet network port: RJ-45 for 10Base-T or 100Base-TX
- Supports Windows 8, 7, Vista, XP, Mac OS X and Linux

DIGITUS® 2+1 Port Print Server

- Offers ports for connecting two USB printers and one parallel printer
- High-Speed data transfer rates of up to 480 Mbps



DN-13006-1 315346 | Fast Ethernet print server, 2-port USB, 1-port parallel

DIGITUS® Fast Ethernet Print Server, USB 2.0

- Ermöglicht die Nutzung eines USB-Druckers durch mehrere PCs
- Fast Ethernet unterstützt schnelle Datenverarbeitung
- Setup- und Diagnoseprogramme ermöglichen eine einfache Einrichtung für jedes Netzwerk

Technical Features

- Complies with IEEE 802.3, IEEE 802.3u Wired Ethernet standards
- One USB 2.0 port suitable for printer connections
- Supports TCP/IP, IPX/SPX, NetBEUI, and AppleTalk network protocols
- Supports LPR, IPP, SMB/TCP, Raw Printing, and Unix Logical printing protocols

DIGITUS® Fast Ethernet Print Server, USB 2.0

- Enables several PCs to use one USB printer
- Fast Ethernet supports fast data processing
- Setup and diagnostic programs enable simple setup for every network

- Supports peer-to-peer printing (TCP/IP/IPX/NetBEUI/AppleTalk)
- Supports server based printing (Novell NetWare and Windows)
- Supports DHCP server and client protocols
- Supports web based management, Windows configuration utility, and SNMP protocol



DN-13003-1 315308 | Fast Ethernet print server, USB 2.0



DIGITUS® Fast Ethernet Print Server, Parallel

- Ermöglicht die Nutzung eines USB-Druckers durch mehrere PCs
- Dank Parallel Port können ältere Drucker im Netzwerk integriert werden
- Automatische Erkennung der Datenübertragungsgeschwindigkeit

Technical Features

- Complies with IEEE 802.3, IEEE 802.3u Wired Ethernet standards
- One parallel port suitable for printer connections
- Supports TCP/IP, IPX/SPX, NetBEUI, and AppleTalk network protocols
- Supports LPR, IPP and SMB/TCP printing protocols
- Supports peer-to-peer printing (TCP/IP/IPX/NetBEUI/AppleTalk)

DIGITUS® Fast Ethernet Print Server, parallel

- Enables several PCs to use one USB printer
- Parallel port enables older printers to be integrated in the network
- Automatic recognition of the data transfer speed

- Supports server based printing (Novell NetWare and Windows)
- Compatible with all major operating systems: Windows XP/Vista/7/8, NetWare (3.x above), MAC OS and Unix/Linux
- Supports DHCP server and client protocols
- Supports web based management, Windows configuration utility, and SNMP protocol

DN-13001-1 315322 | Fast Ethernet print server, parallel



DIGITUS® Mini NAS Server für externe USB Festplatten

- Der kompakte und energieeffiziente NAS Server für den gemeinsamen Dateizugriff über das Netzwerk!
- Ermöglicht einfache Speicherung, Austausch und Sicherung von Daten im gesamten Netzwerk
- NAS Funktion (Network Attached Storage) zur Freigabe der Festplatte im lokalen Netzwerk oder Internet

Technical Features

- The mini NAS Server enables USB 2.0 HDDs to access the network
- NAS function (Network Attached Storage) to provide centralized data access and storage to the network
- RJ45 network connector for Fast Ethernet 10/100 Mbps

DIGITUS® Mini NAS Server for external USB HDD

- The compact and energy efficient NAS Server for sharing your files on the network!
- Easy provides storage space for expansion, sharing and backup to the whole network
- NAS function (Network Attached Storage) to provide centralized data access and storage to the network

- Samba and FTP Server for easy file access
- BitTorrent Server for automatic downloads, even when the computer is switched off
- Easy access of photos, movies or music over iTunes, Xbox 360 and Playstation 3

DN-7023-1 272977 | NAS server for external USB HDD



DIGITUS® Fast Ethernet N-Way 5/8-Port Desktop Switch

- Store-and-Forward-Technologie für einen optimierten Datentransfer
- Automatische Ermittlung der Geschwindigkeiten für 10/100Mbps
- Der Switch kann Betriebssystemunabhängig eingesetzt werden

Technical Features

- 5-port 10/100 Mbps Fast Ethernet Switch
- Compliant to the network standards IEEE 802.3 and IEEE 802.3u
- Auto-Negotiation for 10/100Mbps
- Auto-MDI/MDI-X for cable detection

DIGITUS® Fast Ethernet N-Way 5/8 port desktop switch

- Advanced store-and-forward packet switching ensures an optimized data transfer
- Auto-Negotiation for 10/100Mbps
- The switch can be used independent of operating system

- Advanced store-and-forward packet switching ensures an optimized data transfer
- Noiseless design - without fan
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun

DN-50012 272786 | Fast Ethernet N-Way 5-port desktop switch

DN-50022 272793 | Fast Ethernet N-Way 8-port desktop switch

DIGITUS® BlackRapid 100 5/8-Port Desktop Switch

- Bis zu 200Mbps Vollduplex-Bandbreite an jedem Port
- Universell einsetzbar und kompatibel zu allen gängigen Netzwerksystemen
- Automatische Kabelerkennung

Technical Features

- Housing in DIGITUS design
- IEEE 802.3 and IEEE 802.3u compatible
- 20/200Mbit full duplex
- Automatic speed and half/full duplex detection/configuration
- Store and forward architecture

DIGITUS® BlackRapid 100 5/8 port desktop Switch

- Up to 200Mbps full duplex bandwidth at each port
- Universal and compatible to all common network operating systems
- Automatic cable detection

- Auto MDI/MDI-X function
- Noiseless design - without fan
- External power supply
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun



DN-50011 251729 | 5-Port Fast Ethernet BlackRapid 100 Switch

DN-50021 251736 | 8-Port Fast Ethernet BlackRapid 100 Switch

DIGITUS® Gigabit Switch N-Way 5-Port

- Erweitert Ihr Notebook um fünf zusätzliche Anschlüsse
- Ermittelt automatisch die passende Transfergeschwindigkeit (10/ 100/ 1000 Mbps)
- Benötigt keine zusätzliche Installation - Plug & Play

Technical Features

- 5-port 10/100/1000Mbps Gigabit Ethernet Switch
- Compliant to the network standards IEEE 802.3, IEEE 802.3u and IEEE 802.3ab
- Auto-negotiation for 10/100/1000 Mbps
- Auto-MDI/MDI-X for cable detection
- Advanced store-and-forward packet switching

DIGITUS® Gigabit Switch N-Way 5-port

- Adds five extra ports to your notebook
- Automatically determines the appropriate transfer speed (10/100/1000 Mbps)
- Does not require additional installation - Plug & Play

- ensures an optimized data transfer
- Noiseless design - without fan
- External power supply
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun



DN-80072 293453 | Gigabit Switch N-Way 5-port

DIGITUS® Gigabit Switch N-Way 8-Port

- Erweitert Ihr Notebook um acht zusätzliche Anschlüsse
- Ermittelt automatisch die passende Datengeschwindigkeit (10/ 100/ 1000 Mbps)
- Benötigt keine zusätzliche Installation - Plug & Play

Technical Features

- 8-port 10/100/1000Mbps Gigabit Ethernet Switch
- Compliant to the network standards IEEE 802.3, IEEE 802.3u and IEEE 802.3ab
- Auto-negotiation for 10/100/1000 Mbps
- Auto-MDI/MDI-X for cable detection
- Advanced store-and-forward packet switching

DIGITUS® Gigabit Switch N-Way 8-port

- Adds eight extra ports to your notebook
- Automatically determines the appropriate data speed (10/100/1000 Mbps)
- Does not require additional installation - Plug & Play

- ensures an optimized data transfer
- Noiseless design - without fan
- External power supply
- Operating system independent, supports e.g. Windows, Mac OS, Linux and Sun



DN-80062 293446 | Gigabit Switch N-Way 8-port

DIGITUS® 10/100 Mbps Netzwerk-USB-Adapter

- **Schnelle High Speed und Fast Ethernet Datenübertragung (10/ 100 Mbps) über USB-Anschluss**
- **Erweitert Geräte mit einem zusätzlichen LAN-Anschluss (PC, Notebook, Tablet, etc.)**
- **Kleines und kompaktes Gehäuse eignet sich für mobile Einsätze**



Technical Features

- 10/100 Mbps speed supported on LAN connector
- Ethernet IEEE 802.3 and 802.3u (10Base-T, 100Base-TX) compatible, with auto negotiation
- Auto-MDI(X) capable (straight and cross network cable auto-detection)
- Supports USB 2.0 full speed and high speed (USB bus powered)
- AX88772A chipset

DIGITUS® 10/100 Mbps Network USB Adapter

- **High-Speed and Fast Ethernet data transfer rates (10/100 Mbps) via USB port**
- **Adds an extra LAN port to devices (PC, notebook, tablet, and so on)**
- **Small, compact housing – suitable for mobile use**

- Low power consumption, only 170 mA
- 1 x RJ-45 port, 1x USB A plug
- USB bus powered, plug and play
- Suitable for all common network environments
- Operating temperature: 0 °C - 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DN-10050-1 315285 | 10/100M Network USB Adapter

DIGITUS® Gigabit Ethernet USB-3.0-Adapter

- **Datenübertragung mit bis zu 1000 Mbps**
- **Erweitert Geräte mit einem zusätzlichen LAN-Anschluss (PC, Notebook, Tablet, etc.)**
- **Kleines und kompaktes Gehäuse eignet sich für mobile Einsätze**



Technical Features

- Compliant to USB 3.0 specification, down compatible with USB 2.0 and USB 1.1
- IEEE 802.3, 802.3u, 802.3ab, 802.3az (10BASE-T/100BASE-TX/1000BASE-T) compatible
- Supports both full-duplex with flow control and half-duplex with backpressure operation
- Supports Wake-On-LAN

DIGITUS® Gigabit Ethernet USB 3.0 Adapter

- **Data transfer rates of up to 1000 Mbps**
- **Adds an extra LAN port to devices (PC, notebook, tablet, and so on)**
- **Small, compact housing – suitable for mobile use**

- Low power consumption, only 200 mA
- 1 x RJ-45 port, 1x USB A plug
- Supports advanced link down power saving when Ethernet cable is unplugged
- Supports Windows 8, Windows 7, Vista, XP and Mac OS above 10.6, Linux Kernel above 2.6



DN-3023 318385 | Gigabit Ethernet USB 3.0 Adapter

DIGITUS® Fast Ethernet PCI Netzwerkkarte

- **Stattet Ihren PC mit einem zusätzlichen Ethernet-Anschluss aus**
- **Vollduplex Datenübertragungen von bis zu 200 Mbps**
- **Geeignet für alle gängigen Netzwerkkumgebungen**

Technical Features

- Realtek chipset
- IEEE 802.3 and IEEE 802.3u compatible
- Supports 20/200 Mbps full duplex
- PCI Local Bus Rev.2.1 and 2.2 compatible
- Suitable for all typical network environments

DIGITUS® Fast Ethernet PCI network card

- Adds an extra Ethernet port to your PC
- Full-duplex data transfer rates of up to 200 Mbps
- Suitable for all common network environments



DN-1001J 228677 | Fast Ethernet PCI network card

DIGITUS® Gigabit Ethernet PCI Netzwerkkarte


- **Stattet Ihren PC mit einem zusätzlichen Ethernet-Anschluss aus**
- **Gigabit Ethernet Datenübertragung (10/ 100/ 1000 Mbps)**
- **Niedriges Profilblech auch für Computer mit geringen Platz**

Technical Features

- Supports 10/100/1.000 Mbps auto negotiation
- IEEE 802.3, IEEE 802.3u, IEEE 802.3ab compatible
- IEEE 802.3x full-duplex and flow control
- Supports Autonegotiation and Crossover detection
- Realtek Chipset
- PCI Local Bus Master Rev.2.1 and 2.2 compatible
- Suitable for all common network environments

DIGITUS® Gigabit Ethernet PCI Network Card

- Adds an extra Ethernet port to your PC
- Gigabit Ethernet data transfer rates (10/100/1000 Mbps)
- Space-saving, low-profile plate

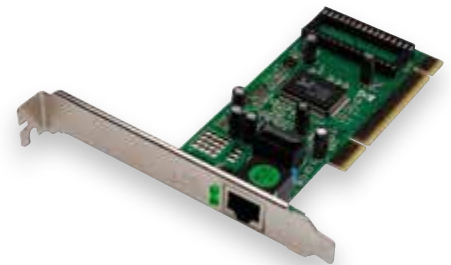

DN-10110 310778 | Gigabit Ethernet PCI network card

DIGITUS® Gigabit Ethernet PCI Express Netzwerkkarte

- **Stattet einen PC mit einem zusätzlichen Gigabit-Anschluss über PCI Express aus**
- **Gigabit Datenübertragung mit bis zu 1000 Mbps**
- **Niedriges Profilblech auch für Computer mit geringen Platz**

Technical Features

- Compliant with 10/100/1.000 IEEE 802.3 specification
- Supports 10/100/1.000 Mbps auto negotiation
- Connection: 1x RJ45 LAN
- Chipset: Realtek RTL8168E
- Supports Auto MDI/MDIX crossover at all speed
- Compliant with PCI Express base specification 1.1
- Single-lane (or X1) PCI Express throughput supports

DIGITUS® Gigabit Ethernet PCI Express Network Card

- Adds an extra Gigabit port to a PC using PCI Express
- Gigabit data transfer rates of up to 1000 Mbps
- Space-saving, low-profile plate



PCI EXPRESS™



DN-10130 310945 | Gigabit Ethernet PCI Express network card

DIGITUS® Serielle 2-Port PCI Karte

DIGITUS® 2-Port Serial PCI Card



- Übertragungsraten von bis zu 115.200 bps
- Zwei serielle Schnittstellen (DB 9) mit UART-Anschlüsse
- Single Chip Design - reduziert CPU Belastung um bis zu 48%

- Transfer rates of up to 115,200 bps
- Two serial interfaces (DB9) with UART connections
- Single-chip design - reduces CPU load by up to 48 percent

Technical Features

- Compliant with PCI Local Bus specifications, Revision 2.3, 32-bit bus
- Supports 2x UART serial ports
- Easy plug and play
- Built-in 16C450/550 compatible UART
- On chip 256 byte FIFOs in transmit and receive path of each serial port
- Serial data transfer rate up to 115,200bps

- Connectors 2x DB9 male serial connectors
- Operating temperature: 0 °C - 85 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



DS-33003 309369 | PCI, Serial Interface Card, 2 x DSUB 9

DIGITUS® 2-Port Serielle Schnittstellenkarte, PCI

DIGITUS® 2-Port Serial interface card, PCI



- Übertragungsraten von bis zu 115.200 bps
- Kompatibel mit der 16C950 UART Spezifikation
- I/O Adresse und IR-Zuweisung über BIOS

- Transfer rates of up to 115,200 bps
- Compatible with the 16C950 UART specification
- I/O address and IR allocation through the BIOS

Technical Features

- 2 x DSUB 9, serial ports, male
- Chipset: 4037T-SUN1989 IC
- Data transfer rate up to 115,2Kbps
- Universal PCI interface 3.3V & 5V, 32-bit/64-bit
- Compliant with PCI 33MHz, ver. 3.0/2.3/2.2/2.1 specification
- Compliant with 16C950UART specification

- 128-bytes onboard FIFO buffer
- On-chip hardware autoflow control to guarantee no data loss
- Plug and play, I/O adress and IRQ assigned by BIOS
- Operating systems supported: Windows, Linux and DOS



DS-33001-1 292999 | PCI, Serial interface card, 2x DSUB 9

DIGITUS® Parallele Schnittstellenkarte, PCI

- Übertragungsraten von bis zu 2,7 Mbps
- Direkte Zuweisung der I/O Adresse und IRQ über BIOS
- Kompatibel zum 1284-Standard


Technical Features

- 1x DSUB 25, parallel port, jack
- Chipset: 4037T-SUN1989 IC
- Data transfer rate up to 2.7Mbps
- Supports Standard Parallel Port (SPP), Bi-directional Parallel Port (BPP), Enhanced Parallel Port (EPP) & Enhanced Capability Port (ECP)

DIGITUS® parallel interface card, PCI

- Transfer rates of up to 2.7 Mbps
- I/O address and IRQ allocated directly through the BIOS
- Compatible with the 1284 standard

- Compatible with IEEE 1284 standards
- Universal PCI interface 3.3V & 5V, 32-bit/64-bit
- Plug and play
- Remap to ISA address 278, 378
- Drivers for Windows 8, 7, Vista, XP
- 1 x manual, 1 x driver CD included in delivery

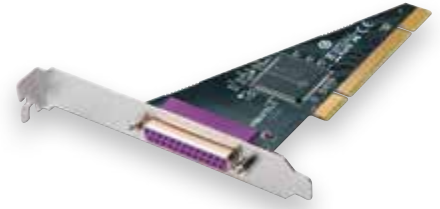

DS-33010-1 293002 | PCI, Parallel interface card 1x DSUB 25

DIGITUS® Parallele PCI Express Karte

- Unterstützt Standard Parallel Port (SPP), Enhanced Parallel Port (EPP) & Enhanced Capability Port (ECP)
- Datentransferrate bis zu 2,5 Mbps
- Inkl. Low-Profile Slotblende

Technical Features

- 1x DSUB 25, parallel port, jack
- Chipset: MCS9901
- Data transfer rate up to 2.5 Mbps
- Supports enhanced capability port (ECP)
- Compliant with PCI Express base specification 1.1
- Compliant with PCI power management 1.2

DIGITUS® 1-Port Parallel Interface Card, PCI Express

- Supports standard parallel port (SPP), enhanced parallel port (EPP) & enhanced capability port (ECP)
- Data transfer rate up to 2.5 Mbps
- Incl. low profile bracket

- Incl. low profile bracket
- Operating temperature: 0 °C - 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



PCI EXPRESS™

DS-30020-1 309383 | PCI express, Parallel interface card 1x DSUB 25



DIGITUS® 4-Port Serielle Schnittstellenkarte, PCI

- Direkte Zuweisung der I/O Adresse und IRQ über BIOS
- Übertragungsraten von bis zu 921.600 bps
- Kompatibel mit der 16C950 UART Spezifikation

Technical Features

- 4 x DSUB 9, serial ports, male
- Chipset: SUN1999
- Data transfer rate up to 921,600bps
- Universal PCI interface 3.3V & 5V, 32-bit/64-bit


DIGITUS® 4-Port Serial interface card, PCI

- I/O address and IRQ allocated directly through the BIOS
- Transfer rates of up to 921,600 bps
- Compatible with the 16C950 UART specification

- Plug and play
- Operating systems supported: Windows, Linux and DOS



DS-33002-1 278528 | PCI, Serial interface card, 4x DSUB 9

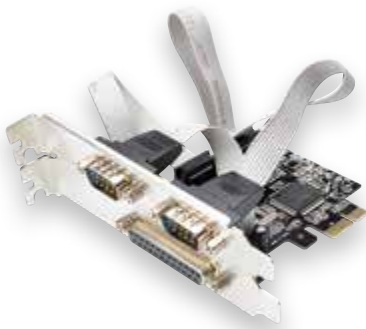

DIGITUS® PCI Express Parallel Karte, 2/1-port

- Zwei serielle und eine parallele Schnittstelle zum Anschluss von Drucker, Scanner, ISDN Adapter, etc.
- Schneller Datentransfer von bis zu 2,3 Mbps (seriell) und 1,5 Mbps (parallel)
- Niedriges Profilblech auch für Computer mit geringen Platz

Technical Features

- Chipset: MCS9901
- 2x DSUB 9, serial ports, male, UART16C450/550
- 1x DSUB 25, parallel port
- Serial data transfer rate up to 2.3Mbps
- Parallel data transfer rate up to 1.5Mbps
- Supports standard parallel port (SPP), enhanced

DIGITUS® PCI Express Parallel Card, 2/1-port

- Two serial interfaces and one parallel interface for connecting printers, scanners, ISDN adapters, and so on
- Fast data transfer of up to 2.3 Mbps (serial) and 1.5 Mbps (parallel)
- Space-saving, low-profile plate

- parallel port (EPP) & enhanced capability port (ECP)
- Compliant with PCI Express Base Specification 1.0a
- Operating temperature: 0 °C - 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8 / 7 / Vista / XP / Server 2003



DS-30040-2 317760 | PCI Express Parallel Card, 2/1-port



DIGITUS® RS 232 Express Karte

- Stattet Ihr Notebook mit einer zusätzlichen seriellen Schnittstelle aus
- Datentransfer auf bis zu 230.400 bps
- Stromversorgung via Express-Bus – spart zusätzliches Netzteil

Technical Features

- 1 x DSUB 9 / RS-232, serial port, male
- Chipset: PL 2303X
- ExpressCard, form factor 34
- Data transfer rate up to 230, 400 bps
- Supports hot-swapping of devices and plug and play
- Powered via express bus, no separate power supply or battery required
- Works with various types of RS-232 serial devices,

DIGITUS® RS 232 ExpressCard

- Adds an extra serial interface to your notebook
- Data transfer rates of up to 230,400 bps
- Power supply via Express bus – no need for additional power supply

- including modems, PDAs, label printers, bar code scanners, digital cameras, and more
- Operating temperature: 0 °C - 85 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



DS-31204-1 322467 | RS 232 ExpressCard 1 port

DIGITUS® eSATA II 300 ExpressCard

- **Plug & Play** – benötigt keine zusätzliche Installation von Treibern
- **SATA-Datentransferrate bis zu 3 Gbps**
- **Entspricht der Express Card 1.0 Spezifikation**

Technical Features

- eSATA II 300 ExpressCard, slim version
- 1 eSATA port
- Easy install with Plug and Play
- ExpressCard/34 form factor
- SATA data transfer rate up to 3.0 Gbps

DIGITUS® eSATA II 300 ExpressCard

- **Plug & Play** – does not require additional installation of drivers
- **SATA data transfer rate of up to 3 Gbps**
- **Conforms to the Express Card 1.0 specification**

- Supports hot plug for connected devices
- Compliant with ExpressCard 1.0 specification
- Supports SATA II Native Command Queuing (NCQ)
- Supports Windows 7, Vista, XP



DS-31101-1 296881 | eSATA II 300 ExpressCard, slim version

DIGITUS® SATA II PCI Express Karte, 2-Port

- **2 x externe eSATA und 2 x interne SATA Ports**
- **Geeignet für jeden freien PCI Express Steckplatz mit beliebiger Lanebreite**
- **Unterstützt eine Datentransferrate bis zu 300MB/s**

Technical Features

- 2 x external eSATA and 2 x internal SATA ports
- Chipset: Sil 3132
- Int. / ext. ports selectable by configuration
- Compliant with PCI Express Base Specification 1.0a
- Compliant with Serial ATA 1.0a specification
- Installable in any available PCI Express slot with different lane widths
- Supports RAID levels 0, 1, 0+1

DIGITUS® SATA II PCI Express card, 2-Port

- **2 x external eSATA and 2 x internal SATA ports**
- **Installable in any available PCI Express slot with different lane widths**
- **Supports data transfer rate of up to 300MB/s**

- Supports data transfer rate of up to 300MB/s
- Supports NCQ (Native Command Queuing)
- Hot-Plug and Hot-Swapping features
- Operating temperature: 0 °C - 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DS-30102-1 322498 | SATA II PCI Express card, 2-port

DIGITUS® SATA 150 RAID PCI Karte, 2 ports

- **Bietet zwei interne SATA-I-Anschlüsse**
- **Schnelle Datenübertragungen mit bis zu 150 Mbps**
- **Unterstützt Raid für wahlweise mehr Geschwindigkeit oder Datensicherheit**

Technical Features

- 2 x Serial ATA connectors
- Chipset: Sil 3512
- Compliant with SATA, revision 1.0
- Compliant with Serial ATA 1.0, revision 2.3 specifications
- Stand-alone PCI to Serial ATA host controller
- Serial ATA generation 1, data transfer rate up to 150MB/sec
- Supports RAID for better speed respectively a higher data protection

DIGITUS® SATA 150 RAID PCI card, 2 ports

- **Offers two internal SATA-I ports**
- **Fast data transfer rates of up to 150 Mbps**
- **Supports RAID for increased speed or data security**

- Supports hard drives larger than 137GB
- Two independent Serial ATA channels supporting up to two Serial ATA hard drives
- Operating temperature: 0 °C - 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



DS-33101-1 317746 | SATA PCI Controller, 2-port

DIGITUS® SATA III / PATA PCI Express Combo-Karte

- Anschluss für zwei intern SATA-III-Ports und einen parallelen ATA-Port
- Insgesamt bis zu vier Geräte anschließbar
- Niedriges Profilblech auch für Computer mit geringen Platz


Technical Features

- 2 x internal SATA III ports
- 1 x internal parallel ATA port - supports up to UDMA-6 transfer mode, ATA and ATAPI
- Chipset: Marvell 88SE9128
- Compliant with PCI-Express Specification v2.0 and backward compatible with PCI-Express 1.x
- Compliant with Serial ATA Specification 3.0
- Supports communication speeds of 6Gbps, 3Gbps and 1.5Gbps

DIGITUS® SATA III / PATA PCI Express combo card

- Two internal SATA-III ports and one parallel ATA port
- Up to four devices can be connected in total
- Space-saving, low-profile plate

- Supports RAID levels 0 and 1 (only for SATA hard drives)
- Installable in any available PCI Express slot with different lane widths
- Supports NCQ (Native Command Queuing)
- Supports Port Multiplier FIS
- Hot-Plug and Hot-Swapping features on SATA ports


DS-30106 282006 | SATA III / PATA PCI Express combo card
DIGITUS® SATA III PCI Express Karte, 4-Port

- Stattet PCs mit vier internen SATA oder wahlweise zwei externen eSATA Anschlüssen aus
- Schneller Datenaustausch zwischen Festplatten dank SATA III (6 Gbps)
- Bis zu 4 TB Kapazität pro SATA-Port


Technical Features

- 4 internal Serial ATA connectors, 2 external eSATA connectors (selectable)
- Chipset: MARVELL 88SE9230
- Bus specification: 4x PCI-Express
- Capacity: up to 4 TB
- Supports SATA III Native Command Queuing (NCQ)
- Compliant with Serial ATA III specifications, up to

DIGITUS® SATA III PCI Express card, 4-port

- Adds four internal SATA ports or two external eSATA ports to PCs
- SATA III for fast data transfer between hard drives (6 Gbps)
- Capacity of up to 4 TB per SATA port

- 600MB/sec
- Stand-alone PCI Express to Serial ATA host controller
- Four independent Serial ATA channels, each of them supporting one connection of a Serial ATA device at the same time
- Supports Windows 8, 7, Vista, Server 2008 R2/8 / Linux 2.6.x and above


DS-30104-1 330240 | SATA III PCI Express card, 4-port

**DIGITUS® PCI Express Karte,
Firewire 1394a (3+1 Port)**

- 3x externe und 1x interne IEEE 1394-Ports, 6-pin
- Geeignet für jeden freien PCI Express Steckplatz mit beliebiger Lane Breite
- Datentransferrate 100 / 200 / 400 Mbps

Technical Features

- 3x external and 1x internal IEEE 1394 ports, 6-pin
- Chipset: VT6315
- Installs in any available PCI-Express slot with different lane width
- Supports hot-swapping and Plug & play connections

**DIGITUS® PCI Express Card,
Firewire 1394a (3+1 ports)**

- 3x external and 1x internal IEEE 1394 ports, 6-pin
- Installs in any available PCI-Express slot with different lane width
- Data transferrate 100 / 200 / 400 Mbps

- Data transferrate 100 / 200 / 400 Mbps
- Operating temperature: 0 °C - 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8 / 7 / Vista / XP / Server 2003



DS-30201-3 317777 | IEEE 1394a / Firewire PCI Express card

**DIGITUS® Firewire 800 (1394b)
PCIe Card**

- 3x FireWire 800 (1394b) Ports: 2x 9-Pin Extern + 1x 9-Pin Intern
- Datentransferraten von 100, 200, 400 und 800Mbps
- Interner 4-Pin Power-Connector zum Anschluss an das PC-Netzteil, stellt bei Verwendung zusätzlichen Strom zur Verfügung (empfohlen)

Technical Features

- 3x FireWire 800 (1394b) ports: 2x 9-pin extern + 1x 9-pin intern
- Chipset: XI02213B
- Data transfer rates of 100, 200, 400, and 800Mbps
- Built-in 4-pin power connector, provides extra power when connected to the system power supply

**DIGITUS® Firewire 800 (1394b)
PCIe Card**

- 3x FireWire 800 (1394b) ports: 2x 9-pin extern + 1x 9-pin intern
- Data transfer rates of 100, 200, 400, and 800Mbps
- Built-in 4-pin power connector, provides extra power when connected to the system power supply (recommended)

- Supports hot-swapping and Plug & play connections
- Works with various types of FireWire 800 (1394b) devices, including external hard disk drives, DV camcorders, digital cameras, CD-RW/DVD-ROM drives, and other audio/video devices



DS-30203-2 322405 | PCIe, FireWire 800 interface card, 2/1-ports

**DIGITUS® Firewire A Add-on Karte
PCI**

- Bietet Platz für bis zu vier Firewire-Geräte (3x extern, 1x intern)
- Überträgt Daten mit einer Geschwindigkeit von bis zu 400 Mbps
- Hot-Swapping erlaubt ein Verbinden und Trennen von Geräten im laufenden Betrieb

Technical Features

- Adds four IEEE1394a (FireWire) ports to your PC for high speed I/O connectivity
- Compliant with IEEE 1394-1995, 1394a (rev. 1.1), and OHCI interface specification 1.0
- Supports data transfer rates of 100, 200 and 400 Mbps
- Chipset: VIA VT6306


**DIGITUS® Firewire A Add-on PCI
Card**

- Offers space for up to four FireWire devices (three external, one internal)
- Data transfer speeds of up to 400 Mbps
- Hot swapping allows the connection and disconnection of devices during ongoing operation

- Hot-swapping feature allows you to connect and disconnect devices without shutting down operating system
- Operating temperature: 0 °C - 85 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



DS-33203-1 317784 | Firewire A Add-on PCI Card

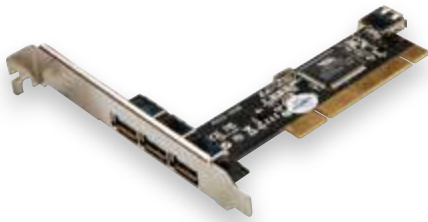

DIGITUS® USB 2.0, PCI-Card

- Die einfache und schnelle Möglichkeit Ihren Computer mit zusätzlichen USB Ports auszurüsten
- USB High-Speed (480Mbps), Full-Speed (12Mbps) und Low-Speed (1.5Mbps) Datentransfermodi werden unterstützt
- 3 x externe USB 2.0 Typ A/Buchse (480Mbps)
- 3 x externe USB 2.0 Typ A/Buchse (480Mbps)

Technical Features

- 3 x external USB 2.0 type A/female (480Mbps)
- 1 x internal USB 2.0 type A/female (480Mbps)
- Chipset: VIA 6212
- Supports USB high speed (480Mbps), full speed (12Mbps), and low speed (1.5Mbps) data transfer modes

DIGITUS® USB 2.0, PCI card

- The quick and easy way to add extra USB Ports to your Computer
- Supports USB high speed (480Mbps), full speed (12Mbps), and low speed (1.5Mbps) data transfer modes
- 3 x external USB 2.0 type A/female (480Mbps)
- 3 x external USB 2.0 type A/female (480Mbps)

- Compliant with USB specification revision 2.0
- PCI 32-bit 33MHz interface
- Supports hot-swapping
- Accessories: 1 x manual, 1 x low profile bracket
- Supports Windows 8, 7, Vista and XP



DS-33221 254294 | PCI, USB 2.0 card, 3+1-ports

DS-33222 254317 | PCI, USB 2.0 card, 4+1-ports



DIGITUS® USB 2.0, PCI-Card

- Die einfache und schnelle Möglichkeit Ihren Computer mit zusätzlichen USB Ports auszurüsten
- USB High-Speed (480Mbps), Full-Speed (12Mbps) und Low-Speed (1.5Mbps) Datentransfermodi werden unterstützt
- 4 x externe USB 2.0 Typ A/Buchse (480Mbps)
- 4 x externe USB 2.0 Typ A/Buchse (480Mbps)

Technical Features

- 4 x external USB 2.0 type A/female (480Mbps)
- 1 x internal USB 2.0 type A/female (480Mbps)
- Chipset: NEC 720101
- Supports USB high speed (480Mbps), full speed (12Mbps), and low speed (1.5Mbps) data transfer modes
- Compliant with USB specification revision 2.0
- Supports hot-swapping

DIGITUS® USB 2.0, PCI card

- The quick and easy way to add extra USB Ports to your Computer
- Supports USB high speed (480Mbps), full speed (12Mbps), and low speed (1.5Mbps) data transfer modes
- 4 x external USB 2.0 type A/female (480Mbps)
- 4 x external USB 2.0 type A/female (480Mbps)

- Accessories: 1 x manual
- Operating temperature: 0 °C - 50 °C
- Storage temperature: -20 °C - 60 °C
- Operating humidity: 20% - 80% RH (non-condensing)
- Storage humidity: 10% - 90% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



DS-33220 254287 | PCI, USB 2.0 card, 4+1-ports



DIGITUS® USB 2.0 Express Karte

- Die einfache und schnelle Möglichkeit Ihr Notebook mit zusätzlichen USB Ports auszurüsten
- 4 x USB 2.0 Typ A Anschlüsse
- Unterstützt Hotswapping und Plug and Play

Technical Features

- 4 x USB 2.0 Typ A Ports
- Chipset: NEC 720114
- ExpressCard/34 form factor
- Data transfer rate up to 480 Mbps
- Supports hotswapping and plug and play

DIGITUS® USB 2.0 ExpressCard

- The quick and easy way to add extra USB Ports to your Notebook
- 4 x USB 2.0 Typ A Ports
- Supports hotswapping and plug and play

- Compliant with EHCI and OHCI standards and specification
- 1 x DC power jack (5V /2A)
- Supports Windows 8, 7, Vista and XP



DS-31203 244943 | DIGITUS USB 2.0 ExpressCard 4 ports

DIGITUS® USB 3.0, 2-Port, PCI Express Add-On Karte

- **Stattet Ihren PCs mit zwei zusätzlichen USB 3.0 Anschlüssen aus**
- **Super Speed Datenübertragungen auf bis zu 5 Gbps**
- **Hot-Plug-Geräte können im laufenden Betrieb entfernt werden**

Technical Features

- 2 x USB 3.0 Ports
- Chipset: NEC UPD720202
- Downward compatible to USB 2.0/1.1 devices
- Supported data transfer rates: Super-Speed (5Gbps), High-Speed (480Mbps), Full-Speed (12Mbps) and Low-Speed (1.5Mbps)
- Supports plug and play and hot swapping

DIGITUS® USB 3.0, 2-Port, PCI Express Add-On card

- **Adds two extra USB 3.0 ports to PCs**
- **SuperSpeed data transfer rates of up to 5 Gbps**
- **Hot-plug devices can be removed during ongoing operation**

- Compliant with universal serial bus 3.0 specification revision 1.0
- Compliant with PCI-Express base specification 2.0; bus interface: PCI-Express x 1
- Supports PCI bus power management interface specification revision 1.2
- Incl. low profile bracket



DS-30220-4 326403 | USB 3.0 PCI Express Add-on Card, 2-Port

DIGITUS® 4-Port USB 3.0 PCI Express-Karte

- **Datentransferrate bis zu 5 Gbps**
- **Unterstützt Plug-and-Play und Hot-Swapping**
- **4x USB 3.0-Ports**

Technical Features

- 4x USB 3.0 ports
- VL805 chipset
- Downward compatible to USB 2.0/1.1 devices
- Supported data transfer rates: Super-Speed (5Gbps), High-Speed (480Mbps), Full-Speed (12Mbps) and Low-Speed (1.5Mbps)
- Supports plug and play and hot swapping
- Compliant with universal serial bus 3.0 specification revision 1.0
- Compliant with PCI-Express base specification 2.0;

DIGITUS® 4-Port USB 3.0 PCI Express Add-on Card

- **Data transfer rate up to 5 Gbps**
- **Supports plug and play and hot swapping**
- **4x USB 3.0 ports**

- bus interface: PCI-Express x 1
- Supports PCI bus power management interface specification revision 1.2
- Microsoft certified WHQL drivers for Windows 7 32/64-bit, Vista 32/64-bit and XP 32/64-bit
- Operating temperature: 0 °C - 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



DS-30221 309338 | USB 3.0 PCI Express Add-on Card, 4-Port

DIGITUS® SATA auf IDE Adapter



- **Kompakte Abmessungen zum direkten Anschluss an ATA-Festplatten**
- **Stand-alone Serial ATA auf Ultra ATA Bridgeboard-Design**
- **Ermöglicht die Verwendung von IDE Storage Devices mit 40-poligem IDC-Stecker an einem Serial ATA Controller.**
- **Ermöglicht die Verwendung von IDE Storage Devices mit 40-poligem IDC-Stecker an einem Serial ATA Controller.**

DIGITUS® SATA to IDE Adapter

- **Compact dimensions allowing direct connections to ATA hard drives**
- **Stand alone Serial ATA to Ultra ATA bridge board design**
- **Allows you to use all kinds of IDE storage devices featuring 40-pin IDC connectors with a Serial ATA controller.**
- **Allows you to use all kinds of IDE storage devices featuring 40-pin IDC connectors with a Serial ATA controller.**

Technical Features

- Chipset: JM20330
- Conforms to Serial ATA 1.0 specification, revision 2.2
- Supports PIO mode 0-4
- Supports all types of ATAPI, ATA/133, ATA/100, ATA/66, ATA/33, EIDE and IDE storage devices (DVD,

- DVD-RAM, MO, CD-ROM, CD-RW, Hard Disk)
- Compact dimensions allowing direct connections to ATA hard drives
- Board design: horizontal version



DS-33150-1 317791 | SATA to IDE adapter

DIGITUS® IDE zu SATA Adapter



- **Ermöglicht die Verwendung von Speichergeräten mit SATA-Anschluss an einem IDE-Controller**
- **Unterstützt alle Arten von SATA Storage Devices**

DIGITUS® IDE to SATA Adapter

- **Enables the use of storage devices with a SATA port on an IDE controller**
- **Supports all types of SATA storage devices**

Technical Features

- Stand alone Ultra ATA to Serial ATA bridge board design
- Conforms to Serial ATA 1.0 specification, revision 2.2
- Chipset: JM20330
- Transfer rate: 1.5Gb/s
- Supports all types of SATA storage devices (DVD, DVD-RAM, MO, CD-ROM, CD-RW, Hard Disk, ...)

- Compact dimensions allowing direct connections to SATA hard drives
- Board design: horizontal version
- Operating temperature: 0 °C - 70 °C
- Operating humidity: 25% - 65% RH (non-condensing)



DS-33151-1 317807 | IDE to SATA Adapter

DIGITUS® 7.1 PCI Sound Karte



- **Der ideale Partner für Surround-Musik-, Film-Wiedergabe und realistischeres Spielerlebnis**
- **Bietet umfassende und wertvolle Heimkino-Technologien für Spiele und Home-Entertainment**
- **Die einfachste Möglichkeit einen beliebigen Computer mit der neuesten Sound-Technologie zu aktualisieren**
- **Genießen Sie Ihre Musik, Filme und Spiele mit dem vollen Potential**

DIGITUS® 7.1 PCI Sound Card

- **The ideal partner for surround music, movie playback and more realistic gaming**
- **Provides complete and valuable Home Theater technologies for games and all home entertainments**
- **The easiest way to update any computer with the latest sound technology**
- **Enjoy all your music, movies and games to their fullest potential**

Technical Features

- Full-duplex playback and recording
- Full-duplex 8CH DAC/2CH ADC
- Support 48/44.1 KHz sampling rate for both playback and recording
- Supports the latest Dolby® Digital EX and DTS ES 6.1/7.1 CH DVD soundtrack playback

- DirectSound™ 3 HW acceleration
- PCI Rev. 2.2 compliant with bus mastering modes
- ACPI compliant power down management
- System requirements: Pentium-class computer with one available PCI slot; DirectX 8.1 above is required



DS-33700-1 317753 | DIGITUS® 7.1 PCI Sound Card

DIGITUS® USB - Parallel-Druckerkabel

- Verbindet einen parallelen Drucker mit dem USB-Port eines Computers
- USB A auf CENT 36-Stecker
- Unterstützt EPP/ECP und bidirektionales Drucken
- Kabellänge: 1,8 m

Technical Features

- Compatible with USB specification revision 1.1
- USB A male to CENT 36-pin male connector
- Supports EPP / ECP and bidirectional printing
- Data transfer rate up to 1,216 Mbps (ECP mode)
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux
- Cable length: 1.8 m

DIGITUS® USB to Parallel Printer Cable

- Connects a parallel printer with a computer's USB port
- USB A male to CENT 36-pin male connector
- Supports EPP / ECP and bidirectional printing
- Cable length: 1.8 m



DC USB-PM1 166306 | USB printer cable, grey

DIGITUS® Serielle Schnittstellenkarte, PCIe

- Datentransferrate bis zu 230.400bps
- Entspricht der PCI Express Base Specification 1.1
- 2 x DSUB 9, serielle Schnittstellen, männlich, UART 16C950

Technical Features

- 2 x DSUB 9, serial ports, male, UART 16C950
- Chipset: MCS9901
- Data transfer rate up to 230, 400 bps
- Compliant with PCI Express base specification 1.1
- Compliant with PCI power management 1.2
- Operating temperature: 0 °C - 70 °C

DIGITUS® 2-Port Serial Interface Card, PCIe

- Data transfer rate up to 230, 400 bps
- Compliant with PCI Express base specification 1.1
- 2 x DSUB 9, serial ports, male, UART 16C950

- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



PCI EXPRESS™



DS-30000-1 309390 | PCIe, Serial Interface Card, 2x DSUB 9

DIGITUS® 2 Ser. / 1 Par. Schnittstellenkarte, PCI

- Serielle Datentransferrate bis zu 115.200bps
- Parallele Datentransferrate bis zu 1,5Mbps
- Automatische Vergabe der IRQ- und I/O-Adressen

Technical Features

- Multi I/O PCI card
- 2x DSUB 9, serial ports, male, UART16C450/550
- 1x DSUB 25, parallel port, jack
- Chipset: MCS9865
- Serial data transfer rate up to 115,200bps
- Parallel data transfer rate up to 1.5Mbps
- Supports standard parallel port (SPP), enhanced parallel port (EPP) & enhanced capability port (ECP)
- Compliant with PCI Local Bus specifications, Revision

DIGITUS® 2 Ser. / 1 Par. interface card, PCI

- Serial data transfer rate up to 115,200bps
- Parallel data transfer rate up to 1.5Mbps
- Automatic assignment of IRQ and I/O addresses

- 2.3, 32-bit bus
- Easy plug and play
- Automatic assignment of IRQ and I/O addresses
- Operating temperature: 0 °C - 85 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP



DS-33040-1 309376 | PCI, 2 ser. / 1 par. interface card

**DIGITUS® USB-Seriell RS 232
Adapter, USB 2.0**



- Ermöglicht den Datenaustausch zwischen PC und seriellen Geräten (Maschinensteuerungen, Modems, Sensoren, etc.)
- Entspricht dem USB 2.0 Standard
- Inkl. USB-Verlängerungskabel

Technical Features

- Supports RS232 serial interface
- Compliant with USB 2.0 standards
- Data transfer rates 1Mbps and more
- Support remote wake-up and power management

**DIGITUS® USB Serial RS 232
Adapter, USB 2.0**

- Enables the transfer of data between a PC and serial devices (machine controls, modems, sensors, and so on)
- Conforms to the USB 2.0 standard
- Includes USB extension cable

- Chipset: FTDI / FT232RL
- Incl. USB extension cable, ca. 80cm
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux



DA-70156 271611 | USB to serial RS 232 adapter, USB 2.0, FTDI-Chipset

**DIGITUS® USB-Seriell RS 485
Adapter, USB 2.0**



- Ermöglicht den Datenaustausch zwischen PC und seriellen Geräten (Maschinensteuerungen, Modems, Sensoren, etc.)
- Unterstützt die RS 485-Schnittstelle
- Inkl. USB-Verlängerungskabel

Technical Features

- Easy connection of serial devices through an USB port
- Compliant with USB 2.0 specifications
- Supports RS485 serial interface
- Can be used for weather stations, set-top-boxes, motor controls, gaming consoles and much more serial devices

**DIGITUS® USB Serial RS 485
Adapter, USB 2.0**

- Enables the transfer of data between a PC and serial devices (machine controls, modems, sensors, and so on)
- Supports the RS-485 interface
- Includes USB extension cable

- Incl. USB extension cable, ca. 80cm
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux
- Data transfer rates of up to 3Mbps
- Chipset: FTDI / FT232RL



DA-70157 307433 | USB to serial RS 485 adapter, USB 2.0, FTDI-Chipset

DIGITUS® USB - Seriell RS 232 Adapter, USB 1.1

- Ermöglicht den Datenaustausch zwischen PC und seriellen Geräten (Maschinensteuerungen, Modems, Sensoren, etc.)
- Entspricht dem USB 1.1 Standard
- Inkl. USB-Verlängerungskabel

Technical Features

- Easy connection of serial devices through an USB port
- Supports RS232 serial interface
- Compliant with USB 1.1 standards
- Data transfer rates 1Mbps and more
- Support remote wake-up and power management
- Can be used for weather stations, set-top-boxes,

DIGITUS® USB to serial RS 232 adaptor, USB 1.1

- Enables the transfer of data between a PC and serial devices (machine controls, modems, sensors, and so on)
- Conforms to the USB 1.1 standard
- Includes USB extension cable

- motor controls, gaming consoles and much more serial devices
- Incl. USB extension cable, ca. 80cm
- Chipset: PL2303RA
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux



DA-70155-1 326144 | USB to serial RS 232 adaptor, USB 1.1, Prolific-Chipset

DIGITUS® RS-232 zu RS-485 Adapter

- Übertragungsgeschwindigkeiten von 300 bps bis 115.200 bps
- Erreicht Reichweiten von 1200 m (RS-485), 5 m (RS-232)
- Erfüllt die EIA und TIA Standards

Technical Features

- Compatible with EIA and TIA
- Transmission via twisted pair cable or STP
- Transmission mode: half duplex, asynchronous
- Transmission rate: 300 - 115200 bps
- Transmission distance: 1200 m (RS-485), 5 m (RS-232)

DIGITUS® RS-232 to RS-485 Adapter

- Transfer speeds of 300 bps to 115,200 bps
- Achieves ranges of 1200 m (RS-485), 5 m (RS-232)
- Complies with the EIA and TIA standards

- Working circumstances from -25 to 70 °C
- Humidity: 5 - 95 %
- Dimensions: 17 x 33 x 63 mm
- Compatible with Windows (2000, 2003, 2008, XP, Vista, 7, 8), Mac & Linux



DA-70161 358480 | RS-232 to RS-485 Adapter

DIGITUS® RS-232 zu TTL-Adapter

DIGITUS® RS-232 to TTL Adapter



- **Übertragungsgeschwindigkeiten von 300 bps bis 115.200 bps**
- **Kompatibel mit EIA/ TIA RS-232 und TTL/ CMOS**
- **Erreicht eine Reichweite von bis zu 5 m**

- **Transfer speeds of 300 bps to 115,200 bps**
- **Compatible with EIA/TIA RS-232 and TTL/CMOS**
- **Achieves a range of up to 5 m**

Technical Features

- Conforming to EIA/TIA RS-232 and TTL/CMOS
- DB9 connectors for both sides
- Transmission via twisted pair cable or STP
- Transmission mode: full duplex, asynchronous
- Transmission rate: 300 - 115200 bps
- Transmission distance: 5 m

- Working enviroments: -40 - 85 °C
- Humidity: 5 - 95 %
- Dimensions: 63 x 34 x 18 mm
- Compatible with Windows (2000, 2003, 2008, XP, Vista, 7, 8), Mac & Linux



DA-70162 358497 | RS-232 to TTL Adapter

**DIGITUS® Galvanisches
Trennelement für RS-232
Schnittstellen**

**DIGITUS® Galvanic separator for
RS-232 interfaces**



- **Erdungsfreier Einsatz von seriellen Schnittstellen**
- **Benötigt keine zusätzlichen Konfigurationen**
- **Unterstützt Übertragungsraten von 300 bps bis 57.600 bps**

- **Use of serial interfaces with no grounding**
- **Does not require additional configurations**
- **Supports transfer rates of 300 bps to 57,600 bps**

Technical Features

- Conforming to EIA RS-232 and CCITT V2.4
- DB9 connectors for both sides
- Isolate voltage: 2500 V peak or 500 VDC rms
- Transmission mode: asynchronous, full duplex, full transparent

- Transmission rate: 300 - 115200 bps
- Working enviroments: -40 - 85 °C
- Humidity: 5 - 95 %
- Dimensions: 17 x 33 x 63 mm
- Weight: 30g



DA-70163 358503 | Galvanic separator for RS-232 interfaces

DIGITUS® USB 2.0 zu 2x RS232-Kabel

- Verbindet gleichzeitig zwei serielle Geräte via USB
- Datentransferraten von über 1 Mbps
- Unterstützt „Remote Wake-Up“ und „Power Management“

Technical Features

- Easy connection of two serial devices at once via USB
- Supports RS232 serial interface
- Compliant with USB 2.0 standards
- Data transfer rates 1Mbps and more
- Support remote wake-up and power management
- Can be used for weather stations, set-top-boxes,

DIGITUS® USB 2.0 to 2x RS232 Cable

- Simultaneously connects two serial devices via USB
- Data transfer rates of over 1 Mbps
- Supports remote wake-up and power management

- motor controls, gaming consoles and much more serial devices
- Chipset: FTDI / FT232RL
- Cable length 1.50m
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux



DA-70158 308522 | USB to serial adapter, USB 2.0, 2-fold

DIGITUS® USB 2.0 zu 4xRS232 Kabel

- Datentransferraten von über 1 Mbps
- Ermöglicht den Datenaustausch zwischen PC und 4 seriellen Geräten (Maschinensteuerungen, Modems, Sensoren, etc.)
- Entspricht dem USB 2.0 Standard

Technical Features

- Easy connection of four serial devices at once via USB
- Supports RS232 serial interface
- Compliant with USB 2.0 standards
- Data transfer rates 1Mbps and more
- Support remote wake-up and power management
- Can be used for weather stations, set-top-boxes,

DIGITUS® USB 2.0 to 4xRS232 Cable

- Data transfer rates of over 1 Mbps
- Enables the transfer of data between a PC and four serial devices (machine controls, modems, sensors, and so on)
- Conforms to the USB 2.0 standard

- motor controls, gaming consoles and much more serial devices
- Chipset: FTDI / FT4232RL
- Cable length 1.50m
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux



DA-70159 308539 | USB to serial adapter, USB 2.0, 4-fold

DIGITUS® Android - RS232 Kabel

- Verbindet serielle Geräte mit Smartphone oder Tablet mit Android Betriebssystem
- Basis UART-Schnittstelle
- Hochwertiger, eigener 12 MHz Oszillator

Technical Features

- Suitable for Android V3.1 or higher
- Allows to use the Android Open Accessory Mode
- Chipset: FT312D
- Supports Baud from 300 to 921600
- Basic UART interface with RXD, TXD, RTS, CTS pins option
- Provides a power source to charge an Android device
- USB 2.0 Full Speed Host
- High quality own 12 Mhz oscillator
- TX ACTIVE signal for controlling transceivers on RS485 interfaces

DIGITUS® Android - RS232 cable

- Connects serial devices to a smartphone or tablet running Android
- Basic UART interface
- Own high-quality, 12-MHz oscillator

- UART RX buffer size: 5512 bytes
- UART TX buffer size: 256 bytes
- USB error indicator pin
- Integrated power-on-reset circuit
- +3V3 Single-Supply-Operation with 5V tolerant inputs
- Extended operating temperature range, -40 °C ~ +85 °C
- UL2725
- AWG30



DA-70160 334415 | Android - RS232 cable, 1,0 m



DIGITUS® USB 3.0 Office Hub, 4-Port

- **Stattet den Arbeitsplatz mit bis zu 4 weiteren USB-Ports aus**
- **Schnellste Datenübertragungen in USB 3.0 SuperSpeed-Geschwindigkeit**
- **Hochwertiges Aluminium-Gehäuse**
- **Benötigt keine zusätzliche Installation - Plug & Play**

Technical Features

- Four USB 3.0 connections
- Supports data transfer rates at SuperSpeed (5 Gbps), high speed (480 Mbps), and full speed (12 Mbps)
- 5 V/2A power supply unit (USB 2.0 micro, type B)
- 1.20 m data cable (USB 3.0 micro, type B)



DIGITUS® USB 3.0 Office Hub, 4-Port

- **Provides your workspace with up to four additional USB ports**
- **Fastest data transfer rates with SuperSpeed USB 3.0**
- **High Quality Aluminium Housing**
- **Does not require additional installation - Plug & Play**

- Downward compatible with USB 2.0, 1.1
- Overvoltage protection
- Material: Aluminium
- Dimensions: 1 x 4.5 x 8.7 cm
- Color: Matt black



DA-70240 371502 | USB 3.0 Hub, 4-Port



DIGITUS® USB 3.0 Office Hub, 7-Port

- **Stattet den Arbeitsplatz mit bis zu 7 weiteren USB-Ports aus**
- **Schnellste Datenübertragungen in USB 3.0 SuperSpeed-Geschwindigkeit**
- **Hochwertiges Aluminium-Gehäuse**
- **Benötigt keine zusätzliche Installation - Plug & Play**

Technical Features

- Seven USB 3.0 connections
- Supports data transfer rates at SuperSpeed (5 Gbps), high speed (480 Mbps), and full speed (12 Mbps)
- 5 V/3.5A power supply unit (USB 2.0 micro, type B)
- 1.20 m data cable (USB 3.0 micro, type B)



DIGITUS® USB 3.0 Office Hub, 7-Port

- **Provides your workspace with up to seven additional USB ports**
- **Fastest data transfer rates with SuperSpeed USB 3.0**
- **High Quality Aluminium Housing**
- **Does not require additional installation - Plug & Play**

- Downward compatible with USB 2.0, 1.1
- Overvoltage protection
- Material: Aluminum
- Dimensions: 1 x 5.5 x 11.5 cm
- Color: Matt black



DA-70241 370147 | USB 3.0 Hub, 7-Port

DIGITUS® USB 2.0 Hub, 10-Port

- Anschluss von bis zu 10 USB-Geräte gleichzeitig
- Unterstützt Hot-Plugging und ist Plug & Play-fähig
- Maximale Datenübertragungsrate 480Mbps (USB 2.0)

Technical Features

- USB 2.0 and USB 1.1 compatible
- 10x USB A, female (USB 1.1 and 2.0 devices)
- Maximum data transfer rate 480Mbps (USB 2.0)
- Over current protection on all outputs

DIGITUS® USB 2.0 Hub, 10-Port

- Connects up to 10 USB-devices at the same time
- Supports hot-plugging, plug & play compliant
- Maximum data transfer rate 480Mbps (USB 2.0)

- Supports hot-plugging, plug & play compliant
- USB connection cable (1m) and power supply included in delivery
- Supports Windows 7, 8, Vista, XP and Mac OS 10.x





DIGITUS® USB 3.0 Hub, 4-port schwarz

- **Erweitert die Anschlussmöglichkeiten auf bis zu vier weitere USB-Schnittstellen**
- **Überträgt Daten im schnellsten USB 3.0 Super Speed (5 Gbps)**
- **Plug & Play – benötigt keine zusätzliche Installation von Treibern**

Technical Features

- Supports Super-Speed USB (5Gbps) and High-Speed USB (480Mbps)
- Compliant to USB 3.0 specification, down compatible with USB 2.0 and USB 1.1
- 4xUSB A/F, 1xUSB M/F, Cable AM/AM 1.2M

DIGITUS® USB 3.0 Hub, 4-port black

- **Allows the connection of up to four more USB interfaces**
- **USB 3.0 SuperSpeed data transfer rates (5 Gbps)**
- **Plug & Play – does not require additional installation of drivers**

- Over-current protection on all outputs
- Supports „Hot-plug“ and is „Plug and Play“ compatible
- Supports Windows 7, 8, Vista, XP and Mac OS 10.x



DA-70231 317005 | USB 3.0 Hub, 4-port black



DIGITUS® USB 3.0 Hub, 4-Port, weiß

- **Erweiterte Anschlussmöglichkeiten für Super-Speed USB 3.0 Geräte**
- **Unterstützt Super-Speed USB (5Gbps) und High-Speed USB (480Mbps)**
- **Unterstützt Media-Copy und Hot-Swap**


Technical Features

- Supports Super-Speed USB (5Gbps) and High-Speed USB (480Mbps)
- Compliant to USB 3.0 specification, down compatible with USB 2.0 and USB 1.1
- 4xUSB A/F, 1xUSB M/F, Cable AM-AM 1.2M

DIGITUS® USB 3.0 Hub, 4-port white

- **Increased connection possibilities for the new generation of Super-Speed USB 3.0 peripherals**
- **Supports Super-Speed USB (5Gbps) and High-Speed USB (480Mbps)**
- **Supports media copy and hot-swap**

- Over-current protection on all outputs
- Supports „Hot-plug“ and is „Plug and Play“ compatible
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x

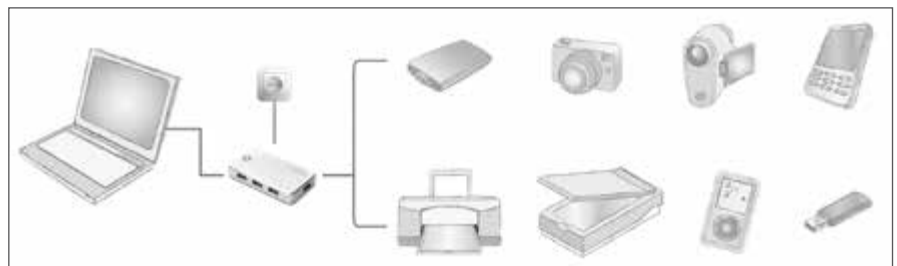

DA-70232 317036 | USB 3.0 Hub, 4-port

DIGITUS® Slim Spider USB-Hub

- Immer anschlussbereit mit fest verbundenem USB-Kabel
- Die schlanke Lösung für USB Verbindungen, ideal für zuhause und unterwegs
- Inkl. DC-Buchse zum Anschluss eines externen Netzteils

Technical Features

- 4-port USB 2.0 hub with a port on each end of the cables
- 4 x USB A jack, 1 x USB A plug
- Including DC-Jack for optional power supply
- Compliant with USB 2.0 specifications
- Supports data transfer rates up to 480Mbps

DIGITUS® Slim Spider USB Hub

- Ready to connect with built-in USB connection cable
- The slim connectivity solution, ideal to use at home or on the road
- Including DC-Jack for optional power supply

- Plug & play and hot-swappable
- Overvoltage protection on each output
- Ready to connect with built-in USB connection cable
- Connection cable length 100cm
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DA-70216 284062 | 4-Port USB Hub „Slim Spider“

DIGITUS® USB 2.0 High-Speed Hub 4-Port

- Schnelle und einfache Datenübertragung
- USB 2.0 Datenübertragungsrates von bis zu 480Mbps
- Kompaktes Gehäuse für einfachen Transport

Technical Features

- USB 2.0 compliant
- Four USB 2.0 ports
- Supports USB High-Speed 480 Mbps and Full-Speed 12 Mbps

DIGITUS® USB 2.0 High-Speed Hub 4-Port

- Quick and easy data transfer
- USB 2.0 data transfer rate of up to 480Mbps
- Compact case for easy transport

- Supports hot-plugging, plug and play compliant
- Color: Black
- Dimensions: 4cm x 3.9cm x 1.1cm
- Supports Windows 7, 8, Vista, XP and Mac OS 10.x



DA-70217 306542 | „Tiny“ USB 4-port hub, USB 2.0, black

DIGITUS® USB 2.0 4-Port-Hub

- Stellt Anschlussmöglichkeiten für bis zu vier USB-Geräte zur Verfügung
- High Speed Datenübertragungen dank USB 2.0 (480 Mbps)
- Stromversorgung via integriertem USB-Anschlusskabel – kein zusätzliches Netzteil nötig

Technical Features

- Hi-Speed USB 2.0 certified for fast data transfer, USB 1.1 compatible
- Supports USB high speed (480Mbps), full speed (12Mbps), and low speed (1.5Mbps) data transfer modes
- No external power supply needed

DIGITUS® USB 2.0 4-Port Hub

- Allows the connection of up to four USB devices
- USB 2.0 High-Speed data transfer rates (480 Mbps)
- Power supply via integrated USB connection cable – no need for additional power supply

- Ideal as a present or giveaway
- Cable length 30cm
- Supports Windows 7, 8, Vista, XP and Mac OS 10.x



AB-50001-1 285373 | USB 2.0 4port hub

DIGITUS® USB 3.0 3-Port Hub & Gigabit LAN-Adapter

- **Schnelle Datenübertragung dank USB 3.0 und Gigabit LAN**
- **Schnell austauschbar, Plug & Play**

Technical Features

- Hot swappable, plug & play
- Down compatible with USB 2.0 and USB 1.1
- IEEE 802.3, 802.3u, 802.3ab, 802.3az (10BASE-T/100BASE-TX/1000BASE-T) compatible
- Supports both full-duplex with flow control and half-duplex with backpressure operation
- Supports twisted pair crossover detection and auto-correction (HP Auto-MDIX)
- Supports Wake-On-LAN
- Supports Windows 8.1, 8, 7, Vista, XP and Mac OS 10.x

DIGITUS® USB 3.0 3-Port Hub & Gigabit LAN Adapter

- **Fast data transmission due to USB 3.0 and gigabit LAN**
- **Hot swappable, plug & play**

- Ports: 1x 10/100/1000 Mbps RJ-45 port, 3x USB 2.0 type A(F), 1x USB type A male cable
- LEDs indicate link/activity
- Input power: 5V/3A
- Power consumption: 5V / 300mA (max)
- Operating temperature: 0 °C ~ 40 °C
- Storage temperature: -20 °C - 60 °C
- Dimensions (L x W x H): 79 mm x 53.5 mm x 15 mm



DIGITUS® USB 3.0 Office Card Reader

- **Unterstützt alle aktuellen Speicherkartenformate**
- **USB 3.0 Super-Speed garantiert schnellste Datenübertragungen**
- **Hochwertiges Aluminium-Gehäuse**
- **Plug & Play - sofort betriebsbereit, benötigt keine Software-Installation**

Technical Features

- Six card slots
- Supports CF / SD / SDHC / MMC / RS-MMC 4.0 / MMC Plus / MMC Mobile / MMC Micro / mini SD / MS / MS Pro / MS Duo / MS Pro Duo / XD / micro SD / T-Flash / MS formats
- Supports data transfer rates at SuperSpeed (5 Gbps), high speed (480 Mbps), and full speed (12 Mbps)

**DIGITUS® USB 3.0 Office Card Reader**

- **Supports all current memory card formats**
- **SuperSpeed USB 3.0 guarantees the fastest data transfer rates**
- **High Quality Aluminium Housing**
- **Plug & Play - Ready to use straight away, no software installation necessary**

- Downward compatible with USB 2.0, 1.1
- 1.20 m data cable (USB 3.0 micro, type B)
- Material: Aluminum
- Dimensions: 2.4 x 3.4 x 10 cm
- Color: Matt black





DIGITUS® Card Reader All-in-one, USB 3.0

- Der schnellste und einfachste Weg um Fotos Ihrer Digitalkamera auf den Computer zu übertragen
- Unterstützt Data Transfer bis zu 5 Gbps (Super-speed)
- Folgende Kartenformate werden unterstützt: Compact Flash (CF) series, Memory Stick (MS) + M2 series + MSXC + MSPRO-HC, Secure Digital (SD / SDHC) + mini SD + Micro SD (Trans-Flash), MMC, SDXC

Technical Features

- Compliant to USB 3.0 specification, down compatible with USB 2.0 and USB 1.1
- Supports data transfer rate: Super-speed (5 Gbps) / High-speed (480 Mbps) / Full-speed (12 Mbps) /

DIGITUS® Card Reader All-in-one, USB 3.0

- The fastest and easiest way to transfer digital images to your computer
- Supports data transfer rate up to 5 Gbps (Super-speed)
- Supports the following memory card formats: Compact Flash (CF) series, memory stick (MS) + M2 series + MSXC + MSPRO-HC, secure digital (SD / SDHC) + mini SD + micro SD (Trans-Flash), MMC, SDXC

- Low-speed (1.5 Mbps)
- Supports media copy and hot-swap
- Supports hot-plugging, plug and play compliant
- Bus powered – no external power supply necessary

DA-70330 300557 | Card Reader, USB 3.0, All-in-one



DIGITUS® „All-in-one“ Kartenleser, USB 2.0

- Einfache Übertragung von digitalen Inhalten an einen PC oder Mac
- Verwenden Sie nahezu jede Art von Speicherkarte
- Wird direkt vom USB-Port mit Strom versorgt

Technical Features

- USB 2.0 compliant
- Supports the following memory card types: CF, SD/SDHC/MMC/MMC4.0/RS-MMC/MMC PLUS/MMC Mobile/MMC Micro/miniSD, MS/MS Pro/MS Pro Duo, XD, Micro SD (T-Flash), M2
- USB Mini B jack
- Supports USB High-Speed 480 Mbps and Full-

DIGITUS® Card-Reader All-in-one, USB 2.0

- Easy transfer of digital content to a PC or Mac
- Use nearly every type of memory card
- Is powered directly by the USB-port

- Speed 12 Mbps
- Supports media copy and hot-swap
- Supports hot-plugging, plug & play compliant
- Color: black, silver
- Dimensions: 7cm x 4cm x 1.45cm
- Supports Windows 7, 8, Vista, XP and Mac OS 10.x

DA-70322-1 328353 | Card Reader, USB 2.0, All-in-one, black



DIGITUS® USB 2.0 Multi Card Reader

- Bis zu zehn verschiedene Kartenformate können beschrieben und gelesen werden
- Kompaktes Gehäuse – ideal für unterwegs
- Schnelle Datenübertragung von bis zu 480 Mbps

Technical Features

- Supports MS, MS Pro, MS Duo, MS Pro Duo, HS MS, SDHC, SD, miniSD, microSD (Trans-Flash), MMC, RS-MMC memory cards
- Compliant with USB 2.0

DIGITUS® USB 2.0 multi card reader

- Can read and write to up to ten different card formats
- Compact housing – ideal for use when on the go
- Fast data transfer rates of up to 480 Mbps

- Complies with USB Storage Class specification version 1.0
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x

DA-70310-2 298472 | USB2.0 multi card reader

DIGITUS® USB Port-Blocker, schwarz

- **4 USB-Aufsätze zur Blockierung von bis zu 4 USB-Anschlüssen gleichzeitig**
- **Entfernen der Blockade ist nur mit Hilfe des Schlüssels möglich**
- **Schnelle und kinderleichte Handhabung**

Technical Features

- Key with 4 USB adapters
- Weight: 12 g
- Dimensions: 71 x 26 x 11 mm
- Color: black

DIGITUS® USB Port Blocker, black

- 4 USB adapters for blocking of up to 4 USB ports at the same time
- Remove the blockade is only possible with the help of the key
- Quick and easy handling



DA-74010 362678 | USB Port Blocker, black

DIGITUS® USB Port-Blocker, silber

- **4 USB-Aufsätze zur Blockierung von bis zu 4 USB-Anschlüssen gleichzeitig**
- **Entfernen der Blockade ist nur mit Hilfe des Schlüssels möglich**
- **Schnelle und kinderleichte Handhabung**

Technical Features

- Key with 4 USB adapters
- Weight: 12 g
- Dimensions: 71 x 26 x 11 mm
- Color: silver

DIGITUS® USB Port Blocker, silver

- 4 USB adapters for blocking of up to 4 USB ports at the same time
- Remove the blockade is only possible with the help of the key
- Quick and easy handling



DA-74011 362692 | USB Port Blocker, silver

DIGITUS® Bluetooth® 4.0 Tiny USB Adapter



- Ermöglicht PC / Notebook den Datenaustausch mit Bluetooth® 4.0
- Benötigt keine zusätzliche Installation - Plug & Play
- Stabiles Signal auch bei großen Distanzen (bis zu 10 m)

Technical Features

- Dual-mode support, Bluetooth® 4.0 and Bluetooth® 3.0
- Ultra low power consumption
- CSR Bluetooth® Chipset
- Operation distance up to 10 m
- Support profile: A2DP, AVRCP, Serial Port, Object Push, File Transfer, LAN Access, Personal Area Network, Audio Gateway, Headset HID, Keyboard, Mouse, HCRP (Printer Cable Replacement)
- Communicates with all standard Bluetooth® devices
- System Requirements: PC with USB 1.1 / USB 2.0 / USB 3.0, Microsoft Windows 7, 8, Vista, XP support

DIGITUS® Bluetooth® 4.0 Tiny USB Adapter

- Enables the transfer of data between a PC and notebook using Bluetooth® 4.0
- Does not require additional installation - Plug & Play
- Stable signal even over long distances (up to 10 m)

- Full-speed USB 2.0 interface
- LED indication: Power on, Linking, Standby
- 2.402-2.48 GHz ISM Band
- Operating humidity: RH45% ~ RH85%
- Operating temperature: -10°C ~ 50°C
- Storage temperature: -20°C ~ 60°C
- Bluetooth® v. 4.0 specification compliant
- Supports BLM (Bluetooth® Low Energy)
- Plug & Play installation - no additional software required
- Dimension: 23 x 14.2 x 4.5 mm
- Weight: 2.4 g



DN-30210-1 325062 | Bluetooth® 4.0 Tiny USB Adapter

DIGITUS® Bluetooth® EDR Tiny USB 2.0 Adapter



- Kleines und kompaktes Gehäuse für den dauerhaften Einsatz am PC/ Notebook
- Bluetooth® 2.0 + EDR Unterstützung
- Datenübertragungen auf bis zu 10 m Reichweite

Technical Features

- Smallest Bluetooth® USB-Adapter - Plug it in once and forget about it!
- Bluetooth® specification 2.0 + EDR (up to 3Mbps)
- Communicates with all standard Bluetooth® devices

DIGITUS® Bluetooth® EDR Tiny USB 2.0 Adapter

- Small and compact housing for long-term use with a PC/ notebook
- Bluetooth® 2.0 + EDR support
- Data transfer over distances of up to 10 m

- Class 2, CSR Chipset
- Up to 10m distance
- USB-bus powered



DN-3020-3 324591 | Bluetooth® EDR tiny USB 2.0 adapter

DIGITUS® USB 2.0 Aktives Verlängerungskabel

- Überbrückt zuverlässig die Distanz zu Ihren USB-Geräten
- Kein Leistungsverlust trotz 5 Metern Kabellänge
- Flexible und schnelle Datenübertragung per USB
- Einfachste Installation - Plug & Play

DIGITUS® USB 2.0 Active Extension Cable

- Bridges reliably the distance to your USB devices
- No power loss despite of 5 meters cable length
- Flexible and quick data transfer via USB
- Easy installation - Plug & Play

Technical Features

- 5 meter USB 2.0 extension cable
- Extends maximum USB cable length permitted by 5.0m
- USB A male to USB A female, cable length 5.0m
- Data transfer rates: up to 480Mbps (USB 2.0)
- Plug and Play, easy installation
- Compatible with USB specification revision 2.0 and 1.1
- Supports USB Low-Speed (1.5Mbps), Full-Speed (12Mbps) and High-Speed (480Mbps)
- Supports Windows 2000/XP/Vista/7/8, Mac OS 10.X



DA-70130-4 325529 | USB 2.0 repeater cable 5m

DA-73100-1 326212 | USB 2.0 repeater cable 10m

DA-73101 306450 | USB 2.0 Repeater Cable 15m

DA-73102 306467 | USB 2.0 Repeater Cable 20m

DA-73103 306474 | USB 2.0 Repeater Cable 25m

DIGITUS® USB 3.0 Aktives Verlängerungskabel

- Überbrückt zuverlässig die Distanz zu Ihren USB-Geräten
- Kein Leistungsverlust trotz 5 Metern Kabellänge
- Datentransferrate bis zu 5 Gbps (Super Speed)
- Einfachste Installation - Plug & Play

DIGITUS® USB 3.0 Active Extension Cable

- Bridges reliably the distance to your USB devices
- No power loss despite of 5 meters cable length
- Data transfer rate up to 5 Gbps (super speed)
- Easy installation - Plug & Play

Technical Features

- 5 meter USB 3.0 extension cable
- Extends maximum USB cable length permitted by 5.0m
- USB A male to USB A female, cable length 5.0m
- Data transfer rates: up to 5 Gbps (USB 3.0, super speed)
- Plug & Play
- Compliant to the USB 3.0 specification, down compatible to USB 2.0/1.1
- Supports USB low speed (1.5Mbps), full speed (12Mbps), high speed (480Mbps) and super speed (5Gbps)
- AWG 28/24
- UL 20726
- Chipset: SN65LVPE502
- Supports Windows 2000/XP/Vista/7/8, Mac OS v9.0 or higher



DA-73104 326229 | USB 3.0 Data Link Cable

DIGITUS® USB 3.0 Data Link Kabel

DIGITUS® USB 3.0 Data Link Cable



- Einfacher Plug & Play Datentransfer von PC zu PC, PC zu Mac® oder Mac® zu Mac®
- Betrieb ohne Treiber-Installation
- CD-ROM-Fernzugriff (liest Daten vom Laufwerk des verbundenen PCs)

- Easy Plug & Play data transfer from PC to PC, PC to Mac® or Mac® to Mac®
- Driverless operation
- CD ROM remote access: can read CD ROM of other PC

Technical Features

- Easy Plug & Play data transfer from PC to PC, PC to Mac® or Mac® to Mac®
- USB 3.0 host to host communication
- Driverless operation
- Easy to use software with valuable applications included
- Transfers personal files and settings from one PC to another with „EasyMover“
- PC to PC file and full Microsoft Outlook

- Synchronization as well as folder synchronization
- CD ROM remote access: can read CD ROM of other PC
- Supports Windows XP, Vista, 7, 8, 8.1 and MAC OS 10.6-10.9
- LED indicator for activity
- Cable length: 1,5 m
- Color: black



DA-70012 354505 | USB 3.0 Data Link Cable

DIGITUS® USB Extender

DIGITUS® USB extender



- Erweitert ein USB Anschlusskabel auf bis zu 45 m Länge
- USB 1.1 Empfangsverstärker mindert den Signalverlust
- Mit eigener Stromversorgung, sodass keine externe Stromquelle benötigt wird

- Extends the USB cable length up to 45 m / 150 ft
- Embedded USB 1.1 transceiver prevent signal loss
- Self-powered, so no external power source is required

Technical Features

- Embedded USB 1.1 transceiver prevent signal loss
- USB 2.0 compatible
- Extends the USB cable length up to 45 m / 150 ft
- Uses one ordinary Cat 5, 5e or 6 network cable (UTP, STP or SFP) with RJ45 plugs
- Self-powered, so no external power source is required
- Easy installation, works fully transparent, no software driver required

- Ideal for e.g. cameras, printers and scanners, etc.
- Only 1 sending unit and 1 receiving unit included in delivery
- Plug & Play
- Length: 20 cm
- Supports: Windows 98/ME/2000/XP/7/8, Linux



DA-70139-2 342311 | USB extender

DIGITUS® USB - PS/2-Adapter

- Plug and Play - Keine Software erforderlich
- Verbindet eine PS/2 Maus und Tastatur an einen einzelnen USB Anschluss
- Kompatibel zur USB Spezifikation Revision 1.1
- Kompatibel zur USB Spezifikation Revision 1.1

Technical Features

- Compatible with USB specification revision 1.1
- Supports PCs and SUN computers
- 2 x MiniDIN 6-pin female for PS/2 mouse and keyboard
- Power supply for USB devices connected via

DIGITUS® USB - PS/2 Adapter

- Plug and Play - No software required
- Connects a PS/2 mouse and keyboard in only one USB port
- Compatible with USB specification revision 1.1
- Compatible with USB specification revision 1.1

- interface
- USB connection supports plug & play
- USB connector cable with USB A male
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DA-70118 117933 | USB -> PS/2 Adapter

DIGITUS® USB 3.0 Sharing Switch

- Bis zu zwei PCs haben gemeinsamen Zugriff auf ein Endgerät (Drucker, Scanner, etc.)
- Garantiert Super-Speed-Datenübertragungen von bis zu 5 Gbps dank USB 3.0
- Bequemes Umschalten per Knopfdruck dank Taster

Technical Features

- USB 3.0 data transfer rate up to 5Gbps
- Compliant to USB 3.0 specification, down compatible with USB 2.0 and USB 1.1
- Selects PCs by using push buttons on top panel
- Connecting to computer by USB 3.0 B-Type port and connecting to device by USB3.0 A-Type

DIGITUS® USB 3.0 Sharing Switch

- Up to two PCs have shared access to one end device (printer, scanner, and so on)
- SuperSpeed data transfer rates of up to 5 Gbps guaranteed, thanks to USB 3.0
- Convenient switching at the push of a button

- High-Speed data transfer, low power consumption
- USB Bus Powered, w/o Power Supply
- Two blue LEDs indicate selected PC
- Supports Windows (2000, XP, Vista, 7, 8) and Mac (OS 10.3 and higher)



DA-73300 293262 | USB 3.0 Sharing Switch, 2 PCs - 1 device



DIGITUS® USB 2.0 Sharing Switch

- **USB 2.0 Sharing Switch, 2 PC - 1 Endgerät**
- **Nutzen Sie ein USB 1.1/2.0-Endgerät mit zwei PCs**
- **Hot-Key-Umschaltung per Tastatur zwischen den Endgeräten / PCs**
- **Kein zusätzliches Netzteil erforderlich - Stromversorgung per USB**

Technical Features

- Compatible to USB 1.1 and USB 2.0 interface
- Compliant with USB 2.0 specifications
- Keyboard hot-key switching between the devices / PCs

DIGITUS® USB 2.0 sharing switch

- **USB 2.0 Sharing Switch, 2 PC - 1 Device**
- **Use one USB 1.1/2.0 device with two PCs**
- **Keyboard hot-key switching between the devices / PCs**
- **No additional power supply required - power supply via USB**

- No additional power supply required - power supply via USB
- Supports Windows (2000, XP, Vista, 7, 8), Mac (OS 10.3 and higher) and Linux



DA-70135-1 293224 | USB 2.0 Sharing Switch, 2 PC - 1 Device



DIGITUS® USB 2.0 Sharing Switch

- **Ermöglicht den Zugriff von bis zu 4 PCs auf ein USB-Gerät (Drucker, Scanner, etc.)**
- **Bequeme Hot-Key Umschaltung per Tastatur**
- **High Speed Datenübertragungen von bis zu 480 Mbps**

Technical Features

- Compliant to USB 2.0 specification
- Use one USB 1.1/2.0 device with four PCs
- Keyboard hot-key switching between the devices / PCs

DIGITUS® USB 2.0 sharing switch

- **Enables up to four PCs to access one USB device (printer, scanner, and so on)**
- **Convenient switching using a keyboard hotkey**
- **High-Speed data transfer rates of up to 480 Mbps**

- No additional power supply required - power supply via USB
- Supports Windows (2000, XP, Vista, 7, 8), Mac (OS 10.3 and higher) and Linux



DA-70136-1 293231 | USB 2.0 Sharing Switch, 4 PC - 1 Device

DIGITUS® SSD/HDD Einbaurahmen für den CD/DVD/Blu-ray Laufwerksschacht, SATA auf IDE, 12,7 mm Bauhöhe

- Einbaurahmen für 2,5" SATA Festplatten (HDD) und SSDs
- Geeignet für alle IDE-Laufwerksschächte mit einer Bauhöhe von 12,7 mm
- Universell gestaltete Blendenhalterung ermöglicht eine individuelle, optische Anpassung

DIGITUS® SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to IDE, 12.7 mm installation height

- Mounting frame for 2.5" SATA hard drives (HDD) and SSDs
- Suitable for all IDE drive slots with a height of 12.7 mm
- Universally designed visor holder enables individual optical adjustment

Technical Features

- Mounting frame for 2.5" SATA hard drives (HDD) and SSDs
- Suitable for almost all IDE drive slots with a height of 12.7 mm
- Universally designed visor holder enables individual optical adjustment
- The frame is made of aluminium for an enhanced heat dissipation
- Screw driver for easy installation included
- Supports Windows 2000/2003/XP/Vista/7/8, Linux
- Dimensions: 12.7 x 128 x 129 mm
- Compatible to new models of e.g. HP, DELL, ACER, BenQ, Asus, Lenovo, Great Wall



DA-71100 362425 | SATA to IDE, SSD/HDD mounting frame for notebooks

DA-71101 362432 | 9,5 mm SATA to IDE, SSD/HDD Mounting Frame

DA-71102 362449 | SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 12.7 mm installation height

DA-71103 362456 | SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 9.5 mm installation height



**DIGITUS® Externes SSD/HDD-
Festplattengehäuse 2.5, SATA zu
USB 2.0**

- **Unterstützte Datentransferrate bis zu 480Mbps**
- **Einfacher schraubenloser Einbau einer Festplatte**
- **Modernes Design in Klavierlackoptik**

Technical Features

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Suitable for standard SATA SSD/ hard disk 2.5"
- Capacity: up to 3 TB
- Compliant to USB 2.0 specification
- Supports data transfer rates up to 480Mbps

**DIGITUS® External SSD/HDD
enclosure 2.5, SATA to USB 2.0**

- Supports data transfer rates up to 480Mbps
- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface

- LED Indicators: power (red), access (blue)
- Supports hot-plugging, plug & play compliant
- USB bus powered
- Size: 13.5cm x 8.5cm x 1.5cm (LxWxH)
- Supports Windows XP, Vista, 7, 8, 8.1, Linux, MAC OS 10.6 above and Android 3.1 above



DA-71002 297925 | External HDD enclosure 2.5, SATA to USB 2.0

**DIGITUS® Externes HDD-
Festplattengehäuse 2.5, IDE zu
USB 2.0**

- **Einfacher schraubenloser Einbau einer Festplatte**
- **Modernes Design in Klavierlackoptik**
- **Unterstützte Datentransferrate bis zu 480Mbps**

Technical Features

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Suitable for standard IDE hard disk 2.5
- Capacity: up to 750 GB
- Compliant to USB 2.0 specification
- Supports data transfer rates up to 480Mbps

**DIGITUS® External HDD Enclosure
2.5, IDE to USB 2.0**

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Supports data transfer rates up to 480Mbps

- LED Indicators: power (red), access (blue)
- Supports hot-plugging, plug and play compliant
- USB bus powered
- Size: 13.5cm x 8.5cm x 1.5cm (LxWxH)
- Supports Windows XP, Vista, 7, 8, 8.1, Linux, MAC OS 10.6 above and Android 3.1 above



DA-71001 297918 | External HDD enclosure 2.5, IDE to USB 2.0

DIGITUS® Externes SSD/HDD- Festplattengehäuse 2.5“, SATA auf USB 3.0

- Geeignet für Standard-SATA SSD-Festplatten 2.5“
- Einfacher schraubenloser Einbau einer Festplatte
- Modernes Design in Klavierlackoptik

Technical Features

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Suitable for standard SATA SSD/ hard disk 2.5“
- Capacity: up to 3 TB
- Compliant to USB 3.0 specification, downward compatible with USB 2.0 High-Speed (480Mbps)

DIGITUS® External SSD/HDD Enclosure 2.5“, SATA to USB 3.0

- Suitable for standard SATA SSD/ hard disk 2.5“
- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface

- USB 3.0 data transfer rate up to 5Gbps
- LED Indicators: power (red), access (blue)
- Supports hot-plugging, plug and play compliant
- USB bus powered
- Size: 13.5cm x 8.5cm x 1.5cm (LxWxH)
- Supports Windows XP, Vista, 7, 8, 8.1, Linux, MAC OS 10.6 above and Android 3.1 above



DA-71030 297932 | External SSD/ HDD enclosure 2.5“, SATA to USB 3.0

DIGITUS® Externes SSD/HDD- Festplattengehäuse 3.5, SATA auf USB 3.0

- Einfacher schraubenloser Einbau einer Festplatte
- Modernes Design in Klavierlackoptik
- Geeignet für Standard-SATA Festplatten 3.5
- USB 3.0 Datentransferrate bis zu 5Gbps

Technical Features

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Capacity: up to 8 TB
- Suitable for standard SATA hard disk 3.5
- Compliant to USB 3.0 specification, downward compatible with USB 2.0 High-Speed (480Mbps)

DIGITUS® External SSD/HDD Enclosure 3.5, SATA to USB 3.0

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Suitable for standard SATA hard disk 3.5
- USB 3.0 data transfer rate up to 5Gbps

- USB 3.0 data transfer rate up to 5Gbps
- LED Indicators: power (red), access (blue)
- Supports hot-plugging, plug and play compliant
- Size: 19.6cm x 11.1cm x 3.5cm (LxWxH)
- Supports Windows XP, Vista, 7, 8, 8.1, Linux, MAC OS 10.6 above and Android 3.1 above



DA-71035 297963 | External HDD Enclosure 3.5, SATA to USB 3.0



DIGITUS® Externes SSD/HDD-Festplattengehäuse 3.5 IDE zu USB 2.0

- Geeignet für Standard-IDE Festplatten 3.5
- Einfacher schraubenloser Einbau einer Festplatte
- Modernes Design in Klavierlackoptik

Technical Features

- Capacity: up to 8 TB
- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Suitable for standard IDE hard disk 3.5
- Capacity: up to 750 GB
- Compliant to USB 2.0 specification

DIGITUS® External SSD/HDD Enclosure 3.5, IDE to USB 2.0

- Suitable for standard IDE hard disk 3.5
- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface

- Supports data transfer rates up to 480Mbps
- LED Indicators: power (red), access (blue)
- Supports hot-plugging, plug and play compliant
- Size: 19.6cm x 11.1cm x 3.5cm (LxWxH)
- Supports Windows XP, Vista, 7, 8, 8.1, Linux, MAC OS 10.6 above and Android 3.1 above



DA-71050 297949 | External HDD enclosure 3.5, IDE to USB 2.0



DIGITUS® Externes SSD/HDD-Festplattengehäuse 3.5 SATA zu USB 2.0

- Einfacher schraubenloser Einbau einer Festplatte
- Modernes Design in Klavierlackoptik
- Geeignet für Standard-SATA Festplatten 3.5

Technical Features

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Suitable for standard SATA hard disk 3.5
- Capacity: up to 8 TB
- Compliant to USB 2.0 specification

DIGITUS® External SSD/HDD Enclosure 3.5 SATA to USB 2.0

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Suitable for standard SATA hard disk 3.5

- Supports data transfer rates up to 480Mbps
- LED Indicators: power (red), access (blue)
- Supports hot-plugging, plug and play compliant
- Size: 19.6cm x 11.1cm x 3.5cm (LxWxH)
- Supports Windows XP, Vista, 7, 8, 8.1, Linux, MAC OS 10.6 above and Android 3.1 above



DA-71051 297956 | External HDD Enclosure 3.5, SATA to USB 2.0

DIGITUS® USB2.0 mini Festplattenadapter für IDE & SATA

- Verbindet Geräte mit IDE oder SATA-Schnittstelle per USB
- High Speed Datenübertragungen dank USB 2.0 (480 Mbps)
- Unterstützt ATA/ATAPI Ultra DMA Mode

Technical Features

- Connections for IDE 3.5, IDE 2.5 (40-pin) and SATA HDD
- Supports 2.5/3.5 IDE and SATA HDDs (and 1.8 HDDs only with suitable adapter, not included)
- Suitable for SATA and SATA II HDDs
- Capacity: up to 8 TB
- Supports USB 2.0 480Mbps High-Speed and

DIGITUS® USB 2.0 Mini IDE & SATA cable

- Connects devices with an IDE or a SATA interface via USB
- USB 2.0 High-Speed data transfer rates (480 Mbps)
- Supports ATA/ATAPI Ultra DMA mode

- 12Mbps Full-Speed USB operation
- Supports ATA/ATAPI Ultra DMA Mode, PACKET command feature set and LBA48 bit addressing mode
- LEDs indicating work status
- Cable length: 90cm
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DA-70200-1 308478 | USB 2.0 IDE & SATA cable

DIGITUS® USB 3.0 IDE & SATA-Kabel

- Verwandeln Sie Ihre SATA/ IDE Festplatte in ein externes USB Laufwerk
- Ideal für Backup und Service
- Unterstützt 2.5/3.5 IDE- und SATA-Festplatten

Technical Features

- Capacity: up to 8 TB
- Supports 2.5/3.5 IDE and SATA HDDs
- Supported data transfer rates: Super-Speed (5Gbps), High-Speed (480Mbps), Full-Speed (12Mbps) and Low-Speed (1.5Mbps)
- Supports SATA 1.5 Gbps /3.0 Gbps speed negotiation

DIGITUS® USB 3.0 IDE & SATA Cable

- Turn your SATA/ IDE hard disk into an external USB drive
- Ideal for backup and service
- Supports 2.5/3.5 IDE and SATA HDDs

- Compliant to Universal Serial Bus 3.0 specification, downwards compatible to USB 2.0, 1.1 specification
- Compliance with USB Mass Storage Class
- Plug & play and hot-swappable
- incl. power supply 12V/2A
- Compliant to Serial ATA2.6



DA-70325 306481 | USB 3.0 IDE & SATA cable

DIGITUS® USB 3.0 zu SATA III Adapter Kabel

- Nutzen Sie Ihre SATA-Festplatte als zusätzliches Laufwerk
- Ideal für Backups und Service
- Datenübertragungen in Super Speed Geschwindigkeit

Technical Features

- Capacity: up to 8 TB
- Supports 2,5/3,5 SATA HDD/SSD's
- Supports SATA 6.0 Gps/ 3.0 Gbps /1.5 Gbps speed negotiation
- Supports data transfer rate: Super-Speed(5 Gbps) / High-Speed(480 Mbps)/ Full-Speed(12 Mbps) / Low-Speed(1.5 Mbps)
- Compliant to USB 3.0 specification, down

DIGITUS® USB 3.0 to SATA III Adapter Cable

- Use your SATA hard drive as an additional drive
- Ideal for backups and service
- SuperSpeed data transfer rates

- compatible with USB 2.0 and USB 1.1
- USB mass storage class support
- Plug & play and hot-swappable
- Compliant to Serial ATA3
- High-Speed data transfer, low power consumption
- Incl. power supply, input: AC 100-240V, 50/60Hz, output: DC 12V2A
- 1.2M USB 3.0 to SATA III cable



DA-70326 308546 | USB 3.0 to SATA III Adapter Cable

DIGITUS® USB 2.0 IDE & SATA Kabel



- Verbindet Geräte mit IDE oder SATA-Schnittstelle per USB
- Schnelle Datenübertragung von bis zu 480 Mbps
- Eignet sich ideal für Backups und Service-Anwendungen

Technical Features

- Capacity: up to 8 TB
- Supports 2.5/3.5/5.25 IDE and SATA HDD's and devices
- Supports SATA, SATA II
- Compliance with USB 2.0 (High-Speed)
- Compliance with USB Mass Storage Class
- High speed USB data transfer rate up to 480 Mbps

DIGITUS® USB 2.0 IDE & SATA cable

- Connects devices with an IDE or a SATA interface via USB
- Fast data transfer rates of up to 480 Mbps
- Ideally suited for backups and service applications

- High-Speed data transfer, low power consumption
- Power supply is not included, please use power from desktop computer itself. (Please refer to User Manual)
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DA-70202 288305 | USB2.0 to IDE and SATA Adapter Cable (without PSU)

DIGITUS® USB 2.0 zu IDE/SATA-Adapter-Kabel



- Unterstützt 2.5/3.5 IDE- und SATA-Festplatten
- Verfügt über ein USB-Y-Kabel für eine bessere und stabilere Stromversorgung
- Ideal für den Service oder das Backup, niemals wieder Computergehäuse öffnen oder Festplatten in ein Festplattengehäuse montieren müssen
- Easy Connection - Fast Transferring - Back Up Files für jede HDD/SSD

Technical Features

- Supports SATA, SATA II
- Capacity: up to 3 TB
- Disposes a USB Y-cable for better and stable power supply
- Supports 480Mbps High Speed (HS) and 12Mbps Full Speed USB operation

DIGITUS® USB 2.0 to IDE/SATA Adapter Cable

- Supports 2.5/3.5 IDE and SATA HDDs
- Disposes a USB Y-cable for better and stable power supply
- Ideal for Service or Backup, never having to open a computer case or mount hard drives in an enclosure
- Easy Connection - Fast Transferring - Back Up Files for any HDD/SSD

- Supports ATA/ATAPI Ultra DMA Mode
- Supports ATA/ATAPI PACKET command feature set
- Supports ATA/ATAPI LBA48-bit addressing mode
- High-Speed data transfer, low power consumption
- Incl. power supply
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DA-70148-3 311287 | USB 2.0 IDE/SATA Cable

DIGITUS® USB 3.0 zu SATA II Adapterkabel



- Unterstützt 2.5/3.5 SATA Festplatten
- High-Speed Datenübertragung, geringe Stromaufnahme
- Inkl. Netzteil, Input: AC 100-240V, 50/60Hz, Output: DC 12V2A

Technical Features

- Supports 2,5/3,5 SATA HDD's
- Compatible to all SATA Standards
- Supports data transfer rate: Super-speed (5 Gbps) / High-speed (480 Mbps) / Full-speed (12 Mbps) / Low-speed (1.5 Mbps)
- Capacity: up to 8 TB
- Compliant to USB 3.0 specification, down compatible with USB 2.0 and USB 1.1
- Supports ATA/ATAPI Ultra DMA mode

DIGITUS® USB 3.0 to SATA II Adapter cable

- Supports 2,5/3,5 SATA HDD's
- High-Speed data transfer, low power consumption
- Incl. power supply, input: AC 100-240V, 50/60Hz, output: DC 12V2A

- Supports ATA/ATAPI PACKET command feature set
- USB mass storage class support
- Plug & play and hot-swappable
- High-Speed data transfer, low power consumption
- Incl. power supply, input: AC 100-240V, 50/60Hz, output: DC 12V2A
- Cable length: approx. 1.27m
- Supports Windows 8, 7, Vista and XP



DA-70300-1 322740 | USB 3.0 to SATA II Adapter cable

DIGITUS® 3.5 Festplatten IDE zu SATA Interface Konverter

- Erreicht Übertragungsraten von bis zu 1,5 Gbps (SATA II)
- Geeignet für den Einsatz von IDE Festplatten an SATA-Anschlüssen

Technical Features

- Ideal for further using your existing IDE hard disks e.g. in a new SATA enabled PC or in a SATA docking station
- Suitable for 3.5 IDE hard disks to be compliant with the SATA interface
- Easy to install: Simply „dock“ the converter to the 3.5 IDE hard disk and fix it by two screws, the HDD is now ready to connect to the SATA controller or a HDD docking station
- Closed metal-housing design for a hassle-free

DIGITUS® 3.5 Hard Disk IDE to SATA Interface Converter

- Achieves transfer rates of up to 1.5 Gbps (SATA II)
- Suitable for using IDE hard drives on SATA ports

- installation without cable clutter
- Supports SATA and SATA II standards with data transfer rate up to 1,5Gbps
- Supports ATA/ATAPI data transfer rates of 66, 100, 133 and 150MB/s
- SATA Plug and Play operation, no additional software needed
- Supports hard drives from Maxtor, Samsung, IBM, Hitachi, Seagate and Western Digital (adapter included)



DA-70545 283867 | 3.5 Hard Disk IDE to SATA Interface Converter

DIGITUS® Serial ATA Festplattenwechselrahmen

- SATA-Festplattenwechselrahmen zum Einbau in CD/ DVD Schacht
- Zusätzliches Schloss schützt vor Diebstahl und Datenmissbrauch
- Integrierter Lüfter reguliert die Betriebstemperatur

Technical Features

- Removable frame for hard drives, suitable for installations in CD/DVD - PC drive bays
- Suitable for Serial ATA hard drives 3.5
- Material: Plastic

DIGITUS® Serial ATA HDD removable frame

- SATA removable hard drive frame for installation in CD/DVD bay
- Additional lock protects against theft and data misuse
- Integrated fan controls the operating temperature

- 1 additional fan integrated
- Drawer lockable
- With status LED



DA-50215 236399 | Serial ATA HDD removable frame, black

DIGITUS® Premium SATA-Festplattenwechselrahmen, grau und schwarz

- SATA-Festplattenwechselrahmen zum Einbau in CD/ DVD Schacht
- Abschließbare Schublade schützt vor unbefugtem Zugriff Ihrer Daten
- Hochwertiges Aluminiumgehäuse dient der Abschirmung vor elektromagnetischen Störungen

Technical Features

- High quality hard drive frame, removable, for S-ATA hard drives 3.5
- Aluminum housing with plastic panel, better EMI / RFI protection

DIGITUS® Premium SATA HDD removable frame, gray and black

- SATA removable hard drive frame for installation in CD/DVD bay
- Lockable drawer protects your data from unauthorized access
- High-quality aluminum housing shields against electromagnetic interference

- Integrated bottom fan
- Drawer lockable
- With status LED



DA-50217 236412 | Premium SATA HDD removable frame metal, black

**DIGITUS® Mini NAS Server für
externe USB Festplatten**

- Der kompakte und energieeffiziente NAS Server für den gemeinsamen Dateizugriff über das Netzwerk!
- Ermöglicht einfache Speicherung, Austausch und Sicherung von Daten im gesamten Netzwerk
- NAS Funktion (Network Attached Storage) zur Freigabe der Festplatte im lokalen Netzwerk oder Internet


**DIGITUS® Mini NAS Server for
external USB HDD**

- The compact and energy efficient NAS Server for sharing your files on the network!
- Easy provides storage space for expansion, sharing and backup to the whole network
- NAS function (Network Attached Storage) to provide centralized data access and storage to the network

Technical Features

- The mini NAS Server enables USB 2.0 HDDs to access the network
- NAS function (Network Attached Storage) to provide centralized data access and storage to the network
- Easy provides storage space for expansion, sharing and backup to the whole network
- RJ45 network connector for Fast Ethernet 10/100 Mbps

- Samba and FTP Server for easy file access
- BitTorrent Server for automatic downloads, even when the computer is switched off
- Easy access of photos, movies or music over iTunes, Xbox 360 and Playstation 3
- Energy consumption 2.5 Watt
- Supports Windows 8, 7, Vista, XP, Mac OS X and Linux

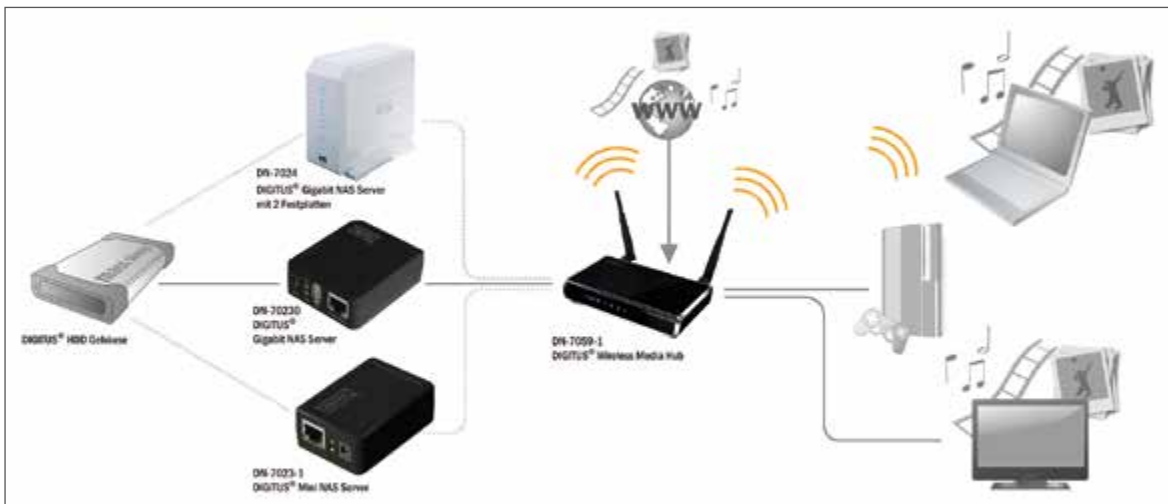

DIGITUS® LockGuard Dockingstation

- **Sichert Daten Ihrer Festplatten unabhängig vom Betriebssystem**
- **Übersichtliche Benutzeroberfläche ermöglicht eine einfache Menü-Navigation und Passworteingabe**
- **Write Protection – schützt vor unerlaubtem Löschen oder Überschreiben Ihrer Daten**

Technical Features

- Supports USB 3.0 SUPERSPEED max 5 Gbps/ USB 2.0 HIGH-SPEED mode 480 Mbps/USB 1.1 FULL-SPEED 12 Mbps
- OS Independent, real-time hardware encryption
- Voice support on main functions
- Capacity: up to 6 TB
- Quality OLED display technology
- Capacitive touchscreen technology
- AES 256bit Encryption algorithm
- ARM based 32bit Controller installed

DIGITUS® LockGuard Dockingstation

- **Safeguards data on your hard drive independently of the operating system**
- **Clear user interface enables easy menu navigation and password entry**
- **Write protection – protects your data so that it cannot be deleted or overwritten**

- 4-8 digit PIN (Password) - over 1 Million combination available
- Compatible with any device which supports USB host
- SATA I/II/III type 3.5" and 2.5" HDD/SDD support
- Emergency data rescue by Master-key
- Easy docking system to recognize and use max 50 different HDDs
- Safely Remove Hardware, Mount/Un-mount function
- HDD Write-Protection (Anti Virus) supports



DA-74001 316589 | DIGITUS LockGuard USB 3.0 Docking Station

DIGITUS® USB 3.0 Duale SATA HDD Dockingstation 2,5"/ 3,5"

- **Zwei Festplatten können gleichzeitig gelesen und beschrieben werden**
- **Daten werden im schnellen USB 3.0 Standard übertragen**
- **Ideal für Backups, Datenarchivierung und Serviceanwendungen**

Technical Features

- Accommodates two 3.5 or 2.5 SATA hard drives, plug-in unit, data can be transferred between 2.5 and 3.5 SATA hard drives
- Clone function
- Two hard drives can be read or written simultaneously
- Supports SuperSpeed USB 3.0 up to 5 Gbps, high speed USB 2.0 up to 480 Mbps, and full speed USB

DIGITUS® 2.5"/3.5" USB 3.0 Dual SATA HDD Docking Station

- **Two hard drives can be read and written to simultaneously**
- **USB 3.0 SuperSpeed data transfer**
- **Ideal for backups, data archiving, and service applications**

- 1.1 at 12 Mbps
- Supports hotswapping of connected devices
- Supports SATA III (6 Gbps) / SATA II (3Gbps) / SATA I (1.5 Gbps)
- LED display for monitoring the cloning process
- Includes DC 12 V/3 A power supply unit
- Includes Data cable (USB 3.0, type B)



DA-71540 371526 | USB 3.0 Docking Station for 2,5"/ 3,5", 2-Port

DIGITUS® IDE- Festplattenwechselrahmen



- Inkl. Lüfter im Rahmen (ein zusätzlicher Lüfter für die Schublade kann nachgerüstet werden)
- Hochwertiger Festplattenwechselrahmen, für IDE-Festplatten 3.5
- Damit wird aus jeder Festplatte 3.5 eine einfach auszutauschende, mobile Festplatte - ideal für Backups

Technical Features

- High quality hard drive frame, removable, for IDE hard drives 3.5
- Material of frame: plastic
- Frames are equipped with a fan (one additional fan

DIGITUS® IDE HDD removable frame

- Frames are equipped with a fan (one additional fan for the drawer can be added)
- High quality hard drive frame, removable, for IDE hard drives 3.5
- Makes any hard drive 3.5 portable and allows it to be swapped quickly - ideal for backups

- for the drawer can be added)
- Drawer lockable
- With status LED



DA-50211-A 194149 | IDE HDD removable frame, grey

DIGITUS® Serial ATA Festplattenwechselrahmen



- Geeignet für Serial ATA-Festplatten 3.5
- 1 Zusatzlüfter eingebaut
- Schublade abschließbar

Technical Features

- Removable frame for hard drives, suitable for installations in CD/DVD - PC drive bays
- Suitable for Serial ATA hard drives 3.5
- Material: Plastic

DIGITUS® Serial ATA HDD removable frame

- Suitable for Serial ATA hard drives 3.5
- 1 additional fan integrated
- Drawer lockable

- 1 additional fan integrated
- Drawer lockable
- With status LED



DA-50214-A 194163 | Serial ATA HDD removable frame, gray

DA-50211-A 194149 | IDE HDD removable frame, grey

DIGITUS® USB 3.0 zu VGA-Adapter

- **Erweitern Sie Ihren Arbeitsplatz (Dual Display); schließen Sie zusätzlich einen Monitor, Fernseher oder Projektor über die USB-Schnittstelle an.**
- **Entspricht den USB 3.0-Spezifikationen**
- **Unterstützt eine hohe Auflösung bis zu 2048x1152**


DIGITUS® USB 3.0 to VGA adapter

- **Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB**
- **Compliant with USB specifications 3.0**
- **Supports High Resolution up to 2048 x 1152**

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Compliant with USB specifications 3.0
- Supports multiple display modes on one PC: primary, extended, mirror
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)
- Up to 6 graphic adapter simultaneously for PC

- Add or remove monitor without system reboot
- Supports High Resolution up to 2048 x 1152
- Video streaming is supported up to 1080p
- USB bus powered
- Resumes from hibernation and suspend modes
- Supports Windows 8, 7, Vista and XP

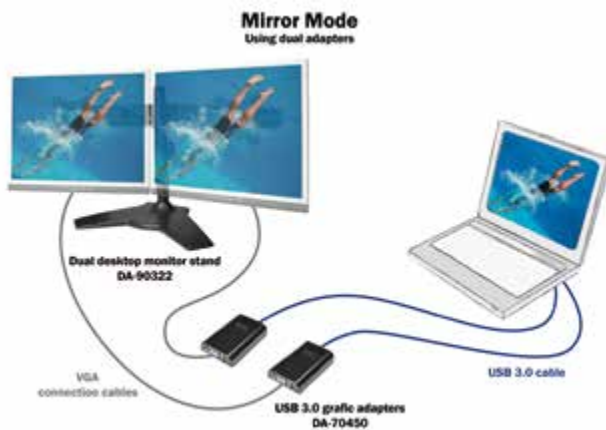

DA-70450 311058 | USB 3.0 to VGA adapter

DA-70451 311065 | USB 3.0 to DVI Adapter

DA-70452 311089 | USB 3.0 to HDMI Adapter

DA-70453 354420 | Display Adapter, USB 3.0 to DisplayPort

DIGITUS® USB 3.0 zu VGA Grafikadapter

- Ergänzt Ihr Windows-Notebook, Tablet oder PC um einen VGA-Anschluss
- Überträgt eine hohe Auflösung bis zu 1080p Full HD
- Unterstützt mehrere Wiedergabemodi: Haupt-/erweitertes Display, Spiegelung

DIGITUS® USB 3.0 to VGA Graphic Adapter

- Extend your Windows Notebook, Tablet or PC by a VGA connection
- Transmits high resolution up to 1080p Full HD
- Supports multiple display modes on one PC: primary, extended, mirror



Technical Features

- Extend your Windows Notebook, Tablet or PC by a VGA connection
- Compliant with USB specifications 3.0
- Supports multiple display modes on one PC: primary, extended, mirror
- Add or remove monitor without system reboot
- Transmits high resolution up to 1080p Full HD
- USB bus powered
- Supports Windows 7, 8, 8.1
- Input: USB 3.0
- Output: VGA
- Dimensions: 13,6 x 26 x 54 mm (without cable)
- Cable length: 50 mm
- Weight: 20g
- Operating temperature: 0 °C - 40 °C
- Storage temperature: -20 °C - 80 °C
- Relative humidity: < 85% (non-condensing)



DA-70455 363613 | USB 3.0 to VGA Graphic Adapter

DIGITUS® USB 3.0 Docking-Adapter, 3-in-1

- Sie erhalten einen LAN- und VGA-Anschluss zusätzlich
- Die USB-Anschlussmöglichkeit bleibt durch den zusätzlichen USB 2.0-Anschluss erhalten
- Optimale Größe für einen Einsatz auf Reisen

DIGITUS® USB 3.0 Docking Adapter, 3 in 1

- You get an additional LAN and VGA port
- The USB connectivity is retained by the additional USB port
- Perfect size for use when traveling



Technical Features

- Input: USB 3.0
- Outputs: USB, LAN, VGA
- Transmits high resolution up to 1080p Full HD
- Supports multiple display modes on one PC: primary, extended, mirror
- LAN port is compatible to IEEE 802.3 and IEEE 802.3u standard
- USB port is compatible with USB 2.0 and USB 1.1
- Transmission speed: 10/100 Mbps (LAN), 480 Mbps (USB)
- Operating temperature: 0 °C - 40 °C
- Storage temperature: -20 °C - 80 °C
- LAN port supports Windows (XP, Vista, 7, 8, 8.1) and Mac Os (10.7, 10.8, 10.9)
- VGA port supports Windows (7, 8, 8.1)
- USB port supports Windows, Mac OS and Linux
- Cable length: 50 mm
- Dimension: 172 x 36 x 15 mm (without cable)
- Product weight: 35 g
- Relative humidity: < 85% (non-condensing)



DA-70835 363606 | USB 3.0 Docking Adapter, 3 in 1

DIGITUS® USB 2.0 auf HDMI Videoadapter

- Erweitern Sie Ihren Arbeitsplatz um einen zusätzlichen Bildschirm per USB-Anschluss
- Erreicht Full HD Auflösungen von bis zu 1080p
- Stromversorgung via USB – erspart den zusätzlichen Einsatz von Netzteilen

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)
- Supports multiple display modes on one PC: primary, extended, mirror
- Compliant with USB specifications 2.0
- HDMI output interface (Video & Audio)

DIGITUS® USB 2.0 to HDMI Video Adapter

- Add an extra display to your workspace via USB connection
- Achieves Full HD resolutions of up to 1080 p
- Power supply via USB – no need for additional power supplies

- Display memory : 8MB SDRAM
- Resolution up to 1920X1080 Full HD
- Up to 6 graphic adapter simultaneously for PC, and 4 for Mac
- Supports Direct X 3D graphic accelerator
- Compliant with latest ATI & nVidia graphic cards
- Support Windows 8/ 7/ Vista/ XP, and Mac OS above 10.5.8



DA-70851 299974 | USB to HDMI video adapter

DIGITUS® Grafikadapter, USB 2.0 auf VGA

- Erweitern Sie Ihren Arbeitsplatz (Dual Display); schließen Sie zusätzlich einen Monitor, Fernseher oder Projektor über die USB-Schnittstelle an.
- Auflösung bis zu 1920 x 1080 Full HD
- Schließen Sie 2 oder mehr Monitore/Projektoren an Ihren Computer an, USB 2.0 auf VGA

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)
- Supports multiple display modes on one PC: primary, extended, mirror
- Up to 6 graphic adapter simultaneously for PC, and

DIGITUS® Graphic Adapter, USB 2.0 to VGA

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Resolution up to 1920X1080 Full HD
- Connect 2 or more monitors/projectors to your computer, USB 2.0 to VGA

- 4 for Mac
- Resolution up to 1920X1080 Full HD
- Display memory: 8MB SDRAM
- Video streaming is supported up to 1080p
- Color depth up to 32 bit
- Supports Direct X 3D graphic accelerator
- Compliant with latest ATI & nVidia graphic cards



DA-70833 299837 | Graphic adapter, USB 2.0 to VGA

DIGITUS® Grafikadapter, USB 2.0 auf DVI

- Erweitern Sie Ihren Arbeitsplatz (Dual Display); schließen Sie zusätzlich einen Monitor, Fernseher oder Projektor über die USB-Schnittstelle an.
- Auflösung bis zu 1080p
- Schließen Sie 2 oder mehr Monitore/Projektoren an Ihren Computer an, USB 2.0 auf DVI, (Full HD)

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)
- Supports multiple display modes on one PC: primary, extended, mirror
- Up to 6 graphic adapter simultaneously for PC, and

DIGITUS® Graphic Adapter, USB 2.0 to DVI

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Resolution up to 1080p
- Connect 2 or more monitors/projectors to your computer, USB 2.0 to DVI, (Full HD)

- 4 for Mac
- Display memory : 8MB SDRAM
- Resolution up to 1920X1080 Full HD
- Video streaming is supported up to 1080p
- Color depth up to 32 bit
- USB bus powered
- Supports Direct X 3D graphic accelerator
- Compliant with latest ATI & nVidia graphic cards



DA-70834 299899 | Graphic adapter, USB 2.0 to DVI

DIGITUS® MHL (Micro USB 2.0) Adapterkabel

- MHL - Inhalte von Smartphones oder Tablets werden auf Bildschirme übertragen
- Full HD Auflösung bis zu 1080p
- Kleines und kompaktes Gehäuse für den idealen Einsatz auf Reisen

DIGITUS® MHL (Micro USB 2.0) adapter cable

- MHL - allows smartphone or tablet content to be transferred to a larger display
- Full HD resolution of up to 1080 p
- Small and compact housing - ideal for use when traveling

Technical Features

- MHL compliance
- USB Micro B plug
- HDMI jack
- Built-in USB Micro B jack for extra power
- Supports 1080p Full HD
- Use your TV remote control to navigate the connected

- device
- HDMI connector dimensions: 5.4cm x 2.8cm x 1.2cm
- Color: Black
- Overall Length: 15cm



DIGITUS® Zweifach 2.5“ HDD/SSD Interner Einbaurahmen

- Einbaueinheit für 2x 2,5“-Festplatten in ein 3,5“-Schacht
- Einfaches Einbauen durch mitgelieferten Montagezubehör


DIGITUS® Dual 2.5“ HDD/SSD Internal Mounting Kit

- Unit for installing 2 x 2.5-inch hard drives in a 3.5-inch bay
- Includes mounting accessories for easy installation

Technical Features

- Supports installation of up to two 2.5 HDDs or SSDs in one 3.5 bay
- Works with HDDs and SSDs
- Also suitable for small Media Center PCs
- Easy installation
- Size: 11,5cm X 10,1cm X 2,3 cm
- Metal material helps to release the heat of HDDs
- Including bracket and screws



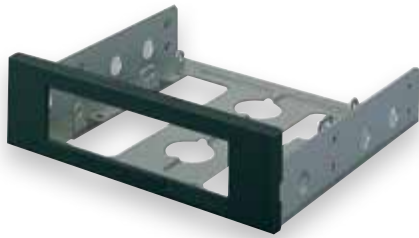

DIGITUS® Floppy Disk Einbaurahmen

- Ermöglicht den Einbau von 3,5"-SSD-/ HDD-/ FDD-Festplatten in ein CD/ DVD Schacht
- Einfaches Einbauen durch mitgelieferten Montagezubehör

Technical Features

- To install floppy drives in CD/DVD bays
- Robust frame, metal, with plastic blind, screws included in delivery

DIGITUS® Floppy Disk Mounting Frame

- Enables the installation of a floppy drive in a CD/ DVD bay
- Includes mounting accessories for easy installation

- Color: Black
- Mounting frame, metal; Set = 2 Pcs.



A-90179NEW/BLACK 173946 | Mounting Frame, Metal, Set = 2 Pcs. black



DIGITUS® Floppy Disk Einbaurahmen

- Dient zum Einbau von Diskettenlaufwerken – liest Ihre älteren Speichermedien
- Montagezubehör ermöglicht einfache Installation

Technical Features

- To install floppy drives in CD/DVD bays
- Robust plastic frame, screws included in delivery


DIGITUS® Floppy Disk Mounting Frame

- For installing floppy drives – reads your older storage media
- Mounting accessories allow easy installation

- Color: Black
- Mounting frame, plastic



A-90179-P BL 111894 | Mounting Frame, Plastic, black

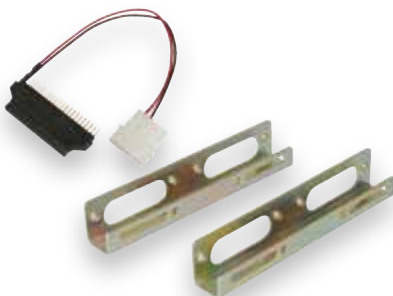

DIGITUS® HDD/SSD Einbaukit inkl. 2.5 => 3.5 Adapter

- Zur Montage von HDD und SSD Festplatten 2.5 in Desktop / Tower Gehäusen
- Adapter für 40-poliges IDE-Kabel und Stromversorgungsadapter im Lieferumfang enthalten
- Zwei Metalleinbauwinkel, Befestigungsschrauben im Lieferumfang enthalten

Technical Features

- To install HDDs and SSDs 2.5 in drive slots 3.5
- Two metal installation brackets and screws included in delivery

DIGITUS® HDD/SSD installation kit including 2.5 => 3.5 adapter

- For mounting HDDs and SSDs 2.5 in desktop or tower computer cases
- Adaptor for 40-pin IDE cable and power supply adaptor included in delivery
- Two metal installation brackets and screws included in delivery

- Adaptor for 40-pin IDE cable and power supply adaptor included in delivery
- HDD and SSD installation kit 2.5=>3.5



DA-70430 170372 | HDD and SSD installation kit 2.5 => 3.5

A-90112 059615 | Metal Mounting Brackets, Set = 2 Pcs.

DIGITUS® Montagekoffer

- **Umfangreiches Zubehör für die Wartung von Multimedia- und Netzwerktechnik**
- **Fixierte Gummibänder zur ordentlichen Verwaltung der Werkzeuge**
- **Schloss mit Zahlenkombination schützt gegen unerlaubten Zugriff**

Technical Features

- Mini flashlight
- Desoldering pump
- 5 cable
- Brush
- Electronic tester
- Adjustable wrench
- 5 screw drivers
- Solder stand, Solder reel
- Soldering iron
- 9 allen keys
- Ratchet
- 3m tape measure
- Electrical tape

DIGITUS® Tool suitcase

- **Comprehensive accessories for multimedia and network system maintenance**
- **Fixed rubber bands for tool organization**
- **Combination lock protects against unauthorized access**

- Socket adapter
- 10 jumpers
- 5 torque driver
- Long nose pliers
- Mini container
- Lineman's pliers
- 10 washers
- Coax crimping tool
- Digital multimeter
- 10 combination wrench
- Side cutter
- 36 screws (various type)



A-SK 90742 257400 | Network tool suitcase

DIGITUS® CPU Lüfter Zubehör

- **Silberanteil von 10%**
- **2,17 W/ m-k Leitfähigkeit**
- **Effizienter Schutz der CPU und GPU vor Überhitzung**

Technical Features

- Thermal conductivity: 2.062W/m-K

DIGITUS® CPU Cooler Accessories

- **10 percent silver**
- **2.17 W/m-k conductivity**
- **Efficiently protects a CPU or GPU from overheating**



A STARS-420 160939 | THERMAL PASTE, White

A STARS-700 104407 | THERMAL PASTE, 10% Silver

DIGITUS® Line-Interactive USV, 600 VA/360 W

- **Kompaktes Gehäuse für platzsparende Installation in Ihrer IT-Infrastruktur**
- **Schnelle Überbrückungszeit bei Stromausfällen**
- **Schnelle Ladezeit**
- **Abwärts-/Aufwärtswandler zur Stabilisierung der Spannung**

Technical Features

- Capacity: 600 VA/360 W
- Input voltage: 230 VAC
- Voltage range: 162-290 VAC
- Frequency range: 50 Hz (auto sensing)
- Output voltage: 230 VAC ± 10%
- AC voltage regulation (battery mode): 10%
- Frequency range (battery mode): 50 Hz ± 1%
- Typical transfer time: 2-6 ms
- Waveform (battery mode): Simulated sine wave
- Battery: 12V/7Ah x 1
- Typical recharge time: 4 hours to recover 90% of capacity

DIGITUS® Line-Interactive UPS, 600 VA/360 W

- **Compact enclosure for space saving installation in your IT infrastructure**
- **Fast bridging times in case of power blackout**
- **Quick charging time**
- **Boost and buck AVR for voltage stabilization**

- With overload-, discharge-, and overcharge protection
- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Alarm sounds: Battery mode (sounding every 10 sec.), low battery (sounding every second), overload (sounding every 0.5 seconds), fault (continuously sounding)
- Dimensions (HxWxD): 279x101x142 mm
- Net weight: 4.2 kg
- Humidity: 0-90% RH @ 0 °C to +40 °C (non condensing)
- Noise level: Less than 40 dB



DN-170024-1



DN-170013-1 345077 | Line-Interactive UPS, 600 VA/360 W

DN-170024-1 345107 | Line-Interactive UPS, 1000 VA/600 W

DN-170025-1 345114 | Line-Interactive UPS, 1500 VA/900 W

DN-170026-1 363583 | Line-Interactive UPS, 2000 VA/1200 W

DIGITUS® PC ATX Netzteil-Tester

- **Der schnellste Weg zur Überprüfung des PC Netzteils**
- **Ideal für den Computer-Service-Techniker und ambitionierte PC-Benutzer**
- **Einfacher und schneller Plug and Play-Betrieb**

Technical Features

- ATX power supply tester with LCD display
- Reliably indicates the accurate status of all power supply voltages
- Fast and easy plug & play operation
- Connectors for testing purposes of 20- / 24-pin mainboard connectors; for 4-pin, 6-pin, and 8-pin extension connectors, floppy connectors, and SATA connectors

DIGITUS® PC ATX power supply tester

- **The fastest way to check your power supply ,s health**
- **Essential for service personnel and computer enthusiasts**
- **Fast and easy plug & play operation**

- Robust aluminum housing
- Essential for service personnel and computer enthusiasts



DA-70601 200178 | PC ATX power supply tester with LCD

DIGITUS® USB Power Monitor

- **Einfache Messung von Spannung, Strom und Ladung an jedem USB Port und USB Gerät.**
- **Hilft Fehlerquellen bei der USB Stromversorgung zuverlässig aufzuspüren und die Einhaltung von Spezifikationen genau zu überprüfen.**
- **Wird einfach zwischen USB-Port und zu prüfenden Gerät angeschlossen. Durchgeschliffene Datenleitungen ermöglichen den normalen Betrieb des zu testenden Gerätes.**
- **Beleuchtetes Display mit Echtzeitanzeige aller Messwerte und das flexible Anschlusskabel ermöglichen das Ablesen auch an unzugänglichen Stellen.**

Technical Features

- Supports the simultaneous display of the USB voltage (volts), amperage (milliamperes), and total current/hour (mAh)
- Connections: USB A plug, USB A jack for device loop-through to any USB connection, micro-USB B jack for the direct connection of, for example, cell phone chargers
- Power supplied over USB, no batteries or additional power sources needed

DIGITUS® USB Power Monitor

- **Straightforward measurement of voltage, current, and load capacity at any USB port and USB device.**
- **Helps reliably identify error sources in USB power supplies and accurately verify compliance with specifications.**
- **Simply connects between the USB port and the device being tested. Loop-through data lines allow the device being tested to operate normally.**
- **The illuminated screen with real-time display of all measured values and flexible connecting cable make readouts possible even in hard to reach areas.**

- Display accuracy: 0.01 V, 0.01 A
- Measuring range: 3-7 V, 50-3,500 mA, capacity 0-19,999 mAh
- Illuminated LCD screen with simultaneous real-time display of all measured values
- Ten memory units for storing capacity, reset, and switchover readings via control knob
- Loop-through data lines for normal operation of the connected USB devices



DA-70610 366799 | USB Power Monitor

DIGITUS® 7.1 USB Sound Box

- **7.1 Surround Lautsprecheranschlüsse**
- **S/PDIF optischer digitaler Ein-und Ausgang**

Technical Features

- Full-duplex playback and recording
- Compliant to USB audio device class spec. 1.0 and USB HID class spec. 1.1
- Support 48/44.1 KHz sampling rate for both playback and recording
- 7.1 Surround speaker connection
- 3.5mm jack connectors

DIGITUS® 7.1 USB Sound Box

- **7.1 surround sound speaker ports**
- **S/PDIF optical digital input and output**

- S/PDIF optical digital in- and output
- USB 2.0 compliant
- Supports Windows 7, Vista and XP



DIGITUS® Stereo Multimedia Headset

- **Hoher Tragekomfort durch die leichte Bauweise und weiche Ohrpolster**
- **Tolles Multimedia-Headset für erstaunliche Gaming-Erfahrungen oder zum Musik hören**
- **Drehbares Schwanenhalsmikrofon für ausgezeichnete Kommunikation**

Technical Features

- Closed stereo headphones, tightly resting on ears, including microphone
- Built-in volume control in cable
- Light-weight design and soft ear pads ensuring a high wearing comfort
- Cable length 1.8m
- Dual 3,5mm stereo jack
- Frequency: 50Hz-3KHz over 70dB
- Impedance: 32 Ohm +/- 15%
- Sensitivity: 90dB +/- 3dB /mW
- Diameter of microphone: 9 x 7mm
- Microphone sensitivity: -52dB +/- 3dB
- Weight: 90g

DIGITUS® Stereo Multimedia Headset

- High wearing comfort through the light-weight design and soft ear pads
- Great multimedia headset for amazing gaming experiences or for listening music
- Revolving gooseneck microphone for excellent communication



DA-12201 320876 | Stereo headset w. volume control

83130 4054007831309 | Stereo headset w. volume control

DIGITUS® USB Telefonhörer

- **Einsetzbar als Mikrofon/Lautsprecher mit allen PC-basierten Softphones wie Skype, Google Chat, Google+, MSN, ICQ, X-lite, Dialpad, MediaRing, Net2phone, etc.**
- **Stromversorgung über USB, keine externe Stromquelle erforderlich**

Technical Features

- USB interface, plug and play
- Easy to use
- Power supply via USB, no external power supply required
- Separate sound card not needed to use this device
- Can be used as a microphone/speaker with all PC based softphones, such as Skype, Google Chat, Google+, MSN, ICQ, X-lite, Dialpad, MediaRing, Net2phone, etc.
- Supports Windows, Android and Linux

DIGITUS® USB Telephone Handset

- Can be used as a microphone/speaker with all PC based softphones, such as Skype, Google Chat, Google+, MSN, ICQ, X-lite, Dialpad, MediaRing, Net2phone, etc.
- Power supply via USB, no external power supply required



DA-70772 185222 | USB telephone handset

DIGITUS® Universal Notebook Netzteil



- Schlankes und leichtes Ersatzgerät oder zweites Netzteil für zuhause, im Büro oder auf Reisen
- Einfache und sichere Wahl der Ausgangsspannung durch den eingesetzten Adapterstecker
- LED Anzeige zeigt die gewählte Ausgangsspannung
- Inklusive 11 verschiedenen Steckern zum Anschluss an nahezu jedes Notebook

Technical Features

- Compact 70 Watt universal notebook power adapter
- Built-in universal USB charging socket, e.g. for MP3 players, mobile phones, etc.
- Compatible with the major notebook brands like Acer, Asus, IBM, Dell, HP, Fujitsu, NEC, Toshiba, Sony, etc.
- Input: 100-240V AC 50-60Hz

DIGITUS® Universal Notebook Power Adapter

- Slim and lightweight replacement or secondary power adapter for home, office or travel
- Easy and safe output voltage selection by inserted tip
- LED identification shows the selected voltage
- Including 11 different tips to fit almost any notebook

- Output: 15V/16V/18V/18,5V/19V/19,5V/20V/ DC max. 70W
- High efficient and energy saving design
- Protection against overload, short circuit and overheating
- Cable length: 30 cm (power outlet to adapter), 120cm (adapter to notebook)



DA-10070 278917 | Universal Notebook Power Adapter, 70W

DIGITUS® Universal Notebook Netzteil



- Kompaktes 90 Watt Universal Notebook Netzteil
- Inklusive 11 verschiedenen Steckern zum Anschluss an nahezu jedes Notebook
- Einfache und sichere Wahl der Ausgangsspannung durch den eingesetzten Adapterstecker
- LED Anzeige zeigt die gewählte Ausgangsspannung an

Technical Features

- Built-in universal USB charging socket, e.g. for MP3 players, mobile phones, etc.
- Compatible with the major notebook brands like Acer, Asus, IBM, Dell, HP, Fujitsu, NEC, Toshiba, Sony, etc.
- Input: 100-240V AC 50-60Hz
- Output: 15V/16V/18V/18,5V/19V/19,5V/20V DC

DIGITUS® Universal Notebook Power Adapter

- Compact 90 Watt universal notebook power adapter
- Including 11 different tips to fit almost any notebook
- Easy and safe output voltage selection by inserted tip
- LED identification shows the selected voltage

- max. 90W
- High efficient and energy saving design
- Protection against overload, short circuit and overheating
- Cable length: 30 cm (power outlet to adapter), 120cm (adapter to notebook)



DA-10090 278931 | Universal Notebook Power Adapter, 90W

DIGITUS® Universal Reise Notebook Netzteil



- Kompaktes 90 Watt Universal Fahrzeug Notebook Netzteil
- Inklusive 11 verschiedenen Steckern zum Anschluss an nahezu jedes Notebook
- Einfache und sichere Wahl der Ausgangsspannung durch den eingesetzten Adapterstecker
- Effizientes und energiesparendes Design

Technical Features

- Built-in universal USB charging socket, e.g. for MP3 players, mobile phones, etc.
- Compatible with the major notebook brands like Acer, Asus, IBM, Dell, HP, Fujitsu, NEC, Toshiba, Sony, etc.
- Input: 12-30V DC (car power adapter)

DIGITUS® Universal Travel Notebook Power Adapter

- Compact 90 Watt universal notebook car adapter
- Including 11 different tips to fit almost any notebook
- Easy and safe output voltage selection by inserted tip
- High efficient and energy saving design

- Output: 15V/16V/18V/18,5V/19V/19,5V/20V DC max. 90W
- High efficient and energy saving design
- Cable length: 30 cm (power outlet to adapter), 120cm (adapter to notebook)



DA-10091 283683 | Universal Travel Notebook Power Adapter, 90W

DIGITUS® SSD/HDD Einbaurahmen für den CD/DVD/Blu-ray Laufwerksschacht, SATA auf IDE, 12,7 mm Bauhöhe

- Einbaurahmen für 2,5“ SATA Festplatten (HDD) und SSDs
- Geeignet für alle IDE-Laufwerksschächte mit einer Bauhöhe von 12,7 mm
- Universell gestaltete Blendenhalterung ermöglicht eine individuelle, optische Anpassung

DIGITUS® SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to IDE, 12.7 mm installation height

- Mounting frame for 2.5“ SATA hard drives (HDD) and SSDs
- Suitable for all IDE drive slots with a height of 12.7 mm
- Universally designed visor holder enables individual optical adjustment

Technical Features

- Mounting frame for 2.5“ SATA hard drives (HDD) and SSDs
- Suitable for almost all IDE drive slots with a height of 12.7 mm
- Universally designed visor holder enables individual optical adjustment
- The frame is made of aluminium for an enhanced heat dissipation
- Screw driver for easy installation included
- Supports Windows 2000/2003/XP/Vista/7/8, Linux
- Dimensions: 12.7 x 128 x 129 mm
- Compatible to new models of e.g. HP, DELL, ACER, BenQ, Asus, Lenovo, Great Wall



DA-71100 362425 | SATA to IDE, SSD/HDD mounting frame for notebooks

DA-71101 362432 | 9,5 mm SATA to IDE, SSD/HDD Mounting Frame

DA-71102 362449 | SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 12.7 mm installation height

DA-71103 362456 | SSD/HDD Installation Frame for CD/DVD/Blu-ray drive slot, SATA to SATA III, 9.5 mm installation height

DIGITUS® USB-Notebookleuchte mit 10 LEDs

DIGITUS® 10 LEDs USB Lamp for Notebook



- **Energiesparend und langlebig durch LED-Technologie**
- **Geeignet für sämtliche USB-kompatiblen Computer (PC und Mac)**
- **Zehn weiße LEDs**

- **Energy saving and long-life span features come with LED technology**
- **Suitable to any USB compatible computer (PC or Mac)**
- **Ten white LEDs**

Technical Features

- Energy saving and long-life span features come with LED technology
- Ten white LEDs
- Clearly illuminates the keyboard or documents in low light environments
- Power supply for USB devices connected via interface
- Suitable to any USB compatible computer (PC or

- Mac)
- Flexible gooseneck
- Length: 45cm
- Power Consumption: 5W
- Slim and light: ideal for traveling
- Suitable for working on the airplane, at night, and in low light environments



DA-70759 296782 | USB 10 LEDs Lamp for notebook, Silver

DIGITUS® Universal Mobility Ladekabel für iPad/iPhone/iPod inkl. USB Hub

DIGITUS® Universal mobility charging cable for iPad/iPhone/iPod incl. USB hub



- **Ladekabel mit USB Hub Funktion**
- **Aufladen von iPads®/ iPhone®/ iPods® via USB**

- **Charging cable with USB hub function**
- **For charging iPads®/iPhone®/iPods® via USB**

Technical Features

- Charging function for iPad, iPhone & iPod
- Provides one additional USB hub
- Maximum data transfer rate 480Mbps (USB 2.0)

- USB 2.0 compliant
- Supports Windows 8, 7, Vista, XP, Mac OS X and Linux



DA-70219 308508 | Universal mobility charging cable for iPad/iPhone/iPod incl. USB hub

DIGITUS® Android - RS232 Kabel

DIGITUS® Android - RS232 cable



- **Verbindet serielle Geräte mit Smartphone oder Tablet mit Android Betriebssystem**
- **Basis UART-Schnittstelle**
- **Hochwertiger, eigener 12 MHz Oszillator**

- **Connects serial devices to a smartphone or tablet running Android**
- **Basic UART interface**
- **Own high-quality, 12-MHz oscillator**

Technical Features

- Suitable for Android V3.1 or higher
- Allows to use the Android Open Accessory Mode
- No additional drivers for the peripheral devices needed
- Chipset: FT312D
- Supports Baud from 300 to 921600
- Basic UART interface with RXD, TXD, RTS, CTS pins option
- Provides a power source to charge an Android device
- TX ACTIVE signal for controlling transceivers on

- RS485 interfaces
- UART RX buffer size: 5512 bytes
- UART TX buffer size: 256 bytes
- USB error indicator pin
- Integrated power-on-reset circuit
- +3V3 Single-Supply-Operation with 5V tolerant inputs
- UL2725
- AWG30



DA-70160 334415 | Android - RS232 cable, 1,0 m

DIGITUS® USB 3.0 Office Hub, 4-Port

- **Stattet den Arbeitsplatz mit bis zu 4 weiteren USB-Ports aus**
- **Schnellste Datenübertragungen in USB 3.0 Super-Speed-Geschwindigkeit**
- **Hochwertiges Aluminium-Gehäuse**
- **Benötigt keine zusätzliche Installation - Plug & Play**

Technical Features

- Four USB 3.0 connections
- Supports data transfer rates at SuperSpeed (5 Gbps), high speed (480 Mbps), and full speed (12 Mbps)
- 5 V/2A power supply unit (USB 2.0 micro, type B)
- 1.20 m data cable (USB 3.0 micro, type B)



DIGITUS® USB 3.0 Office Hub, 4-Port

- **Provides your workspace with up to four additional USB ports**
- **Fastest data transfer rates with SuperSpeed USB 3.0**
- **High Quality Aluminium Housing**
- **Does not require additional installation - Plug & Play**

- Downward compatible with USB 2.0, 1.1
- Overvoltage protection
- Material: Aluminium
- Dimensions: 1 x 4.5 x 8.7 cm
- Color: Matt black



DA-70240 371502 | USB 3.0 Hub, 4-Port

DIGITUS® USB 3.0 Office Card Reader

- **Unterstützt alle aktuellen Speicherkartenformate**
- **USB 3.0 Super-Speed garantiert schnellste Datenübertragungen**
- **Hochwertiges Aluminium-Gehäuse**
- **Plug & Play - sofort betriebsbereit, benötigt keine Software-Installation**

Technical Features

- Six card slots
- Supports CF / SD / SDHC / MMC / RS-MMC 4.0 / MMC Plus / MMC Mobile / MMC Micro / mini SD / MS / MS Pro / MS Duo / MS Pro Duo / XD / micro SD / T-Flash / MS formats
- Supports data transfer rates at SuperSpeed (5 Gbps), high speed (480 Mbps), and full speed (12



DIGITUS® USB 3.0 Office Card Reader

- **Supports all current memory card formats**
- **SuperSpeed USB 3.0 guarantees the fastest data transfer rates**
- **High Quality Aluminium Housing**
- **Plug & Play - Ready to use straight away, no software installation necessary**

- Mbps)
- Downward compatible with USB 2.0, 1.1
- 1.20 m data cable (USB 3.0 micro, type B)
- Material: Aluminum
- Dimensions: 2.4 x 3.4 x 10 cm
- Color: Matt black



DA-70331 371519 | USB 3.0 Business Card Reader, 6 Ports

**DIGITUS® USB 3.0 Office Hub,
7-Port**

- **Stattet den Arbeitsplatz mit bis zu 7 weiteren USB-Ports aus**
- **Schnellste Datenübertragungen in USB 3.0 Super-Speed-Geschwindigkeit**
- **Hochwertiges Aluminium-Gehäuse**
- **Benötigt keine zusätzliche Installation - Plug & Play**

**DIGITUS® USB 3.0 Office Hub,
7-Port**

- **Provides your workspace with up to seven additional USB ports**
- **Fastest data transfer rates with SuperSpeed USB 3.0**
- **High Quality Aluminium Housing**
- **Does not require additional installation – Plug & Play**

Technical Features

- Seven USB 3.0 connections
- Supports data transfer rates at SuperSpeed (5 Gbps), high speed (480 Mbps), and full speed (12 Mbps)
- 5 V/3.5A power supply unit (USB 2.0 micro, type B)
- 1.20 m data cable (USB 3.0 micro, type B)
- Downward compatible with USB 2.0, 1.1
- Overvoltage protection
- Material: Aluminum
- Dimensions: 1 x 5.5 x 11.5 cm
- Color: Matt black



DIGITUS® Drahtlose optische Ergonomie Maus

- **Drahtlose optische 5-Tasten Maus mit Scrollrad**
- **Ergonomisch geformtes Design für Rechtshänder**
- **Zusätzliche Funktionstaste für dpi und Seite vor/zurück**

Technical Features

- Wireless 5-button optical mouse with scrolling wheel
- Switchable 800/1600dpi high resolution optical sensor, works on virtually any surface
- Powered by one usual standard AA battery
- Automatic power-off mode
- LED indicator for dpi switching and low-battery warning
- USB nano receiver with reliable 2.4 GHz technology, operating distance up to 10 m

DIGITUS® Wireless Optical Ergonomic Mouse

- **Wireless optical five-button mouse with scroll wheel**
- **Ergonomically shaped for right-handed users**
- **Additional function button for dpi and page up/down**

- Ergonomic shaped design with rubber coating for right-hander
- Additional buttons for dpi selection and page forward / backward
- Size: 11.6cm x 6.2cm x 3.8 cm
- Weight: 102g
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DA-20128 283829 | Wireless Optical Scroll Mouse

DIGITUS® Drahtlose optische Mini Notebook Scroll Maus

- **Bietet höhere Präzision und bequemere Bedienung als ein Notebook Touchpad**
- **Drahtlose optische 3-Tasten-Maus mit Scrollradfunktion**
- **Kompaktes Design, ideal für unterwegs, geeignet für Links- und Rechtshänder**

Technical Features

- Wireless optical 3-button mouse with scrolling wheel
- 800dpi high resolution optical sensor, works on virtually any surface
- Powered by one usual standard AAA battery
- Automatic power-off mode
- USB nano receiver with reliable 2.4 GHz technology, operating distance up to 10 m

DIGITUS® Wireless Optical Mini Notebook Scroll Mouse

- **More precision and convenience than a notebook touchpad**
- **Wireless optical 3-button mouse with scrolling wheel**
- **Compact travel size with a comfortable contoured design suitable for right and left hand**

- Compact travel size with a comfortable contoured design suitable for right and left hand
- Size: 8.1cm x 4.9cm x 3cm (mouse)
- Weight: 80g
- Supports Windows 8, 7, Vista, XP and Mac OS 10.x



DA-20129 285205 | Wireless Optical Notebook Scroll Mouse

DIGITUS® USB 3.0 zu VGA-Adapter


- Erweitern Sie Ihren Arbeitsplatz (Dual Display); schließen Sie zusätzlich einen Monitor, Fernseher oder Projektor über die USB-Schnittstelle an.
- Entspricht den USB 3.0-Spezifikationen
- Unterstützt eine hohe Auflösung bis zu 2048x1152

DIGITUS® USB 3.0 to VGA adapter

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Compliant with USB specifications 3.0
- Supports High Resolution up to 2048 x 1152

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Compliant with USB specifications 3.0
- Supports multiple display modes on one PC: primary, extended, mirror
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)
- Up to 6 graphic adapter simultaneously for PC
- Add or remove monitor without system reboot
- Supports High Resolution up to 2048 x 1152
- Video streaming is supported up to 1080p
- USB bus powered
- Resumes from hibernation and suspend modes
- Supports Windows 8, 7, Vista and XP

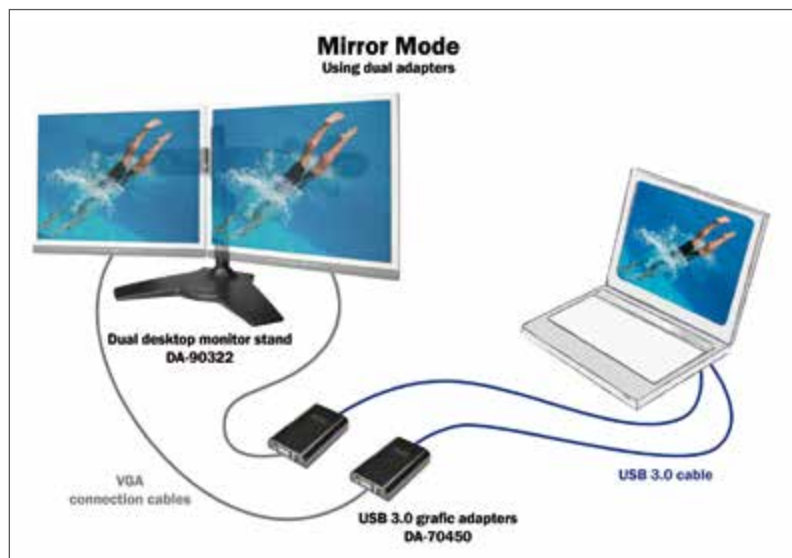

DA-70450 311058 | USB 3.0 to VGA adapter

DA-70451 311065 | USB 3.0 to DVI Adapter

DA-70452 311089 | USB 3.0 to HDMI Adapter

DA-70453 354420 | Display Adapter, USB 3.0 to DisplayPort

DIGITUS® USB 3.0 zu DVI Adapter

- Erweitern Sie Ihren Arbeitsplatz um einen zusätzlichen Bildschirm per USB-Anschluss
- Hohe Auflösung bis zu 2048 x 1152p
- Stromversorgung via USB – erspart den zusätzlichen Einsatz von Netzteilen

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Compliant with USB specifications 3.0
- Supports multiple display modes on one PC: primary, extended, mirror
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)

DIGITUS® USB 3.0 to DVI Adapter

- Add an extra display to your workspace via USB connection
- High resolution of up to 2048 x 1152 p
- Power supply via USB – no need for additional power supplies

- Up to 6 graphic adapter simultaneously for PC
- Add or remove monitor without system reboot
- Supports High Resolution up to 2048 x 1152
- Video streaming is supported up to 1080p
- USB bus powered
- Resumes from hibernation and suspend modes
- Supports Windows 8, 7, Vista and XP



DA-70451 311065 | USB 3.0 to DVI Adapter

DIGITUS® USB 3.0 zu HDMI Adapter

- Erweitern Sie Ihren Arbeitsplatz (Dual Display); schließen Sie zusätzlich einen Monitor, Fernseher oder Projektor über die USB-Schnittstelle an.
- Entspricht den USB 3.0-Spezifikationen
- Bis zu 6 Grafikadapter gleichzeitig nutzbar für PC
- Geeignet für Windows 8, 7, Vista, XP

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Compliant with USB specifications 3.0
- Supports multiple display modes on one PC: primary, extended, mirror
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)

DIGITUS® USB 3.0 to HDMI Adapter

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Compliant with USB specifications 3.0
- Up to 6 graphic adapter simultaneously for PC
- Supports Windows 8, 7, Vista and XP

- Up to 6 graphic adapter simultaneously for PC
- Add or remove monitor without system reboot
- Supports High Resolution up to 2048 x 1152
- Supports 2.1 audio channel
- Video streaming is supported up to 1080p
- USB bus powered
- Resumes from hibernation and suspend modes
- Supports Windows 8, 7, Vista and XP



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

DA-70452 311089 | USB 3.0 to HDMI Adapter

DIGITUS® Bildschirm-Adapter, USB 3.0 zu DisplayPort

- Auflösung bis zu 2560 x 1600 (WQXGA)
- Unterstützt Video Streaming bis zu 1080p
- Abwärtskompatibel mit HD/ Altmonitore
- Unterstützt mehrere Wiedergabemodi: Haupt-/erweitertes Display, Spiegelung
- Unterstützt Windows XP, Vista, 7, 8, 8.1
- Maße: 7,5 x 4,5 x 1,6 cm
- Farbe schwarz

Technical Features

- Resolution up to 2560 x 1600 (WQXGA)
- Supports video streaming up to 1080p
- Backward compatible with HD/ legacy monitors
- Supports multiple display modes on one PC: primary, extended, mirror

DIGITUS® Display Adapter, USB 3.0 to DisplayPort

- Resolution up to 2560 x 1600 (WQXGA)
- Supports video streaming up to 1080p
- Backward compatible with HD/ legacy monitors
- Supports multiple display modes on one PC: primary, extended, mirror
- Supports Windows XP, Vista, 7, 8, 8.1
- Dimension: 7.5 x 4.5 x 1.6 cm
- Color: black

- extended, mirror
- Supports Windows XP, Vista, 7, 8, 8.1
- Dimension: 7.5 x 4.5 x 1.6 cm
- Color: black



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

DA-70453 354420 | Display Adapter, USB 3.0 to DisplayPort

DIGITUS® USB 3.0 zu VGA Grafikadapter

- Ergänzt Ihr Windows-Notebook, Tablet oder PC um einen VGA-Anschluss
- Überträgt eine hohe Auflösung bis zu 1080p Full HD
- Unterstützt mehrere Wiedergabemodi: Haupt-/erweitertes Display, Spiegelung



Technical Features

- Extend your Windows Notebook, Tablet or PC by a VGA connection
- Compliant with USB specifications 3.0
- Supports multiple display modes on one PC: primary, extended, mirror
- Add or remove monitor without system reboot
- Transmits high resolution up to 1080p Full HD
- USB bus powered
- Supports Windows 7, 8, 8.1

DIGITUS® USB 3.0 to VGA Graphic Adapter

- Extend your Windows Notebook, Tablet or PC by a VGA connection
- Transmits high resolution up to 1080p Full HD
- Supports multiple display modes on one PC: primary, extended, mirror

- Input: USB 3.0
- Output: VGA
- Dimensions: 13,6 x 26 x 54 mm (without cable)
- Cable length: 50 mm
- Weight: 20g
- Operating temperature: 0 °C - 40 °C
- Storage temperature: -20 °C - 80 °C
- Relative humidity: < 85% (non-condensing)



DA-70455 363613 | USB 3.0 to VGA Graphic Adapter

DIGITUS® USB 2.0 auf HDMI Videoadapter

- Erweitern Sie Ihren Arbeitsplatz um einen zusätzlichen Bildschirm per USB-Anschluss
- Erreicht Full HD Auflösungen von bis zu 1080p
- Stromversorgung via USB – erspart den zusätzlichen Einsatz von Netzteilen



Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)
- Supports multiple display modes on one PC: primary, extended, mirror
- Compliant with USB specifications 2.0
- HDMI output interface (Video & Audio)

DIGITUS® USB 2.0 to HDMI Video Adapter

- Add an extra display to your workspace via USB connection
- Achieves Full HD resolutions of up to 1080 p
- Power supply via USB – no need for additional power supplies

- Display memory : 8MB SDRAM
- Resolution up to 1920x1080 Full HD
- Up to 6 graphic adapter simultaneously for PC, and 4 for Mac
- Supports Direct X 3D graphic accelerator
- Compliant with latest ATI & nVidia graphic cards
- Support Windows 8/ 7/ Vista/ XP, and Mac OS above 10.5.8



DA-70851 299974 | USB to HDMI video adapter

DIGITUS® USB 3.0 Docking-Adapter, 3-in-1

- Sie erhalten einen LAN- und VGA-Anschluss zusätzlich
- Die USB-Anschlussmöglichkeit bleibt durch den zusätzlichen USB 2.0-Anschluss erhalten
- Optimale Größe für einen Einsatz auf Reisen

DIGITUS® USB 3.0 Docking Adapter, 3 in 1

- You get an additional LAN and VGA port
- The USB connectivity is retained by the additional USB port
- Perfect size for use when traveling

Technical Features

- Input: USB 3.0
- Outputs: USB, LAN, VGA
- Transmits high resolution up to 1080p Full HD
- Supports multiple display modes on one PC: primary, extended, mirror
- LAN port is compatible to IEEE 802.3 and IEEE 802.3u standard
- USB port is compatible with USB 2.0 and USB 1.1
- Transmission speed: 10/100 Mbps (LAN), 480 Mbps (USB)

- Operating temperature: 0 °C - 40 °C
- Storage temperature: -20 °C - 80 °C
- LAN port supports Windows (XP, Vista, 7, 8, 8.1) and Mac Os (10.7, 10.8, 10.9)
- VGA port supports Windows (7, 8, 8.1)
- USB port supports Windows, Mac OS and Linux
- Cable length: 50 mm
- Dimension: 172 x 36 x 15 mm (without cable)
- Product weight: 35 g
- Relative humidity: < 85% (non-condensing)



DA-70835 363606 | USB 3.0 Docking Adapter, 3 in 1

DIGITUS® Grafikadapter, USB 2.0 auf VGA

- Erweitern Sie Ihren Arbeitsplatz (Dual Display); schließen Sie zusätzlich einen Monitor, Fernseher oder Projektor über die USB-Schnittstelle an.
- Auflösung bis zu 1920 x 1080 Full HD
- Schließen Sie 2 oder mehr Monitore/Projektoren an Ihren Computer an, USB 2.0 auf VGA

DIGITUS® Graphic Adapter, USB 2.0 to VGA

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Resolution up to 1920X1080 Full HD
- Connect 2 or more monitors/projectors to your computer, USB 2.0 to VGA

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)
- Supports multiple display modes on one PC: primary, extended, mirror
- Up to 6 graphic adapter simultaneously for PC, and 4 for Mac

- Resolution up to 1920X1080 Full HD
- Display memory: 8MB SDRAM
- Video streaming is supported up to 1080p
- Color depth up to 32 bit
- Supports Direct X 3D graphic accelerator
- Compliant with latest ATI & nVidia graphic cards



DA-70833 299837 | Graphic adapter, USB 2.0 to VGA

DIGITUS® Grafikadapter, USB 2.0 auf DVI



- Erweitern Sie Ihren Arbeitsplatz (Dual Display); schließen Sie zusätzlich einen Monitor, Fernseher oder Projektor über die USB-Schnittstelle an.
- Auflösung bis zu 1080p
- Schließen Sie 2 oder mehr Monitore/Projektoren an Ihren Computer an, USB 2.0 auf DVI, (Full HD)

Technical Features

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- User-friendly application: screen rotation, multi-display management, smart monitor ID detection (EDID)
- Supports multiple display modes on one PC: primary, extended, mirror
- Up to 6 graphic adapter simultaneously for PC, and 4 for Mac

DIGITUS® Graphic Adapter, USB 2.0 to DVI

- Extends your desktop workspace (dual display); add-on monitor, TV or projector via USB
- Resolution up to 1080p
- Connect 2 or more monitors/projectors to your computer, USB 2.0 to DVI, (Full HD)

- Display memory : 8MB SDRAM
- Resolution up to 1920X1080 Full HD
- Video streaming is supported up to 1080p
- Color depth up to 32 bit
- USB bus powered
- Supports Direct X 3D graphic accelerator
- Compliant with latest ATI & nVidia graphic cards



DA-70834 299899 | Graphic adapter, USB 2.0 to DVI

DIGITUS® MHL (Micro USB 2.0) Adapterkabel



- MHL - Inhalte von Smartphones oder Tablets werden auf Bildschirme übertragen
- Full HD Auflösung bis zu 1080p
- Kleines und kompaktes Gehäuse für den idealen Einsatz auf Reisen

Technical Features

- MHL compliance
- USB Micro B plug
- HDMI jack
- Built-in USB Micro B jack for extra power
- Supports 1080p Full HD
- Use your TV remote control to navigate the connected device

DIGITUS® MHL (Micro USB 2.0) adapter cable

- MHL - allows smartphone or tablet content to be transferred to a larger display
- Full HD resolution of up to 1080 p
- Small and compact housing - ideal for use when traveling

- HDMI connector dimensions: 5.4cm x 2.8cm x 1.2cm
- Color: Black
- Overall Length: 15cm



AK-300305-002-S 305835 | USB Micro B to HDMI MHL adapter, black, 0,15m

DIGITUS® USB Port-Blocker, schwarz oder silber

- 4 USB-Aufsätze zur Blockierung von bis zu 4 USB-Anschlüssen gleichzeitig
- Entfernen der Blockade ist nur mit Hilfe des Schlüssels möglich
- Schnelle und kinderleichte Handhabung

Technical Features

- Key with 4 USB adapters
- Weight: 12 g
- Dimensions: 71 x 26 x 11 mm
- Color: black, silver



DIGITUS® USB Port Blocker, black or silver

- 4 USB adapters for blocking of up to 4 USB ports at the same time
- Remove the blockade is only possible with the help of the key
- Quick and easy handling



DA-74010 362678 | USB Port Blocker, black

DA-74011 362692 | USB Port Blocker, silver

DIGITUS® Externes SSD/HDD-Festplattengehäuse 2.5, SATA zu USB 2.0

- Unterstützte Datentransferrate bis zu 480Mbps
- Einfacher schraubenloser Einbau einer Festplatte
- Modernes Design in Klavierlackoptik

Technical Features

- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface
- Suitable for standard SATA SSD/ hard disk 2.5"
- Capacity: up to 3 TB
- Compliant to USB 2.0 specification
- Supports data transfer rates up to 480Mbps



DIGITUS® External SSD/HDD enclosure 2.5, SATA to USB 2.0

- Supports data transfer rates up to 480Mbps
- Screwless design, easy assembling a hard disk
- Modern image is shown by the shining polished surface

- LED Indicators: power (red), access (blue)
- Supports hot-plugging, plug & play compliant
- USB bus powered
- Size: 13.5cm x 8.5cm x 1.5cm (LxWxH)
- Supports Windows XP, Vista, 7, 8, 8.1, Linux, MAC OS 10.6 above and Android 3.1 above



DA-71002 297925 | External HDD enclosure 2.5, SATA to USB 2.0



MONITOR

// TV // VIDEO

| | |
|---------------------|-----------|
| Monitor Mounts..... | 146 - 149 |
| TV Mounts | 150 |
| Video | 141-150 |

DIGITUS® Single Desktop Monitorhalter



- Perfekte Lösung wenn Sie beides wünschen, Höhen und Lagen Flexibilität
- Digitus Einzel-Monitor Tischständer, schwarz, 20° schwenkbar, 20° neigbar, rotierbar 90°, 15" - 24" TFT, max gew.12Kg

DIGITUS® Single Desktop Monitor Holder

- Perfect solution when you want both, height and location flexibility
- Digitus Single-monitor stand, table stand, black, 20°, swivel, 20°, swivel, rotation 90°, 15" to 24" TFT, max weight 12Kg



DA-90317 314158 | Single Monitor Stand up to 24"

DIGITUS® Dual LCD Display Stand



- Optimaler Halt für bis zu 2 Monitore mit 15"- 24"
- Hält bis zu 15 kg (pro Gelenk) Belastung aus, dank stabilen Standfuß
- Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten

DIGITUS® Dual LCD Display Stand

- Optimal support for up to two monitors measuring 15" to 24"
- Supports a maximum weight of up to 15 kg (per arm) thanks to a sturdy base stand
- Higher inclination angle and height adjustability enable you to work flexibly

Technical Features

- Support flat panel size: 15" - 24"
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Material: Steel / Aluminium Alloy
- Support max. weight for each hinge: 15Kg (33lbs)
- Swivel for each hinge: + / - 20 °

- Tilt for each hinge: + / - 15°
- Dimension (W x D x H): 672x370x240mm (26.46x14.57x9.45")
- Weight: 3.3 Kg (7.26lbs)
- Cable Management
- Screw type: M4,M6



DA-90322 314233 | Dual LCD Display Stand up to 32"

DIGITUS® Monitorerweiterungsset für DA-90322



- Erweiterung Ihres Monitorhalters auf bis zu 4 Monitore mit 15" - 24"
- Unterstützt ein Maximalgewicht von bis zu 8 kg pro Gelenk
- Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten

DIGITUS® Monitor Mount Extension for DA-90322

- Expand your monitor mount for up to four monitors measuring 15" to 24"
- Supports a maximum weight of up to 8 kg per arm
- Higher inclination angle and height adjustability enable you to work flexibly

Technical Features

- Expand by up to four monitors
- Extension for DA-90322
- Supports VESA standards: 100 x 100 mm/75 x 75 mm
- Maximum load: 8 kg per arm (in combination with the DA-90322)
- Swivel angle: +/-15°

- Inclination angle: +/-20°
- 360° rotatable
- Screw Type: M4
- Material: Aluminium
- Dimensions: 13.8 x 36 x 71.5 cm
- Weight: 2.65 kg
- Color: Black



DA-90342 366416 | Twin Monitor Mount, 24", for the DA-90342

DIGITUS® Dual LCD Desktop Monitorhalter mit Tischhalterung


- **Erweitern Sie Ihre Produktivität!**
- **Unterstützt Flachbildschirm Größe: 24" - 32"**
- **Tischhalterung mit Schraubverschluß, für eine einfache Installation**

Technical Features

- Material: Steel / Aluminium Alloy
- Supports flat panel size: 24" - 32"
- Tilt for each hinge: + / - 15 °
- Swivel for each hinge: + / - 20 °
- Rotate for each hinge: 90 °
- Desk Mount, for easy installation
- Screw Type: M4, M6
- weight: 5.7 Kg (12.57 lbs)
- Cable Management
- Support max. weight for each hinge: 15Kg (33 lbs)
- Dimensions (W x D x H): 924x570x144mm (36.38x22.44x5.67")

DIGITUS® Dual LCD Desktop Monitor Stand with Desk Mount

- Expand your Field of View in productivity, gaming and entertainment
- Supports flat panel size: 24" - 32"
- Desk Mount with screw clamp, for easy installation

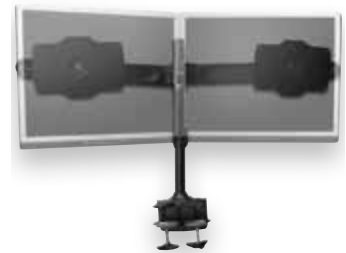

DA-90321 314219 | Dual LCD Desktop Monitor Stand with Desk Mount

DIGITUS® Monitoreerweiterungsset für DA-90321


- **Erweiterung Ihres Monitorhalters auf bis zu 4 Monitore mit 24" - 32"**
- **Unterstützt ein Maximalgewicht von bis zu 12 kg pro Gelenk**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

Technical Features

- Extension for DA-90321
- Expand by up to four monitors
- Supports VESA standards: 200 x 100 mm/100 x 100 mm/75 x 75 mm
- Maximum load: 12 kg per arm (in combination with the DA-90321)
- Swivel angle: +/-20°
- Inclination angle: +/-15°
- 360° rotatable
- Screw Type: M4
- Material: Aluminum
- Dimensions: 30.7 x 47 x 92.4 cm
- Weight: 5.1 kg
- Color: Black

DIGITUS® Monitor Mount Extension for DA-90321

- Expand your monitor mount for up to four monitors measuring 24" to 32"
- Supports a maximum weight of up to 12 kg per arm
- Higher inclination angle and height adjustability enable you to work flexibly

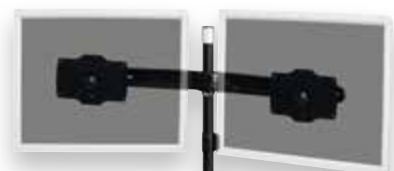

DA-90341 366768 | Twin Monitor Mount, 24" to 32" for the DA-90321

DIGITUS® Triple Desktop Monitorhalter

DIGITUS® Triple Desktop Monitor Stand



- **Optimaler Halt für bis zu 3 Monitore mit 15" - 24"**
- **Hält bis zu 8 kg (pro Gelenk) Belastung aus, dank stabilen Standfuß**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

- **Optimal support for up to three monitors measuring 15" to 24"**
- **Supports a maximum weight of up to 8 kg (per arm) thanks to a sturdy base stand**
- **Higher inclination angle and height adjustability enable you to work flexibly**

Technical Features



- Material: Steel / Aluminium Alloy
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Support flat panel size: 15" - 24"
- Support max. weight for each hinge: 8Kg (17.64 lbs)
- Swivel for each hinge: + / - 20 °
- Tilt for each hinge: + / - 20 °
- Rotate for each hinge: 90 °
- Dimension (W x D x H): 1280x349x370mm (50.39x13.74x14.57")
- Weight: 5.3 Kg (11.63 lbs)
- Cable Management
- Screw Type: M4



DA-90315 314127 | Triple Monitor Stand up to 24"

DIGITUS® Monitoreerweiterungsset für DA-90315

DIGITUS® Monitor Mount Extension for DA-90315



- **Erweiterung Ihres Monitorhalters auf bis zu 6 Monitore mit 26" - 32"**
- **Unterstützt ein Maximalgewicht von bis zu 6 kg pro Gelenk**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

- **Expand your monitor mount for up to six monitors measuring 26" to 32"**
- **Supports a maximum weight of up to 6 kg per arm**
- **Higher inclination angle and height adjustability enable you to work flexibly**

Technical Features



- Extension for DA-90315
- Supports VESA standards: 100 x 100 mm / 75 x 75 mm
- Maximum load: 6 kg per arm (in combination with the DA-90315)
- Swivel angle: +/-20°
- Inclination angle: +/-20°
- 360° rotatable
- Screw type: M4
- Material: Aluminum
- Dimensions: 14.4 x 36 x 130 cm
- Weight: 4.24 kg
- Color: Black



DA-90345 366447 | Triple Monitor Mount, 24", for the DA-90315

DIGITUS® 3-Fach Monitorhalter

- **Optimaler Halt für bis zu 3 Monitore mit 26" - 32"**
- **Hält bis zu 8 kg (pro Gelenk) Belastung aus, dank stabilen Standfuß**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

Technical Features

- Supports VESA standards: 200 x 100 mm/100 x 100 mm/75 x 75 mm
- Swivel angle: +/-15°
- Inclination angle: +/-15°
- 360° rotatable
- Screw type: M4
- Material: Aluminium / Grey
- Dimensions: 13.5 x 50.4 x 169.6 cm
- Weight: 6.2 kg
- Color: Black

DIGITUS® Triple Monitor Stand

- **Optimal support for up to three monitors measuring 26" to 32"**
- **Supports a maximum weight of up to 8 kg (per arm) thanks to a sturdy base stand**
- **Higher inclination angle and height adjustability enable you to work flexibly**



DA-90333 366423 | Triple Monitor Stand

DIGITUS® Monitoreerweiterungsset für DA-90333

- **Erweiterung Ihres Monitorhalters auf bis zu 6 Monitore**
- **Unterstützt ein Maximalgewicht von bis zu 8 kg pro Gelenk**
- **Hoher Neigungswinkel und Höhenverstellbarkeit ermöglichen flexibles Arbeiten**

Technical Features

- Extension for DA-90333
- Supports VESA standards: 200 x 100 mm/100 x 100 mm/75 x 75 mm
- Maximum load: 8 kg per arm (in combination with the DA-90333)
- Swivel angle: +/-15°
- Inclination angle: +/-15°
- 360° rotatable
- Screw Type: M4
- Material: Aluminum
- Dimensions: 13.5 x 46 x 169.6 cm
- Weight: 5.18 kg
- Color: Black

DIGITUS® Monitor Mount Extension for DA-90333

- **Expand your monitor mount for up to six monitors**
- **Supports a maximum weight of up to 8 kg per arm**
- **Higher inclination angle and height adjustability enable you to work flexibly**



DA-90343 366430 | Triple Monitor Mounts, 26"-30", for DA-90333



DIGITUS® Wandbefestigung für TFT Displays

- Unterstützt VESA Standard - Maße (75x75mm und 100x100mm)
- Eigengewicht: 0.8kg; Gesamtlänge 80mm;
- Maximale Belastbarkeit 15kg
- Monitor drehbar um: 180°

DIGITUS® Wall mount for TFT displays

- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 0.8kg; overall length 80mm; max. load capacity 15kg
- Monitor can be turned: 180°

Technical Features

- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 0.8kg; overall length 80mm; max. load capacity 15kg
- Monitor can be turned: 180°



DA-90307 239376 | Wall mount for TFT displays



DIGITUS® Wandbefestigung für TFT Displays

- Komfortabler Seheneuß für das perfekte Multimedia Erlebnis
- Kleine Hakenbefestigung für Wandmontage
- Maximale Belastbarkeit: 30kg

DIGITUS® Wall mount for TFT displays

- Brings viewing comfort to your living room
- Small hook attachment for wall mounting
- Maximum loading: 30kg

Technical Features

- Small hook attachment for wall mounting
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 0.5kg Dimensions 114x114x21.5mm
- Maximum loading: 30kg



DA-90303 239369 | Wall mount for TFT displays



DIGITUS® Wandbefestigung für LCD/TFT TV

- Kleine Wandbefestigung für LCD/TFT Fernsehgeräte bis zu 110cm (42")
- Unterstützt VESA Standard - Maße (100x200mm und 200x200mm)
- Maximale Belastbarkeit: 70kg

DIGITUS® Wall mount for LCD/TFT TV

- Small wall mounting for up to 110cm (42") LCD/TFT TV's
- Supports VESA standard dimensions (100x200mm and 200x200mm)
- Maximum loading: 70kg

Technical Features

- Small wall mounting for up to 110cm (42") LCD/TFT TV's
- Supports VESA standard dimensions (100x200mm and 200x200mm)

- Net weight: 1.7kg Dimensions 230x230x25.3mm
- Maximum loading: 70kg
- Projection: 25mm



DA-90310 239383 | Wall mount for LCD/TFT TV up to 70kg

DIGITUS® TFT Display Schwenkarm für Tischmontage

- Unterstützt ein Maximalgewicht von bis zu 10 kg
- In alle Richtungen schwenkbar – unterstützt flexibles Arbeiten
- Einfache Installation am Schreibtisch dank Tischklemme

Technical Features

- Easy to install by means of special table clamp
- Can be moved in any direction
- Supports VESA standard dimensions (75x75mm and 100x100mm)
- Net weight: 2.0kg
- Overall length: 520mm
- Maximum height: 315mm
- Max. load capacity: 10kg
- Maximum thickness of the tabletop: 75mm
- LCD monitor can be turned: 180 degrees
- Excellent way of saving space

DIGITUS® TFT display swivel arm for table mounting

- Supports a maximum weight of 10 kg
- Flexible positioning – can be swiveled in all directions
- Desk clamp allows easy installation



DA-90306-1 259671 | TFT display swivel arm for table mounting up to 10kg

DIGITUS® Wandbefestigung für LCD/TFT TV

- Schwenkbare Wandbefestigung für bis zu 82cm (32") LCD/TFT TV
- Unterstützt VESA Standard - Maße (75x75mm, 200x100mm, 100x100mm und 200x200mm)
- Maximale Belastung: 32kg

Technical Features

- Articulating wall mount for up to 82cm (32") LCD/TFT TV
- Easy installation and strong combination both
- Supports VESA standard dimensions (75x75mm, 200x100mm, 100x100mm and 200x200mm)
- Maximum loading: 32kg
- Swivel left & right: 20, 180 degrees
- Pivot upwards & downwards: 20 degrees

DIGITUS® Wall mount for LCD/TFT TV

- Articulating wall mount for up to 82cm (32") LCD/TFT TV
- Supports VESA standard dimensions (75x75mm, 200x100mm, 100x100mm and 200x200mm)
- Maximum loading: 32kg



DA-90312 239406 | Wall mount for LCD/TFT TV up to 32kg

DIGITUS® Wandbefestigung für LCD/Plasma TV

- Universell verstellbare Wandbefestigung für bis zu 165cm (65") LCD/Plasma TV
- Sowohl einfache Befestigung als auch Anbringung des Fernsehgerätes
- Maximale Belastung: 80kg

Technical Features

- Universal adjustable wall mount and tilting for up to 165cm (65") LCD/Plasma TV
- Easy installation
- Weight: 4.9kg, 760x800x520mm (LxWxH)
- Maximum loading: 80kg
- Pivot upwards and downwards: 26°
- Universal adjustable wall mount and tilting for up to 165cm (65") LCD/Plasma TV
- Easy installation
- Maximum loading: 80kg

DIGITUS® Wall mount for LCD/Plasma TV

- Universal adjustable wall mount and tilting for up to 165cm (65") LCD/Plasma TV
- Easy installation
- Maximum loading: 80kg



DA-90313 239413 | LCD/Plasma wall mount for up to 165cm (65") TV



DIGITUS® Wireless Streaming Box

- Drahtlose Wiedergabe Ihrer Videos/ Bilder über Smartphone, Tablet, PC und Notebook auf Ihren Fernseher
- Zeigt Inhalte in Full-HD an (1080p)
- Kleines und kompaktes Gehäuse – ideal für den Einsatz unterwegs

DIGITUS® Wireless Streaming Box

- Wireless playback of your videos/images on your television via smartphone, tablet, pc and notebook
- Displays contents in Full HD (1080 p)
- Small, compact housing – ideal for on-the-go use

Technical Features

- Wireless LAN Standard: IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
- Supported video format: MPEG 1/2, MPEG TS, MP4, AVI, 3GP, WMV, MOV, DVR-MW
- Supported audio format: MP3, AAC, WMA, WAV, OGG, PDM, LPCM, MP4
- Supported picture format: GIF, PNG, BMP, JPEG

- Windows, Android, iOS, Mac® support
- Full HD resolution up to 1080p
- HDMI jack
- Micro USB B, jack
- USB 2.0 port
- RJ45 port



DN-70310 356585 | Wireless Streaming Box



DIGITUS® Android TV-Box


- Leistungsstarke Hardware (Dual Core CPU / 1 GB RAM / 4GB interner Speicher)
- Aktuelle Android 4.2 (Jelly Bean) Version / Google Play Store Zugriff
- 1 x HDMI / 2 x USB 2.0 / 1 x microSD
- Vorinstallierte Apps: Facebook, Yahoo Messenger, Skype und Twitter

DIGITUS® Android TV Box

- Powerful hardware (Dual Core CPU / 1GB RAM / 4 GB internal memory)
- Actual Android 4.2 (Jelly Bean) Version / Google Play Store access
- 1 x HDMI / 2 x USB 2.0 / 1 x microSD
- Pre-installed apps: Facebook, Yahoo Messenger, Skype and Twitter

Technical Features

- 1GHz ARM Cortex Dual-core A9+ 1080P media+3D GPU
- 1 GB DDR3 memory
- Nand Flash 4GB
- Optional with WiFi dongle
- HDMI max resolution up to 1920x1080p (Full HD)
- Video support: RM/RMVB, MPEG, MKV, AVI, MP4, MOV, FLV, H.263, H.264, VC-1, DivX, Xvid, TS, RealVideo, VP6, VP8 up to 1080p
- Support for 1GB/ 2GB/ 4GB/ 8GB/ 16GB/ 32GB SD cards
- Android 4.2 operating system
- Support for Adobe Flash 10.1 or above
- 24 languages supported, e.g. German, English and Chinese
- 2200 mAh, output: 5 V/1 A
- Dimensions (L x W x H): 90 mm x 33 mm x 12 mm
- Product weight: 28 g

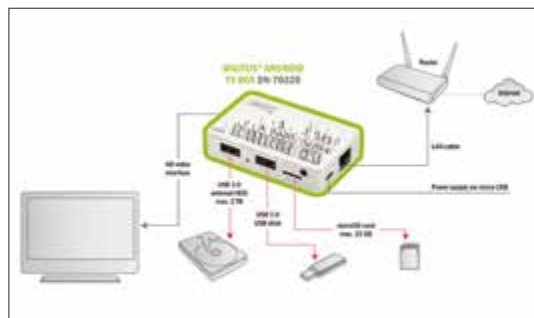

DN-70320 361336 | Android TV Box

DIGITUS® 4K HDMI Matrix Switch, 4x2

- **Bequemes Wechseln zwischen bis zu 4 HDMI-Quellen und 2 Wiedergabegeräten (Fernsehern, Monitoren oder Beamern) unabhängig von einander, ohne lästiges Umstecken von Kabeln**
- **Zeigen Sie verschiedene Medieninhalte von bis zu 4 HDMI-Quellen auf bis zu 2 Wiedergabegeräten (Fernsehern, Monitoren oder Beamer) zeitgleich und unabhängig von einander**
- **Wechseln zwischen den HDMI-Geräten sowie den Wiedegabe- bzw. Aufnahmegeräten bequem per Fernbedienung, über intelligente automatische Erkennung oder alternativ per Schalter am Switch selbst**
- **Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung**
- **Unterstützt Full HD, Full 3D, 4K2K Video**

DIGITUS® 4K HDMI Matrix Switch, 4x2

- **Switch comfortably between up to four HDMI sources and two playback devices (televisions, monitors, projectors) independently of each other, without having to swap cables**
- **Display different media content from up to four HDMI sources on up to two playback devices (televisions, monitors, projectors) simultaneously and independently of each other**
- **Covenient switching between the HDMI devices as well as between playback or recording devices via remote control, intelligent automatic detection or by using a button on the switch itself**
- **Supports 4K Ultra HD, 4096 x 2160 pixel resolution**
- **Supports Full HD, Full 3D, 4K2K video**

Technical Features

- HDMI connections: 4 inputs, 2 outputs
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection
- Supports Deep Color: 12 bits per channel, in total 36 bits
- Status LEDs (connection status)
- Complies with Standard HDMI / High Speed HDMI
- Supports digital audio: Stereo Toslink, Coaxial
- Supports compressed audio formats, e.g., DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Supports standard audio, for example, DSD audio, HD (HBR) audio
- Complies with HDCP Ver. 1.3
- Supports HDCP repeaters
- Frequency range/data transmission rate: 25 MHz-340 MHz, up to 3.4 Gbps per channel
- Includes remote control
- Power supply unit (5V/2A)
- Dimensions: L 12.0 x W 27.0 x H 3.2 cm
- Weight: 773 g
- Color: black



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

Ultra HD
4K / 2160p





DIGITUS® 4K HDMI Switch, 5x1

- Bequemes Wechsel zwischen bis zu 5 HDMI-Quellen, ohne lästiges Umstecken
- Wechseln zwischen den HDMI-Geräten bequem per Fernbedienung, über intelligente automatische Erkennung oder alternativ per Schalter am Switch selbst
- Integrierter HDMI-Signalverstärker - Zusätzliche Kabellänge von 5 m (Standard HDMI) bzw. bis zu 15 m (High Speed HDMI) möglich
- Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung
- Unterstützt Full HD, Full 3D, 4K2K Video

DIGITUS® 4K HDMI Switch, 5x1

- Switch comfortably between up to five HDMI sources, without having to swap cables every time
- Convenient switching between the HDMI devices via remote control, intelligent automatic detection or by using a button on the switch itself
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Supports 4K Ultra HD, 4096 x 2160 pixel resolution
- Supports Full HD, Full 3D, 4K2K video

Technical Features



- HDMI connections: 5 inputs, 1 output
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection

- Complies with HDCP Ver. 1.3
- Supports HDCP repeaters
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)

DS-49304 366256 | 4K HDMI Switch 5x1



DIGITUS® 4K HDMI Switch 3x1

- Bequemes Wechsel zwischen bis zu 3 HDMI-Quellen, ohne lästiges Umstecken
- Wechseln zwischen den HDMI-Geräten bequem per Fernbedienung, über intelligente automatische Erkennung oder alternativ per Schalter am Switch selbst
- Integrierter HDMI-Signalverstärker - Zusätzliche Kabellänge von 5 m (Standard HDMI) bzw. bis zu 15 m (High Speed HDMI) möglich
- Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung
- Unterstützt Full HD, Full 3D, 4K2K Video

DIGITUS® 4K HDMI Switch, 3x1

- Switch comfortably between up to three HDMI sources, without having to swap cables every time
- Convenient switching between the HDMI devices via remote control, intelligent automatic detection or by using a button on the switch itself
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Supports 4K Ultra HD, 4096 x 2160 pixel resolution
- Supports Full HD, Full 3D, 4K2K video

Technical Features



- HDMI connections: 3 inputs, 1 output
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection

- Complies with HDCP Ver. 1.3
- Supports HDCP repeaters
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)

DS-48304 366249 | 4K HDMI Switch 3x1



DIGITUS® 4K HDMI Switch, 3x1

- Unterstützt Ultra HD, 4096x2160p Auflösung
- Unterstützt 12-bit Full HD, Full 3D, 4K2K video
- Bequemes Umschalten zwischen bis zu 3 HDMI Quellen
- Kompatibel mit High Speed HDMI Spezifikation bis zu 3.0 Gbps
- Wechseln zwischen den HDMI-Quellen durch Switch-Taste

DIGITUS® 4K HDMI Switch, 3x1

- Supports Ultra HD, 4096x2160p resolution
- Supports 12-bit Full HD, Full 3D, 4K2K video
- Convenient switching between up to 3 HDMI sources
- Compliant with High Speed HDMI specification up to 3.0 Gbps
- Switching between HDMI sources by pressing switch button

Technical Features



- Supports Ultra HD, 4096x2160p resolution
- 1x HDMI output and 3x HDMI inputs
- Compliant with High Speed HDMI specification up to 3.0 Gbps
- Supports 12-bit Full HD, Full 3D, 4K2K video

- Integrated HDCP decryption/encryption engines which are compliant with HDCP rev 1.3
- Switching between HDMI sources by pressing switch button
- Compliant to HDCP Rev. 1.3

DS-44304 358299 | 4K HDMI Switch, 3x1

DIGITUS® 4K HDMI Switch, 5x1

- Unterstützt Ultra HD, 4096x2160p Auflösung
- Unterstützt 12-bit Full HD, Full 3D, 4K2K video
- Bequemes Umschalten zwischen bis zu 5 HDMI-Quellen
- Kompatibel mit High Speed HDMI Spezifikation bis zu 3.0 Gbps
- Wechseln zwischen den HDMI-Quellen durch Switch-Taste

Technical Features

- Supports Ultra HD, 4096x2160p resolution
- 1x HDMI output and 5x HDMI inputs
- Compliant with High Speed HDMI specification up to 3.0 Gbps
- Convenient switching between up to 5 HDMI sources
- Supports Deep Color, 30/36 bit
- Intergrated HDCP decryption/encryption engines

DIGITUS® 4K HDMI Switch, 5x1

- Supports Ultra HD, 4096x2160p resolution
- Supports 12-bit Full HD, Full 3D, 4K2K video
- Convenient switching between up to 5 HDMI sources
- Compliant with High Speed HDMI specification up to 3.0 Gbps
- Switching between HDMI sources by pressing switch button

- which are compliant with HDCP rev 1.3
- Switching between HDMI sources by pressing switch button
- Compliant to HDCP Rev. 1.3



DS-45304 358305 | 4K HDMI Switch, 5x1

DIGITUS® Automatischer HDMI Switch, 2-Port

- Einfache Installation und Nutzung - automatische Umschaltung
- Plug and Play - Keine Software erforderlich
- Kompatibel zur HDMI und HDCP Spezifikation

Technical Features

- 2 inputs, 1 output
- Easy to install and simple to operate - automatic switching
- Plug and Play - No software required
- HDCP compliant
- Compatible with HDTV 480i, 480p, 720i, 720p, 1080i and 1080p

DIGITUS® Automatic HDMI Switch, 2 Port

- Easy to install and simple to operate - automatic switching
- Plug and Play - No software required
- Compliant with HDMI and HDCP specification

- Supports VGA, SVGA, XGA and UXGA
- HDMI High Speed compatible
- Supports for 8bit, and 12bit deep color per channel



DS-44302 271581 | HDMI Automatic Switch, 2 Port

DIGITUS® HDMI Switch, 3-Port

- Bequemes Umschalten zwischen verschiedenen HDMI Quellen ohne Umstecken und Kabelgewirr
- Mehrere Schaltmethoden: intelligente automatische Auswahl, IR Fernbedienung, Berührungssensor
- Höchste unterstützte Videoauflösung 1080p

Technical Features

- Select one HDMI video source out of several different to display it on one display
- Multi-switching methods: intelligent automatic, IR remote control or by touch button
- IR remote control included
- Highest supported video resolution 1080p
- Bandwidth: 250MHz/2.5Gbps per channel (7.5Gbps all channel)
- Supports 12bit per channel (36bit all channel) deep

DIGITUS® HDMI Switch, 3 Port

- Convenient switching between different HDMI sources without cable clutter
- Multi-switching methods: intelligent automatic, IR remote control or by touch button
- Highest supported video resolution 1080p

- color
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (LxWxH; Weight): 80x58x18mm; 55g



DS-44300 271550 | HDMI Switch, 3 Port

DIGITUS® HDMI Switch, 5-Port

- Anschluss für bis zu fünf HDMI Geräte (Blu-Ray-Player, Gamingkonsole, Digital Receiver, etc.)
- Bequemes Wechseln der HDMI-Kanäle per Fernbedienung
- Full HD Auflösung bis zu 1080p



Technical Features

- Select one HDMI video source out of several different to display it on one display
- Multi-switching methods: intelligent automatic, IR remote control or by touch button
- IR remote control included
- Highest supported video resolution 1080p
- Bandwidth: 250MHz/2.5Gbps per channel (7.5Gbps all channel)
- Supports 12bit per channel (36bit all channel) deep color

DIGITUS® HDMI Switch, 5 Port

- Ports for up to five HDMI devices (Blu-Ray player, gaming console, digital receiver, and so on)
- Convenient switching of HDMI channels by remote control
- Full HD resolution of up to 1080 p

- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (LxWxH; Weight): 220x128x25mm; 350g



DS-45300 271567 | HDMI Switch, 5 Port

DIGITUS® HDMI Video Switch mit integrierter PC Verbindung

- Anschluss für bis zu vier HDMI-Geräte (Blu-Ray-Player, Gamingkonsole, Digital Receiver, etc.)
- Zusätzlicher USB-Port ermöglicht das Navigieren über Notebook oder PC
- Hohe Auflösung bis zu 1080p (Full HD)



Technical Features

- The ideal solution for comprehensively equipped home cinema and entertainment systems with blue-ray player, media player, play station, receiver etc.
- The integrated Plug & Play USB 2.0 graphic adapter displays the picture of the PC on the connected television or monitor and therefore facilitates direct monitoring of the replayed videos (up to HD resolution)
- Four HDMI inputs, one USB 2.0 input and HDMI output

DIGITUS® HDMI Video Switch with integrated PC connection

- Ports for up to four HDMI devices (Blu-Ray player, gaming console, digital receiver, and so on)
- Additional USB port enables navigation via notebook or PC
- High resolution of up to 1080p (Full HD)

- Reduces the installation's wire mess and avoids replugging while switching between the different devices
- Share full HD video and audio from the computer on an HDTV
- 225MHz/2.25Gbps per channel (6.75Gbps all channels) bandwidth
- 12bit per channel (36bit all channels) deep color
- 3D all formats, including 1080p@24Hz, 720p@60Hz/50Hz



DS-45310 306085 | HDMI Video Switch with integrated PC connection

DIGITUS® HDMI Matrix Switch, 4x2-Port

- **Beliebige Verteilung von ein oder zwei aus vier möglichen HDMI Eingangssignalen auf zwei HDMI Displays**
- **Einfaches Umschalten zwischen vier beliebigen HDMI Quellen**
- **Mehrere Schaltmethoden: intelligente automatische Auswahl, IR Fernbedienung, Berührungssensor**
- **Höchste unterstützte Videoauflösung 1080p**


Technical Features

- Switch easily between any of up to four HDMI sources
- Distributes any of the four inputs to any or any combination of the two HDMI output displays
- Multi-switching methods: intelligent automatic, IR remote control or by touch button
- Highest supported video resolution 1080p
- Compatible to High Speed HDMI
- Bandwidth: 225MHz/2.25Gbps per channel(6.75Gbps all channel)
- Supports 12bit per channel (36bit all channel) deep color

DIGITUS® HDMI Matrix Switch, 4x2 Port

- Distributes any of the four inputs to any or any combination of the two HDMI output displays
- Switch easily between any of up to four HDMI sources
- Multi-switching methods: intelligent automatic, IR remote control or by touch button
- Highest supported video resolution 1080p

- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (DxWxH; Weight): 128x220x25mm
- Weight: 350 g

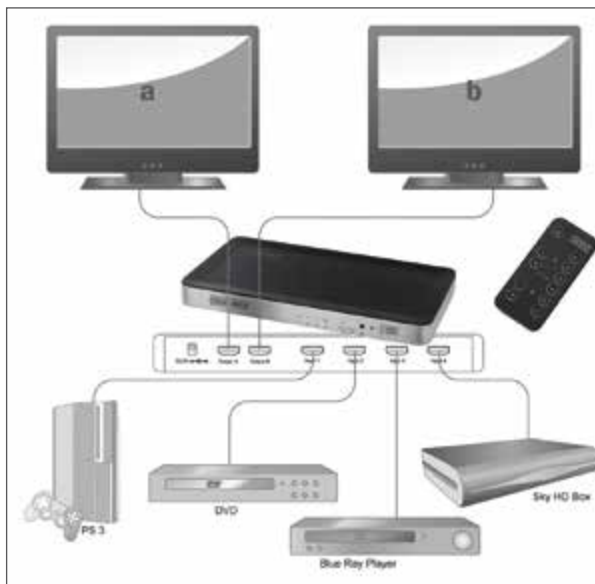



DIGITUS® 4K HDMI Splitter, 1x2

- Einfacher Anschluss von 2 Geräten (Fernseher, Monitor, Beamer) an 1 HDMI-Eingangsquelle
- Integrierter HDMI-Signalverstärker - Zusätzliche Kabellänge von 5 m (Standard HDMI) bzw. bis zu 15 m (High Speed HDMI) möglich
- Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung
- Unterstützt Full HD, Full 3D, 4K2K Video

Technical Features

- HDMI connections: 1 input, 2 outputs
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection
- Supports Deep Color, 30/36-bit
- Status LEDs (connection status)
- Supports compressed audio formats, e.g., DTS

DIGITUS® 4K HDMI Splitter, 1x2

- Easily connect two devices (televisions, monitors, projectors) to one HDMI input source
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Supports 4K Ultra HD, 4096 x 2160 pixel resolution
- Supports Full HD, Full 3D, 4K2K video

- Cascades up to 3 splitters (max. 8 displays)
- Supports HDCP repeaters
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Frequency range/data transmission rate: 25 MHz-340 MHz, up to 3.0 Gbps per channel



DS-46304 366225 | 4K HDMI Splitter 1x2



DIGITUS® 4K HDMI Splitter, 1x4

- Einfacher Anschluss von 4 Geräten (Fernseher, Monitor, Beamer) an 1 HDMI-Eingangsquelle
- Integrierter HDMI-Signalverstärker - Zusätzliche Kabellänge von 5 m (Standard HDMI) bzw. bis zu 15 m (High Speed HDMI) möglich
- Unterstützt 4K Ultra HD, 4096 x 2160p Auflösung
- Unterstützt Full HD, Full 3D, 4K2K Video

Technical Features

- HDMI connections: 1 input, 4 outputs
- Supports Ultra HD, 4096 x 2160 pixel resolution
- Supports 4K Full HD, Full 3D, 4K2K video
- Supports HDTV, 4096 x 2160 pixel resolution
- EDID support: automatic input source detection
- Supports Deep Color, 30/36-bit
- Status LEDs (connection status)
- Complies with Standard HDMI / High Speed HDMI

DIGITUS® 4K HDMI Splitter, 1x4

- Easily connect four devices (televisions, monitors, projectors) to one HDMI input source
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Supports 4K Ultra HD, 4096 x 2160 pixel resolution
- Supports Full HD, Full 3D, 4K2K video

- Supports compressed audio formats, e.g., DTS
- Cascades up to 3 splitters (max. 64 displays)
- Supports HDCP repeaters
- The integrated HDMI signal amplifier supports additional cable lengths of 5 m (Standard HDMI) and even up to 15 m (High Speed HDMI)
- Frequency range/data transmission rate: 25 MHz-340 MHz, up to 3.0 Gbps per channel



DS-47304 366232 | 4K HDMI Splitter 1x4



DIGITUS® 4K HDMI Splitter, 1x4

- Zeigen Sie Ihre Inhalte in Ultra HD auf bis zu 4 Monitoren oder Fernsehern
- Unterstützt Ultra HD, 4096x2160p Auflösung
- Full 3D Unterstützung
- High Speed HDMI kompatibel
- Unterstützt HDCP Repeater

Technical Features

- Supports 12-bit Full HD, Full 3D, 4K2K video
- Supports Ultra HD, 4096x2160p resolution
- Supports Deep Color, 30/36 bit
- High Speed HDMI compliant
- Supports Standard audio, DSD audio, HD (HBR) audio
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)

DIGITUS® 4K HDMI Splitter, 1x4

- Show your content in Ultra HD on up to 4 Monitors or TVs
- Supports Ultra HD, 4096x2160p resolution
- Full 3D support
- High Speed HDMI compliant
- Supports HDCP Repeater

- Supports HDCP Repeater
- Frequency range: 25 MHz - 340 MHz
- 1x HDMI input and 4x HDMI outputs
- Built in HDMI booster
- Compliant to HDCP Rev. 1.3
- Product dimensions: 168 x 66 x 20 mm
- Color: black



DS-42304 358282 | 4K HDMI Splitter, 1x4

DIGITUS® HDMI Pocket Video Splitter , 2-port


- **Einer der kleinsten HDMI Video Splitter! Gibt ein Videosignal gleichzeitig auf zwei verschiedenen HDTV Bildschirmen wieder!**
- **Geeignet für Distanzen bis 15m**
- **High Speed HDMI und HDCP kompatibel**
- **Kompatibel mit HDTV 480i, 480p, 720i, 720p, 1080i und 1080p**

Technical Features

- 1 input, 2 outputs
- Easy to install and simple to operate
- Supports a distance of up to 15m
- Compatible with HDTV 480i, 480p, 720i, 720p, 1080i and 1080p
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Supports VGA, SVGA, XGA and UXGA
- High Speed HDMI and HDCP compatible
- Operation pixel frequency range: 25-225MHz

DIGITUS® HDMI Pocket Video Splitter , 2 Port

- **One of the smallest HDMI Video Splitter! Display one video signal on two different HDTV monitors!**
- **Supports a distance of up to 15m**
- **High Speed HDMI and HDCP compatible**
- **Compatible with HDTV 480i, 480p, 720i, 720p, 1080i and 1080p**

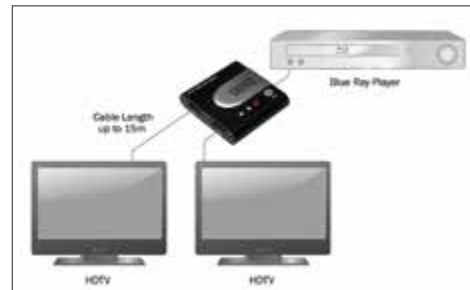

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE



DS-41302 276586 | Pocket HDMI Splitter, 2 Port

DIGITUS® HDMI Splitter, 2-Port


- **Gleichzeitige Wiedergabe eines HDMI Videosignals auf mehreren Ausgabegeräten**
- **Optimal zum Anschluss mehrerer Fernseher und Monitore an eine HDMI Quelle**
- **Kaskadierbar: erweiterte Verteilung über Kaskadierung mehrerer HDMI Splitter**
- **Höchste unterstützte Videoauflösung 1080p**

Technical Features

- Simultaneous display of one HDMI video signal on different output devices
- Easy to Use: Install in seconds, no need of setting
- Cascadeable: Large distribution achieved by cascading the HDMI Amplifier Splitter
- Highest supported video resolution 1080p
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Bandwidth: 225MHz/2.25Gbps per channel(6.75Gbps all channel)
- Supports 12bit per channel (36bit all channel) deep color
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (LxWxH; Weight): 155×70×23mm; 260g

DIGITUS® HDMI Splitter, 2 Port

- **Simultaneous display of one HDMI video signal on different output devices**
- **The best choice for carrying and splitting the HDMI signal to more than one display**
- **Cascadeable: Large distribution achieved by cascading the HDMI Amplifier Splitter**
- **Highest supported video resolution 1080p**



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE



DS-41300 271536 | HDMI Splitter, 2 Port

DIGITUS® HDMI Splitter, 4-Port

- **Gleichzeitige Wiedergabe eines HDMI Videosignals auf mehreren Ausgabegeräten**
- **Parallele Verteilung von Videosignalen auf bis zu 4 Monitore**
- **Kaskadierbar: erweiterte Verteilung über Kaskadierung mehrerer HDMI Splitter**
- **Full HD Auflösung bis zu 1080p**

DIGITUS® HDMI Splitter, 4-Port

- **Simultaneous display of one HDMI video signal on different output devices**
- **Parallel splitting of video signals to up to four monitors**
- **Cascadeable: Large distribution achieved by cascading the HDMI Amplifier Splitter**
- **Full HD resolution of up to 1080 p**

Technical Features

- Simultaneous display of one HDMI video signal on different output devices
- Easy to Use: Install in seconds, no need of setting
- Cascadeable: Large distribution achieved by cascading the HDMI Amplifier Splitter
- Highest supported video resolution 1080p
- Supports 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz
- Bandwidth: 225MHz/2.25Gbps per channel(6.75Gbps all channel)
- Supports 12bit per channel (36bit all channel) deep color
- Supports HDCP
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- Dimensions (LxWxH; Weight): 270×180×40mm; 385g



DIGITUS® 8-Port HDMI Video Splitter

- **Optimal zum Anschluss mehrerer Fernseher und Monitore an eine HDMI Quelle**
- **Verteilt HDMI Signale auf bis zu acht Monitore**
- **Erreicht Full HD Auflösung bis zu 1080p**
- **Unterstützt HDMI High Speed**

Technical Features

- Splits one HDMI video input signal to eight outputs
- Easy to install and simple to operate
- Supports HDMI High Speed
- Video resolution 1920x1080 pixel, supports 480i,576i,1080i, 480p,576p,720p,1080p
- Support 3D all format, including 1080p@24Hz, 720p@60Hz/50Hz
- Bandwidth 225MHz/2.25Gbps per channel(6.75Gbps all channel)
- Deep color 12bit per channel (36bit all channel)
- HDCP Support
- Supports uncompressed audio such as LPCM, DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)

DIGITUS® 8-Port HDMI Video Splitter

- The best choice for carrying and splitting the HDMI signal to more than one display
- Splits HDMI signals to up to eight monitors
- Achieves Full HD resolution of up to 1080 p
- Supports HDMI High Speed





CABLES

| | |
|--|-----------|
| HDMI..... | 166 |
| Display Port | 167 |
| VGA..... | 168 |
| DVI..... | 168 |
| USB 2.0 | 169 |
| USB 3.0 | 170 |
| USB Type-C™ | 170 |
| MHL | 171 |
| Printer | 171 |
| Parallel | 171 |
| PS/2..... | 172 |
| Gender Changer..... | 172 |
| SATA | 172 |
| Firewire | 173 |
| Internal PC Cables..... | 173 |
| Phone Cords | 173 |
| Power Cords | 174 |
| Device Connection Cables..... | 174 |
| Audio-/ Video | 174 |
| Network Outlets | 176 - 177 |
| Connection Modules..... | 178 |
| Modular Adapters..... | 179 |
| Tools | 180 - 181 |
| Twisted Pair Installation Cables | 182 - 183 |
| Patch Cables Category 6, S-FTP | 184 |
| Patch Cables Category 6, SF-UTP | 185 |

DIE MARKE DIGITUS® // THE TRADEMARK DIGITUS®

Starke Marken unter einem Dach

Die ASSMANN Gruppe hat in den vergangenen Jahrzehnten verschiedene Marken erfolgreich etabliert und geprägt.

Die Marke DIGITUS®

Zu den bekanntesten Marken der ASSMANN Electronic GmbH gehört die Marke DIGITUS®. Sie entstand 1994 aus der Idee, der wachsenden Nachfrage nach technisch hochwertigen und zugleich umweltfreundlichen Produkten gerecht zu werden.

Inzwischen ist DIGITUS® seit 25 Jahren erfolgreich im internationalen Markt präsent. Produktion und Vertrieb unterliegen der regelmäßigen Selbstkontrolle und sind zertifiziert nach DIN EN ISO 9001:2000 und nach der Umweltnorm DIN EN ISO 14001.

Die immer kürzeren technischen Entwicklungszyklen stellen völlig neue Anforderungen an unsere Produkte, wie zum Beispiel Kabel und Adapter, die mit in ihren Übertragungseigenschaften und Steckertypen in der aktuellen Entwicklung mithalten müssen. Deswegen sind wir stolz auf unser Team von erfahrenen und kreativen Produktmanagern und -designern, welches unser Sortiment mit der nötigen Begeisterung für den technischen Fortschritt betreut.

Strong brands under one roof

In the past decades, the ASSMANN group has successfully established and shaped various different brands.

The DIGITUS® brand

The DIGITUS® brand counts among the most famous brands of ASSMANN Electronic GmbH. It came into being in 1994 from the idea of addressing the growing demand for technically advanced, and at the same time environmentally friendly, products.

DIGITUS® has now been operating successfully in international markets for over 25 years. Production and sales are subject to self-regulation and are certified to DIN EN ISO 9001:2000 and the Environmental Standard DIN EN ISO 14001.

The ever shorter technical development cycles place completely new demands on our products, such as, for example, cables and adapters which must keep abreast of current developments in terms of their transmission properties and types of plug. That is why we are proud of our team of experienced and creative product managers and designers, which looks after our range with the necessary enthusiasm for technical progress.




So sind unsere Artikelnummern aufgebaut

| | |
|------------------|--------|
| DK | |
| // Verpackung | ID-No. |
| // Packaging | ID-No. |
| DIGITUS® Polybag | DK- |

| | |
|------------------|--------|
| 30 | |
| // Kabelgruppen | ID-No. |
| // Kind of Range | ID-No. |

| | |
|----------------------------------|----|
| USB | 30 |
| HD SUB | 31 |
| DVI | 32 |
| HDMI | 33 |
| DisplayPort | 34 |
| SATA | 40 |
| SAS | 41 |
| FireWire | 42 |
| Power PC internal | 43 |
| Power | 44 |
| TAE | 45 |
| Modular (ISDN / UAE) | 46 |
| TK international (Telefon) | 47 |
| RCA / Cinch | 48 |
| Scart | 49 |
| Toslink | 50 |
| Klinke | 51 |
| TV (BL / IEC) | 52 |
| SAT (F-plug) | 53 |
| BNC | 54 |
| TNC | 55 |
| Printer/Centronic | 58 |
| DIN/mini DIN (PS/2, S-VHS) | 59 |
| Apple iSeries | 60 |
| D-Sub | 61 |
| Samsung Galaxy | 62 |
| Thunderbolt | 63 |
| Montagematerial | 77 |

How are our Article Numbers structured

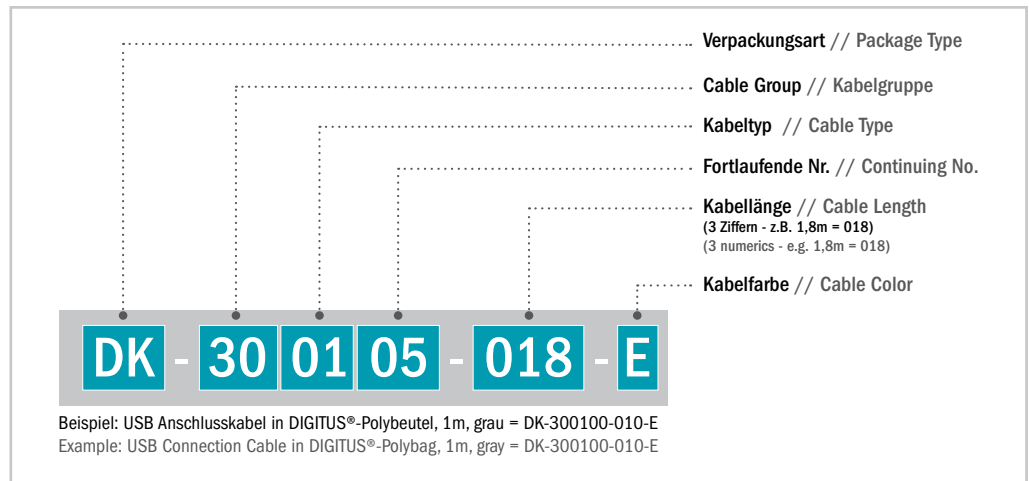

| | |
|------------------------|--------|
| 01 | |
| // Kabelart | ID-No. |
| // Kind of Cable | ID-No. |

| | |
|----------------------------|----|
| No classification | 00 |
| Connection cable | 01 |
| Extension cable | 02 |
| Adaptercable | 03 |
| Splittercable | 04 |
| Adapter | 05 |
| Plugs/Jacks | 06 |
| Installationcable | 07 |
| Wallplates & Sockets | 08 |
| Special | 09 |

| | |
|-----------------|-----|
| 018 | |
| // Länge | No. |
| // Length | No. |

| | |
|-------------------------|------|
| No length (0,0 m) | -000 |
| e.g. 0,1 m | -001 |
| e.g. 1,0 m | -010 |
| e.g. 10,0 m | -100 |
| e.g. 0,2 m | -002 |
| e.g. 2,0 m | -020 |
| e.g. 20,0 m | -200 |
| e.g. 0,35 m | -003 |
| e.g. 1,75 m | -018 |
| e.g. 1,74 m | -017 |
| e.g. 10,5 m | -105 |

| | |
|----------------|--------|
| E | |
| // Farbe | ID-No. |
| // Color | ID-No. |

| | |
|--------------------|---|
| black | S |
| beige (grey) | E |
| white | W |
| 2-color | D |
| red | D |
| blue | B |
| yellow | Y |
| green | G |
| silver | I |
| mixed | M |

KABELKLASSIFIZIERUNG // CABLE CLASSIFICATION

DIGITUS® Blisterbag

Die DIGITUS® Classic Kabel bieten Markenqualität für den technisch anspruchsvollen Kunden. Die Kabel werden aus hochwertigen Materialien (z. B. Kupfer und vergoldete Kontakte) gefertigt und gemäß den offiziellen Spezifikationen und Standards präzise verarbeitet. Somit garantieren wir eine sichere und störungsfreie Signalübertragung, Langlebigkeit und eine hohe Zuverlässigkeit.

Verpackung

Die DIGITUS® Classic Kabel werden im strapazierfähigen DIGITUS® Blisterbag geliefert.

Die Blisterbag-Verpackungen sind mit einem sicheren Klebeverschluss versehen und schützen so die Ware vor Staub und Verschmutzung. Des Weiteren sind die Blisterbags mit einem Aufkleber versehen. Dort finden Sie neben dem Produktnamen in 10 Sprachen und der Artikelnummer auch einen QR-Code mit Verlinkung auf die Webseite. Außerdem befinden sich auf der Verpackung ein aufgedruckter Garantie-Stempel sowie das jeweilige Branding. Dank Euro-Lochung und hoher Reißfestigkeit sind die Blisterbags ideal für die Blisterwand geeignet.

DIGITUS® Blisterbag

DIGITUS® Classic cables provide brand quality for the technically demanding customer. The cables are made of high-quality materials (e.g. copper and gold-plated contacts) and are manufactured exactly in accordance with official specifications and standards. In this way, we guarantee safe and interference-free signal transmission, durability, and high reliability.

Packaging

DIGITUS® Classic cables are supplied in a durable DIGITUS® blister bag.

The blister bag packaging is fitted with a secure adhesive closure, and thus protects the product from dust and contamination. In addition, the blister bags are supplied with a label where, apart from the product name in 10 languages and the part number, you will also find a QR code with a link to the web page. A guarantee stamp is also located on the packaging as well as the respective branding. Thanks to the Euro-holes and high tear strength, the blister bags are ideally suited to blister panel displays.



Alle DIGITUS® Produkte werden in einer leichten Blisterbag Verpackung geliefert.

All DIGITUS® products are delivered in a light Blisterbag packaging.



HDMI



type A M/M



type D - A M/M



type A,w / amp. M/M



type C - type A M/M

| Type | Art. No. | EAN | Name | Length |
|------|-----------------|---------------|--|--------|
| HDMI | DK-330107-010-S | 4016032333579 | HDMI High Speed connection cable, type A M/M, w/Ethernet, Ultra HD 60p,UL, bl, gold | 1,0 m |
| | DK-330107-020-S | 4016032334064 | HDMI High Speed connection cable, type A M/M, w/Ethernet, Ultra HD 60p,UL, bl, gold | 2,0 m |
| | DK-330107-030-S | 4016032334279 | HDMI High Speed connection cable, type A M/M, w/Ethernet, Ultra HD 60p,UL, bl, gold | 3,0 m |
| | DK-330107-050-S | 4016032334583 | HDMI High Speed connection cable, type A M/M, w/Ethernet, Ultra HD 60p,UL, bl, gold | 5,0 m |
| | DK-330107-100-S | 4016032334187 | HDMI High Speed connection cable, type A M/M, w/Ethernet, Ultra HD 24p,UL, bl, gold | 10,0 m |
| | DK-330105-100-S | 4016032333562 | HDMI High Speed connection cable, type A, w/ amp. M/M, Full HD,UL, bl, gold | 10,0 m |
| | DK-330105-150-S | 4016032336761 | HDMI High Speed connection cable, type A, w/ amp. M/M, Full HD,UL, bl, gold | 15,0 m |
| | DK-330105-200-S | 4016032336778 | HDMI High Speed connection cable, type A, w/ amp. M/M, Full HD,UL, bl, gold | 20,0 m |
| | DK-330118-100-S | 4016032336792 | HDMI High Speed connection cable, type A, w/ amp. M/M, w/Ethernet, Ultra HD 24p,UL, bl, gold | 10,0 m |
| | DK-330118-150-S | 4016032336808 | HDMI High Speed connection cable, type A, w/ amp. M/M, w/Ethernet, Ultra HD 24p,UL, bl, gold | 15,0 m |
| | DK-330118-200-S | 4016032336815 | HDMI High Speed connection cable, type A, w/ amp. M/M, w/Ethernet, Ultra HD 24p,UL, bl, gold | 20,0 m |
| | DK-330106-020-S | 4016032310501 | HDMI High Speed connection cable, type C - type A M/M, Ultra HD 24p,UL, bl, gold | 2,0 m |
| | DK-330106-030-S | 4016032334576 | HDMI High Speed connection cable, type C - type A M/M, Ultra HD 24p,UL, bl, gold | 3,0 m |
| | DK-330109-010-S | 4016032334194 | HDMI High Speed connection cable, type D - A M/M, w/Ethernet, Ultra HD 60p,UL, bl, gold | 1,0 m |
| | DK-330109-020-S | 4016032334200 | HDMI High Speed connection cable, type D - A M/M, w/Ethernet, Ultra HD 60p,UL, bl, gold | 2,0 m |
| | DK-330201-020-S | 4016032333838 | HDMI High Speed extension cable, type A M/F, w/Ethernet, Ultra HD 60p,UL, bl, gold | 2,0 m |
| | DK-330201-030-S | 4016032333845 | HDMI High Speed extension cable, type A M/F, w/Ethernet, Ultra HD 60p,UL, bl, gold | 3,0 m |
| | DK-330300-020-S | 4016032333869 | HDMI adapter cable, type A-DVI(18+1) M/M, Full HD,UL, bl | 2,0 m |
| | DK-330300-030-S | 4016032334361 | HDMI adapter cable, type A-DVI(18+1) M/M, Full HD,UL, bl | 3,0 m |
| | DK-330300-050-S | 4016032333883 | HDMI adapter cable, type A-DVI(18+1) M/M, Full HD,UL, bl | 5,0 m |
| | DK-330300-100-S | 4016032333906 | HDMI adapter cable, type A-DVI(18+1) M/M, Full HD,UL, bl | 10,0 m |
| | DK-330400-002-S | 4016032333951 | HDMI Y-splitter cable, type A -2xtype A M/F, passiv, Full HD,UL, bl, gold | 0,2 m |
| | DK-330500-000-S | 4016032334019 | HDMI adapter, type A F/F, Ultra HD 60p,bl | - |
| | DK-330502-000-S | 4016032324348 | HDMI adapter, type A, 90° angled M/F, Ultra HD 60p,bl, gold | - |
| | DK-330505-000-S | 4016032334668 | HDMI adapter, type A - DVI-I(24+5) M/F, Ultra HD 60p,bl | - |
| | DK-330508-000-S | 4016032334026 | HDMI adapter, type C - A M/F, Ultra HD 60p,UL, bl | - |
| | DK-330509-000-S | 4016032334033 | HDMI adapter, type A - D M/F, Ultra HD 60p,UL, bl | - |

DISPLAY PORT



DP M/M



DP - DVI (24+1) M/M



DP - HDMI type A M/F



mini DP - DP M/M

| Type | Art. No. | EAN | Name | Length |
|--------------|-----------------|---------------|---|--------|
| DISPLAY PORT | DK-340100-010-S | 4016032336099 | DisplayPort connection cable, DP M/M, w/interlock, DP, 1.2 conform,UL, bl | 1,0 m |
| | DK-340100-020-S | 4016032336112 | DisplayPort connection cable, DP M/M, w/interlock, Ultra HD 4K,UL, bl | 2,0 m |
| | DK-340100-010-S | 4016032336099 | DisplayPort connection cable, DP M/M, w/interlock, DP, 1.2 conform,UL, bl | 1,0 m |
| | DK-340100-020-S | 4016032336112 | DisplayPort connection cable, DP M/M, w/interlock, Ultra HD 4K,UL, bl | 2,0 m |
| | DK-340100-030-S | 4016032336129 | DisplayPort connection cable, DP M/M, w/interlock, Ultra HD 4K,UL, bl | 3,0 m |
| | DK-340100-050-S | 4016032336136 | DisplayPort connection cable, DP M/M, w/interlock, DP, 1.2 conform,UL, bl | 5,0 m |
| | DK-340100-100-S | 4016032336143 | DisplayPort connection cable, DP M/M, w/interlock, Full HD 1080p,UL, bl | 10,0 m |
| | DK-340100-150-S | 4016032336150 | Displayport connection cable, DP M/M, w/interlock, Full HD 1080p,UL, bl | 15,0 m |
| | DK-340102-010-W | 4016032336167 | DisplayPort connection cable, mini DP - DP M/M, w/interlock, DP 1.1a conform,UL, wh | 1,0 m |
| | DK-340102-020-W | 4016032336174 | DisplayPort connection cable, mini DP - DP M/M, w/interlock, DP 1.1a conform,UL, wh | 2,0 m |
| | DK-340102-030-W | 4016032336181 | DisplayPort connection cable, mini DP - DP M/M, w/interlock, DP 1.1a conform,UL, wh | 3,0 m |
| | DK-340200-020-S | 4016032336198 | DisplayPort extension cable, DP M/F, 2.0m, w/interlock, DP 1.2 conform,UL, bl | 2,0 m |
| | DK-340301-010-S | 4016032336228 | DisplayPort adapter cable, DP - DVI (24+1) M/M, w/interlock, DP 1.2 compatible,UL, CE, bl | 1,0 m |
| | DK-340301-020-S | 4016032336235 | DisplayPort adapter cable, DP - DVI (24+1) M/M, w/interlock, DP 1.2 compatible,UL, CE, bl | 2,0 m |
| | DK-340301-030-S | 4016032336242 | DisplayPort adapter cable, DP - DVI (24+1) M/M, w/interlock, DP 1.2 compatible,UL, CE, bl | 3,0 m |
| | DK-340301-050-S | 4016032336259 | DisplayPort adapter cable, DP - DVI (24+1) M/M, w/interlock, DP 1.2 compatible,UL, CE, bl | 5,0 m |
| | DK-340305-010-W | 4016032336266 | DisplayPort adapter cable, mini DP - DVI(24+1) M/M, DP 1.1a compatible,UL, CE, wh | 1,0 m |
| | DK-340305-020-W | 4016032336273 | DisplayPort adapter cable, mini DP - DVI(24+1) M/M, DP 1.1a compatible,UL, CE, wh | 2,0 m |
| | DK-340305-030-W | 4016032336280 | DisplayPort adapter cable, mini DP - DVI(24+1) M/M, DP 1.1a compatible,UL, CE, wh | 3,0 m |
| | DK-340400-001-S | 4016032336297 | DisplayPort adapter cable, DP - HDMI type A M/F, w/interlock, DP 1.1a compatible,UL, CE, bl | 0,15 m |
| | DK-340401-001-S | 4016032336303 | DisplayPort adapter cable, DP - DVI (24+5) M/F, w/interlock, DP 1.2 compatible,UL,CE, bl | 0,15 m |
| | DK-340403-001-S | 4016032336310 | DisplayPort adapter cable, DP - HD15 M/F, w/interlock, DP 1.2 compatible,UL,CE, bl | 0,15 m |
| | DK-340404-001-W | 4016032336327 | DisplayPort adapter cable, mini DP - HDMI type A M/F, DP 1.1a compatible,UL, CE, wh | 0,15 m |
| | DK-340406-001-W | 4016032336334 | DisplayPort adapter cable, mini DP - DVI (24+5) M/F, DP 1.1a compatible,UL, CE, wh | 0,15 m |
| | DK-340407-001-W | 4016032336341 | DisplayPort adapter cable, mini DP - HD15 M/F, DP 1.1a compatible,UL, CE, wh | 0,15 m |
| | DK-340509-002-W | 4016032336358 | DisplayPort splitter cable, miniDP - DP+HDMI+DVI M/F, DP 1.1a compatible,UL, CE, wh | 0,2 m |
| | DK-340602-000-S | 4016032336365 | DisplayPort adapter, DP - HDMI type A M/F,w/interlock,UL, CE, bl | - |
| | DK-340603-000-S | 4016032336372 | DisplayPort adapter, DP - DVI-I (24-5) M/F, w/interlock,UL, CE, bl | - |
| | DK-340604-000-S | 4016032336426 | DisplayPort adapter, DP - HD15 M/F, w/ interlock,UL, CE, bl | - |

VGA



HD15 M/M, 3Coax



HD15 M/F, 3Coax



HD15 - 2xHD15 M/F


 DVI (18+1) - HDMI type A M/F
DVI-D single link

| Type | Art. No. | EAN | Name | Length |
|------------|-----------------|---------------|--|--------|
| VGA | DK-310103-018-E | 4016032334439 | VGA Monitor connection cable, HD15 M/M, 3Coax/7C, 2xferrite,UL, be | 1,8 m |
| | DK-310103-018-S | 4016032357070 | VGA Monitor connection cable, HD15 M/M, 3Coax/7C, 2xferrite,UL, bl | 1,8 m |
| | DK-310103-030-E | 4016032334446 | VGA Monitor connection cable, HD15 M/M, 3Coax/7C, 2xferrite,UL, be | 3,0 m |
| | DK-310103-050-E | 4016032334453 | VGA Monitor connection cable, HD15 M/M, 3Coax/7C, 2xferrite,UL, be | 5,0 m |
| | DK-310103-050-S | 4016032357094 | VGA Monitor connection cable, HD15 M/M, 3Coax/7C, 2xferrite,UL, bl | 5,0 m |
| | DK-310103-100-E | 4016032334477 | VGA Monitor connection cable, HD15 M/M, 3Coax/7C, 2xferrite,UL, be | 10,0 m |
| | DK-310103-150-E | 4016032334903 | VGA Monitor connection cable, HD15 M/M, 3Coax/7C, 2xferrite,UL, be | 15,0 m |
| | DK-310103-200-E | 4016032334484 | VGA Monitor connection cable, HD15 M/M, 3Coax/7C, 2xferrite,UL, be | 20,0 m |
| | DK-310203-018-E | 4016032334491 | VGA Monitor extension cable, HD15 M/F, 3Coax/7C, 2xferrite,UL, be | 1,8 m |
| | DK-310203-030-E | 4016032334507 | VGA Monitor extension cable, HD15 M/F, 3Coax/7C, 2xferrite,UL, be | 3,0 m |
| | DK-310203-050-E | 4016032334514 | VGA Monitor extension cable, HD15 M/F, 3Coax/7C, 2xferrite,UL, be | 5,0 m |
| | DK-310203-100-E | 4016032334521 | VGA Monitor extension cable, HD15 M/F, 3Coax/7C, 2xferrite,UL, be | 10,0 m |
| | DK-310203-150-E | 4016032334538 | VGA Monitor extension cable, HD15 M/F, 3Coax/7C, 2xferrite,UL, be | 15,0 m |
| | DK-310203-200-E | 4016032334545 | VGA Monitor extension cable, HD15 M/F, 3Coax/7C, 2xferrite,UL, be | 20,0 m |
| | DK-310400-002-S | 4016032334569 | VGA Monitor Y-splitter cable, HD15 - 2xHD15 M/F, 0.2m, passiv,UL, gold, bl | 0,2 m |

DVI



DVI (24+1), 2x ferrit M/M



DVI (24+1) - HD15, 2x ferrit M/M

| Type | Art. No. | EAN | Name | Length |
|------------|-----------------|---------------|--|--------|
| DVI | DK-320100-020-S | 4016032335092 | DVI connection cable, DVI(18+1), 2x ferrit M/M, DVI-D single link,UL, bl | 2,0 m |
| | DK-320100-030-S | 4016032335108 | DVI connection cable, DVI(18+1), 2x ferrit M/M, DVI-D single link,UL, bl | 3,0 m |
| | DK-320100-050-S | 4016032335115 | DVI connection cable, DVI(18+1), 2x ferrit M/M, DVI-D single link,UL, bl | 5,0 m |
| | DK-320101-020-S | 4016032319542 | DVI connection cable, DVI(24+1), 2x ferrit M/M, DVI-D dual link,UL, bl | 2,0 m |
| | DK-320101-030-S | 4016032335160 | DVI connection cable, DVI(24+1), 2x ferrit M/M, DVI-D dual link,UL, bl | 3,0 m |
| | DK-320101-050-S | 4016032335177 | DVI connection cable, DVI(24+1), 2x ferrit M/M, DVI-D dual link,UL, bl | 5,0 m |
| | DK-320101-100-S | 4016032335184 | DVI connection cable, DVI(24+1), 2x ferrit M/M, DVI-D dual link,UL, bl | 10,0 m |
| | DK-320200-020-S | 4016032335191 | DVI extension cable, DVI(24+1), 2x ferrit M/M, DVI-D dual link,UL, bl | 2,0 m |
| | DK-320200-030-S | 4016032335207 | DVI extension cable, DVI(24+1), 2x ferrit M/F, DVI-D dual link,UL, bl | 3,0 m |
| | DK-320200-050-S | 4016032335214 | DVI extension cable, DVI(24+1), 2x ferrit M/F, DVI-D dual link,UL, bl | 5,0 m |
| | DK-320200-100-S | 4016032335221 | DVI extension cable, DVI(24+1), 2x ferrit M/F, DVI-D dual link,UL, bl | 10,0 m |
| | DK-320300-020-S | 4016032335283 | DVI adapter cable, DVI(24+5) - HD15, 2x ferrit M/M, DVI-I dual link,UL, bl | 2,0 m |
| | DK-320300-030-S | 4016032335245 | DVI adapter cable, DVI(24+5) - HD15, 2x ferrit M/M, DVI-I dual link,UL, bl | 3,0 m |
| | DK-320300-050-S | 4016032335276 | DVI adapter cable, DVI(24+5) - HD15, 2x ferrit M/M, DVI-I dual link,UL, bl | 5,0 m |
| | DK-320401-002-S | 4016032310549 | DVI Y-splitter cable, DVI(24+5) - 2x DVI(24+5) M/F, DVI-I dual link, passiv,UL, gold, bl | 0,2 m |
| | DK-320402-002-S | 4016032335337 | DVI Y-splitter cable, DVI(24+5) - 2x HD15 M/F, DVI-I dual link, passiv,UL, gold, bl | 0,2 m |
| | DK-320500-000-S | 4016032335351 | DVI Adapter, DVI(18+1) - HDMI type A M/F, DVI-D single link,HDMI 1.3 compatible,bl | - |
| | DK-320502-000-S | 4016032335498 | DVI adapter, DVI(24+1) - DVI(24+5) M/F, DVI-D dual link,bl | - |
| | DK-320504-000-S | 4016032310518 | DVI adapter, DVI(24+5) - HD15 M/F, DVI-I dual link,bl | - |
| | DK-320505-000-S | 4016032335429 | DVI adapter, DVI(24+5) - HD15 F/M, DVI-I dual link,bl | - |

USB 2.0



type A M/M



type A - B M/M



type A - mini B (5 pin) M/M



type A - micro B M/M

| Type | Art. No. | EAN | Name | Length |
|-----------------|-----------------|---|---|--------|
| USB 2.0 | DK-300101-010-S | 4016032334620 | USB 2.0 connection cable, type A M/M, USB 2.0 conform,UL, bl | 1,0 m |
| | DK-300101-018-S | 4016032334637 | USB 2.0 connection cable, type A M/M, USB 2.0 conform,UL, bl | 1,8 m |
| | DK-300101-030-S | 4016032335542 | USB 2.0 connection cable, type A M/M, USB 2.0 conform,UL, bl | 3,0 m |
| | DK-300101-050-S | 4016032334644 | USB 2.0 connection cable, type A M/M, USB 2.0 conform,UL, bl | 5,0 m |
| | DK-300105-005-S | 4016032335559 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, bl | 0,5 m |
| | DK-300105-010-E | 4016032335627 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, be | 1,0 m |
| | DK-300105-010-S | 4016032334682 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, bl | 1,0 m |
| | DK-300105-018-E | 4016032334699 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, be | 1,8 m |
| | DK-300105-018-S | 4016032334705 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, bl | 1,8 m |
| | DK-300105-030-E | 4016032334712 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, be | 3,0 m |
| | DK-300105-030-S | 4016032334729 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, bl | 3,0 m |
| | DK-300105-050-E | 4016032334736 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, be | 5,0 m |
| | DK-300105-050-S | 4016032334743 | USB 2.0 connection cable, type A - B M/M, USB 2.0 conform,UL, bl | 5,0 m |
| | DK-300107-018-S | 4016032334750 | USB connection cable, type A - mini B (4pin) M/M, USB 2.0 compatible,UL, bl | 1,8 m |
| | DK-300108-010-S | 4016032334767 | USB 2.0 connection cable, type A - mini B (5pin) M/M, USB 2.0 conform,UL, bl | 1,0 m |
| | DK-300108-018-S | 4016032310457 | USB 2.0 connection cable, type A - mini B (5pin) M/M, USB 2.0 conform,UL, bl | 1,8 m |
| | DK-300108-030-S | 4016032334774 | USB 2.0 connection cable, type A - mini B (5pin) M/M, USB 2.0 conform,UL, bl | 3,0 m |
| | DK-300109-018-S | 4016032334798 | USB 2.0 connection cable, type A - micro A M/M, USB 2.0 conform,UL, bl | 1,8 m |
| | DK-300110-010-S | 4016032335450 | USB 2.0 connection cable, type A - micro B M/M, USB 2.0 conform,UL, bl | 1,0 m |
| | DK-300110-018-S | 4016032334811 | USB 2.0 connection cable, type A - micro B M/M, USB 2.0 conform,UL, bl | 1,8 m |
| | DK-300110-030-S | 4016032334828 | USB 2.0 connection cable, type A - micro B M/M, USB 2.0 conform,UL, bl | 3,0 m |
| | DK-300113-010-S | 4016032334835 | USB 2.0 Y-connection cable, type mini B (5pin) - 2xA M/M, USB 2.0 compatible,UL, bl | 1,0 m |
| | DK-300202-050-E | 4016032310532 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, be | 5,0 m |
| | DK-300202-050-S | 4016032310969 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, bl | 5,0 m |
| | DK-300301-002-E | 4016032334880 | USB Slot Bracket cable, 2x type A-2x5pin IDC F/F, USB 2.0 compatibel,UL, be | 0,25 m |
| | DK-300304-002-E | 4016032334897 | USB Slot Bracket cable, 4x type A-2x10pin IDC F/F, USB 2.0 compatibel,UL, be | 0,25 m |
| | DK-300309-002-S | 4016032336082 | USB 2.0 adpter cable, OTG, type micro B - A M/F, 0.2m, USB 2.0 conform,UL, bl | 0,2 m |
| | DK-300310-002-S | 4016032335054 | USB 2.0 adapter cable, OTG, type mini B - A M/F, 0.2m, USB 2.0 conform,UL, bl | 0,2 m |
| | DK-300503-000-S | 4016032334910 | USB adapter, type A F/F, USB 2.0 conform, UL, bl | - |
| | DK-300507-000-S | 4016032334927 | USB adapter, type micro B - A M/F, USB 2.0 conform, UL, bl | - |
| | DK-300304-002-E | 4016032334897 | USB Slot Bracket cable, 4x type A-2x10pin IDC F/F, USB 2.0 compatibel,UL, be | 0,25 m |
| | DK-300309-002-S | 4016032336082 | USB 2.0 adpter cable, OTG, type micro B - A M/F, USB 2.0 conform,UL, bl | 0,2 m |
| | DK-300310-002-S | 4016032335054 | USB 2.0 adapter cable, OTG, type mini B - A M/F, USB 2.0 conform,UL, bl | 0,2 m |
| | DK-300503-000-S | 4016032334910 | USB adapter, type A F/F, USB 2.0 conform, UL, bl | - |
| DK-300507-000-S | 4016032334927 | USB adapter, type micro B - A M/F, USB 2.0 conform, UL, bl | - | |
| DK-300202-018-E | 4016032334842 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, be | 1,8 m | |
| DK-300202-018-S | 4016032334859 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, bl | 1,8 m | |
| DK-300202-030-E | 4016032334866 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, be | 3,0 m | |
| DK-300202-030-S | 4016032334873 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, bl | 3,0 m | |


USB 3.0



type A - micro B M/M



type A M/F

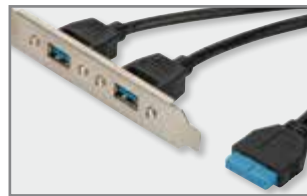

2x type A-2x10pin IDC F/F

| Type | Art. No. | EAN | Name | Length |
|-----------------|-----------------|---|--|--------|
| USB 3.0 | DK-300319-001-S | 4016032368663 | MHL 3.0 adapter cable, micro USB B-HDMI A, active M/F, Ultra HD 4K,UL,bl | 0,1 m |
| | DK-300116-010-S | 4016032335009 | USB 3.0 connection cable, type A - micro B M/M, USB 3.0 conform,UL, bl | 1,0 m |
| | DK-300116-018-S | 4016032335023 | USB 3.0 connection cable, type A - micro B M/M, USB 3.0 conform,UL, bl | 1,8 m |
| | DK-300117-003-S | 4016032334941 | USB 3.0 connection cable, USB A - Micro USB B M/M, 0.25m, USB 3.0 conform,UL, bl | 0,3 m |
| | DK-300136-010-S | 4016032368809 | USB 3.1 connection cable, type C to A M/M, Super Speed,UL, bl | 1,0 m |
| | DK-300136-018-S | 4016032368823 | USB 2.0 connection cable, type C to A M/M, High-Speed,UL, bl | 1,8 m |
| | DK-300137-010-S | 4016032368816 | USB 3.1 connection cable, type C to micro B M/M, Super Speed,UL, bl | 1,0 m |
| | DK-300137-018-S | 4016032368830 | USB 3.1 connection cable, type C to micro B M/M, High-Speed,UL, bl | 1,8 m |
| | DK-300138-010-S | 4016032368953 | USB 3.1 connection cable, type C to C M/M, High-Speed,UL, bl | 1,0 m |
| | DK-300138-018-S | 4016032368977 | USB 3.1 connection cable, type C to C M/M, High-Speed,UL, bl | 1,8 m |
| | DK-300202-018-E | 4016032334842 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, be | 1,8 m |
| | DK-300202-018-S | 4016032334859 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, bl | 1,8 m |
| | DK-300202-030-E | 4016032334866 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, be | 3,0 m |
| | DK-300202-030-S | 4016032334873 | USB 2.0 extension cable, type A M/F, USB 2.0 conform,UL, bl | 3,0 m |
| | DK-300203-018-S | 4016032310570 | USB 3.0 extension cable, type A M/F, USB 3.0 conform,UL, bl | 1,8 m |
| | DK-300203-030-S | 4016032310587 | USB 3.0 extension cable, type A M/F, USB 3.0 conform,UL, bl | 3,0 m |
| | DK-300203-050-S | 4016032310594 | USB 3.0 extension cable, type A M/F, USB 3.0 conform,UL, bl | 5,0 m |
| | DK-300306-002-S | 4016032335030 | USB 3.0 Slot Bracket cable, 2x type A-2x10pin IDC F/F, USB 3.0 compatible,UL, bl | 0,25 m |
| | DK-300314-002-S | 4016032354031 | USB 3.0 adpter cable, OTG, type micro B - A M/F, USB 3.0 conform,UL, bl | 0,2 m |
| | DK-300315-001-S | 4016032368847 | USB 3.1 adapter cable, type C to A M/F, Super Speed,UL, bl | 0,1 m |
| DK-300316-001-S | 4016032368854 | USB 3.1 adapter cable, type C to micro B M/F, High-Speed,UL, bl | 0,1 m | |

USB TYPE-C™



type C - A, M/M



type C - micro B, M/M



type C - C, M/M



type C - A, M/F

| Type | Art. No. | EAN | Name | Length |
|--------------------|-----------------|---------------|--|--------|
| USB TYPE-C™ | DK-300136-010-S | 4016032368809 | USB Type-C connection cable, type C to A, M/M, Super Speed, UL, bl | 1,0 m |
| | DK-300136-018-S | 4016032368823 | USB Type-C connection cable, type C to A, M/M, High-Speed, UL, bl | 1,8 m |
| | DK-300137-010-S | 4016032368816 | USB Type-C connection cable, type C to micro B, M/M, Super Speed, UL, bl | 1,0 m |
| | DK-300137-018-S | 4016032368830 | USB Type-C connection cable, type C to micro B, M/M, High-Speed, UL, bl | 1,8 m |
| | DK-300138-010-S | 4016032368953 | USB Type-C connection cable, type C to C, M/M, High-Speed, UL, bl | 1,0 m |
| | DK-300138-018-S | 4016032368977 | USB Type-C connection cable, type C to C, M/M, High-Speed, UL, bl | 1,8 m |
| | DK-300506-000-S | 4016032370819 | USB Type-C adapter, type C to A, M/F, Super-Speed, UL, bl | - |
| | DK-300315-001-S | 4016032368847 | USB Type-C adapter cable, type C to A, M/F, Super Speed, UL, bl | 0,15 m |
| | DK-300316-001-S | 4016032368854 | USB Type-C adapter cable, type C to micro B, M/F, 0,1m, High-Speed, UL, bl | 0,1 m |

MHL



micro USB B - HDMI A M/F



micro USB B - HDMI A M/M



micro SUB - VGA

| Type | Art. No. | EAN | Name | Length |
|------|-----------------|---------------|--|--------|
| MHL | DK-300305-002-S | 4016032338055 | MHL adapter cable, aktiv, micro USB B - HDMI A M/F, former HDMI 1.3 compatible,UL, CE, FCC, bl | 0,1 m |
| | DK-300307-010-S | 4016032338062 | MHL adapter cable, passiv, micro USB B - HDMI A M/M, former HDMI 1.3 compatible,UL, gold, bl | 1,0 m |
| | DK-300307-015-S | 4016032338079 | MHL adapter cable, passiv, micro USB B - HDMI A M/M, former HDMI 1.3 compatible,UL, gold, bl | 1,5 m |
| | DK-300319-001-S | 4016032368663 | MHL 3.0 adapter cable, micro USB B-HDMI A, active M/F, Ultra HD 4K,UL,bl | 0,1 m |
| | DK-300320-0012S | 4016032370888 | MHL adapter cable, aktiv, micro USB B - VGA | 0,2 m |

SERIAL



D-Sub25 M/F



D-Sub9 M/F



D-Sub - IDC 2x5pin M/F

| Type | Art. No. | EAN | Name | Length |
|--------|-----------------|---------------|--|--------|
| SERIAL | DK-610106-020-E | 4016032335801 | Datatransfer connection cable, D-Sub9 F/F, serial, molded,be | 2,0 m |
| | DK-610106-030-E | 4016032335818 | Datatransfer connection cable, D-Sub9 F/F, serial, molded,be | 3,0 m |
| | DK-610106-050-E | 4016032335832 | Datatransfer connection cable, D-Sub9 F/F, serial, molded,be | 5,0 m |
| | DK-610107-020-E | 4016032335894 | Datatransfer connection cable, D-Sub9 M/M, serial, molded,be | 2,0 m |
| | DK-610107-030-E | 4016032335900 | Datatransfer connection cable, D-Sub9 M/M, serial, molded,be | 3,0 m |
| | DK-610201-020-E | 4016032335931 | Datatransfer extension cable, D-Sub25 M/F, serial/parallel, molded,be | 2,0 m |
| | DK-610201-030-E | 4016032335948 | Datatransfer extension cable, D-Sub25 M/F, serial/parallel, molded,be | 3,0 m |
| | DK-610201-050-E | 4016032335955 | Datatransfer extension cable, D-Sub25 M/F, serial/parallel, molded,be | 5,0 m |
| | DK-610201-100-E | 4016032335962 | Datatransfer extension cable, D-Sub25 M/F, serial/parallel, molded,be | 10 m |
| | DK-610203-020-E | 4016032310556 | Datatransfer extension cable, D-Sub9 M/F, erial, molded,be | 2,0 m |
| | DK-610203-030-E | 4016032335986 | Datatransfer extension cable, D-Sub9 M/F, erial, molded,be | 3,0 m |
| | DK-610203-050-E | 4016032335993 | Datatransfer extension cable, D-Sub9 M/F, serial, molded,be | 5,0 m |
| | DK-610203-100-E | 4016032336006 | Datatransfer extension cable, D-Sub9 M/F, serial molded,be | 10 m |
| | DK-610300-003-E | 4016032338239 | Serial Slot Bracket cable, D-Sub9 - IDC 2x5pin M/F, serial, DTK,UL, be | 0,25 m |

PRINTER/PARALLEL



miniDIN6 M/m, be

| Type | Art. No. | EAN | Name | Length |
|---------|-----------------|---------------|--|--------|
| PRINTER | DK-580300-003-E | 4016032315087 | Printer Slot Bracket cable, D-Sub25 - IDC 26pin F/F, 0.25m, parallel/serial,UL, be | 0,25 m |


PS/2



miniDIN6 M/m, be

| Type | Art. No. | EAN | Name | Length |
|------|-----------------|---------------|---|--------|
| PS/2 | DK-590100-020-E | 4016032337072 | PS/2 connection cable, miniDIN6 M/M, be | 2,0 m |
| | DK-590200-020-E | 4016032337089 | PS/2 extension cable, miniDIN6 M/F, be | 2,0 m |
| | DK-590200-050-E | 4016032337096 | PS/2 extension cable, miniDIN6 M/F, be | 5,0 m |

GENTER CHANGER

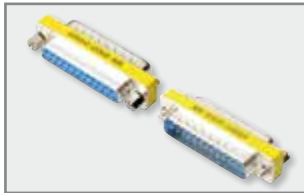


D-Sub25 M/F



D-Sub9




D-SUB15

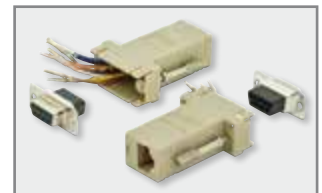

Modular DB9

| Type | Art. No. | EAN | Name | Length |
|----------------|-----------------|---------------|--|--------|
| GENDER CHANGER | DK-610502-000-I | 4016032336945 | Gender Changer, D-Sub9 M/F, metal housing,with Hex screws | - |
| | DK-610503-000-I | 4016032336952 | Gender Changer, D-Sub25 M/F, metal housing,with Hex screws | - |
| | DK-610505-000-I | 4016032336990 | Gender Changer, D-Sub9, metal housing, M/M,with Hex screws | - |
| | DK-610506-000-I | 4016032337003 | Gender Changer, D-Sub9metal housing, F/F,with Hex screws + nut | - |
| | DK-610510-000-I | 4016032337010 | Gender Changer, D-Sub25,metal housing, F/F,with Hex screws | - |
| | DK-610511-000-I | 4016032337027 | Gender Changer, D-Sub15,metal housing, M/M,with Hex screws | - |
| | DK-610512-000-I | 4016032337034 | Gender Changer, D-Sub15,metal housing, F/F,with Hex screws | - |
| | DK-610513-000-I | 4016032337041 | Zero Modem adapter, D-Sub9,metal housing, M/F,with Hex screws | - |
| | DK-610516-000-I | 4016032334255 | Adaptor, DB9, RJ45, ModularDB9 F, RJ45 F | - |
| | DK-610517-000-I | 4016032337058 | Adaptor, DB9, RJ45, ModularDB9 M, RJ45 F | - |
| | DK-610518-000-I | 4016032337065 | Adapter, DB25, RJ45, ModularDB25 M, RJ45 F | - |


SATA



L-type, w/ latchF/F



Sata22pin - L-type + powerF/F

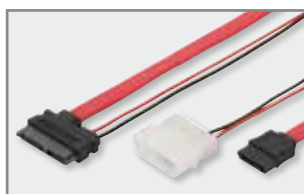

SATA13pin - L-type+powerF/F

| Type | Art. No. | EAN | Name | Length |
|------|-----------------|---------------|--|--------|
| SATA | DK-400102-003-R | 4016032337331 | SATA connection cable, L-type, w/ latchF/F, straight,SATA II/III, UL, re | 0,3 m |
| | DK-400102-005-R | 4016032337355 | SATA connection cable, L-type, w/ latchF/F, straight,SATA II/III, UL, re | 0,5 m |
| | DK-400102-008-R | 4016032337362 | SATA connection cable, L-type, w/ latchF/F, straight,SATA II/III, UL, re | 0,75 m |
| | DK-400112-005-R | 4016032337379 | SATA connection cable, SATA22pin - L-type + powerF/F, straight,SATA II/III, UL, re | 0,5 m |
| | DK-400114-005-R | 4016032337409 | SATA connection cable, SATA13pin - L-type + powerF/F, Slimline,SATA II/III, UL, re | 0,5 m |

FIREWIRE



6pin M/M



9pin - 4pin M/M



9pin - 6pin M/M

| Type | Art. No. | EAN | Name | Length |
|------------------|-----------------|---------------|---|--------|
| FIRE WIRE | DK-420101-018-S | 4016032337102 | FireWire 400 connection cable, 6pin M/M, IEEE 1394-2008,UL, bl | 1,8 m |
| | DK-420101-030-S | 4016032337119 | FireWire 400 connection cable, 6pin M/M, IEEE 1394-2008,UL, bl | 3,0 m |
| | DK-420104-018-S | 4016032337157 | FireWire 800 connection cable, 9pin - 4pin M/M, IEEE 1394-2008,UL, bl | 1,8 m |
| | DK-420105-018-S | 4016032337164 | FireWire 800 connection cable, 9pin - 6pin M/M, IEEE 1394-2008,UL, bl | 1,8 m |


INTERNAL POWER



IDE - SATA 15pin connector



IDE - 2x IDE connector

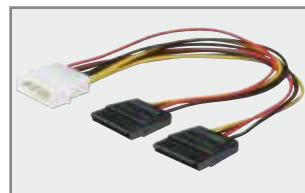

IDE - 2x SATA 15pin connector




2x IDE - 6pin PCI graphic card connector

| Type | Art. No. | EAN | Name | Length |
|-----------------------|-----------------|---------------|--|--------|
| INTERNAL POWER | DK-430300-002-M | 4016032335641 | Internal power supply cable, IDE - SATA 15pin connector,UL | 0,15 m |
| | DK-430302-002-M | 4016032335719 | Internal power supply cable, IDE - IDE + 3pin cooler connector,UL | 0,3 m |
| | DK-430400-002-M | 4016032335658 | Internal Y-power supply cable, IDE - 2x IDE connector,UL | 0,2 m |
| | DK-430400-002-S | 4016032335740 | Internal Y-splitter power supply cable, IDE - 2x SATA 15pin connector,UL | 0,2 m |
| | DK-430401-002-M | 4016032335672 | Internal Y-power supply cable, IDE - IDE + floppy connector,UL | 0,2 m |
| | DK-430402-002-M | 4016032335771 | Internal Y-power supply cable, IDE - 2x floppy connector,UL | 0,2 m |
| | DK-430403-002-M | 4016032335788 | Internal power supply cable, 2x IDE - 6pin PCI graphic card connector,UL, Pin connection ver_1 | 0,2 m |

PHONE CORDS



Modular connection cable retractable, RJ45

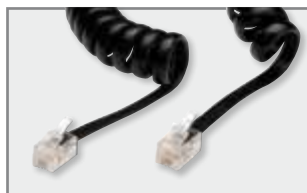

UAE connection cable, m RJ10



UAE connection cable, m RJ11

| Type | Art. No. | EAN | Name | Length |
|--------------------|-----------------|---------------|---|--------|
| PHONE CORDS | DK-460100-010-S | 4016032337713 | Modular connection cable, retractable, RJ45 | 1,0 m |
| | DK-460101-020-S | 4016032337720 | UAE connection cable, RJ10 | 2,0 m |
| | DK-460101-040-S | 4016032337737 | UAE connection cable, RJ10 | 4,0 m |
| | DK-460102-030-S | 4016032337744 | UAE connection cable, RJ11 | 3,0 m |
| | DK-460102-060-S | 4016032337751 | UAE connection cable, RJ11 | 6,0 m |

POWER CORDS // DEVICE CONNECTION CABLES



Schuko 90° angled - C13 M/F



Schuko - C5 M/F



Euro - C7 M/F



C14 - C13 M/F

| Type | Art. No. | EAN | Name | Length |
|--------------------|-----------------|---------------|---|--------|
| POWER CORDS | DK-440100-018-S | 4016032337171 | Power Cord, Schuko 90° angled - C13 M/F, H05VV-F3G 0.75qmm,bl | 1,8 m |
| | DK-440100-025-S | 4016032337188 | Power Cord, Schuko 90° angled - C13 M/F, H05VV-F3G 1.0qmm,bl | 2,5 m |
| | DK-440100-050-S | 4016032337195 | Power Cord, Schuko 90° angled - C13 M/F, H05VV-F3G 1.0qmm,bl | 5,0 m |
| | DK-440101-018-S | 4016032337201 | Power Cord, Schuko - C13 M/F, H05VV-F3G 0.75qmm,bl | 1,8 m |
| | DK-440102-018-S | 4016032337218 | Power Cord, Schuko - C13, 90° angled M/F, H05VV-F3G 0.75qmm,bl | 1,8 m |
| | DK-440103-018-S | 4016032337225 | Power Cord, Schuko - C5 M/F, H05VV-F3G 0.75qmm,bl | 1,8 m |
| | DK-440104-018-S | 4016032337232 | Power Cord, Euro - C7 M/F, H03VV-F2G 0.75qmm,bl | 1,8 m |
| | DK-440106-018-S | 4016032337249 | Power Cord, US plug - C13 M/F, H05VV-F3G 0.75qmm,bl | 1,8 m |
| | DK-440107-018-S | 4016032337256 | Power Cord, UK plug, 90° angled - C13 M/F, H05VV-F3G 1.0qmm, fuse 5A,bl | 1,8 m |
| | DK-440201-012-S | 4016032337263 | Power Cord extension cable, C14 - C13 M/F, H05VV-F3G 0.75qmm,bl | 1,2 m |
| | DK-440201-018-S | 4016032337270 | Power Cord extension cable, C14 - C13 M/F, H05VV-F3G 0.75qmm,bl | 1,8 m |
| | DK-440201-050-S | 4016032337287 | Power Cord extension cable, C14 - C13 M/F, H05VV-F3G 1.0qmm,bl | 5,0 m |
| | DK-440400-017-S | 4016032337317 | Power Cord splitter cable, C14 - 2x C13 M/F, H05VV-F3G 1.0qmm/0.75qmm,bl | 1,7 m |
| | DK-440401-017-S | 4016032337324 | Power Cord splitter cable, Schuko - 2x C13 M/F, H05VV-F3G 1.0qmm/0.75qmm,bl | 1,7 m |

AUDIO-/ VIDEO CABLES



stereo 3,5 mm



stereo 3,5 mm - 2x RCA



stereo 3,5 mm - CCS



Scart 21pin

| Type | Art. No. | EAN | Name | Length |
|----------------------|-----------------|-----------------|---|--|
| 3.5 mm STEREO | DK-510100-015-S | 4016032337799 | Audio connection cable, stereo 3.5mm, CCS, 2x0.10/10, shielded, M/M,bl | 1,5 m |
| | DK-510100-025-S | 4016032338826 | Audio connection cable, stereo 3.5mm, CCS, 2x0.10/10, shielded, M/M,black | 2,5 m |
| | DK-510200-015-S | 4016032337614 | Audio extension cable, stereo 3.5mm, CCS, 2x0.10/10, shielded, M/F,bl | 1,5 m |
| | DK-510200-030-S | 4016032337621 | Audio extension cable, stereo 3.5mm, CCS, 2x0.10/10, shielded, M/F,bl | 3,0 m |
| | DK-510200-050-S | 4016032337638 | Audio extension cable, stereo 3.5mm, CCS, 2x0.10/10, shielded, M/F,bl | 5,0 m |
| | DK-510300-015-S | 4016032337560 | Audio connection cable, stereo 3.5mm - 2x RCA, CCS, 2x0.10/10, shielded, M/M,bl | 1,5 m |
| | DK-510300-025-S | 4016032337584 | Audio connection cable, stereo 3.5mm - 2x RCA, CCS, 2x0.10/10, shielded, M/M,bl | 2,5 m |
| | DK-510300-050-S | 4016032337591 | Audio connection cable, stereo 3.5mm - 2x RCA, CCS, 2x0.10/10, shielded, M/M,bl | 5,0 m |
| | DK-510300-100-S | 4016032337607 | Audio connection cable, stereo 3.5mm - 2x RCA, CCS, 2x 0.10/10, shielded, M/M,bl | 10,0 m |
| | DK-510400-002-S | 4016032337645 | Audio Y-splitter extension cable, stereo 3.5mm, CCS, 2x0.10/10, shielded, M/F,bl | 0,2 m |
| | DK-510500-000-S | 4016032337652 | Audio adapter, stereo 3.5mm - 2x stereo 3.5mmplastic housing, M/F,bl | - |
| | SCART | DK-490100-015-S | 4016032337669 | Scart connection cable, Scart 21pin, CCS, 21x6/0.1mm, shielded, M/M,bl |
| DK-490101-015-S | | 4016032337676 | Scart connection cable, Scart 21pin - 3x RCA, CCS, 1x0.4mm/2x0.10/10, shielded, M/M,bl, with I/O switch | 1,5 m |
| DK-490500-000-S | | 4016032337683 | Scart adapter, Scart 21pin - 3x RCA/SVHSplastic housing, with I/O switch, M/F,bl | - |





DIGITUS® CAT 6 Datendose, Unterputz

- Unterputz Design und horizontaler Kabeleingang sorgen für eine ordentliche Installation
- Gewährleistete Sicherheit durch komplett geschirmte RJ45-Buchsen und LSA-Leisten
- Die Buchsen sind um 40° gedreht, was das Einstecken von Patchkabeln vereinfacht

Technical Features

- CAT 6, EIA/TIA 568 und ISO/IEC 11801 / EN 50173
- Complete shielding of RJ45 sockets and LSA strips from enclosed metal die cast housing
- Integrated strain relief for installation cables
- 40° socket angle
- Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B

DIGITUS® CAT 6 wall outlet, flush mount

- Flush mount design and horizontal cable entry provide a neat installation
- Ensured safety due to completely shielded RJ45 sockets and LSA strips
- The sockets are angled by 40° which makes the plug in of patch cables very easy

- Frame 80x80 mm incl. central plate 50x50 mm according to DIN 49075
- Horizontal cable entry
- Color: Pure white



DN-9005-N 175711 | CAT 6 Outlet, flush mount



DIGITUS® CAT 6, Datendose, Aufputz, geschirmt

- Aufputz Design und horizontaler Kabeleingang sorgen für eine ordentliche und einfach zugängliche Installation
- Gewährleistete Sicherheit durch komplett geschirmte RJ45-Buchsen und LSA-Leisten
- Die Buchsen sind um 40° gedreht, was das Einstecken von Patchkabeln vereinfacht

Technical Features

- CAT 6, EIA/TIA 568 und ISO/IEC 11801 / EN 50173
- Complete shielding of RJ45 sockets and LSA strips from enclosed metal die cast housing
- Integrated strain relief for installation cables
- 40° socket angle
- Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B

DIGITUS® CAT 6, wall outlet, shielded, surface mount

- Surface mount design and horizontal cable entry provide a neat and easy accessible installation
- Ensured safety due to completely shielded RJ45 sockets and LSA strips
- The sockets are angled by 40° which makes the plug in of patch cables very easy

- Frame in 80x80 mm incl. central plate 50x50 mm according to DIN 49075
- Horizontal cable entry
- Color: Pure white



DN-9006-N 175735 | CAT 6 outlet, surface mount

DIGITUS® CAT 5e, Datendose, Unterputz

- Unterputz Design und horizontaler Kabeleingang sorgen für eine ordentliche Installation
- Gewährleistete Sicherheit durch komplett geschirmte RJ45-Buchsen und LSA-Leisten
- Die Buchsen sind um 40° gedreht, was das Einstecken von Patchkabeln vereinfacht

Technical Features

- CAT 5e, EIA TIA 568 and ISO IEC 11801 / EN 50173
- Complete shielding of RJ45 sockets and LSA strips from enclosed metal die cast housing
- Integrated strain relief for installation cables
- 40° socket angle
- Cable installation via LSA strips, color coded according to EIA/TIA 568 A & B
- Frame 80x80 mm incl. central plate 50x50 mm according to DIN 49075
- Horizontal cable entry
- Color: Pure white

DIGITUS® CAT 5e, wall outlet, flush mount

- Flush mount design and horizontal cable entry provide a neat installation
- Ensured safety due to completely shielded RJ45 sockets and LSA strips
- The sockets are angled by 40° which makes the plug in of patch cables very easy



DN-9001-N 175650 | CAT 5e outlet, flush mount

DIGITUS® CAT 5e, Datendose, geschirmt, Aufputz

- Aufputz Design und horizontaler Kabeleingang sorgen für eine ordentliche und einfach zugängliche Installation
- Gewährleistete Sicherheit durch komplett geschirmte RJ45-Buchsen und LSA-Leisten
- Die Buchsen sind um 40° gedreht, was das Einstecken von Patchkabeln vereinfacht

Technical Features

- CAT 5e, EIA TIA 568 and ISO IEC 11801 / EN 50173
- Complete shielding of RJ45 sockets and LSA strips from enclosed metal die cast housing
- Integrated strain relief for installation cables
- 40° socket angle
- Cable installation via LSA strips, colour codes based on EIA/TIA 568 A & B
- Frame 80x80 mm incl. central plate 50x50 mm according to DIN 49075
- Color: Pure white

DIGITUS® CAT 5e, wall outlet, shielded, surface mount

- Surface mount design and horizontal cable entry provide a neat and easy accessible installation
- Ensured safety due to completely shielded RJ45 sockets and LSA strips
- The sockets are angled by 40° which makes the plug in of patch cables very easy



DN-9002-N 175681 | CAT 5e outlet, surface mount

DIGITUS® CAT 6 Verbindungsmodul für Twisted Pair Kabel



- Die perfekte CAT 6 Lösung um zwei Twisted Pair Kabel miteinander zu verbinden
- Erweitern Sie Ihre IT-Infrastruktur oder ersetzen Sie beschädigte Kabel ohne den gesamten Verkabelungsabschnitt neu installieren zu müssen
- Einfache Kabelinstallation möglich durch farbcodierte LSA-Leisten

DIGITUS® CAT 6 Connection module for Twisted Pair Cables

- The perfect CAT 6 solution to connect two Twisted Pair Cables
- Extend your IT infrastructure or use it for an easy replacement of a broken cable without installation a whole new segment
- Easy wire installation possible due to color coded LSA strips

Technical Features


- Material enclosure: Zinc diecast
- Material surface: Bronze with shining Nickel
- Connection over LSA strips
- Integrated strain relief
- Shielded
- LSA EIA/TIA 568 A & B
- Cable entry: up to 6.8 mm
- Diameter Cu-Conductor: AWG (26/1 ... 22/1)

- Temperature range: -40°C ... +80°C
- Current carrying capacity: 1A at 50°C
- Material IDC Terminal: Phosphor bronze with 50 µm tin plated over 60 µm nickel plated
- Material PCB: FR4, 1.2 mm thickness
- Workable with 110- and KRONE LSA punch down tools



AT-ALSA6-M 132837 | CAT 6 Connection Module for Twisted Pair Cables

DIGITUS® CAT 5e Verbindungsmodul für Twisted Pair Kabel



- Die perfekte CAT 5e Lösung um zwei Twisted Pair Kabel miteinander zu verbinden
- Erweitern Sie Ihre IT-Infrastruktur oder ersetzen Sie beschädigte Kabel ohne den gesamten Verkabelungsabschnitt neu installieren zu müssen
- Einfache Kabelinstallation möglich durch farbcodierte LSA-Leisten

DIGITUS® CAT 5e Connection module for Twisted Pair Cables

- The perfect CAT 5e solution to connect two Twisted Pair Cables
- Extend your IT infrastructure or use it for an easy replacement of a broken cable without installation a whole new segment
- Easy wire installation possible due to color coded LSA strips

Technical Features

- Material enclosure: ABS non halogen, UL 94 V0
- Connection over LSA strips
- Integrated strain relief
- Shielded
- LSA EIA/TIA 568 A & B
- Cable entry: up to 6.8 mm
- Diameter Cu-Conductor: AWG (26/1 ... 22/1)

- Temperature range: -40°C ... +80°C
- Current carrying capacity: 1A at 50°C
- Material IDC Terminal: Phosphor bronze with 50 µm tin plated over 60 µm nickel plated
- Material PCB: FR4, 1.2 mm thickness
- Workable with 110- and KRONE LSA punch down tools



DN-93902 266495 | CAT 5e Connection module for Twisted Pair Cables

DIGITUS® CAT 6, modulare Kupplung

- **Schnelle und einfache Verlängerung von Patchkabeln**
- **Die RJ45-Buchsen sind geschirmt und bieten so optimale Sicherheit**
- **Die Kupplung bietet eine lange Lebensdauer (Steckzyklen)**

Technical Features

- 2 x RJ45 female
- Shielded: Bronze with Nickel plated
- PCB:FR4, UL 94V-0
- Contacts coating: Nickel, gold plated 0.6 µ
- Material contacts: Phosphor bronze

DIGITUS® CAT 6, modular couplers

- **Quick and easy extention of patch cables**
- **The RJ45 sockets are shielded which provides optimized safety**
- **The coupler offers a long life time (mating cycles)**

- Life (mating cycles): ≥ 750 (ISO/IEC 11801, IEC 60603-7-5)
- Operating temperature: -10 °C ~ +60 °C
- Tested according to Link Performance CAT 6 CLASS E for up to 250 MHz, EN 50173, ISO/IEC 11801



AT-AG 8/8 C6S 229032 | CAT 6, modular coupler, shielded

DIGITUS® CAT 5e, RJ45 Modular Kupplung

- **Schnelle und einfache Verlängerung von Patchkabeln**
- **Die RJ45-Buchsen sind geschirmt und bieten so optimale Sicherheit**
- **Die Kupplung bietet eine lange Lebensdauer (Steckzyklen)**

Technical Features

- CAT 5e modular coupler for connection of shielded CAT 5e patch cables, configuration 1:1, metal shielded case.
- 2 x RJ45 female
- Assignment: 1:1
- Shielded version
- Material enclosure: ABS non halogen, UL 94 V0

DIGITUS® CAT 5e, RJ45 Modular Coupler

- **Quick and easy extention of patch cables**
- **The RJ45 sockets are shielded which provides optimized safety**
- **The coupler offers a long life time (mating cycles)**

- Material PCB: FR4, 1.2 mm thickness
- Contacts coating: Nickel, gold plated 0.6 µ
- Material contacts: Phosphor bronze
- Mating cycles: ≥ 750
- Operating temperature: -40 °C ~ +80 °C



DN-93901 266488 | CAT 5e RJ45 Modular Coupler

DIGITUS® Klettband für strukturierte Verkabelung


- Strukturieren Sie Ihre Verkabelung auf einfache und effiziente Weise
- Das Klettband sitzt dicht und gleichmäßig an und übt keinen starken Druck auf die Kabel aus - perfekt für empfindliche Installationen
- Wiederverwendbar

DIGITUS® Velcro Tape for structured cabling

- Structure your cabling in an easy and efficient way
- The tape fits close and regularly and doesn't put too much pressure on the cable - perfect for sensitive installations
- Re-usable

Technical Features

- 20 mm wide
- 10 m overall length
- Color black
- Multiple use possible

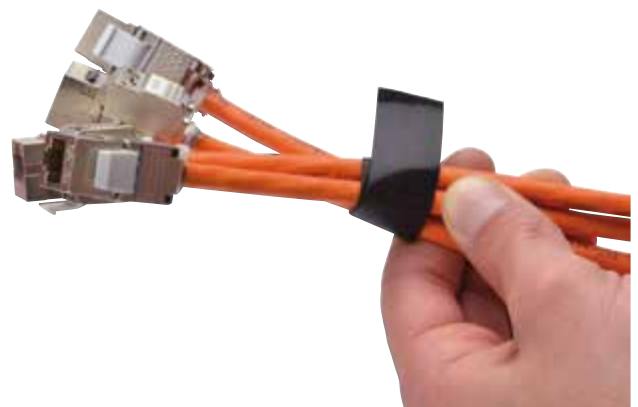

DIGITUS® Netzwerk-Werkzeugset

- Alle notwendigen Werkzeuge für die Vorortinstallation in einem Set
- Sicher verpackt in Textiltasche
- Handliches Design - einfach überall hin mitzunehmen

Technical Features

- LAN-Tester RJ11, 12 and 45
- LSA Punch Down Tool with cable cutter
- Crimping Tool RJ11, 12 and 45
- Cut and Stripping Tool
- Textile bag

DIGITUS® Network Tool Set

- All necessary tools for field installation in one set
- Safely packed in a textile bag
- Handy design - take it everywhere easily



DN-94022 348849 | Network tool set, bag incl. various tools

DIGITUS® Seitenschneider

- Unisoliert
- Tragen Sie einen Augenschutz
- Benutzen Sie das Werkzeug mit Sorgfalt für Ihre Sicherheit

Technical Features

- Compact design
- Sharp pliers
- Cutting area: 9.45 mm hole
- Precision cutting for soft wire and hard wire
- Non-insulated

DIGITUS® Pliers

- Non insulated
- Wear eye protection
- Use it with care for your safety



DN-94014 342328 | Pliers, compact & ergonomic design

DIGITUS® LSA Auflegewerkzeug

- Mit Ausziehhaken und Entriegelungsklinge
- Dieses Werkzeug sorgt für eine einfache Installation sowie Abschneiden überstehender Kabelenderenden auf LSA-Blöcken
- Lieferung inkl. Kunstledertasche

Technical Features

- Punch Down Tool for LSA strips
- Cable insulation and cutting of the extending cable ends
- Includes synthetic leather carry case
- Includes Extraction- and Unlocking Device

DIGITUS® LSA punch tool

- Includes Extraction- and Unlocking Device
- This tool easily crimps and cuts wires onto the LSA termination head
- Delivery incl. synthetic leather carry case



DN-LSA-PT 206569 | LSA punch down tool

DIGITUS® Professional CAT 7, S-FTP Twisted Pair Installationskabel, LSZH-1

- 4 x 2 x AWG23 S-FTP CAT 7 1200 MHz LSZH-1, Installationskabel
- Geeignet für die strukturierte Gebäudeverkabelung im sekundären und tertiären Bereich
- Konform zu den Normen ISO/IEC 11801, DIN EN 50173, DIN EN 50288-9-1



Technical Features

- Basic conductor: Solid AWG 23/1; bare annealed copper 0.57 mm nom
- Insulation: SFS-PO
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Individual pair shielding: aluminum foil, providing 100 % coverage

DIGITUS® Professional CAT 7, S-FTP, Twisted Pair Installation Cable, LSZH-1

- 4 x 2 x AWG23 S-FTP CAT 7 1200 MHz LSZH-1, Installation cable
- Suitable for building structured cabling in the secondary an tertiary area
- Conforming to ISO/IEC 11801, DIN EN 50173, DIN EN 50288-9-1

- Overall shielding: tin-coated copper wire braid, 35% nom. coverage, drain wire
- Outer jacket: Low-smoke, zero-halogen, flame retardant, non corrosive compound for indoor use
- Outer jacket, thickness: 0.6 mm nom.
- Color: Orange (RAL 2000)
- Overall diameter: 7.5 mm mom.

DK-1741-VH-1 247449 | Professional CAT 7 S-FTP twisted pair installation cable

DIGITUS® Professional CAT 7, Klasse F, S-FTP, Twisted Pair Installationskabel, LSZH-1, Duplex

- 4 x 2 x AWG23 S-FTP CAT 7 1200 MHz LSZH-1, Installationskabel
- Geeignet für die strukturierte Gebäudeverkabelung im sekundären und tertiären Bereich
- Konform zu den Normen ISO/IEC 11801, DIN EN 50173, DIN EN 50288-9-1



Technical Features

- Basic conductor: Solid AWG 23/1; bare annealed copper 0.57 mm nom
- Insulation: SFS-PO
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Individual pair shielding: aluminum foil, providing 100 % coverage
- Overall shielding: tin-coated copper wire braid, 35%

DIGITUS® Professional CAT 7, Class F, S-FTP, Twisted Pair Installation Cable, LSZH-1, Duplex

- 4 x 2 x AWG23 S-FTP CAT 7 1200 MHz LSZH-1, Installation cable
- Suitable for building structured cabling in the secondary an tertiary area
- Conforming to ISO/IEC 11801, DIN EN 50173, DIN EN 50288-9-1

- nom. coverage, drain wire
- Outer jacket: Low-smoke, zero-halogen, flame retardant, non corrosive compound for indoor use
- Outer jacket, thickness: 0.6 mm nom.
- Color: Orange (RAL 2000)
- Overall diameter: 7.5 mm mom.

DK-1741-VH-D-1 302292 | Professional CAT 7 S-FTP twisted pair installation cable

**DIGITUS® Professional
CAT 6_A, U-FTP, Twisted Pair
Installationskabel, LSZH-1**

- 4 x 2 x AWG23 U-FTP CAT 6_A 500 MHz LSZH-1, Installationskabel
- Geeignet für die strukturierte Gebäudeverkabelung im sekundären und tertiären Bereich
- Konform zu den Normen ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1

**DIGITUS® Professional CAT 6_A,
U-FTP, Twisted Pair Installation
Cable, LSZH-1**

- 4 x 2 x AWG23 U-FTP CAT 6_A 500 MHz LSZH-1, Installation cable
- Suitable for building structured cabling in the secondary an tertiary area
- Conforming to ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1

Technical Features

- | | |
|--|---|
| <ul style="list-style-type: none"> • Basic conductor: Solid AWG 23/1; bare annealed copper 0.55 mm nom • Insulation: HD-PE • Total number of insulated conductors: 8, twisted in 4 pairs • Individual pair shielding: none • Overall shielding: aluminum foil, providing 100 % coverage, drain wire | <ul style="list-style-type: none"> • Outer jacket: Low-smoke, zero-halogen, flame retardant, non corrosive compound for indoor use • Outer jacket, thickness: 0.6 mm nom. • Color: Purple • Overall diameter: 7.0 mm nom. |
|--|---|



DK-1623-A-VH-1 344117 | Professional CAT 6_A U-FTP twisted pair installation cable

**DIGITUS® Professional
CAT 6, F-UTP, Twisted Pair
Installationskabel, LSZH-1**

- 4 x 2 x AWG23 F-UTP CAT 6 250 MHz LSZH-1, Installationskabel
- Geeignet für die strukturierte Gebäudeverkabelung im sekundären und tertiären Bereich
- Konform zu den Normen ISO/IEC 11801, DIN EN 50173, DIN EN 50288-5-1

**DIGITUS® Professional CAT 6,
F-UTP, Twisted Pair Installation
Cable, LSZH-1**

- 4 x 2 x AWG23 F-UTP CAT 6 250 MHz LSZH-1, Installation cable
- Suitable for building structured cabling in the secondary an tertiary area
- Conforming to ISO/IEC 11801, DIN EN 50173, DIN EN 50288-5-1

Technical Features

- | | |
|--|---|
| <ul style="list-style-type: none"> • Basic conductor: Solid AWG 23/1; bare annealed copper 0.55 mm nom • Insulation: HD-PE • Total number of insulated conductors: 8, twisted in 4 pairs • Individual pair shielding: none • Overall shielding: aluminum foil, providing 100 % coverage, drain wire | <ul style="list-style-type: none"> • Outer jacket: Low-smoke, zero-halogen, flame retardant, non corrosive compound for indoor use • Outer jacket, thickness: 0.6 mm nom. • Color: Purple • Overall diameter: 7.0 mm nom. |
|--|---|



DK-1623-VH-1 344117 | Professional CAT 6_A U-FTP twisted pair installation cable

DIGITUS® CAT 6 S-FTP Patchkabel

- LSOH, AWG 27/7
- ISO/IEC 11801 & TIA/EIA 568-B
- Betriebstemperatur: -20 bis +60 °C
- Flammtest Standard: IEC 60332-1, IEC 60332-3, IEC 61034
- Geschirmt

DIGITUS® CAT 6 S-FTP patch cable

- LSOH, AWG 27/7
- ISO/IEC 11801 & TIA/EIA 568-B
- Operating temperature: -20 up to +60 °C
- Flame test standard: IEC 60332-1, IEC 60332-3, IEC 61034
- Shielded




| Length/Color | Grey | Blue | Black | Green | Magenta | Orange | Red | Violet | Yellow |
|--------------|------------------------|--------------------------|---------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| 0.25 m | DK-1644-0025 321477 | DK-1644-0025/B 321484 | DK-1644-0025/BL 321491 | DK-1644-0025/G 321507 | --- | --- | DK-1644-0025/R 321514 | --- | DK-1644-0025/Y 321538 |
| 0.50 m | DK-1644-005 321545 | DK-1644-005/B 321569 | DK-1644-005/BL 321576 | DK-1644-005/G 321583 | --- | DK-1644-005/OR 328735 | DK-1644-005/R 321590 | --- | DK-1644-005/Y 321613 |
| 1.00 m | DK-1644-010 321620 | DK-1644-010/B 321637 | DK-1644-010/BL 321644 | DK-1644-010/G 321651 | DK-1644-010/MG 328766 | DK-1644-010/OR 328773 | DK-1644-010/R 321668 | --- | DK-1644-010/Y 321699 |
| 2.00 m | DK-1644-020 321712 | DK-1644-020/B 321729 | DK-1644-020/BL 321743 | DK-1644-020/G 321767 | DK-1644-020/MG 328797 | --- | DK-1644-020/R 321781 | DK-1644-020/VI 328810 | DK-1644-020/Y 321828 |
| 3.00 m | DK-1644-030 321842 | DK-1644-030/B 321866 | DK-1644-030/BL 321880 | DK-1644-030/G 321897 | DK-1644-030/MG 328834 | --- | DK-1644-030/R 321910 | --- | DK-1644-030/Y 321941 |
| 5.00 m | DK-1644-050 321996 | DK-1644-050/B 322016 | DK-1644-050/BL 322009 | DK-1644-050/G 322023 | --- | --- | DK-1644-050/R 322030 | --- | DK-1644-050/Y 322054 |
| 7.00 m | DK-1644-070 322061 | --- | DK-1644-070/BL 322085 | DK-1644-070/G 322108 | --- | --- | DK-1644-070/R 322115 | --- | DK-1644-070/Y 322146 |
| 10.00 m | DK-1644-100 322160 | --- | DK-1644-100/BL 322214 | DK-1644-100/G 322221 | --- | --- | DK-1644-100/R 322245 | --- | DK-1644-100/Y 322276 |
| 15.00 m | DK-1644-150 322290 | --- | --- | --- | --- | --- | --- | --- | --- |
| 20.00 m | DK-1644-200 327943 | --- | --- | --- | --- | --- | --- | --- | --- |
| 25.00 m | DK-1644-250 328025 | --- | --- | --- | --- | --- | --- | --- | --- |
| 30.00 m | DK-1644-300 328087 | --- | --- | --- | --- | --- | --- | --- | --- |

DIGITUS® CAT 5e SF-UTP Patchkabel

- PVC, AWG 26/7
- ISO/IEC 11801 & TIA/EIA 568-B
- Betriebstemperatur: -20 bis +60 °C
- Geschirmt

DIGITUS® CAT 5e SF-UTP patch cable

- PVC, AWG 26/7
- ISO/IEC 11801 & TIA/EIA 568-B
- Operating temperature: -20 up to +60 °C
- Shielded

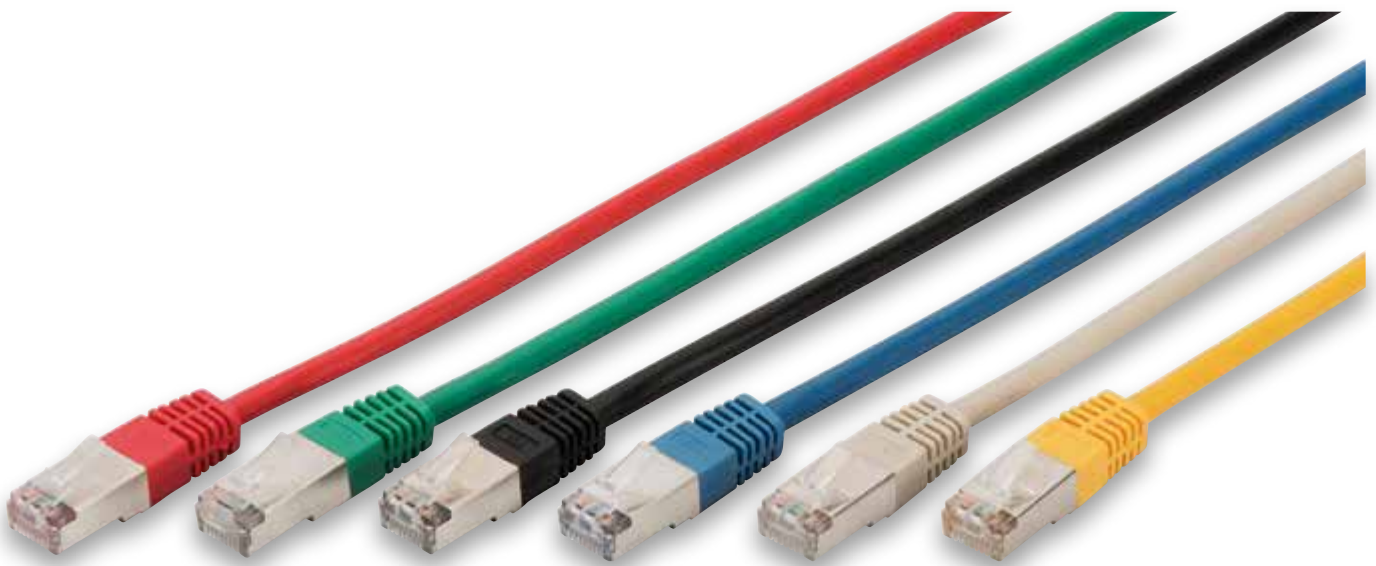

| Length/Color | Grey | Blue | Black | Green | Red | Yellow |
|--------------|-----------------------|-------------------------|--------------------------|-------------------------|-------------------------|-------------------------|
| 0.50 m | DK-1532-005 198703 | DK-1532-005/B 199618 | DK-1532-005/BL 321057 | DK-1532-005/G 199649 | DK-1532-005/R 199625 | DK-1532-005/Y 199632 |
| 1.00 m | DK-1532-010 199656 | DK-1532-010/B 199731 | DK-1532-010/BL 321163 | DK-1532-010/G 200000 | DK-1532-010/R 199816 | DK-1532-010/Y 199922 |
| 2.00 m | DK-1532-020 199663 | DK-1532-020/B 199748 | DK-1532-020/BL 321323 | DK-1532-020/G 200024 | DK-1532-020/R 199823 | DK-1532-020/Y 199939 |
| 3.00 m | DK-1532-030 199670 | DK-1532-030/B 199755 | DK-1532-030/BL 321408 | DK-1532-030/G 200048 | DK-1532-030/R 199830 | DK-1532-030/Y 199946 |
| 5.00 m | DK-1532-050 199687 | DK-1532-050/B 199762 | DK-1532-050/BL 321552 | DK-1532-050/G 200055 | DK-1532-050/R 199847 | DK-1532-050/Y 199953 |
| 10.00 m | DK-1532-100 199700 | --- | --- | --- | --- | --- |
| 15.00 m | DK-1532-150 199717 | --- | --- | --- | --- | --- |
| 20.00 m | DK-1532-200 199724 | --- | --- | --- | --- | --- |
| 30.00 m | DK-1532-300 321378 | --- | --- | --- | --- | --- |



NOTIZEN // NOTES



 **Unterwegs lesen**
Read on the road



ASSMANN Germany

ASSMANN Electronic GmbH
Auf dem Schüttel 3
D-58513 Lüdenscheid

Tel+49 / 23 51 / 5 54-0
Fax+49 / 23 51 / 5 54 99-865
E-Mail info@assmann.com
Internet www.assmann.com



ASSMANN Austria

ASSMANN Electronic Ges.mbH
Gewerbepark 8
A-8401 Kalsdorf / Graz

Tel+43 / 31 35 / 5 44 33-0
Fax+43 / 31 35 / 5 44 33-22
E-Mail office@assmann24h.at
Internet www.assmann24h.at



ASSMANN France

ASSMANN Electronic France
Immeuble le Mandinet
13, Place des Libertes Publiques
F-77185 Lognes

Tel+33 / 1 / 60 17 91 51
Fax+33 / 1 / 64 80 44 73
E-Mail info@assmann.fr
Internet www.assmann.com



ASSMANN Poland

ASSMANN Distribution Sp. z o.o.
ul. Szczecinska 17-21
PL-54-517 Wroclaw

Tel+48 / 71 / 3 26 71 40
Fax+48 / 71 / 3 26 71 41
E-Mail office@assmann.pl
Internet www.assmann.pl



ASSMANN Croatia

ASSMANN Electronic D.O.O.
Radnicka cesta 220
HR-10000 Zagreb

Tel+385 / 1 / 4 66 03 08
Fax+385 / 1 / 4 66 03 09
E-Mail info@assmann.hr
Internet www.assmann.hr



ASSMANN Switzerland

ASSMANN IT-Solutions AG
Europastrasse 15
CH-8152 Glatbrugg

Tel+41 / 43 501 / 39 00
Fax+41 / 43 501 / 39 01
E-Mail info@assmann-it.ch
Internet www.assmann-it.ch



ASSMANN Taiwan

ASSMANN Electronic Branch Office
3F, No. 61, Dongxing Road, Xingyi Dist.
110 Taipei/Taiwan

Tel+886 / 2 / 87 68 24 88
Fax+886 / 2 / 87 68 24 82
E-Mail info@assmann.com.tw
Internet www.assmann.com



ASSMANN China

ASSMANN Electronic China Branch
Room 2C, 2F, Jin Lian Xuan, Lotus Plaza, No.126
De Zheng Zhong RD. Changan Town,
Dongguan City, Guangdong 523847, China

Tel+86 / 769 / 85 42 62 - 01 and 02
Fax+86 / 769 / 85 42 62 00
E-Mail info@assmann.com.tw
Internet www.assmann.com

All stated cable lengths can differ by up to ± 5 %. Distribution and reproduction of this document is not permitted unless expressly authorized. Infringements shall lead to claims for compensation. Because of the rapidly changing market requirements, our product selection is constantly being reworked and updated. For this reason, information is subject to technical changes where necessary. Design differences from the catalogue images are also reserved. Delivery while stocks last. We do not accept liability for printing errors and mistakes.

www.assmann.com

YOUR BRAND

Avery Zweckform 3481 // 70 x 41 mm

All stated cable lengths can differ by up to $\pm 5\%$. Distribution and reproduction of this document is not permitted unless expressly authorized. Infringements shall lead to claims for compensation. Because of the rapidly changing market requirements, our product selection is constantly being reworked and updated. For this reason, information is subject to technical changes where necessary. Design differences from the catalogue images are also reserved. Delivery while stocks last. We do not accept liability for printing errors and mistakes.

BACKCOVER

with individual adress field!