

### Overview

Hewlett Packard's StorageWorks 2000 Family of storage arrays features P2000 G3 MSA arrays with the latest 8Gb Fibre Channel, 6Gb SAS, and 10GbE iSCSI connected models, along with the MSA2000i G2 1GbE iSCSI model. The arrays are designed for entry-level customers and feature the latest in functionality and host-connect technology while offering excellent price/performance. They are ideal for companies with small budgets or limited IT expertise, and also larger companies with departmental or remote requirements. Each solution is designed to be easy to deploy, to be secure, along with low management costs, while driving rapid return on investment through efficient storage consolidation.

The P2000 G3 arrays are 2U storage area network (SAN) or direct connect solutions (OS and protocol dependent) offering a choice of four controllers - two FC, one SAS, and the newest model features 10GbE iSCSI. The first Fibre Channel controller is a high-performance, 8 Gb dual port model. The second offering is a unique dual-purpose Combo controller with two 8 Gb Fibre Channel ports with the addition of two 1GbE iSCSI ports. The third controller choice is 6Gb SAS with four ports per controller. The latest controller introduction features two 10GbE iSCSI ports per controller.

The dual-protocol P2000 G3 MSA FC/iSCSI Combo Controller gives exceptional flexibility. The 8 Gb FC ports support a full FC SAN while the two 1GbE iSCSI ports can serve two purposes. With this combination you can economically share the array storage resource with a smaller department accessing it over iSCSI or enable the new optional Remote Snap functionality over iSCSI protocol (also available over FC).

The P2000 G3 SAS is the follow-on product to the MSA2000sa G2, adding the latest 6 Gb SAS technology to the four host ports per controller. The P2000 G3 SAS array is designed for directly attaching up to four dual-path or eight single path rack servers. SAS array support for BladeSystems will continue to come from the MSA2000sa G2.

The most recent addition is the P2000 G3 10GbE iSCSI, bringing the very latest in high-performance host connection with technology generally found only in higher priced arrays. The bandwidth it provides in conjunction with server consolidation is highly advantageous in shared storage configurations. Array connection to 10GbE switches that are in turn connected to 1GbE NICs is commonplace. Directly attached server support requires the units to have 10GbE NICs.

All P2000 G3 models can be equipped with single or dual controllers, feature the same scalability, and offer 6 Gb SAS back-end transmission speed to drives and JBODs. Significant data protection advances are delivered by the all P2000 G3 arrays. First, all G3 units come STANDARD with sixty-four snapshot capability at no extra cost and there is an option for the G3 series of five hundred and twelve snapshots. Volume copy (clone) also comes standard. In a further move to protect the user's data, optional Remote Snap (replication) capability is offered on the FC or FC/iSCSI versions (only).

The controller-less P2000 chassis is offered in two models - one comes standard with twelve Large Form Factor (LFF) 3.5-inch drive bays, the other can accommodate twenty-four Small Form Factor (SFF) 2.5-inch drives. Both are able to simultaneously support enterprise-class SAS drives, SAS Midline, and archival-class SATA Midline drives. Either chassis can have one or two matching P2000 G3 controllers (same protocol) and are available with AC or DC power Supplies.


The HP modular approach to entry level SAN solutions enables incremental customer purchases, allowing the array to grow as needs grow, thus allowing a maximum return on investment. Choose a single controller unit for low initial cost with the ability to upgrade later; or decide on a model with dual controllers for the most demanding entry-level situations. There are no unexpected additional charges, licenses or fees as you add enclosures or hosts and users.

Capacity can easily be added as the need develops by attaching additional drive enclosures. Maximum capacity ranges with LFF drives up to 57.6 TB SAS or 192 TB SAS Midline or SATA Midline with the addition of the maximum number of drive enclosures. Configurations utilizing the SFF drive chassis and the maximum number of drive enclosures can grow to 44.7 TB of SAS or 74.5 TB of SAS Midline or SATA Midline with a total of 96 LFF or 149 SFF drives.


### Overview

### What's New in the P2000 G3 array family


- A new G3 iSCSI controller with two 10GbE Ethernet ports per controller.

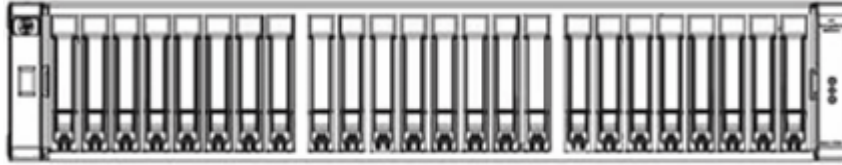

HP StorageWorks P2000 G3 SFF Modular Smart Array

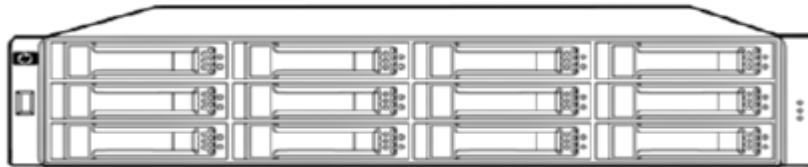


HP StorageWorks P2000 G3 LFF Modular Smart Array

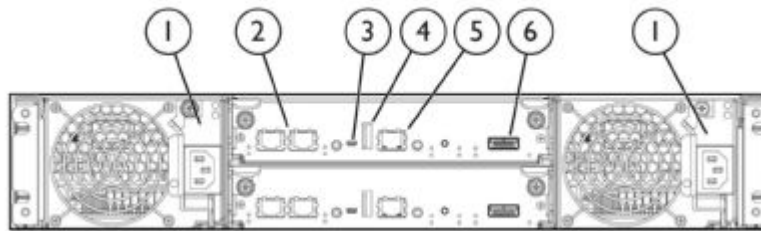

#### P2000 G3 FC Controllers, 2 installed


- |                             |                             |
|-----------------------------|-----------------------------|
| 1. Power supplies           | 4. Reserved for future use  |
| 2. 8 Gb Fibre Channel ports | 5. Management Ethernet port |
| 3. CLI port (mini-USB)      | 6. Expansion port           |

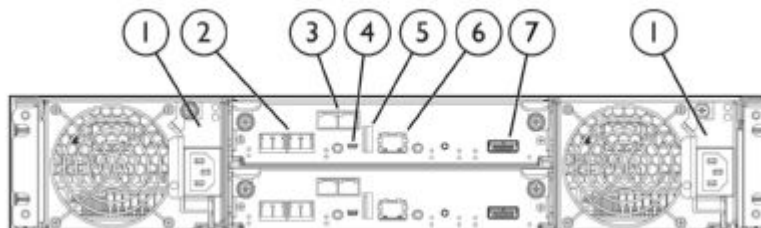

#### P2000 G3 FC/iSCSI Combo Controllers, 2 installed


- |                             |                             |
|-----------------------------|-----------------------------|
| 1. Power supplies           | 5. Reserved for future use  |
| 2. 8 Gb Fibre Channel ports | 6. Management Ethernet port |
| 3. 1GbE iSCSI ports         | 7. Expansion port           |
| 4. CLI port (mini-USB)      |                             |

### Overview

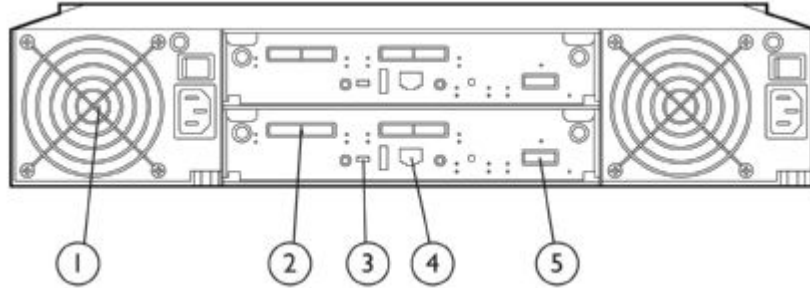

#### **P2000 G3 SAS controllers, 2 installed**

1. Power supplies
2. 6Gb SAS ports (four per controller)
3. CLI port (mini-USB)
4. Management Ethernet port
5. Expansion port

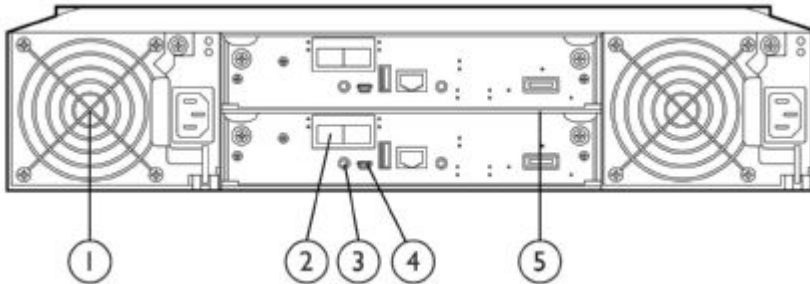

#### **P2000 G3 10GbE iSCSI controllers, 2 installed**

1. Power supplies
2. 10GbE iSCSI ports
3. CLI port (mini-USB)
4. Management Ethernet port
5. Expansion port

### Models

<b>StorageWorks P2000 G3 Modular Smart Array</b>	<b>P2000 G3 Fibre Channel Controllers</b>	
	HP StorageWorks P2000 G3 FC Modular Smart Array Controller (two 8Gb FC ports per controller)	AP836A
	HP StorageWorks P2000 G3 FC/iSCSI Combo Modular Smart Array Controller (two 8Gb FC ports and two 1GbE iSCSI ports per controller)	AP837A
	<b>P2000 G3 SAS Controller</b>	
	HP StorageWorks P2000 G3 SAS MSA Array System Controller (four 6Gb SAS ports per controller)	AW592A
	<b>P2000 G3 10GbE iSCSI controller</b>	
	HP P2000 G3 10GbE iSCSI MSA Controller (two 10GbE iSCSI ports per controller)	AW595A
	<b>P2000 Controller-less Chassis (AC-powered)</b>	
	HP StorageWorks P2000 Modular Smart Array 3.5-in Drive Bay Chassis (LFF) (Will accept one or two controllers or Disk Enclosure I/O modules)	AP838A
	HP StorageWorks P2000 Modular Smart Array 2.5-in Drive Bay Chassis (SFF) (Will accept one or two controllers, not I/O modules)	AP839A
	<b>Configured Units, 8 Gb Fibre Channel Systems</b>	
	HP StorageWorks P2000 G3 MSA FC Dual Controller LFF Modular Smart Array System	AP845A
	HP StorageWorks P2000 G3 MSA FC Dual Controller SFF Modular Smart Array System	AP846A
	HP StorageWorks P2000 G3 MSA FC/iSCSI Dual Combo Controller LFF Modular Smart Array System	AW567A
	HP StorageWorks P2000 G3 MSA FC/iSCSI Dual Combo Controller SFF Modular Smart Array System	AW568A
	<b>Configured Units, 6 Gb SAS Systems</b>	
	HP StorageWorks P2000 G3 SAS MSA Dual Controller LFF Array System	AW593A
	HP StorageWorks P2000 G3 SAS MSA Dual Controller SFF Array System	AW594A
	<b>P2000 G3 FC SAN Starter Kits</b>	
	HP StorageWorks P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit (includes dual 8 Gb FC controllers, 12-drive bay LFF chassis, two 8-port 8 Gb switches, four 8 Gb single-port HBAs, SFPs and cables)	AP847A
	HP StorageWorks P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit (includes dual 8 Gb controllers, 24-drive bay SFF chassis, two 16-port 8 Gb switches, six 8 Gb single-port HBAs, SFPs and cables)	AP848A
<b>Configured Units, 10GbE iSCSI Systems</b>		
HP StorageWorks P2000 G3 10GbE iSCSI MSA Dual Controller LFF Array System	AW596A	
HP StorageWorks P2000 G3 10GbE iSCSI MSA Dual Controller SFF Array System	AW597A	
<b>Disk Enclosures</b>		
HP StorageWorks P2000 Dual I/O LFF Drive Enclosure, twelve 3.5" drive bays (w/ two .5m mini-SAS to mini-SAS cables. Used with single or dual controller LFF or SFF array head)	AP843A	

### Models

HP StorageWorks P2000 LFF Drive Enclosure I/O Module (no cable included. Designed exclusively for use with the LFF chassis AP838A to create a single I/O JBOD)	AJ844A
HP StorageWorks D2700 SFF Disk Enclosure, twenty-five 2.5" drive bays (w/ two .5m mini-SAS to mini-SAS cables. Used with single or dual controller LFF or SFF array head)	AJ941A
<b>Controller-less Chassis (DC-powered)</b>	
HP StorageWorks P2000 DC-power LFF Chassis (can add one or two P2000 G3 FC or SAS controllers or P2000 JBOD I/O modules)	AP840A
HP StorageWorks P2000 DC-power SFF Chassis (can add one or two P2000 G3 FC or SAS controllers. No P2000 JBOD I/O module support)	AP841A
<b>Related Option: MSA2000 G2 controllers</b> (Previous generation) (for use only by those needing to configure a prior model MSA2000fc G2 or MSA2000sa G2 array. Only supports G2 features, functionalities. Maximum 99 SFF or 60 LFF drives, 256 snaps, no Remote Snap)	
HP StorageWorks 2300fc G2 Modular Smart Array Controller (limited use)	AJ798A
HP StorageWorks 2300sa G2 Modular Smart Array Controller (limited use)	AJ808A

### Features

#### Key Features

The HP StorageWorks P2000 G3 Modular Smart Array family encompasses four controllers, each featuring different protocols or combination of protocols to match the exact needs of the user.

- P2000 G3 FC/iSCSI Combo MSA controller: this unique controller offers both 8 Gb Fibre Channel and 1 GbE iSCSI functionalities built into a single array controller. This allows customers to enable storage needing high performance thru the FC ports while leveraging their SAN investment by sharing the array resources with smaller departments through low-cost iSCSI. It also enables optional Remote Snap (replication) for data protection.
- P2000 G3 FC MSA controller: Dual 8Gb Fibre Channel host ports per controller give high performance with a mature topology and is compatible with the largest installed base of SAN users.
- P2000 G3 10GbE iSCSI MSA controller: HP is the first of the major modular array manufacturers that brings a high performance dual-ported 10GbE iSCSI solution to the entry level segment. Ideal for those who want to utilize cost-effective Ethernet as their infrastructure without sacrificing access time to their data.
- P2000 G3 SAS MSA controller: the P2000 G3 SAS model gives fast 6 Gb transmission rates with low cost SAS connections. Four host ports per controller support a highly efficient direct connect configuration.

---

#### All P2000 G3 models offer a common set of valuable features:

- Ease of management featuring browser-based out-of-band access. This allows a department or small company to effectively handle growing storage requirements, with the aid of an intuitive GUI to administer the unit with a minimum of complexity. Ideal for local or remote installations.
- All G3 models come standard with 64 controller-based snapshots and clone capability. The G3 arrays also support an optional 512 snaps.
- Choose either a low-cost single controller array or start with a configured dual controller array model to fit the budget and performance needs.
- All models feature a wide variety of drives: enterprise-class SAS, SAS Midline, and archival-class SATA Midline in either P2000 LFF 3.5-inch or HP ProLiant SFF 2.5-inch drives.
- P2000 G3 models can have a maximum number of P2000 LFF drive enclosures (7), a maximum number of D2700 SFF enclosures (5), or mix both sizes. The array can grow incrementally from a few drives to 57.6 TB SAS or 192 TB of SAS MDL or SATA MDL.
- 2 GB transportable read/write cache per controller. Battery-free cache backup with super capacitors and compact flash
- 512 LUNs with LUN size up to 16TB
- Upgradable by design. Owners of an original MSA2000 G1 or G2 array are able to do data-in-place controller upgrades to the P2000 G3 FC, Combo FC/iSCSI, 10GbE iSCSI, or P2000 G3 SAS. Cross protocol upgrades are also supported between the protocols. This unique ability protects the earlier investments in chassis, drives, and JBODs

Follow us on twitter and be a part of the conversation, and get the latest P2000 G3/MSA related news and information at:

<http://www.twitter.com/MSAstorage>

---

#### HP P2000 G3 FC MSA SAN Starter Kits

The new P2000 G3 FC MSA SAN Starter kits are offered to simplify ordering and implementation of your SAN. HP includes all the necessary hardware components to build your own SAN solution in one package, just add the drives of your choice. These kits are offered at very affordable prices which reflects a savings over purchasing each SAN component separately.

##### Virtualization SAN Starter Kit

The HP StorageWorks P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit addresses the growing need for server and storage administrators to deliver end-to-end storage, virtualization, and management capabilities across their network infrastructure. The hardware bundle consists of six Host Bus Adapters (HBAs), two FC switches, a P2000 G3 FC MSA Dual Controller Array

### Features

(SFF Chassis) as well as two licenses per switch enabling Server Application Optimization (SAO) and Adaptive Networking (AN). SAO is an adapter technology that offers Quality of Service (QoS) capabilities that can be used in conjunction with fabric wide QoS and AN to enable a high performing, virtualized infrastructure. With SAO deployed, administrators can protect a VM and its application by assigning its IO flow to a specific priority level. The QoS priorities are enforced at the hardware level, thereby providing adequate bandwidth during periods of high congestion. Applications such as email and databases achieve better performance when deployed in specific SAO and MSA configurations.

HP P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit

AP848A

### Small Business SAN Starter Kit

The HP StorageWorks P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit is a unique end-to-end 8 Gbps SAN Solution, just add disks and power. This kit includes one 8 Gbps P2000 G3 FC MSA Dual Controller Array (LFF Chassis), four 8 Gbps FC HBAs, two HP StorageWorks SN6000 Stackable 8 Gbps 8-port FC switches and HP unique Simple SAN Connection Manager (SSCM) SAN management software, cables, rails and optics. SSCM is the only SAN management software that can manage the FC switch, HBA and provision HP storage from a single pane of glass.

HP P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit

AP847A

### Application Solutions

The HP StorageWorks P2000 SAN is the ideal solution for customers running Oracle, Microsoft, SAP environments and those customers who are deploying virtual server technologies like VMware, Hyper-V, and Oracle Virtual Machine. The HP P2000 SAN delivers enterprise functionality that enhances virtual environments, simplifies management, and reduces costs. Easy to deploy, scale and maintain, HP P2000 SANs ensure that crucial business data remains available. This innovative approach to storage provides unique double fault protection across the entire SAN, reducing vulnerability without driving up costs the way traditional SANs can.

For customers, one of the greatest concerns is always database performance. With storage clustering, network RAID data availability, thin provisioning, data protection and disaster recovery capabilities built into the HP P2000 SAN, customers get industry leading, super fast performance along with the scalability, availability, and ease of management capabilities they have come to expect from HP Storage Solutions. Everything a customer depends on when managing their most critical business asset...business data.

HP has developed best-in-class expertise in Oracle, Microsoft, SAP, and Virtualization Hypervisor technology through extensive testing with the HP P2000 SAN, HP servers, and management software; high availability and disaster recovery solutions; and backup and recovery on the Oracle, Microsoft, and SAP application platforms. As a result, our customers can expect a wide range of operational and business benefits where they can:

- Deploy IT assets across multiple locations.
- Simplify provisioning to manage unpredictable storage demands.
- Incrementally grow storage without interruption.
- Enable use of shared storage for server virtualization.
- Leverage the high availability of server, virtual machine, and storage virtualization.
- Enable high availability and disaster recovery capabilities for critical applications.
- Easily deploy a remote disaster recovery site.
- Efficiently replicate shared, highly available storage back to the data center from remote sites.

### Features

#### Learn more

To learn more about specific HP Storage Solutions that are built with Oracle, Microsoft, SAP and Virtualization environments in mind, visit the solution sites supporting each of these applications.

HP Storage for Oracle hyperlink to: <http://www.hp.com/storage/oracle>

HP Storage for Microsoft hyperlink to: <http://www.hp.com/storage/microsoft>

HP Storage for SAP hyperlink to: <http://www.hp.com/storage/sap>

HP Storage for VMware hyperlink to: <http://www.hp.com/go/vmware/storage>



### Family Information

	P2000 G3 FC	P2000 G3 SAS	P2000 G3 10GbE iSCSI	MSA2000i G2 1GbE iSCSI
<b>Capacity</b> Minimum / with maximum additional drive enclosures	<b>LFF:</b> 7.2 TB SAS or 24 TB SAS MDL or SATA w/ 7 LFF enclosures: 57.6 TB SAS or 192 TB SAS MDL or SATA <b>SFF:</b> 7.2 TB SAS or 12 TB SATA w/ 5 D2700 JBODs: 44.7 TB SAS or 74.5 TB SATA	<b>LFF:</b> 7.2 TB SAS or 24 TB SAS MDL or SATA w/ 7 LFF enclosures: 57.6 TB SAS or 192 TB SAS MDL or SATA <b>SFF:</b> 7.2 TB SAS or 12 TB SATA w/ 5 D2700 JBODs: 44.7 TB SAS or 74.5 TB SATA	<b>LFF:</b> 7.2 TB SAS or 24 TB SAS MDL or SATA w/ 7 LFF enclosures: 57.6 TB SAS or 192 TB SAS MDL or SATA <b>SFF:</b> 7.2 TB SAS or 12 TB SATA w/ 5 D2700 JBODs: 44.7 TB SAS or 74.5 TB SATA	<b>LFF:</b> 7.2 TB SAS or 24 TB SAS MDL or SATA w/ 4 drive enclosures 36 TB SAS or 120 TB SAS MDL or SATA <b>SFF:</b> 7.2 TB SAS or 6 TB SATA w/ 3 MSA70 JBODs: 29.7 TB SAS or 24.7 TB SATA
<b>Controller Cache</b>	2 GB per controller	2 GB per controller	2 GB per controller	1 GB per controller
<b>Total LUNs</b>	512	512	512	512
<b>Host connect</b> P2000 & MSA2000 have 1 or 2 controllers, EVA has 2 controllers standard	Two 8 Gb Fibre Channel ports or Two 8Gb FC and two 1GbE iSCSI ports per controller	Four 6 Gb (x4) SAS ports per controller	Two 10 GbE iSCSI ports per controller	Four 3 Gb SAS ports per controller
<b>Maximum Drives</b> w/ expansion	96 LFF/149 SFF	96 LFF/149 SFF	96 LFF/149 SFF	60 LFF/99 SFF
<b>Maximum host supported</b> (dual controller)	64	8 single path 4 dual path	64	16
<b>Optional software: Snapshot, clone, Remote Snap</b>	Snapshot, 64 standard (max 512) Clone (standard) Remote Snap	Snapshot, 64 standard (max 512) Clone (standard)	Snapshot, 64 standard (max 512) Clone (standard)	Snapshot (max 255) clone
<b>Use for Storage</b>	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA

**NOTE:** maximum available storage capacity depends on the RAID level being implemented

## Product Technology

**8Gb Fibre Channel controller** Two host ports per FC controller shipped with SFPs. The P2000 G3 FC controller can run in either point-to-point or FCAL (loop). The default is FCAL which is used in Direct Connect, particularly with two controllers. The PtP (fabric) mode is used with almost all switches.

**Combo controller with FC and iSCSI ports** This ingenious dual-protocol "combo" controller supports a full FC SAN through the 8Gb FC ports, while designating the two 1 GbE iSCSI ports to enable remote replication over iSCSI protocol and perform as an iSCSI target. This allows economical sharing of the storage resource (the P2000 G3 array) with one department needing the performance afforded by the 8 Gb FC ports while simultaneously supporting another department with lesser performance needs and a budget only allowing a 1GbE iSCSI network.

**6Gb SAS controller** Four host ports per 6Gb 4x SAS controller.

**10GbE iSCSI** Two 10GbE ports per G3 10GbE iSCSI controller. Ports are ready for the choice of SFP (none



### Family Information

<b>controller</b>	<p>included)</p> <p>Supports the ProCurve and ISS versions of the following 10GbE parts for use in the controllers:</p> <p>HP 10Gb Cables</p> <ul style="list-style-type: none"><li>• HP SFP+ 10GbE Copper Cable</li><li>• HP ProCurve 10-GbE SFP+-SFP+ Direct Attach Cable</li></ul> <p>HP SFP+ Transceivers</p> <ul style="list-style-type: none"><li>• HP BladeSystem 10Gb SR SFP+ and HP BladeSystem 10Gb LRM SFP+</li><li>• HP ProCurve 10-GbE SFP+ SR Transceiver and HP ProCurve 10-GbE SFP+ LRM Transceiver</li><li>• No SFP+ LR Transceiver support</li></ul>
<b>Modular Chassis</b>	<p>2U rack height. 12 Large Form Factor or 24 Small Form Factor drive bays, accommodating SAS and SATA. Comes with space for one or two controllers, or P2000 3.5-inch disk Enclosure I/O modules (LFF chassis only)</p>
<b>Drives available</b>	<p>The new P2000 G3 controllers support both the P2000 3.5-inch Large Form Factor (LFF) drives, and the HP ProLiant 2.5-inch Small Form Factor (SFF) drives.</p> <ul style="list-style-type: none"><li>• Serial Attached SCSI (SAS) enterprise-class drives are designed for high demand, 24x7 usage.</li><li>• SAS Midline and SATA Midline are usually reserved for archival of data as they are both relatively inexpensive and are available in very large capacities.</li></ul> <p>The HP entry-level family of arrays can accommodate both SAS and SATA drives within the same enclosure making it ideal to have both business-critical, high activity files on SAS drives while using Snapshot, clone, or Remote Snap capability to keep back-up or archival data on the less expensive drives.</p> <p>For investment protection, the controllers will support single and dual port SAS &amp; SATA drives in a legacy single - or dual - domain MSA70. This support allows current owners of MSA70s to migrate their single port drives (in their MSA70 only, not into the array head) to be attached to a P2000 G3 FC or SAS. They can only cascade to another single I/O MSA70. This is not a data-in-place transition, and overall performance could be impacted.</p> <p>SAS drive performance can be approximately 30% greater than SATA performance on sequential host I/O. SAS performance excels in sequential lower latency response time and random I/O per second transaction performance due to higher rpm disk speeds yielding lower seek times. SAS drive random performance is generally twice that of SATA drives.</p> <p><b>NOTE:</b> P2000 and MSA2 3.5-inch Large Form Factor (LFF) drives are for use only in the P2000 G3 or MSA2000 models. The 2.5-inch Small Form Factor (SFF) drives are supported only with the P2000 G3 or the MSA2300 G2 controllers and are common with and are the same part numbers as the ProLiant hot-plug 2.5-inch drives.</p>
<b>Optional Disk enclosures</b>	<p>Just as the user has a choice of chassis for the array head (LFF and SFF drive bays, AC or DC powered), so also do they have a choice of expansion disk enclosures accommodating either drive size.</p> <p><b>(NOTE: these are not supported as part of a NEBS-certified with the MSA Carrier Grade Chassis. There is a certified JBOD listed in the Carrier-grade section)</b></p> <p><b>P2000 3.5-inch drive enclosure.</b> This 2U unit has twelve LFF (3.5-inch) drive bays and accepts for P2000 dual-ported SAS and SATA drives. The pre-configured HP StorageWorks P2000 Dual I/O LFF Drive Enclosure (AP843A) has two I/O modules and supports both single and dual controller arrays. If a single I/O disk enclosure model is desired, the appropriate chassis should be purchased</p>

### Family Information

along with a single I/O module (AP844A).

- This 3.5-inch drive enclosure can be attached to either the P2000 G3 FC or SAS LFF or SFF array head.
- Each configured model ships standard with two .5m mini-SAS to mini-SAS cables for cascading to other P2000 drive enclosures
- Up to seven P2000 3.5-inch enclosures can be attached to a P2000 G3 FC, FC/iSCSI Combo, or SAS controller in the array head.

**D2700 2.5-inch drive enclosure.** This 2U storage enclosure (AJ941A) is designed to support twenty five ProLiant 2.5-inch Universal form factor (SFF) 6Gb SAS or SATA hard drives. It ships standard with dual I/O modules installed.

- This 2.5-inch drive enclosure can be attached to a P2000 G3 controller (SFF or LFF) array head
- The D2700 enclosure ships with a two .5m miniSAS to miniSAS cable.
- Up to five D2700 may be attached to the P2000 G3 array head, given total support for 149 SFF drives.

### Scalability

The P2000 G3 FC, Combo FC/iSCSI, SAS or 10GbE controller is designed to allow an installation to begin with smaller capacity and be able to grow gradually as needed. The flexibility of SAS or SATA drive technology, form factors, sizes, speeds, and costs per GB allows a system to easily fit in almost any budget.

- Large Form Factor configurations can scale up to 7.2 TB SAS or 24 TB SATA, expandable to 57.6 TB SAS or 192 TB SATA with the addition of a maximum of seven P2000 3.5-inch Drive Enclosures.
- Small Form Factor configurations can scale from 7.2 TB SAS or 12 TB SATA. With the addition of five D2700 JBODs, the P2000 G3 FC can support 44.7 TB SAS or 74.5 TB SATA.
- Users may configure a 24-drive P2000 G3 FC SFF array head with 12-drive LFF P2000 3.5-inch disk enclosures. This is an excellent method for a configuration that supports fast SFF enterprise-class SAS drives in the array head, combined with economical LFF drives staged for archival purposes, all in the same array.
- Qualification of larger capacity drives is ongoing.

### LUNs

The HP StorageWorks 2000 family of arrays supports 512 LUNs (total volumes in a dual controller system) and LUN sizes up to 16 TB. The array supports expansion and deletion of any LUN.

### RAID 0, 1, 3, 5, 6, 10, 50

In addition to the usual RAID levels, the P2000 G3 features several important additional levels. RAID 6 is the highest level of RAID protection. It allocates two sets of parity data across drives and allows simultaneous write operations. It can withstand two simultaneous drive failures without downtime or data loss. RAID 10 is mirroring and striping without parity. It is the most popular of the multiple RAID levels, allowing large arrays with high performance in most cases and superior fault tolerance. RAID 50 combines the block striping and parity of RAID 5 with the straight block striping of RAID 0, yielding higher performance than RAID 5 through the addition of RAID 0, particularly during writes.

### Performance

Performance numbers are a guideline as established by tests using RAW I/O in an Operating System Agnostic test lab environment. 144 GB 15K SAS drives were used in a dual controller configuration of 12 vdisks consisting of twelve disks per vdisk, 1.6 TB volumes, and 3 volumes per host. 4 hosts directly attached to the P2000 G3 array were used in this test configuration (results cannot be expected with a single host). Results were achieved in Sequential Writes with 256K blocks; all random tests were based on 8K block sizes.

**NOTE:** Number and type of applications, drive type and number of drives, operating system used, and the number of hosts will affect overall performance. This table is provided strictly as a test-lab comparison. Note: These numbers reflect a full array configuration with the maximum number of front-end ports, disks, and controllers. The test results shown for the P2000 G3 are preliminary and designed to give a reference point for comparisons. They will be reposted shortly when finalized.

### Family Information

2000 Array Performance	P2000 G3 FC	P2000 G3 SAS	P2000 G3 10GbE iSCSI
			(preliminary)
Protocol (host connect)	8 Gb Fibre Channel	6 Gb SAS	10Gb Ethernet
<b>2000 RAID 10 Performance Results</b>			
Sequential Reads MB/s	1,572	1,572	1,500
Sequential Writes MB/s	790	787	775
Random Mix IOPs 60/40 read/write	18,698	19,682	15,500
<b>2000 RAID 5 Performance Results</b>			
Sequential Reads MB/s	1,572	1,572	1,500
Sequential Writes MB/s	1,195	1,172	1,000
Random Mix IOPs 60/40 read/write	12,511	12,835	10,500
<b>2000 RAID 6 Performance Results</b>			
Sequential Reads MB/s	1,572	1,572	1,500
Sequential Writes MB/s	1,173	1,024	1,000
Random Mix IOPs 60/40 read/write	7,362	8,044	6,500
Refer to the paper titled "Upgrading the HP StorageWorks MSA2000 (G1 or G2) to the P2000 G3 MSA ", available in the Resource Library at: <a href="http://www.hp.com/go/p2000">www.hp.com/go/p2000</a> .			

#### DC-power chassis

HP is making the two models of controller-less chassis available with direct current (DC) power supplies. They each have the two empty bays where users can insert one or two P2000 G3 controller(s). In addition, the P2000 chassis with LFF drive bay can have P2000 3.5-inch I/O modules inserted to create a LFF DC-power JBOD.

The 500 watt power supply is designed to operate over the input range of -40VDC to -75VDC.

HP StorageWorks P2000 DC-power LFF twelve 3.5-in Drive Bays AP840A  
(supports up to 2 controllers or I/O modules)

HP StorageWorks P2000 DC-power SFF twenty-four 2.5-in Drive Bays AP841A  
(supports up to 2 controllers, not I/O modules)

#### Configuration and Management Tools

HP StorageWorks Storage Management Utility (SMU). Management access, out-of-band: WEB GUI, CLI. Interface Types: USB, 10/100 Ethernet. Protocols Supported SNMP, SMI-S, SSL, SSH, SMTP, FTP, HTTP, Telnet

#### P2000 Software and Documents Support CD

- All product documentation (CD can be used on ALL supported server Operating Systems.)
- MSA Device Discovery Tool (Win and Linux) - reports P2000/MSA HW devices, and supported storage software
- Host Software Bundles (Win and Linux for both ProLiant x86, ProLiant x64 and Integrity IA64servers)
- CD updated quarterly on HP.com with sustaining firmware updates

#### Hot Plug Expansion and Replacement Support

All P2000 G3 models support hot plug expansion and replacement of redundant controllers, enclosures, fans, power supplies, and I/O modules for simple, fast installation and maintenance.

#### Snapshot and Clone

All G3 arrays come standard with 64 snaps, 512 snaps available. Controller based functionality. Offers higher levels of data protection, enabling an almost instant recovery from data failure or corruption. Offers alternative development testing of 'offline' production data and the ability to backup snapped/cloned data.

#### Overview

The P2000 G3 arrays come integrated with web browser and CLI based software for storage and RAID management, setup, configuration, and troubleshooting. This reduces the cost of ownership



### Family Information

	<p>by reducing the training and technical expertise necessary to install and maintain your HP storage solution.</p> <p>The SPOCK database provides interoperability information for thousands of components and millions of component combinations. It is available to all users at <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a>.</p>
<b>Server Compatibility</b> <b>NOTE:</b> depends on protocol	<p>Supports most HP ProLiant, BladeSystems and Integrity servers including</p> <ul style="list-style-type: none"> <li>• HP ProLiant DL, ML</li> <li>• HP c-Class Blade Servers (<b>NOTE:</b> SAS BladeServer support is with the MSA2000sa G2)</li> <li>• Integrity servers, IA64 (FC and FC/iSCSI support only)</li> <li>• Compatibility must be confirmed at: <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></li> </ul>
<b>Industry Standard servers support</b>	<ul style="list-style-type: none"> <li>• Supports most multi-vendor industry standard 32-bit Intel and AMD based (x86) servers. HP requires the Third-Party Server to be logo'd and listed on the Microsoft Windows Server Catalog.</li> <li>• Refer to the Microsoft website: <a href="http://www.microsoft.com/windows/catalog/server/">http://www.microsoft.com/windows/catalog/server/</a></li> <li>• HP StorageWorks Division recommends that the Third-Party Server Vendor is an active member of TSANet. Refer to the TSANet website for details: <a href="http://www.tsanet.com">www.tsanet.com</a></li> <li>• Non-HP servers will generally be supported if the HP storage stack is used. This includes supported HP branded HBAs and drivers, and supported FC switches.</li> </ul>
<b>OS Support</b> <b>Fibre Channel ports</b>	<p>Refer to the HP support statements for complete current OS version support: <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></p> <ul style="list-style-type: none"> <li>• Microsoft Windows Server 2008 IA32, x64, IA64 (Standard, Enterprise, Datacenter)</li> <li>• Microsoft Windows Server 2008 R2 x64</li> <li>• Microsoft Windows 2003 SP1, SP2, and R2 and 2003 R2 IA32, x64</li> <li>• HP-UX</li> <li>• Red Hat Linux (32/64)</li> <li>• SuSE SLES (32/64)</li> <li>• Microsoft Windows Server 2008 x64 Hyper-V</li> <li>• VMware</li> <li>• OpenVMS</li> <li>• Citrix XenServer HP Enterprise Edition</li> <li>• Solaris 10 (x86)</li> </ul>
<b>OS Support</b> <b>Fibre Channel Ports (Integrity)</b>	<ul style="list-style-type: none"> <li>• HP-UX</li> <li>• Windows</li> <li>• OpenVMS</li> <li>• Linux</li> </ul>
<b>OS Support</b> <b>1GbE iSCSI ports on the G3 Combo FC/iSCSI Controller</b>	<ul style="list-style-type: none"> <li>• Microsoft Windows Server 2008 and 2008 R2 (x64, IA64)</li> <li>• Microsoft Windows Server 2008 x64 Hyper-V</li> <li>• Microsoft Windows 2003 (SP1, SP2, and R2) and 2003 R2 (IA32, x64) Red Hat Enterprise Linux (32/64)</li> <li>• VMware ESX</li> </ul>
<b>OS Support</b> <b>G3 SAS Controller</b>	<p>Refer to the HP support statements for complete current OS version support: <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></p> <ul style="list-style-type: none"> <li>• Microsoft Windows Server 2008 IA32, x64</li> <li>• Microsoft Windows Server 2008 R2</li> <li>• Microsoft Windows 2003 and 2003 R2 IA32, x64</li> <li>• Red Hat Linux (32/64)</li> <li>• SuSE SLES (32/64)</li> <li>• Microsoft Windows Server 2008 x64 Hyper-V</li> <li>• VMware</li> <li>• Solaris 10 (x86)</li> </ul>

### Family Information

<b>OS Support G3 10GbE Controller</b>	<ul style="list-style-type: none"><li>• Microsoft Windows Server 2008 SP1, SP2, R2</li><li>• Microsoft Hyper-V (x64 only)</li><li>• Microsoft Windows Server 2003 and 2003 R2, SP2</li><li>• Red Hat Linux (32/64)</li><li>• SuSE SLES (32/64)</li><li>• VMware</li></ul> <p><b>NOTE:</b> the G3 10GbE array must connect to a 10GbE switch; direct connect to the G3 10GbE array must be to a 10GbE NIC and supported by the OS.</p>
<b>Web Browser support</b>	<ul style="list-style-type: none"><li>• The P2000 G3 and the older MSA2000 support target based management, and include a Web interface and a telnet interface, and require a web browser for management.</li><li>• The P2000 G3 FC requires Microsoft Internet Explorer V7.x or V8.x</li><li>• The original MSA2000 and the MSA2000 G2 arrays require Microsoft Internet Explorer V6.X and V7.X (strongly encouraged)</li><li>• Mozilla Firefox 1.0.7 or later is supported</li></ul>

### Optional Software

#### Snapshot and Volume Copy Software for the P2000 G3 Product Features Data Protection

- Snapshots create up to 512 point-in-time pictures of data (512 snaps are exclusive to the P2000 G3)
- Volume Copies create up to 128 point-in-time copies of data
- Recovery is instant - revert data from any previous Snapshot or Volume Copy
- Backup 'snapped' data to disk, virtual tape, or physical tape without a backup window
- A 64 snapshot license and Volume Copy are included with all P2000 G3 models.
- Support and updates are desired for bundled software functionalities (such as 64 LTU Snap and/or Volume Copy etc in the P2000 G3 products) a combination HW + SW support care pack must be purchased.
- HP does not provide warranty assistance for software products included with our base hardware products. This would either be SupportPlus or SupportPlus24. The hardware warranty component of these services is accounted for in the pricing of the SP and SP24 care packs.

#### Data Testing

- Snap or clone data to test the performance of a software application on 'offline' production data
- Snap or clone data to test how a software patch or enhancement will function on 'offline; production dat0061

#### P2000 G3 Snapshot and Clone:

G3 controllers/models come STANDARD with 64 snapshots and Volume Copy software  
512 Snapshot option is ONLY available and supported with the G3, not the prior generation MSA2000 models

HP P2000 Snapshot 512 Software LTU TA806A

HP P2000 Snapshot 512 Software E-LTU TA806AAE

#### MSA2000 and MSA2000 G2 Snapshot and Clone software:

Snapshot and Volume Copy software is optional on models other than the P2000 G3.  
The following skus are designated for use by the MSA2000 G2 models. They are neither necessary nor available for the P2000 G3 FC.

HP StorageWorks 2000 Modular Smart Array Snapshot 255 Software LTU<sup>1</sup> T5539A

HP StorageWorks 2000 Modular Smart Array Snapshot 64 Software LTU T5512A

HP StorageWorks 2000 Modular Smart Array Snapshot 8 Software LTU T5513A

HP StorageWorks 2000 Modular Smart Array Snapshot 8/255 Upgrade Software LTU<sup>1</sup> T5540A

HP StorageWorks 2000 Modular Smart Array Snapshot 64/255 Upgrade Software LTU<sup>1</sup> T5541A

HP StorageWorks 2000 Modular Smart Array Snapshot 8 to 64 Upgrade Software LTU T5515A

HP StorageWorks 2000 Modular Smart Array Volume Copy Software LTU T5514A

<sup>1</sup> The snapshot software is supported on G2 and G3 models only. 512 snaps only applies to G3 controllers.

#### HP StorageWorks P2000 Remote Snap

- HP StorageWorks P2000 Remote Snap Software is array based software that provides remote replication on the HP StorageWorks P2000 G3 MSA Array Fibre Channel of



### Optional Software

#### Software (G3 FC and FC/iSCSI controllers only)

FC/iSCSI Combo products. HP Remote Snap is a form of asynchronous replication which consists of replication of block-level data from a volume on a local system to a volume that may be on the same system or on a second independent system. This second system may be collocated with the first system or may be located at a remote site.

- HP Remote Snap functionality is based on existing Snapshot technology offered by HP P2000 SAN Array products. Snapshots are used to track the data to be replicated as well as to determine the differences in data updated on the master volume, minimizing the amount of data to be transferred.
- HP Remote Snap replication technology provides the ability to accomplish key data management and protection capabilities. First, because Remote Snap uses snapshots as the underlying technology it creates multiple local recovery points which can be used for such tasks as to complement daily backups; second, replication provides the ability to access data in a remote site which could be used for dispersed operations; and third but definitely not least important replication allows for business continuance in the event of a failure on the primary site.
- In order to perform a replication, a snapshot of the volume to be replicated is taken, creating a point-in-time image of the data. This point-in-time image is then replicated to the destination volume by copying the data represented by the snapshot via a transport medium such as TCP/IP (iSCSI) or Fibre Channel. The amount of data transferred is minimized though the use of snapshots whenever possible.

HP StorageWorks P2000 Array System Remote Snap Software LTU

TA808A

HP StorageWorks P2000 Array System Remote Snap Software E-LTU

TA808AAE


**(NOTE: One license per array is required for replication. For example, if you have two P2000 arrays performing replication (from Primary system to Remote System), you will need 2 licenses).**

#### Product Features

- Storage based asynchronous snapshot replication
- Initial copy of data can be performed locally, reducing burden on wide area networks
- Support of both Ethernet and Fiber Channel interconnects provides flexible options to the application environments.
- Snapshot based replication technology means only changed data will be replicated to alternate site
- Replication Wizard simplifies the task of setting up and establishing replication pairs from one unified, easy to use GUI.
- Snapshot based replication enables both local and remote recovery depending on the need. Snapshot replication isolates problems to a specific point in time which can be selected by the administrator. Additionally snapshot replication supports longer distance replication.
- Multiple relationships provide greater storage flexibility and utilization.
- Bundled 64 Snapshots and Volume Copy integration provides better efficiencies by combining the management and array technologies to create local copies.
- Fast application recovery with minimal or no transaction loss
- Creation of disaster tolerant copies of your critical business data
- No-single-point-of-failure solution to increase the availability of your customers data



## Optional Software

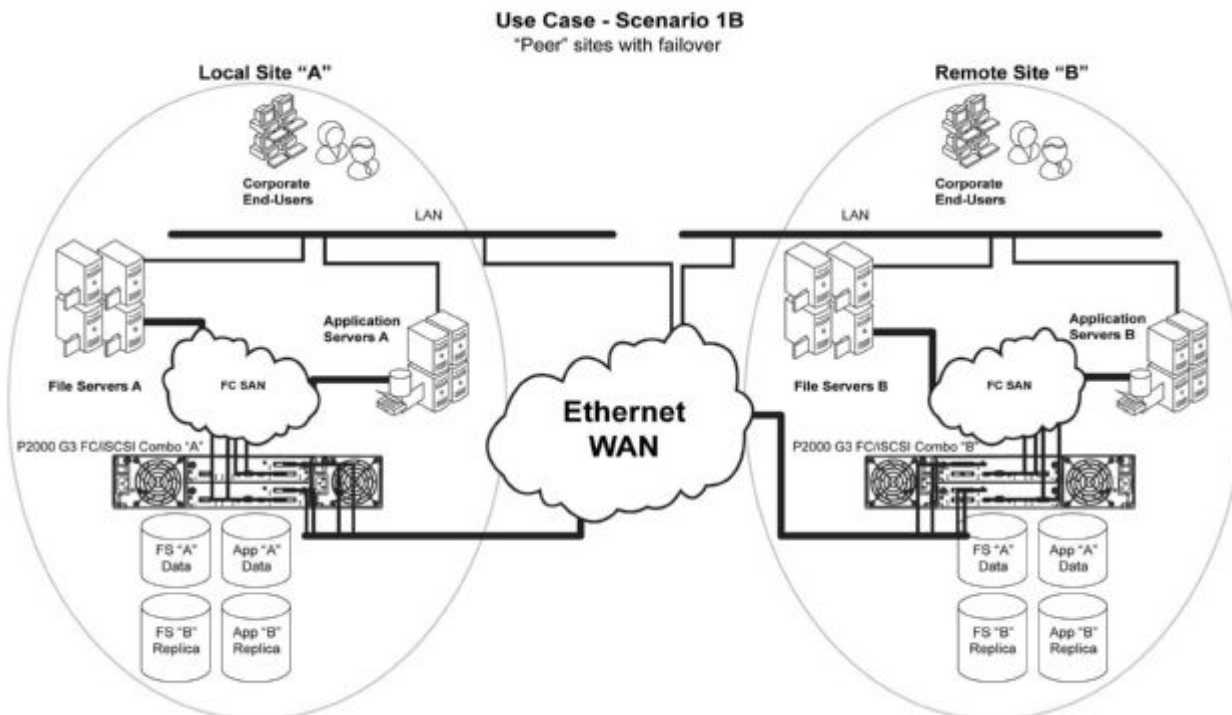

### Customer Benefits

#### Disaster Recovery

Replication technology has typically been used to address disaster recovery issues. Disaster recovery is still the driving business case behind replication. Remote replication can be implemented from the production site to one or more remote sites across a campus, across town, across a state or across the country. When a disaster strikes the primary location, the applications can be brought up at the remote site and continue processing against the replicated copies. When the primary site is back online, the replication can be reversed and when the data is resynchronized, processing can be switched back to the primary site and business can continue. In the past, if an e-mail system experienced a disaster it was an "oh well" moment. The loss of a day or more of e-mail was not considered important. Today, e-mail is a critical component of many companies' business plans and recovering e-mail after a disaster quickly and completely is required.

#### Maintenance

HP Remote Snap software can also be used to solve other business needs. For instance, E-mail servers may need periodic maintenance that can take hours to complete. With remote replication in place, the downtime can be minimal (as long as it takes to bring the remote peer of the primary e-mail server online). The primary server can be worked on (patches, hardware upgrades, etc.) and then brought back online and into production. A whole datacenter can be failed over to a remote site on purpose to perform maintenance on generators, air conditioning, etc. Replication can also be used to perform a datacenter move with minimal downtime (fail everything to the DR site, move the production datacenter to its new location then fail the DR site back to the new datacenter).

#### Storage Based

Data replication is performed at the storage subsystem controller level and is totally transparent to the host, alleviating unnecessary host cycles to perform the data mirroring functions. Unlike a fabric based or host based solution, the storage based solution dedicates its resources to managing the replication process between arrays, with minimal impact to applications, other data or devices on the SAN.

### Optional Software

#### **Bi-Directional**

The bidirectional HP P2000 Array solution addresses the growing need among businesses to ensure continuous availability of applications that are critical to daily business operations. HP StorageWorks P2000 enables two sites in a remote replication connection to use each other as a destination to maintain replicated copies of online data. This maximizes resource utilization while enabling business continuance, even in the event of disaster.

#### **Disaster Tolerance**

The P2000 G3 FC products utilize snapshot data online and in real time to a remote P2000 G3 through a local or extended storage area network (SAN). Additionally, data replication can be bidirectional, meaning that a storage array can be both a source and a destination. A particular LUN can be replicated in only one direction between the two storage arrays. Write I/O data sent to the source is replicated by HP P2000 Array to the destination. A pair of properly configured HP P2000 G3 FC arrays is a replication solution that guarantees data integrity in the event of a storage system or site failure.

#### **Normalization (first initial copy)**

When a DR site is initially created a normalization or initial copy of the data from the source volume to the target volume must occur. The P2000 G3 array allows this first copy to take place locally. After completion the disks can be manually moved to the remote location. Subsequent changes will only remotely copy the changed blocks.

#### **SAN Extensions**

HP P2000 G3 Array provides the capability to replicate data over direct Fibre Channel. The distances supported over dark fiber are determined by the speed of the dark fiber connection and the technology used to communicate over the dark fiber.

#### **HP StorageWorks Storage Mirroring**

Natural and man-made disasters can occur when you least expect it - serving as a reminder that in less than a moment's notice, volumes of data loss can occur. To prevent data loss from failure, error, or disaster, HP StorageWorks Storage Mirroring Software provides replication and recovery of valuable Windows and Linux data to another server. Proactive replication is a key strategy coupled with tape backup and snapshot technology for up-to-the-second data protection. Having replicated data co-located enables customers to recover their static and transactional data in seconds to minutes.

Patented replication and failover technology continuously captures byte-level data changes as they occur in your production environment and replicates those changes to one or more servers in any location without geographic limitations. By replicating only the bytes that change, Storage Mirroring Software uses the absolute minimum bandwidth required to replicate customer data. The software does not require special hardware to run and utilizes existing LAN or WAN infrastructure - saving time, additional investment, and maintenance. Storage Mirroring software is storage independent and will support any DAS, NAS, and SAN storage device. Additional flexibility is achieved with Windows and Linux operating system support. Storage Mirroring works on Windows Server 2003, Windows Server 2008, Windows Storage Server, 64-bit Windows, Windows on Itanium and Red Hat Linux. The platform flexibility, resource optimization, and application-specific protection enable customers to solidify their data and disaster protection strategies.

For more information visit:

<http://h18006.www1.hp.com/products/storage/software/sm/index.html>

### Optional Software

Storage Mirroring will now be offered in 3 different product SKU families

- Stock LTU (channel stocked license(s))
- E-LTU (electronic delivery - order any number of licenses - 10 or higher)
- LTU (paper delivery which replaces all previous 10 pack licenses -an alternative to electronic delivery)

#### Paper Delivery LTU

Order E-LTU when you require 10 or more licenses and you desire electronic delivery of those 10+ licenses. E-LTUs replace the previous 10 packs. Previously, an odd number of licenses over 10 require 10 packs and multiple singles, now E-LTUs will deliver the exact number of licenses electronically. Add corresponding Storage Mirroring Care Packs for support.

HP StorageWorks Storage Mirroring Windows Media Kit	TA778A
HP StorageWorks Storage Mirroring Data Migration LTU	TA779A
HP StorageWorks Storage Mirroring Replicate Edition LTU	TA781A
HP StorageWorks Storage Mirroring Replicate Target Edition LTU	TA783A
HP StorageWorks Storage Mirroring Replicate Target Exchange LTU	TA785A
HP StorageWorks Storage Mirroring Recover Entry Edition LTU	TA787A
HP StorageWorks Storage Mirroring Recover Standard Edition LTU	TA789A
HP StorageWorks Storage Mirroring Recover Enterprise Edition LTU	TA791A
HP StorageWorks Storage Mirroring Recover Premium Edition LTU	TA793A
HP StorageWorks Storage Mirroring Recover Virtual Host 1 LTU	TA795A
HP StorageWorks Storage Mirroring Recover Virtual Host 10 LTU	TA797A
HP StorageWorks Storage Mirroring Recover Virtual Host Unlimited LTU	TA799A

#### E-LTU Base Models

**NOTE:** Electronic software is now available in most countries. HP recommends purchasing electronic products over physical products when available for faster delivery and the convenience of not having to manage-either file away or throw away-confidential paper licenses. For more information, please contact an HP representative.

HP StorageWorks Storage Mirroring Data Migration E-LTU	TA779AAE
--	----------

**NOTE:** Electronic software is available in all countries except China and Japan. China and Japan customers should order the physical equivalent.

HP StorageWorks Storage Mirroring Replicate Edition E-LTU	TA781AAE
---	----------

**NOTE:** Electronic software is available in all countries except China and Japan. China and Japan customers should order the physical equivalent.

HP StorageWorks Storage Mirroring Replicate Target Edition E-LTU	TA783AAE
--	----------

**NOTE:** Electronic software is available in all countries except China and Japan. China and Japan customers should order the physical equivalent.

HP StorageWorks Storage Mirroring Replicate Target Exchange E-LTU	TA785AAE
---	----------

**NOTE:** Electronic software is available in all countries except China and Japan. China and Japan customers should order the physical equivalent.

HP StorageWorks Storage Mirroring Recover Entry Edition E-LTU	TA787AAE
---	----------

**NOTE:** Electronic software is available in all countries except China and Japan. China and Japan customers should order the physical equivalent.

HP StorageWorks Storage Mirroring Recover Standard Edition E-LTU	TA789AAE
--	----------

**NOTE:** Electronic software is available in all countries except China and Japan. China and Japan customers should order the physical equivalent.

### Optional Software

HP StorageWorks Storage Mirroring Recover Enterprise Edition E-LTU	TA791AAE
<b>NOTE:</b> Electronic software is available in all countries except China and Japan. China and Japan customers should order the physical equivalent.	
HP StorageWorks Storage Mirroring Recover Premium Edition E-LTU	TA793AAE
<b>NOTE:</b> Electronic software is available in all countries except China and Japan. China and Japan customers should order the physical equivalent.	

#### Stock LTU Base Models

Order the Stock LTU from an HP authorized reseller. Delivery will consist of a paper entitlement certificate per SKU and a single activation code. Add a corresponding Storage Mirroring Care Pack for support.

HP StorageWorks Storage Mirroring Data Migration Stock LTU	TA780A
HP StorageWorks Storage Mirroring Replicate Edition Stock LTU	TA782A
HP StorageWorks Storage Mirroring Replicate Target Edition Stock LTU	TA784A
HP StorageWorks Storage Mirroring Replicate Target Exchange Stock LTU	TA786A
HP StorageWorks Storage Mirroring Recover Entry Edition Stock LTU	TA788A
HP StorageWorks Storage Mirroring Recover Standard Edition Stock LTU	TA790A
HP StorageWorks Storage Mirroring Recover Enterprise Edition Stock LTU	TA792A
HP StorageWorks Storage Mirroring Recover Premium Edition Stock LTU	TA794A
HP StorageWorks Storage Mirroring Recover Virtual Host 1 Stock LTU	TA796A
HP StorageWorks Storage Mirroring Recover Virtual Host 10 Stock LTU	TA798A
HP StorageWorks Storage Mirroring Recover Virtual Host Unlimited Stock LTU	TA800A

**NOTE:** For more information visit:

<http://h18006.www1.hp.com/products/storage/software/sm/index.html>

#### Path failover (MPIO)

MPIO for Windows provides a single multi-path solution for HP StorageWorks P2000 G3 Modular Smart Array on HP servers. Support for Windows 2003 and Windows 2003 R2 operating systems is provided by HP MPIO Full Featured DSM. For the P2000 G3 this version is 2.6.1.7 or greater. Support for Microsoft Windows 2008 is bundled within the operating system. Support for Linux distributions is with Device Mapper 4.4.0 or greater. Support for HP-UX is native multipathing in HP-UX v3 and PV-Links in HP-UX v2.

#### HP StorageWorks

#### Add more value to your P2000 array

#### X3000 Network Storage Gateways

Stretch your P2000 array investment by adding file & print services, iSCSI connectivity, and management hosting with an X3000 Series Network Storage Gateway platform. X Series Network Storage Gateways are optimized file and print server solutions that are built on industry-standard HP ProLiant servers and come with Microsoft Windows Storage Server 2008 operating system pre-installed. Since they're Windows-based, network integration is easy, your tools and data protection applications run right on the box, and management has a familiar look and feel. Like many Network Attached Storage (NAS) devices, they support heterogeneous file serving environments and are pre-configured to install in minutes.

An X3000 Network Storage Gateway is a file/iSCSI gateway that adds IP-based services to your Fibre Channel array or SAN. So it not only enhances your P2000 investment with file and print services, but it helps you save even more by enabling tiered (Fibre Channel and iSCSI) block access for application servers. All of your important client and server data can be managed, scaled, and protected on a single MSA2000 array.

## Optional Software

**NOTE:** For more information visit: [www.hp.com/go/X3000](http://www.hp.com/go/X3000)

### HP P2000 G3 & MSA2000 G2 Carrier-Grade Components

The P2000 G3 is an 8 Gb Fibre Channel connected 2U storage area network (SAN) or direct connect solution designed for network equipment providers (NEPs) and communication service providers. Suited for those who need a robust telecom infrastructure--- they need storage devices to catch videos, photos, text, new services---need a place to have the data stored and cached.

The HP P2000 Carrier-Grade Chassis (AP841A) is a controller-less 6Gb chassis capable of supporting one or two P2000 G3 8Gb Fibre Channel controllers (AP836A) and has twenty-four Small Form Factor (SFF) drive bays. It comes equipped with two DC-power power supplies.

The HP P2000 2.5-in Dual I/O JBOD is a special model disk enclosure designed only for use with the carrier-grade array heads. It has 24 drive bays (unlike the D2700 with 25 drive bays) and has dual DC-power supplies. It is only sold with a carrier grade array. Five of these JOBDS may be cascaded from the array head.

When used in conjunction with the Seismic cabinet (AH343A) and specific ProLiant SFF SAS drives, the solution is NEBS certified. NEBS level-3 certification provides the assurance that the equipment is safe to operate and sturdy enough to withstand certain physical and environmental (for example, fire, earthquakes) conditions.

#### **P2000 DC-power Carrier-grade SFF Chassis**

HP P2000 Modular Smart Array 2.5-in Drive Bay Carrier-Grade Chassis. NEBS certified AP841A

#### **G3 Controller 8Gb FC**

HP StorageWorks P2000 G3 FC Modular Smart Array Controller (1 or 2) With two 8Gb FC ports per controller. NEBS certified. AP836A

#### **G2 Controller 3Gb SAS**

HP StorageWorks 2300sa G2 3Gb SAS Modular Smart Array Controller (1 or 2) with four 3Gb SAS ports per controller NEBS certified. AJ808A

#### **SFF Carrier-grade (only) DC-power JBOD**

HP P2000 2.5-in Dual I/O DC-power Drive Enclosure. NEBS certified. 24-drive SFF bays, NEBS certified, **NOTE: only sold with carrier-grade arrays** AW561A

#### **Drives, carrier-grade**

HP 146GB 6G SAS 15K SFF DP ENT HDD 512547-B21

HP 300GB 6G SAS 10K 2.5in DP ENT HDD 507127-B21

#### **Carrier-grade HBA**

HP FC2242SR PCI-e DC HBA A8003A

HP StorageWorks PCI-e 8Gb Host Bus Adapter (Emulex 82E) AJ763A

For more information on HP Carrier Grade Platforms go to [http://www.hp.com/products1/servers/carrier\\_grade/index.html?jumpid=reg\\_R1002\\_USEN](http://www.hp.com/products1/servers/carrier_grade/index.html?jumpid=reg_R1002_USEN)

### Service and Support, HP Care Pack, and Warranty Information

#### Warranty

Three-year limited warranty, parts exchange Next Business day delivery

Enclosures, Hard drives, and Options for the P2000 G3 FC carry their own warranty. Refer to HP's Limited Warranty Statement for more information.

The P2000 G3 FC has been designed with customer self repairable parts to minimize repair time and provide greater flexibility in performing defective parts replacement. Please refer to HP's limited warranty Statement and parts replacement instructions for further details.

<http://h18006.www1.hp.com/products/storageworks/warranty.html>

Products included in various kits carry their own individual warranties.

**NOTE:** The warranty of the hard drive options purchased with the P2000 G3 FC, SAS, and 10GbE iSCSI products is different for SAS hard drives versus SAS MDL and SATA hard drives. SAS hard drive options have a three year warranty and SAS MDL and SATA hard drives options have a one year warranty.

---

## HP Care Pack Services: Packaged server and storage services for increased uptime, productivity and ROI

When you buy HP server and storage products and solutions, it's also a good time to think about what levels of support you may need. Our portfolio of service options reduce deployment and management worries while helping you get the most out of your server and storage investments. We take a holistic approach to your environment, bridging servers, blades, storage, software and network infrastructures with our packaged HP Care Pack Services for servers and storage.

### Protect your business beyond warranty

When it comes to robustness and reliability, standard computing equipment warranties have matured along with technology. Good news that can also create problems stemming from depending on standard warranties designed to only protect against product defects and some downtime causes. Using a standard approach to warranty uplifts, such as HP Care Pack Services, helps reduce downtime risks and provides operational consistency for mission-critical and standard business computing.

### HP Care Pack Services: Upgrading or extending standard server and storage warranties cost effectively

HP Care Pack Services offer a standard reactive hardware and software support services suite sold separately, or combined with our Support Plus and Support Plus 24 services. The portfolio also provides a combination of integrated proactive and reactive services, such as Proactive 24 Service and Critical Service. In addition with HP Proactive Select, you can acquire the specific proactive constancy and technical services. HP Proactive Select menu offers a broad set of service options that you can mix and match depending on your specific requirements. Proactive service options include offers for server, storage, network, SAN device, software, environment and education services.

"HP server and storage lifecycle support services offers a full spectrum of customer care-from technology support to complex migrations to complete managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education Services offer flexible, comprehensive training on to help your IT staff get the most out of your server and storage investments. HP Financial solutions extend innovative financing and cost-effective asset management programs-from purchase to equipment retirement.

Learn more: [www.hp.com/services/servers](http://www.hp.com/services/servers) and [www.hp.com/services/storage](http://www.hp.com/services/storage)

### *Service and Support, HP Care Pack, and Warranty Information*

**NOTE:** Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at

<http://www.hp.com/go/lookuptool>

### **Recommended HP Care Pack Services for optimal satisfaction with your HP product.**

#### **3-Year HP Support Plus 24**

For a higher return on your server and storage investment, HP Support Plus 24 provides integrated hardware and software support services designed specifically for your technology. Available 24x7, this 3-year combined reactive support option delivers onsite hardware support and over-the-phone software support around-the-clock. Leverage the full strength of HP Technology Services - customers can trust the services professionals at HP to work collaboratively with them, putting our strategic and technical know-how to work across their entire infrastructure.

- Improve uptime with responsive hardware and software services
- Enjoy consistent service coverage across geographically dispersed sites
- Update HP software at a predictable cost
- Increase customer satisfaction-with no interoperability gaps

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EEE>

#### **HP StorageWorks MSA Family Disk Array Installation and Startup Service**

For smooth startup, HP StorageWorks MSA Family Disk Array Installation and Startup Service -provides you with a custom-tailored deployment of the MSA Array so that it is properly integrated into your storage environment, and helps you realize the maximum benefit from your storage investment. In today's new era of business technology, technology must produce thousands of business outcomes. Today's HP Technology Services portfolio helps customers manage their technology in action-because when technology works, business works.

- Verification that any service prerequisites are met prior to installation
- Delivery of the service at a mutually scheduled convenient time
- Installation of HP StorageWorks MSA and SAN deployment according to product specification
- Availability of an HP service specialist to answer basic questions during the onsite delivery of this service
- Customized installation plan to support unique configuration requirements

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-3048ENW.pdf>

#### **HP Proactive Select Service**

HP Proactive Select Service improves your IT performance and manageability through the use of cost effective flexible services. HP provides technical expertise and best practices to accelerate ROI of your technology investment. Selectable proactive services span a wide range of technology and process services - a flexible way to purchase proactive services that fit your particular environment and situation.

HP Proactive Select Service is technology agnostic and purchased in addition to your choice of underlying reactive support."

- Access to a list of flexible and customizable proactive service activities
- Enhance customers' in-house IT team with complementary assistance from HP
- Improved time to solution
- Reduce business risk and project costs by accessing HP specialists



### *Service and Support, HP Care Pack, and Warranty Information*

- Simplify IT operational procedures by leveraging HP best practices

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA2-3842ENN.pdf>

#### **Optional HP Care Pack Services that will enhance your HP product experience.**

##### **5-Year HP Support Plus 24**

As an alternative to our recommended support level, for customers who need to improve uptime with responsive 24x7 product support:

HP Support Plus 24 helps you increase performance and availability with comprehensive, consistent hardware and software services. Working with your IT team, HP Services engineers deliver onsite hardware support and over-the-phone software support around-the-clock 365 days per year. Service coverage encompasses HP products and selected multivendor hardware and software.

In addition, this convenient HP Care Pack packaged service makes software updates available to you at substantial savings.

Choose Support Plus 24 when you need to:

- Improve uptime with responsive hardware and software services available anytime
- Cost-effectively obtain expert 24x7 multivendor hardware and software support
- Enjoy consistent service coverage across geographically dispersed sites
- Update HP and selected third-party software at a predictable cost
- Take advantage of subscription savings on software updates

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EN.pdf>

##### **HP Entry Storage Data Migration Service for Windows**

For customers who need to safely migrate Windows data within their TCP/IP networks with minimal impact to their operations:

You have a need to migrate data between Windows servers within your TCP/IP network. Or you have a need to migrate storage for your Windows servers. Or both. And you need to accomplish these migrations efficiently while minimizing risk at the same time.

HP Entry Storage Data Migration Service for Windows offers you a cost competitive and convenient way to accommodate data migration triggered by a need to refresh or consolidate storage, or to create different storage tiers. This service offers a migration cost in line with the costs of storage products in small and medium-sized storage environments. The service is delivered via a skilled HP service specialist with special consideration for data availability, integrity, and ongoing operational performance during the transfer process."

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA2-4734ENW.pdf>

##### **eSupport**

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

##### **Support Portal**

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.





### *Service and Support, HP Care Pack, and Warranty Information*

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit <http://www.hp.com/support>

HP Insight Remote Support software delivers secure remote monitoring and support for your HP Servers and Storage, 24 X 7, so you can spend less time solving problems and more time focused on your business. You can have your systems remotely monitored for hardware failure using secure technology that's been proven at thousands of companies around the world. In many cases, you can avoid problems before they occur.

### **Customer Technical Training**

HP Education Services

In today's cost-conscious business environment, IT professionals, developers, consultants and users face an interesting challenge: how to keep up with the latest technologies and expand important skills while delivering profitable results on current projects. To help address this challenge, HP offers innovative training solutions that help keep you up-to-date on virtualization, server, storage, Insight Control, Citrix, Microsoft® and open source/Linux-related topics-while spending less time away from business-critical activities.

### **HP Services Awards**

HP Technology Services continues to be recognized for service and support excellence by customers, partners, industry organizations and publications around the world. Recent honors and award reflect our services team's dedications, technical expertise, professionalism and uncompromising commitment to customer satisfaction.

### **Additional Services Information**


To learn more on HP ProLiant servers, HP BladeSystem servers and HP StorageWorks storage products, please contact your HP sales representative or HP Authorized Channel Partner. Or visit [www.hp.com/services/proliant](http://www.hp.com/services/proliant) or [www.hp.com/services/bladesystem](http://www.hp.com/services/bladesystem) or <http://www.hp.com/hps/storage>

## Configuration Information

### Configure to Order Program Information

HP introduces the Configure to Order program for the P2000 G3 family. The P2000 G3 models and options may or may not be factory installed in a rack with add-on controllers, switches, hubs, P2000 disk enclosures and hard drives. The P2000 G3 arrays may be integrated with ProLiant servers or as standalone storage.

Orders to be shipped through the CTO process must have a minimum of two drives ordered per controller. SAN Starter Kits are not eligible for CTO.

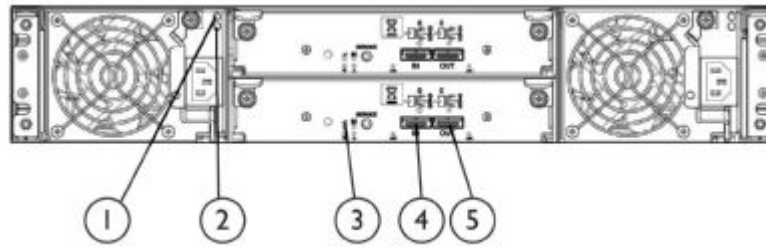

**P2000 Dual I/O 3.5-inch 12 Drive Enclosure  
Rear Panel components**

- |                    |                 |                 |
|--------------------|-----------------|-----------------|
| 1. Power Indicator | 3. Unit Locator | 5. SAS Out Port |
| 2. Fault Indicator | 4. SAS In Port  |                 |

### Description

### Product #

#### P2000 G3 Controllers & Controller-less Chassis

HP StorageWorks P2000 G3 FC Modular Smart Array Controller (two 8Gb FC ports)	AP836A#0D1
HP StorageWorks P2000 G3 FC/iSCSI Combo Modular Smart Array Controller (two 8Gb FC ports and two 1GbE iSCSI ports)	AP837A#0D1
HP StorageWorks P2000 G3 SAS Modular Smart Array Controller (four 6Gb 4x SAS ports)	AW592A#0D1
HP StorageWorks P2000 G3 10GbE iSCSI Modular Smart Array Controller (two 10GbE iSCSI ports)	AW595A#0D1
HP StorageWorks P2000 Modular Smart Array 3.5-in Drive Bay Chassis (LFF) (Will accept one or two controllers or Disk Enclosure I/O modules)	AP838A#0D1
HP StorageWorks P2000 Modular Smart Array 2.5-in Drive Bay Chassis (SFF) (Will accept one or two controllers, not I/O modules)	AP839A#0D1

### Disk Enclosures


HP StorageWorks P2000 Dual I/O LFF Drive Enclosure, twelve 3.5" drive bays Used with single or dual controller LFF or SFF array head	AP843A#0D1
HP StorageWorks P2000 LFF Drive Enclosure I/O Module (no cable included. Designed for use with blank LFF chassis AP838A)	AP844A#0D1

### Configured Units

HP StorageWorks P2000 G3 FC MSA Dual Controller LFF Modular Smart Array System	AP845A#0D1
HP StorageWorks P2000 G3 FC MSA Dual Controller SFF Modular Smart Array System	AP846A#0D1

### Configuration Information

HP StorageWorks P2000 G3 FC/iSCSI MSA Dual Combo Controller LFF Array	AW567A#0D1
HP StorageWorks P2000 G3 FC/iSCSI MSA Dual Combo Controller SFF Array	AW568A#0D1
HP StorageWorks P2000 G3 SAS MSA Dual Controller LFF Modular Smart Array System	AW593A#0D1
HP StorageWorks P2000 G3 SAS MSA Dual Controller SFF Modular Smart Array System	AW594A#0D1
HP StorageWorks P2000 G3 10GbE iSCSI MSA Dual Controller LFF Array System	AW596A#0D1
HP StorageWorks P2000 G3 10GbE iSCSI MSA Dual Controller SFF Array System	AW597A#0D1

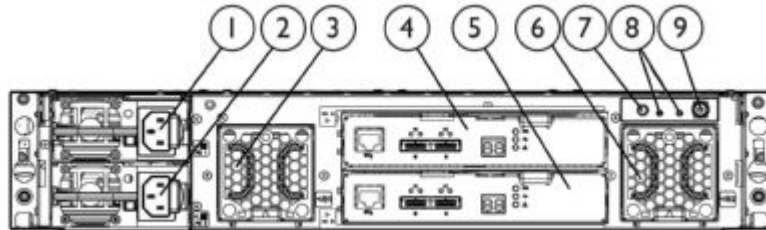

### HP StorageWorks D2700 Disk Enclosure Rear Panel components

- |                   |                 |                            |
|-------------------|-----------------|----------------------------|
| 1. Power Supply 1 | 4. I/O Module A | 7. Rear UID push button    |
| 2. Power Supply 2 | 5. I/O Module B | 8. Enclosure LEDs          |
| 3. Fan 1          | 6. Fan 2        | 9. Power on/standby button |

<b>D2700</b>	HP StorageWorks D2700 Disk Enclosure	AJ941A#0D1
	25 Small Form Factor (SFF) drive bays	
<b>SAS &amp; SATA Drives (SFF 2.5-inch)</b>	HP 146GB 6G SAS 10K 2.5 inch DP ENT HDD	507125-B21
	HP 300GB 6G SAS 10K 2.5 inch DP ENT HDD	507127-B21
	HP 72GB 6G SAS 15K 2.5 inch DP ENT HDD	512545-B21
	HP 146GB 6G SAS 15K 2.5 inch DP ENT HDD	512547-B21
	HP 500GB 6G SAS 7.2K 2.5 inch DP MDL HDD	507610-B21
	HP 500GB 3G SATA 7.2K SFF (2.5 inch) MDL HDD	507750-B21

**NOTE:** Go to the [HP Hard Drive Compatibility table](http://www.hp.com/products/harddiskdrives) for complete drive compatibility information (<http://www.hp.com/products/harddiskdrives>). Using hard drives in unsupported configurations will result in voiding the warranty and could result in damage to the drive and/or loss of data.

## Configuration Information

### Step 1 - P2000 G3 - Base Configuration

Select one:

Model Name	Part Number
HP StorageWorks P2000 Modular Smart Array 3.5-inch Drive Bay Chassis <ul style="list-style-type: none"> <li>Controller-less chassis with twelve Large Form Factor (LFF) drive bays. Space for two controllers.</li> </ul>	AP838A
HP StorageWorks P2000 Modular Smart Array 2.5-inch Drive Bay Chassis <ul style="list-style-type: none"> <li>Controller-less chassis with twenty-four Small Form Factor (SFF) ProLiant drives bays. Space for two controllers.</li> </ul>	AP839A

There are two array-head chassis - one with twelve 3.5-inch large form factor bays, the other with twenty-four 2.5-inch small form factor drive bays. For an additional twelve drive bays purchase a P2000 3.5-inch Disk Enclosure. You may attach a total of seven P2000 Drive Enclosures for a total of ninety-six LFF drive bays. For 25 additional SFF drive bays purchase D2700 JBOD. You may attach a total of five D2700 JBODs for a total of one hundred and forty nine SFF drive bays. Dual I/O modules JBODS support both single and dual controller arrays.

### Step 2 - Options

Select each option with quantities specified.

#### Step 2a - Options

Quantity	Description with Parts Shipped:	Part Number
1 or 2	HP StorageWorks P2000 G3 MSA Fibre Channel Controller (for either the LFF or SFF P2000 or the two DC-powered chassis)	AP836A
1 or 2	HP StorageWorks P2000 G3 MSA FC/iSCSI Combo Modular Smart Array Controller (for either the LFF or SFF P2000 or the two DC-powered chassis)	AP837A
1 or 2	HP StorageWorks P2000 G3 SAS MSA Fibre Channel Controller (for either the LFF or SFF P2000 or the two DC-powered chassis)	AW592A
1 or 2	HP StorageWorks P2000 G3 10GbE iSCSI MSA Controller (for either the LFF or SFF P2000 or the two DC-powered chassis)	AW595A

#### Step 2b - SAS and SATA Drive Options

**NOTE:** SATA drives are designed for archival or reference data. They should not be used in a heavy or intense I/O environment. Those situations require the use of enterprise-class SAS drives. P2000 3.5-inch drives are for use only with P2000 products.

##### P2000 Large Form Factor (LFF) SAS drives for P2000 G3 FC and P2000 3.5-inch Disk Enclosure

HP P2000 300GB 6G SAS 15K LFF (3.5 inch) DP ENT HDD	AP858A
HP P2000 450GB 6G SAS 15K LFF (3.5 inch) DP ENT HDD	AP859A
HP P2000 600GB 6G SAS 15K LFF (3.5 inch) DP ENT HDD	AP860A

##### P2000 Large Form Factor (LFF) SAS MDL DP drives for P2000 G3 FC and P2000 3.5-inch Disk Enclosure

HP P2000 1TB 6G SAS 7.2K LFF (3.5 inch) DP MDL HDD	AP861A
HP P2000 2TB 6G SAS 7.2K LFF (3.5 inch) DP MDL HDD	AW555A

##### MSA2 Large Form Factor (LFF) SATA drives for P2000 array head an P2000 disk enclosure

HP StorageWorks MSA2 1TB 7.2K LFF (3.5-inch) SATA DP HDD	AJ740A
--	--------



### Configuration Information

HP P2000 2TB 3G SATA 7.2K LFF (3.5-inch) DP HDD AW556A

**ProLiant Small Form Factor (SFF) SAS drives for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**

HP 146GB 6G SAS 10K SFF (2.5 inch) DP ENT HDD	507125-B21
HP 300GB 6G SAS 10K SFF (2.5 inch) DP ENT HDD	507127-B21
HP 72GB 6G SAS 15K SFF (2.5 inch) DP ENT HDD	512545-B21
HP 146GB 6G SAS 15K SFF (2.5 inch) DP ENT HDD	512547-B21

**ProLiant Small Form Factor (SFF) SAS MidLine drive for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**

HP 500 GB 6G SAS 7.2K SFF (2.5 inch) DP MDL HDD	507610-B21
---	------------

**ProLiant Small Form Factor (SFF) SATA MidLine drive for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**

**(NOTE: SFF SATA drives are single ported and therefore do not have a fail-over path intrinsic to their design)**

HP 500 GB 3G SATA 7.2K SFF (2.5 inch) MDL HDD	507750-B21
---	------------

### Step 2c - Drive Enclosure Options

Use either disk enclosure with Large or Small Form Factor, single or dual controller array heads. Each ship with two .5m mini-SAS to mini-SAS cables.

HP StorageWorks P2000 Dual I/O 3.5-inch 12 Drive Disk Enclosure	AP843A
HP StorageWorks D2700 Dual I/O 2.5-inch 25 Drive Disk Enclosure	AJ941A
HP StorageWorks P2000 Drive Enclosure I/O Module (Only used in conjunction with the P2000 blank chassis (AP838A) if a single I/O disk enclosure is desired. No cable included)	AP844A

### Step 2c - SAS Cable Options

**miniSAS to miniSAS Cables:**

Connecting P2000 G3 FC or SAS controller to a JBOD if a longer cable is desired. Also used for attaching the P2000 G3 SAS host ports to servers

HP Ext miniSAS to miniSAS 1m Cable	407337-B21
HP Ext miniSAS to miniSAS 2m Cable	407339-B21

## Configuration Information

### Step 3 - Other P2000 G3 Options

#### Choose optional AC Power Cords (2 required)

**NOTE:** Two PDU cables: one 142263-008 (Black) and one 1422633-013 (Grey), ship standard with all AC-powered enclosures.

Power Cord, 220/240 VAC, (US/Canada/Mexico)	227099-001
Power Cord, (Australia/China/New Zealand)	227098-001
Power Cord, (Central Europe)	157215-001
Power Cord, (United Kingdom/Hong Kong)	157216-001
Power Cord, (Switzerland)	157219-001
Power Cord, (Italy)	157217-001
Power Cord, (Denmark)	157218-001
Power Cord, (Japan)	139867-001
Power Cord, (South East Asia/India)	157220-001

### Step 4a - Choose Supported Options For Fibre Channel Infrastructure

Fibre Channel Host Bus Adapters - X86 servers	Model	Description	Part Number
	<b>BladeSystem c-Class Fibre Channel Mezzanine HBAs</b>		
		QLogic QMH2562 8Gb FC HBA for HP c-Class BladeSystem	451871-B21
		HP BLc Emulex LPe1205- 8Gb FC HBA for HP c-Class BladeSystem	456972-B21
		Lpe1105-HP 4Gb FC HBA for HP c-Class BladeSystem	403621-B21
		QMH2462 4Gb FC HBA for HP c-Class BladeSystem Windows and Linux	403619-B21
		Brocade 804 8Gb FC HBA for HP BladeSystem c-Class, Windows, VMware, Linux	590647-B21
	<b>StorageWorks Fibre Channel HBAs</b>		
	<b>NOTE:</b> Please visit <a href="http://www.hp.com/go/fchba">www.hp.com/go/fchba</a> for product details and <a href="http://www.hp.com/storage/spock">www.hp.com/storage/spock</a> for compatibility details.		
	<u>Brocade Fibre Channel HBAs</u>		
		HP StorageWorks 81B PCI-e FC HBA Single Port	AP769A
		HP StorageWorks 82B PCI-e FC HBA Dual Port	AP770A
		HP StorageWorks 41B 4Gb PCI-e FC HBA	AP767A
		HP StorageWorks 42B 4Gb Dual-Port PCI-e FC HBA	AP768A
	<u>Emulex Fibre Channel HBAs</u>		
		HP StorageWorks 81E PCI-e FC HBA Single Port	AJ762A
		HP StorageWorks 82E PCI-e FC HBA Dual Port	AJ763A
		HP StorageWorks FC2142 4Gb PCI-e HBA	A8002A
		HP StorageWorks FC2242 Dual Channel 4Gb PCI-e HBA	A8003A
	<u>QLogic Fibre Channel HBAs</u>		
		HP StorageWorks 81Q PCI-e FC HBA Single Port	AK344A
		HP StorageWorks 82Q PCI-e FC HBA Dual Port	AJ764A
		HP StorageWorks FC1142 4Gb PCI-e HBA	AE311A
		HP StorageWorks FC1242 Dual Channel 4Gb PCI-e HBA	AE312A
<b>Fibre Channel Integrity</b>		HP PCI-X 2.0 1Port 4Gb	AB378B

### Configuration Information

#### Host Bus Adapters - Integrity servers

HP PCI-X 2.0 2Port 4Gb Fibre Channel HBA	AB379B
HP PCIe 2Port 4Gb Fibre Channel HBA	AD300A
HP PCIe 1Port 4Gb Fibre Channel HBA	AD299A
HP PCIe 2-Port 4Gb Fibre Channel HBA	AD355A
HP PCIe 1p 4Gb FC and 1p 1000BT Adapter	AD221A
HP PCIe 2p 4Gb FC and 2p 1000BT Adapter	AD222A
HP PCIe 2p 4Gb FC and 2p 1000BSX Adapter	AD393A
HP PCI-x 1p 4Gb FC and 1p 1000BT Adapter	AD193A
HP PCI-x 2p 4Gb FC and 2p 1000BT Adapter	AD194A
HP PCIe 1-port 8Gb FC SR (QLogic) HBA	AH400A
HP PCIe 2-port 8Gb FC SR (QLogic) HBA	AH401A
HP PCIe 1-port 8Gb FC SR (Emulex) HBA	AH402A
HP PCIe 2-port 8Gb FC SR (Emulex) HBA	AH403A
<b>Integrity server blades</b> HP BLc Emulex LPe1105 FC HBA Opt Kit	403621-B21
HP BLc QLogic QMH2462 HC HBA Opt Kit	403619-B21
HP BLc Q MH 2562 8Gb FC HBA	451871-B21
HP BLc Emulex LPe1205 8Gb FC HBA	456972-B21

#### Fibre Channel Switches

HP StorageWorks 8/8 Base SAN Switch	AM866A
HP StorageWorks 8/8 SAN Switch	AM867A
HP StorageWorks 8/24 Base SAN Switch	AM868A
HP StorageWorks 8/40 Base SAN Switch	AM869A
HP StorageWorks 8/40 Power Pack+ SAN Switch	AM870A
HP StorageWorks 8/80 Power Pack+ SAN Switch	AM872A
HP StorageWorks 8/80 Base SAN Switch	AM871A
HP StorageWorks 1606 Power Pack+ Extension SAN Switch	AP864A
HP StorageWorks 1606 Full Extension SAN Switch	AP863A
HP StorageWorks 1606 Base Extension SAN Switch	AP862A
HP StorageWorks 2408 FCoE Base Converged Network Switch	AP801A
HP StorageWorks 2408 FCoE Power Pack+ Converged Network Switch	AP802A
HP StorageWorks Encryption SAN Switch	AR944A
HP StorageWorks DC04 Power Pack+ SAN Director	AR479A
HP StorageWorks DC04 SAN Director	AR478A
Brocade 8/12c SAN Switch for HP BladeSystem c-Class	AJ820A
Brocade 8/24c SAN Switch for HP BladeSystem c-Class	AJ821A
Brocade 8/24c SAN Switch for HP BladeSystem c-Class Power Pack+	AJ822A
HP StorageWorks 8/20q Fibre Channel Switch (8 switch ports active)	AQ233A
HP StorageWorks 8Gb Simple SAN Connection Kit (8 switch ports active)	AK241A
HP StorageWorks 8/20q Fibre Channel Switch (16 switch ports active)	AK242A
HP SN6000 Stackable 8Gb 24-port single power supply FC Switch (20 device ports/4 stacking (ISL) ports active)	AW575A
HP SN6000 Stackable 8Gb 24-port dual power supply FC Switch (20 device ports/4 stacking (ISL) ports active)	AW576A

### Configuration Information

HP StorageWorks SN6000 Stackable 8 Gb 12-port Single Power Fibre Channel Switch (8 device ports/4 stacking (ISL) ports active)	BK780A
Cisco MDS 9124 8-ports Active Fabric Switch	AG646A
Cisco MDS 9124 16-ports Active Fabric Switch	AG647A
Cisco MDS 9124 24-ports Active Fabric Switch	AG648A
Cisco MDS 9124e 12-port Fabric Switch for HP c-Class BladeSystem	AG641A
Cisco MDS 9124e 24-port Fabric Switch for HP c-Class BladeSystem	AG642A
Cisco MDS 9134 24-ports Active Fabric Switch	AG874A
Cisco MDS 9134 32-ports Active Fabric Switch	AG875A

<b>PremierFlex OM3+ type cables P2000 G3</b>	0.5m PremierFlex LC/LC Multi-Mode Optical Cable	BK837A
	1m PremierFlex LC/LC Multi-Mode Optical Cable	BK838A
	2m PremierFlex LC/LC Multi-Mode Optical Cable	BK839A
	5m PremierFlex LC/LC Multi-Mode Optical Cable	BK840A
	15m PremierFlex LC/LC Multi-Mode Optical Cable	BK841A
	30m PremierFlex LC/LC Multi-Mode Optical Cable	BK842A
	50m PremierFlex LC/LC Multi-Mode Optical Cable	BK843A

<b>OM3 FC LC-LC cables options for the P2000 G3</b>	LC-LC Multi-Mode OM3 Fibre Channel Cable 0.5m	AJ833A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 1m	AJ834A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 2m	AJ835A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 5m	AJ836A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 15m	AJ837A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 30m	AJ838A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 50m	AJ839A

<b>OM2 LC-LC type cables</b>	2 m LC-LC Multi-Mode Fibre Channel Cable	221692-B21
	5 m LC-LC Multi-Mode Fibre Channel Cable	221692-B22
	15 m LC-LC Multi-Mode Fibre Channel Cable	221692-B23
	30 m LC-LC Multi-Mode Fibre Channel Cable	221692-B26
	50 m LC-LC Multi-Mode Fibre Channel Cable	221692-B27

<b>LC-SC for between 1 Gb and 2Gb devices</b>	2 m LC-SC Multi-Mode Fibre Channel Cable	221691-B21
	5 m LC-SC Multi-Mode Fibre Channel Cable	221691-B22
	15 m LC-SC Multi-Mode Fibre Channel Cable	221691-B23
	30 m LC-SC Multi-Mode Fibre Channel Cable	221691-B26

### Step 4b - Choose Supported Options For 10GbE Infrastructure

- verify that the cable/transceiver is supported with the connecting device (i.e. switch or NIC/iSCSI HBA)



### Configuration Information

<b>Copper Cable</b>	HP 0.5m SFP+ 10GbE Copper Cable	487649-B21
	HP 1m SFP+ 10GbE Copper Cable	487652-B21
	HP 3m SFP+ 10GbE Copper Cable	487655-B21
	HP 5m SFP+ 10GbE Copper Cable	537963-B21
	HP 7m SFP+ 10GbE Copper Cable	487658-B21
<b>SFP</b>	HP BladeSystem 10Gb SR SFP+	455883-B21
	HP BladeSystem 10Gb LRM SFP+	455889-B21
	HP ProCurve 10-GbE SFP+ 1m Direct Attach Cable	J9281B
	HP ProCurve 10-GbE SFP+ 3m Direct Attach Cable	J9283B
	HP ProCurve 10-GbE SFP+ 7m Direct Attach Cable	J9285B
	HP ProCurve 10-GbE SFP+ SR Transceiver	J9150A
	HP ProCurve 10-GbE SFP+ LRM Transceiver	J9152A
<b>NIC</b>	HP NC522SFP Dual Port 10GbE Server Adapter	468332-B21
	HP NC524SFP Dual Port 10GbE Module	489892-B21
	HP NC550SFP Dual Port 10GbE Server Adapter	581201-B21
	HP NC522m Dual Port Flex -10 10GbE Multifunction BL-c Adapter	467801-B21
	HP NC532m 10GbE Dual Port Flex-10 10GbE Multifunction BL-c Adapter	467799-B21
	HP NC550m 10Gb 2-port PCIe x8 Flex-10 Ethernet Adapter	581204-B21
<b>iSCSI HBA - standup</b>	Qlogic QLe4062c	Reference sell
<b>iSCSI HBA - mezz</b>	HP BLc QLogic iSCSI Dual Port Adapter with Virtual Connect Kit	488074-B22
<b>NIC - mezz</b>	HP NC522m Dual Port 10GbE Multifunction BL-c Adapter	467801-B21

### Step 4c - Choose Supported Options For SAS connection

HP SC08e 6Gb SAS HBA	614988-B21
----------------------	------------

### Step 5 - Choose Rack Options

Select each required option with quantities specified.

#### Rack Cabinet, Customer Assembled

100 Series rack v142	AF046A
----------------------	--------

#### 14U rack

HP S10614 Rack with Shock Pallet	292302-B22
----------------------------------	------------

#### Rack Cabinets 10622 G2

10622 G2 Universal Rack w/Shock Pallet	AF022A
10622 G2 Universal Rack w/Standard Pallet	AF021A

#### Rack Cabinets under 10636 G2

10636 G2 (36U) Rack Cabinet - Pallet	AF011A
10636 G2 (36U) Rack Cabinet - Shock Pallet	AF012A
10636 G2 (36U) Rack Cabinet - Crated	AF013A
10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet	AF014A

### Configuration Information

#### Rack Cabinets 10642 G2

10642 G2 (42U) Rack Cabinet - Pallet	AF001A
10642 G2 (42U) Rack Cabinet - Shock Pallet	AF002A
10642 G2 (42U) Rack Cabinet - Crated	AF003A
1200 mm deep 10642 G2 rack (42U) on shock pallet	AF034A
Modular Cooling System G2 (MCS G2)	AF025A
Modular Cooling System G2 10642 G2 Expansion Rack	AF026A

#### Rack Cabinets 10842 G2

10842 G2 Universal Rack w/Shock Pallet	AF042A
10842 G2 Universal Rack w/Standard Pallet	AF041A

#### Rack Cabinets 10647 G2

10647 Rack G2 Pallet	AF031A
----------------------	--------

### Technical Specifications

<b>P2000 G3 FC</b> <b>P2000 G3 FC/iSCSI</b> <b>P2000 G3 SAS</b> <b>P2000 G3 10GbE iSCSI</b>	<b>POWER REQUIREMENTS</b>	
	Input Power Requirements (typical-running I/O)	<ul style="list-style-type: none"> <li>• 8G FC (2 Port - 8G FC) 110VAC 3.32A, 365W; 220VAC 1.61A, 355W</li> <li>• FC/iSCSI Combo (2 Port - 8G FC + 2 Port - 1G iSCSI) 110VAC; 3.64A, 400W, 220VAC 1.77 A, 390W</li> <li>• 6G SAS (4 Port - 6G SAS) 110VAC 3.49A, 4384W, 220VAC 1.7A 374W</li> <li>• 10GbE iSCSI (2 Port - 10 GbE iSCSI)</li> <li>• 110VAC 3.67A, 395W, 220VAC, 1.95 388.2W</li> </ul>
	Max Input Power	100-240 VAC, 50/60 Hz., 4.5-1.9A; 48-60 VDC 10.4A/8.3A
	Heat Dissipation	1622 BTU/hr
	<b>TEMPERATURE AND HUMIDITY RANGES</b>	
	Operating Temperature	41°F to 104°F (5°C to 40°C)
	Shipping Temperature	-40°F to 158°F (-40°C to 70°C)
	Operating Humidity	10% to 90% RH @ 104°F (40°C) non-condensing
	Non-Operating Humidity	Up to 93% RH @ 104°F (40°C)
	<b>DECLARED ACOUSTIC NOISE LEVELS</b>	
	Sound Power	A weighted sound power LWAd=6,75 B
	Sound Pressure	A weighted sound pressure LpAm - 55dB
	<b>SHOCK AND VIBRATION</b>	
	Shock, Operational	10G's for 10 milliseconds
	Shock, Non-Operational	15G 11ms half sine
	Vibration, Operational	5-500Hz, 0.21Grms flat
	Vibration, Non-Operational	3-365-3Hz, 1.22 Grms, z-axis, 0.85 Grms, X&Y axis shaped spectrum
	<b>PHYSICAL</b>	
	Height	3.5 in / 8.9 cm
	Depth (excluding cables) (back of ear to back of controller handle)	P2000 G3 FC SFF 24-bay array: 20.28 in / 51.510 cm P2000 G3 FC LFF 12-bay array: 21.3 in. / 55.1 cm
	Width (body only)	17.6 in / 44.7 cm (w/ ears 19 in / 48.26 cm)
	Chassis Weight (no controllers)	P2000 LFF chassis: 34.1 lbs. (DC-pwr model: 37.9 lbs) P2000 SFF chassis: 32.3 lbs (DC-pwr model: 36.1 lbs)

## Technical Specifications

<b>P2000 G3 FC Controller</b>	<b>User Interface</b>	Status and activity provided via management interfaces. Status Indicators on front of Controller
	<b>RAID Support</b>	0, 1, 3, 5, 6, 10, 50
<b>FC/iSCSI Combo Controller</b> <b>P2000 G3 SAS Controller</b>	<b>Cache Memory</b>	2GB Read/Write. ECC protection with backup to Flash memory (indefinite backup)
	<b>Cache Backup</b>	ECC protection with back up to flash memory (indefinite backup)
<b>P2000 G3 10GbE iSCSI Controller</b>	<b>Upgradeable Firmware</b>	yes
	<b>Disk Drive and Enclosure Protocol Support</b>	6 Gb SAS - Serial Attached SCSI
	<b>Host Ports</b>	FC: 2 x 8Gb Fibre Channel SFP+ SAS: 4 -4x lane 6 Gb SAS Host Connections 10GbE iSCSI: 2 x 10GbE SFP+
	<b>Expansion Port</b>	SAS (SFF8088) 4x lane 6 Gb SAS
	<b>Weight, controller</b>	P2000 G3 Fibre Channel, FC/iSCSI, SAS, and 10GbE iSCSI MSA Controllers 4.5lbs. 10GbE iSCSI is 4.89 lbs

<b>P2000 G3 Regulatory Info</b>	<b>Safety</b>	UL 60950-1 (USA)
		CAN/CSA-C22.2 No.60950-1-03 (Canada)
		EN 60950-1 (European Union)
		GS mark (Germany)
		IEC 60950-1 (International)
		CCC Mark (power supply only, China PRC)
	<b>Electromagnetic Compatibility</b>	VCCI:2008-04 Class A (Japan)
		FCC 15:109(g) Class A (USA)
		ICES-003:2004 Class A (Canada)
		EN55022 : (European Union Class A); CISPR 22 (International Class A)
		EN61000-3-2 : (Harmonics) (European Union)
		EN61000-3-3 : (Flicker) (European Union)
		EN 55024 (European Union, Immunity, Class A);CISPR 24 (International Immunity, Class A)
		AS/NZS CISPR 22, Class A (Australia, New Zealand)
	CNS 13438 Taiwan, Class A (Taiwan)	
KN22 Class A (Emissions Class A); KN24 (Immunity) (S Korea)		
<b>RoHS and WEEE</b>	RoHS-6/6 Compliance, China RoHS, WEEE	
<b>Country Approvals</b>	United States ,Australia/New Zealand, Canada, China (PRC), European Union, Germany (GS Mark), Japan, South Korea, Taiwan	

### *Technical Specifications*

© Copyright 2010 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation. Unix is a registered trademark of The Open Group.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.