



Fiber Optic Network Solutions

Comprehensive Solutions from the Edge to the Core


- Metro Ethernet
- VDSL2
- Media Conversion
- Industrial Fiber
- GEPO



Introduction




In the broadband communication, the fiber optic network deployment is increasingly applied to today's cloud applications and high-demanding multimedia streaming service. The fiber optic transmission has large advantages over the existing copper wire as the optic fiber cable carries much lower attenuation and interference. However, compared to the existing copper or UTP cable, fiber optic is relatively expensive and difficult to be widely deployed in a short period of time. Besides, fiber optic system is usually employed by core networks such as telecommunications, campuses and hospitals, utilizing fiber switches, media converters, GEPON passive optic devices, and more. There are various available ways to efficiently deploy fiber connectivity network.

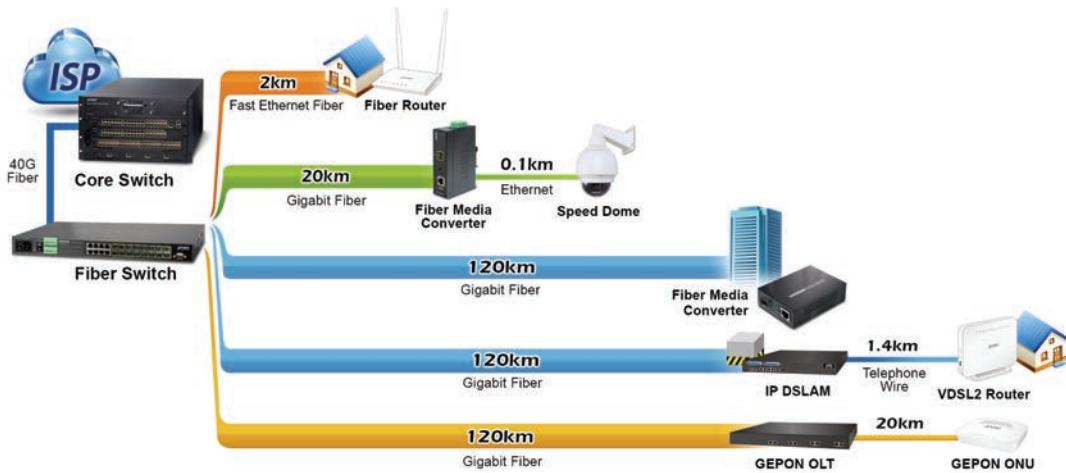

Comprehensive Solutions from the Edge to the Core

Through decades of experience in IP networking and fiber communication, PLANET has developed a comprehensive fiber connectivity solution to help ISPs and telecoms quickly construct broadband service as well as the fast connectivity to the edge.

PLANET provides a broad range of fiber-related product lines adapting to all kinds of work environments. PLANET delivers solutions to fiber connectivity in commercial, carrier grade, and especially industrial level products for stable networking in wide operating temperature. In the Chile's miners rescue mission in 2010, PLANET fiber solution successfully assisted the miners trapped in a 624-meter tunnel in hopes of looking for lives via visual and voice communication with their families and rescue team.

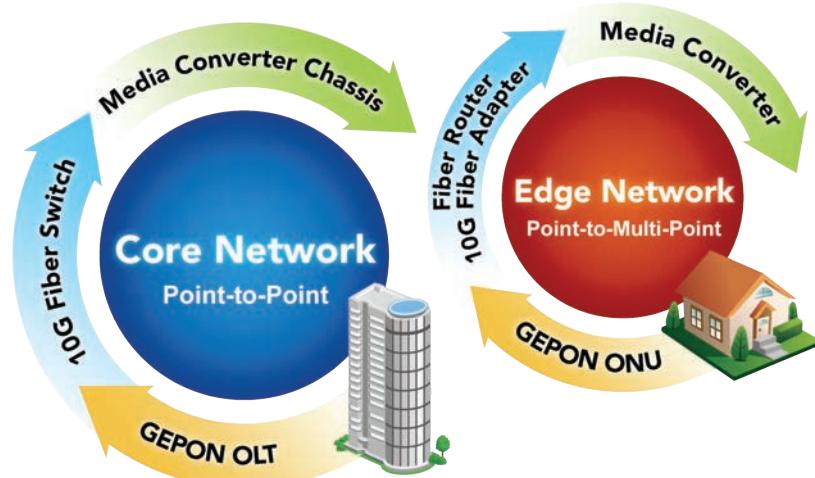


Metro Fiber Switches



To improve the technology of Optical Fiber Ethernet with highly-flexible, highly-extendable and easy-to-install features, the data exchange speed of Optical Fiber Ethernet is up to 100Gbps and the distance of Gigabit Optical Fiber is up to 120km. PLANET provides many kinds of Point-to-Multi Point Managed Fiber Switches and CPE especially for Metro Ethernet applications. The benefits of Metro Ethernet Switches include not only professional Internet Management Technology, such as IPv6/IPv4 Dual-Stack, Q-in-Q VLAN, Multicast, QoS, Security and High Availability, but also Optical Ethernet Internet Architecture up to 100Gbps to meet the needs of high-bandwidth multi-media. PLANET Metro Ethernet Switch Solution is the best choice to connect the enterprise, community and campus in the metropolitan area to backbone network for service providers.

The Advantages of Metro Ethernet

- Long distance and better quality of transmission for Optical Ethernet: the distance up to 120km between points
- Lower cost for installation of Gigabit Ethernet and 10Gigabit Ethernet
- Easy Internet architecture, the same and simple Protocol from LAN to MAN
- Flexible bandwidth management based on customers' demands
- Meeting the demands for high bandwidth triple-play service

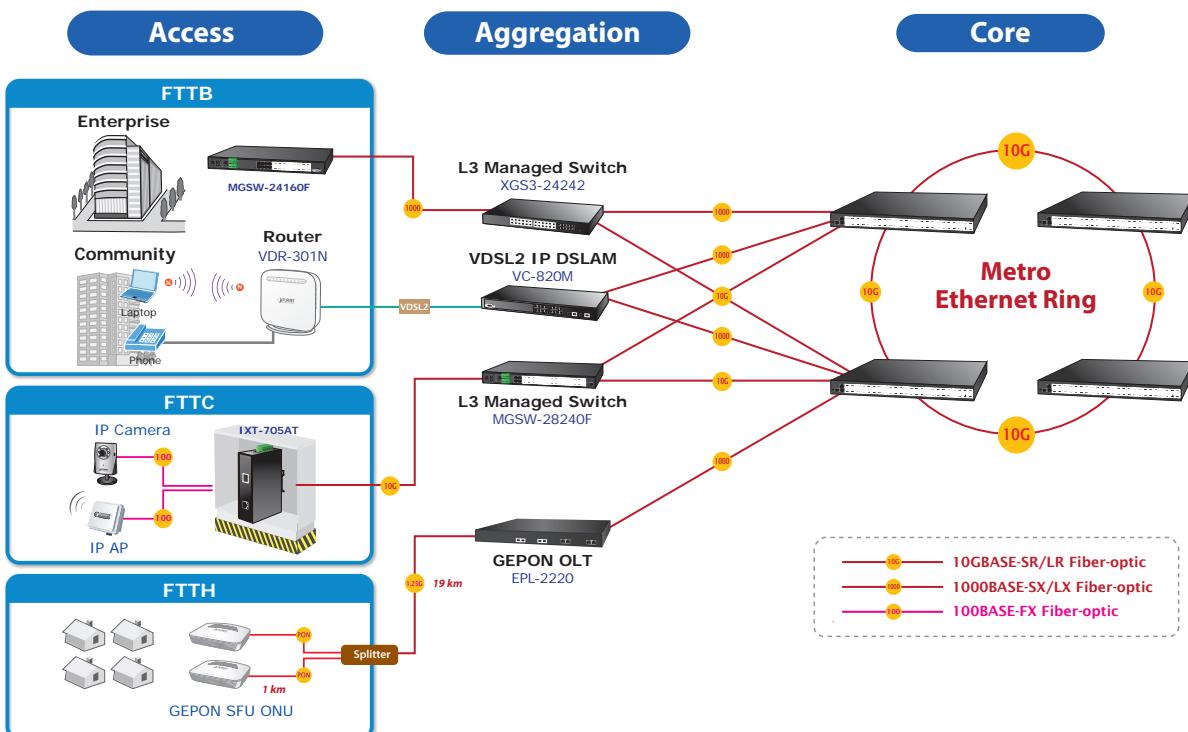

Metro Fiber Switches

Metro Core Multi-Layer IPV6/IPV4 Routing Switches

Chassis Switch			Multi-Layer	Stackable
Model	XGS3-4200R	Model	XGS3-24242	SGS-6341-16S8C4XR
Product Image		Product Image		
Chassis Slots	Total Number of Slots	4 (2 Management Modules + 2 Standard Modules or 1 Management Module + 3 Standard Modules)	Hardware	
	Max. Management Module	2	10/100BASE-TX	-
	Max. Standard Module	3	10/100/1000BASE-T	12 combo
	Management Module Redundancy	●	Mini-GBIC / SFP	24
	Number of Power Supply Bays	2	10G SFP+ Slot	4
Total Port Capacity	Max. 10G XFP Slot	12	PoE 802.3at Port	-
	Max. 10/100/1000BASE-T	160	PoE Budget	-
	Max. 1000BASE-SX/LX SFP Slot	96	Switch Fabric	208Gbps
Hardware Specifications	Switch Processing Scheme	Store-and-Forward	MAC Table	128Gbps
	Backplane Bandwidth	1.2Tbps	Jumbo Frame	16K
	Switching Capacity	376Gbps	Memory Buffer	9K
	Full-Mesh Switching Capacity	160Gbps	IP Interfaces	1.5MB
	MAC Table	Max.32K	Routing Tables	1K
	VLAN Table	4K	Layer 3 Features	1K/256
	ACL Table	16K max.	Routing Protocols	RIP, OSPFv2/v3,BGPv4/v4+ RIPng, PIM-DM/SM/SSM, VRRP
	Routing Table	IPv4 Protocol: 128K max. IPv6 Protocol: 64K max.	Hardware Accelerated	●
IPv4 Layer 3 Functions	Layer 3 Interface	500 max.	Interface	●
	Port Queues	8	Port Mirror	TX, RX, Both
	Jumbo Frame	9kbytes	Port Trunk	TX, RX, Both
	Dimensions (W x D x H)	440 x 421 x 266 mm	LACP	TX, RX, Both
	Power Input	AC: Input 100~240V, 50~60 Hz	802.1Q VLAN	TX, RX, Both
IPv6 Layer 3 Functions	IP Routing Protocol	Static Route, RIPv1/v2, OSPFv2, BGP4, Policy-based Routing (PBR), LPM Routing(MD5 authentication)	Q-in-Q VLAN	TX, RX, Both
	Multicast Routing Protocol	IGMP v1/v2/v3, DVMRP, PIM-DM/SM, PIM-SSM	Private VLAN	TX, RX, Both
	Layer 3 Protocol	VRRP, ARP, ARP Proxy	Spanning Tree	TX, RX, Both
	Routing Interface	Per VLAN	802.1D	TX, RX, Both
IPv6 Layer 3 Functions	IP Routing Protocol	RIPng, OSPFv3, BGP4+	802.1w	TX, RX, Both
	Layer 3 Protocol	Configured Tunnels, ISATAP, CIDR	802.1s	TX, RX, Both
Layer 2 Functions	Multicast	MLDv1/v2, MLD v1/v2 Snooping	Rapid Data Recovery	TX, RX, Both
	Access Control List	Supports Standard and Expanded ACL, IP-based ACL / MAC-based ACL, Time-based ACL, ACL Pool can be used for QoS classification, Up to 1K entries	E.R.P.S.	TX, RX, Both
	Security	IPv4 / IPv6 + MAC + Port Binding, IPv4/IPv6 + Port Binding, ARP Spoofing Prevention, ARP Scanning Prevention, IP Source Guard	IGMP Snooping	v1, v2, v3
	Authentication	IEEE 802.1x Port-based Network Access Control, AAA Authentication: IPv4 / IPv6 over RADIUS	MVR	v1, v2, v3
Management Function	System Configuration	Console, Telnet, SSH, Web Browser, SSL SNMPv1, v2c and v3	802.1p Priority	●/8 queues
	Management	United for IPv4/IPv6 HTTP and SSL, the user IP Security inspection for IPv4/IPv6 SNMP, IPv4/IPv6 NTP, IPv4/IPv6 SSH, SNMP v1/v2c/v3, TACACS+, security IP Safety Net Management Function	Priority Mode	●/8 queues
Standards Conformance	Regulatory Compliance	FCC Part 15 Class A, CE	IP TOS/DSCP	Strict/WRR
			QoS Mode	Strict/WRR
			DiffServ Policy QoS	●
			Ingress/Egress	●/●
			Access Control List	●/●
			IP-based	●
			MAC-based	●
			802.1x Port-based Authentication	●
			MAC Filtering	●
			Port Security	●
			IPv6/IPv4	●/●
			Console	●/●
			Telnet	●/●
			Web Management	●/●
			SNMP	v1, v2c, v3
			RMON	v1, v2c, v3
			SSH/SSL	1, 2, 3, 9
			Firmware Upgrade	1, 2, 3, 9
			Configuration Backup/Recovery	●/●
			Single IP Management	●/●
			Syslog	●/●
			Physical	Dimensions (W x D x H)
				440 x 350 x 44 mm
				Power Supply
				100~240V AC, -48 DC RPS
				EMI/Safety
				FCC Class A,CE
				FCC Class A,CE

Metro Core 10G Routing Switches

	Standalone			
Model	XGS-6350-24X4C	XGS-6350-12X8TR	XGS-5250-12X8CR	
Product Image			 TAIWAN EXCELLENCE 2018	
Hardware				
10/100/1000BASE-T	-	8	8	
1000BASE-X SFP	-	-	8 combo	
10G SFP+ Slot	24	12	12	
40G QSFP+ Slot	-	-	-	
100G QSFP28 Slot	4 (Compatible with QSFP+ 40G)	-	-	
PoE 802.3at Port	-	-	-	
PoE Budget	-	-	-	
Switch Fabric	1.28Tbps	256Gbps	256Gbps	
MAC Table	32K	32K	32K	
Jumbo Frame	9K	9K	9K	
Memory Buffer	3MB	3MB	3MB	
Layer 3 Features				
IP Interfaces	128	128	128	
Routing Tables	16K	128	32	
Routing Protocols	Static routing, RIP and OSPF	Static routing, RIP and OSPF	Static routing	
Accelerated Hardware	-	-	-	
Interface	Port Mirror	TX, RX, Both	TX, RX, Both	
Link Aggregation	Port Trunk	●	●	
	LACP	●	●	
VLAN	802.1Q VLAN	●/4K	●/4K	
	Q-in-Q VLAN	●	●	
	Private VLAN	●	●	
Spanning Tree	802.1D	●	●	
	802.1w	●	●	
	802.1s	●	●	
Rapid Data Recovery	E.R.P.S	-	-	
Multicast	IGMP Snooping	v1, v2, v3	v1, v2, v3	
	MVR	●	●	
Quality of service	802.1p Priority	●/8 queues	●/8 queues	
	Priority Mode	Strict/WRR	Strict/WRR	
	IP TOS/DSCP	●	●	
	QoS Mode	Port-CoS, DSCP-CoS, L4 Port-CoS		
	DiffServ Policy Qos	●	●	
Data Control	Ingress/Egress	●/●	●/●	
Access Control List	IP-based	●	●	
	MAC-based	●	●	
Security	802.1x Port-based Authentication	●	●	
	MAC Filtering	●	●	
	Port Security	●	●	
Management	IPv6/IPv4	●/●	●/●	
	Console	●/RJ45	●/RJ45	
	Telnet	●	●	
	Web Management	●	●	
	SNMP	v1, v2c, v3	v1, v2c, v3	
	RMON	1, 2, 3, 9	1, 2, 3, 9	
	SSH/SSL	●/-	●/-	
	Firmware Upgrade	●	●	
	Configuration Backup/Recovery	HTTP, TFTP	HTTP, TFTP	
	Single IP Management	-	-	
	Syslog	●	●	
Physical	Dimensions (W x D x H)	442.5 x 315 x 44 mm	442.5 x 315 x 44 mm	
	Power Supply	Dual 100~240V AC, 50/60Hz	Dual 100~240V AC, 50/60Hz Dual 40~60V DC	
Regulatory	EMI/Safety	FCC Class A, CE	FCC Class A, CE	

Metro Fiber Switches

Metro Core IPv6/IPv4 Routing Switches

	Metro Fiber Switches				Standalone		
Model	MGSD-10080F	MGSW-24160F	MGSW-28240F	IGS-6325-20S4C4X	GS-5220-16S8C	GS-5220-44S4C	GS-5220-46S2C4X
Product Image							
Hardware	10/100BASE-TX	-	-	-	-	-	-
	10/100/1000BASE-T	2	8	4 (combo)	4 (combo)	8 (combo)	4 (combo)
	Mini-GBIC / SFP	8 (100FX Compatible)	16 (100FX Compatible)	24 (100FX Compatible)	24 (100FX Compatible)	24	48
	10G SFP+ Slot	-	-	4 (1000X Compatible)	4 (1000X Compatible)	-	4 (1000X Compatible)
	Switch Fabric	20Gbps	48Gbps	128Gbps	128Gbps	48Gbps	96Gbps
	MAC Table	8K	8K	32K	32K	16K entries	16K entries
	Jumbo Frame	9K	9K	10K	10K	10K bytes	10K bytes
	Memory Buffer	4Mbps	4Mbps	32Mbps	32Mbps	16Mbps	32Mbps
Layer 3 Features	IP Interfaces	128	128	128	128	128	128
	Routing Tables	32	32	32	128	32	32
	Routing Protocols	Static routing	Static routing	Static routing, OSPFv2		Static routing	Static routing
	Accelerated Hardware	-	-	-	-	-	-
Interface	Port Configuration	●	●	●	●	●	●
	Port Mirror	TX, RX, Both	TX, RX, Both	TX, RX, Both	TX, RX, Both	TX, RX, Both	TX, RX, Both
	DDM	●	●	●	●	●	●
Link Aggregation	Port Trunk	5 Trunks / 8 Ports	24 Trunks / 8 Ports	24 Trunks / 8 Ports	24 Trunks / 8 Ports	12 Trunks / 8 Ports	24 Trunks / 8 Ports
	LACP	●	●	●	●	●	●
VLAN	Port-based	●	●	●	●	●	●
	802.1Q VLAN	●/256	●/256	●/256	●/256	●/256	●/256
	Protocol-based	-	-	●	●	●	●
	GVRP	-	-	-	-	-	-
Spanning Tree	802.1D	●	●	●	●	●	●
	802.1w	●	●	●	●	●	●
	802.1s	●	●	●	●	●	●
Multicast	IGMP Snooping	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	●	●
	MVR	●	●	●	●	●	●
Quality of Service	802.1p Priority	●/4 queues	●/4 queues	●/8 queues	●/8 queues	●/8 queues	●/8 queues
	Priority Mode	Strict/WRR	Strict/WRR	Strict/WRR	Strict/WRR	Strict/WRR	Strict/WRR
	IP TOS/DSCP	●	●	●	●	●	●
	QoS Mode	Port-COS, DSCP-COS, L4 Port-COS				Port-COS, DSCP-COS, L4 Port-COS	
Data Control	DiffServ Policy QoS	●	●	●	●	●	●
	Ingress / Egress	●/●	●/●	●/●	●/●	●/●	●/●
Access Control List	IP-based	●	●	●	●	●	●
	MAC-based	●	●	●	●	●	●
Security	802.1x Port-based Authentication	●	●	●	●	●	●
	MAC Binding	●	●	●	●	●	●
	MAC Filtering	●	●	●	●	●	●
	Port Security	●	●	●	●	●	●
Management	IPv6 / IPv4	●/●	●/●	●/●	●/●	●/●	●/●
	Console (RS232)	RJ45 Console	RJ45 Console	RJ45 Console	RJ45 Console	RJ45 Console	RJ45 Console
	Telnet	●	●	●	●	●	●
	Web Management	●	●	●	●	●	●
	SNMP	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
	RMON	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9	●	●
	SSH/SSL	●/●	●/●	●/●	●/●	●/●	●/●
	Firmware Upgrade	HTTP, TFTP	HTTP, TFTP	HTTP, TFTP	HTTP, TFTP	HTTP, TFTP	HTTP, TFTP
	Configuration backup/recovery	●	●	●	●	●	●
Physical	Syslog	●	●	●	●	●	●
	Dimensions (W x D x H)	330 x 155 x 43.5 mm	440 x 200 x 44 mm	440 x 200 x 44 mm	440 x 200 x 44 mm	440 x 300 x 44.5 mm, 1U height	440 x 200 x 44.5 mm, 1U height
	Power Supply	100–240V AC, 50/60Hz -48V DC RPS				AC 100–240V, 50/60Hz	
	EMI/Safety	FCC Class A, CE	FCC Class A, CE	FCC Class A, CE	FCC Class A, CE	FCC Part 15 Class A, CE	

Industrial Fiber Switches & Media Converters




PLANET Industrial Ethernet Solution offers high reliability and security to ensure continuous industrial operation in harsh environments such as factory floors, outdoors, and places with extreme temperatures. The Industrial Ethernet upgrades the traditional, proprietary factory-floor networks to a low-cost, high-performance, and scalable architecture. PLANET Industrial Ethernet switches and converters integrate 100/1000 Fiber technology with highly-reliable and long-reach data transmission. PLANET provides suitable product portfolio for information level, control level, and device level in the Industrial Ethernet network.



Fiber-Optic Link Capability Extends the Range of Network Deployment

The SFP slots built in with PLANET Industrial Fiber Switches are compatible with 100BASE-FX or 1000BASE-SX/LX/WDM through SFP (Small Form Factor Pluggable) fiber-optic transceivers. The fiber-optic uplink capability guarantees the throughput to all nodes hooked into the network and the Gigabit Ethernet distance can be extended from 550 meters (Multi-mode fiber cable) up to 10/20/30/40/50/70/120 kilometers (Single-mode fiber or WDM fiber).

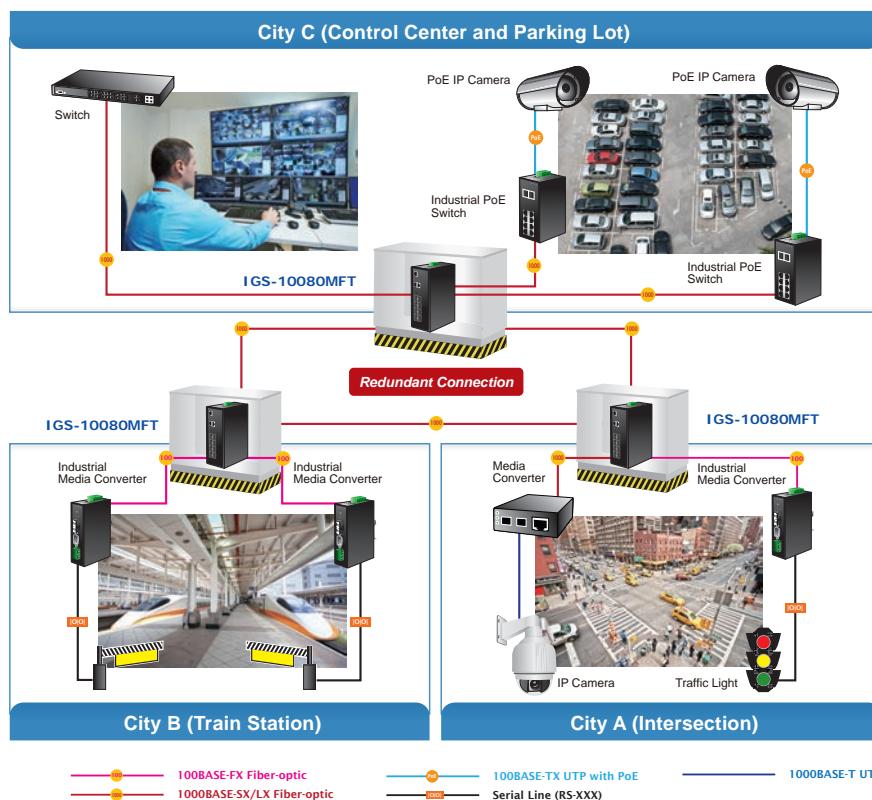

Industrial Fiber Switches & Media Converters

Industrial Managed / PoE Switches

		Managed				PoE			
Model		IGS-10080MFT	IGS-5225-8T2S2X	WGS-5225-8T2SV	WGS-4215-8T2S	WGS-4215-8P2S	WGS-5225-8P2SV	IGS-5225-8P2S2X	
Product Image									
		10G		Touch LCD		Touch LCD		10G	
Hardware	LCD	-	-	2.4" Color TFT touch screen	-	-	2.4" Color TFT touch screen	-	-
	10/100/1000BASE-T	2	8	8	8	8	8	8	8
	10/100BASE-TX	-	-	-	-	-	-	-	-
	1000 mini-GBIC	8	2	2	2	2	2	2	2
	100BASE-FX	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
	10G SFP+ Slot	-	2	-	-	-	-	-	2
	Switch Fabric	20Gbps	60Gbps	20Gbps	20Gbps	20Gbps	20Gbps	60Gbps	
	DI/DO	-	2/2	-	-	-	-	2/2	
Power	Inputs	Dual 12~48V DC or 24V AC			Dual 12~48V DC or 24V AC		Dual 48~56V DC	Dual 48~56V DC	Dual 48~56V DC
	Connector	6-pin terminal block			3-pin terminal block, DC socket		3-pin terminal block, DC socket	6-pin terminal block	6-pin terminal block
	Consumption	13.92 watts	18 watts	12 watts	7.9 watts	220 watts	260 watts	260 watts	
Mechanical	Dimensions (W x D x H)	72 x 107 x 152 mm	72 x 107 x 152 mm	178 x 25 x 134 mm	178 x 25 x 134 mm	178 x 25 x 134 mm	178 x 25 x 134 mm	72 x 107 x 152 mm	
	Enclosure	IP30 aluminum	IP30 aluminum	IP30 metal	IP30 metal	IP30 metal	IP30 metal	IP30 aluminum	
	Mounting	DIN-rail, wall-mountable		DIN-rail, wall-mountable and magnetic wall mount		DIN-rail, wall-mountable and magnetic wall mount		DIN-rail, wall-mountable	
Environment	Operating Temperature	-40~75 degrees C	-40~75 degrees C	-20~70 degrees C	-40~75 degrees C	-40~75 degrees C	-20~70 degrees C	-40~75 degrees C	
	Operating Humidity	5%~70% RH(Non-condensing)		5% to 95% RH (Non-condensing)		5%~70% RH(Non-condensing)			
Regulatory	Emissions	FCC Class A, CE Class A			FCC Class A, CE Class A				
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)				IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), EC60068-2-6 (Vibration)			
PoE	PoE Standard	-	-	-	-	802.3at PoE+	802.3at PoE+	802.3at PoE+	
	PoE Port	-	-	-	-	8	8	8	
	PoE Budget	-	-	-	-	200 watts	200 watts	240 watts	
	PSE Type	-	-	-	-	End-span	End-span	End-span	
	Power Pin Assignment	-	-	-	-	1/2(+), 3/6(-)	Pair 1: 1/2(+), 3/6(-)	Pair 1: 1/2(+), 3/6(-)	
Layer 3 Features	IP Interfaces	8 VLAN	128 VLAN	8 VLAN	-	-	8 VLAN	128 VLAN	
	Routing Tables	32	32	32	-	-	32	32	
	Routing Protocols	IPv6/IPv4 Static Routing			-	-	IPv6/IPv4 Static Routing		
	Accelerated Hardware	-	●	-	-	-	-	●	
Protocol	VLAN	802.1Q VLAN, Q-in-Q, Private VLAN, MAC-based VLAN, Protocol-based VLAN, Voice VLAN and MVR				802.1Q VLAN/Q-in-Q/ Private VLAN/Protocol-based VLAN/ Voice VLAN/GVRP	802.1Q VLAN, Q-in-Q, Private VLAN, MAC-based VLAN, Protocol-based VLAN, Voice VLAN and MVR		
	IGMP Snooping	v1/v2/v3/query	v1/v2/v3/query	v1/v2/v3/query	v2/v3/query	v2/v3/query	V1/v2/v3/query	V1/v2/v3/query	
	Spanning Tree	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	802.1w/802.1s	
	Data Redundancy	ERPS Ring <20ms	ERPS Ring <20ms	ERPS Ring <20ms	RSTP/MSTP	RSTP/MSTP	ERPS Ring <20ms	ERPS Ring <20ms	
	QoS	Port-based/802.1P/IP DSCP Policy-based/Voice VLAN				Port-based/802.1P/IP DSCP Policy-based/Voice VLAN			
	Security	802.1x, Static MAC, MAC filter, Port Security and IP Security			802.1x, Static MAC, MAC filter, Port Security and IP Security		802.1x, static MAC, MAC filter, Port Security and IP security, AAA		
	Traffic Control	In/out rate limit, storm control				In/out rate limit, storm control			
Management	Interface	Console, Web, Telnet, SSH and SSL		Web, Telnet, SSH and SSL	Web, Telnet, SSH and SSL	Web, Telnet, SSH and SSL	Web, Telnet, SSH and SSL	Console, Web, Telnet, SSH and SSL	
	SNMP	v1, v2c, v3, trap				v1, v2c, v3, trap			
	Alarm	Power and Port alarm		-	-	-	-	Power and Port alarm	
	System Log	System Log and remote Syslog				System Log and remote Syslog			

Industrial Media Converters

Fast Ethernet							
Model	IFT-802T	IFT-802TS15		IFT-805A			
Product Image							
Copper							
Fiber	Copper Interface	1 x 10/100BASE-TX port, RJ45, Auto-negotiation, Auto-MDI/MDI-X					
	Optical Interface	100BASE-FX port					
	Optical Connector	SC	SC	SFP			
	Optical Mode	Multi-mode	Single mode	Vary on module			
	Max. Distance	2km	15km	Vary on module			
	Optic Wavelength	1310nm	1310nm	Vary on module			
	Fiber-optic cable	50/125µm or 62.5/125µm multi-mode fiber cable	9/125µm single mode cable	Vary on module			
Mechanical	Dimensions (W x D x H)	32 x 87.8 x 135 mm					
	Weight	400g					
	Enclosure	IP30 Metal					
	Mounting	DIN-rail, Wall-mountable					
Power	Inputs	Dual 12~48V DC					
	Connector	6-Pin Removable Terminal Block					
	PoE	-					
	Consumption	4.6 watts max.					
Environment	Operating Temperature	-40~75 degrees C					
	Operating Humidity	5% to 95% RH (Non-condensing)					
Regulatory	Emissions	FCC Class A, CE Class A					
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)					
Management		-					

Gigabit						10G
Model	IGT-1205AT	IGT-905A IGT-805AT	IGTP-805AT	IGTP-802T IGTP-802TS	IXT-705AT	
Product Image						
		PoE 30 Watts				
Fiber	Copper Interface	1 x 10/100/1000BASE-T, RJ45, Auto-negotiation, Auto-MDI/MDI-X				1 x 10G/5G/2.5G/1G/100 NBASE-T, RJ45
	Optical Interface	100 /1000BASE-X	Vary on module	1000BASE-SX/LX	1000BASE-X	10GBASE-SR/LR
	Optical Connector	2 x SFP	SFP	1 x SFP	IGTP-802T: SC / IGTP-802TS: SC	1 x SFP
	Optical Mode	Vary on module				Vary on module
	Max. Distance	Vary on module				IGTP-802T: 220m & 550m IGTP-802TS: 10km
	Optic Wavelength	Vary on module				IGTP-802T: 850nm IGTP-802TS: 1310nm
Mechanical	Fiber-optic cable	Vary on module				please see the Optical Connector Field
	Dimensions (W x D x H)	32 x 87.8 x 135 mm			135 x 87 x 32 mm	32 x 87.8 x 135 mm
	Weight	400g	405g	500g	510g	400g
	Enclosure	IP30 Metal			IP30 Metal	IP30 Metal
Power	Mounting	DIN-rail, Wall-mountable			DIN-rail, Wall-mountable	DIN-rail, Wall-mountable
	Inputs	Dual 12~48V DC		12V or 48V DC	12 ~ 48V DC; 24V AC	Dual 12~48V DC
	Connector	6-Pin Removable Terminal Block				
	PoE	-	-	IEEE 802.3af/at PoE Injector		-
	Consumption	7.5 watts max.	7.7 watts max.	33 watts max.	24V:4.3watts/14BTU, 48V:4.8watts/16BTU(w/o PoE) 24V:33watts/112BTU, 48V:31watts/105BTU(w/ PoE)	8 watts max.
Environment	Operating Temperature	-40~75 degrees C	-30~75 degrees C	-40~75 degrees C	-40 to 75 degrees C	-40~75 degrees C
	Operating Humidity	5% to 95% RH (Non-condensing)			5~90% (non-condensing)	5% to 95% RH (Non-condensing)
Regulatory	Emissions	FCC Class A, CE Class A			FCC Class A, CE Class A	FCC Class A, CE Class A
	Stability	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)			IEC60068-2-32 (free fall), IEC60068-2-27 (shock), IEC60068-2-6 (vibration)	IEC60068-2-32 (Free Fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
Management		-	●*1	-		-

*1. [IGT-905A] IP-based Web / SNMP v1, v2c / RMON In-Band 802.3ah OAM / TS-1000 OAM In / Out Bandwidth Control 802.1Q VLAN / Q-in-Q VLAN TOS / DSCP / 802.1p QoS TCP / UDP packet filter

Media Converters



Media conversion is a cost-effective solution to extending fiber networking rapidly rather than adopting optic fiber only. It also efficiently helps to solve the distance limit between the Ethernet and Local Area Network. With the feature-rich chassis provided by PLANET, at least 16 converters can easily expand the fiber-optic networks by simply plug and play. The wiring distance of PLANET media converter chassis is extendable from 2 to 120 kilometers and available upon request as well.

Building a network solution of FTTH (Fiber to the Home) or FTTC (Fiber to the Curb) for ISPs, the PLANET Managed family of chassis and FST/GST series converters offer the multiple selections for FTTx deployment. The Managed family is a series of managed Media Conversion Center that provides hot plug and play slots for various types of converters. Through the management interface, the entire status of the converters could be remotely controlled within the chassis from on/off and status/statistics of ports, as well as the advanced features like redundant links.

Managed Media Converter Chassis

The MC-1610MR series is ideal for telecom and corporate applications where a number of fiber links need to be managed and controlled from a central location. The management function provided by the MC-1610MR series enables network administrators to monitor media converter connection status and configure the converters remotely via web browser or locally. Through the management interface, the entire status of the converters such as link on/off or statistics of the port will be clearly demonstrated and monitored.

Managed Media Converter Chassis		
Model	MC-1610MR	MC-1610MR48
Product Image		
	Managed	Managed
Slots	16 converter open slots; 2 power slots (1 loaded)	
Dimensions (W x D x H)	440 x 350 x 88 mm; 2U	
Power Requirements	100 ~ 240V AC, 50/60Hz	-48V DC (-30 ~ -60V DC)
Power Consumption	120 watts (full load)	96 watts (full load)
Environment	Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)	
Converter Modules	PLANET FST-80x, GST-80x series (Page 11)	
Management	SNMP v1/v2C, Web, CLI, SSH	
Management Ports	1 x RS232 Console 1 x 10/100BASE-TX RJ45; Auto-MDI, Auto-Negotiation	
Features	System Temperature Threshold Protection, Slot Redundancy, Hot-swappable dual power system, SNMP trap	
Emission	CE, FCC class A	

Web / SNMP Management



- ▶ OAM
- ▶ Device Control
- ▶ Redundant Link
- ▶ Link Status Monitoring
- ▶ SNMP Trap Alarm

Hot-Swappable / Flexible Power Input




Power Module

Standard Media Converter Chassis

The MC-1500 series provides 15 slots for PLANET's full-ranging media converters, including Fast Ethernet, Gigabit Ethernet or VDSL2 Converters. The 15 slots in the 19" rack-mountable housing help to save more spaces for Fiber-Optic wiring, simplify the structure and ease the maintenance of media conversion. With an independent power supply on each slot of the MC-1500 series, any converter is hot-swappable without causing an interruption to other converters. Each bay of the media converter chassis can be populated with any of PLANET's media converter series, the FT, GT, VC-20x and ICS, to provide media conversion between fiber optic, phone wire, serial and copper lines, offering high flexibility in installation and cost-effective scalable solution.

Standard Media Converter Chassis				
Model	MC-700	MC-1500	MC-1500R	MC-1500R48
Product Image				
Slots	7 converter open slots	15 converter open slots	15 converter slots; 2 power slots (1 loaded)	
LED Indicators	Power x 1 Fan x 1	Power x 1 Fan x 2	Power x 2 Fan x 2	Power x 2 Fan x 2
Dimensions	217 x 140 x 88.5 mm 2U	440 x 180 x 103 mm 2.4U	440 x 180 x 103 mm 2.4U	440 x 180 x 103 mm 2.4U
Weight	2kg	5kg	5.5kg	5.5kg
Power Requirements	100 ~ 240V AC, 50/60Hz	100 ~ 240V AC, 50/60Hz	100 ~ 240V AC, 50/60Hz	-48V DC (-30 ~ -60V DC)
Power Consumption	40 watts (full load)	75 watts (full load)	90 watts (full load)	90 watts (full load)
Power Output per Slot	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.
Environment	Operating Temperature: 0~50 degrees C Storage Temperature: -10~70 degrees C Humidity: 5~90% RH (Operating), 5~90% RH (Storage)	Operating Temperature: 0~50 degrees C Storage Temperature: -10~70 degrees C Humidity: 5~90% RH (Operating), 5~90% RH (Storage)		
Converter Modules	PLANET FT-80x, FT-90x, FT-1205A, GT-80x, GT-90x, GT-1205A, VC-201A/202A, VC-231, VC-231G, ICS-10x series, VF-10XG series (Page 12)			
Emission	CE, FCC Class A	CE, FCC Class A	CE, FCC Class A	CE, FCC Class A
Installation	Rack Mounting	Rack Mounting	Rack Mounting	Rack Mounting

Multi-function Converter Chassis

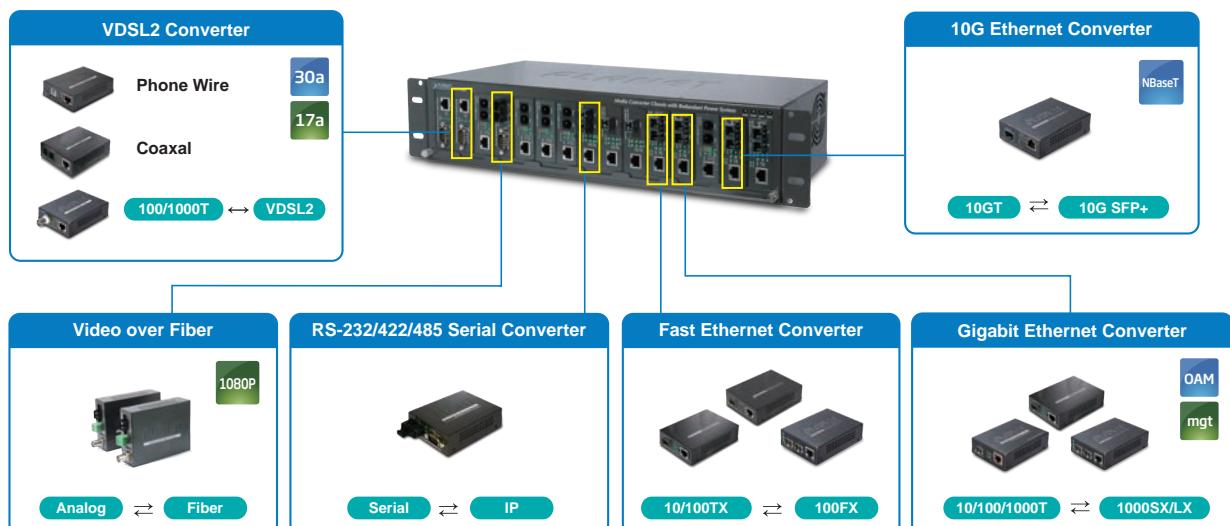

Industrial Fiber Switches & Media Converters

Smart Gigabit Ethernet Media Converters							
Model	GST-802	GST-802S	GST-806A15	GST-806B15	GST-806A60	GST-806B60	GST-805A
Product Image							
Ports	1 x 10/100/1000BASE-T RJ45; Auto-MDI, Auto-Negotiation, 1 x 1000BASE-SX / LX						
Optic Interface	MM SC	SM SC	SM WDM SC	SM WDM SC	SM WDM SC	SM WDM SC	SFP
Wavelength	850nm	1310nm	TX: 1310nm RX: 1550nm	TX: 1550nm RX: 1310nm	TX: 1310nm RX: 1550nm	TX: 1550nm RX: 1310nm	Vary on module
Max Distance	220 / 550 m	10km	15km	15km	60km	60km	Vary on module
Dimensions (W x D x H)	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm
Power	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.
Power Consumption	8.5 watts max.	8.5 watts max.	8.5 watts max.	8.5 watts max.	8.5 watts max.	8.5 watts max.	8.5 watts max.
Environment	Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)						
DIP Switch	DIP 1: Fiber Forced Mode, DIP 2: Fiber LLC Enable / Disable						
Features	9K Jumbo Frame; IEEE 802.3ah, TS-1000 OAM, In-band management, Remote loopback, Dying gasp event notification						
Applied Chassis	MC-1610MR / MC-1610MR48	MC-1610MR / MC-1610MR48	MC-1610MR / MC-1610MR48	MC-1610MR / MC-1610MR48	MC-1610MR / MC-1610MR48	MC-1610MR / MC-1610MR48	MC-1610MR / MC-1610MR48

Smart Fast Ethernet Media Converters							
Model	FST-801	FST-802	FST-802S15	FST-802S35	FST-802S50	FST-806A20	FST-806B20
Product Image							
Ports	1 x 10/100BASE-TX RJ45; Auto-MDI, Auto-Negotiation, 1 x 100BASE-FX				1 x 10/100BASE-TX RJ45; Auto-MDI, Auto-Negotiation, 1 x 100BASE-FX		
Optic Interface	MM ST	MM SC	SM SC	SM SC	SM SC	SM WDM SC	SM WDM SC
Wavelength	1310nm	1310nm	1310nm	1310nm	1310nm	TX: 1310nm, RX: 1550nm	TX: 1550nm, RX: 1310nm
Max Distance	2km	2km	15km	35km	50km	20km	20km
Dimensions (W x D x H)	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm	94 x 81 x 26 mm
Power	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.
Power Consumption	6.7 watts	6.7 watts	6.7 watts	6.7 watts	6.7 watts	6.7 watts	6.7 watts
Environment	Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)						
DIP Switch	6; TP speed, TP negotiation, TP/FX duplex mode, LLCF, LLR						
Features	Smart managed via MC-16xx for both FST-80x/FST-81x						
Applied Chassis	MC-1610MR / MC-1610MR48		MC-1610MR / MC-1610MR48		MC-1610MR / MC-1610MR48		MC-1610MR / MC-1610MR48

PoE Gigabit / Fast Ethernet Media Converters					Dual SFP Fast / Gigabit Ethernet Media Converters			
Model	GTP-802	GTP-802S15	GTP-805A	FTP-802	FTP-802S15	Model	FT-1205A	GT-1205A
Product Image						Product Image		
Ports	1x 10/100/1000BASE-T RJ45, Auto-negotiation, 1000BASE-SX/LX			1x 10/100BASE-TX RJ45, Auto-negotiation, 100BASE-FX		Ports	1 10/100BASE-TX 2 100BASE-FX	1 10/100/1000BASE-T 2 1000BASE-SX/LX
Fiber Interface	MM SC	SM SC	SFP (LC)	MM SC	SM SC	Optic Interface	SFP	SFP
Fiber Cable Wavelength	850nm	1310nm	Vary on SFP Module	850nm	1310nm	Wavelength	Vary on module	Vary on module
Max Distance	220m & 550m	10km	Vary on SFP Module	2km	15km	Max Distance	Vary on module	Vary on module
Dimensions (W x D x H)	97 x 70 x26 mm			97 x 70 x26 mm			94 x 70 x 26 mm	
Power Requirements	52V DC, 0.6A max.			48V DC, 0.35A max.			Power	5V DC, 2A max.
Power Consumption	36 Watts max. with PoE load			21 Watts max. with PoE load			Power Consumption	5.7 watts max.
Environment	Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)						Environment	Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)
IEEE 802.3at / 802.3af PoE Port	1, End-Span, 1/2(+), 3/6(-)			1, End-Span, 1/2(+), 3/6(-), 802.3af only			Features	DIP switch for 3-port Switch mode, redundant mode support
LFP DIP Switch	ON / OFF	ON / OFF	ON / OFF	ON / OFF	ON / OFF			-
Enclosure	Metal Case	Metal Case	Metal Case	Metal Case	Metal Case	Applied Chassis	MC-700 / MC-1500 / MC-1500R / MC-1500R48	
Installation	DIN rail kit and wall mount ear			DIN rail kit and wall mount ear				
Stability Testing	N/A	N/A	N/A	N/A	N/A			

Managed Gigabit Ethernet Media Converters					Managed Fast Ethernet Media Converters					
Model	GT-902	GT-902S	GT-905A		FT-902	FT-902S15	FT-905A			
Product Image										
Ports	1 x 10/100/1000BASE-T RJ45; Auto-MDI, Auto-Negotiation, 1 x 1000BASE-SX / LX				1 x 10/100BASE-TX RJ45; Auto-MDI, Auto-Negotiation, 1 x 100BASE-FX					
Optic Interface	MM SC	SM SC	SFP		MM SC	SM SC	SFP			
Wavelength	850nm	1310nm	Vary on module		1310nm	1310nm	Vary on module			
Max Distance	220/550m	10km	Vary on module		2km	15km	Vary on module			
Dimensions (W x D x H)	94 x 70 x 26 mm	94 x 70 x 26 mm	94 x 70 x 26 mm		94 x 70 x 26 mm	94 x 70 x 26 mm	94 x 70 x 26 mm			
Power	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.		5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.			
Power Consumption	5.6 watts max.	5.6 watts max.	5.6 watts max.		5.5 watts max.	5.5 watts max.	5.5 watts max.			
Environment	Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)				Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)					
Management	Web, SNMPv1, v2c, Smart Discovery utility, Dying Gasp				Web, SNMPv1, v2c, Smart Discovery utility					
Features	Max. Packet Size: 9K Jumbo Frame VLAN: 802.1q VLAN, QinQ VLAN Priority: 802.1p, IP DSCP, WRR QoS policy Remote Management: IEEE 802.3ah, TS-1000 OAM, In-band management, Remote loopback				Max. Packet Size: 2Kbytes VLAN: 802.1q VLAN, QinQ VLAN Priority: 802.1p, IP DSCP, WRR QoS policy Remote Management: IEEE 802.3ah, TS-1000 OAM, In-band management, Remote loopback					
Applied Chassis	MC-700 / MC-1500 / MC-1500R / MC-1500R48				MC-700 / MC-1500 / MC-1500R / MC-1500R48					
10G		Gigabit Ethernet Media Converters			Fast Ethernet Media Converters					
Model	XT-705A	GT-802	GT-802S	GT-805A	GT-805AT-PD	FT-801	FT-802	FT-802S15	FT-806A20	FT-806B20
Product Image										
Ports	1 x 10G/5G/2.5G/1G 100 NBASE-T RJ45, 1x10G BASE-SR/LR	1 x 10/100/1000BASE-T RJ45; Auto-MDI, Auto-Negotiation, 1 x 1000BASE-SX / LX				1 x 10/100BASE-TX RJ45; Auto-MDI, Auto-Negotiation, 1 x 100BASE-FX				
Optic Interface	SFP+	MM SC	SM SC	SFP	SFP	MM ST	MM SC	SM SC	SM SC	SM WDM SC
Wavelength	Vary on module	850nm	1310nm	Vary on module		1310nm	1310nm	1310nm	TX: 1310nm RX: 1550nm	TX: 1550nm RX: 1310nm
Max Distance	Vary on module	220/550m	10km	Vary on module		2km	2km	15km	20km	20km
Dimensions (W x D x H)	94 x 70 x 26 mm	94 x 70 x 26 mm	94 x 70 x 26 mm			94 x 70 x 26 mm	94 x 70 x 26 mm	94 x 70 x 26 mm		
Power	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.			5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.	5V DC, 2A max.
Power Consumption	3.75 watts max.	4.6 watts max.	4.6 watts max.			5.5 watts	5.5 watts	5.5 watts	5.5 watts	5.5 watts
Environment	Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)				Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)					
Features	-	9K Jumbo Frame, TS-1000 / OAM support				LFP, FX duplex mode selection				
Applied Chassis	MC-700 / MC-1500 / MC-1500R / MC-1500R48				MC-700 / MC-1500 / MC-1500R / MC-1500R48					
Video over Fiber Media Converters					Serial over Fast Ethernet Media Converters					
Model	VF-101G-KIT	VF-102G-KIT	VF-106G-KIT	VF-402-KIT	Model	ICS-100	ICS-105A			
Product Image					Product Image					
Ports	1 x Fiber, 1 x BNC (75ohm / unbalanced interface)		1 x Fiber, 4 x BNC (75ohm / unbalanced interface)							
Optic Interface	ST	FC	WDM-SC	FC						
Wavelength	T model: TX 1310nm RX 1550nm R model: TX 1550nm RX 1310nm									
Max Distance	20km for single mode									
Video Type	1080p: AHD/TVI/CVI 480p: CVBS									
Dimensions (W x D x H)	94 x 70 x 26 mm		157 x 116.5 x 48 mm							
Power / Power Consumption	5V DC, 2A max./4.8 watts max.		5V DC, 2A max./4.8 watts max.							
Environment	Operating Temperature: -25 ~ 70 degrees C, Humidity: 0 ~ 95% RH (non-condensing)									
Video Type	1080p: AHD/TVI/CVI 480p: CVBS									
Video Specifications	1 bi-directional channel; NTSC/PAL system compliant; 6.5MHz video bandwidth; SNR Weighted @63db (typical)		4 bi-directional channel; NTSC/PAL system compliant; 6.5MHz video bandwidth; SNR Weighted @63db (typical)							
Data Interface Specifications	1 simplex channel RS485: 115.2kbps data rate max.; Bit Error Rate @10ns									
Applied Chassis	MC-700 / MC-1500 / MC-1500R / MC-1500R48		-							
Ports	1 x 10/100BASE-TX 1 x DB9				1 x 100BASE-FX 1 x DB9					
Optic Interface	-									
Wavelength	-									
Max Distance	100m UTP					550m ~ 120km Vary on SFP Module				
Serial Interface	3-in-1 DB9, RS232, RS422 and RS485 (2/4-wire) 110 to 921Kbps									
Dimensions	94 x 70 x 26 mm									
Power	5V DC, 2A max.									
Power Consumption	5.5 watts									
Environment	Operating Temperature: 0 ~ 50 degrees C Humidity: 5% ~ 90% RH (non-condensing)									
Features	Web Management, VCOM utility, PLANET Smart Discovery Multiple operating modes									
Applied Chassis	MC-700 / MC-1500 / MC-1500R / MC-1500R48									

Passive Optical Network - GEAPON




Passive Optical Network (PON) would be the most promising Next Generation Network technology to meet the high bandwidth demand for HDTV, IPTV, VoIP and multimedia broadband applications. PON technology is developed to support PMP (Point-to-Multi-Point) applications and offers the advantages of reduced cost by sharing the equipment and fiber at the CO, and easy maintenance compared to the active equipment.

PLANET offers the perfect GEAPON OLT and ONU solutions bringing the FTTx applications with high scalability yet cost-effective network connection. The competitive advantages of PLANET GEAPON OLT and ONU solutions include:

- High split ratio of 1:64
- Up to 20km distance between equipment nodes
- Centralized management with user-friendly GUI utility
- Easy installation and maintenance
- Lower operating costs from the reduction of "active" components

Fiber To The Home(FTTH) Application

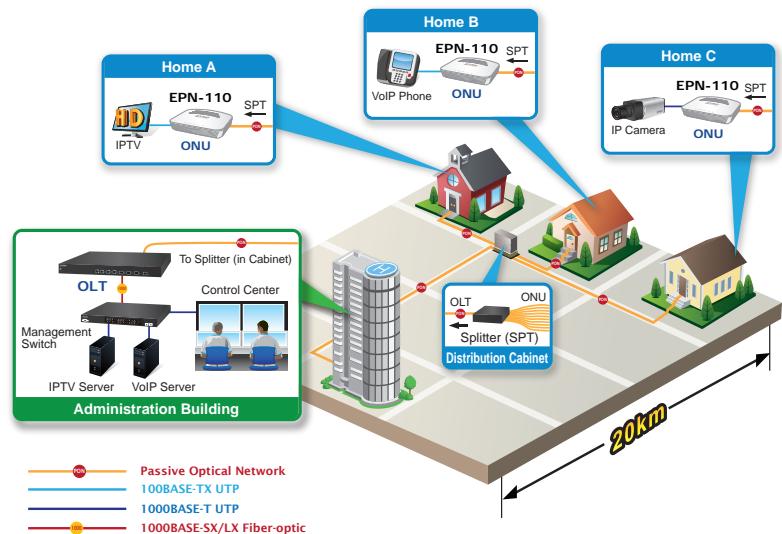

Network Connectivity Products

GEAPON OLT	
Model	EPL-2220

Product Image



GEAPON ONU	
Model	EPN-110

Product Image



Transmission Speed	Downstream: 1.25 Gbps Upstream: 1.25 Gbps
Ethernet Port	2 x 1000BASE-T RJ45, 2 x Gigabit SFP interface
PON Port	2 x PON interface
Console Port	●
Management Port	1 x 10/100 RJ45 port
Maximum Splits	64 per PON port
Maximum Distance	20km
IEEE 802.3ah	●
IEEE 802.3ah FEC	●
OAM	●
DBA	●
SLA	●
802.1Q VLAN	●
802.1p QoS	●
IGMP	IGMP Snooping
MAC Filtering	●
128-bit AES Encryption	-
802.1X Authentication	-
Logical Link IDs (LLID)	256
MAC Address	16k
Queues	4
GUI Management	●
ONU Management	●
Bandwidth Control	●

Transmission Speed	Downstream: 1.25Gbps Upstream: 1.25Gbps
Ethernet Port	1 x 10/100/1000Mbps RJ45 Port
PON Port	1 x PON interface with SC Type Connector
Maximum Distance	20km
IEEE 802.3ah	●
IEEE 802.3ah FEC	●
OAM	●
DBA	●
802.1Q VLAN	-
802.1p QoS	-
128-bit AES Encryption	-
802.1X Authentication	-
Logical Link IDs (LLID)	8
MAC Address	64
Queues	-
Integrated Buffering	1.5MB
Layer 2/3/4 Classification	●
Internal MIB Counters	●

Fiber Optic Transceivers

Fast Ethernet Transceivers (100BASE-X SFP)								Fast Ethernet Transceivers (100BASE-BX, Single Fiber Bi-Directional SFP)				
Model	MFB-FX	MFB-F20	MFB-F40	MFB-F60	MFB-F120	MFB-TFX	MFB-TF20	Model	MFB-TSA	MFB-TSB	MFB-FA20	MFB-FB20
Product Image								Product Image				
Speed (Mbps)	100	100	100	100	100	100	100	Speed (Mbps)	100	100	100	100
Connector Interface	LC	LC	LC	LC	LC	LC	LC	Connector Interface	LC	LC	WDM(LC)	WDM(LC)
Fiber Mode	Multi Mode	Single Mode				Multi Mode	Single Mode	Fiber Mode	Multi Mode		Single Mode	
Distance	2km	20km	40km	60km	120km	2km	20km	Distance	2km	2km	20km	20km
Wavelength (nm)	1310nm	1310nm	1310nm	1310nm	1550nm	1310nm	1550nm	Wavelength (TX)	1310nm	1550nm	1310nm	1550nm
Wavelength (RX)	1550nm		1310nm		1550nm		1310nm		Wavelength (RX)	1550nm	1310nm	1550nm
Operating Temp.	0 ~ 60 °C	0 ~ 60 °C	-40 ~ 75 °C	-40 ~ 75 °C	Operating Temp.	-40 ~ 75 °C	-40 ~ 75 °C	0 ~ 60 °C	0 ~ 60 °C			
Gigabit Ethernet Transceivers (1000BASE-X/Fiber Channel SFP)												
Model	MGB-GT	MGB-SX	MGB-SX2	MGB-LX	MGB-L40	MGB-L80	MGB-L120	MGB-TSX	MGB-TSX2	MGB-TLX	MGB-TL40	MGB-TL80
Product Image												
Speed (Mbps)	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Connector Interface	Copper	LC	LC	LC	LC	LC	LC	LC	LC	LC	LC	LC
Fiber Mode	-	Multi Mode		Single Mode		Single Mode		Multi Mode		Single Mode		
Distance	100m	550m	2km	20km	40km	80km	120km	550m	2km	20km	40km	80km
Wavelength (nm)	-	850nm	1310nm	1310nm	1310nm	1550nm	1550nm	850nm	1310nm	1310nm	1310nm	1550nm
Operating Temp.	0 ~ 60 °C	0 ~ 60 °C	0 ~ 60 °C	0 ~ 60 °C	-40 ~ 75 °C		-40 ~ 75 °C					
Gigabit Ethernet Transceivers (1000BASE-BX, Single Fiber Bi-Directional SFP)								40Gbps QSFP+ (40Ethernet/40GBASE)				
Model	MGB-LA10	MGB-LB10	MGB-LA20	MGB-LB20	MGB-LA40	MGB-LB40	MGB-LA80	MGB-LB80	Model	QSFP-40G-SR4	QSFP-40G-LR4	
Product Image									Product Image			
Speed (Mbps)	1000	1000	1000	1000	1000	1000	1000	1000	Speed (Mbps)	40G	40G	
Connector Interface	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	Connector Interface	MPO	LC	
Fiber Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Fiber Mode	Multi Mode	Single Mode	
Distance	10km	10km	20km	20km	40km	40km	80km	80km	Distance	Up to 100m	10km	
Wavelength (TX)	1310nm	1550nm	1310nm	1550nm	1310nm	1550nm	1310nm	1550nm	Wavelength (nm)	850nm	1310nm	
Wavelength (RX)	1550nm	1310nm	1550nm	1310nm	1550nm	1310nm	1550nm	1310nm	Operating Temp.	0 ~ 60°C	0 ~ 60°C	
Operating Temp.	0 ~ 60 °C	0 ~ 60 °C	0 ~ 60 °C	0 ~ 60 °C	0 ~ 60 °C							
10Gbps SFP+ (10G Ethernet/10GBASE)												
Model	MTB-RJ	MTB-SR	MTB-LR	MTB-LA20	MTB-LB20	MTB-LA40	MTB-LB40	MTB-LA60	MTB-LB60	Model	QSFP-100G-SR4	QSFP-100G-LR4
Product Image										Product Image		
Speed (Mbps)	10G	10G	10G	10G	10G	10G	10G	10G	Speed (Mbps)	100G	100G	
Connector Interface	RJ45	LC	LC	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	WDM(LC)	Connector Interface	MPO	LC	
Fiber Mode	-	Multi Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Single Mode	Fiber Mode	Multi Mode	Single Mode	
Distance	300m	Up to 300m	10km	20km	20km	40km	40km	60km	Distance	Up to 100m	10km	
Wavelength (nm)	-	850nm	1310nm	TX:1270nm RX:1330nm	TX:1330nm RX:1270nm	TX:1270nm RX:1330nm	TX:1330nm RX:1270nm	TX:1270nm RX:1330nm	Wavelength (nm)	850nm	1310nm	
Operating Temp.	0 ~ 60 °C	0 ~ 60 °C	0 ~ 60 °C	0 ~ 60 °C	0 ~ 60 °C	Operating Temp.	0 ~ 60 °C	0 ~ 60 °C				
100G QSFP28												
Model									Model			
Product Image									Product Image			
Speed (Mbps)	10G	10G	10G	10G	10G	10G	10G	10G	Speed (Mbps)	100G	100G	
Connector Interface									Connector Interface	MPO	LC	
Fiber Mode									Fiber Mode	Multi Mode	Single Mode	
Distance									Distance	Up to 100m	10km	
Wavelength (nm)									Wavelength (nm)	850nm	1310nm	
Operating Temp.									Operating Temp.	0 ~ 60 °C	0 ~ 60 °C	

Edge Connecting Products

Metro Edge Switches				
Model	WGSD-10020	IGS-10020MT	GSD-1020S	GSD-1002M
Features	IPv6/IPv4 L2 Switch	Industrial IPv6/IPv4 L2 Switch	IPv6/IPv4 L2 Switch	Industrial L2 Managed Switch
Product Image				
1000BASE-X	2 SFP	2 SFP	2 SFP	2 SFP
10/100/1000BASE-T	8	8	8	8
100BASE-FX	Compatible	Compatible	Compatible	Compatible
10BASE-T/100BASE-TX	●	●	●	●
Power Requirements	100~240V AC	12~48V DC 24V AC	100~240V AC	IEEE 802.3af/at PoE 48~56V DC 12V DC power adapter
Operating Temperature	0~50 degrees C	-40~75 degrees C	0~50 degrees C	0~50 degrees C

Metro Edge Routers / CPE		Fiber Network Adapters	
Model	Features	Model	Features
FRT-415N	Fiber Router	ENW-9701	Gigabit NIC
Product Image	Product Image	Product Image	Product Image

1000BASE-X	-	Attached Interface	X1 PCI Express	X8 PCI Express
10/100/1000BASE-T	-	Network Interface	1000BASE-X	10GBASE-SR/LR
100BASE-FX	1 x 100BASE-FX SFP	Media Interface	SFP	SFP+
10/100BASE-TX	4 x 10/100BASE-TX	OS Support	Windows Server 2008	●
Wireless	802.11b/g/n		Windows 8	-
Power Requirements	12V DC, 0.5A		Windows 7	●
Operating Temperature	0~40 degrees C		Windows XP	●
			Linux	●
			Mac OS X 10.4, 10.5 and 10.6 Intel-based Mac computer	●
			VMware® ESX 4.x	-

FRT-415N Communications

