



Rivet Nut Catalog

BOLD DIRECTION. STRAIGHTFORWARD SOLUTIONS.



INTRODUCTION



Pacific Warehouse Sales and the Lehman name have represented honesty, integrity and reliability in the fastener industry for over 55 years. Based upon those principles and with the promise to sell to distributors only, we proudly introduce our new division, AFIXX Alliance®.

AFIXX will provide distributors with an advanced E-commerce site that allows us to maintain our personal customer service combined with the ease of doing business. PWS has been selling fasteners on the West Coast for over 35 years, and AFIXX was created in an effort to expand this product line to distributors nationwide. AFIXX will continue to offer the experience of an intimate family company along with the benefits of using innovative business solutions.

AFIXX is your valued fastener provider.

AFIXX Alliance® Product Line:

- Blind Rivets
- Multigrip Rivets
- Closed End Rivets
- Painted Rivets
- Interlok Structural Rivets
- Rivet Nuts
- Backup Washers
- Hand Tools
- Air Tools
- Sherex TEC Series™ Wedge Locking Washers
- Standard Cable Ties
- Specialty Cable Ties
- Cable Tie Accessories
- Specialty Items & Custom Orders



15368 El Prado Road
Chino, CA 91710
Phone: 1.855.607.6781
Fax: 877.647.3523
sales@afixx.com



15340 Herriman Blvd.
Noblesville, IN 46060
Phone: 317.723.5050
Fax: 317.323.5052
afixxsales@crossroad.bz



TABLE OF CONTENTS

Introduction.....	1
Table of Contents.....	2
Cross Reference Charts.....	3
Packaging Options.....	4
AFIXX Rivet Nuts	
LSS/LSA Series.....	5
SSS Series.....	6
LKS Series.....	7
SKS Series.....	8
KTS Series.....	9
Sherex Rivet Nuts	
CAL Series.....	10-11
CA Series.....	12
CAH Series.....	13-14
CAK Series.....	15-16
CAO Series.....	17
CAT/CFT Series.....	18-19
CPB Series.....	20
CPN Series.....	21
Rivet Nut Tools	
Hand Tools.....	22
Pneumatic Tools.....	23
Terms	24



CROSS REFERENCE

RIVET NUT MATERIAL

RIVET NUT MATERIAL	TYPE	PWS	MARSON®	AVK	KANEBRIDGE	BOLLHOFF	ATLAS	SHEREX	AVDEL	BF GOODRICH
ALUMINUM	Small Flange/ Smooth Body	CA03-****_***	575**	-	LA-****	-	-	CA03-****_***	0948*-0****	AT*-***
	Large Flange/ Smooth Body	CA-****A-***	572**	RNA-***_***	XA-****	A*-***	AEA**-***ZYR	CA-****A-***	0944*-0****	A**-***
	Small Flange/ Knurled Body	CAK3-****_***	-	AKAI-****_***	LA-****S	-	AELAI****_***	CAK3-****_***	DKA-****_***	ATR**-***
	Large Flange/ Knurled Body	CAL3-****_***	576**	ALAI-***_***	XA-****S	-	AEA**R***ZYR	CAL3-****_***	DLA-****_***	AR**-***
STEEL	Small Flange/ Smooth Body	CA02-****_***	574**	AOS4-****_***	LS-****	-	AEOS4-****_***	CA02-****_***	96**_***	ST**-***
	Large Flange/ Smooth Body	CA-****S-***	571**	RNS-***_***	XS-****	S**-***	AES**-***ZYR	CA-****S-***	0943*-0****	S**-***
	Small Flange/ Knurled Body	CAK2-****_***	-	AKS4-****_***	LS-****S	ITR**-***SK	AEKS8-****_***	CAK2-****_***	DKS-****_***	STR**-***
	Large Flange/ Knurled Body	CAL2-****_***	573**	ALS4-****_***	XS-****S	ITR**-***SD	AES**R-***ZYR	CAL2-****_***	DLS-****_***	SR**-***

COMMITTED TO DISTRIBUTORS.
COMMITTED TO YOU.



PACKAGING OPTIONS



1/4 Keg Bulk Cartons

- Best price value
- Quantities from 1,500-10,000 depending on size



Packaged Boxes

- Made from durable kraft board
- Slot Lok design for secure product
- Quantities from 100-500 depending on size




Visual Box

- Sturdy plastic case
- Tab for easy hanging
- Quantities from 25-100 depending on size



AFIXX LSS/LSA SERIES RIVET NUT

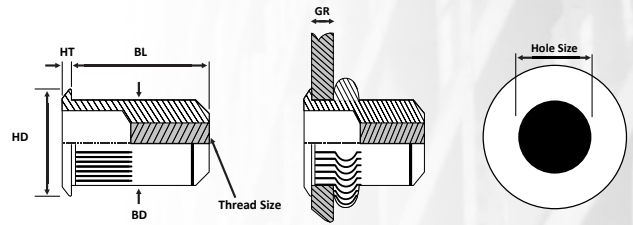


Steel					
Part Number	Thread Size	Grip Range (GR) Min-Max	Body Length (BL) Max	Body Diameter (BD) Max	Hole Size
AFX-LSS-0632-075	6-32 UNC	.010-.075	0.438	0.155	0.189
AFX-LSS-0632-120	6-32 UNC	.075-.120	0.500	0.189	0.189
AFX-LSS-0632-160	6-32 UNC	.120-.160	0.500	0.189	0.189
AFX-LSS-0832-075	8-32 UNC	.010-.075	0.438	0.221	0.221
AFX-LSS-0832-120	8-32 UNC	.075-.120	0.500	0.221	0.221
AFX-LSS-0832-160	8-32 UNC	.120-.160	0.500	0.221	0.221
AFX-LSS-1024-080	10-24 UNC	.010-.080	0.531	0.250	0.250
AFX-LSS-1024-130	10-24 UNC	.080-.130	0.594	0.250	0.250
AFX-LSS-1024-180	10-24 UNC	.130-.180	0.641	0.250	0.250
AFX-LSS-1032-080	10-32 UNF	.010-.080	0.531	0.250	0.250
AFX-LSS-1032-130	10-32 UNF	.080-.130	0.594	0.250	0.250
AFX-LSS-1032-180	10-32 UNF	.130-.180	0.641	0.250	0.250
AFX-LSS-2520-080	1/4-20 UNC	.020-.080	0.625	0.332	0.332
AFX-LSS-2520-140	1/4-20 UNC	.080-.140	0.687	0.332	0.332
AFX-LSS-2520-200	1/4-20 UNC	.140-.200	0.750	0.332	0.332
AFX-LSS-3118-125	5/16-18 UNC	.030-.125	0.750	0.413	0.413
AFX-LSS-3118-200	5/16-18 UNC	.125-.200	0.875	0.413	0.413
AFX-LSS-3118-275	5/16-18 UNC	.200-.275	0.937	0.413	0.413
AFX-LSS-3716-115	3/8-16 UNC	.030-.115	0.844	0.490	0.490
AFX-LSS-3716-200	3/8-16 UNC	.115-.200	0.938	0.490	0.490
AFX-LSS-3716-285	3/8-16 UNC	.200-.285	1.031	0.490	0.490

Aluminum					
Part Number	Thread Size	Grip Range (GR) Min-Max	Body Length (BL) Max	Body Diameter (BD) Max	Hole Size
AFX-LSA-0832-075	8-32 UNC	.010-.075	0.438	0.221	0.221
AFX-LSA-1024-080	10-24 UNC	.010-.080	0.531	0.250	0.250
AFX-LSA-1032-080	10-32 UNF	.010-.080	0.531	0.250	0.250
AFX-LSA-2520-080	1/4-20 UNC	.020-.080	0.625	0.332	0.332

[BACK TO TABLE OF CONTENTS](#)



AFIXX SSS SERIES RIVET NUT

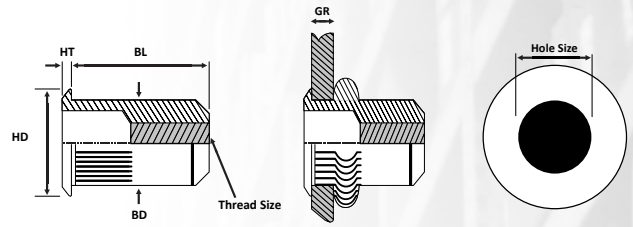

Steel					
Part Number	Thread Size	Grip Range (GR) Min-Max	Body Length (BL) Max	Body Diameter (BD) Max	Hole Size
AFX-SSS-0632-080	6-32 UNC	.020-.080	0.385	0.249	0.250
AFX-SSS-0832-080	8-32 UNC	.020-.080	0.385	0.249	0.250
AFX-SSS-1024-130	10-24 UNC	.020-.130	0.440	0.280	0.281
AFX-SSS-1032-130	10-32 UNF	.020-.130	0.440	0.280	0.281
AFX-SSS-2520-165	1/4-20 UNC	.030-.165	0.580	0.374	0.375
AFX-SSS-2528-165	1/4-28 UNF	.030-.165	0.580	0.374	0.375
AFX-SSS-3118-200	5/16-18 UNC	.040-.200	0.690	0.499	0.500
AFX-SSS-3124-200	5/16-24 UNF	.040-.200	0.690	0.499	0.500
AFX-SSS-3716-200	3/8-16 UNC	.040-.200	0.690	0.499	0.500
AFX-SSS-3724-200	3/8-24 UNF	.040-.200	0.690	0.499	0.500




ALUMINUM AVAILABLE UPON REQUEST

[BACK TO TABLE OF CONTENTS](#)



AFIXX LKS SERIES RIVET NUT

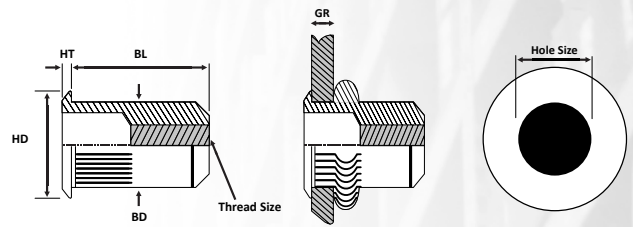

Steel					
Part Number	Thread Size	Grip Range (GR) Min-Max	Body Length (BL) Max	Body Diameter (BD) Max	Hole Size
AFX-LKS-0632-080	6-32 UNC	.020-.080	0.420	0.265	0.266
AFX-LKS-0632-130	6-32 UNC	.080-.130	0.470	0.265	0.266
AFX-LKS-0832-080	8-32 UNC	.020-.080	0.420	0.265	0.266
AFX-LKS-0832-130	8-32 UNC	.080-.130	0.470	0.265	0.266
AFX-LKS-1024-130	10-24 UNC	.020-.130	0.475	0.296	0.297
AFX-LKS-1024-225	10-24 UNC	.130-.225	0.585	0.296	0.297
AFX-LKS-1032-130	10-32 UNF	.020-.130	0.475	0.296	0.297
AFX-LKS-1032-225	10-32 UNF	.130-.225	0.585	0.296	0.297
AFX-LKS-2520-165	1/4-20 UNC	.027-.165	0.580	0.390	0.391
AFX-LKS-2520-260	1/4-20 UNC	.165-.260	0.680	0.390	0.391
AFX-LKS-2528-165	1/4-28 UNF	.027-.165	0.580	0.390	0.391
AFX-LKS-2528-260	1/4-28 UNF	.165-.260	0.680	0.390	0.391
AFX-LKS-3118-150	5/16-18 UNC	.027-.150	0.690	0.390	0.531
AFX-LKS-3118-312	5/16-18 UNC	.150-.312	0.805	0.530	0.531
AFX-LKS-3124-150	5/16-24 UNF	.027-.150	0.690	0.530	0.531
AFX-LKS-3124-312	5/16-24 UNF	.150-.312	0.805	0.530	0.531
AFX-LKS-3716-150	3/8-16 UNC	.027-.150	0.690	0.530	0.531
AFX-LKS-3716-312	3/8-16 UNC	.150-.312	0.805	0.530	0.531
AFX-LKS-3724-150	3/8-24 UNF	.027-.150	0.690	0.530	0.531
AFX-LKS-3724-312	3/8-24 UNF	.150-.312	0.805	0.530	0.531




ALUMINUM AVAILABLE UPON REQUEST

[BACK TO TABLE OF CONTENTS](#)



AFIXX SKS SERIES RIVET NUT

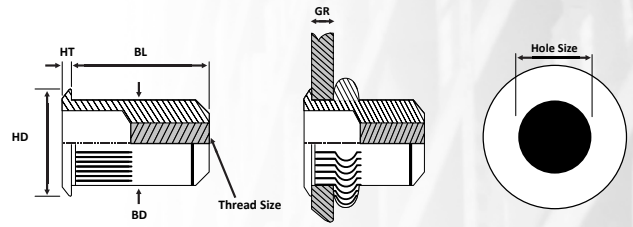

Steel					
Part Number	Thread Size	Grip Range (GR) Min-Max	Body Length (BL) Max	Body Diameter (BD) Max	Hole Size
AFX-SKS-0632-080	6-32 UNC	.020-.080	0.420	0.265	0.266
AFX-SKS-0632-130	6-32 UNC	.080-.130	0.470	0.265	0.266
AFX-SKS-0832-080	8-32 UNC	.020-.080	0.420	0.265	0.266
AFX-SKS-0832-130	8-32 UNC	.080-.130	0.470	0.265	0.266
AFX-SKS-1024-130	10-24 UNC	.020-.130	0.475	0.296	0.297
AFX-SKS-1024-225	10-24 UNC	.130-.225	0.585	0.296	0.297
AFX-SKS-1032-130	10-32 UNF	.020-.130	0.475	0.296	0.297
AFX-SKS-1032-225	10-32 UNF	.130-.225	0.585	0.296	0.297
AFX-SKS-2520-165	1/4-20 UNC	.027-.165	0.580	0.390	0.391
AFX-SKS-2520-260	1/4-20 UNC	.165-.260	0.680	0.390	0.391
AFX-SKS-2528-165	1/4-28 UNF	.027-.165	0.580	0.390	0.391
AFX-SKS-2528-260	1/4-28 UNF	.165-.260	0.680	0.390	0.391
AFX-SKS-3118-150	5/16-18 UNC	.027-.150	0.690	0.530	0.531
AFX-SKS-3118-312	5/16-18 UNC	.150-.312	0.805	0.530	0.531
AFX-SKS-3124-150	5/16-24 UNF	.027-.150	0.690	0.530	0.531
AFX-SKS-3124-312	5/16-24 UNF	.150-.312	0.805	0.530	0.531
AFX-SKS-3716-150	3/8-16 UNC	.027-.150	0.690	0.530	0.531
AFX-SKS-3716-312	3/8-16 UNC	.150-.312	0.805	0.530	0.531
AFX-SKS-3724-150	3/8-24 UNF	.027-.150	0.690	0.530	0.531
AFX-SKS-3724-312	3/8-24 UNF	.150-.312	0.805	0.530	0.531




ALUMINUM AVAILABLE UPON REQUEST

[BACK TO TABLE OF CONTENTS](#)



AFIXX KTS SERIES RIVET NUT

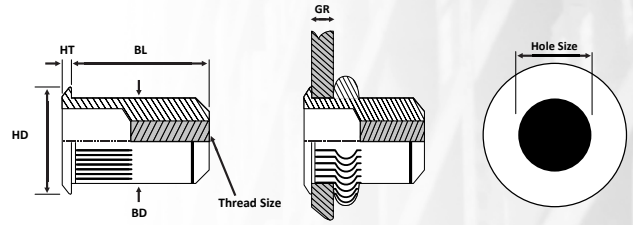


KTS							
Part Number	Thread Size	Head Diameter (HD)	Body Length (BL)	Body Diameter (BD)	Material Thickness		Material
					.0937-.1562	.1562-Infinity	
		± 0.005	± 0.005	± .002	Hole Size	Hole Size	
KTS-0632	6-32 UNC	0.250	0.375	0.215	0.221	0.234	Aluminum
KTS-0832	8-32 UNC	0.282	0.375	0.246	0.250	0.261	Aluminum
KTS-1024	10-24 UNC	0.314	0.375	0.277	0.281	0.290	Aluminum
KTS-1032	10-32 UNF	0.314	0.375	0.277	0.281	0.290	Aluminum
KTS-2520	1/4-20 UNC	0.408	0.510	0.372	0.391	0.391	Aluminum
KTS-3118	5/16-18 UNC	0.537	0.615	0.496	0.500	0.516	Aluminum
KTS-3716	3/8-16 UNC	0.600	0.740	0.559	0.562	0.578	Aluminum

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAL SERIES RIVET NUT

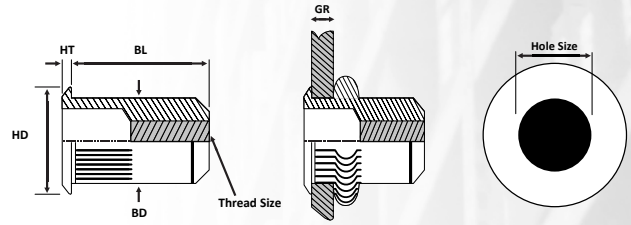

CAL LARGE FLANGE KNURLED BODY THIN WALL SERIES (Unit - Inches)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.					
CAL2-0632-080	6-32 UNC	0.020	0.080	0.420	0.390	0.030	0.265	0.266
CAL2-0632-130	6-32 UNC	0.080	0.130	0.470	0.390	0.030	0.265	0.266
CAL2-0832-080	8-32 UNC	0.020	0.080	0.420	0.390	0.030	0.265	0.266
CAL2-0832-130	8-32 UNC	0.080	0.130	0.470	0.390	0.030	0.265	0.266
CAL2-1024-130	10-24 UNC	0.020	0.130	0.475	0.415	0.030	0.296	0.297
CAL2-1024-225	10-24 UNC	0.130	0.225	0.585	0.415	0.030	0.296	0.297
CAL2-1032-130	10-32 UNF	0.020	0.130	0.475	0.415	0.030	0.296	0.297
CAL2-1032-225	10-32 UNF	0.130	0.225	0.585	0.415	0.030	0.296	0.297
CAL2-2520-165	1/4-20 UNC	0.027	0.165	0.580	0.500	0.030	0.390	0.391
CAL2-2520-260	1/4-20 UNC	0.165	0.260	0.680	0.500	0.030	0.390	0.391
CAL2-2528-165	1/4-28 UNF	0.027	0.165	0.580	0.500	0.030	0.390	0.391
CAL2-2528-260	1/4-28 UNF	0.165	0.260	0.680	0.500	0.030	0.390	0.391
CAL2-3118-150	5/16-18 UNC	0.027	0.150	0.690	0.685*	0.035	0.530	0.531
CAL2-3118-312	5/16-18 UNC	0.150	0.312	0.805	0.685*	0.035	0.530	0.531
CAL2-3124-150	5/16-24 UNF	0.027	0.150	0.690	0.685*	0.035	0.530	0.531
CAL2-3124-312	5/16-24 UNF	0.150	0.312	0.805	0.685*	0.035	0.530	0.531
CAL2-3716-150	3/8-16 UNC	0.027	0.150	0.690	0.685*	0.035	0.530	0.531
CAL2-3716-312	3/8-16 UNC	0.150	0.312	0.805	0.685*	0.035	0.530	0.531
CAL2-3724-150	3/8-24 UNF	0.027	0.150	0.690	0.685*	0.035	0.530	0.531
CAL2-3724-312	3/8-24 UNF	0.150	0.312	0.805	0.685*	0.035	0.530	0.531
CAL2-5013-200	1/2-13 UNC	0.063	0.200	1.150	0.865*	0.047	0.685	0.688
CAL2-5013-350	1/2-13 UNC	0.200	0.350	1.300	0.865*	0.047	0.685	0.688

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL • 3- ALUMINUM

STEEL 1008/1010

STAINLESS STEEL 302*

ALUMINUM 5056

RoHS Compliant Finishes:

Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2


Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAL SERIES RIVET NUT

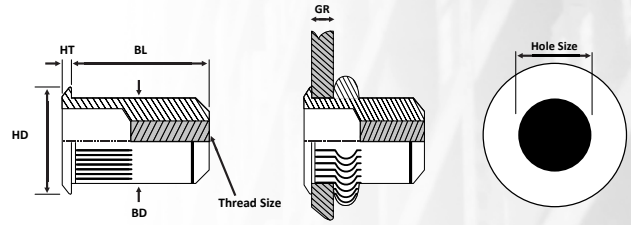

CAL LARGE FLANGE KNURLED BODY THIN WALL SERIES (Unit - Millimeters)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.					
CAL2-470-2.0	M4x0.7 ISO	0.50	2.00	10.68	9.91	0.76	6.73	6.75
CAL2-470-3.3	M4x0.7 ISO	2.00	3.30	11.94	9.91	0.76	6.73	6.75
CAL2-580-3.3	M5x0.8 ISO	0.50	3.30	12.07	10.54	0.76	7.52	7.60
CAL2-580-5.7	M5x0.8 ISO	3.30	5.70	14.86	10.54	0.76	7.52	7.60
CAL2-610-4.2	M6x1.0 ISO	0.70	4.20	14.73	12.70	0.76	9.91	10.00
CAL2-610-6.6	M6x1.0 ISO	4.20	6.60	17.27	12.70	0.76	9.91	10.00
CAL2-8125-3.8	M8x1.25 ISO	0.70	3.80	17.53	17.40*	0.89	13.46	13.50
CAL2-8125-7.9	M8x1.25 ISO	3.80	7.90	20.45	17.40*	0.89	13.46	13.50
CAL2-1015-3.8	M10x1.5 ISO	0.70	3.80	17.53	17.40*	0.89	13.46	13.50
CAL2-1015-7.9	M10x1.5 ISO	3.80	7.90	20.45	17.40*	0.89	13.46	13.50
CAL2-12175-5.1	M12x1.75 ISO	1.60	5.10	29.21	21.97*	1.19	17.40	17.45
CAL2-12175-8.9	M12x1.75 ISO	5.10	8.90	33.02	21.97*	1.19	17.40	17.45

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL • 3- ALUMINUM

STEEL 1008/1010

STAINLESS STEEL 302*

ALUMINUM 5056

RoHS Compliant Finishes:

Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2


Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)





SHEREX CA SERIES RIVET NUT

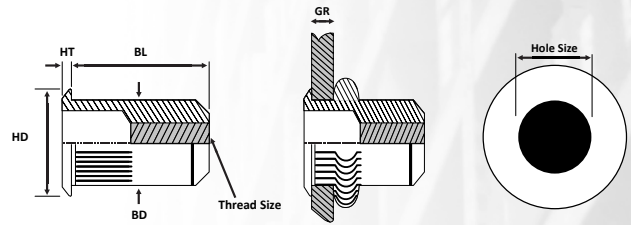

CA HEAVY DUTY RIVET NUT FLAT HEAD SERIES (Unit - Inches)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.	± .015	± .015	Nom.	Max.	
CA-0440S-060	4-40 UNC	0.010	0.060	0.345	0.270	0.025	0.155	.155-.157
CA-0440S-085	4-40 UNC	0.060	0.085	0.370	0.270	0.025	0.155	.155-.157
CA-0440S-110	4-40 UNC	0.085	0.100	0.400	0.270	0.025	0.155	.155-.157
CA-0632S-075	6-32 UNC	0.010	0.075	0.438	0.325	0.032	0.189	.189-.193
CA-0632S-120	6-32 UNC	0.075	0.120	0.500	0.325	0.032	0.189	.189-.193
CA-0632S-160	6-32 UNC	0.120	0.160	0.500	0.325	0.032	0.189	.189-.193
CA-0832S-075	8-32 UNC	0.010	0.075	0.438	0.357	0.032	0.221	.221-.226
CA-0832S-120	8-32 UNC	0.075	0.120	0.500	0.357	0.032	0.221	.221-.226
CA-0832S-160	8-32 UNC	0.120	0.160	0.500	0.357	0.032	0.221	.221-.226
CA-1024S-080	10-24 UNC	0.010	0.080	0.531	0.406	0.038	0.250	.250-.256
CA-1024S-130	10-24 UNC	0.080	0.130	0.594	0.406	0.038	0.250	.250-.256
CA-1024S-180	10-24 UNC	0.130	0.180	0.641	0.406	0.038	0.250	.250-.256
CA-1032S-080	10-32 UNF	0.010	0.080	0.531	0.406	0.038	0.250	.250-.256
CA-1032S-130	10-32 UNF	0.080	0.130	0.594	0.406	0.038	0.250	.250-.256
CA-1032S-180	10-32 UNF	0.130	0.180	0.641	0.406	0.038	0.250	.250-.256
CA-2520S-080	1/4-20 UNC	0.020	0.080	0.625	0.475	0.058	0.332	.332-.338
CA-2520S-140	1/4-20 UNC	0.080	0.140	0.687	0.475	0.058	0.332	.332-.338
CA-2520S-200	1/4-20 UNC	0.140	0.200	0.750	0.475	0.058	0.332	.332-.338
CA-3118S-125	5/16-18 UNC	0.030	0.125	0.750	0.665	0.062	0.413	.413-.423
CA-3118S-200	5/16-18 UNC	0.125	0.200	0.875	0.665	0.062	0.413	.413-.423
CA-3118S-275	5/16-18 UNC	0.200	0.275	0.937	0.655	0.062	0.413	.413-.423
CA-3716S-115	3/8-16 UNC	0.030	0.115	0.844	0.781	0.088	0.490	.490-.500
CA-3716S-200	3/8-16 UNC	0.115	0.200	0.938	0.781	0.088	0.490	.490-.500
CA-3716S-285	3/8-16 UNC	0.200	0.285	1.031	0.781	0.088	0.490	.490-.500
CA-5013S-150	1/2-13 UNC	0.050	0.150	0.906	0.906	0.085	0.625	.625-.635
CA-5013S-250	1/2-13 UNC	0.150	0.250	1.031	0.906	0.085	0.625	.625-.635
CA-5013S-350	1/2-13 UNC	0.250	0.350	1.141	0.906	0.085	0.625	.625-.635

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL • 3- ALUMINUM

STEEL 1008/1010/1110

NON-MAGNETIC STAINLESS STEEL 302

STAINLESS STEEL 430

ALUMINUM 5056/6053

RoHS Compliant Finishes:


Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAH SERIES RIVET NUT

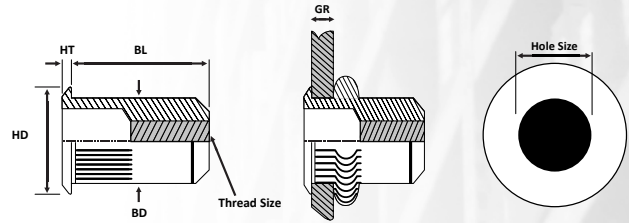

CAH HALF HEX BODY LARGE FLANGE THIN WALL SERIES (Unit - Inches)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter A/F (BD)	Hole Size A/F
		Min.	Max.					
CAH2-0632-080	6-32 UNC	0.020	0.080	± .015	±.010 ±.025*	± .003	Max.	+.004/- .000
CAH2-0632-130	6-32 UNC	0.080	0.130	0.385	0.375	0.027	0.249	0.250
CAH2-0832-080	8-32 UNC	0.020	0.080	0.435	0.375	0.027	0.249	0.250
CAH2-0832-130	8-32 UNC	0.080	0.130	0.385	0.375	0.027	0.249	0.250
CAH2-1024-130	10-24 UNC	0.020	0.130	0.435	0.390	0.027	0.280	0.281
CAH2-1024-225	10-24 UNC	0.130	0.225	0.535	0.390	0.027	0.280	0.281
CAH2-1032-130	10-32 UNF	0.020	0.130	0.435	0.390	0.027	0.280	0.281
CAH2-1032-225	10-32 UNF	0.130	0.225	0.535	0.390	0.027	0.280	0.281
CAH2-2520-165	1/4-20 UNC	0.027	0.165	0.685	0.510	0.030	0.374	0.375
CAH2-2520-260	1/4-20 UNC	0.165	0.260	0.585	0.510	0.030	0.374	0.375
CAH2-2528-165	1/4-28 UNF	0.027	0.165	0.685	0.510	0.030	0.374	0.375
CAH2-2528-260	1/4-28 UNF	0.165	0.260	0.585	0.510	0.030	0.374	0.375
CAH2-3118-150	5/16-18 UNC	0.027	0.150	0.685	0.655*	0.035	0.499	0.500
CAH2-3118-312	5/16-18 UNC	0.150	0.312	0.845	0.655*	0.035	0.499	0.500
CAH2-3124-150	5/16-24 UNF	0.027	0.150	0.685	0.655*	0.035	0.499	0.500
CAH2-3124-312	5/16-24 UNF	0.150	0.312	0.845	0.655*	0.035	0.499	0.500
CAH2-3716-150	3/8-16 UNC	0.027	0.150	0.685	0.655*	0.035	0.499	0.500
CAH2-3716-312	3/8-16 UNC	0.150	0.312	0.845	0.655*	0.035	0.499	0.500
CAH2-3724-150	3/8-24 UNF	0.027	0.150	0.685	0.655*	0.035	0.499	0.500
CAH2-3724-312	3/8-24 UNF	0.150	0.312	0.845	0.655*	0.035	0.499	0.500

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL • 3- ALUMINUM

STEEL 1008/1010
 STAINLESS STEEL 302*
 ALUMINUM 5056

RoHS Compliant Finishes:


Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2
 Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAH SERIES RIVET NUT

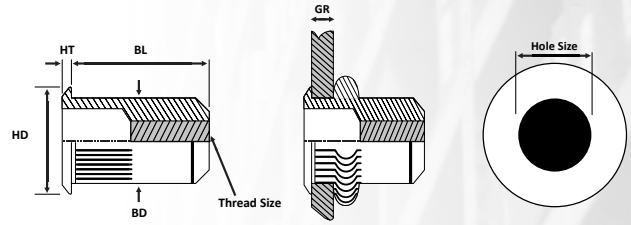

CAH HALF HEX BODY LARGE FLANGE THIN WALL SERIES (Unit - Millimeters)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter A/F (BD)	Hole Size A/F
		Min.	Max.					
CAH2-470-2.0	M4x0.7 ISO	0.50	2.00	9.78	9.53	0.68	6.35	6.35
CAH2-470-3.3	M4x0.7 ISO	2.00	3.30	11.05	9.53	0.68	6.35	6.35
CAH2-580-3.3	M5x0.8 ISO	0.50	3.30	11.05	9.91	0.68	7.10	7.14
CAH2-580-5.7	M5x0.8 ISO	3.30	5.70	13.59	9.91	0.68	7.10	7.14
CAH2-610-4.2	M6x1.0 ISO	0.70	4.20	14.86	12.96	0.76	9.50	9.53
CAH2-610-6.6	M6x1.0 ISO	4.20	6.60	17.40	12.96	0.76	9.50	9.53
CAH2-8125-3.8	M8x1.25 ISO	0.70	3.80	17.40	16.64*	0.89	12.70	12.70
CAH2-8125-7.9	M8x1.25 ISO	3.80	7.90	21.46	16.64*	0.89	12.70	12.70
CAH2-1015-3.8	M10x1.5 ISO	0.70	3.80	17.40	16.64*	0.89	12.70	12.70
CAH2-1015-7.9	M10x1.5 ISO	3.80	7.90	21.46	16.64*	0.89	12.70	12.70

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL • 3- ALUMINUM

STEEL 1008/1010
 STAINLESS STEEL 302*
 ALUMINUM 5056

RoHS Compliant Finishes:


- Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2
- Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAK SERIES RIVET NUT

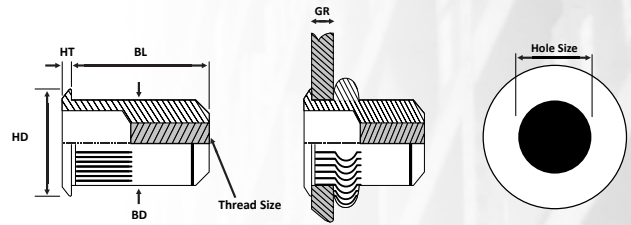

CAK SMALL FLANGE KNURLED BODY THIN WALL SERIES (Unit - Inches)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.					
CAK2-0632-080	6-32 UNC	0.020	0.080	± .015	±.010 ±.015*	± .002	Max.	+0.006/-0.000
CAK2-0632-130	6-32 UNC	0.080	0.130	0.470	0.310	0.019	0.265	0.266
CAK2-0832-080	8-32 UNC	0.020	0.080	0.420	0.310	0.019	0.265	0.266
CAK2-0832-130	8-32 UNC	0.080	0.130	0.470	0.310	0.019	0.265	0.266
CAK2-1024-130	10-24 UNC	0.020	0.130	0.475	0.340	0.019	0.296	0.297
CAK2-1024-225	10-24 UNC	0.130	0.225	0.585	0.340	0.019	0.296	0.297
CAK2-1032-130	10-32 UNF	0.020	0.130	0.475	0.340	0.019	0.296	0.297
CAK2-1032-225	10-32 UNF	0.130	0.225	0.585	0.340	0.019	0.296	0.297
CAK2-2520-165	1/4-20 UNC	0.027	0.165	0.580	0.455	0.022	0.390	0.391
CAK2-2520-260	1/4-20 UNC	0.165	0.260	0.680	0.455	0.022	0.390	0.391
CAK2-2528-165	1/4-28 UNF	0.027	0.165	0.580	0.455	0.022	0.390	0.391
CAK2-2528-260	1/4-28 UNF	0.165	0.260	0.680	0.455	0.022	0.390	0.391
CAK2-3118-150	5/16-18 UNC	0.027	0.150	0.690	0.595*	0.022	0.530	0.531
CAK2-3118-312	5/16-18 UNC	0.150	0.312	0.805	0.595*	0.022	0.530	0.531
CAK2-3124-150	5/16-24 UNF	0.027	0.150	0.690	0.595*	0.022	0.530	0.531
CAK2-3124-312	5/16-24 UNF	0.150	0.312	0.805	0.595*	0.022	0.530	0.531
CAK2-3716-150	3/8-16 UNC	0.027	0.150	0.690	0.595*	0.022	0.530	0.531
CAK2-3716-312	3/8-16 UNC	0.150	0.312	0.805	0.595*	0.022	0.530	0.531
CAK2-3724-150	3/8-24 UNF	0.027	0.150	0.690	0.595*	0.022	0.530	0.531
CAK2-3724-312	3/8-24 UNF	0.150	0.312	0.805	0.595*	0.022	0.530	0.531

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL • 3- ALUMINUM

STEEL 1008/1010

STAINLESS STEEL 302*

ALUMINUM 5056

RoHS Compliant Finishes:

Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2


Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAK SERIES RIVET NUT

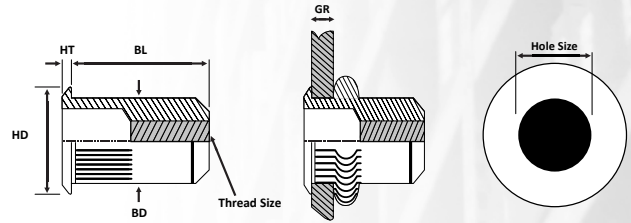

CAK SMALL FLANGE KNURLED BODY THIN WALL SERIES (Unit - Millimeters)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.					
CAK2-470-2.0	M4x0.7 ISO	0.50	2.00	10.67	7.87	0.48	6.73	6.75
CAK2-470-3.3	M4x0.7 ISO	2.00	3.30	11.94	7.87	0.48	6.73	6.75
CAK2-580-3.3	M5x0.8 ISO	0.50	3.30	12.07	8.64	0.48	7.52	7.60
CAK2-580-5.7	M5x0.8 ISO	3.30	5.70	14.86	8.64	0.48	7.52	7.60
CAK2-610-4.2	M6x1.0 ISO	0.70	4.20	14.73	11.56	0.55	9.91	10.00
CAK2-610-6.6	M6x1.0 ISO	4.20	6.60	17.27	11.56	0.55	9.91	10.00
CAK2-8125-3.8	M8x1.25 ISO	0.70	3.80	17.53	15.11*	0.55	13.46	13.50
CAK2-8125-7.9	M8x1.25 ISO	3.80	7.90	20.45	15.11*	0.55	13.46	13.50
CAK2-1015-3.8	M10x1.5 ISO	0.70	3.80	17.53	15.11*	0.55	13.46	13.50
CAK2-1015-7.9	M10x1.5 ISO	3.80	7.90	20.45	15.11*	0.55	13.46	13.50

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL • 3- ALUMINUM

STEEL 1008/1010
 STAINLESS STEEL 302*
 ALUMINUM 5056

RoHS Compliant Finishes:


- Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2
- Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAO SERIES RIVET NUT

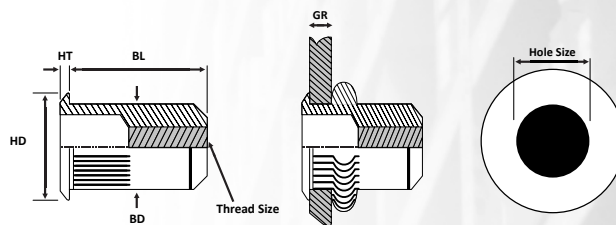

CAO SMALL FLANGE SMOOTH BODY THIN WALL SERIES (Unit - Inches)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.					
CAO2-0632-080	6-32 UNC	0.020	0.080	± .015	± .010 ± .015*	± .003	Max.	+.006/- .000
CAO2-0832-080	8-32 UNC	0.020	0.080	0.385	0.295	0.018	0.249	0.250
CAO2-1024-130	10-24 UNC	0.020	0.130	0.385	0.295	0.018	0.249	0.250
CAO2-1032-130	10-32 UNF	0.020	0.130	0.440	0.320	0.020	0.280	0.281
CAO2-2520-165	1/4-20 UNC	0.030	0.165	0.440	0.320	0.020	0.280	0.281
CAO2-2528-165	1/4-28 UNF	0.030	0.165	0.580	0.425	0.022	0.374	0.375
CAO2-3118-200	5/16-18 UNC	0.040	0.200	0.580	0.425	0.022	0.374	0.375
CAO2-3124-200	5/16-24 UNF	0.040	0.200	0.690	0.560*	0.022	0.499	0.500
CAO2-3716-200	3/8-16 UNC	0.040	0.200	0.690	0.560*	0.022	0.499	0.500
CAO2-3724-200	3/8-24 UNF	0.040	0.200	0.690	0.560*	0.022	0.499	0.500

CAO SMALL FLANGE SMOOTH BODY THIN WALL SERIES (Unit - Millimeters)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.					
CAO2-470-2.0	M4x0.7 ISO	0.50	2.00	± .38	± .25 ± .38*	± .08	Max.	+.15/- .000
CAO2-580-3.3	M5x0.8 ISO	0.50	3.30	9.78	7.49	0.46	6.32	6.40
CAO2-610-4.2	M6x1.0 ISO	0.76	4.20	11.18	8.13	0.51	7.11	7.20
CAO2-8125-5.1	M8x1.25 ISO	1.02	5.10	14.73	10.80	0.56	9.50	9.60
CAO2-1015-5.1	M10x1.5 ISO	1.02	5.10	17.53	14.22*	0.56	12.67	12.70

MATERIAL

• 2- STEEL • 3- ALUMINUM

STEEL 1008/1010

ALUMINUM 5056

RoHS Compliant Finishes:

Inch: Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001


Metric: Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAT/CFT SERIES RIVET NUT

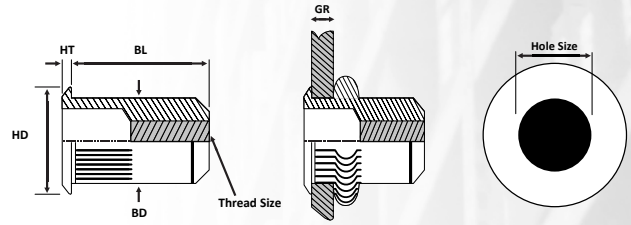

CAT/CFT KNURLED 360° SWAGING SERIES (Unit - Inches)

Part Number	Thread Size	Cadmium Free & RoHS Compliant	Head Diameter (HD) ± .005	Body Length (BL) ± .015	Body Diameter (BD) Max.	Recommended Hole Size +.005/- .00			
						Material Thickness	Material Thickness	Material Thickness	Material Thickness
						.030-.090	.091-.124	.125-.186	.187-Over
CAT2-0440	4-40 UNC	N	0.211	0.370	0.188	0.188	0.194	0.194	0.196
CAT2-0632	6-32 UNC	N	0.240	0.370	0.219	0.219	0.221	0.228	0.228
CAT2-0832	8-32 UNC	N	0.269	0.370	0.250	0.250	0.257	0.266	0.266
CAT2-1024	10-24 UNC	N	0.306	0.370	0.281	0.281	0.290	0.290	0.297
CAT2-1032	10-32 UNF	N	0.306	0.370	0.281	0.281	0.290	0.290	0.297
CAT2-2520	1/4-20 UNC	N	0.400	0.515	0.375	0.375	0.375	0.386	0.391
CAT2-3118	5/16-18 UNC	N	0.528	0.615	0.500	0.500	0.500	0.516	0.516
CAT2-3716	3/8-16 UNC	N	0.588	0.745	0.562	0.563	0.563	0.578	0.578
CAT2-5013	1/2-13 UNC	N	0.800	0.935	0.749	0.750	0.766	0.781	0.797

CFT2-0440	4-40 UNC	Y	0.211	0.370	0.188	0.188	0.194	0.194	0.196
CFT2-0632	6-32 UNC	Y	0.240	0.370	0.219	0.219	0.221	0.228	0.228
CFT2-0832	8-32 UNC	Y	0.269	0.370	0.250	0.250	0.257	0.266	0.266
CFT2-1024	10-24 UNC	Y	0.306	0.370	0.281	0.281	0.290	0.290	0.297
CFT2-1032	10-32 UNF	Y	0.306	0.370	0.281	0.281	0.290	0.290	0.297
CFT2-2520	1/4-20 UNC	Y	0.400	0.515	0.375	0.375	0.375	0.386	0.391
CFT2-3118	5/16-18 UNC	Y	0.528	0.615	0.500	0.500	0.500	0.516	0.516
CFT2-3716	3/8-16 UNC	Y	0.588	0.745	0.562	0.563	0.563	0.578	0.578
CFT2-5013	1/2-13 UNC	Y	0.800	0.935	0.749	0.750	0.766	0.781	0.797

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL

STEEL, 12L14

STEEL, 1215

STAINLESS STEEL, 304 L

CAT is a Cadmium Plated per QQ-P-416 Type 1, Class 3 with clear protective coating


CFT is Proprietary Tin Plated

[BACK TO TABLE OF CONTENTS](#)





SHEREX CAT/CFT SERIES RIVET NUT

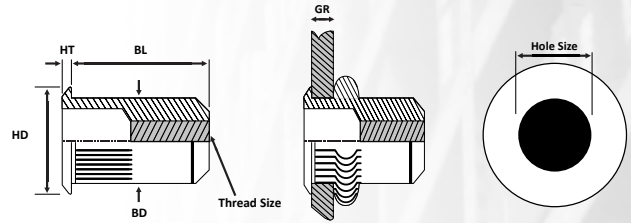

CAT/CFT KNURLED 360° SWAGING SERIES (Unit - Millimeters)

Part Number	Thread Size	Cadmium Free & RoHS Compliant	Head Diameter (HD)	Body Length (BL)	Body Diameter (BD)	Recommended Hole Size $\pm .13 / -.00$			
						Material Thickness	Material Thickness	Material Thickness	Material Thickness
						$\pm .13$	$\pm .38$	Max.	0.76-2.29
CAT2-350	M3X0.5 ISO	N	5.36	9.40	4.76	4.75	4.90	4.90	4.97
CAT2-470	M4X0.7 ISO	N	6.83	9.40	6.34	6.35	6.52	6.74	6.74
CAT2-580	M5X0.8 ISO	N	7.77	9.40	7.12	7.14	7.36	7.36	7.54
CAT2-610	M6X1.0 ISO	N	10.16	13.08	9.51	9.52	9.52	9.80	9.92
CAT2-8125	M8X1.25 ISO	N	13.41	15.62	12.69	12.70	12.70	13.09	13.09
CAT2-1015	M10X1.5 ISO	N	14.94	18.92	14.26	14.28	14.28	14.68	14.68
CAT2-12175	M12X1.75 ISO	N	20.32	23.75	19.01	19.05	19.44	19.83	20.24

CFT2-350	M3X0.5 ISO	Y	5.36	9.40	4.76	4.75	4.90	4.90	4.97
CFT2-470	M4X0.7 ISO	Y	6.83	9.40	6.34	6.35	6.52	6.74	6.74
CFT2-580	M5X0.8 ISO	Y	7.77	9.40	7.12	7.14	7.36	7.36	7.54
CFT2-610	M6X1.0 ISO	Y	10.16	13.08	9.51	9.52	9.52	9.80	9.92
CFT2-8125	M8X1.25 ISO	Y	13.41	15.62	12.69	12.70	12.70	13.09	13.09
CFT2-1015	M10X1.5 ISO	Y	14.94	18.92	14.26	14.28	14.28	14.68	14.68
CFT2-12175	M12X1.75 ISO	Y	20.32	23.75	19.01	19.05	19.44	19.83	20.24

MATERIAL

- 1- STAINLESS STEEL • 2- STEEL

STEEL, 12L14

STEEL, 1215

STAINLESS STEEL, 304 L

CAT is a Cadmium Plated per QQ-P-416 Type 1, Class 3 with clear protective coating


CFT is Proprietary Tin Plated

[BACK TO TABLE OF CONTENTS](#)





SHEREX CPB SERIES RIVET NUT

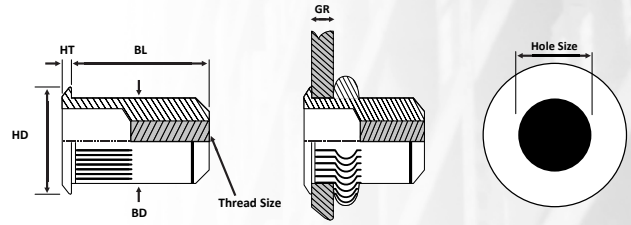

CPB PREBULBED SLOTTED BODY SERIES (Unit - Inches)								
Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.	Min. Max.	±.015	±.005	Max.	+.006/- .000
CPB2-1024-175	10-24 UNC	0.020	0.175	.490-.510	0.828	0.038	0.329	0.336
CPB2-1024-320	10-24 UNC	0.175	0.320	.490-.510	0.921	0.038	0.329	0.336
CPB2-1032-175	10-32 UNF	0.020	0.175	.490-.510	0.828	0.038	0.329	0.336
CPB2-1032-320	10-32 UNF	0.175	0.320	.490-.510	0.921	0.038	0.329	0.336
CPB2-2520-280	1/4-20 UNC	0.020	0.280	.610-.645	1.000	0.059	0.382	0.390
CPB2-2520-500	1/4-20 UNC	0.280	0.500	.610-.645	1.234	0.059	0.382	0.390
CPB2-3118-280	5/16-18 UNC	0.020	0.280	.740-.770	1.141	0.062	0.495	0.500
CPB2-3118-500	5/16-18 UNC	0.280	0.500	.740-.770	1.375	0.062	0.495	0.500

CPB PREBULBED SLOTTED BODY SERIES (Unit - Millimeters)								
Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.	Min. Max	±0.38	±0.13	Max.	+ .15/- .000
CPB2-580-4.45	M5x0.8 ISO	0.50	4.45	12.45-12.95	21.03	0.96	8.35	8.55
CPB2-580-8.1	M5x0.8 ISO	4.45	8.10	12.45-12.95	23.80	0.96	8.35	8.55
CPB2-610-7.1	M6x1.0 ISO	0.50	7.10	15.50-16.38	25.40	1.50	9.70	10.00
CPB2-610-12.7	M6x1.0 ISO	7.10	12.70	15.50-16.38	31.32	1.50	9.70	10.00
CPB2-8125-7.1	M8x1.25 ISO	0.50	7.10	18.80-19.65	28.95	1.57	12.57	12.70
CPB2-8125-12.7	M8x1.25 ISO	7.10	12.70	18.80-19.65	34.90	1.57	12.57	12.70

MATERIAL

- 1- STAINLESS STEEL • 3- ALUMINUM

STEEL 1008/1010

ALUMINUM 5056

RoHS Compliant Finishes:

Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2


Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)





SHEREX CPN SERIES RIVET NUT

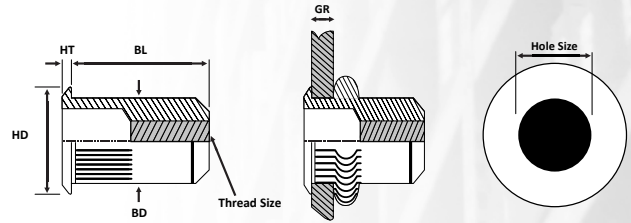

CPN STRAIGHT SHANK SLOTTED BODY SERIES (Unit - Inches)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.					
CPN2-1024-175	10-24 UNC	0.020	0.175	.490-.510	± .015	± .038	Max.	+.006/-0.000
CPN2-1024-320	10-24 UNC	0.175	0.320	.490-.510	± .015	± .038	Max.	+.006/-0.000
CPN2-1032-175	10-32 UNF	0.020	0.175	.490-.510	± .015	± .038	Max.	+.006/-0.000
CPN2-1032-320	10-32 UNF	0.175	0.320	.490-.510	± .015	± .038	Max.	+.006/-0.000
CPN2-2520-280	1/4-20 UNC	0.020	0.280	.610-.645	± .015	± .059	Max.	+.006/-0.000
CPN2-2520-500	1/4-20 UNC	0.280	0.500	.610-.645	± .015	± .059	Max.	+.006/-0.000
CPN2-3118-280	5/16-18 UNC	0.020	0.280	.740-.770	± .015	± .062	Max.	+.006/-0.000
CPN2-3118-500	5/16-18 UNC	0.280	0.500	.740-.770	± .015	± .062	Max.	+.006/-0.000

CPN STRAIGHT SHANK SLOTTED BODY SERIES (Unit - Millimeters)

Part Number	Thread Size	Grip Range (GR)		Body Length (BL)	Head Diameter (HD)	Head Height (HT)	Body Diameter (BD)	Hole Size
		Min.	Max.					
CPN2-580-4.45	M5x0.8 ISO	0.50	4.45	12.45-12.95	± 0.38	± .13	Max.	+0.15/-0.00
CPN2-580-8.1	M5x0.8 ISO	4.45	8.10	12.45-12.95	± 0.38	± .13	Max.	+0.15/-0.00
CPN2-610-7.1	M6x1.0 ISO	0.50	7.10	15.50-16.38	± 0.38	± .13	Max.	+0.15/-0.00
CPN2-610-12.7	M6x1.0 ISO	7.10	12.70	15.50-16.38	± 0.38	± .13	Max.	+0.15/-0.00
CPN2-8125-7.1	M8x1.25 ISO	0.50	7.10	18.80-19.65	± 0.38	± .13	Max.	+0.15/-0.00
CPN2-8125-12.7	M8x1.25 ISO	7.10	12.70	18.80-19.65	± 0.38	± .13	Max.	+0.15/-0.00

MATERIAL

- 2- STEEL • 3- ALUMINUM

STEEL 1008/1010

ALUMINUM 5056

RoHS Compliant Finishes:

Zinc Plated-Yellow Trivalent Chromate per Sherex SFS-01-001, SC2

Zinc Plated-Clear Trivalent Chromate per Sherex SFS-01-001

[BACK TO TABLE OF CONTENTS](#)



RIVET NUT HAND TOOLS

AFX-944

- Light Rivet-Nut Hand Installation Tool
- Up to 3/8-16 Aluminum and 1/4-20 Steel
- Available in Metric “AFX-944-M”



M4

- Heavy Duty Hand Installation Tool
- Installs 1/4” thru 1/2” (M6-M12)
- Installs all Materials



LHF-202

- Ideal for Small Production Work and Prototyping
- Pulls any Rivet-Nut from #6-32 to 1/4"-20 (M4-M6)
- Includes Setups :
Inch: #8-32, #10-24 and 1/4"-20
Metric: M4, M5 and M6



M5

- Ratchet Style Hand Installation Tool
- Installs #6 thru 3/8” (M4-M10)
- Installs all Materials



RNHT

- Rivet Nut Hand Tool
- Purchased Individually by Size
- Handles any Style of Rivet-Nut from #6-32 to 3/8”-16
- Each Tool Requires One 11/16” Ratchet and One 7/8” Wrench for All Sizes

Part Number	Thread Size
RNHT-0632	6-32
RNHT-0832	8-32
RNHT-1024	10-24
RNHT-1032	10-32
RNHT-2520	1/4-20
RNHT-2528	1/4-28
RNHT-3118	5/16-18
RNHT-3124	5/16-24
RNHT-3716	3/8-16
RNHT-3724	3/8-24
RNHT-M3	M3
RNHT-M4	M4
RNHT-M5	M5
RNHT-M6	M6
RNHT-M8	M8
RNHT-M10	M10



[BACK TO TABLE OF CONTENTS](#)



RIVET NUT PNEUMATIC

SSG 800 Pistol Series

- Designed for installing Sherex CAL, CAK, CAH, CAO, CFT/CAT, CFW/CAW and CPB Rivet Nut Inserts
- Installs #4 thru 1/2" (M3-M12)



SSG 900 Inline Series

- Designed for installing Sherex CAL, CAK, CAH, CAO, CFT/CAT, CFW/CAW and CPB Rivet Nut Inserts
- Installs #4 thru 3/8" (M3-M10)



SSG 910 Angel Series

- Designed for installing Sherex CAL, CAK, CAH, CAO, CFT/CAT, CFW/CAW, and CPB Rivet Nut Inserts
- Installs #4 thru 3/8" (M3-M10)



MS 100

- Designed for installing Thin Wall and Heavy Duty Rivet Nuts 5/16" thru 1/2" (M8-M14)



FLEX-5 Series

- Rivet Nut Installation Tool #4 thru 3/8 (M3 to M10)
- Pull to Stroke Installation or Pull to Pressure Installation



[BACK TO TABLE OF CONTENTS](#)



TERMS AND CONDITIONS

PRICES: Any listed prices supersede all previous price schedules and are subject to change without notice.

FREIGHT: All orders are freight collect. Prepaid freight at \$2500 total purchase.

TERMS: Net 30 days from date of invoice on materials to approved accounts only. Cash and Credit Cards are also accepted.

MINIMUM ORDER: \$40.00 of parts, does not include certification.

RETURNED GOODS: No return will be accepted without a return authorization by an AFIXX employee. Goods returned, and not the cause of an AFIXX error, may be charged a 20% restocking charge. All returns must be freight prepaid.

CERTIFICATIONS: Available on certain line items. Certification must be made at the time of order and are subject to a charge.

AFIXX Alliance® makes no warranties or representations, express or implied, including warranties as to merchantability or as to the fitness of the products listed for sale or sold hereunder for any particular use or purpose, and shall not be liable for any loss or damage, directly or indirectly, arising from the use of such products or for consequential damages. Any description of the product, whether in writing or made orally by AFIXX Alliance®, are for the sole purpose of identifying the product and shall not be construed as an express warranty. Technical information is provided as a reference only. AFIXX Alliance® will not be responsible for the accuracy of this information.

BOLD DIRECTION. STRAIGHTFORWARD SOLUTIONS.





**STATE OF THE ART SITE
THAT PROVIDES MAXIMUM
SAVINGS AND SERVICE.**

COMMITTED TO DISTRIBUTORS. COMMITTED TO YOU.



afixx.com

15368 El Prado Road Chino, CA 91710 Phone: 855.607.6781 Fax: 877.647.3523