



# AUDIO

## 2022



Mobile applicable

Excellent sound



27002



4K 60Hz

**63333**  
HDMI Audio Extractor 4K 60 Hz compact

- Connectors:
  - Input:
    - 1 × HDMI-A female
    - 1 × USB Type Micro-B female (5 V power supply)
  - Output:
    - 1 × HDMI-A male
    - 1 × 3.5 mm 3 pin stereo jack female (audio)
    - 1 × TOSLINK female S/PDIF
- High Speed HDMI, 3D and HDCP 1.4/ HDCP 2.2
- Supports HDR (High Dynamic Range)



4K 30Hz

**62784**  
HDMI Audio Extractor 4K 30 Hz compact

- Connectors:
  - Input:
    - 1 × HDMI-A 19 pin male
    - 1 × USB Type Micro-B female (5 V power supply)
  - Output:
    - 1 × HDMI-A 19 pin female
    - 1 × 3.5 mm 3 pin stereo jack female (audio)
    - 1 × TOSLINK female S/PDIF
- High Speed HDMI, 3D and HDCP 1.4



4K 60Hz

**63276**  
HDMI Audio Extractor 4K 60 Hz compact

- Connectors:
  - Input:
    - 1 × HDMI-A 19 pin male
    - 1 × USB Type Micro-B female (5 V power supply)
  - Output:
    - 1 × HDMI-A 19 pin female
    - 1 × 3.5 mm 3 pin stereo jack female (audio)
    - 1 × TOSLINK female S/PDIF
- High Speed HDMI, 3D and HDCP 1.4/HDCP 2.2
- Supports HDR (High Dynamic Range)

CONTENTS

|                         | Page  |
|-------------------------|-------|
| Speaker                 | 2     |
| Sound Box /             | 3     |
| Audio Extractors        | 3     |
| Headphones/Headsets     | 4-5   |
| Microphones             | 6-9   |
| Splitter/Converters     | 10-11 |
| Adapters                | 12-13 |
| Adapters/Adapter Cables | 14-15 |
| Cables                  | 16-18 |
| Sound Card              | 19    |
| Amplifier               | 20    |



**27001**  
Stereo 2.0 PC Speaker with 3.5 mm stereo jack male and USB powered

- Connectors:
  - 1 × 3.5 mm 3 pin stereo jack male
  - 1 × USB Type-A male (power supply)
- 1 × volume control button
- Audio system: 2.0
- Output/RMS: 3 W
- Impedance: 4 Ω
- Frequency range: 80 Hz - 18 kHz
- Colour: black
- Cable lengths:
  - between the boxes ca. 1.00 m
  - Stereo jack cable/USB cable ca. 1.25 m
- Dimensions (LxWxH): ca. 95 × 75 × 158 mm



**27002**  
Mini Stereo PC Speaker with 3.5 mm stereo jack male and USB powered

- Connectors:
  - 1 × 3.5 mm 3 pin stereo jack male
  - 1 × USB Type-A male (power supply)
- 1 × volume control button
- Audio system: 2.0
- Output/RMS: 2 × 1 W
- Impedance: 4 Ω
- Frequency range: 100 Hz - 18 kHz
- Colour: black/grey
- Cable lengths:
  - between the boxes ca. 69 cm
  - Stereo jack cable/USB cable ca. 93 cm
- Dimensions (LxWxH): ca. 83 × 73 × 82 mm



**61803**  
USB Sound Box 7.1

- Connectors:
  - 1 × USB 2.0 Type-B female to
  - 1 × S/PDIF optical digital input
  - 1 × S/PDIF optical digital output
  - 2 × 3.5 mm 3 pin stereo jack female microphone (L, R, Mono)
  - 1 × 3.5 mm 3 pin stereo jack female headset
  - 1 × 3.5 mm 3 pin stereo jack line-in
  - 1 × 3.5 mm 3 pin stereo jack front speaker (L, R)
  - 1 × 3.5 mm 3 pin stereo jack surround (L, R)
  - 1 × 3.5 mm 3 pin stereo jack center/bass
  - 1 × 3.5 mm 3 pin stereo jack rear speaker



4K 30Hz

**62692**  
HDMI Audio Extractor 4K 30 Hz

- Connectors:
  - Input:
    - 1 × HDMI-A 19 pin female
    - 1 × 5 V DC jack 2.1 × 5.5 mm
  - Output:
    - 1 × HDMI-A 19 pin female
    - 1 × 3.5 mm 3 pin stereo jack female (audio)
    - 1 × TOSLINK female S/PDIF
    - 1 × RCA female S/PDIF
- Switchable between stereo and 5.1 channel
- High Speed HDMI, 3D and HDCP 1.4
- Output with HDMI repeater function
- Dimensions (LxWxH): ca. 71 × 61 × 21 mm



4K 60Hz

**63332**  
HDMI HD Audio Extractor 4K 60 Hz to HDMI with eARC

- Connectors:
  - Input:
    - 1 × HDMI-A female
    - 1 × USB Type Micro-B female (5 V power supply)
  - Output:
    - 2 × HDMI-A female
- High Speed HDMI, 3D and HDCP 1.4/ HDCP 2.2
- Supports HDR (High Dynamic Range)
- Dedicated HDMI output for audio only with 720p (black screen)
- Dimensions (LxWxH): ca. 70 × 65 × 27 mm

For office and leisure time



**27183**  
**In-Ear Headphones with 4 pin 3.5 mm Stereo jack plug, Microphone and Volume Control + Quick Mute Function for Smartphones and Tablets**

- Connector: 1 × 3.5 mm 4 pin stereo jack male 90° angled (CTIA standard)
- Sensitivity: 100 dB +/- 3 dB
- Frequency range: 20 Hz–25 kHz
- Audio driver Ø: 10 mm
- Impedance: 32 Ω @ 1 kHz
- Cable remote control: loud/quiet
- Multifunction button: mute/play/pause/forward
- Built-in microphone
- Cable length: ca. 1.2 m



**18351**  
**Apple AirPods Accessory Set white**

- Bag to protect against scratches or damage
- Cut-out for charging connection
- Snap hooks for fastening
- Retaining clip for Apple Watch strap
- Earplugs and retaining strap for AirPods
- Material: plastic/silikon
- Colour: white
- Dimensions protective bag (LxWxH): ca. 55 × 50 × 20 mm

27183

27181

27177



**27180**  
**USB Stereo Headset with Cable Remote Control and Quick-Mute Button for PC and Laptop**

- Connector: 1 × USB 2.0 Type-A male
- Directivity: omnidirectional
- Sensitivity: Headphone: 103 dB +/- 3 dB  
Microphone: -19 dB +/- 3 dB, @ 1 kHz
- Frequency range: Headphone: 20 Hz–20 kHz  
Microphone: 100 Hz–10 kHz
- Impedance: 32 +/- 5 Ω
- Sample rate: 16 Bit/48 kHz for record and playback
- Cable remote control (loud/quiet/mute)



Bluetooth

**27181**  
**Bluetooth 5.0 Headphones Over-Ear foldable with integrated Microphone and intense Bass, up to 20 hours playback time**

- Connectors: 1 × 3.5 mm 4 pin stereo jack female (AUX-In)  
1 × USB Type Micro-B female (5 V power supply)
- Multifunction buttons: Track forwards/Track backwards–volume-up/volume-down  
On/Off–Play/Pause
- Class 2, operating range up to 10 meter
- Sensitivity: 95 dB +/- 3 dB @ 1 kHz 1 mW
- Frequency range: 20 Hz–20 kHz



**27182**  
**Gaming Headset Over-Ear with 3.5 mm Stereo jack and blue LED light for PC, Laptop and Game Consoles**

- Connectors: 1 × 3.5 mm 4 pin stereo jack male (CTIA standard)  
1 × USB 2.0 Type-A male (5 V power supply)
- Directivity: omnidirectional
- Sensitivity: Headphone: 109 dB +/- 3 dB  
Microphone: -38 dB +/- 3 dB
- Frequency range: Headphone: 20 Hz–20 kHz
- Audio driver Ø: 40 mm
- Impedance: 2.2 kΩ
- Cable remote control (loud/quiet/mute)



**27177**  
**USB Mono Headset with Volume Control for PC and Laptop–Ultra Lightweight**

- Connector: 1 × USB 2.0 Type-A male
- Directivity: omnidirectional
- Sensitivity: Headphone: 105 dB +/- 3 dB  
Microphone: -42 dB +/- 2 dBV/Pa
- Frequency range: Headphone: 20 Hz–20 kHz  
Microphone: 40 Hz–13 kHz
- Impedance: 32 +/- 5 Ω
- Sample rate: 16 Bit/48 kHz for record and playback
- Volume control (loud/quiet)
- Cable length: ca. 2.4 m
- Weight: ca. 70 g



**27178**  
**USB Stereo Headset with Volume Control for PC and Laptop–Ultra Lightweight**

- Connector: 1 × USB 2.0 Type-A male
- Directivity: omnidirectional
- Sensitivity: Headphone: 105 dB +/- 3 dB  
Microphone: -42 dB +/- 2 dBV/Pa
- Frequency range: Headphone: 20 Hz–20 kHz  
Microphone: 40 Hz–13 kHz
- Impedance: 32 +/- 5 Ω
- Sample rate: 16 Bit/48 kHz for record and playback
- Volume control (loud/quiet)
- Cable length: ca. 2.4 m
- Weight: ca. 75 g



**27179**  
**USB Stereo Headset with Volume Control for PC and Laptop**

- Connector: 1 × USB 2.0 Type-A male
- Directivity: omnidirectional
- Sensitivity: Headphone: 105 dB +/- 3 dB  
Microphone: -42 dB +/- 2 dBV/Pa
- Frequency range: Headphone: 20 Hz–20 kHz  
Microphone: 40 Hz–13 kHz
- Impedance: 32 +/- 5 Ω
- Sample rate: 16 Bit/48 kHz for record and playback
- Volume control (loud/quiet)
- Cable length: ca. 2.4 m
- Weight: ca. 90 g



Professional microphone

Ideal for podcasting

XLR connector



66640



**66330**  
Desktop USB Gaming Microphone with Gooseneck and Mute Button

- Connectors: 1 × USB 2.0 Type-A male, 1 × 3.5 mm 3 pin stereo jack female
- Directivity: omnidirectional
- Sensitivity: -30 dB +/- 3 dB
- Frequency range: 50 Hz – 16 kHz
- Sample rate: 16 Bit/44.1 kHz
- Signal-to-noise ratio (SNR): ca. 60 dB
- Impedance: 2.2 kOhm
- Mute-Button
- LED on/off button
- Cable length: ca. 1.5 m
- Dimensions (LxWxH): ca. 108 × 97 × 325 mm



**66822**  
Multifunctional Dual Capsule USB Microphone with 3.5 mm Stereo Headphone Jack and Volume Control + Quick-Mute Funktion

- Connectors: 1 × USB Type-C™ 2.0 female, 1 × 3.5 mm 3 pin stereo jack female
- Cable: 1 × USB Type-C™ 2.0 male to 1 × USB 2.0 Type-A male
- Directivity: unidirectional/ omnidirectional
- Sensitivity: -35 dB +/- 3 dB
- Frequency range: 20 Hz – 20 kHz
- Sampling rates: recording and playback up to 16 Bit/48 kHz



**66582**  
Vlog Shotgun Microphone Set for Smartphones and DSLR Cameras

- Connector: 1 × 3.5 mm 4 pin stereo jack female
- Coiled Cable: 1 × 3.5 mm 4 pin audio stereo jack male to 1 × 3.5 mm 4 pin audio stereo jack male
- Adapter: 1 × 3.5 mm 4 pin stereo jack female to 1 × 3.5 mm 3 pin stereo jack male (TRRS to TRS)
- Directivity: supercardioid
- Sensitivity: -23 dB +/- 3 dB
- Frequency range: 20 Hz – 12 kHz
- Signal-to-noise ratio (SNR): ca. 70 dB
- Sound pressure level (SPL): max. 110 dB
- Smartphone clamp: width up to 8.5 cm
- Hot shoe adapter for mounting on cameras with accessory shoe



**66300**  
Professional USB Condenser Microphone Set for Podcasting and Gaming

- Connector: 1 × USB 2.0 Type-B female
- Directivity: unidirectional
- Sensitivity: -38 dB +/- 3 dB
- Frequency range: 30 Hz – 16 kHz
- Sample rate: 24 Bit/192 kHz
- Signal-to-noise ratio (SNR): ca. 70 dB
- Self-Noise: max. 16 dBA
- Sound pressure level (SPL): max. 120 dB
- Dual-Layer pop filter: ∅ 120 mm
- Stand: ∅ ca. 130 mm (ca. 600 g)



**66331**  
USB Condenser Microphone Set for Podcasting, Gaming and Vocals

- Connector: 1 × USB 2.0 Type-A male
- Directivity: unidirectional
- Sensitivity: -47 dB +/- 3 dB
- Frequency range: 20 Hz – 20 kHz
- Sample rate: 16 Bit/44.1 kHz
- Signal-to-noise ratio (SNR): ca. 60 dB
- Impedance: 2.2 kOhm
- Cable length: ca. 1.5 m
- Colour: black
- Dimensions (LxWxH): ca. 150 × 45 × 35 mm



**66640**  
Professional Computer Podcasting Microphone with XLR

- Connector: 1 × XLR plug, 1 × XLR jack to 1 × 3.5 mm 3 pin stereo jack male
- Y-Adapter: 1 × 3.5 mm 4 pin stereo jack male (CTIA standard) to 1 × 3.5 mm 3 pin stereo jack female microphone, 1 × 3.5 mm 3 pin stereo jack female headset
- Directivity: unidirectional
- Sensitivity: -38 dB +/- 3 dB
- Frequency range: 30 Hz – 16 kHz
- Signal-to-noise ratio (SNR): ca. 70 dB
- Self-Noise: max. 16 dBA
- Sound pressure level (SPL): max. 120 dB
- Cable length: ca. 2.5 m



**66832**  
USB Condenser Microphone with Stand 24 Bit/192 kHz for PC and Laptop

- Connector: 1 × USB 2.0 Type-B female
- Directivity: unidirectional
- Sensitivity: -13 dB +/- 3 dB
- Frequency range: 20 Hz – 20 kHz
- Sample rate: 24 Bit/192 kHz
- Signal-to-noise ratio (SNR): ca. 60 dB
- Sound pressure level (SPL): max. 93 dB
- Cable length: ca. 1.5 m
- USB bus powered
- Plug & Play



**66882**  
Professional USB Condenser Microphone 24 Bit/192 kHz for PC and Laptop

- Connector: 1 × USB 2.0 Type-B female
- Directivity: unidirectional
- Sensitivity: -38 dB +/- 3 dB
- Frequency range: 30 Hz – 16 kHz
- Sample rate: 24 Bit/192 kHz
- Signal-to-noise ratio (SNR): ca. 70 dB
- Self-Noise: max. 16 dBA
- Sound pressure level (SPL): max. 120 dB



**65939**  
USB Condenser Microphone with Table Stand – ideal for gaming, Skype and vocals

- Connector: 1 × USB 2.0 Type-A male
- Directivity: omnidirectional
- Sensitivity: -38 dB +/- 3 dB
- Frequency range: 50 Hz – 16 kHz
- Sample rate: 16 Bit/44.1 kHz
- Signal-to-noise ratio (SNR): ca. 36 dB
- Impedance: 2.2 kOhm
- Cable length: ca. 1.35 m
- Dimensions (LxWxH): ca. 150 × 55 × 30 mm

24 Bit/192 KHz

HiFi studio quality



66638

**66499**  
**USB Microphone with Gooseneck and Mute Button**

- Connector: 1 × USB 2.0 Type-A male
- Directivity: unidirectional
- Sensitivity: -35 dB +/- 3 dB
- Frequency range: 70 Hz–15 kHz
- Sample rate: 16 Bit/48 kHz
- Mute-Button
- Gooseneck, length ca. 7 cm
- Status LED
- Dimensions (LxWxH): ca. 196 × 23 × 23 mm

**20672**  
**USB Condenser Microphone Omni-directional for Conferences**

- Connectors: 1 × USB 2.0 Type-A male, 1 × 3.5 mm 3 pin stereo jack female
- Directivity: omnidirectional
- Sensitivity: -16 dB +/- 3 dB
- Frequency range: 100 Hz–10 kHz
- Sample rate: 16 Bit/44.1 kHz
- Signal-to-noise ratio (SNR): ca. 65 dB
- Mute-Button
- Cable length: ca. 1.5 m
- Dimensions (∅ × H): ca. 75 × 19 mm

**65873**  
**Condenser Table Microphone omni-directional for conference with 3.5 mm stereo jack male 3 pin**

- Connector: 1 × 3.5 mm 3 pin stereo jack male
- Y-Adapter: 1 × 3.5 mm 4 pin stereo jack male (CTIA standard) to 1 × 3.5 mm 3 pin stereo jack female microphone, 1 × 3.5 mm 3 pin stereo jack female headset
- Directivity: omnidirectional
- Impedance: 2.2 kOhm
- Sensitivity: -32 dB +/- 3 dB
- Frequency range: 100 Hz–10 kHz
- Dimensions (∅ × H): ca. 60 × 15 mm
- Weight: ca. 65.5 g
- Cable length: ca. 2.5 m



**65868**  
**USB Microphone with base and Touch-Mute Button**

- Connector: 1 × USB 2.0 Type-A reversible male
- Sensitivity: -37 dB +/- 3 dB
- Frequency range: 70 Hz–15 kHz
- Impedance: 2.2 kOhm +/- 30% at 1 kHz
- Sample rate: 16 Bit/48 kHz
- Touch Mute-Button
- Gooseneck
- Rubber Base
- Cable length: ca. 1.7 m
- Dimensions (LxWxH): ca. 140 × 60 × 60 mm



**65872**  
**Condenser Microphone Omni-Directional for Smartphone/Tablet with gooseneck 3.5 mm 4 pin stereo jack male + 3.5 mm stereo jack female**

- Connectors: 1 × 3.5 mm 4 pin audio stereo jack male, 1 × 3.5 mm 3 pin stereo jack female
- Directivity: omnidirectional
- Impedance: 2.2 kOhm
- Sensitivity: -32 dB +/- 3 dB
- Frequency range: 100 Hz–13 kHz
- Cable length: ca. 1.7 m
- Dimensions (LxWxH): ca. 55 × 64 × 143 mm



**65871**  
**USB Gooseneck Microphone with base and mute + on/off button**

- Connector: 1 × USB 2.0 Type-A reversible male
- Directivity: unidirectional
- Sensitivity: -44 dB +/- 3 dB
- Frequency range: 70 Hz–9 kHz
- Sample rate: 16 Bit/48 kHz
- Function key: 1 × On/Off switch, 1 × mute switch
- Gooseneck, length ca. 25 cm
- Rubber Base
- Cable length: ca. 1.7 m
- Dimensions (LxWxH): ca. 120 × 85 × 320 mm



**66638**  
**USB Tie Lavalier Microphone Omnidirectional 24 bit/192 kHz with clip and 3.5 mm stereo jack headphone port**

- Connectors: 1 × USB 2.0 Type-A male, 1 × 3.5 mm 3 pin stereo jack female
- Directivity: omnidirectional
- Sensitivity: -30 dB +/- 3 dB
- Frequency range: 50 Hz–18 kHz
- Sampling rates: recording up to 24 bit/192 kHz, playback up to 32 bit/192 kHz
- Signal-to-noise ratio (SNR): ca. 74 dB
- Cable length: ca. 2 m
- Housing material: metal
- Weight: ca. 30 g



**66279**  
**Tie Lavalier Microphone Omnidirectional with Clip 3.5 mm stereo jack male 3 pin + Adapter Cable for Smartphone and Tablet**

- Connector: 1 × 3.5 mm 3 pin stereo jack male
- Y-Adapter: 1 × 3.5 mm 4 pin stereo jack male (CTIA standard) to 1 × 3.5 mm 3 pin stereo jack female microphone, 1 × 3.5 mm 3 pin stereo jack female headset
- Directivity: omnidirectional
- Impedance: 2.2 kOhm
- Sensitivity: -30 dB +/- 3 dB
- Frequency range: 50 Hz–16 kHz
- Weight: ca. 15.5 g
- Cable length: ca. 1.8 m



**65894**  
**Condenser Microphone Uni-Directional 3.5 mm 4 Pin Stereo Jack 90° angleable**

- Connector: 1 × 3.5 mm 4 pin audio stereo jack
- Directivity: uni-directional
- Up to 90° angle possible
- Material: aluminium housing, copper-plug gold-plated, steel grid and ABS lining
- Impedance: 2.2 kOhm
- Sensitivity: -38 dB +/- 3 dB
- Frequency range: 50 Hz–16 kHz
- Signal noise ratio (SNR): ca. 56 dB
- Weight: ca. 6.5 g

**65893**  
**Condenser Microphone Uni-Directional 3.5 mm 4 Pin Stereo Jack 90° angleable silver**

High sampling rates



**63972**  
Digital Audio Converter to Analogue HD with Headphone Amplifier

- Connectors:  
Input:  
1 × TOSLINK female S/PDIF  
1 × Coaxial female S/PDIF  
1 × USB Type Micro-B female (5 V power supply)  
Output:  
2 × RCA female  
1 × 3.5 mm 3 pin stereo jack female
- Frequency response: 20 Hz–20 kHz +/- 0.2 dB
- Supported sample rates:  
32/44.1/48/96/192 kHz
- Dimensions (LxWxH): ca. 70 × 60 × 20 mm



**63397**  
S/PDIF TOSLINK Switch 1 In 3 Out with USB Powered

- Connectors:  
Input:  
1 × TOSLINK female S/PDIF  
1 × USB Type Mini-B female (5 V power)  
Output: 3 × TOSLINK female S/PDIF
- Supported sample rates: 32/44.1/48/96 kHz
- Bit rate 16–24 Bit
- Baud rate: max. 16 Mbps
- Supports all common 2.0 and 5.1 audio formats: LPCM, Dolby Digital, DTS Audio
- Supports signal retiming
- Dimensions (LxWxH): ca. 61 × 54 × 20 mm



**63395**  
S/PDIF TOSLINK Switch 3 In 1 Out with IR Remote Control and USB Powered

- Connectors:  
Input:  
3 × TOSLINK female S/PDIF  
1 × USB Type Mini-B female (5 V power)  
1 × 3.5 mm 3 pin stereo jack female (infrared input)  
Output: 1 × TOSLINK female S/PDIF
- Supported sample rates: 32/44.1/48/96 kHz
- Bit rate 16–24 Bit
- Baud rate: max. 16 Mbps
- Supports all common 2.0 and 5.1 audio formats: LPCM, Dolby Digital, DTS Audio
- Supports signal retiming
- Switch to change the input source
- Dimensions (LxWxH): ca. 61 × 54 × 20 mm



**62443**  
Audio Converter Analogue to Digital

- Connectors:  
Input:  
2 × RCA female  
1 × DC jack  
Output:  
1 × TOSLINK female S/PDIF  
1 × Coaxial female S/PDIF
- Sample rate: 16 Bit/48 kHz
- Robust metal housing
- Dimensions (LxWxH): ca. 63 × 41 × 21 mm



**62444**  
Audio Converter Digital to Analogue

- Connectors:  
Input:  
1 × TOSLINK female S/PDIF  
1 × Coaxial female S/PDIF  
1 × DC jack  
Output:  
2 × RCA female
- Supported sample rates: 32/44.1/48/96 kHz
- Robust metal housing
- Dimensions (LxWxH): ca. 63 × 41 × 21 mm



**63468**  
Audio Converter Analogue to Digital HD

- Connectors:  
Input:  
2 × RCA female  
1 × USB Type Micro-B female (5 V power supply)  
Output:  
1 × TOSLINK female S/PDIF  
1 × Coaxial female S/PDIF
- Chipset: WM8805
- Sample rate: 16 Bit/96 kHz
- Plastic housing
- Colour: black
- Dimensions (LxWxH): ca. 63 × 44 × 23 mm



**63477**  
Audio Converter Digital to Analogue HD

- Connectors:  
Input:  
1 × TOSLINK female S/PDIF  
1 × Coaxial female S/PDIF  
1 × USB Type Micro-B female (5 V power supply)  
Output:  
2 × RCA female
- Chipset: MS8416
- Supported sample rates:  
32/44.1/48/96/192 kHz
- Bit rate 16–24 Bit
- Plastic housing
- Dimensions (LxWxH): ca. 63 × 44 × 23 mm



# ADAPTERS

# ADAPTERS



**84499**  
Adapter 2 x RCA female to 1 x RCA male



**65365**  
Adapter Audio Stereo plug 3.5 mm 3 pin to 2 x RCA jack



**65364**  
Adapter Audio Stereo Jack 3.5 mm 3 Pin male to female angled



**64141**  
Audio Adapter RCA female to female for installation, white ring



**64142**  
Audio Adapter RCA female to female for installation, red ring



**64143**  
Audio Adapter binding post to binding post for installation, red ring



**65361**  
Adapter Stereo plug 6.35 mm to Stereo jack 3.5 mm 3 pin metal



**66390**  
Adapter 6.35 mm Stereo plug to 3.5 mm Stereo jack 3 pin metal screwable



**65983**  
Adapter 6.35 mm Stereo plug to 3.5 mm Stereo jack 3 pin metal screwable 2 pieces



**64144**  
Audio Adapter binding post to binding post for installation, black ring




**64145**  
Audio Adapter binding post to binding post for installation, red ring



**64146**  
Audio Adapter binding post to binding post for installation, black ring



**65360**  
Adapter Stereo plug 3.5 mm 3 pin to Stereo jack 6.35 mm 3 pin metal



**65629**  
Adapter Audio Stereo jack 3.5 mm male to 3.5 mm 3 pin male



**65547**  
Adapter Audio Stereo jack 3.5 mm to Stereo jack 3.5 mm 3 pin



**63965**  
Audio Adapter USB Type-C™ male – Stereo Jack female 3.5 mm + USB 3.0 A female



**63926**  
External USB 2.0 Sound Adapter 24 bit/96 kHz with S/PDIF



**61645**  
USB Sound Adapter 7.1



**86732**  
D-Type Module 3.5 mm 3 pin stereo jack female to terminal block



**65590**  
Adapter 3.5 mm 4 pin Stereo jack male to 3.5 mm 4 pin Stereo jack female (changes pin assignment)



**65548**  
Adapter Stereo 3.5 mm plug to 6.35 mm jack 3 pin



**66168**  
RCA Adapter male to female angled 90°



**65899**  
Adapter USB 2.0 Sound High-Res Audio 24 bit/96 kHz



**66069**  
USB to Stereo Jack 3.5 mm Adapter for iPod Shuffle



**65996**  
Adapter Stereo jack male 4.4 mm 5 pin to Stereo jack female 2.5 mm 4 pin



**65994**  
Adapter Stereo jack male 4.4 mm 5 pin to Stereo jack female 3.5 mm 3 pin



**65897**  
Adapter Stereo jack male 4.4 mm 5 pin to Stereo jack female 2.5 mm 4 pin



**86383**  
Keystone Module stereo jack female 3.5 mm 4 pin to stereo jack female 3.5 mm 4 pin gold plated



**64114**  
Adapter USB Type-C™ to 2 x USB Type-C™ PD



**66731**  
USB Headset and Microphone Adapter with 2 x 3.5 mm Stereo Jack for Windows and Mac OS



**65546**  
Stereo plug 3.5 mm stereo with bend protection soldering version



**65534**  
Stereo plug 3.5 mm stereo with bend protection soldering version



**65532**  
Stereo plug 3.5 mm with bend protection soldering version



## ADAPTER CABLES



**65896**  
Adapter Audio Stereo Jack 3.5 mm 4 pin female to female 13 cm



**66317**  
Audio Adapter 8 pin Lightning™ male DAC 24 Bit/48 kHz Hi-Res to 3.5 mm 4 pin stereo jack female 10.5 cm



**66302**  
Audio Adapter USB Type-C™ male to 4.4 mm 5 pin stereo jack female 12.5 cm



**65913**  
Audio Adapter USB Type-C™ male to Stereo Jack female 14 cm



**65842**  
Audio Adapter USB Type-C™ male to Stereo Jack female 14 cm



**65926**  
Audio adapter USB Type-C™ to stereo jack female 14 cm



**65925**  
Audio adapter USB Type-C™ to stereo jack female 14 cm



**65674**  
Audio Cable Stereo jack 2.5 mm 3 pin male angled to Stereo jack 3.5 mm 4 pin female 17 cm



**65673**  
Audio Cable Stereo jack 3.5 mm 4 pin male angled to Stereo jack 2.5 mm 3 pin female 17.5 cm



**65672**  
Audio Cable Stereo jack 2.5 mm 3 pin male angled to Stereo jack 3.5 mm 3 pin female 17.5 cm



**65675**  
Audio Cable Stereo jack 3.5 mm 3 pin male angled to Stereo jack 2.5 mm 3 pin female 17 cm



**65397**  
Cable Audio Stereo 2.5 mm male angled to 3.5 mm female 3 pin 14 cm



**62498**  
Cable Stereo jack 3.5 mm 4 pin to Stereo plug 3.5 mm 4 pin (changes the pin assignment) 17.5 cm



**65459**  
Headset Adapter 1 x 3.5 mm 4 pin Stereo jack female to 2 x 3.5 mm 3 pin Stereo jack male (CTIA pin assignment) 12 cm



**65344**  
Headset Adapter 1 x 3.5 mm 4 pin Stereo jack male to 2 x 3.5 mm 3 pin Stereo jack female (OMTP) 10 cm



**65447**  
Headset Adapter 1 x 3.5 mm 4 pin Stereo jack male to 2 x 3.5 mm 3 pin Stereo jack female (iPhone) 20 cm



**65585**  
Headset Adapter 1 x 3.5 mm 4 pin Stereo jack female to 2 x 3.5 mm 3 pin Stereo jack male (iPhone) 20 cm



**65967**  
Headset Adapter 1 x 3.5 mm 4 pin Stereo jack female to 2 x 3.5 mm 3 pin Stereo jack male 20 cm

## ADAPTERS / CABLES



**65683**  
Adapter Cable audio splitter stereo jack male 3.5 mm 3 pin to 2 x stereo jack female 3.5 mm 3 pin + Volume control 19 cm



**66438**  
Audio Splitter stereo jack male 3.5 mm to 2 x stereo jack female 3.5 mm 4 pin angled 25 cm



**66439**  
Audio Splitter stereo jack male 3.5 mm to 2 x stereo jack female 3.5 mm 3 pin angled 25 cm



**66740**  
Headset Adapter 1 x 3.5 mm 4 pin Stereo jack female to 2 x 3.5 mm 3 pin Stereo jack male (CTIA) 25 cm



**66437**  
Headset Adapter 1 x 3.5 mm 4 pin Stereo jack male to 2 x 3.5 mm 3 pin Stereo jack female (CTIA) 25 cm



**66519**  
Headset Adapter 1 x 3.5 mm 4 pin Stereo jack male to 2 x 3.5 mm 4 pin Stereo jack female 20 cm



**66564**  
Audio Splitter USB Type-C™ to 2 x stereo jack female metal Dimensions (LxWxH): ca. 36 x 30 x 9 mm



**66073**  
Stereo Jack Cable 3.5 mm 4 pin male to male Ultra Slim white 0.5 m



**66075**  
Stereo Jack Cable 3.5 mm 4 pin male to male Ultra Slim 0.5 m



**66562**  
Audio Splitter USB Type-A to 2 x stereo jack female metal Dimensions (LxWxH): ca. 36 x 30 x 9 mm



**66561**  
Audio Splitter USB Type-A to 2 x stereo jack female plastic Dimensions (LxWxH): ca. 36 x 30 x 9 mm



**66563**  
Audio Splitter USB Type-C™ to 2 x stereo jack female plastic Dimensions (LxWxH): ca. 36 x 30 x 9 mm

**HiRes** (also Hires or Hi-Res) is the abbreviation for the term High Resolution.

Compared to the quality of sound waves and the low sampling rate of the CD, the data transfer of HiRes audio at 24 bit/96 kHz is already 3.2 x higher than a CD recording. At a frequency of 24 bit/192 kHz it even corresponds to 6.5 x as much. The high quality of HiRes can be found in Delock's audio range.



Analog recording



CD: 16 bit/44.1 kHz



HiRes Audio: 24 bit/96 kHz  
HiRes Audio: 24 bit/192 kHz

Schematic diagram for comparison of sampling rates.



CABLES

- 85808** Audio Cable 2 × RCA male to 1 × 3.5 mm 3 pin Stereo Jack 1.4 m 
- 85806** Audio Cable 2 × RCA male to 1 × 3.5 mm 3 pin Stereo Jack 20 cm 
- 85848** Audio Cable 2.5 mm 4 pin stereo jack male to 2 × MMCX male 1.20 m 
- 85845** Audio Cable 3.5 mm 3 pin stereo jack male to 2 × MMCX male 1.20 m 
- 85846** Audio Cable 4.4 mm 5 pin stereo jack male to 2 × MMCX male 1.20 m 
- 85847** Audio Cable 3.5 mm 4 pin stereo jack male angled to 2 × MMCX male 1.25 m 
- 66074** Audio Extension Cable Stereo Jack 3.5 mm 4 pin male to female Ultra Slim 0.5 m 
- 66072** Audio Extension Cable Stereo Jack 3.5 mm 4 pin male to female Ultra Slim 0.5 m 
- 86586** Audio Cable 8 pin Lightning™ male to Stereo jack male 3.5 mm 3 pin 0.5 m **86587** 1.5 m 
- 65672** Audio Cable Stereo jack 2.5 mm 3 pin male angled to Stereo jack 3.5 mm 3 pin 
- 85807** 2 × RCA Extension Cable 5 m 
- 85835** DIN Cable diode plug 5 pin to 2 × RCA female 20 cm 

- 84277** Cable Audio 3.5 mm stereo jack male to 2 × RCA male 10 m 
- 84000** Cable Audio 3.5 mm stereo jack male to 2 × RCA male 1.5 m **84942** 3 m; **84212** 5 m 
- 84438** Cable Audio DC jack 3.5 mm 3 pin male/male 5 m 
- 85115** Cable Stereo Jack 3.5 mm female panel-mount to Stereo Jack 3.5 mm female panel-mount 25 cm 
- 85116** Cable Stereo Jack 3.5 mm female panel-mount to Stereo Jack 3.5 mm male 1 m 
- 84001** Cable Audio DC jack 3.5 mm male/male 2.5 m 
- 65355** Cable audio splitter stereo jack male 3.5 mm 3 pin to 2 × stereo jack female 3.5 mm 3 pin 25 cm 
- 65356** Cable audio splitter stereo jack male 3.5 mm 3 pin to 2 × stereo jack female 3.5 mm 3 pin 25 cm 
- 65575** Cable audio splitter stereo jack male 3.5 mm 4 pin to 2 × stereo jack female 3.5 mm 4 pin 25 cm 
- 65576** Cable audio splitter stereo jack male 3.5 mm 4 pin to 2 × stereo jack female 3.5 mm 4 pin 25 cm 
- 84493** Cable RCA 2 × female to RCA 1 × male 0.2 m 
- 83439** Cable Stereo Jack 3.5 mm 4 pin male to male 0.5 m; **83440** 1 m; **83441** 2 m; **83442** 3 m; **83443** 5 m; **84729** 10 m; **84731** 15 m 

CABLES

- 84736** Cable Stereo Jack 3.5 mm 4 pin male to male angled 0.5 m white 
- 84737** Cable Stereo Jack 3.5 mm 4 pin male to male angled 1 m **84740** 2 m; **84742** 3 m; **84743** 5 m 
- 84724** Cable Stereo jack 3.5 mm 4 pin male angled to 3 × RCA male 1.5 m 
- 84504** Cable Stereo jack 3.5 mm 4 pin male angled to 3 × RCA male 1.5 m 
- 82879** Cable Toslink Standard male–male 1 m **82880** 2 m 
- 82875** Cable Toslink Standard male to Toslink mini 3.5 mm male 1 m **82876** 2 m 
- 82887** Cable Toslink Standard male–male 1 m **82888** 2 m 
- 85719** Cable USB Type A male + 3.5 mm 4 pin stereo jack male to female bulkhead with closure cap USB Type A female + 3.5 mm 4 pin female (audio) 2 m 
- 85718** Cable USB Type-A male + 3.5 mm 4 pin stereo jack male to female bulkhead USB Type-A female + 3.5 mm 4 pin female (audio) 1.5 m 
- 83742** Stereo Jack Cable 3.5 mm 3 pin male to male 0.5 m **83744** 1 m; **83746** 2 m; **83748** 3 m 
- 83743** Stereo Jack Cable 3.5 mm 3 pin male to male 0.5 m **83749** 3 m 
- 85545** Stereo Jack Cable 3.5 mm 3 pin male to male 0.5 m **85547** 1 m; **85549** 2 m; **85551** 3 m 

- 83752** Stereo Jack Cable 3.5 mm 3 pin male to male angled 0.5 m **83754** 1 m; **83756** 2 m; **83758** 3 m; **83760** 5 m 
- 85564** Stereo Jack Cable 3.5 mm 3 pin male to male angled black 0.5 m **85566** 1 m; **85568** 2 m 
- 83757** Stereo Jack Cable 3.5 mm 3 pin male to male angled 2 m 
- 85784** Stereo Jack Cable 3.5 mm 3 pin male to male with screw adapter 0.5 m; **85785** 1 m; **85786** 2 m; **85787** 3 m; **85788** 5 m 
- 85592** Stereo Jack Cable 3.5 mm 4 pin male to male 0.5 m **85595** 1 m; **85598** 2 m; **85601** 3 m 
- 85607** Stereo Jack Cable 3.5 mm 4 pin male to male angled 0.5 m **85610** 1 m; **85613** 2 m; **85616** 3 m 
- 85611** Stereo Jack Cable 3.5 mm 4 pin male to male angled 1 m purple 
- 83434** Stereo Jack Cable 3.5 mm 4 pin male to male 0.5 m **83435** 1 m; **83436** 2 m; **83437** 3 m; **83438** 5 m 
- 85695** Stereo Jack Cable 3.5 mm 5 pin male to male 0.5 m **85696** 1 m; **85697** 2 m; **85698** 3 m; **85699** 5 m 
- 85790** Stereo Jack Cable 4.4 mm 5 pin male to male 0.5 m **85791** 1 m; **85792** 2 m; 
- 83762** Stereo Jack Extension Cable 3.5 mm 3 pin male to female 0.5 m **83764** 1 m; **83766** 2 m; 
- 83763** Stereo Jack Extension Cable 3.5 mm 3 pin male to female 0.5 m **83765** 1 m; **83767** 2 m; **83769** 3 m; **83771** 5 m 

# CABLES

**85576** Stereo Jack Extension Cable 3.5 mm  
3 pin male to female 1 m  
**85590** 5 m



**85628** Stereo Jack Extension Cable 3.5 mm  
4 pin male to female 0.5 m  
**85577** 1 m; **85579** 2 m; **85591** 5 m



**85779** Stereo Jack Extension Cable 3.5 mm  
3 pin male to female with 6.35 mm screw  
adapter 0.5 m  
**85780** 1 m; **85782** 3 m; **85783** 5 m



**85627** Stereo Jack Extension Cable 3.5 mm  
4 pin male to female 0.5 m  
**85629** 1 m; **85631** 2 m; **85633** 3 m;  
**85635** 5 m



**84716** Stereo Jack Extension Cable 3.5 mm  
4 pin male to female 0.5 m  
**84666** 1 m; **84667** 2 m; **84668** 3 m;  
**84669** 5 m



**86942**  
**FPC Flat Ribbon Cable USB Type-C™ to Stereo jack**

- Connectors:  
1 × USB Type-C™ male to  
1 × 3.5 mm 4 pin stereo jack female
- Chipset: Synaptics CX21986
- FPC (Flexible Printed Circuit) flat ribbon cable
- Sample rate: up to 24 Bit/96 kHz
- Cable thickness: ca. 3 mm
- Length incl. connectors: ca. 10 cm



**86767** Stereo Jack Extension Cable 6.35 mm 3  
pin male to female 5 m  
**86766** 10 m



**86983** TOSLINK Standard Cable male–male 1 m  
**86984** 2 m; **86985** 3 m; **86986** 5 m



**84002** Extension Cable Audio Stereo jack  
3.5 mm male/female 3 m



**84717** Extension Cable Audio Stereo Jack  
3.5 mm male/female 4 pin 0.5 m  
**84480** 1 m; **84482** 2 m; **84483** 3 m;  
**84484** 5 m



**85700** Extension Cable Stereo Jack 3.5 mm  
5 pin male to female 0.5 m  
**85701** 1 m; **85702** 2 m; **85703** 3 m;  
**85704** 5 m



**85795** Extension Cable Stereo Jack 4.4 mm  
5 pin male to female 0.5 m  
**85796** 1 m; **85797** 2 m; **85798** 3 m;  
**85799** 5 m



**84237** Extension Cable Audio Stereo jack  
3.5 mm male/female 5 m



**85836** Coiled Cable 3.5 mm 3 pin Stereo Jack  
male to Stereo Jack male with screw  
adapter 1 m  
**85837** 2 m; **85838** 3 m; **85839** 5 m



**85831** Coiled Cable Extension 3.5 mm 3 pin  
Stereo Jack male to Stereo Jack female  
with 6.35 mm screw adapter 1 m  
**85832** 2 m; **85833** 3 m; **85834** 5 m



**86768** Coiled Cable Extension 3.5 mm 3 pin  
Stereo Jack male to Stereo Jack female  
1.5 m



**85938** Coiled Cable Extension 3 pin 6.35 mm  
Stereo Jack male to Stereo Jack female  
2 m




**86592** TOSLINK Standard Cable male–male 1 m  
**86593** 2 m; **86594** 3 m; **86595** 5 m



# SOUND CARD

Inclusive low profile bracket

24 Bit/192 kHz

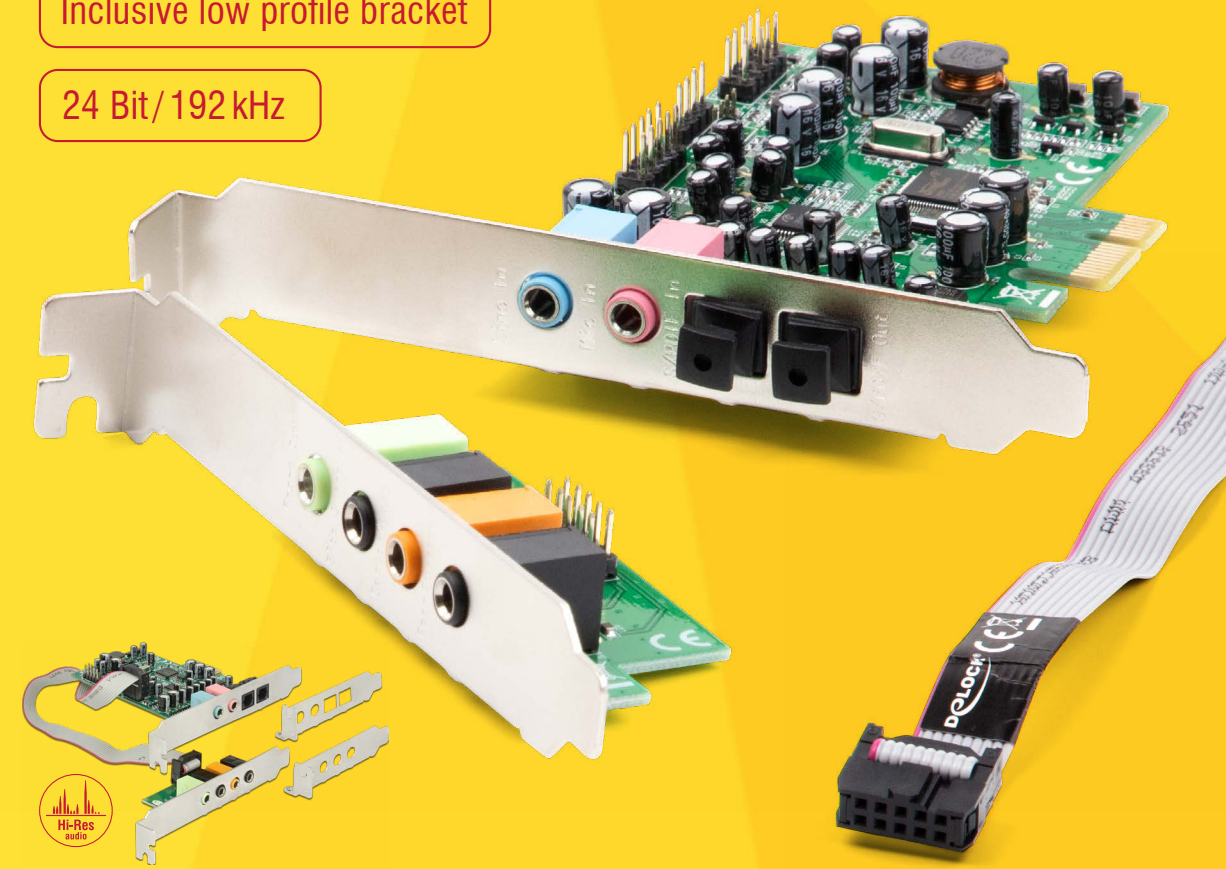

**89640**  
**PCI Express Soundcard 7.1 – 24 Bit/192 kHz with TOSLINK In/Out**

This PCI Express sound card extends the system with various sound inputs and outputs and has 8 sound channels. This allows devices such as speakers, headphones etc. to be connected. When used in conjunction with a headset, the sound card is ideal for applications such as Skype or gaming. By using the included low profile brackets, the PCI Express card can be also installed into a Mini-PC.

- Connectors:  
external:  
1 × 3.5 mm stereo jack line-In  
1 × 3.5 mm stereo jack microphone input (L, R)  
1 × S/PDIF TOSLINK optical digital input  
1 × S/PDIF TOSLINK optical digital output  
1 × 3.5 mm stereo jack front speaker (L, R) (daughter card)  
1 × 3.5 mm stereo jack Surround speaker (L, R) (daughter card)  
1 × 3.5 mm stereo jack center/bass speaker (daughter card)  
1 × 3.5 mm stereo jack rear speaker (daughter card)

- internal:  
2 × 10 pin connector plug for the daughter card  
1 × 4 pin header for analogue CD-In port (signal: L-G-G-R)  
1 × 4 pin header for analogue CD-In port (signal: G-R-G-L)  
1 × 9 pin header for front panel plug  
1 × PCI Express x1, V1.1
- Chipset:  
CMedia CM8828 multi-channel audio processor  
CMedia CM9882A 8-Channel HDA Codec
- Up to 24 Bit/192 kHz sampling rate for recording and playback
- Signal noise ratio (SNR): ca. 92 dB
- Supports ASIO and WASAPI
- Supports 7.1 channel sound



1 IN  
2 OUT

## Stereo Headphone Amplifier with dual output and bass boost

64056

### Small audio star to go:

with two outputs and bass boost

The portable headphone booster amplifies the output power by a factor of five. With the two connections **1** for headphones, favorite music can also be listened to by two people.

Always enough power on the go

The integrated rechargeable battery **2** provides up to 8 hours of audio enjoyment and can be charged with a smartphone power adapter via the micro USB port **3**.

The amplifier can also be switched on and off via the volume control **4**.

Last but not least, the triple adjustable bass boost makes the small mobile companion to the new favorite piece for on the road! **5**



64056

### Portable Stereo Headphone Amplifier with dual output and bass boost

- Connectors:  
Input:  
1 × 3.5 mm 4 pin stereo jack female  
1 × USB Type Micro-B female charging port  
Output:  
2 × 3.5 mm 4 pin stereo jack female
- Frequency response: 20 Hz – 20 kHz +/- 1.0 dB
- Signal-to-noise ratio (SNR): > 90 dB
- Supports headphones with 16 – 100 ohm impedance
- Slide switch for bass boost level
- Volume control with on/off switch
- Rechargeable battery: Li-Polymer battery 200 mAh, (ca. 8 hours playback)
- Dimensions (LxWxH): ca. 57 × 45 × 16 mm



OUT Headphones 1 **1** **2** OUT Headphones 2

**BASS BOOST SWITCH**  
LEVEL 1 = FLAT  
LEVEL 2 = MEDIUM  
LEVEL 3 = HIGH

IN Apple, Samsung etc.



Premium IT Accessory