



Overview

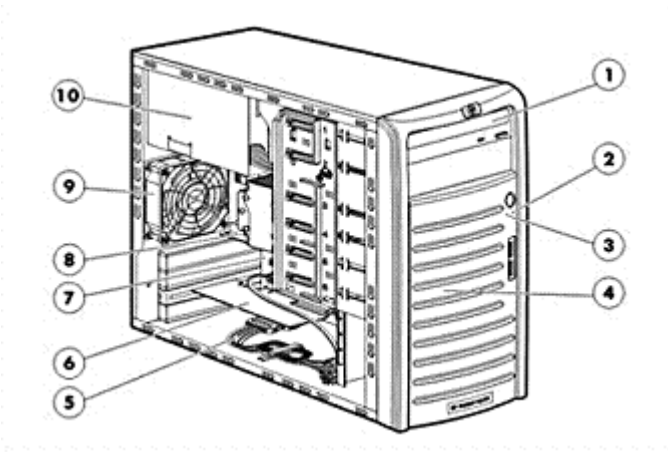

Front View:

1. DVD-ROM Drive
2. Power LED
3. Drive Activity LED
4. Front Bezel
5. SAS Cable (SAS model only)
6. Hard Drive Controller Card (Optional)
7. System Board
8. HP ProLiant 100 G5 Lights-Out 100c Management Card Port (Optional)
9. System Fan
10. 365W Power Supply

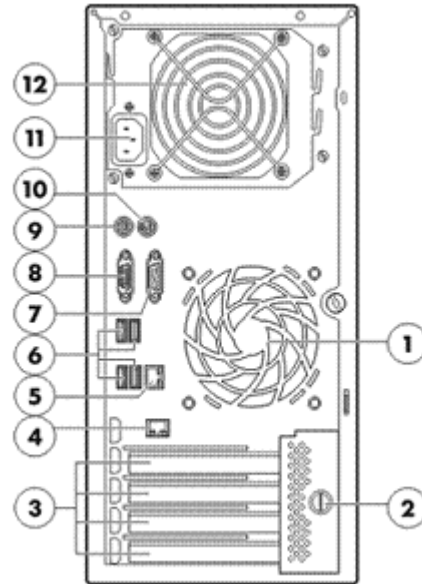

Rear View:

1. Rear System fan
2. PCI Slot Cover Retainer
3. PCI Slot Covers
4. HP ProLiant 100 G5 Lights-Out 100c Management Card Port (Optional)
5. LAN Port (RJ-45)
6. Rear USB 2.0 Ports
7. Serial Port
8. VGA Port
9. PS/2 Keyboard Port
10. PS/2 Mouse Port
11. Power Supply Outlet
12. Power Supply Unit (PSU) Fan

What's New

- Support for Quad-Core Intel® Xeon® X3300 series processors

Overview

At A Glance

- Processor:
 - Quad-Core Intel® Xeon® processors 3300 sequence
 - Quad-Core Intel® Xeon® processors 3200 sequence
 - Dual-Core Intel® Xeon® processors 3100 sequence
 - Dual-Core Intel® Xeon® processors 3000 sequence
 - Dual-Core Intel® Core 2 processors 4000 sequence
 - Dual-Core Intel® Pentium® processors 2000 sequence
 - Single-Core Intel® Celeron® processors 400 Sequence
- Memory:
 - 512 MB Standard (1GB on SAS Models) / 8 GB Maximum of PC6400 DDR2, Unbuffered ECC
- Storage Controller:
 - SATA Models: Integrated 6 ports SATA controller with embedded RAID (4 ports available for Hard Disks)
 - SAS Models: HP SC40Ge Host Bus Adapter with RAID 0, 1 support, FIO
- Internal Drive Support:
 - 4 HDD Support:
 - 3.0TB SATA max storage (4 x 750GB HDD)
 - 1.2TB SAS max storage (4 x 300GB HDD)
- Network Controller:
 - Embedded NC105i PCI Express Gigabit Ethernet Server Adapter
- Expansion Slots:
 - Slot 1: PCI 32-bit/33MHz at 3.3V
 - Slot 2: PCI-Express x8 connector with x1 link
 - Slot 3: PCI-Express x8 connector with x1 link
 - Slot 4: PCI-Express X8 connector with x8 link
- USB Ports:
 - 8 Total USB ports
 - 2 Front
 - 4 Rear
 - 2 Internal (one for tape, one for standard USB device)
- Management:
 - Standard Lights Out 100 IPMI 2.0 reporting
 - Optional HP ProLiant 100 G5 Lights Out 100c Remote Management Card
 - Standard HP ProLiant ML110 G5 Easy Set-up CD
- Form Factor:
 - Micro ATX tower (4U)
- Warranty:
 - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair is available for one year from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. SATA hard drives have a one year warranty.
 - **NOTE: Server Warranty includes 1 year Parts, 1 year Labor, 1-year on-site support with next business day response. Additional information regarding worldwide limited warranty and technical support is available <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>**

Standard Features

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/ERC/downloads/4AA1-5498ENW.pdf>

Processor

One of the following depending on Model

Quad-Core Processors

Quad-Core Intel® Xeon® Processor X3350 (2.66 GHz, 95W, 1333 FSB, 12M)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Quad-Core Intel® Xeon® Processor X3320 (2.50 GHz, 95W, 1333FSB, 6M)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Quad-Core Intel® Xeon® Processor X3220 (2.40 GHz, 95W, 1066 FSB,8M)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Quad-Core Intel® Xeon® Processor X3210 (2.13 GHz, 95W, 1066FSB,8M)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Dual-Core

Dual-Core Intel® Xeon® Processor E3110 (3.00 GHz, 65W, 1333 FSB, 6M)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Dual-Core Intel® Xeon® Processor X3075 (2.66 GHz, 65W,1333 FSB, 4M)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Dual-Core Intel® Xeon® Processor X3065 (2.33 GHz, 65W, 1333 FSB, 4M)

Dual-Core Intel® Core 2 Processor E4600 (2.40 GHz, 65W, 800 FSB, 2M)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Dual-Core Intel® Pentium® Processor E2160 (1.80 GHz, 65W, 800FSB, 1M)

Single-Core

Single-Core Intel® Celeron® Processor 440 (2.0 GHz, 35W, 800 FSB, 512K)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Single-Core Intel® Celeron® Processor 420 (1.6 GHz, 35W, 800 FSB, 512K)

NOTE: Available through Configure To Order only. See Factory Integration Models section for more details.

Standard Features

Cache Memory	12 MB Level 2 cache (Intel® Xeon® 3350 sequence)
One of the following depending on Model	8 MB Level 2 cache (Intel® Xeon® 3220 sequence)
	8 MB Level 2 cache (Intel® Xeon® 3210 sequence)
	6 MB Level 2 cache (Intel® Xeon® 3320 sequence)
	6 MB Level 2 cache (Intel® Xeon® 3110 sequence)
	4 MB Level 2 cache (Intel® Xeon® 3075 sequence)
	4 MB Level 2 cache (Intel® Xeon® 3065 sequence)
	2 MB Level 2 cache (Intel® Core 2 Duo E6400 sequence)
	1 MB Level 2 cache (Intel® Pentium® E2160 sequence)
	512KB Level 2 cache (Intel® Celeron® 440 and 420)

Chipset Intel® 3200

Memory Protection ECC

Memory	Type	PC2-6400 unbuffered DDR2 ECC 800MHz
	Standard	512 MB 1 GB (SAS Models)
	Maximum	8 GB

Network Controller Embedded NC105i PCI Express Gigabit Ethernet Server Adapter

Expansion Slots #	Technology	Bus Width***	Connector Width	Bus Number*	Device Number**	Form Factor	Notes
1	PCI	32-bit	N/A	0	30	Full height slot	
2	PCIe	X1	X8	0	28	Full height slot	
3	PCIe	X1	X8	2	28	Full length, full height slot	
4	PCIe	X8	X8	0	1	Full length, full height slot	

*Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

*** Indicates the number of physical electrical lanes running to a PCI-e connector.

NOTE: PCI-X Interface (PCI 32bit/33MHz compatible)

Standard Features

Storage Controller <i>One of the following depending on Model</i>	SATA Models	Integrated 6 ports SATA controller with embedded RAID (4 ports available for Hard Disks)
	SAS Models	HP SC40Ge Host Bus Adapter with RAID 0, 1 support Embedded RAID setup instructions are located in the User Guide. CTO RAID set-up is not available. HP ProLiant ML100 Series Server User Guide: http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00260539/c00260539.pdf

Storage	Optical Drive	SATA DVD-ROM Drive	
	Hard Drives	SATA	160GB SATA 7200 rpm Drive
		SAS	72GB SAS 15,000 rpm Drive

Maximum Internal Storage	Type		
	SAS (Not-hot plug)	1.2TB	(4 x 300GB)
	SATA (Non-hot plug)	3.0TB	(4 x 750GB)

Interfaces	Parallel	0
	Serial	1
	Pointing Device (Mouse, PS2)	1
	Graphics	1
	Keyboard (PS2)	1
	USB 2.0 Ports	8 total (4 rear, 2 front panel, 2 internal (one for USB Tape connectivity))
	Network RJ-45 (Ethernet) Management	1 HP ProLiant 100 G5 Lights-Out 100c Remote Management port (Optional)

NOTE: Internal USB ports are optimal for the attachment of HP USB DAT Tape Drives
NOTE: Please see the following URL for additional information regarding USB support:
<http://h18004.www1.hp.com/products/servers/platforms/usb-support.html>

Graphics	32MB shared supporting 1600 x 1200 x 16M resolution
----------	---

Form Factor	Micro ATX Tower (4U)
-------------	----------------------

Standard Features

Remote Management Lights-Out 100c

Lights Out LO100c is a Remote Management Card (RMC) for ProLiant 100 series servers that do not have embedded LO100i. The LO100c has all the features of the LO100i Advanced license and allows customers, or their service providers, to remotely manage ProLiant servers over a LAN or the Internet from anywhere, anytime regardless whether the server is located in the same building, across town, or around the globe.

With LO100c, users can acquire complete remote control with Virtual KVM (graphical hardware-based, remote console). Users can also access the server's serial console, control system power, update system firmware and software, as well as monitor system environmental conditions. The LO100c remote management card can be accessed from a web browser or command line interface. This virtual "at-the-server" functionality means administrators stay in control of remote HP ProLiant 100 series servers.

The HP Lights-Out100c consists of a management processor and firmware that provides cost-effective, entry-level lights-out functionality, basic system board management functions, and diagnostics.

NOTE: For more information, please refer to the QuickSpecs for the LO100c found at:

<http://h18004.www1.hp.com/products/servers/management/remotemgmt/lightsout100/index.html>

Core Infrastructure Management

HP ProLiant ML110 G5 Easy Set-up CD

The HP ProLiant Easy Set-up CDs optimize single-server setup, providing a simple way to deploy reliable and consistent server configurations. The HP ProLiant 100 Series Easy Set-up CD ship standard with the ML110 G5.

It offers essential single-server deployment tools for HP ProLiant 100 series servers that simplify HP entry server setup, providing a repeatable way to deploy reliable and consistent single-server configurations. The HP ProLiant Easy Set-up CDs assist with the OS installation process by preparing the system for installing "off-the-shelf" versions of Windows operating system software and automatically integrating optimized HP ProLiant server software drivers and utilities. Users enjoy the following benefits:

- An easy-to-use, intuitive graphical interface that guides you through preparing your system for the OS installation process.
- Integration of key server software drivers with assisted installation.
- Dependency and validity checks to ensure that all supported ProLiant software can be installed.

NOTE: For the latest information about other related software; please visit the HP Insight Control Management Software Portfolio at:

<http://h18004.www1.hp.com/products/servers/management/> and the HP ProLiant Easy Set-up CD Web site at www.hp.com/servers/easysetup

Subscriber's Choice

Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides software and driver change notifications for ProLiant products. Sign up at:

<http://www.hp.com/go/subscriberschoice> and customize your profile to

Standard Features

ROMPaq software and latest drivers

receive various new alerts as they become available on a weekly or monthly basis.

The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options, available through ProLiant Support Packs or downloaded from software and drivers download pages website at: <http://www.hp.com/go/support>.

Industry Standard Compliance

ACPI V3.0a Compliant
PCI 2.3 Compliant
PXE Support
WOL Support
IPMI 2.0 compliance

Manageability

Standard Lights Out 100 IPMI 2.0 reporting
Optional HP ProLiant 100 G5 Lights-Out 100c Remote Management Card
Standard HP ProLiant ML110 G5 Easy Set-Up CD

Security

Power-on password
Setup password
USB lock

Server Power Cords

6' country specific, lowline NEMA power cord.

Power Supply

365 Watts

System Fans

1 – non-redundant system fan shipped standard
1 – non-redundant CPU heatsink fan shipped standard

Standard Features

OS Support

Microsoft Windows Server 2003 Web edition
Microsoft Windows Server 2003 Standard Edition (x86 and x64)
Microsoft Windows Server 2003 Enterprise Edition (x86 and x64)
Microsoft Windows 2003 Small Business Edition
Windows Server 2003 R2 Standard Edition (x86 and x64)
Windows Server 2003 R2 Enterprise Edition (x86 and x64)
Windows Small Business Server 2003 R2
Microsoft Windows Server 2008 Web Edition
Microsoft Windows Server 2008 Standard Edition (x86 and x64)
Microsoft Windows Server 2008 Enterprise Edition (x86 and x64)
Red Hat Enterprise Linux
SUSE Linux Enterprise Server
Netware

NOTE: For more complete and up-to-date information of all supported OSes for ProLiant, certification information and how to buy server operating systems from HP please visit the OS products site at:

<http://h18004.www1.hp.com/products/servers/software/OEM.html>.

NOTE: For an up-to-date listing of the latest software and drivers available for your server, please select your server:

<http://h20000.www2.hp.com/bizsupport/TechSupport/Product.jsp?lang=en&cc=us&taskId=135&prodTypeId=15351&prodCatId=241435>.

NOTE: When installing a Windows OS Environment and configuring the embedded SATA RAID, AHCI, or SAS controllers, installation of a driver from a diskette device is required. HP's 256MB or 1GB USB 2.0 floppy drive key (P/N: 442084-B21 or 442085-B21) is required on the ML110 G5 to accomplish this operation. A USB drive key may not work to complete driver installation

Factory Express Portfolio HP Factory Express offers configuration, customization, integration and deployment services for HP servers for Servers and Storage and/or storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging and custom packaging HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers, as well as, the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

Standard Features

Service and Support HP Care Pack Services provide total care and support expertise with committed response designed to meet your IT and business needs.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server that are purchased at the same time or afterward and internal to the enclosure. It also includes the 22" and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalize on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Recommended Service – Simplify ProLiant solution implementation, maintenance and management.

- Support Service – 3 Year, 9x5 Next Business Day coverage, excluding HP holidays only
- Deployment Service – Hardware Installation only

Enhanced Service – Optimize service level to increase IT performance and availability

- Support Service – 3 Year 13x5 Same Business Day, 4-Hour response coverage
- Deployment Service – Installation and Start-up only

Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays.

For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see "Configuration Information - Factory Integrated Models" section.

SATA Models

ML110 G5 Pentium E2160 NHP-SATA 444809-xx1	Processor(s)	(1) Dual-Core Intel® Pentium® Processor E2160 (1.8GHz, 65W, 800 FSB, 1MB)
	Cache Memory	1 x 1MB Level 2 cache
	Memory	512 MB PC2-6400 ECC (DDR2-800MHz) (1 x 512 MB)
	Storage Controller	HP Embedded 6 Port SATA Controller with Embedded RAID (4 ports for HDD)
	Hard Drive	160GB SATA HDD
	Internal Storage	Maximum 3.0TB (4 x 750GB) SATA
	Optical Drive	16x SATA DVD-ROM
	Form Factor	Micro ATX Tower (4U)

ML110 G5 Xeon 3065 NHP-SATA 444810-xx1	Processor(s)	(1) Dual-Core Intel® Xeon® Processor 3065 (2.33GHz, 65W, 1333 FSB, 4MB)
	Cache Memory	1 x 4MB Level 2 cache
	Memory	512 MB PC2-6400 ECC (DDR2-800MHz) (1 x 512 MB)
	Storage Controller	HP Embedded 6 Port SATA Controller with Embedded RAID (4 ports for HDD)
	Hard Drive	160GB SATA HDD
	Internal Storage	Maximum 3.0TB (4 x 750GB) SATA
	Optical Drive	16x SATA DVD-ROM
	Form Factor	Micro ATX Tower (4U)

SAS Models

ML110 G5 XEON 3065 NHP-SAS 444811-xx1	Processor(s)	(1) Dual-Core Intel® Xeon® Processor X3065 (2.33GHz, 65W, 1333 FSB, 4MB)
	Cache Memory	1 x 4MB Level 2 cache
	Memory	1 GB PC2-6400 ECC (DDR2-800MHz) (1 x 1GB)
	Storage Controller	HP SC40Ge Host Bus Adapter with RAID 0, 1 support
	Hard Drive	72GB SAS HDD
	Internal Storage	Maximum 1.2TB (4 x 300GB) SAS
	Optical Drive	16x SATA DVD-ROM
	Form Factor	Micro ATX Tower (4U)

Models

Country Code Key	XX=00	NA
	XX=01	Australia
	XX=03	UK
	XX=04	Germany
	XX=05	France
	XX=20	Brazil
	XX=29	Japan
	XX=37	AP
	XX=42	Euro
	XX=AA	PRC

Configuration Information-Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option is a Factory Installable Option.

Step 1: Base Configuration

Models	<p>HP ProLiant ML110G5 NHP CTO Chassis</p> <p>Factory Integrated Models ship with:</p> <p>Embedded NC105i PCI Express Gigabit Ethernet Server Adapter</p> <p>Keyboard and Mouse</p> <p>365 Watts, PFC (Power Factor Correcting)</p> <p>Micro ATX Tower (4U)</p> <p>NOTE: HP SATA Drive Models are limited to <3.0TB support.</p> <p>NOTE: On SATA models with embedded RAID, setup instructions are located in the User Guide. CTO RAID set-up is not available. HP ProLiant ML100 Series Server User Guide:</p> <p>http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00260539/c00260539.pdf</p>	445607-B21
--------	--	------------

Step 2: Choose Required Options (only one of the following from each list unless other noted)

Processors	<p>Quad-Core Processor</p> <p>Quad-Core Intel® Xeon® Processor X3350 (2.66 GHz, 95W, 1333FSB, 12M), FIO</p> <p>Quad-Core Intel® Xeon® Processor X3320 (2.50 GHz, 95W, 1333FSB, 6M), FIO</p> <p>Quad-Core Intel® Xeon® Processor X3220 (2.40 GHz, 95W, 1066 FSB, 8M), FIO</p> <p>Quad-Core Intel® Xeon® Processor X3210 (2.13 GHz, 95W, 1066 FSB, 8M), FIO</p> <p>Dual-Core Processor</p> <p>Dual-Core Intel® Xeon® Processor E3110 (3.00 GHz, 1333 FSB, 6M), FIO</p> <p>Dual-Core Intel® Xeon® Processor X3075 (2.66 GHz, 65W, 1333 FSB, 4M), FIO</p> <p>Dual-Core Intel® Xeon® Processor X3065 (2.33 GHz, 65W, 1333 FSB, 4M), FIO</p> <p>Dual-Core Intel® Core 2 Processor E4600 (2.40 GHz, 65W, 800 FSB, 2M), FIO</p> <p>Dual-Core Intel® Pentium® Processor E2160 (1.8GHz, 65W, 800 FSB, 1M), FIO</p> <p>Single-Core</p> <p>Single-Core Intel® Celeron® Processor 440 (2.0GHz, 35W, 800 FSB, 512K), FIO</p> <p>Single-Core Intel® Celeron® Processor 420 (1.6GHz, 35W, 800 FSB, 512K), FIO</p>	<p>464374-L21</p> <p>464375-L21</p> <p>455069-L21</p> <p>455068-L21</p> <p>464376-L21</p> <p>450454-L21</p> <p>450360-L21</p> <p>481618-L21</p> <p>450359-L21</p> <p>455072-L21</p> <p>455071-L21</p>
------------	---	---

Configuration Information-Factory Integrated Models

Memory	2 GB Unbuffered PC2-6400 ECC DIMM (1 x 2 GB)	450260-B21
	1 GB Unbuffered PC2-6400 ECC DIMM (1x1 GB)	450259-B21
	512 MB Unbuffered PC2-6400 ECC DIMM(1x512 MB)	450258-B21
Optical Drive	HP Half-Height SATA DVD ROM Kit	447326-B21
	HP Half-Height SATA DVD-RW Optical Kit	447328-B21
Hard Drives (up to 4)	SATA Non-Hot Plug Midline (MDL) Drives	
	HP 750GB 3G SATA 7.2K NHP 3.5" MDL HDD	462595-B21
	HP 500GB 3G SATA 7.2K NHP 3.5" MDL HDD	458941-B21
	HP 250GB 3G SATA 7.2K NHP 3.5" MDL HDD	458939-B21
	SATA Non-Hot Plug Entry (ETY) Drives	
	HP 160GB 3G SATA 7.2K NHP 3.5" ETY HDD	458947-B21
	SAS Non-Hot Plug Enterprise Drives	
	HP 300GB SAS 3.5" 15K NHP	431950-B21
	HP 146GB SAS 3.5" 15K NHP	432093-B21
	HP 72GB SAS 3.5" 15K NHP	432095-B21
<p>NOTE: The purchase of SAS hard drives requires the purchase of HP Internal SAS/SATA 4-Port Cable (P/N 457692-B21). This cable is standard in the SAS BTO model.</p>		

Step 3: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Options" section below.

NOTE: Some options may not be factory integratable. Please contact your local sales representative for additional information.

Storage Controller	HP SC40Ge Host Bus Adapter, FIO	449176-B21
Communications	Agere 2006 PCI Hi-Speed 56K Modem, FIO	440519-B21
Operating Systems	Pre-install Microsoft Windows 2003 SBS Standard Edition	
	MS W2003 SBS R2 Std 1XX FIO Eng SW	432564-xx1
	MS W2003 SBS R2 Prm 1XX FIO Eng SW	432566-xx1

Configuration Information-Factory Integrated Models

Country Code Key	xx=00	NA
	xx=01	Australia
	xx=03	UK
	xx=04	Germany
	xx=05	France
	xx=06	Italy
	xx=07	Spanish
	xx=20	Brazil
	xx=21	Hungarian
	xx=22	Czech
	xx=24	Polish
	xx=33	Dutch
	xx=37	AP
	xx=42	Euro
	xx=AA	PRC
	xx=29	Japan
	xx=AB	Taiwan
	xx=AD	Korea

Options

Memory	2 GB Unbuffered PC2-6400 ECC DIMM (1 x 2 GB)	450260-B21
	1 GB Unbuffered PC2-6400 ECC DIMM (1 x 1 GB)	450259-B21
	512 MB Unbuffered PC2-6400 ECC DIMM (1x512 MB)	450258-B21
<hr/>		
Optical Drives	HP Half-Height SATA DVD ROM Kit	447326-B21
	HP Half-Height SATA DVD-RW Optical Kit	447328-B21
<hr/>		
Hard Drives	SATA Non-Hot Plug Midline (MDL) Drives	
	HP 750GB 3G SATA 7.2K NHP 3.5" MDL HDD	462595-B21
	HP 500GB 3G SATA 7.2K NHP 3.5" MDL HDD	458941-B21
	HP 250GB 3G SATA 7.2K NHP 3.5" MDL HDD	458939-B21
	SATA Non-Hot Plug Entry (ETY) Drives	
	HP 160GB 3G SATA 7.2K NHP 3.5" ETY HDD	458947-B21
	NOTE: SATA drives have a 1 year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html (Worldwide)	
	SATA Non-Hot Plug Drives	
	NOTE: The following previous generation of 1.5G SATA Hot Plug hard drives are supported. These drives can be purchased as an option, however, are no longer configurable.	
	HP 250GB 1.5G SATA 7.2K NHP 3.5" HDD	411276-B21
	HP 160GB 1.5G SATA 7.2K NHP 3.5" HDD	411275-B21
	NOTE: SATA drives have a 1 year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.html (Worldwide)	
	SAS Non-Hot Plug	
HP 300GB SAS 3.5" 15K NHP	431950-B21	
HP 146GB SAS 3.5" 15K NHP	432093-B21	
HP 72GB SAS 3.5" 15K NHP	432095-B21	
NOTE: The purchase of SAS hard drives requires the purchase of HP Internal SAS/SATA 4-Port Cable (P/N 457692-B21). This cable is standard in the SAS BTO model.		
NOTE: Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html (Worldwide)		

Options

Storage Controllers	<p>SAS HBA</p> <p>HP SC44Ge Host Bus Adapter 416096-B21</p> <p>NOTE: Supports RAID 0, 1.</p> <p>NOTE: Please see the following QuickSpecs for additional information: http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html (SC44Ge HBA)</p> <p>SCSI HBA</p> <p>HP SC11Xe U320 Host Bus Adapter 412911-B21</p> <p>NOTE: Supports Tape only, no RAID support.</p> <p>NOTE: Please see the following QuickSpecs for Technical Specifications and additional information: http://h18004.www1.hp.com/products/quickspecs/12566_div/12566_div.html (SC11Xe HBA)</p> <p>Smart Array E200 Controller</p> <p>HP Smart Array E200/128 BBWC Controller 411508-B21</p> <p>NOTE: Supports RAID 0, 1, 1+0, 5/BBWC.</p> <p>NOTE: Please see the following QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.html (Smart Array E200 Controller)</p> <p>HP SAS/SATA 4-Port Cable 430479-B21</p> <p>NOTE: The purchase of a SAS Storage Controller requires the purchase of HP SAS/SATA 4-Port Cable</p> <p>NOTE: SAS Storage Controllers supports both SATA and SAS drives.</p> <p>NOTE: On SATA models with embedded RAID, setup instructions are located in the User Guide. CTO RAID set-up is not available. HP ProLiant ML100 Series Server User Guide: http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00260539/c00260539.pdf</p>
Communications	<p>HP NC110T PCI Express Gigabit Server Adapter 434905-B21</p> <p>HP NC360T PCI Express Dual Port Gigabit Server Adapter 412648-B21</p> <p>HP NC373T PCI Express Multifunction Gigabit Server Adapter 394791-B21</p> <p>Agere 2006 PCI Hi-Speed 56K Modem EK694AA</p>

Options

Tape Drives	<p>NOTE: Installation of SCSI tape drives in a ML110 G5 model requires SCSI controller kit (PN: 412911-B21).</p> <p>NOTE: For complete listing of tape drive offerings see: http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html</p> <p>DAT USB Tape Drives</p> <p>HP StorageWorks DAT 40 USB Internal Tape Drive (Carbonite) DW022A</p> <p>HP StorageWorks DAT 72 USB Internal Tape Drive (Carbonite) DW026A</p> <p>HP DAT160 USB Internal Tape Drive for ProLiant Q1580A</p> <p>DAT SAS Tape Drives</p> <p>HP StorageWorks DAT 160 SAS Internal Tape Drive Q1587A</p> <p>DAT SCSI Tape Drives</p> <p>HP StorageWorks DAT 40 SCSI Internal Tape Drive (Carbon) C5686C</p> <p>HP StorageWorks DAT 72 SCSI Internal Tape Drive (Carbon) Q1522B</p> <p>HP StorageWorks DAT 160 SCSI Internal Tape Drive Q1573A</p> <p>LTO Ultrium SAS Tape Drives</p> <p>HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive DW085A</p> <p>HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive EH847A</p>
-------------	--

HP D2D Backup System	<p>HP StorageWorks D2D110 Backup System EH880A</p> <p>NOTE: 1TB of Disk Storage.</p> <p>HP StorageWorks D2D110 Backup System with Data Protector Express Software Kit EH923A</p> <p>NOTE: 1TB of Disk Storage.</p> <p>HP StorageWorks D2D120 Backup System EH884A</p> <p>NOTE: 2TB of Disk Storage.</p> <p>HP StorageWorks D2D120 Backup System with Data Protector Express Software Kit EH924A</p> <p>NOTE: 2TB of Disk Storage.</p> <p>HP StorageWorks D2D130 Backup System EH950A</p> <p>NOTE: 3TB of Disk Storage.</p> <p>HP StorageWorks D2D130 Backup System with Data Protector Express Software Kit EH951A</p> <p>NOTE: 3TB of Disk Storage.</p> <p>HP StorageWorks D2D130 Backup System with LTO-3 Ultrium 920 SAS Tape Drive EH952A</p> <p>NOTE: 3TB of Disk Storage.</p> <p>NOTE: Please see the HP D2D Backup Systems QuickSpecs for additional information: http://www.hp.com/go/d2d</p>
----------------------	---

Installation of Server into	Monitor/Utility Shelf 253449-B21
Racks	ProLiant Rack Enabling Kit 417705-B21

Options

Remote Management	HP ProLiant ML100 G5 Lights-Out 100c Remote Management Card NOTE: Supports HP ProLiant DL180 G5, ML110 G5, ML115 G5 and ML150 G5 servers, NOTE: For additional information on Lights-Out 100c Remote Management Card, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12468_div/12468_div.html	445513-B21
-------------------	--	------------

UPS	HP T1000 UPS, JPN/TWN HP T1000 UPS, NA HP T1000 UPS, INTL HP T750 UPS, Low Voltage (NA/JPN) HP T750 UPS, High Voltage (INTL) HP 1.83m 10A C13 CH Power Cord HP 1.83m 10A C13 DK Power Cord HP 1.83m 10A C13 EU Power Cord HP 1.83m 10A C13 IL Power Cord HP 1.83m 10A C13 UK Power Cord HP 1.83m C13 IT/CL Power Cord HP 2m C13 JPN Power Cord HP PWR CRD 2.5m 10A C13-ARGENTINA HP PWR CRD 1.83m 10A C13-BRAZIL HP PWR CRD 1.83m 10A C13-CHINA HP PWR CRD 1.83m 10A C13-UL DOM	AF404A AF403A AF405A 378439-D71 378439-B31 AF565A AF566A AF568A AF564A AF570A AF571A AF572A AF558A AF559A AF557A AF556A
-----	--	--

USB Options	HP 1GB USB 2.0 Floppy Drive Key HP 256MB USB 2.0 Floppy Drive Key 1.44MB External USB Floppy Drive ALL HP USB 2-Button Optical Mouse ALL HP USB 04 Standard Keyboard	442085-B21 442084-B21 DC141B DC172B DT528A#xxx
-------------	--	--

HP KVM Switch Options	HP 1x4 Console Switch HP PS2 Server Console Cable, 6 foot, 2-Pack HP USB Server Console Cable, 6 foot, 2-Pack NOTE: required for supporting USB peripherals. NOTE: For additional information regarding KVM Switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm	AF611A AF612A AF613A
-----------------------	---	----------------------------

Service and Support, HP Care Pack, and Warranty Information

Service and Support Offerings (HP Care Pack Services)	Extended Care - Minimum recommended service support level	
	Next Business Day On-Site Service, 9-Hour x 5-Day Coverage, 3 Years, Electronic	U4433E
	Committed Care - Cost-effective service options designed to extend HP Services committed response and guaranteed fix times, designed to speed problem resolution.	
	4-Hour On-Site Service - 13-Hour x 5-Day Coverage, 3 Years, Electronic	U4434E
	Committed Response - Optimum service level to increase IT Performance and availability	
	4-Hour On-Site Service - 24-Hour x 7-Day Coverage, 3 Years, Electronic	U4435E
Deployment Services - HP Installation and Start Up services designed to take time, risk, and worry out of the deployment of ProLiant servers - and free customers people to focus on what they do best, their business.		
Hardware Installation, Electronic (install services)	U4444E	
NOTE: For more information, customer/resellers can contact: http://www.hp.com/services/carepack .		

Memory

HP ProLiant ML110 G5 Models

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

Standard Memory

SATA Models:

512 MB of PC2-6400 DDR2 SDRAM running at 800MHz with ECC capabilities memory installed (1 x 512 MB SDRAM DIMM).

SAS Models:

1 GB of PC2-6400 DDR2 SDRAM running at 800MHz with ECC capabilities memory installed (1x 1024 MB SDRAM DIMM)

Standard Memory Plus Optional Memory

Up to 5 GB (SAS Model 6 GB) memory is available with the optional installation of 2 x 2048 MB +1 x 512 MB PC2-6400 un-buffered ECC DDR2 SDRAM DIMM Memory kits. (SAS Model 2 x 2048 MB + 1x 1024 MB)

Standard Memory Replaced with Optional Memory

Up to 8GB of memory is available with the removal of the standard 512 MB (SAS model: 1 GB) of memory and the optional installation of 4x 2 GB PC2-6400 un-buffered ECC DDR2 SDRAM DIMM Memory kits.

NOTE: The below chart does not represent all possible memory configurations.


NOTE: For best performance, it is recommended that customer installs memory in identical pairs (Slots 1 and 3 are interleaving pair. Slots 2 and 4 are interleaving pair).

Memory		Slot			
		4	3	2	1
Standard	512 MB	Empty	Empty	Empty	512 MB
Optional	3 GB	1 GB	512 MB	1 GB	512 MB
Maximum	8 GB	2 GB	2 GB	2 GB	2 GB

Following are memory options available from HP:

2 GB Unbuffered PC2-6400 ECC DIMM (1 x 2 GB)	450260-B21
1 GB Unbuffered PC2-6400 ECC DIMM (1 x 1 GB)	450259-B21
512 MB Unbuffered PC2-6400 ECC DIMM (1x512 MB)	450258-B21

Storage

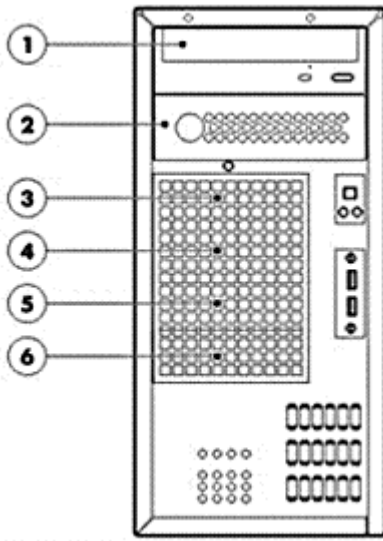

1 16x SATA DVD-ROM

2 Removable Media Bays (5.25" each)

3, 4, 5, Four Non-Hot Plug Drive Bays
6

Drive Support

	Quantity Supported	Position Supported	Controller
Removable Media			
DVD Drive	2	1 or 2	Integrated SATA
DVD-RW Drive	2	1 or 2	Integrated SATA

Hard Drives (SATA Models only)

SATA Non-Hot Plug Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
250 GB 3G 7.2K	Up to 4	3,4,5,6	6 Port SATA controller with Embedded RAID on Motherboard
500 GB 3G 7.2K			
750 GB 3G 7.2K			

SATA Non-Hot Plug Entry (Ety) Drives

	Quantity Supported	Position Supported	Controller
160 GB 3G 7.2K	Up to 4	3,4,5,6	6 Port SATA controller with Embedded RAID on Motherboard

SATA Non-Hot Plug Drives

	Quantity Supported	Position Supported	Controller
160 GB 1.5G 7.2K	Up to 4	3,4,5,6	6 Port SATA controller with Embedded RAID on Motherboard
250 GB 1.5G 7.2K			

Storage

Hard Drives (SAS Models only)

SAS – Non-Hot Plug

	Quantity Supported	Position Supported	Controller
<u>3.5-inch</u> 72 GB 3G 15K 146 GB 3G 15K 300 GB 3G 15K	Up to 4	3,4,5,6	HP 4 Internal Port SAS HBA SC40Ge with RAID (0,1)

Maximum Storage Capacity – SATA/SAS Models

Internal	SATA	3.0TB (4 x 750GB)
	SAS	1.2TB (4x300GB)

Tape Drives and D2D Backup System

NOTE: Installation of SCSI tape drives in a ML110 G5 model requires SCSI controller kit (PN: 412911-B21).

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:
<http://h18000.www1.hp.com/products/quickspecs/division/10233.html> (Worldwide)

	Position Supported	Controller	Controller/HBA Option Kit Part Number
Internal USB Tape Drives DAT 40 USB DAT 72 USB DAT 160 USB	2	USB 2.0 port	N/A
External USB Tape Drives DAT 40 USB DAT 72 USB DAT 160 USB	External	USB 2.0 port	N/A
Internal SAS Tape Drives DAT 160 SAS LTO-2 Ultrium 448 SAS LTO-3 Ultrium 920 SAS	2	HP SC44Ge Host Bus Adapter	416096-B21
External SAS Tape Drives DAT 160 SAS LTO-2 Ultrium 448 SAS LTO-3 Ultrium 920 SAS	External	HP SC44Ge Host Bus Adapter	416096-B21
Internal SCSI Tape Drives DAT 40 DAT 72 DAT 160	2	HP SC11Xe Host Bus Adapter	412911-B21

Storage

External SCSI Tape Drives	External	HP SC11Xe Host Bus Adapter	412911-B21
DAT 40			
DAT 72			
DAT 160			
HP StorageWorks D2D Backup Systems	External	Embedded Network Controller	N/A
D2D110			
D2D120			
D2D130			

Power Specifications

Part Number	445067-001
Spare Kit	457884-001
Operational Input Voltage Range (Vrms)	100 to 127 and 200 to 240 V auto ranging
Frequency Range (Nominal) (Hz)	50 to 60 Hz

Nominal Input Voltage (Vrms)	100	120	200	230	240
Max Rated Output Wattage Rating	365	365	365	365	365
Nominal Input Current (A rms)	6	N/A	3	N/A	N/A
Max Rated Input Wattage Rating (Watts)	N/A	N/A	N/A	N/A	N/A
Max. Rated VA (Volt-Amp)	600	N/A	N/A	N/A	N/A
Efficiency (%)	>65%	>65%	>65%	>65%	>65%
Power Factor	N/A	N/A	N/A	N/A	N/A
Leakage Current (mA)	N/A	<0.45mA	N/A	N/A	N/A
Maximum Inrush Current (A peak)	N/A	No component was damaged and input fuse shall not blow	N/A	No component was damaged and input fuse shall not blow	N/A
Maximum Inrush Current duration (mS)	N/A	N/A	N/A	N/A	N/A

System Specifications

	Power **
HP ProLiant ML110 G5 Fully Configured	(see **)
Fully Loaded System output Wattage (W)	365W
Fully Loaded System Input Current (Arms)	6A @ 100V, 3A @ 200V
Fully Loaded System Thermal (BTU- Hr)	1915BTU
Fully Loaded System VA (Volt-Amp)	600 VA
System Leakage with all power supplies loaded (mA)	0.45mA@120V
System Inrush Current with all power supplies loaded (A)	<150A@ 240Vac
Power cord requirements	Nema 5-15P to IEC320-C13
	IEC320-C13 to IEC320-C14
	**Power shown is for a fully configured system consisting of (1) CPU, (4) double-sided DIMMs, (4) HDDs, (1) DVD-ROM, (4) PCI cards, and (1) power supply.
Power Cords (13 Cord Sets)	Power Cord Part Number
Country	
APD	100614-009, 100613-008, 139867-005, 187487-001 (India)
Brazil	285052-001
Australia	100661-001
Euro	100614-009
France	100614-009
Germany	100614-009
Japan	139867-005
PRC	286496-001
UK	100613-008
US, Taiwan	121565-001

Technical Specifications

System Unit	Dimensions (HxWxD) (with feet)	14.5 x 6.9 x 16.8 in (36.7 x 17.5 x 42.6 cm)	
	Weight (approximate)	Maximum (all hard drives, power supplies, and processors installed)	39 lb (17.5 kg)
		Minimum (one hard drive, power supply, and processor installed)	23.81 lb (10.8 kg)
	Input Requirements (per power supply)	Rated Line Voltage	90 to 132 VAC, 180 to 264 VAC
		Rated Input Current	6 A (at 100 VAC), 3 A (at 200 VAC)
		Rated Input Frequency	47 to 63 Hz
		Rated Input Power	600 W (at 100 VAC), 600 W (at 200 VAC)
	Power Specifications	<p>To review typical system power ratings use the Power Calculator which is available via the online tool located at URL: http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls</p> <ul style="list-style-type: none"> - Click on the system of interest. Example: DL380 G5 - Follow the instructions of the next screens. 	
	Power Supply Output (per power supply)	Rated Steady-State Power	365 W (at 100 VAC), 365 W (at 200 VAC)
		Maximum Peak Power	385 W (at 100 VAC), 385 W (at 200 VAC)
	System Inlet Temperature	Operating	<p>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.</p> <p>System performance may be reduced if operating with a fan fault or above 30°C (86°F).</p>
		Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Relative Humidity (non-condensing)	Operating	10% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.

Technical Specifications

	Non-operating	5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	SATA Model	
	Idle	
	LWAd	4.2 Bels
	LpAm	26 dBA
	Operating	
	LWAd	5.1 Bels
	LpAm	34 dBA
	SAS Model	
	Idle	
LWAd	5.2 Bels	
LpAm	34 dBA	
Operating		
LWAd	5.7 Bels	
LpAm	40 dBA	

Technical Specifications

HP 160GB 3.0G SATA 160GB 7,200 rpm
7.2K NHP 3.5" ETY HDD
458947-B21

Capacity	160,041 MB	
Height	1.0 in. (26.1 mm)	
Maximum drive dimension		
Width	4.0 in (101.6 mm)	
Depth	5.787 in (147.0 mm)	
Maximum drive dimension		
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	N/A	
Seek Time (typical reads, including settling)	Single Track	2.0 ms
	Average	<11 ms
	Full-Stroke	23.0 ms
	Rotational Speed	7,200 rpm
Physical Configuration	Bytes/Sector	512
	Logical Blocks	312,581,808
Operating Temperature	41° to 131° F (5° to 55° C)	

NHP 72GB 3G SAS 15K 72GB 15K
3.5" HDD
432095-B21

Capacity	73,407,856,856	
Height	1.0 in (25.4mm)	
Width	4.0 in. (101.6 mm)	
Interface	SAS	
Transfer rate synchronous (maximum)	3Gb/sec	
Seek time (typical reads, including settling)	Single track	0.27 ms
	Average	3.5 ms
	Full-stroke	3.5 ms
	Rotational speed	15,000 rpm
Physical Configuration	Bytes/Sector	512
	Logical Blocks	143,374,737
Operating Temperature	50° to 95° F (10° to 35° C)	

Technical Specifications

16X Max SATA DVD-ROM Drive	Disk	Applicable Disk	CD-ROM, CD-XA, CD-DA (Mode 1, Mode 2, Form 1 and 2) Photo CD (Single and Multi-session) CD-R, CD-RW Mixed Mode (Audio and Data combined) DVD-ROM DVD-R/RW, DVD+R/RW CD-R, CD-RW, DVD-ROM, DVD+R, DVD+RW
		Capacity	4.7 GB (DVD-5) 8.54 GB (DVD-9)
	Block Size	DVD Media	2,048 bytes
	Interface	SATA	
	Access Times (typical)	Random	<140 ms
		Full-Stroke	<250 ms
	Data Transfer Rate	Sustained	8100 to 21600 KB/s (6X to 16X)
		Bus Rate	1.5 Gbps
	Cache Buffer	128 KB	
	Start-up Time (typical)	< 7 seconds	
	Stop Time	< 4 seconds	
	Laser Parameters	Type	Semiconductor Laser GaAlAs
		Wave Length	780 ± 25 nm
	Operating Conditions	Temperature	41° to 122° F (5° to 50° C)
		Humidity	10% to 90%
	Dimensions	(HxWxD, maximum)	1.7 x 5.85 x 8.11 in (42.9 x 150 x 195 mm)
		Weight	2.64 lb (1.2 kg)

HP 4 Internal Port SAS Host Bus Adapter (SAS/SATA HP Model)	SATA Protocol	SATA 1.5Gb/s
	SATA Ports	4 internal
	Port transfer rate	1.5 Gb/s total
	Maximum Capacity	up to 3.0TB (4 x 750GB Non-Hot Plug SATA HDD)
	RAID Levels Supported	RAID 1 (Mirroring) RAID 0 (Striping)
	Logical RAID Volumes Supported	2
	Dimensions (excluding bracket)	6.6 x 2.5 x 0.6 in (16.8 x 6.4 x 1.6 cm)
	Disk Drive and Enclosure Protocol Support	3 Gbps SAS (Serial Attached SCSI) 1.5 Gbps SATA (Serial Advanced Technology Attachment)
	Architecture	64-bit

Technical Specifications

SAS Connectors	1 internal SFF8484 x4 Wide SAS Connectors 12 Gbps per x4 Wide SAS Port (4 x 3 Gbps)
Data Transfer Method	PCI-Express x8 - 2 GB/s maximum bandwidth
PCI Bus Speed	PCI-Express x8
Simultaneous Drive Transfer Ports	1 x4 Wide SAS Connectors
Port Transfer Rate	12 Gb/s per x4 Wide SAS Port (4 x 3 Gb/s)
Software upgradeable Firmware	Yes
Maximum Capacity	1.2TB (4 x 300GB)
Memory Addressing	64-bit, supporting servers memory greater than 4 GB
Logical Drives Supported	Up to 2 Logical Volumes Up to 10 drives total in all RAID volumes Up to 2 Drives per RAID 1 Up to 4 Drives per RAID 0
RAID Support	RAID 1 (Mirroring) RAID 0 (Striping)
Upgradeable Firmware	4-MB flashable ROM
Disk Drive and Enclosure Protocol Support	3 Gbps SAS and 1.5 Gbps SATA

HP SC40Ge SAS Host Bus Adapter with RAID	RAID 1 (Mirroring) RAID 0 (Striping)
Logical Drives Supported	Up to 2 Logical Volumes Up to 10 drives total in all RAID volumes Up to 2 Drives per RAID 1 Up to 8 Drives per RAID 0
Maximum Capacity	3.6TB (8 x 450GB)
Data Transfer Method	PCI-Express x8 - 2 GB/s maximum bandwidth
Port Transfer Rate	12 Gb/s per x4 Wide SAS Port (4 x 3 Gb/s)
Simultaneous Drive Transfer Ports	2 x4 Wide SAS Connectors
Protocols	3 Gbps SAS and 1.5 Gbps SATA 1.5 Gbps SATA (Serial Advanced Technology Attachment)
External SAS Connectors	None
Internal SAS Connector	2 internal SFF8484 x4 SAS Connectors
Upgradeable Firmware	4MB flashable ROM

Technical Specifications

Embedded NC105i PCI Network Interface Gigabit Server Adapter	Integrated 10/100/1000BASE-T Transceiver
	Combines a triple-speed IEEE 802.3TM – Compliant Media Access Controller (MAC) with a triple-speed Ethernet transceiver.
Data Transfer Method	Compliant to x1 PCIe Specification
Network Transfer Rate	10Base-T (Half-Duplex) 10 Mb/s
	10Base-T (Full-Duplex) 20 Mb/s
	100Base-TX (Half-Duplex) 100 Mb/s
	100Base-TX (Full-Duplex) 200 Mb/s
	1000Base-TX (Half and Full-Duplex) 2000Mb/s
Connector	RJ-45 connector
Cable Support	Performs all the physical layer functions for 10BASE-T, 100BASE-T, and 1000BASE-T Ethernet on standard Category 5 UTP

Environment-friendly Products and Approach and Recycling End-of-life Management Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.