



Overview

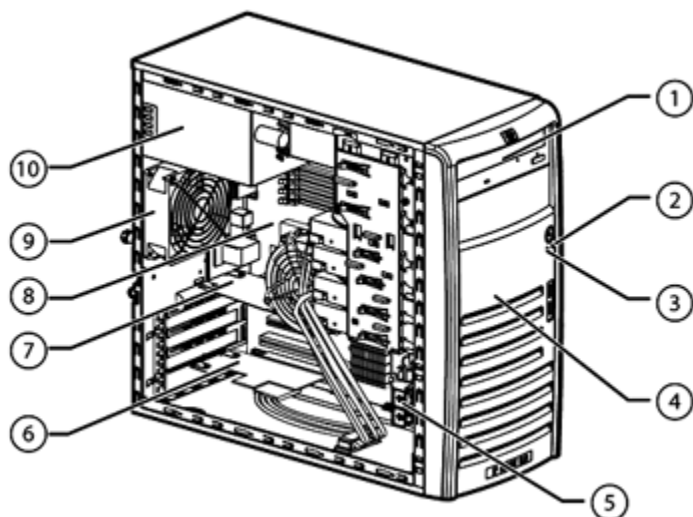

Front View:

1. CD-ROM Drive
2. Power LED
3. Drive Activity LED
4. Well ventilated chassis design
5. Full Length Card Retainer
6. HDD controller card (Optional)
7. HP LO 100c Management Card (Optional)
8. Main System Board
9. Rear System Fan
10. 370W Power Supply

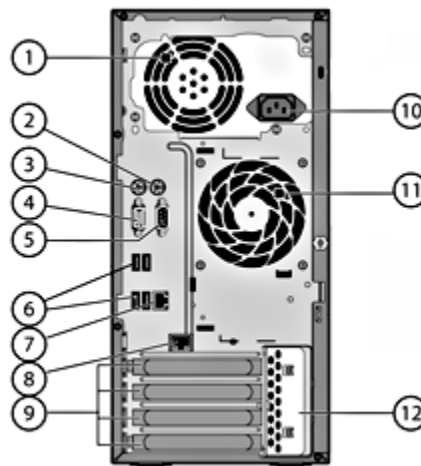

Rear View:

1. PSU fan
2. PS/2 mouse port
3. PS/2 keyboard port
4. VGA port
5. Serial port A
6. Rear USB 2.0 ports
7. LAN port (RJ-45)
8. HP LO100c Remote Management Card port(Optional)
9. PCI slot covers
10. Power supply outlet
11. Rear system fan
12. PCI slot cover lock

At A Glance

- **Processor:**
 - Dual-Core AMD Opteron 1000 Series processors
 - Single-Core Athlon 64 3500+ processors
- **Memory:**
 - 512 MB Standard / 8 GB Maximum of PC2-5300 DDR2 667 MHz ECC unbuffered Memory
- **Storage Controller:**
 - 4 Port SATA controller with Embedded RAID on Motherboard (RAID 0,1,5)
- **Internal Drive Support:**
 - 4 HDD Support:
 - 2TB SATA max storage (utilizing 500GB CTO HDD)
 - 1.2TB SAS max storage (4 x 300GB)
- **Network Controller:**
 - Embedded NC320i PCI Express Gigabit Server Adapter
- **Expansion Slots:**
 - Two 32-bit/33MHz PCI at 3.3V slot
 - Two PCI-Express slots (x8 and x16).
- **USB Ports:**
 - Eight total USB ports (2 internal, 2 front, 4 rear)
- **Form Factor:**
 - Micro ATX tower
- **Management:**

Overview

- Standard IPMI reporting
- Lights Out 100c Remote Management Card (Optional)
- **Warranty:**
 - Protected by HP Services, including a one-year, limited warranty, Next Business Day 1 year on-site limited Global warranty - Certain restrictions and exclusions apply. (3-1-1 warranty offered in AP only).

Standard Features

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/ERC/downloads/4AA1-0483ENW.pdf>

Processor Dual-Core AMD Opteron 1210 (1.8 GHz)
 One of the following depending on Model Dual-Core AMD Opteron 1214 (2.2 GHz)
 Single-Core AMD Athlon 3500+ (2.2 GHz)*
 Dual-Core AMD Opteron 1216 (2.4 GHz)*
 Dual-Core AMD Opteron 1220 SE (2.8 GHz)*
 * Offered through Configure-To-Order only. See Factory Integrated Models section for more details

Cache Memory 2MB (2x1MB) Level 2 cache (Opteron models)
 One of the following depending on Model 512KB Level 2 cache (Athlon models)

Chipset nVidia MCP55S Pro

Memory Protection Advanced ECC

Memory Type PC2-5300 unbuffered DDR2 SDRAM (667MHz)
 Standard 512 MB
 Maximum 8 GB

Network Controller Embedded NC320i PCIe Gigabit Server Adapter

Expansion Slots	Slot Number	Bus Speed	Hot Plug Y/N	PCI Voltage	Notes
	4	X16 PCI Express	No	n/a	Full Height
	3	X8 PCI Express	No	n/a	In a x8 slot Full Height
	1/2	32bit/33MHz PCI	No	3.3V	Full Height

NOTE: Only one brace for full length cards provided.

NOTE: Slot 2 only supports standard PCI 32 bit add-on card due to proximity of the Heat Sink.

Storage Controller HP 8 Internal Port SAS HBA with RAID (0,1)
 One of the following depending on Model Integrated 4 port SATA controller with embedded RAID (0,1,5)*
 *Embedded RAID setup instructions located in User Guide, CTO RAID set-up not available.
 HP ProLiant 100 Series Server User Guide:
http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00368941/c00368941.pdf?jumpid=reg_R1002_USEN

Storage CD-ROM 48x IDE (ATAPI) CD-ROM Drive
 Hard Drives
 SATA 160GB SATA 7200 rpm Drive

Standard Features

Maximum Internal Storage	Type		
	SAS (Not-hot plug)	1.2TB	(4x300GB)
	SATA (Non-hot plug)	2TB	(4 x 500GB*)

*Offered through Configure-To-Order only. See Factory Integrated Models section for more details

Interfaces	Parallel	0	
	Serial	1	
	Pointing Device (Mouse, PS2)	1	
	Graphics	1	
	Keyboard (PS2)	1	
	USB	8 total (4 rear, 2 front panel, 2 internal (one for USB Tape connectivity))	
	Network RJ-45 (Ethernet)	1	
	Management		Optional Lights-Out 100c Remote Management port

Graphics Integrated 2MB video controller

Form Factor Micro ATX Tower (4U)

Industry Standard Compliance ACPI V2.0 Compliant
 PCI 2.3 Compliant
 PXE Support
 WOL Support
 IPMI 2.0 compliance

Manageability Embedded IPMI standard reporting
 Optional HP ProLiant Lights-Out 100c Remote Management Card

Security Power-on password
 Setup password

Server Power Cords 12' country specific, lowline NEMA power cord.
NOTE: Rack models ship standard with a 12' IEC cable. Most redundant power supply options ship with a 6' country specific power cord. Localized cables included with geographic specific models in other world regions.

Standard Features

Power Supply 370 Watts

System Fans 1 – non-redundant system fan shipped standard
1 – non-redundant CPU heatsink fan shipped standard

OS Support Microsoft Windows Server 2003: Standard & Enterprise Edition (32 and 64 bit)
Microsoft Windows Small Business Server 2003
Microsoft Windows 2003 Server, Web Edition
Novell NetWare 6.5 SBS (only after SP6 release)
RedHat Enterprise Linux
SUSE Linux Enterprise Server

NOTE: For an up-to-date listing of the latest ML115 OS support matrix, please see:
<http://www.hp.com/go/supportos>

NOTE: For an up-to-date listing of the latest drivers available for the HP server ML115, please see: <http://h18023.www1.hp.com/support/files/server/us/family/model/5769.html?lang=en&cc=us>

NOTE: Drivers may also found on the base media for some Linux OS's. When configuring your server, please consult your base media driver base, or visit HP.com at:
<http://h18023.www1.hp.com/support/files/server/us/index.html>

NOTE: For more Linux OS support & certification information, please visit our the ProLiant & Bladesystem Server Linux matrix
<http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html>

Optional ProLiant Essentials Value Packs Optional software offerings that extend the functionality of an Adaptive Infrastructure to address specific business problems and needs:

- **Server Migration Pack** - The Server Migration Pack automates the manual processes required for migrating servers between physical or virtual platforms (P2V, V2P, and V2V).

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information

Factory Express Portfolio for Servers and Storage HP Factory Express offers configuration, customization, integration and deployment services for HP servers and/or storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging and custom packaging HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers, as well as, the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

Standard Features

HP ProLiant Smart Buys (NA only)

The HP Smart Buy program offers mainstream business solutions at competitive prices with excellent availability and superior HP quality. It offers a wide range of industry-leading HP products at compelling prices, allowing you to receive richer configurations with additional options.

NOTE: ProLiant Smart Buys are available in NA only. For detailed specification information on ProLiant Smart Buys please click on the following link:
<ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>

HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for one year from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

NOTE: Server Warranty includes 1 year Parts, 1 year Labor, 1-year on-site support (3-1-1 warranty offered in AP only). Additional information regarding worldwide limited warranty and technical support is available at:
<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

NOTE: For all server/switch warranty commitment and HP Care Pack part numbers need to be updated for each product type.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as 22" and smaller external monitors and tower UPS options up to 3kVA; these items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

HP services provide continuous care and support expertise with committed response designed to meet your IT and business needs.

To fully capitalize on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Extended Care - options provide a base line service level to ensure optimum server availability, delivering extended access to expert assistance, remote and onsite diagnostic support, and remedial hardware support.

- *Next Business Day on site coverage, 3 Years*

Continuous Care options deliver a recommended support level with committed same day response or fix times, designed to provide speedy problem identification and resolution ensuring high level of server availability.

- *4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years*

Total Care service options designed to provide round the clock support and complex problem resolution through integrated hardware and software support delivering high level of application

Standard Features

and data availability taking into account your entire IT environment.

- *4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Deployment Services - HP Installation and Start Up services designed to take time, risk, and worry out of the deployment of ProLiant servers - and free customers people to focus on what they do best, their business.

- *Installation of a ProLiant server as per Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays*

NOTE: For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

Models

NOTE: ProLiant Smart Buys are available in NA only. For detailed specification information on ProLiant Smart Buys please click on the following link: <ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>.

SATA Models

ML115 Opteron 1210 NHP-SATA (1P) 437288-xx1	Processor(s)	(1) Dual-Core AMD Opteron 1210 (1.8GHz, 2MB Cache)
	Cache Memory	(1) Dual-Core AMD Opteron 1214 (2.2GHz, 2MB Cache)
ML115 Opteron 1214 NHP-SATA (1P) 437289-xx1	Processor(s)	2MB (2x1MB) Level 2 cache (Opteron)
	Cache Memory	512 MB PC2-5300 ECC (DDR2-667Mhz) (1 x 512 MB)
	Memory	HP Embedded 4 Port SATA Controller with embedded RAID (0,1,5)
	Storage Controller	160GB SATA HDD
	Hard Drive	Maximum 2TB (4 x 500GB) SATA
	Internal Storage	48x CD-ROM
	Optical Drive	Micro ATX Tower
	Form Factor	

SAS Models

ML115 Opteron 1214 NHP-SAS (1P) 437290-xx1	Processor(s)	(1) Dual-Core AMD Opteron 1214 (2.2GHz, 2MB Cache)
	Cache Memory	2MB (2x1MB) Level 2 cache (Opteron)
ML115 Opteron 1214 NHP-SAS (1P) 437290-xx1	Memory	512 MB PC2-5300 ECC (DDR2-667Mhz) (1 x 512 MB)
	Storage Controller	HP 8 Internal Port SAS HBA with RAID (0,1)
	Hard Drive	72GB SAS HDD
	Internal Storage	Maximum 1.2TB (4 x 300GB) SAS
	Optical Drive	48x CD-ROM
	Form Factor	Micro ATX Tower

Country Code Key	XX=00	NA
	XX=01	Australia
	XX=03	UK
	XX=04	Germany
	XX=05	France
	XX=20	Brazil
	XX=37	AP
	XX=42	Euro
	XX=AA	PRC
	XX=29	Japan
	XX=AB	Taiwan
	XX=AD	Korea

Configuration Information-Factory Integrated Models (North America Only)

NOTE: For Configure to Order requirements within EMEA region, please consult local Sales Contact.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option is a Factory Installable Option.

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

Step 1: Base Configuration

Models	HP ProLiant ML115 NHP CTO Chassis (North America) Factory Integrated Models ship with: Embedded NC320i PCI Express Gigabit Server Adapter Keyboard and Mouse 370 Watts, PFC (Power Factor Correcting) Tower Form Factor (4U)	439138-B21
	<p>NOTE: HP SATA Drive Models are limited to <2TB support.</p> <p>NOTE: On SATA models with embedded RAID, setup instructions are located in User Guide, CTO RAID is set-up not available. HP ProLiant 100 Series Server User Guide: http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00368941/c00368941.pdf?jumpid=reg_R1002_USEN</p>	

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Processors	AMD Athlon Processor Model 3500+ (2.2 GHz) Option Kit, FIO AMD Opteron™ Processor Model 1220SE (2.8 GHz) Option Kit, FIO AMD Opteron Processor Model 1216 (2.4 GHz) Option Kit, FIO AMD Opteron Processor Model 1214 (2.2 GHz) Option Kit, FIO AMD Opteron Processor Model 1210 (1.8 GHz) Option Kit, FIO	440962-L21 437376-L21 437375-L21 437374-L21 437373-L21
Memory	2048 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1 x 2048 MB), Dual Rank 1024 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1 x 1024 MB), Dual Rank 512 MB Unbuffered Advanced ECC PC2-5300 DDR2 DIMM (1 x 512 MB), Single Rank	432806-B21 432804-B21 432803-B21

Configuration Information-Factory Integrated Models (North America Only)

Hard Drives	Serial ATA (SATA) - Non-hot Plug HDD	
	HP 500GB 1.5G SATA 7.2K NHP 3.5" HDD, FIO*	404469-B21
	HP 250GB 1.5G SATA 7.2K NHP 3.5" HDD	411276-B21
	HP 160GB 1.5G SATA 7.2K NHP 3.5" HDD	411275-B21
	HP 80GB 1.5G SATA 7.2K NHP 3.5" HDD	383410-B21
	*NOTE: Factory Integrated Only	
	HP Non-Hot Plug SATA Cable	442901-B21
	NOTE: The purchase of a SATA Hard Disk Drive requires the purchase of HP SATA Cable option kit (P/N 442901-B21).	
	Serial Attached SCSI (SAS) Non-Hot Plug	
	HP 300GB SAS 3.5" 15K NHP	431950-B21
HP 146GB SAS 3.5" 15K NHP	432093-B21	
HP 72GB SAS 3.5" 15K NHP	432095-B21	

Optical Drives	CD-RW/DVD-ROM Combo Drive Option Kit	331346-B21
	HP DVD+R/RW 8X HH	383974-B21
	HP ProLiant 48X CD	398972-B21
	DVD ROM Drive 16x	217053-B21
	NOTE: For the installation of Windows and other OS's, a floppy drive (DC361B) may be required to complete driver installation. A USB drive key may not work to complete driver installation.	

Step 3: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Options" section below.

NOTE: Some options may not be factory integratable. Please contact your local sales representative for additional information.

Operating Systems	Pre-install Microsoft Windows 2003 SBS Standard Edition	
	MS W2003 SBS R2 Std 1XX FIO Eng SW	432564-XX1
	MS W2003 SBS R2 Prm 1XX FIO Eng SW	432566-XX1

Country Code Key	XX=00	NA
	XX=01	Australia
	XX=03	UK
	XX=04	Germany
	XX=05	France
	XX=06	Italy
	XX=07	Spanish
	XX=20	Brazil
	XX=21	Hungarian
	XX=22	Czech
	XX=24	Polish
	XX=33	Dutch
	XX=37	AP
	XX=42	Euro
	XX=AA	PRC
	XX=29	Japan
XX=AB	Taiwan	

Configuration Information-Factory Integrated Models (North America Only)

XX=AD

Korea

Options

Optional ProLiant Essentials Value Packs	ProLiant Essentials Server Migration Pack ProLiant Essentials Server Migration Pack, No Media, 1-Migration License NOTE: This license allows 1 P2V, V2P, or V2V migration. Contains one license with a unique license activation key and documentation	435663-B21
---	--	------------

Memory	2048 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1x2048 MB), Dual Rank	432806-B21
	1024 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1x1024 MB), Dual Rank	432804-B21
	512 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1x512 MB), Single Rank	432803-B21

Optical Drives	CD-RW/DVD-ROM Combo Drive Option Kit	331346-B21
	48X CD-ROM Option, Carbon	398972-B21
	DVD-RW Drive Option Kit	383974-B21
	1.44 MB USB Diskette Drive	DC361B
NOTE: For the installation of Windows and other OS's, a floppy drive may be required to complete driver installation. A USB drive key may not work to complete driver installation.		

Hard Drives	Serial – ATA (SATA) – Non-Hot Plug (SATA Models Only)	
	HP 250GB 1.5G SATA 7.2K NHP 3.5" HDD	411276-B21
	HP 160GB 1.5G SATA 7.2K NHP 3.5" HDD	411275-B21
	HP 80GB 1.5G SATA 7.2K NHP 3.5" HDD	383410-B21
	NOTE: When purchasing systems with the 500GB Non-Hot Plug SATA drives, please reference the Configuration Information Section of this QuickSpecs to order via Configuration to Order.	
	HP Non-Hot Plug SATA Cable	442901-B21
	NOTE: The purchase of a SATA Hard Disk Drive requires the purchase of HP SATA Cable option kit (P/N 442901-B21).	
	Serial Attached SCSI (SAS) Non-Hot Plug (SAS Models Only)	
	HP 300GB SAS 3.5" 15K NHP	431950-B21
	HP 146GB SAS 3.5" 15K NHP	432093-B21
HP 72GB SAS 3.5" 15K NHP	432095-B21	
NOTE: The purchase of SAS hard drives requires the purchase of part number 430479-B21, the HP Internal SAS/SATA 4-Port Cable. This cable is standard in the SAS BTO model.		

Options

Storage Controllers	HP SC44Ge Host Bus Adapter	416096-B21
	HP SC11Xe Host Bus Adapter	412911-B21
	HP 8 Internal Port SAS HBA with RAID	347786-B21
	NOTE: PCI-X Interface (PCI 32bit/33MHz compatible)	
	NOTE: Slot 2 only supports standard PCI 32 bit add-on card due to proximity to Heat Synk.	
	HP Smart Array E200/128 BBWC Controller	411508-B21
	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
	NOTE: PCI-X Interface (PCI 32bit/33MHz compatible)	
	NOTE: Slot 2 only supports standard PCI 32 bit add-on card due to proximity to Heat Synk	
	128MB Battery-Backed Write Cache Enabler	351580-B21
NOTE: Supports the Smart Array E200 Controller, Smart Array 641 Controller and Smart Array 642 Controller.		
HP SAS/SATA 4-Port Cable	430479-B21	
NOTE: The purchase of a SAS Storage Controller requires the purchase of HP SAS/SATA 4-Port Cable (P/N 430479-B21)		
NOTE: On SATA models with embedded RAID, setup instructions are located in User Guide, CTO RAID is set-up not available. HP ProLiant 100 Series Server User Guide: http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00368941/c00368941.pdf?jumpid=reg_R1002_USEN		
<hr/>		
Communications	HP NC110T PCI Express Gigabit Server Adapter	434905-B21
	NOTE: Does not support Windows 2000	
	HP NC150T PCI 4-port Gigabit Combo Switch Adapter	367132-B21
	HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
	Agere 2006 PCI Hi-Speed 56K Modem	440519-B21
<hr/>		
Tape Backup Drives	NOTE: Installation of SCSI internal tape drives in a ML115 model requires SCSI controller kit (PN: 374654-B21).	
	NOTE: The SCSI Controller Kit (P/N 374654-B21) cannot be installed in Slot 2 due to proximity to heat sync	
	NOTE: For complete listing of tape drive offerings see: http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html	
	USB Tape Drives	
	HP StorageWorks DAT 40 USB Internal Tape Drive (Carbonite)	DW022A
	HP StorageWorks DAT 72 USB Internal Tape Drive (Carbonite)	DW026A
	DAT Tape Drives	
	HP StorageWorks DAT 40 SCSI Internal Tape Drive (Carbon)	C5686C
	HP StorageWorks DAT 72 SCSI Internal Tape Drive (Carbon)	Q1522B
	Ultrium Tape Drives	
	HP StorageWorks Ultrium 232 SCSI Internal Tape Drive (Carbonite)	DW064A
	HP StorageWorks Ultrium 448 External Tape Drive (Carbonite)	DW017B
	HP StorageWorks Ultrium 448 Internal Tape Drive (Carbonite)	DW016A
<hr/>		
Installation of Server into Racks	Monitor/Utility Shelf	253449-B21

Options

Lights Out Management Card	HP ML115 Lights-Out 100c Remote Management Card	437372-B21
UPS	HP T1000 UPS, JPN/TWN	AF404A
	HP T1000 UPS, NA	AF403A
	HP T1000 UPS, INTL	AF405A
	HP T750 UPS, Low Voltage (NA/JPN)	378439-D71
	HP T750 UPS, High Voltage (INTL)	378439-B31
USB Options	HP 1GB USB 2.0 Floppy Drive Key	442085-B21
	HP 256MB USB 2.0 Floppy Drive Key	442084-B21
	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	HP USB 04 Standard Keyboard	DT528A#xxx
	USB 2.0 4-port HUB	DG954A
HP KVM Switch Options	HP 1x4 Console Switch	AF611A
	HP PS2 Server Console Cable, 6 foot, 2-Pack	AF612A
	HP USB Server Console Cable, 6 foot, 2-Pack	AF613A
	NOTE: Required for supporting USB peripherals.	
	NOTE: For additional information regarding KVM Switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm	

Service and Support, HP Care Pack, and Warranty Information

Service and Support Offerings (HP Care Pack Services)	Hardware Services 4-Hour On-site Service	
	13-Hour x 5-Day Coverage, 3 Years	U4434E
	24-Hour x 7-Day Coverage, 3 Years	U4435E
	Hardware Services Next Business Day On-Site Service	
	9-Hour x 5-Day Coverage, 3 Years	U4433E
	Hardware Services 6 Hour Call-to-Repair	
24-Hour x 7-Day Coverage, 3 Years, 6 Hour Call-to-Repair	U4436E	
Hardware Installation Service		
HP Install ProLiant ML115 Service	U4444E	
NOTE: For more information, customer/resellers can contact http://www.hp.com/services/carepack .		

Memory

HP ProLiant ML115 Models

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

Standard Memory

512 MB of PC2-5300 DDR2 SDRAM running at 512 MB with Advanced ECC capabilities Memory installed (1 x 512 MB SDRAM DIMM).

Standard Memory Plus Optional Memory

Up to 5120 MB memory is available with the optional installation of PC2-5300 un-buffered ECC DDR2 SDRAM DIMM Memory kits.

Standard Memory Replaced with Optional Memory

Up to 8192 MB of memory is available with the removal of the standard 512 MB of memory and the optional installation of PC2-5300 un-buffered ECC DDR2 SDRAM DIMM Memory kits.

NOTE: The below chart does not represent all possible memory configurations.


NOTE: In memory configurations requiring 2 DIMM and 4 DIMM configurations, the memory must be paired for optimal performance. This means that DIMMs in slot 1 and 3 have to be identical, in slot 2 and 4 have to be identical. (For example, the Optional memory configuration shown below)

Memory		Slot			
		4	3	2	1
Standard	512 MB	Empty	Empty	Empty	512 MB
Optional	5120 MB	2048 MB	512 MB	2048 MB	512 MB
Maximum	8192 MB	2048 MB	2048 MB	2048 MB	2048 MB

Following are memory options available from HP:

2048 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1 x 2048 MB), Dual Rank	432806-B21
1024 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1 x 1024 MB), Dual Rank	432804-B21
512 MB Unbuffered Advanced ECC PC2-5300 DDR2 DIMM (1 x 512 MB), Single Rank	432803-B21

Storage

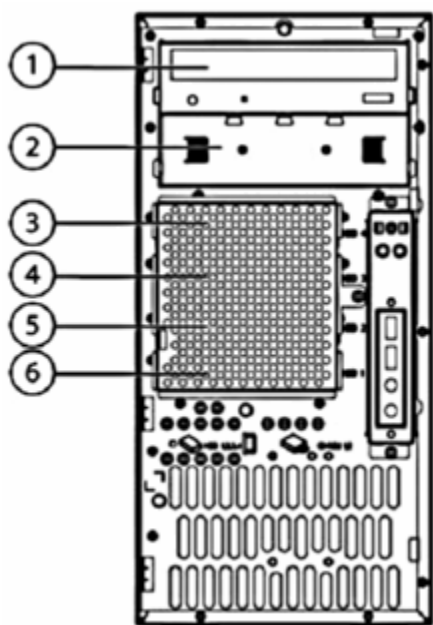

- 1 48x IDE (ATAPI) CD-ROM
- 2 Removable Media Bays (1.6" each)
- 3, 4, 5, 6 Four (4) Non-Hot Plug Drive Bays

Drive Support

	Quantity Supported	Position Supported	Controller
Removable Media			
DVD + CDRW Drive	2	1 or 2	Integrated IDE (ATAPI)
DVD-RW Drive	2	1 or 2	Integrated IDE (ATAPI)

Hard Drives (SATA Models only)

SATA 1.5Gb – Non-Hot Plug

	Quantity Supported	Position Supported	Controller
3.5-inch 500GB 7.2K SATA 250GB 7.2K SATA 160GB 7.2K, SATA 80GB 7.2K, SATA	Up to 4	3,4,5,6	4 Port SATA controller with Embedded RAID on Motherboard (0,1,5)

Hard Drives (SAS Models only)

SAS – Non-Hot Plug

	Quantity Supported	Position Supported	Controller
3.5-inch 300GB 15K SAS 145GB 15K SAS 72GB 15K, SAS	Up to 4	3,4,5,6	HP 8 Internal Port SAS HBA with RAID (0,1)

Storage

Maximum Storage Capacity – SATA/SAS Models

Internal	SATA	1TB (4x250GB (BTO)) 2TB (4 x 500GB (CTO))
	SAS	1.2TB (4x300GB)
Total	SATA	1TB (4x250GB (BTO)) 2TB (4 x 500GB (CTO))
	SAS	1.2TB (4x300GB)

Tape Drives

NOTE: A SCSI controller needs to be purchased to operate internal SCSI devices in the SATA Models.

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/Division/10233.html> (Worldwide)

	Position Supported	Controller	Controller/HBA Option Kit Part Number
Internal USB Tape Drives DAT 40 USB DAT 72 USB	2	USB 2.0 port	N/A
External USB Tape Drives DAT 40 USB DAT 72 USB	External	USB 2.0 port	N/A
Internal SCSI Tape Drives DAT 40 DAT 72 Ultrium 232 Ultrium 448	2	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 NOTE: Slot 2 only supports standard PCI 32 bit add-on card due to proximity of the Heat Sink	374654-B21
External SCSI Tape Drives DAT 40 DAT 72 Ultrium 232 Ultrium 448	External	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 NOTE: Slot 2 only supports standard PCI 32 bit add-on card due to proximity of the Heat Sink	374654-B21

Power Specifications

Part Number	416121-001
Spare Kit	419029-001
Operational Input Voltage Range (Vrms)	100 to 127 and 200 to 240 V auto ranging
Frequency Range (Nominal) (Hz)	50 to 60 Hz

Nominal Input Voltage (Vrms)	100	115	208	220	230	240
Max Rated Output Wattage Rating	N/A	370	N/A	N/A	370	N/A
Nominal Input Current (A rms)	N/A	8	N/A	N/A	4	N/A
Max Rated Input Wattage Rating (Watts)	N/A	N/A	N/A	N/A	N/A	N/A
Max. Rated VA (Volt-Amp)	N/A	N/A	N/A	N/A	N/A	N/A
Efficiency (%)	N/A	>65%	N/A	N/A	>65%	N/A
Power Factor	N/A	N/A	N/A	N/A	N/A	N/A
Leakage Current (mA)	0.25mA (at 60HZ)	N/A	N/A	N/A	N/A	N/A
Maximum Inrush Current (A peak)	N/A	No component was damaged and input fuse shall not blow	N/A	N/A	No component was damaged and input fuse shall not blow	N/A
Maximum Inrush Current duration (mS)	N/A	N/A	N/A	N/A	N/A	N/A

System Specifications

	Power **
HP ProLiant ML115 Fully Configured	(see **)
Fully Loaded System output Wattage (W)	370W
Fully Loaded System Input Current (A rms)	8A @ 115V, 4A @ 230V
Fully Loaded System Thermal (BTU-Hr)	1907BTU
Fully Loaded System VA (Volt-Amp)	920
System Leakage with all power supplies loaded (mA)	0.75mA@240V 0.45mA@120V
System Inrush Current with all power supplies loaded (A)	80A
Power cord requirements	Nema 5-15P to IEC320-C13
	IEC320-C13 to IEC320-C14
	**Power shown is for a fully configured system consisting of (1) CPU, (4) double-sided DIMMs, (4) HDDs, (1) CD-ROM, (1) DVD-ROM, (4) PCI cards, and (1) power supply.
Power Cords (13 Cord Sets)	Power Cord Part Number
Country	
APD	100614-009, 100613-008, 139867-004, 187487-004 (India)
Brazil	285052-001
Australia	100661-001
Euro	100614-009
France	100614-009
Germany	100614-009
Japan	139867-004
PRC	286496-001
UK	100613-008
US, Taiwan	121565-001

Technical Specifications

System Unit	Dimensions (HxWxD) (with feet)	14.46 x 6.88 x 16.76 in (36.7 x 17.5 x 42.6 cm)
	Weight (approximate)	23.15 lb (10.5 kg)
	Input Requirements (per power supply)	Range Input Voltage 100 to 127 VAC/200 to 240 VAC Normal Line Voltage 115 or 230 VAC
	Line Frequency	50 to 60 Hz
	Rated Input Current	load 8A at 115VAC, 4A at 230VAC
	BTU Rating	1907 BTU
	SCSI Connectors (SCSI Models only)	One internal LVD/SE connector for U160 devices, plus two internal SE connectors for legacy devices.
	Power Supply Output Power (per power supply)	Rated Steady-State 370W Power Maximum Peak Power 370W
	Temperature Range	Operating 50° to 95° F (10° to 35° C) Shipping -31° to 140° F (-35° to 60° C)
	Relative Humidity (non-condensing)	Operating 10% to 90% Non-operating 10% to 95%
	Acoustic Noise	Idle (Fixed Disk Drives Spinning) L WAd (BELS) 5.4 L pAm (dBA) 36 Operating (Random Seeks to Fixed Disks) L WAd (BELS) 5.9 L pAm (dBA) 38

HP 160GB 1.5G SATA 7.2K NHP 3.5" HDD 411275-B21	160GB 7,200 rpm	Capacity	160,041 MB
		Height	1.0 in. (26.1 mm)
		Width	4.0 in. (101.6 mm)
		Interface	Serial ATA
		Transfer rate synchronous (maximum)	1.5 Gb/s
		Seek time (typical reads,Single track including settling)	Average 0.9 ms 9.0 ms Full-stroke 17.8 ms
			Rotational speed 7,200 rpm
		Physical Configuration	Bytes/Sector 512 Logical Blocks 312,581,808
		Operating Temperature	41° to 131° F (5° to 55° C)

Technical Specifications

**NHP 72GB 3G SAS 15K 72GB 15K
3.5" HDD**
431950-B21

Capacity	73,407,856,856
Height	1.0 in (25.4mm)
Width	4.0 in. (101.6 mm)
Interface	SAS
Transfer rate synchronous (maximum)	3 Gb/sec
Seek time (typical reads,Single track including settling)	0.27 ms
	Average 3.5 ms
	Full-stroke 3.5 ms
	Rotational speed 15,000 rpm
Physical Configuration	Bytes/Sector 512
	Logical Blocks 143,374,737
Operating Temperature	50° to 95° F (10° to 35° C)

**48X Max IDE (ATAPI)
CD-ROM Drive**
398972-B21

Disk	Applicable Disk	CD-ROM, CD-XA, CD-DA (Mode 1, Mode 2, Form 1 and 2) Photo CD (Single and Multi-session) Mixed Mode (Audio and Data combined) CD-R
	Capacity	540MB (Mode 1, 12 cm) 650MB (Mode 2, 12 cm)
Block Size	Mode 1	2,048 bytes, 1024 bytes
	Mode 2	2,340 bytes, 2,336 bytes, 1024 bytes
	CD-DA	2,352 bytes
	CD-XA	2,328 bytes
Interface	IDE (ATAPI)	
Access Times (typical)	Random	<100 ms
	Full-Stroke	<150 ms
Data Transfer Rate	Sustained	3000 to 7200 KB/s (20X to 48X)
	Burst	150 KBps to 7,200 KBps
	Bus Rate	16.7 MBps
Cache Buffer	128 KB	
Start-up Time (typical)	< 7 seconds	
Stop Time	< 4 seconds	
Laser Parameters	Type	Semiconductor Laser GaAlAs
	Wave Length	780 ± 25 nm
Operating Conditions	Temperature	41° to 122° F (5° to 50° C)
	Humidity	10% to 90%
Dimensions	(HxWxD, maximum)	1.63 x 5.75 x 7.87 in (41.3 x 146 x 200 cm)
	Weight	2.64 lb (1.2 kg)

Technical Specifications

4 port Embedded SATA controller	SATA Protocol	SATA 2, 3Gb/s
	SATA Ports	4 internal
	Port transfer rate	1.5 Gb/s total
	Maximum Capacity	up to 2 TB (4 x 500GB non hot plug SATA HDD)
	RAID Levels Supported	RAID 1+0 (Striping & Mirroring) RAID 1 (Mirroring) RAID 0 (Striping) RAID 5 (Striping with parity)
	Logical RAID Volumes Supported	NOTE: On SATA models with embedded RAID, setup instructions are located in User Guide, CTO RAID is set-up not available. HP ProLiant 100 Series Server User Guide: http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00368941/c00368941.pdf?jumpid=reg_R1002_USEN

HP 8 Internal Port SAS Host Bus Adapter with RAID (SAS Model only)	Dimensions (excluding bracket)	6.6 x 2.5 x 0.6 in (16.8 x 6.4 x 1.6 cm)
	Disk Drive and Enclosure Protocol Support	3 Gbps SAS (Serial Attached SCSI) 1.5 Gbps SATA (Serial Advanced Technology Attachment)
	Architecture	64-bit
	SAS Connectors	2 internal SFF8484 x4 Wide SAS Connectors 12 Gbps per x4 Wide SAS Port (4 x 3 Gbps)
	Data Transfer Method	64-bit wide, PCI-X 133 MHz (1 GB/s maximum bandwidth)
	PCI Bus Speed	PCI-X-133 and 3.3 volt PCI compatibility only
	PCI	PCI-X and 3.3 volt PCI compatibility only
	Simultaneous Drive Transfer Ports	2 x4 Wide SAS Connectors
	Port Transfer Rate	12 Gb/s per x4 Wide SAS Port (4 x 3 Gb/s)
	Software upgradeable Firmware	Yes
	Maximum Capacity	576GB (8 x 72GB)
	Memory Addressing	64-bit, supporting servers memory greater than 4 GB
	Logical Drives Supported	Up to 2 Logical Volumes Up to 10 drives total in all RAID volumes Up to 2 Drives per RAID 1 Up to 8 Drives per RAID 0
	RAID Support	RAID 1 (Mirroring) RAID 0 (Striping)
	Upgradeable Firmware	4-MB flashable ROM
	Disk Drive and Enclosure Protocol Support	3 Gbps SAS and 1.5 Gbps SATA
		NOTE: Slot 2 only supports standard PCI 32 bit add-on card due to proximity of the Heat Sink

Technical Specifications

Embedded NC320i PCIe Network Interface	10Base-T/100Base-TX/1000Base-TX	
Gigabit Server Adapter Compatibility	IEEE 802.3 10Base-T	
	IEEE 802.3ab 1000Base-T	
	IEEE 802.3u 100Base-TX	
Data Transfer Method	Single lane (x1), 100MHz PCI Express Reference Clock	
Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s
	10Base-T (Full-Duplex)	20 Mb/s
	100Base-TX (Half-Duplex)	100 Mb/s
	100Base-TX (Full-Duplex)	200 Mb/s
	1000Base-TX (Half and Full-Duplex)	2000Mb/s
Connector	RJ-45 connector	
Cable Support	10Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)
	10/100/1000Base-TX	Category 5 UTP; up to 328 ft (100 m)

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Opteron and Athlon are a US registered trademark of AMD Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.