

Welcome to the new edition of the **ABDOS LIFESCIENCES CATALOG**

Abdos now has a new and meaningful vision for its stakeholders; “To be the first choice of customers by building long-term relationships with them through our product range, service levels, innovations and sustainability endeavours.” In 2019-20 Abdos started its first overseas plant in Nigeria (Western Africa) in its packaging division. They set up a new greenfield state of the art manufacturing plant (in Kolkata, Eastern India) in its FMCG division. Abdos is into the diversified business of packaging, FMCG, distribution, contract manufacturing, and life sciences. Please connect with us through our websites and various social media platforms to know more about us.

The Life Sciences vertical of Abdos began in the year 2010 with a state of the art manufacturing and distribution centre in Roorkee (India) with offices in New Delhi (India), Kolkata (India), and it's logistics subsidiary in Venlo (Netherlands). Our products are used in various applications, from research to drug discovery & from quality control to diagnostics. Our products add value and improve the lives of people around us.

Last year Abdos Life sciences had undergone massive expansion in both manufacturing and logistics space. This new capability makes us one of the biggest clean room manufacturers in South East Asia. Two years back, Abdos set up its first logistics subsidiary in Europe, which has brought us closer to our customers in 32 European countries. In times to come, there are more subsidiaries planned in other parts of the world. Currently, Abdos products are available through our distributors in India and 65 countries worldwide.

This is our 7th edition of the product catalog with 25 new products and three new product lines. We have added MAXIRCF™ Trace Metal Free Centrifuge Tubes, Biofill™ Vacuum Filtration system, and an entirely new range of Electrophoresis. As always, we are continually evaluating new products, keeping in mind new growth areas and research in the field of life sciences.

In 2020, the global COVID-19 pandemic has changed the landscape of the world and has affected our families, businesses, communities, and our way of life. Our heart goes out to anyone who is impacted by the virus, to whom we extend our heartfelt wishes for a speedy recovery. We're genuinely inspired by the selfless healthcare workers around the world who are on the front lines, working tirelessly to care for people in need. During this time, Abdos team, in all our business verticals, continued to work tirelessly and relentlessly, and we have emerged more reliable than ever before.

Abdos continues to invest in products, infrastructure, customer services, and after-sales. Still, the future is 'digital,' and at Abdos, we embrace the future, so we look forward to connecting with you on our digital platforms like LinkedIn, Facebook, our mobile app, and at our website: www.abdoslifesciences.com. These platforms serve as a knowledge base on products, services, latest events, technical support, and certifications. It also provides some unique scientific utility tools that can be of help to researchers and technicians.

We thank all our stakeholders for their continuous support towards the growth of Abdos.

Jai Hind



Team Abdos

ABDOS manufacturing plant spread over
40,000 square meters



Facility validated from ISO CLASS 8 & equipped with latest robotics & automation machines

400+ Products & Delivering across 65+ Countries



Robust warehouse infrastructure helping customers across the globe



ASSURED QUALITY

Abdos is investing into the future with cutting-edge robotics and automation platforms to provide consistent and high-performance products. We have initiated “manufacturing happiness” at all our production locations and automation continues to be an integral strategy to achieve it.

QUALITY OBJECTIVE

We are committed to provide the best quality products to our consumers at best possible prices. We will strive to innovate and respond creatively and competitively to changes in external environment and technological advancement. We believe our strength lies in our employees and we are ever so willing to give them training, equipment and tools to empower them to be confident of quality. We conduct periodic reviews to ensure our plant and maintenance systems run effectively and efficiently so that there is no compromise on quality.

We, at Abdos, promise to provide complete consumer satisfaction by emphasizing strongly on continual improvement through lean business processes, with the engagement of employees at all levels.

QUALITY MANAGEMENT

Abdos quality standards are certified according to ISO 9001:2015 through its state of the art production processes, quality inspections, process parameters, SOP and automations. Since 2015 Abdos has received NS-EN ISO 13485:2016 to establish itself as a high quality manufacturer of medical devices. Abdos believes in using the latest technologies with stringent quality control measures and periodic reviews to ensure our plants and warehouses run efficiently and effectively. We believe in the qualification and development of people in our organization and provide them with training, equipment and resources to empower them to be confident of quality.

CE MARKING

Products that fall under the scope of European Directive 98/79/EC on In Vitro Diagnostic Device have been specified as CE IVD in the catalogue. This helps us to comply with the general requirements and safety regulations of CE. Find CE IVD logo on the inside pages as shown here:



Quality Control Process

01

Check Incoming Products

Incoming products like raw materials, packaging materials and consumables are checked for contaminants, strength and aesthetics according to the agreed specifications with the supplier.

02

On-line Quality Inspection

During the manufacturing process, the product quality is checked in every shift based on Standard Testing Protocols. If any deviations arise, the required improvements are done during manufacturing.

03

Application Tests in Laboratory

Each product is checked for physical, chemical and biological functions. Our in-house labs perform the necessary application tests as an end-user, to certify the products are fit to be dispatched to customers.

04

Final Pre-Dispatch Audit

Products are finally tested for proper verification of labels, packaging and documents. Traceability of products is verified at this stage for lot number, expiry date, manufacturing date, etc.

Quality Certifications

Products from Abdos Life Sciences provide the following certifications and application dependent features.



E.A.R - CERTIFICATE
GPSD 2001/95/EC &
IVD 98/79/EC



ENVIRONMENT
MANAGEMENT SYSTEM
ISO 14001



QUALITY
MANAGEMENT SYSTEM
ISO 9001



MEDICAL DEVICES
(Quality Management System)
EN ISO 13485

Abdos Knowledge Center

Abdos is more than just products. Our endeavour has always been to provide information on our products and services to optimize the daily work flow. Visit our knowledge center below.



Mobile App



Featuring Data Comparisons, FAQs & More.

Download Now from:



Website

Everything you need to know about Abdos Life Sciences, right from product catalog, with ordering facility to technical information, data comparisons & more.

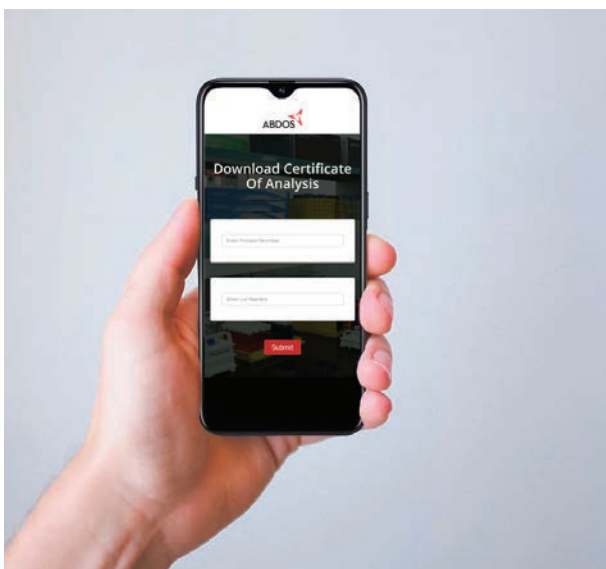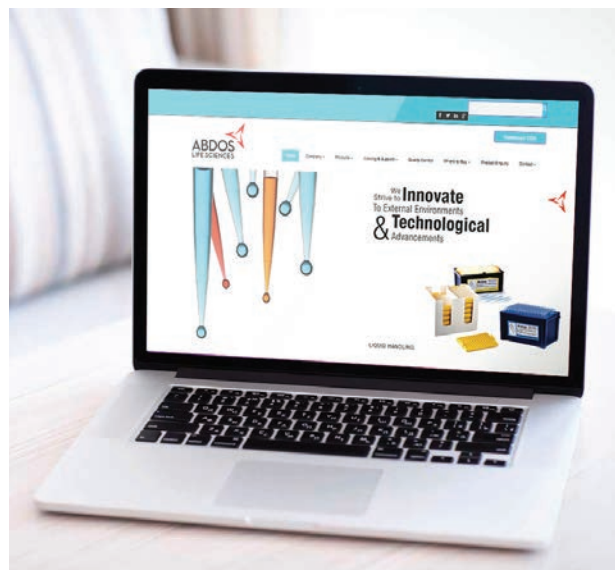

COA Online

Visit ABDOS website and access all the latest COA files online.



COMMITTED TO THE EARTH

Pursuing 'Green' has become a quest for ABDOS towards Go Green Earth, with competitiveness and global excellence.

As a young and innovative company, ABDOS is setting the environmental standards for others to follow.

STEPS TAKEN FOR BEING A GREEN ORGANIZATION

Green Logistics; Goods are transported by rail or sea whenever possible.

Hot runner moulds save on plastic usage.

Closed water cycle cooling process saves energy.

The use of modern, electronic moulding machines which consume less energy than the older, hydraulic machines.

The use of robotic and automation reduce human interference thereby reducing carbon footprint.

As a manufacturer, ABDOS has control over the design and manufacturing of its products by reducing waste and weight of the plastic, paper bags and foils generated at ours and our supplier's plant.

Abdos eliminates printing waste by e-marketing its products and services.

A large expanse of greenery and plants at all locations of ABDOS reduce ozone levels, helping to remove carbon dioxide and other greenhouse gases from the air, which cools the earth.



Royal Society of Chemistry

Institutes

1. Bhabha Atomic Research Centre, Department of Atomic Energy, Hyderabad.
2. Nuclear Fuel Complex, Department of Atomic Energy, Hyderabad.
3. Analytical Chemistry Division, Bhabha Atomic Research Centre, Department of Atomic Energy, Mumbai.

Topic

Development of a microwave-assisted digestion method for the rapid determination of chloride and fluoride in nuclear-grade boron carbide powders

Product

ABDOS Centrifuge tubes of 15 mL and 50 mL capacity (Product code: P10402 & P10404)

Link

<https://pubs.rsc.org/en/content/articlehtml/2014/ay/c3ay41313f>



Springer

Institutes

Nanoformulation Research Laboratory, Faculty of Pharmacy, Jamia Hamdard (Hamdard University), New Delhi,

Topic

Transungual Delivery of Ketoconazole Nanoemulgel for the Effective Management of Onychomycosis

Product

ABDOS vortex mixer (Product code : E11190)

Link

<https://link.springer.com/article/10.1208/s12249-016-0488-0>



Science Direct

Institutes

Department of Food Engineering & Technology, Sant Longowal Institute of Engineering & Technology, Longowal, Punjab 148106, India.

Topic

Structural modification of quinoa seed protein isolates (QPIs) by variable time sonification for improving its physicochemical and functional characteristics.

Product

ABDOS Swirlax-Vortex Shaker (Product code : E11190)



spiedigitallibrary.org

Topic

Application of graphene paper laser ablation for separation of cancer cells.

Product

ABDOS Centrifuge tube (15 ml graduated) (Product code: P10402)



Springer

Institutes

Guwahati Biotech Park, Technology Complex, IIT Guwahati and The Sophisticated Analytical Instrument Facility (SAIF), NEHU Shillong, and College of Veterinary Science, Guwahati.

This work was financially supported by the Department of Biotechnology, Ministry of Science & Technology, Government of India under Grant No. BT/504/NE/TBP/2013.

Topic

Successful Delivery of Zidovudine-Loaded Docosanol Nanostructured Lipid Carriers (Docosanol NLCs) into Rat Brain

Product

ABDOS- Swirlax-Vortex Shaker, (Product code : E11190)

ABDOS Centrifuge tubes of 15 mL and 50 mL capacity (Product code: P10430 & P10431)



Bio protocol

Institutes

Microbiology, School of Natural Sciences, National University of Ireland, Galway, Ireland.

Topic

Determination of Survival of Wildtype and Mutant Escherichia coli in Soil.

Product

1. ABDOS Sterile micropipette tips (100–1,000 µl) (Product code: P10102)
2. ABDOS Sterile micropipette tips (2–200 µl) (Product code: P10101)
3. ABDOS Microcentrifuge tube (1.5 ml) (Product code: P10202)
4. ABDOS Centrifuge tube (15 ml graduated) (Product code: P10402) 90 mm
5. ABDOS Petri dishes (Product code: P10901)

Link

https://archivsearch.library.nuigalway.ie/bitstream/handle/10379/6820/Somorin_%26_%27Byrne_2017.pdf?sequence=1&isAllowed=y



Elsevier

Institutes

Department of Food Engineering & Technology, Sant Longowal Institute of Engineering & Technology, Longowal, Punjab 148106, India.

Topic

Structural modification in album (Chenopodium album) protein isolates due to controlled thermal modification and its relationship with protein digestibility.

Product

ABDOS Swirlax-Vortex Shaker (Product code : E11190)

NOMENCLATURE

CE certified



Quality management system



Quality management system - Medical Devices



Environment Management System



Petridish Standard



Gamma sterilization (Sterile R)



Forensic DNA Grade



Accuracy Standards



IVD CERTIFIED IVD 98/79/EC



DNase Rnase Free



Endotoxin Free



Human DNA free



ATP & Pyrogen free



Heavy Metal Free



Leak-proof Tested 635 mm/Hg



Sterile (Gamma Irridiation / Ethylene oxide/ E Beam)



GC/MS (Gas chromatography & Mass Spectrophotometry Test)



95 kPa pressure Test



Autoclave / Non Autoclave



New Product



Alphanumeric Identification



Product Suitable for food use



Product Suitable for Real-time PCR



Do not expose to flame



Recyclable



The technical data (dimensions, capacities and resistances) specified in this catalogue are approximated. The resistances (to chemical products, temperature, centrifugation...) may suffer variations depending on external conditions. We recommend to test the product under the forecasted conditions of use. Please do not hesitate to ask for samples if necessary.

TABLE OF CONTENTS

CENTRIFUGE TECHNIQUES

13 – 25

MICRO CENTRIFUGE TUBES
CENTRIFUGE TUBES
RACKS FOR MICRO CENTRIFUGE TUBE
RACKS FOR CENTRIFUGE TUBE
EQUIPMENTS & MORE

CRYO TECHNIQUES

26 – 33

FREEZING TUBES
CRYO VIALS
STORAGE VIALS
CRYO BOXES & MORE

LIQUID HANDLING

34 – 75

MICRO PIPETTES: SINGLE & MULTICHANNEL
PIPETTE TIPS: UNIVERSAL TIPS, FILTER TIPS, LOW RETENTION TIPS
SAMPLE CONTAINERS
PASTURE & SEROLOGICAL PIPETTES
RIA VIALS & MORE

MICROBIOLOGY

76 – 82

PETRI DISH (PS): 60, 90 & 140 MM
SOFT INOCULATION LOOPS & CELL SPREADERS
EQUIPMENTS & MORE

CELL CULTURE

83 – 90

CELL CULTURE: FLASKS, PLATES & DISHES
BIO REACTION TUBES
ROLLER BOTTLES & MEDIA BOTTLES
BIOFILL – FILTRATION SYSTEM & MORE

PCR TECHNIQUES

91 – 98

PCR TUBES
PCR PLATES
PCR STRIP CAPS
PCR SEALING FILMS & WORKSTATION

ELECTROPHORESIS SYSTEM

99 – 110

MINI HORIZONTAL UNITS
MIDI HORIZONTAL UNITS
MAXI HORIZONTAL ELECTROPHORESIS SYSTEMS
VERTICAL DUAL MINI ELECTROPHORESIS SYSTEMS
POWER SUPPLIES & MORE

MULTIPURPOSE RACKS & BOXES

111 – 117

ROTATOR WORKSTATION
MULTI COMBINATION RACKS
FROSTY MATE RACKS
STORAGE RACKS
TEST TUBE RACKS & MORE

BOTTLES & CARBOYS

118 – 124

NARROW & WIDE MOUTH BOTTLES
ASPIRATOR BOTTLES
CARBOYS & MORE

GENERAL LABORATORY PRODUCTS

125 – 141

BEAKERS & MEASURING CYLINDERS
VOLUMETRIC FLASKS & DESSICATORS
SCOOPS & SPATULA
STIRRER BARS & MORE

UTILITIES

142 – 152

BIOHAZARD & AUTOCLAVE DISPOSABLE BAGS
GLOVES & SAFETY GOGGLES
SHARP CONTAINERS
N95 MASKS & PPE KITS & MORE

EQUIPMENTS

153 – 181

MAGNETIC STIRRERS & HOTPLATES
DIGITAL DRY BATH & THERMO MIX
ROTATING MIXERS & SHAKERS
DIGITAL INCUBATORS
OIL FREE VACUUM PUMPS & MORE

GENERAL INFORMATION

182 – 201

CONVERSION TABLE: A Guide To Basic Metric Essentials
TECHNICAL PROPERTIES OF ABDOS LABWARE
INDEX
TERMS & CONDITIONS



01 CENTRIFUGE TECHNIQUES

MICRO CENTRIFUGE TUBES

CENTRIFUGE TUBES

RACKS FOR MICRO CENTRIFUGE TUBE

RACKS FOR CENTRIFUGE TUBE

EQUIPMENTS & MORE

01 | Micro Centrifuge Tubes, PP

- Abdos Micro Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- These tubes can be used between -80°C to 121°C & with various organic solvents.
- These tubes are boil proof.
- These tubes come with integral snap cap.
- Frosting on the surface of the tubes makes writing easier.
- Large moulded-in graduations make identification easy.
- Can withstand up to 20000 xg RCF*.
- Amber colour micro centrifuge tubes suitable for light-sensitive samples do not allow any light to pass through the tubes.




Micro Centrifuges Tube, PP						
Code	Capacity	Outer Diameter	Height	No. / case	Price/case (₹)	Price/144 case (₹)
PI0201	0.5 ml	10 mm	31.5 mm	1000	598	80907
PI0202	1.5 ml	13 mm	41 mm	500	426	57712
PI0203	2.0 ml	13 mm	41 mm	500	470	63649

Micro Centrifuges Tubes, PP (Coloured & Amber)					
Code	Capacity	Outer Diameter	Height	No. / case	Price/case (₹)
PI0207	0.5 ml Coloured	10 mm	31.5 mm	1000	726
PI0201A	0.5 ml Amber	10 mm	31.5 mm	1000	734
PI0204	1.5 ml Coloured	13 mm	41 mm	500	470
PI0204A	1.5 ml Amber	13 mm	41 mm	500	533
PI0205	2.0 ml Coloured	13 mm	41 mm	500	533
PI0203A	2.0 ml Amber	13 mm	41 mm	500	582

PI0207, PI0204 & PI0205 are available in Red, Blue, Yellow and Green colour.

02 | LAST DROP™, Low Retention Micro Centrifuge Tubes, PP

- Abdos Micro Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Abdos low binding technology provides 10 times lesser retention level with highly viscous samples & saves costly reagents.
- These tubes are boil proof.
- These tubes can be used at -80°C to 121°C and with various organic solvents and are also boil proof.
- These tubes come with integral snap cap.
- Frosting on the surface of the tubes makes writing easier.
- Large moulding in graduations make identification easy.
- Can withstand up to 20000 xg RCF*

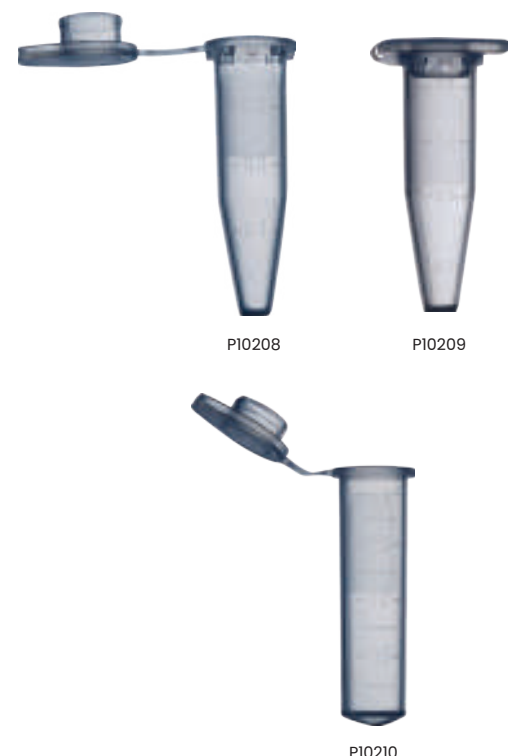

Code	Capacity	Outer Diameter	Height	No. / case	Price/case (₹)
PI0208	0.5 ml	10 mm	31.5 mm	1000	1219
PI0209	1.5 ml	13 mm	41 mm	500	877
PI0210	2.0 ml	13 mm	41 mm	500	967

*Depending on the quality of Centrifuge and compatibility of Rotor.

Centrifuge Tube Techniques

Features

Unique printing technology makes the surface chemical resistant & scratch proof.

Perfect grip on screw cap provides secure control on the cap in wet conditions.

Even wall thickness to withstand maximum G-force, 18000*g RCF.

Suitable for temperatures between -80°C and +121°C.

Sterile tubes have been validated according to ISO 11137 SAL 10⁻⁶.

The large white frosted portion for easy writing.

Highly transparent, 5% less haze percentage than competitor.

Hydrodynamic conical bottom for perfect pelleting of sediments.

Abdos centrifuge tubes are manufactured from ultra pure USP class VI certified virgin medical grade polypropylene to ensure the highest quality & confirming to US FDA 21 CFR.

Free from heavy metals, natural rubber & inhibitory plasticizers.

Gas chromatography/ Mass spectrometry (GC/MS) tests ensure purity of the products.

The Cap

Specially designed flat thread confirms perfect vacuum tight closure, makes it leak proof & prevents override of cap.

Unique plug seal ensures perfect sealing & makes it leak proof.



03 | Centrifuge Tubes Conical Bottom, PP/HDPE

- Abdos Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- The large white frosted portion for easy writing.
- Silk-Screen graduation makes identification easy.
- Amber colour option for light-sensitive samples.
- Built-in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶
- Can withstand up to 18000 xg RCF*.



Centrifuge Tube Conical Bottom, PP/HDPE

Code	Capacity	Cap Colour	Outer Diameter	Height	No. / case	Price/case (₹)	Price/ 20 case (₹)
PI0430	15 ml (Bulk)	Blue	16.5 mm	121 mm	500	3399	63901
PI0401	15 ml	Blue	16.5 mm	121 mm	500	3718	69898
PI0441	15 ml	Red	16.5 mm	121 mm	500	3718	69898
PI0402	15 ml, Sterile	Blue	16.5 mm	121 mm	500	4053	76196
PI0442	15 ml, Sterile	Red	16.5 mm	121 mm	500	4053	76196
PI0431	50 ml (Bulk)	Blue	29.2 mm	116 mm	500	4650	87420
PI0403	50 ml	Blue	29.2 mm	116 mm	500	4699	88341
PI0443	50 ml	Red	29.2 mm	116 mm	500	4699	88341
PI0404	50 ml, Sterile	Blue	29.2 mm	116 mm	500	5820	109416
PI0444	50 ml, Sterile	Red	29.2 mm	116 mm	500	5820	109416

Centrifuge Tube Conical Bottom, PP AMBER

Code	Capacity	Cap Colour	Outer Diameter	Height	No. / case	Price/case (₹)
PI0405	15 ml, Amber	Blue	16.5 mm	121 mm	500	4659
PI0406	15 ml, Sterile Amber	Blue	16.5 mm	121 mm	500	5057
PI0407	50 ml, Amber	Blue	29.2 mm	116 mm	500	5993
PI0408	50 ml, Sterile Amber	Blue	29.2 mm	116 mm	500	7406
PI0405T	15 ml, Transparent Amber	Blue	16.5 mm	121 mm	500	4659
PI0406T	15 ml, Transparent Amber, Sterile	Blue	16.5 mm	121 mm	500	5057
PI0407T	50 ml, Transparent Amber	Blue	29.2 mm	116 mm	500	5993
PI0408T	50 ml, Transparent Amber, Sterile	Blue	29.2 mm	116 mm	500	7406

*Depending on the quality of Centrifuge and compatibility of Rotor.

*Transparent Amber Centrifuge tubes can be supplied upon request.

04 | Centrifuge Tubes Conical Bottom, PS/HDPE

- Abdos Centrifuge tubes are manufactured using high purity virgin USP Class VI Polystyrene (PS) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Polystyrene centrifuge tube are hydrophobic & its biologically inert surface is good for cell and protein recovery.
- Perform well with animal cell culture handling.
- The large white frosted portion for easy writing.
- Silk-Screen graduation makes identification easy.
- Amber colour option for light-sensitive samples.
- Built-in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶
- Can withstand up to 2500 xg RCF*.




Code	Capacity	Cap Colour	Outer Diameter	Height	No./case	Price/case (₹)
PI0419	15 ml, Sterile	Blue	16.5 mm	121 mm	500	4900
PI0421	15 ml, Racked Sterile	Blue	16.5 mm	121 mm	750 (25 pcs x 30 racks)	8900

*Depending on the quality of Centrifuge and compatibility of Rotor.

05 | Centrifuge Tubes Self Standing, PP/HDPE

- Abdos Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Skirted bottom makes it easier to use without any rack.
- The large white frosted portion for easy writing.
- Silk-Screen graduation makes identification easy.
- Amber colour option for light-sensitive samples.
- Built-in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶
- Can withstand up to 7000 xg RCF*.




Code	Capacity	Cap Colour	Outer Diameter	Height	No./case	Price/case (₹)
PI0432	50 ml (Bulk)	Blue	29.2 mm	117.3 mm	500	5300
PI0423	50 ml	Blue	29.2 mm	117.3 mm	500	5595
PI0449	50 ml	Red	29.2 mm	117.3 mm	500	5595
PI0424	50 ml, Sterile	Blue	29.2 mm	117.3 mm	500	6926
PI0450	50 ml, Sterile	Red	29.2 mm	117.3 mm	500	6926

*Depending on the quality of Centrifuge and compatibility of Rotor.



06 | PureRight™ Individually Wrapped Centrifuge Tube Conical Bottom, PP/HDPE

- Abdos Centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Best suited for less number of samples.
- The large white frosted portion for easy writing.
- Silk-Screen graduation makes identification easy.
- Built-in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶
- Can withstand upto 18,000 xg RCF* & 7000 xg RCF* for Conical & Self-standing centrifuge tubes respectively.



Code	Capacity	Cap Colour	Outer Diameter	Height	No./case	Price/case (₹)
PI0425	15 ml, Sterile	Blue	16.5 mm	121 mm	500	4473
PI0451	15 ml, Sterile	Red	16.5 mm	121 mm	500	4473
PI0426	50 ml, Sterile	Blue	29.2 mm	116 mm	500	8905
PI0452	50 ml, Sterile	Red	29.2 mm	116 mm	500	8905
PI0427	50 ml Self Standing, Sterile	Blue	29.2 mm	117.3 mm	450	8650
PI0453	50 ml Self Standing, Sterile	Red	29.2 mm	117.3 mm	450	8650

*Depending on the quality of Centrifuge and compatibility of Rotor.



07 | Racked Centrifuge Tubes Conical Bottom, Paper

- These Racks are designed to hold Centrifuge Conical Bottom.
- These racks designate a convenient solution for storing Abdos Centrifuge Tubes.
- These racks are made of eco-friendly paper to hold 25 Abdos 15 ml & 50 ml Conical Bottom Centrifuge Tubes.



Code	Capacity	Height	No./case	Price/case (₹)
PI0409	15 ml, Rack Only	47 mm	10	750
PI0410	50 ml, Rack Only	48 mm	10	750
PI0411	15 ml, Racked	121 mm	750 (25 pcs x 30 racks)	7546
PI0412	15 ml, Racked, Sterile	121 mm	750 (25 pcs x 30 racks)	8448
PI0413	15 ml, Amber, Racked	121 mm	750 (25 pcs x 30 racks)	8617
PI0414	15 ml, Amber, Racked, Sterile	121 mm	750 (25 pcs x 30 racks)	9455
PI0415	50 ml, Racked	116 mm	400 (25 pcs x 16 Racks)	5676
PI0416	50 ml, Racked, Sterile	116 mm	400 (25 pcs x 16 Racks)	6569
PI0417	50 ml, Amber, Racked	116 mm	400 (25 pcs x 16 Racks)	6641
PI0418	50 ml, Amber, Racked, Sterile	116 mm	400 (25 pcs x 16 Racks)	7701




08 | MaxiRCF™ Trace Metal Free Centrifuge Tubes

- Abdos MaxiRCF™ Trace Metal Free centrifuge tubes are manufactured using high purity virgin USP Class VI Medical grade polypropylene conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Abdos MaxiRCF™ Trace Metal Free Centrifuge Tubes withstands 20,000xg RCF.
- Pure, Additive Free Natural Colour Cap for easy labelling and Trace Metal free.
- Abdos MaxiRCF™ Trace Metal Free Centrifuge Tubes works excellently in high density gradient separation of sample.
- Large white frosted area for easy writing.
- Sterile tubes are validated according to ISO 11137 for SAL 10⁻⁶

Abdos MaxiRCF™ Trace Metal Free centrifuge tubes are specifically manufactured to ensure that common trace metals and elements that can interfere with experiments are below an ICP-MS detection level of one part per billion (< 1ppb).
Metals included in testing are: Zinc, Iron, Copper, Manganese, Aluminum, Silicon, Nickel, Vanadium, Phosphorous, Cobalt, Chromium, Lithium, Selenium, Cadmium, Mercury, Arsenic and Lead.

*Note: MaxiRCF™ Trace Metal Free centrifuge tubes:

- 50 ml CT (Conical Bottom) with 20000*g RCF
- 50 ml CT (Self Standing) with 7000*g RCF
- 15 ml CT (Conical Bottom) with 18000*g RCF

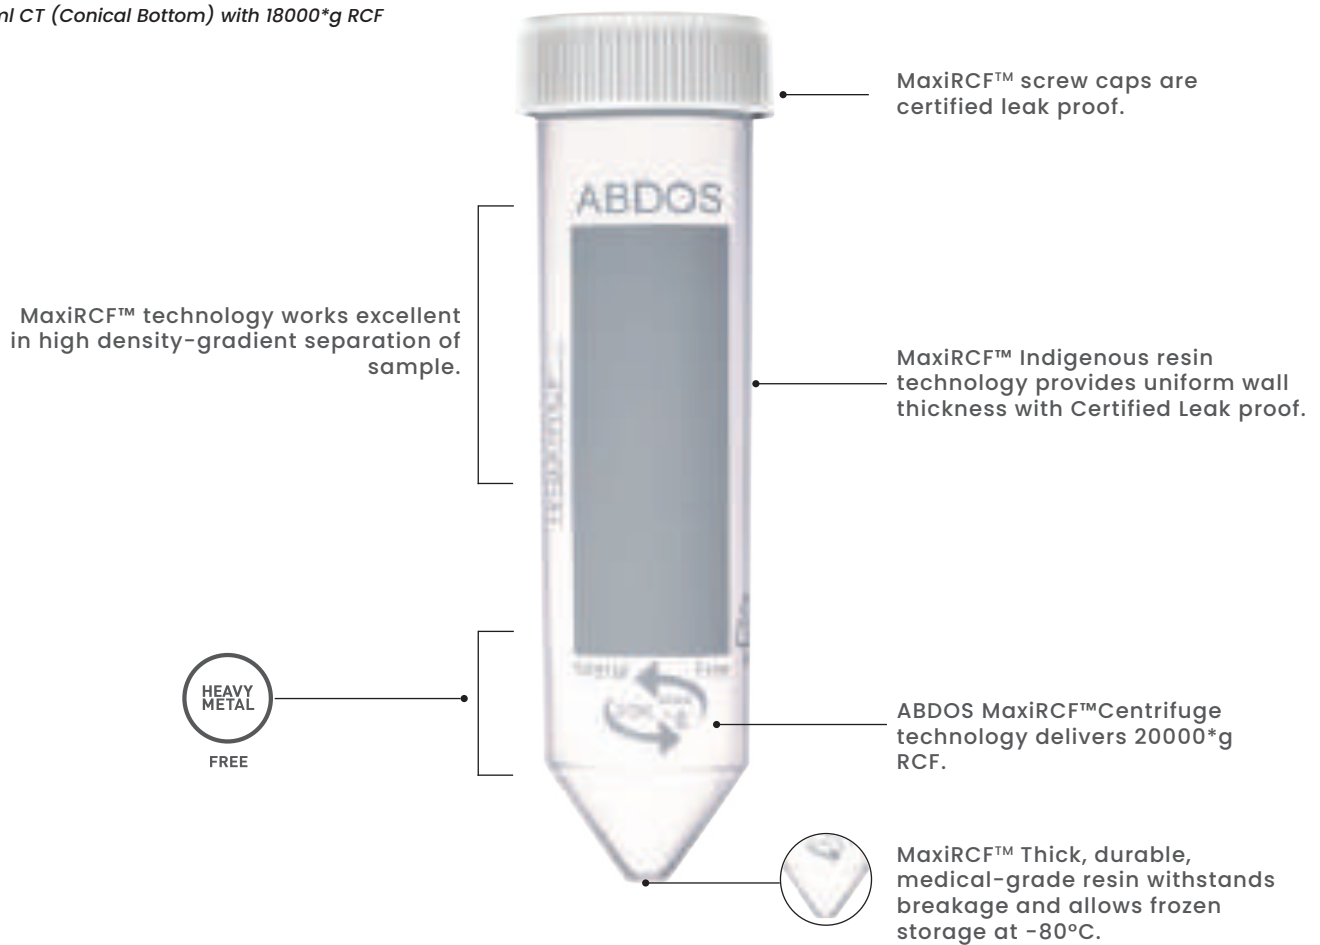

Code	Capacity	Cap Colour	Outer Diameter	Height	No./case	Price/case (₹)
P10480	15 ml (Bulk)	Natural	16.5 mm	121 mm	500	4000
P10481	15 ml	Natural	16.5 mm	121 mm	500	4400
P10482	15 ml, Sterile	Natural	16.5 mm	121 mm	500	4800
P10483	50 ml (Bulk)	Natural	29.2 mm	116 mm	500	5400
P10484	50 ml	Natural	29.2 mm	116 mm	500	5578
P10485	50 ml, Sterile	Natural	29.2 mm	116 mm	500	6827
P10486	50 ml, Self Standing (Bulk)	Natural	29.2 mm	117.3 mm	500	6360
P10487	50 ml, Self Standing	Natural	29.2 mm	117.3 mm	500	6714
P10488	50 ml, Self Standing (Sterile)	Natural	29.2 mm	117.3 mm	500	8310

09 | Rack for Micro Centrifuge Tube, RPP


- Sturdy rack with rubber support at the bottom for stability.
- Racks lock together on each side to allow the user to attach several racks for larger experiments.
- Compatible with both 1.5 ml and 2.0 ml Micro Centrifuge Tube.
- Easy removal and insertion of tubes.
- Each hole has moulded-in numbers for easy sample identification.



Code	Capacity	Places	Colour	L x W x H	No./case	Price/case (₹)
P20205	1.5 & 2.0 ml	20 Places (10x2 Array)	White	215 x 70 x 40 mm	8	1230

10 | Rack For Micro Centrifuge Tube, PC

- Easy to hold ergonomic design.
- Each hole has moulded-in numbers and letters for easy sample identification.
- Racks are stackable when empty or full.
- Easy removal and insertion of tubes.
- Compatible with both 1.5 ml and 2.0 ml Micro Centrifuge Tubes.

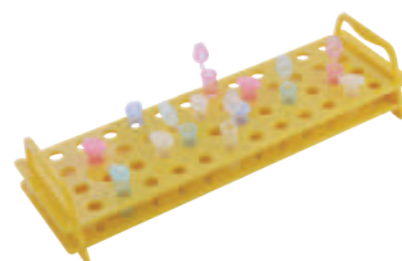

Code	Capacity	Places	Colour	L x W x H	No./case	Price/case (₹)
P20201	1.5 & 2.0 ml	24 Places (6x4 Array)	White	164 x 100 x 59 mm	8	2142
P20202	1.5 & 2.0 ml	24 Places (6x4 Array)	Yellow	164 x 100 x 59 mm	8	2142
P20203	1.5 & 2.0 ml	48 Places (12x4 Array)	White	293 x 100 x 59 mm	8	3917
P20204	1.5 & 2.0 ml	48 Places (12x4 Array)	Yellow	293 x 100 x 59 mm	8	3917

11 | Centrifuge Tube Box, PP


- Abdos Centrifuge tube box provides a more durable and rugged alternative to cardboard or foam racks.
- The distinctive green colour on the 15 ml and blue colour on the 50 ml makes these racks easy to distinguish.
- These racks can withstand a temperature of -80°C to 121°C.
- All grids are properly indexed with a clear lid that provides easy tube identification.



Code	Tube Capacity	Colour	Places	L x W x H	No./case	Price/case (₹)
P20604	15 ml	Green	36 Places (6 x 6 Array)	147 x 147 x 126 mm	4	1687
P20605	50 ml	Blue	16 Places (4 x 4 Array)	147 x 147 x 126 mm	4	1687

12 | Click Together Conical Tube Racks, ABS

- Shipped flat, they are easy to assemble and snap together securely.
- Designed for stable use in a water bath.
- Alphanumeric index aids for tube identification.

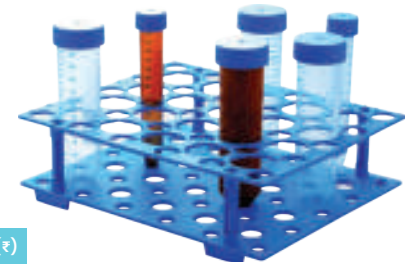

Code	Tube Capacity	Colour	Places	L x W x H	No./case	Price/case (₹)
P20218	15 ml & 50 ml	Blue	15 ml Tube - 30 (6 x 5 Array) 50 ml Tube - 20 (5 x 4 Array)	209 x 171 x 63 mm	4	2662
P20219	15 ml & 50 ml	Blue	15 ml Tube - 18 (6 x 3 Array) 50 ml Tube - 10 (5 x 2 Array)	209 x 98 x 63 mm	4	2662



13 | Universal Centrifuge Tube Rack, PP

- Ideal for firmly holding a wide range of tubes and vessels.
- Accepts tubes and vessels from 16-30 mm.
- Moulded indexing for easy identification of tubes and vials.
- Quickly change the tube with this adaptable polypropylene rack. Open the well with a turn of the knob or directly insert a tube into the opening.
- Generous handles for easy transport.



Code	Tube Capacity	Colour	Places	L x W x H	No./case	Price/case (₹)
P20212	15 ml & 50 ml	Blue	12 (4 x 3 Array)	194 X 140 X 51 mm	1	5350

14 | Foldable Space Saving Rack, PP

- Simple to open and close, expand and collapse when racks are needed.
- Designed to help recognize 15 and 50 ml tubes.
- Moulded indexing for easy identification of tubes and vials.
- Racks can be stacked in open or closed position.
- Save space when racks are not in use.
- Available in individual 17 mm hole diameter for 15 ml tubes & 30 mm hole diameter for 50 ml tubes or combination of both 17 mm & 30 mm hole diameter for 15 ml & 50 ml centrifuge tubes.



Code	Tube Capacity	Colour	Places	L x W x H	No./case	Price/case (₹)
P20213	15 ml	Purple	45 (9 x 5 Array)	255 x 137 x 72 mm	2	3455
P20214	50 ml	Green	18 (6 x 3 Array)	255 x 137 x 72 mm	2	3455
P20215	15 ml & 50 ml	Blue	15 ml Tube - 21 (7 x 3 Array) 50 ml Tube - 12 (6 x 2 Array)	255 x 137 x 72 mm	2	3455
P20216	15 ml & 50 ml	Pink	15 ml Tube - 21 (7 x 3 Array) 50 ml Tube - 12 (6 x 2 Array)	255 x 137 x 72 mm	2	3455



15 | Floating Rack for Micro Centrifuge Tube, PP

- Use on the bench, with water bath or ice containers.
- Polypropylene racks keep micro tubes afloat in water bath or can be pushed into crushed ice – perfect for controlling sample temperature.
- Not recommended for autoclaving.
- Detachable legs provide two options:
 - a. Attach legs so rack stands upright on bench top.
 - b. Detach legs so samples can be quickly popped out by pushing down onto any surface.



Code	Tube Capacity	Colour	Places	L x W x H	No./case	Price/case (₹)
P20225	1.5 ml & 2 ml	White	16	102 x 102 x 60 mm	4	1376
P20226	1.5 ml & 2 ml	White	20	98 x 60 (Ø x h) mm	4	1376

16 | Swirl Mini Micro Centrifuge

- Swirl is a small, compact and reliable centrifuge for spin-down and microfiltration procedures.
- Swirl is supplied with 8 place angular rotor of 1.5 ml and a PCR rotor that admit four strips of 0.2 mL PCR strip.
- It has a maximum speed of 7000 rpm/2680 xg RCF.
- It uses minimal bench-top space.
- Rotor can change without tools and the machine accelerates and brakes in seconds.
- Swirl adapts a Brushless DC Motor.
- CE explosion proof safe test IEC/EN61010-2-20.



Code	Product	No./case	Price/case (₹)
E11501	Swirl Mini Micro Centrifuge Including 8 Place Rotor for 1.5 & 2.0 ml Tube & 4 Place Rotor for 8 x 0.2 ml Tube Strip	1	13750

Spare Accessories:

Code	Product	No./case	Price/case (₹)
E11502	8 Place Rotor for 1.5 & 2.0 ml	1	3565
E11503	32 (8 x 4) Strips Place Rotor for 0.2 ml PCR & 64 Place Rotor for 0.2 ml PCR tubes	1	2648

SPECIFICATIONS :

Voltage	220-240 V
Frequency	50-60 Hz
Max Speed	7000 rpm
Max RCF	2680 xg
Run Time	Continuous operation
Rotor Capacity	0.2/0.5/1.5/2.0 mL x 8 0.2 mL x 32 PCR Strips 2.0 mL x 4 PCR 8 Strips
Noise Level	≤45 dB
Dimensions	160 x 170 x 122 mm
Weight	0.5 kg
Permissible ambient temperature	4 to 45°C
Permissible relative humidity	80%



17 | Swirl Maxi Micro Centrifuge

- Swirl Maxi is a personal micro centrifuge used for sedimentation of cells and virus, separation of sub-cellular organelles and isolation of macromolecules such as DNA, RNA, proteins or lipids.
- Swirl Maxi is used in physical and chemical analysis, biochemistry, cellular biology, clinical labs, blood donation centre and high-end research.
- Swirl Maxi has a large ergonomic design with easy to read display and sound.
- Both RPM and G-force can be displayed.
- Swirl Maxi is stable and silent during operation. It also delivers fast acceleration and deceleration.
- Swirl Maxi conforms to international safety standards and regulations. It has also passed the explosion proof test from CE, TUV and FCC.
- Swirl Maxi adapts a Brushless DC Motor.
- Automatic lid-lock release prevents sample warming and allows easy access to samples.
- The short spin function is used for quick spins by pressing and holding PULSE key. The centrifuge speed can be accelerated and held at the target speed.
- High strength aluminium alloy rotors are fully autoclavable, and can withstand stream sterilizing at 121°C for 20 minutes.



Code	Product	No./case	Price/case (₹)
E11510	Swirl Maxi Micro Centrifuge with 12 Place Rotor for 0.2, 0.5, 1.5 & 2.0 ml	1	79175

Spare Accessories:

Code	Product	No./case	Price/case (₹)
E11511	12 Place Rotor for 0.2, 0.5, 1.5 & 2.0 ml	1	25909
E11512	Rotor Adapter for 0.2 ml - 2.0 ml used with E11511	24	5843
E11513	Rotor Adapter for 0.5 ml - 2.0 ml used with E11511	24	5843

SPECIFICATIONS :

Voltage	220-240 V
Frequency	50-60 Hz
Current	3 A
Max Speed	15000 rpm (500-15000 rpm) with increment of 100 rpm
Max. RCF [xg]	15100 xg with increment of 100 xg
Speed Accuracy	±20 rpm
Rotor Capacity	0.2mL, 0.5mL, 1.5 mL & 2mL x 12 places.
Run Time	30 sec - 99 min - HOLD (Continuous operation)
Driving Motor	Brushless DC motor
Safety Devices	Dual door interlock Over-speed detection Over temperature detection Automatic internal diagnosis
Noise Level	≤54 dB
Additional Features	Speed/RCF switch Short-time run function Sound-alert function
Acceleration /Braking time	11 sec for Acceleration & 9 sec for Braking
Dimensions	255 x 245 x 140 mm
Weight	6 kg
Permissible Ambient Temperature	4°C to 40°C
Permissible Relative Humidity	80%



18 | Swirl Pro High Speed Micro Centrifuge

- Swirl Pro is a micro centrifuge used for sedimentation of cells and virus, separation of sub-cellular organelles and isolation of macromolecules such as DNA, RNA, proteins or lipids.
- Swirl Pro is used in physical and chemical analysis, biochemistry, cellular biology, clinical labs, blood donation centre and high-end research.
- Swirl Pro has a large ergonomic design with easy to read display and sound alert.
- Automatic lid opening when run is complete prevents sample warming and allow easy access of samples.
- Both RPM and G-force can be displayed.
- Swirl Pro is stable and silent during operation. It also delivers fast acceleration and deceleration.
- Swirl Pro conforms to international safety standards and regulations. It has also passed the explosion proof test and CE, TUV and FCC marked.
- Special multi-flow air-cooling design helps to keep lower rotor temperature.
- Bio-safe rotor and anti-sample overflow prevents sample does not leak in centrifugal process causing microbial contamination.
- Robust aluminum alloy rotor can be fully autoclaved.
- Swirl Pro adapts a Brushless DC Motor.



Code	Product	No./case	Price/case (₹)
E11520	Swirl Pro High Speed Micro Centrifuge	1	152775

Spare Accessories:

Code	Product	No./case	Price/case (₹)
E11521	24 Place Rotor for 0.2, 0.5, 1.5 & 2.0 ml	1	22575
E11522	18 Place Rotor for 5.0 ml	1	22575
E11528	12 Place Rotor for 5.0 ml (Eppendorf Tube)	1	22575
E11523	36 Place Rotor for 0.2 & 0.5 ml	1	22575
E11524	32 (8 x 4) Place Rotor for 0.2 ml PCR	1	56700
E11525	Rotor Adapter for 2.0 ml - 0.2 ml used with E11521	24	5775
E11526	Rotor Adapter for 2.0 ml - 0.5 ml used with E11521	24	5775
E11527	Rotor Adapter for 0.5 ml - 0.2 ml used with E11523	36	7875

SPECIFICATIONS :

Voltage	220-240 V
Frequency	50-60 Hz
Current	3 A
Max Speed	15000 rpm (200-15000rpm) with increment of 10 rpm
Max. RCF [xg]	21380 x g with increment of 10 xg
Speed Accuracy	±20 rpm
Rotor Capacity	5 mL x 18 places. 0.2mL/0.5mL/ 1.5 ml/2mL x 24 places. 0.5mL x 36 places PCR 8 x 4 places
Run Time	30sec-99min-HOLD (Continuous operation)
Driving Motor	Brushless DC motor
Safety Devices	Dual door interlock Over-speed detection Over temperature detection Automatic internal diagnosis
Noise Level	≤54 Db
Additional Features	Speed/RCF switch Short-time run function Sound-alert function
Acceleration /Braking time	25 sec for both Acceleration and Braking
Dimensions [mm]	280 x 364 x 266
Weight	12 kg
Permissible ambient temperature & Humidity	+4-45° C, 80%



19 | Swirl Clinical Centrifuge

- Swirl Clinical Centrifuge is used for separation of serum, plasma, urea, urine, blood samples and other routine applications in hospital and research. They are also used in environmental analyses for clarification of water and soil samples and in schools as a teaching aid.
- Swirl Clinical Centrifuge has a large ergonomic design with easy to read display and sound alert.
- Automatic lid opening when run is complete prevents sample warming and allow easy access of samples.
- Both RPM and G-force can be displayed.
- Digital LCD display can show real time parameters and has symbol showing experimental process.
- Swirl Clinical is used for quick spins by pressing and holding the pulse key.
- It has precise control, high accuracy of speed and has gentle breaking at low speeds with efficient separation.
- Swirl Clinical conforms to international safety standards and regulations. It has also passed the explosion proof test from CE, TUV and FCC.
- Bio-safe rotor and anti-sample overflow prevents sample leakage in the centrifugal process causing microbial contamination.
- Swirl Clinical adapts a Brushless DC Motor.
- Passed EN61010-2-101:2002 for invitro diagnostic (IVD) medical equipment.
- Goes into a self-diagnostic check when switched on and then displays accumulative time & last running parameter.



Code	Product	No./case	Price/case (₹)
E11540	Swirl Clinical Clinical Centrifuge with 8 Place Rotor for 15 ml & 12 Place Rotor for 5, 7 & 10 ml centrifuge tube & Rotor Adapter for 10 ml centrifuge tube	1	66150

Spare Accessories:

Code	Product	No./case	Price/case (₹)
E11541	8 Place Rotor for 15 ml & 12 Place Rotor for 5, 7 & 10 ml	1	15435
E11542	Rotor Adapter for 10 ml used with E11541	12	2756

SPECIFICATIONS :

Voltage	220-240 V
Frequency	50-60 Hz
Current	3 A
Max Speed	300-4500 rpm with increment of 100 rpm
Max. RCF [xg]	2490 xg with increment of 100 xg
Speed Accuracy	±20 rpm
Rotor Capacity	5 mL/7 mL/10 mL x 12 places. 15 mL x 8 places
Run Time	30 sec-99 min-HOLD (Continuous operation)
Driving Motor	Brushless DC motor
Safety Devices	Dual door interlock Over-speed detection Over temperature detection Automatic internal diagnosis
Noise Level	≤56 dB
Additional Features	Speed/RCF switch Short-time run function Sound-alert function
Acceleration /Braking time	20 sec for both Acceleration & Breaking
Dimensions	301 x 354 x 217 mm
Weight	6 kg
Permissible Ambient Temperature	+4 to +40°C
Permissible Relative Humidity	80%



20 | Swirl Micro Plate Centrifuge

- Less than half the size of conventional centrifuge (9 x 10 inches).
- The easily reachable rotor chamber includes two plate carriers that rest at a 75° angle, thus allowing plates to be inserted confidently without seal in tapes or caps.
- Upon closing the lid of the centrifuge, the rotor accelerates and the centrifugal force swings the plates into a horizontal position. Any droplets on the walls of the plate quickly concentrate into the well bottoms.
- With a G-force of 600 xg, most samples can be spun.
- Just open the lid and the automatic electric brake brings the rotor to a quick & smooth stop in just 4.0 seconds.



Code	Product	No./case	Price/case (₹)
E11550	Swirl Micro Plate Centrifuge	1	104999

Spare Accessories:

Code	Product	No./case	Price/case (₹)
E11551	Adapter, 96 x 0.2 ml or 8 and 12 x PCR strips.	2	8400
E11552	Rotor with carriers for deepwell plates upto 35mm tall (max speed 1500 rpm)	1	27300

SPECIFICATIONS :

Voltage	220–230 V
Frequency	50–60 Hz
Max Speed	2550 rpm/600 xg
Rotor Capacity	2 x 2 PCR Plates 2 x Microtiter plates 24 x 0.2 mL PCR Strips
Deceleration	4 seconds
Dimensions	230 x 260 x 197 mm
Weight	4.0 kg
Permissible Ambient Temperature	4 to +40°C
Permissible Relative Humidity	80%

**When stacking skirted PCR plates, max capacity is 4 plates.*



Before & after centrifugation
(angled position)



During centrifugation
(Horizontal position)

#CommittedtotheEarth



02 CRYO TECHNIQUES

FREEZING TUBES

CRYO VIALS

STORAGE VIALS

CRYO BOXES & MORE

21 | Freezing Tubes, PP

- Abdos Freezing tubes are manufactured using high purity virgin polypropylene (PP) conforming to US FDA 21 CFR free from natural rubber, heavy metal.
- Manufactured to be used at a temperature between -80° C to 121° C.
- Large white frosted portion for easy writing.
- Silk-Screen graduation makes identification easy.
- Built in plug in the cap makes it leak proof.
- Sterile Tubes have been validated according to EN ISO 11137 for SAL 10⁻⁶



Code	Capacity	Outer Diameter	Height	No./case	Price /Case (₹)	Price/20 Case (₹)
P60102	1.8 ml Sterile Skirted Foot	11.80 mm	45.7 mm	1000	5460	102648
P60103	4.5 ml Sterile Skirted Foot	11.80 mm	86.5 mm	500	4410	82908



P60102 P60103

22 | Freezing Tube Coders, HDPE

- These coders fit onto the top of 'Abdos' Freezing Tube closures.
- Suitable for P60102, P60103 and P60118.
- These provide quick visual identification of specific vials to simplify inventory maintenance.
- Available in wide range of colours.



Code	Colour of cap	No./case	Price/piece (₹)	Price /Case (₹)
P60104W	White	100	1.5	167
P60104B	Blue	100	1.5	167
P60104R	Red	100	1.5	167
P60104Y	Yellow	100	1.5	167
P60104G	Green	100	1.5	167



23 | Cryo Vial External Thread, PP

- Abdos Cryo Vial external thread are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Abdos Cryo Vial is designed for long-term cryogenic storage of biological samples, all type of cells and any enzymes or reagents.
- It's leak-proof cap design and strong wall thickness makes it an ideal product for transporting samples and specimens.
- These cryo vials are designed for mechanical freezing and it's a screw cap reduces the risk of contamination due to handling.
- Manufactured to be used at a temperature between -196°C to 121°C.
- The large white frosted portion for easy writing.
- Graduation in silk-screen printing makes identification easy.
- Unique Star Foot design allows for single hand operation and grooves into Abdos P20616 single hand cryo holder rack.
- Best suited for IVD use (an IVD Certified product).
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶




Code	Capacity	Outer Diameter	Height	No./case	Price/case (₹)	Price/ 20 case (₹)
P60115	1.0 ml Sterile Star Foot	12.00 mm	41.0 mm	1000	6028	113323
P60116	1.8 ml Sterile Star Foot	12.00 mm	48.5 mm	1000	6674	125465
P60117	1.8 ml Sterile Round Bottom	12.00 mm	47.5 mm	1000	6674	125465
P60118	4.5 ml Sterile Skirted Foot	11.80 mm	86.5 mm	500	4736	89040

* Please note compatible coders for P60118 Cryo Vial 4.5 ml Skirted Foot is P60104.



LEECHING PERFORMANCE REPORT WITH DMSO

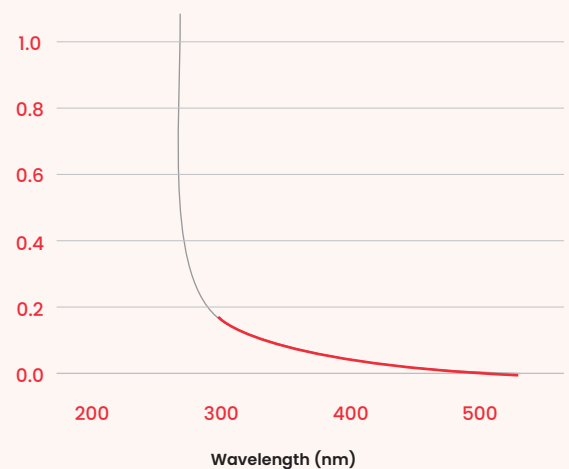

The graph demonstrates no absorbants & confirms no traceable leeching with DMSO (Dimethyl sulfoxide).

* Caution: Do not use Abdos Cryogenic vial in the liquid phase of liquid nitrogen. Improper use may cause liquefied nitrogen to be trapped inside the vial and lead to pressure build up resulting in possible explosion or biohazard release. Can be used in vapour phase of liquid nitrogen.


24 | Cryo Vial Internal Thread, PP

- Abdos Cryo Vial internal thread are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Abdos Cryo Vial is designed for long-term cryogenic storage of biological samples, all type of cells and any enzymes or reagents.
- It's leak-proof cap design with Silicon Seal and strong wall thickness makes it an ideal product for transporting samples and specimens.
- These cryo vials are designed for vapour phase LN₂ freezing and also incorporate a silicone seal to enhance cap sealing.
- Manufactured to be used at a temperature between -196°C to 121°C.
- The large white frosted portion for easy writing.
- Graduation in silk-screen printing makes identification easy.
- Unique Star Foot design allows for single hand operation and grooves into Abdos P20616 single hand cryo holder rack.
- The silicon ring used in Abdos Cryo Vial for Sealing effects is made up of the material & ingredient under the code of federal regulation 21, as per 21 CFR 177.2600 (G) & meets USP – Class VI Regularities under plastic vial & Cap.
- Best suited for IVD use (an IVD Certified product).
- Sterile Tubes have been validated according to ISO 11137 for SAL 10⁻⁶



Code	Capacity	Outer Diameter	Height	No./case	Price/case (₹)	Price/ 20 case (₹)
P60108	1.0 ml Sterile Star Foot	12.3 mm	41.2 mm	1000	8989	168993
P60109	1.8 ml Sterile Star Foot	12.3 mm	47.5 mm	1000	9400	176720
P60110	1.8 ml Round Bottom	12.3 mm	46.2 mm	1000	9400	176720
P60112	4.5 ml Sterile Star Foot	12.3 mm	90.3 mm	500	6477	121768
P60113	4.5 ml Sterile Round Bottom	12.3 mm	89.0 mm	500	6477	121768

LEECHING PERFORMANCE REPORT WITH DMSO

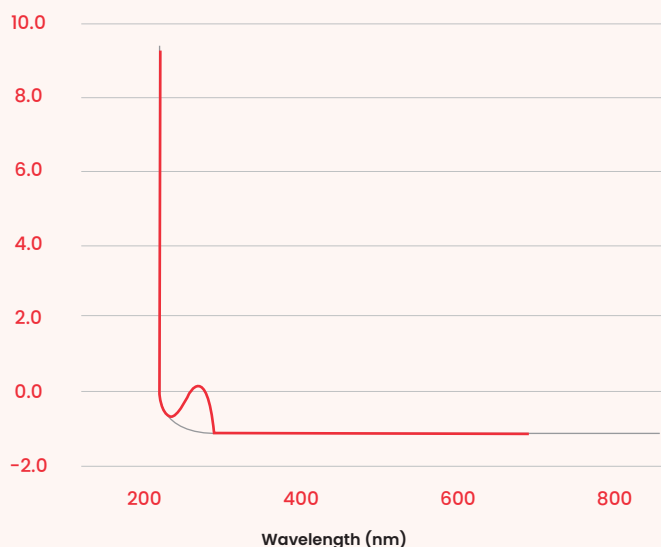

The graph demonstrates no absorbants & confirms no traceable leeching with DMSO (Dimethyl sulfoxide).

* Caution: Do not use Abdos Cryogenic vial in the liquid phase of liquid nitrogen. Improper use may cause liquefied nitrogen to be trapped inside the vial and lead to pressure build up resulting in possible explosion or biohazard release. Can be used in vapour phase of liquid nitrogen.



P60108

P60109

P60110

P60112

P60113

25 | Cryo Coders for External & Internal Threaded Vials, HDPE

- These coders fit onto the top of 'Abdos' skirted foot externally threaded cryogenic vial closures.
- These provide quick visual identification of specific vials to simplify inventory maintenance.
- Available in a wide range of colours.



Code	Colour Of Cap	No./case	Price/piece (₹)	Price/case (₹)
P60114W	White	100	1.5	167
P60114B	Blue	100	1.5	167
P60114R	Red	100	1.5	167
P60114Y	Yellow	100	1.5	167
P60114G	Green	100	1.5	167

26 | Storage Vial, PP

- Abdos Storage Vial are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Used for storage of PCR reagents, enzymes and other diagnostics & biochemical reagents or samples.
- HDPE screw closure is leak proof.
- Can be used at low temperature.
- Amber Storage Vial can be used for light-sensitive samples.



Storage Vial Natural, PP						
Code	Capacity	Outer Diameter	Height	No./case	Price/case (₹)	Price/20 case (₹)
P60119	1.0 ml	12.0 mm	41 mm	1000	2966	55768
P60106	2.0 ml	11.8 mm	47.2 mm	1000	2966	55768
P60107	5.0 ml	11.8 mm	88.0 mm	1000	3605	67774

Storage Vial Amber, PP					
Code	Capacity	Outer Diameter	Height	No./case	Price/case (₹)
P60119A	1.0 ml Amber	12.0 mm	41 mm	1000	3863
P60119A1	1.0 ml Transparent Amber	12.0 mm	41 mm	1000	3863
P60106A	2.0 ml Amber	11.80 mm	45.7 mm	1000	3914
P60106A1	2.0 ml Transparent Amber	11.80 mm	45.7 mm	1000	3914
P60107A	5.0 ml Amber	11.80 mm	86.5 mm	1000	4944
P60107A1	5.0 ml Transparent Amber	11.80 mm	86.5 mm	1000	4944



P60107 P60106

27 | Single Hand Cryo Holder Rack, PP

- Designed for use with Cryogenic Vial, Freezer Tubes, Storage Vial and Micro Tubes.
- It has unique innovative locking system allowing the user to unlock star foot Cryo Vial with one hand.
- The rack has a secure locking system in each well that will not allow the Cryo Vial to turn on either side.
- Inbuilt numbered and letters grid for sample identification.
- Anti-skid rubber feet support the rack.



Code	Tube Capacity	Places	Colors	L x W x H	No./case	Price/case (₹)
P20616	1 - 2 ml	40 (10 x 4 Array)	White, Yellow, Blue	201 x 105 x 22 mm	4	1707



28 | Cryo Box, PC

- Made of strong polycarbonate and designed to be used at a temperature between -196°C to 121°C .
- Can be used in gas phase of liquid nitrogen with appropriate safety procedure in place.
- Transparent lids permit viewing of contents.
- These boxes create small, space-efficient storage system within a large mechanical freezer.
- Lids have numbered grid for sample identification. The surface of the lid has a frosted area suitable for writing with markers, facilitating inventory control.
- The dimensions of the cryo box are compatible with vertical, horizontal and drawer style freezer racks.
- Specially Designed venting in base & lid ensures a smooth flow for vapours for consistency in cooling.



Code	Tube Capacity	Places	Colour	L x W x H	No. / case	Price/case (₹)
P20601	1 - 2 ml	25 (5 x 5 Array)	White, Yellow, Blue	75 x 75 x 54 mm	8	1323
P20601 Assorted	1 - 2 ml	25 (5 x 5 Array)	White, Yellow, Blue	75 x 75 x 54 mm	8	1323
P20602	1 - 2 ml	81 (9 x 9 Array)	White, Yellow, Blue	133 x 132 x 54 mm	4	1654
P20602 Assorted	1 - 2 ml	81 (9 x 9 Array)	White, Yellow, Blue	133 x 132 x 54 mm	4	1654
P20603	5 ml	81 (9 x 9 Array)	White, Yellow, Blue	133 x 132 x 97 mm	4	2342
P20603 Assorted	5 ml	81 (9 x 9 Array)	White, Yellow, Blue	133 x 132 x 97 mm	4	2342

* Add colour code of your choice- White (W), Yellow (Y), Blue (B).



29 | Cryo Box, System 100 places, PC

- Made of strong polycarbonate and designed to be used at a temperature between -196°C to 121°C .
- Can be used in gas phase of liquid nitrogen with appropriate safety procedure in place.
- These boxes have 10x10 array (100 places) that can optimize the storage volume of the end user.
- These boxes create small, space-efficient storage system within a large mechanical freezer.
- Transparent lids permit viewing of contents.
- Lids have numbered grid for sample identification. The surface of the lid has a frosted area suitable for writing with markers, facilitating inventory control.
- The dimensions of the P20615 Cryo Box are compatible with vertical, horizontal and drawer style freezer racks.



Code	Tube Capacity	Places	Colour	L x W x H	No. / case	Price/case (₹)
P20615	1 - 2 ml (Freezer Compatible)	100 (10 x 10 Array)	White, Yellow, Blue	133 x 133 x 54 mm	4	1930
P20611	1 - 2 ml	100 (10 x 10 Array)	White, Yellow, Blue	140 x 140 x 54 mm	4	1930

* Add colour code of your choice- White (W), Yellow (Y), Blue (B).



30 | Cryo Cube Box / Storage Cube Box, PP

- Manufactured in state of the art moulding facility using high purity polypropylene.
- These boxes are stackable, versatile and designed for sample storage up to -80°C .
- These boxes help you to meet storage requirements of 1.5 – 2.0 ml microtubes & 1.0-2.0 ml cryogenic vials.
- The dimension of P20614 Cryo Cube Box is compatible with vertical, horizontal & drawer style freezer racks.
- These boxes have hinged lid connected to the base and the ultra smooth locking system ensures secure closure preventing accidental opening of these boxes in deep freezers.
- Inbuilt numbered and letters grid for sample identification.



Code	Capacity	Places	Colour	L x W x H	No./case	Price/case (₹)
P20612	1.5 – 2 ml Micro Tube & 1– 2 ml Cryo Tube	50 (10 x 5 Array)	Green, Yellow, Blue	142 x 85 x 59 mm	8	1367
P20614	1.5 – 2 ml Micro Tube & 1– 2 ml Cryo Tube	81 (9 x 9 Array)	Green, Yellow, Blue	130 x 130 x 55 mm	4	1202
P20607	1.5 – 2 ml Micro Tube & 1– 2 ml Cryo Tube	100 (10 x 10 Array)	Green, Yellow, Blue	140 x 140 x 55 mm	4	1307

31 | Freezing Cardboard Cryo Boxes, CARDBOARD

- Designed for storage and preservation of frozen samples.
- Can withstand ultra-low temperature in deep freezer.
- The removable top lid makes it easy to open and close.
- These boxes can be used for upright freezers, drawers & chest freezers with dividers.
- Lamination on these boxes does not allow moisture to soak or liquid to stick on these boxes.



Code	Tube Capacity	Places	L x W x H	No./case	Price / Case (₹)
P20606	1.5 – 2 ml Micro Tube & 1– 2 ml Cryo Tube	81 (9 x 9 Array)	132 x 132 x 50 mm	8	1481
P20613	1.5 – 2 ml Micro Tube & 1– 2 ml Cryo Tube	100 (10 x 10 Array)	132 x 132 x 50 mm	8	1481

32 | Cryo Apron

- These Cryo aprons provide a high level of thermal protection to the torso and upper legs in harsh cryogenic atmospheres.
- Multi-layered construction allows for the maximum level of thermal protection and waterproof nylon outer shell protects you from cryogenic splashes and keeps you safe and comfortable.
- These Cryogenic aprons have quick-release buckles at the neck & waist for added safety and function.
- Not for immersion in liquid nitrogen.



Code	Size	No./case	Price/case (₹)	Application	Environment
U20331	36 inch or 91.4 cm	1	19175	Cold room / walking freezer	Cryo preservation facilities
U20332	42 inch or 106.7 cm	1	20875		Blast freezers
U20333	48 inch or 121.9 cm	1	23000	Delivery and filling of cryogenic liquid	
U20334	54 inch or 137.2 cm	1	24700		Bio medical
					Blood banks
					Frozen food processing

33 | Cryo Gloves

- These cryogenic gloves protect your hands and arms when working in hazardous, ultra-cold environments.
- These gloves have an innovative design that offers superior thermal protection allowing for a maximum level of flexibility and dexterity.
- These cryo gloves are made from state-of-the-art fabrics and use a flexible, multi-layered insulated construction that provides maximum thermal protection to perform tasks effectively and safely.
- High performance, thermal inner lining wicks moisture away from hands, maintaining comfort over extended periods.
- Not for immersion in liquid nitrogen.

Code	Places	No./case	Price/case (₹)
U20307	Wrist S	1 Pair	14550
U20308	Wrist M	1 Pair	14550
U20309	Wrist L	1 Pair	14550
U20310	Wrist XL	1 Pair	14550
U20311	Mid Arm S	1 Pair	15350
U20312	Mid Arm M	1 Pair	15350
U20313	Mid Arm L	1 Pair	15350
U20314	Mid Arm XL	1 Pair	15350
U20315	Elbow S	1 Pair	19425
U20316	Elbow M	1 Pair	19425
U20317	Elbow L	1 Pair	19425
U20318	Elbow XL	1 Pair	19425

Application	Environment
Ultra low blast freezers	Clinical laboratory
Cold rooms	Bio medical
Dry ice handling	Blood banks Pharmaceutical Frozen food processing



34 | Water Proof Cryo Gloves

- These cryogenic gloves protect your hands and arms when working in hazardous, ultra-cold environments.
- These gloves are designed to provide a high level of thermal protection where the exposure to cryogenic fluids might exist.
- These gloves are multi-layered and allow for a maximum level of thermal protection, flexibility and dexterity essential feature when the function is important and safety is critical.
- Not for immersion in liquid nitrogen.

Code	Size	No./case	Price/case (₹)
U20319	Wrist S	1 Pair	19175
U20320	Wrist M	1 Pair	19175
U20321	Wrist L	1 Pair	19175
U20322	Wrist XL	1 Pair	19175
U20323	Mid Arm S	1 Pair	20650
U20324	Mid Arm M	1 Pair	20650
U20325	Mid Arm L	1 Pair	20650
U20326	Mid Arm XL	1 Pair	20650
U20327	Elbow S	1 Pair	25550
U20328	Elbow M	1 Pair	25550
U20329	Elbow L	1 Pair	25550
U20330	Elbow XL	1 Pair	25550

Application	Environment
LN2 atmosphere and environment	Fertility clinic
Refrigerated liquid baths	Bio medical
Cryo freezers	Genetic and bio technology
Cryogenic grinding	Pharmaceutical





03 LIQUID HANDLING

SINGLE & MULTICHANNEL PIPETTES

TIPS: MICRO & LARGE TIPS, FILTER TIPS, LOW RETENTION TIPS

SAMPLE CONTAINERS

PASTEUR & SEROLOGICAL PIPETTES

RIA VIALS & MORE

Abdos Pipettes

ABDOS pipette meets the highest needs in precision and accuracy – combined with ultimate ergonomics and increased flexibility with sophisticated blend of features and functionality.

It is easy to calibrate and maintain with tools supplied.

It is supplied with operator manual that provides complete information on recalibration and maintenance of the pipette.



Comfortable Finger Support: helps in prolonged pipetting operation with less fatigue.

Easy Calibration: Calibrated accordance with ISO8655. Each pipette is supplied with Individual Calibration Certificate.

Display: Clear and easy read display with large numbers and precise increment.


Ejector: Very low operating force and position in such a way that thumb strain is reduced when moving to eject tips.

Fully Autoclavable without disassembly with steam Sterilization at 121°C, 1atm for 20 minutes. Does not require any special preparations.

Premium Pipette with lower part autoclavable to ensure contamination free operations.

Slim Pipette Shaft: Allows Pipetting into narrow vessels.

Tip Cone: Optimized Standard Design. Pipette tips from ABDOS and other manufacturers can be used.

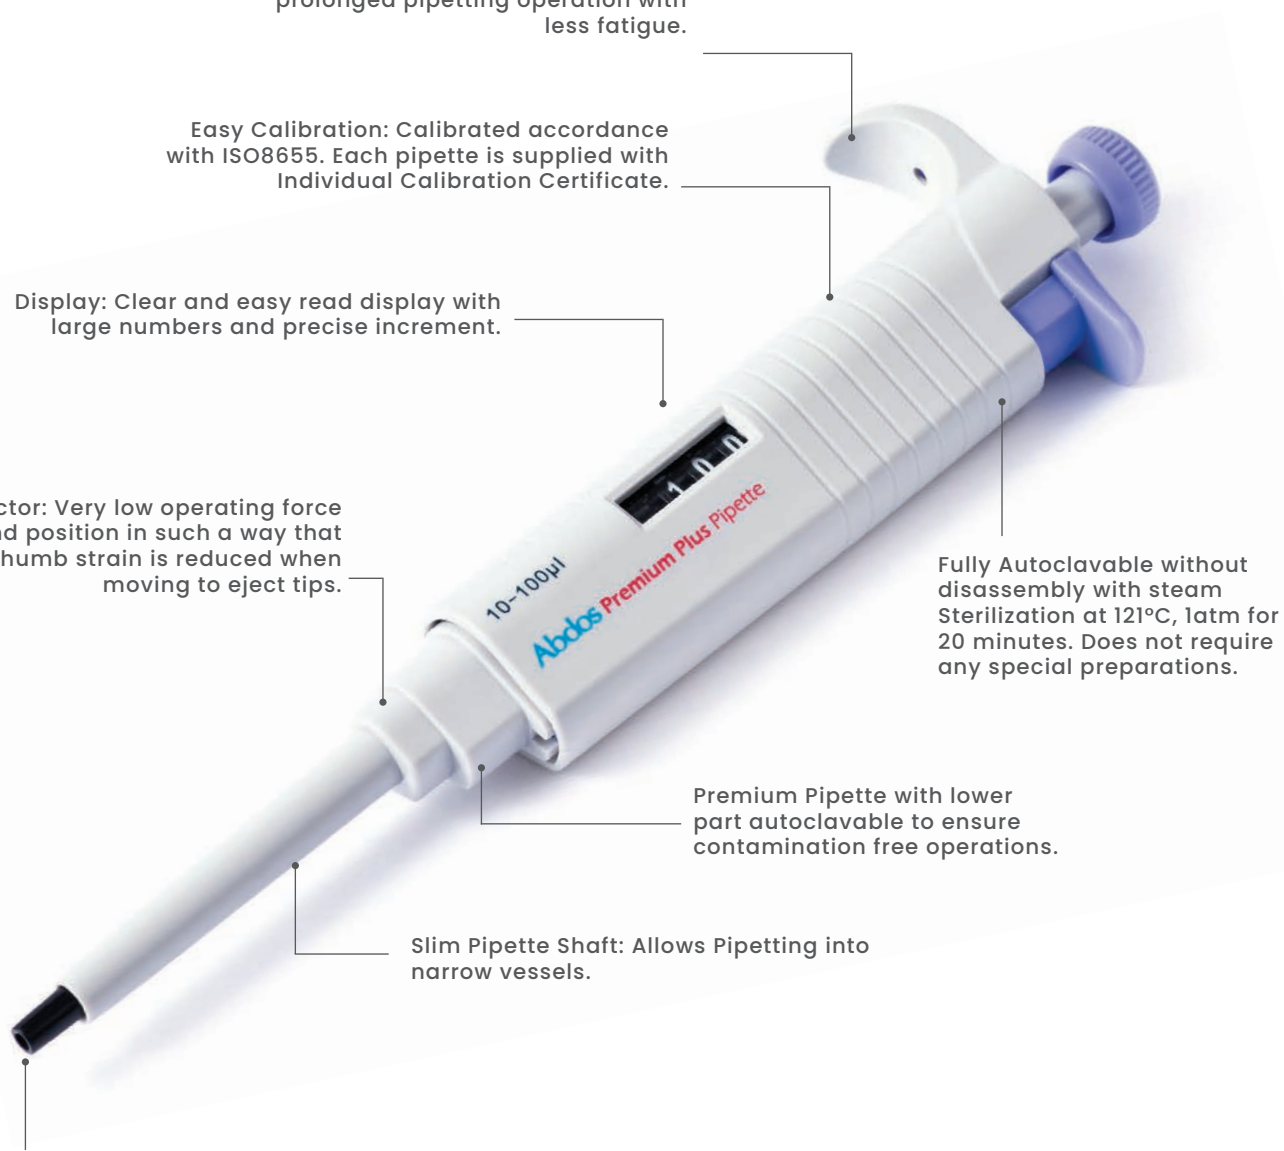

35 | Fixed Premium Pipette, PP



Code	Capacity	Test Volume	Maximum Permissible Systematic Error		Maximum Permissible Random Error		No./case	Price/case (₹)
			Inaccuracy	Inaccuracy	Imprecision	Imprecision		
E10001	5 µl	5 µl	± 1.3 %	± 0.065 µl	± 1.2 %	± 0.06 µl	1	3055
E10002	10 µl	10 µl	± 0.8 %	± 0.08 µl	± 0.8 %	± 0.08 µl	1	3055
E10003	20 µl	20 µl	± 0.6 %	± 0.12 µl	± 0.5 %	± 0.1 µl	1	3055
E10004	25 µl	25 µl	± 0.5 %	± 0.125 µl	± 0.3 %	± 0.075 µl	1	3055
E10005	50 µl	50 µl	± 0.5 %	± 0.25 µl	± 0.3 %	± 0.15 µl	1	3055
E10006	100 µl	100 µl	± 0.5 %	± 0.50 µl	± 0.3 %	± 0.30 µl	1	3055
E10007	200 µl	200 µl	± 0.4 %	± 0.80 µl	± 0.2 %	± 0.40 µl	1	3055
E10008	250 µl	250 µl	± 0.4 %	± 1 µl	± 0.2 %	± 0.50 µl	1	3055
E10009	500 µl	500 µl	± 0.3 %	± 1.5 µl	± 0.2 %	± 1.0 µl	1	3055
E10010	1000 µl	1000 µl	± 0.3 %	± 3 µl	± 0.2 %	± 2.0 µl	1	3055

36 | Premium Pipettes Semi-Autoclavable, PP



Code	Capacity	Increment	Test Volume	Maximum Permissible Systematic Error		Maximum Permissible Random Error		No./case	Price/case (₹)
				Inaccuracy	Inaccuracy	Imprecision	Imprecision		
E11100	0.1 – 2.5 µl	0.05 µl	2.5 µl	± 2.50 %	± 0.062 µl	± 2.00 %	± 0.05 µl	1	5408
			1.25 µl	± 3.00 %	± 0.037 µl	± 3.00 %	± 0.0375 µl		
			0.25 µl	± 12.00 %	± 0.03 µl	± 6.00 %	± 0.015 µl		
E11101	0.5 – 10 µl	0.1 µl	10 µl	± 1.00 %	± 0.1 µl	± 0.80 %	± 0.08 µl	1	5408
			5 µl	± 1.50 %	± 0.175 µl	± 1.50 %	± 0.075 µl		
			1 µl	± 2.50 %	± 0.025 µl	± 1.50 %	± 0.015 µl		
E11102	2 – 20 µl	0.5 µl	20 µl	± 0.90 %	± 0.18 µl	± 0.40 %	± 0.08 µl	1	5408
			10 µl	± 1.20 %	± 0.12 µl	± 1.00 %	± 0.10 µl		
			2 µl	± 3.00 %	± 0.06 µl	± 2.00 %	± 0.04 µl		
E11106	5 – 50 µl	0.5 µl	50 µl	± 0.60 %	± 0.3 µl	± 0.30 %	± 0.15 µl	1	5408
			25 µl	± 0.90 %	± 0.225 µl	± 0.60 %	± 0.15 µl		
			5 µl	± 2.00 %	± 0.1 µl	± 2.00 %	± 0.1 µl		
E11103	10 – 100 µl	1.0 µl	100 µl	± 0.80 %	± 0.80 µl	± 0.15 %	± 0.15 µl	1	5408
			50 µl	± 1.00 %	± 0.50 µl	± 0.40 %	± 0.20 µl		
			10 µl	± 3.00 %	± 0.30 µl	± 1.50 %	± 0.15 µl		
E11104	20 – 200 µl	1.0 µl	200 µl	± 0.60 %	± 1.20 µl	± 0.15 %	± 0.30 µl	1	5408
			100 µl	± 0.80 %	± 0.80 µl	± 0.30 %	± 0.30 µl		
			20 µl	± 3.00 %	± 0.60 µl	± 1.00 %	± 0.20 µl		
E11112	50 – 200 µl	1.0 µl	200 µl	± 0.60 %	± 1.20 µl	± 0.15 %	± 0.30 µl	1	5408
			100 µl	± 0.80 %	± 0.80 µl	± 0.30 %	± 0.30 µl		
			50 µl	± 1.00 %	± 0.50 µl	± 0.40 %	± 0.2 µl		
E11105	100 – 1000 µl	5 µl	1000 µl	± 0.60 %	± 6 µl	± 0.20 %	± 2 µl	1	5408
			500 µl	± 0.70 %	± 3.50 µl	± 0.25 %	± 1.25 µl		
			100 µl	± 2.00 %	± 2 µl	± 0.70 %	± 0.70 µl		
E11131	1000 – 5000 µl	50 µl	5000 µl	± 0.50 %	± 25 µl	± 0.15 %	± 7.5 µl	1	5408
			2500 µl	± 0.60 %	± 15 µl	± 0.30 %	± 7.5 µl		
			1000 µl	± 0.70 %	± 7 µl	± 0.30 %	± 3 µl		
E11132	2000 – 10000 µl	100 µl	10000 µl	± 0.60 %	± 60 µl	± 0.20 %	± 20 µl	1	5408
			5000 µl	± 1.20 %	± 60 µl	± 0.30 %	± 15 µl		
			2000 µl	± 3.00 %	± 60 µl	± 0.60 %	± 12 µl		

37 | Premium Plus Pipettes Fully-Autoclavable, PP



Code	Capacity	Increment	Test Volume	Maximum Permissible Systematic Error		Maximum Permissible Random Error		No./case	Price/case (₹)
				Inaccuracy	Inaccuracy	Imprecision	Imprecision		
E11145	0.1 – 2.5 µl	0.05 µl	2.5 µl	± 2.50 %	± 0.062 µl	± 2.00 %	± 0.05 µl	1	5923
			1.25 µl	± 3.00 %	± 0.037 µl	± 3.00 %	± 0.0375 µl		
			0.25 µl	± 12.00 %	± 0.03 µl	± 6.00 %	± 0.015 µl		
E11107	0.5 – 10 µl	0.1 µl	10 µl	± 1.00 %	± 0.1 µl	± 0.80 %	± 0.08 µl	1	5923
			5 µl	± 1.50 %	± 0.175 µl	± 1.50 %	± 0.075 µl		
			1 µl	± 2.50 %	± 0.025 µl	± 1.50 %	± 0.015 µl		
E11108	2 – 20 µl	0.5 µl	20 µl	± 0.90 %	± 0.18 µl	± 0.40 %	± 0.08 µl	1	5923
			10 µl	± 1.20 %	± 0.12 µl	± 1.00 %	± 0.10 µl		
			2 µl	± 3.00 %	± 0.06 µl	± 2.00 %	± 0.04 µl		
E11146	5 – 50 µl	0.5 µl	50 µl	± 0.60 %	± 0.3 µl	± 0.30 %	± 0.15 µl	1	5923
			25 µl	± 0.90 %	± 0.225 µl	± 0.60 %	± 0.15 µl		
			5 µl	± 2.00 %	± 0.1 µl	± 2.00 %	± 0.1 µl		
E11109	10 – 100 µl	1.0 µl	100 µl	± 0.80 %	± 0.80 µl	± 0.15 %	± 0.15 µl	1	5923
			50 µl	± 1.00 %	± 0.50 µl	± 0.40 %	± 0.20 µl		
			10 µl	± 3.00 %	± 0.30 µl	± 1.50 %	± 0.15 µl		
E11110	20 – 200 µl	1.0 µl	200 µl	± 0.60 %	± 1.20 µl	± 0.15 %	± 0.30 µl	1	5923
			100 µl	± 0.80 %	± 0.80 µl	± 0.30 %	± 0.30 µl		
			20 µl	± 3.00 %	± 0.60 µl	± 1.00 %	± 0.2 µl		
E11147	50 – 200 µl	1.0 µl	200 µl	± 0.60 %	± 1.20 µl	± 0.15 %	± 0.30 µl	1	5923
			100 µl	± 0.80 %	± 0.80 µl	± 0.30 %	± 0.30 µl		
			50 µl	± 1.00 %	± 0.50 µl	± 0.40 %	± 0.2 µl		
E11111	100 – 1000 µl	5.0 µl	1000 µl	± 0.60 %	± 6 µl	± 0.20 %	± 2 µl	1	5923
			500 µl	± 0.70 %	± 3.50 µl	± 0.25 %	± 1.25 µl		
			100 µl	± 2.00 %	± 2 µl	± 0.70 %	± 0.70 µl		
E11134	1000 – 5000 µl	50 µl	5000 µl	± 0.50 %	± 25 µl	± 0.15 %	± 7.5 µl	1	5923
			2500 µl	± 0.60 %	± 15 µl	± 0.30 %	± 7.5 µl		
			1000 µl	± 0.70 %	± 7 µl	± 0.30 %	± 3 µl		



Premium Plus Multi Channel Pipettes


ABDOS Premium Plus Multi-Channel Pipette meets the highest needs in precision and accuracy – combined with ultimate ergonomics and increased flexibility with sophisticated blend of features and functionality.

These fully autoclavable 8-channel and 12-multichannel pipette is available for Standard 96-well plates.

Individual piston and Tip cone assemblies allow easy repair and maintenance.

It is easy to calibrate and maintain with tools supplied. Calibrated in accordance with ISO8655. The quality control includes the gravimetric testing with distilled water at 22°C.

It is supplied with operator manual that provides complete information on recalibration and maintenance of the pipette.

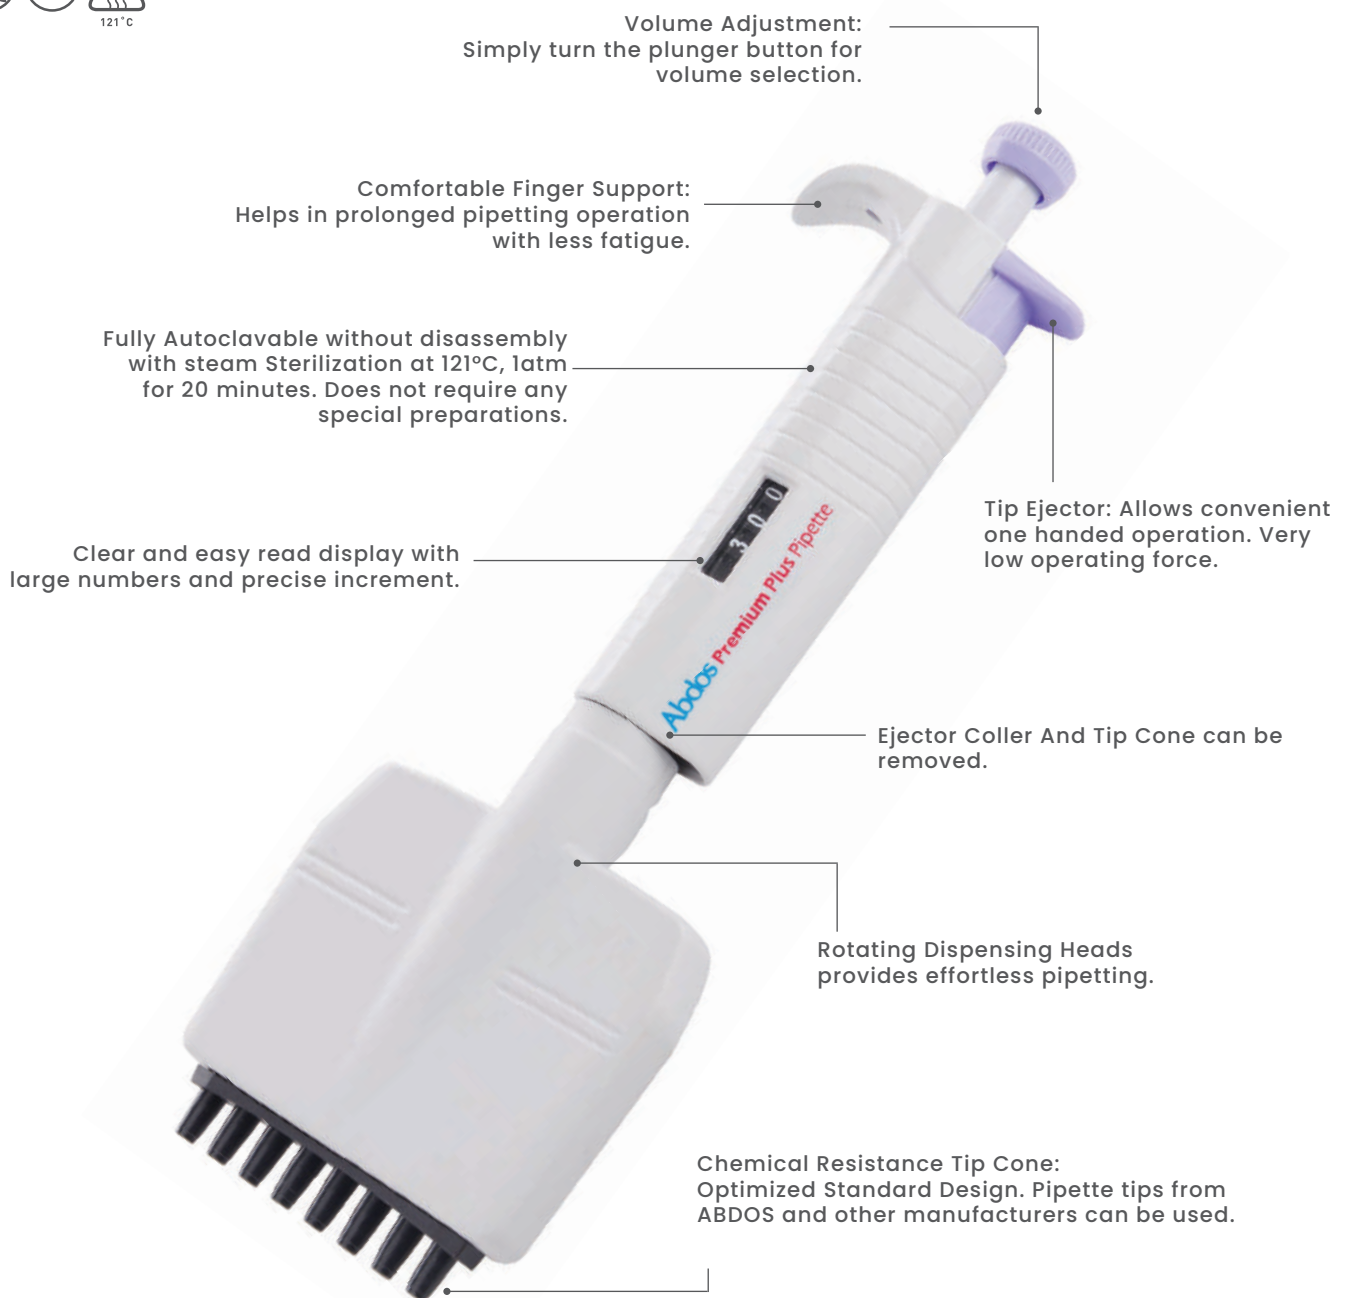

Volume Adjustment:
Simply turn the plunger button for
volume selection.

Comfortable Finger Support:
Helps in prolonged pipetting operation
with less fatigue.

Fully Autoclavable without disassembly
with steam Sterilization at 121°C, 1atm
for 20 minutes. Does not require any
special preparations.

Clear and easy read display with
large numbers and precise increment.

Tip Ejector: Allows convenient
one handed operation. Very
low operating force.

Ejector Coller And Tip Cone can be
removed.

Rotating Dispensing Heads
provides effortless pipetting.

Chemical Resistance Tip Cone:
Optimized Standard Design. Pipette tips from
ABDOS and other manufacturers can be used.

38 | Premium Plus 8-Channel Adjustable Multichannel Pipette

- Abdos Premium Plus Multi-channel Pipettes have a unique ergonomic design for comfortable finger support and convenient tip ejector design allows one-handed operation.
- The dispensing head of these pipettes rotate for optimum pipetting.
- The special compound material tip cone design allows visual seal verification and has excellent chemical resistance.
- Individual piston and tip cone assemblies allow easy repair and maintenance.
- Volume settings can be clearly read through digital display.
- Abdos Premium Plus Multi-channel Pipettes are easy to calibrate and maintain with the tools supplied.
- These pipettes are designed to avoid repetitive strain injuries.
- All Abdos pipettes are supplied with operator manual that provides complete information on recalibration and maintenance of the pipettes.



Code	Capacity	Increment	Test Volume	Maximum Permissible Systematic Error		Maximum Permissible Random Error		No./case	Price/case (₹)
				Inaccuracy	Inaccuracy	Imprecision	Imprecision		
E11136	0.5 – 10 µl	0.1 µl	10 µl	± 1.50 %	± 0.15 µl	± 1.50 %	± 0.15 µl	1	22660
			5 µl	± 2.50 %	± 0.125 µl	± 2.50 %	± 0.125 µl		
			1 µl	± 4.00 %	± 0.04 µl	± 4.00 %	± 0.04 µl		
E11137	5 – 50 µl	0.5 µl	50 µl	± 1.00 %	± 0.50 µl	± 0.50 %	± 0.25 µl	1	22660
			25 µl	± 1.50 %	± 0.375 µl	± 1.00 %	± 0.25 µl		
			5 µl	± 3.00 %	± 0.15 µl	± 2.00 %	± 0.10 µl		
E11138	50 – 300 µl	5 µl	300 µl	± 0.70 %	± 2.10 µl	± 0.25 %	± 0.75 µl	1	22660
			150 µl	± 1.00 %	± 1.50 µl	± 0.50 %	± 0.75 µl		
			50 µl	± 1.50 %	± 0.75 µl	± 0.80 %	± 0.40 µl		

39 | Premium Plus 12-Channel Adjustable Multichannel Pipette



Code	Capacity	Increment	Test Volume	Maximum Permissible Systematic Error		Maximum Permissible Random Error		No./case	Price/case (₹)
				Inaccuracy	Inaccuracy	Imprecision	Imprecision		
E11139	0.5 – 10 µl	0.1 µl	10 µl	± 1.50 %	± 0.15 µl	± 1.50 %	± 0.15 µl	1	24205
			5 µl	± 2.50 %	± 0.125 µl	± 2.50 %	± 0.125 µl		
			1 µl	± 4.00 %	± 0.04 µl	± 4.00 %	± 0.04 µl		
E11140	5 – 50 µl	0.5 µl	50 µl	± 1.00 %	± 0.50 µl	± 0.50 %	± 0.25 µl	1	24205
			25 µl	± 1.50 %	± 0.375 µl	± 1.00 %	± 0.25 µl		
			5 µl	± 3.00 %	± 0.15 µl	± 2.00 %	± 0.10 µl		
E11141	50 – 300 µl	5 µl	300 µl	± 0.70 %	± 2.10 µl	± 0.25 %	± 0.75 µl	1	24205
			150 µl	± 1.00 %	± 1.50 µl	± 0.50 %	± 0.75 µl		
			50 µl	± 1.50 %	± 0.75 µl	± 0.80 %	± 0.40 µl		

40 | Pipette Rack Stand, ACRYLIC

- Holds five standard size pipettes.
- Racks are mounted on their own stand.
- Keeps working area or desk free from clutter.



Code	No. of Places	L x W x H	No./case	Price/case (₹)
P70201	5	190 x 135 x 265 mm	1	2709



41 | Pipette Rack Stand (Carsol Type), PP

- Holds Six standard size pipettes.
- The Carousel Stand rotates smoothly and comfortably.
- Keeps working area or desk free from clutter.



Code	No. of Places	No./case	Price / Case (₹)
P70203	6	1	6489



42 | Premium Electronic Pipette

- Abdos Premium electronic pipette is fast, precise with an ergonomic design that is easy to use in laboratories.
- High accuracy, high performance stepper motor ensures accuracy and repeatability, eliminating manual pipetting errors. A motor driven digital control pipette with multi-function Pipetting, Mixing, Stepper and Dilution.
- 2 buttons handle all operational settings.
- Light weight, ergonomic design, small body dimension for easy handling that guarantees fatigue free pipetting.
- Adjustable speeds for aspiration and dispensing.
- Comprehensive range with easy programming.
- Motor driven with build-in-error control improving pipetting precision and providing reliable results.
- Highly efficient lithium-ion battery offering long running time with each charge makes the Premium Electronic Pipette a work-horse during busy times in the laboratories.
- Lower part is autoclavable.
- Reduces workload and improves the accuracy and precision.
- A bright LED display makes setting and reading easy, thus reducing or eliminating errors.
- User can Self-calibrate by limiting the pipette to a PC via USB connector.




Code	Capacity	Increment	Test Volume	Inaccuracy	Inaccuracy	Imprecision	Imprecision	No./case	Price/case (₹)
E11161	0.5 – 10 µl	0.01 µl	10 µl 1 µl	± 1.0 % ± 3.5 %	± 0.10 µl ± 0.035 µl	0.05 *s.d µl 0.03 *s.d µl	0.5 CV% 3.0 CV%	1	38625
E11162	5 – 50 µl	0.1 µl	50 µl 5 µl	± 0.8 % ± 3.0 %	± 0.40 µl ± 0.15 µl	0.15 *s.d µl 0.125 *s.d µl	0.3 CV % 2.5 CV %	1	38625
E11163	30 – 300 µl	1 µl	300 µl 30 µl	± 0.6 % ± 3.0 %	± 1.8 µl ± 0.9 µl	0.6 *s.d µl 0.21 *s.d µl	0.2 CV % 0.7 CV %	1	38625
E11164	100 – 1000 µl	5 µl	1000 µl 100 µl	± 0.6 % ± 3.0 %	± 6.0 µl ± 3.0 µl	2.0 *s.d µl 0.6 *s.d µl	0.2 CV % 0.6 CV %	1	38625



PIPETTE TIPS, PP

WAFER VALUE ADDITIONS

Each wafer of the rack is printed with effective Volume Range and Lot Number with Product Code, making it easy to keep your work organized and ensure supplies are traceable.

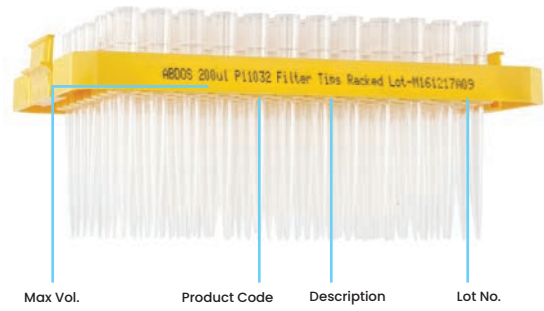

Pipette Tips

Features

All Tips are manufactured from ultra pure USP Class VI certified virgin polypropylene to ensure the highest quality & conforming to US FDA 21 CFR. Free from heavy metals, natural rubber & inhibitory plasticizers.

Free from Bacteriostatic & Fungistatic property.

Superior leeching performance in its class assures contamination free results.

DNase, RNase & Pyrogen free.

Precise Graduation mark for error free pipetting.

Tips with High clarity for better visibility of samples.

Diamond polished moulds for an extremely hydrophobic & smooth surface to ensure lowest retention in its class.





ABDOS BEVELLED TIPS

Precise diamond polished with special treatment on bevelled orifice prevents smooth working & sample hold-up. Bevelled orifice prevents sample hang up and makes it easier to pipette-off the last drop of sample. Bevelled tips prevent accidental damage of gel rupture during loading. Perfect airlock grip on pipette by inner radial rings for accurate pipetting.



THE ABDOS EDGE

The Universal Tip collar fits all popular pipettes.

The use of multiple cavity tools guarantees high conformity within one batch. The automated moulding and assembling procedures carried out under validated clean-room conditions to eliminate contamination.

Thin-wall technology ensures perfect seal while reducing the loading and ejection forces.



ABDOS ULTRA-POINT TIPS


Ultra point orifice for precise work like gel loading & careful pipetting between space as small as 1 mm as in PAGE, electrophoresis & IEF.

Ultra clear transparency for two phase pipetting.



43 | Pipette Tips, Bulk in Resealable Bags, PP


- Bulk Micro Tips are offered in resealable zip lock bag.
- The micro Tips can be manually accumulated in empty boxes.
- The product is free from contamination and dust.
- Abdos polyethylene pouches are recyclable.

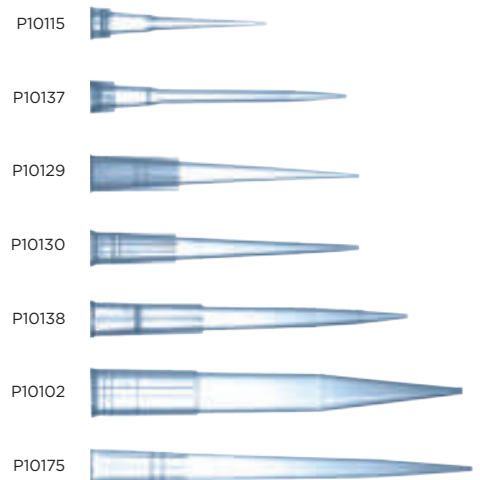

Code	Capacity	Colour	No./case	Price/case (₹)	Price/192 case (₹)
P10115	0.1 - 10 µl (Graduated)	Natural	1000	480	86630
P10137	0.1 - 10 µl Extended (Graduated)	Natural	1000	480	86630
P10129	1 - 200 µl (Bevelled Graduated)	Yellow	1000	370	66821
P10130	1 - 200 µl (Bevelled Graduated)	Natural	1000	370	66821
P10101	1 - 200 µl (Ultra Point Tip Orifice)	Yellow	1000	394	71109
P10105	1 - 200 µl (Ultra Point Tip Orifice)	Natural	1000	394	71109
P10138	1 - 300 µl (Graduated)	Natural	1000	479	86492
P10102	100 - 1000 µl	Blue	500	285	51437
P10106	100 - 1000 µl	Natural	500	285	51437
P10174	100 - 1000 µl XL (Graduated)	Natural	500	330	59558
P10175	100 - 1250 µl (Graduated)	Natural	500	325	58656

44 | Large Volume Pipette Tips, Bulk in Resealable Bags, PP


- The ergonomically optimized cone geometry provides the optimal pipette fit on the models from other manufacturers.
- Fine Graduations make visual checks of the pipetting volume even easier.

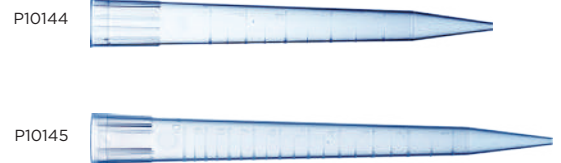

Code	Capacity	Colour	No./case	Price/case (₹)
P10144	1 - 5 ml (Graduated)	Natural	100	395
P10145	1 - 10 ml (Graduated)	Natural	100	798

45 | PureRight™ Pipette Tips, Individually Wrapped, Sterile, PP

- Individually wrapped pipette tips are manufactured as per the sterile purity level.
- Sterile individually wrapped tips have been validated according to ISO 11137 SAL 10⁻⁶



Code	Capacity	Colour	No./case	Price/case (₹)
P10164	0.1 - 10 µl (Graduated)	Natural	400	1010
P10165	0.1 - 10 µl (Extended Graduated)	Natural	400	1010
P10161	1 - 200 µl (Bevelled Graduated)	Natural	400	1010
P10166	1 - 300 µl (Graduated)	Natural	200	510
P10163	100 - 1000 µl	Natural	200	566
P10167	100 - 1000 µl XL (Graduated)	Natural	200	630
P10168	100 - 1250 µl (Graduated)	Natural	200	622
P10169	100 - 5000 µl (Graduated)	Natural	60	720
P10170	500 - 10000 µl (Graduated)	Natural	50	899

46 | Pipette Tips, Racked, PP

- Racked Micro Tips are offered in prefilled racks that don't require manual accumulation in empty boxes.
- Polypropylene racks are very robust, sturdy with consistent and thick wall thickness.
- Racks are hinged with transparent lid & base providing excellent view inside the box.
- Racks are stackable. Reusable once empty.



Code	Capacity	Colour	No./case	Price/case (₹)
PI0116	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs	1675
PI0139	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs	1680
PI0140	1 – 200 µl (Bevelled Graduated)	Yellow	10 Racks x 96 pcs	1720
PI0141	1 – 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	1720
PI0107	1 – 200 µl (Ultra Point Tip Orifice)	Yellow	10 Racks x 96 pcs	1806
PI0108	1 – 200 µl (Ultra Point Tip Orifice)	Natural	10 Racks x 96 pcs	1806
PI0142	1 – 300 µl (Graduated)	Natural	10 Racks x 96 pcs	1720
PI0109	100 – 1000 µl	Blue	10 Racks x 96 pcs	1872
PI0110	100-1000 µl	Natural	10 Racks x 96 pcs	1872
PI0155	100-1000 µl XL (Graduated)	Natural	10 Racks x 96 pcs	1872
PI0157	100-1250 µl (Graduated)	Natural	10 Racks x 96 pcs	1872
PI0159	100-5000 µl (Graduated)	Natural	6 Racks x 24 pcs	1700
PI0160	500-10000 µl (Graduated)	Natural	6 Racks x 24 pcs	2549



47 | Pipette Tips, Sterile Racked, PP



Code	Capacity	Colour	No./case	Price/case (₹)
PI0117	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs	2015
PI0147	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs	2020
PI0148	1 – 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	2077
PI0149	1 – 200 µl (Bevelled Graduated)	Yellow	10 Racks x 96 pcs	2077
PI0111	1 – 200 µl (Ultra Point Tip Orifice)	Yellow	10 Racks x 96 pcs	2160
PI0112	1 – 200 µl (Ultra Point Tip Orifice)	Natural	10 Racks x 96 pcs	2160
PI0150	1 – 300 µl (Graduated)	Natural	10 Racks x 96 pcs	2077
PI0113	100-1000 µl	Blue	10 Racks x 96 pcs	2308
PI0114	100 – 1000 µl	Natural	10 Racks x 96 pcs	2308
PI0156	100-1000 µl XL (Graduated)	Natural	10 Racks x 96 pcs	2308
PI0158	100-1250 µl (Graduated)	Natural	10 Racks x 96 pcs	2308
PI0171	100-5000 µl (Graduated)	Natural	6 Racks x 24 pcs	1900
PI0178	500-10000 µl (Graduated)	Natural	6 Racks x 24 pcs	2749




48 | Pipette Tips, Refill Pack, PP

- Racked Micro Tips are offered in prefilled trays that can be directly loaded in the box.
- Easy to load and remove into boxes.
- Saves time and costs of manual accumulation in empty boxes.
- More Cost effective and economical than racked micro tips.
- Fits Perfectly onto Abdos Micro Tip Box.
- 12 x 8 Array to align the contents in the box.
- Can be autoclaved when racked.



Code	Capacity	Colour	No./case	Price/case (₹)
PI0118	0.1 – 10 µl (Graduated)	Natural	12 Refill Racks x 96 Pcs	1331
PI0152	1 – 200 µl (Bevelled Graduated)	Natural	10 Refill Racks x 96 Pcs	1153
PI0153	1 – 200 µl (Bevelled Graduated)	Yellow	10 Refill Racks x 96 Pcs	1153
PI0119	1 – 200 µl (Ultra Point Tip Orifice)	Yellow	10 Refill Racks x 96 Pcs	1211
PI0120	1 – 200 µl (Ultra Point Tip Orifice)	Natural	10 Refill Racks x 96 Pcs	1211
PI0154	1 – 300 µl (Graduated)	Natural	10 Refill Racks x 96 Pcs	1153
PI0176	100-1000 XL µl (Graduated)	Natural	6 Refill Racks x 96 Pcs	800
PI0177	100-1250 µl (Graduated)	Natural	6 Refill Racks x 96 Pcs	800

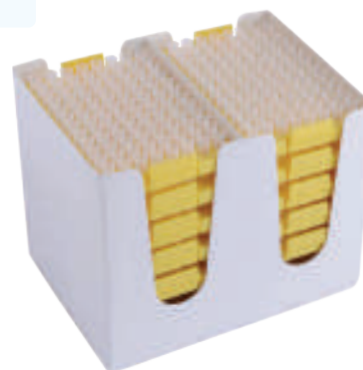

LAST DROP™ Low Retention

Pipette Tips Features



The Retention level is 10 times lesser with viscous samples than standard pipette tips.

Super homogenous surface free sites prevent non-specific binding.

DNase, RNase and Pyrogen free.

Tips are also free from Bacteriostatic & Fungistatic property that gives tips a unique feature to work in microbiological lab.

Optimal surface for enhanced dispensing behaviour & minimal sample loss of highly viscous liquids or samples containing detergents.

The use of the latest injection moulding process produce high precision, thin wall tips with high clarity for better visibility of sample.


Reduce Sample retention for precision & to save on costly reagents.

All tips are manufactured from ultrapure USP Class VI certified, Virgin PP (Polypropylene) to ensure the highest quality. Free from heavy metals, natural rubber and inhibitory plasticizers.

MATERIAL & METHOD

- 200µl Last Drop pipette tips were compared with other low retention tips in combination with an electronic pipette, were used to aspirate & dispense 100µl of Malachite Green, Methylene Blue, Glycerol & Titron-X (Liquid detergent) at a constant pipetting speed.
- Residual in the pipette were washed out by repeated rinsing with 200µl water into cuvette and compared photometrically. The average values established are shown in the table.

COMPARISON CHART

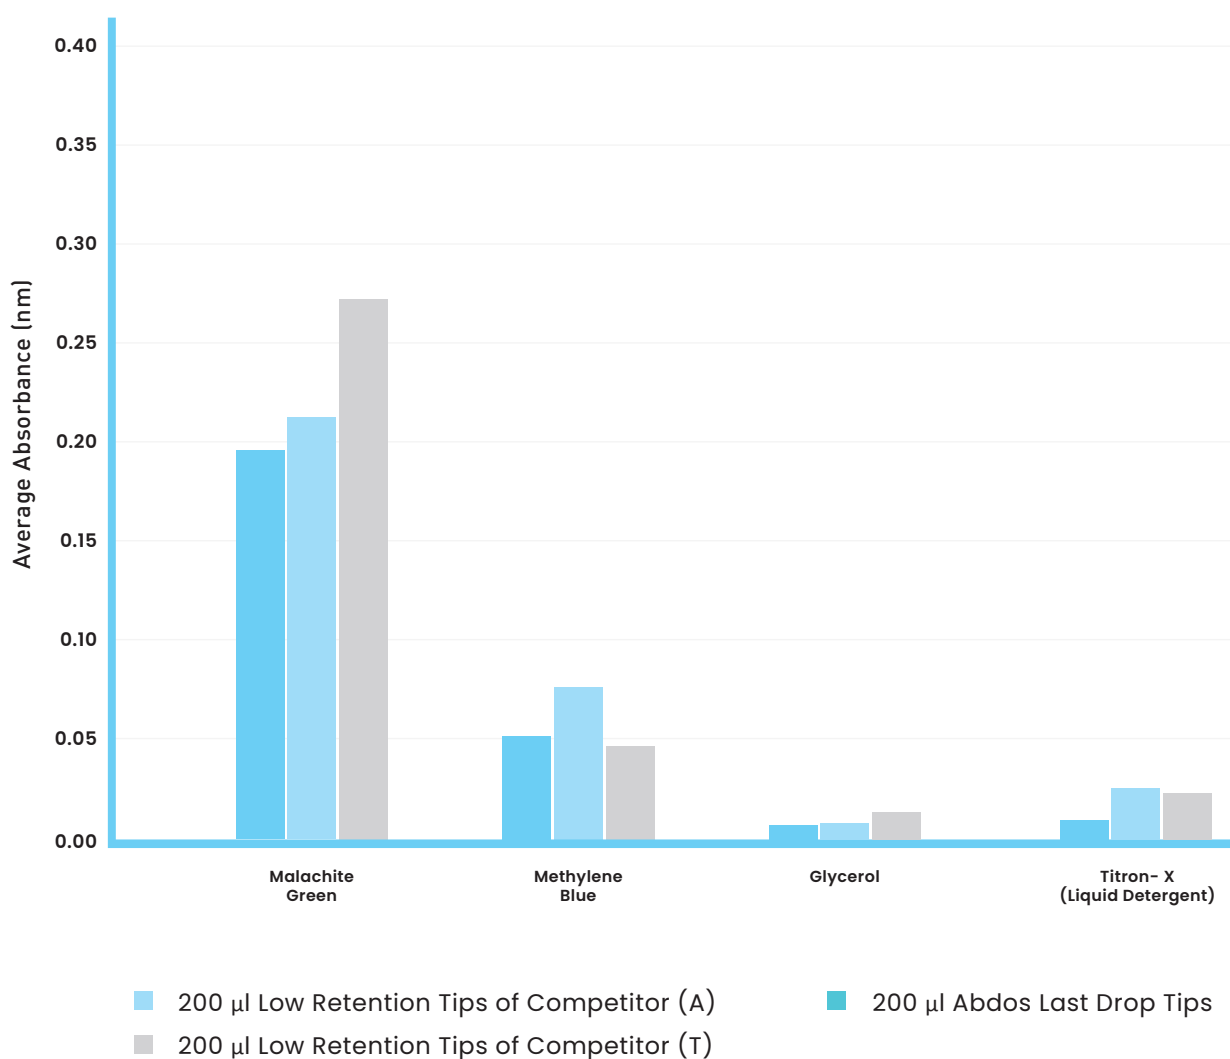


Result: Abdos Last Drop Pipette Tips clearly reduce sample loss. As seen above in the graph, it clearly indicates that Abdos Tips retained least amount of residue and saves on costly reagents.

49 | Last Drop™ Low Retention Pipette Tips, Bulk in Resealable Bags, PP

- Bulk Last Drop™ Micro Tips are offered in resealable zip lock bag.
- Tips can be manually accumulated in empty boxes.
- The product is free from contamination and dust.
- Abdos polyethylene pouches are recyclable.



Code	Capacity	Colour	No./case	Price/case (₹)
PI0001	0.1 – 10 µl (Graduated)	Natural	1000	790
PI0002	0.1 – 10 µl Extended (Graduated)	Natural	1000	795
PI0003	1 – 200 µl (Bevelled Graduated)	Natural	1000	999
PI0004	1 – 200 µl (Ultra Point Tip Orifice)	Natural	1000	1059
PI0005	1 – 300 µl (Graduated)	Natural	1000	899
PI0006	100 – 1000 µl	Natural	500	619
PI0007	100 – 1000 µl XL (Graduated)	Natural	500	625
PI0008	100 – 1250 µl (Graduated)	Natural	500	619

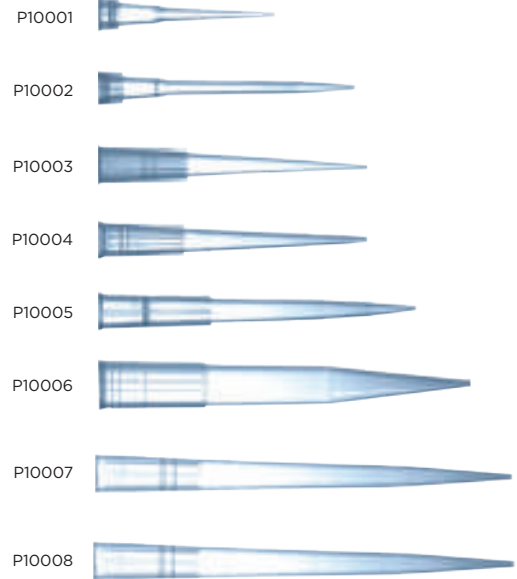

50 | PureRight™ Last Drop Low Retention Pipette Tips, Individually Wrapped, Sterile, PP

- Individually wrapped pipette tips are manufactured as per the sterile purity level
- Sterile individually wrapped tips have been validated according to ISO 11137 SAL 10⁻⁶



Code	Capacity	Colour	No./case	Price/case (₹)
PI0010	0.1 – 10 µl (Graduated)	Natural	400	1219
PI0011	0.1 – 10 µl Extended (Graduated)	Natural	400	1219
PI0012	1 – 200 µl (Bevelled Graduated)	Natural	400	1219
PI0013	1 – 300 µl (Graduated)	Natural	200	609
PI0014	100 – 1000 µl	Natural	200	699
PI0015	100 – 1000 µl XL (Graduated)	Natural	200	749
PI0016	100 – 1250 µl (Graduated)	Natural	200	739



51 | Last Drop™ Low Retention Pipette Tips, Racked, PP

- Racked Last Drop™ Micro Tips are offered in prefilled racks that do not require manual accumulation in empty boxes.
- Polypropylene racks are very robust, sturdy with consistent and thick wall thickness.
- Can be used for repeat autoclaving.
- Racks are hinged with transparent lid & base providing excellent view inside the box.
- Racks are stackable.
- Reusable once empty.



Code	Capacity	Colour	No./case	Price/case (₹)
PI0020	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs	2275
PI0021	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs	2275
PI0022	1 – 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	2349
PI0023	1 – 200 µl (Ultra Point Tip Orifice)	Natural	10 Racks x 96 pcs	2465
PI0024	1 – 300 µl (Graduated)	Natural	10 Racks x 96 pcs	2349
PI0025	100–1000 µl	Natural	10 Racks x 96 pcs	2692
PI0026	100 – 1000 µl XL (Graduated)	Natural	10 Racks x 96 pcs	2742
PI0027	100 – 1250 µl (Graduated)	Natural	10 Racks x 96 pcs	2732



52 | Last Drop™ Low Retention Pipette Tips, Sterile Racked, PP



Code	Capacity	Colour	No./case	Price/case (₹)
PI0040	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs	2635
PI0041	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs	2635
PI0042	1 – 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	2729
PI0043	1 – 200 µl (Ultra Point Tip Orifice)	Natural	10 Racks x 96 pcs	2839
PI0044	1 – 300 µl (Graduated)	Natural	10 Racks x 96 pcs	2729
PI0045	100 – 1000 µl	Natural	10 Racks x 96 pcs	3119
PI0046	100 – 1000 µl XL (Graduated)	Natural	10 Racks x 96 pcs	3169
PI0047	100 – 1250 µl (Graduated)	Natural	10 Racks x 96 pcs	3159




53 | Last Drop™ Low Retention Pipette Tips, Refill Pack, PP

- Racked Micro Tips are offered in prefilled trays that can be directly loaded in the box.
- Easy to load and remove into boxes.
- Saves time and costs of manual accumulation in empty boxes.
- Fits Perfectly onto Abdos Micro Tip Box.
- 12 x 8 Array to align the contents in the box.
- Can be autoclaved when racked.




Code	Capacity	Colour	No./case	Price/case (₹)
PI0060	0.1 – 10 µl (Graduated)	Natural	12 Refill Racks x 96 pcs	1811
PI0061	1 – 200 µl (Bevelled Graduated)	Natural	10 Refill Racks x 96 pcs	1569
PI0062	1 – 200 µl (Ultra Point Tip Orifice)	Natural	10 Refill Racks x 96 pcs	1669
PI0063	1 – 300 µl (Graduated)	Natural	10 Refill Racks x 96 pcs	1569
PI0064	100 – 1000 µl XL (Graduated)	Natural	6 Refill Racks x 96 pcs	1759
PI0065	100 – 1250 µl (Graduated)	Natural	6 Refill Racks x 96 pcs	1749

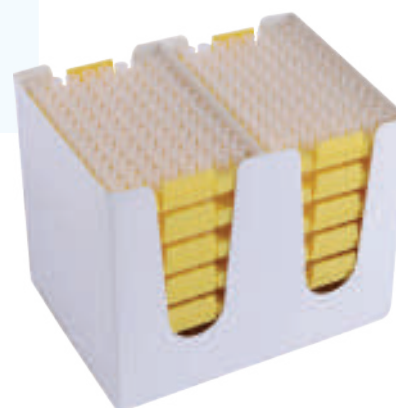

SUPER™ Filter Tips

Features

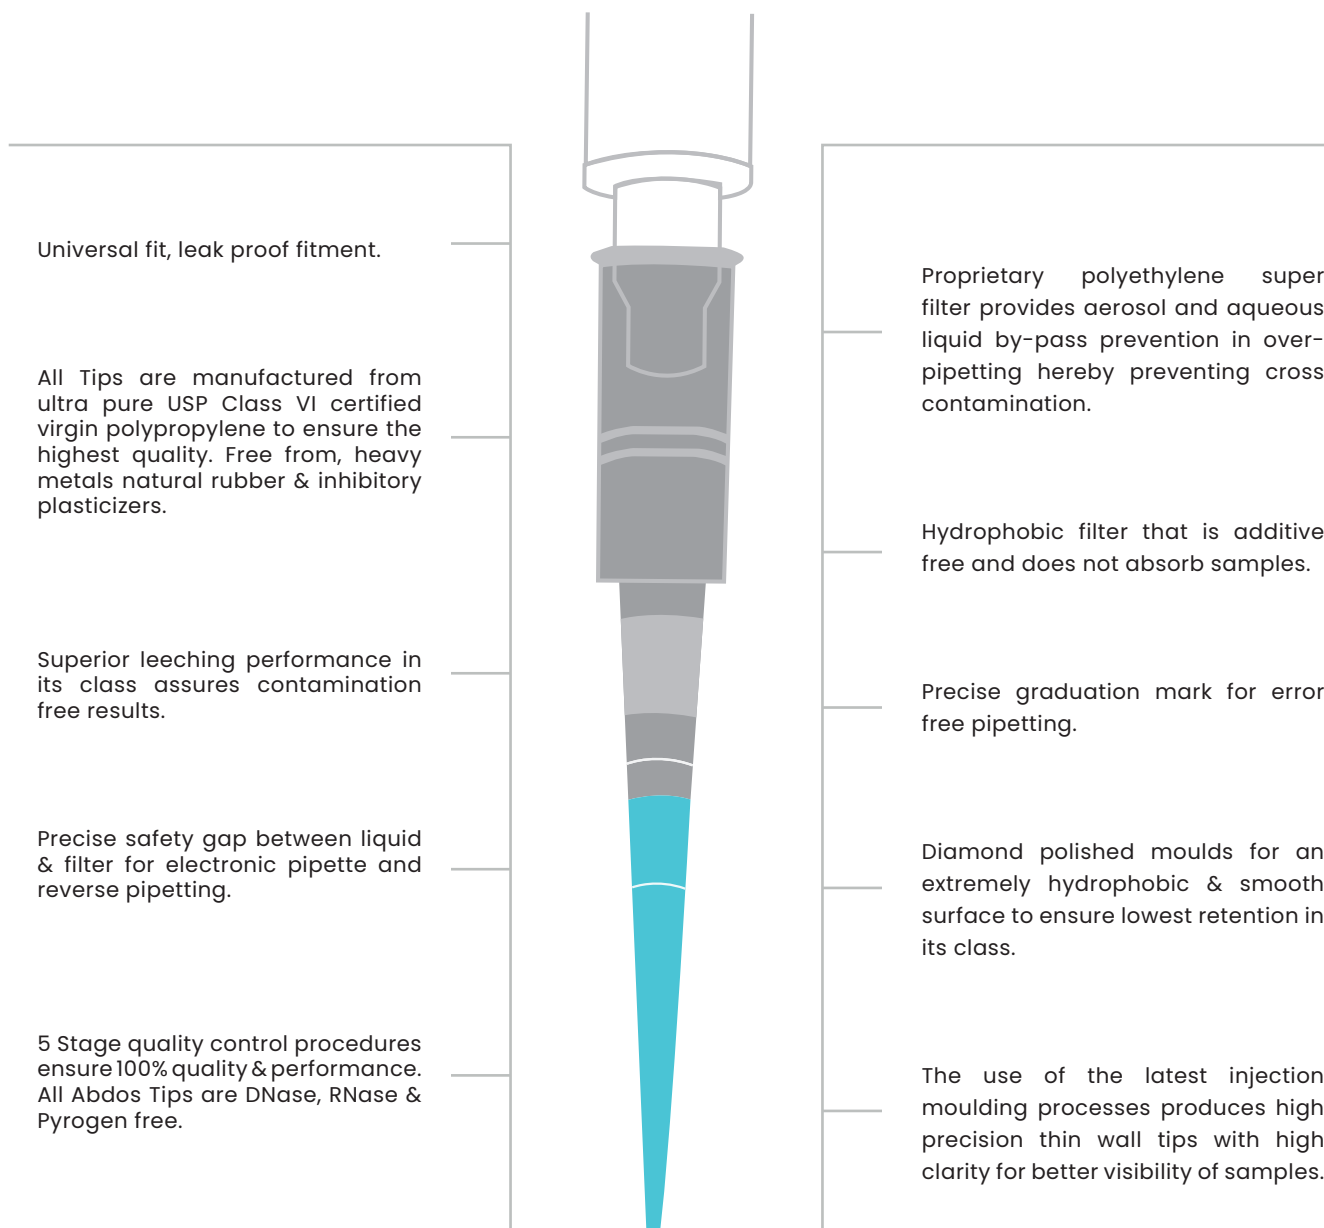

Universal fit, leak proof fitment.

All Tips are manufactured from ultra pure USP Class VI certified virgin polypropylene to ensure the highest quality. Free from, heavy metals natural rubber & inhibitory plasticizers.

Superior leeching performance in its class assures contamination free results.

Precise safety gap between liquid & filter for electronic pipette and reverse pipetting.

5 Stage quality control procedures ensure 100% quality & performance. All Abdos Tips are DNase, RNase & Pyrogen free.

Proprietary polyethylene super filter provides aerosol and aqueous liquid by-pass prevention in over-pipetting hereby preventing cross contamination.

Hydrophobic filter that is additive free and does not absorb samples.

Precise graduation mark for error free pipetting.

Diamond polished moulds for an extremely hydrophobic & smooth surface to ensure lowest retention in its class.

The use of the latest injection moulding processes produces high precision thin wall tips with high clarity for better visibility of samples.

Best Suited for Biological application.

Abdos Filter is 100% pure porous PE. It makes Recovery of Samples from Wetted, Filtered without Contamination.

Non Cytotoxic (ISO 10993-5 MRM, Minimal Essential Media Elution, GLP Compliant).

99.9% Bacterial Aerosol Filtration Efficiency (BFE), (ASTM F21012).

Non Hemolytic (Modified ASTM F 756-08 Hemolysis Direct Contact GLP with Human Blood).

Inert, Hydrophobic Filter does not trap or block the liquid.


**Note: Abdos SUPER™ filter tips are recommended in the WHO & ICMR approved Covid-19 testing protocol.*

ABDOS SUPER™ FILTER PREVENTS BOTH LIQUID & AEROSOL PASSING THROUGH THE FILTER


Case Study:

Contamination is one of the major issue we faced while working in our labs. Majorly contamination is been carried out while pipetting the samples from one source to the other; therefore Abdos offers Super filter that prevents both Liquid & Aerosol passing through the filter, thus making pipette shaft contamination free.

Non filter
Pipette Tips

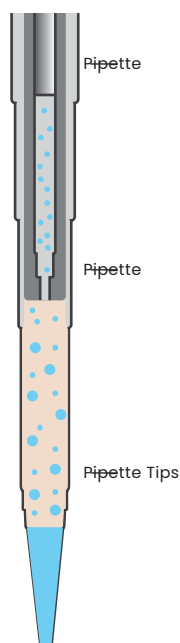

Selective Barrier
Pipette Tips

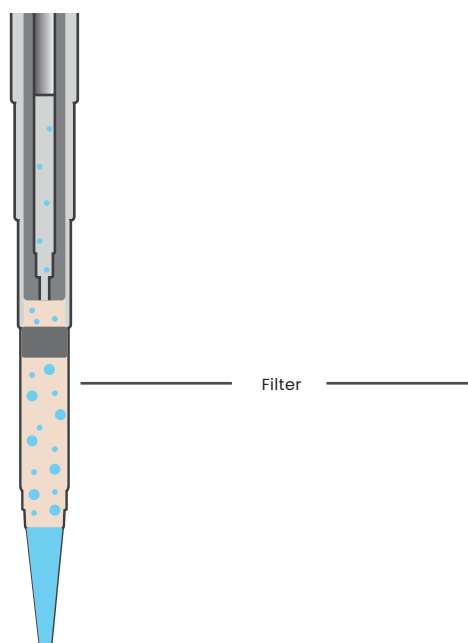

Abdos Super
Filter Tip



May lead to contamination of the pipette as there is no barrier for Liquid or Aerosol to prevent entering into the shaft. Thus can affect your experiment & you may lose your precious samples.

Most filter pipette tips do not act as a barrier to both liquid and Aerosol. The Pores of the filter act as a selective barrier thereby contaminating the pipette. While in other filter pipette tips, the liquid touches the filter, the filter becomes wet and locks. Hence, possibility of sample recovery is not possible.

Abdos Super filter prevents Aerosol passing through & aqueous liquid by-pass prevention in over-pipetting. Thus makes it unique in preventing the contamination.


Proprietary Pure Porous Hydrophobic PE filter helps us to recover contamination free samples from wetted filter and does not trap or block the liquid into the filter.

54 | Filter Pipette Tips, Bulk in Resealable Bags, PP

- Bulk Filter Pipette Tips are offered in resealable zip lock bag.
- Tips can be manually accumulated in empty boxes.
- The product is free from contamination and dust.
- Abdos polyethylene pouches are recyclable.



Code	Capacity	Colour	No./case	Price/case (₹)
P11001	0.1 – 10 µl (Graduated)	Natural	1000	1940
P11002	0.1 – 10 µl Extended (Graduated)	Natural	1000	1945
P11003	1 – 20 µl (Bevelled Graduated)	Natural	1000	2158
P11004	1 – 100 µl (Bevelled Graduated)	Natural	1000	2158
P11005	1 – 200 µl (Bevelled Graduated)	Natural	1000	2158
P11006	1 – 300 µl (Graduated)	Natural	1000	2158
P11007	100 – 1000 µl	Natural	500	1349
P11015	100 – 1000 µl XL (Graduated)	Natural	500	1459
P11016	100 – 1250 µl (Graduated)	Natural	500	1449

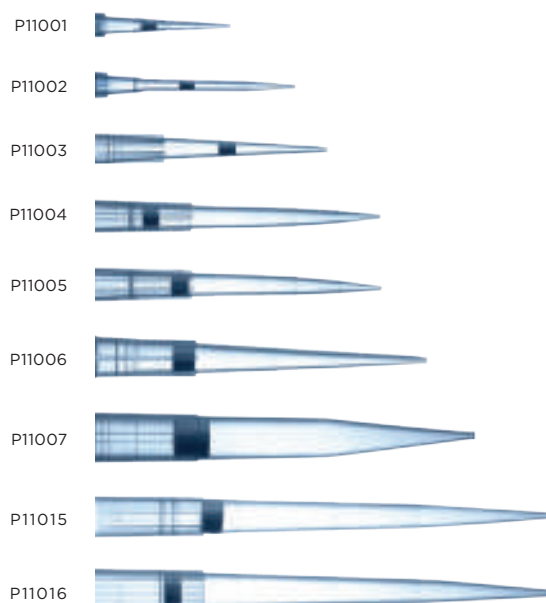


55 | Large Volume Filter Pipette Tips, Bulk in Resealable Bags, PP

- The ergonomically optimized cone geometry provides the optimal pipette fit on the models from other manufacturers.
- Fine Graduations make visual checks of the pipetting volume even easier.



Code	Capacity	Colour	No./case	Price/case (₹)
P11017	100 – 5000 µl (Graduated)	Natural	100	1200
P11018	500 – 10000 µl (Graduated)	Natural	100	1650

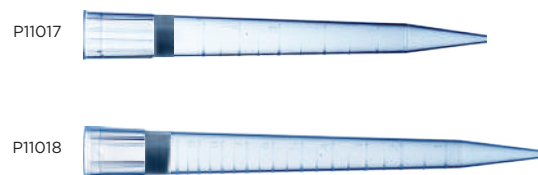

56 | PureRight™ Filter Pipette Tips, Individually Wrapped, Sterile, PP

- PureRight™ Individually Filter Tips are offered in sealed proof packaging.
- These tips are gamma radiated.
- The product is free from contamination and dust.
- Every piece comes with infographics of Lot & Expiry details.
- Abdos polyethylene pouches are recyclable.



Code	Capacity	Colour	No./case	Price/case (₹)
P11008	0.1 – 10 µl (Graduated)	Natural	400	1669
P11009	0.1 – 10 µl Extended (Graduated)	Natural	400	1669
P11010	1 – 20 µl (Graduated)	Natural	400	1669
P11011	1 – 100 µl (Graduated)	Natural	400	1669
P11012	1 – 200 µl (Graduated)	Natural	400	1669
P11013	1 – 300 µl (Graduated)	Natural	200	835
P11014	100 – 1000 µl	Natural	200	1000
P11019	100 – 1000 µl XL (Graduated)	Natural	200	1050
P11049	100 – 1250 µl (Graduated)	Natural	200	1050
P10099	100 – 5000 µl (Graduated)	Natural	60	999
P10100	500 – 10000 µl (Graduated)	Natural	50	1739



57 | Filter Pipette Tips – Racked, PP

- Racked Filter Tips are offered in prefilled racks that do not require manual accumulation in empty boxes.
- Polypropylene racks are very robust, sturdy with consistent and thick wall thickness.
- Racks are hinged with transparent lid & base providing excellent view inside the box.
- Racks are stackable.
- Reusable once empty.



Code	Capacity	Colour	No./case	Price/case (₹)
P11020	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs	3310
P11022	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs	3410
P11024	1 – 20 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	3310
P11026	1 – 50 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	3310
P11028	1 – 100 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	3310
P11032	1 – 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	3310
P11034	1 – 300 µl (Graduated)	Natural	10 Racks x 96 pcs	3310
P11036	100–1000 µl	Natural	10 Racks x 96 pcs	3835
P11038	100 – 1000 µl (Graduated)	Natural	10 Racks x 96 pcs	4072
P11039	100 – 1250 µl (Graduated)	Natural	10 Racks x 96 pcs	4062
P11030	100 – 5000 µl (Graduated)	Natural	6 Racks x 24 pcs	2319
P11031	500 – 10000 µl (Graduated)	Natural	6 Racks x 24 pcs	3345



58 | Filter Pipette Tips, Sterile Racked, PP



Code	Capacity	Colour	No./case	Price/case (₹)	No./Bulk Case	Price/Bulk Case (₹)
P11021	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs	3510	20	65983
P11023	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs	3602	20	67711
P11025	1–20 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	3510	20	65983
P11027	1–50 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	3510	20	65983
P11029	1–100 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	3510	20	65983
P11033	1 – 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	3510	20	65983
P11035	1 – 300 µl (Graduated)	Natural	10 Racks x 96 pcs	3510	20	65983
P11037	100–1000 µl	Natural	10 Racks x 96 pcs	4040	20	75952
P11047	100 – 1000 µl (Graduated)	Natural	10 Racks x 96 pcs	4279	20	80452
P11048	100 – 1250 µl (Graduated)	Natural	10 Racks x 96 pcs	4269	20	80262
P10172	100 – 5000 µl (Graduated)	Natural	6 Racks x 24 pcs	2500	20	46995
P10173	500 – 10000 µl (Graduated)	Natural	6 Racks x 24 pcs	3535	20	66458




59 | Refill Filter Pipette Tips, Sterile PP

- Refill filter Tips are offered in prefilled tray that can be directly loaded in the box.
- Easy to load and remove into box.
- Saves time and costs of manual accumulation in empty box.
- More Cost effective and economical.
- Each Wafer comes in Individual wrapping.




Code	Capacity	Colour	No./case	Price/case (₹)
P11092	0.1 – 10 µl (Graduated)	Natural	10 refill pack x 96 pcs	2317
P11093	0.1 – 10 µl Extended (Graduated)	Natural	10 refill pack x 96 pcs	2395
P11094	1 – 20 µl (Graduated)	Natural	10 refill pack x 96 pcs	2317
P11095	1 – 100 µl (Graduated)	Natural	10 refill pack x 96 pcs	2317
P11096	1 – 200 µl (Graduated)	Natural	10 refill pack x 96 pcs	2317
P11097	1 – 300 µl (Graduated)	Natural	10 refill pack x 96 pcs	2317
P11098	100 – 1000 µl	Natural	10 refill pack x 96 pcs	2669
P11099	100 – 1000 µl XL (Graduated)	Natural	10 refill pack x 96 pcs	2759
P11100	100 – 1250 µl (Graduated)	Natural	10 refill pack x 96 pcs	2749

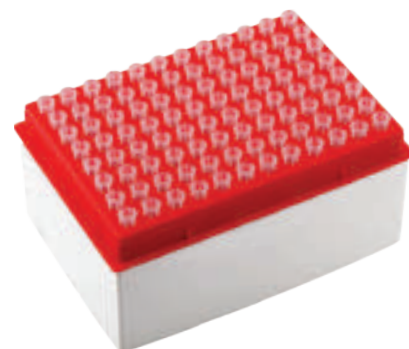

LAST DROP™ Filter Tips

Features

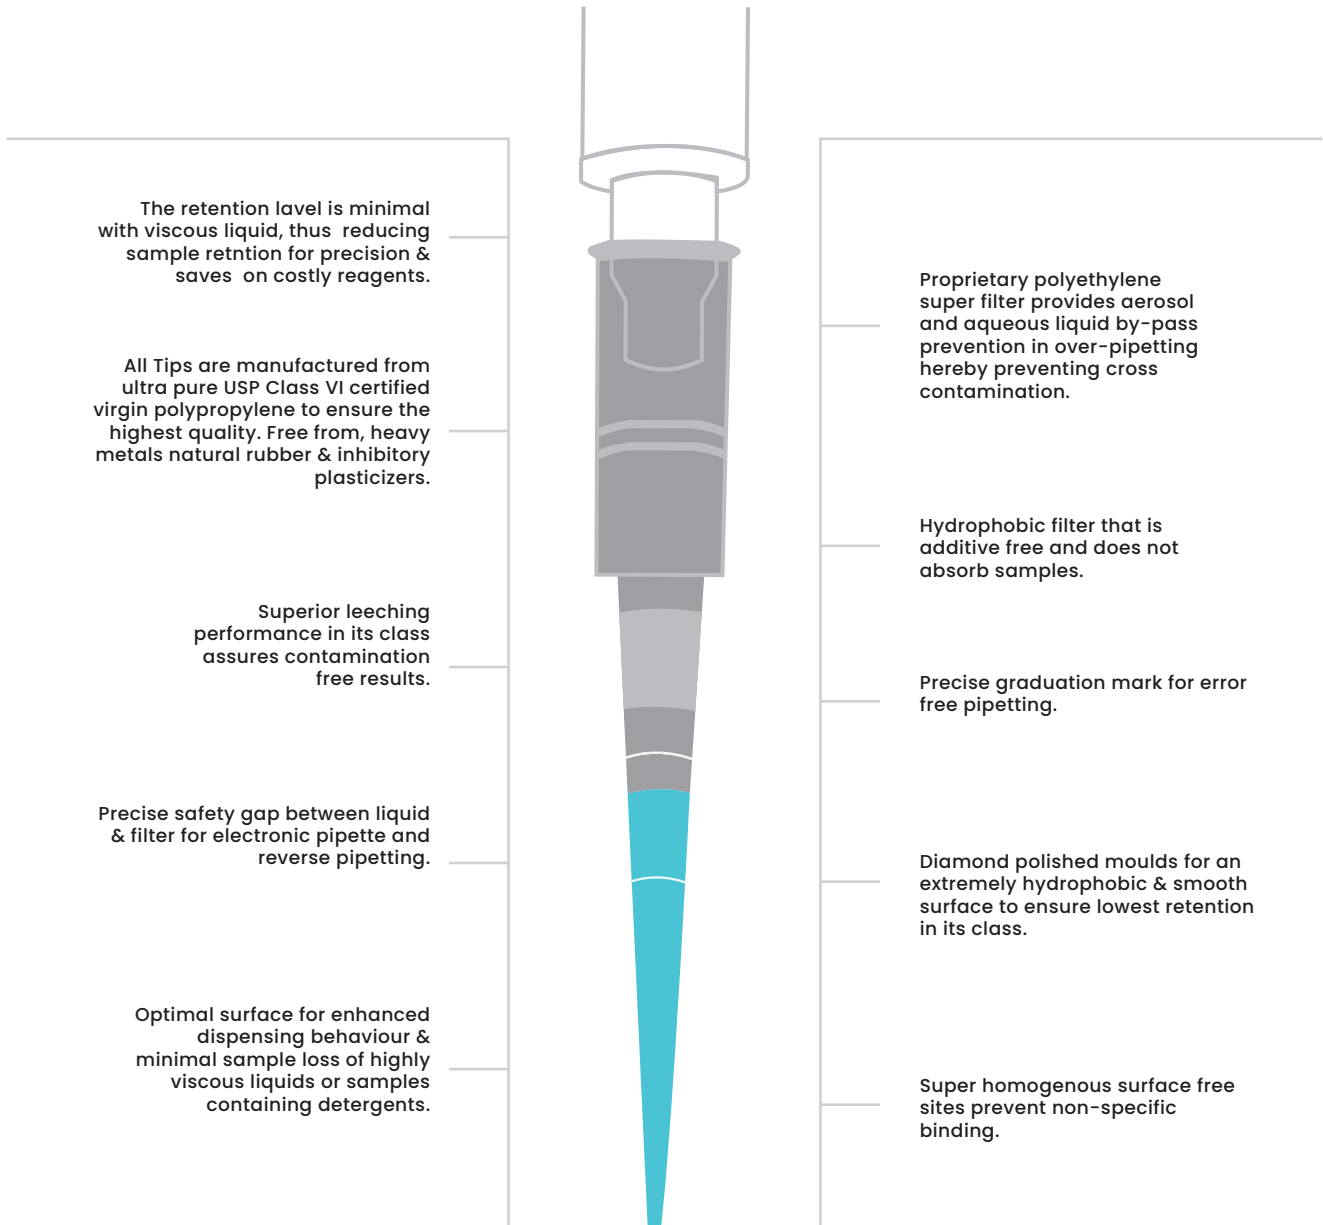

Best Suited for Biological application.

Abdos Filter is 100% pure porous PE. It makes Recovery of Samples from Wetted, Filtered without Contamination.

Non Cytotoxic (ISO 10993-5 MRM, Minimal Essential Media Elution, GLP Compliant).

99.9% Bacterial Aerosol Filtration Efficiency (BFE), (ASTM F21012).

Non Hemolytic (Modified ASTM F 756-08 Hemolysis Direct Contact GLP with Human Blood).


Inert, Hydrophobic Filter does not trap or block the liquid.

60 | Last Drop™, Low Retention Filter Pipette Tips, Bulk in Resealable Bags, PP

- Bulk Last Drop™ Filter Tips are offered in resealable zip lock bag.
- The micro Tips can be manually accumulated in empty boxes.
- The product is free from contamination and dust.
- Abdos polyethylene pouches are recyclable.




Code	Capacity	Colour	No./case	Price/case (₹)
P11050	0.1 – 10 µl (Graduated)	Natural	1000	2585
P11051	0.1 – 10 µl (Extended Graduated)	Natural	1000	2680
P11052	1 – 20 µl (Bevelled Graduated)	Natural	1000	2772
P11053	1 – 100 µl (Bevelled Graduated)	Natural	1000	2772
P11054	1 – 200 µl (Bevelled Graduated)	Natural	1000	2772
P11055	1 – 300 µl (Graduated)	Natural	1000	2772
P11056	100–1000 µl	Natural	500	1695
P11057	100 – 1000 µl (Graduated)	Natural	500	1789
P11058	100 – 1250 µl (Graduated)	Natural	500	1779

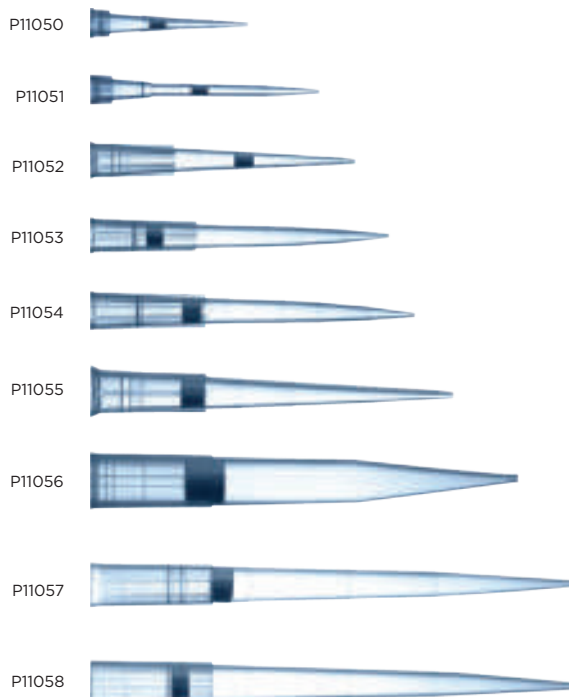

61 | PureRight™ Last Drop Low Retention Filter Pipette Tips, Individually Wrapped, Sterile, PP

- Individually Filter Tips are offered in sealed proof packaging.
- These tips are gamma radiated.
- The product is free from contamination and dust.
- Every piece comes with infographics of Lot and Expiry details.
- Abdos polyethylene pouches are recyclable.



Code	Capacity	Colour	No./case	Price/case (₹)
P11040	0.1 – 10 µl (Graduated)	Natural	400	1999
P11041	0.1 – 10 µl Extended (Graduated)	Natural	400	1999
P11042	1 – 20 µl (Graduated)	Natural	400	1999
P11043	1 – 100 µl (Graduated)	Natural	400	1999
P11044	1 – 200 µl (Graduated)	Natural	400	1999
P11045	1 – 300 µl (Graduated)	Natural	200	1000
P11046	100 – 1000 µl (Graduated)	Natural	200	1209
P11070	100 – 1000 µl XL, (Graduated)	Natural	200	1269
P11071	100 – 1250 µl, (Graduated)	Natural	200	1259



62 | Last Drop™, Low Retention Filter Pipette Tips – Racked, PP

- Racked Last Drop™ Filter Tips are offered in prefilled racks that do not require manual accumulation in empty boxes.
- Polypropylene racks are very robust, sturdy with consistent and thick wall thickness.
- Racks are hinged with transparent lid & base providing excellent view inside the box.
- Racks are stackable. Reusable once empty.



Code	Capacity	Colour	No./case	Price/case (₹)
PI1060	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs	4281
PI1062	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs	4373
PI1064	1 – 20 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	4281
PI1066	1 – 50 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	4281
PI1068	1 – 100 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	4281
PI1072	1 – 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	4281
PI1074	1 – 300 µl (Graduated)	Natural	10 Racks x 96 pcs	4281
PI1076	100–1000 µl	Natural	10 Racks x 96 pcs	4827
PI1078	100 – 1000 µl (XL) (Graduated)	Natural	10 Racks x 96 pcs	5085
PI1080	100 – 1250 µl (Graduated)	Natural	10 Racks x 96 pcs	5075



63 | Last Drop™, Low Retention Filter Pipette Tips – Sterile Racked, PP



Code	Capacity	Colour	No./case	Price/case (₹)	No./ Bulk Case	Price/Bulk Case (₹)
PI1061	0.1 – 10 µl (Graduated)	Natural	10 Racks x 96 pcs	4589	20	86273
PI1063	0.1 – 10 µl Extended (Graduated)	Natural	10 Racks x 96 pcs	4589	20	86273
PI1065	1 – 20 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	4589	20	86273
PI1067	1 – 50 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	4589	20	86273
PI1069	1 – 100 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	4589	20	86273
PI1073	1 – 200 µl (Bevelled Graduated)	Natural	10 Racks x 96 pcs	4589	20	86273
PI1075	1 – 300 µl (Graduated)	Natural	10 Racks x 96 pcs	4589	20	86273
PI1077	100–1000 µl	Natural	10 Racks x 96 pcs	5100	20	95880
PI1079	100 – 1000 µl (XL) (Graduated)	Natural	10 Racks x 96 pcs	5500	20	103400
PI1081	100 – 1250 µl (Graduated)	Natural	10 Racks x 96 pcs	5400	20	101520




64 | Last Drop™, Low Retention Refill Filter Pipette Tips – Sterile, PP

- Refill filter Tips are offered in prefilled tray that can be directly loaded in the box.
- Easy to load and remove into box.
- Saves time and costs of manual accumulation in empty box.
- More Cost effective and economical.



Code	Capacity	Colour	No./case	Price/case (₹)
PI1082	0.1 – 10 µl (Graduated)	Natural	10 refill pack x 96 pcs	2996
PI1083	0.1 – 10 µl Extended (Graduated)	Natural	10 refill pack x 96 pcs	3055
PI1084	1 – 20 µl (Graduated)	Natural	10 refill pack x 96 pcs	2996
PI1085	1 – 100 µl (Graduated)	Natural	10 refill pack x 96 pcs	2996
PI1086	1 – 200 µl (Graduated)	Natural	10 refill pack x 96 pcs	2996
PI1087	1 – 300 µl (Graduated)	Natural	10 refill pack x 96 pcs	2996
PI1088	100 – 1000 µl	Natural	10 refill pack x 96 pcs	3349
PI1089	100 – 1000 µl XL (Graduated)	Natural	10 refill pack x 96 pcs	3499
PI1090	100 – 1250 µl (Graduated)	Natural	10 refill pack x 96 pcs	3489

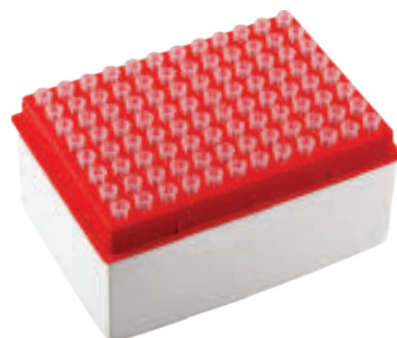

65 | Empty Micro Tip Box, PP

- Abdos Micro Tip Boxes are robust with consistent wall thickness for repetitive use in single and multi channel pipette.
- Abdos Micro Tip Box can accommodate Abdos Micro Tips and the tip holding spaces are uniformly placed to facilitate easy use in multi channel pipette.
- These boxes are stackable.
- Transparent top cover provides an excellent view of the Micro Tips inside the box.
- Manufactured in high quality polypropylene.
- All Tip Boxes contain 96 Tip holes.
- Can be autoclaved.



Code	Tip Capacity	Places	L x W x H	No./case	Price/case (₹)
P20101	0.1 – 10 µl	96	126 x 93 x 70 mm	6	842
P20102	1 – 200 µl	96	127 x 93 x 70 mm	6	842
P20104	1 – 300 µl	96	127 x 93 x 77 mm	6	874
P20103	100 – 1000 µl	96	146 x 99 x 97 mm	6	1092
P20105	100 – 1000 µl (XL) / 1250 µl	96	146 x 99 x 120 mm	6	1110
P20106	100 – 5000 µl	24	125 x 92 x 134 mm	3	1292
P20107	500 – 10000 µl	24	125 x 92 x 172 mm	3	1292



66 | Reagent Reservoir, HIPS

- Unique “trough within a trough” maximizes reagent recovery.
- Convenient pour-off spouts on all four corners.
- A wide base provides stability and avoids spills.
- Graduated marks on inside wall.
- Superior design provides stronger sidewalls.
- 100ml reagent reservoir has capacity for extended multi-channel pipetting into microtiter plates.
- This design allows ample clearance for all types of pipettes.

Code	Capacity	No./case	Price/case (₹)
P10501	25 ml	10	1229
P10503	100 ml	10	1447



ABDOS TIPS & LAST DROP PIPETTE TIPS

COMPATIBILITY CHART

Pipettor Brand / Make			Abdos Premium (Single Channel)					Abdos Premium Plus (Single Channel)					Abdos Fixed (Single Channel)					Abdos Premium (Multi Channel)			Abdos Premium Plus (Multi Channel)							
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.5 - 10 µl	2-20 µl	10-100 µl	20-200µl	100-1000 µl	0.5 - 10 µl	2-20 µl	10-100 µl	20-200 µl	100-1000 µl	5 µl	10 µl	20 µl	25 µl	50 µl	100 µl	200 µl	250 µl	500 µl	1000 µl	0.5 - 10 µl	5 - 50 µl	50-300 µl	0.5 - 10 µl	5 - 50 µl	50-300 µl
P10115	P10001	0.2 - 10 µl	√					√				√	√										√			√		
P10137	P10002	0.2 - 10 µl	√					√				√	√										√			√		
P10129	-	2 - 200 µl		√	√	√			√	√	√				√	√	√	√	√	√	√			√	√		√	√
P10130	P10003	2 - 200 µl		√	√	√			√	√	√				√	√	√	√	√	√	√			√	√		√	√
P10101	-	2 - 200 µl		√	√	√			√	√	√				√	√	√	√	√	√	√			√	√		√	√
P10105	P10004	2 - 200 µl		√	√	√			√	√	√				√	√	√	√	√	√	√			√	√		√	√
P10138	P10005	2 - 300 µl		√	√	√			√	√	√				√	√	√	√	√	√	√			√	√		√	√
P10102	-	100 - 1000 µl					√					√										√	√					
P10106	P10006	100 - 1000 µl					√					√										√	√					

Pipettor Brand/ Make			Biohit eLine (Single channel)				Biohit eLine (multi channel)				Biohit m- Line® (Single channel)				Biohit m-Line® (multi channel)			Biohit Proline (Single channel)				Biohit Proline (Multi channel)			Biohit ePet (Single channel)				
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.2-10µl	5-120µl	10-300µl	50-1000µl	0.2-10µl	5-120µl	10-300µl	0.5-10µl	2-20µl	10-100µl	20-200µl	100-1000µl	0.5-10µl	5-100µl	30-300µl	0.2-10µl	5-100µl	10-250µl	10-500µl	50-1000µl	0.2-10µl	5-100µl	25-250µl	0.2-10µl	5-100µl	5-100µl	50-1200µl
P10115	P10001	0.2 - 10 µl	√				√		√					√			√						√			√			
P10137	P10002	0.2 - 10 µl	√				√		√					√			√						√			√			
P10129	-	2 - 200 µl		√							√	√				√			√					√			√		
P10130	P10003	2 - 200 µl		√							√	√				√			√					√			√		
P10101	-	2 - 200 µl		√							√	√				√			√					√			√		
P10105	P10004	2 - 200 µl		√							√	√				√			√					√			√		
P10138	P10005	2 - 300 µl		√	√			√			√	√				√	√		√	√				√	√		√		
P10102	-	100 - 1000 µl				√							√									√							
P10106	P10006	100 - 1000 µl				√							√									√							

Pipettor Brand/ Make			Biohit ePet (multi channel)				Biohit Proline electronics (Single channel)				Biohit Proline electronics (Multi channel)				Biohit Proline (Single channel)				Biohit Proline (Multi channel)				Biohit Proline Plus (Single channel)						
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.2-10µl	5-100µl	50-1200µl	25-250 µl	0.2-10µl	5-100µl	10-250µl	50-1000µl	50-1200µl	0.2-10µl	5-100µl	10-250µl	50-1200µl	0.2-10µl	5-50µl	10-100µl	50-200µl	10-250µl	200-1000µl	0.5-10µl	5-50µl	50-250µl	50-300µl	0.5-10µl	20-200µl	100-1000 µl	
P10115	P10001	0.2 - 10 µl	√				√				√				√							√				√			
P10137	P10002	0.2 - 10 µl	√				√				√				√							√				√			
P10129	-	2 - 200 µl		√				√				√				√	√	√					√				√		
P10130	P10003	2 - 200 µl		√				√				√				√	√	√					√				√		
P10101	-	2 - 200 µl		√				√				√				√	√	√					√				√		
P10105	P10004	2 - 200 µl		√				√				√				√	√	√					√				√		
P10138	P10005	2 - 300 µl		√		√		√	√			√	√			√	√	√	√				√	√	√		√		
P10102	-	100 - 1000 µl							√												√								√
P10106	P10006	100 - 1000 µl							√												√								√

Pipettor Brand/ Make			Brand Transferpette														Brand Electronics										
			Single Channel							Multi Channel							Single Channel			Multi Channel							
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-1µl	0.5-10µl	2-20µl 'ULTRA MICRO'	2-20µl	5-50µl	10-100µl	20-200µl	25-250µl	100-1000µl	0.5-10µl	2-20µl	2.5-25µl	5-50µl	10-100µl	20-200µl	0.5-10µl	10-100µl	20-200µl	30-300µl	100-1000µl	0.5-10µl	5-100µl	10-200µl	15-300µl	
P10115	P10001	0.2 - 10 µl		✓								✓						✓					✓				
P10137	P10002	0.2 - 10 µl		✓								✓						✓					✓				
P10129	-	2 - 200 µl					✓	✓	✓						✓	✓	✓		✓	✓					✓	✓	
P10130	P10003	2 - 200 µl					✓	✓	✓						✓	✓	✓		✓	✓					✓	✓	
P10101	-	2 - 200 µl					✓	✓	✓						✓	✓	✓		✓	✓					✓	✓	
P10105	P10004	2 - 200 µl					✓	✓	✓						✓	✓	✓		✓	✓					✓	✓	
P10138	P10005	2 - 300 µl					✓	✓	✓	✓					✓	✓	✓	✓	✓	✓	✓				✓	✓	✓
P10102	-	100 - 1000 µl									✓											✓					
P10106	P10006	100 - 1000 µl									✓											✓					

Pipettor Brand/ Make			Brand Transferpette S							Capp Aero						Gilson Pipetman				Gilson Pipetman Ultra								
			Single Channel				Multi Channel			Single Channel /Multi Channel						Single Channel				Multi Channel								
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-1µl	0.5-10µl	2-20µl 'ULTRA MICRO'	10-100µl	20-200µl	100-1000µl	0.5-10µl	10-100µl	20-200µl	30-300µl	0.2-2µl	0.5-10µl	5-50µl	10-100µl	25-200µl	50-300µl	100-1000µl	0.2-2µl	1-10µl	2-20µl	20-100µl	50-200µl	200-1000µl	1-20µl	20-300µl	
P10115	P10001	0.2 - 10 µl		✓					✓				✓	✓						✓	✓							
P10137	P10002	0.2 - 10 µl		✓					✓	✓			✓	✓						✓	✓							
P10129	-	2 - 200 µl					✓	✓		✓	✓					✓	✓						✓	✓				
P10130	P10003	2 - 200 µl					✓	✓		✓	✓					✓	✓						✓	✓				
P10101	-	2 - 200 µl					✓	✓		✓	✓					✓	✓						✓	✓				
P10105	P10004	2 - 200 µl					✓	✓		✓	✓					✓	✓						✓	✓				
P10138	P10005	2 - 300 µl					✓	✓		✓	✓	✓				✓	✓	✓					✓	✓			✓	
P10102	-	100 - 1000 µl						✓											✓						✓			
P10106	P10006	100 - 1000 µl						✓											✓						✓			

Pipettor Brand / Make			Gilson Pipetman Ultra					Gilson Concept			Gilson Concept			Gilson Neo				
			Single Channel					Single Channel			Multi Channel			Single Channel				
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.2-2µl	1-10µl	2-20µl	20-100µl	20-200µl	200-1000µl	0.5-10µl	5-100µl	20-300µl	1-10µl	10-100µl	30-300µl	0.2-2µl	1-10µl	20-100µl	100-1000µl
P10115	P10001	0.2 - 10 µl		✓					✓			✓				✓		
P10137	P10002	0.2 - 10 µl		✓					✓			✓				✓		
P10129	-	2 - 200 µl				✓	✓			✓			✓				✓	
P10130	P10003	2 - 200 µl				✓	✓			✓			✓				✓	
P10101	-	2 - 200 µl				✓	✓			✓			✓				✓	
P10105	P10004	2 - 200 µl				✓	✓			✓			✓				✓	
P10138	P10005	2 - 300 µl				✓	✓			✓	✓		✓	✓			✓	
P10102	-	100 - 1000 µl						✓										✓
P10106	P10006	100 - 1000 µl						✓										✓

Pipettor Brand/ Make			Vistalab Ovation QS					Vistalab Ovation M					Vistalab Ovation E				Eppendorf Reference					"Eppendorf Electronic"							
			Single Channel					Single Channel					Multi Channel				Single Channel												
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.2-2µL	1-10µL	2-20µL	10-100µL	20-200µL	100-1000µL	0.2-2µL	1-10µL	2-20µL	10-100µL	20-200µL	100-1000µL	0.5-20µL	5-250µL	2-125µL	25-1250µL	0.1-10µL	"0.1-10µL 'ULTRA MICRO'"	2-20µL	10-100µL	20-200µL	100-1000µL	0.5-10µL	5-100µL	2-200µL	50-1000µL	
P10115	P10001	0.2 - 10 µl	√	√	√				√	√	√			√				√		√									
P10137	P10002	0.2 - 10 µl	√	√	√				√	√	√			√				√		√									
P10129	-	2 - 200 µl				√	√					√	√		√	√						√	√			√	√		
P10101	-	2 - 200 µl				√	√					√	√		√	√						√	√			√	√		
P10105	P10004	2 - 200 µl				√	√					√	√		√	√						√	√			√	√		
P10138	P10005	2 - 300 µl				√	√					√	√		√	√						√	√			√	√		
P10102	-	100 - 1000 µl						√									√							√					√
P10106	P10006	100 - 1000 µl						√									√							√					√

Pipettor Brand/ Make			Eppendorf Research					"Eppendorf "					"Thermo Finnpiquette"				"Thermo Finnpiquette"			"Matrix Impact/Impact2"								
			Single Channel					Multi Channel					Single Channel				Multi Channel			s/mc								
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-2.5µl	0.5-10µl	2-20µl	10-100µl	20-200µl	100-1000µl	0.5-10µl	5-100µl	50-100µl	0-300µl	30-300µl	50-1200µl	0.2-10µl	0.5-10µl	5-40µl	40-200µl	100-1000µl	200-1000µl	0.1-10µl	10-100µl	30-300µl	2-125µl	2-20µl	15-1250µl		
P10115	P10001	0.2 - 10 µl		√	√				√						√	√					√							
P10137	P10002	0.2 - 10 µl		√	√				√						√	√					√							
P10129	-	2 - 200 µl				√	√			√	√						√					√			√			
P10101	-	2 - 200 µl				√	√			√	√						√					√			√			
P10105	P10004	2 - 200 µl				√	√			√	√						√					√			√			
P10138	P10005	2 - 300 µl				√	√			√	√	√	√				√					√	√		√	√		
P10102	-	100 - 1000 µl						√						√*						√	√							
P10106	P10006	100 - 1000 µl						√						√*						√	√							

Pipettor Brand/ Make			Labnet Labpette					Labnet Labpette					Labnet BioPette E					"Nichiryu / Oxford Benchmate"									
			Single Channel					Multi Channel					Single Channel					Multi Channel					Single Channel & Multi Channel				
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-2µl	0.5-10µl	2-20µl	10-100µl	20-200µl	100-1000µl	1-10µl	5-50µl	20-200µl	50-300µl	0.5-10µl	2-20µl	10-200µl	100-1000µl	0.5-10µl	2-20µl	10-200µl	100-1000µl	0.5-10µl	2-20µl	10-50µl	10-100µl	20-200µl	100-1000µl	
P10115	P10001	0.2 - 10 µl	√	√					√				√				√				√						
P10137	P10002	0.2 - 10 µl	√	√					√				√				√				√						
P10129	-	2 - 200 µl				√	√				√			√					√				√	√			
P10101	-	2 - 200 µl				√	√				√			√					√				√	√			
P10105	P10004	2 - 200 µl				√	√				√	√		√					√				√	√			
P10138	P10005	2 - 300 µl				√	√				√	√		√					√				√	√			
P10102	-	100 - 1000 µl						√							√					√							√
P10106	P10006	100 - 1000 µl						√							√					√							√

Pipettor Brand/ Make			Socorex Calibra /Accura											Axygen Axyjet														
			Single Channel						Multi Channel					Single Channel					Multi Channel									
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	0.1-20µl	0.2-20µl	0.5-10µl	1-10µl	2-20µl	10-100µl	20-200µl	100-1000µl	1-10µl	5-50µl	10-100µl	20-200µl	50-200µl	0.1-2µl	0.5-10µl	2-20µl	5-50µl	10-100µl	20-200µl	50-250µl	100-1000µl	1-10µl	5-50µl	20-200µl	50-300µl	
P10115	P10001	0.2 - 10 µl			√	√					√					√								√				
P10137	P10002	0.2 - 10 µl			√	√					√					√								√				
P10129	-	2 - 200 µl						√	√			√	√	√	√					√	√	√				√	√	√
P10130	P10003	2 - 200 µl						√	√			√	√	√	√					√	√	√				√	√	√
P10101	-	2 - 200 µl						√	√			√	√	√	√					√	√	√				√	√	√
P10105	P10004	2 - 200 µl						√	√			√	√	√	√					√	√	√				√	√	√
P10138	P10005	2 - 300 µl						√	√			√	√	√	√					√	√	√	√			√	√	√
P10102	-	100 - 1000 µl								√														√				
P10106	P10006	100 - 1000 µl								√														√				

Pipettor Brand/ Make		BRAND		Eppendorf		Biohit Proline plus		Gilson		Thermo		Abdos	
Abdos Code for Pipette Tips	Volume	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml
P10144	1 - 5 ml			√		√		√				√	
P10145	1 - 10 ml		√		√		√		√				√

Pipettor Brand/ Make			Abdos premium	Abdos premium Plus	ABDOS D. Pipette (Electronic)	Brand Transferpette S	Gilson Pipetman	Eppendorf Research
			Single channel			Single channel		
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	100-1000µl	100-1000µl	100-1000µl	100-1000µl	100-1000µl	100-1000µl
P10174	P10026	100 - 1000 µl XL	√	√	√	√	√	√
P10175	P10027	100 - 1250 µl	√	√	√	√	√	√

Pipettor Brand/ Make			THERMO (Electronic) Finnpiptette	Thermo Finnpiptette F3	Nichiryo NICHIPET EX	SOCOREX ACURA 825	BIOHIT Proline	ErgoOne Star Lab
			Multi channel	Single channel				
Abdos Code for Pipette Tips	Abdos Code for Last Drop Pipette Tips	Volume	100-1200µl	100-1000µl	100-1000µl	100-1000µl	100-1000µl	100-1000µl
P10174	P10026	100 - 1000 µl XL	√	√	√	√	√	√
P10175	P10027	100 - 1250 µl	√	√	√	√	√	√

ABDOS FILTER TIPS & LAST DROP FILTER PIPETTE TIPS

COMPATIBILITY CHART

Pipettor Brand/ Make			Abdos Premium (Single Channel)					Abdos Premium Plus (Single Channel)					Abdos Fixed (Single Channel)								Abdos Premium (Multi Channel)			Abdos Premium Plus (Multi Channel)				
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.5 - 10 µl	2-20 µl	10-100 µl	20-200µl	100-1000 µl	0.5 - 10 µl	2-20 µl	10-100 µl	20-200 µl	100-1000 µl	5 µl	10 µl	20 µl	25 µl	50 µl	100 µl	200 µl	250 µl	500 µl	1000 µl	0.5 - 10 µl	5 - 50 µl	50-300 µl	0.5 - 10 µl	5 - 50 µl	50-300 µl
P11001	P11050	0.2 - 10 µl	√					√				√	√									√			√			
P11002	P11051	0.2 - 10 µl	√					√				√	√									√			√			
P11003	P11052	2 - 20 µl		√	√	√			√	√	√			√	√	√	√	√	√	√	√		√	√		√	√	
P11026	P11066	2 - 50 µl		√	√	√			√	√	√			√	√	√	√	√	√	√	√		√	√		√	√	
P11004	P11053	2 - 100 µl		√	√	√			√	√	√			√	√	√	√	√	√	√	√		√	√		√	√	
P11005	P11054	2 - 200 µl		√	√	√			√	√	√			√	√	√	√	√	√	√	√		√	√		√	√	
P11006	P11055	2 - 300 µl		√	√	√			√	√	√			√	√	√	√	√	√	√	√		√	√		√	√	
P11007	P11056	100 - 1000 µl				√					√										√	√						

Pipettor Brand / Make			Biohit eLine (Single Channel)				Biohit eLine (Multi Channel)			Biohit m- Line® (Single channel)				Biohit m-Line® (Multi Channel)			Biohit Proline (Single Channel)				Biohit Proline (Multi Channel)			Biohit ePet (Single Channel)				
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.2-10µl	5-120µl	10-300µl	50-1000µl	0.2-10µl	5-120µl	10-300µl	0.5-10µl	2-20µl	10-100µl	20-200µl	100-1000µl	0.5-10µl	5-100µl	30-300µl	0.2-10µl	5-100µl	10-250µl	10-500µl	50-1000µl	0.2-10µl	5-100µl	25-250µl	0.2-10µl	5-100µl	50-1200µl
P11001	P11050	0.2 - 10 µl	√				√			√				√			√					√			√			
P11002	P11051	0.2 - 10 µl	√				√			√				√			√					√			√			
P11003	P11052	2 - 20 µl		√							√	√			√			√					√				√	
P11026	P11066	2 - 50 µl		√							√	√			√			√					√				√	
P11004	P11053	2 - 100 µl		√							√	√			√			√					√				√	
P11005	P11054	2 - 200 µl		√							√	√			√			√					√				√	
P11006	P11055	2 - 300 µl		√	√			√			√	√			√	√		√	√	√	√		√	√		√	√	
P11007	P11056	100 - 1000 µl				√							√									√						

Pipettor Brand/ Make			Biohit ePet Multi Channel				Biohit Proline electronics (Single Channel)				Biohit Proline Electronics (Multi Channel)				Biohit Proline (Single Channel)				Biohit Proline (Multi Channel)				Biohit Proline Plus (Single Channel)					
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.2-10µl	5-100µl	50-1200µl	25-250 µl	0.2-10µl	5-100µl	10-250µl	50-1000µl	50-1200µl	0.2-10µl	5-100µl	10-250µl	50-1200µl	0.2-10µl	5-50µl	10-100µl	50-200µl	10-250µl	200-1000µl	0.5-10µl	5-50µl	50-250µl	50-300µl	0.5-10µl	20-200µl	100-1000 µl
P11001	P11050	0.2 - 10 µl	√				√				√				√						√				√			
P11002	P11051	0.2 - 10 µl	√				√				√				√						√				√			
P11003	P11052	2 - 20 µl		√				√				√				√	√	√	√			√				√		
P11026	P11066	2 - 50 µl		√				√				√				√	√	√	√			√				√		
P11004	P11053	2 - 100 µl		√				√				√				√	√	√	√			√				√		
P11005	P11054	2 - 200 µl		√				√				√				√	√	√	√			√				√		
P11006	P11055	2 - 300 µl		√		√		√	√			√	√			√	√	√	√	√		√	√	√		√	√	
P11007	P11056	100 - 1000 µl							√												√							√

Pipettor Brand/ Make			Brand Transferpette													Brand Electronics											
			Single Channel							Multi Channel						Single Channel			Multi Channel								
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-1µl	0.5-10µl	2-20µl 'ULTRA MICRO'	2-20µl	5-50µl	10-100µl	20-200µl	25-250µl	100-1000µl	0.5-10µl	2-20µl	2.5-25µl	5-50µl	10-100µl	20-200µl	30-300µl	0.5-10µl	10-100µl	20-200µl	30-300µl	100-1000µl	0.5-10µl	5-100µl	10-200µl	15-300µl
P11001	P11050	0.2 - 10 µl		✓							✓								✓					✓			
P11002	P11051	0.2 - 10 µl		✓							✓								✓					✓			
P11003	P11052	2 - 20 µl				✓	✓	✓						✓	✓	✓			✓	✓					✓	✓	
P11026	P11066	2 - 50 µl				✓	✓	✓						✓	✓	✓			✓	✓					✓	✓	
P11004	P11053	2 - 100 µl				✓	✓	✓						✓	✓	✓			✓	✓					✓	✓	
P11005	P11054	2 - 200 µl				✓	✓	✓						✓	✓	✓			✓	✓					✓	✓	
P11006	P11055	2 - 300 µl				✓	✓	✓	✓					✓	✓	✓	✓		✓	✓	✓				✓	✓	✓
P11007	P11056	100 - 1000 µl								✓													✓				

Pipettor Brand/ Make			Brand Transferpette S							Capp Aero						Gilson Pipetman				Gilson Pipetman Ultra								
			Single Channel				Multi Channel			Single Channel /Multi Channel						Single Channel				Multi Channel								
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-1µl	0.5-10µl	2-20µl 'ULTRA MICRO'	10-100µl	20-200µl	100-1000µl	0.5-10µl	10-100µl	20-200µl	30-300µl	0.2-2µl	0.5-10µl	5-50µl	10-100µl	25-200µl	50-300µl	100-1000µl	0.2-2µl	1-10µl	2-20µl	20-100µl	50-200µl	200-1000µl	1-20µl	20-300µl	
P11001	P11050	0.2 - 10 µl		✓					✓				✓	✓						✓	✓							
P11002	P11051	0.2 - 10 µl		✓					✓				✓	✓						✓	✓							
P11003	P11052	2 - 20 µl				✓	✓		✓	✓					✓	✓						✓	✓					
P11026	P11066	2 - 50 µl				✓	✓		✓	✓					✓	✓						✓	✓					
P11004	P11053	2 - 100 µl				✓	✓		✓	✓					✓	✓						✓	✓					
P11005	P11054	2 - 200 µl				✓	✓		✓	✓					✓	✓						✓	✓					
P11006	P11055	2 - 300 µl				✓	✓		✓	✓	✓				✓	✓	✓					✓	✓				✓	
P11007	P11056	100 - 1000 µl					✓											✓						✓				

Pipettor Brand/ Make			Gilson Pipetman Ultra					Gilson Concept			Gilson Concept			Gilson Neo				
			Single Channel					Single Channel			Multi Channel			Single Channel				
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.2-2µl	1-10µl	2-20µl	20-100µl	20-200µl	200-1000µl	0.5-10µl	5-100µl	20-300µl	1-10µl	10-100µl	30-300µl	0.2-2µl	1-10µl	20-100µl	100-1000µl
P11001	P11050	0.2 - 10 µl		✓					✓		✓				✓			
P11002	P11051	0.2 - 10 µl		✓					✓		✓				✓			
P11003	P11052	2 - 20 µl				✓	✓			✓		✓					✓	
P11026	P11066	2 - 50 µl				✓	✓			✓		✓					✓	
P11004	P11053	2 - 100 µl				✓	✓			✓		✓					✓	
P11005	P11054	2 - 200 µl				✓	✓			✓		✓					✓	
P11006	P11055	2 - 300 µl				✓	✓			✓	✓	✓	✓				✓	
P11007	P11056	100 - 1000 µl						✓										✓

Pipettor Brand/ Make			Vistalab Ovation QS					Vistalab Ovation M					Vistalab Ovation E				Eppendorf Reference					Eppendorf Electronic							
			Single Channel					Single Channel					Multi Channel				Single Channel												
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.2-2µL	1-10µL	2-20µL	10-100µL	20-200µL	100-1000µL	0.2-2µL	1-10µL	2-20µL	10-100µL	20-200µL	100-1000µL	0.5-20µL	5-250µL	2-125µL	25-1250µL	0.1-10µL	"0.1-10µL 'ULTRA MICRO"	2-20µL	10-100µL	20-200µL	100-1000µL	0.5-10µL	5-100µL	2-200µL	50-1000µL	
P11001	P11050	0.2 - 10 µl	√	√	√				√	√	√			√				√		√									
P11002	P11051	0.2 - 10 µl	√	√	√				√	√	√			√				√		√									
P11003	P11052	2 - 20 µl				√	√					√	√		√	√					√	√				√	√		
P11026	P11066	2 - 50 µl				√	√					√	√		√	√						√	√			√	√		
P11004	P11053	2 - 100 µl				√	√					√	√		√	√						√	√			√	√		
P11005	P11054	2 - 200 µl				√	√					√	√		√	√						√	√			√	√		
P11006	P11055	2 - 300 µl				√	√					√	√		√	√						√	√			√	√		
P11007	P11056	100 - 1000 µl						√					√				√							√				√	

Pipettor Brand/ Make			Eppendorf Research					Eppendorf					Thermo Finnpipette					Thermo Finnpipette		Matrix Impact/Impact2									
			Single Channel					Multi Channel					Single Channel					Multi Channel		s/mc									
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-2.5µl	0.5-10µl	2-20µl	10-100µl	20-200µl	100-1000µl	0.5-10µl	5-100µl	50-100µl	0-300µl	30-300µl	50-1200µl	0.2-10µl	0.5-10µl	5-40µl	40-200µl	100-1000µl	200-1000µl	0.1-10µl	10-100µl	30-300µl	2-125µl	2-20µl	15-1250µl			
P11001	P11050	0.2 - 10 µl		√	√				√					√	√						√								
P11002	P11051	0.2 - 10 µl		√	√				√					√	√						√								
P11003	P11052	2 - 20 µl				√	√			√	√						√					√		√					
P11026	P11066	2 - 50 µl				√	√			√	√						√					√		√					
P11004	P11053	2 - 100 µl				√	√			√	√						√					√		√					
P11005	P11054	2 - 200 µl				√	√			√	√						√					√		√					
P11006	P11055	2 - 300 µl				√	√			√	√	√	√				√					√	√	√					
P11007	P11056	100 - 1000 µl						√					√*						√	√									

Pipettor Brand/ Make			Labnet Labpette					Labnet Labpette				Labnet BioPette E					Nichiryo /Oxford Benchmate												
			Single Channel					Multi Channel				Single Channel			Multi Channel		Single Channel & Multi Channel												
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-2µl	0.5-10µl	2-20µl	10-100µl	20-200µl	100-1000µl	1-10µl	5-50µl	20-200µl	50-300µl	0.5-10µl	2-20µl	10-200µl	100-1000µl	0.5-10µl	2-20µl	10-200µl	100-1000µl	0.5-10µl	2-20µl	10-50µl	10-100µl	20-200µl	100-1000µl			
P11001	P11050	0.2 - 10 µl	√	√					√				√			√					√								
P11002	P11051	0.2 - 10 µl	√	√					√				√			√					√								
P11003	P11052	2 - 20 µl				√	√				√			√					√					√	√				
P11026	P11066	2 - 50 µl				√	√				√			√					√					√	√				
P11004	P11053	2 - 100 µl				√	√				√			√					√					√	√				
P11005	P11054	2 - 200 µl				√	√				√			√					√					√	√				
P11006	P11055	2 - 300 µl				√	√				√	√		√					√					√	√				
P11007	P11056	100 - 1000 µl						√							√				√									√	

Pipettor Brand/ Make			Socorex Calibra/Accura										Axygen Axypet														
			Single Channel					Multi Channel					Single Channel					Multi Channel									
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	0.1-20µl	0.2-20µl	0.5-10µl	1-10µl	2-20µl	10-100µl	20-200µl	100-1000µl	1-10µl	5-50µl	10-100µl	20-200µl	50-200µl	0.1-2µl	0.5-10µl	2-20µl	5-50µl	10-100µl	20-200µl	50-250µl	100-1000µl	1-10µl	5-50µl	20-200µl	50-300µl
P11001	P11050	0.2 - 10 µl			✓	✓					✓						✓							✓			
P11002	P11051	0.2 - 10 µl			✓	✓					✓						✓							✓			
P11003	P11052	2 - 20 µl						✓	✓			✓	✓	✓	✓				✓	✓	✓				✓	✓	✓
P11026	P11066	2 - 50 µl						✓	✓			✓	✓	✓	✓				✓	✓	✓				✓	✓	✓
P11004	P11053	2 - 100 µl						✓	✓			✓	✓	✓	✓				✓	✓	✓				✓	✓	✓
P11005	P11054	2 - 200 µl						✓	✓			✓	✓	✓	✓				✓	✓	✓				✓	✓	✓
P11006	P11055	2 - 300 µl						✓	✓			✓	✓	✓	✓				✓	✓	✓	✓			✓	✓	✓
P11007	P11056	100 - 1000 µl								✓													✓				

Pipettor Brand/ Make			BRAND		Eppendorf		Biohit Proline plus		Gilson		Thermo		Abdos	
Abdos Code for Filter Pipette Tips	Volume		1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml
P10144	1 - 5 ml				✓		✓		✓				✓	
P10145	1 - 10 ml			✓		✓		✓		✓				✓

Pipettor Brand/ Make			Abdos premium	Abdos premium Plus	ABDOS D. Pipette (Electronic)	Brand Transferpette S	Gilson Pipetman	Eppendorf Research
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	Single channel			Single channel		
			100-1000µl	100-1000µl	100-1000µl	100-1000µl	100-1000µl	100-1000µl
P11015	-	100 - 1000 µl XL	✓	✓	✓	✓	✓	✓
P11016	-	100 - 1250 µl	✓	✓	✓	✓	✓	✓

Pipettor Brand/ Make			THERMO (Electronic) Finnpiquette	Thermo Finnpiquette F3	Nichiryo NICHIPET EX	SOCOREX ACURA 825	BIOHIT Proline	ErgoOne Star Lab
Abdos Code for Filter Pipette Tips	Abdos Code for Last Drop Filter Pipette Tips	Volume	Multi channel	Single channel				
			100-1200µl	100-1000µl	100-1000µl	100-1000µl	100-1000µl	100-1000µl
P11015	P11057	100 - 1000 µl XL	✓	✓	✓	✓	✓	✓
P11016	P11058	100 - 1250 µl	✓	✓	✓	✓	✓	✓

Pipettor Brand/ Make			BRAND		Eppendorf		Biohit Proline plus		Gilson		Thermo		Abdos	
Abdos Code for Filter Pipette Tips	Volume		1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml	1-5 ml	1-10 ml
P10170	1 - 5 ml				✓		✓		✓				✓	
P10171	1 - 10 ml			✓		✓		✓		✓				✓

Note: Variants of all tips are compatible with the pipette's brand mentioned in the above list.

Eg. Type : Tips - Bulk in Resealable Bags

Variants : Pipette Tips, (P10115, P10137, P10129, P10130, P10101, P10105, P10138, P10102, P10106, P10174, P10175)
 Last Drop™ Low Retention Pipette Tips (P10001, P10002, P10003, P10004, P10005, P10006)
 Filter Pipette Tips (P11001, P11002, P11003, P11004, P11005, P11006, P11007, P11015, P11016)
 Last Drop™ Low Retention Filter Pipette Tips (P11050, P11051, P11052, P11053, P11054, P11055, P11056)

Followed with other variants & Types: Tips - Individually wrapped, Racked, Racked Sterile & Refill pack.

67 | Stepmate Stepper

- Stepmate Stepper is ideal for routine or research applications in diagnostics, molecular biology, environmental analysis and more.
- Stepmate stepper works on positive displacement pressure and offers highest precision dispensing of liquid media with high viscosity, high density and high vapour pressure.
- It provides up to 48 dispensing steps and improves work efficiently.
- It is lightweight and ergonomic.
- It can be used with one hand and is maintenance free.
- Factory fitted calibration.



Stepmate Stepper			
Code	Capacity	No./case	Price/case (₹)
E11171	0.5 - 50 ml	1	21924

Suitable Tips & Adapter For Stepmate Stepper				
Code	Capacity	Colour	No./case	Price/case (₹)
E11172D	0.5 ml	Natural	5	2241
E11173D	1.25 ml	Natural	5	2241
E11174D	2.5 ml	Natural	5	2241
E11175D	5 ml	Natural	5	2241
E11176D	12.5 ml	Natural	5	2241
E11177D	25 ml	Natural	2 pcs piston + 1 pcs adaptor	2241
E11178D	50 ml	Natural	2 pcs piston + 1 pcs adaptor	2241
E11179D	25 & 50 Adaptor		10	8657

* The first and last dispensing liquid should be discarded for precision.

Dial Setting	01	02	03	04	05
Number of Steps	48	23	15	11	8

Syringe Volume	Test Volume (µl)					A%	P%
0.50 ml	10	20	30	40	50	± 0.8	≤ 0.7
1.25 ml	25	50	75	100	125	± 0.8	≤ 0.5
2.50 ml	50	100	150	200	250	± 0.8	≤ 0.4
5.00 ml	100	200	300	400	500	± 0.4	≤ 0.3
12.50 ml	250	500	750	1000	1250	± 0.3	≤ 0.3
25.00 ml	500	1000	1500	2000	2500	± 0.2	≤ 0.3
50.0 ml	1000	2000	3000	4000	5000	± 0.2	≤ 0.2



68 | Supreme Bottle Top Dispenser

- Supreme is a robust and reliable basic bottle top dispenser designed through years of research.
- Supreme has a smooth and soft plunger for easy working in difficult laboratory conditions.
- Fully Autoclavable.

SPECIFICATIONS :

Piston	PTFE & ETP
Cylinder	Borosilicate Glass
Volume Adjustment Knob	PP, 180°, Rotation
Value Housing	PFA
Value Assembly	Borosilicate Glass Ball & Seat
Discharge Assembly	PTFE
Delivery Tube	FEP
Inlet Tube	FEP
Calibration	Individually Calibrated and Certified
Accuracy & Reproducibility	According to ISO 8655 Standards
Compatibility	Excellent with all reagents except HF



Code	Capacity	Increment	Accuracy	CV	No./case	Price/case (₹)
E11701	0.25 – 2.5 ml	0.05 ml	± 0.6 % ± 0.015 ml	± 0.2 % ± 0.005 ml	1	11648
E11702	0.50 – 5 ml	0.1 ml	± 0.6 % ± 0.030 ml	± 0.2 % ± 0.010 ml	1	11648
E11703	1 – 10 ml	0.2 ml	± 0.6 % ± 0.060 ml	± 0.2 % ± 0.020 ml	1	11648
E11704	2.5 – 30 ml	0.5 ml	± 0.6 % ± 0.180 ml	± 0.2 % ± 0.060 ml	1	17202
E11705	5 – 60 ml	1 ml	± 0.6 % ± 0.360 ml	± 0.2 % ± 0.120 ml	1	17202
E11706	10 – 100 ml	2 ml	± 0.6 % ± 0.600 ml	± 0.2 % ± 0.200 ml	1	20748



69 | Supreme Plus Bottle Top Dispenser

- Supreme duet is the most advanced, next generation, highly robust and reliable bottle top dispenser designed through years of research.
- Supreme duet has a recirculation valve for redirecting the liquid into the bottle for bubble free dispensing without any loss of reagent.
- Supreme duet has a smooth and soft plunger for easy working in difficult laboratory conditions.
- Fully Autoclavable.

SPECIFICATIONS :

Piston	PTFE & ETP
Cylinder	Borosilicate Glass
Volume Adjustment Knob	PP, 180° Rotation
Value Housing	PFA
Re-Circulation Value Housing	PFA
Value Assembly	Borosilicate Glass Ball & Seat
Discharge Assembly	PTFE
Delivery Tube	FEP
Inlet Tube	FEP
Calibration	Individually Calibrated and Certified
Accuracy & Reproducibility	According to ISO 8655 Standards
Compatibility	Excellent with all reagents except HF



Code	Capacity	Increment	Accuracy	CV	No./case	Price/case (₹)
E11711	0.25 – 2.5 ml	0.05 ml	± 0.6 % ± 0.015 ml	± 0.2 % ± 0.005 ml	1	16016
E11712	0.50 – 5 ml	0.1 ml	± 0.6 % ± 0.030 ml	± 0.2 % ± 0.010 ml	1	16016
E11713	1 – 10 ml	0.2 ml	± 0.6 % ± 0.060 ml	± 0.2 % ± 0.020 ml	1	16016
E11714	2.5 – 30 ml	0.5 ml	± 0.6 % ± 0.180 ml	± 0.2 % ± 0.060 ml	1	22464
E11715	5 – 60 ml	1 ml	± 0.6 % ± 0.360 ml	± 0.2 % ± 0.120 ml	1	22464
E11716	10 – 100 ml	2 ml	± 0.6 % ± 0.600 ml	± 0.2 % ± 0.200 ml	1	26728



70 | Supreme Duet Bottle Top Dispenser

- Supreme duet is the most advanced, next generation, highly robust and reliable bottle top dispenser designed through years of research.
- Supreme duet has a recirculation valve for redirecting the liquid into the bottle and rinsing the instrument without dismounting from the bottle.
- Supreme duet with a worldwide patent can be used in 4 modes: dilution, rinsing, dual liquid handling and re-circulation all in a single unit.
- Supreme duet has a smooth and soft plunger for easy working in difficult laboratory conditions.
- Fully Autoclavable.

SPECIFICATIONS :

Piston	PTFE & ETP
Cylinder	Borosilicate Glass
Volume Adjustment Knob	PP, 180° Rotation
Value Housing	PFA
Re-Circulation Value Housing	PFA
Value Assembly	Borosilicate Glass Ball & Seat
Discharge Assembly	PTFE
Delivery Tube	FEP
Inlet Tube	FEP
Calibration	Individually Calibrated and Certified
Accuracy & Reproducibility	According to ISO 8655 Standards
Compatibility	Excellent with all reagents except HF



Code	Capacity	Increment	Accuracy	CV	No./case	Price/case (₹)
E11731	0.25 – 2.5 ml	0.05 ml	± 0.6 % ± 0.015 ml	± 0.2 % ± 0.005 ml	1	28912
E11732	0.50 – 5 ml	0.1 ml	± 0.6 % ± 0.030 ml	± 0.2 % ± 0.010 ml	1	28912
E11733	1 – 10 ml	0.2 ml	± 0.6 % ± 0.060 ml	± 0.2 % ± 0.020 ml	1	28912
E11734	2.5 – 30 ml	0.5 ml	± 0.6 % ± 0.180 ml	± 0.2 % ± 0.060 ml	1	39052
E11735	5 – 60 ml	1 ml	± 0.6 % ± 0.360 ml	± 0.2 % ± 0.120 ml	1	39728
E11736	10 – 100 ml	2 ml	± 0.6 % ± 0.600 ml	± 0.2 % ± 0.200 ml	1	54808



71 | Serological Pipettes Sterile, PS

- ABDOS serological pipettes are designed for accurate and rapid fluid dispensing.
- ABDOS sterile serological pipettes are pyrogen free and PE filter plugged for a variety of liquid handling applications. The sharp, black, highly legible permanent graduations prevent ambiguity and guarantee precise reading and accurate dispensing to $\pm 2\%$.
- Made of transparent medical grade polystyrene, sterilized by gamma irradiation.
- ABDOS serological pipettes are tested for endotoxins (0.005 EU/ml), cytotoxicity (ISO 10993-5) and are guaranteed non-haemolytic.
- Ideal in Cell culture & tissue culture applications.
- The reverse graduations of ABDOS disposable serological pipettes show volume removed or remaining on all pipettes larger than 1ml. Moreover, the generous negative graduations provide additional pipetting volume.
- ABDOS sterile serological pipettes have an effective filter barrier to prevent overflow of liquid into pipette. Designed to fit with available motorized pipette controllers.



STERILE R



Code	P10601	P10602	P10603	P10604	P10605	P10606
Capacity	1 ml	2 ml	5 ml	10 ml	25 ml	50 ml
Height	262 mm	280 mm	333 mm	354 mm	312 mm	360 mm
No./case	500	400	200	200	200	100
Price/case (₹)	5550	4842	3150	3360	6510	6300

72 | Fast Release Pipette Pump

- Abdos fast release pipette pump ensures quick and accurate operation.
- This lightweight pipette pump has a fast release trigger that dispenses the entire pipette contents.
- The thumb wheel easily rotates for precision aspirating or dispensing, down to a volume of one drop at a time.
- The thumb wheel can be used to blow out the contents of the pipette.
- Resistant to acids, alkalis.
- Easily disassemble for cleaning.



Code	Capacity	No./case	Price/case (₹)
E11219	2 ml	4	3675
E11220	10 ml	4	3675
E11221	25 ml	4	4200

73 | Handypette Pipette Aid

- Colour coded by volume with green for 10 ml and red for 25 ml.
- Users can easily insert glass and plastic pipettes into the collar with stable fingers for secure hold.
- Rotating the knurled thumbwheel draws liquid to desired volumes. To release liquid apply light pressure to the fast release lever. For gradual dispensing rotate the thumb wheel.
- Resistant to acids, alkalis.
- Easily disassemble for cleaning.



Code	Capacity	No./case	Price/case (₹)
E11222	2 ml	4	2520
E11218	10 ml	4	2520
E11216	25 ml	4	2770

74 | Rubber Pipette Pump

- Pump opening is standard to fit almost all glass and plastic pipettes.
- One size can be used for pipetting liquid upto 100 ml.
- The pump has a heavy wall and easy to grip body.

Code	Capacity	No./case	Price/case (₹)
E11217	Up to 100 ml	4	2550



75 | Rave Pipette Controller, PP

- Abdos Rave Pipette Controller is robust, lightweight and its simple to use operations makes it ideal for repetitive pipetting.
- Users can use Volumetric and Serological Pipettes ranging from 1 ml to 100 ml.
- Abdos Rave Pipette Controller has autoclavable silicone pipette holder.
- Abdos Rave Pipette Controller is supplied with integral and replaceable 0.3 um filter. The in-line filter prevents contamination.
- Precise Pipetting control is possible in Abdos Rave Pipette Controller.



Rave Pipette Controller			
Code	Product	No./case	Price/case (₹)
E1113	Rave Pipette Controller	1	3360

Spare Filters			
Code	Product	No./case	Price/case (₹)
E1119	Spare 3.00 um Filter	1	280

76 | Rave Pipette Filler

- Abdos Rave Plus Pipette Filler is robust, light-weight and is ergonomically designed to allow longer, fatigue-free pipetting.
- Abdos Rave Plus Pipette Filler is powerful and can fill a 50 ml Pipette in less than 10 seconds. Motor & pump operate quietly with very low vibration.
- Users can use Volumetric and Serological Pipettes ranging from 1 ml to 100 ml.
- Abdos Rave Plus Pipette Filler is supplied with Lithium-ion battery that provides enough battery power to finish the users series.
- Abdos Rave Pipette Controller is supplied with integral and replaceable 0.45 µm filter.

SPECIFICATIONS :

Battery	Lithium-Ion
Battery Service Life	More than 8 hours of Intermittence use.
Charging Time	Approx. 2 Hours.
Pipette Types	Glass or Plastic Pipettes (0.1-100ml)
Aspirate Speeds	8
Dispense Speeds	8 Gravity Dispense
Filter	0.45 µm Hydrophobic



Rave Pipette Filler			
Code	Product	No./case	Price/case (₹)
E1114	Rave Plus Pipette Filler	1	20900
E1120	Rave Eco Pipette Filler	1	15800

Rave Pipette Filler			
Code	Product	No./case	Price/case (₹)
E1116	Spare 0.45 µm Filter	1	730
E1117	Spare Lithium - ion	1	6405
E1118	Spare Adapter	1	5616



77 | Pipette Stand Vertical, PP

- These Polypropylene racks can hold upto 28 glass or plastic pipettes in vertical position.
- The Heavy base has a diameter of 9 inch and polypropylene coated square rod having a length of 15 inches is screwed into the base.
- These racks are available in white colour.
- There are two discs to hold the pipette and give it stability. Both Discs can be moved in upward and downward direction to accommodate various lengths of pipette.
- Can be autoclaved.



Code	Places	D x H	No./case	Price/case (₹)
P70205	28	232 x 381 mm	1	608




78 | Pipette Stand Horizontal, PP

- These Polypropylene racks can hold upto 12 glass or plastic pipettes in horizontal position.
- The rack consists of three polypropylene coated metal rods to provide stability and strength to rack.
- Can be Autoclaved.
- These Racks are available in white colour.
- These racks can be easily assembled or disassembled to save space.



Code	Places	No./case	Price/case (₹)
P70204	12	6	1097

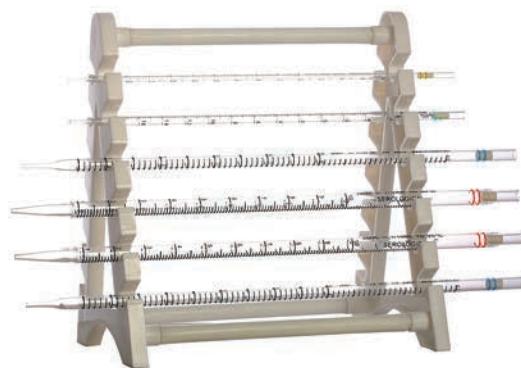

79 | Pipette Storage Rack with Magnet, ABS

- These racks help to protect and organize glass and plastic pipettes.
- Angled four shelved compartments keep 0.1 to 50 mL pipettes or cans within easy reach while preventing damage and clutter.
- These have cut-out viewing window and come with two removable attachments that hold pipette bulbs, fillers, and pumps.
- These unique innovative magnetized racks have strong magnets on both sides and mount securely to most metal surfaces.

Code	Places	L x W x H	No./case	Price/case (₹)
P70202	Store 1 - 50 ml pipette or cans	291 x 88 x 401 mm	1	4148



80 | Pipette Storage Rack, ABS

- These racks can be assembled together horizontally or vertically to build the desired configuration, or used as individual holders, using sections.
- Angle shelve design makes these racks compatible to use for storing 0.1 to 50 ml of Serological pipettes.
- Can be used bench-top or can be connected to most metal surfaces.

Code	Size (W x H x D)	Compatible	No./case	Price/case (₹)
P10620	301 x 100 x 127.5mm	0.1 ml to 50 ml	3	6999



81 | Pasteur Pipettes, LDPE

- Excellent chemical stability.
- Suitable for drawing, transferring and blending various volumes of liquid.
- Transparent with clear graduation markings for easy liquid level observation.
- Manufactured in ISO 8 grade clean room.
- No additive contamination.
- Pipettes can be twisted and contorted for use with micro-vessels & oddly shaped containers.
- High precision and good repeatability.
- The individually packed pipettes are sterilized by Gama radiation.



Individually wrapped Pasteur Pipettes



Code	P31207	P31208	P31201	P31202	P31209	P31210	P31205	P31206
Capacity	0.4 ml	0.4 ml Sterile, Individually wrapped	1.0 ml	1.0 ml Sterile, Individually wrapped	2.0 ml	2.0 ml Sterile, Individually wrapped	3.0 ml	3.0 ml Sterile, Individually wrapped
Height	131 mm	131 mm	154 mm	154 mm	152 mm	152 mm	154 mm	154 mm
No./case	500	500	500	450	500	450	500	450
Price/case (₹)	758	2727	686	2205	697	2205	710	2205
Price/48 Case (₹)	34178	123042	30943	99482	31444	99482	32048	99482

82 | RIA Vial & Cap / Test Tube & Cap

- Abdos Ria Vials are polypropylene/polystyrene tubes generally used in Radioimmuno Assay –a scientific method used to test antigens (for sample, hormone levels in the blood) without the need to use a bioassay.
- Abdos Ria Vial PP are clear and can withstand 3000*g RCF during centrifugation while the transparent polystyrene tubes can withstand 1400*g RCF.
- The PP tubes can accept common acids, alkalies & solvents at room temperature while the PS tubes can accept mild bases, weak acids but not organic solvents.
- Amber Ria Vials are used for light sensitive samples.
- Abdos Ria Vials PP are autoclavable while PS tubes are non-autoclavable.



RIA Vial & Plastic Test Tube

Code	Φ x h	Material	Capacity	No./case	Price/case (₹)	Price/260 Case (₹)
PI0301	12 x 75 mm	PP	5 ml	500	443	108303
PI0303	12 x 75 mm	PS	5 ml	500	453	110710
PI0305	12 X 40 mm	PP	2.5 ml	500	335	81829
PI0306	12 X 40 mm	PS	2.5 ml	500	340	83186
PI0308	13 X 100 mm	PP	8 ml	500	1145	
PI0309	13 X 100 mm	PS	8 ml	500	1187	
PI0310	16 X 100 mm	PP	10 ml	500	1423	
PI0311	16 X 100 mm	PS	10 ml	500	1460	



RIA Vial Cap & Plastic Test Tube Cap

Code	Φ	Material	No./case	Price/case (₹)	Price/192 case (₹)
PI0304	12 mm	HDPE	500	235	42341
PI0307	12 mm	PP	500	280	50563
PI0302	12 mm	LDPE	500	280	50563
PI0312	13 mm	HDPE	1000	1108	
PI0313	16 mm	HDPE	1000	1411	



Amber RIA Vial

Code	Φ x h	Material	Capacity	No./case	Price/case (₹)
PI0301A	12 x 75 mm	PP Amber	5 ml	500	541
PI0301A1	12 x 75 mm	PP Transparent Amber	5 ml	500	541
PI0305A	12 x 40 mm	PP Amber	2.5 ml	500	414
PI0305A1	12 x 40 mm	PP Transparent Amber	2.5 ml	500	414



Amber RIA Vial Cap, HDPE

Code	Φ	Material	No./case	Price/case (₹)
PI0304A	12 mm	HDPE Amber	500	289
PI0304A1	12 mm	HDPE Transparent Amber	500	289



83 | Sample Container, PP/HDPE

- Ultra clear polypropylene container with polyethylene leak proof screw cap.
- Frosted portion for easy writing.
- Clear and easy to read graduations.
- Sterile container is individually packed in polyethylene pouch.
- Clean room ISO class 8.



Code	Capacity	Colours	Subdivision	Height	No./case	Price/Piece(₹)	Price/case (₹)
P40101	60 ml	Blue, Red & White	10 ml	55 mm	400	5.99	2399
P40102	60 ml Sterile, Individually wrapped	Blue, Red & White	10 ml	55 mm	350	7.99	2799
P40105	60 ml (Spoon Included)	Blue, Red & White	10 ml	55 mm	400	7.39	2958
P40106	60 ml, Sterile Individually Wrapped (Spoon Included)	Blue, Red & White	10 ml	55 mm	350	9.38	3284
P40103	120 ml	Blue, Red & White	20 ml	76 mm	200	8.18	1616
P40104	120 ml Sterile, Individually wrapped	Blue, Red & White	20 ml	76 mm	200	9.54	1909
P40112	200 ml	Blue, Red & White	20 ml	120 mm	150	18.36	1836
P40113	200 ml Sterile, Individually wrapped	Blue, Red & White	20 ml	120 mm	100	19.38	1938

Add Colour Code of your choice: BLUE (B), RED (R), WHITE (W)



VALUE ADDITIONS

50 ml Sample Container can withstand up to 95 kPa of pressure, best suitable for vacuum transportation lift for samples at Hospitals.

- The Unique Grip screw cap provides a secure grip in wet conditions.
- Moulded ring provides stability and confirms complete closure of the cap while ensuring 100% leak proof.
- Sterile containers are individually wrapped and has been validated according to ISO 11137 for SAL 10⁻⁶
- Engraved graduation marks and frosted surface for Name, No. and date provides better visibility on volume and traceability of the samples.
- Highly Transparent for easy visualization of samples.



An IVD CERTIFIED PRODUCTS best recommended for diagnostics with a leakproof screw cap, principally important when transporting hazardous material. Ideal for transport and storage of urine, sputum and most liquids or particulate samples.

Samples containers shatter resistant Manufactured from ultra-pure USP-VI Virgin Polypropylene (PP) and Comply with the requirement of 21 CFR 177.1520.

Containers are Manufactured inside the controlled, validated Clean Room ISO Class 8 by high-end Injection Moulding using high precision moulds which ensure smooth and symmetrical End product.

84 | Wire Sample Container Rack, Epoxy Coated Steel

- Durable racks for transport or sample handling.
- Suitable for various shaped (round, conical, flat bottom) tubes & bottles.
- Superior chemical resistance.
- Holds bottle and vessels up to 58 mm in diameter.
- Slotted Bottom has mesh that gives support.

Code	Tube Diameter	Places	L x W x H	No./case	Price/case (₹)
P40111	55 mm	24 (6 x 4 Array)	393 x 262 x 50 mm	01	3561



#CommittedtotheEarth



04 MICROBIOLOGY



PETRI DISH (PS): 60, 90 & 140 MM

SOFT INOCULATION LOOPS



CELL SPREADERS

EQUIPMENTS & MORE

Petri Dish Features

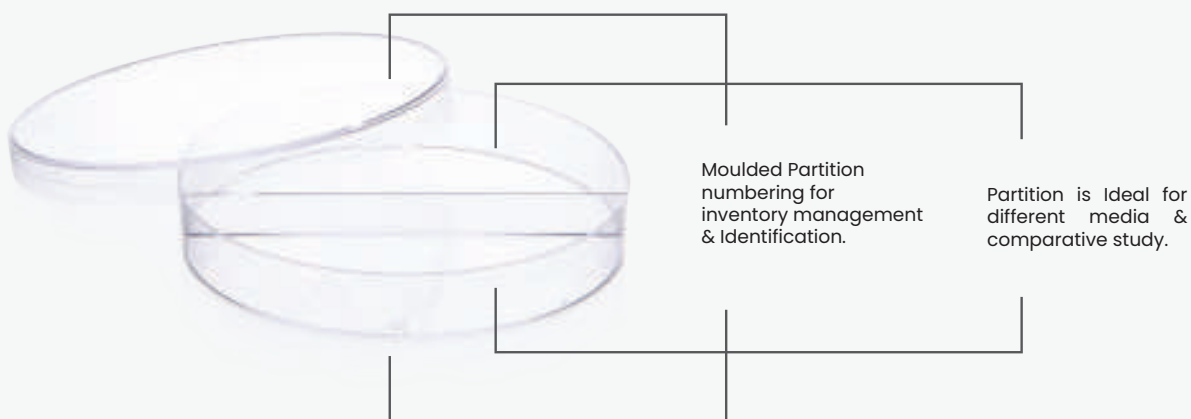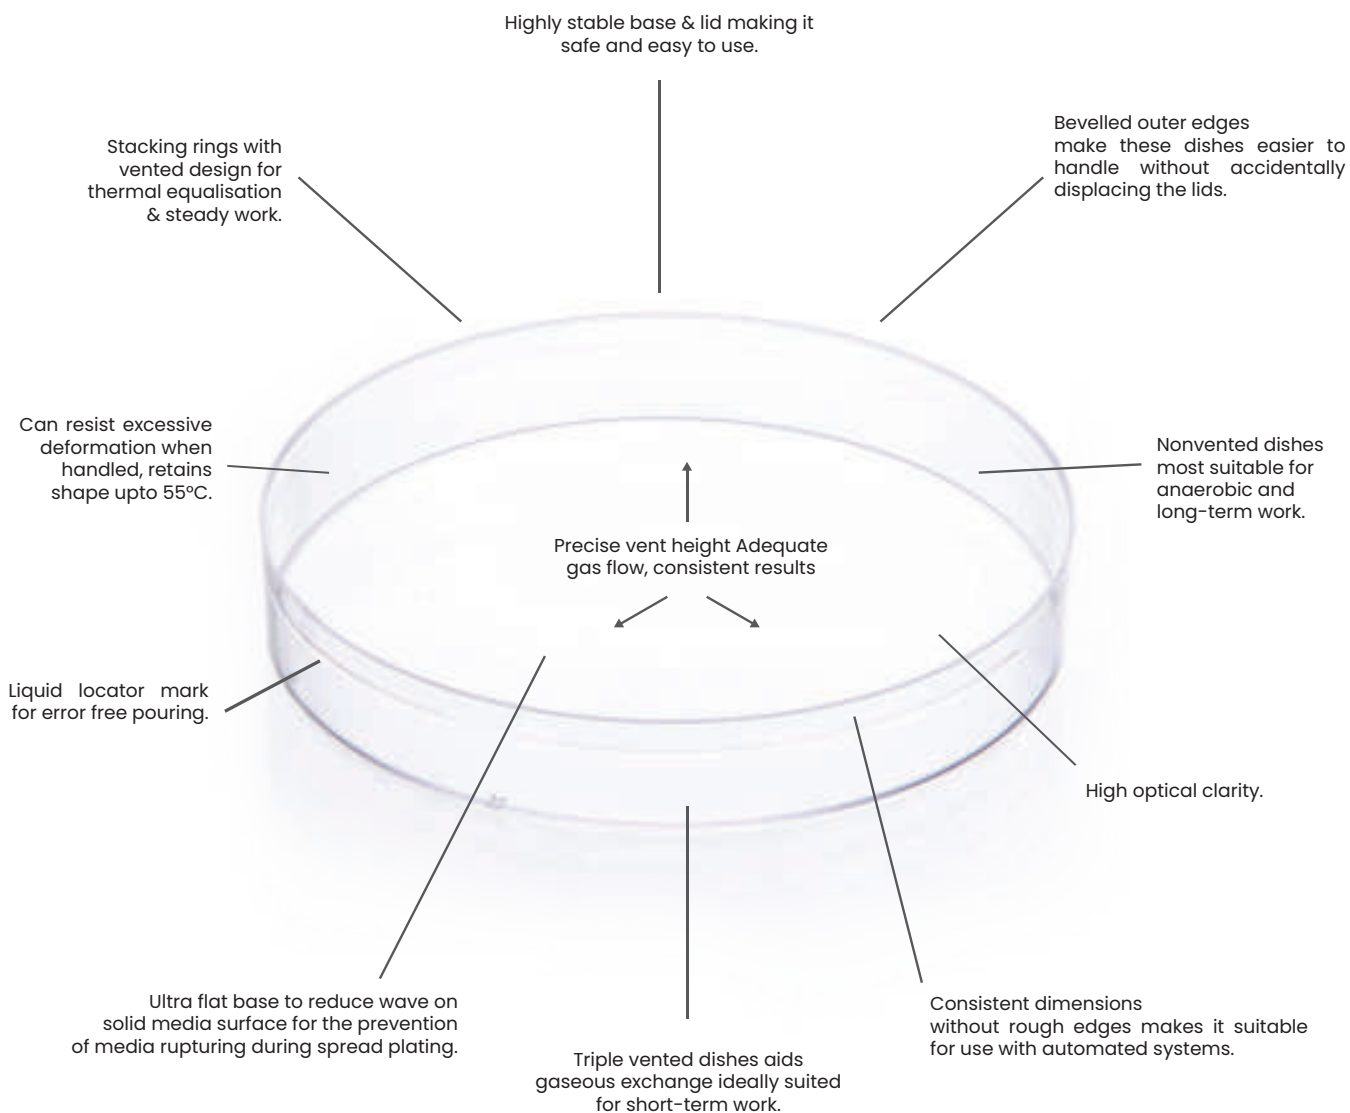

- Abdos high quality disposable Petri Dishes are suitable for all microbiological applications manufactured as per ISO 24998 'Plastics laboratory ware – Single-use'.
- Robust dimensional accuracy of 90 mm ensures compatibility with most automated systems.
- Extremely high optical clarity for easy view on microscope.
- Vented Dishes have elevated lid that allows for superior gas exchange and evaporation.
- Non-Vented Dishes have flat lid that prevents evaporation, encouraging long incubation period & anaerobic application.
- Shallow dish design allows for maximum use of incubator space.
- Easy to stack.
- Abdos Petri Dishes retain their shape upto 55°C.
- Aseptic Dishes are manufactured in clean room under controlled low bio-burden conditions for best performance in all applications.
- Abdos Petri Dishes are also available in two & three compartments that enable parallel testing of single sample using different agar, solvents and reagents.
- Sterile Plates have been validated according to ISO 11137 for SAL 10⁻⁶

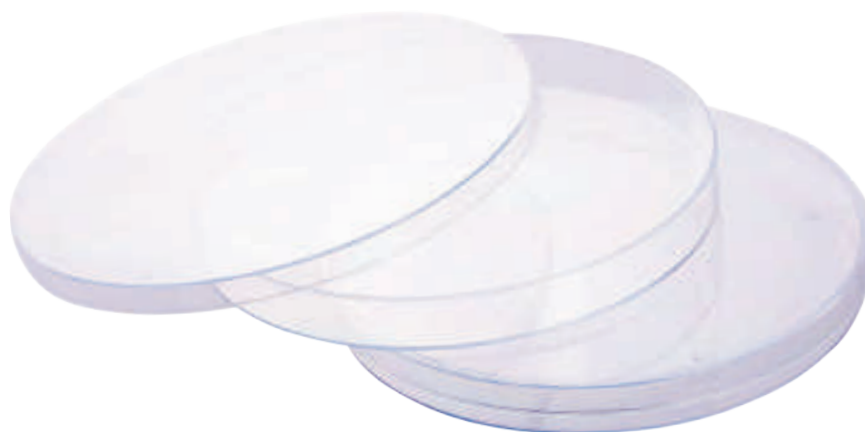

Petri Dish – Aseptic, PS								
Code	Diameter	Height	Compartment	Vented	Packing	No. / case	Price/case (₹)	Price/20 case (₹)
PI0931	60 mm	14.20 mm	No	0 Vent	Sleeve of 20	1400	8831	166013
PI0932	60 mm	14.20 mm	No	3 Vent	Sleeve of 20	1400	8831	166013
PI0901	90 mm	15.80 mm	No	3 Vent	Sleeve of 20	480	3097	58216
PI0902	90 mm	15.80 mm	No	3 Vent	Individual Wrapped	380	2771	52101
PI0903	90 mm	15.80 mm	No	0 Vent	Sleeve of 20	480	3097	58216
PI0904	90 mm	15.80 mm	No	0 Vent	Individual Wrapped	380	2771	52104
PI0933	140 mm	17.50 mm	No	0 Vent	Sleeve of 5	180	5431	102103
PI0934	140 mm	17.50 mm	No	3 Vent	Sleeve of 5	180	5431	102103

Petri Dish – Gamma Radiated Sterile, PS								
Code	Diameter	Height	Compartment	Vented	Packing	No. / case	Price/case (₹)	Price/20 case (₹)
PI0935	60 mm	14.20 mm	No	0 Vent	Sleeve of 20	1400	9100	171080
PI0936	60 mm	14.20 mm	No	3 Vent	Sleeve of 20	1400	9100	171080
PI0905	90 mm	15.80 mm	No	3 Vent	Sleeve of 20	480	3425	64390
PI0906	90 mm	15.80 mm	No	3 Vent	Sleeve of 10	480	3495	65706
PI0907	90 mm	15.80 mm	No	3 Vent	Individual Wrapped	380	3099	58261
PI0908	90 mm	15.80 mm	No	0 Vent	Sleeve of 20	480	3425	64390
PI0909	90 mm	15.80 mm	No	0 Vent	Sleeve of 10	480	3495	65706
PI0910	90 mm	15.80 mm	No	0 Vent	Individual Wrapped	380	3099	58261
PI0937	140 mm	17.50 mm	No	0 Vent	Sleeve of 5	180	5763	108344
PI0938	140 mm	17.50 mm	No	3 Vent	Sleeve of 5	180	5763	108344

Petri Dish – Gamma Radiated Sterile, Double Wrapped, PS								
Code	Diameter	Height	Compartment	Vented	Packing	No. / case	Price/case (₹)	
PI0928	90 mm	15.80 mm	No	0 Vent	Sleeve of 18	432		3547
PI0927	90 mm	15.80 mm	No	0 Vent	Sleeve of 8	384		3327
PI0939	90 mm	15.80 mm	No	3 Vent	Sleeve of 18	432		3547
PI0940	90 mm	15.80 mm	No	3 Vent	Sleeve of 8	384		3327

2 Compartment Petri Dish - Aseptic, PS

Code	Diameter	Height	Compartment	Vented	Packing	No. / case	Price/case (₹)
PI0911	90 mm	15.80 mm	2 Compartment	3 Vent	Sleeve of 20	480	3959
PI0912	90 mm	15.80 mm	2 Compartment	3 Vent	Individual Wrapped	380	3535
PI0913	90 mm	15.80 mm	2 Compartment	0 Vent	Sleeve of 20	480	3959
PI0914	90 mm	15.80 mm	2 Compartment	0 Vent	Individual Wrapped	380	3535

2 Compartment Petri Dish - Gamma Radiated Sterile, PS

Code	Diameter	Height	Compartment	Vented	Packing	No. / case	Price/case (₹)
PI0915	90 mm	15.80 mm	2 Compartment	3 Vent	Sleeve of 20	480	4389
PI0916	90 mm	15.80 mm	2 Compartment	3 Vent	Individual Wrapped	380	3968
PI0917	90 mm	15.80 mm	2 Compartment	0 Vent	Sleeve of 20	480	4389
PI0918	90 mm	15.80 mm	2 Compartment	0 Vent	Individual Wrapped	380	3968



3 Compartment Petri Dish - Aseptic, PS

Code	Diameter	Height	Compartment	Vented	Packing	No. / case	Price/case (₹)
PI0919	90 mm	15.80 mm	3 Compartment	3 Vent	Sleeve of 20	480	5027
PI0920	90 mm	15.80 mm	3 Compartment	3 Vent	Individual Wrapped	380	4319
PI0921	90 mm	15.80 mm	3 Compartment	0 Vent	Sleeve of 20	480	5027
PI0922	90 mm	15.80 mm	3 Compartment	0 Vent	Individual Wrapped	380	4319

3 Compartment Petri Dish - Gamma Radiated Sterile, PS

Code	Diameter	Height	Compartment	Vented	Packing	No. / case	Price/case (₹)
PI0923	90 mm	15.80 mm	3 Compartment	3 Vent	Sleeve of 20	480	5568
PI0924	90 mm	15.80 mm	3 Compartment	3 Vent	Individual Wrapped	380	5018
PI0925	90 mm	15.80 mm	3 Compartment	0 Vent	Sleeve of 20	480	5568
PI0926	90 mm	15.80 mm	3 Compartment	0 Vent	Individual Wrapped	380	5018



86 | Petri Dish Stand, ACRYLIC

- The simple design can hold and secure glass and plastic petri-dishes.
- This stand makes transport safe and easier.
- Clear racks give the visibility to check culture during incubation.



Code	Places	Size (W x H x D)	Compatible Petridish	No./case	Price/case (₹)
PI0970	28	213 x 252 x 112mm	90mm	1	1830



87 | Soft Inoculation Loop, ABS

- Smooth surface provides uniform and gentle streaking without damaging the gel surface.
- Polygonal shaft improves grip, assists orientation and makes operation easy.
- Available in individual wrapped pack and zip lock sleeve that eliminates the risk of contamination.
- Sterile loops have been validated according to ISO 11137 for SAL 10⁻⁶



STERILE R

Code	Capacity	Colour	Length	Packing	No./case	Price/case (₹)
PI0985	1 µl loop + Incorporated Needle	White	200 mm	Sleeve of 20	2000	9287
PI0986	1 µl loop + Incorporated Needle	White	200 mm	Individually Wrapped	500	3338
PI0987	10 µl loop + Incorporated Needle	Blue	200 mm	Sleeve of 20	2000	9287
PI0988	10 µl loop + Incorporated Needle	Blue	200 mm	Individually Wrapped	500	3338




88 | Cell Spreader Gamma Radiated Sterile, PP

- Cell spreaders are designed to spread and disperse liquid onto the surface of an agar or any media plate without gouging or cutting the medium.
- Available in Triangular, T-shaped & L-shaped.
- Sterile Cell Spreader has been validated according to ISO 11137 for SAL 10⁻⁶



STERILE R

Code	Shape	Length	Blade Width	Colour	Packing	No./case	Price/case (₹)
PI0989	Triangle Shaped	215 mm	30 mm	Blue	Individually Wrapped	100	1903
PI0990	Triangle Shaped	240 mm	60 mm	Yellow	Individually Wrapped	100	2836
PI0991	T- Shaped	140 mm	35 mm	Blue	Individually Wrapped	400	6363
PI0995	L - Shaped	145 mm	37.5 mm	Green	Individually Wrapped	100	1122
PI0996	L - Shaped	145 mm	37.5 mm	Green	Sleeve of 10	500	3152

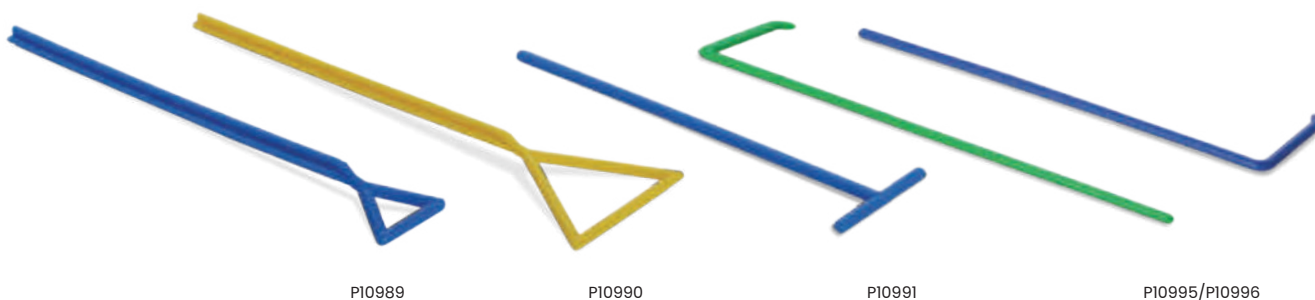

PI0989

PI0990

PI0991

PI0995/PI0996

89 | Swirlex - Digital Handheld Homogenizer

- ABDOS Swirlex-Digital Handheld Homogenizer is a powerful handheld homogenizer designed to rapidly homogenize, disperse and disintegrate biological samples in 10–30 seconds with adjustable speed ranging from 8,000 rpm up to 30,000 rpm.
- The homogenizer is ideal to use with samples from 0.5ml to 250ml with three types of generator probes available for different sample volume range.
- It is lightweight, can be held with one hand and also mounted to a stand for fatigue-free and longer operation. Complete homogenization of tissues (muscle, liver, breast tissue, etc.) is generally achieved in a few seconds.
- Autoclavable generator shaft is made up of 316L stainless steel Interchangeable generator probes that are easily disassembled for clean-up.
- Optional H-type stand with adjustable height and angle available for more convenient and lengthier operation.

Swirlex-Digital Hand Held Homogenizer				
Code	Product	Volume Range	No./case	Price/case (₹)
E12410	Swirlex-Digital Hand Held Homogenizer with Dispersing shaft Supporting for volume 0.1-50 ml & Support Stand.	0.1-50 ml	1	86500
E12420	Swirlex-Digital Hand Held Homogenizer with Dispersing shaft Supporting for volume 1-250 ml & Support Stand	1-250 ml	1	89800

Spare Accessories				
Code	Product	Volume Range	No./case	Price/case (₹)
E12411	Dispersing Shaft - Length-90mm, process volume- 0.1-50 ml	5 mm	1	44000
E12412	Dispersing Shaft - Length-160mm, process volume- 0.3-50 ml	7 mm	1	47000
E12413	Dispersing Shaft - Length-150mm, process volume-1-250 ml	10 mm		
E12414	Dispersing Shaft Length-170mm;process volume-2-250 ml	14 mm		
E12415	Support Stand	-		

SPECIFICATIONS :

Voltage	220-240 V
Frequency	50-60 Hz
Motor Type Universal Motor	AC Carbon Brush Motor
Speed range	8000-30000 rpm
Max. Circum Speed	6.3-14 m/sec
Speed Control Dial Knob	6 Stage
Working Volume (ml, H ₂ O)	0.1-50 ml (5mm Dispersing Shaft-E12411) 1-250 ml (10mm Dispersing Shaft-E12413)
Maximum Viscosity	5,000 mPas
Material of Dispersing Shaft	SS 316L Stainless steel, PTFE
Weight	0.6 kg
Dimension (L x W x H)	46 x 55 x 230 mm
Noise	72 dB
Permissible ambient Temperature & Humidity	5-40°C
Permissible relative humidity	80%
Protection Class	IP20



90 | Swirlex - Flapping Homogenizer (Stomaker)

- Swirlex-Flapping Homogenizer (Stomaker) is a new generation lab blender, silent, easy-to-use & has a new design, with great new features, along with the silent blending. It is adapted to all kinds of applications and with a guarantee of optimal extraction, it is a great tool for lab analyses avoiding all risk of cross-contamination and damage.
- It can be used to extract bacteria from solid samples as well as homogenization of animal tissues, cosmetics, and biological samples. It is convenient, very quick, mild, accurate and also provides good repeatability.
- To extract bacteria from solid samples, put the original samples and the diluents into a sterile bag. Put the bag then into the homogenizer, through the flapping of the paddles. The material inside the bag can rapidly reach a homogenized state by the pressure, shaking, and vibration inside.
- In order to get a guaranteed uniformity of the effective extraction of the bacteria inside and on the surface of the solid samples, make sure to include all the materials in the sterile bag to the homogenizer. Then the homogenized sample can be used for analysis, the sterile bag avoids the cross-contamination.
- The main advantage of Swirlex -flapping homogenizer is that it is convenient, very quick, mild, accurate and also provides good repeatability. Samples used for the extraction will not be contaminated, damaged, heated, and no sterilization, as well as no container is needed, thus no container cleaning process either.

Swirlex - STOMAKER - Flapping Homogenizer						
Code	Product	Flapping Speed	Exterior Size	Interior Size	No./case	Price/case (₹)
E12430	Stomaker, Stainless Steel Door	Adjustable between 20-600 Stokes/min (10-300rpm/min)	45 x 21 x 24 cm	10 x 19 x 22 cm	1	P.O.R.
E12431	Stomaker Plus, Stainless Steel Door with Observation Window	Adjustable between 20-600 Stokes/min (10-300rpm/min)	45 x 21 x 24 cm	10 x 19 x 22 cm	1	P.O.R.

Spare Accessories				
Code	Product	Capacity	No. of bag / Box	Price/case (₹)
E12432	Sterilization Bag	80 ml	1500 (25 pcs per pack, 60 packs per case)	P.O.R.
E12433	Sterilization Bag	400 ml	500 (25 pcs per pack, 20 packs per case)	P.O.R.
E12435	Sterilization Bag with filter on one side	400 ml	500 (25 pcs per pack, 20 packs per case)	P.O.R.
E12436	Sterilization Bag with overall filter	400 ml	500 (25 pcs per pack, 20 packs per case)	P.O.R.
E12437	Clip for Sterilization Bag	-	1	P.O.R.

SPECIFICATIONS :

	STOMAKER	STOMAKER PLUS
Voltage	220-240 V	220-240 V
Frequency	50-60 Hz	50-60 Hz
Door Design	Stainless Steel Door	Stainless Steel Door with observation window
Capacity Range	50-400 mL	50-400 mL
Flapping Speed	Adjustable between 20-600 Stokes/min(10-300rpm/min)	Adjustable between 20-600 Stokes/min(10-300rpm/min)
Exterior Size (W x D x H)	45 x 21 x 24 cm	45 x 21 x 24 cm
Interior Size (W x D x H)	10 x 19 x 22 cm	10 x 19 x 22 cm





05 CELL CULTURE

CELL CULTURE: FLASKS, PLATES & DISHES

BIO REACTION TUBES

ROLLER BOTTLES & MEDIA BOTTLES

BIOFILL – FILTRATION SYSTEM & MORE

91 | Cell Culture Flasks, PS

- Abdos Cell culture flasks are made from the highest quality of virgin polystyrene.
- Culture flasks have been treated with vacuum plasma to assure uniform growth.
- Flat high clarity polysterene surface for distortion-free observation.
- Angled neck for easy access till corner of the flask.
- Frosted writing area with clear moulded graduation marking.
- Designed with precision for stackable stability.
- Culture flask with breathable vented cap membrane 0.22 μm , hydrophobic filter ensure gas exchange without contamination.
- Sterilized by E-beam, Sterile culture flask has been validated according to ISO 11137 for SAL 10^{-6}



Code	Capacity	Cap Style	Cell Growth Area	Recommended Medium Volume	No. / Pack	No./case	Price/case (₹)
P21010	50 ml	Sealed Cap	25 cm ²	5 ml - 7.5 ml	10	200	9489
P21011	50 ml	Vent Cap	25 cm ²	5 ml - 7.5 ml	10	200	10813
P21012	250 ml	Sealed Cap	75 cm ²	15 ml - 22.5 ml	5	100	9268
P21013	250 ml	Vent Cap	75 cm ²	15 ml - 22.5 ml	5	100	10813
P21014	750 ml	Sealed Cap	175 cm ²	35 ml - 52.5 ml	5	40	6797
P21015	750 ml	Vent Cap	175 cm ²	35 ml - 52.5 ml	5	40	7944
P21016	950 ml	Sealed Cap	225 cm ²	45 ml - 67.5 ml	5	25	8551
P21017	950 ml	Vent Cap	225 cm ²	45 ml - 67.5 ml	5	25	10620



Both vent and plug seal caps are available




92 | Tissue Culture Treated Plates, PS

- Abdos Tissue culture treated plates are made from highest quality of virgin polystyrene.
- Plates are designed with low profile & low-evaporation rate ensuring no loss of samples.
- Vital gaps on the bottom corners of each plate eliminates scraping of the microscopic lens.
- Plates have been treated with vacuum plasma to assure uniform growth.
- Easy to peel-open and individually wrapped blister pack with lot number for traceability.
- Sterilized by E-beam, Sterile plates have been validated according to ISO 11137 for SAL 10^{-6}



STERILE E

Code	No. of well	Cell Growth Area	Bottom shape	Recommended Medium Volume	No./case	Price/case (₹)
P21020	6	9.5 cm ²	flat	1.90 ml - 2.90 ml	50	5517
P21021	12	3.6 cm ²	flat	0.76 ml - 1.14 ml	50	5793
P21022	24	1.9 cm ²	flat	0.38 ml - 0.57 ml	50	5793
P21023	48	0.88 cm ²	flat	0.19 ml - 0.28 ml	50	6234
P21024	96	0.32 cm ²	flat	0.10 ml - 0.20 ml	100	10482
P21025	96	0.32 cm ²	U	0.10 ml - 0.20 ml	100	13240
P21026	96	0.32 cm ²	V	0.10 ml - 0.20 ml	100	13240

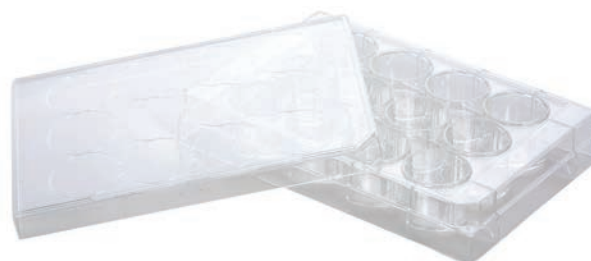

93 | Cell Culture Dish, PS

- Abdos Tissue culture treated plates are made from highest quality of virgin polystyrene.
- Culture dishes are ideal for all types of culturing where microscopic observation is required.
- Dishes have been treated with vacuum plasma to assure uniform growth.
- Flat high clarity polysterene surface for distortion-free observation.
- Sterilized by E-beam, Sterile culture dish has been validated according to ISO 11137 for SAL 10⁻⁶



Code	Diameter	Height	Cell Growth Area	Recommended Medium Volume	No. / Pack	No./case	Price/case (₹)
P21030	35 mm	9 mm	9 cm ²	1.80 ml - 2.70 ml	20	500	7172
P21031	60 mm	12 mm	21 cm ²	4.20 ml - 6.30 ml	20	500	8827
P21032	100 mm	17.7 mm	55 cm ²	11 ml - 16.50 ml	20	300	7944
P21033	150 mm	23.1 mm	152 cm ²	30.40 ml - 45.60 ml	5	100	10482

94 | Cell Scraper, PP/HIPS

- Abdos Cell Scrapers blades are made for HIPS and handle is made of PP.
- Specially designed with free rotating blade to turn as per required direction.
- Sterilized by E-beam, Sterile cell scrapers have been validated according to ISO 11137 for SAL 10⁻⁶



APPLICATION

P21040 - T-25/ T-75 Cell Culture flasks, 60 mm cell culture dish

P21041 - T-75/ T-175/ T-225 Cell Culture flasks, 150 mm cell culture dish

Code	Length	Blade Width	No./case	Price/case (₹)
P21040	220 mm	13 mm	100	8248
P21041	280 mm	20 mm	100	10284

95 | Cell Strainers

- ABDOS Cell strainers are manufactured from a strong medical grade nylon mesh with fine and even spaced pores used for isolating primary cells to suffice tissue culture technique for obtaining uniform single cell suspension from tissues.
- These strainers are available in 3 mesh sizes : 40 µm, 70 µm and 100 µm with 3 different color codings for easy identification.
- The frame of strainer is made of virgin Polypropylene with extended lip for easy handling.
- These strainers provide ideal fitment with ABDOS 50 ml Centrifuge tubes.
- Sterilized by Gamma irradiation, Cell Strainers have been validated according to ISO 11137 for SAL 10⁻⁶



Code	Pore Size	Colour	No./case	Price/case (₹)
P21050	40 µm	Blue	50	8800
P21051	70 µm	White	50	8800
P21052	100 µm	Yellow	50	8800



96 | Roller Bottles, PS

- ABDOS Roller bottles are made from the highest quality Polystyrene suitable for high yield of cell growth and multiplication.
- These bottles are available in 3 volumes of 1000ml, 2000ml, 5000ml with wide cell growth area of 490cm², 850cm², 1900cm² for adhesions and huge growth volume for cell suspension.
- These bottles are Designed with large knurls on the cap for easy grip and to prevent slip during process.
- These bottles have silk-printed graduation for easy identification.
- Suitable for all the general instruments and automation used in tissue/ cell culture technique.
- Sterilized by Gamma irradiation, sterile roller bottles have been validated according to ISO 11137 for SAL 10⁻⁶



Code	Capacity	Cap Style	Cell Growth Area	Recommended Medium Volume	Surface treated	No./case	Price/case (₹)
P21060	1000 ml	Sealed	490 cm ²	100 ml - 150 ml	Yes	24	10999
P21061	1000 ml	Vent	490 cm ²	100 ml - 150 ml	Yes	24	11899
P21062	1000 ml	Sealed	490 cm ²	100 ml - 150 ml	No	24	8999
P21063	1000 ml	Vent	490 cm ²	100 ml - 150 ml	No	24	9899
P21064	2000 ml	Sealed	850 cm ²	180 ml - 260 ml	Yes	12	6300
P21065	2000 ml	Vent	850 cm ²	180 ml - 260 ml	Yes	12	6600
P21066	2000 ml	Sealed	850 cm ²	180 ml - 260 ml	No	12	5900
P21067	2000 ml	Vent	850 cm ²	180 ml - 260 ml	No	12	6200
P21068	5000 ml	Sealed	1900 cm ²	300 ml - 400 ml	Yes	12	7400
P21069	5000 ml	Vent	1900 cm ²	300 ml - 400 ml	Yes	12	8200

97 | Bio Reaction Tubes, PP

- ABDOS Bio-Reaction tubes are manufactured with high purity virgin Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber & heavy metal.
- Bioreaction tubes are convenient and economical option for small scale, high density suspension cell culture and are ideal for biological reaction experiments that require aseptic conditions with free gas exchange.
- These tubes consist of ultrasonically welded 0.22µm hydrophobic membrane to allow gas exchange.
- These tubes come with a large unerasable frosting white printed writing area and engraved graduation.
- These tubes are ideal for culture and centrifuge applications. Can withstand maximum 12,000*g RCF for 15ml tubes, 16,000*g RCF for 50ml conical bottom tubes, and 6,000*g RCF for self-standing tubes.



Code	Capacity	Bottom	No. / Pack	No./case	Price/case (₹)
P21070	15 ml	Conical	10	100	5000
P21071	50 ml	Conical	10	100	6800
P21072	50 ml	Self-standing	10	100	7200

98 | Media Bottles, PETG

- ABDOS Media Bottle is manufactured with high quality PETG that complies US FDA 21 CFR, free from heavy metals.
- The Cap of the bottle is Screw cap made with HDPE (High Density Polyethylene), free of heavy metal.
- These bottles come with embossed graduation on two sided.
- These bottles have a Shelf life of three years from the month of production.
- These bottles are compatible to work in Temperature range from -60 °C to 60°C.



Code	Capacity	Cap	Sterile	No./case	Price/case (₹)
P21080	500 ml	Yes	No	24	7499
P21081	500 ml	Yes	Yes	24	7999



99 | BIOFILL Bottle Top Filtration System

- BIOFILL Bottle Top Filtration System is available as a Full Assembly or as a bottle top Funnel. ABDOS BIOFILL Bottle Top Filtration Systems are disposable, sterile, vacuum operated systems for the sterile preparation of buffers, tissue culture media, microbiological media, and other biological fluids. Systems are available with asymmetric 0.1 µm, 0.22 µm & 0.45 µm PES membranes. ABDOS PES membrane has low protein binding and is surfactant-free.
- BIOFILL Filtration system is designed for sterilization or clarification of aqueous laboratory fluids. The filters are gamma radiated & manufactured in clean room plant.
- The complete system is composed of a polystyrene filter funnel and receiver bottle, a SECURE grasp cap, and a vacuum hose adapter. Systems are also available with 15 ml and 50 ml polypropylene centrifuge tubes.
- Filtration funnels are compatible with the Quick Connect pedestal system, a cradle ring for use with existing lab stands, & vacuum hose adapters. Quick-Connect pedestal offers one-time vacuum connection and one-handed operation. Quick Connect Pedestal are sold separately.



BIOFILL Bottle Top Funnel

Code	Product Description	Funnel capacity Volume	GL Size/Threads	Filter Pore Size	Membrane Diameter	No./case	Price/case (₹)
P21101	250ml Funnel Only with 0.2 um PES Membrane	250 ml	45	0.2 µm	66 mm	24	17500
P21102	500ml Funnel Only with 0.2 um PES Membrane	500 ml	45	0.2 µm	66 mm	24	20400
P21103	1000ml Funnel Only with 0.2 um PES Membrane	1000 ml	45	0.2 µm	90 mm	24	33300
P21104	250ml Funnel Only with 0.1 um PES Membrane	250 ml	45	0.1 µm	90 mm	24	28700
P21105	500ml Funnel Only with 0.1 um PES Membrane	500 ml	45	0.1 µm	66 mm	24	31500
P21106	1000ml Funnel Only with 0.1 um PES Membrane	1000 ml	45	0.1 µm	90 mm	24	42900
P21107	250ml Funnel Only with 0.45 um PES Membrane	250 ml	45	0.45 µm	90 mm	24	17500
P21108	1000ml Funnel Only with 0.45 um PES Membrane	1000 ml	45	0.45 µm	90 mm	24	20400
P21109	1000ml Funnel Only with 0.45 um PES Membrane	1000 ml	45	0.45 µm	90 mm	24	33300

BIOFILL Bottle Top Filtration System

Code	Product Description	Funnel capacity Volume	Receiver Capacity Volume	Filter Pore Size	Membrane Diameter	No./case	Price/case (₹)
P21090	250ml, 0.2µm High Flow PES Bottle Top Filter Full Assembly, Sterile	250 ml	250 ml	0.2 µm	66 mm	12	11500
P21091	500ml, 0.2µm High Flow PES Bottle Top Filter Full Assembly, Sterile	500 ml	500 ml	0.2 µm	90 mm	12	16150
P21092	1000ml, 0.2µm High Flow PES Bottle Top Filter Full Assembly, Sterile	1000 ml	1000 ml	0.2 µm	90 mm	12	24300
P21093	250ml, 0.45µm High Flow PES Bottle Top Filter Full Assembly, Sterile	250 ml	250 ml	0.45 µm	66 mm	12	11500
P21094	500ml, 0.45µm High Flow PES Bottle Top Filter Full Assembly, Sterile	500 ml	500 ml	0.45 µm	90 mm	12	16150
P21095	1000ml, 0.45µm High Flow PES Bottle Top Filter Full Assembly, Sterile	1000 ml	1000 ml	0.45 µm	90 mm	12	24300
P21096	250ml, 0.1µm High Flow PES Bottle Top Filter Full Assembly, Sterile	250 ml	250 ml	0.1 µm	66 mm	12	17500
P21097	500ml, 0.1µm High Flow PES Bottle Top Filter Full Assembly, Sterile	500 ml	500 ml	0.1 µm	90 mm	12	22100
P21098	1000ml, 0.1µm High Flow PES Bottle Top Filter Full Assembly, Sterile	1000 ml	1000 ml	0.1 µm	90 mm	12	27500
P21099	50ml centrifuge Tube and Funnel , 0.2µm High Flow PES Membrane, Sterile	50 ml	50 ml	0.2 µm	40 mm	24	24999
P21100	15ml centrifuge Tube and Funnel , 0.2µm High Flow PES Membrane, Sterile	50 ml	15 ml	0.2 µm	40 mm	24	24999



100 | BIOFILL QUICK-CONNECT PEDESTAL SYSTEM

- BIOFILL Quick-Connect Pedestal System or cradle ring provides hands-free operation. Simply attach your vacuum line to the Quick-Connect hardware. When you are ready to filter, set the BIOFILL Filtration unit onto the base or cradle and open the built-in vacuum control. These units are specially designed to upgrade your efficiency and productivity in various life science applications such as tissue culture, cell therapy, genomics, and drug discovery.
- These two filtering options offer a permanent vacuum hose connection and minimize set-up time. The vacuum hose connects to the back of the pedestal or cradle ring and enables adjustable flow control using the on/off switch. This patented docking system is made from aluminium. Works in conjunction with BIOFILL Bottle Top Filtration system in 15 ml, 50 ml, 250 ml, 500 ml, and 1000 ml.
- Dual Centrifuge Tube Stand holder provides a stationary set-up and preventing spills and tissue culture hood contamination. These optional holders allow for hands-free operation of the filter unit. Works in conjunction with BIOFILL Filtration system in 15 ml & 50 ml.

Code	Product Description	Application	No./case	Price/case (₹)
E12400	Vacuum Filtration Pedestal	Works in conjunction with BIOFILL Bottle Top Filtration system in 15 ml, 50 ml, 250 ml, 500 ml and 1000 ml.	1	76900
E12401	Vacuum Filtration Cradle Ring	Works in conjunction with BIOFILL Bottle Top Filtration system in 15 ml, 50 ml, 250 ml, 500 ml and 1000 ml.	1	28100
E12402	Polystyrene Dual Centrifuge Stand	Works in conjunction with BIOFILL Filtration system in 15 ml & 50 ml.	5	4000



#CommittedtotheEarth



06 PCR TECHNIQUES

PCR TUBES

PCR PLATES

PCR STRIP CAPS

PCR SEALING FILMS & WORKSTATION

101 | PCR Tubes, PP

- Abdos PCR tubes are manufactured in state of the art precision moulded facility using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Abdos PCR tubes have thin and consistent wall thickness to reduce insulating effect on the tube.
- Abdos PCR tubes have optimum length and even cap insertion that ensures tight fit eliminating risk of sample evaporation.
- Flat caps are optically clear for real time qPCR.



Code	Capacity	Type	Height	No./case	Price/case (₹)
P10701	0.2 ml	Clear Flat Cap	21.5 mm	1000	2961
P10702	0.2 ml	Domed Cap	23.16 mm	1000	2961



102 | PCR STRIP TUBES- 8 Strips & 12 Strips, PP

- Abdos PCR Strip Tubes are manufactured in state of the art precision moulded facility using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Strip Tubes have uniform ultra thin walls to reduce insulating effect on the strips.
- Optically clear for real time qPCR.
- Strip Tubes are available in both Standard and Low Profile Wells.



Code	Capacity	Type	Height	No./case	Price/case (₹)
P10706	0.2 ml	8 Strip Standard Tubes	20.7 mm	125 strips	6526
P10708	0.1 ml	8 Strip Low Profile Tubes	16.1 mm	125 strips	3576
P10707	0.2 ml	12 Strip Standard Tubes	20.7 mm	80 strips	6292




103 | Strip Caps, PP

- Abdos Strips PCR Caps are manufactured in state of the art precision moulded facility using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Caps feature ultra-clear surface ideal for fluorescent, luminescent and real time PCR applications.
- Optically clear caps for real time qPCR.



Code	Capacity	Type	No./case	Price/case (₹)
P10709	0.2 ml	8 Strip Cap Flat Optically Clear	125 strips	1736
P10710	0.2 ml	12 Strip Cap Flat Optically Clear	80 strips	1062
P10711	0.2 ml	8 Strip Cap Domed	125 strips	1411
P10712	0.2 ml	12 Strip Cap Domed	80 strips	1098

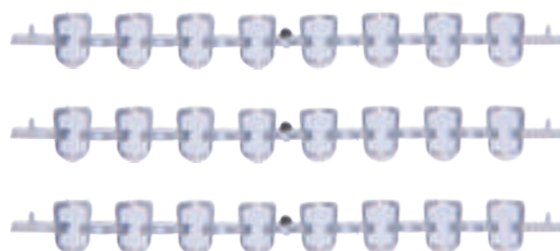


104 | PCR Plates Family, PP

- Abdos PCR plates are manufactured in state of the art precision moulded facility using high purity virgin USP Class VI Medical grade polypropylene (PP) conforming to US FDA 21 CFR, free from natural rubber and heavy metal.
- Ultra thin and consistent wall thickness allows precise thermal transfer.
- Maximum G-Force 4000 RCF.
- Abdos PCR plates are qPCR compatible.
- DNase, RNase, Endotoxin and PCR inhibitor free.
- Kindly see Thermal Cycler Compatibility Chart on Page No. 91.



Code	Product	Type	No./case	Price/case (₹)
P10713	96 Well standard well	Unskirted Standard Well	25 Plates	4869
P10714	96 Well low profile well	Unskirted Low Profile well	25 Plates	5703
P10715	96 Well elevated top well	Unskirted Elevated Top Standard Well	10 Plates	1925
P10722	96 Well semi-skirted low profile well	Semi-Skirted low profile	25 Plates	7231
P10716	96 Well semi-skirted standard well	Semi - Skirted Standard Well	10 Plates	2783
P10723	96 Well fully skirted low profile well	Fully-Skirted Low Profile Well	10 Plates	3031
P10717	384 Well fully skirted well	Fully - Skirted Well	10 Plates	3441

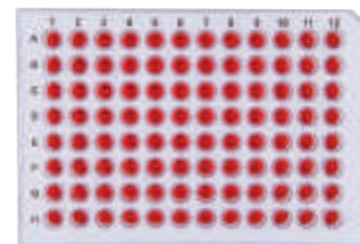

P10713

P10714

P10715

P10716

P10717

P10722

P10723

105 | Sealing Mats, Silicone

- These mats are made of silicone rubber and designed to seal all PCR plates except P10717.
- The mat is made up of 96 (12 x 8 array) plugs.
- The mat has to be compressed. A plug that caps the individual well seals each well on the PCR plate.

Code	Type	No./case	Price/case (₹)
P10721	Silicone Sealing Mats	50 mats	15248

* These mats are used for sealing all the above PCR plates except P10717.



106 | Sealing Films, Polyester

- Abdos sealing films are optically clear and are suitable for use in real-time PCR applications and PCR plates.
- The film is adhesive coated and sticks to the plate.
- Abdos sealing films are disposable and for single use only.

Code	Type	No./case	Price/case (₹)
P10718	Clear Seal Film	100 sheets	14980



107 | Sealing Films, Aluminium

- These sealing films are aluminium hence completely opaque and the end user cannot see the contents in the well. The film is adhesive coated and sticks to the plate.
- These films are readily pierceable either by manual pipette or by liquid handling robot. Once the hole is pierced the film is no longer self sealing.




Code	Type	No./case	Price/case (₹)
PI0719	Silver Seal	100 sheets	8457

108 | Deep Well Plates Family, PP

- Abdos Deep Well plates are manufactured in state of the art precision moulded facility using high purity virgin polypropylene.
- Deep well plates are used for sample collection, in-vitro growth chambers and long-term storage.
- Abdos Deep Well Plates are square with conical base. Conical Base helps to minimize dead volumes.
- These plates come with clear alphanumeric indexing.
- Can be used at temperature down to -80°C .
- Excellent chemical resistance.
- Can be autoclaved.



Code	Capacity	Type	No./case	Price/case (₹)
PI0802	2.2 ml	Deep Well Plates	25 plates	9363
PI0803	1.2 ml	Deep Well Plates	50 plates	13910

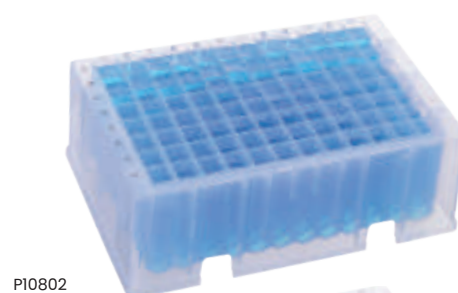

PI0802



PI0803

109 | Reagent reservoir, PP

- Abdos Reagent Reservoir are manufactured in state of the art precision moulded facility using high purity virgin polypropylene.
- Standard SBS footprint is designed to be robot compatible.
- Base of the reservoir minimizes dead volume.
- Most durable for multi-use and cost effective for single use.
- Can be used at temperature down to -80°C .
- Excellent chemical resistance.
- Can be autoclaved.



Code	Capacity	Type	No./case	Price/case (₹)
PI0801	22 ml	Reagent Reservoir	25 Reservoir	20800



110 | Square Sealing Mats for Deep Well Plates Family, Silicone Rubber

- These sealing mats are suitable for rectangular wells.
- These mats are suitable for heat sealing.
- Excellent chemical resistance.



Code	Type	No./case	Price/case (₹)
PI0804	Square Well Sealing Mats	50 mats	13595

* These Mats are used for sealing above mentioned Deep Well Plates PI0802 & PI0803.

111 | PCR Workup Rack, PP

- Manufactured in state of the art moulding facility using high purity polypropylene.
- These workup racks can be easily stackable.
- These racks can accommodate unskirted, semi-skirted and skirted 96 well PCR plates. It can also accommodate strip PCR tubes.
- Legs at all four corners make it robust and stable for good grip on the surface.
- These racks have Moulded alphanumeric indexing for fast and accurate identification.
- Operating temperature is -80°C to $+121^{\circ}\text{C}$.
- Can be autoclaved.
- Available in colours (Red, Green, Yellow, White & Blue).



Code	Tube Capacity	L x W x H	No./case	Price/case (₹)
PI1101	1 x 96 well PCR plates, 96 place for individual PCR tube, 12 x 8-well PCR strips	138 x 98 x 39 mm	5	2025



112 | PCR workstation rack with lid, PP

- Manufactured in state of the art moulding facility using high purity polypropylene.
- These workstation are easily stackable.
- These racks can accommodate unskirted, semi-skirted and skirted 96 well PCR plates, individual PCR tubes and 0.5, 1.5 & 2.0 ml micro centrifuge tubes.
- These workstations have moulded alphanumeric indexing for fast and accurate identification.
- These workstations are ideal platform to satisfy all pre or post PCR sampling applications.
- Operating temperature is -80°C to $+121^{\circ}\text{C}$.
- Can be autoclaved.
- Available in colours (Red, Green, Yellow, White & Blue).



Code	Tube Capacity	L x W x H	No./case	Price/case (₹)
PI1103	24 individual 0.2 ml PCR tubes, 16 x 1.5 or 2.0 ml tubes, 16 x 0.5 ml tubes and 96 well rack for PCR plates	215 x 120 x 50 mm	5	4048



113 | ABDOS PCR Work Station

- PCR amplification is extremely sensitive to contamination, prevention of contamination requires good laboratory practices to minimize external or cross-contamination during reagent and sample preparation.
- ABDOS PCR Workstation is designed to protect against contamination in sensitive PCR amplification reactions. ABDOS manufactures Mini and Midi PCR workstations which are designed for UV Irradiation of PCR Chemicals. These PCR workstations are self-contained work area that will help protect your PCR runs against contamination.
- It is ideally suited for use with non-hazardous contaminants and when flexible access to the instrumentation in the cabinet is required.

Code	Type	Working Platform	No./case	Price/case (₹)
E12480	ABDOS-Mini PCR Work Station	250X120X120 mm	1	18800
E12481	ABDOS-Midi PCR Work Station	650x450x300 mm	1	48600
E12483	ABDOS-Midi PCR Work Stationwith HEPA Filter	600x500x450 mm	1	66500

SPECIFICATION :

Code	E12480	E12481	E12482
Voltage	220-240 V	220-240 V	220-240 V
Frequency	50-60HZ	50-60HZ	50-60HZ
HEPA Filters	----	----	2 Nos (10X10 cm)
Fluorescent Tube	1 Nos	2 Nos	2 Nos
UV Tubes	1 No	1 No	1 No
Pipet Holder	-----	1 Nos for standing 5 Micropipettes	1 Nos for standing 5 Micropipettes
Switches	At Side	At Side	At Side
Socket Inside	---	Yes; For Running Mini Equipment	Yes; For Running Mini Equipment
Sliding Door	Yes, From Front Side	Yes, From Front Side	Yes, From Front Side
Cabinet	MS Powder coated with Stainless Steel working top	MS Powder coated with Stainless Steel working top	MS Powder coated with Stainless Steel working top
Working Area(LXHXD)	250 X 120 X 120 mm	650 x 450 x 300 mm	600 x 500 x 450 mm



THERMAL CYCLER COMPATIBILITY GUIDE for ABDOS 96 & 384 Wellplates

Well Shape		P10713 96 Well, Unskirted Standard Well	P10714 96 Well, Unskirted Low Profile Well	P10715 96 Well, Unskirted, Elevated Top, Standard Well	P10722 96 Well, Semi Skirted, Low Profile Well	P10716 96 Well, Semi Skirted, Standard Well	P10723 96 Well, Fully Skirted, Low Profile Well	P10717 384 Well, Full Skirted, Low Profile Well
Standard well <small>(Overall well height approx 21 mm, Max. capacity > 350L)</small>		•		•		•		
Low Profile well <small>(Overall well height approx 16 mm; Max capacity approx. 200L)</small>			•		•		•	50 µl
Manufacturer	Thermal Cycler Model							
APPLIED BIOSYSTEMS								
Thermal Cyclers	2700	•		•		•		•
	9600	•		•		•		
	9700	•		•		•		•
	9800 "Fast"							
"Real Time" Thermal Cyclers	5700	•				•		
	PRISM 7000	•				•		
	7300	•			•			
	7500	•			•			
	7500 "Fast"							
	7700	•				•		
	7900HT	•			•			
	Sequencers	PRISM 310	•		•		•	
	PRISM 3100	•		•		•		
	3130 (XL)	•		•		•		
	3700	•		•		•	•	
	PRISM 3730 (XL)	•		•		•		
AMERSHAM								
Sequencers	Mega BACE 500						•	
	Mega MACE 1000						•	
	Mega BACE 4000							•
BECKMAN								
Sequencers	CEQ	•						
BIOMETRA								
Thermal Cyclers	Uno	•	•	•		•	•	
	Uno II	•	•	•		•		•
	T1 Thermal Cycler	•	•	•		•	•	•
	Tgradient	•	•	•		•	•	
	Trobot	•	•	•		•	•	•
BIO-RAD / MJ RESEARCH								
Thermal Cyclers	Gene Cycler	•		•				
	PTC -100	•	•	•		•	•	•
	PTC -200	•	•	•		•	•	•
	PTC-225 TETERAD	•	•	•		•	•	•
	DYAD-DYAD Disciple	•	•	•		•	•	•
	iCYCLER	•		•		•	•	
	MyCycler	•		•		•	•	
	"Real Time" Thermal Cyclers	OPTICON / OPTICON2	•	•			•	
	Chrome 4		•			•		
	ICYCLER	•		•		•	•	
	Myiq	•		•		•		
	IQ5	•		•		•		
Sequencers	BaseStation					•		
CORBETT RESEARCH								
Thermal Cyclers	PamCycler 96	•				•		
	PamCycler 384						•	•

Plates to SBS Specifications foot print. Certified Free From DNase, RNase and Detectable DNA.
This chart is intended as a guide only. Abdos cannot accept any liability or responsibility for information given.
PCR is a patented process of Roche Holdings.

THERMAL CYCLER COMPATIBILITY GUIDE

for ABDOS 96 & 384 Wellplates

Well Shape		P10713 96 Well, Unskirted Standard Well	P10714 96 Well, Unskirted Low Profile Well	P10715 96 Well, Unskirted, Elevated Top, Standard Well	P10722 96 Well, Semi Skirted, Low Profile Well	P10716 96 Well, Semi Skirted, Standard Well	P10723 96 Well, Fully Skirted, Low Profile Well	P10717 384 Well, Full Skirted, Low Profile Well
Standard well <small>[Overall well height approx 21 mm Max. capacity > 350L]</small>		•		•		•		
Low Profile well <small>[Overall well height approx 16 mm; Max capacity approx. 200L]</small>			•		•		•	50 µl
Manufacturer	Thermal Cycler Model							
EPPENDORF								
Thermal Cyclers	Mastercycler	•	•	•		•	•	
	Mastercycler Gradient	•		•				
	Mastercycler ep	•	•	•		•	•	
	Mastercycler M384							•
"Real Time" Thermal Cyclers	Mastercycler ep Realplex		•				•	
ERICOM								
Thermal Cyclers	Power Block L	•	•	•	•			
	Deltacycler L	•	•	•		•		
	Deltacycler LL	•	•	•	•			
	Single Block	•	•	•		•		
	Twin Block	•	•	•		•		
ESCO								
	Swift	•		•		•		•
FLEXI								
Thermal Cyclers	Gene	•		•		•	•	•
	Genius	•		•		•	•	
G-STORM								
Thermal Cyclers	GS1	•	•	•	•	•		
	GS4	•	•	•	•	•		
	GSX	•	•	•	•	•		
	GSXs	•	•	•	•	•		
MWG								
Thermal Cyclers	Primus 96	•	•	•	•		•	
	Primus 384							•
ROCHE								
	Lightcycler 480							•
STRATAGENE								
Thermal Cyclers	Robocycler 96	•				•		
	Robocycler Gradient	•	•	•	•	•	•	
"Real Time" Thermal Cyclers	Mx4000 and Mx 3000	•	•	•	•			
TAKARA								
Thermal Cyclers	TP 240						•	
	TP3000	•	•	•	•	•	•	
TECHNE								
Thermal Cyclers	Touchgene	•	•	•	•	•		
	Cyclogene	•	•	•	•	•		
	Genius	•	•	•	•	•		
	Genius Quad	•	•	•	•	•		
	Genius (TC412)	•	•	•	•	•	•	
	Flexigene	•	•	•	•	•	•	•
	Touchgene X	•	•	•	•	•	•	•
	Touchgene Gradient (TC512)	•	•	•	•	•	•	•
"Real Time" Thermal Cyclers	Quantica		•				•	
THERMO HYBAID								
Thermal Cyclers	PCR Sprit	•	•	•	•	•	•	
	MBS Satalite (Multiblock)	•	•	•	•	•	•	•
	System	•	•	•	•	•	•	•
	Px2 and PxE	•	•	•	•	•	•	•
	PCR Express and Omni-E	•	•	•	•	•	•	•
	Touchdown	•	•	•	•	•	•	•
	Omnigene	•	•	•	•	•	•	•
TRANSGENOMIC								
Sequencers	WAVE System						•	

Plates to SBS Specifications foot print. Certified Free From DNase, RNase and Detectable DNA.
 This chart is intended as a guide only. Abdos cannot accept any liability or responsibility for information given.
 PCR is a patented process of Roche Holdings.



07 ELECTROPHORESIS SYSTEM

MINI HORIZONTAL UNITS

MIDI HORIZONTAL UNITS

MAXI HORIZONTAL ELECTROPHORESIS SYSTEMS

VERTICAL DUAL MINI ELECTROPHORESIS SYSTEMS

POWER SUPPLIES & MORE

114 | ABDOS Mini Horizontal Gel Unit

- The system has moulded basic unit with fixed platinum electrode assembly along with Gel running and Gel casting Tray.
- The combs are adjustable by height to offer complete control over loading volume and well depth, upto a maximum of 32 samples throughput.
- Gel length is a short 6 cm ideal for rapid separations.
- The tank is very compact reducing the buffer volume required to cover the gel, providing greater control over the voltage gradient and run-time.



ABDOS-Mini Horizontal Electrophoresis System

Code	Product	No./case	Price/case (₹)
E12100	Mini Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 6 x 7.5 cm (1 No.), 16 Well ABS comb with 1.5 mm thickness (2 Nos.), Connecting Cord (1 Pair).	1	19115

Spare Accessories

Code	Product	No./case	Price/case (₹)
E12101	Gel Running Tray : 6 X 7.5 cm	1	2800
E12102	Gel Casting Tray : 6 X 7.5 cm	1	3050
E12103	16 Well Adjustable Comb	1	2750
E12104	Connecting Cord for E12100	2	1900

SPECIFICATION :

Material	ACRYLIC
Unit Dimensions (L x B x H)	14 x 25 x 7 cm
Gel Dimensions (W x L)	6 x 7.5 cm
Buffer Volume	325 ml
Maximum Sample Capacity	32
Adjustable Combs	16 Well Adjustable comb (2 Nos)
Comb Thickness	1 mm, 1.5 mm or 2 mm
Comb Throughput	16 samples
Comb Slots	2
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12376, E12377 & E12378



115 | ABDOS Mini Submarine Horizontal Gel Unit

- The system has moulded basic unit with fixed platinum electrode assembly along with Gel running and Gel casting Tray.
- The combs having a maximum 8-sample throughput.



ABDOS Mini Submarine Horizontal Gel Unit

Code	Product	No./case	Price/case (₹)
E1211	Mini Submarine Gel System includes Basic unit with Platinum Electrode Assembly, Gel running Trays of 100 x 70 mm (1 No.), 50 x 70 mm (2 Nos.) 8 -well Acrylic comb with 1.5mm thickness (2 Nos.), 3-well preparative Acrylic comb with 3 mm thickness (1 No.), connecting Cord(1 Pair)	1	19955

Spare Accessories

Code	Product	No./case	Price/case (₹)
E12112	Gel Scoop for 10X7cm Gels	1	1400
E12113	Gel Scoop for 10X7cm Gels-UV Transparent	1	7600
E12114	Spare Electrode	2	6600
E12115	Gel running tray 70X50 mm	2	2012
E12116	Gel casting tray 70X50 mm	1	2200
E12117	UV Transparent Gel running tray 70X50 mm	1	3900
E12118	Gel running tray 100X70 mm	1	2012
E12119	Gel casting tray 100X70 mm	1	2200
E12120	UV Transparent Gel running tray 100X70 mm	1	6600
E12121	Acrylic Comb Mini 8 well 1.5mm	1	1450
E12122	Acrylic Comb Mini 14 well 1.0 & 1.5mm	1	2012
E12123	Acrylic Comb Mini 3 well preparative 3.0 mm	1	1450
E12124	Connecting Cord for E12111	1	1340

SPECIFICATION :

Material	Acrylic
Unit Dimensions (L x B x H)	20 x 10 x 8 cm
Gel Dimensions (W x L)	10 x 7 cm
Gel Running Tray	10 x 7 cm : 1 No 5 x 7 cm : 2 Nos
Gel Casting tray	1 No
Maximum Sample Capacity	8
Combs	8 well Acrylic comb ;1.5 mm thickness : 2 Nos 3 well preparative Acrylic comb ;3 mm thickness : 1 No
Platinum Electrode	Red and Black : 1 Pair
Connecting Cord	Red & Black (1Each)
Recommended Power Supply	E12376, E12377 & E12378



116 | ABDOS Mini Plus Horizontal Gel Unit

- The system has moulded basic unit with fixed platinum electrode assembly along with Gel running and Gel casting Tray.
- The combs are adjustable by height to offer complete control over loading volume and well depth, upto a maximum of 80 samples throughput.
- Gel length is a short 10 cm ideal for rapid separations.
- The tank is very compact reducing the buffer volume required to cover the gel, providing greater control over the voltage gradient and run-time.



ABDOS Mini Plus Horizontal Electrophoresis System

Code	Product	No./case	Price/case (₹)
E12126	Mini Plus Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 10 x 11.5cm (1 No.), 20 Well ABS Comb with 1.5 mm thickness (2 Nos.), Connecting Cord (1 Pair)	1	29900

Spare Accessories

Code	Product	No./case	Price/case (₹)
E12127	Gel Running Tray : 10 X 11.5 cm	1	3200
E12128	Gel Casting Tray : 10 X 11.5 cm	1	3100
E12129	20 Well Adjustable Comb	1	3100
E12130	Connecting Cord for E12126	2	1900

SPECIFICATION :

Material	ACRYLIC
Unit Dimensions (L x B x H)	17 x 23.5 x 7 cm
Gel Dimensions (W x L)	10 x 11.5 cm
Buffer Volume	450 ml
Maximum Sample Capacity	80
Adjustable Combs	20 Well Adjustable comb (2 Nos)
Comb Thickness	1, 1.5 or 2 mm
Comb Throughput	20 samples
Comb Slots	4
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12376, E12377 & E12378



117 | ABDOS Midi Horizontal Gel Unit

- The system has moulded basic unit with fixed platinum electrode assembly along with Gel running and Gel Casting Tray.
- The combs are adjustable by height to offer complete control over loading volume and well depth, up to a maximum of 112 samples throughput.
- Gel length is a short 10 cm ideal for rapid separations.
- The tank is very compact reducing the buffer volume required to cover the gel, providing greater control over the voltage gradient and run-time.



ABDOS-Midi Horizontal Electrophoresis System

Code	Product	No./case	Price/case (₹)
E12151	Midi Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 12.8 x 15 cm (1 No.), 28 Well ABS Comb with 1.5 mm thickness (2 Nos.), Connecting Cord (1 Pair)	1	36000

Spare Accessories

Code	Product	No./case	Price/case (₹)
E12152	Gel Running Tray : 12.8 X 15 cm	1	4000
E12153	Gel Casting Tray : 12.8 X 15 cm	1	3800
E12154	28 Well Adjustable Comb	1	3800
E12155	Connecting Cord for E12151	2	1900

SPECIFICATION :

Material	ACRYLIC
Unit Dimensions (L x B x H)	21 x 30.5 x 8 cm
Gel Dimensions (W x L)	12.8 x 15 cm
Buffer Volume	900 ml
Maximum Sample Capacity	112
Adjustable Combs	28 Well Adjustable comb (2 Nos)
Comb Thickness	1, 1.5 or 2 mm
Comb Throughput	28 samples
Comb Slots	4
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12377 & E12378



118 | ABDOS Maxi Horizontal Gel Unit

- The system has large 20 x 20 cm gel Tray that is ideal for high resolution techniques, such as screening PCR Products and RFLP analysis.
- The combs are height adjustable to offer complete control over loading volume and well depth.
- The system has four comb positions along the tray for fast separation of a maximum of 168 samples.
- The Combs in this system are compatible with Multichannel pipette with a maximum of 42 sample throughput to reduce gel loading time.



ABDOS MAXI Horizontal Electrophoresis System

Code	List of Power Supply Systems	No./case	Price/case (₹)
E12176	Maxi Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 20 x 20cm (1 No.), 42 Well ABS Comb with 1.5 mm thickness (2 Nos.), Connecting Cord(1 Pair)	1	59000

Spare Accessories

Code	Product	No./case	Price/case (₹)
E12177	Gel Running Tray : 20 X 20 cm	1	4800
E12178	Gel Casting Tray : 20 X 20 cm	1	4800
E12179	42 Well Adjustable Comb	1	4200
E12180	Connecting Cord for E12176	2	1900

SPECIFICATION :

Material	ACRYLIC
Unit Dimensions (L x B x H)	26 x 47 x 8.5 cm
Gel Dimensions (W x L)	20 x 20 cm
Buffer Volume	2200 ml
Maximum Sample Capacity	168
Adjustable Combs	42 Well Adjustable comb (2 Nos)
Comb Thickness	1, 1.5 or 2 mm
Comb Throughput	42 samples
Comb Slots	4
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12377 & E12378



119 | ABDOS Maxi Plus Horizontal Gel Unit

- The system has large 25 x 30 cm gel Tray that is ideal for high resolution techniques, such as screening PCR Products and RFLP analysis.
- The combs are height adjustable to offer complete control over loading volume and well depth.
- The system has 12 comb positions at different intervals along the tray for fast separation of a maximum of 624 samples.
- The Combs in this system are compatible with Multichannel pipette with a maximum of 52 sample throughput to reduce gel loading time.



ABDOS-MAXI Plus Horizontal Electrophoresis System


Code	List of Power Supply Systems	No./case	Price/case (₹)
E12201	Maxi Plus Horizontal System includes Basic unit with fixed Platinum Electrode Assembly, Gel Running Trays of 25 x 30 cm (1 No.), 52 Well ABS Comb with 1.5 mm thickness (2 Nos.), Connecting Cord (1 Pair)	1	81000

Spare Accessories

Code	Product	No./case	Price/case (₹)
E12202	Gel Running Tray : 25 X 30 cm	1	5500
E12203	Gel Casting Tray : 25 X 30 cm	1	5500
E12204	52 Well Adjustable Comb	1	5200
E12205	Connecting Cord for E12201	2	1900

SPECIFICATION :

Material	ACRYLIC
Unit Dimensions (L x B x H)	34 x 57 x 10 cm
Gel Dimensions (W x L)	25 x 30 cm
Buffer Volume	3000 ml
Maximum Sample Capacity	256
Adjustable Combs	52 Well Adjustable comb (6 Nos)
Comb Thickness	1, 1.5 or 2 mm
Comb Throughput	52 samples
Comb Slots	12
UV Trays	Gel Running Tray with inbuilt Casting Gates
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended Power Supply	E12377 & E12378

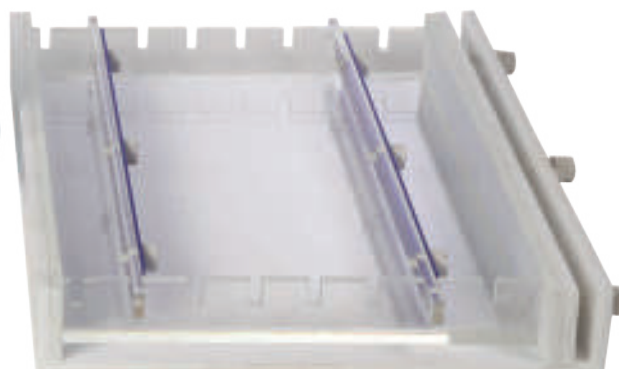

120 | ABDOS Vertical Dual Mini Gel System

- The system is a twin plate 8 x 7 cm mini-gel unit designed specifically for PAGE techniques requiring self-cast gels, although precast gels may also be used.
- The system contains standard casting units.
- The system is compatible with standard, 8 x 7cm (W x H) commercially available precast gels.
- Low buffer volume within the inner chamber of the GRM and bottom reservoir economises buffer consumption.
- Combs and spacers available in 0.5 & 1 mm thickness.
- The system has a small footprint area and occupies minimal bench space.



ABDOS Vertical Mini Dual Slab Gel Electrophoresis System

Code	Product	No./case	Price/case (₹)
E12226	Vertical Mini Dual Slab Gel Electrophoresis System - Basic unit includes Dual Vertical Assembly, Glass Plates (Rectangular & Notched) : 2 sets, Comb 0.5 mm Thickness (7 wells) - 2 No's, Comb 1 mm Thickness (7 wells) - 2 No's, Spacer 0.5 mm Thickness - 4 No's, Spacer 1.0 mm Thickness - 4 No's, Gel Casting Stand - 1No, Supporting Screws-2 No's, Safety Lid - 1 No, Connecting Cord - 1 Pair	1	22500

Spare Accessories

Code	Product	No./case	Price/case (₹)
E12227	Glass Plates(Notched & Rectangular)	1 set	1500
E12228	Mini Multiple Gel Casting Unit(For 2 Gels)	1	15000
E12229	Teflon Comb 7 well 0.5 mm	1	1600
E12230	Teflon Comb 7 well 0.75 mm	1	1600
E12231	Teflon Comb 7 well 1.0 mm	1	1600
E12232	Teflon Comb 7 well 1.5 mm	1	1600
E12233	Teflon Comb 10 well 0.5 mm	1	2000
E12234	Teflon Comb 10 well 0.75 mm	1	2000
E12235	Teflon Comb 10 well 1.0 mm	1	2000
E12236	Teflon Comb 10 well 1.5 mm	1	2000
E12237	Teflon Spacers 0.5 mm	6	1200
E12238	Teflon Spacers 0.75 mm	6	1200
E12239	Teflon Spacers 1.0 mm	6	1200
E12240	Teflon Spacers 1.5 mm	6	1200
E12241	ACRYLIC Clamp(1 pcs) and Screws(2 pcs)	1 set	1100
E12242	Gel Developing Tray with Gel Holder 8 x 7 cm(05-02)	1	2800
E12243	Glass Plate Stand	1	3700
E12244	Connecting Cords	2	1400

SPECIFICATION :

Material	ACRYLIC
Unit Dimensions (L x B x H)	16 x 20 x 15 cm
Upper Buffer Tank Dimension (L x B x H)	70 x 70 x 43 cm
Lower Buffer Tank Dimension (L x B x H)	150 x 130 x 115 cm
Active Gel Dimension (W X H)	8 x 7 cm
Maximum Sample Capacity	14
Recommended Buffer Volume	Upper Tank : 150 ml Lower Tank : 200 ml
Water Circulation Facility	Yes
No. of Combs	7 well Teflon comb 0.5 & 1.0 mm (2 Nos each)
No. of Teflon Spacer	0.5 & 1 mm (4 Nos each)
Glass plates	Notched & Rectangular (2 Sets)
Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended power supply	E12377 & E12378



121 | ABDOS Vertical Midi - Gel System

- The system is a single plate 16 x 14 cm midi-gel unit a simple, non-cooled cost-effective solution for low throughput PAGE.
- Low buffer volume within the inner chamber of the GRM and bottom reservoir economises buffer consumption.
- Ventilation holes in the system prevent the build-up of condensation during electrophoresis.
- Combs and spacers available in 0.5, 1.0 and 1.5 mm thickness.
- The system has a small footprint area and occupies minimal bench space.



ABDOS Vertical Midi Slab Gel Electrophoresis System			
Code	Product	No./case	Price/case (₹)
E12276	Vertical Midi Slab Gel Electrophoresis System- basic unit includes Vertical Assembly, Glass plates (Rectangular and Notched): 2 sets, Comb 0.5 mm Thickness (13 wells) - 1 No, Comb 1 mm Thickness (13 wells) - 1 No, Comb 1.5 mm Thickness (13 wells) - 1 No, Spacer 0.5 mm Thickness - 2 No's, Spacer 1.0 mm Thickness - 2 No's, Spacer 1.5 mm Thickness - 2 No's, Gel Casting Stand - 1No, Supporting Screws-2 No's, Safety Lid-1 No, Connecting cord-1 Pair.	1	25500

Spare Accessories			
Code	Product	No./case	Price/case (₹)
E12277	Glass Plates(Notched & Rectangular)	1 set	2000
E12278	Regular Multiple Gel Casting Unit(For 2 Gels)	1	22000
E12279	Gel Developing Tray with Gel Holder for 16 x 14 cm	1	3500
E12280	Gradient Maker, total Capacity 25 + 25 ml	1	3000
E12281	Teflon Comb 13 well 0.5 mm	1	2200
E12282	Teflon Comb 13 well 1.0 mm	1	2200
E12283	Teflon Comb 13 well 1.5 mm	1	2200
E12284	Teflon Comb 20 well 0.5,1.0, 1.5 mm	1	2200
E12285	Teflon Spacers 0.5 mm	1 pack (6 pcs per pack)	1500
E12286	Teflon Spacers 1.0 mm	1 pack (6 pcs per pack)	1500
E12287	Teflon Spacers 1.5 mm	1 pack (6 pcs per pack)	1500
E12288	Teflon Spacers 3.0 mm	1 pack (6 pcs per pack)	1800
E12289	ACRYLIC Combprep. 3 well 3.0 mm	1	1800
E12290	ACRYLIC Combprep. 3 well 6.0 mm	1	1800
E12291	ACRYLIC Clamp (1 pcs) and Screws (2 pcs)	1 pack	1400
E12292	Lavelling Screws	3	700
E12293	Glass Plate Stand	1	7000
E12244	Connecting Cords	2	1400



SPECIFICATION :

Material	ACRYLIC
Unit Dimensions (L x B x H)	25 x 20 x 27 cm
Upper Buffer Tank Dimension (L x B x H)	140 x 60 x 25 cm
Lower Buffer Tank Dimension (L x B x H)	200 x 60 x 60 cm
Active Gel Dimension (WX H)	16 x 14cm
Maximum Sample Capacity	13
Recommended Buffer Volume	Upper Tank : 150 ml, Lower Tank : 200ml
No. of Combs	13 well Teflon comb, 0.5, 1.0 & 1.5 mm (1 Nos each)
No. of Spacer	0.5, 1 mm & 1.5 mm (4 Nos each)
Glass plates	Notched and Rectangular (2 Sets)
Gasket	Fixed
Clamp & Screws	4 Sets
No. of Platinum Electrode	Red and Black (1 Pair)
Connecting Cord	Red and Black (1 Each)
Recommended power supply	E12377 & E12378

122 | ABDOS Vertical Dual Midi Gel System


- The system is a twin plate 16 x 14 cm midi-gel unit designed specifically for PAGE techniques requiring self-cast gels, although precast gels may also be used.
- The system contains standard casting units.
- The system is compatible with standard, 16 x 14cm (W x H) commercially available precast gels.
- Low buffer volume within the inner chamber of the GRM and bottom reservoir economises buffer consumption.
- Combs and spacers available in 0.5 & 1 mm thickness.
- The system has a small footprint area and occupies minimal bench space.



ABDOS Vertical Midi Dual Slab Gel Electrophoresis System				Spare Accessories			
Code	Product	No./case	Price/case (₹)	Code	Product	No./case	Price/case (₹)
E12326	Vertical Midi Dual Slab Gel Electrophoresis System - Basic unit includes Dual Vertical Assembly, Glass Plates(Rectangular & Notched): 2 sets, Comb 0.5 mm Thickness (13 wells) - 2 No's, Comb 1 mm Thickness (13 wells) - 2 No's., Spacer 0.5 mm Thickness - 4 No's, Spacer 1.0 mm Thickness - 4 No's, Gel Casting Stand - 1 No, Supporting Screws - 4 No's, Safety Lid - 1 No, Connecting Cord-1 Pair	1	27400	E12327	Glass Plates(Notched & Rectangular)	1 set	1800
				E12328	Regular Multiple Gel Casting Unit(For 2 Gels)	1	13000
				E12329	Gel Developing Tray with Gel Holder for 16 x 14 cm	1	3200
				E12330	Gradient Maker,total Capacity 25 + 25 ml	1	3000
				E12331	Teflon Comb 13 well 0.5 mm	1	2500
				E12332	Teflon Comb 13 well 1.0 mm	1	2500
				E12333	Teflon Comb 13 well 1.5 mm	1	2500
				E12334	Teflon Comb 20 well 0.5,1.0, 1.5 mm	1	1800
				E12335	Teflon Spacers 0.5 mm	6	2000
				E12336	Teflon Spacers 1.0 mm	6	2000
				E12337	Teflon Spacers 1.5 mm	6	2000
				E12338	Teflon Spacers 3.0 mm	6	2200
				E12339	ACRYLIC Combprep. 3 well 3.0 mm	1	2100
				E12340	ACRYLIC Combprep. 3 well 6.0 mm	1	2100
				E12341	ACRYLIC Clamp(1) and Screws(2)	1 pack	1500
				E12342	Lavelling Screws	3	700
				E12343	Glass Plate Stand	1	4800
				E12244	Connecting Cords	2	1200

SPECIFICATION :

Material	ACRYLIC
Unit Dimensions (L x B x H)	23 x 18 x 27.5 cm
Upper Buffer Tank Dimension (L x B x H)	140 x 70 x 20 cm
Lower Buffer Tank Dimension (L x B x H)	200 x 160 x 190 cm
Active Gel Dimension (W x H)	16 x 14 cm
Maximum Sample Capacity	26
Recommended Buffer Volume	Upper Tank : 250 ml Lower Tank : 500 ml
Water Circulation Facility	Yes
No. of Combs	13 well Teflon comb 0.5 & 1.0 mm (2 Nos each)
No. of Teflon Spacer	0.5 & 1 mm (4 Nos each)
Glass plates	Notched and Rectangular (2 Sets)
Clamp & Screws	4 Sets
No. of Platinum Electrode	Red and Black (1 Pair)
Gasket	Fixed
Connecting Cord	Red and Black (1 Each)
Recommended power supply	E12377 & E12378

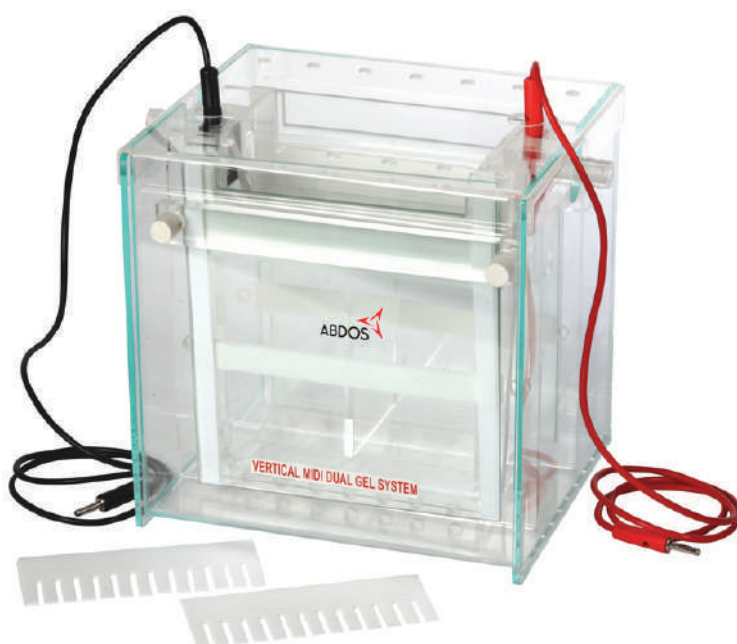

123 | Digital Model Power Supply

- It consists of a small Power supply suitable for most Electrophoresis System tanks and applications. The front panel and graphical display are designed for ease of use. The display provides all useful information during runs.
- Digital Power supplies are the most robust, long lasting and durable electrophoresis power supplies in the market.



FEATURES :

- Operates in constant Voltage and Constant Current Method
- Digital Display for Volt, Current and Timer
- Runs two gels simultaneously
- Feather Touch Knobs
- Overload protection
- Short Circuit Protection



Code	Product description	No./case	Price/case (₹)
E12376	Digital Power Supply 0-300 V ; 0-100 mA ; 30 W Power supply for 230 V main supply; Two(2) output Terminal.	1	34900
E12378	Digital Power Supplies PS- 0-300 V ; 0-300mA ; 90 watts power supply for 230 Vac main supply;Three(3) output Terminal.	1	37800

SPECIFICATION :	E12376	E12378
Body	MS with Powder Coated Body	MS with Powder Coated Body
Dimension (LxWxH)	24 x 16 x 11 cm	24 x 28 x 12 cm
Input	220-240 V,50-60 Hz, AC	220-240 V,50-60 Hz, AC
Output Voltage	0 to 300 V DC	0 to 300 V DC
Output Current	0 to 100 mA	0 to 300 mA
Timer	0 minutes to 9.99 Hrs cut off timer	0 minutes to 9.99 Hrs cut off timer
Input Power Cable	3-Wire Grounded	3-Wire Grounded
Output Power	30 W	90 W
Protection	Auto balancing facility for constant voltage (V) and current modes (mA) with overload and short circuit protection	Auto balancing facility for constant voltage(V) and current modes (mA)with overload and short circuit protection
Display	Digital display for Volt, Current and Run time	Digital display for Volt, Current and Run time
Output Terminal	Can run 2 units simultaneously	Can run 3 units simultaneously

124 | Microprocessor based Programmable Power Supply



FEATURES

- Compact and Lightweight
- LCD Digital Display & Digital Control
- Runs Four Gels simultaneously
- Short circuit & overload protection
- Pause Key function to hold the output power
- Auto Recovery after Power failure
- Alarm & Memory option



Code	Product description	No./case	Price/case (₹)
E12377	Microprocessor Based Programmable Power Supplies 0-300V;0-400mA	1	68000

SPECIFICATION :

Body	MS with Powder Coated
Dimension (L x W x H)	240 x 260 x 120 mm
Power Requirement	220-240 V,50-60 Hz, AC
Output Voltage	0 to 300 V
Output Current	0 to 400 mA
Timer	0 minutes to 24 Hrs
Parameters	16 programmable
Display	LCD Digital Display
Output Terminal	4 Parallel (4mm Socket)



08 MULTIPURPOSE RACKS & BOXES

- ROTATOR WORKSTATION
- MULTI COMBINATION RACKS
- FROSTY MATE RACKS
- STORAGE RACKS
- TEST TUBE RACKS

125 | Rotator Workstation, PP

- Abdos rotator workstation is a unique ultimate workstation helping you organize your laboratory work.
- Cube shaped multi-hole rack suitable for different products, has a unique rotate and lock design that helps add or subtract racks according to end user's needs.
- These racks can withstand temperature of -80°C to 121°C .



Code	Tube Capacity	L x W x H	No./case	Price/case (₹)
P20208	PCR Tubes & Plates, 0.5ml & 1.5ml & 2.0ml, 15ml & 50ml	108 x 68 x 108 mm	4 (assorted colours)	2112

Product Compatibility chart for Rotatory Workstation:

PRODUCT	NO. PER UNIT
50 ml Centrifuge Tube	2 per unit
15 ml Centrifuge Tube	8 per unit
1.5 ml or 2.0 ml Micro Centrifuge Tube	9 per unit
0.5 ml Micro Centrifuge Tube	6 per unit
PCR Plates (unskirted or semi skirted 96 well)	1 per 2 unit locked together
PCR 8-tube strip	6 per unit
PCR 12-tube strip	8 per 2 unit
PCR 0.2 ml tubes	48 per unit

Assorted colours consist of Blue (B), Green (G), Yellow (Y) & Red (R).



126 | Multi Combination Racks, PP

- Abdos multi combination rack is a unique combination for various tubes and vials.
- Multi-Hole for keeping different products as per own requirement, and has a unique rotate and lock design that helps add or subtract racks according to end user's needs.
- These racks can withstand temperature of -80°C to 121°C .



Code	Tube Capacity	L x W x H	No./case	Price/case (₹)
P20209	0.5ml & 1.5ml & 2.0ml, 12 x 75 Tube, 15ml & 50ml	175 x 90 x 65 mm	4 (assorted colours)	995

Product Compatibility chart for Rotatory Workstation:

PRODUCT	NO. PER UNIT
50 ml Centrifuge Tube	4 per unit
15 ml Centrifuge Tube	12 per unit
1.5 ml or 2.0 ml Micro Centrifuge Tube	32 per unit
0.5 ml Micro Centrifuge Tube	32 per unit
RIA Vial 12 x 75 mm (5ml tube)	32 per unit

Assorted colours consist of Blue (B), Green (G), Yellow (Y) & Red (R).



127 | Expanding Tube Rack, PP


- Abdos Expanding tube racks are designed to reduce sample handling time and the need for several racks when working with samples for cold temperature storage.
- The opening and closing mechanism allows the rack to expand, creating more space for sample handling. When done, simply collapse the rack back to its compact form and its ready for the freezer.
- Stackable, with alphanumeric well identifications.
- Temperature range of -80°C to 121°C .



Code	Tubes	Capacity	Places	L x W x H	No./case	Price/case (₹)
P20230	12 mm	1.5 & 2.0 mL	64	310 x 128 x 335 mm	1	2258
P20231	7.8 mm & 5.1 mm	0.5 ml & 0.2 ml	64 - 0.5 ml & 96 - 0.2 ml	310 x 128 x 310 mm	1	2258

128 | Reversible Rack with Cover, PP

- Manufactured in the state of the art moulding facility using high purity virgin polypropylene.
- Holds 1.5/2.0ml micro centrifuge tubes on one side with smaller positions for the 0.5ml tubes on another side.
- 16 x 5 Array on the 80 Place rack for 0.5, 1.5 & 2.0 ml micro centrifuge tubes and 12 x 8 array On the 96 place rack for 0.5, 1.5 ml & 2.0 ml micro centrifuge tubes.
- Moulding Indexing for easy reference of tubes and vials.

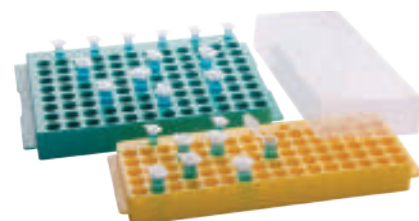

Code	Tubes Capacity	Places	L x W x H	No./case	Price/case (₹)
P20206	1.5/2.0 ml & 0.5 ml	96 (12 x 8 Array)	220 x 150 x 50 mm	6	1965
P20206 Assorted	1.5/2.0 ml & 0.5 ml	96 (12 x 8 Array)	220 x 150 x 50 mm	6 (2 pieces of each colour)	1965
P20207	1.5/2.0 ml & 0.5 ml	80 (16 x 5 Array)	240 x 85 x 50 mm	6	1349
P20207 Assorted	1.5/2.0 ml & 0.5 ml	80 (16 x 5 Array)	240 x 85 x 50 mm	6 (2 pieces of each colour)	1349

Add colour of your choice- Green (G), Yellow (Y), Blue (B).

129 | Twisty Tube Rack, PP

- These racks make dilution and concentration study easier as they can transfer samples between 0.2ml PCR tubes to 0.5, 1.5 and 2.0ml tubes.
- Can be rotated and customized according to end-user application.
- These racks have tapered wells that securely suspend tubes and makes removal easy.
- Moulded in indexing for easy retrieval of tubes.
- These Racks can withstand a temperature of -80°C to 121°C .
- Blue section holds 48 (0.5ml) tubes and reverses side holds 48 (1.5ml) tubes whereas purple section holds 96 (0.2ml) tubes and 48 (1.5ml) tubes on the reverse side.



Code	Tube Capacity	Colour	Places	L x W x H	No./case	Price/case (₹)
P20210	0.2ml, 0.5ml, 1.5ml & 2.0 ml	Blue, Purple	0.2 ml - 96 0.5 ml - 48 1.5/2.0 ml - 48	296 x 118 x 34 mm	1 Kit (Blue + Purple)	3202

130 | Frosty Mate™ Storage Racks, PC


- These racks have consistent thermal protection to maintain low temperatures.
- These racks are suitable for storage for PCR reagents, cells, enzymes or other temperature sensitive reagents and protecting the critical sample from temperature fluctuations.
- Moulded indexing makes identification faster and easier.
- These racks are available in two temperature range :
 - (a) -20°C unit will maintain a temperature between -10°C & -20°C for up to three hours.
 - (b) 0°C unit will maintain a temperature of 0°C for 5 hours.
- These racks are filled with an inert, non-toxic gel.



-20°C Frosty Mate™ Freezer Storage Racks					
Code	Capacity	Places	L x W x H	No./case	Price/case (₹)
P11104	1.5 - 2.0 ml Micro Tube, 1.0 - 2.0 ml Cryo Tube & 0.5 ml Micro Tube with external attachment	32 (8 x 4 Array)	240 x 120 x 120 mm	1	5439

0°C Frosty Mate™ Freezer Storage Racks					
Code	Capacity	Places	L x W x H	No./case	Price/case (₹)
P11105	1.5 - 2.0 ml Micro Tube, 1.0 - 2.0 ml Cryo Tube & 0.5 ml Micro Tube with external attachment	32 (8 x 4 Array)	240 x 120 x 120 mm	1	5439

Graph representing temperature stability VS Time

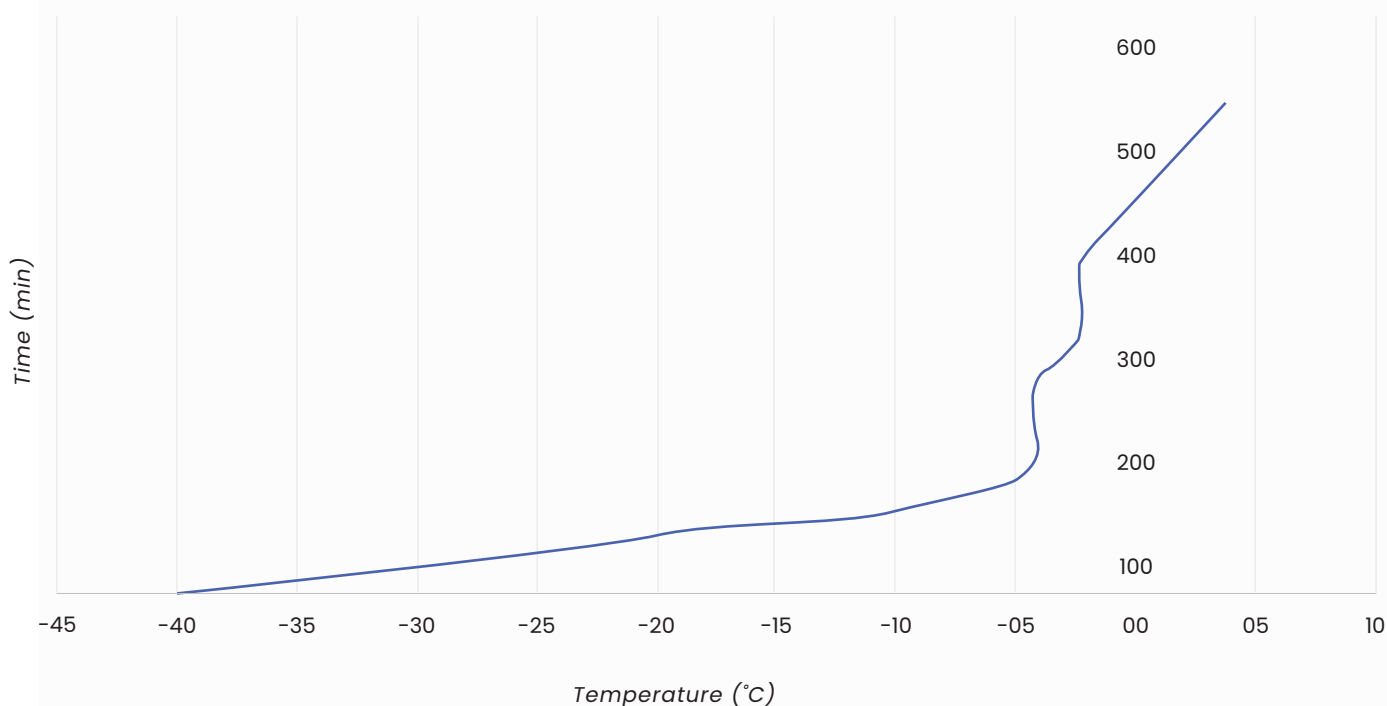

Note - Before use, Frosty Mate™ should be kept for 24 hours at - 40°C temperature deep freeze.

131 | Frosty Mate™ Colour Change Racks, PP


- These racks maintain a temperature of less than 4°C for almost 3.5 hours (with the lid on the rack) at room temperature.
- Frosty Mate™ can be used for transportation of biological samples, chemicals etc. at a stable temperature for a long time.
- Consistently cooled samples – FROSTY MATE™ colour changes dramatically when the temperature of a rack containing samples reaches below 4°C.
- A clear visible colour change from Green to Yellow.



MCT Freezer Change Racks							
Code	Colour at cold temperature	Colour at warm temperature	Capacity	Places	L x W x H, mm	No./case	Price/case (₹)
PI1106	Green	Yellow	1.5 - 2 ml Micro Tube & 0.5 ml Micro Tube with external attachment	24 (6 x 4 Array)	150 x 100 x 75 mm	1	4477

PCR Freezer Change Racks, PP							
Code	Colour at cold temperature	Colour at warm temperature	Capacity	Places	L x W x H, mm	No./case	Price/case (₹)
PI1107	Green	Yellow	PCR tubes/ 96 well plates/ strip tubes	96 (12 x 8 Array)	150 x 100 x 75 mm	1	4586



Graph representing temperature stability VS Time

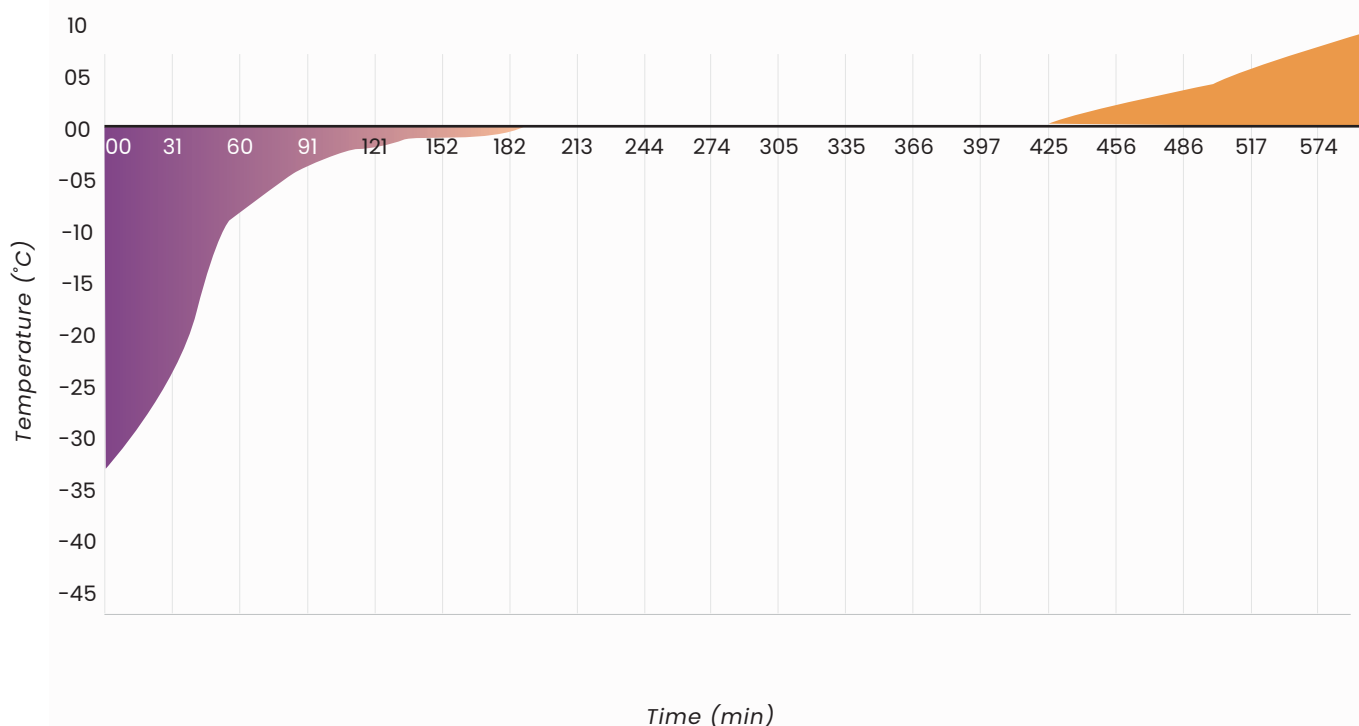

Note - Before use, Frosty Mate™ should be kept for 24 hours at - 40°C temperature deep freeze.

132 | Test Tube Rack, RPP & PC

- Holes are keyed with moulded-in numbers and letters for easy identification.
- Ergonomics design facilitates easy handling.
- Can be used in a wide temperature range.
- Superior chemical resistance.

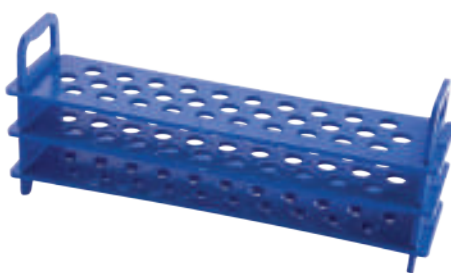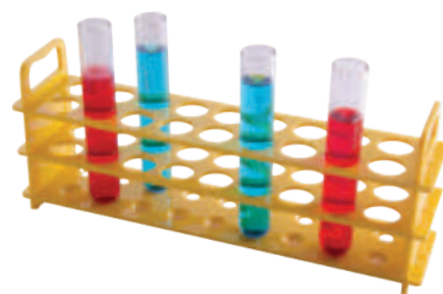


Test Tube Rack, RPP						
Code	Tube	Places	Colour	L x W x H	No./case	Price/case (₹)
P20701	13 mm	31 Places	White, Yellow, Blue	275 x 65 x 110 mm	4	867
P20702	16 mm	31 Places	White, Yellow, Blue	275 x 65 x 110 mm	4	867
P20703	20 mm	20 Places	White, Yellow, Blue	324 X 73 X 127 mm	4	997
P20704	25 mm	18 Places	White, Yellow, Blue	324 X 73 X 127 mm	4	997
P20705	32 mm	12 Places	White, Yellow, Blue	280 X 84 X 127 mm	4	1154

Test Tube Rack, PC						
Code	Tube	Places	Colour	L x W x H	No./case	Price/case (₹)
P20706	13 mm	31 Places	White, Yellow, Blue	275 x 65 x 110 mm	4	1719
P20707	13 mm	62 Places	White, Yellow, Blue	275 x 133 x 112 mm	2	1719
P20708	16 mm	31 Places	White, Yellow, Blue	275 x 65 x 110 mm	4	1719
P20709	16 mm	62 Places	White, Yellow, Blue	275 x 133 x 112 mm	2	1719
P20710	20 mm	20 Places	White, Yellow, Blue	324 x 73 x 127 mm	4	1915
P20711	20 mm	40 Places	White, Yellow, Blue	324 x 143 x 127 mm	2	1915
P20712	25 mm	18 Places	White, Yellow, Blue	324 x 73 x 127 mm	4	1915
P20713	25 mm	36 Places	White, Yellow, Blue	324 x 143 x 127 mm	2	1915
P20714	32 mm	12 Places	White, Yellow, Blue	280 x 84 x 127 mm	4	2173
P20715	32 mm	24 Places	White, Yellow, Blue	280 x 170 x 128 mm	2	2173

Add colour of your choice- White (W), Yellow (Y), Blue (B).

133 | Double Jumbo Test Tube Rack, RPP

- These innovative double jumbo test tube racks are used for high capacity storage for tubes, vials and vessels.
- Extremely suitable for high throughput labs requiring large sample storage.
- Manufactured from robust, sturdy and lightweight material suitable for easy movement and transport.
- Holes are keyed with moulded-in numbers and letters for easy identification.
- Due to its sheer size, the rack eliminates the risk of using multiple racks. Use these racks for storing various grouping samples.

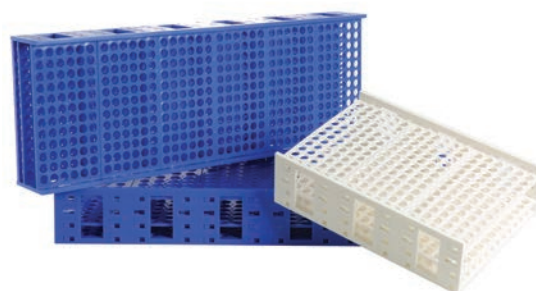

Double Jumbo Test Tube Rack, RPP						
Code	Tube	Places	Colour	L x W x H	No./case	Price/case (₹)
P20441	10 - 13 mm	432 Places	White, Blue	673 x 230 x 80 mm	1	7571
P20442	13 - 16 mm	240 Places	White, Blue	521 x 260 x 89 mm	1	7571

Jumbo Test Tube Rack, RPP						
Code	Tube	Places	Colour	L x W x H	No./case	Price/case (₹)
P20443	10 - 13 mm	216 Places	White, Blue	337 x 267 x 91 mm	1	4002
P20444	13 - 16 mm	120 Places	White, Blue	337 x 267 x 91 mm	1	4002

Add colour of your choice- White (W), Blue (B).


134 | Polygrid Test Tube Racks, PP

- Manufactured in the state of the art moulding facility using high purity virgin polypropylene (PP).
- Can be used in a wide temperature range.
- Racks have precise grid and vents.
- Superior chemical resistance.



Code	Tubes	Places	L x W x H	No./case	Price/case (₹)
P20716	13 mm	90 Places	248 x 116 x 64 mm	4	1077
P20717	17 mm	72 Places	245 x 118 x 70 mm	4	1077
P20718	21 mm	40 Places	248 x 116 x 70 mm	4	1077

Add colour of your choice- White (W), Blue (B).

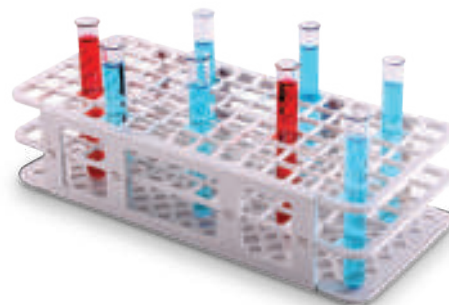

135 | Polywire Racks, Delrin

- Polywire racks are durably moulded in a single continuous piece, so no assembly required and there are no detachable pieces.
- Manufactured from delrin® which is very tough, highly resistant to acids, bases solvents and heat.
- Superior performance to Nylon.
- Moulded in indexing for easy identification.
- These racks have flat labelling area for easier identification.
- Stable in water bath.
- Can be used in a wide temperature range from - 40°C to 140°C.



Polywire Rack Half, Delrin						
Code	Tube	Places	Colour	L x W x H	No./case	Price/case (₹)
P20720	13 mm	36 Places	White, Blue, Red	104 x 104 x 59 mm	4	3308
P20721	16 mm	36 Places	White, Blue, Red	127 x 127 x 70 mm	4	4410
P20722	20 mm (15 ml tube)	20 Places	White, Blue, Red	100 x 127 x 83 mm	4	4515
P20723	25 mm	16 Places	White, Blue, Red	120 x 122 x 92 mm	4	4515
P20724	30 mm (15 ml tube)	9 Places	White, Blue, Red	110 x 110 x 85 mm	4	4515



Polywire Rack Full, Delrin						
Code	Tube	Places	Colour	L x W x H	No./case	Price/case (₹)
P20725	13 mm	72 Places	White, Blue, Red	104 x 202 x 59 mm	4	4410
P20726	16 mm	72 Places	White, Blue, Red	127 x 250 x 70 mm	4	5954
P20727	20 mm (15 ml tube)	40 Places	White, Blue, Red	100 x 252 x 83 mm	4	6064
P20728	25 mm	40 Places	White, Blue, Red	120 x 300 x 92 mm	4	7718
P20729	30 mm (15 ml tube)	24 Places	White, Blue, Red	110 x 282 x 85 mm	4	7718

Add colour of your choice- White (W), Blue (B), Red (R).



#CommittedtotheEarth



09 BOTTLE & CARBOYS

NARROW & WIDE MOUTH BOTTLES,
ASPIRATOR BOTTLES
CARBOYS & MORE

136 | Narrow Mouth Bottle, PP

- These bottles come with inner thread for superior sealing and better security.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
P11135	4 ml	12.2 mm	39.0 mm	100	822
P11136	8 ml	17.5 mm	42.3 mm	100	1027
P11137	15 ml	17.5 mm	56.1 mm	100	1233
P11138	30 ml	17.5 mm	60.0 mm	12	210
P11131	60 ml	17.5 mm	82.4 mm	12	271
P11132	125 ml	21.0 mm	97.6 mm	12	358
P11133	250 ml	21.0 mm	130.7 mm	12	592
P11134	500 ml	24.6 mm	165.5 mm	12	789



137 | Narrow Mouth Bottle, LDPE

- These bottles come with inner thread for superior sealing and better security.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.
- Suitable for storage of low density liquids.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
P11145	4 ml	12.2 mm	39 mm	100	859
P11146	8 ml	17.5 mm	42.3 mm	100	854
P11147	15 ml	17.5 mm	56.1 mm	100	1008
P11148	30 ml	17.5 mm	60 mm	12	169
P11141	60 ml	17.5 mm	82.4 mm	12	218
P11142	125 ml	21 mm	97.6 mm	12	302
P11143	250 ml	21 mm	130.7 mm	12	472
P11144	500 ml	24.6 mm	165.5 mm	12	581



138 | Narrow Mouth Bottle, HDPE

- These bottles come with inner thread for superior sealing and better security.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.
- Suitable for storage of low density liquids.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
P11155	4 ml	12.2 mm	39.0 mm	100	759
P11156	8 ml	17.5 mm	42.3 mm	100	907
P11157	15 ml	17.5 mm	56.1 mm	100	1109
P11158	30 ml	17.5 mm	60.0 mm	12	181
P11151	60 ml	17.5 mm	82.4 mm	12	242
P11152	125 ml	21.0 mm	97.6 mm	12	327
P11153	250 ml	21.0 mm	130.7 mm	12	520
P11154	500 ml	24.6 mm	165.5 mm	12	641



139 | Amber Narrow Mouth Bottle, HDPE

- These bottles come with inner thread for superior sealing and better security.
- Opaque amber colour reduces UV light transmissions to protect light sensitive samples.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.
- Suitable for storage of low density liquids.



121°C

Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PIII55A	4 ml	12.2 mm	39.0 mm	100	916
PIII56A	8 ml	17.5 mm	42.3 mm	100	1119
PIII57A	15 ml	17.5 mm	56.1 mm	100	1425
PIII58A	30 ml	17.5 mm	60.0 mm	12	232
PIII51A	60 ml	17.5 mm	82.4 mm	12	305
PIII52A	125 ml	21.0 mm	97.6 mm	12	415
PIII53A	250 ml	21.0 mm	130.7 mm	12	647
PIII54A	500 ml	24.6 mm	165.5 mm	12	867



140 | Narrow Mouth Bottle (Carboy Type), PP

- These bottles come with long inner thread for superior sealing and better security.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.



121°C

Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PIII27	2000 ml	24.9 mm	248.1 mm	6	2008
PIII28	4000 ml	25.6 mm	333 mm	6	3927
PIII29	8000 ml	38.3 mm	410 mm	6	6694



141 | Wide Mouth Bottle, PP

- These bottles come with inner thread for superior sealing and better security.
- Wide mouth of bottles allows for easy filling and emptying.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.



121°C

Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PIII60	30 ml	21.2 mm	58.9 mm	12	231
PIII61	60 ml	24.8 mm	81 mm	12	318
PIII62	125 ml	32 mm	94.5 mm	12	440
PIII63	250 ml	32.2 mm	126.7 mm	12	672
PIII64	500 ml	47.5 mm	163.2 mm	12	904



142 | Wide Mouth Bottle, LDPE

- These bottles come with inner thread for superior sealing and better security.
- Wide mouth of bottles allows for easy filling and emptying.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.



121°C

Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
P11170	30 ml	21.2 mm	58.9 mm	12	192
P11171	60 ml	24.8 mm	81 mm	12	256
P11172	125 ml	32 mm	94.5 mm	12	354
P11173	250 ml	32.2 mm	126.7 mm	12	550
P11174	500 ml	47.5 mm	163.2 mm	12	745



143 | Wide Mouth Bottle, HDPE

- These bottles come with inner thread for superior sealing and better security.
- Wide mouth of bottles allows for easy filling and emptying.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.



121°C

Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
P11180	30 ml	21.2 mm	58.9 mm	12	211
P11181	60 ml	24.8 mm	81 mm	12	281
P11182	125 ml	32 mm	94.5 mm	12	391
P11183	250 ml	32.2 mm	126.7 mm	12	611
P11184	500 ml	47.5 mm	163.2 mm	12	830



144 | Amber Wide Mouth Bottle, HDPE

- These bottles come with inner thread for superior sealing and better security.
- Opaque amber colour reduces UV light transmissions to protect light sensitive samples.
- Wide mouth of bottles allows for easy filling and emptying.
- These bottles are used for packing, shipping and storage purposes.
- Superior chemical resistance.
- Complete emptying is guaranteed through inclination of shoulders.



121°C

Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
P11180A	30 ml	21.2 mm	58.9 mm	12	264
P11181A	60 ml	24.8 mm	81 mm	12	345
P11182A	125 ml	32 mm	94.5 mm	12	481
P11183A	250 ml	32.2 mm	126.7 mm	12	752
P11184A	500 ml	47.5 mm	163.2 mm	12	1011



145 | Aspirator Bottle with Stopcock, PP

- Aspirator bottles are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These bottles come with secure sealing cap for better security and long-term storage.
- These bottles are used for storing and shipping reagents, chemicals, culture media, and standards.
- These are very strong and durable for extended use over time with a strong carrying handle.
- Comes with high quality and durable stopcock or tap for easy withdrawal of liquids, chemicals, reagents, culture media and standards.
- Can be used at a temperature below 0°C.
- Superior chemical resistance.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PII515	5 LTS	51.4 mm	374 mm	1	1410
PII516	10 LTS	51.4 mm	445 mm	1	2349
PII517	20 LTS	51.4 mm	525 mm	1	3224



146 | Carboy, PP

- Abdos Carboys are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These carboys come with secure sealing cap for better security and long-term storage.
- These carboys are used for storing and shipping reagents, chemicals, culture media, and standards.
- These are very strong and durable for extended use over time with a strong carrying handle on both sides of the carboy.
- Can be used at a temperature below 0°C.
- Superior chemical resistance.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PII518	10 LTS	63.8 mm	378 mm	1	1771
PII519	20 LTS	64.2 mm	525 mm	1	2512



147 | Carboy with Stopcock, PP

- Abdos Carboys are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These carboys come with secure sealing cap for better security and long-term storage.
- These carboys are used for storing and shipping reagents, chemicals, culture media, and standards.
- These are very strong and durable for extended use over time with a strong carrying handle on both sides of the carboy.
- Comes with high quality and durable stopcock or tap for easy withdrawal of liquids, chemicals, reagents, culture media and standards.
- Can be used at a temperature below 0°C.
- Superior chemical resistance.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PII520	10 LTS	63.8 mm	378 mm	1	2512
PII521	20 LTS	64.2 mm	525 mm	1	3460



148 | Carboy Wide Mouth, PP

- Abdos Carboys are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These carboys come with secure sealing cap for better security and long-term storage.
- These carboys are used for storing and shipping reagents, chemicals, culture media, and standards.
- These are very strong and durable for extended use over time with a strong carrying handle on both sides of the carboy.
- Comes with wide mouth easy withdrawal and refill of liquids, chemicals, reagents, culture media and standards.
- Can be used at a temperature below 0°C.
- Superior chemical resistance.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PI1522	10 LTS	76 mm	378 mm	1	1600
PI1523	20 LTS	85 mm	525 mm	1	2250



149 | Heavy Duty Wide Mouth Carboy with Stopcock, HDPE

- Abdos Carboys are manufactured using high purity virgin USP Class VI Medical grade polypropylene (PP).
- These carboys come with secure sealing cap for better security and long-term storage.
- These carboys are used for storing and shipping reagents, chemicals, culture media, and standards.
- These heavy-duty carboys are large with wide mouth capable of handling large volume.
- These are very strong and durable for extended use over time with a strong carrying handle on both sides of the carboy.
- Comes with high quality and durable stopcock or tap for easy withdrawal of liquids, chemicals, reagents, culture media and standards.
- Superior chemical resistance.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PI1511	30 LTS	250 mm	440 mm	1	6125
PI1512	50 LTS	250 mm	650 mm	1	9129
PI1513	100 LTS	250 mm	800 mm	1	13752
PI1510	Spare Stopcock	9 mm	NA	1	736



150 | Spray Bottle, LDPE

- These bottles are used to spray, clean and disinfect bench top space, laminar flow, incubators, bench-top instruments and production floor.
- Can also be used for spraying into areas difficult to access as well as applications in thin layer chromatography.
- Spray bottles have stable smooth operated pump trigger and adjustable spray nozzle that can be regulated from finest mist to precise liquid jet.
- Superior chemical resistance.



Code	Capacity	No. / case	Price/case (₹)
PI1191	500 ml	6	3813
PI1192	1000 ml	6	4160
PI1200	Spare Pump	1	439



151 | Dropping Bottle, LDPE

- These dropping bottles are used for routine storage and pouring applications in laboratory.
- These bottles can be squeezed to ensure precise and steady dropping of liquid from the bottle.
- Moulded from high quality virgin low-density polyethylene to ensure excellent results.
- Superior chemical resistance.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PI1301	60 ml	23.6 mm	94.2 mm	12	314
PI1302	125 ml	22.8 mm	101.8 mm	12	460



152 | Dropping Bottle Euro Type, LDPE

- These dropping bottles are used for routine storage and pouring applications in laboratory.
- These bottles can be squeezed to ensure precise and steady dropping of liquid from the bottle.
- Moulded from high quality virgin low-density polyethylene to ensure excellent results.
- Superior chemical resistance.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PI1305	30 ml	17.5 mm	60 mm	12	365
PI1306	60 ml	17.5 mm	82.4 mm	12	440
PI1307	125 ml	23.6 mm	94.2 mm	12	570
PI1308	250 ml	22.8 mm	101.8 mm	12	870



153 | Wash Bottle, LDPE

- Moulded from high quality virgin low-density polyethylene to ensure excellent results.
- These wash bottles are used for routine storage and pouring applications in the laboratory.
- These bottles have an internal spray to ensure precise dropping of liquid from the bottle.
- Superior chemical resistance.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PI1311	250 ml	24 mm	148 mm	12	653
PI1312	500 ml	23.8 mm	173 mm	6	469



154 | Wash Bottle (Comet), LDPE

- Moulded from high quality virgin low-density polyethylene to ensure excellent results.
- These wash bottles are used for routine storage and pouring applications in the laboratory.
- These bottles have an internal spray to ensure precise dropping of liquid from the bottle.
- These bottles are ideal for Distilled water and suitable for foodstuff.



Code	Capacity	Mouth Diameter	Height	No. / case	Price/case (₹)
PI1313	250 ml	28.2 mm	134.5 mm	12	885
PI1314	500 ml	28.2 mm	165.7 mm	12	999



#CommittedtotheEarth



10 GENERAL LABORATORY PRODUCTS

BEAKERS & MEASURING CYLINDERS
VOLUMETRIC FLASKS & DESSICATORS
SCOOPS & SPATULA
STIRRER BARS & MORE

155 | Beakers Without Handle, PP & TPX

- Manufactured in state of the art moulding facility using high purity virgin polypropylene (PP) & polymethylpentene (TPX).
- PP Material conforming to US FDA 21 CFR.
- TPX Material has distinct advantage of high transparency & chemical resistivity, also has higher thermal withstand capacity over PP beakers.
- Tapered stacking style saves space and makes it easy to handle.
- All sizes have easy to read silk-screened graduations.
- Precise pouring spouts.



Beakers Without Handle, PP				
Code	Capacity	Height	No. / case	Price/case (₹)
P50601	50 ml	59 mm	12	249
P50602	100 ml	73 mm	12	273
P50603	250 ml	94 mm	12	486
P50604	500 ml	128 mm	6	379
P50605	1000 ml	150 mm	4	518
P50606	2000 ml	192 mm	4	909
P50607	5000 ml	263 mm	2	1112
P50608	10000 ml	328 mm	1	976



Beakers Without Handle, TPX				
Code	Capacity	Height	No. / case	Price/case (₹)
P50701	50 ml	59 mm	12	502
P50702	100 ml	73 mm	12	697
P50703	250 ml	94 mm	12	1444
P50704	500 ml	128 mm	6	1315
P50705	1000 ml	150 mm	4	1354
P50706	2000 ml	192 mm	4	2178
P50707	5000 ml	263 mm	2	2156
P50708	10000 ml	328 mm	1	2155

156 | Beakers With Handle, PP & TPX



Beakers With Handle, PP				
Code	Capacity	Height	No. / case	Price/case (₹)
P50802	100 ml	73 mm	6	213
P50803	250 ml	94 mm	6	368
P50804	500 ml	128 mm	6	652
P50805	1000 ml	150 mm	4	854
P50806	2000 ml	192 mm	4	1280
P50807	5000 ml	263 mm	2	1409
P50808	10000 ml	330 mm	1	1456



Beakers With Handle, TPX				
Code	Capacity	Height	No. / case	Price/case (₹)
P50902	100 ml	73 mm	6	465
P50903	250 ml	94 mm	6	838
P50904	500 ml	128 mm	6	1511
P50905	1000 ml	150 mm	4	1770
P50906	2000 ml	192 mm	4	2615
P50907	5000 ml	263 mm	2	2288
P50908	10000 ml	330 mm	1	2278

157 | Measuring Cylinder, PP Class "B"

- Moulded-in large easy to read graduation.
- Moulded-in from highest quality translucent virgin polypropylene.
- Cylinders have generous pour spout for smooth flow of liquid during pouring.
- Hexagonal shape gives stability to the base.



Code	Capacity	Sub division	Error Limit	Height	No./case	Price/case (₹)
P50301	10 ml	0.2 ml	± 0.2 ml	138 mm	12	1465
P50302	25 ml	0.5 ml	± 0.5 ml	170 mm	12	1746
P50303	50 ml	1 ml	± 1 ml	198 mm	12	1978
P50304	100 ml	1 ml	± 1 ml	257 mm	6	1264
P50305	250 ml	2 ml	± 2 ml	314 mm	6	2033
P50306	500 ml	5 ml	± 5 ml	344 mm	3	1316
P50307	1000 ml	10 ml	± 10 ml	412 mm	3	1707
P50308	2000 ml	20 ml	± 20 ml	482 mm	3	4085



158 | Measuring Cylinder, TPX Class "B"

- These transparent graduated cylinders have excellent value.
- Moulded-in large, neat and easy to read graduations.
- Hexagonal shape gives stability to the base.
- Cylinders have generous pour spout for smooth flow of liquid during pouring.



Code	Capacity	Sub division	Error Limit	Height	No./case	Price/case (₹)
P50401	10 ml	0.2 ml	± 0.2 ml	138 mm	12	2332
P50402	25 ml	0.5 ml	± 0.5 ml	170 mm	12	3100
P50403	50 ml	1 ml	± 1 ml	198 mm	12	3559
P50404	100 ml	1 ml	± 1 ml	257 mm	6	2189
P50405	250 ml	2 ml	± 2 ml	314 mm	6	3497
P50406	500 ml	5 ml	± 5 ml	344 mm	3	2595
P50407	1000 ml	10 ml	± 10 ml	412 mm	3	3944
P50408	2000 ml	20 ml	± 20 ml	482 mm	3	6973



159 | Measuring Cylinder, TPX Class "A"

- These transparent graduated cylinders have excellent value.
- Moulded-in large, neat and easy to read graduations.
- Hexagonal shape gives stability to the base.
- Cylinders have generous pour spout for smooth flow of liquid during pouring.
- Meet accuracy requirements of class A under "DIN 12681/ISO 6706".
- Supplied with conformity test certificate that indicates batch number and year of production that is also marked on the cylinder.



Code	Capacity	Sub division	Error Limit	Height	No./case	Price/case (₹)
P50501	10 ml	0.2 ml	± 0.1 ml	138 mm	1	760
P50502	25 ml	0.5 ml	± 0.25 ml	170 mm	1	874
P50503	50 ml	1 ml	± 0.5 ml	198 mm	1	998
P50504	100 ml	1 ml	± 0.5 ml	257 mm	1	1248
P50505	250 ml	2 ml	± 1 ml	314 mm	1	1929
P50506	500 ml	5 ml	± 2.5 ml	343 mm	1	2859
P50507	1000 ml	10 ml	± 5 ml	412 mm	1	4198
P50508	2000 ml	20 ml	± 10 ml	482 mm	1	6921



160 | Volumetric flask. TPX, Class A

- These Volumetric Flasks are manufactured from the medical grade TPX polymer conforming to 21 CFR free of heavy metal and natural rubber.
- These Flasks are made from Glass like TPX offering excellent clarity.
- These Volumetric Flasks Come with polypropylene stopper.
- Meet accuracy requirements of class A under "ISO 1042".
- Supplied with conformity test certificate that indicates batch number & year of production.
- These flasks are recommended to be washed at max 60°C.
- Can be autoclaved.



Code	Capacity	Error Limit	Bulb Diameter	Height with stopper	Neck Size	No./case	Price/case (₹)
P50201	25 ml	±0.04 ml	40 mm	115 mm	10/19	1	1145
P50202	50 ml	±0.06 ml	50 mm	150 mm	12/21	1	1627
P50203	100 ml	±0.10 ml	60 mm	180 mm	14/23	1	1848
P50204	250 ml	±0.15 ml	80 mm	235 mm	19/26	1	2180
P50205	500 ml	±0.25 ml	100 mm	270 mm	19/26	1	2365
P50206	1000 ml	±0.40 ml	125 mm	310 mm	24/29	1	2809



161 | Conical Flask, PP

- Moulded from high quality virgin Polypropylene to ensure excellent results.
- These Conical Flasks are used for routine storage and pouring applications in the laboratory.
- These Flasks have a screw cap designed with inner thread for superior sealing and better security.



Code	Capacity	No. / case	Price/case (₹)
P11620	125 ml	12	889
P11621	250 ml	12	1089
P11622	500 ml	12	1799



162 | Scoop, HDPE

- These scoops are used for withdrawal and movement of solid, granulates, gels and other samples.
- Round bottom for better use.
- With precise formed filling edge and comfortable, stable and robust handle.
- Natural in colour.
- Superior chemical resistance.



Code	Capacity	Total Length	No./case	Price/case (₹)
P11901	100 ml	180 mm	12	2452
P11902	250 ml	240 mm	12	3189
P11903	500 ml	300 mm	6	2287
P11904	1000 ml	360 mm	6	2697
P11905	2500 ml	400 mm	3	2207



163 | Dual Purpose Scoop, HDPE

- ABDOS Dual purpose Scoop is designed to combine the function of a scoop, weigh boat, and funnel to make this product economically beneficial.
- These Scoops are made from high quality anti-static polystyrene that is waterproof and reduces the probability of materials sticking to the scoop.
- These scoops have locking tabs that help to retain materials.
- These scoops can withstand powders, gels, and semi-solids.
- The broad tip design keeps the scoop stable while on the scale and enables materials to be easily scooped and dispensed.
- The dosage requirements for electron beam sterilization that results in sterilized products is determined by procedures that are compliant with ISO 11137.



STERILE E

NEW

Code	Size	Dimension	Color	No./case	Price/case (₹)
P11907	Large	127 x 90 mm	White	100	3599
P11908	Small	127 x 63 mm	White	100	3999



164 | Weighing Boats, PS

- Abdos weighing boats are flexible with smooth surfaces to provide accurate pour-outs with minimal sample loss.
- Biologically inert and resistant to dilute weak acids, aqueous solutions, alcohols, and bases.
- All Abdos weighing boats are anti-static and facilitate the weighing of the static-affected sample.
- These boats can withstand temperature between 10°C to 70°C.
- Can be used with microwave moisture analysers.
- Suitable for use with food.
- Standard Weighing Boats are shallow with a wide, flat bottom to resist tipping.
- They have rounded corners to simplify transfer.
- Pour spout weighing boat have an innovative unique design for easy dispense of the sample without flexing the dish. 12-mil thickness provides good strength, stability and handling.



121°C



Weighing Boats Standard, PS					
Code	Size	Colour	L x W x H	No./case	Price/case (₹)
P70501	Small	Blue	46 x 46 x 8 mm	250	1532
P70502	Medium	Blue	85 x 85 x 24 mm	250	2535
P70505	Large	Blue	140 x 140 x 22 mm	250	4541

Weighing Boat with Pour Spout, PS					
Code	Size	Colour	L x W x H	No./case	Price/case (₹)
P70503	Small	White	43 x 58 x 13 mm	250	2520
P70504	Medium	White	83 x 132 x 26 mm	250	4557
P70506	Large	White	108 x 183 x 26 mm	250	8258



165 | Spatula, PP

- Abdos Spatula is moulded in polypropylene.
- Spatula consists of a spoon on one side while the other end is a flat construction with a knife edge.
- The edge is helpful in breaking up crystals of different salts while the spoon is used to draw salts from containers.
- Suitable for use with food.



Spatula, PP			
Code	Length	No./case	Price/case (₹)
P70707	150 mm	12	184
P70708	200 mm	12	235



166 | Funnel, PP

- Designed specifically for analytical chemistry.
- Each size takes a standard size filter paper.
- The body of the funnel is 60° angle.
- Provided with external and internal ribs.



Code	Size Diameter	Internal Diameter	Stem Length	No./case	Price/case (₹)
P70314	50 mm	50 mm	50 mm	72	727
P70315	62 mm	62 mm	67 mm	36	444
P70316	75 mm	75 mm	77 mm	36	565
P70317	100 mm	100 mm	95 mm	36	1495



167 | Funnel Holder, PP

- These are corrosion free and can hold funnels with diameter 3 in to 6 in.
- Extra plate provided can be placed to hold funnels with diameter 1 in to 3 in.
- Two tapered wedges are provided to have a firm grip on rods.



Code	Places	No./case	Price/case (₹)
P70311	Single	12	1854
P70312	Double	6	1282



168 | Powder Funnel, PP

- These Powder Funnels are used for transferring material in narrow bottles without spillage.
- Various sizes for different container sizes and volumes.
- Moulded from high quality virgin Polypropylene to ensure excellent results.



Code	Internal Diameter	No./case	Price/case (₹)
P70318	65 mm	36	616
P70319	80 mm	36	861
P70320	100 mm	36	1965



169 | Separatory Funnel, PP

- ABDOS Separatory funnel is moulded from high quality virgin Polypropylene to ensure excellent clarity and strength.
- This Funnel is pear shaped and has screw cap for superior sealing and leak proof.
- This funnel comes with PTFE plug for easy usage.
- Push Fit Plugs make the assembly easy and convenient.



Code	Capacity	No./case	Price/case (₹)
P70321	125 ml	2	721
P70322	250 ml	2	773
P70323	500 ml	2	1015



170 | Separatory Funnel Holder, PP

- These are corrosion free with a front opening that allows a clear view of the solution and allows unobstructed placement of separating funnels.
- Two tapered wedges are provided to have a firm grip on rods.



Code	Places	No./case	Price/case (₹)
P70313	Single	12	1431



171 | Retort Stand, PP/PE Coated Rod

- Retort stand is used to attach clamp that holds test tubes and other equipment like burettes.
- It is used for titration, distillation and filtering of samples.
- It is available in both central and side holes.
- Base of the stand is PP and the rod is coated in PE.

Code	L x B, mm	Height of Rod	No./case	Price/case (₹)
P70211	225 x 150 side hole	750 mm	1	910
P70212	300 x 200 centre hole	750 mm	1	1146
P70213	301 x 200 side hole	750 mm	1	1146



172 | Burette Clamp, PP

- Burette clamps are used to hold burettes, test tubes, etc.
- Completely corrosion proof as it is moulded in polypropylene.
- Spring-loaded jack in the middle provides grip to the burette and prevents it from slipping.
- Two tapered wedges are provided to ensure firm grip on the rods.
- Available in both single and double clamp.

Code	Places	No./case	Price/case (₹)
P70601	Single	12	1820
P70602	Double	6	1258



173 | Assorted Workstation storage Bin, ACRYLIC

- Users can organize most of their commonly used laboratory disposables in one location.
- First section of the bins can be used to store tubes, vials, pipette tips, hair cap or masks.
- Second section of the bin is used to store and dispense tissue paper, kimwipes and Parafilm M (supplied with super-sharp serrated blade).
- Third section of the bin is used to store and dispense gloves.



Code	No. of Compartment	L x W x H	No./case	Price/case (₹)
P70104	5	255 x 135 x 368 mm	1	6660

174 | Workstation storage/ Dispenser Bin, ACRYLIC


- Ideal for storing and dispensing small laboratory product such as Pipette tips, Pasture Pipette, Micro Centrifuge Tubes.
- Removable top cover allows easy filling in to the box.
- Hinged opening at the front to take out items from the bin.
- Holes at the back of the bin help it to be placed or stuck on to the wall.



Code	Size	L x W x H	No./case	Price/case (₹)
P70101	Small	200 x 140 x 190 mm	1	3254
P70102	Large	200 x 140 x 275 mm	1	4915

175 | Drying Rack, SS

- These Drying Racks are used for draining and drying test tubes, beakers, flasks & other labware.
- There are 55 pegs in the rack, 50 smaller pegs for products with small diameter & 5 large brackets are designed to hold Erlenmeyer flasks, beakers, etc.
- These pegs are plastic coated for better protection.
- The racks come with a tray at the bottom in order to avoid drops on the surface or table.

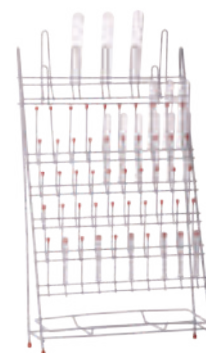

Code	Places	L x W x H	No./case	Price/case (₹)
P20302	55 places	360 x 160 x 650 mm	1	3660

176 | Animal Cage, PP/SS

- These provide excellent shelter for animal species in the laboratory.
- Metallic top provides good ventilation and provides for feeding the animal species.
- Excellent chemical resistance.



Code	Places	L x W x H	No./case	Price/case (₹)
P20501	Single Grill	290 x 220 x 140 mm	1	1156
P20502	Single Grill	430 x 270 x 150 mm	1	1733
P20503	Twin Grill	290 x 220 x 140 mm	1	1965
P20504	Twin Grill	430 x 270 x 150 mm	1	2542

177 | Water Bottle for Animal Species, PP/SS

- These narrow mouth bottles come with attached stainless steel pipe for release of liquid.
- Easy to fill, empty and wash.
- Leak proof.



Code	Capacity	Mouth Diamter	Height	No./case	Price/case (₹)
P20511	125 ml	290 x 220 x 140 mm	97.6 mm	12	1351
P20512	250 ml	430 x 270 x 150 mm	130.7 mm	12	2019



178 | Utility Tray

- Moulded from high quality virgin Polypropylene to ensure excellent results.
- These Utility Trays are used for routine washing and keeping labware and transporting material.
- This tray is designed for easy grip and handling heavy loads.



Code	L x W x H	No./case	Price/case (₹)
P90115	350 x 275 x 75 mm	10	3199
P90116	360 x 310 x 130 mm	6	3399



179 | Plain and Vacuum Desiccator, PP/CC

Plain Desiccator

- Desiccators are enclosures containing desiccants for preserving moisture sensitive products.
- These desiccators are moulded-in from high quality plastics which is light and easy to handle.
- Silicone O-ring assures tight seal down to 0°C without using grease.
- Bottom part of the desiccators comes with thick perforated polypropylene disc with big holes in the middle for easy lifting.
- Use with disposable or reusable desiccant.
- Bottom part of the desiccators is white in color.

Vacuum Desiccator

- Vacuum desiccator are moulded in high quality plastics which is light and easy to handle.
- Silicone O-ring assures tight seal down to 0°C without using grease.
- Polypropylene stopcock with PTFE.
- Bottom part of the desiccators comes with thick perforated polypropylene disc with big holes in the middle for easy lifting.
- Bottom part of the desiccators is transparent in all clear vacuum desiccator.



Plain Desiccator
(PP/PC)



Vacuum Desiccator
(PP/PC)



All Clear Vacuum Desiccator
(PC/PC)

Code	Product	Plate Diameter	Inside Diameter	Flange Outer Diameter	Overall Height	No./case	Price/case (₹)
E11601	Plain Desiccator	150 mm	145 mm	170 mm	210 mm	1	1083
E11602	Plain Desiccator	200 mm	195 mm	230 mm	270 mm	1	2027
E11603	Plain Desiccator	250 mm	240 mm	275 mm	330 mm	1	2810
E11604	Plain Desiccator	300 mm	297 mm	338 mm	410 mm	1	4283
E11605	Vacuum Desiccator	150 mm	145 mm	170 mm	210 mm	1	1838
E11606	Vacuum Desiccator	200 mm	195 mm	230 mm	270 mm	1	2816
E11607	Vacuum Desiccator	250 mm	240 mm	275 mm	330 mm	1	3535
E11608	Vacuum Desiccator	300 mm	297 mm	338 mm	410 mm	1	5072
E11609	All Clear Vacuum Desiccator	150 mm	145 mm	170 mm	210 mm	1	2254
E11610	All Clear Vacuum Desiccator	200 mm	195 mm	230 mm	270 mm	1	3457
E11611	All Clear Vacuum Desiccator	250 mm	240 mm	275 mm	330 mm	1	4435
E11612	All Clear Vacuum Desiccator	300 mm	297 mm	338 mm	410 mm	1	6620

SPARE ACCESSORIES FOR ALL DESICCATOR


Code	Product	No./case	Price/case (₹)
E11620	Stop Cock for Vacuum Desiccator	1	787
E11621	Silicone Ring for 150 mm Desiccator	1	143
E11622	Silicone Ring for 200 mm Desiccator	1	210
E11623	Silicone Ring for 250 mm Desiccator	1	264
E11624	Silicone Ring for 300 mm Desiccator	1	337

180 | Vacuum Gauge Round / Cubic Desiccator

- These vacuum desiccators feature a round design with light weight yet high tensile strength.
- Maximum vacuum of 1 Torr (1.33×10^{-4} Mpa) for 72 hours.
- High quality silicone gasket ensures greaseless airtight seal for cost effective and clean test environment.
- Highly transparent, shatterproof, non-corrosive, and easy to clean polycarbonate construction.
- Three-way stopcock ensures consistent and uniform vacuum draw, vacuum release, or gas exchange. The barbed fitting on each side secures attachment of tubing.
- Flange lock holds the top and the bottom together during non-vacuum conditions.
- UV-blocking model minimizes damage and discoloration of light-sensitive samples.
- In Vacuum Gauge Round Desiccator, vacuum gauge is attached at the centre of the lid while it is attached at the front door in Vacuum Gauge Cubic Desiccator.



Vacuum Gauge Round Desiccator

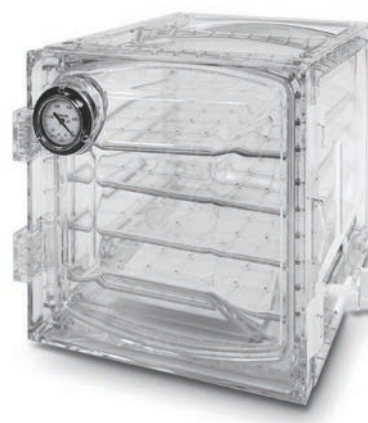

Vacuum Gauge Cubic Desiccator

Code	Capacity	D x H	Colour	No./case	Price/case (₹)	Code	Capacity	W x D x H	Colour	No./case	Price/case (₹)
E11617	6 LTS	242 x 354 mm	Natural	1	28130	E11613	11 LTS	322 x 285 x 271 mm	Natural	1	109304
E11617 A	6 LTS	243 x 354 mm	Amber	1	37131	E11613 A	11 LTS	323 x 285 x 271 mm	Amber	1	114770
E11618	10 LTS	308 x 400 mm	Natural	1	34881	E11614	23 LTS	420 x 397 x 281 mm	Natural	1	136631
E11618 A	10 LTS	308 x 400 mm	Amber	1	42757	E11614 A	23 LTS	421 x 397 x 281 mm	Amber	1	142096
E11619	20 LTS	385 x 475 mm	Natural	1	42757	E11615	35 LTS	420 x 397 x 381 mm	Natural	1	172154
E11619 A	20 LTS	385 x 475 mm	Amber	1	50634	E11615 A	35 LTS	421 x 397 x 381 mm	Amber	1	179259
						E11616	45 LTS	420 x 397 x 491 mm	Natural	1	218609
						E11616 A	45 LTS	421 x 397 x 491 mm	Amber	1	229539

SPECIFICATIONS :

Code	E11617 & E11617 A	E11618 & E11618 A	E11619 & E11619 A	E11613 & E11613 A	E11614 & E11614 A	E11615 & E11615 A	E11616 & E11616 A
Internal Volume	6 L / 0.2 cu ft	10 L / 0.4 cu ft	20 L / 0.7 cu ft	11 L / 0.4 cu ft	23 L / 0.8 cu ft	35 L / 1.2 cu ft	45 L / 1.6 cu ft
Gauge Range	0 to -0.1 Mpa	0 to -0.1 Mpa	0 to -0.1 Mpa	0 to -0.1 Mpa	0 to -0.1 Mpa	0 to -0.1 Mpa	0 to -0.1 Mpa
Nozzle Diameter	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch	9.5 mm / 0.37 inch
Max. Permissible Vacuum	1.33×10^{-4} Mpa	1.33×10^{-4} Mpa	1.33×10^{-4} Mpa	1.33×10^{-4} Mpa	1.33×10^{-4} Mpa	1.33×10^{-4} Mpa	1.33×10^{-4} Mpa
Max Load per shelf	-	-	-	3 Kg	5 Kg	5 kg	5 kg
Number of Shelves	-	-	-	2 standard / 4 maximum	2 standard / 4 maximum	3 standard / 5 maximum	3 standard / 6 maximum
Material - Body	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Material - Perforated Sample Tray	Polypropylene	Polypropylene	Polypropylene	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Material - Drying Agent Tray / Locker	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Material - Vacuum Seal	Silicone Rubber	Silicone Rubber	Silicone Rubber	Silicone Rubber	Silicone Rubber	Silicone Rubber	Silicone Rubber
Dimension - Interior (W x D x H)	-	-	-	248 x 254 x 238 mm	346 x 365 x 246 mm	355 x 375 x 345 mm	355 x 374 x 445 mm
Dimension - Exterior (Dia X H)	242 x 354 mm	308 x 400 mm	385 x 475 mm	-	-	-	-
Dimension - Exterior (W x D x H)	-	-	-	322 x 285 x 271 mm	420 x 397 x 281 mm	420 x 397 x 381 mm	420 x 397 x 491 mm
Net Weight	1.5 Kg	2.5 Kg	4.2 Kg	4.2 Kg	8.2 Kg	10.8 Kg	12.2 Kg

E11617 A, E11618 A, E11619 A, E11613 A, E11614 A, E11615 A, E11616 A codes are translucent (Amber colour) Vacuum desiccators with Ultra Violet block effect. All models come with vacuum gauge.

181 | Coplin Jar

- These Coplin Jars are Polypropylene staining jars that holds either 5 single or 10 back-to-back standard 75 x 25 mm slides.
- Interior of the Coplin Jar is grooved to hold the slides in an upright position.
- Flat Cap, features large milled edge for easy hand grip and has a built-in plug seal.



Code	Places	Height	No./case	Price/case (₹)
P90101	10	114 mm	12	674




182 | Slide Box, ABS

- These Slide Box are suitable for holding standard 25 x 75 mm microscope slides.
- Slide tray are mounted with cock sheet on the bottom and index list inside the lid for microscope slide identification.
- Uniform grooved slide slots separates slides and prevents it to come in contact with each other.



Code	Places	L x W x H	No./case	Price/case (₹)
P90103	25	95 x 82 x 32 mm	12	1108
P90104	50	199 x 82 x 32 mm	6	923
P90105	100	192 x 162 x 32 mm	6	1803

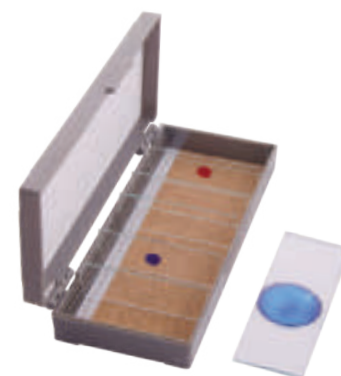

183 | Slide Tray, PS

- These Slide Trays are suitable for holding standard 25 x 75 mm microscope slides.
- Slide tray are manufactured in state in art molding facility using virgin Polysterene.
- Thumb cut area provides space for easy slide handling.



Code	Places	L x W x H	No./case	Price/case (₹)
P90102	20	300 x 194 x 12 mm	6	2750



184 | Slide Dispenser, PS

- These Slide Dispenser are suitable for holding standard 25 x 75 mm microscope slides.
- The over all design of the dispensers make it easy to load and dispense slides.
- User can effortlessly turn either side of wheel to dispense slides one at a time.



Code	Places	L x W x H	No./case	Price/case (₹)
P90106	72	120 x 120 x 163 mm	1	847



185 | Slide Mailer, PP

- These Slide Mailer are suitable for holding standard 25 x 75 mm slides.
- They are ideal for secure shipping and storing of slides.
- Easy to close secure snaps for storage of valuable slides.



Code	Places	L x W x H	No./case	Price/case (₹)
P90107	1	85 x 42 x 5 mm	25	235
P90108	2	82 x 70 x 5 mm	25	379
P90109	3	100 x 84 x 5 mm	25	390
P90110	5	82 x 30 x 17 mm	25	422



186 | Microscope Slide File, HIPS

- These Slide File will hold upto 20 standard microscope slides 25 x 75 mm.
- These slide file is made of two parts the base is holding the slides horizontally in prenumbered spaces for easy identification and transparent door which can either cover the slides and allow easy reading of ID labels with or without optical bar code reader.
- Will resist temperature between -80°C to +80°C.



Code	Places	L x W x H	No./case	Price/case (₹)
P90113	20	192 x 295 x 11 mm	10	6789



187 | Slide Storage System, HIPS

- The most convenient, organized and versatile way of storing 75 x 25 mm microscope slides.
- Slide storage system includes a slide box and a removable tray & transparent hinged cover makes the contents of the box easy to see at a glance.
- Can withstand temperature between - 80 °C to + 80 °C.
- All slides are stored upright for easier insertion and removal. To easily pick up the slide simply tilt the slides forward and backward with one finger.



Code	Places	L x W x H	No./case	Price/case (₹)
P90111	100	82 x 245 x 86 mm	10	8486




188 | Slide Drain Rack, HIPS

- This tray used as drain rack can hold upto 200 microscope slides in 100 individual numbered slots.
- All slides are stored upright for easier insertion and removal.
- To easily pick up the slide simply tilt the slides forward and backward with one finger.



Code	Places	L x W x H	No./case	Price/case (₹)
P90112	100 / 200	75 x 231 x 25 mm	10	2419

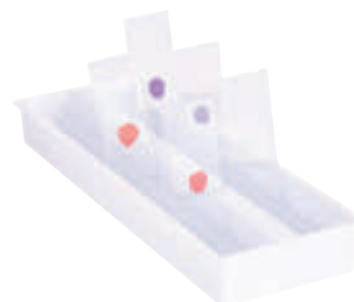

189 | Slide Staining System, Acetal

- This system has two components a square staining jar and a 12-position vertical slide rack.
- This system is made of acetal plastic and will not break like glass jars.
- Resist temperature between -150 °C to 121°C
- Superior chemical resistance.
- The base is wide and offers greater stability while the inside is recessed allowing for a smaller reagent volume of only 80 ml.
- Can be autoclaved.



Code	Places	Height	No./case	Price/case (₹)
P90114	12	64 x 76 x 92 mm	1 Kit	2372



190 | Micro Magnetic Stirrer Bar, PTFE/ALNICO V MAGNET

- For the stirring of liquids on magnetic stirrer and hot plates stirrers.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.
- For use in small vessels, e.g. test tubes, vials etc.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80136	2 x 2 mm	5	928
P80137	2 x 5 mm	5	928
P80101	2 x 7 mm	5	928
P80102	3 x 10 mm	5	928



191 | Magnetic Stirrer Bar With Pivot Ring, PTFE/ALNICO V MAGNET

- Central pivot ring ensures efficient spinning even on curved or uneven bases.
- For the stirring of liquids on magnetic stirrers and hot plates stirrers.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80138	4.5 X 12	10	1221
P80103	4.5 x 15	10	1221
P80124	6 X 12	10	1363
P80104	6 x 20	10	1500
P80123	6 x 25	10	1651
P80105	6 x 30	10	1801
P80139	6 x 35	10	1921
P80125	8 X 13	10	1736
P80106	8 x 40	10	2169
P80107	8 x 50	10	2454
P80126	10 X 25	10	2113
P80108	10 X 60	5	2013
P80109	10 X 70	5	2078
P80127	13 x 75	2	1737
P80140	24 X 57	2	3420
P80141	24 X 108	2	7076
P80142	24 X 159	2	8845



192 | Cylindrical Magnetic Stirrer Bar, PTFE/ALNICO V MAGNET

- Plain design with rounded ends, suitable for a wide range of flat bottomed containers.
- For the stirring of liquids on magnetic stirrers and hot plates stirrers.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C



Code	OD(φ) X L, (mm)	No./case	Price/case (₹)
P80143	6 X 10	10	1331
P80144	6 X 15	10	1263
P80110	6 x 20	10	1263
P80154	6 x 25	10	1355
P80111	6 x 30	10	1428
P80145	8 X 13	10	1650
P80146	8 X 20	10	1650
P80147	8 X 25	10	1992
P80148	8 X 30	10	1992
P80112	8 x 40	10	1815
P80113	8 x 50	10	2819
P80149	10 x 60	10	3773
P80114	10 x 70	10	4717
P80150	10 x 80	10	5543



193 | Plain Magentic Stirrer Bar, PTFE/ALNICO V MAGNET

- Plain design for more turbulence at low speed.
- For the stirring of liquids on magnetic stirrers and hot plates stirrers.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.



Code	OD(φ) X L, (mm)	No./case	Price/case (₹)
P80155	6 X 10	10	1179
P80156	6 X 15	10	1297
P80157	6 x 20	10	1533
P80158	6 x 25	10	1710
P80159	6 x 30	10	2004
P80160	8 X 13	10	1828
P80161	8 x 25	10	2475
P80162	8 x 40	10	1850
P80163	8 x 50	10	2948
P80164	8 x 60	10	3420
P80165	10 x 25	10	2948
P80166	10 x 35	10	2948
P80167	10 x 50	10	3537
P80168	10 x 60	10	3892
P80169	10 x 70	10	4364
P80170	10 x 80	10	4716



194 | Octagonal Magentic Stirrer Bar, PTFE/ALNICO V MAGNET

- Shape gives increased turbulence at low speeds.
- Bars with central pivot ring.
- For the stirring of liquids on magnetic stirrers and hot plates stirrers.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80115	8 x 13	10	1499
P80116	8 x 25	10	1589
P80117	8 x 38	10	1979
P80128	8 x 51	10	2179
P80129	8 x 64	10	3082
P80151	10 x 13	10	2005
P80152	10 x 25	10	2005
P80153	10 x 38	10	2241
P80118	10 x 51	10	2999
P80119	13 x 75	10	5897

195 | Oval Magentic Stirrer Bar, PTFE/ALNICO V MAGNET

- Best suited for round bottom flask.
- For the stirring of liquids on magnetic stirrers and hot plates stirrers.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80171	5 x 10	10	1769
P80172	6 x 15	10	1769
P80173	10 x 20	10	2477
P80174	10 x 25	10	2948
P80175	10 x 30	10	3774
P80176	16 x 30	10	4600
P80177	16 x 35	10	5307
P80178	20 x 40	10	6958
P80179	20 x 50	10	9199
P80180	20 x 64	10	10496
P80181	20 x 70	10	11794

196 | Triangular Magnetic Stirrer Bar, PTFE/ALNICO V MAGNET

- Ideal for mixing difficult solutions e.g. dissolving solvents or mixing sediments.
- Spins well giving the best possible mixing action.
- For the stirring of liquids on magnetic stirrers and hot plates stirrers.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80130	14 x 25	2	1250
P80131	14 x 40	2	1487
P80132	14 x 55	2	1676
P80182	14 X 80	2	2181

197 | Wings Magnetic Stirrer Bar, PTFE/ALNICO V MAGNET

- Best suited for test tubes.
- For the stirring of liquids on magnetic stirrers and hot plates stirrers.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures upto 260°C.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80183	8 x 11	2	1887
P80184	10 x 16	2	2359
P80185	13 x 10	2	1887
P80186	13 x 20	2	2359



198 | Double Ended Magnetic Stirrer Bars, PTFE/ALNICO V MAGNET

- Double ended stirrer bars have double paddle action for efficient stirring plus high stability.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80133	8 X 35	5	3125
P80134	8 X 55	5	3774



199 | Cross-spin Magnetic Stirrer Bars, PTFE/ALNICO V MAGNET

- Cross spin stirrer bars add speed and efficiency to your mixing requirements.
- The cross shape creates a deep vortex and provides stable and quiet operation.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80135	8 x 20, 9 x 25, 10 x 30, 11 x 38, 15 x 50, 20 x 60	1 set consisting of 1 pcs each	3817



200 | Magnetic Retrievers, PTFE/ALNICO V MAGNET

- Used to retrieve stirrer bar.
- Inert & leak Free.
- Moulded in from FDA approved PTFE and LNICO V MAGNET.
- Strong alloy magnets sheathed in pure white inert PTFE.
- Resistant to virtually all chemical attack and temperatures up to 260°C.



Code	OD(Ø) X L, (mm)	No./case	Price/case (₹)
P80187	10 x 150	2	2241
P80188	10 x 250	2	2830
P80189	10 x 350	2	3184





10 UTILITIES

BIOHAZARD & AUTOCLAVE DISPOSABLE BAGS

GLOVES & SAFETY GOGGLES

SHARP CONTAINERS

N95 MASKS & PPE KITS & MORE

201 | Biohazard Disposable Bags, PP

- Polypropylene bags include black biohazard symbol and precautionary procedures printed in four languages (English, Spanish, French, German) for added safety.
- These bags are easy to open and close and used to dispose biohazard waste and other plastic laboratory disposables.
- High temperature steam autoclavable to 135°C (275°F).
- Pass ASTM 1922 Tear Resistance and ASTM 1709 Dart Impact Tests.



Code	W x L (inch)	Colour	No./case	Price/case (₹)
U40105	12 x 18 inches	Red, Yellow & Natural	200	2222
U40106	12 x 24 inches	Red, Yellow & Natural	200	2480
U40107	16 x 24.5 inches	Red, Yellow & Natural	200	3116
U40103	18 x 22 inches	Red, Yellow & Natural	200	2970
U40104	25 x 35 inches	Red, Yellow & Natural	200	6000
U40114	24 x 31.5 inches	Red, Yellow & Natural	100	6600
U40120	42 x 42 inches	Red, Yellow & Natural	100	8763



202 | Autoclavable Bags, PP

- These polypropylene autoclave bags made of 2 mil thickness are used for discarding used petri dishes, membrane filters, cell culture flasks, pipettes, culture plates & other plastic products.
- These bags are transparent.



Code	W x L (inch)	No./case	Price/case (₹)
U40112	8 x 12 inches	100	791
U40113	12 x 24 inches	100	1452
U40108	16 x 18 inches	100	1694
U40109	16 x 24 inches	100	3176



203 | Transport/ Resealable Bags with Zip Lock, PE

- These Bags can be used to store and ship samples, solids and food/suitable for use with food.
- Though it can be used for all applications it is especially used in food, water, forensic science and quality control laboratory.
- Using the rim and channel closure the bag can be closed by finger pressure and reopened repeatedly.
- Content stored in the bag would be dust free and free of contaminants.



Code	W x L (inch)	No./case	Price/case (₹)
U40110	9.8 x 10.2 inches	100	827
U40111	13 x 13.35 inches	100	1272



204 | Sharp Container, PP

- A complete Line of Containers for needle, sharps and cutting waste, hospital waste.
- Secure lock on lid makes it safe to discard with sharp waste.
- Special design on lid makes it user-friendly to use with one hand while disposing sharp needles.
- Opening design inhibits hand entry to reduce the risk of needle stick when disposing sharps.
- Clear top and translucent containers allow you to monitor the fill level.
- Puncture-resistant, durable polypropylene, can be autoclaved or incinerated.
- Clearly marked with biohazard label.



Code	Capacity(ml)	No./case	Price/ Each	Price/case (₹)
P50111	800 ml	40	95	4347
P50112	1200 ml	60	135	9266
P50113	3000 ml	60	185	12698
P50114	5000 ml	60	230	15787

205 | Safety Goggles, PC

- Polycarbonate lens with side shield.
- Impact resistant and lightweight frames for comfortable eyewear.
- 99.9% UVA/UVB protection.
- U50103 are best suitable for the complete protection of eye.
- U50104 can be worn over spectacles for complete protection of eyes.



U 40101

U 50103



U 50104

Code	No./case	Price/case (₹)
U40101	2	588
U50103	2	1146
U50104	2	1380

206 | Safety Goggles Box, ACRYLIC

- This safety box can be set on the bench top or mounted on the wall for storage of goggles, glasses and other small lab products.
- Safety Lid keeps the box free of dust and contamination.
- Clear window helps to view the inventory from the outside.



Code	L x W x H	Size	No./case	Price/case (₹)
P70106	23 x 16 x 18 cm	Small	1	3661
P70107	23 x 16 x 25 cm	Large	1	4576

207 | Safety Face Shield

- Clear face shield of polycarbonate provides high impact and splash protection.
- Ratched adjustment on the headgear provides comfortable fit.

Code	L x W x H, mm	No./case	Price/case (₹)
U40102	15.5 x 8 x 0.04	1	2751



208 | Abdos N95 Respirator Mask

- These masks are disposable respirators that provide protection from particulates.
- Bacterial Filtration Efficiency $\geq 95\%$ approved as per guidelines.
- Confirm Minimum Splash Resistance Pressure.
- Satisfy all regulations of all accredited NABL labs.
- Particulate Filtration Efficiency $\geq 95\%$ Confirms FFP2 as BIS: IS: 9473-2002 with/without Expiratory Valve.



Code	Description	Size	Colour	No./case	Price/case (₹)
U20417A	N 95 Particulate respirator	Regular	White/Grey	100	9000
U20418A	N 95 Particulate respirator with exhalation	Regular	White/Grey	100	10900

209 | PPE Kit

Coverall Body Suit with Heat Seal Taped

- Impermeable to blood and body fluids. Thumb / Finger loops to anchor sleeves in place.
- 90 GSM, Single Use. ISO 16603:2004 Certified.
- Free Size suitable for all fits. Colors available: White / Blue.
- Elasticated Hood, Wrist & Ankle.

Gloves

- Nitrile, Non Sterile, Powder Free.
- Sizes 6.5, 7 & 7.5 can be supplied.

Shoe Cover

- Made up of the same fabric of coverall, 100 GSM.
- Reaches above ankles.

Goggles

- Comes with transparent glass, zero power, well fitting, covered from all sides. Seals well with the skin.
- Covers the eye and the surrounding areas. Protects the Mucous Membranes of the Eyes. Flexible frame to easily fit all face contours without too much pressure.
- Fog and scratch resistant.
- May be re-usable (provided appropriate arrangements for decontamination are in place) or disposable.

3 Ply Surgical Face Mask

- Triple Layer Surgical mask of non-woven material with elastic band.
- Filter efficiency of 99% for 3 micron particle size.

N95 Face Mask

- Bacterial Filtration Efficiency $\geq 95\%$ SITRA approved. Conforms to all regulations of all accredited NABL labs.
- Confirmed Minimum Splash Resistance Pressure.
- Particulate Filtration Efficiency $\geq 95\%$.
- Conforms to FFP2 as BIS: IS: 9473-2002.
- With / Without Expiratory Valve.



Code	Description	No. / Pack	No./case	Price/case (₹)
U50110	PPE KIT- NON STERILE (with 3 ply mask)	1	10	5000
U50111	PPE KIT- STERILE (with 3 ply mask)	1	10	5500
U50112	PPE KIT - NON STERILE (With N95 Mask)	1	10	5500
U50113	PPE KIT - STERILE (With N95 Mask)	1	10	6000
U50114	PPE KIT -NON STERILE (With N95 Mask With Exhalation Valve)	1	10	5750
U50115	PPE KIT -STERILE (With N95 Mask with Exhalation Valve)	1	10	6250

210 | Abdos DERMA Blue Nitrile Gloves - 9.5 inches length

- These gloves are ideal product to protect you from exposure to bacteria, viruses and chemicals. It also enhances your ability to offer maximum security against cross-contamination.
- Its unique blue color provides quick, visual differentiation from natural rubber latex and other synthetic gloves.
- Ambidextrous, textured fingertips and beaded cuff enhance wet and dry grip.
- Custom design enhance comfort and fit.
- These gloves are powder free, minimizing the potential for powder related complications.
- Conforms to ASTM D6319 and EN 455 Standards.

Code	Sizes	No./case	Price/case (₹)
U20447	X Small	100	800
U20341	Small	100	800
U20342	Medium	100	800
U20343	Large	100	800
U20448	X Large	100	800



211 | Abdos DERMA Blue Nitrile Gloves - 9.5 inches length

- These gloves are ideal product to protect you from exposure to bacteria, viruses and chemicals. It also enhances your ability to offer maximum security against cross-contamination.
- Ambidextrous, textured fingertips and beaded cuff enhance wet and dry grip.
- Softness provides superior comfort and natural fit.
- These gloves are powder free, minimizing the potential for powder related complications, irritation and dermatitis.
- Lower level of extractable proteins and chemical residue, hence lower incidences of allergic reactions.
- Conforms to ASTM D6319 and EN 455 Standards.

Code	Sizes	No./case	Price/case (₹)
U20449	X Small	100	720
U20344	Small	100	720
U20345	Medium	100	720
U20346	Large	100	720
U20450	X Large	100	720



212 | Safeskin Purple Nitrile Gloves, 9.5 & 12 inches length

- These gloves are ideal product to protect you from exposure to bacteria, viruses and chemicals. It also enhances your ability to offer maximum security against cross-contamination.
- Its unique purple color provides quick, visual differentiation from natural rubber latex and other synthetic gloves.
- Its textured fingertips enhance wet and dry grip.
- Custom design enhance comfort and fit.
- These gloves are powder free, minimizing the potential for powder related complications.

Safe Skin Purple Nitrile Gloves - 9.5 inches length				Safe Skin Purple Nitrile Gloves - 12 inches length			
Code	Sizes	No./case	Price/case (₹)	Code	Sizes	No./case	Price/case (₹)
U20301	Small	100	1133	U20304	Small	50	1107
U20302	Medium	100	1133	U20305	Medium	50	1107
U20303	Large	100	1133	U20306	Large	50	1107



213 | Glove Box Holder, Acrylic

- They designate a place for gloves.
- Clear and pristine holder to give clean appearance.
- Top loading of the glove box.
- Easy to dispense the gloves through the holder.
- Each holder has holes that help it to be installed in a convenient location to the proximity of your work and tasks.



Code	No. of places	L x W x H, mm	No./case	Price/case (₹)
P70301	1	260 x 100 x 138	1	1874
P70302	2	260 x 100 x 270	1	2487
P70303	3	260 x 100 x 415	1	3293

214 | Kimtech Science Kimwipes Wipers

- These wipers is an ideal product for cleaning and wiping delicate surfaces such as beakers, lenses, slides, optical lenses, optical instruments, surface and glass layer.
- Low in lint and low extractable wipers.
- Non-abrasive wipers wont scratch on delicate surface when used wet.
- Absorbent wipers hence easily wipe up liquid and dust.
- LINTGURD anti-stat polyshield on each pop-up box helps to further reduce the lint and static buildup.
- Multi-fold dispensing format enables one-at-a-time dispensing which controls usage.
- Handy, portable pop-up box makes the product convenient to use.



Code	Sizes	Units/pack	No./case	Price/case (₹)
U20409	11.17 cm x 21.3 cm	280 sheets	60 packs	19685
U20410	37.33 cm x 42.16 cm	140 sheets	15 packs	18644

215 | Wypall X70 Wipers

- An ideal product to replace cloth towels or rags.
- They can exceptionally absorb oil, grease, solvents and water, reusable and durable.
- They are designed to perform the wiping function that helps to improve productivity and performance.
- They are made from advanced HYDROKNIT material that deliver products that are absorbent, higher in strength and have more bulk.
- They are bio-degradable hence reduce disposable cost and are environmental friendly.
- Available in 100 meters roll format in white and blue colour with perforation making it easy to use.



Code	Sizes (LxW)	Colour	No./case	Price/case (₹)
U20407	24.7 cm x 20 cm	White	1 Roll-100 metres	3782
U20413	24.7 cm x 20 cm	Blue	1 Roll-100 metres	3782
U20414	26 cm x 26 cm	White	50 Sheets	714
U20415	25.4 cm x 38.1cm	Blue	50 Sheets	911

216 | Wypall L30 Wipers

- This product will consistently deliver the wiping performance that you need in convenient and cost effective manner.
- Wiper is highly absorbent, thus controls usage and reduces wastage.
- One time use and throw wipers, eliminates cross-contamination.
- Wipers have low lint hence do not leave particles behind.
- Versatile, highly absorbent wiper leaves surface clean and dry.
- Available in both sheet and roll format that makes it easy to use.



Code	Sizes (LxW)	Colour	No./case	Price/case (₹)
U20408	21.75 cm x 36.5 cm	White	56 sheets	655
U20423	38 cm x 23.4 cm	Blue	1 Roll-300 metres	5603

217 | Parafilm M

- Parafilm M is a flexible, thermoplastic, waterproof self-sealing film that holds moisture loss to the minimum and offers secure sealing to the content of tubes, beakers, flasks, petri-dish and vials.
- It has excellent resistance to air, other gases, alcohol, common acids and moderately concentrated alkalis.
- At 21° C (70° F), it stretches 200% and returns partially to its original size at 82° C to 93° C (180° F to 200° F) and softens enough to make an adhesive bond between papers, cloths and leathers.



Code	Sizes	No./case	Price/case (₹)
U30101	2 Inches x 250 feet	1 Roll	2750
U30102	4 Inches x 125 feet	1 Roll	2550

218 | Parafilm M Dispenser, ACRYLIC

- Ideal for storing, dispensing and cutting Parafilm® M, tape and labels.
- Openable top lid allows easy filling into the Dispenser.
- These dispensers can hold both 2 inches and 4 inches Rolls.
- Tapes and Labels can be easily cut through super-sharp serrated blade.



Code	Capacity	L x W x H, mm	No./case	Price/case (₹)
P70401	2 inch & 4 inch	180 x 120 x 160	1	3363

* Dispenser does not include Parafilm M

219 | Parafilm M Dispenser, ABS

- Ideal for storing, dispensing and cutting Parafilm® M, tape and labels.
- Openable top lid allows easy filling into the Dispenser.
- These dispensers can hold both 2 inches and 4 inches Rolls.
- These dispensers are designed with safety razor that sides and cuts with no danger to fingers.



Code	Capacity	L x W x H, mm	No./case	Price/case (₹)
P70402	2 inch & 4 inch	156 x 120 x 156	1	3900

* Dispenser does not include Parafilm M

220 | Freezer Thermometer

- These thermometer can be used as probe to investigate and protect frozen and chilled samples from potential spoilage.
- Monitor temperatures inside your freezer or refrigerator with the added convenience of sound and flashing LED lights to alert out-of-range temperatures.
- Suction cup attaches the probe inside freezer/refrigerator while the thermometer secures to the outside with hook-and loop tape
- Large digital display shows freezer/refrigerator temperature plus ambient temperature
- Set freezer range: (-9.5° to -23°C); set refrigerator range: (2° to 8°C)
- Can be used as Fahrenheit °F or Celsius °C
- Includes one AAA battery
- Probe cable measures 0.9 m; probe measures 5 mm OD x 17 mm L



Code	L x W x H, mm	No./case	Price/case (₹)
U20610	136 x 19 x 28	1	4045

221 | Container Seal

- Container Seal is a sealing tape designed for the vast range of bottles and containers used in laboratory application.
- Its unique elastomeric characteristics allow it to stretch and conform around the irregular perimeters of containers lids and covers to form a tight seal.
- Container Seal will block water vapor loss, reduce the rate of gas exchange and prevent entry of contaminants.
- Ideally sized (0.75" wide) tape can be easily removed from surface without leaving an adhesive residue.
- Container Seal stretches and conforms, can resist chemical & temperature range and is waterproof.
- Available in a wide variety of colours.



Code	Sizes	Colour	No./case	Price/case (₹)
U20101 C	0.75 inches x 108 feet	Clear	1 Roll	7497
U20101 W	0.75 inches x 108 feet	White	1 Roll	7497
U20101 B	0.75 inches x 108 feet	Blue	1 Roll	7497



222 | Cryo-Babies and Cryo-Tags

- Cryo-Babies are ideally used for 0.5ml and 2.0ml tubes and Cryo-Tags are used for general-purpose applications.
- Cryo-Babies and Cryo Tags can withstand freezer temperatures down to -196°C (liquid and vapor phase nitrogen), boiling water baths (100°C), autoclaving and moderate oven temperature (150°C). They will resist water soaking for at least 24 hours at room temperature and water vapor (100% relative humidity) at 35°C for at least 24 hours.
- These are chemically inert labels and resist most organic solvents and caustic agents.
- Made with a flexible, polyolefin label material and acrylic adhesive. This unique combination expands and contract together with temperature fluctuations resulting in strong adhesive bond.
- These labels can adhere to most plastics (100% virgin polypropylene tubes recommended), glass and metals without cracking, peeling or degrading.
- These labels accept writing from most lab markers.

Cryo - Babies			
Code	Sizes	No./case	Price/case (₹)
UI0401	0.94 inches x 0.50 inches	1000	4080
UI0402	1.28 inches x 0.50 inches	1000	4080

Cryo - Tags			
Code	Sizes	No./case	Price/case (₹)
UI0501	1.50 inches x 0.75 inches	1000	4080



223 | Tough Spots

- Tough Spots are ideally used for labeling 0.5ml, 1.5ml and 2.0ml micro centrifuge tubes.
- Tough Spots can withstand freezer temperatures down to -196°C (liquid and vapor phase nitrogen), boiling water bath (100°C), autoclaving and moderate oven temperature (150°C).
- Tough Spots can endure sustained humidity and soaking, submersion in boiling water bath, autoclaving, organic solvents, caustic agents and other challenges without peeling, degrading or becoming brittle.
- Made with a flexible, polyolefin label material and acrylic adhesive. This unique combination expands and contracts together with temperature fluctuation resulting in strong adhesive bond.
- These labels can adhere to most plastics (100% virgin polypropylene tubes recommended), glass and metals without cracking, peeling or degrading.
- These labels accept writing from most lab markers.



Code	Sizes	No./case	Price/case (₹)
UI0301	1/2 inches	1000	3490
UI0302	3/8 inches	1000	3490
UI0303	1/2 inches	5000	13960
UI0304	3/8 inches	5000	13960



224 | Tough Tags

- Tough Tags are ideally used for labeling 0.5ml, 1.5ml and 2.0ml tubes. White Tough Tags can also be used for labeling general purpose label and microplates.
- Tough Tags can withstand temperatures from -40°C to 121°C , boiling water bath, autoclaving and moderate freezer temperature.
- Chemically inert, polyester sheets resist most organic solvents and caustic agents.
- Tubes labeled with Tough-Tags easily slide in and out of centrifuge rotors without binding.
- These labels can adhere to most plastics (100% virgin polypropylene tubes recommended), glass and metals without cracking, peeling or degrading.
- Tough-Tags are pre-cut peel-off labels which accept any marking instrument. They are perfectly sized to fit microcentrifuge tubes and other container in the laboratory.
- Dispensing box assists in labeling individual tubes used in small experiments.



Code	Sizes	No./case	Price/case (₹)
UI0201	1.28 inches x 0.50 inches	1000	4660
UI0202	0.94 inches x 0.50 inches	1000	4075

225 | Tough – Tag Station

- Tough Tag Station can conveniently hold up to 6 roll of Tough-Tags, Tough-Spots or cryo-Tags.
- Users can utilize the ledge to easily write on labels for sample identification.



Code	No./case	Price/case (₹)
U10601	1	10235

226 | Petri-Seal

- Petri-Seal stretches and conforms to form a tight seal and is temperature resistant, water - proof and chemically resistant.
- It resists abrasion and puncture and blocks vapor loss while reducing the rate of gas exchange.
- Petri-Seal can be used with microtiter plates, petri dishes and culture plates to prevent entry of any contaminants.
- Petri-Seal remains flexible down to -30°C and can withstand continuous exposure from -40°C (with intermittent exposure up to 100°C).
- Tests have shown that PetriSeal leaves on adhesive residue even after two years.
- Available in a wide variety of colours.



Code	Sizes	Colour	No./case	Price/case (₹)
U10901 C	0.5 inches x 108 feet	Clear	1 Roll	5110
U10901 W	0.5 inches x 108 feet	White	1 Roll	5110
U10901 B	0.5 inches x 108 feet	Blue	1 Roll	5110
U10901 R	0.5 inches x 108 feet	Red	1 Roll	5110
U10901 Y	0.5 inches x 108 feet	Yellow	1 Roll	5110



227 | Multipurpose Labeling Tape

- These autoclavable tapes adhere to almost any dry surface—glass, plastic, metal, paper and rubber.
- These tapes sticks throughout the most demanding procedures, is oil-proof, waterproof and acid resistant and can be steam autoclaved.
- Holds in a wide range of temperatures and transfers and transfers cleanly from one surface to another, leaving no messy residue.
- These labels accept handwritten notations inscribed with pen, pencil or marker.



Code	Sizes	Colour	No./case	Price/case (₹)
U10701 W	0.75 inches x 500 inches	White	1 Roll	935
U10701 B	0.75 inches x 500 inches	Blue	1 Roll	935
U10701 G	0.75 inches x 500 inches	Green	1 Roll	935
U10701 O	0.75 inches x 500 inches	Orange	1 Roll	935
U10701 Y	0.75 inches x 500 inches	Yellow	1 Roll	935

228 | Multi-Tape Dispenser

- These dispensers facilitate easy dispensing from one convenient location.
- Special design allows fast addition or replacement of label roll.

Code	Size	No./case	Price/case (₹)
U20501	for 500 inches Roll	1	9050



229 | Speciality Indicator Tape for Steam Autoclave

- Versatile tape indicates completion of normal steam sterilization process.
- All specialty steam indicator tape accepts handwritten notations, may be used to seal and identify almost all laboratory material before and after processing.
- Change of colour of the written matter from white to dark after completion of autoclave cycle.



Code	Size	No./case	Price/case (₹)
U20802	1 inch x 500 inches	1 Roll	2100

230 | High Temperature Indicator Tape

- Hi-Temperature indicator tape shows the word "Sterilized" in bold letters after standard dry oven processing.
- These are imprinted with heat-sensitive indicator ink.
- These are cloth-textured tape that can stick to any surface or shape and can withstand acids, alkalis, oils and greases.
- Indicates blue colour at dry heat 160° C.



Code	Size	No./case	Price/case (₹)
U20702	0.75 inches x 250 inches	1 Roll	6650

231 | Hi/Lo Temperature Tape

- These are cloth-textured tape that can stick to any container, withstands acid, alkalis, oil, greases, dry ice and liquid gases and wont crack or peel in dry oven or cryogenic temperatures.
- Maximum operating temperature 260° C.



Code	Size	No./case	Price/case (₹)
U20603	1 Inch	1 Roll	6273

#CommittedtotheEarth



11 EQUIPMENTS

MAGNETIC STIRRERS & HOTPLATES
DIGITAL DRY BATH & THERMO MIX
ROTATING MIXERS & SHAKERS
DIGITAL INCUBATORS
OIL FREE VACUUM PUMPS & MORE

232 | Swirltop – Ultra Flat & Eco Magnetic Stirrer

- SWIRLTOP magnetic stirrer is used in biotech labs, provides better mixing & is ideal for application of physical & chemical analysis.
- Its body is made of ABS material.
- It comes with automatic reverse rotation for better mixing result.
- Top plate is made from chemically resistant materials (PET).



Code	Product	Workplate Size	No./case	Price/case (₹)
E11307	Ultra Flat Magnetic Stirrer	9 x 9 cm	1	12600
E11308	Eco Magnetic Stirrer	12 x 12 cm	1	9975

SPECIFICATIONS :

	E11307	E11308
Code	E11307	E11308
Voltage	220-240V	220-240V
Frequency	50-60Hz	50-60Hz
Motor Type	Motor less	Brushless DC Motor
Stirring position	01	01
Speed range	15-1500 rpm	300-2000 rpm
Max. stirring quantity (H ₂ O)	0.8L	1.5L
Maximum magnetic bar (length)	40mm	40mm
Dimensions of work plate	90x90mm	120x120mm
Dimensions	175x120x15 mm	150x145x50 mm
Weight	0.3kg	0.3kg
Speed setting	Button	Scale
Permissible ambient Temperature & Humidity	5-40°C	5-40°C
Permissible relative humidity	80%	80%
Protection Class	IP65	IP21



233 | Swirltop – Digital (LED) Magnetic Stirrer & Hot Plate

- Swirl Top unit features an extremely durable, chemical resistant white stainless steel ceramic coated surface that allows immediate heat transfer.
- LED Display shows temperature and speed.
- External Temperature sensor accessory is available with accuracy of $\pm 0.5^{\circ}\text{C}$.
- Extremely accurate digital control system is ideal for applications of analytical and biological laboratory.
- Swirl Top has advanced microprocessor control with convenient turn knobs that allows quick, precise adjustment and maintains accurate temperature and speed.
- Large, backlit LCD display provides constant visualization of speed and temperature while safety LED indicates when the top plate is above 50°C .
- This digital system is compatible with a wide variety of popular glass beakers, flasks, bottles and vessels.
- Heat resistant ABS casing.



SWIRLTOP – LED Digital Magnetic Stirrer & Hot Plate

Code	Product	Circular Workplate Size	No./case	Price/case (₹)
E11231	LED Digital Magnetic Stirrer & Hot Plate with support rod & external temperature probe	13.5 cm	1	24570
E11234	LED Digital Magnetic Stirrer & Hot Plate	13.5 cm	1	22050

Spare Accessories

Code	Product	No./case	Price/case (₹)
E11232	SP - Support Rod	1	4000
E11233	ETP - External Temperature Probe	1	8269

SPECIFICATIONS :

Voltage	220-240V
Frequency	50-60Hz
Motor type	DC Motor
Maximum stirring capacity	3L
Work plate dimensions diameter	Diameter 5 Inch
Work plate material	SS Cover Ceramic
Shaking movement	Orbital
Temperature range	Room Temperature – 280°C
Speed range	200 – 1500 rpm
Dimension	150 x 260 x 80 mm
Weight	1.8 kg
Permissible ambient temperature	5 – 40°C
Permissible relative humidity	80%
Protection Class	IP21



234 | Swirltop – Digital (LCD) Magnetic Stirrer & Hot Plate

- Swirl Top unit features an extremely durable, chemical resistant white ceramic work surface.
- It has advanced microprocessor control with convenient turn knobs that allows quick, precise adjustment and maintains accurate temperature and speed.
- Large, backlit LCD display provides constant visualization of speed and temperature while safety LCD indicates when the top plate is above 50°C.
- This digital system is compatible with a wide variety of popular glass beakers, flasks, bottles and vessels.
- Optional probe is available to derive precise temperature control. When connected, the probe provides direct feedback to the microprocessor that continuously adjusts and maintains the selected temperature in the sample within an accuracy of $\pm 0.5^{\circ}\text{C}$.



SWIRLTOP – LCD Digital Magnetic Stirrer & Hot Plate

Code	Product	Workplate Size	No./case	Price/case (₹)
E11227	Digital Magnetic Stirrer & Hot Plate	16.5 x 16.5 cm	1	35280

Spare Accessories

Code	Product	No./case	Price/case (₹)
E11228	Support Rod	1	5880
E11229	External Temperature Probe	1	12128

SPECIFICATIONS :

Voltage	220-240V
Frequency	50-60 Hz
Shaking movement	Orbital
Maximum stirring capacity	5 L
Temperature range	5 – 380°C
Speed Range	200-1500rpm
Dimension	177 x 265 x 100mm
Weight	1.8kg
Permissible ambient temperature	5 – 40°C
Permissible relative humidity	80%



235 | SWIRLTOP- 380°C Digital Magnetic Stirrers & Hotplate

- Swirl top 380°C Digital Magnetic stirrers & Hotplate include all leading safety standards and is chemically-resistant with white ceramic work plate. They can be used in physical, chemical, analytical and biological laboratories.
- Digital temperature control with max. temperature at 380°C.
- Digital speed control with max. speed up to 1500rpm.
- High resolution LCD displays for actual temperature and speed.
- Brushless DC motor is maintenance free.
- Ceramic plate for chemical resistance and easy clean.
- Aluminium cover with ceramic work plate, allows for immediate heat transfer.
- Hot warning sign if temperature is above 50°C.
- Max. stirring quantity of H₂O at 5L.
- External temperature control is available as temperature sensor PT1000.

SWIRLTOP- 380°C Digital Magnetic Stirrers & Hotplate

Code	Product	Workplate Size	No./case	Price/case (₹)
E11224	380° Digital Magnetic Stirrer & Hot Plate with Support Rod and External Temperature Probe	14.0 x 14.0 cm	1	35300

Spare Accessories

Code	Product	No./case	Price/case (₹)
E11232	SP - Support Rod	1	4000
E11233	ETP - External Temperature Probe	1	8269

SPECIFICATIONS :

Voltage	220-240V
Frequency	50-60Hz
Motor type	DC Motor
Maximum stirring capacity	5L
Work plate dimensions diameter	140x140mm
Work plate material	Aluminium Cover Ceramic
Temperature range	Room Temperature +5°C - 380°C
Speed range	200 - 1500rpm
External Temperature Sensor	PT1000(Accuracy ±0.5°C)
Dimension	320x180x108mm
Weight	2.2kg
Permissible ambient temperature	5 - 40°C
Permissible relative humidity	80%
Protection Class	IP21



236 | Swirltop – 7 inch LCD Digital Magnetic Stirrer & Hot Plate

- LCD display for precise monitoring of speed and temperature for Magnetic stirrer & Hot plate.
- Built in PID Controller ensures the safe heating of the medium with overheating and protection.
- Max heating plate temperature 550°C.
- Glass ceramic work plate provides excellent chemical resistant performance and efficient heat transfer.
- External temperature control is possible by connecting the temperature sensor (PT 1000) with an accuracy at $\pm 0.2^\circ\text{C}$.
- Digital speed control.
- Maximum Speed at 1500rpm.
- Outstanding brushless DC motor performance enables more stirring power.
- Two rotating knobs enable the easy and direct change of speed and temperature.
- HOT WARNING will flash when the work plate temperature is above 50°C or even the hot plate is turned off.
- Remote Function provides PC Control and data transmission via RS232 using 3rd Party Software.



SWIRLTOP – LED Digital Magnetic Stirrer & Hot Plate				
Code	Product	Workplate Size	No./case	Price/case (₹)
E11650	LCD DIGITAL Magnetic Stirrer & Hotplate with support Rod & External Temperature Probe	18.4 x 18.4 cm	1	57750
E11651	LCD DIGITAL Hotplate with support Rod & External Temperature Probe	18.4 x 18.4 cm	1	42000
E11652	LCD DIGITAL Magnetic Stirrer & Hotplate	18.4 x 18.4 cm	1	54600
E11653	LCD DIGITAL Hotplate	18.4 x 18.4 cm	1	38325

Spare Accessories			
Code	Product	No./case	Price/case (₹)
E11654	SS/Support Rod-Seven Inch	1	3969
E11233	ETP – External Temperature Probe	1	8269



SPECIFICATIONS :

Code	E11650 & E11652	E11651 & E11653
Voltage	220-240V	220-240V
Frequency	50-60 Hz	50-60 Hz
Motor Type	Brushless DC Motor	Brushless DC Motor
Maximum stirring capacity	20 L	NA
Work plate dimensions diameter	184 x 184mm (7Inch)	184 x 184mm (7Inch)
Work plate material	Glass Ceramic	Glass Ceramic
Temperature range	Room Temperature – 550°C, Increment 1°C	Room Temperature – 550°C, Increment 1°C
Overheating protection	580°C	580°C
Temperature control accuracy	$\pm 0.1^\circ\text{C}$	$\pm 0.1^\circ\text{C}$
Speed display	LCD	NA
Temperature display	LCD	LCD
Speed range	100 – 1500 rpm, resolution ± 1 rpm	NA
Maximum magnetic bar (length)	80mm	NA
Dimension	215x360x112mm	215x360x112mm
Weight	5.3kg	5.3kg
Permissible ambient temperature & Humidity	5 – 40°C	5 – 40°C
Permissible relative humidity	80%	80%
Protection class	IP21	IP21

237 | Swirltop – Multi Channel Magnetic Stirrer & Hot Plate

- SWIRLTOP Unit features an extremely durable stainless steel plate with anti-slip and anti-corrosion silicon surface.
- SWIRLTOP advanced Microprocessor based electronic speed control motor provides constant speed.
- High performance multi-position magnetic stirrer with uniform temperature distribution.
- Micro-processor based stirring controls to provide consistency with various samples.
- Brushless DC Motor for maintenance free & quiet operations.



Code	Product	Workplate Size	No./case	Price/case (₹)
E11235	10 Channel Magnetic Stirrer	18 x 45 cm	1	97808
E11236	10 Channel Magnetic Stirrer & Hot Plate	18 x 45 cm	1	141278

SPECIFICATIONS :

	E11235	E11236
Code	E11235	E11236
Voltage	220-240V	220-240V
Frequency	50-60 Hz	50-60 Hz
Dimension of work plate	180 x 450 mm	180 x 450 mm
Speed display	Scale	Scale
Shaking Movement	Orbital	Orbital
Temperature range	NA	Room Temperature – 120°C
Motor Type	DC Motor	DC Motor
Stirring Speed	0 – 1100 rpm	0 – 1100 rpm
Stirring Position	10	10
Maximum Stirring capacity	0.4 L(Each stirring position)	0.4 L(Each stirring position)
Max. Stirring Bar	40 mm	40 mm
Plate Material	Stainless Steel with silicon	Stainless Steel with silicon
Dimension	Film	Film
Weight	182 x 622 x 65mm	182 x 622 x 65mm
Permissible ambient temperature & Humidity	5.3 kg	5.3kg
Humidity	5 – 40°C	5 – 40°C
Permissible relative humidity	80%	80%
Protection class	IP42	IP42



238 | Swirlmax – Tube Roller

- Swirlmax is a classic tube roller that can be used for rocking and rolling for complete mixing.
- It has a wide speed range of 0–70rpm.
- It has a total of six rollers with small footprints and it is very easy to clean.
- Swirlmax has a quiet DC brushless motor which is reliable, sound free and maintenance free.
- Swirlmax can be used in cold rooms or in incubators.



Code	Product	No./case	Price/case (₹)
E11230	Tube Roller	1	22574

SPECIFICATIONS :

Voltage	220–240V
Frequency	50Hz
Power	25W
Motor Type	DC Motor
Rocking Motion	Rocking and Rolling
Amplitude	24mm
Max. load capacity	4kg
Number of Rollers	6
Roller Size	280mm
Speed Range	0–70rpm
Speed Display	Scale
Operation Type	Continuous operation
Dimensions	450 X 260 X 120 mm
Weight	4.5 kg
Permissible ambient temperature	5–40°C
Permissible ambient humidity	80%
Protection Class	IP21




239 | HOTBLOCK – LED Digital Dry Bath

- ABDOS-LED Digital Dry Bath Heaters are available in single and dual block configurations and provide a broad temperature range up to 150°C, which makes them useful for a variety of applications in molecular biology, histology, clinical, environmental, and industrial laboratories.
- They have been designed to incorporate the best combination of features including block capacity, dual displays, and an external temperature probe that gives life science researchers the confidence and efficiency they need when working with precious lab samples.
- This is ideal for including melting and boiling point determination, enzyme reactions, incubation and activation of cultures, immunoassays, DNA denaturation, culture and media tests, coagulation, tests, blood urea nitrogen determinations and in-situ hybridizations.
- The blocks are precision machined to match the conical size and shape of 0.5, 1.5, 2.0, 15 and 50ml tube sizes, providing unsurpassed temperature transfer. Assorted blocks are available for compatibility with nearly all common laboratory tubes and plates.
- Various optional blocks are available for best performance.
- Protection class according to DIN EN 60529.



HOTBLOCK – LED Digital Dry Bath					
Code	Product	Block Capacity	Temperature Range	No./case	Price/case (₹)
E11330	LED Digital Dry Bath with one Heating Block	Single	Ambient +5°C -120°C	1	40425
E11360	LED Digital Dry Bath with one heating Block	Single	Ambient +5°C -105°C	1	38500
E11370	LED Digital Dry Bath with two Heating Block	Dual	Ambient +5°C -105°C	1	64500
E11380	LED Digital Dry Bath with one heating Block	Single	Ambient +5°C -150°C	1	48000
E11390	LED Digital Dry Bath with two Heating Block	Dual	Ambient +5°C -150°C	1	70500

Spare Accessories of E11330				
Code	Product	Places	No./case	Price/case (₹)
E11331	Heating Block, used for 0.2 ml	54	1	13650
E11332	Heating Block, used for 0.5 ml	40	1	13650
E11333	Heating Block, used for 1.5 ml	40	1	13650
E11338	Heating Block, used for 2.0 ml	40	1	13650
E11334	Heating Block, used for 5/15 ml	28	1	13650
E11335	Heating Block, used for 50 ml	8	1	13650
E11336	Heating Block, used for 0.2, 0.5, 1.5/2.0 ml	18	1	13650
E11337	Heating Block, used for 96/384 Microplate	96 /384 Microplate	1	13650
E11339	Heating Block, used for 2.0 ml (Thin)	40	1	13650
E11368	Heating Block, used for 1.5 ml (Thin)	40	1	13650



E11331



E11333



E11335



E11336

Spare Accessories of E11360, E11370, E11380, E11390				
Code	Product	Places	No./case	Price/case (₹)
E11361	Heating Block, used for 0.2 ml	30	1	13650
E11362	Heating Block, used for 0.5 ml	20	1	13650
E11363	Heating Block, used for 1.5 ml	20	1	13650
E11364	Heating Block, used for 2 ml	20	1	13650
E11365	Heating Block, used for 5 ml	12	1	13650
E11366	Heating Block, used for 15 ml	12	1	13650
E11367	Heating Block, used for 50 ml	4	1	13650



E11361



E11364



E11365



E11367

SPECIFICATIONS :	E11330	E11360	E11370	E11380	E11390
Voltage	220-240V	220-240V	220-240V	220-240V	220-240V
Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Adaptor block material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Maximum heating rate	5.5°C/min	5.5°C/min	5.5°C/min	5.5°C/min	5.5°C/min
Heating temperature Range	Room Temperature +5-120°C	Room Temperature +5-105°C	Room Temperature +5-105°C	Room Temperature +5-150°C	Room Temperature +5-150°C
Temperature Setting Range	25-120	25-105	25-105	25-150	25-150
Temperature Control accuracy	±0.5°C	25-90 : ±0.3 90-105 : ±0.6	25-90 : ±0.3 90-105 : ±0.6	25-90 : ±0.3 90-150: ±0.6	25-90 : ±0.3 90-150 : ±0.6
Temperature Uniformity @ 37°C	±0.5	±0.2	±0.2	±0.2	±0.2
Sound Alarming Function	-	Yes	Yes	Yes	Yes
Timer	Yes	Yes	Yes	Yes	Yes
Time setting range	1 Min - 99Hr 59Min	0 Min - 99Hr 59Min	0 Min - 99Hr 59Min	0 Min - 99Hr 59Min	0 Min - 99Hr 59Min
Operation type	Continuous/timed operation	Continuous/timed operation	Continuous/timed operation	Continuous/timed operation	Continuous/timed operation
External Sensor	-	Yes	Yes	Yes	Yes
USB Interface	-	Yes	Yes	Yes	Yes
Dimension (W x D x H)	175 x 220 x 85mm	290 x 210 x 120mm	290 x 210 x 120mm	290 x 210 x 120mm	290 x 210 x 120mm
Permissible ambient temperature	5-40°C	5-40°C	5-40°C	5-40°C	5-40°C
Permissible humidity	80%	80%	80%	80%	80%
Protection Class	IP21	IP21	IP21	IP21	IP21



E11330



E11360 & E11380



E11370 & E11390

240 | THERMO MIX– LCD Digital

- ABDOS Thermo Mix Series allows for precise and efficient shaking and mixing as well as excellent temperature accuracy and uniformity, offering a wide range of applications, such as Gene Synthesis, Gene Purification, Gene Denaturation, Protein Denaturation, Enzymatic reaction, Bacterial growth and many more.
- ABDOS Thermo Mix is equipped with quick interchange of blocks with magnet Adhesion technology and without any tools.
- It is programmable and has three points calibration with precise temperature control for heating and cooling.




Thermo Mix – LCD Digital			
Code	Product	No./case	Price/case (₹)
E11340	LCD Digital Thermo Mix with Heating and Cooling and Mixing with 1.5 ml Heating Block	1	P.O.R.
E11341	LCD Digital Thermo Mix with Heating and Cooling with 1.5 ml Heating Block	1	P.O.R.
E11342	LCD Digital Thermo Mix with Heating and Mixing with 1.5 ml Heating Block	1	P.O.R.


Spare Accessories					
Code	Product	Speed	Places	No./case	Price/case (₹)
E11343	Heating Block, used for 0.2 ml / 96 well PCR plate	1500rpm	96	1	P.O.R.
E11344	Heating Block, used for 96/384 well microplate	1500rpm	96/384	1	P.O.R.
E11345	Heating Block, used for 0.5 ml	1500rpm	24	1	P.O.R.
E11346	Heating Block, used for 1.5 ml	1500rpm	24	1	P.O.R.
E11347	Heating Block, used for 2.0 ml	1500rpm	24	1	P.O.R.
E11348	Heating Block, used for 5 ml (Round Bottom)	1500rpm	8	1	P.O.R.
E11358	Heating Block, used for 5ml (Conical Bottom)	1400rpm	8	1	P.O.R.
E11349	Heating Block, used for 15 ml	800rpm	8	1	P.O.R.
E11350	Heating Block, used for 50 ml	600rpm	4	1	P.O.R.

SPECIFICATIONS :


	E11340	E11341	E11342
Code	E11340	E11341	E11342
Voltage	220-240 V	220-240 V	220-240 V
Frequency	50-60 HZ	50-60 HZ	50-60 HZ
Functions	Heating, cooling & Mixing	Heating & Cooling	Heating & Mixing
Adaptor Block Material	Aluminium	Aluminium	Aluminium
Temperature Range	Heating : 25°C-100°C Cooling : 25°C - below	Heating : 25°C-110°C Cooling : 25°C - below	Heating : 25°C-100°C
Setting Temperature Range	15°C	25°C	15-100°C
Temperature Uniformity @ 20-45°C	0.1-100°C	-5-100°C	±0.5°C
Temperature control accuracy@ 20-45°C	±0.5°C	±0.5°C	±0.5°C
Maximum Heating Rate	5.5°C/min	5.5°C/min	-
Maximum Cooling Rate	5.5°C/min(100°C-25°C) 0.5°C/min(below 25°C)	2.5°C/Min(100°C-25°C) 0.5°C/Min(below 25°C)	-
Mixing Frequency	200-1500 rpm	NA	200-1500 rpm
Mixing Orbit	3 mm	NA	3 mm
Program	9	9	9
Overheating Protection	150°C	150°C	150°C
Dimension(WXDXH)	200 x 235 x 120mm	200 x 235 x 120mm	200 x 235 x 120mm
Weight	7.3 kg	7.3 kg	7.3 kg




E11345




E11346



E11347




E11348



E11349



E11350



E11344



E11343

241 | Swirlex – LCD Digital Overhead Stirrer

- Swirlex overhead stirrer is widely used in chemical synthesis, pharmaceutical synthesis, physical and chemical analysis, petrochemical industry and more.
- Reliability, long continuous service and outstanding performance are its hallmarks.
- Digital LCD display for precise monitoring of set and actual speed.
- LCD Torque displays real time information on viscosity changes.
- Protection and safety circuits ensure automatic cut-off in an anti-stall or overload conditions.
- Provides a constant speed even with changes in viscosities of sample.
- RS232 interface PC can control and document all operation values.



Swirlex – Digital Overhead Stirrer

Code	Product	Maximum Stirring Quantity	No./case	Price/case (₹)
E11310	LED Digital Overhead Stirrer with Universal Plate Stand including support (holder) and fixing device and (E11312) Stainless Steel crossed Stirrer(E11313)	20L	1	75712
E11311	LED Digital Overhead Stirrer with Universal Plate Stand including support (holder) and fixing device and (E11312) Stainless Steel crossed Stirrer(E11313)	40L	1	90168
E11321	LCD Digital Overhead Stirrer with Timer with Universal Plate Stand including support (holder) and fixing device and (E11312) Stainless Steel grand crossed Stirrer(E11324)	70L	1	142500
E11322	LCD Digital Overhead Stirrer with Timer with Grand Plate Stand including support (holder) and fixing device and (E11323) Stainless Steel grand crossed Stirrer(E11324)	70L	1	142500

Spare Accessories for E11310, E11311, E11321 & E11322

Code	Product	Dimensions	No./case	Price/case (₹)
E11312	Universal Plate Stand including support (holder) & fixing device	20 x 31 cm (L x W)	1	11025
E11313	Stainless Steel Crossed Stirrer	40 x 5 cm (L x Φ)	1	1323
E11314	Stainless Steel Straight Stirrer	40 x 6 cm (L x Φ)	1	3308
E11315	Stainless Steel Blade Stirrer	40 x 6.8 cm (L x Φ)	1	3308
E11316	Stainless Steel Centrifugal Stirrer	40 x 9 cm (L x Φ)	1	3308
E11317	PTFE Crossed Stirrer	35 x 6.5 cm (L x Φ)	1	5093
E11318	PTFE Straight Stirrer	35 x 7 cm (L x Φ)	1	5093
E11319	PTFE Blade Stirrer	35 x 6.8 cm (L x Φ)	1	5093
E11320	PTFE Centrifugal Stirrer	35 x 8.5 cm (L x Φ)	1	5093

Spare Accessories for E11321 & E11322

Code	Product	Dimension	No./case	Price/case (₹)
E11323	Universal Grand Plate Stand including support (holder) & fixing device	33.5 x 46.3 cm (L x W)	1	40000
E11324	Stainless Steel Grand Crossed Stirrer	60 x 10 cm (L x Φ)	1	3999
E11325	Stainless Steel Grand blade Stirrer	60 x 10 cm (L x Φ)	1	3999
E11326	Stainless Steel grand anchor Stirrer	60 x 10 cm (L x Φ)	1	3999
E11327	Stainless Steel grand Centrifugal Stirrer	60 x 10 cm (L x Φ)	1	3999



SPECIFICATIONS :

Code	E11310	E11311	E11321 & E11322
Voltage	220-240V	220-240V	220-240V
Frequency	50-60Hz	50-60Hz	50-60Hz
Power	70W	130W	200W
Speed Range	50 – 2200rpm	50 – 2200rpm	50 – 1100rpm
Speed Display	LED	LED	LCD
Max. Stirring Quantity	20L	40L	70L
Max Torque	40Ncm	60Ncm	300Ncm
Max Viscosity	10000mPas	50000mPas	100000mPas
Chuck range diameter	0.5 – 10mm	0.5 – 10mm	0.5 – 10mm
Overload Protection Display	LED Lights, Motor Automatically Stops	LED Lights, Motor Automatically Stops	LED Lights, Motor Automatically Stops
Dimensions	83 x 220 x 186 mm	83 x 220 x 186 mm	83 x 220 x 186 mm
Weight	2.8 kg	2.8 kg	3.2 kg
Data Interface RS232	No	No	Yes
Permissible ambient Temperature	5-40°C	5-40°C	5-40°C
Permissible ambient Humidity	80%	80%	80%
Protection class according to DIN/EN 60529	IP21	IP21	IP21



242 | Swirlex – Vortex Shaker

- Swirlex-Vortex is suitable for touch or continuous or fixed operation.
- Used for gentle mixing to vigorous re-suspension of biological cells and canonical liquid components in tubes using eccentric mechanism.
- These vortex shakers contain specially designed silicone feet and steel base excellent for damping vibration.
- Swirlex vortex Shaker is eccentric with oil less ball bearing.
- A wide range of accessories are also available.



SWIRLEX – Vortex Shaker				
Code	Product	Work Plate Diameter	No./case	Price/case (₹)
E11190	Swirlex Adjustable Vortex Shaker	4 mm	1	11040

Spare Accessories				
Code	Product	No./case	Price/case (₹)	
E11191	Tube holding Rod	1	3885	
E11192	Universal 100mm top plate with 4 vacuum suction feet	1	1313	
E11198	Platform pad for tubes and vessels ϕ 99 mm	1	1470	
E11197	Tube Adapter for 48 holes test tube ϕ 6mm	1	1470	
E11193	Tube Adapter for 15 holes test tube ϕ 10mm	1	1470	
E11194	Tube Adapter for 16 holes test tube ϕ 12mm	1	1470	
E11195	Tube Adapter for 8 holes test tube ϕ 16mm	1	1470	
E11196	Tube Adapter for 8 holes test tube ϕ 20mm	1	1470	

Kindly Note: E11192 is required to run E11198, E11197, E11193, E11194, E11195, E11196 & E11196 Adapter.

SPECIFICATIONS :

Voltage	220-240V
Frequency	50-60Hz
Speed Range	0 – 2500 rpm
Shaking Movement	Orbital
Motor Type	Shaded Pole Motor
Outer Diameter	4mm
Speed Display	Analog Type
Run Type	Continuous/Touch operation
Dimensions	127x130x160 mm
Weight	3.5 kg
Power	60W
Permissible ambient temperature	5-40°C
Permissible relative humidity	80%
Protection Class	IP21



243 | Swirlex – Microplate Mixer

- SWIRLEX–Micro plate Mixer is used for holding single or double micro plates with an SBS footprint.
- This is widely used in life sciences including microbiology, cell and molecular biology, immunology and biotechnology for various mixing applications with optional adapters.
- The high speed and small diameter combine to offer a true vortexing action in each well of the micro plate. This action ensures both complete and uniform mixing.



SWIRLEX – Microplate Mixer			
Code	Product	No./case	Price/case (₹)
E11200	Swirlex Microplate Mixer Including Microplate Clamp(E11201) as standard	1	35000

Spare Accessories			
Code	Product	No./case	Price/case (₹)
E11201	Microplate clamp	1	832
E11202	Double microplate clamps	1	936

SPECIFICATIONS :

Voltage	220–240V
Frequency	50–60Hz
Shaking Movement	Orbital
Speed Range	Single Microplate : 0–1500 rpm Double Microplate : 0–1000 rpm
Orbit Diameter	4.5 mm
Maximum Shaking Weight (With accessory)	0.5 Kg
Motor Type	Brushless DC Motor
Dimensions	260x150x80mm
Permissible ambient temperature	5–40°C
Permissible relative humidity	80%
Protection Class	IP21



E11202

244 | Wavex – Classic Tube Rotator

- Wavex tube rotators provide gentle but effective mixing of biological samples, held in 1.5 ml to 50 ml tubes.
- Used in a variety of applications including immune precipitations, prevention of blood coagulation & latex diagnostics.
- Wavex–Classic Tube Rotator has Disk Type Design.



SWIRLEX – Classic Tube Rotator			
Code	Product	No./case	Price/case (₹)
E11300	Wavex–Classic Tube Rotator	1	37648

Spare Accessories			
Code	Product	No./case	Price/case (₹)
E11301	Plastic Clips for 1.5 ml x 12 micro centrifuge tubes,Disk accessory	12	629
E11302	Plastic Clips for 15 ml x 12 micro centrifuge tubes, Disk accessory	12	786
E11303	Plastic Clips for 50 ml x 12 micro centrifuge tubes,Disk accessory	12	996

SPECIFICATIONS :

Voltage	220–240V
Frequency	50–60Hz
Power	20W
Motor Type	DC Motor
Tilt Angle	90°
Speed Range	0–80rpm
Speed Display	Scale
Operation Type	Continuous
Dimensions	300 x 220 x 310mm
Weight	2 kg
Permissible ambient Temperature	5–40°C
Permissible ambient Humidity	80%
Protection Class	IP21



245 | Wavex – LCD Tube Rotator

- Wavex tube rotators provide gentle but effective mixing of biological samples, held in 1.5 ml to 50 ml tubes.
- Used in a variety of applications including immune precipitations, prevention of blood coagulation & latex diagnostics.
- Wavex tube rotator has a disk type design.
- LCD displays and digital speed control allows procedures to be accurate.
- Speed range of 10 to 70 rpm.
- Wavex tube rotator has an adjustable mixing angle between 0 – 90°.
- Wavex tube rotator has dual dish accessories for larger tubes.



SWIRLEX – Microplate Mixer


Code	Product	No./case	Price/case (₹)
E11270	Wavex-LCD Digital Tube Rotator with Disk accessory for 50ml x 8 Centrifuge Tubes	1	72800

Spare Accessories

Code	Product	No./case	Price/case (₹)
E11271	Disk accessory for 1.5 ml x 60 micro centrifuge tubes	1	10500
E11272	Disk accessory for 50 ml x 8 centrifuge tubes	1	5250
E11273	Disk accessory for 15 ml x 16 centrifuge tubes	1	5775
E11274	Disk support rods used with disk accessories	4	2625

SPECIFICATIONS :


Voltage	220-240V
Frequency	50Hz
Power	40 W
Motor Type	DC Motor
Tilt Angle	0 – 90°
Speed Range	0-70 rpm
Speed & Timer Display	LCD
Speed & Timer Display	1 – 1199 min.
Time Setting Range	Continuous / timed operation
Operation Type	510 x 190 x 260 mm
Dimensions	8 kg
Weight	5-40°C
Permissible ambient Temperature	80%
Permissible ambient Humidity	IP 21
Protection Class	

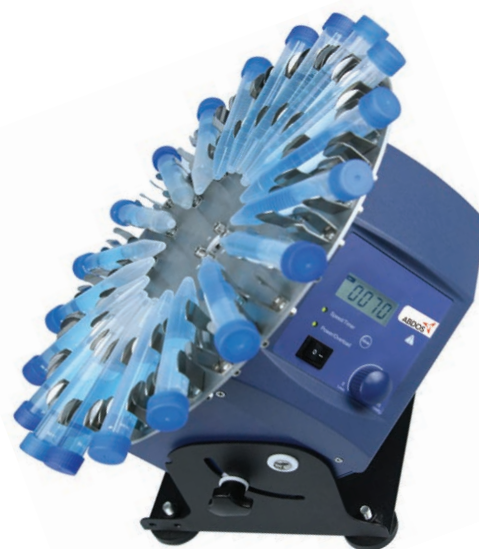

E11271



E11272



E11273



E11274

246 | Wavex – Classic Rotating Mixer

- Wavex tube rotators provide gentle but effective mixing of biological samples, held in 1.5 ml to 50 ml tubes.
- Used in a variety of applications including immune precipitations, prevention of blood coagulation and latex diagnostics.
- Wavex–Classic Tube Rotator has Disk Type Design.



SWIRLEX – Vortex Shaker			
Code	Product	No./case	Price/case (₹)
E11305	Wavex–Classic Rotating Mixer	1	36000

Spare Accessories			
Code	Product	No./case	Price/case (₹)
E11301	Plastic Clips for 1.5 ml x 12 micro centrifuge tubes,Disk accessory	12	629
E11302	Plastic Clips for 15 ml x 12 micro centrifuge tubes,Disk accessory	12	786
E11303	Plastic Clips for 50 ml x 12 micro centrifuge tubes,Disk accessory	12	996

SPECIFICATIONS :

Voltage	220–240V
Frequency	50–60Hz
Power	20W
Motor Type	DC Motor
Tilt Angle	90°
Speed Range	0–80rpm
Speed Display	Scale
Operation Type	Continuous
Dimensions	150 x 530 x 190mm
Weight	1.7 kg
Permissible ambient Temperature	5–40°C
Permissible ambient Humidity	80%
Protection Class	IP21



247 | Wavex-LCD Rotating Mixer

- Wavex –LCD Rotating Mixer give gentle but effective mixing of biological samples to be held in 1.5 ml to 50 ml tubes used in a variety of applications including immune precipitations, prevention of blood coagulation and latex diagnostics.
- Wavex rotating mixer has a rotisserie type design.
- LCD displays and digital speed control allows procedures to be accurate.



Wavemax – LCD Rotating Mixer			
Code	Product	No./case	Price/case (₹)
E11280	LCD Digital Rotating Mixer with Rotisserie accessory for 50 ml x 24 centrifuge tubes horizontally	1	62400

Spare Accessories			
Code	Product	No./case	Price/case (₹)
E11281	Rotisserie accessory for 1.5 ml x 48 micro centrifuge tubes horizontally	1	10400
E11282	Rotisserie accessory for 50 ml x 24 centrifuge tubes horizontally	1	9360
E11283	Rotisserie accessory for 15 ml x 24 centrifuge tubes horizontally	1	9360
E11284	Rotisserie accessory for 1.5 ml x 32 micro centrifuge tubes vertically	1	9360
E11285	Rotisserie accessory for 50 ml x 16 centrifuge tubes vertically	1	9360
E11286	Rotisserie accessory for 15 ml x 16 centrifuge tubes vertically	1	9360
E11274	Disk support rods with disk accessories	4	2625

SPECIFICATIONS :


Voltage	220-240V
Frequency	50Hz
Power	40 W
Motor Type	DC Motor
Tilt Angle	0 - 90°
Speed Range	0-70 rpm
Speed & Timer Display	LCD
Time Setting Range	1 - 1199 min.
Operation Type	Continuous / timed operation
Dimensions	510 x 190 x 260 mm
Weight	8 kg
Permissible ambient Temperature	5-40°C
Permissible ambient Humidity	80%
Protection Class	IP 21




E11281



E11282




E11283



E11284



E11285



E11286

248 | Wavemax – Digital Rocking Shaker

- Abdos Digital rocking shakers are used for staining and destaining gels, hybridization procedures, haematology and blotting techniques. Designed to provide precise speed and tilt angles required for broad range of molecular and biological mixing applications.
- It boasts of digital speed control and large LED display, speed and timer can be viewed simultaneously.
- Aluminium-alloyed platform provides strong bearing capability, with non-slip mat that holds vessels and prevents it from slipping.
- Specially designed and developed compact space-saving design fits easily in the incubator.
- Space Accessories have a wide range of platforms for use with a variety of vessels.



WAVEMAX – LED Digital Rocking Shaker

Code	Product	No./case	Price/case (₹)
E11410	Wavemax – Digital Rocking Shaker with platform with Dish Attachment with non-Slip Mat	1	32000

Spare Accessories for Digital Rocking Shaker (E11410)

Code	Product	No./case	Price/case (₹)
E11451	Universal attachment with 3 Bars	1	10474
E11452	Dish attachment with non-slip mat	1	9923
E11453	Fixing clip attachment	1	5513
E11415	Fixing clip for 25 ml flask	1	992
E11416	Fixing clip for 50 ml flask	1	992
E11417	Fixing clip for 100 ml flask	1	992
E11418	Fixing clip for 200/250 ml flask	1	1874
E11419	Fixing clip for 500 ml flask	1	1874

* Pls note E11453 is required to run E11415, E11416, E11417, E11418 & E11419.



SPECIFICATIONS :

Voltage	220-240V
Frequency	50-60Hz
Power	50W
Motor type	DC Motor
Rocking motion	See-saw rocking
Maximum load capacity (With Platform)	3.0 kg
Tilt angle	7°
Speed range	10-70rpm
Speed & timer display	LED
Time range	1 min – 19 h 59 min
Operation Type	Continuous /timed operation
Dimensions	270 x 330 x 130mm
Weight	3.2 Kg
Permissible ambient temperature	5-40°C
Permissible ambient Humidity	80%
Protection class	IP21



Universal attachment with bars



Dish attachment with non-slip mat

249 | Wavemax – Digital (3D) Dancing Shaker

- Wavemax classic dancing shakers are used for staining and destaining gels, hybridization procedures, haematology and blotting techniques.
- This 3 dimensional shaker is designed to provide precise speed and tilt angles required for broad range of molecular and biological mixing applications.
- Abdos LED dancing shaker boasts of digital speed control and large LED display, speed and timer can be viewed simultaneously.
- Aluminium-alloyed platform provides strong bearing capability, with non-slip mat that holds vessels and prevents it from slipping.
- Specially designed and developed compact space-saving design fits easily in the incubator.
- Space accessories have a wide range of platforms for use with a variety of vessels.



WAVEMAX – Digital (3D) Dancing Shaker			
Code	Product	No./case	Price/case (₹)
E11430	Wavemax – Digital Dancing Shaker with platform with Dish Attachment with non-Slip Mat	1	32000

Spare Accessories for Digital (3D) Dancing Shaker (E11430)			
Code	Product	No./case	Price/case (₹)
E11451	Universal attachment with 3 Bars	1	10474
E11452	Dish attachment with non-slip mat	1	9923
E11453	Fixing clip attachment	1	5513
E11415	Fixing clip for 25 ml flask	1	992
E11416	Fixing clip for 50 ml flask	1	992
E11417	Fixing clip for 100 ml flask	1	992
E11418	Fixing clip for 200/250 ml flask	1	1874
E11419	Fixing clip for 500 ml flask	1	1874

*Please note E11453 is required to run E11415, E11416, E11417, E11418 & E11419.



SPECIFICATIONS :

Voltage	220-240V
Frequency	50-60Hz
Power	40W
Motor type	DC Motor
Rocking motion	3 Dimensional
Maximum load capacity (With Platform)	3.0 kg
Tilt angle	7°
Speed range	10-80 rpm
Speed & timer display	LED
Time range	1 min – 19h59min
Operation Type	Continuous /timed operation
Dimensions	270 x 330 x 130mm
Weight	2.7Kg
Permissible ambient temperature	5-40°C
Permissible ambient Humidity	80%
Protection class	IP21



Universal attachment with bars



Dish attachment with non-slip mat

250 | Wavemax – Orbital Shaker Junior

- Abdos orbital shaker has digital speed control of upto 300 rpm.
- These shakers have horizontal circular 19 mm orbit for aeration and mixing.
- Universal magnetic clamp can be instantly exchanged.
- These shakers have a capacity of up to 20 x 50ml, 12 x 125 ml, 8 x 250 ml, 5 x 500 ml, 4 x 1L flasks.



WAVEMAX – Orbital Shaker Junior				
Code	Product	Platform Dimension	No./case	Price/case (₹)
E11260	Wavemax – Orbital Shaker Junior with flat mat	9.5" x 8"	1	57200

Spare Accessories				
Code	Product	Platform Dimension	No./case	Price/case (₹)
E11261	Universal Magnetic platform for flasks and tube racks	11" x 9.5"	1	13650
E11262	Adjustable Spring platform for unique vessel types	-	1	18900

Kindly Note: Flask clamps and Fixed Platforms are sold separately. See page No. 179 for complete listing

SPECIFICATIONS :

Voltage	220-240 V
Frequency	50 Hz
Shaking Movement	Orbital
Timer	1min-99hrs59min
Speed Range	50 – 300 rpm, Variable
Speed Increment	10 rpm
Orbit	19 mm
Load Capacity	Maximum 4 kg
Dimension	280 x 270 x 130 mm
Weight	5.5 kg
Permissible ambient temperature	+4 to +65° C
Permissible relative humidity	80%



251 | Wavemax – Orbital Shaker

- Abdos powerful orbital shaker is capable of mixing liquids upto a load capacity of 6 kg in bottles, flasks, test tubes & dishes.
- Abdos orbital shaker has digital speed control of upto 300 rpm.
- These shakers have high capacity of upto 24 x 125 ml, 14 x 250 ml, 9 x 500 ml, 5 x 1l and 2 x 2l flasks and bottles.
- These shakers have horizontal circular 19 mm orbit for aeration and mixing.
- Universal magnetic clamp can be instantly exchanged.



WAVEMAX – Orbital Shaker				
Code	Product	Platform Dimension	No./case	Price/case (₹)
E11290	Wavemax – Orbital Shaker with flat mat	13" x 12"	1	178500

Spare Accessories				
Code	Product	Platform Dimension	No./case	Price/case (₹)
E11291	Universal Magnetic platform for flasks and tube racks	14" x 12"	1	29400

Kindly Note: Flask clamps and Fixed Platforms are sold separately. See page No. 179 for complete listing

SPECIFICATIONS :

Voltage	220-240V
Frequency	50 Hz
Shaking Movement	Orbital
Speed Range	30 – 300 rpm, Variable
Speed Increment	1 rpm
Orbit	19 mm
Load Capacity	Maximum 6 kg
Dimension	280 x 330 x 75 mm
Weight	11.25 kg
Permissible ambient temperature	+4 to +65° C
Permissible relative humidity	80%



252 | Wavemax – LED Digital Orbital & Linear Shaker

- Abdos orbital and linear shakers are capable of mixing and shaking liquids in bottles, flasks, vessels, test tubes & dishes.
- Independent LED display for adjusting speed and time. Speed and timer can be viewed simultaneously.
- Maximum load capacity of 3.0 kg with platform.
- Specially designed and developed compact space-saving design fits easily in the incubator and refrigerator.
- Electronic time switching clock controls time or continuous operation mode.
- Space Accessories have a wide range of platforms for use with a variety of vessels.
- Over speed detection and protection.



WAVEMAX – Digital Orbital Shaker			
Code	Product	No./case	Price/case (₹)

E11460	Wavemax – LED Digital Orbital Shaker with dish attachment with non-slip mat.	1	46000
--------	--	---	-------

WAVEMAX – Digital Linear Shaker			
Code	Product	No./case	Price/case (₹)

E11470	Wavemax – LED Digital Linear Shaker with dish attachment with non-slip mat.	1	46000
--------	---	---	-------

Spare Accessories for E11460 & E11470			
Code	Product	No./case	Price/case (₹)

E11451	Universal attachment with 3 Bars	1	10474
E11452	Dish attachment with non-slip mat	1	9923
E11453	Fixing clip attachment	1	5,513
E11415	Fixing clip for 25 ml flask	1	992
E11416	Fixing clip for 50 ml flask	1	992
E11417	Fixing clip for 100 ml flask	1	992
E11418	Fixing clip for 200/250 ml flask	1	1874
E11419	Fixing clip for 500 ml flask	1	1874

* PIs note E11453 is required to run E11415, E11416, E11417, E11418 & E11419.

SPECIFICATIONS :

	E11460	E11470
Voltage	220-240V	220-240V
Frequency	50-60Hz	50-60Hz
Power	20W	20W
Motor Type	Brushless DC Motor	Brushless DC Motor
Shaking Motion	Orbital	Linear
Orbital Diameter	20mm	20mm
Maximum load capacity (With Platform)	3.0 kg	3.0 kg
Speed Range	40-200rpm	40-200rpm
Speed & Timer Display	LED	LED
Time Range	1 min – 19h59min	1 min – 19h59min
Operation Type	Continuous /timed operation	Continuous/timed operation
Dimensions	270 x 330 x 110 mm	270 x 330 x 110 mm
Weight	3.1 Kg	3.1 Kg
Permissible ambient Temperature	5-40°C	5-40°C
Permissible ambient Humidity	80%	80%
Protection Class	IP21	IP21



Universal attachment with bars



Dish attachment with non-slip mat



Fixing clamp attachment

253 | Wavemax – Heavy Duty LCD Digital Orbital & Linear Shaker

- Abdos orbital and linear shakers are capable of mixing and shaking liquids in bottles, flasks, vessels, test tubes & dishes.
- Independent LCD display for adjusting speed and time, speed and timer can be viewed simultaneously.
- Maximum load capacity of 7.5 kg with platform.
- Specially designed and developed compact space-saving design fits easily in the incubator and refrigerator.
- Electronic time switching clock controls time or continuous operation mode.
- Space Accessories have a wide range of platforms for use with a variety of vessels.
- Over speed detection and protection.



WAVEMAX – Heavy Duty LCD Digital Orbital Shaker

Code	Product	No./case	Price/case (₹)
E11480	Wavemax – Heavy Duty Orbital Shaker with universal Attachment with 4 Bar	1	83430

WAVEMAX – Heavy Duty LCD Digital Linear Shaker

Code	Product	No./case	Price/case (₹)
E11490	Wavemax – Heavy Duty Linear Shaker with universal Attachment with 4 Bar	1	83430

Spare Accessories for E11480 & E11490

Code	Product	No./case	Price/case (₹)
E11411	Universal attachment with 4 Bars	1	11810
E11413	Dish attachment with non-slip mat & fixed string	1	10474
E11414	Fixing clip attachment	1	7718
E11415	Fixing clip for 25 ml flask	1	992
E11416	Fixing clip for 50 ml flask	1	992
E11417	Fixing clip for 100 ml flask	1	992
E11418	Fixing clip for 200/250 ml flask	1	1874
E11419	Fixing clip for 500 ml flask	1	1874

* Pls note E11414 is required to run E11415, E11416, E11417, E11418 & E11419.

SPECIFICATIONS :	E11480	E11490
Voltage	220-240V	220-240V
Frequency	50-60Hz	50-60Hz
Power	30W	30W
Motor Type	Brushless DC Motor	Brushless DC Motor
Shaking Motion	Orbital	Linear
Orbital Diameter	10 mm	10 mm
Maximum load capacity (With Platform)	7.5kg	7.5kg
Speed Range	100-500 rpm	100-350 rpm
Speed & Timer Display	LCD	LCD
Time Range	1 min – 19 h 59 min	1 min – 19 h 59 min
Operation Type	Continuous /timed operation	Continuous /timed operation
Data Connector	RS232	RS232
Dimensions	370 x 420 x 100 mm	370 x 420 x 100 mm
Weight	13.5 Kg	13.5 Kg
Permissible ambient Temperature	5-40°C	5-40°C
Permissible ambient Humidity	80%	80%
Protection Class	IP21	IP21



Fixing Clamps



Universal attachment with bars



Dish attachment with non-slip mat

254 | Wavemax-Digital Incubator

- Wavemax-Digital Incubators provide the facility to monitor the chamber temperatures in real time.
- Has large internal chambers with two adjustable shelves for increased space. Internal Power Outlet for Installation of other Equipment for sample agitation within the Digital Incubators.
- Wavemax-Digital Incubator is available in a heating unit or heating and cooling for lower temperature applications.



Wavemax - Digital Incubator			
Code	Product	No./case	Price/case (₹)
E11355	Heating Digital Incubator	1	62762
E11356	Heating & Cooling Digital Incubator	1	94713

Spare Accessories				
Code	Product	Platform Dimension	No./case	Price/case (₹)
E11357	Extra Shelf, 10.5 x 8 inch, Plastic (not autoclavable)	10.5" x 8"	1	5796

SPECIFICATIONS :

	E11355	E11356
Voltage	220-240 V	220-240 V
Frequency	50-60 HZ	50-60 HZ
Temp. Range (Heating)	Ambient +5°C to 60°C	Ambient -15°C to 60°C
Temp. Operation	Only Heating	Heating & Cooling
Temp. Accuracy	±0.5°C (at 37°C)	±0.5°C (at 37°C)
Temp. Uniformity	±1.5°C (at 37°C)	±1.5°C (at 37°C)
Temp. Increment	1°C	1°C
Platform Dimensions	235 x 290 mm(9.5x11.5 in)	235 x 290 mm(9.5x11.5 in)
Operating Temp. Range	+4 to +65°C	+4 to +65°C
Exterior	335 x 370 x 475 mm	335 x 370 x 475 mm
Interior	260x235x325mm	260x235x325mm
Capacity	20L	20L
Weight	6.5 kg	6.5 kg

*Minimum temperature is approx. 7°C in 22°C room temp.



255 | Wavemax - Incu-shaker Mini

- Wavemax-Incu-Shaker Mini is a compact shaking incubator that can accept a variety of flasks, tubes, trays, etc.
- The standard platform features a non-slip surface ideal for staining trays, tissue culture flasks, and Petri dishes.
- Abdos Incu-Shaker offer exceptional temperature uniformity and accuracy due to a proprietary heat distribution technology that ensures temperatures are precisely maintained throughout the chamber within 0.25%, even in the corners.
- Featuring the MAGIC Clamp platform, this shaker lets you customize the size and types of vessels being used by simply exchanging clamp sizes. Clamps utilize a powerful magnetic base to securely attach to the shaking platform without screws, bolts, or tools.
- Speed, temperature, and time are controlled with a push of a button and are displayed on the LED panel.
- Over temperature and over speed controls ensure safety, long life, and sample integrity.
- Advanced motor isolation system minimizes noise and vibration.



WAVEMAX - INCU-SHAKER				
Code	Product	Platform Dimension	No./case	Price/case (₹)
E11920	Wavemax-Incu-Shaker Mini with Non-Slip Rubber Mat	9.5" x 11.5"	1	P.O.R.

Spare Accessories				
Code	Product	Platform Dimension	No./case	Price/case (₹)
E11925	Universal Magnetic Platform for Flasks and Tube racks (For E11920)	9.5" x 11.5"	1	P.O.R.

Kindly Note: Flask clamps and Fixed Platforms are sold separately, see page No. 179 for complete listing

SPECIFICATIONS :

Voltage	220-240V
Frequency	50-60Hz
Speed	Variable, 30 to 300rpm
Speed Adjustment	1rpm
Shaking Orbit	19mm
Temperature Range	Room Temperature +5°C to 70°C
Temperature Increment	0.1°C
Temperature Accuracy	±0.1°C
Temperature Uniformity	±0.25%
Timer	1 min to 48 hours/continuous
Platform Dimensions	23.5 x 29cm (9.5"x11.5")
Overall Dimensions (W x D x H)	280 x 410 x 330 mm
Weight	11.5 kg



Spare Accessories for E11260, E11290 & E11920

Code	Product	No./case	Price/case (₹)
E11928	Universal Magnetic Clamp for 125ml, 250ml, 500ml flasks	1	6368
E11929	Magnetic Clamp for 1000 ml flask	1	8106
E11930	Magnetic Clamp for 500 ml flask	1	5219
E11931	Magnetic Clamp for 250 ml flask	1	5219
E11932	Magnetic Clamp for 125 ml flask	1	4631
E11933	Magnetic Clamp for 50 ml flask	1	4284
E11934	Magnetic Clamp for one Microplate	1	11025
E11935	Magnetic Clamp for Tube Rack 30x15ml & 20x50ml tubes	1	11445
E11936	Magnetic Clamp for Tube Rack 72x14mm culture tubes	1	19845
E11937	Magnetic Clamp for Tube Rack 32x15ml, tubes	1	11445
E11938	Magnetic Clamp for Tube Rack 15x50ml, tubes	1	11445

Spare Accessories for E11290 & E11920

Code	Product	No./case	Price/case (₹)
E11939	Magnetic Clamp for Tube Rack 4x500ml or 600ml conical bottles	1	23153
E11940	Magnetic Clamp for Tube Rack 12x1.5/2.0 ml tubes horizontal	1	13781
E11941	Magnetic clamp for tube Rack 4x15ml tubes horizontal	1	13781
E11942	Magnetic Clamp for Tube Rack 2x50ml tubes horizontal	1	13781
E11943	Magnetic Clamp for tilted holder for 15ml and 50ml tube rack	1	15435
E11944	Universal spring Platform	1	P.O.R
E11948	Platform for 5 x 500 ml	1	P.O.R.
E11949	Platform for 8 x 250 ml	1	P.O.R.
E11950	Platform for 1 x 125 ml	1	P.O.R.
E11951	Platform for 4 microplates	1	P.O.R.

256 | AEROVAC-Oil-Free Vacuum Pumps

- ABDOS Aerovac Oil Free Vacuum Pump is a compact, lightweight and mobile oil-free piston Vacuum pump.
- It features manual pressure control and a gauge for pressure monitoring.
- The unit is maintenance-free and its oil-free design reduces its environmental impact.
- The pump can achieve flow rates of up to 52 L/min and an ultimate vacuum down to 13 mbar.
- A wide range of optional accessories are available.
- Application Areas: Abdos Vacuum Pump is useful for Biology laboratories, Food industry, Microbiological detection, Vacuum extraction, Liquid filtration, Vacuum drying, Suspended solids measurement.



Oil Free Vacuum Pump				
Code	Product	Product Dimension	No./case	Price/case (₹)
E11800	Aerovac-300	Vacuum: 100mbar; Max. Flow Rate: 17 L/min(220V)	1	26250
E11801	Aerovac-400	Vacuum: 100 mbar; Max. Flow Rate: 34 L/min(220V)	1	35500
E11802	Aerovac-600	Vacuum: 100 mbar; Max. Flow Rate: 60 L/min(220V)	1	49061
E11803	Aerovac-410	Vacuum: 30 mbar; Max. Flow Rate: 19 L/min(220V)	1	49061
E11804	Aerovac-610	Vacuum:30 mbar; Max. Flow Rate: 40 L/min(220V)	1	49061
E11805	Aerovac-430	Vacuum:150/ 5.5 bar(max.pressure); Max. Flow Rate: 28L/min(220V)	1	42950
E11806	Aerovac-800	Vacuum: 100 mbar; Max. Flow Rate: 80 L/min(220V)	1	75600
E11807	Aerovac-810	Vacuum: 30 mbar; Max. Flow Rate: 50 L/min(220V)	1	75600

Spare Accssories				
Code	Product	Product Dimension	No./case	Price/case (₹)
E11810	Connectors	Outlet diameter: 9.5mm	1	6930
E11815	L-shape connector	Outlet diameter: 8mm	1	12130
E11816	Quick connection outlet	Outlet diameter: 12mm	1	8085
E11821	Silencer	Suitable for Aerovac300 / Aerovac400 / Aerovac410	1	6930
E11822	Silencer	Suitable for Aerovac600 / Aerovac610	1	6930
E11823	Vacuum regulator / filter	Incl. pressure gauge	1	27489
E11824	Vacuum regulator / filter	without pressure gauge	1	2,525
E11825	Foot pedal	Suitable for Aerovac series vacuum pumps	1	16055
E11826	FEP tubing	Outer diameter: 6mm, Inner diameter: 4mm, Thickness: 1 mm, Length : 1m	1	4045
E11830	Silicon tubing	Outer diameter: 12mm, Inner diameter: 6mm, Thickness: 3mm, Length : 1m	1	2890

SPECIFICATIONS :	E11800	E11801	E11802	E11803	E11804	E11805	E11806	E11807
Volt	220 V	220 V	220 V	220 V	220 V	220 V	220 V	220 V
Frequency	50 Hz	50 Hz	50 hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
Maximum Power	60 W	80 W	190 W	80 W	210 W	125 W	220 W	220 W
Maximum Current	0.3 A	0.4 A	1.0 A	0.4 A	1.0 A	0.6 A	1.0 A	1.0 A
Maximum Vacuum	100 mbar	100 mbar	100 mbar	30 mbar	30 mbar	150/5.5 bar	100 mbar	30 mbar
Maximum Flow Rate	17 L/min	34 L/min	60 L/min	19 L/min	40 L/min	28 L/min	80 L/min	50 L/min
Motor Rotation	1450 rpm	1450 rpm	1450 rpm	1450 rpm	1450 rpm	1450 rpm	1450 rpm	1450 rpm
Dimension (W x D x H)mm	272 x 142 x 165	310 x 152 x 165	340 x 155 x 195	310 x 152 x 165	340 x 155 x 195	247 x 235 x 200	340 x 185 x 195	340 x 185 x 195
Weight	4.4 Kg	5.4 Kg	8.6 Kg	5.4 Kg	8.6 Kg	5.5 Kg	8.6 Kg	8.6 Kg
Noise Level	50 dB	60 dB	52 dB	50 dB	52 dB	50 dB	52 dB	52 dB



General Conversion Table

Instructions for using the Table

To Convert one unit of (A) into (B) multiply by (C)

To Convert one unit of (B) into (A) multiply by (D)

A	B	C (X 1 unit of A = B)	D (X 1 unit of B = A)	A	B	C (X 1 unit of A = B)	D (X 1 unit of B = A)
Inches	Centimetres	2.54	0.3937	Lb. per sq. in	H'd of water (M.)	0.7	1.4285
Feet	Centimetres	30.48	0.0328	Lb. per sq. in	Atmospheres	0.068	14.7
Yards	Metres	0.194	1.094	Tons per sq. in	Kgm. / sq. mm.	1.575	0.635
Miles	Metres	1,609.30	0.000621	Lb. per sq. ft	Kgm. / sq. metre	4.883	0.205
Nautical miles	Metres	1,853.27	0.000539	Lb. per cub. yd.	Kgm. / cub. metre	0.593	1.686
Square inches	Sq. cms	6.45	0.155	Lb. per cub. ft	Kgm. / cub. metre	16.02	0.0624
Square feet	Sq. Metres	0.093	10.764	Lb. per gallon	Kgm. / litre	0.0998	10.02
Square yards	Sq. Metres	0.836	1.196	Foot-lb	K'gram-metres	0.1833	7.23
Cubic inches	Cub. cms	16.39	0.061	Foot-tons	Tonne-metres	0.33	3
Cubic feet	Litres	28.3	0.0353	Hors-Power	Force de Cheval	1.014	0.9861
Cubic feet	Gallons	6.24	0.1602	Hors-Power	Watts	746	0.00134
Cubic yards	Cub. metres	0.765	1.308	Hors-Power	Ft.-lb / min	33,000	0.00003
Pounds (Troy)	Kilogrammes	0.3732	2.68	Hors-Power	Kg.-m. / sec.	73	0.01316
Ounces (Troy)	Grammes	31.1	0.03216	Watts	Ft.-lb. / min	44	0.0227
Pounds (Avoir.)	Kilogrammes	0.4536	2.2046	Watts	Kg.-m. / sec	0.1	10
Pounds (Avoir.)	Grains (Troy)	7,000	0.000143	Heat units	Cal ories	0.252	3.97
Ounces (Avoir.)	Grammes	28.35	0.0353	Atmospheres	Lb. / sq. inch	14.7	0.068
Grains	Grammes	0.065	15.38	German candles	English candles	0.90	1.1111
Cwt.	Kilogrammes	50.8	0.01968	Carrels	Candles.	9.55	0.1047
Tons	Kilogrammes	1,016	0.000984	Joules	Ft. / lb	0.737	1.357
Gallons	Litres	4.546	0.22	Miles / hour	Ft. / Min	88	0.01134
Gallons of water	Pounds	10	0.1	Metres / sec	Ft / Min .	197	0.00508
Pounds of water	Litres	0.454	2.202	C.H.U	B. Th. U .	1.8	0.5555
Lb per sq. in .	Gm./sq. cm.	70.3	0.0142	Centipoise	Lb. force sec. / Sq. ft.	0.208	4.8
Lb per sq. in .	H'd of water (ft.)	2.3	0.434				
To obtain	From		Multiply-by above	To obtain	From		Multiply-by above

Physical Properties Of Abdos Labware

Resin	Max Use Temp °C	Brittleness Temp °C	Transparency	Sterilization					Specific Gravity	Flexibility	Water Absorption %
				Autoclaving	Gas	Dry Heat	Radiation	Disinfectant			
HDPE	120	-100	Translucent	No	Yes	No	Yes	Yes	0.95	Rigid	< 0.01
LDPE	80	-100	Translucent	No	Yes	No	Yes	Yes	0.92	Excel	< 0.01
PC	135	-135	Clear	Yes+	Yes	No	No	Yes	1.20	Rigid	0.35
PMMA	50	20	Clear	No	Yes	No	Yes	Some	1.20	Rigid	0.30
PP	135	0	Translucent	Yes	Yes	No	No	Yes	0.90	Rigid	< 0.02
PS	90	20	Clear	No	Yes	No	Yes	Some	1.05	Rigid	0.05
PSF	165	-10	Clear	Yes	Yes	Yes+	Yes	Yes	1.24	Rigid	0.30
PTFE	270	-200	Opaque	Yes	Yes	Yes	No	Yes	2.17	Excel	< 0.01
PVDF	110	-62	Translucent	Yes	Yes	No	No	Yes	1.75	Rigid	0.05
TPX*	175	20	Clear	Yes	Yes	Yes+	No	Yes	0.83	Rigid	< 0.01

Sterilization

• Autoclaving (121°C, 15 psi for 20 minutes) Clean and rinse item with distilled water before autoclaving. Certain chemicals which have no appreciable effect on resins at room temperature may cause deterioration at autoclaving temperatures.

ALWAYS COMPLETELY DISENGAGE THREADS BEFORE AUTOCLAVING.

• Gas - Ethylene oxide, formaldehyde.

• Dry Heat - 106°C for 120 minutes.

• Disinfection - Benzalkonium chloride, Formalin, Ethanol, etc.

• Radiation - Gamma irradiated at 2.5 Mrad with unstabilized plastic.

+ Sterilizing reduces mechanical strength. Do not use PC vessels for vacuum application if they have been autoclaved.

Chemical Resistance for ABDOS Labware

Class of Substance at Room Temperature	HDPE	LDPE	PC	PMMA	PP	PS	PSF	PTFE	PVDF	TPX*	Resin Code
Acids, Dilute or Weak	E	E	E	G	E	E	E	E	E	E	HDPE High-density polyethylene
Acids, Strong and Concentrated	E	E	N	N	E	F	G	E	E	E	LDPE Low-density polyethylene
Alcohols, Aliphatic	E	E	G	N	E	E	G	E	E	E	PC Polycarbonate
Aldehydes	G	G	F	G	G	N	F	E	E	G	PMMA Polymethyl methacrylate
Bases	E	E	N	F	E	E	E	E	E	E	PP Polypropylene
Esters	G	G	N	N	G	N	N	E	G	G	PS Polystyrene
Hydrocarbons, Aliphatic	G	F	F	G	G	N	G	E	E	F	PSF Polysulfone
Hydrocarbons, Aromatic	G	F	N	N	F	N	N	E	E	F	PTFE Polytetrafluoroethylene
Hydrocarbons, Halogenated	F	N	N	N	F	N	N	E	N	N	PVDF Polyvinylidene fluoride
Ketones	G	G	N	N	G	N	N	E	N	F	TPX* Polymethylpentene
Oxidizing Agents, Strong	F	F	N	N	F	N	G	E	G	F	

Chemical Resistance Classification

■ E = Excellent - 30 Days of constant exposure cause no damage. Plastics may even tolerate for years.

■ G = Good - Little or no damage after 30 Days of constant exposure to the reagent.

■ F = Fair - Some effect after 7 days of constant exposure to the reagent, like cracking, loss of strength or discoloration.

■ N = Not Recommended - Not for continuous use. Immediate damage may occur.

*TPX is the registered Trade Mark of Mitsui & Company Limited

Thermoplastics Chemical and Properties

CHEMICAL STABILITY OF PLASTICS

MEDIUM	PTFE		PMP(TPX)		PP		HDPE		LDPE		PC		POM		PA		SAN		PMMA		PS		NR	
	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	
Acetaldehyde	E	E	G	F	E	F	E	G	E	F	G	F	E	E	G		F	F	F	F	F	F	F	F
Acetic acid (glacial acetic acid), 100%	E	E	E	G	E	G	E	E	E	G	F	F	F	F	F	F					F	F	G	
Acetic acid 50%	E	E	E	E	E	E	E	E	E	E	E	G	G	F	F	F	E	G	F	F	G	G	F	
Acetic anhydride	E	E	E	G	G	G	G	G	F	F	F	F	F	F	G	G					F	F	G	
Acetone	E	E	E	E	E	E	E	E	E	G	F	F	E	E	E		F	F	F	F	F	F	F	G
Acetonitrile	E	E	G	F	E	G	E	G	E	G	F	F	E		E		F	F	F	F	F	F	F	F
Acetophenone	E	E	G	F	G	G	G	G	F	F	F	F	E		E		F	F	F	F	F	F	F	F
Acetyl chloride (acetic acid chloride)	E	E			E		E		E		F	F			F	F	F	F	F	F	F	F	F	F
Acetylacetone	E	E	E		E		E		E		F	F	E				F	F	F	F	F	F	F	F
ACRYLIC acid(2- propenic acid)	E	E	E		E		E		E		F	F	F	F			F	F	F	F	F	F	F	F
Acrylonitrile	E	E	F	F	G	F	E	E	E	E	F	F	F	F	E		F	F	F	F	F	F	F	F
Adipic acid	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E
Allyl alcohol(2-propan-1-ol)	E	E	E	G	E	E	E	E	E	E	G	G	E	E	G		G	F	F	F	G	G	G	G
Aluminium chloride	E	E	E	E	E	E	E	E	E	E	F	F	E	G	G	F	E	E	E	E	E	E	E	G
Aluminium hydroxide	E	E	E	G	E	E	E	E	E	E	G	F	E	E	E	E	G	G	G	G	G	G	G	E
Amino acid	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
Ammonium chloride	E	E	E	E	E	E	E	E	E	E	G	G	E	E	E		E	E	G	G	E	E	E	E
Ammonium fluoride	E	E	E	E	E	E	E	E	E	E	G	G	E	E	E		E	E	G	G	E	E	F	F
Ammonium hydroxide,30%(ammonia)	E	E	E	E	E	E	E	E	E	E	F	F	G	G	G		E	G	E	E	G	F	E	E
Ammonium sulphate	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	G
n-Amyl acetate (pentyl acetate)	E	E	E	G	G	F	E	G	G	F	F	F	E	E	G		F	F	E	E	F	F	G	G
Amyl alcohol (pentanol)	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E			G	G	G	G
Amyl chloride (chloropentane)	E	E	F	F	F	F	F	F	F	F	F	F	E	E	E		F	F	F	F	F	F	F	F
Aniline	E	E	E	G	E	E	E	E	E	G	G	F	G	G	G	F	F	F	F	F	F	F	F	F
Aqua regia	E	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Barium chloride	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E
Benzaldehyde	E	E	E	E	E	E	E	E	E	E	G	F	E	E	G		F	F	F	F	F	F	F	F
Benzene	E	E	G	G	E	G	E	E	G	F	F	F	E	G	E		F	F	F	F	F	F	F	F
Benzoyl chloride	E	E	G	G	E	G	E	E	G	F	F	F	E	G	F	F	F	F	F	F	F	F	F	F
Benzyl alcohol	E	E	G	F	G	F	G	F	G	F	G	G	E	E	F	F	F	F	F	F	F	F	F	F
Benzyl chloride	E	E											E		E						F	F	F	F
Benzylamine	E	E	G		G		G		G	F	F	F	E				F	F	F	F	F	F	F	F
Boric acid, 10%	E	E	E	E	E	E	E	E	E	F	E	E	E	E	E		E	E	E	E	E	E	E	E
Bromine	E	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Bromobenzene	E	E	F	F	F	F	F	F	F	F	F	F			E		F	F	F	F	F	F	F	F
Bromoform	E	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Bromonapthalene	E	E															F	F			F	F		
Butanediol	E	E	E	E	E	E	E	E	E	E			E	E	E		F	F			F	F	G	G
1-Butanol (butyl alcohol)	E	E	E	G	E	E	E	E	E	E	G	G	E	E	E	G	E	G	G	F	G	F	E	E
n-Butyl acetate (acetic acid n-butyl ester)	E	E	E	G	G	G	E	E	G	G	F	F	E	G	E		F	F	F	F	F	F	F	F
Butyl methyl ether	E	E	E	F	E	G	G	F	G	F	F	F	E	E			F	F	F	F	F	F	F	F
Butylamine	E	E											E	E			F	F			F	F	F	F
Butyric acid (butanoic acid)	E	E			F	F	G	F	F	F	G	F			G	G	F	F			F	F	F	F
Calcium carbonate	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
Calcium Chloride	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	E	E	E
Calcium hydroxide	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E		E	G	E	E	E	G	E	E
Calcium hypochlorite	E	E	E	G	E	E	E	E	E	E	G	F	E	E	E	F	E	E	G	G	E	E	F	F
Carbon disulphide	E	E	F	F	F	F	F	F	F	F	F	F	E	E	G		F	F	F	F	F	F	F	F
Carbon tetrachloride	E	E	F	F	F	F	G	F	G	F	F	F	G	G	F	F	F	F	G	F	F	F	F	F
Chloroacetaldehyde, 45%	E	E														F	F	F	F	F	F	F	F	F
Chloroacetic acid (monochloroacetic acid)	E	E	E	G	E	G	E	E	E	E	G	F	F	F	F	F	F	F	G	F	G	F	F	F
Chloroacetone	E	E															F	F	F	F	F	F	G	G

MEDIUM	PTFE		PMP(PTPX)		PP		HDPE		LDPE		PC		POM		PA		SAN		PMMA		PS		NR
	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C
Chlorobenzene	E	E	F	F	F	F	F	F	F	F	F	F			F	F	F	F	F	F	F	F	F
Chlorobutane	E	E	G	F	G	F	G	F	G	F			F	F			F	F	F	F	F	F	F
Chloroform	E	E	G	F	F	F	G	F	G	F	F	F	F	F	G	F	F	F	F	F	F	F	F
Chloronaphthalene	E	E											F	F									F
Chlorosulphonic acid	E	E											F	F	F	F							F
Cromic acid, 10%	E	E	E	E	E	E	E	E	E	E	E	G	G	G	F	F	F	F	G	F	F	F	F
Cromic acid, 50%	E	E	G	G	G	G	E	G	E	G	G	F	F	F	F	F	G	G	F	F	F	F	F
Cromic sulphuric acid	E	E	G	F	F	F	F	F	F	F	F	F	F	F	F	F	G	G	F	F	G	G	F
Copper sulphate	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	E	E	E	E	G
Cresol	E	E	F	F	G	G	G	F	F	F	F	F			F	F					F	F	F
Cumene(Isopropylbenzene)	E	E	F	F	G	F	E	G	G	F	F	F	E	F			F	F	F	F	F	F	F
Cyclohexane	E	E	F	F	G	F	G	F	G	F	F	F	E	E	E						F	F	F
Cyclohexenone	E	E	G	G	G	F	G	F	F	F	F	F			E						F	F	F
Cyclopentane	E	E	G	F	G	F	G	F	F	F	F	F									F	F	F
Decane	E	E	G		G		G	F			G		E										F
1-Decanol	E	E	E		E		E				G		E				G				G		G
Di-ethylene glycol	E	E	E	E	E	E	E	E	E	E	G	G	E	G	G		E	E	F	F	G	F	E
Dibenzyl ether	E	E	G		E		E						E				F	F	F	F	F	F	F
Dibromoethane	E	E																					
Dibutylphthalate	E	E	E	G	E	G	G	F	G	F	F	F	E	E			F	F	F	F	F	F	F
Di-chloroacetic acid	E	E	E	E	G	F	G	G	G	F	G	F			F	F					G	F	F
Dichlorobenzene	E	E	F	F	G	F	G	F	G	F	F	F	F	F	E		F	F	F	F	F	F	F
Dichloroethane	E	E	G	F	G	F	G	F	G	F			F	F	G								F
Dichloromethane (Methylene chloride)	E	E	G	F	G	F	G	F	G	F	F	F			G	F					F	F	F
Diesel oil	E	E	G	F	E	G	E	G	G	F	F	F	E	E	E	E	F	F	G	F	F	F	F
Diethanolamine	E	E			G		G				F	F					F	F	F	F	F	F	
Diethyl ether	E	E	F	F	G	F	G	F	F	F	F	F	E	E	E	E	F	F	F	F	F	F	F
Di-ethylamine	E	E	G	G	G	F	G	F	F	F	F	F									G	G	G
1,2 Diethylbenzene	E	E	F	F	F	F	G	F	F	F	G	F									F	F	F
Dimethyl sulphoxide(DMSO)	E	E	E	E	E	E	E	E	E	E	E	F	F				F	F	F	F	F	F	
Dimethylaniline	E	E									F	F					F	F	F	F	F	F	F
Dimethylformamide(DMF)	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E		F	F	F	F	F	F	G
1,4-Dioxane	E	E	G	G	E	G	E	E	E	G	G	G	G	G	E		F	F	F	F	F	F	F
Diphenyl ether	E	E											G		G		F	F	F	F	F	F	F
1,2 Ethanediol (ethylene glycol, glycol)	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	E	E	E	E	E	E	F
Ethanol (ethyl alcohol)	E	E	E	G	E	E	E	E	E	E	E	G	E	E	E		G	F	F	F	G	F	G
Ethanolamine	E	E			E																		F
Ethyl acetate (acetic acid ethyl ester)	E	E	G	F	E	G	E	E	E	E	F	F			E						F	F	F
Ethyl methyl Ketone(MEK)	E	E	F	F	E	G	G	F	G	F	F	F	F	F	E		F	F			F	F	F
Ethylbenzene	E	E	F	F	F	F	F	F	F	F	F	F					F	F	F	F	F	F	F
Ethylene Oxide	E	E	G	F	G	F	G	G	G	G	G	F	E	E	G		F	F	F	F	F	F	F
Fluroacetic acid	E										F	F	F	F			F	F	F	F	F	F	F
Formaldehyde, 40%	E	E	E	E	E	E	E	E	E	E	E	G	E	E	E	G	E	E	F	F	F	F	G
Formamide	E	E	E	E	E	E	E	E	E	E			F	F	E								E
Formic acid, 98-100%	E	E	E	G	E	E	E	E	E	E	E	G	F	F	F	F	G	G	F	F	E	G	G
Gasoline	E	E	G	G	G	G	E	E	G	F	G	F	E	E	E		F	F	E		F	F	F
Glycerine	E	E	E	E	E	E	E	E	E	E	E	E	G	G	E	E	E	E	E	E	E	E	G
Glycolic acid, 70%	E	E	E	E	E	E	E	E	E	E					F	F							E
Heating oil (Diesel oil)	E	E	G	F	E	G	E	G	G	F	F	F	E	E	E		F	F	G	F	F	F	F
Heptane	E	E	G	G	G	G	G	G	G	F	E	G			E				G	F	F	F	F
Hexane	E	E	G	F	E	G	E	G	G	F	F	F	E	E	E		E	E	G	G	F	F	F
Hexonic acid	E	E																	E				
Hexanol	E	E	E	E	E	E	E	E	E	E									E				G
Hydrochloric acid,10%	E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	G	F	G		E	E	G
Hydrochloric acid,20%	E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	G	F	G	F	E	E	G
Hydrochloric acid, 37%	E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	G	F	G	F	G	G	G

MEDIUM	PTFE		PMP(TPX)		PP		HDPE		LDPE		PC		POM		PA		SAN		PMMA		PS		NR	
	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	
Hydrofluoric acid, 40%	E	E	E	E	E	E	E	E	E	E	F	F	F	F	F	F	E	G	F	F	E	E	F	
Hydrofluoric acid, 70%	E	G	E	G	E	G	E	G	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Hydrogen bromide	E	E	E	E	E	E	E	E	E	E	E	F	F	F	F							G	F	G
Hydrogen peroxide, 35%	E	E	E	E	E	E	E	E	E	E	E	E	F	F	F	E	E	F	F	E	E	F	F	F
Hydroiodic acid	E	E	E	E	E	E	E	E	E	E														
Isoamyl alcohol (3-methyl-1-butanol)	E	E	E	E	E	E	E	E	E	E			E	E										G
Isobutanol (isobutyl alcohol)	E	E	E	E	E	E	E	E	E	E	E	E	E	E			G	F	G	F	G	G	G	E
Isooctane	E	E									G				E		G	F			G	F	F	
Isopropanol (2-propanol)	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	G	F	G	F	G	G	E
Isopropyl ether	E	E	F	F	F	F	F	F	F	F	F	F			F	F					F	F	F	F
Lactic acid (2-hydroxypropionic acid)	E	E	E	E	E	E	E	E	E	E	E	E	F	G	F	E	E	G	F	E	E	E	G	
Lugol's solution (Iodine/potassium iodine solution)	E	E	E	G	E	E	F	F	F	F	G	F	G	G			G	F	F	F	G	F	E	
Mercury	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
Mercury chloride	E	E	E	E	E	E	E	E	E	E	E	E	G	G	F	F	E	E	E	E	E	E	G	E
Methanol	E	E	E	E	E	E	E	E	E	G	E	G	E	E	G		G	F	F	F	G	F	G	
Methoxybenzene	E	E									F	F	G				F	F	F	F	F	F	F	F
Methyl butyl ether	E	E	E	G	E	E	G	F	F	F	F	F	G				F	F	F	F	F	F	F	F
Methyl ethyl ketone(MEK)	E	E	F	F	E	G	G	F	G	F	F	F	F	F			F	F	F	F	F	F	F	F
Methyl formate (formic acid methyl ester)	E	E									F	F	E				F	F	F	F	F	F	F	F
Methyl propyl ketone	E	E	G	G	E	G	E	E	E	G	F	F	E	E			F	F	F	F	F	F	F	F
Methylene chloride (dichloromethane)	E	E	F	F	G	F	G	F	G	F	F	F	F	F	G	F	F	F	F	F	F	F	F	F
Mineral oil	E	E	E	E	E	E	E	E	E	G	F	F	E	E			E		E	E	E		F	
Monochloroacetic acid	E	E	E	G	E	G	E	E	E	E	G	F	F	F	F	F	F	F	G	F	G	F	F	F
Nitric acid, 10%	E	E	E	E	E	E	E	E	E	E	E	G	F	F	F	F	E	G	E	G	F	F	F	F
Nitric acid, 30%	E	E	G	F	G	F	G	F	G	G	E	G	F	F	F	F	G	F	G	G	F	F	F	F
Nitric acid, 70%	E	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Nitrobenzene	E	E	F	F	F	F	G	F	F	F	F	F	G	F	F	F	F	F	F	F	F	F	F	F
Oleic acid	E	E													G		F	F	F	F	F	F	F	F
Oxalic acid	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	E	E	E	E	G
Ozone	E	E	E	E	G	F	G	F	G	F	F	F	F	F	F	F	G	G	E	G	G	G	F	F
n-Pentane	E	E														G								F
Peracetic acid	E	E									F	F	F	F										
Perchloric acid	E	E	G	F	E	F	E	F	E	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Perchloroethylene	E	E	F	F	F	F	F	F	F	F	F	F	E	G	F	F	G	G	G	F	F	F	F	F
Petroleum	E	E	G	G	G	F	G	F	G	F	G	G	E	E	E				E		F	F	F	F
Petroleum ether	E	E							G				E	E	E				E		F	F	F	F
Phenol	E	E	G	G	E	E	E	E	E	G	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Phenyl ethanol	E	E			G		G									G								
Phenylhydrazine	E	E			G		G																	G
Phosphoric acid, 85%	E	E	E	E	E	E	E	E	E	E	E	E	E	F	F	F	E	E	F	F	E	G	F	F
Piperadine	E	E			E		E																	F
Potassium chloride	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		G	G	E	E	G	G	E	E
Potassium Dichromate	E	E														F	F							G
Potassium hydroxide	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E		G	G	E	E	G	G	G	G
Potassium permanganate	E	E	E	E	E	E	E	E	E	E	E	E	G	G	F	F	E	G	E	E	E	E	F	F
Propanol	E	E	E	E	E	E	E	E	E	E	G		E	E	E	E	E	E	G		G		E	E
Propionic acid	E	E	E	G	E	G	E	G	G	F	F	F	F	F	G	G					G	F	F	F
Propylene glycol (propanediol)	E	E	E	E	E	E	E	E	E	E	E	G	E	E	F	F	F	F	G	G	E	E	E	E
Pyridine	E	E	E	G	G	G	E	G	E	G	F	F	E	G	E		F	F	F	F	F	F	F	F
Salicylaldehyde	E	E	E	E	E	E	E	E	E	E	G	G					F	F			F	F		
Salicylic acid	E	E	E	E	E	E	E	E	E	E			F	F	E		E	E			E	E	E	E
Silver acetate	E	E	E	E	E	E	E	E	E	E	E	E	G	G			G	G	G	G	G	G	E	E
Silver nitrate	E	E	E	E	E	E	E	E	E	E	E	E	G	G	E		E	E	E	E	G	G	E	E
Sodium acetate	E	E	E	E	E	E	E	E	E	E	E	E	E	G	E		E	E	F	F	E	E	E	E
Sodium Chloride	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	E
Sodium dichromate	E	E	E	E	E	E	E	E	E	E	E	F	E	E	E		E	G	E	G	E	G	E	E
Sodium fluoride	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E		E	E	E	E	E	E	E	G
Sodium hydroxide	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E	G	E	E			E	E	E	G

Medium	PTFE		PMP(ITPX)		PP		HDPE		LDPE		PC		POM		PA		SAN		PMMA		PS		NR
	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C	50°C	20°C
Sulphuric acid, 60%	E	E	E	E	E	E	E	E	E	E	G	G	F	F	F	F	E	G	F	F	F	F	F
Sulphuric acid, 98%	E	E	E	E	F	F	G	F	G	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Tartaric acid	E	E	E	E	E	E	E	E	E	E	E	E	E	E	G	G	E	E	G	G	E	E	E
Tetrachloroethylene	E	E													F	F							F
Tetrahydrofuran(THF)	E	E	G	F	F	F	G	F	G	F	F	F	G	G	E		F	F	F	F	F	F	F
Tetramethylammonium hydroxide	E	E									F	F	F	F									
Toluene	E	E	G	F	G	F	G	G	G	F	F	F	E	E	E		F	F	F	F	F	F	F
Tri-ethylene glycol	E	E	E	E	E	E	E	E	E	E	E	G	E	G			E	E	G	G	E	E	G
Tri-propylene glycol	E	E	E	E	E	E	E	E	E	E	E	G	E	G			E	E	G	G	E	E	E
Trichloroacetic acid	E	E	E	E	G	F	G	G	G	F	G	F			F	F					G	F	G
Trichlorobenzene	E	E	G	G	F	F	F	F	F	F	F	F									F	F	
Trichloroethane	E	E	F	F	F	F	G	F	F	F	F	F	G	F	G		F	F	F	F	F	F	F
Trichloroethylene	E	E	F	F	F	F	G	F	F	F	F	F	F	F	G		F	F	F	F	F	F	F
Trichlorotrifluoroethane	E	E													G		F	F			F	F	
Triethanolamine	E	E															F	F			F	F	G
Trifluoroacetic acid (TFA)	E	G											F	F			F	F			F	F	
Trifluoroethane	E	E															F	F			F	F	F
Turpentine	E	E	G	G	F	F	G	F	G	F	F	F	E	E	E		G	G	E	E	F	F	F
Urea	E	E	E	E	E	E	E	E	E	E	F	F	E	E	E		E	E	E	E	E	E	E
Xylene	E	E	G	F	F	F	G	F	G	F	F	F	E	E	E		F	F	F	F	F	F	F
Zinc Chloride, 10%	E	E	E	E	E	E	E	E	E	E	E	E	E	G	F	F	E	E	F	F	E	E	E
Zinc Sulphate, 10%	E	E	E	E	E	E	E	E	E	E	E	E	G	F	F	F	E	E	G	G	E	E	G

E = Continuous exposure to media and solvents causes no harm to the product.

G = Continuous exposure for 7 -30 days to media and solvents causes minor damage to the product.
(e.g. swelling, softening, mechanical strength, discolouration).

F= Not Suitable for continuous exposure to media and solvents. May damage the product.
(e.g. deformation, cracking, liquification).

The above Chemical resistance chart is meant to be used as a guide only. As temperature, exposure time and functional conditions affect resistance and can vary for each application, Abdos highly recommends users to evaluate products under their own conditions prior to use. Abdos does not warrant (neither expressed or implied) that the information in this chart is accurate or that any material is suitable for any purpose.

WHAT IS GAMMA IRRADIATION ?

Gamma rays are a form of electromagnetic radiation-like x-rays, but with higher energy. The primary industrial sources of gamma rays are radionuclide elements such as Cobalt 60, which emit gamma rays during radioactive decay. Gamma rays pass readily through plastics and kill bacteria by breaking the covalent bonds of bacterial DNA. They are measured in units called kiloGrays (kGy).

Gamma irradiation provides a number of benefits in cost and sterility assurance. It can be applied under safe, well-defined, and controlled operating parameters, and is not a heat or moisture generating process. Consequently, there is no heat stress and condensate drainage or outgassing is not required. Most importantly, there is no residual radioactivity after irradiation.

DOSE VALIDATION

Gamma Radiation dose is validated according to IS. EN. ISO 11137-2 Method 1 to confirm the SAL 10^{-6}

For that routine testing of bioburden & Sterility test carried out at our manufacturing facility.

VALIDITY OF STERILITY

We assure all sterile products have been sterile through Co-60 gamma radiation with valid certified dose and has been PASSED for all sterility tests. We confirm that the Sterile product would be Sterile until unless the packing pouch is not tampered/punctured/open or 3 yrs from date of Radiation.

SUITABILITY OF ABDOS PLASTICS FOR FOODSTUFF

The phthalates for which opinions have been given by EFSA (European Food Safety Authority) and TDI's (Tolerable Daily Intake) established for use in plastics for containers in food application, are not intentionally added in the manufacture of or the formulation of this product. The phthalates are di-isobutyl phthalate (DIBP), di-(2-ethylhexyl) phthalate (DEHP), di-n-butyl phthalate (DBP), di-iso-decyl phthalate (DIDP), butylbenzyl phthalate (BBP). In addition, di-iso-butyl phthalate (DIBP) has recently been classified by TC C&L of ECB (Commission Working Group on Classification & Labeling - European Chemicals Bureau) in accordance with the requirements of Directive 67/548/EC (Classification and labeling of dangerous substance), taking into account a NOAEL, the toxicity of DIBP is more than 100 times lower than DNBPs (product assessed by EFSA for use in plastics in contact with food). Phthalates are not used in the manufacture of or the formulation of any Abdos manufactured products.

Abdos manufactured products have passed the USP tests for a Class VI, physio-chemical testing and meets USP limits.

Abdos manufactured products are made from the base resin which meets the FDA requirements contained in the Code of Federal Regulation in 21 CFR 177.1520 (a)(3)(i) and (c)3.1a. 3. 2a. All other ingredients meet the requirements of their respective FDA regulations and 21 CFR 177.1520(b). All Abdos manufactured products meet the FDA criteria in 21 CFR 177.1520 for food contact applications, including cooking.

AUTOCLAVE GUIDE LINE

To ensure successful steam sterilization of your plastic labware please adhere to the following guideline: Autoclave all plastic consumables at 121°C for 20 minutes, 15psi/1 atm. Do not use a dry cycle as this may cause deformation or weakening of the plastic. Allow temperature within the autoclave to return to at least 80°C before removing product.

Autoclaving (steam sterilisation) is defined as the destruction or irreversible inactivation of all reproducible microorganisms under exposure to "saturated steam at a minimum of 120 °C." (DIN 58946-1, 1987). DIN EN 285 specifies a minimum exposure time (t_e) of 20 minutes (killing time and safety margin) at a sterilisation temperature of 121 °C. For the correct sterilisation procedure, including biological safety (DIN EN285), please contact your hygiene specialist.

Prior to autoclaving plastic labware, ensure that no soiling or residual contamination remains on the equipment. Otherwise, the residual contamination will bake on solidly during the autoclaving process.

Even substances that have no effect on the plastic at room temperature can still lead to destruction of the plastic during the autoclaving process. Additionally, microorganisms might not be killed effectively if they are protected by the residual contamination.

NOTES ON AUTOCLAVING

- Containers with screw tops or stoppers must be open during autoclaving to allow for pressure equalisation.
- Autoclaving of a closed container will lead to the deformation or destruction of the container.
- Plastic labware should be stood upright on a level surface during autoclaving to avoid shape deformation.
- Plastic labware should not be laid on its side during autoclaving.
- No mechanical stresses should be present during autoclaving.
- For example, do not stack items.
- Do not autoclave any container that contains residual contamination or even rinsing agent.
- Not all plastics are resistant to steam sterilisation! For example, polycarbonate loses its tensile strength.
- Mind the temperature limits for the plastics.
- Autoclavable products are identified with a "121 °C" symbol in this catalogue.

The surfaces of some plastics can be attacked by chemicals present during autoclaving, which can cause persistent clouding. Some transparent plastics can absorb minute quantities of steam, which can lead to reversible clouding. This clouding disappears upon drying, which can be accelerated through the use of a drying oven.

RPM VS. RCF "WHAT'S THE DIFFERENCE?"

RPM – stands for "Revolutions Per Minute" and is the speed that your rotor spins in your centrifuge.

RPM is specific to individual centrifuge brands and rotor sizes.

RCF – stands for "Relative Centrifugal Force" and is better known as g-force. This indicates the actual force resulting from the spinning action in the centrifuge.

It is g-force that drives sample separation.

The following equation can be used to convert RPM to RCF for any model centrifuge.

$$RCF = 0.0001118 \times \text{radius of rotation (cm)} \times \text{RPM}^2$$

Note: radius of rotation is given by the distance of the furthest most point of the tube from the axis of rotation. Please refer to your centrifuge user guide for radius value.

NON-PYROGENIC CERTIFICATE OF ANALYSIS

Every lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes, Cryo Vials, Petri Dish, Radioimmunoassay (Ria) Vials, Pasteur Pipette & other products are tested for Pyrogenic.

This report certifies that samples of the above products obtained from finished products are Non-Pyrogenic. Endotoxin levels are ≤ 0.005 EU/device. Products were tested for Endotoxins as per USP by Chromogenic Assay Method.

PROCEDURE:

Lot samples of the products were extracted according to current FDA guidelines in Pyrogen free water and the extract solution was then assayed along with the positive and negative controls.

- A. P11007 Lot no. A261118B
- B. P60116 Lot no. A251019A
- C. P10202 Lot no. M110919C07
- D. P10163 Lot no. A281119A
- E. P10401 Lot no. A110919A
- F. P10301 Lot no. M140919C06
- G. P10901 Lot no. M230919B12

RESULTS:

Endotoxin levels ≤ 0.005 EU/ml

COMMENTS:

Current FDA/USP guidelines set endotoxin limits for medical devices at 0.5 EU/ml, and 0.06 EU/ml for devices that contact cerebral spinal fluid. We test products according to the guidelines for medical devices that contact cerebral spinal fluid.

RNASE FREE CERTIFICATE OF ANALYSIS

Every lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes, Cryo Vials, Petri Dish, Radioimmunoassay (Ria) Vials, Pasteur Pipette & other products are tested for RNase.

This report certifies that samples of the above products obtained from finished products are free of any detectable RNase contamination. Products were tested for RNase activity by the following protocol.

PROCEDURE:

Products were extracted in RNase free water. The extract was then added to an RNA standard. The RNA standard was incubated at 37°C for 1 hour then heated to 65°C for 5 minutes. RNA samples were then run on an agarose gel, photographed, and evaluated for degradation.

Lane (A) P10105 Lot No-1503001.(B) P60102 Lot No-1503007.(C) RNA standard exposed to RNase as a positive control (D) unexposed RNA standard as a negative control.

CONCLUSIONS:

No visible degradation is present in the product samples confirming that the products can be considered RNase free.



DNASE FREE CERTIFICATE OF ANALYSIS

Every lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes, Cryo Vials, Petri Dish, Radioimmunoassay (Ria) Vials, Pasteur Pipette & other products are tested for DNase.

This report certifies that samples of the above products obtained from the finished products are free of any detectable DNase contamination. Products were tested for DNase activity by the following protocol.

PROCEDURE:

Products were extracted in DNase free water. The extract was then added to a DNA standard. The DNA standard was incubated at 37°C for 1 hour then heated to 65°C for 5 minutes. DNA samples were then run on an agarose gel, photographed, and evaluated for degradation.



Lane (A) unexposed DNA standard as a negative control, (B) DNA standard exposed to DNase as a positive control, (C) P10105 Lot No-1503001, (D) P60102 Lot No-1503007, (E) P10202 Lot No-1503036, (F) P10401 Lot No-1503009, (G) P10403 Lot No-1503010, (H) P60103 Lot No-1502010.

CONCLUSIONS:

No visible degradation is present in the product samples confirming the products can be considered DNase free.

ATP FREE CERTIFICATE OF ANALYSIS

Every Lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes, Cryo Vials, & Other Products are tested for ATP Free.

- A. P11007 Lot no. A261118B
- B. P60116 Lot no. A251019A
- C. P10202 Lot no. M110919C07
- D. P10163 Lot no. A281119A
- E. P10401 Lot no. A110919A

PROCEDURE:

Procedure is to provide guidelines for ATP FREE Test (by Glucose Oxidase/ATP Method). Glucose is a widely distributed simple sugar with an active aldehyde group. Estimation of glucose by glucose oxidase gives the true glucose concentrations eliminating the interference by other reducing sugars.

PRINCIPLE:

Glucose oxidase catalyses the oxidation of alpha-D-glucose to D-glucono-1, 5 lactone (gluconic acid) with the formation of hydrogen peroxide. The oxygen liberated from hydrogen peroxide by peroxidase reacts with the O-dianisidine & oxidizes it to a red chromophore product. Read the colour intensity at 540 through UV Spectrophotometer or at 450 through ELISA.

Glucose + O₂

Glucose Oxidase \rightarrow H₂O₂ + Gluconic Acid

H₂O₂ + O-dianisidine Peroxidase \rightarrow Red colour product

CONCLUSIONS:

The tested products are free from ATP detectable contamination (<1.0 fg).

HUMAN DNA FREE CERTIFICATE OF ANALYSIS

Every Lot of Abdos Micro Tips, Micro Centrifuge Tubes, Centrifuge Tubes , Cryo Vials, & Other Products are tested for ATP Free.

- A. P11007 Lot no. A261118B
- B. P60116 Lot no. A251019A
- C. P10202 Lot no. M110919C07
- D. P10163 Lot no. A281119A
- E. P10401 Lot no. A110919A

PROCEDURE:

Nucleic Acid (DNA) extraction and measurement were done by the procedures of Zachleder (50) as applied by Danovaro et al, (9) and Danovaro(10), with a few modifications to enhance DNA extraction from the sediment. Briefly, 1g of sediment (three replicates) was treated with 3.0 ml of 0.5N Perchloric acid, stirred for 3min & sonicated three times for 1min (with intervals of 30 sec). Nucleic acid extraction was carried out 75 °C for 30min under continuous stirring on water bath. After centrifugation (3000 rpm, 10min), the absorbance of the Total Nucleic Acid (TNA) in the supernatant was measured at 260 nm. For RNA take absorbance on 230 nm & for protein on 280 nm.

CONCLUSIONS:

The tested products are free from Human DNA detectable contamination (<0.5 pg/microliter).

Index

Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.
E10001	36	E11172D	66	E11281	171	E11344	163	E11520	23	E11650	158
E10002	36	E11173D	66	E11282	171	E11345	163	E11521	23	E11651	158
E10003	36	E11174D	66	E11283	171	E11346	163	E11522	23	E11652	158
E10004	36	E11175D	66	E11284	171	E11347	163	E11523	23	E11653	158
E10005	36	E11176D	66	E11285	171	E11348	163	E11524	23	E11654	158
E10006	36	E11177D	66	E11286	171	E11349	163	E11525	23	E11701	67
E10007	36	E11178D	66	E11290	174	E11350	163	E11526	23	E11702	67
E10008	36	E11179D	66	E11291	174	E11355	178	E11527	23	E11703	67
E10009	36	E11190	167	E11300	168	E11356	178	E11528	23	E11704	67
E10010	36	E11191	167	E11301	168, 170	E11357	178	E11530	23	E11705	67
E11100	36	E11192	167	E11302	168, 170	E11358	163	E11540	24	E11706	67
E11101	36	E11193	167	E11303	168, 170	E11360	161	E11541	24	E11711	67
E11102	36	E11194	167	E11305	170	E11361	161	E11542	24	E11712	67
E11103	36	E11195	167	E11307	154	E11362	161	E11550	25	E11713	67
E11104	36	E11196	167	E11308	154	E11363	161	E11551	25	E11714	67
E11105	36	E11197	167	E11310	165	E11364	161	E11552	25	E11715	67
E11106	36	E11198	167	E11311	165	E11365	161	E11601	134	E11716	67
E11107	37	E11200	168	E11312	165	E11366	161	E11602	134	E11731	68
E11108	37	E11201	168	E11313	165	E11367	161	E11603	134	E11732	68
E11109	37	E11202	168	E11314	165	E11368	161	E11604	134	E11733	68
E11110	37	E11216	70	E11315	165	E11370	161	E11605	134	E11734	68
E11111	37	E11217	70	E11316	165	E11380	161	E11606	134	E11735	68
E11112	36	E11218	70	E11317	165	E11390	161	E11607	134	E11736	68
E11113	70	E11219	70	E11318	165	E11410	172	E11608	134	E11800	180
E11114	71	E11220	70	E11319	165	E11411	176	E11609	134	E11801	180
E11116	71	E11221	70	E11320	165	E11413	176	E11610	134	E11802	180
E11117	71	E11222	70	E11321	165	E11414	176	E11611	134	E11803	180
E11118	71	E11224	157	E11322	165	E11415	172, 173, 175, 176	E11612	134	E11804	180
E11119	70	E11227	156	E11323	165	E11416	172, 173, 175, 176	E11613	135	E11805	180
E11120	71	E11228	156	E11324	165	E11417	172, 173, 175, 176	E11613 A	135	E11806	180
E11131	36	E11229	156	E11325	165	E11418	172, 173, 175, 176	E11614	135	E11807	180
E11132	36	E11230	160	E11326	165	E11419	172, 173, 175, 176	E11614 A	135	E11810	180
E11134	37	E11231	155	E11327	165	E11430	173	E11615	135	E11815	180
E11136	39	E11232	155, 157	E11330	161	E11451	172, 173, 175	E11615 A	135	E11816	180
E11137	39	E11233	155, 157, 158	E11331	161	E11452	172, 173, 175	E11616	135	E11821	180
E11138	39	E11234	155	E11332	161	E11453	172, 173, 175	E11616 A	135	E11822	180
E11139	39	E11235	159	E11333	161	E11460	175	E11617	135	E11823	180
E11140	39	E11236	159	E11334	161	E11470	175	E11617 A	135	E11824	180
E11141	39	E11260	174	E11335	161	E11480	176	E11618	135	E11825	180
E11145	37	E11261	174	E11336	161	E11490	176	E11618 A	135	E11826	180
E11146	37	E11262	174	E11337	161	E11501	21	E11619	135	E11830	180
E11147	37	E11270	169	E11338	161	E11502	21	E11619 A	135	E11920	178
E11161	40	E11271	169	E11339	161	E11503	21	E11620	134	E11925	178
E11162	40	E11272	169	E11340	163	E11510	22	E11621	134	E11928	179
E11163	40	E11273	169	E11341	163	E11511	22	E11622	134	E11929	179
E11164	40	E11274	169, 171	E11342	163	E11512	22	E11623	134	E11930	179
E11171	66	E11280	171	E11343	163	E11513	22	E11624	134	E11931	179

Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.
E11932	179	E12177	104	E12327	108	P10007	48	P10117	45	P10203	14
E11933	179	E12178	104	E12328	108	P10008	48	P10118	45	P10203A	14
E11934	179	E12179	104	E12329	108	P10010	48	P10119	45	P10204	14
E11935	179	E12180	104	E12330	108	P10011	48	P10120	45	P10204A	14
E11936	179	E12201	105	E12331	108	P10012	48	P10129	44	P10205	14
E11937	179	E12202	105	E12332	108	P10013	48	P10130	44	P10207	14
E11938	179	E12203	105	E12333	108	P10014	48	P10137	44	P10208	14
E11939	179	E12204	105	E12334	108	P10015	48	P10138	44	P10209	14
E11940	179	E12205	105	E12335	108	P10016	48	P10139	45	P10210	14
E11941	179	E12226	106	E12336	108	P10020	49	P10140	45	P10301	74
E11942	179	E12227	106	E12337	108	P10021	49	P10141	45	P10301A	74
E11943	179	E12228	106	E12338	108	P10022	49	P10142	45	P10301A1	74
E11944	179	E12229	106	E12339	108	P10023	49	P10144	44	P10302	74
E11948	179	E12230	106	E12340	108	P10024	49	P10145	44	P10303	74
E11949	179	E12231	106	E12341	108	P10025	49	P10147	45	P10304	74
E11950	179	E12232	106	E12342	108	P10026	49	P10148	45	P10304A	74
E11951	179	E12233	106	E12343	108	P10027	49	P10149	45	P10304A1	74
E12100	100	E12234	106	E12376	109	P10040	49	P10150	45	P10305	74
E12101	100	E12235	106	E12377	110	P10041	49	P10152	45	P10305A	74
E12102	100	E12236	106	E12378	109	P10042	49	P10153	45	P10305A1	74
E12103	100	E12237	106	E12400	90	P10043	49	P10154	45	P10306	74
E12104	100	E12238	106	E12401	90	P10044	49	P10155	45	P10307	74
E12111	101	E12239	106	E12402	90	P10045	49	P10156	45	P10308	74
E12112	101	E12240	106	E12410	81	P10046	49	P10157	45	P10309	74
E12113	101	E12241	106	E12411	81	P10047	49	P10158	45	P10310	74
E12114	101	E12242	106	E12412	81	P10060	49	P10159	45	P10311	74
E12115	101	E12243	106	E12413	81	P10061	49	P10160	45	P10312	74
E12116	101	E12244	106, 107, 108	E12414	81	P10062	49	P10161	44	P10313	74
E12117	101	E12276	107	E12415	81	P10063	49	P10163	44	P10401	16
E12118	101	E12277	107	E12420	81	P10064	49	P10164	44	P10402	16
E12119	101	E12278	107	E12430	82	P10065	49	P10165	44	P10403	16
E12120	101	E12279	107	E12431	82	P10099	52	P10166	44	P10404	16
E12121	101	E12280	107	E12432	82	P10100	52	P10167	44	P10405	16
E12122	101	E12281	107	E12433	82	P10101	44	P10168	44	P10405T	16
E12123	101	E12282	107	E12434	82	P10102	44	P10169	44	P10406	16
E12124	101	E12283	107	E12435	82	P10105	44	P10170	44	P10406T	16
E12126	102	E12284	107	E12436	82	P10106	44	P10171	45	P10407	16
E12127	102	E12285	107	E12437	82	P10107	45	P10172	53	P10407T	16
E12128	102	E12286	107	E12480	96	P10108	45	P10173	53	P10408	16
E12129	102	E12287	107	E12481	96	P10109	45	P10174	44	P10408T	16
E12130	102	E12288	107	E12482	96	P10110	45	P10175	44	P10409	17
E12151	103	E12289	107	P10001	48	P10111	45	P10176	45	P10410	17
E12152	103	E12290	107	P10002	48	P10112	45	P10177	45	P10411	17
E12153	103	E12291	107	P10003	48	P10113	45	P10178	45	P10412	17
E12154	103	E12292	107	P10004	48	P10114	45	P10201	14	P10413	17
E12155	103	E12293	107	P10005	48	P10115	44	P10201A	14	P10414	17
E12176	104	E12326	108	P10006	48	P10116	45	P10202	14	P10415	17

Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.
P10416	17	P10710	92	P10901	78	P11026	53	P11074	56	P11145	119
P10417	17	P10711	92	P10902	78	P11027	53	P11075	56	P11146	119
P10418	17	P10712	92	P10903	78	P11028	53	P11076	56	P11147	119
P10419	16	P10713	93	P10904	78	P11029	53	P11077	56	P11148	119
P10421	16	P10714	93	P10933	78	P11030	53	P11078	56	P11151	119
P10423	17	P10715	93	P10934	78	P11031	53	P11079	56	P11151A	120
P10424	17	P10716	93	P10935	78	P11032	53	P11080	56	P11152	119
P10425	17	P10717	93	P10936	78	P11033	53	P11081	56	P11152A	120
P10426	17	P10718	93	P10937	78	P11034	53	P11082	56	P11153	119
P10427	17	P10719	94	P10938	78	P11035	53	P11083	56	P11153A	120
P10430	16	P10721	93	P10939	78	P11036	53	P11084	56	P11154	119
P10431	16	P10722	93	P10940	78	P11037	53	P11085	56	P11154A	120
P10432	17	P10723	93	P10970	80	P11038	53	P11086	56	P11155	119
P10441	16	P10801	94	P10985	80	P11039	53	P11087	56	P11155A	120
P10442	16	P10802	94	P10986	80	P11040	55	P11088	56	P11156	119
P10443	16	P10803	94	P10987	80	P11041	55	P11089	56	P11156A	120
P10444	16	P10804	95	P10988	80	P11042	55	P11090	56	P11157	119
P10449	17	P10901	78	P10989	80	P11043	55	P11092	53	P11157A	120
P10450	17	P10902	78	P10990	80	P11044	55	P11093	53	P11158	119
P10451	17	P10903	78	P10991	80	P11045	55	P11094	53	P11158A	120
P10452	17	P10904	78	P10995	80	P11046	55	P11095	53	P11160	120
P10453	17	P10905	78	P10996	80	P11047	53	P11096	53	P11161	120
P10480	18	P10906	78	P11001	52	P11048	53	P11097	53	P11162	120
P10481	18	P10907	78	P11002	52	P11049	52	P11098	53	P11163	120
P10482	18	P10908	78	P11003	52	P11050	55	P11099	53	P11164	120
P10483	18	P10909	78	P11004	52	P11051	55	P11100	53	P11170	121
P10484	18	P10910	78	P11005	52	P11052	55	P11101	95	P11171	121
P10485	18	P10911	79	P11006	52	P11053	55	P11103	95	P11172	121
P10486	18	P10912	79	P11007	52	P11054	55	P11104	114	P11173	121
P10487	18	P10913	79	P11008	52	P11055	55	P11105	114	P11174	121
P10488	18	P10914	79	P11009	52	P11056	55	P11106	115	P11180	121
P10501	57	P10915	79	P11010	52	P11057	55	P11107	115	P11180A	121
P10503	57	P10916	79	P11011	52	P11058	55	P11127	120	P11181	121
P10601	69	P10917	79	P11012	52	P11060	56	P11128	120	P11181A	121
P10602	69	P10918	79	P11013	52	P11061	56	P11129	120	P11182	121
P10603	69	P10919	79	P11014	52	P11062	56	P11131	119	P11182A	121
P10604	69	P10920	79	P11015	52	P11063	56	P11132	119	P11183	121
P10605	69	P10921	79	P11016	52	P11064	56	P11133	119	P11183A	121
P10606	69	P10922	79	P11017	52	P11065	56	P11134	119	P11184	121
P10620	72	P10923	79	P11018	52	P11066	56	P11135	119	P11184A	121
P10701	92	P10924	79	P11019	52	P11067	56	P11136	119	P11191	123
P10702	92	P10925	79	P11020	53	P11068	56	P11137	119	P11192	123
P10705	92	P10926	79	P11021	53	P11069	56	P11138	119	P11200	123
P10706	92	P10927	78	P11022	53	P11070	55	P11141	119	P11301	124
P10707	92	P10928	78	P11023	53	P11071	55	P11142	119	P11302	124
P10708	92	P10931	78	P11024	53	P11072	56	P11143	119	P11305	124
P10709	92	P10932	78	P11025	53	P11073	56	P11144	119	P11306	124

Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.
P11307	124	P20210	113	P20709	116	P21063	87	P40112	75
P11308	124	P20212	20	P20710	116	P21064	87	P40113	75
P11311	124	P20213	20	P20711	116	P21065	87	P50111	144
P11312	124	P20214	20	P20712	116	P21066	87	P50112	144
P11313	124	P20215	20	P20713	116	P21067	87	P50113	144
P11314	124	P20216	20	P20714	116	P21068	87	P50114	144
P11510	123	P20218	20	P20715	116	P21069	87	P50201	128
P11511	123	P20219	20	P20716	117	P21070	87	P50202	128
P11512	123	P20225	21	P20717	117	P21071	87	P50203	128
P11513	123	P20226	21	P20718	117	P21072	87	P50204	128
P11515	122	P20230	113	P20720	117	P21080	88	P50205	128
P11516	122	P20231	113	P20721	117	P21081	88	P50206	128
P11517	122	P20302	132	P20722	117	P21090	89	P50301	127
P11518	122	P20441	116	P20723	117	P21091	89	P50302	127
P11519	122	P20442	116	P20724	117	P21092	89	P50303	127
P11520	122	P20443	116	P20725	117	P21093	89	P50304	127
P11521	122	P20444	116	P20726	117	P21094	89	P50305	127
P11522	123	P20501	132	P20727	117	P21095	89	P50306	127
P11523	123	P20502	132	P20728	117	P21096	89	P50307	127
P11620	128	P20503	132	P20729	117	P21097	89	P50308	127
P11621	128	P20504	132	P21010	84	P21098	89	P50401	127
P11622	128	P20511	133	P21011	84	P21099	89	P50402	127
P11901	128	P20512	133	P21012	84	P21100	89	P50403	127
P11902	128	P20601	31	P21013	84	P21101	88	P50404	127
P11903	128	P20601 Assorted	31	P21014	84	P21102	88	P50405	127
P11904	128	P20602	31	P21015	84	P21103	88	P50406	127
P11905	128	P20602 Assorted	31	P21016	84	P21104	88	P50407	127
P11907	129	P20603	31	P21017	84	P21105	88	P50408	127
P11908	129	P20603 Assorted	31	P21020	85	P21106	88	P50501	127
P20101	57	P20604	19	P21021	85	P21107	88	P50502	127
P20102	57	P20605	19	P21022	85	P21108	88	P50503	127
P20104	57	P20606	32	P21023	85	P21109	88	P50504	127
P20103	57	P20607	32	P21024	85	P31201	73	P50505	127
P20105	57	P20611	31	P21025	85	P31202	73	P50506	127
P20106	57	P20612	32	P21026	85	P31205	73	P50507	127
P20107	57	P20613	32	P21030	86	P31206	73	P50508	127
P20201	19	P20614	32	P21031	86	P31207	73	P50601	125
P20202	19	P20615	31	P21032	86	P31208	73	P50602	125
P20203	19	P20616	30	P21033	86	P31209	73	P50603	125
P20204	19	P20701	116	P21040	86	P31210	73	P50604	125
P20205	19	P20702	116	P21041	86	P40101	75	P50605	125
P20206	113	P20703	116	P21050	86	P40102	75	P50606	125
P20206 Assorted	113	P20704	116	P21051	86	P40103	75	P50607	125
P20207	113	P20705	116	P21052	86	P40104	75	P50608	125
P20207 Assorted	113	P20706	116	P21060	87	P40105	75	P50701	125
P20208	112	P20707	116	P21061	87	P40106	75	P50702	125
P20209	112	P20708	116	P21062	87	P40111	75	P50703	125

Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.	Code	Page No.
P50704	125	P70102	132	P80111	139	P80165	139	U10601	151	U20343	146
P50705	125	P70104	132	P80112	139	P80166	139	U10701B	151	U20344	146
P50706	125	P70106	144	P80113	139	P80167	139	U10701G	151	U20345	146
P50707	125	P70107	144	P80114	139	P80168	139	U10701O	151	U20346	146
P50708	125	P70201	39	P80115	140	P80169	139	U10701W	151	U20407	147
P50802	126	P70202	72	P80116	140	P80170	139	U10701Y	151	U20408	148
P50803	126	P70203	40	P80117	140	P80171	140	U10901C	151	U20409	147
P50804	126	P70204	72	P80118	140	P80172	140	U10901B	151	U20410	147
P50805	126	P70205	71	P80119	140	P80173	140	U10901R	151	U20413	147
P50806	126	P70211	131	P80123	138	P80174	140	U10901W	151	U20414	147
P50807	126	P70212	131	P80124	138	P80175	140	U10901Y	151	U20415	147
P50808	126	P70213	131	P80125	138	P80176	140	U20101C	149	U20417A	145
P50902	126	P70301	147	P80126	138	P80177	140	U20101W	149	U20418A	145
P50903	126	P70302	147	P80127	138	P80178	140	U20101B	149	U20423	148
P50904	126	P70303	147	P80128	140	P80179	140	U20301	146	U20447	146
P50905	126	P70311	130	P80129	140	P80180	140	U20302	146	U20448	146
P50906	126	P70312	130	P80130	140	P80181	140	U20303	146	U20449	146
P50907	126	P70313	129	P80131	140	P80182	140	U20304	146	U20450	146
P50908	126	P70314	130	P80132	140	P80183	141	U20305	146	U20501	151
P60102	27	P70315	130	P80133	141	P80184	141	U20306	146	U20603	151
P60103	27	P70316	130	P80134	141	P80185	141	U20307	33	U20610	149
P60104B	27	P70317	130	P80135	141	P80186	141	U20308	33	U20702	151
P60104R	27	P70318	130	P80136	138	P80187	141	U20309	33	U20802	151
P60104G	27	P70319	130	P80137	138	P80188	141	U20310	33	U30101	148
P60104W	27	P70320	130	P80138	138	P80189	141	U20311	33	U30102	148
P60104Y	27	P70321	131	P80139	138	P90101	136	U20312	33	U40101	144
P60106	30	P70322	131	P80140	138	P90102	136	U20313	33	U40102	144
P60106A	30	P70323	131	P80141	138	P90103	136	U20314	33	U40103	143
P60106A1	30	P70401	148	P80142	138	P90104	136	U20315	33	U40104	143
P60107	30	P70402	148	P80143	139	P90105	136	U20316	33	U40105	143
P60107A	30	P70501	129	P80144	139	P90106	136	U20317	33	U40106	143
P60107A1	30	P70502	129	P80145	139	P90107	137	U20318	33	U40107	143
P60108	29	P70503	129	P80146	139	P90108	137	U20319	33	U40108	143
P60109	29	P70504	129	P80147	139	P90109	137	U20320	33	U40109	143
P60110	29	P70505	129	P80148	139	P90110	137	U20321	33	U40110	143
P60112	29	P70506	129	P80149	139	P90111	137	U20322	33	U40111	143
P60113	29	P70601	131	P80150	139	P90112	137	U20323	33	U40112	143
P60114 W	30	P70602	131	P80151	140	P90113	137	U20324	33	U40113	143
P60114 B	30	P70707	130	P80152	140	P90114	138	U20325	33	U40114	143
P60114 R	30	P70708	130	P80153	140	P90115	133	U20326	33	U40120	143
P60114 Y	30	P80101	138	P80155	139	P90116	133	U20327	33	U50103	144
P60114G	30	P80102	138	P80156	139	U10201	150	U20328	33	U50104	144
P60115	28	P80103	138	P80157	139	U10202	150	U20329	33	U50110	145
P60116	28	P80104	138	P80158	139	U10301	150	U20330	33	U50111	145
P60117	28	P80105	138	P80159	139	U10302	150	U20331	32	U50112	145
P60118	28	P80106	138	P80160	139	U10303	150	U20332	32	U50113	145
P60119	30	P80107	138	P80161	139	U10304	150	U20333	32	U50114	145
P60119A	30	P80108	138	P80162	139	U10401	150	U20334	32	U50115	145
P60119A1	30	P80109	138	P80163	139	U10402	150	U20341	146		
P70101	132	P80110	139	P80164	139	U10501	150	U20342	146		

Product	Page No.	Product	Page No.
A Abdos DERMA Blue Nitrile Gloves – 9.5 inches length	146	Filter Pipette Tips, Bulk in Resealable Bags , PP	52
Abdos DERMA Blue Nitrile Gloves – 9.5 inches length	146	Filter Pipette Tips, Sterile Racked, PP	53
ABDOS Maxi Horizontal Gel Unit	104	Fixed Premium Pipette, PP	36
ABDOS Maxi Plus Horizontal Gel Unit	105	Floating Rack for Micro Centrifuge Tube, PP	21
ABDOS Midi Horizontal Gel Unit	103	Foldable Space Saving Rack, PP	20
ABDOS Mini Horizontal Gel Unit	100	Freezer Thermometer	149
ABDOS Mini Plus Horizontal Gel Unit	102	Freezing Cardboard Cryo Boxes, CARDBOARD	32
ABDOS Mini Submarine Horizontal Gel Unit	101	Freezing Tube Coders, HDPE	27
Abdos N95 Respirator Mask	145	Freezing Tubes, PP	27
ABDOS PCR Work Station	96	Frosty Mate™ Colour Change Racks, PP	115
ABDOS Vertical Dual Midi Gel System	108	Frosty Mate™ Storage Racks, PC	114
ABDOS Vertical Dual Mini Gel System	106	Funnel Holder, PP	130
ABDOS Vertical Midi – Gel System	107	Funnel, PP	130
AEROVAC–Oil–Free Vacuum Pumps	180	G Glove Box Holder, Acrylic	147
Amber Narrow Mouth Bottle, HDPE	120	H Handypette Pipette Aid	70
Amber Wide Mouth Bottle, HDPE	121	Heavy Duty Wide Mouth Carboy with Stopcock, HDPE	123
Animal Cage, PP/SS	132	Hi/Lo Temperature Tape	152
Aspirator Bottle with Stopcock, PP	122	High Temperature Indicator Tape	152
Assorted Workstation storage Bin, ACRYLIC	132	HOTBLOCK – LED Digital Dry Bath	161
Autoclavable Bags, PP	143	K Kimtech Science Kimwipes Wipers	147
B Beakers With Handle, PP & TPX	126	L Large Volume Filter Pipette Tips, Bulk in Resealable Bags, PP	52
Beakers Without Handle, PP & TPX	126	Large Volume Pipette Tips, Bulk in Resealable Bags, PP	44
Bio Reaction Tubes, PP	87	Last Drop™, Low Retention Pipette Tips, Bulk in Resealable Bags, PP	48
BIOFILL Bottle Top Filtration System	88	Last Drop™, Low Retention Pipette Tips, Racked, PP	49
BIOFILL QUICK–CONNECT PEDESTAL SYSTEM	90	Last Drop™, Low Retention Pipette Tips, Refill Pack, PP	49
Biohazard Disposable Bags, PP	143	Last Drop™, Low Retention Pipette Tips, Sterile Racked, PP	49
Burette Clamp, PP	131	Last Drop™, Low Retention Filter Pipette Tips, Bulk in Resealable Bags , PP	55
C Carboy Wide Mouth, PP	123	LAST DROP™, Low Retention Micro Centrifuge Tubes, PP	14
Carboy with Stopcock, PP	122	Last Drop™, Low Retention Filter Pipette Tips – Racked, PP	56
Carboy, PP	122	Last Drop™, Low Retention Filter Pipette Tips – Sterile Racked, PP	56
Cell Culture Dish, PS	86	Last Drop™, Low Retention Refill Filter Pipette Tips – Sterile, PP	56
Cell Culture Flasks, PS	84	M Magnetic Retrievers, PTFE/ALNICO V MAGNET	141
Cell Scraper, PP/HIPS	86	Magnetic Stirrer Bar With Pivot Ring, PTFE/ALNICO V MAGNET	138
Cell Spreader Gamma Radiated Sterile, PP	80	MaxiRCF™ Trace Metal Free Centrifuge Tubes	18
Cell Strainers	86	Measuring Cylinder, PP Class “B”	127
Centrifuge Tube Box, PP	19	Measuring Cylinder, TPX Class “A”	127
Centrifuge Tubes Conical Bottom, PP/HDPE	16	Measuring Cylinder, TPX Class “B”	127
Centrifuge Tubes Conical Bottom, PS/HDPE	16	Media Bottles, PETG	88
Centrifuge Tubes Self Standing, PP/HDPE	17	Micro Centrifuge Tubes, PP	14
Click Together Conical Tube Racks, ABS	20	Micro Magnetic Stirrer Bar, PTFE/ALNICO V MAGNET	138
Conical Flask, PP	128	Microprocessor based Programmable Power Supply	110
Container Seal	149	Microscope Slide File, HIPS	137
Coplin Jar	136	Multi Combination Racks, PP	112
Cross–spin Magnetic Stirrer Bars, PTFE/ALNICO V MAGNET	141	Multipurpose Labeling Tape	151
Cryo Apron	32	Multi–Tape Dispenser	151
Cryo Box, PC	31	N Narrow Mouth Bottle (Carboy Type), PP	120
Cryo Box, System 100 places, PC	31	Narrow Mouth Bottle, HDPE	119
Cryo Coders for External & Internal Threaded Vials, HDPE	30	Narrow Mouth Bottle, LDPE	119
Cryo Cube Box / Storage Cube Box, PP	32	Narrow Mouth Bottle, PP	119
Cryo Gloves	33	O Octagonal Magentic Stirrer Bar, PTFE/ALNICO V MAGNET	140
Cryo Vial External Thread, PP	28	Oval Magentic Stirrer Bar, PTFE/ALNICO V MAGNET	140
Cryo Vial Internal Thread, PP	29	P Parafilm M	148
Cryo–Babies and Cryo–Tags	149	Parafilm M Dispenser, ABS	148
Cylindrical Magnetic Stirrer Bar, PTFE/ALNICO V MAGNET	139	Parafilm M Dispenser, ACRYLIC	148
D Deep Well Plates Family, PP	94	Pasteur Pipettes, LDPE	73
Digital Model Power Supply	109	PCR Plates Family, PP	93
Double Ended Magnetic Stirrer Bars, PTFE/ALNICO V MAGNET	141	PCR STRIP TUBES– 8 Strips & 12 Strips, PP	92
Double Jumbo Test Tube Rack, RPP	116	PCR Tubes, PP	92
Dropping Bottle Euro Type, LDPE	124	PCR workstation rack with lid, PP	95
Dropping Bottle, LDPE	124	PCR Workup Rack, PP	95
Drying Rack, SS	132	Petri Dish Stand, ACRYLIC	80
Dual Purpose Scoop, HDPE	129	Petri Dish, PS	78
E Empty Micro Tip Box, PP	57	Petri–Seal	151
Expanding Tube Rack, PP	113	Pipette Rack Stand (Carsol Type), PP	40
F Fast Release Pipette Pump	70	Pipette Rack Stand, ACRYLIC	39
Filter Pipette Tips – Racked, PP	53		

Product	Page No.	Product	Page No.
P Pipette Stand Horizontal, PP	72	Stepmate Stepper	66
Pipette Stand Vertical, PP	71	Storage Vial, PP	30
Pipette Storage Rack with Magnet, ABS	72	Strip Caps, PP	92
Pipette Storage Rack, ABS	72	Supreme Bottle Top Dispenser	67
Pipette Tips, Bulk in Resealable Bags, PP	44	Supreme Duet Bottle Top Dispenser	68
Pipette Tips, Racked, PP	45	Supreme Plus Bottle Top Dispenser	67
Pipette Tips, Refill Pack, PP	45	Swirl Clinical Centrifuge	24
Pipette Tips, Sterile Racked, PP	45	Swirl Maxi Micro Centrifuge	22
Plain and Vacuum Desiccator, PP/CC	134	Swirl Micro Plate Centrifuge	25
Plain Magentic Stirrer Bar, PTFE/ALNICO V MAGNET	139	Swirl Mini Centrifuge	21
Polygrid Test Tube Racks, PP	117	Swirl Pro High Speed Micro Centrifuge	23
Polywire Racks, Delrin	117	Swirlex - Digital Handheld Homogenizer	81
Powder Funnel, PP	130	Swirlex - Flapping Homogenizer (Stomaker)	82
PPE Kit	145	Swirlex - LCD Digital Overhead Stirrer	165
Premium Electronic Pipette	40	Swirlex - Microplate Mixer	168
Premium Pipettes Semi-Autoclavable, PP	36	Swirlex - Vortex Shaker	167
Premium Plus 12-Channel Adjustable Multichannel Pipette	39	Swirlmax - Tube Roller	160
Premium Plus 8-Channel Adjustable Multichannel Pipette	39	Swirltop - 7 inch LCD Digital Magnetic Stirrer & Hot Plate	158
Premium Plus Pipettes Fully-Autoclavable, PP	37	Swirltop - Digital (LCD) Magnetic Stirrer & Hot Plate	156
PureRight™ Individually Wrapped Centrifuge Tube Conical Bottom, PP/HDPE	17	Swirltop - Digital (LED) Magnetic Stirrer & Hot Plate	155
PureRight™ Filter Pipette Tips, Individually Wrapped, Sterile , PP	52	Swirltop - Multi Channel Magnetic Stirrer & Hot Plate	159
PureRight™ Last Drop Low Retention Filter Pipette Tips, Individually, Wrapped, Sterile, PP	55	Swirltop - Ultra Flat & Eco Magnetic Stirrer	154
PureRight™ Last Drop Low Retention Pipette Tips, Individually Wrapped, Sterile, PP	48	SWIRLTOP- 380°C Digital Magnetic Stirrers & Hotplate	157
PureRight™ Pipette Tips, Individually Wrapped, Sterile , PP	44	T Test Tube Rack, RPP & PC	116
R Rack For Micro Centrifuge Tube, PC	19	THERMO MIX- LCD Digital	163
Rack for Micro Centrifuge Tube, RPP	19	Tissue Culture Treated Plates, PS	85
Racked Centrifuge Tubes Conical Bottom, Paper	17	Tough - Tag Station	151
Rave Pipette Controller, PP	70	Tough Spots	150
Rave Pipette Filler	71	Tough Tags	150
Reagent Reservoir, HIPS	57	Transport/ Resealable Bags with Zip Lock, PE	143
Reagent reservoir, PP	94	Triangular Magnetic Stirrer Bar, PTFE/ALNICO V MAGNET	140
Refill Filter Pipette Tips, Sterile PP	53	Twisty Tube Rack, PP	113
Retort Stand, PP/PE Coated Rod	131	U Universal Centrifuge Tube Rack, PP	20
Reversible Rack with Cover, PP	113	Utility Tray	133
RIA Vial & Cap / Test Tube & Cap	74	V Vacuum Guage Round / Cubic Desiccator	135
Roller Bottles, PS	87	Volumetric flask, TPX, Class A	128
Rotator Workstation, PP	112	W Wash Bottle (Comet), LDPE	124
Rubber Pipette Pump	70	Wash Bottle, LDPE	124
S Safeskin Purple Nitrile Gloves, 9.5 & 12 inches length	146	Water Bottle for Animal Species, PP/SS	133
Safety Face Shield	144	Water Proof Cryo Gloves	33
Safety Goggles Box, ACRYLIC	144	Wavemax - Digital (3D) Dancing Shaker	173
Safety Goggles, PC	144	Wavemax - Digital Rocking Shaker	172
Sample Container, PP/HDPE	75	Wavemax - Heavy Duty LCD Digital Orbital & Linear Shaker	177
Scoop, HDPE	128	Wavemax - Incu-shaker Mini	179
Sealing Films, Aluminium	94	Wavemax - LED Digital Orbital & Linear Shaker	175
Sealing Films, Polyester	93	Wavemax - Orbital Shaker	174
Sealing Mats, Silicone	93	Wavemax - Orbital Shaker Junior	174
Separatory Funnel , PP	131	Wavemax-Digital Incubator	178
Separatory Funnel Holder, PP	131	Wavex - Classic Rotating Mixer	170
Serological Pipettes Sterile, PS	69	Wavex - Classic Tube Rotator	168
Sharp Container, PP	144	Wavex - LCD Tube Rotator	169
Single Hand Cryo Holder Rack, PP	30	Wavex-LCD Rotating Mixer	171
Slide Box, ABS	136	Weighing Boats, PS	129
Slide Dispenser, PS	136	Wide Mouth Bottle, HDPE	121
Slide Drain Rack, HIPS	137	Wide Mouth Bottle, LDPE	121
Slide Mailer, PP	137	Wide Mouth Bottle, PP	120
Slide Staining System, Acetal	138	Wings Magnetic Stirrer Bar, PTFE/ALNICO V MAGNET	141
Slide Storage System, HIPS	137	Wire Sample Container Rack, Epoxy Coated Steel	75
Slide Tray, PS	136	Workstation storage/ Dispenser Bin, ACRYLIC	132
Soft Inoculation Loop, ABS	80	Wypall L30 Wipers	148
Spatula, PP	130	Wypall X70 Wipers	147
Speciality Indicator Tape for Steam Autoclave	152		
Spray Bottle, LDPE	123		
Square Sealing Mats for Deep Well Plates Family, Silicone Rubber	95		

Terms & Conditions of Sale

- The Price list includes 'Abdos' Brand products and Products from other manufacturers.
- All prices are at-door delivery basis within India or our consignee.
- The price for an item of the special requirement will be quoted on request.
- This cancels all our previous price list.
- Our responsibility shall be within the competent courts in Kolkata.
- Goods will be dispatched in standard packaging or multiple thereof.
- Capacity measures are for laboratory use only and not for commercial use.
- The company reserves the rights to change the colour and modify the design.
- The price is effective from 1st July 2020.
- GST will be charged extra as applicable.
- Due to unforeseen conditions beyond control, the company reserves the rights to change the pricing.

© April 2020. All rights reserved.

Every effort has been made to ensure the content of this publication is correct. ABDOS Labtech Pvt. Ltd. cannot take responsibility for any errors or omissions.

LASTDROP, FROSTY MATE, DERMA GUARD are registered Trademarks and owned by ABDOS LABTECH Pvt. Ltd.

MaxiRCF, PureRight, Premium Plus, SUPER, SWIRL, SWIRLEX, Swirlmax, Swirltop, BIOFILL, AEROVAC, Wavemax, Wavex, Thermo Mix, HOTBLOCK are Trademarks of ABDOS Labtech Pvt. Ltd.



ABDOS LABTECH PRIVATE LIMITED

Reg. Office : 13A, Govt. Place East, 2nd Floor, Kolkata – 700069, West Bengal – INDIA

Head Office: 319, DLF Tower – A, DDA District Center, Jasola, New Delhi – 110025, INDIA

Europe: Columbusweg 10, 5928 LC Venlo, NETHERLANDS

Work: Shiv Ganga Industrial Estate, Plot No. 1 Lakeshwari, Bhagwanpur, Roorkee – 247667 Uttarakhand, INDIA

Ph: +(91) 11 41081897 **F:** +(91) 11 45644222 **E:** labtech@abdosindia.com **W:** www.abdoslifesciences.com