

lighting your vision.



AFK





As we have for over 75 years, AFX offers a diverse and evolving array of **The Inside Advantage** energy-saving, affordable lighting solutions for commercial and residential spaces.


An industry leader in LED, fluorescent and other light sources, we have maintained our respected position in the lighting industry. Our growth has paralleled the development and advancement of energy-efficient fluorescent and LED lighting. By fully understanding the needs and expectations of our customers, we will continue advancing the use of sustainable LED lighting solutions with the focus of reducing energy consumption, operating and maintenance costs.

When you select AFX, you're choosing the best. We offer award-winning decorative fixtures that fuse design with technology. Our commitment to superior engineering ensures we consistently deliver high quality and technologically-advanced lighting products.

lighting your vision.

With versatile, energy-efficient lighting solutions for a wide-range of commercial and residential applications, AFX products provide the performance you need in decorative designs that blend with any architectural style.



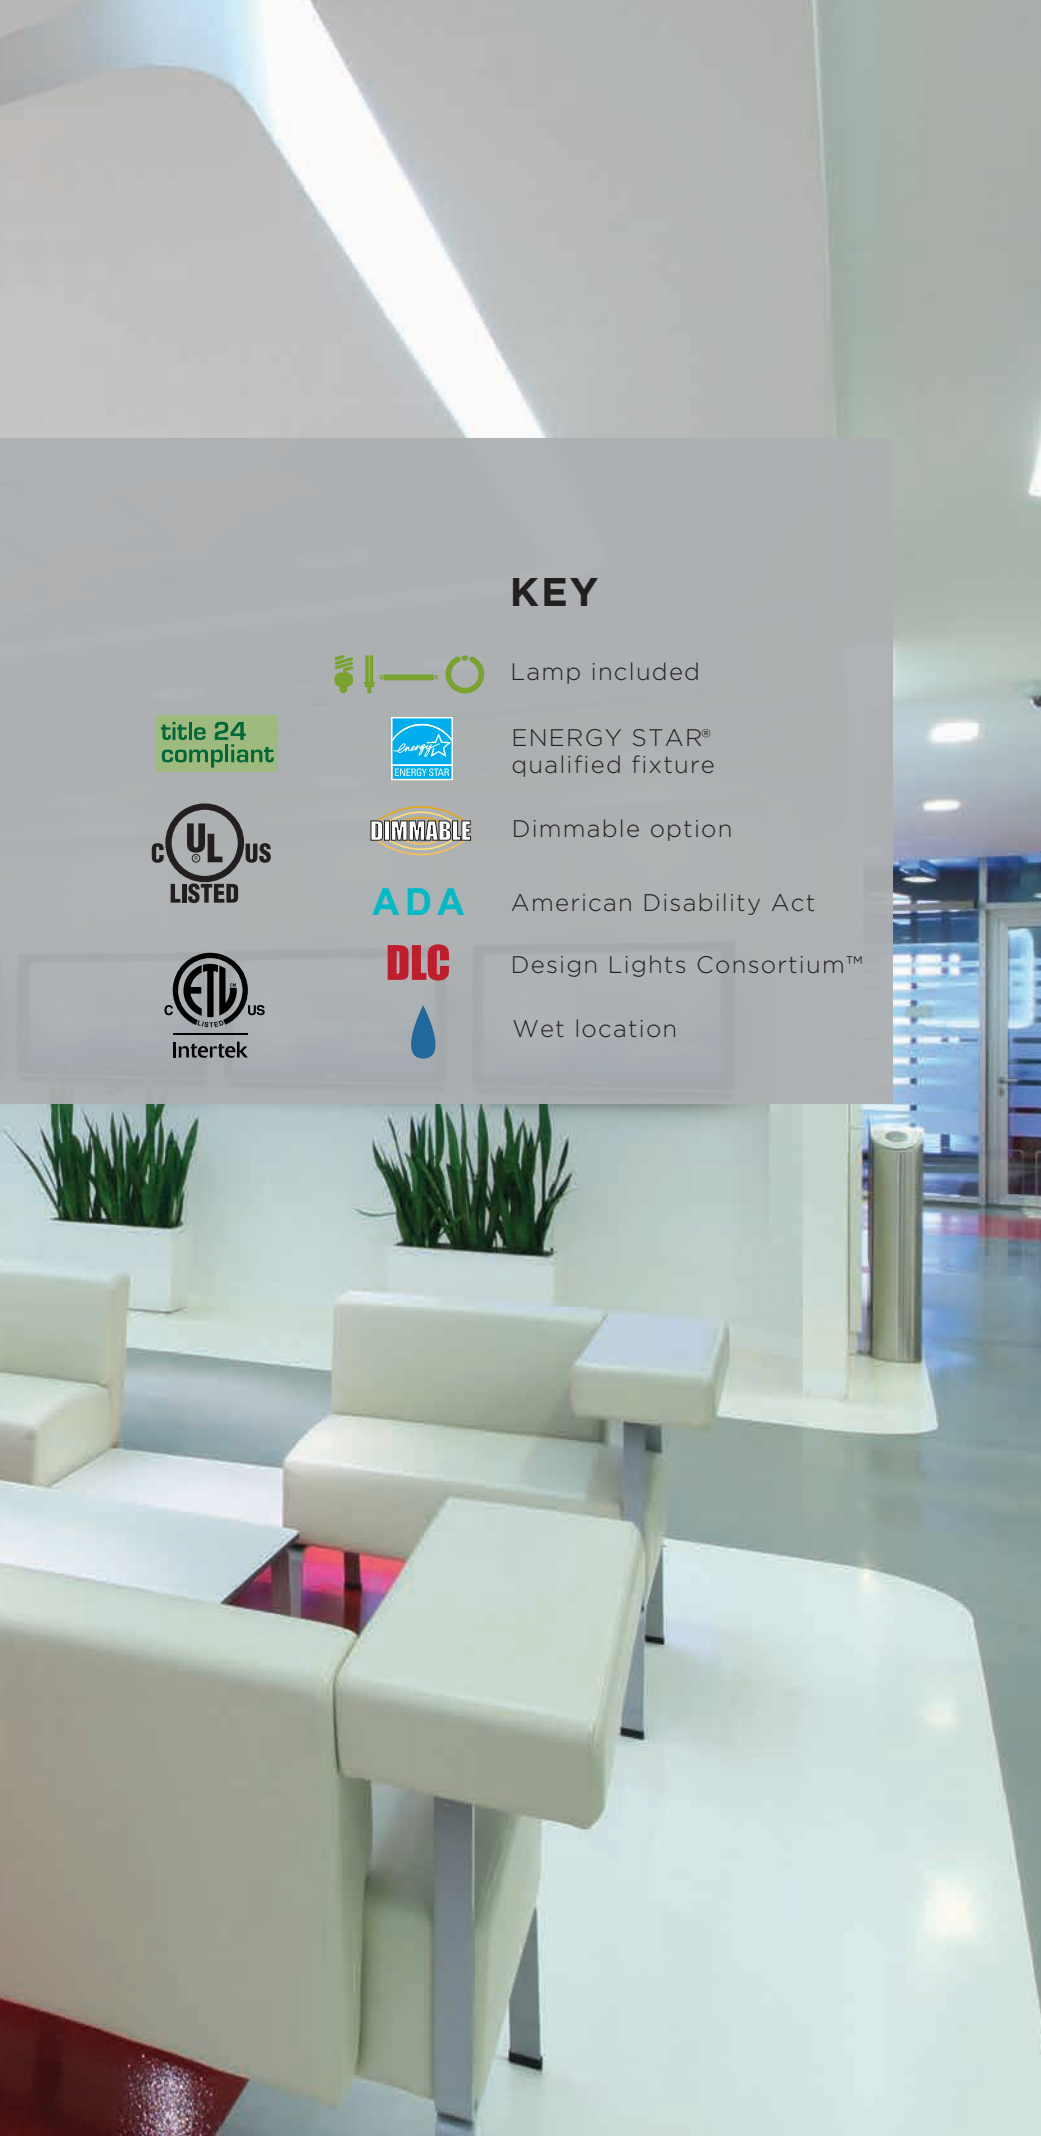

KEY



Lamp included

title 24
compliant



ENERGY STAR®
qualified fixture



Dimmable option



American Disability Act



Design Lights Consortium™



Wet location

Collection

p.4

Pendant

p.17

Sconce

p.35

Vanity

p.61

Fixed Rail

p.73

Ceiling

p.77

Decorative Linear

p.97

Outdoor

p.109

Overbed

p.119

Undercabinet

p.125

Hera

p.132

MP Lighting

p.140

Reference/Index

p.154



COLLECTION

Decorative lighting collections allow for design continuity and provide limitless options for décor with companion lighting fixtures.



CORTEZ

Sheer elegance can be found throughout this contemporary collection. Shade-in-shade design combining a sheer organza fabric outer shade and a white linen inner shade to give these fixtures a sophisticated look in satin nickel and oakley bronze finish. The Cortez Collection includes: ceiling, pendant, sconce and vanity fixtures. Custom organza shade colors are available.



ALGIERS

Simplistic contemporary collection featuring an unassuming, clean design with metal end covers. The fixtures include a linen acrylic front diffuser with frosted white acrylic top and bottom diffusers. Satin nickel and oakley bronze finish. The Algiers Collection includes: ceiling, sconce and vanity fixtures.



p. 86



p. 47



p. 64

NOLAN

This transitional designer line features glass-in-glass design with a clear outer glass cylinder surrounding a frosted white inner acrylic diffuser in either oakley bronze or satin nickel finish. The Nolan Collection includes: ceiling, sconce and vanity fixtures.



p. 51



p. 51



p. 87



p. 62



p. 34



p. 34



p. 34

ARIA

A great solution for any décor, this sleek and contemporary collection features hand-blown frosted glass diffusers. High finish die-cast housing in satin nickel or oil-rubbed bronze finish. The Aria Collection includes: multiple pendants, vanity, indoor/outdoor ceiling and sconce fixtures.



p. 64



p. 55



p. 111



p. 110



p. 110



p. 66



p. 89

TAYLOR

Clean, straight lines highlight this contemporary collection, featuring white linen acrylic shades and polished chrome finish trim. The ceiling fixture features an inter-connectable option allowing for various patterns or runs. The Taylor Collection includes: sconce, ceiling and vanity fixtures.



p. 53



p. 53

SHERIDAN

Make a bold statement with this transitional style collection showcasing white linen acrylic or hard-back linen shades with decorative accent details in die-cast metal. Champagne and satin nickel finish. The Sheridan Collection includes: ceiling, sconce, vanity and overbed fixtures.




p. 48



p. 48



p. 83

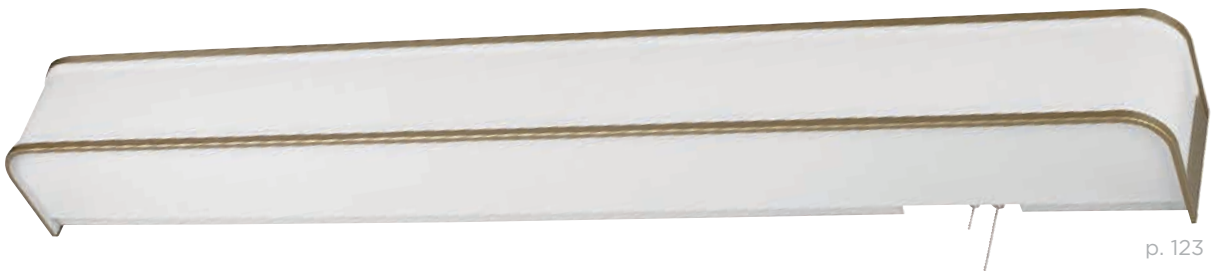

p. 123



p. 57

BILBAO

Designed to complement today's contemporary architecture, the Bilbao utilizes white glass and acrylic diffusers with clean, well-designed geometric banded rings in a satin aluminum finish. The Bilbao Collection includes: ceiling, pendant, vanity, overbed, indoor and outdoor sconce fixtures.



p. 57



p.91



p. 113



p. 31



p. 124



p. 67



p. 90



p. 59



p. 111



p. 111

CENTURY

Modern art deco design in this contemporary collection featuring a simple curved white diffuser and sculpted polished chrome details. The Century Collection includes: ceiling, indoor and outdoor sconces and vanity fixtures.



p. 66



p. 66

FUSION

Nature inspired, contemporary collection featuring uniquely patterned textured white glass diffuser in a satin nickel finish. The Fusion Collection includes: ceiling, indoor and outdoor sconces and vanity fixtures.



p. 68



p. 68



p. 90



p. 113



p. 113



p. 58

COLLECTION

IDEAL


A practical choice, this contemporary line featuring a simple and clean design with smooth white acrylic and opal glass diffusers. High finish satin nickel details. The Ideal Collection includes: ceiling, sconce and overbed fixtures.



p. 57



p. 94

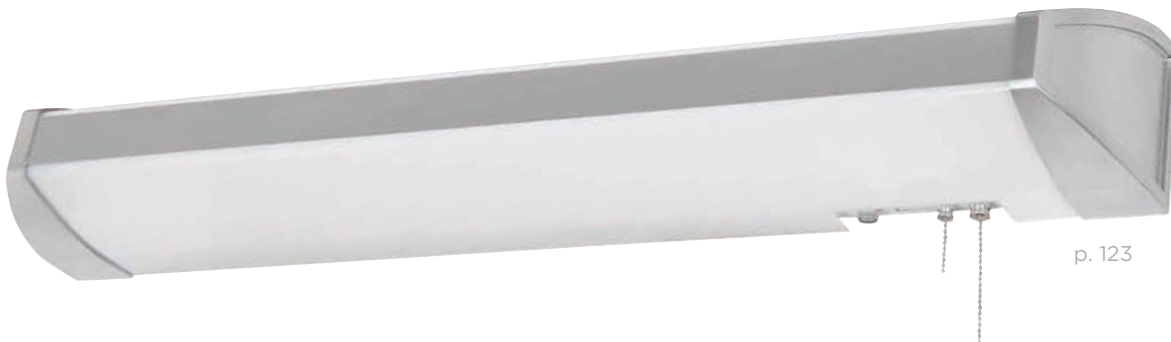

p. 123



PENDANT

Versatile, energy-saving pendant lighting solutions provide task and accent lighting, but with a decorative flair. Available in a variety of diffuser styles, color options and canopy finishes to add flexibility to your design.



Black



Orange



White



Silver

ORA

- Aluminum ring with powder coated finish
- 8 ft. adjustable cord with twist-lock strain relief
- Silver powder coated canopy

LED

- 50,000 hr. LED life, available in 900 lumens (12W), 80 CRI

Series	Size (Inches)		LED	CCT	Driver	Color	Diffuser
	DIA.	Lumens					
ORP	12	900	L	30 3000K	D2 Voltage (120-277V 0-10V Dimming)	BK Black OG Orange SL Silver WH White	WA White Acrylic


Example: ORP12900L30D2OG-WA



Canopy




Black



Silver



White



Orange

See page 153 for listing of expanded colors





OKETO

- Aluminum cylinder with powder coated finish
- 8 ft. adjustable cable

LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI



Silver

White



Black
Clear Crackle

PENDANT

Series	Size (Inches)		Lumens	LED	CCT	Driver	Color	Finish Glass	Diffuser Option*
	DIA.	H							
OTP	2	06 12 18	450	L	27 2700K 40 4000K	D1 Voltage (120V TRIAC Dimming) MV Voltage (120V-277V Universal Non-Dimming)	BK Black SL Silver WH White	SN Satin Nickel	Blank No Diffuser CC Clear Crackle CS Clear Seeded

Example: OTP218450L40D1BKSNCC

*Add 1-1/2" to length of fixture when adding glass diffuser option



Canopy



Black



Silver



White

See page 153 for listing of expanded colors



Clear Crackle



Clear Seeded

Companion



VIEW

- Soft frosted glass cylinder inner clear outer glass
- 8 ft. adjustable cable with twist lock strain relief

LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI


4-5/8" DIA. x 16" H

Series	Lumens	LED	CCT	Glass	Finish	Driver
VIP	450	L	27 2700K 40 4000K	AM Amber BR Brown CR Cream WH White	SN Satin Nickel KB Oakley Bronze	D1 Voltage (120V TRIAC Dimming) MV Voltage (120-277V Universal Non-Dimming)

Example: VIP450L27AMSND1



See page 25 for hanging multiple pendants



SOHO

- Soft frosted glass cylinder inner clear outer glass
- 8 ft. adjustable cable with twist lock strain relief

LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI


3-7/8" DIA. x 14" H

Series	Lumens	LED	CCT	Glass	Finish	Driver
SSP	450	L	27 2700K 40 4000K	AM Amber BR Brown CR Cream WH White	SN Satin Nickel KB Oakley Bronze	D1 Voltage (120V TRIAC Dimming) MV Voltage (120-277V Universal Non-Dimming)

Example: SSP450L40BRSND1



See page 25 for hanging multiple pendants



NIA

- Curved cylinder with patterned silk screen frosted glass
- 8 ft. adjustable cable with twist lock strain relief



LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI


6" DIA. x 16" H

Series	Lumens	LED	CCT	Glass	Finish	Driver
NIP	450	L	27 2700K 40 4000K	AM Amber BR Brown CR Cream WH White	SN Satin Nickel KB Oakley Bronze	D1 Voltage (120V TRIAC Dimming) MV Voltage (120-277V Universal Non-Dimming)

Example: NIP450L27CRSND1




See page 25 for hanging multiple pendants

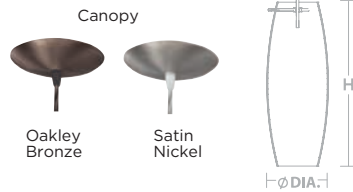

ENZO

- Frosted white glass inside a tinted elliptical outer glass
- 8 ft. adjustable cable with twist lock strain relief

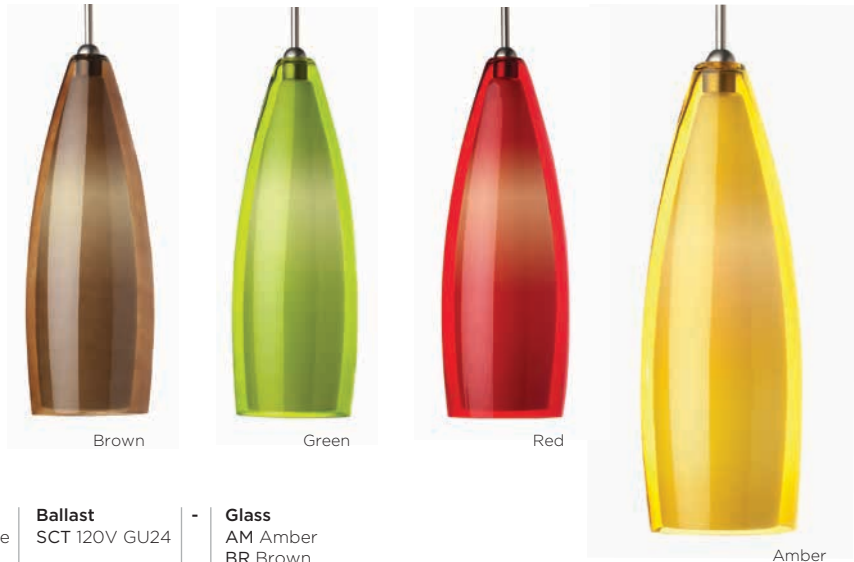

FLUORESCENT

- GU24 lamp included (2700K)


5-3/4" DIA. x 17" H

Series	Qty.	Lamp	Finish	Ballast	Glass
ENP	1	13 13W GU24 18 18W GU24	KB Oakley Bronze SN Satin Nickel	SCT 120V GU24	AM Amber BR Brown GN Green RD Red

Example: ENP18KBSCT-AM



See page 25 for hanging multiple pendants



BELLA

- Tear drop shaped mini glass pendant
- 8 ft. adjustable cable with twist lock strain relief

LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI


3-3/8" DIA. x 6-1/2" H

Series	Source Lumens	CCT	Glass	Finish	Driver
BEPL	450	27 2700K 40 4000K	AM Amber BU Blue RD Red WH White	RB Rubbed Bronze SN Satin Nickel	D1 Voltage (120V TRIAC Dimming) MV Voltage (120-277V Universal Non-Dimming)

Example: BEPL45027AMRBD1



See page 25 for hanging multiple pendants

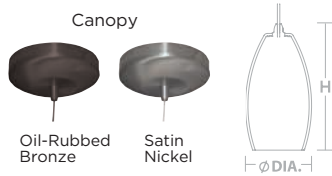

LAVEER

- Cone shaped mini glass pendant
- 8 ft. adjustable cable with twist lock strain relief

LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI


4-1/2" DIA. x 7" H

Series	Source Lumens	CCT	Glass	Finish	Driver
LAPL	450	27 2700K 40 4000K	AM Amber BU Blue GR Green WH White	RB Rubbed Bronze SN Satin Nickel	D1 Voltage (120V TRIAC Dimming) MV Voltage (120-277V Universal Non-Dimming)

Example: LAPL45040BUSNMV



See page 25 for hanging multiple pendants

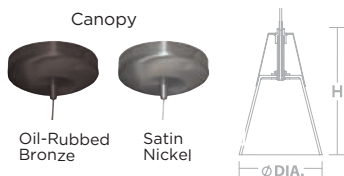

ESSEX

- Drop shaped mini glass pendant
- 8 ft. adjustable cable with twist lock strain relief

LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI


4-1/4" DIA. x 5" H

Series	Lumens	CCT	Glass	Finish	Driver
SXPL	450	27 2700K 40 4000K	AM Amber BU Blue RD Red WH White	RB Rubbed Bronze SN Satin Nickel	D1 Voltage (120V TRIAC Dimming) MV Voltage (120-277V Universal Non-Dimming)

Example: SXPL45040WHSND1



See page 25 for hanging multiple pendants

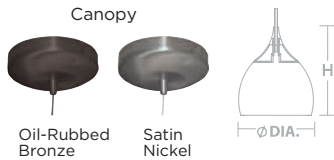

Blue

Amber

Red



White

GEO

- Cube shaped mini glass pendant
- 8 ft. adjustable cable with twist lock strain relief

LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI


3-1/8" DIA. x 3-7/8" H

Series	Lumens	CCT	Glass	Finish	Driver
GEPL	450	27 2700K 40 4000K	WH White	RB Rubbed Bronze SN Satin Nickel	D1 Voltage (120V TRIAC Dimming) MV Voltage (120-277V Universal Non-Dimming)

Example: GEPL45040WHRBD1



See page 25 for hanging multiple pendants

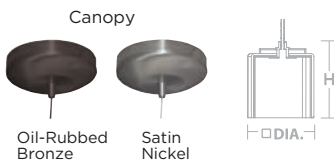

PENDANT



ROUND canopy

• 3-point and 6-point canopies for displaying multiple pendants

Satin Nickel	Rubbed Bronze	POINT	DIA.	H
CAN-RND3-SN	CAN-RND3-RB	3	1-3/8"	15-1/8"
CAN-RND6-SN	CAN-RND6-RB	6	1-3/8"	15-1/8"



Oil-Rubbed Bronze



Satin Nickel

LINEAR canopy

• 3-point canopies for displaying multiple pendants

Satin Nickel	Rubbed Bronze	POINT	L	W	D
CAN-LNR3-SN	CAN-LNR3-RB	3	41"	5-1/4"	1-5/8"



Oil-Rubbed Bronze



Satin Nickel

PENDANT



AMBROSE

- LumaFuse™ laminated fabric/acrylic shade
- White bottom acrylic diffuser
- 8 ft. adjustable cord/cable

LED

- 50,000 hr. LED life, available in 2400 lumens (15W) or 3200 lumens (35W), 90 CRI

19" DIA. x 8-1/2" H


24" DIA. x 8-1/2" H



Linen White

Series	Size (Inches)		LED	CCT	Driver	Finish	Shade
	DIA.	Lumens					
ABP	19	= 2400	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	SN Satin Nickel	JT Jute
	24	= 3200		30 3000K			LW Linen White

Example: ABP243200L30D2SN-LW

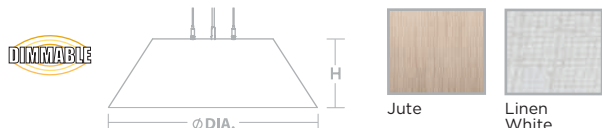

WILLOW

- LumaFuse™ laminated veneer/acrylic shade
- White bottom acrylic diffuser
- 8 ft. adjustable cord/cable

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (25W) or 3200 lumens (35W), 90 CRI

12-1/4" DIA. x 4-7/8" H

15" DIA. x 4-7/8" H


19-1/4" DIA. x 5-5/8" H



Grey Veneer

Series	Size (Inches)		LED	CCT	Driver	Finish	Color
	DIA.	Lumens					
WLP	12	= 1400	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	SN Satin Nickel	GV Grey Veneer
	15	= 2400		30 3000K			
	19	= 3200					

Example: WLP152400L30D2SN-GV

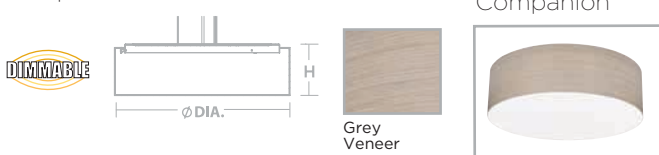



PENDANT

ANTON

- LumaFuse™ laminated fabric/acrylic shade
- White bottom acrylic diffuser
- 8 ft. adjustable cord/cable

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (25W) or 3200 lumens (35W), 90 CRI

12-1/4" DIA. x 4-7/8" H

15" DIA. x 4-7/8" H


19-1/4" DIA. x 5-5/8" H

Series	Size (Inches)		LED	CCT	Driver	Finish	Shade
	DIA.	Lumens					
ANP	12	= 1400	L	27	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	SN Satin Nickel	JT Jute LW Linen White
	15	= 2400		30			
	19	= 3200					

Example: ANP121400L30D2SN-LW



Jute



Companion



RHOME

- LumaFuse™ laminated fabric/acrylic shade
- White bottom acrylic diffuser
- 8 ft. adjustable cord/cable

LED

- 50,000 hr. LED life, available in 3200 lumens (35W) or 4400 lumens (40W), 90 CRI

24" DIA. x 9-3/4" H



30" DIA. x 9-3/4" H

Series	Size (Inches)		LED	CCT	Driver	Finish	Shade
	DIA.	Lumens					
RHP	24	= 3200	L	27	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	SN Satin Nickel	JT Jute LW Linen White
	30	= 4400		30			

Example: RHP304400L30D2KB-JT



Jute



Companion





DAYTON

- Two-tier white linen fabric shade
- White bottom acrylic diffuser
- 8 ft. adjustable cable
- Optional 36 in. stem/canopy kit - Part # DYKR24SN (12 in. & 24 in. stems available - order separately)

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI


Satin Nickel	Source		CCT	DIA.	H
	LED	Lumens			
DYP243200L27D1SN	35W	3200	2700K	24"	9"
DYP243200L27D2SN	35W	3200	2700K	24"	9"
DYP243200L30D1SN	35W	3200	3000K	24"	9"
DYP243200L30D2SN	35W	3200	3000K	24"	9"
DYP304400L27D1SN	40W	4400	2700K	30"	12"
DYP304400L27D2SN	40W	4400	2700K	30"	12"
DYP304400L30D1SN	40W	4400	3000K	30"	12"
DYP304400L30D2SN	40W	4400	3000K	30"	12"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Qty.	Lamp	DIA.	H
DYP418SNMV	4	18W CFQ 4-Pin	24"	9"
DYP618SNMV	6	18W CFQ 4-Pin	30"	12"



PENDANT

SANIBEL

- Shade-in-shade LumaFuse™ laminated fabric/acrylic
- White bottom acrylic diffuser
- 8 ft. adjustable cord/cable

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (25W) or 3200 lumens (35W), 90 CRI

16" DIA. x 5-5/8" H
 18" DIA. x 5-5/8" H
 23-1/4" DIA. x 5-5/8" H

Series	Size (Inches)			CCT	Driver	Finish	Shade
	DIA.	Lumens	LED				
SAP	16	= 1400	L	27	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	SN Satin Nickel	JT Jute LW Linen White
	18	= 2400		30			
	23	= 3200					

Example: SAP182400L30D1SN-JT



Jute



Jute



Linen White

Companion



MONTCLAIR

- LumaFuse™ laminated fabric/acrylic shade
- Fully illuminated stepped white acrylic bottom diffuser
- 8 ft. adjustable cord/cable

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (25W) or 3200 lumens (35W), 90 CRI



12" DIA. x 3-1/2" H
 15" DIA. x 3-1/2" H
 19" DIA. x 4" H

Series	Size (Inches)			CCT	Driver	Finish	Shade
	DIA.	Lumens	LED				
MCP	12	= 1400	L	27	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	SN Satin Nickel	BK Black
	15	= 2400		30			
	19	= 3200					

Example: MCP193200L27D1SN-BK



Black



Black

Companion



OSLO

- LumaFuse™ laminated fabric/acrylic shade
- Domed white bottom acrylic diffuser
- 8 ft. adjustable cord/cable

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), or 2400 lumens (35W), 90 CRI

17" DIA. x 4-1/8" H
24" DIA. x 5" H

Series	Size (Inches)		LED	CCT	Driver	Finish	Shade
	DIA.	Lumens					
OSP	17	= 1400	L	27	2700K	SN Satin Nickel	JT Jute LW Linen White
	24	= 2400		30	3000K		

Example: OSP171400L27D2SN-LW



Linen White

BILBAO

- Linear extruded aluminum accent bands
- White acrylic diffuser
- 36 in. stem kit (12 in. & 24 in.) included

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Aluminum	LED	Source Lumens	CCT	DIA.	H
BBP253200L27D1SA	35W	3200	2700K	25"	24"
BBP253200L27D2SA	35W	3200	2700K	25"	24"
BBP253200L30D1SA	35W	3200	3000K	25"	24"
BBP253200L30D2SA	35W	3200	3000K	25"	24"
BBP314400L27D1SA	40W	4400	2700K	31"	24"
BBP314400L27D2SA	40W	4400	2700K	31"	24"
BBP314400L30D1SA	40W	4400	3000K	31"	24"
BBP314400L30D2SA	40W	4400	3000K	31"	24"




FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Aluminum	Qty.	Lamp	DIA.	H
BBP413SAMV	4	13W CFQ 4-Pin	25"	24"
BBP613SAMV	6	13W CFQ 4-Pin	31"	24"



Companion



PENDANT





CORTEZ

- Sheer organza fabric outer shade
- White linen inner shade
- White acrylic bottom diffuser
- 8 ft. adjustable cable (CZPC)
- 36 in. stem/canopy kit (CZPS)

LED

- 50,000 hr. LED life, available in 3200 lumens (35W) or 4400 lumens (40W), 90 CRI

24" DIA. x 5" H
30" DIA. x 6" H

Series	Size (Inches)		LED	CCT	Driver	Finish	Shade-In-Shade
	DIA.	Lumens					
CZPC	24	= 3200	L	30 3000K	D1 Voltage (120V TRIAC Dimming)	KB Oakley Bronze	WHWH White/White
CZPS	30	= 4400			D2 Voltage (120-277V 0-10V Dimming)	SN Satin Nickel	BZWH Bronze/White

Example: CZPS242400L30D2KB-BZWH



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included


24" DIA. x 5" H

Series	Qty.	Lamp	Finish	Ballast	Shade-In-Shade
CZPC	4	18Q 18W CFQ 4-Pin	KB Oakley Bronze	MV Voltage (120-277V Universal Non-Dimming)	WHWH White/White
CZPS			SN Satin Nickel		BZWH Bronze/White

30" DIA. x 6" H

Series	Qty.	Lamp	Finish	Ballast	Shade-In-Shade
CZPC	6	18Q 18W CFQ 4-Pin	KB Oakley Bronze	MV Voltage (120-277V Universal Non-Dimming)	WHWH White/White
CZPS			SN Satin Nickel		BZWH Bronze/White

Example: CZPC618QKBMV-WHWH



Companion



ARIA

- Frosted white case glass diffuser
- 6 ft. adjustable cord with twist lock strain relief

FLUORESCENT

- 120V electronic socket ballast
- Lamps not included




Satin Nickel	Type	Qty.	Lamp	DIA.	H	L
ARPI13SNEC	Singular	1	13W CFQ 4-Pin	2-7/8"	10-1/8"	Adj.
ARPC313SNEC	Circular	3	13W CFQ 4-Pin	15"	10-1/8"	Adj.
ARPB313SNEC	Linear	3	13W CFQ 4-Pin	-	10-1/8"	40-7/8"



Companion



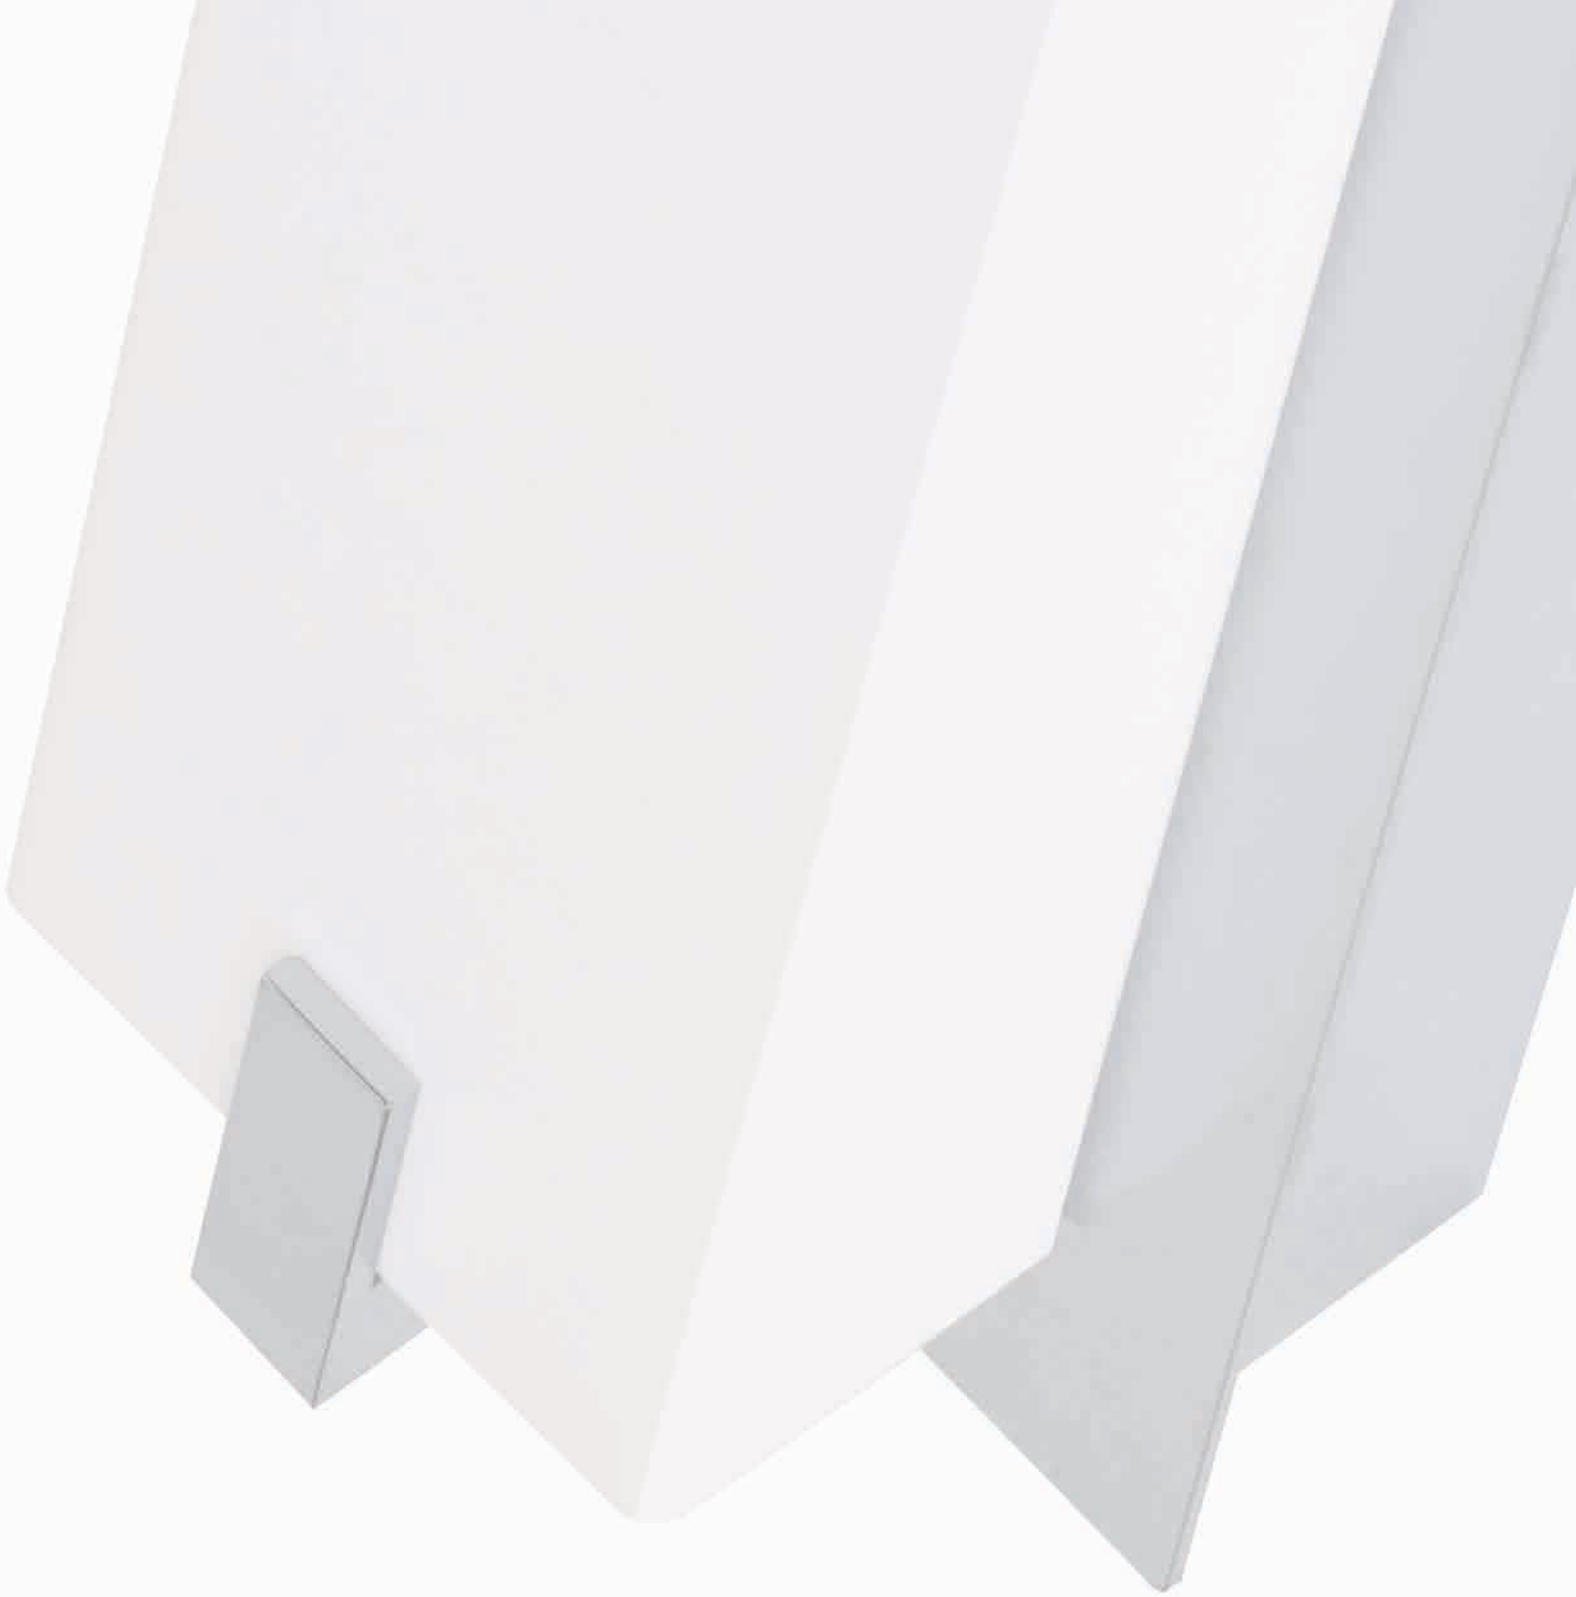

SCONCE

From contemporary to transitional, wall-mounted sconces from AFX are available in a variety of styles to complement your décor.



ABERDEEN

- LumaFuse™ laminated fabric/acrylic shade
- Solid maple wood backplate and trim

LED


- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, available in 1400 lumens (15W), 90 CRI

19" H x 5-1/2" W x 3" D

Series	Size (Inches)		Lumens	LED	CCT	Driver	Wood Finish	Shade
	W	H						
ADS	5	19	1400	L	27 2700K 30 3000K	UD Voltage (120-277V Universal Dimming)	ES Espresso MP Maple WG Weathered Grey	JT Jute LW Linen White

Example: ADS5191400L27UDCT-JT

Weathered Grey
Jute



ANTON

- LumaFuse™ laminated fabric/acrylic shade
- White top and bottom acrylic diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI



Linen
White

Linen White		Jute	LED	Source Lumens	CCT	H	W	D
ANSI08700L27UD-LW	ANSI08700L27UD-JT	7W	700	2700K	9-3/4"	9-1/2"	3-7/8"	
ANSI08700L30UD-LW	ANSI08700L30UD-JT	7W	700	3000K	9-3/4"	9-1/2"	3-7/8"	
ANSI081400L27UD-LW	ANSI081400L27UD-JT	15W	1400	2700K	9-3/4"	9-1/2"	3-7/8"	
ANSI081400L30UD-LW	ANSI081400L30UD-JT	15W	1400	3000K	9-3/4"	9-1/2"	3-7/8"	



Companion





OKETO

- Aluminum cylinder with powder coated finish

LED

- 50,000 hr. LED life, available in 700 lumens (7W) or 1400 lumens (15W), 90 CRI

10" H x 5" W x 3-3/4" D
 16" H x 5" W x 3-3/4" D
 22" H x 5" W x 3-3/4" D

Series	Size (Inches)		Lumens	LED	CCT	Driver	Color	Finish	Glass Diffuser Option**
	W	H							
OTS	5	10	700	L	27 2700K 30 3000K	D1 Voltage (120V TRIAC Dimming)	BK Black SL Silver WH White	SN Satin Nickel	Blank No Diffuser (No Optic) CC Clear Crackle (No Optic) CS Clear Seeded (No Optic) FL No Diffuser (Flood Optic)
		16							
		22							

15" H x 5" W x 3-3/4" D
 27" H x 5" W x 3-3/4" D
 39" H x 5" W x 3-3/4" D



Series	Size (Inches)		Lumens	LED	CCT	Driver	Color	Finish	Glass Diffuser Option**
	W	H							
OTSD	5	15	1400	L	27 2700K 30 3000K	D1 Voltage (120V TRIAC Dimming)	BK Black SL Silver WH White	SN Satin Nickel	Blank No Diffuser (No Optic) CC Clear Crackle (No Optic) CS Clear Seeded (No Optic) FL No Diffuser (Flood Optic)
		27							
		39							

Example: OTS5271400L30D1BKSNCC

**Add 1-1/2" to length of fixture when adding glass diffuser option



See page 153 for listing of expanded colors



Companion





Maple
Linen White

APEX

- Solid wood accent detail
- LumaFuse™ laminated fabric/acrylic shade
- White acrylic closed top and bottom

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, available in 1400 lumens (15W), 90 CRI

13-1/2" H x 5" W x 3" D

Series	Size (Inches)		Lumens	LED	CCT	Driver	Wood Finish	Shade
	W	H						
APS	5	13	1400	L	27 2700K 30 3000K	UD Voltage (120-277V Universal Dimming)	ES Espresso MP Maple WG Weathered Grey	JT Jute LW Linen White

Example: APS5131400L30UDES-LW



Companion





Grey
Linen White



Chocolate Oak
Jute

EDEN

- LumaFuse™ laminated fabric/acrylic shade
- Wood veneer trim detail
- White acrylic closed top and bottom

LED


- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, available in 1400 lumens (15W), 90 CRI

11" H x 6" W x 3" D

Series	Size (Inches)		Lumens	LED	CCT	Driver	Wood Vaneer	Shade
	W	H						
EDS	6	11	1400	L	27 2700K 30 3000K	UD Voltage (120-277V Universal Dimming)	CV Chocolate Oak Veneer GV Grey Veneer	JT Jute LW Linen White

Example: EDS6111400L27UDCV-JT

ADA



Chocolate
Oak Veneer



Grey Veneer



Jute



Linen
White

Companion




SINCLAIR


- Plated steel housing
- Frosted white acrylic diffuser
- Closed top and bottom
- Requires a rectangular J-Box for installation

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI

		LED	Source Lumens	CCT	H	W	D
Satin Nickel							
SNS410700L27UDSN	Polished Chrome	7W	700	2700K	10"	3-3/4"	3"
SNS410700L30UDSN	SNS410700L30UDPC	7W	700	3000K	10"	3-3/4"	3"
SNS4181400L27UDSN	SNS4181400L27UDPC	15W	1400	2700K	18"	3-3/4"	3"
SNS4181400L30UDSN	SNS4181400L30UDPC	15W	1400	3000K	18"	3-3/4"	3"





Black Diagonal



Stainless Steel Slotted



White Solid

NOMA

- Powder coat with pattern, die cut or solid face
- White acrylic top and bottom diffuser
- Custom cut-outs available (consult factory)

LED

- 50,000 hr. LED life, available in 500 lumens (5W), 80 CRI

4-3/4" H x 5-7/8" W x 3-5/8" D

Series	Size (Inches)		Lumens	LED	CCT	Driver	Finish	Die Cut
	W	H						
NMS	6	5	500	L	30 3000K	D1 Voltage (120V TRIAC Dimming) MV Voltage (120V-277V Universal Non-Dimming)	BK Black SS Stainless WH White	DC Diagonal SL Slotted Blank Solid

Example: NMS65500L30MVSS-SL

ADA



See page 153 for listing of expanded colors





AXEL



- Metal housing with white matte powder coated finish
- Frosted acrylic diffuser
- Ceiling or wall mount

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	H	W	D
AXF06800L30D1WH	8W	800	3000K	6"	6"	2"

ADA DIMMABLE

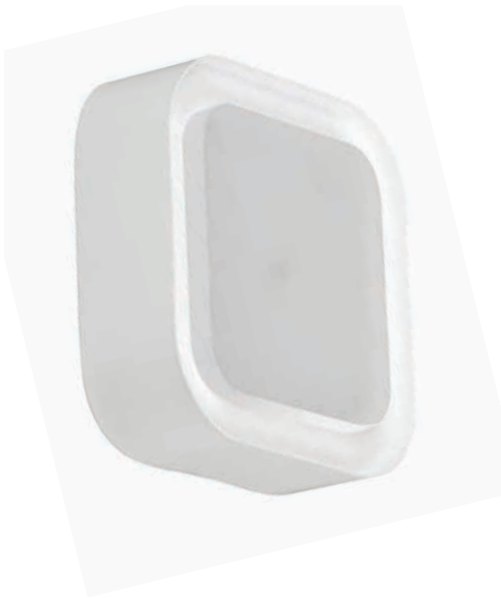

MADDOX

- Metal housing with white matte powder coated finish
- Frosted acrylic diffuser
- Ceiling or wall mount

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	H	W	D
MAF06800L30D1WH	8W	800	3000K	6"	6"	2"

ADA DIMMABLE



KASS


- Metal housing with white matte powder coated finish
- Enclosed white frosted acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	H	W	D
KAS508700L30D1WH	7W	700	3000K	8-1/8"	4-3/4"	1-7/8"

ADA DIMMABLE




GENEVA

- White metal body
- Frosted acrylic diffuser illuminated from center perimeter
- Ceiling or wall mount

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	H	W	D
GAF101300L30D1WH	13W	1300	3000K	10"	10"	2"
GAF162300L30D1WH	23W	2300	3000K	16"	16"	2"

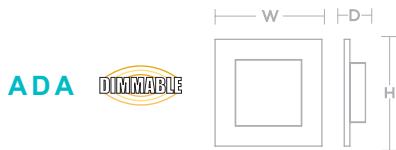

LYON

- White metal body
- Frosted acrylic diffuser illuminated from center perimeter
- Ceiling or wall mount

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	H	W	D
LYF10800L30D1WH	8W	800	3000K	10"	10"	2"
LYF161900L30D1WH	15W	1900	3000K	16"	16"	2"



ELLIPSE

- Internal edge lit
- Metal housing
- Frosted acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI
- Requires a rectangular J-Box for installation

White	LED	Source Lumens	CCT	H	W	D
ELS11081200L30D1WH	12W	1200	3000K	11-1/4"	8.5"	2"



CORTEZ

- Sheer organza fabric outer shade
- White linen inner shade with die-cast details

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI




		LED	Source Lumens	CCT	H	W	D
Satin Nickel	Oakley Bronze	15W	1400	2700K	25"	6"	4"
CZS6221400L27UDSNWHWH	CZS6221400L27UDRBWHWH	15W	1400	2700K	25"	6"	4"
CZS6221400L27UDSNBZWH	CZS6221400L27UDRBBZWH	15W	1400	2700K	25"	6"	4"
CZS6221400L30UDSNWHWH	CZS6221400L30UDRBWHWH	15W	1400	3000K	25"	6"	4"
CZS6221400L30UDSNBZWH	CZS6221400L30UDRBBZWH	15W	1400	3000K	25"	6"	4"
CZS6312100L27UDSNWHWH	CZS6312100L27UDRBWHWH	23W	2100	2700K	31-1/4"	6"	4"
CZS6312100L27UDSNBZWH	CZS6312100L27UDRBBZWH	23W	2100	2700K	31-1/4"	6"	4"
CZS6312100L30UDSNWHWH	CZS6312100L30UDRBWHWH	23W	2100	3000K	31-1/4"	6"	4"
CZS6312100L30UDSNBZWH	CZS6312100L30UDRBBZWH	23W	2100	3000K	31-1/4"	6"	4"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamp not included

		Qty.	Lamp	H	W	D
Satin Nickel	Oakley Bronze	1	FT18W/2G11	25"	6"	4"
CZS0622118PMVSNBZWH	CZS0622118PMVKBBZWH	1	FT18W/2G11	25"	6"	4"
CZS062218PMVSNWHWH	CZS062218PMVKBWHWH	1	FT18W/2G11	25"	6"	4"
CZS0631124PMVSNBZWH	CZS0631124PMVKBBZWH	1	FT24W/2G11	31-1/4"	6"	4"
CZS0631124PMVSNWHWH	CZS0631124PMVKBWHWH	1	FT24W/2G11	31-1/4"	6"	4"

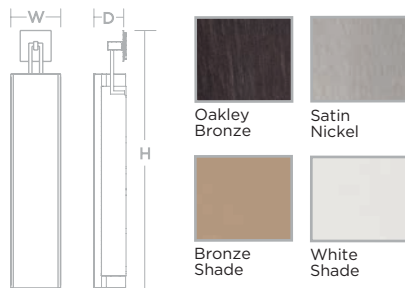

Companion



WELLS

- Solid maple construction
- White acrylic diffuser

LED


- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, available in 1400 lumens (15W) or 2100 lumens (23W), 90 CRI

15"H x 9-1/2" W x 4" D

Series	Size (Inches)		Lumens	LED	CCT	Driver	Wood Finish	Frame
	W	H						
WES	9	15	1400 2100	L	27 2700K 30 3000K	UD Voltage (120-277V Universal Dimming)	ES Espresso MP Maple WG Weathered Grey	4B Four Bars 6B Six Bars



Example: WES9151400L3027UDMP6B

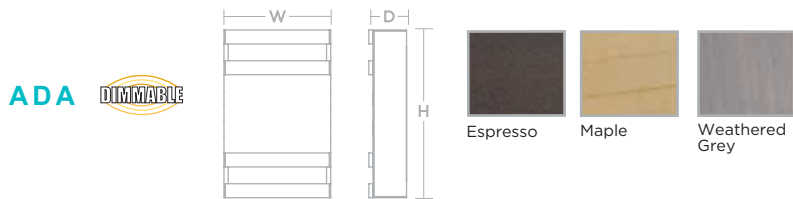

WELLS MINI

- Solid maple construction
- White acrylic diffuser

LED


- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, available in 1400 lumens (15W), 90 CRI

12"H x 7" W x 3-1/2" D

Series	Size (Inches)		Lumens	LED	CCT	Driver	Wood Finish	Frame
	W	H						
WES	7	12	1400	L	27 2700K 30 3000K	UD Voltage (120-277V Universal Dimming)	ES Espresso MP Maple WG Weathered Grey	4B Four Bars 6B Six Bars



Example: WES7121400L30UDWG6B

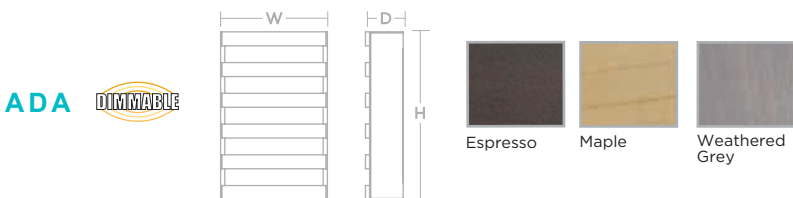



Spiral Beige
Architectural Bronze



Whimzy White
Satin Nickel



Jute
Architectural Bronze



Linen White
Satin Nickel

GENESIS

- Decorative paper inlay or LumaFuse™ acrylic inlay
- Metal trim band

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, available in 1400 lumens (15W), 90 CRI

11-1/4" H x 10" W x 4" D

Series	Size (Inches)		Lumens	LED	CCT	Driver	Finish	Paper Inlay
	W	H						
GNS	10	11	1400	L	27 2700K 30 3000K	UD Voltage (120-277V Universal Dimming)	AB Architectural Bronze SN Satin Nickel	SB Spiral Beige WW Whimzy White LumaFuse™ Inlay JT Jute LW Linen White

Example: GNS10111400L30UDSNSB



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

11-1/4" H x 10" W x 4" D

Series	Qty.	Lamp	Finish	Ballast	Paper Inlay
GNS	2	18 18W CFQ 4-Pin	AB Architectural Bronze SN Satin Nickel	MV Voltage (120V-277V Universal Non-Dimming)	SB Spiral Beige WW Whimzy White LumaFuse™ Inlay JT Jute LW Linen White

Example: GNS218ABMVWWT





Satin Nickel



Oakley Bronze

ALGIERS

- Curved front with metal ends
- Linen acrylic front diffuser
- White acrylic closed top and bottom diffuser
- Vertical or horizontal mount

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Oakley Bronze	LED	Source Lumens	CCT	H	W	D
ALS16061400L27UDSN	ALS16061400L27UDKB	13W	1400	2700K	6"	15-1/2"	4"
ALS16061400L30UDSN	ALS16061400L30UDKB	13W	1400	3000K	6"	15-1/2"	4"




FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Oakley Bronze	Qty.	Lamp	H	W	D
ALS1606218QMVSNLA	ALS1606218QMVKBLA	2	18W CFQ 4-Pin	6"	15-1/2"	4"



Companion

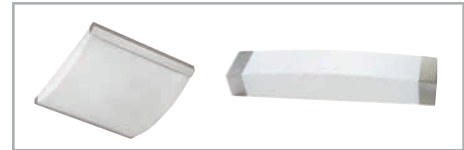


HURON

- White linen acrylic shade
- White acrylic top diffuser with open bottom

FLUORESCENT

- 120V electronic socket ballast
- Lamp not included

Polished Chrome	Qty.	Lamp	H	W	D
HUS118PCEC-LA	1	18W CFQ 4-Pin	17-1/4"	4-7/8"	4"





SHERIDAN

- Single or double die-cast arm
- Linen acrylic (LA) or cream linen (LN) shade options

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


Linen Acrylic Shade		Cream Linen Shade		LED	Source Lumens	CCT	H	W	D
Satin Nickel		Champagne							
SHS618700L27UDSNLA		SHS618700L27UDACLN		7W	700	2700K	18-1/2"	6-1/8"	4"
SHS618700L30UDSNLA		SHS618700L30UDACLN		7W	700	3000K	18-1/2"	6-1/8"	4"
SHS12181400L27UDSNLA		SHS12181400L27UDACLN		15W	1400	2700K	18"	12-5/8"	4"
SHS12181400L30UDSNLA		SHS12181400L30UDACLN		15W	1400	3000K	18"	12-5/8"	4"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamp(s) not included

Satin Nickel	Champagne	Qty.	Lamp	H	W	D
-	SHS0618113QMVSNLA	1	13W CFQ 4-Pin	18-1/2"	6-1/8"	4"
-	SHS0618118QMVAACLN	1	18W CFQ 4-Pin	18-1/2"	6-1/8"	4"
-	SHS1218213QMVSNLA	2	13W CFQ 4-Pin	18"	12-5/8"	4"
-	SHS1218218QMVAACLN	2	18W CFQ 4-Pin	18"	12-5/8"	4"



Companion





Satin Nickel



Oakley Bronze

TORY

- Die-cast arms
- White linen (WH) or linen acrylic (LA) shade
- White acrylic top and bottom diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


		LED	Source Lumens	CCT	H	W	D
Satin Nickel	Oakley Bronze						
TYS11231400L27UDSNWH	TYS11231400L27UDKBWH	15W	1400	2700K	22-3/4"	11-3/8"	4"
TYS11231400L30UDSNWH	TYS11231400L30UDKBWH	15W	1400	3000K	22-3/4"	11-3/8"	4"
TYS11231400L27UDSNLA	TYS11231400L27UDKBKLA	15W	1400	2700K	22-3/4"	11-3/8"	4"
TYS11231400L30UDSNLA	TYS11231400L30UDKBLA	15W	1400	3000K	22-3/4"	11-3/8"	4"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

		Qty. Lamp	H	W	D
Satin Nickel	Oakley Bronze				
TYS1123213QMVSNWH	TYS1123213QMVKBWH	2 13W CFQ 4-Pin	22-3/4"	11-3/8"	4"
TYS1123218QMVSNWH	TYS1123218QMVKBWH	2 18W CFQ 4-Pin	22-3/4"	11-3/8"	4"
TYS1123226QMVSNWH	TYS1123226QMVKBWH	2 26W CFQ 4-Pin	22-3/4"	11-3/8"	4"
TYS1123213QMVSNLA	TYS1123213QMVKBLA	2 13W CFQ 4-Pin	22-3/4"	11-3/8"	4"
TYS1123218QMVSNLA	TYS1123218QMVKBLA	2 18W CFQ 4-Pin	22-3/4"	11-3/8"	4"
TYS1123226QMVSNLA	TYS1123226QMVKBLA	2 26W CFQ 4-Pin	22-3/4"	11-3/8"	4"





NOLAN

- Clear outer glass
- White acrylic inner diffuser with die-cast metal accent



Satin Nickel



Oakley Bronze

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


Satin Nickel	Oakley Bronze	LED	Source Lumens	CCT	H	W	D
NLS6121400L27UDSN	NLS6121400L27UDKB	15W	1400	2700K	12-5/8"	6-1/2"	3-7/8"
NLS6121400L30UDSN	NLS6121400L30UDKB	15W	1400	3000K	12-5/8"	6-1/2"	3-7/8"
NLS6191400L27UDSN	NLS6191400L27UDKB	15W	1400	2700K	19-1/2"	6-1/2"	3-7/8"
NLS6191400L30UDSN	NLS6191400L30UDKB	15W	1400	3000K	19-1/2"	6-1/2"	3-7/8"
NLS6192100L27UDSN	NLS6192100L27UDKB	23W	2100	2700K	19-1/2"	6-1/2"	3-7/8"
NLS6192100L30UDSN	NLS6192100L30UDKB	23W	2100	3000K	19-1/2"	6-1/2"	3-7/8"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Oakley Bronze	Qty.	Lamp	H	W	D
NLS0612118QMVSN	NLS0612118QMVRB	1	18W CFQ 4-Pin	12-5/8"	6-1/2"	3-7/8"
NLS0619124PMVSN	NLS0619124PMVRB	1	24W 2G11 4-Pin	19-1/2"	6-1/2"	3-7/8"



Companion



BELLA

- Hand blown glass diffuser


LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI

7-7/8" H x 4-1/2" W x 5-5/8" D

Model	Source Lumens	CCT	Glass	Finish	Driver
BESL	450	27 2700K 40 4000K	AM Amber BU Blue RD Red WH White	RB Oil-Rubbed Bronze SN Satin Nickel	D1 Voltage (120V TRIAC Dimming) MV Voltage (120V-277V Universal Non-Dimming)

Example: BESL45027AMRBD1



Companion



LAVEER

- Hand blown cone shaped glass diffuser


LED

- 50,000 hr. LED life, available in 450 lumens (6W), 80 CRI

8-1/2" H x 4-5/8" W x 6-1/4" D

Model	Source Lumens	CCT	Glass	Finish	Driver
LASL	450	27 2700K 40 4000K	AM Amber BU Blue GN Green WH White	RB Oil-Rubbed Bronze SN Satin Nickel	D1 Voltage (120V TRIAC Dimming) MV Voltage (120V-277V Universal Non-Dimming)

Example: LASL45027WHSNMV



Companion



TAYLOR

- Single or double arm
- Linen acrylic shade
- White acrylic top and bottom diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI

Polished Chrome	LED	Source Lumens	CCT	H	W	D
TAS613700L27UDPCLA	7W	700	2700K	13-1/2"	6-1/8"	4"
TAS613700L30UDPCLA	7W	700	3000K	13-1/2"	6-1/8"	4"
TAS13131400L27UDPCLA	15W	1400	2700K	13-1/2"	12-5/8"	4"
TAS13131400L30UDPCLA	15W	1400	3000K	13-1/2"	12-5/8"	4"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamp(s) not included

Polished Chrome	Qty.	Lamp	H	W	D
TAS0613113QMVPCLA	1	13W CFQ 4-Pin	13-1/2"	6-1/8"	4"
TAS1313213QMVPCLA	2	13W CFQ 4-Pin	13-1/2"	12-5/8"	4"




MONTROSE

- Single or double torch
- Cream linen shade

FLUORESCENT

- 120V electronic socket ballast
- Lamps not included

Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	W	D
MNS0818118QENSN	MNS0818118QENRB	1	18W CFQ 4-Pin	18-1/8"	7-1/2"	4"
MNS1318218QENSN	MNS1318218QENRB	2	18W CFQ 4-Pin	18-1/8"	12-1/2"	4"



LANCET

- Decorative finials
- White glass diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


White	LED	Source Lumens	CCT	H	W	D
LCS6151400L27UDWH	15W	1400	2700K	15"	5-7/8"	3-7/8"
LCS6151400L30UDWH	15W	1400	3000K	15"	5-7/8"	3-7/8"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

White	Qty.	Lamp	H	W	D
LCS0615213QENWH	2	13W CFQ 4-Pin	15"	5-7/8"	3-7/8"
LCS0615218QENWH	2	18W CFQ 4-Pin	15"	5-7/8"	3-7/8"



RESTORATION

- Interlocking metal accent trim
- Opal glass diffuser
- Open top and bottom

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


Oil-Rubbed Bronze	LED	Source Lumens	CCT	H	W	D
RES12111400L27UDRB	15W	1400	2700K	11-3/4"	12-3/4"	4"
RES12111400L30UDRB	15W	1400	3000K	11-3/4"	12-3/4"	4"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Oil-Rubbed Bronze	Qty.	Lamp	H	W	D
RES1211213QMVRB	2	13W CFQ 4-Pin	11-3/4"	12-3/4"	4"
RES1211218QMVRB	2	18W CFQ 4-Pin	11-3/4"	12-3/4"	4"
RES1211226QMVRB	2	26W CFQ 4-Pin	11-3/4"	12-3/4"	4"



DELANY

- Open top and bottom
- Faceted white acrylic diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


Satin Nickel	LED	Source Lumens	CCT	H	W	D
MIDS13151400L27UDSN	13W	1400	2700K	15"	13"	3-7/8"
MIDS13151400L30UDSN	13W	1400	3000K	15"	13"	3-7/8"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Qty.	Lamp	H	W	D
MIDS1315213QMVSN	2	13W CFQ 4-Pin	15"	13"	3-7/8"

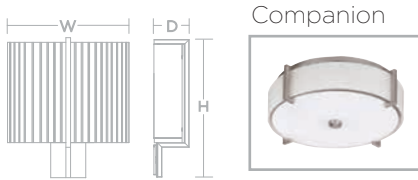

ARIA

- Frosted white case glass diffuser

FLUORESCENT

- 120V electronic socket ballast
- Lamps not included

Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	W	D
*ARS118SNEC	*ARS118RBEC	1	18W CFQ 4-Pin	11"	4-3/8"	4"
ARS126SNEC	ARS126RBEC	1	26W CFQ 4-Pin	11"	4-3/8"	4-1/2"



Satin Nickel



Oil-Rubbed Bronze



Satin Nickel



Oil-Rubbed Bronze

BRIO

- Decorative metal bands
- White acrylic diffuser, open top and bottom

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


Satin Nickel		Oil-Rubbed Bronze		LED	Source Lumens	CCT	H	W	D
BRS7181400L27UDSN	BRS7181400L27UDRB	15W	1400	2700K	18"	7-1/4"	4"		
BRS7181400L30UDSN	BRS7181400L30UDRB	15W	1400	3000K	18"	7-1/4"	4"		
BRS7182100L27UDSN	BRS7182100L27UDRB	23W	2100	2700K	18"	7-1/4"	4"		
BRS7182100L30UDSN	BRS7182100L30UDRB	23W	2100	3000K	18"	7-1/4"	4"		



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel		Oil-Rubbed Bronze		Qty.	Lamp	H	W	D
BRS0718226QMVSN	BRS0718226QMVRB	2	26W CFQ 4-Pin	18"	7-1/4"	4"		



TRILLIUM

- Decorative metal bands
- White acrylic diffuser, open top and bottom

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


Satin Nickel		LED	Source Lumens	CCT	H	W	D
TRS7121400L27UDSN	15W	1400	2700K	12-7/8"	7-7/8"	4"	
TRS7121400L30UDSN	15W	1400	3000K	12-7/8"	7-7/8"	4"	
TRS7122100L27UDSN	23W	2100	2700K	12-7/8"	7-7/8"	4"	
TRS7122100L30UDSN	23W	2100	3000K	12-7/8"	7-7/8"	4"	



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel		Qty.	Lamp	H	W	D
TRS0712213QMVSN	2	13W CFQ 4-Pin	12-7/8"	7-7/8"	4"	



BILBAO


- Linear extruded aluminum accent bands
- White glass diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI

Satin Aluminum	LED	Source Lumens	CCT	H	W	D
BBSS1011400L27UDSA	15W	1400	2700	11-1/8"	10"	4"
BBSS1011400L30UDSA	15W	1400	3000	11-1/8"	10"	4"

Satin Aluminum	LED	Source Lumens	CCT	H	W	D
BBSS17051400L27UDSA	15W	1400	2700K	4-3/4"	16-7/8"	4"
BBSS17051400L30UDSA	15W	1400	3000K	4-3/4"	16-7/8"	4"

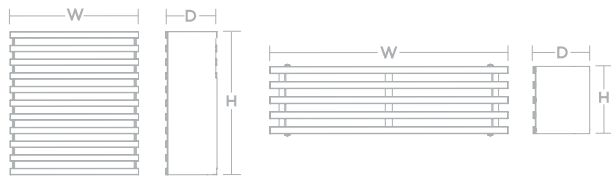

BBS



BBSS

Companion




IDEAL

- Metal accent bands
- White glass

FLUORESCENT

- 120V 18W GU24 lamps included (2700K)

Satin Nickel	Qty.	Lamp	H	W	D
IDS0910118GU27SN	1	18W GU24	10"	8-3/4"	3-1/2"



MONROE


- Plated metal finish
- Enclosed frosted white glass diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. life, 80 CRI, 3000K



Satin Nickel	LED	Source Lumens	H	W	D
MRS44500L30D1SN	5W	500	4-5/8"	4-5/8"	4"



Companion



FUSION

- Patterned textured glass diffuser with open top
- White glass bottom diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI



Satin Nickel



Oil-Rubbed Bronze

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	H	W	D
FUS10111400L27UDSN	FUS10111400L27UDRB	15W	1400	2700K	11-1/4"	9-7/8"	4"
FUS10111400L30UDSN	FUS10111400L30UDRB	15W	1400	3000K	11-1/4"	9-7/8"	4"




FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	W	D
FUS1011213QMVS	FUS1011213QMVRB	2	13W CFQ 4-Pin	11-1/4"	9-7/8"	4"
FUS1011218QMVS	FUS1011218QMVRB	2	18W CFQ 4-Pin	11-1/4"	9-7/8"	4"
FUS1011226QMVS	FUS1011226QMVRB	2	26W CFQ 4-Pin	11-1/4"	9-7/8"	4"



Companion



RIO

- Sleek, cylindrical brushed nickel housing
- Single or double white acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	H	W	D
RIS21800L27D1SN	8W	800	2700K	21-1/2"	4"	3-5/8"
RIS21800L30D1SN	8W	800	3000K	21-1/2"	4"	3-5/8"
RIS321600L27D1SN	16W	1600	2700K	32-1/2"	4"	3-5/8"
RIS321600L30D1SN	16W	1600	3000K	32-1/2"	4"	3-5/8"

ADA



CENTURY

- White glass diffuser with die-cast metal accents

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI

Polished Chrome	LED	Source Lumens	CCT	H	W	D
CES11121400L27UDPC	15W	1400	2700K	12"	10-7/8"	4"
CES11121400L30UDPC	15W	1400	3000K	12"	10-7/8"	4"

ADA




FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Polished Chrome	Qty.	Lamp	H	W	D
CES1112213QMVPC	2	13W CFQ 4-Pin	12"	10-7/8"	4"
CES1112218QMVPC	2	18W CFQ 4-Pin	12"	10-7/8"	4"
CES1112226QMVPC	2	26W CFQ 4-Pin	12"	10-7/8"	4"

ADA



Companion





LASALLE

- Enclosed top and bottom
- White acrylic front and top diffuser

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial 0-10V dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI


Satin Nickel	LED	Source Lumens	CCT	H	W	D
LAS6261400L27UDSN	15W	1400	2700K	27-7/8"	5-1/2"	4"
LAS6261400L30UDSN	15W	1400	3000K	27-7/8"	5-1/2"	4"
LAS6262100L27UDSN	23W	2100	2700K	27-7/8"	5-1/2"	4"
LAS6262100L30UDSN	23W	2100	3000K	27-7/8"	5-1/2"	4"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Qty.	Lamp	H	W	D
LAS0626214T5MVSN	2	14W T5	27-7/8"	5-1/2"	4"




UNITY

- Decorative finials
- White glass diffuser

LED

- 120-277V universal-voltage driver
- 50,000 hr. LED life, 80 CRI

Brushed Nickel	LED	Source Lumens	CCT	H	W	D
USS60030LBNWS	10.5W	600	3000K	8-1/4"	8"	4"





VANITY

Stylish yet functional, decorative vanity lighting from AFX provides flexibility for commercial and residential lighting applications.



Oil-Rubbed
Bronze



Satin
Nickel

EVOLUTION

- Metal decorative ends
- Vertical or horizontal mount

FLUORESCENT

- 120V electronic ballast
- Lamps not included

Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	L	D
EOV217SNR8	EOV217RBR8	2	F17T8	5-3/4"	24-3/4"	4-1/4"
EOV225SNR8	EOV225RBR8	2	F25T8	5-3/4"	36-3/4"	4-1/4"
EOV232SNR8	EOV232RBR8	2	F32T8	5-3/4"	48-3/4"	4-1/4"



Satin
Nickel



Oakley
Bronze

NOLAN

- Clear outer glass
- White acrylic inner diffuser with die-cast metal accent
- Vertical or horizontal mount

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Oakley Bronze	Qty.	Lamp	H	L	D
NLV214SNMV	NLV214RBMV	2	F14T5	6-1/4"	25-3/4"	4"
NLV221SNMV	NLV221RBMV	2	F21T5	6-1/4"	37-3/4"	4"
NLV228SNMV	NLV228RBMV	2	F28T5	6-1/4"	49-3/4"	4"



Companion



ADA

PACIFIC

- Metal decorative ends
- Vertical or horizontal mount
- White acrylic diffuser

LED

- 120-277V universal-voltage driver
- 50,000 hr. LED life, 80 CRI



Satin Nickel	LED	Source Lumens	CCT	H	L	D
PAV241700L30MVSN	17W	1700	3000K	5-3/4"	24"	4-1/4"
PAV362500L30MVSN	25W	2500	3000K	5-3/4"	36"	4-1/4"
PAV483400L30MVSN	34W	3400	3000K	5-3/4"	48"	4-1/4"



CORTEZ

- Sheer organza fabric outer shade
- White linen inner shade with die-cast details
- White acrylic bottom diffuser



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

24-1/4" L x 5" H x 4-3/4" D

Series	Qty.	Lamp	Finish	Ballast	Shade-In-Shade
CZV	2	18Q 18W CFQ 4-Pin 26Q 26W CFQ 4-Pin	KB Oakley Bronze SN Satin Nickel	MV Voltage (120V-277V Universal Non-Dimming)	WHWH White/White BZWH Bronze/White


37-1/4" L x 5" H x 4-3/4" D

Series	Qty.	Lamp	Finish	Ballast	Shade-In-Shade
CZV	3	18Q 18W CFQ 4-Pin 26Q 26W CFQ 4-Pin	KB Oakley Bronze SN Satin Nickel	MV Voltage (120V-277V Universal Non-Dimming)	WHWH White/White BZWH Bronze/White

50-1/4" L x 5" H x 4-3/4" D

Series	Qty.	Lamp	Finish	Ballast	Shade-In-Shade
CZV	4	18Q 18W CFQ 4-Pin 26Q 26W CFQ 4-Pin	KB Oakley Bronze SN Satin Nickel	MV Voltage (120V-277V Universal Non-Dimming)	WHWH White/White BZWH Bronze/White

Example: CZV418QKBMV-BZWH



Companion





Satin Nickel



Oil-Rubbed Bronze

ARIA

- White matte acrylic diffuser with cast aluminum ends
- Vertical or horizontal mount

LED

- 120-277V universal-voltage, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	H	L	D
ARV26041100L30SND2	ARV26041100L30RBD2	20W	1100	3000K	2-1/2"	26-1/4"	4"
ARV38041500L30SND2	ARV38041500L30RBD2	30W	1500	3000K	2-1/2"	38"	4"
ARV50042300L30SND2	ARV50042300L30RBD2	40W	2300	3000K	2-1/2"	50"	4"

ADA

FLUORESCENT

- 120-277V universal-voltage ballast
- T5 high output lamp included (2700K)

Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	L	D
ARV124SNMVT	ARV124RBMVT	1	24W T5HO	2-1/2"	26-1/4"	4"
ARV139SNMVT	ARV139RBMVT	1	39W T5HO	2-1/2"	38"	4"
ARV154SNMVT	ARV154RBMVT	1	54W T5HO	2-1/2"	50"	4"

ADA



Companion



ALGIERS

- Metal ends
- Linen acrylic front diffuser
- White acrylic top and bottom diffuser
- Vertical or horizontal mount

LED

- 120-277V universal-voltage, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Oakley Bronze	LED	Source Lumens	CCT	H	L	D
*ALV25052000L30SND2	*ALV25052000L30KBD2	20W	2000	3000K	5"	25-1/4"	4"
*ALV37053000L30SND2	*ALV37053000L30KBD2	30W	3000	3000K	5"	37-1/4"	4"
ALV49054000L30SND2	ALV49054000L30KBD2	40W	4000	3000K	5"	49-1/4"	4-7/8"

ADA*

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Oakley Bronze	Qty.	Lamp	H	L	D
*ALV214SNMV-LA	*ALV214KBMV-LA	2	F14T5	5"	25-1/4"	4"
*ALV217SNMV-LA	*ALV217KBMV-LA	2	F17T8	5"	25-1/4"	4"
*ALV221SNMV-LA	*ALV221KBMV-LA	2	F21T5	5"	37-1/4"	4"
*ALV225SNMV-LA	*ALV225KBMV-LA	2	F25T8	5"	37-1/4"	4"
ALV228SNMV-LA	ALV228KBMV-LA	2	F28T5	5"	49-1/4"	4-7/8"
ALV232SNMV-LA	ALV232KBMV-LA	2	F32T8	5"	49-1/4"	4-7/8"

ADA*



Satin Nickel




Oakley Bronze



Companion



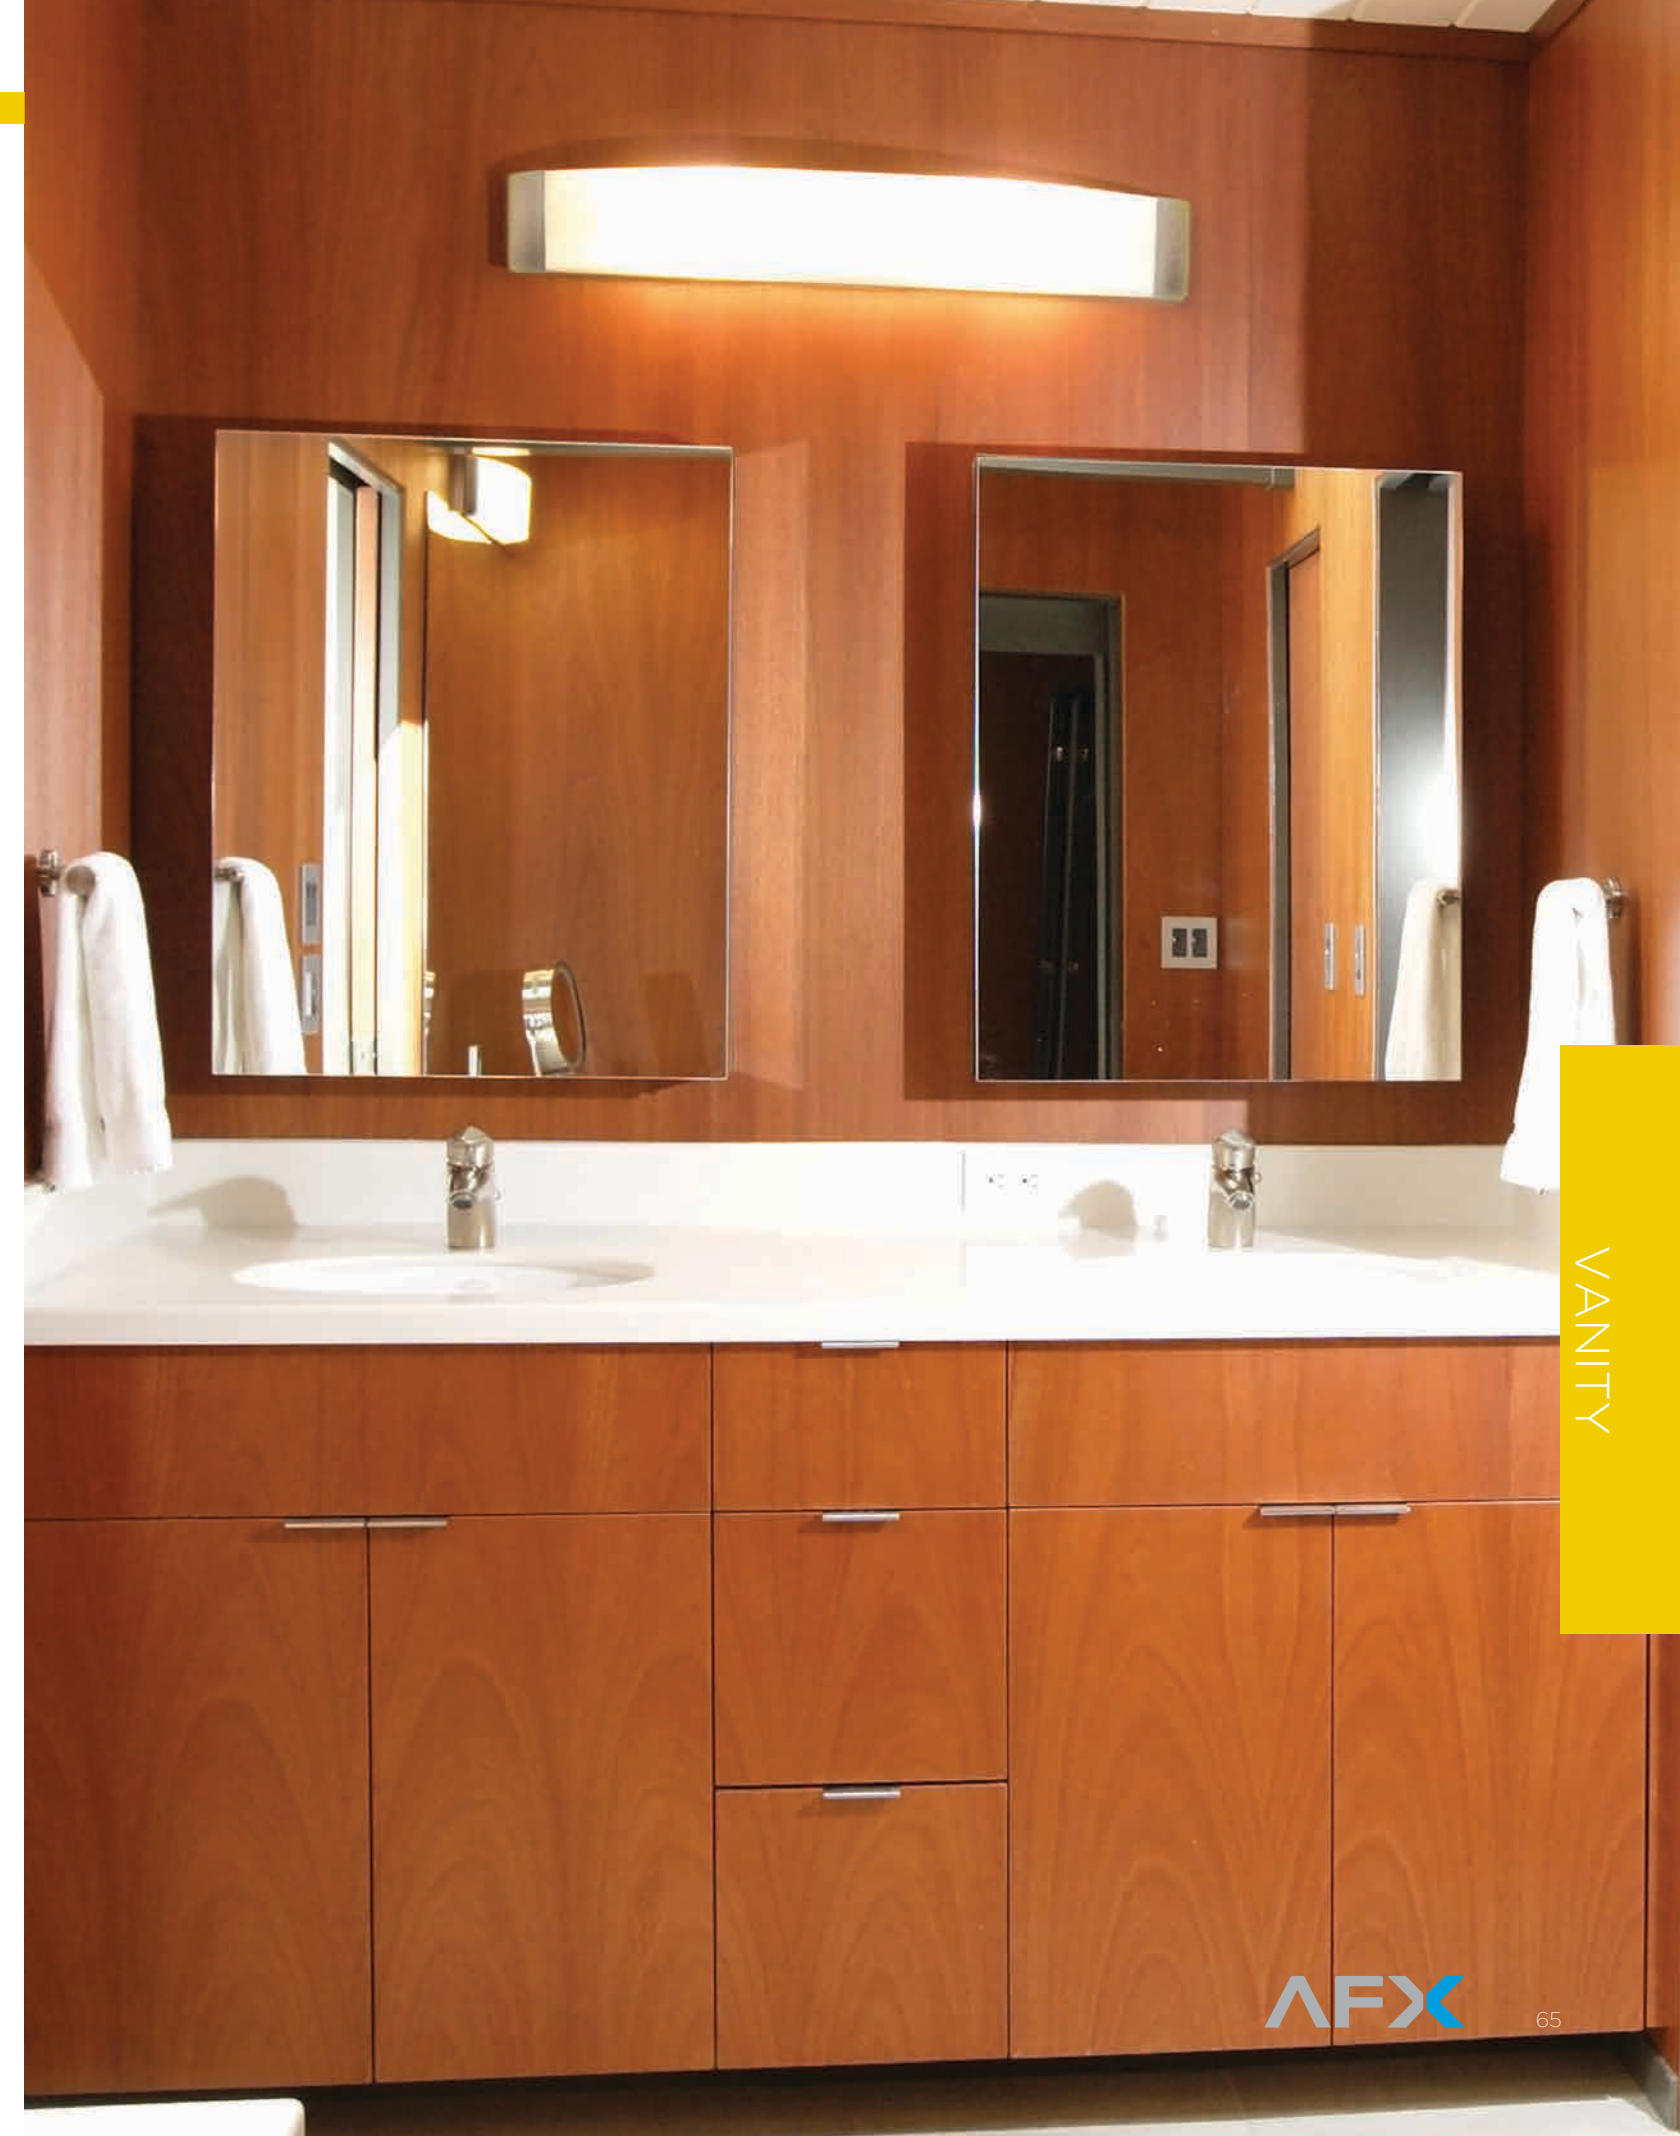

VANITY



TAYLOR

- White linen acrylic front diffuser
- Clear top and white bottom acrylic diffuser

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Polished Chrome	Qty.	Lamp	H	L	D
TAV225PCMV	2	F25T8	6-1/4"	40-1/4"	5-1/8"



Companion



CENTURY

- Die-cast metal accents
- White acrylic diffuser
- Vertical or horizontal mount

LED

- 120-277V universal-voltage, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Polished Chrome	LED	Source Lumens	CCT	H	L	D
CEV26042000L30D2PC	20W	2000	3000K	3-3/4"	26-1/4"	4"
CEV38043000L30D2PC	30W	3000	3000K	3-3/4"	38-1/8"	4"
CEV50044000L30D2PC	40W	4000	3000K	3-3/4"	50"	4"



FLUORESCENT

- 120V electronic ballast (E5)
- 120-277V universal-voltage ballast (MV)
- T5 high output lamp(s) included (2700K)

Polished Chrome	Qty.	Lamp	H	L	D
*CEV124PCE5T	1	25W T5HO	3-3/4"	26-1/4"	4"
*CEV139PCMV	1	39W T5HO	3-3/4"	38-1/8"	4"
*CEV154PCMV	1	54W T5HO	3-3/4"	50"	4"
CEV217PCMV	2	F17T8	6-1/4"	26-1/4"	4-3/8"
CEV225PCMV	2	F25T8	6-1/4"	38-1/8"	4-3/8"
CEV232PCMV	2	F32T8	6-1/4"	50"	4-3/8"



Companion



BILBAO

- Linear accent bands
- White acrylic diffuser

LED

- 120-277V universal-voltage, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Aluminum	LED	Source Lumens	CCT	H	L	D
BBV32052000L30D2SA	20W	2000	3000K	4-1/2"	32-3/8"	4-1/2"
BBV44053000L30D2SA	30W	3000	3000K	4-1/2"	44-3/8"	4-1/2"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Aluminum	Qty.	Lamp	H	L	D
BBV217SAMV	2	F17T8	4-1/2"	32-3/8"	4-1/2"
BBV225SAMV	2	F25T8	4-1/2"	44-3/8"	4-1/2"



Companion




HELIOS

- Flaired ends
- White acrylic diffuser
- Can be mounted vertically or horizontally

FLUORESCENT

- 120-277V universal-voltage ballast
- T5 high output lamp included (2700K)

Polished Chrome	Qty.	Lamp	H	L	D
HEV139PCMVT	1	39W T5HO	5"	39-3/4"	4-3/8"
HEV154PCMVT	1	54W T5HO	5"	51-1/2"	4-3/8"





RIO

- Sleek, cylindrical brushed nickel housing
- Double white acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	H	W	D
RIS321600L27D1SN	16W	1600	2700K	32-1/2"	4"	3-5/8"
RIS321600L30D1SN	16W	1600	3000K	32-1/2"	4"	3-5/8"

ADA 

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Qty.	Lamp	H	W	D
RIS224SNMV	2	24W 2G11 4-Pin	4"	32-1/2"	3-5/8"

ADA



Companion



FUSION


- Metal band end and center accent
- White textured glass diffuser
- Horizontal or vertical mount

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Qty.	Lamp	H	L	D
FUV217SNMV	2	F17T8	5-3/8"	25-3/4"	4"
FUV225SNMV	2	F25T8	5-3/8"	37-3/4"	4"
FUV232SNMV	2	F32T8	5-3/8"	50"	4"

ADA



Companion





VANITY




VOLTARE

- White glass diffusers with decorative metal accents
- Mount up or down

FLUORESCENT

- GU24 self-ballast lamps included (2700K)

Satin Nickel	Qty.	Lamp	H	L	D
VOV213SNSCT	2	13W GU24	8-1/8"	14"	5-7/8"
VOV218SNSCT	2	18W GU24	8-1/8"	14"	5-7/8"
VOV313SNSCT	3	13W GU24	8-1/8"	23-3/4"	5-7/8"
VOV318SNSCT	3	18W GU24	8-1/8"	23-3/4"	5-7/8"



VERNON

- White opal glass diffusers with stepped metal base
- Mount up or down

FLUORESCENT

- GU24 self-ballast lamps included (2700K)

Satin Nickel	Qty.	Lamp	H	L	D
VNV313SNSCT	3	13W GU24	8"	17-1/2"	5"
VNV513SNSCT	5	13W GU24	8"	29-1/2"	5"





STRATUS

- White acrylic diffuser fully encloses housing
- Horizontal or vertical mount

FLUORESCENT

- 120V electronic ballast (R8)
- 120-277V universal-voltage ballast (MV)
- Lamps not included

White

120V	120-277V	Qty.	Lamp	H	L	D
V8PN217R8	V8PN217MV	2	F17T8	4-5/8"	26-3/4"	4"
V8PN225R8	V8PN225MV	2	F25T8	4-5/8"	38-3/4"	4"
V8PN232R8	V8PN232MV	2	F32T8	4-5/8"	50-3/4"	4"




ADA



Chrome

VISTA

- Metal end caps
- Smooth white acrylic diffuser
- Horizontal or vertical mount

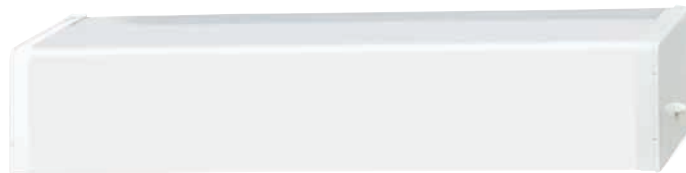

White

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Chrome	White	Qty.	Lamp	H	L	D
VSC217MV	VSW217MV	2	F17T8	4-1/2"	24-1/4"	4-1/2"
VSC225MV	VSW225MV	2	F25T8	4-1/2"	36-1/4"	4-1/2"
VSC232MV	VSW232MV	2	F32T8	4-1/2"	48-1/4"	4-1/2"



AMHERST

- White acrylic diffuser
- Horizontal or vertical mount

FLUORESCENT

- 120V electronic ballast
- Lamps not included

Aluminum	Qty.	Lamp	H	L	D
AMC115R8	1	F15T8	2-5/8"	18-3/8"	4-1/4"
AMC117R8	1	F17T8	2-5/8"	24-3/8"	4-1/4"
AMC125R8	1	F25T8	2-5/8"	36-3/8"	4-1/4"
AMC132R8	1	F32T8	2-5/8"	48-3/8"	4-1/4"



ASPEN

- Ribbed white acrylic diffuser
- Horizontal or vertical mount

FLUORESCENT

- 120V electronic ballast
- Lamps not included

Aluminum	Qty.	Lamp	H	L	D
ASPI15R8	1	F15T8	2-5/8"	18-3/8"	4-1/4"
ASPI17R8	1	F17T8	2-5/8"	24-3/8"	4-1/4"
ASPI25R8	1	F25T8	2-5/8"	36-3/8"	4-1/4"
ASPI32R8	1	F32T8	2-5/8"	48-3/8"	4-1/4"



ATWATER

- Ribbed white acrylic diffuser
- Horizontal or vertical mount

FLUORESCENT

- 120V electronic ballast
- Lamps not included

White	Qty.	Lamp	H	L	D
ADWW217R8	2	F17T8	3-3/8"	24-1/8"	5-1/4"
ADWW225R8	2	F25T8	3-3/8"	36-1/8"	5-1/4"
ADWW232R8	2	F32T8	3-3/8"	48-1/8"	5-1/4"





FIXED RAIL

Decorative LED fixed rail lighting solutions provide energy-efficient directional illumination for projects that demand style and high-performance.



CHAPPELLE

- Heads swivel and pivot
- Ceiling or wall mount

LED


- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI



Satin Nickel	LED	Source Lumens	CCT	L	W	H
CHRF4300L30SN	23W	1200	3000K	36-5/8"	5-1/4"	7"



See page 75 for listing of compatible dimmers



CANTRELL

- Heads swivel and pivot
- Ceiling or wall mount

LED


- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI



Satin Nickel	LED	Source Lumens	CCT	L	W	H
CARF4300L30SN	23W	1200	3000K	36-5/8"	5-1/4"	5-5/8"



See page 75 for listing of compatible dimmers





Polished
Chrome



Satin
Nickel

CORE

- Heads swivel and pivot
- Ceiling or wall mount

LED


- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI



	LED	Source Lumens	CCT	L	W	H
Satin Nickel						
CRRF4300L30SN	23W	1200	3000K	36-3/8"	5-3/8"	6-1/4"
CRRF6300L30SN	32W	1800	3000K	55-1/8"	5-1/4"	7-1/2"
Polished Chrome						
CRRF4300L30PC	23W	1200	3000K	36-3/8"	5-3/8"	6-1/4"



See page 75 for listing of compatible dimmers



Wall Dimmer Compatibility Chart

Product can be dimmed to 10% of full scale using a standard two-wire dimmer.

Brand

Leviton®

Lutron®

Legrand®/Pass & Seymour

Model

6633, 6681, 6621-WWP, 6631-WWP

TG-600P, TG-603P, LG-600H

T600WV, WS700TCCCVG



TORINO

- Heads swivel and pivot
- Ceiling or wall mount


LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	L	W	H
TRRF4300L30SN	23W	1200	3000K	36-5/8"	5-1/4"	5-5/8"



See page 75 for listing of compatible dimmers

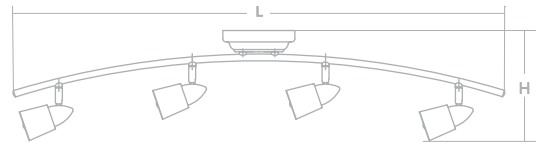

METRO

- Frosted glass diffusers
- Heads swivel and pivot
- Ceiling or wall mount


LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	L	W	H
MTRF4300L30SN	23W	1200	3000K	36-5/8"	5-15/16"	6-13/16"



See page 75 for listing of compatible dimmers

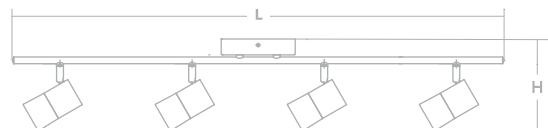



CEILING

From dramatic to understated, AFX offers a wide variety of ceiling lighting solutions to add illumination and style to residential and commercial settings.

MONTCLAIR

- LumaFuse™ laminated fabric/acrylic shade
- Fully illuminated stepped white acrylic bottom diffuser

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (25W) or 3200 lumens (35W), 90 CRI

12" DIA. x 3-1/2" D

15" DIA. x 3-1/2" D

19" DIA. x 4" D

Series	Size (Inches)		LED	CCT	Driver	Shade
	DIA.	Lumens				
MCF	12	= 1400	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	BK Black
	15	= 2400		30 3000K		
	19	= 3200				

Example: MCF193200L27D1-BK



Companion



Black



Black

SANIBEL

- Shade-in-shade LumaFuse™ laminated fabric/acrylic
- White bottom acrylic diffuser

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (24W) or 3200 lumens (35W), 90 CRI

16" DIA. x 5-5/8" D

18" DIA. x 5-5/8" D

23-1/4" DIA. x 5-5/8" D

Series	Size (Inches)		LED	CCT	Driver	Shade
	DIA.	Lumens				
SAF	16	= 1400	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	JT Jute LW Linen White
	18	= 2400		30 3000K		
	23	= 3200				

Example: SAF232400L30D1-JT



Companion



Jute



Linen White



Jute

EDEN

- LumaFuse™ laminated fabric/acrylic shade with wood veneer trim detail
- White bottom acrylic diffuser

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (24W) or 3200 lumens (35W), 90 CRI

12" DIA. x 4-1/2" D

15" DIA. x 4-1/2" D


19" DIA. x 4-1/2" D

Series	Size (Inches)			LED	CCT	Driver	Wood Finish	Shade
	DIA.	Lumens	L					
EDF	12	= 1400	L	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	CV Chocolate Oak Veneer GV Grey Veneer	JT Jute LW Linen White
	15	= 2400			30 3000K			
	19	= 3200						

Example: EDF121400L30D1CV-JT



Companion



Chocolate Oak Veneer
Linen White

APEX

- Solid wood accent detail
- LumaFuse™ laminated fabric/acrylic shade
- White bottom acrylic diffuser

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (24W) or 3200 lumens (35W), 90 CRI

12-1/4" DIA. x 4-7/8" D

15" DIA. x 4-7/8" D

19-1/4" DIA. x 5-5/8" D

Series	Size (Inches)			LED	CCT	Driver	Wood Finish	Shade
	DIA.	Lumens	L					
APF	12	= 1400	L	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	ES Espresso MP Maple WG Weathered Grey	JT Jute LW Linen White
	15	= 2400			30 3000K			
	19	= 3200						

Example: APF152400L30D2ES-LW



Companion



Weathered Grey
Linen White



Oakley Bronze

Bronze/White



Satin Nickel

White/White

CORTEZ

- Sheer organza fabric outer shade
- White linen inner shade
- White acrylic bottom diffuser

LED

- 50,000 hr. LED life, available in 2400 lumens (24W), 3200 lumens (35W) or 4400 lumens (40W), 90 CRI

18" DIA. x 6-5/8 D
 24" DIA. x 6-5/8 D
 30" DIA. x 6-5/8 D

Series	Size (Inches)		LED	CCT	Driver	Finish	Shade-In-Shade
	DIA.	Lumens					
CZF	18	= 2400	L	30 3000K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	KB Oakley Bronze SN Satin Nickel	WHWH White/White BZWH Bronze/White
	24	= 3200					
	30	= 4400					

Example: CZF182400L30D2KB-BZWH



FLUORESCENT

- 120V normal power factor ballast (EN)
- 120-277V universal-voltage ballast (MV)
- Lamps not included

18" DIA. x 6-5/8 D

Series	Qty.	Lamp	Finish	Ballast	Shade-In-Shade



24" DIA. x 6-5/8 D

CZF	3 4	18Q 18W CFQ 4-Pin 26Q 18W CFQ 4-Pin	KB Oakley Bronze SN Satin Nickel	EN Voltage (120V Normal Power Factor) MV Voltage (120-277V Universal Non-Dimming)	WHWH White/White BZWH Bronze/White
-----	--------	--	-------------------------------------	--	---------------------------------------

30" DIA. x 6-5/8 D

CZF	6	18Q 18W CFQ 4-Pin 26Q 18W CFQ 4-Pin	KB Oakley Bronze SN Satin Nickel	EN Voltage (120V Normal Power Factor) MV Voltage (120-277V Universal Non-Dimming)	WHWH White/White BZWH Bronze/White
-----	---	--	-------------------------------------	--	---------------------------------------

Example: CZF318QSNEN-WHWH

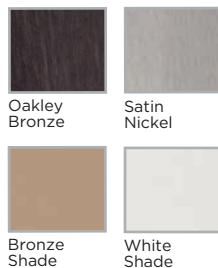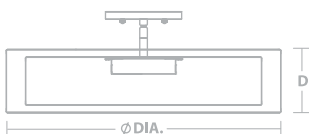

Companion





CEILING

WILLOW

- LumaFuse™ laminated veneer/acrylic shade
- White bottom acrylic diffuser

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (24W) or 3200 lumens (35W), 90 CRI



Grey Veneer


12-1/4" DIA. x 4-7/8" H

15" DIA. x 4-7/8" H

19-1/4" DIA. x 5-5/8" H

Series	Size (Inches)		LED	CCT	Driver	Color
	DIA.	Lumens				
WLF	12	= 1400	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	GV Grey Veneer
	15	= 2400		30 3000K		
	19	= 3200				

Example: WLF152400L30D2-GV

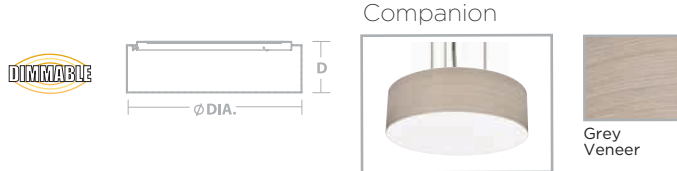

ANTON

- LumaFuse™ laminated fabric/acrylic shade
- White bottom acrylic diffuser

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), 2400 lumens (24W) or 3200 lumens (35W), 90 CRI



Jute

12-1/4" DIA. x 4-7/8" H

15" DIA. x 4-7/8" H

19-1/4" DIA. x 5-5/8" H

Series	Size (Inches)		LED	CCT	Driver	Shade
	DIA.	Lumens				
ANF	12	= 1400	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	JT Jute LW Linen White
	15	= 2400		30 3000K		
	19	= 3200				

Example: ANF121400L30D2-LW





Champagne



Satin Nickel


SHERIDAN

- White linen acrylic side shade in satin nickel or hardback linen shade in champagne
- White acrylic bottom diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Champagne	LED	Source Lumens	CCT	DIA.	D
SHC162400L30D1SN-LA	SHC162400L30D1AC	24W	2400	3000K	16"	6"
SHC162400L30D2SN-LA	SHC162400L30D2AC	24W	2400	3000K	16"	6"
SHC223200L30D1SN-LA	SHC223200L30D1AC	35W	3200	3000K	22"	6"
SHC223200L30D2SN-LA	SHC223200L30D2AC	35W	3200	3000K	22"	6"



FLUORESCENT

- 120-277V universal-voltage ballast
- Circline lamps included

Satin Nickel	Champagne	Qty.	Lamp	DIA.	D
SHC2240SNMVT-LA	SHC2240ACMVT	2	(1) 22W & (1) 40W T5 Circline	22"	6"



Companion



OSLO

- LumaFuse™ laminated fabric/acrylic shade
- Domed white bottom acrylic diffuser

LED

- 50,000 hr. LED life, available in 1400 lumens (15W), or 2400 lumens (35W), 90 CRI

17" DIA. x 4-1/8" D
24" DIA. x 5" D

Series	Size (Inches)		LED	CCT	Driver	Shade
	DIA.	Lumens				
OSF	17	= 1400	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	JT Jute LW Linen White
	24	= 2400		30 3000K		

Example: OSF171400L27D2-LW

Companion




GENEVA

- White metal body
- Frosted acrylic diffuser illuminated from center perimeter
- Ceiling or wall mount

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	DIA.	D
GAF101300L30D1WH	13W	1300	3000K	10"	2"
GAF162300L30D1WH	23W	2300	3000K	16"	2"

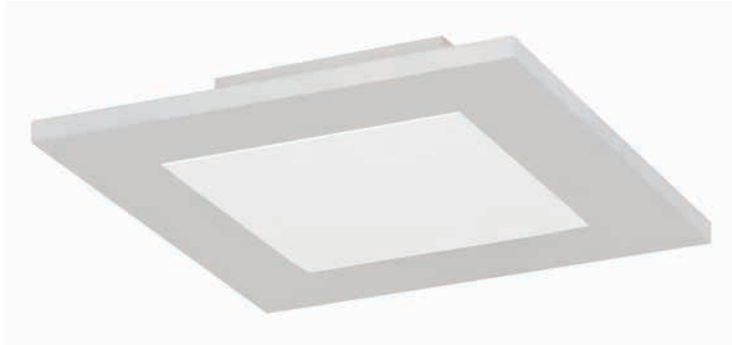


LYON

- White metal body
- Frosted acrylic diffuser illuminated from center perimeter
- Ceiling or wall mount

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	DIA.	D
LYF10800L30D1WH	8W	800	3000K	10"	2"
LYF161900L30D1WH	15W	1900	3000K	16"	2"

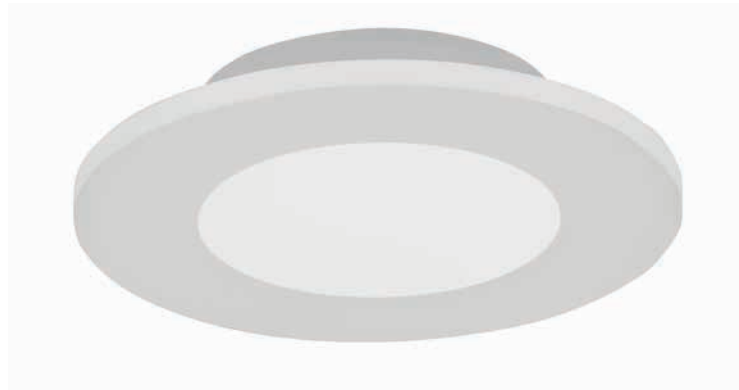

Illuminated

MADDOX

- Metal housing with white matte powder coated finish
- Frosted acrylic diffuser
- Ceiling or wall mount

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	DIA.	D
MAF606800L30D1WH	8W	800	3000K	6"	2"



AXEL

- Metal housing with white matte powder coated finish
- Frosted acrylic diffuser
- Ceiling or wall mount

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	LED	Source Lumens	CCT	DIA.	D
AXF06800L30D1WH	8W	800	3000K	6"	2"



ALGIERS

- Metal trim ends
- Linen acrylic diffuser



Satin Nickel



Oakley Bronze

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Oakley Bronze	LED	Source Lumens	CCT	L	W	D
ALF162400L30D1SNLA	ALF162400L30D1KBLA	24W	2400	3000K	16-1/4"	16-1/4"	3"
ALF162400L30D2SNLA	ALF162400L30D2KBLA	24W	2400	3000K	16-1/4"	16-1/4"	3"



Companion



DELANY

- Round faceted opal acrylic side diffuser
- White acrylic bottom diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI


Satin Nickel	LED	Source Lumens	CCT	DIA.	D
MIDF162400L30D1SN	24W	2400	3000K	16-1/4"	5-3/4"
MIDF162400L30D2SN	24W	2400	3000K	16-1/4"	5-3/4"
MIDF222400L30D1SN	24W	2400	3000K	22-1/4"	5-3/4"
MIDF222400L30D2SN	24W	2400	3000K	22-1/4"	5-3/4"
MIDF223200L30D1SN	35W	3200	3000K	22-1/4"	5-1/2"
MIDF223200L30D2SN	35W	3200	3000K	22-1/4"	5-1/2"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel	Qty.	Lamp	DIA.	D
MIDF313SNMV	3	13W CFQ 4-Pin	16-1/4"	5-3/4"
MIDF318SNMV	3	18W CFQ 4-Pin	16-1/4"	5-3/4"
MIDF413SNMV	4	13W CFQ 4-Pin	22-1/4"	5-1/2"
MIDF418SNMV	4	18W CFQ 4-Pin	22-1/4"	5-1/2"



Companion



NOLAN

- White acrylic inner diffuser with die-cast metal accent
- Clear outer acrylic diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Oakley Bronze	LED	Source Lumens	CCT	DIA.	D
NLF162400L30D1SN	NLF162400L30D1KB	24W	2400	3000K	16-1/8"	3-1/2"
NLF162400L30D2SN	NLF162400L30D2KB	24W	2400	3000K	16-1/8"	3-1/2"



Satin Nickel



Oakley Bronze



Companion



RESTORATION

- Interlocking metal accent trim
- Opal glass diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI


Oil-Rubbed Bronze	LED	Source Lumens	CCT	DIA.	D
REF131400L30D1RB	15W	1400	3000K	12-1/4"	4-7/8"
REF131400L30D2RB	15W	1400	3000K	12-1/4"	4-7/8"
REF162400L30D1RB	24W	2400	3000K	15-1/4"	4-7/8"
REF162400L30D2RB	24W	2400	3000K	15-1/4"	4-7/8"




FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Oil-Rubbed Bronze	Qty.	Lamp	DIA.	D
REF13213QMVRB	2	13W CFQ 4-Pin	12-1/4"	4-7/8"
REF16218QMVRB	2	18W CFQ 4-Pin	15-1/4"	4-7/8"
REF16226QMVRB	2	26W CFQ 4-Pin	15-1/4"	4-7/8"

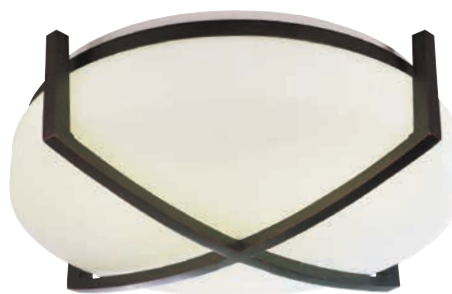

Companion





TAYLOR

- White linen side shade
- White acrylic bottom diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Polished Chrome	LED	Source Lumens	CCT	L	W	D
TAF162400L30D1PC-LA	24W	2400	3000K	16-1/2"	16-1/2"	5-1/4"
TAF162400L30D2PC-LA	24W	2400	3000K	16-1/2"	16-1/2"	5-1/4"



Link up to eight fixtures from a single power source



Companion



MONROE

- Die-cast metal finial
- White acrylic diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	DIA.	D
MRF162400L30D1SN	24W	2400	3000K	16-1/8"	3-1/4"
MRF162400L30D2SN	24W	2400	3000K	16-1/8"	3-1/4"



Companion



CENTURY

- Die-cast metal accents
- White glass diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI


Polished Chrome	LED	Source Lumens	CCT	DIA.	D
CEF131400L30D1PC	15W	1400	3000K	12-5/8"	4-3/4"
CEF131400L30D2PC	15W	1400	3000K	12-5/8"	4-3/4"
CEF162400L30D1PC	24W	2400	3000K	15-5/8"	4-3/4"
CEF162400L30D2PC	24W	2400	3000K	15-5/8"	4-3/4"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Polished Chrome	Qty.	Lamp	DIA.	D
CEF13213QMVPC	2	13W CFQ 4-Pin	12-5/8"	4-3/4"
CEF16218QMVPC	2	18W CFQ 4-Pin	15-5/8"	4-3/4"
CEF16226QMVPC	2	26W CFQ 4-Pin	15-5/8"	4-3/4"



Companion




FUSION

- Twin metal bands
- Raised textured white glass
- White glass bottom diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	DIA.	D
FUF131400L30D1SN	15W	1400	3000K	12-1/2"	4-3/4"
FUF131400L30D2SN	15W	1400	3000K	12-1/2"	4-3/4"
FUF162400L30D1SN	24W	2400	3000K	15-1/2"	4-3/4"
FUF162400L30D2SN	24W	2400	3000K	15-1/2"	4-3/4"



Companion




HUDSON

- Ornamental laser cut metal detail
- Linen acrylic patterned side and bottom diffusers

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	DIA.	D
HZC162400L30D1SN	24W	2400	3000K	16"	6"
HZC162400L30D2SN	24W	2400	3000K	16"	6"
HZC223200L30D1SN	35W	3200	3000K	22"	6"
HZC223200L30D2SN	35W	3200	3000K	22"	6"



BILBAO

- Linear accent bands
- White glass diffuser

LED

- 120V TRIAC dimmable (D1)
- 120-277V universal-voltage driver, 0-10V dimming (D2)
- 50,000 hr. LED life, 90 CRI


Satin Aluminum	LED	Source Lumens	CCT	DIA.	D
BBF131400L30D1SA	15W	1400	3000K	13-1/2"	4-1/2"
BBF131400L30D2SA	15W	1400	3000K	13-1/2"	4-1/2"
BBF162400L30D1SA	24W	2400	3000K	16-1/2"	4-1/2"
BBF162400L30D2SA	24W	2400	3000K	16-1/2"	4-1/2"



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Aluminum	Qty.	Lamp	DIA.	D
BBF13213QMVSA	2	13W CFQ 4-Pin	13-1/2"	4-1/2"
BBF16218QMVSA	2	18W CFQ 4-Pin	16-1/2"	4-1/2"
BBF16226QMVSA	2	26W CFQ 4-Pin	16-1/2"	4-1/2"



Companion





CARLISLE

- Two-tier round metal bands
- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	DIA.	D
CAF121200L27D1	13W	1200	2700K	12"	3.5"
CAF121200L30D1	13W	1200	3000K	12"	3.5"
CAF142400L27D1	26W	2400	2700K	14"	3.5"
CAF142400L30D1	26W	2400	3000K	14"	3.5"
CAF243100L27D1	35W	3100	2700K	24"	3.5"
CAF243100L30D1	35W	3100	3000K	24"	3.5"




CARLISLE SEMI-FLUSH

- Two-tier metal bands with 5" stem and canopy
- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	DIA.	D
CAC121200L27D1	13W	1200	2700K	12"	3.5"
CAC121200L30D1	13W	1200	3000K	12"	3.5"
CAC142400L27D1	26W	2400	2700K	14"	3.5"
CAC142400L30D1	26W	2400	3000K	14"	3.5"
CAC243100L27D1	35W	3100	2700K	24"	3.5"
CAC243100L30D1	35W	3100	3000K	24"	3.5"





Oil-Rubbed Bronze



Satin Nickel


COVINA

- Oval shaped two-tier metal band
- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	L	W	D
CVF324400L30D1SN	CVF324400L30D1RB	45W	4400	3000K	32-3/8"	17"	4-3/8"



IDEAL

- Oval metal trim band
- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	L	W	D
IDF324400L30D1SN	45W	4400	3000K	32"	17"	3-5/8"



Companion





Brushed Nickel



White

CAPRI

- Metal trim band
- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

White	Brushed Nickel	LED	Source Lumens	CCT	DIA.	D
CFF091100L27D1WH	CFF091100L27D1BN	13W	1100	2700K	9-9/16"	2-3/8"
CFF091100L30D1WH	CFF091100L30D1BN	13W	1100	3000K	9-9/16"	2-3/8"
CFF111600L27D1WH	CFF111600L27D1BN	17W	1600	2700K	11"	3"
CFF111600L30D1WH	CFF111600L30D1BN	17W	1600	3000K	11"	3"
CFF142400L27D1WH	CFF142400L27D1BN	26W	2400	2700K	14"	3-7/16"
CFF142400L30D1WH	CFF142400L30D1BN	26W	2400	3000K	14"	3-7/16"
CFF193100L27D1WH	CFF193100L27D1BN	35W	3100	2700K	19"	4-3/16"
CFF193100L30D1WH	CFF193100L30D1BN	35W	3100	3000K	19"	4-3/16"



CAMDEN

- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	LED	Source Lumens	CCT	DIA.	D
CMF091100L27D1	13W	1100	2700K	9"	3-3/4"
CMF091100L30D1	13W	1100	3000K	9"	3-3/4"
CMF111600L27D1	17W	1600	2700K	11"	3-3/4"
CMF111600L30D1	17W	1600	3000K	11"	3-3/4"
CMF142400L27D1	26W	2400	2700K	14"	3-3/4"
CMF142400L30D1	26W	2400	3000K	14"	3-3/4"
CMF193100L27D1	35W	3100	2700K	19"	3-3/4"
CMF193100L30D1	35W	3100	3000K	19"	3-3/4"



CARTER

- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI



White	LED	Source Lumens	CCT	DIA.	D
CSF101100L27D1	13W	1100	2700K	10"	2.5"
CSF101100L30D1	13W	1100	3000K	10"	2.5"
CSF121600L27D1	17W	1600	2700K	12"	2.5"
CSF121600L30D1	17W	1600	3000K	12"	2.5"
CSF142400L27D1	26W	2400	2700K	14"	2.5"
CSF142400L30D1	26W	2400	3000K	14"	2.5"
CSF193100L27D1	35W	3100	2700K	19"	2.5"
CSF193100L30D1	35W	3100	3000K	19"	2.5"



title 24 compliant



CIRRUS

- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI



White	LED	Source Lumens	CCT	DIA.	D
C2F091100L27D1	13W	1100	2700K	9"	3"
C2F091100L30D1	13W	1100	3000K	9"	3"
C2F111600L27D1	17W	1600	2700K	11"	3"
C2F111600L30D1	17W	1600	3000K	11"	3"
C2F142400L27D1	26W	2400	2700K	14"	3"
C2F142400L30D1	26W	2400	3000K	14"	3"
C2F193100L27D1	35W	3100	2700K	19"	3"
C2F193100L30D1	35W	3100	3000K	19"	3"



title 24 compliant





DECORATIVE LINEAR

Combining function and style, AFX decorative linear lighting solutions create visually appealing, energy-efficient illumination possibilities for commercial and residential applications.



Satin Nickel



Oil-Rubbed Bronze

GIZELLE

- Tapered low profile
- White acrylic diffuser

FLUORESCENT

- 120V electronic ballast (R8)
- 120-277V universal-voltage ballast (MV)
- Lamps not included

Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	W	L
GZL432SNR8	GZL432RBR8	4	F32T8	3-5/8"	17"	48-3/8"
GZL432SNMV	GZL432RBMV	4	F32T8	3-5/8"	17"	48-3/8"



White



Satin Nickel

HIGHLAND

- White acrylic diffuser
- Adjustable hanging cable up to 48" included
- Without cable kit (NN,WN models)
- Optional stem mount kits available

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Nickel	White	Qty.	Lamp	H	W	L
HPL332NMV	HPL332WMV	3	F32T8	4-1/4"	11"	49-3/4"
HPL332NNMV	HPL332WNMV	3	F32T8	4-1/4"	11"	49-3/4"



Stems - White (Ordered Separately)

Rigid	Swivel	Length
HKR18W	HKS18W	18"
HKR24W	HKS24W	24"
HKR30W	HKS30W	30"

Cable Kit	Length
HKC	48"

Joiner
HPLJN-Nickel
HPLJW-White

*Stems are listed as individual units
order in pairs to increase height



Cherry



Unfinished Oak



Oak



White

WINCHESTER

- Solid wood crown molding
- White acrylic diffuser

FLUORESCENT

- 120V electronic ballast (R8)
- 120-277V universal-voltage ballast (MV)
- Lamps not included

Cherry	Oak	Unfinished Oak	White	Qty.	Lamp	H	W	L
CCM232R8	KCM232R8	UCM232R8	WCM232R8	2	F32T8	3-3/8"	13-1/2"	51-3/8"
CCM2U3R8	KCM2U3R8	UCM2U3R8	WCM2U3R8	2	FB32T8	3-3/8"	27-3/4"	27-3/4"
CCM432R8	KCM432R8	UCM432R8	WCM432R8	4	F32T8	3-3/8"	18-1/4"	51-3/8"
CCM432MV	KCM432MV	UCM432MV	WCM432MV	4	F32T8	3-3/8"	18-1/4"	51-3/8"
CCM232MV	KCM232MV	UCM232MV	WCM232MV	2	F32T8	3-3/8"	13-1/2"	51-3/8"
CCM2U3MV	KCM2U3MV	UCM2U3MV	WCM2U3MV	2	FB32T8	3-3/8"	27-3/4"	27-3/4"



CONROE

- Half round wood mold
- White acrylic diffuser

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage ballast
- Lamps not included

Satin Nickel

120V	120-277V	Qty.	Lamp	H	W	L
CN232R8	CN232MV	2	F32T8	3-1/2"	12-1/2"	50"
CN2U3R8	CN2U3MV	2	FB32T8	3-1/2"	25-7/8"	25-7/8"
CN432R8	CN432MV	4	F32T8	3-1/2"	17-5/8"	50"






AEON SUSPENDED

- Satin aluminum with white acrylic diffuser
- Oil-rubbed bronze with linen acrylic diffuser
- Direct/Indirect light output
- 12" stem kit or 45" cable kit (CK)

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Aluminum	Oil-Rubbed Bronze	Qty.	Lamp	H	W	L
AEL232SAMV	AEL232RBMV	2	F32T8	17-3/8"	16"	53-3/8"
AEL432SAMV	AEL432RBMV	4	F32T8	17-3/8"	22"	53-3/8"
AEL232SAMV-CK	AEL232RBMV-CK	2	F32T8	ADJ.	16"	53-3/8"
AEL432SAMV-CK	AEL432RBMV-CK	4	F32T8	ADJ.	22"	53-3/8"

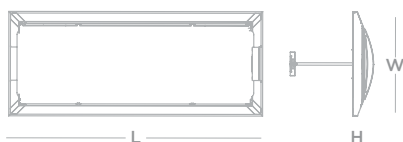

Stems/Cable Kit (Ordered Separately)

Satin Aluminum	
STEM-SA-06	6" Stem
STEM-SA-12	12" Stem
STEM-SA-24	24" Stem
CK4W-SA	45" Cable Kit w/Canopy
Oil-Rubbed Bronze	
STEM-RB-06	6" Stem
STEM-RB-12	12" Stem
STEM-RB-24	24" Stem
CK4W-RB	45" Cable Kit w/Canopy

*Stems are listed as individual units-order in pairs to increase height



Satin Aluminum



Oil-Rubbed Bronze

AEON

- Satin aluminum with white acrylic diffuser
- Oil-rubbed bronze with linen acrylic diffuser

LED

- 50,000 hr. LED life, available in 3000 lumens (28W) or 5000 lumens (46W), 90 CRI

4-3/8" H x **16" W** x 53-3/8" L
 4-3/8" H x **22" W** x 53-3/8" L

Series	Size (Inches)		LED	CCT	Driver	Finish
	W	Lumens				
AELF	16	= 3000	L	27 2700K	D1 Voltage (120V TRIAC Dimming) D2 Voltage (120-277V 0-10V Dimming)	RB Oil-Rubbed Bronze SA Satin Aluminum
	22	= 5000		30 3000K		

Example: AELF163000L30D1SA



FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

Satin Aluminum	Oil-Rubbed Bronze	Qty.	Lamp	H	W	L
AELF232SAMV	AELF232RBMV	2	F32T8	4-3/8"	16"	53-3/8"
AELF432SAMV	AELF432RBMV	4	F32T8	4-3/8"	22"	53-3/8"





Oak



White

CAMPTON

- Solid wood molding
- White acrylic diffuser

FLUORESCENT

- 120V electronic ballast
- Lamps not included



Cherry

Cherry	Oak	White	Qty.	Lamp	H	W	L
CTC232R8	CTK232R8	CTW232R8	2	F32T8	3-1/2"	11-3/4"	49-1/8"
CTC2U3R8	CTK2U3R8	CTW2U3R8	2	FB32T8	3-1/2"	25-1/8"	25-1/8"
CTC432R8	CTK432R8	CTW432R8	4	F32T8	3-1/2"	16-3/4"	49-1/8"



Maple

MISSION

- Solid wood molding
- Smooth white acrylic diffuser

FLUORESCENT

- 120V electronic ballast
- Lamps not included



Cherry

Cherry	Maple	Qty.	Lamp	H	W	L
MCC232R8	MCM232R8	2	F32T8	3-1/2"	11-1/4"	49-1/2"
MCC2U3R8	MCM2U3R8	2	FB32T8	3-1/2"	25-1/4"	25-1/4"
MCC432R8	MCM432R8	4	F32T8	3-1/2"	17-1/4"	49-1/2"





COURTLAND

- Low profile
- White acrylic diffuser

FLUORESCENT

- 120V electronic ballast (R8)
- 120-277V universal-voltage ballast (MV)
- Lamps not included

White	Qty.	Lamp	H	W	L
CLL232R8	2	F32T8	3-3/4"	11-1/2"	52"
CLL232MV	2	F32T8	3-3/4"	11-1/2"	52"
CLL428MV	4	F28T5	3-3/4"	11-1/2"	52"



LED CLOUD

- Narrow profile
- White acrylic diffuser

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Warm White	LED	Source Lumens	CCT	L	W	D
LC3000L30D1	36W	3000	3000K	50-3/4"	10-1/2"	4-7/8"
LC4100L30D1	50W	4100	3000K	50-3/4"	10-1/2"	4-7/8"
LC5000L30D1	60W	5000	3000K	50-3/4"	10-1/2"	4-7/8"

Cool White	LED	Source Lumens	CCT	L	W	D
LC3000L40D1	36W	3000	4000K	50-3/4"	10-1/2"	4-7/8"
LC4100L40D1	50W	4100	4000K	50-3/4"	10-1/2"	4-7/8"
LC5000L40D1	60W	5000	4000K	50-3/4"	10-1/2"	4-7/8"





LARGO

- Full size profile
- White acrylic diffuser
- Lift and shift mount
- Order diffuser and housing separately

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

White Diffuser	White Housing	Qty.	Lamp	H	W	L
RC14	CSW142MV	2	F32T8	6"	15"	51-3/4"
RC14	CSW144MV	4	F32T8	6"	15"	51-3/8"
RC22	CSW224MV	4	F17T8	6"	27"	27-1/2"
RC22	CSW2U4MV	2	FB32T8	6"	27"	27-1/2"
RC24	CSW244MV	4	F32T8	6"	27"	51-1/2"



RIGBY

- Narrow profile
- White acrylic diffuser
- Lift and shift mount

FLUORESCENT

- 120V electronic ballast (R8)
- 120-277V universal-voltage ballast (MV)
- Lamps not included

White						
120V	120-277V	Qty.	Lamp	H	W	L
RC232R8	RC232MV	2	F32T8	4-7/8"	10-1/2"	50-3/4"
RC2U3R8	RC2U3MV	2	FB32T8	6"	27"	27-1/2"
RC417R8	RC417MV	4	F17T8	5-1/4"	15"	24-1/2"
RC432R8	RC432MV	4	F32T8	5-1/4"	15"	50-3/4"



MALIBU

- Full size square profile
- White acrylic diffuser
- Lift and shift mount
- Order diffuser and housing separately

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

White Diffuser	Housing	Qty.	Lamp	H	W	L
MAR14	CSW142MV	2	F32T8	5"	14"	50"
MAR14	CSW144MV	4	F32T8	5"	14"	50"
MAR22	CSW224MV	4	F17T8	5"	26"	25-1/2"
MAR22	CSW2U4MV	2	FB32T8	5"	26"	25-1/2"
MAR24	CSW244MV	4	F32T8	5"	26"	50"



MARINA

- Narrow square cloud
- White acrylic diffuser
- Lift and shift mount

FLUORESCENT

- 120V electronic ballast (R8)
- 120-277V universal-voltage ballast (MV)
- Lamps not included

White	Qty.	Lamp	H	W	L
MAR232R8	2	F32T8	3-5/8"	9-3/4"	50"
MAR232MV	2	F32T8	3-5/8"	9-3/4"	50"
MAR432R8	4	F32T8	3-5/8"	16-1/4"	50"
MAR432MV	4	F32T8	3-5/8"	16-1/4"	50"



LED WRAP

- White steel housing
- Frosted white prismatic acrylic diffuser




LED

- 120V TRIAC dimmable (D1)
- 120-277V, 0-10V DC dimmable (D2)
- 50,000 hr. LED life, 90 CRI

Warm White		LED	Source Lumens	CCT	L	W	D
* LWL07483000L30D1	25W	3000	3000K	48"	7"	3"	
LWL07485000L30D1	45W	5000	3000K	48"	7"	3"	
* LWL07483000L30D2	25W	3000	3000K	48"	7"	3"	
LWL07485000L30D2	45W	5000	3000K	48"	7"	3"	

Cool White		LED	Source Lumens	CCT	L	W	D
* LWL07483000L40D1	25W	3000	4000K	48"	7"	3"	
LWL07485000L40D1	45W	5000	4000K	48"	7"	3"	
* LWL07483000L40D2	25W	3000	4000K	48"	7"	3"	
LWL07485000L40D2	45W	5000	4000K	48"	7"	3"	

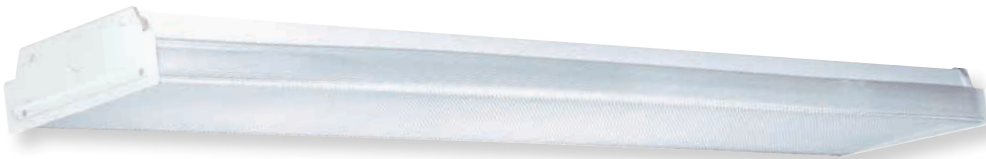

Prismatic



White

NARROW WRAP

- White steel housing
- Clear prismatic or white acrylic diffuser
- Flush, stem or row mounting

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage ballast
- Lamps not included

Prismatic				White									
120V	120-277V	Qty.	Lamp	H	W	L	120V	120-277V	Qty.	Lamp	H	W	L
LW217R8	LW217AMV	2	F17T8	2-3/8"	7"	24"	LW217WAR8	LW217WAMV	2	F17T8	2-3/8"	7"	24"
LW232R8	LW232AMV	2	F32T8	2-3/8"	7"	48"	LW232WAR8	LW232WAMV	2	F32T8	2-3/8"	7"	48"
LW432R8	LW432AMV	4	F32T8	2-3/8"	11-1/2"	48"	LW432WAR8	LW432WAMV	4	F32T8	2-3/8"	11-1/2"	48"





COMMERCIAL GRADE STRIPLIGHT

- Pre-finished white steel housing
- Flush, stem or row mounting

FLUORESCENT

- 120V electronic high power factor ballast
- 120-277V universal-voltage ballast
- Lamps not included

800 mA High Output -20° F

120V	Qty.	Lamp	H	W	L
S248HOE12	2	F48T12HO	3-3/4"	4-1/4"	48"
S296HOCWE12	2	F96T12HO-O/F96T8HO	3-3/4"	4-1/4"	96"

430 mA Slimline

120-277V	Qty.	Lamp	H	W	L
S296MV	2	F96T8	3-3/4"	4-1/4"	96"



STANDARD STRIPLIGHT

- Pre-finished white steel housing
- Flush, stem or row mounting

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage ballast
- Lamps not included

Single

120V	120-277V	Qty.	Lamp	H	W	L
ST115R8		1	F15T8	3-1/4"	3-1/8"	18"
ST117R8	ST117MV	1	F17T8	3-1/4"	3-1/8"	24"
ST125R8	ST125MV	1	F25T8	3-1/4"	3-1/8"	36"
ST132R8	ST132MV	1	F32T8	3-1/4"	3-1/8"	48"

Double

120V	120-277V	Qty.	Lamp	H	W	L
ST217R8	ST217MV	2	F17T8	3-1/4"	4-3/4"	24"
ST225R8	ST225MV	2	F25T8	3-1/4"	4-3/4"	36"
ST232R8	ST232MV	2	F32T8	3-1/4"	4-3/4"	48"
	ST232-8MV	4	F32T8	3-1/4"	4-3/4"	96"





LOW-PROFILE STRIPLIGHT

- Pre-finished white steel housing
- Flush, stem or row mounting

FLUORESCENT

- 120-277V universal-voltage ballast
- Energy efficient T5 technology
- Lamps not included

Single			H	W	L	Double			H	W	L
Model	Qty.	Lamp				Model	Qty.	Lamp			
STN114MV	1	F14T5	2-3/8"	1-7/8"	22-3/8"	STN214MV	2	F14T5	2-3/4"	3-1/8"	22-3/8"
STN121MV	1	F21T5	2-3/8"	1-7/8"	34-3/8"	STN221MV	2	F21T5	2-3/4"	3-1/8"	34-3/8"
STN128MV	1	F28T5	2-3/8"	1-7/8"	46-3/8"	STN228MV	2	F28T5	2-3/4"	3-1/8"	46-3/8"
STN124MV	1	F24T5HO	2-3/8"	1-7/8"	22-3/8"	STN224MV	2	F24T5HO	2-3/4"	3-1/8"	22-3/8"
STN139MV	1	F39T5HO	2-3/8"	1-7/8"	34-3/8"	STN239MV	2	F39T5HO	2-3/4"	3-1/8"	34-3/8"
STN154MV	1	F54T5HO	2-3/8"	1-7/8"	46-3/8"	STN254MV	2	F54T5HO	2-3/4"	3-1/8"	46-3/8"



VAPORTITE

- Reinforced fiberglass housing
- Spring mounted easy install diffuser brackets
- Molded, high impact acrylic
- Continuous gasket offers secure seal against dust and moisture
- Includes mounting brackets and water tight connector

FLUORESCENT

- 120-277V universal-voltage ballast
- Lamps not included

White			H	W	L
Model	Qty.	Lamp			
VTL228MV	2	F28T5	5-1/8"	6-3/4"	50"
VTL232MV	2	F32T8	5-1/8"	6-3/4"	50"
VTL254HOMV	2	F54T5HO	5-1/8"	6-3/4"	50"
VTL228-8MV	4	F28T5	5-1/8"	6-3/4"	98"
VTL232-8MV	4	F32T8	5-1/8"	6-3/4"	98"
VTL254HO-8MV	4	F54T5HO	5-1/8"	6-3/4"	98"





OUTDOOR

Decorative outdoor lighting fixtures provide stylish yet functional perimeter illumination for commercial and residential applications.

ARIA MINI FLUSH

- Corrosion resistant cast aluminum housing
- White glass diffuser

LED

- Minimum starting temp -20°F
- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	DIA.	H
ARMF07800L30D1SN	ARMF07800L30D1RB	8W	800	3000K	7"	3-5/8"



ADA



Satin Nickel



Oil-Rubbed Bronze

ARIA MINI

- White glass diffuser
- Corrosion resistant cast aluminum housing

LED

- Minimum starting temp -20°F
- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Oil-Rubbed Bronze	LED	Source Lumens	CCT	H	W	D
ARMW4700L27D1SN	ARMW4700L27D1RB	8W	700	2700K	4-1/2"	4-7/8"	5-3/4"
ARMW4700L30D1SN	ARMW4700L30D1RB	8W	700	3000K	4-1/2"	4-7/8"	5-3/4"



Satin Nickel




Oil-Rubbed Bronze


FLUORESCENT

- Photo sensor option (PC)
- 120V electronic ballast
- Minimum starting temp 0°F
- Lamp included (2700K)

Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	W	D
ARMW1F13SNECT	ARMW1F13RBECT	1	13W Flattened CFL 4-Pin	4-1/2"	4-7/8"	5-3/4"
ARMW1F13SNECT-PC	ARMW1F13RBECT-PC	1	13W Flattened CFL 4-Pin	4-1/2"	4-7/8"	5-3/4"



Companion

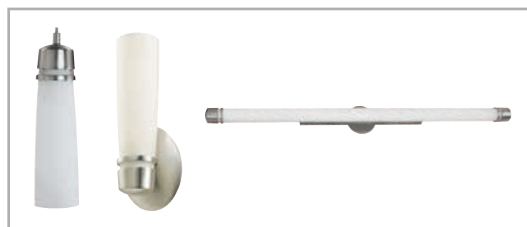

ARIA

- Corrosion resistant cast aluminum housing
- White glass diffuser is closed at top

FLUORESCENT

- Minimum starting temp 0°F
- 120V socket ballast
- Lamp not included

Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	W	D
*ARW113SNEC	*ARW113RBEC	1	13W CFQ 4-Pin	11"	4-3/8"	4"
ARW118SNEC	ARW118RBEC	1	18W CFQ 4-Pin	14-1/2"	5-3/8"	4-3/4"




Satin Nickel




Oil-Rubbed Bronze



ADA*



Companion

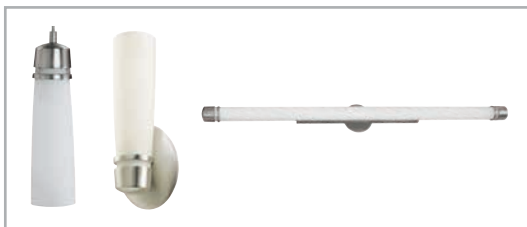

CENTURY

- White acrylic diffuser with die-cast metal accents

FLUORESCENT

- Photo sensor option (PC)
- Minimum starting temp 0°F
- 120V residential
- Lamp not included


Painted Nickel	Qty.	Lamp	H	W	D
CEW113PNEC	1	13W CFQ 4-Pin	10-1/8"	7-3/8"	4-5/8"
CEW113PNEC-PC	1	13W CFQ 4-Pin	10-1/8"	7-3/8"	4-5/8"
CEW118PNEC	1	18W CFQ 4-Pin	12-1/2"	7-3/8"	4-5/8"
CEW118PNEC-PC	1	18W CFQ 4-Pin	12-1/2"	7-3/8"	4-5/8"



113



118



Companion



OUTDOOR




BILBAO

- Linear extruded aluminum accent bands
- White acrylic diffuser

FLUORESCENT

- Photo sensor option (PC)
- Minimum starting temp 0°F
- 120V residential
- Lamp not included

Satin Aluminum	Qty.	Lamp	H	W	D
BBW113SAEC	1	13W CFQ 4-Pin	9"	8"	4"
BBW113SAEC-PC	1	13W CFQ 4-Pin	9"	8"	4"



Companion




FUSION

- Metal ends
- White textured glass diffuser

FLUORESCENT

- Photo sensor option (PC)
- Minimum starting temp 0°F
- 120V electronic ballast
- Lamp(s) not included

Satin Nickel	Qty.	Lamp	H	W	D
FUW113SNEC	1	13W CFQ 4-Pin	9-1/2"	5-3/8"	4"
FUW113SNEC-PC	1	13W CFQ 4-Pin	9-1/2"	5-3/8"	4"
FUW213SNEC	2	13W CFQ 4-Pin	19"	5-3/8"	4"
FUW213SNEC-PC	2	13W CFQ 4-Pin	19"	5-3/8"	4"



Companion



OUTDOOR

BRIO

- Decorative metal bands
- White acrylic diffuser

FLUORESCENT

- Photo sensor option (PC)
- Minimum starting temp 0°F
- 120V electronic ballast (EC)
- 120-277V universal-voltage ballast (MV)
- Lamps not included


Satin Nickel	Oil-Rubbed Bronze	Qty.	Lamp	H	W	D
BRW218SNMV	BRW218RBMV	2	18W CFQ 4-Pin	18"	7-1/4"	4-5/8"
BRW218SNEC-PC	BRW218RBEC-PC	2	18W CFQ 4-Pin	18"	7-1/4"	4-5/8"



Oil-Rubbed Bronze



Satin Nickel




BRISTOL

- Corrosion resistant aluminum housing
- White acrylic diffuser

LED

- Minimum starting temp -20°F
- 120V residential
- 50,000 hr. LED life, 80 CRI

Black	LED	Source Lumens	CCT	H	W	D
BSSW081070050LBK	9W	700	5000K	9-1/2"	7-3/4"	4-1/2"





OUTDOOR


HANOVER

- Corrosion resistant aluminum housing
- Amber tinted glass diffuser

LED

- Minimum starting temp -20°F
- 120V residential
- 50,000 hr. LED life, 80 CRI

Oil-Rubbed Bronze	LED	Source Lumens	CCT	H	W	D
HNSW20045LRTS	8W	320	4500K	10"	6"	6-1/4"




BRONSON

- Corrosion resistant aluminum housing
- Clear seeded glass diffuser

LED

- Minimum starting temp -20°F
- 120V residential
- 50,000 hr. LED life, 80 CRI

Black	LED	Source Lumens	CCT	H	W	D
BNSW20045LBKCS	6W	240	4500K	13"	7-1/4"	8-1/2"




LED SECURITY

- Polycarbonate housing
- Frosted polycarbonate diffuser
- Integrated photocell for dusk-to-dawn operation

LED

- Minimum starting temp -20°F
- 120V residential
- 50,000 hr. LED life, 80 CRI

Bronze	LED	Source Lumens	CCT	H	W	D
BWSW1600L41RB	18W	1620	4100K	10"	7-1/2"	4-3/8"




- Polycarbonate housing
- Frosted polycarbonate diffuser
- Integrated photocell for dusk-to-dawn operation

LED

- Minimum starting temp -20°F
- 120V residential
- 50,000 hr. LED life, 80 CRI

Bronze	LED	Source Lumens	CCT	H	W	D
BWSW2400L41RB	27W	2430	4100K	11"	6-3/8"	5-1/2"



OUTDOOR


LED FLOOD

- Corrosion resistant cast aluminum housing
- Clear polycarbonate prismatic diffuser

LED

- Minimum starting temp -20°F
- 120V residential
- 50,000 hr. LED life, 80 CRI

Black	LED	Source Lumens	CCT	H	W	D
TPDW70050LBK	10.5W	700	5000K	4"	8"	5-7/8"
TPDW110050LBK	17W	1100	5000K	4"	8"	5-7/8"
TPDW1300L50BK	13.5W	1300	5000K	4"	8"	5-7/8"
TPDW2600L50BK	28W	2600	5000K	4"	8"	5-7/8"

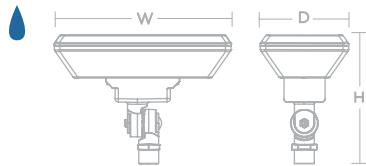


- Corrosion resistant cast aluminum housing with back plate
- Clear polycarbonate prismatic diffuser
- Dusk-to-dawn operation with motion sensor

LED

- Minimum starting temp -20°F
- 120V residential
- 50,000 hr. LED life, 80 CRI

Bronze	LED	Source Lumens	CCT	Sensor Range	H	W	D
TPDW1300L50RBMS	14W	1300	5000K	180°	8"	8"	6-1/2"
TPDW2600L50RBMS	29W	2600	5000K	240°	8"	8"	6-1/2"

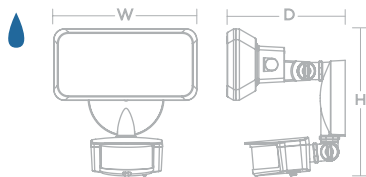



OVERBED

Wall-mounted overbed luminaires from AFX contribute to a relaxed feel while meeting the functional needs of a healthcare setting. The versatile overbed fixtures feature four-way pull switches to conveniently switch between ambient and task lighting along with a variety of decorative styles and finishes to complement room designs.



GLENVIEW

- Crown molding profile
- Faux wood finish ends
- White acrylic diffuser
- 4-way pull switch with night light



LED

- 50,000 hr. LED life, 90 CRI

White	Light Oak	Mahogany	LED	Source Lumens	CCT	H	L	D
GLB384000L30ENWH	GLB384000L30ENLK	GLB384000L30ENMH	36W	1350 up/2700 down	3000K	5-1/2"	38-1/4"	6-1/2"
GLB505400L30ENWH	GLB505400L30ENLK	GLB505400L30ENMH	45W	1800 up/3600 down	3000K	5-1/2"	50-1/4"	6-1/2"

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage option available without switch and nightlight (consult factory)
- Lamps not included

White	Light Oak	Mahogany	Qty.	Lamp	H	L	D
GLB325E8WH	GLB325E8LK	GLB325E8MH	3	F25T8	5-1/2"	38-1/4"	6-1/2"
GLB332E8WH	GLB332E8LK	GLB332E8MH	3	F32T8	5-1/2"	50-1/4"	6-1/2"



PALMETTO

- Off white alabaster acrylic diffuser
- White acrylic bottom and top diffuser
- 4-way pull switch with night light

LED

- 50,000 hr. LED life, 90 CRI

Alabaster	LED	Source Lumens	CCT	H	L	D
PLB424000L30EN	36W	1350 up/2700 down	3000K	5-1/4"	42-1/2"	5-1/8"
PLB545400L30EN	45W	1800 up/3600 down	3000K	5-1/4"	54-1/4"	5-1/8"

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage option available without switch and nightlight (consult factory)
- Lamps not included

Alabaster	Qty.	Lamp	H	L	D
PLB325ALE8	3	F25T8	5-1/4"	42-1/4"	5-1/8"
PLB332ALE8	3	F32T8	5-1/4"	54-1/4"	5-1/8"





White



Taupe

HINSDALE

- Solid wood crown molding frame
- White acrylic bottom and clear top diffuser
- 4-way pull switch with night light



Ivory

LED

- 50,000 hr. LED life, 90 CRI

Ivory	Taupe	White	LED	Source Lumens	CCT	H	L	D
HDB434000L30ENPI	HDB434000L30ENTT	HDB434000L30ENWH	36W	1350 up/2700 down	3000K	6"	43"	7-1/4"
HDB555400L30ENPI	HDB555400L30ENTT	HDB555400L30ENWH	45W	1800 up/3600 down	3000K	6"	55"	7-1/4"

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage option available without switch and nightlight (consult factory)
- Lamps not included

Ivory	Taupe	White	Qty.	Lamp	H	L	D
HDB325PIE8	HDB325TTE8	HDB325WHE8	3	F25T8	6"	43"	7-1/4"
HDB332PIE8	HDB332TTE8	HDB332WHE8	3	F32T8	6"	55"	7-1/4"



Cherry

CAMERON

- Solid wood trim frame
- White acrylic bottom and clear top diffuser
- 4-way pull switch with night light



Espresso

LED

- 50,000 hr. LED life, 90 CRI

Cherry	Espresso	LED	Source Lumens	CCT	H	L	D
CMB394000L30ENCH	CMB394000L30ENES	36W	1350 up/2700 down	3000K	6"	39-5/8"	5-3/4"
CMB515400L30ENCH	CMB515400L30ENES	45W	1800 up/3600 down	3000K	6"	51-5/8"	5-3/4"

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage option available without switch and nightlight (consult factory)
- Lamps not included

Cherry	Espresso	Qty.	Lamp	H	L	D
CMB325CHE8	CMB325ESE8	3	F25T8	6"	39-5/8"	5-3/4"
CMB332CHE8	CMB332ESE8	3	F32T8	6"	51-5/8"	5-3/4"





Overbed Lighting Functions



All On



Downlight



Uplight



Brushed Nickel



Light Oak



Mahogany

IDEAL

- Tapered front with faux wood finish
- White acrylic diffuser
- 4-way pull switch with night light

LED

- 50,000 hr. LED life, 90 CRI

Brushed Nickel	Light Oak	Mahogany	LED	Source Lumens	CCT	H	L	D
IDB394000L30ENBN	IDB394000L30ENLK	IDB394000L30ENMH	36W	1350 up/2700 down	3000K	5-3/8"	39-15/16"	6-1/4"
IDB515400L30ENBN	IDB515400L30ENLK	IDB515400L30ENMH	45W	1800 up/3600 down	3000K	5-3/8"	51-15/16"	6-1/4"

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage option available without switch and nightlight (consult factory)
- Lamps not included

Brushed Nickel	Light Oak	Mahogany	Qty.	Lamp	H	L	D
IDB325E8BN	IDB325E8LK	IDB325E8MH	3	F25T8	5-3/8"	39-15/16"	6-1/4"
IDB332E8BN	IDB332E8LK	IDB332E8MH	3	F32T8	5-3/8"	51-15/16"	6-1/4"



SHERIDAN

- Decorative metal trim
- White linen patterned acrylic front diffuser
- White acrylic bottom and clear top diffuser
- 4-way pull switch with night light

LED

- 50,000 hr. LED life, 90 CRI

Satin Nickel	Champagne	LED	Source Lumens	CCT	H	L	D
SHB444000L30ENSN	SHB444000L30ENAC	36W	1350 up/2700 down	3000K	4-5/8"	44-1/4"	6-1/2"
SHB565400L30ENSN	SHB565400L30ENAC	45W	1800 up/3600 down	3000K	4-5/8"	56-1/4"	6-1/2"

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage option available without switch and nightlight (consult factory)
- Lamps not included

Satin Nickel	Champagne	Qty.	Lamp	H	L	D
SHB325SNE8-LA	SHB325ACE8-LA	3	F25T8	4-5/8"	44-1/4"	6-1/2"
SHB332SNE8-LA	SHB332ACE8-LA	3	F32T8	4-5/8"	56-1/4"	6-1/2"



Champagne



Satin Nickel

BILBAO

- Linear aluminum accent bands
- White acrylic front, bottom and top diffuser
- 4-way pull switch with night light

LED

- 50,000 hr. LED life, 90 CRI

Satin Aluminum	LED	Source Lumens	CCT	H	L	D
BBB434000L30ENSA	36W	1350 up/2700 down	3000K	5-1/4"	43"	5-5/8"
BBB555400L30ENSA	45W	1800 up/3600 down	3000K	5-1/4"	55"	5-5/8"

FLUORESCENT

- 120V electronic ballast
- 120-277V universal-voltage option available without switch and nightlight (consult factory)
- Lamps not included

Satin Aluminum	Qty.	Lamp	H	L	D
BBB325SAE8	3	F25T8	5-1/4"	43"	5-5/8"
BBB332SAE8	3	F32T8	5-1/4"	55"	5-5/8"





UNDERCABINET

Enhance work and task environments while saving energy with premium undercabinet lighting solutions.



LED NOBLE PRO

- Plug-in or direct wire
- Linkable up to 200 watts with 12" connecting cable or direct wire
- Selectable switch - choose 1 of 3 color temperature levels: 2700K, 3000K or 4000K
- Dimmable with TRIAC wall dimmer, page 131
- White polycarbonate diffuser hides LEDs
- Fully integrated LEDs
- Title 24 compliant
- ≥ 90 CRI
- 50,000 hour LED life
- Hi-Low switch
- Rear access plate for quick wire connections
- Captive mounting screws
- Includes: connecting cable, cord & plug, direct connector & hardwire connector
- Extruded aluminum construction



Size	White	Oil-Rubbed Bronze	Brushed Aluminum	Type	Lumens			LPW	L	W	D
					2.7K	3.0K	4.0K				
9 in.	NLLP9WH	NLLP9RB	NLLP9BA	4.6W SMT-Array	259	290	384	63	9"	3-3/4"	1"
14 in.	NLLP14WH	NLLP14RB	NLLP14BA	6.7W SMT-Array	384	437	442	65	14"	3-3/4"	1"
22 in.	NLLP22WH	NLLP22RB	NLLP22BA	10.7W SMT-Array	656	746	755	69	22"	3-3/4"	1"
32 in.	NLLP32WH	NLLP32RB	NLLP32BA	14.4W SMT-Array	927	1022	1023	70	32"	3-3/4"	1"
40 in.	NLLP40WH	NLLP40RB	NLLP40BA	18W SMT-Array	1170	1302	1310	72	40"	3-3/4"	1"

LPW based on 3000K color temperature



Accessories



Order separately, see page 131



UNDERCABINET

LED NOBLE

- Plug-in or direct wire
- Linkable up to 200 watts with 12" connecting cable or direct wire
- 3000K color temperature
- Dimmable with TRIAC wall dimmer, page 131
- White polycarbonate diffuser hides LEDs
- Fully integrated LEDs
- ≥ 80 CRI
- 50,000 hour LED life
- Hi-Low switch
- Rear access plate for quick wire connections
- Captive mounting screws
- Includes: connecting cable, cord & plug, direct connector & hardwire connector
- Extruded aluminum construction



Size	White	Oil-Rubbed Bronze	Type	Lumens	LPW	L	W	D
9 in.	NLL9WH2	NLL9RB2	5W SMT-Array	310	62	9"	3-3/4"	1"
14 in.	NLL14WH2	NLL14RB2	7.3W SMT-Array	487	66	14"	3-3/4"	1"
22 in.	NLL22WH2	NLL22RB2	11.7W SMT-Array	761	65	22"	3-3/4"	1"
32 in.	NLL32WH2	NLL32RB2	16W SMT-Array	1026	64	32"	3-3/4"	1"
40 in.	NLL40WH2	NLL40RB2	20.1W SMT-Array	1332	66	40"	3-3/4"	1"




Accessories

Included	Additional
Power Cord 12" Connecting Cable Connector Hardwire Connector	Set of 4 Clips Hardwire Box 24", 36", 48", 60", 72" Connecting Cable Available in White or Black

Order separately, see page 131

LED T5L

- Direct wire
- Hardwire only
- 3000K color temperature
- Dimmable with TRIAC wall dimmer, page 131
- White polycarbonate diffuser hides LEDs
- Fully integrated LEDs
- ≥ 80 CRI
- 50,000 hour LED life
- On/off switch
- Multiple knockouts conveniently located
- Includes hardwire connector
- Stamped steel construction

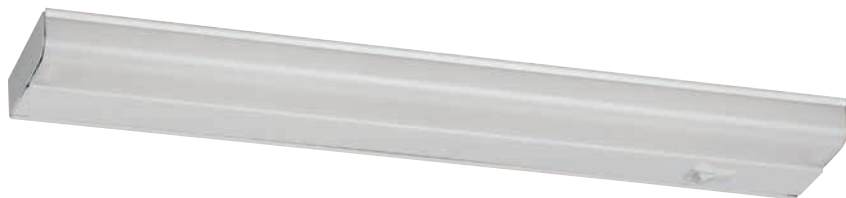

Size	White	Oil-Rubbed Bronze	Type	Lumens	LPW	L	W	D
12 in.	T5L12RWH	T5L12RRB	5W SMT-Array	315	63	12"	3-1/2"	1-1/8"
18 in.	T5L18RWH	T5L18RRB	7.5W SMT-Array	520	69	18"	3-1/2"	1-1/8"
21 in.	T5L21RWH	T5L21RRB	8.5W SMT-Array	570	67	21"	3-1/2"	1-1/8"
24 in.	T5L24RWH	T5L24RRB	9W SMT-Array	630	70	24"	3-1/2"	1-1/8"
33 in.	T5L33RWH	T5L33RRB	13.5W SMT-Array	950	70	33"	3-1/2"	1-1/8"
42 in.	T5L42RWH	T5L42RRB	16.5W SMT-Array	1150	69	42"	3-1/2"	1-1/8"




Accessories

Included
Hardwire Connector


XENON NXL

- Plug-in or direct wire
- Linkable with 12" connecting cable or direct connect up to 560 watts
- 5,000 hour, 20 watt bi-pin lamps included (2700K)
- Dimmable with standard 600 watt wall dimmer
- Tempered frosted glass diffuser
- Multiple back and top knockouts
- Push-in wire connectors for easy wiring
- Includes: connecting cable, cord & plug, direct connector & hardwire connector
- Captive mounting screws
- Sturdy steel construction

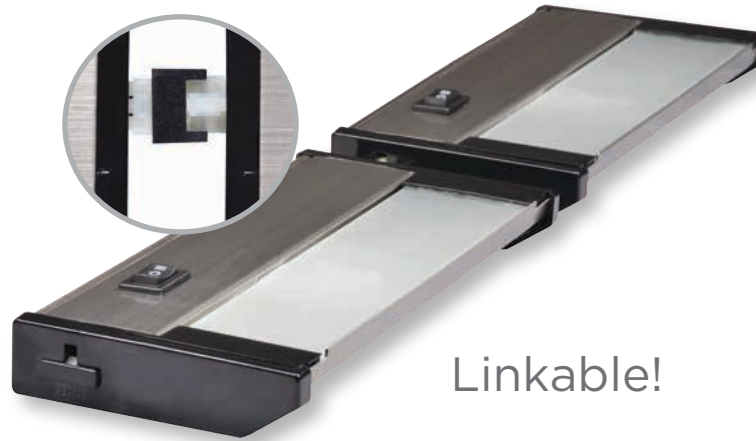


Linkable!

Size	White	Bronze	Stainless	Type 120V	L	W	D
8 in.	NXL120WH	NXL120RB	NXL120SS	(1) 20W Xenon Bi-Pin	8"	3-3/4"	1"
14 in.	NXL220WH	NXL220RB	NXL220SS	(2) 20W Xenon Bi-Pin	14"	3-3/4"	1"
22 in.	NXL320WH	NXL320RB	NXL320SS	(3) 20W Xenon Bi-Pin	22"	3-3/4"	1"
32 in.	NXL420WH	NXL420RB	NXL420SS	(4) 20W Xenon Bi-Pin	32"	3-3/4"	1"
40 in.	NXL520WH	NXL520RB	NXL520SS	(5) 20W Xenon Bi-Pin	40"	3-3/4"	1"

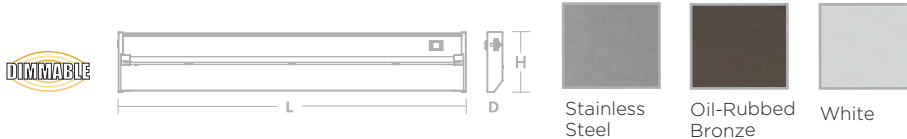

Accessories

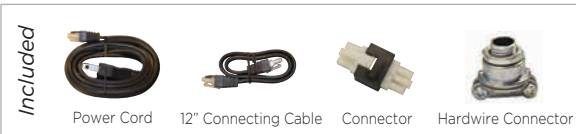

UNDERCABINET

T5 FLUORESCENT

- Direct wire
- White metal housing
- White diffuser snaps in and out for easy maintenance
- Multi-purpose hardwire fitting included
- 120V electronic ballast
- T5 lamp(s) required
- Also available with on/off switch and T5 lamps included (RT models, 4100K)



Standard	Lamps & Switch	Qty.	Lamp	L	W	D
T5U108	T5U108RT	1	F8T5	12-3/8"	3-5/8"	1-1/4"
T5U113	T5U113RT	1	F13T5	21-3/8"	3-5/8"	1-1/4"
T5U208	T5U208RT	2	F8T5	24-3/8"	3-5/8"	1-1/4"
T5U138	T5U138RT	2	(1) F13T5 & (1) F8T5	34-3/8"	3-5/8"	1-1/4"
T5U213	T5U213RT	2	F13T5	42-3/8"	3-5/8"	1-1/4"

Accessories



T8 FLUORESCENT

- Direct wire
- White metal housing
- White diffuser snaps in and out for easy maintenance
- Multi-purpose hardwire fitting included (excludes closet models)
- 120V electronic ballast
- T8 lamp(s) required
- Also available with on/off switch and convenience outlet (RCO models)
- 15W T8 lamp included (T models, 4100K)



Standard	Switch & Outlet	Pre-heat	Lamp & Switch	Qty.	Lamp	L	W	D
T8U15		T8U15PH	T8U15PHRT	1	F15T8	18"	4"	1-3/8"
T8U17	T8U17RCO			1	F17T8	24"	4"	1-3/8"
T8U25	T8U25RCO			1	F25T8	36"	4"	1-3/8"
T8U32	T8U32RCO			1	F32T8	48"	4"	1-3/8"

- Closet light has special knockout pattern for universal J-box mounting
- Meets national electrical codes for closet lighting
- Available with pull-chain switch (PS)
- 15W T8 lamps included (4100K)

Pre-heat Closet	Qty.	Lamp	L	W	D
T8U15PHCLT	1	F15T8	18"	4"	1-3/8"
T8U15PHCLT-PS	1	F15T8	18"	4"	1-3/8"

Accessories



Additional Accessories Noble Pro / Noble Series / NXL Series

White

- XLCP60WH
 - 60" Cord & Plug
- XLHBWH
 - Hardwire Box
- XLCC24WH
 - 24" Interconnect Cord
- XLCC36WH
 - 36" Interconnect Cord
- XLCC48WH
 - 48" Interconnect Cord
- XLCC72WH
 - 72" Interconnect Cord

Black

- XLCP60BL
 - 60" Cord & Plug
- XLHBBL
 - Hardwire Box
- XLCC24BL
 - 24" Interconnect Cord
- XLCC36BL
 - 36" Interconnect Cord
- XLCC48BL
 - 48" Interconnect Cord
- XLCC72BL
 - 72" Interconnect Cord

XLC-Clip

- Clear cord clip with screws
(4 pieces)

Compatible Dimmers for Noble Pro / Noble Series / T5L

Brand	Model #
Cooper	6013W
Leviton	6633, 6681, 6621-WWP, 6631-WWP, DSE06-10Z
Lutron®	TG-600P, TG-603P, AY600P, MACL153MH, SELV-300P
Legrand®	T600WV, WS700TCCCVG



UNDERCABINET





Hera[®]

Light Years Ahead.

AFX Partner

Hera designs, develops and manufactures high-quality lighting solutions specifically for cabinets, furniture and displays. Hera comes from a European heritage in innovative lighting design and technology and as manufacturers develop our own unique lighting systems.

Hera's expertise in bringing new trends and technology to the market has been evident throughout the decades. As a driving force in lighting technology, Hera's main focus for more than a decade has been LED technology -- bringing energy-efficient and maintenance free LEDs to market.

All Hera lighting products are unique, stylishly designed and on the leading edge of today's lighting technology, with lighting systems that exemplify beauty as well as form and function.



STICK 2 LED

MINI LINEAR LED WITH INTEGRATED CONNECTING SYSTEM

- Aluminum and plexiglass housing
- Recess or surface mount
- 50,000 hr. life
- Dimmable with optional accessories (consult factory)
- Uses: furniture, cabinets, displays, closets, food cases

3000K	Watt	Lumens	L	W	D
STICK2/8/WW	1.6	80	8"	7/16"	3/8"
STICK2/12/WW	2.4	109	12"	7/16"	3/8"
STICK2/34/WW	7.2	341	34"	7/16"	3/8"
STICK2/46/WW	9.7	461	46"	7/16"	3/8"

4100K	Watt	Lumens	L	W	D
STICK2/8/CW	1.6	70	8"	7/16"	3/8"
STICK2/12/CW	2.4	107	12"	7/16"	3/8"
STICK2/34/CW	7.2	304	34"	7/16"	3/8"
STICK2/46/CW	9.7	411	46"	7/16"	3/8"

Accessories	
STICK2/PC	Power cord 98"
STICK2/CC1	1" connecting cable
STICK2/CC12	12" connecting cable
STICK2/CC39	39" connecting cable
STICK/TB	Terminal block
KB12LEDCC39	39" power cable
KB12LEDCC98	98" power cable

Drivers	
STICKPS24/6WATT	6 watt
STICKPS24/30HE	30 watt
STICKPS24/75	75 watt
STICKPS24/96/DIM	96 watt

STICK 3 LED

MINI LINEAR LED WITH INTEGRATED CONNECTING SYSTEM

- Aluminum housing
- Frosted light lens
- Recess or surface mount
- 50,000 hr. life
- Dimmable with optional accessories (consult factory)
- Uses: furniture, cabinets, displays, show cases

3000K	Watt	Lumens	L	W	D
STICK3/8/WW	2.5	260	7-7/8"	1/2"	1/2"
STICK3/12/WW	4	420	11-13/16"	1/2"	1/2"
STICK3/24/WW	7.5	840	22-7/16"	1/2"	1/2"
STICK3/34/WW	11.5	1260	34-1/4"	1/2"	1/2"
STICK3/46/WW	15	1680	44-7/8"	1/2"	1/2"

4100K	Watt	Lumens	L	W	D
STICK3/8/CW	2.5	260	7-7/8"	1/2"	1/2"
STICK3/12/CW	4	420	11-13/16"	1/2"	1/2"
STICK3/24/CW	7.5	840	22-7/16"	1/2"	1/2"
STICK3/34/CW	11.5	1260	34-1/4"	1/2"	1/2"
STICK3/46/CW	15	1680	44-7/8"	1/2"	1/2"

5000K	Watt	Lumens	L	W	D
STICK3/8/5000	2.5	290	7-7/8"	1/2"	1/2"
STICK3/12/5000	4	475	11-13/16"	1/2"	1/2"
STICK3/24/5000	7.5	950	22-7/16"	1/2"	1/2"
STICK3/34/5000	11.5	1415	34-1/4"	1/2"	1/2"
STICK3/46/5000	15	1890	44-7/8"	1/2"	1/2"

Accessories	
STICK3/PC	Power cord 59"
STICK3/CC2	2" connecting cable
STICK3/CC12	12" connecting cable
STICK3/CC39	39" connecting cable
STICK/TB	Terminal block
KB12LEDCC39	39" power cable
KB12LEDCC98	98" power cable

Drivers	
STICKPS24/6WATT	6 watt
STICKPS24/30HE	30 watt
STICKPS24/75	75 watt
STICKPS24/96/DIM	96 watt



ELITE LED

LINEAR LED WITH DIRECT CONNECT SYSTEM

- Aluminum housing with frosted lens
- Recess or surface mount
- 50,000 hr. life
- Uses: furniture, cabinets, displays

3000K	Watt	Lumens	L	W	D
EL/LED/12/WW	5	320	11"	1"	1-3/8"
EL/LED/22/WW	9	700	21-3/16"	1"	1-3/8"
EL/LED/34/WW	12	950	33"	1"	1-3/8"
EL/LED/46/WW	15	1200	44-13/16"	1"	1-3/8"
EL/LED/59/WW	18	1550	56-5/8"	1"	1-3/8"

Accessories
Connecting cables from 6" to 144"
Straight or 90°

Power Cords
With plug from 36" to 144"

4100K	Watt	Lumens	L	W	D
EL/LED/12/CW	5	320	11"	1"	1-3/8"
EL/LED/22/CW	9	700	21-3/16"	1"	1-3/8"
EL/LED/34/CW	12	950	33"	1"	1-3/8"
EL/LED/46/CW	15	1200	44-13/16"	1"	1-3/8"
EL/LED/59/CW	18	1550	56-5/8"	1"	1-3/8"

Consult factory



SLIMLITE XL T5

LINEAR FLUORESCENT WITH DIRECT CONNECT SYSTEM

- Steel housing and aluminum with optional lens (order separately)
- Surface mount
- Energy efficient T5 lamps (order separately)
- Electronic ballast
- Uses: shelves, cabinets, displays, food applications

White	Lamp	Lumens	L	W	H
ES12/R	F8WT5	400	12-7/8"	7/8"	1-5/16"
ES22/R	F14WT5	1350	23-1/8"	7/8"	1-5/16"
ES34/R	F21T5	2100	34-7/8"	7/8"	1-5/16"
ES46/R	F28T5	2900	46-3/4"	7/8"	1-5/16"
ES59/R	F35T5	3650	58-7/16"	7/8"	1-5/16"

Accessories
SCC6/XL/R 6" connecting cable
SCC12/XL/R 12" connecting cable
SCC24/XL/R 24" connecting cable
SCC48/XL/R 48" connecting cable
SCC72/XL/R 72" connecting cable
SCC120/XL/R 120" connecting cable
SDC/XL/R Direct connect

Power Cords
SPC/XL/R 72"
SPC/S/XL/R 72" with roller switch
SPC72/STC 72" with straight connector



R55

LED SPOTLIGHT

- Aluminum housing
- Recess or surface mount
- 50,000 hr. life
- Dimmable with optional accessories (consult factory)
- Uses: furniture, cabinets, displays

3000K		Color	Watt	Lumens	Dia	D
R55-LED/SS/WW	Stainless Steel	3	165	2-11/16"	7/16"	
R55-LED/CH/WW	Matte Chrome	3	165	2-11/16"	7/16"	
R55-LED/BL/WW	Black	3	165	2-11/16"	7/16"	
R55-LED/WH/WW	White	3	165	2-11/16"	7/16"	

4100K		Color	Watt	Lumens	Dia	D
R55-LED/SS/CW	Stainless Steel	3	165	2-11/16"	7/16"	
R55-LED/CH/CW	Matte Chrome	3	165	2-11/16"	7/16"	
R55-LED/BL/CW	Black	3	165	2-11/16"	7/16"	
R55-LED/WH/CW	White	3	165	2-11/16"	7/16"	

Accessories	
STICK/TB	Terminal block
KB12LEDCC39	39" power cable
KB12LEDCC98	98" power cable

Drivers	
STICKPS24/6WATT	6 watt
STICKPS24/30HE	30 watt
STICKPS24/75	75 watt
STICKPS24/96/DIM	96 watt



FR68

LED SPOTLIGHT

- Aluminum housing with frosted lens
- Recess or surface mount
- 50,000 hr. life
- Dimmable with optional accessories (consult factory)
- Uses: furniture, cabinets, displays

3000K		Color	Watt	Lumens	Dia	D
FR68/SS/3000	Stainless Steel	4	230	2-15/16"	9/16"	
FR68/MC/3000	Matte Chrome	4	230	2-15/16"	9/16"	

4000K		Color	Watt	Lumens	Dia	D
FR68/SS/4000	Stainless Steel	4	230	2-15/16"	9/16"	
FR68/MC/4000	Matte Chrome	4	230	2-15/16"	9/16"	

Accessories	
STICK/TB	Terminal block
KB12LEDCC39	39" power cable
KB12LEDCC98	98" power cable

Drivers	
STICKPS24/6WATT	6 watt
STICKPS24/30HE	30 watt
STICKPS24/75	75 watt
STICKPS24/96/DIM	96 watt



AR78 LED SPOTLIGHT

- Aluminum housing with frosted lens
- Recess or surface mount
- 50,000 hr. life
- Dimmable with optional accessories (consult factory)
- Uses: furniture, cabinets, displays, lightweight ceilings



3000K	Color	Watt	Lumens	Dia	D	Accessories
AR78/SS/WW	Stainless Steel	7.5	350	3-1/2"	9/16"	STICK/TB Terminal block
AR78/BL/WW	Black	7.5	350	3-1/2"	9/16"	KB12LEDCC39 39" power cable
AR78/WH/WW	White	7.5	350	3-1/2"	9/16"	KB12LEDCC98 98" power cable
4000K	Color	Watt	Lumens	Dia	D	Drivers
AR78/SS/CW	Stainless Steel	7.5	350	3-1/2"	9/16"	STICKPS24/30HE 30 watt
AR78/BL/CW	Black	7.5	350	3-1/2"	9/16"	STICKPS24/75 75 watt
AR78/WH/CW	White	7.5	350	3-1/2"	9/16"	STICKPS24/96/DIM 96 watt

EYE-LED LED MINI SPOTLIGHT

- Aluminum housing
- Recess mount
- 50,000 hr. life
- Dimmable with optional accessories (consult factory)
- Uses: furniture, cabinets, displays, closets



3000K	Color	Watt	Lumens	Dia	D	Accessories
EYELEDSS/WW	Stainless Steel	1	60	1-1/8"	1/2"	LEDCC36 36" connecting cable
EYELEDA/WW	Aluminum	1	60	1-1/8"	1/2"	LEDCC72 72" connecting cable
						TBLED/B Terminal block
4000K	Color	Watt	Lumens	Dia	D	Drivers
EYELEDSS/CW	Stainless Steel	1	80	1-1/8"	1/2"	PSLED10 10 watt
EYELEDA/CW	Aluminum	1	80	1-1/8"	1/2"	PSLED/DIM/S 18 watt dimmable
						DIMCONTROL LED dimmer control

SR68

LED SWIVEL SPOTLIGHT

- Aluminum housing with frosted lens
- Recess mount with 20° swivel and tilt
- 50,000 hr. life
- Dimmable with optional accessories (consult factory)
- Uses: furniture, cabinets, displays, closets

3000K	Color	Watt	Lumens	Dia	D
SR68/WW	Brushed Aluminum	4.8	283	3-3/16"	1-9/16"
4000K	Color	Watt	Lumens	Dia	D
SR68/CW	Brushed Aluminum	4.8	283	3-3/16"	1-9/16"



Accessories	
LEDCC36	36" connecting cable
LEDCC72	72" connecting cable

Drivers	
PSLED/10	10 watt
PSLED/DIM/S	18 watt dimmable
DIMCONTROL	LED dimmer control

SR45

LED SWIVEL SPOTLIGHT

- Aluminum housing
- Recess mount with 20° swivel and tilt
- 50,000 hr. life
- Dimmable with optional accessories (consult factory)
- Uses: furniture, cabinets, displays, closets

3000K	Color	Watt	Lumens	Dia	D
SR45/SS/3000	Stainless Steel	5.3	422	2"	1-1/4"
SR45/WH/3000	White	5.3	422	2"	1-1/4"
4000K	Color	Watt	Lumens	Dia	D
SR45/SS/4000	Stainless Steel	5.3	422	2"	1-1/4"
SR45/WH/4000	White	5.3	422	2"	1-1/4"



Accessories	
LEDCC36	36" connecting cable
LEDCC72	72" connecting cable

Drivers	
PSLED/10	10 watt
PSLED/DIM/S	18 watt dimmable
DIMCONTROL	LED dimmer control




[✓] MPLIGHTING®

AFX Partner

As AFX's strategic partner, MP Lighting® furthers our continued commitment to bring design, technology and ever-increasing value to our lighting partners.

MP's focus is innovative design technologies that keeps their products at the forefront of technology in the Commercial/Consumer lighting industry, specializing in manufacturing specification-grade architectural LED fixtures, as well as Low Voltage, Line Voltage, and Multi-Circuit Track Systems.

Established in 1994, MP Lighting is a Canadian owned and operated company with headquarters in Vancouver, BC. Products are suited for commercial, institutional, industrial, hospitality, and residential applications.

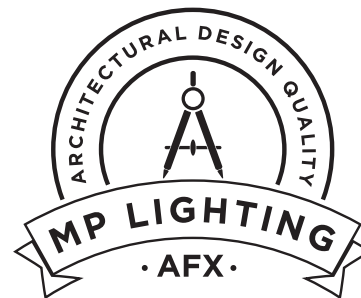



L01 IN-GRADE ACCENT LIGHT

- Exterior/Interior Grade
- IP68 Wet location listed
- Tempered clear glass lens, 30° beam spread
- Splice box, aluminum flange and level gauge (included)
- Dimmable with 12V AC power supply* (not included)
- Uses: stairs, ramps, aisle installation

Stainless	Watt	Lumens	CCT	Dia	D
L01-1W27SNCOASO-S6	1	58	2700K	2-1/4"	1-3/4"
L01-2W27SNCOASO-S6	2.5	78	2700K	2-1/4"	1-3/4"
Matte Clear Anodized					
L01-1W27SNCOASO-MA	1	58	2700K	2-1/4"	1-3/4"
L01-2W27SNCOASO-MA	2.5	78	2700K	2-1/4"	1-3/4"
Bronze					
L01-1W27SNCOASO-BZ	1	58	2700K	2-1/4"	1-3/4"
L01-2W27SNCOASO-BZ	2.5	78	2700K	2-1/4"	1-3/4"

*TLW120MT050-01 — recommended Dimmable Power Supply (order separately)



L02 IN-GRADE ACCENT LIGHT

- Interior Grade
- IP53 Dry location listed
- Tempered clear glass lens, 30° beam spread
- Steel flange (included)
- Dimmable with 12V AC power supply* (not included)
- Uses: stairs, ramps, aisle installation

Stainless	Watt	Lumens	CCT	Dia	D
L02-1W27SNCOA-S6	1	58	2700K	2-1/4"	1-3/4"
L02-2W27SNCOA-S6	2.5	78	2700K	2-1/4"	1-3/4"
Matte Clear Anodized					
L02-1W27SNCOA-MA	1	58	2700K	2-1/4"	1-3/4"
L02-2W27SNCOA-MA	2.5	78	2700K	2-1/4"	1-3/4"
Bronze					
L02-1W27SNCOA-BZ	1	58	2700K	2-1/4"	1-3/4"
L02-2W27SNCOA-BZ	2.5	78	2700K	2-1/4"	1-3/4"

*TLW120MT050-01 — recommended Dimmable Power Supply (order separately)



L06 IN-GRADE ACCENT LIGHT

- Exterior/Interior Grade
- IP68 Wet location listed
- Tempered frosted glass lens
- Can be ordered with mounting box (B) or without (N)
- Uses: driveways, sidewalks

Stainless	Watt	Lumens	CCT	Dia	D
L06-WWHSFB2-S6	0.2	2.1	2700K	4-7/8"	2-1/2"
L06-WWHSFB4-S6	0.2	2.1	2700K	4-7/8"	4"
L06-WWHSFB8-S6	0.2	2.1	2700K	4-7/8"	8"
L06-WWHSFN2-S6	0.2	2.1	2700K	4-7/8"	2-1/2"
L06-WWHSFN4-S6	0.2	2.1	2700K	4-7/8"	4"
L06-WWHSFN8-S6	0.2	2.1	2700K	4-7/8"	8"

*TLDDL10W12V1 — recommended NON-Dimmable Power Supply (order separately)



L07 IN-GRADE ACCENT LIGHT

- Exterior/Interior Grade
- IP67 Wet location listed
- Tempered clear (C) or frosted (F) glass lens
- Uses: deck flooring

Stainless	Watt	Lumens	CCT	Dia	D
L07-WWHC-S6	0.2	2.1	2700K	3/4"	1-1/2"
L07-WWHF-S6	0.2	2.1	2700K	3/4"	1-1/2"

*TLDDL10W12V1 – recommended NON-Dimmable Power Supply (order separately)



L08 IN-GRADE ACCENT LIGHT

- Exterior/Interior Grade
- IP68 Wet location listed
- Tempered clear glass lens, single or double aperture
- Back box, aluminum flange and level gauge (included)
- Dimmable with 12V AC power supply* (not included)
- Uses: upright walls, columns, architectural features

Stainless	Apertures	Watt	Lumens	CCT	Dia	D
L08-1W27SSASO-S6	Single	1	0.5	2700K	2-7/16"	2"
L08-1W27SDASO-S6	Double	1	1	2700K	2-7/16"	2"
L08-2W27SSASO-S6	Single	2.5	0.8	2700K	2-7/16"	2"
L08-2W27SDASO-S6	Double	2.5	1.5	2700K	2-7/16"	2"
Matte Clear Anodized						
L08-1W27SSASO-MA	Single	1	0.5	2700K	2-7/16"	2"
L08-1W27SDASO-MA	Double	1	1	2700K	2-7/16"	2"
L08-2W27SSASO-MA	Single	2.5	0.8	2700K	2-7/16"	2"
L08-2W27SDASO-MA	Double	2.5	1.5	2700K	2-7/16"	2"
Bronze						
L08-1W27SSASO-BZ	Single	1	0.5	2700K	2-7/16"	2"
L08-1W27SDASO-BZ	Double	1	1	2700K	2-7/16"	2"
L08-2W27SSASO-BZ	Single	2.5	0.8	2700K	2-7/16"	2"
L08-2W27SDASO-BZ	Double	2.5	1.5	2700K	2-7/16"	2"

*TLW120MT050-01 – recommended Dimmable Power Supply (order separately)



L09 IN-GRADE ACCENT LIGHT

- Interior Grade
- IP53 Dry location listed
- Tempered clear glass lens, single or double aperture
- Back box, aluminum flange and level gauge (included)
- Dimmable with 12V AC power supply* (not included)
- Uses: upright walls, columns, architectural features

Stainless	Apertures	Watt	Lumens	CCT	Dia	D
L09-1W27SSA-S6	Single	1	0.5	2700K	2-3/8"	2"
L09-1W27SDA-S6	Double	1	1	2700K	2-3/8"	2"
L09-2W27SSA-S6	Single	2.5	0.8	2700K	2-3/8"	2"
L09-2W27SDA-S6	Double	2.5	1.5	2700K	2-3/8"	2"
Matte Clear Anodized						
L09-1W27SSA-MA	Single	1	0.5	2700K	2-3/8"	2"
L09-1W27SDA-MA	Double	1	1	2700K	2-3/8"	2"
L09-2W27SSA-MA	Single	2.5	0.8	2700K	2-3/8"	2"
L09-2W27SDA-MA	Double	2.5	1.5	2700K	2-3/8"	2"
Bronze						
L09-1W27SSA-BZ	Single	1	0.5	2700K	2-3/8"	2"
L09-1W27SDA-BZ	Double	1	1	2700K	2-3/8"	2"
L09-2W27SSA-BZ	Single	2.5	0.8	2700K	2-3/8"	2"
L09-2W27SDA-BZ	Double	2.5	1.5	2700K	2-3/8"	2"

*TLW120MT050-01 – recommended Dimmable Power Supply (order separately)



L300 IN-GRADE ACCENT LIGHT

- Exterior/Interior Grade
- IP66 Wet location listed
- Tempered clear glass lens, 30° beam spread
- Splice box, aluminum flange and level gauge (included)
- Dimmable with 12V AC power supply* (not included)
- Uses: stairs, ramps, aisle installation

Stainless	Watt	Lumens	CCT	Dia	D
L300-1W27SNCOASO-S6	1	31	2700K	2-1/2"	2"
L300-2W27SNCOASO-S6	2.5	50	2700K	2-1/2"	2"
Matte Clear Anodized					
L300-1W27SNCOASO-MA	1	31	2700K	2-1/2"	2"
L300-2W27SNCOASO-MA	2.5	50	2700K	2-1/2"	2"
Bronze					
L300-1W27SNCOASO-BZ	1	31	2700K	2-1/2"	2"
L300-2W27SNCOASO-BZ	2.5	50	2700K	2-1/2"	2"

*TLW120MT050-01 – recommended Dimmable Power Supply (order separately)



L304 IN-GRADE ACCENT LIGHT

- Square Exterior/Interior Grade
- IP66 Wet location listed
- Tempered clear glass lens, 30° beam spread
- Splice box, aluminum flange and level gauge (included)
- Dimmable with 12V AC power supply* (not included)
- Uses: upright walls, columns, architectural features

Stainless	Watt	Lumens	CCT	L	W	D
L304-1W27SNCOAS-S6	1	31	2700K	2-1/4"	2-1/4"	1-7/16"
L304-2W27SNCOAS-S6	2.5	50	2700K	2-1/4"	2-1/4"	1-7/16"
Matte Clear Anodized						
L304-1W27SNCOAS-MA	1	31	2700K	2-1/4"	2-1/4"	1-7/16"
L304-2W27SNCOAS-MA	2.5	50	2700K	2-1/4"	2-1/4"	1-7/16"
Bronze						
L304-1W27SNCOAS-BZ	1	31	2700K	2-1/4"	2-1/4"	1-7/16"
L304-2W27SNCOAS-BZ	2.5	50	2700K	2-1/4"	2-1/4"	1-7/16"

*TLW120MT050-01 – recommended Dimmable Power Supply (order separately)



L337 IN-GRADE ACCENT LIGHT

- Exterior/Interior Grade
- IP67 Wet location listed
- Tempered clear (C) or frosted (F) glass lens
- Uses: ceiling mount light

Stainless	Watt	Lumens	CCT	Dia	D
L337-WWHSC-S6	0.2	2.1	2700K	7/8"	1-3/8"
L337-WWHSF-S6	0.2	2.1	2700K	7/8"	1-3/8"

*TLDDL10W12V1 – recommended NON-Dimmable Power Supply (order separately)



L302

IN-GRADE ACCENT LIGHT

- Trimless Exterior/Interior Grade
- IP66 Wet location listed
- Tempered clear glass lens, 30° beam spread
- Splice box, aluminum flange and level gauge (included)
- Dimmable with 12V AC power supply* (not included)
- Uses: uplight walls, columns, architectural features

Stainless	Watt	Lumens	CCT	Dia	D
L302-1W27SNA0S-S6	1	58	2700K	1-3/4"	1-7/16"
L302-2W27SNA0S-S6	2.5	78	2700K	1-3/4"	1-7/16"
Matte Clear Anodized					
L302-1W27SNA0S-MA	1	58	2700K	1-3/4"	1-7/16"
L302-2W27SNA0S-MA	2.5	78	2700K	1-3/4"	1-7/16"
Bronze					
L302-1W27SNA0S-BZ	1	58	2700K	1-3/4"	1-7/16"
L302-2W27SNA0S-BZ	2.5	78	2700K	1-3/4"	1-7/16"

*TLW120MT050-01 — recommended Dimmable Power Supply (order separately)



L46

WALL MOUNT



- Exterior/Interior Grade
- IP66 Wet location listed
- Polycarbonate lens
- Non-dimmable with 12V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

Stainless	Watt	Lumens	CCT	H	W	D
L46-3W30SD-S6	3	28	3000K	3-3/8"	5"	3/8"
L46-6W30SD-S6	6	50	3000K	3-3/8"	5"	3/8"
Matte Clear Anodized						
L46-3W30SD-MA	3	28	3000K	3-3/8"	5"	3/8"
L46-6W30SD-MA	6	50	3000K	3-3/8"	5"	3/8"
Bronze						
L46-3W30SD-BZ	3	28	3000K	3-3/8"	5"	3/8"
L46-6W30SD-BZ	6	50	3000K	3-3/8"	5"	3/8"

L47

WALL MOUNT



- Exterior/Interior Grade
- IP66 Wet location listed
- Polycarbonate lens
- Non-dimmable with 12V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

Stainless	Watt	Lumens	CCT	H	W	D
L47-3W30SD-S6	3	28	3000K	5"	3-3/8"	3/8"
L47-6W30SD-S6	6	50	3000K	5"	3-3/8"	3/8"
Matte Clear Anodized						
L47-3W30SD-MA	3	28	3000K	5"	3-3/8"	3/8"
L47-6W30SD-MA	6	50	3000K	5"	3-3/8"	3/8"
Bronze						
L47-3W30SD-BZ	3	28	3000K	5"	3-3/8"	3/8"
L47-6W30SD-BZ	6	50	3000K	5"	3-3/8"	3/8"

L49

WALL MOUNT



- Exterior/Interior Grade
- IP66 Wet location listed
- Polycarbonate lens
- Adjustable 30° tilt light, 60° beam spread
- Dimmable with 19.2V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

Stainless	Watt	Lumens	CCT	H	W	D
L49-6W27S0A-S6	6	112	2700K	4-7/8"	9-3/4"	1/2"
Matte Clear Anodized						
L49-6W27S0A-MA	6	112	2700K	4-7/8"	9-3/4"	1/2"
Bronze						
L49-6W27S0A-BZ	6	112	2700K	4-7/8"	9-3/4"	1/2"



MP LIGHTING



L13

WALL MOUNT

- Interior Grade
- IP50 Dry location listed
- Tempered clear glass lens, 30° beam spread
- Non-dimmable with 3.2V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

	Mounting	Watt	Lumens	CCT	H	W	D
Matte Chrome							
L13-1W27HNVA-MC	Vertical	1	43	2700K	4-3/4"	3-1/8"	1-1/4"
L13-2W27HNVA-MC	Vertical	2.5	88	2700K	4-3/4"	3-1/8"	1-1/4"
L13-1W27HNHA-MC	Horizontal	1	43	2700K	4-3/4"	3-1/8"	1-1/4"
L13-2W27HNHA-MC	Horizontal	2.5	88	2700K	4-3/4"	3-1/8"	1-1/4"
Black							
L13-1W27HNVA-BK	Vertical	1	43	2700K	4-3/4"	3-1/8"	1-1/4"
L13-2W27HNVA-BK	Vertical	2.5	88	2700K	4-3/4"	3-1/8"	1-1/4"
L13-1W27HNHA-BK	Horizontal	1	43	2700K	4-3/4"	3-1/8"	1-1/4"
L13-2W27HNHA-BK	Horizontal	2.5	88	2700K	4-3/4"	3-1/8"	1-1/4"
Brushed Nickel							
L13-1W27HNVA-BN	Vertical	1	43	2700K	4-3/4"	3-1/8"	1-1/4"
L13-2W27HNVA-BN	Vertical	2.5	88	2700K	4-3/4"	3-1/8"	1-1/4"
L13-1W27HNHA-BN	Horizontal	1	43	2700K	4-3/4"	3-1/8"	1-1/4"
L13-2W27HNHA-BN	Horizontal	2.5	88	2700K	4-3/4"	3-1/8"	1-1/4"
White							
L13-1W27HNVA-WH	Vertical	1	43	2700K	4-3/4"	3-1/8"	1-1/4"
L13-2W27HNVA-WH	Vertical	2.5	88	2700K	4-3/4"	3-1/8"	1-1/4"
L13-1W27HNHA-WH	Horizontal	1	43	2700K	4-3/4"	3-1/8"	1-1/4"
L13-2W27HNHA-WH	Horizontal	2.5	88	2700K	4-3/4"	3-1/8"	1-1/4"



L16

WALL MOUNT

- Exterior/Interior Grade
- IP66 Wet location listed
- Tempered clear glass lens, 30° beam spread
- Non-dimmable with 3.2V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

	Watt	Lumens	CCT	H	W	D
L16-1W27SNVD-S6	1	43	2700K	5"	3-3/8"	2-5/8"
L16-2W27SNVD-S6	2.5	97	2700K	5"	3-3/8"	2-5/8"



L17

WALL MOUNT

- Exterior/Interior Grade
- IP66 Wet location listed
- Tempered clear glass lens, 30° beam spread
- Non-dimmable with 6.4V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

	Watt	Lumens	CCT	H	W	D
L17-1W27SNVD-S6	1	109	2700K	5"	3-3/8"	2-5/8"
L17-2W27SNVD-S6	2.5	175	2700K	5"	3-3/8"	2-5/8"

L22

WALL MOUNT

- Exterior/Interior Grade
- IP66 Wet location listed
- Polycarbonate lens
- Non-dimmable with 3.2V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

Stainless	Watt	Lumens	CCT	H	D
L22-1W27SFD-S3	1	14	2700K	4-5/8"	3/4"
L22-2W27SNVD-S3	2.5	28	2700K	4-5/8"	3/4"



L720

WALL MOUNT

- Exterior/Interior Grade
- IP66 Wet location listed
- Tempered clear glass lens, 30° beam spread
- Non-dimmable with 12V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

Matte Clear Anodized	Watt	Lumens	CCT	H	Dia
L720-16W27SNC-MA	16	614	2700K	8-1/2"	4"



L721

WALL MOUNT

- Exterior/Interior Grade
- IP66 Wet location listed
- Tempered clear glass lens, 30° beam spread
- Non-dimmable with 12V DC power supply (included)
- Uses: stairs, ramps, aisle, walkway installation

Matte Clear Anodized	Watt	Lumens	CCT	H	Dia
L721-8W27SNC-MA	8	307	2700K	4-7/8"	4"





L500 CABINET LIGHT

- Interior Grade
- IP20 Dry location listed
- Friction fit spring clips
- Tempered clear glass lens, 30° beam spread
- Powered by remote dimmable DC power supply* (not included)
- Uses: showcases, cabinets, millwork

Stainless	Watt	Lumens	CCT	L	W	D
L500-2W27SSND-MA	2.5	106	2700K	2-1/4"	2-1/4"	1-1/2"

*Recommended driver LED18W700iB for 2 to 6 fixtures in series



L501 CABINET LIGHT

- Interior Grade
- IP20 Dry location listed
- Friction fit spring clips
- Tempered clear glass lens, 30° beam spread
- Powered by remote dimmable DC power supply* (not included)
- Uses: showcases, cabinets, millwork

Matte Clear Anodized	Watt	Lumens	CCT	Dia	D
L501-2W27SSND-MA	2.5	108	2700K	2-1/2"	1-1/2"

*Recommended driver LED18W700iB for 2 to 6 fixtures in series

L182

WINE RACK

- Interior Grade - black anodized
- IP40 Dry location listed
- Wall mount, non-UV
- 30° beam spread
- Dimmable with 12V AC power supply* (not included) / 1 fixture in series, 1-25 legs in parallel
- Dimmable with DC driver* (not included) / 2-12 fixtures connected in a series
- Uses: restaurants, bars, wine cellars

Rack Arms


Black Anodized	Arm	Accessories	CrossBar	Watt	Lumens	CCT	L	W	D
L182T-W27HNHSA-BA	Top	Half Shroud	NA	1	64	2700K	NA	8"	8-1/4"
L182M-W27HNHSA1A-BA	Middle	Half Shroud	Single Neck View	1	64	2700K	NA	3-1/2"	8-1/4"
L182M-W27HNHSA2A-BA	Middle	Half Shroud	Double Neck View	1	64	2700K	NA	5-7/8"	8-1/4"
L182M-W27HNHSA1B-BA	Middle	Half Shroud	Single Front View	1	64	2700K	NA	8"	8-1/4"
L182M-W27HNHSA2B-BA	Middle	Half Shroud	Double Front View	1	64	2700K	NA	8"	8-1/4"
L182B-1A-BA	Bottom	NA	Single Neck View	NA	NA	NA	NA	3-1/2"	8-1/4"
L182B-2A-BA	Bottom	NA	Double Neck View	NA	NA	NA	NA	5-7/8"	8-1/4"
L182B-1B-BA	Bottom	NA	Single Front View	NA	NA	NA	NA	8"	8-1/4"
L182B-2B-BA	Bottom	NA	Double Front View	NA	NA	NA	NA	8"	8-1/4"

Rack Rail

Black Anodized	L	W	D
RAL182-2-WR-MB-BA	24"	1-1/4"	1"
RAL182-3-WR-MB-BA	36"	1-1/4"	1"
RAL182-4-WR-MB-BA	48"	1-1/4"	1"
RAL182-5-WR-MB-BA	60"	1-1/4"	1"
RAL182-6-WR-MB-BA	72"	1-1/4"	1"
RAL182-7-WR-MB-BA	84"	1-1/4"	1"
RAL182-8-WR-MB-BA	96"	1-1/4"	1"

Recommended*
 TLW120MT050-01 (AC) Dimmable Power Supply
 LED18W350i (DC) Dimmable Power Supply
 (order separately)



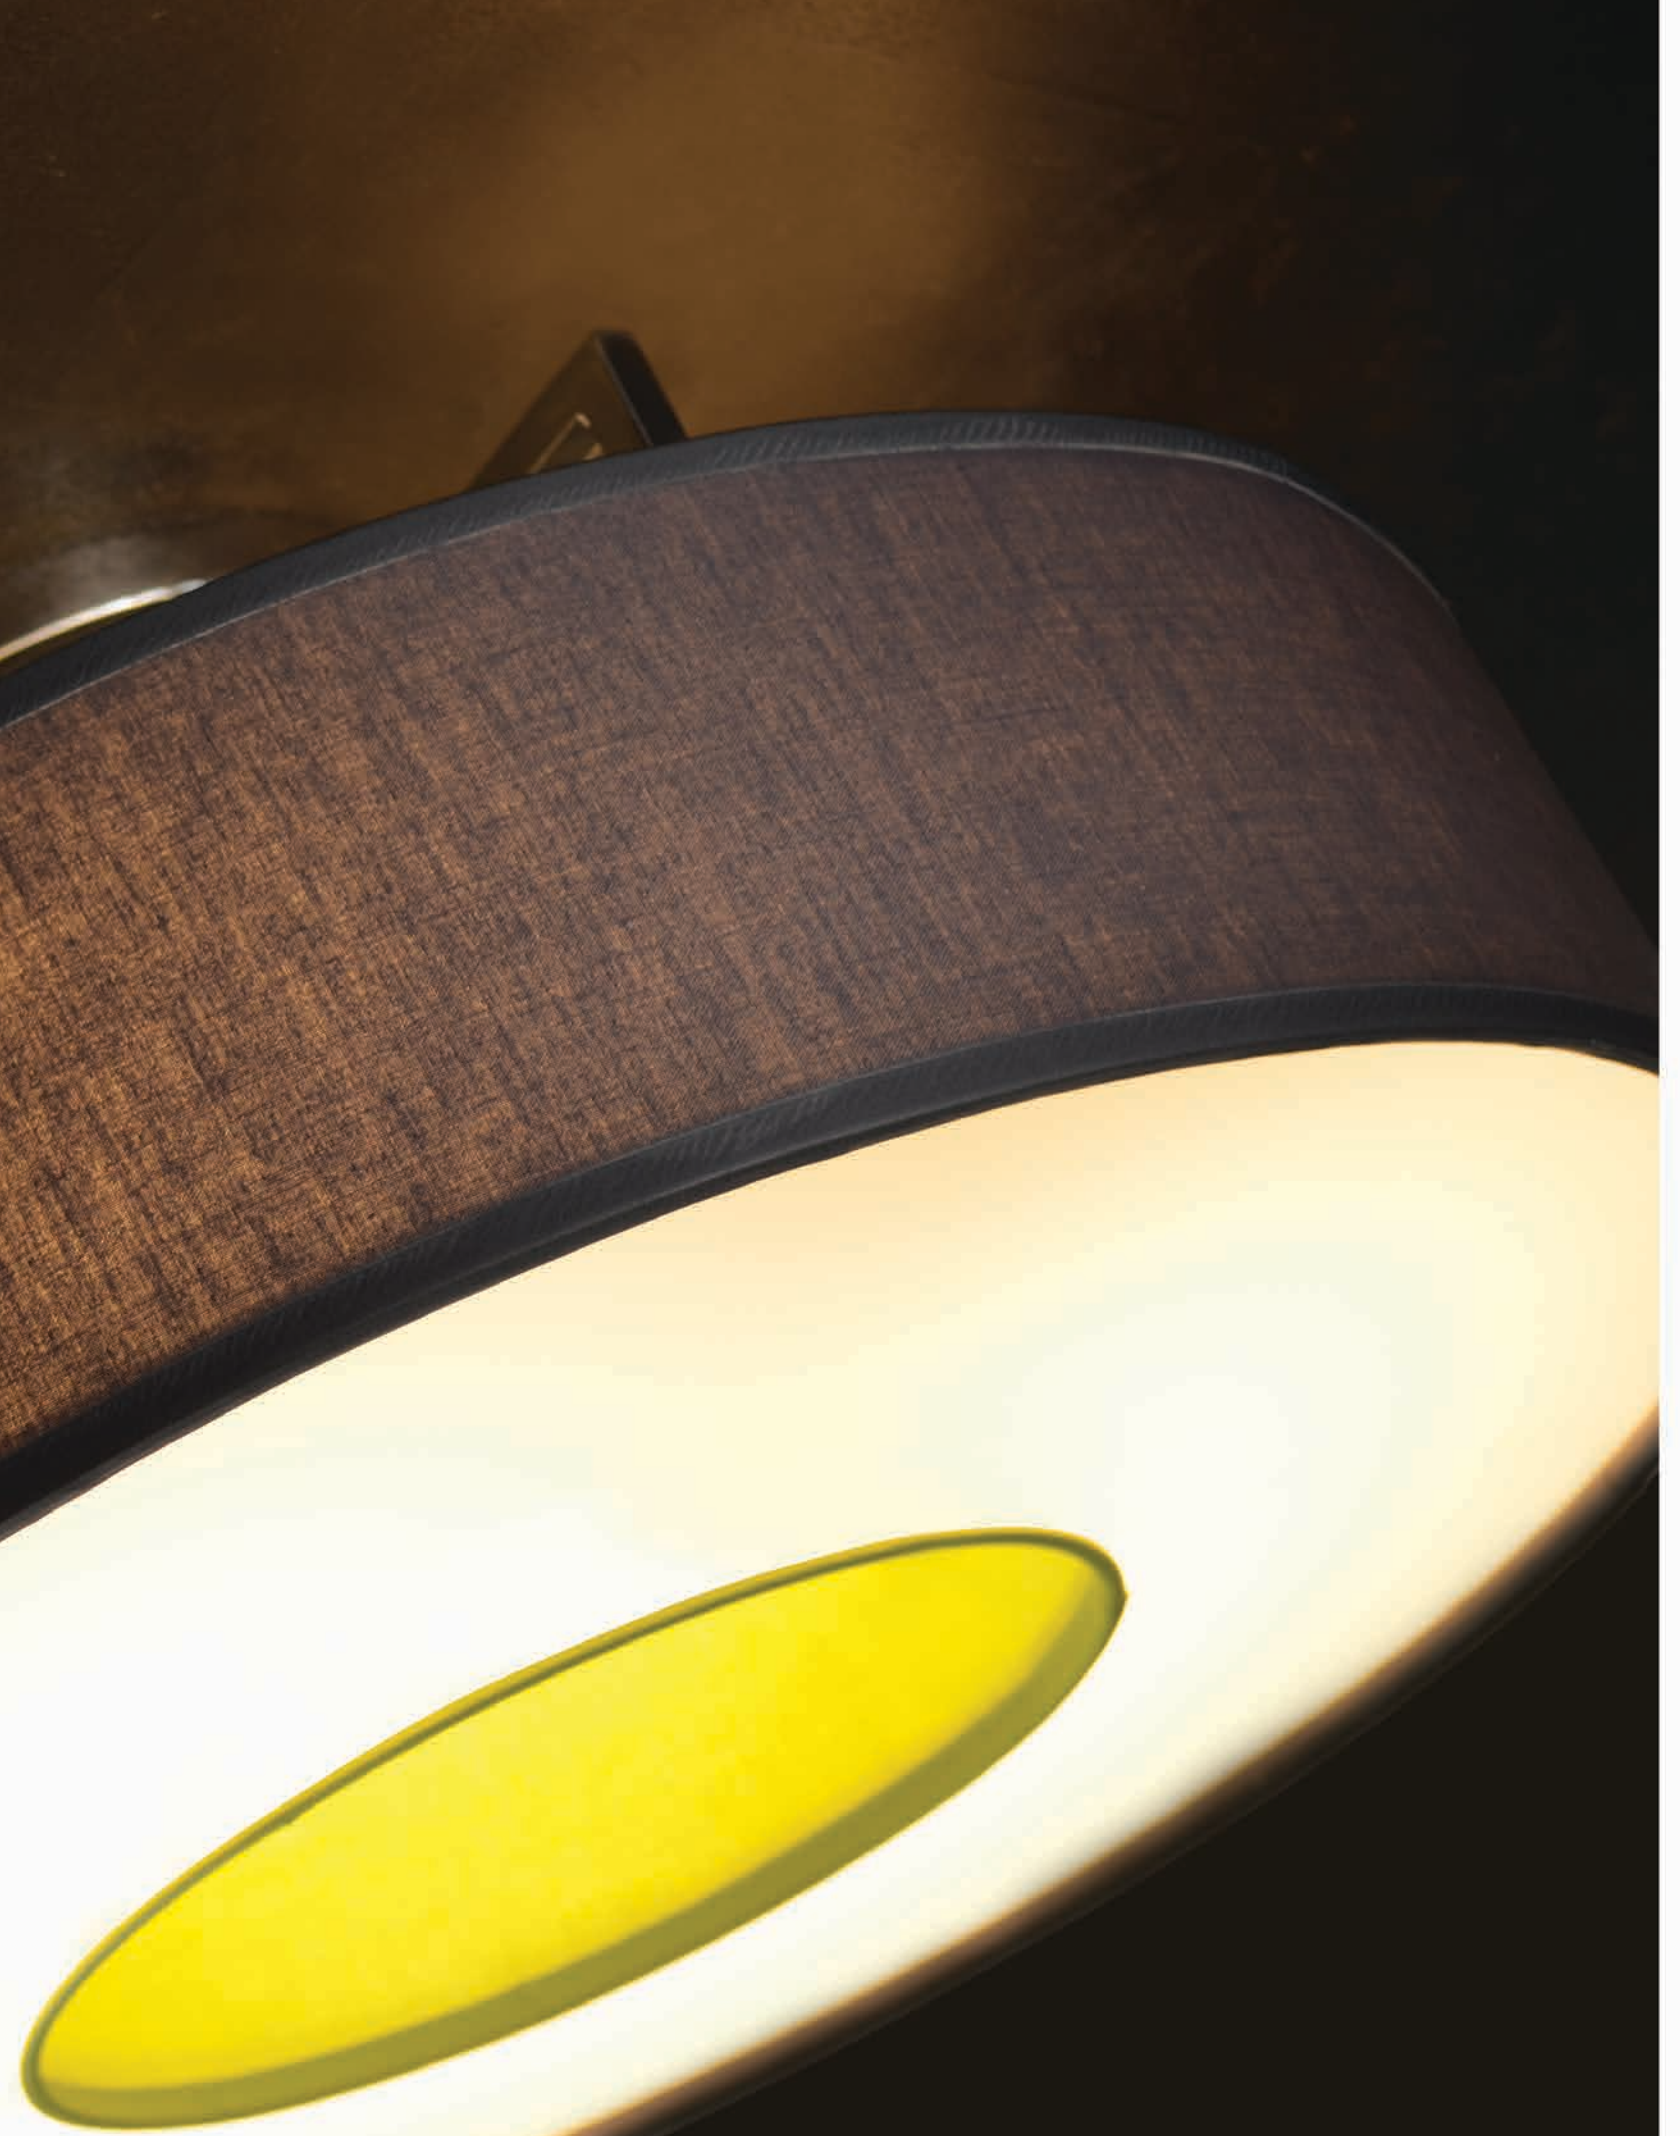

Custom Capabilities

Making your vision a reality.


At AFX, we appreciate that every space and application is unique to each designer's vision. To accommodate flexibility and creativity, AFX product lines are engineered with the idea that they can be customized to satisfy each client's project requirements.

If you don't see the exact solution from among our standard product offerings, AFX gives you the freedom to create your own lighting solution. From stock to modifications to full custom, we offer numerous options to meet your specific needs. To support projects requiring quick turnaround, we also maintain sufficient inventory levels on many items to meet job quantity requirements.


The **Standard Product Modification Program** is designed to offer modification flexibility on selected standard products to meet a specific need. Customizable options include finish, shade, glass, color, ballast type and lamping. Typical lead time from receipt of order is 4 - 8 weeks.

The **Custom Program** takes collaboration to a higher level. We work more closely with "you" the interior designer, architect, lighting designer, and specifier to develop custom lighting solutions specific to your needs. A drawing, photo or description of the fixture concept is all we need to get started. From there, our team will work with you and your customer to create a one-of-a-kind lighting solution. Typical lead time is 12 weeks from order receipt and drawing approval.


Expanded Colors (minimum quantities/set-up fees apply)



Purple (PU)



Green (GN)



Blue (BU)



Bronze (BZ)



Copper (CU)



Gold (AV)





















































Red (RD)



Orange (OG)

Lamp Equivalency

The chart below gives the general comparison of fluorescent lamps to the incandescent lamps listed on the left.

		Incandescent to Fluorescent Lamp Equivalency						
INCANDESCENT:		SINGLE CFL	SINGLE GU24	MULTIPLE CFL	MULTIPLE GU24	T9 CIRCLINE	T5 CIRCLINE	LINEAR FLUORESCENT
4,000-5,000 lumens	3 x 100 watt  5,070 lumens						 22W & 40W Circline 12,000 hrs 5,000 lumens	 2 x 32W T8 Straight Tube (48") 20,000 hrs. 5,600 lumens
	2 x 100 watt  3,380 lumens			 2 x 26W Quad CFL 3,420 lumens	 2 x 26W GU24 3,600 lumens	 32W & 40W Circline 15,000 hrs & 18,000 hrs 4,750 lumens	 70W 2C Circline 10,000 hrs 4,600 lumens	
3,500 lumens	150 watt  150W A19 750 hrs 2,850 lumens	 24W PL-L CFL Electronic 4-pin 15,000 hrs 1,800 lumens	 26W GU24 10,000 hrs 1,800 lumens	 2 x 18W Quad CFL 2,300 lumens	 22W & 32W Circline 12,000 hrs & 15,000 hrs 3,000 lumens	 55W Circline 12,000 hrs 4,000 lumens	 28W T5 Straight Tube (46") 25,000 hrs 2,900 lumens	
	2 x 60 watt  1,700 lumens	 26W Quad CFL Electronic 4-pin 12,000 hrs 1,710 lumens		 2 x 18W GU24 2,700 lumens	 40W Circline 18,000 2,800 lumens	 55W 2C Circline 10,000 hrs 3,900 lumens	 32W T8 Straight Tube (48") 20,000 hrs 2,800 lumens	
3,000 lumens	100 watt  100W A19 750 hrs 1,690 lumens		 25W GU24 Dim 8,000 hrs 1,600 lumens	 2 x 13W GU24 1,900 lumens	 32W Circline 15,000 hrs 1,950 lumens		 21W T5 Straight Tube (34") 25,000 hrs 2,100 lumens	
	75 watt  75W A19 750 hrs 1,170 lumens	 18W Quad CFL Electronic 4-pin 12,000 hrs 1,150 lumens	 18W GU24 10,000 hrs 1,350 lumens					 25W T8 Straight Tube (36") 20,000 hrs 2,050 lumens
2,500 lumens	2 x 60 watt  1,700 lumens	 26W Quad CFL Electronic 4-pin 12,000 hrs 1,710 lumens						
	100 watt  100W A19 750 hrs 1,690 lumens		 25W GU24 Dim 8,000 hrs 1,600 lumens					
2,000 lumens	75 watt  75W A19 750 hrs 1,170 lumens	 18W Quad CFL Electronic 4-pin 12,000 hrs 1,150 lumens	 13W GU24 10,000 hrs 950 lumens					 14W T5 Straight Tube (22") 25,000 hrs 1,350 lumens
	60 watt  60W A19 1000 hrs 850 lumens	 13W Quad CFL Electronic 4-pin 12,000 hrs 900 lumens				 22W Circline 12,000 hrs 1,050 lumens		 17W T8 Straight Tube (24") 20,000 hrs 1,325 lumens
1,500 lumens	60 watt  60W A19 1000 hrs 850 lumens	 13W Twin Tube CFL 10,000 hrs 800 lumens						 15W T8 Straight Tube (18") 20,000 hrs 870 lumens
	40 watt  40W A19 1500 hrs 495 lumens							
500 lumens	40 watt  40W A19 1500 hrs 495 lumens							 8W T5 Straight Tube (12") 7,500 hrs 450 lumens
	25 watt  25W A19 1000 hrs 320 lumens							 6W T5 Straight Tube (9") 7,500 hrs 325 lumens


*This chart is for general comparison only. Light output shown is initial lumens as published by Osram Sylvania and MaxLite. Ballast factors are not considered.

GU24 socket/ballast/lamp

GU24 allows for the same flexibility as traditional screw-base bulbs by using a universal connecting system. Just twist and lock to install! The only question is which wattage to choose, based on how much light is desired, up to the max wattage of the fixture - because the full range of bulbs is compatible with all GU24 sockets. All styles of bulb are available for reorder directly from AFX, or wherever energy-efficient bulbs are sold.

GENERAL SPECIFICATIONS

BALLAST TYPE	ELECTRONIC
STARTING METHOD	MODIFIED RAPID START
INPUT LINE VOLTAGE	120VAC
INPUT LINE FREQUENCY	50/60HZ
MIN. STARTING TEMP	0 °F
MAX. BALLAST CASE TEMP	90 °C
COLOR RENDERING INDEX	84

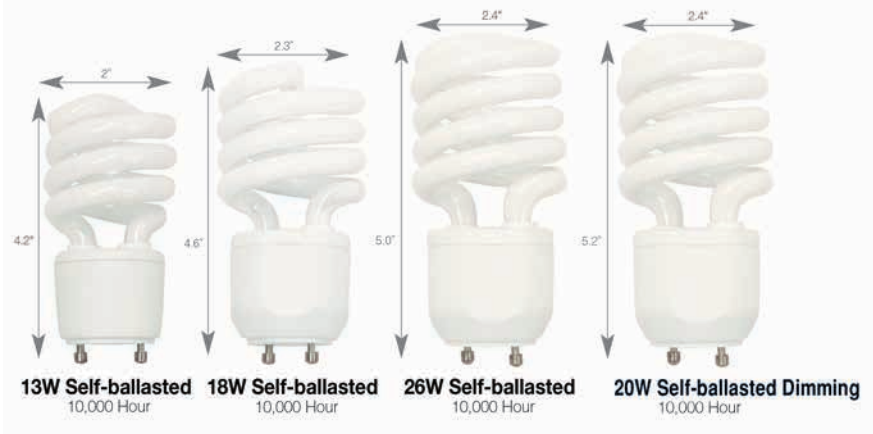

GU24 LAMP/BALLAST SPECIFICATIONS

WATTS	DESCRIPTION	INCANDESCENT EQUIVALENT	LUMENS	BALLAST/TYPE	LAMP LIFE (HRS)	DIMENSIONS (W" X MOL")	COLOR TEMP
13	13W GU24 SPIRAL	60W	950	INTEGRAL	10,000	2"x 4.2"	2700K
18	18W GU24 SPIRAL	75W	1350	INTEGRAL	10,000	2.3"x 4.6"	2700K
26	26W GU24 SPIRAL	100W	1800	INTEGRAL	10,000	2.4"x 5"	2700K
25	25W GU24 DIMMING	60W	900	INTEGRAL	10,000	2.4"x 5.2"	2700K



GU24 SOCKET SPECIFICATIONS

WATTS	DESCRIPTION	TYPE	BALLAST LIFE (HRS)	LAMP LIFE (HRS)	DIMENSIONS (W" X MOL")
13	ADAPTER FOR 13W GU24 CFL	TWO PIECE	30,000	12,000	1.6"x 2.3"
18	ADAPTER FOR 18W GU24 CFL	TWO PIECE	30,000	12,000	1.6"x 2.3"
26	ADAPTER FOR 26W GU24 CFL	TWO PIECE	30,000	12,000	1.6"x 2.3"

*Specifications shown as published by MaxLite, except for 20W dimming lamp


Lamp Recommendations

To achieve a warm, incandescent equivalent lighting application with a high CRI (color rendering index), we recommend the use of a 2700K or 3000K color temperature lamp. These lamps are available from our inventory and can be shipped with your fixtures for your convenience.

PART #	DESCRIPTION	CRI VALUE
CFQ13K27	13W QUAD TUBE (4 PIN) COMPACT FLUORESCENT - 2700K	82
CFQ18K27	18W QUAD TUBE (4 PIN) COMPACT FLUORESCENT - 2700K	82
CFQ26K27	26W QUAD TUBE (4 PIN) COMPACT FLUORESCENT - 2700K	82
CFSB13K27	13W GU24 SPIRAL COMPACT FLUORESCENT - 2700K	84
CFSB18K27	13W GU24 SPIRAL COMPACT FLUORESCENT - 2700K	84
CFSB26K27	26W GU24 SPIRAL COMPACT FLUORESCENT - 2700K	84
CFSB20K27D	25W GU24 DIMMABLE SPIRAL COMPACT FLUORESCENT - 2700K	80
CFSF13K27	13W GU24 SPIRAL (FLATTENED) COMPACT FLUORESCENT - 2700K	84
CFT13K27	13W TWIN TUBE (2 PIN) COMPACT FLUORESCENT - 2700K	82
F17T8K30	T8 LINEAR (STRAIGHT) 2' TUBE-17W - 3000K	85
F25T8K30	T8 LINEAR (STRAIGHT) 3' TUBE-25W - 3000K	85
F32T8K30	T8 LINEAR (STRAIGHT) 4' TUBE-32W - 3000K	85

Color Temperature

When selecting bulbs for AFX fixtures, it's important to consider color temperature in relation to the application. Whether for a residence or a commercial space, for a productive environment or leisure area, it's a subjective and personal choice. But, there are some generally accepted standards: Warm light is better for residential living areas; cool light is better for task areas such as the kitchen or office. Current energy-efficient technology allows for a high level of quality across the whole color spectrum, so the choice is yours. The chart below offers some suggestions. Consult your lamp supplier for more specific applications.

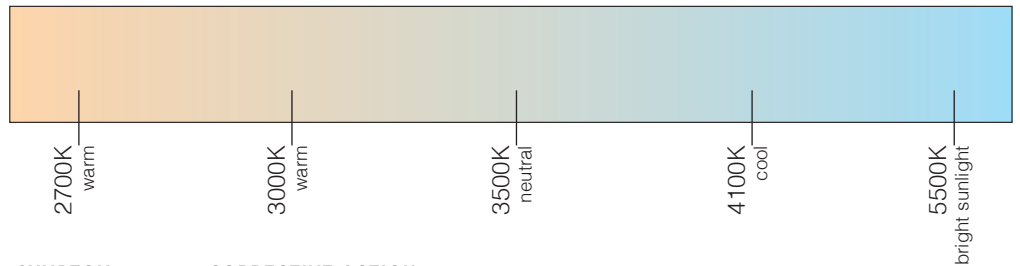

Ballast Troubleshooting

It is important to know which ballast is in the fluorescent fixture and which lamp is compatible with that ballast. Not using the correct lamp may result in ballast overheating, ballast thermal cycling or premature ballast failure. AFX products offer superior ballasting, but it is very important to use the proper lamp for optimum performance. Here are several tips for ballast troubleshooting:

SYMPTOM	CORRECTIVE ACTION
LAMPS WILL NOT OPERATE	<ol style="list-style-type: none"> CHECK IF THERE IS POWER TO THE FIXTURE BE SURE LAMP IS PROPERLY SEATED IN SOCKET REPLACE LAMP RESET OR CHANGE STARTER (PREHEAT ONLY) CHECK WIRING CONNECTIONS TEST BALLAST
SLOW OR ERRATIC STARTING	<ol style="list-style-type: none"> CHECK GROUND (FIXTURE MUST BE GROUNDED FOR RELIABLE STARTING) CHECK BALLAST LABEL FOR CORRECT LAMP CHECK WIRING CONNECTIONS CHECK FOR LOW SUPPLY VOLTAGE BE SURE LAMP IS PROPERLY SEATED IN SOCKET TEST BALLAST
EXCESSIVE NOISE	<ol style="list-style-type: none"> TIGHTEN LOOSE COMPONENTS INSTALL BALLASTS OF THE PROPER SOUND RATING REPLACE FAULTY BALLAST(S). NORMAL OPERATION SHOULD RESUME NOTE: ALL FLUORESCENT BALLASTS EMIT SOME NOISE
LAMPS ARE CYCLING	<ol style="list-style-type: none"> CHECK AIR TEMPERATURE IN AND AROUND THE FIXTURE CHECK BALLAST AND COIL TEMPERATURES - BALLAST CASE TEMPERATURES SHOULD NOT EXCEED 90°C AND COIL TEMPERATURES SHOULD NOT EXCEED 105°C REMOVE BUILDING INSULATION FROM ABOVE FIXTURES TO ALLOW FOR HEAT DISSIPATION REPLACE FAULTY BALLAST(S). NORMAL OPERATION SHOULD RESUME
INTERFERENCE	<ol style="list-style-type: none"> RADIO AND ANTENNA MUST BE 4 - 10 FEET FROM LAMPS CORRECT CONDITION BY USE OF RADIO INTERFERENCE FILTERS LIGHTING FIXTURES SHOULD BE ON SEPARATE ELECTRICAL

Linear Electronic Ballast and Lamp System Performance

BALLAST TYPE	LAMP DESCRIPTION	VOLTAGE	LAMP WATTS	LAMP SIZE	DESCRIPTION	LIFE HOURS	APPROX. INPUT WATTS	INITIAL DELIVERED LUMENS	THD%	POWER FACTOR	AMPS
R8	RESIDENTIAL ELECTRONIC NORMAL POWER FACTOR 120V		32W	T8	F32T8/TL841	20,000	56	5016	≤ 120	≥ 50	
MV	COMMERCIAL/RESIDENTIAL ELECTRONIC HIGH POWER FACTOR	120V 277V	32W 32W	T8 T8	F32T8/TL841 F32T8/TL841	20,000 24,000	58 56	5016 5251	≤ 30 ≤ 10	≥ 90 ≥ 99	.49 .22
EN	RESIDENTIAL	120V	32W	CFQ	PL-C-4 PIN	12,000	51	3420	≤ 10	≥ 99	.43

LED Driver System Performance

DRIVER TYPE	DESCRIPTION	INPUT VOLTAGE	OUTPUT CURRENT (mA)	POWER FACTOR	MIN. STARTING TEMP.	DIMMABLE
D1	RESIDENTIAL ELECTRONIC HIGH POWER FACTOR	120V	220-800	>0.90	-30°F/-34°C	YES - TRIAC (FORWARD PHASE OR LEADING-EDGE)/ ELV (REVERSE-PHASE OR TRAILING-EDGE)
MV	COMMERCIAL/RESIDENTIAL ELECTRONIC HIGH POWER FACTOR	120-277V	350-800	>0.90	-30°F/-34°C	NO
UD	COMMERCIAL/RESIDENTIAL ELECTRONIC HIGH POWER FACTOR	120-277V	250-2100	>0.90	-30°F/-34°C	YES - TRIAC (FORWARD PHASE OR LEADING -EDGE)/ ELV (REVERSE-PHASE OR TRAILING-EDGE)
D2	COMMERCIAL ELECTRONIC HIGH POWER FACTOR	120-277V	350-800	>0.90	-30°F/-34°C	AND 0-10V YES - 0-10V



ENERGY STAR®

Through innovation and design, AFX is creating the next generation of energy-efficient fixtures by proving that energy-efficient lighting doesn't have to be uninteresting. As you browse through our catalog look for the ENERGY STAR logo. This identifies ENERGY STAR qualified products throughout this catalog. Consult factory or www.energystar.gov for current listing.



LED Evolution

LED's (light-emitting diodes) bring several advantages to the lighting industry, including high efficacy and durability. With superior life over other lamp sources (50,000 hours+), the required maintenance for LED products is greatly reduced. This translates into energy savings and environmental sustainability. LEDs create greater optical control (more controllable source), dimming, instant on/off, and reduced rate of lumen depreciation (potential for long application life).

The use of LED luminaires in commercial and residential applications is viable today both economically and from an illumination performance standpoint. The advances in LED technology allow AFX to bring these products to the marketplace via retrofitting, hybrid or new designs to meet a variety of lighting applications.

LED options are available in many products. If the fixture you are seeking does not currently offer an LED option, consult the factory for availability.

LED Features and Benefits?

Benefits of LED lighting:

Long-lasting—LEDs last up to 5 times longer than compact fluorescents, and far longer than typical incandescent lamps. Average LED lamp life: 50,000 hrs.

Cold weather—Excellent for use in cold climates.

Durable—Since LEDs do not have filament, they are not damaged under circumstances when regular incandescent bulb would be broken.


Instant-On—LED fixtures turn on instantly in all weather conditions.

Cool—LEDs produce 3.4 btu's/hour, compared to 85 btu's for incandescent bulbs.

Mercury-free—No mercury is used in the manufacturing of LEDs.

More efficient—LEDs use only 2-10 watts of electricity (1/3rd to 1/30th of incandescent or CFL).

Cost effective— Although LEDs are more expensive than CFL or incandescent, the cost is recouped over time in energy savings, maintenance reduction and little to no replacement costs.

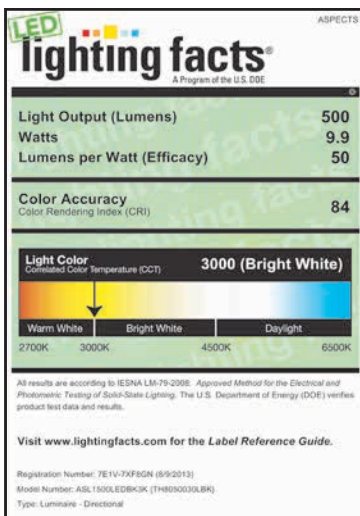

LED Lighting Facts® product label

The LED Lighting Facts program is a voluntary pledge program to verify that LED lighting products are represented correctly in the market. At AFX we are proud to be voluntary members in this program. We take pride in our LED fixtures and the Lighting Facts verification process ensures our product is performance tested and the data listed is accurate.

The label itself provides key information of product performance. It guards against exaggerated claims and ensures confidence in consumer purchases. Performance results in five areas; lumens, efficiency, watts, correlated color temperature (CCT) and color rendering index (CRI) are used to measure against the industry standard for LED testing photometric performance, IES LM-79-2008.

Sponsored by the Department of Energy (DOE) this program was designed for the consumer to assure them that the products they are purchasing perform to their expectations.

For more information on LED Lighting Facts, visit www.lightingfacts.com

Lighting Definitions

BALLAST FACTOR – Ratio of a lamp's light output on ballast compared to the lamp's rated light output. The higher the ballast factor, the more light delivered.

CIRCLE E BALLAST – Indicates special EPCACT compliant version of ballast. Check the laws and codes for specific applications.

COLOR TEMPERATURE OR CHROMATICITY – The appearance of the light that comes from a light source. The color temperature is measured in Kelvin or "K". The higher the color temperature, the visually cooler or bluer the light appears.

COLOR RENDERING INDEX – CRI indicates how true-to-color lighted objects appear. A higher number means truer color. The CRI rates light sources on a scale of 0 to 100. The higher the CRI, the more vibrant or close to natural the colors of objects appear. Light from lamps with good (70-80 CRI) and excellent (80+ CRI) color rendering properties is said to be "high quality light" because objects and people look more appealing, and the light level itself is perceived to be higher.

ELECTRONIC BALLAST – A ballast that utilizes electronic components to transform current at high frequency to operate fluorescent or discharge lamps.

FOOTCANDLE – The measurement of the amount of light reaching a surface. Footcandles are measured in lumens per square foot.

LAMP EFFICACY – Different lamp types have different abilities to convert electrical power (watts) into visible light (lumens). The quantity of light emitted (measured in lumens) is divided by the input power (watts) to determine the lamp's efficacy. This is expressed as lumens per watt or LPW.

LED – The common abbreviation for light-emitting diode. Each individual LED consists of a semiconductor diode that emits light when a voltage is applied to it.

LIFE – How long on average a bulb is estimated to last (median life). The number of burning hours on average, after which 50% of large representative groups of lamps in laboratory tests, under controlled burning conditions and at a specified number of burning hours per start have failed.

LPW – Lumens per watt is a measure of energy efficiency. Fluorescent lamps are very energy efficient and emit up to 100 lumens per watt.

LUMENS – Bulb brightness. A higher number means brighter light. Fluorescent lamp lumens decrease over its life.

POWER FACTOR – The ratio of power (watts) to volt-amps of the ballast. The power factor ratio may be used to determine how efficiently total input power is being used. HPF ballasts require less AC current to do an optimum lighting job than would be required by an equivalent low power factor ballast. Additionally, fewer LPF fixtures can be installed in the circuit, increasing installation cost.

VOLTAGE – A measurement of electromotive force or the pressure of electricity.
Typical residential construction is 120V @ 60Hz
Typical commercial construction is 120V or 277V @ 60Hz

WATTAGE – A measurement of power.

AFX has dedicated to being environmentally responsible and preserving our natural resources. As a company we continually strive to reduce our carbon footprint and global emissions, not only in the products we sell, but in the materials we use to promote them. Our philosophy of offering products that are technologically advanced as well as energy efficient runs through our company down to our internal recycling program.

FSC logo with number - Ripon

We have chosen to print this catalog with FSC certified recycled paper, because the preservation of our natural resources is a practice we can all strive for.

*FSC is a non profit organization devoted to encouraging the responsible management of the world's forests. FSC sets high standards that ensure forestry is practiced in an environmentally responsible, socially beneficial and economically viable way.

Fluorescent lamps contain trace amounts of Mercury. If lamp is marked Hg it contains Mercury and must be disposed of properly. Follow local and/or state laws regarding disposal of fluorescent lamps. Information regarding lamp recycling can be found at www.epa.gov/cfl or www.lamprecycle.org



Photo credits:

Bilbao Outdoor Wall Sconce
Lightology, LLC
Chicago, IL
www.lightology.com

Laveer Pendant
Dundee Library
East Dundee, IL

Taylor Flush Mount
Noma Apartment Building
Washington, D.C.
Whitney Cox
New York, NY

Brio Outdoor Wall Sconce
LaQuinta Inn
Arlington Heights, IL
John Schmuttenmaer

Dayton Pendant
Time Warner Cable
Racine, WI
John Schmuttenmaer

©2016 AFX All rights reserved.
Specifications subject to change without notice.
Specific items may be protected by patents or patents pending.

INDEX

A	
ABP	26
ADS	36
ADWW	72
AEL	100
AELF	101
ALF	86
ALS	47
ALV	64
AMC	72
ANF	82
ANP	28
ANS	36
APF	79
APS	38
AR78	138
ARMF	110
ARMW	110
ARP	34
ARPB	34
ARPC	34
ARS	55
ARV	64
ARW	111
ASP	72
AXF	42, 85
B	
BBB	124
BBF	91
BBP	31
BBS	57
BBSS	57
BBV	67
BBW	113
BEPL	22
BESL	52
BNSW	116
BRS	56
BRW	114
BSSW	114
BWSW	117
C	
C2F	96
CAC	93
CAF	93
CAN	25
CARF	74
CCM	99
CEF	90
CES	59
CEV	66
CEW	111
CFF	95
CHRF	74
CK4W-RB	100
CK4W-SA	100
CLL	103
CMB	121
CMF	95
CN	99
CRRF	75
CSF	96
CSW	104, 105
CTC	102
CTK	102

CTW	102
CVF	94
CZF	80
CZPC	33
CZPS	33
CZS	44
CZV	63

D	
DIMCONTROL	138, 139
DYK	29
DYP	29

E	
EDF	79
EDS	39
EL	135
ELS	43
ENP	21
EOV	62
ES	135
EYELED	138

F	
FR68	137
FUF	90
FUS	58
FUV	68
FUW	113

G	
GAF	43, 84
GEPL	23
GLB	120
GNS	46
GZL	98

H	
HDB	121
HEV	67
HKC	98
HKR	98
HKS	98
HNSW	116
HPL	98
HPLJN	98
HPLJW	98
HUS	47
HZC	91

I	
IDB	123
IDF	94
IDS	57

K	
KAS	42
KB12	134, 137, 138
KCM	99

L	
L01	142
L02	142
L06	142
L07	143
L08	143
L09	143
L13	148
L16	148
L17	148

L22	149
L46	146
L47	146
L49	146
L182	151
L300	144
L302	145
L304	144
L337	144
L500	150
L501	150
L720	149
L721	149
LAPL	22
LAS	60
LASL	52
LC	103
LCS	54
LED18	150, 151
LEDCC	138, 139
LW	106
LWL	106
LXF	85
LYF	43, 84

M	
MAF	42, 85
MAR	105
MCC	102
MCF	78
MCM	102
MCP	30
MIDF	86
MIDS	55
MNS	53
MRF	89
MRS	58
MTRF	76

N	
NIP	21
NLF	87
NLL	128
NLLP	126
NLS	51
NLV	62
NMS	41
NXL	129

O	
ORP	18
OSF	83
OSP	31
OTP	19
OTS	37
OTSD	37

P	
PAV	63
PLB	120
PSLED	138, 139

R	
R55	137
RAL182	151
RC	104
REF	87
RES	54
RHP	28
RIS	59, 68

S	
S	107
SAF	78
SAP	30
SCC	135
SDC	135
SHB	123
SHC	83
SHS	48
SNS	40
SPC	135
SR45	139
SR68	139
SSP	20
ST	107
STEM-RB	100
STEM-SA	100
STICK2	134
STICK3	134
STICKPS	134, 137, 138
STICK/TB	137, 138
STICK2/TB	134
STN	108
SXPL	23

T	
T5L	128
T5U	130
T8U	130
TAF	89
TAS	53
TAV	66
TBLED/B	138
TLD	142, 143, 144
TLW	142, 143, 144, 145, 151
TPDW	118
TRRF	76
TRS	56
TYS	49

U	
UCM	99
USS	60

V	
V8PN	71
VIP	20
VNV	70
VOV	70
VSC	71
VSW	71
VTL	108

W	
WCM	99
WES	45
WLF	82
WLP	26

X	
XLC	131
XLH	131



2345 N. Ernie Krueger Circle • Waukegan, IL 60087

847.249.5970 • AFXinc.com



title 24
compliant



ADA

