

Construction and operation of the new Belgian Research Station, Dronning Maud Land, Antarctica

FINAL COMPREHENSIVE
ENVIRONMENTAL
EVALUATION (CEE)

March 2007



BELGIAN SCIENCE POLICY



TABLE OF CONTENTS

1. INTRODUCTION	1
1.1. Purpose of the new station	1
1.2. History of Belgian Antarctic research	3
1.3. Planned science	4
1.4. CEE preparation and submission	6
1.5. Permits, applications etc.	6
1.6. Legislation, standards and guidelines	7
1.7. Project management structure	7
2. DESCRIPTION OF THE PROPOSED ACTIVITY	9
2.1. Location.....	9
2.2. Site selection.....	9
2.2.1 Utsteinen selection	9
2.2.2 Construction site selection	12
2.3. Principal characteristics of the proposed activity	14
2.3.1. General specifications of the station	15
2.3.2. Shipping and logistics	16
2.4. Station description	24
2.4.1. Station programme	24
2.4.2. Station design	30
2.4.3. Anchoring the building	34
2.4.4. Building support concept	36
2.4.5. Aerodynamic studies carried out at the von Karman Institute	38
2.4.6. Station surroundings	43
2.4.7. Water generation and disposal	45
2.4.8. Energy	46
2.4.9. Emissions	49
2.4.10. Communications	49
2.4.11. Testing and validation	49
2.4.12. Transport	50
2.4.13. Construction on site	50
2.4.14. Materials	50
2.4.15. Upgradeability	50
2.4.16. Best practice strategies	51
2.4.17. Documentation	51
2.4.18. Decommissioning	51
2.4.19. Minimum Impact Objectives	51
2.5. Area of disturbance	52
2.5.1. Area of operations	52
2.5.2. Duration & Intensity	52
2.5.3. Standard Procedures	52
2.5.4. Fuel depot	53
2.6. Description of Construction Camp	53
2.7. Waste collection and disposal.....	54
3. ALTERNATIVES TO PROPOSED ACTIVITY	55
3.1. Do not go alternative	55
3.2. Alternative locations	56
3.3. Alternative designs/technologies	57
3.4. Alternative transport.....	58
4. INITIAL ENVIRONMENTAL REFERENCE STATE OF THE SØR RONDANE	61
4.1 Location.....	61
4.2 Geology	62

4.2.1	Geology of the western Sør Rondane	62
4.2.2	Geology of the proposed station site	62
4.3	Glaciology	63
4.4	Climate	64
4.4.1	Air temperature	64
4.4.2	Wind speed and direction	66
4.4.3	Atmospheric pressure	67
4.4.4	Conclusion:	68
4.5	Chemical baseline monitoring	68
4.6	Biological baseline monitoring	69
4.6.1	Flora	70
4.6.2	Vertebrate Fauna	75
4.6.3	Invertebrate Fauna	78
4.6.4	Micro-organisms, including algae	78
4.6.5	Sampling trips in the Sør Rondane mountains	81
4.7	Tourism	82
4.8	Protected Areas and Historic Sites and Monuments	82
4.9	Prediction of the future environmental reference state in the absence of the proposed activity	82
5.	LIKELY IMPACTS, ASSESSMENT, MINIMISATION AND MITIGATION OF THE PROPOSED ACTIVITIES	83
5.1	Methodologies	83
5.2	Source, Pathways and Receptors	84
5.3	Atmospheric Emissions	84
5.4	Fuel and Oil Spills	88
5.5	Domestic Waste Water ('Grey' water)	89
5.6	Solid Waste	90
5.7	Noise	91
5.8	Light Pollution	92
5.9	Flora and Fauna	93
5.10	Physical Disturbance, Aesthetic Values	93
5.11	Introduction of alien species and translocation of diseases	94
5.12	Adjacent and Associated Ecosystems	95
5.13	Impact Matrix	95
6.	INDIRECT & CUMULATIVE IMPACTS	98
7.	MONITORING AND VERIFICATION	98
8.	GAPS IN KNOWLEDGE AND UNCERTAINTIES	99
9.	ENVIRONMENTAL MANAGEMENT PLAN	99
10.	CONCLUSION	101
11.	REFERENCES	102
12.	TABLES	105
13.	COMMENTS RECEIVED ON THE DRAFT CEE	116

LIST OF TABLES

Table 2.1:	Coordinates of major survey points	18
Table 2.2:	Summary of personnel movements.....	22
Table 2.3:	Categories of transport needs	22
Table 2.4:	Ship transport needs for construction (movement of goods and personnel 2006/2007/2008)	23
Table 2.5:	Base energy “modes” identified for energy consumption	46
Table 2.6:	Overview of the construction camp facilities	53
Tabel 3.1:	Design trade-off	58
Table 4.1	Snow accumulation and horizontal displacement obtained for the 5 stake positions near Utsteinen Ridge.....	63
Table 4.2	Meteorological observations from the Utsteinen automatic weather station (AWS) in 2005	64
Table 5.1:	Estimates of fuel use for construction and operation of the station (litres)	85
Table 5.2:	Calculated atmospheric emissions.....	87
Table 5.3:	Estimated amount of waste generated during construction of the station.	90
Table 5.4:	Criteria for ranking scope, persistence, intensity, probability and importance of the activity	95
Table 5.5:	Impact matrix, showing preventative or mitigating measures	96
Table 7.1:	Planning monitoring programmes	99
Table 12.1:	Acronyms used in the Final CEE	105
Table 12.2:	Site Coordinates.....	105
Table 12.3:	Expected effluent quality of the bio membrane reactor after final ozone,	106
Table 12.4:	Overview soil samples	106
Table 12.5:	Overview snow samples	107
Table 12.6:	Analyses results chemical baseline monitoring	108
Table 12. 7:	List of samples collected by D. Ertz during BELARE 2006	112
Table 12.8:	List of taxa recorded at Utsteinen during BELARE 2006 – 2007	113
Table 12.9:	Distribution and abundance of lichens and bryophyte per parcel of the grid map of Utsteinen Ridge	114
Table 12.10:	Lichens and bryophyte species on Utsteinen Nunatak	115

LIST OF FIGURES

Fig. 1.1	DROMLAN-ALCI map giving an overview of research stations in Dronning Maud Land.....	2
Fig. 1.2	MODIS image displaying the Sør Rondane Mountains and Breid Bay.....	3
Fig. 2. 1	View of Utsteinen Ridge from Utsteinen Nunatak. Picture looking to the North.	10
Fig. 2. 2	Close-up view of Utsteinen Ridge and Utsteinen Nunatak in the back.....	11
Fig. 2. 3	Overview of the different ridge sections (Northern, Middle and Southern section).....	13
Fig. 2. 4	Overview of different ridge sectors in the Southern section.	14
Fig. 2. 5	Unloading at Breid Bay (Pictures taken during BELARE 2006)	17
Fig. 2. 6	Overview of access routes (eastern and western) from Utsteinen to Breid Bay and unloading site.	18
Fig. 2. 7	Picture of the BELARE 2006 traverse.	19
Fig. 2. 8	Overview logistic route points with fuel depots from Breid Bay and unloading site to Utsteinen.....	20
Fig. 2. 9	Scheme of different transport routes for the proposed activity.....	24
Fig. 2. 10	Building programme - functional relations and thermal layers (abstract).....	27
Fig. 2. 11	Main and Garage/storage building (Emergency exits shown in red)	28
Fig. 2. 12	Contact with the environment.....	29
Fig. 2. 13	Hybrid concept of the proposed new Belgian station:	31
Fig. 2. 14	Development of building type study.	32
Fig. 2. 15	Main building integration variants.....	32
Fig. 2. 16	Main building programme – preliminary layout for 45° integration variant garage/storage building (under-snow):.....	33
Fig. 2. 17	Building concept: impression of buildings integrations on-site.....	34
Fig. 2. 18	Topographic model: snow-free area (Snow boundary = red).....	35
Fig. 2. 19	Utsteinen Ridge characteristics:	35
Fig. 2. 20	Anchoring points survey: 3D surface measurements.....	36
Fig. 2. 21	Building support concept:.....	37
Fig. 2. 22	Building concept: main building and connection to garage/storage building.....	38
Fig. 2. 23	WTT-1 - Snowdrift model validation	39
Fig. 2. 24	Terrain model (contour lines in m a.s.l.) and simulated wind field (m/s)	40
Fig. 2. 25	Wind speed up map (in %) due to building integration showing	41

Fig. 2. 26	WTT-3: Sand erosion testing with garage building integrated.	41
Fig. 2. 27	Instrumented wind tunnel tests.	42
Fig. 2. 28	Boundaries of construction area, station operation, landing strip:	43
Fig. 3.1	Part of the geological map in the vicinity of Utsteinen, with Gunnestadbreen lying in the centre.....	56
Fig. 3.2	Overview of accessibility options:.....	59
Fig 4.1	Field depot and litter left behind by previous expeditions.	61
Fig 4.2	Automatic Weather Station, installed during the BELARE 2005 expedition on Utsteinen Ridge,.....	65
Fig 4.3	Monthly mean air temperature (T _m) at Utsteinen in 2005.	65
Fig 4.4	Monthly mean wind speed (V _m) at the Utsteinen site in 2005.....	66
Fig 4.5	Frequency of winds (upper panel) and winds stronger than 15 m/s (bottom panel).	67
Fig 4.6	Monthly mean atmospheric pressure observed at Utsteinen during 2005.	68
Fig 4.7	Grid map of the Utsteinen Ridge.....	71
Fig 4 8	Map of the Utsteinen Nunatak	73
Fig 4.9	The lichen <i>Xanthoria</i> gr. <i>candelaria</i> (eastern side of Utsteinen Nunatak)	74
Fig 4.10	A crack covered by the lichens <i>Buellia frigida</i> , <i>Physcia caesia</i> , <i>Umbilicaria aprina</i>	74
Fig 4.11	The lichen <i>Usnea</i> cf. <i>sphacelata</i> on Utsteinen Ridge.	75
Fig 4.12	The bryophyte <i>Schistidium antarctici</i> on Utsteinen Ridge.....	75
Fig 4.13	Snow petrel colony on Utsteinen Nunatak. The “X” indicate the breeding areas on the Nunatak	76
Fig 4.14	Eastern side of Utsteinen Nunatak.....	77
Fig 4.15	Snow petrel on the eastern side of Utsteinen Nunatak.....	77
Fig 4.16	Weddell seal mother and pup at Breid Bay	78
Fig 4.17	Northern side of Utsteinen Nunatak with a frozen lake	79
Fig 4.18	Results of filtering lake water showing algae or cyanobacteria on the filter	79
Fig 4.19	Two cyanobacteria (a colony of <i>Nostoc</i> sp. on the left	80
Fig 4.20	The green alga <i>Prasiola</i> sp. (eastern side of Utsteinen Nunatak).....	80
Fig 4.21	A “dry valley” in the Sør Rondane Mountains	81
Fig 4.22	<i>Umbilicaria decussata</i> in the dry valley.....	81

CONTACT DETAILS

This Final Comprehensive Environmental Evaluation (CEE) report has been prepared by the Belgian Federal Science Policy Office, Brussels, Belgium (hereafter referred to as Belspo), with support and input from Dr. H. Declair (CEP scientific advisor, Belgium), Johan Berte (coordinator of the station design and construction, the International Polar Foundation hereafter referred to as IPF, Brussels, Belgium), Dr. F. Pattyn (Glaciology unit ULB, Belgium), Dr. Damien Ertz and Dr. Bart Van de Vijver (National Botanic Garden of Belgium), Dr. Annick Wilmotte (Protein Engineering unit ULg, Belgium), Dr. Anne Willems (microbiology unit UG, Belgium), Dr. Wim Vyverman and Dr. Elie Verleyen (Protistology and Aquatic Ecology unit UG, Belgium), Dr. Emmanuël Sérusiaux (Plant Taxonomy and Conservation Biology unit ULg, Belgium), Dr. Willem Desmet (Polar Biology, Limnology and Palaeobiology unit UA, Belgium) and Poles Apart Ltd (environmental consultancy, Cambridge, UK).

It has been approved and endorsed by the Belgian Federal Ministries of Foreign Affairs, Environment and Science Policy. The report was submitted as an Information Paper (IP) to ATCM XXX (30 April – 11 May, New Delhi) on Friday 30 March 2007 and the complete report is available for download via the Belspo website www.belspo.be/antar.

For further information on this CEE report and its contents or if you would like to comment, please contact:

Maaïke Vancauwenberghe
Programme Manager
Programme "Antarctic Research"
Belgian Federal Public Planning Service Science Policy
Wetenschapsstraat 8 Rue de la science
1000 BRUSSELS
T.: + +32/2/238 36 78
F.: + +32/2/230 59 12
e-mail: vcaw@belspo.be
<http://www.belspo.be>
<http://www.belspo.be/antar/>

NON-TECHNICAL SUMMARY

This Final CEE report, approved by the Belgian Federal Ministries of Environment, Foreign Affairs and Science Policy, covers the:

- construction, operation and maintenance of a new Belgian research station in Antarctica;
- building and operation of the temporary camp required during the construction phase and
- transport and movement of cargo and personnel to the station site south of 60° S.

and includes responses to comments on the Draft CEE made at ATCM XXIX and CEP IX

The new Belgian research station will replace the former Belgian Roi Baudouin base, built in 1958 at Breid Bay in Dronning Maud Land, closed in 1967 and buried under meters of snow. The short operational period associated with the Roi Baudouin base, situated on the ice shelf, and with the nearby Japanese Asuka station (1986-1992), situated on the inland ice slope, both subject to high snow accumulation rates and strong katabatic winds, resulted in the decision to construct the new station on bedrock and in the protected western part of the Sør Rondane mountain range.

The proposed construction site is situated approximately 1 km north of Utsteinen Nunatak, on a small relatively flat granite ridge (71°57'S 023°20'E), 173 km inland from the former Roi Baudouin base and 55 km from the former Asuka station. With the closing of Asuka station in 1992, the 20-30 degrees east sector of Antarctica became again a vast territory having witnessed up to now only brief periods of systematic investigation. The new station will thus reoccupy the 1072 km empty stretch between the Japanese Syowa station (684 km) and the Russian Novolazarevskaya station (431 km).

The new platform is offered to the Belgian and international scientific community in a flexible way both operationally and with respect to research opportunities. The station will serve as a hub for field exploration in the 20-30 degrees east sector of Antarctica.

During the initial years of operation emphasis will be placed on glaciology, earth and atmospheric sciences and terrestrial (micro)biology. The station will also serve as a node in the network of geophysical and climatic observatories in this part of Antarctica. The station will initially carry out geophysical observations in synergy with the earth sciences and glaciological programme. Apart from routine surface weather observations, aerosol particles will be monitored. In line with guidelines set up by COMNAP and SCAR, a chemical and environmental monitoring plan will be set-up to record the impacts of the station's activities on the Antarctic environment. Station research activities will go hand in hand with a publicity campaign and educational programme to inform the general public, students and schools about the importance and challenges of research in the Polar Regions including climate change and sustainable development.

The construction of the summer station is planned in the austral summer of 2007-2008. In this period the station will be built, the system acceptance tests performed and then it will be handed over to the Belgian Science Policy Office (Belspo) at the end of the season. The expected design life is a minimum of 25 years.

The station is designed for optimal use by 12 people with a surface area (living, technical, research, storage) of 900 m². The use of a station "extension" will make it possible to accommodate another 8 people. This extension consists of heated shelters used for sleeping only. The station's facilities (kitchen, sanitary installations, offices ...) and the emergency shelter are designed to cope with the larger occupation.

The station has a hybrid design, with the main building above ground-level and anchored onto snow-free rock area. The adjacent garage/storage building is located nearby and is mainly constructed under the

surrounding snow surface. Both buildings are inter-connected by a weather protected corridor. The design and layout of the facilities will minimise snow management.

Consistent with the philosophy of the project, the station design will make best use of the terrain conditions for the integration of the buildings and will be such that it minimises impact on the environment and on the landscape during the construction, operation and removal of the station.

The system design of the station is based on sustainable technology and high energy efficiency, with a full-year monitoring and remote sensing capability. Nevertheless safety, health, comfort, functionality and cost are equally important design drivers. The facilities will use renewable energy as the primary energy source, integrating a comprehensive energy management regime, thereby minimising the use of fossil fuels. To assure a constant energy supply, two back-up generators will be installed. The amount of fuel used at the station will be mainly for vehicles.

The station will have a comprehensive waste management regime. Waste treatment will include the treatment of grey water and sewage and recycling capability for non-potable water applications. A Waste Management Plan (WMP) will be prepared that will comply with all the requirements of Annex III of the Environmental Protocol.

The station has been designed for low maintenance and recycling. Lifetime maintenance strategies will reduce the running costs. It is designed for easy repair and damage control. The manual and multiple handling of all stores and equipment will be minimised across all operations, including annual relief, normal operation and eventual decommissioning of the facilities. A risk contingency plan will be developed. By design the station has extended upgrade capability. It will be easy to integrate new state of the art technologies and, if required, the station can be upgraded to a full year station with minimal effort.

The environmental impacts of the construction and operation of the research station have been considered. The geographical area affected includes the route of the ship, the unloading site at Breid Bay, the traverse route from coast to station (180km), aircraft flight routes, the station area and areas visited during scientific fieldwork. Operations will generally take place within a radius of 200km of the station.

The main sources of direct impacts have been identified as:

- atmospheric emissions from the burning of fossil fuels;
- fuel spills to snow or ice and
- treated water discharge.

These impacts are likely to be higher during the construction of the station as a large amount of cargo will be transported to the site, there will be more people and the renewable energy systems will not be in place. Atmospheric emissions should be significantly reduced once the station is operational.

Direct impacts are described and summarised using impact matrices. These matrices also identify prevention and mitigation measures in order to avoid or reduce the impacts.

An Environmental Management Plan will be prepared for the construction and operation of the station. During the construction phase, the IPF Project Manager will be responsible for compliance with this Plan, including the implementation of mitigation measures set out in the CEE. During station operation the Belspo Station Manager will take over these responsibilities.

The potential environmental impacts of the station have been considered from the start of the design process, with an aim of minimising impacts wherever possible. The station has an energy efficient design, with maximal use of renewable energy. Water will be recycled and all wastes minimised. Cooperation with other nations for shipping and aircraft support will reduce the overall impact of long distance transport. Improvements in the environmental performance of the station and logistic support will be made wherever possible during the lifetime of the station.

As the station is designed to have a low environmental footprint with low energy consumption and minimal waste output, indirect impacts will be minor. Cumulative impacts may result from emissions to air, fuel spills and local discharge of treated water during the construction and operation of the station and may reduce the scientific value of the area.

Monitoring is one of the key components of the planned science at the new station and baseline monitoring work has already been undertaken during the BELARE 2004, 2005 and 2006 site surveys. A monitoring program will be developed to integrate with other work undertaken by national operators and in line with COMNAP guidelines.

Monitoring will be designed to investigate the potential impacts of the activities, so that adverse effects will be discovered in good time. Information on the operation of the station will be recorded, including emissions, fuel spills and wastes produced. The CEE impact assessment will be reviewed regularly to establish if the impacts are as predicted and to assess the effectiveness of mitigation measures.

Gaps and uncertainties in this Final CEE report include the unpredictability of weather and sea ice conditions which may cause delays in construction and possible changes in future scientific and logistic requirements.

Belgium therefore concludes that the global scientific importance and value to be gained by the construction and operation of the new Belgian station in the 1072 km empty sector between the Japanese Syowa station and the Russian Novolazarevskaya station outweighs the more than minor and transitory impacts the station construction and operation will have on the Antarctic environment and fully justifies the launch of this project.

1. INTRODUCTION

1.1. Purpose of the new station

Aware of the increasing impact of human activities on the earth system, Belspo launched in 1997 a research programme in support of a sustainable development policy. This umbrella programme included the Belgian Scientific Programme on Antarctic Research, already in operation since 1985. The Antarctica programme was a legacy of the famous 1897-1899 'Belgica' expedition and Belgium's involvement in Antarctic exploration as one of the original signatories of the Antarctic Treaty.

Understanding how the earth system works is paramount in establishing a policy of sustainable development. Recent findings highlighted the importance of the Polar Regions in the global weather and climate systems, their value as a treasure house for past environmental archives and their key role in major bio-geochemical cycles. Antarctica has also proved to be ideally situated not only to study life processes in an extreme (cold) environment but also to observe geophysical and astronomical phenomena.

In order to further this challenging endeavour and to facilitate Belgian scientists in their Antarctic work, a panel of experts (commissioned by Belspo) recommended the re-opening of a Belgian scientific station in Antarctica (Belspo, 2002). Such a station, open to all countries interested in conducting research activities in this part of Antarctica, would foster scientific cooperation with other research programmes and significantly enhance Belgium's visibility within the Antarctic Treaty System.

The new Belgian research station will replace the former Belgian Roi Baudouin base, built in 1958 on the ice shelf at Breid Bay in Dronning Maud Land. The new station will be erected on the Utsteinen Ridge (71°57'S; 023°21'E), situated at the foot of the Sør Rondane Mountains, Dronning Maud Land, 173 km inland from the former Roi Baudouin base (1958-1967) and 55 km from the former Japanese Asuka station (1986-1992) (**Fig. 1.1** and **1.2**). Positioned halfway between the Japanese Syowa station (684 km) and the Russian Novolazarevskaya station (431 km) it will fill in a 1072 km unoccupied stretch between these two stations in one of the least occupied sectors of Antarctica that has only been intermittently investigated since the International Geophysical Year (IGY).

Although at present designed as a summer station only, power supply will be such that continuous year-round monitoring will also be feasible, allowing the station to function as an important node in the network of solid earth and upper air geophysical observations. The station will also be situated in the exit area of the Gunnestadbrean, one of the major outlet glaciers of the Sør Rondane, giving access to the inland Plateau (Japanese Dome Fuji Station: 765 km; German Heinz Kohnen Station: 807 km).

The station therefore occupies a central position for investigating the characteristic sequence of Antarctic geographical regions (polynia, coast, ice shelf, ice sheet, marginal mountain area and dry valleys, inland plateau) within a radius of 200 km. By monitoring environmental changes, Belgium hopes to take up its full responsibilities with respect to the aspects of environmental protection in Antarctica.

The station will be designed as 'state of the art' with respect to sustainable development, energy consumption and waste disposal, with a minimum lifetime of 25 years. If dismantling of the station is required, no significant or very little remnants of the occupation will be left, in order to meet the requirements of the Environmental Protocol and relevant Belgian domestic law.

With this initiative taking place during the 4th IPY Belgium wants to contribute to a new area of high-tech Antarctic stations, offering a platform for science and exploration, open to the international scientific community.

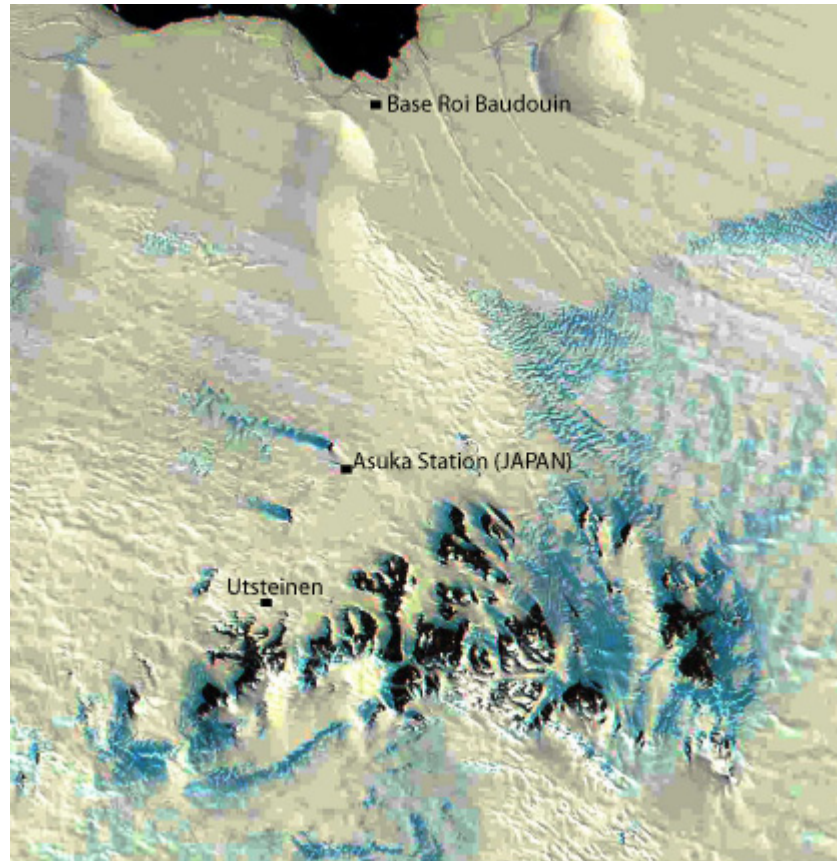


Fig. 1.2: MODIS image displaying the Sør Rondane Mountains and Breid Bay.

Situation of the former Belgian Baudouin Base, the former Japanese Asuka station and the proposed Belgian Utsteinen site. The size of the image is approximately 250 by 250 km.

1.2. History of Belgian Antarctic research

Belgian involvement in Antarctic exploration began with the well known '1897-1899 Belgica Expedition' of Adrien de Gerlache. This expedition was the first expedition to winter in the Antarctic pack ice and is generally considered as one of the first genuine scientific expeditions to the Antarctic regions. The "Belgica Expedition" heralded the so called "Heroic Age" of Antarctic exploration which culminated in 1911 with the attainment of the South Pole by Roald Amundsen, second mate on the 'Belgica'.

In 1958 Belgium took an active part in the conception and preparation of the International Geophysical Year and, based on the legacy of the Belgica expedition, Belgium's commitment to the IGY included the establishment in January 1958 of the Roi Baudouin Research Station (70°26'S; 024°18'E) on a floating ice shelf of the Prinsesse Ragnhild Kyst in Dronning Maud Land. The Belgian base was integrated in a synoptic network of geophysical observations, carried out at more than 50 stations which contributed to our knowledge of surface weather and climate, and to our understanding of the upper atmosphere. The station also served as a base of operations for field work and geographical reconnaissance further inland. Geological and glaciological investigations were carried out for the first time in the Sør Rondane Mountains and new mountains were discovered further to the east (Belgica Mountains and Queen Fabiola Mountains). At the political level Belgium took an active part in the discussions leading to the Antarctic Treaty, one of the major outcomes of the IGY and was one of the original signatories. From 1964-1966 Base Roi Baudouin was the home of Belgian-Dutch Antarctic Expeditions. When the base was abandoned and closed in 1967, it was buried under meters of snow and was unsafe to inhabit. After the closure of the Roi Baudouin base, a period of discontinuous activities followed. In 1985 Belgium resumed its Antarctica activities at the scientific level with a multi-annual research programme,

while at the political level Belgium took active part in the development of the Protocol on Environmental Protection to the Antarctic Treaty (referred to hereafter as the 'Environmental Protocol') in 1991.

The scientific programme started with nine 4-year projects, financing 10 scientific teams for about 2 MEUR. Today, 15 scientific teams are financed within four 4-year and one 2-year network research projects for about 5 MEUR. The programme has evolved from a 'stand alone' programme within Belspo, to a part of a more general programme of sustainable development, positioning as such the Antarctic research and the role of Antarctica within the global environmental system. The major current research themes are climate change and biodiversity. At present Belspo supports high quality research teams, internationally recognised within the fields of ice-dynamics modelling, biogeochemical modelling, food-web dynamics, shelf slope dynamics, marine and terrestrial biodiversity and paleoclimate.

Since closing Roi Baudouin base in 1967, Belgian scientists have depended solely on the hospitality of other nations to invite them to participate as guests in their scientific campaigns. Although this situation has led to a number of important and sustainable collaborations with other countries, this was not a long lasting situation as Belgium couldn't give an adequate return for the support, while it limited the selection of favourable sites for specific research activities.

1.3. Planned science

Constructed during the 2007-2008 International Polar Year, the new Belgian Research Station will link the intensive burst of IPY activities with the post IPY role of Antarctica to study the functioning of the Earth System for the benefit of society. The objectives of the science programme at the new station therefore mirror the major themes put forward within the Science Plan of the International Polar Year:

(i) determine the present state of the environment; (ii) observe and understand the change of the natural environment, develop projections of the future environment; (iii) study the link between Antarctica and the rest of the globe; (iv) open new frontiers of science (microbiology, subglacial extreme environment); (v) use the unique vantage point of a station remotely situated at the edge of the polar plateau for the observations of the earth's interior (crustal dynamics) and the cosmos (meteorites, upper air physics); (vi) making use of the momentum created by the IPY to develop programs with respect to education (youth, schools) and outreach (general public).

Although this scope seems broad for a single nation to achieve, Belgium aims at integrating each scientific project in one of the many international programmes which are launched in the context or in the aftermath of the International Polar Year. This not only guarantees scientific quality but also allows the findings in and around the base to be generalised and to contribute to our knowledge of the continent as a whole and in the global context. It implies that the research at or around the base should thus concentrate on the basic processes active in Antarctica. It also implies that the new platform created by Belgium should be offered in the most flexible way to the international community for collaborative research activities. Operational flexibility can be assured by Belgium's participation and involvement in the DROMLAN and DROMSHIP networks allowing shared means of transport as well as multiple entries during an extended summer season from the beginning of November until the end of February. Scientific diversity is guaranteed by the unique situation of the base at the foot of an important mountain range and the edge of the polar plateau. It allows easy access to a range of different Antarctica environments within a radius of 200 km (coastal polynia, fast ice, ice shelf, coastal ice rises, ice sheet, mountain range, dry valleys, Polar Plateau). In strategic terms the new station will act as a hub for field exploration in the 20-30 degrees East sector of Antarctica.

When fully operational, the new station will occupy a significant node in the network of geophysical observatories in East Antarctica because of its remote location more than 400 km from its nearest neighbour. The station is well situated for monitoring environmental change in Antarctica and will enhance Belgium's role within the CEP and COMNAP with respect to the conservation of Antarctica and operational management. The concept of the new Belgian station, particularly the near zero emission

design matches this vision of Antarctica as the last natural reserve on earth and a continent reserved for science and peace.

(i) Starting from 2008-2009 a scientific programme will be implemented with emphasis during the initial years on glaciology, earth sciences and terrestrial (micro)biology:

- The glaciers flowing around and in the Sør Rondane are among the least investigated glaciers in Antarctica. The ice-dynamic surveying of the glaciers will be coupled with ice-modelling and geochemical-isotopic studies, fields in which Belgian research teams excel, contributing to the study of how large ice masses and especially their ice-rock interface react to the climate signal.
- The study of rock outcrops in the Sør Rondane, belonging to the East Antarctic basement shield, was initiated by Belgian geologists (1958-1966) and further explored by Japanese scientists in the period 1986-1992. It is clear that the Sør Rondane (together with Enderby Land) forms a key area in Antarctica for investigating the crustal evolution of Gondwana Land. Also in the past, the blue ice fields characterising the hinterland of the Sør Rondane (Nansenisen) have been successfully used by Japanese scientists to collect meteorites and cosmic dust. Using the gateway from the new Belgian research station to Nansenisen via the Gunnestadbreen, a new period of search for meteorites will contribute to the study of planetary processes.
- Finally the new Belgian station will be used as a basis for biological and paleoclimatological exploration of the Sør Rondane Mountains and other terrestrial oases and nunataks in East Antarctica. Focus will be put on the study of microbial communities as previously unknown taxa are continuously discovered in Antarctica. Microbial communities are very sensitive to changing environmental conditions and may serve to monitor current and future responses to climate-driven changes. Antarctic lake sediments, rich in microbiological, geochemical and sedimentological information, provide prime high resolution records of past environmental and climatic change, help constraining and calibrating ice-sheet models and deliver a natural context for modern climate anomalies. In addition physiological experiments as well as molecular-genetic and genomic approaches are planned to gain a better understanding of how microbial communities are adapted to the extreme environments they inhabit and which factors are likely to be important in the context of future climatic change.

(ii) Also starting from 2008, the new Belgian Research Station will commence its role as a new node in the network of geophysical and climatic observatories, significantly completing the coverage of stations in this part of Antarctica. Initially the station will carry out observations in synergy with the earth sciences and glaciological programmes:

- A broad-band seismometer will help to improve understanding of intra-plate seismic activity and the lithospheric structure. The combination of absolute gravity measurements and continuous GPS measurements (surface deformation measurements) will allow scientists to estimate the change in ice-load and hence the regional mass balance in the region. At the same time, GPS dual frequency measurements can be used to reconstruct ionospheric disturbances and ionospheric scintillations. Such measurements in the upper atmosphere would significantly benefit from continuous monitoring of the geomagnetic field. The continuous monitoring of the geomagnetic field with an absolute accuracy is, at present, considered part of a second phase of geophysical measurements at the new station. The same applies for experiments to monitor the D-region of the ionosphere by passive and active electromagnetic sounding.
- In the realm of atmospheric sciences a programme will be set up to monitor, apart from surface weather observations, aerosol particles and in a later phase UV radiation, ozone and related trace gases. Emphasis will be put on the study of the origin of aerosol particles and their impact on the climate by determining their optical properties and air mass back trajectories. Such studies not only serve our understanding of the present and future climatic sensitivity but also help to interpret the aerosol content of the past climate as revealed by ice cores.

(iii) The impact of the station's activities on the Antarctic environment will be investigated by sampling water, soil, snow and ice in the immediate vicinity of the station following the guidelines set up by

COMNAP/SCAR. A biological monitoring programme will follow-up possible changes in flora and fauna (snow petrels, lichens, mosses...). This evaluation will be possible due to the chemical and biological reference data obtained at a pristine site before construction of the station. In a later phase a more ambitious plan will be set up for eco-toxicological research of lichens and birds in a wider area to monitor the possible introduction of non-native biota, diseases or toxic substances due to increased human activities elsewhere and/or global warming.

(iv) Education and Outreach: Belgium's decision to take up its share of responsibilities with respect to Antarctica will go hand in hand with a publicity campaign and an educational programme – set up in collaboration with IPF – in order to inform the general public, students and schools about the importance and challenges of research in the polar regions, climate change and sustainable development. In line with this engagement, Belspo will provide station accommodation to researchers of non-Treaty Parties within the framework of The Sixth Continent Initiative IPY project, which is being coordinated by the IPF.

Scientific projects at the new station will be financed separately from scientific projects funded within the Belgian multi-annual research programme on Antarctica and thus will not necessarily be part of the multi-annual programme. This will allow the continuation of a number of successful multi-annual research projects such as marine biodiversity, marine biogeochemistry, and/or terrestrial research in other specific regions of Antarctica, independent of the new station's activities.

Long-term research monitoring projects at the station will commence at the end of the construction season 2007-2008. The first field campaigns will start in the 2008-2009 season. Apart from the monitoring programmes, requiring continuous measurements, the plan is to start-up with a number of core projects and to expand gradually.

1.4. CEE preparation and submission

The CEE report has been prepared to meet the requirements of Article 8 and Annex I of the Protocol on Environmental Protection to the Antarctic Treaty and the provisions of the Belgian Law of 7 April 2005 in execution of the Protocol on Environmental Protection to the Antarctic Treaty (Official Journal 19 May 2005). A Draft CEE was submitted to CEP IX (Edinburgh, 2007) in accordance with ATCM procedures. The Final CEE addresses comments made at CEP IX and by individual states. The text of Appendix 1 of the Report of the Committee for Environmental Protection (CEPIX) is given in **Section 13.1**.

The Final CEE was circulated for comments and approval to the Belgian Federal Ministries of Environment, Foreign Affairs and Science Policy. On Friday 30 March 2007 the Final CEE was submitted by the Belgian Government to ATCM XXX to be held from 30 April to 11 May 2007 in New Delhi, India. The Final CEE will be presented to the Committee for Environmental Protection (CEP).

1.5. Permits, applications etc.

Belgian activities in Antarctica are regulated by Belgian law implementing the Protocol of the Antarctic Treaty on the protection of the environment (Belgian law of 7 April 2005). It contains provisions on permit requests, regulations regarding the protection of indigenous fauna and flora, the elimination and management of waste, Specially Protected Areas and the prevention of marine pollution. It describes general obligations in case of environmental emergency situations.

Belgian law states that no Antarctic activity by Belgian citizens can take place without a written permit, except in the case of scientific activities authorised by another Treaty Party. The permit can only be delivered if the activity conforms to the provisions of the Environmental Protocol.

The Belgian Federal Ministry of Environment oversees the execution and follow up of the Belgian law implementing the Protocol. It sets permit conditions, reviews environmental impacts of the authorised activity and may impose additional obligations and conditions.

The Ministry has permitted the three site survey visits “BELARE 2004”, “BELARE 2005” and “BELARE 2006” in the Sør Rondane region in the framework of the preparations for the construction of the Belgian Antarctic research station. End of Mission Reports including the impact on the environment of the visits were transmitted to the Federal Ministry of Environment after each expedition.

The Final CEE was approved in March 2007 by the Belgian Federal Ministry of Environment.

1.6. Legislation, standards and guidelines

The Antarctic Treaty (1959), which came into force in 1961, has been developed by the adoption of measures, resolutions, decisions and the negotiation of further international agreements. It is known collectively as the Antarctic Treaty System and includes the Convention for the Conservation of Antarctic Seals (CCAS 1972), the Convention on the Conservation of Antarctic Marine Living Resources (CCAMLR 1980) and the Protocol on Environmental Protection to the Antarctic Treaty (Environmental Protocol, 1991).

The Environmental Protocol sets out environmental principles, procedures and obligations for the comprehensive protection of the Antarctic environment and its dependent and associated ecosystems. Belgium ratified the Environmental Protocol in May 1995 and the law implementing the Protocol of the Antarctic Treaty on the protection of the environment was published in the Belgian Official Journal on 19 May 2005.

Additional relevant laws, in line with the sustainability philosophy of the project, include international environmental agreements such as the Convention on Biological Diversity (1993) and the Kyoto Protocol on Climate Change (2005). Ship and aircraft operations fall under a number of international and national regulations including the Convention on International Civil Aviation (Chicago Convention) and the International Convention for the Prevention of Marine Pollution from Ships (MARPOL 73/78). Ships and aircraft will be fully certified in their country of registration.

Relevant resolutions will be followed including Resolution 2 (2004) on Guidelines for the Operation of Aircraft near Concentrations of Birds in Antarctica. Documents and guidelines produced within the Antarctic Treaty System by COMNAP have been used in the preparation of this document. These include guidelines on monitoring and on the preparation of environmental impact assessments (COMNAP, 2000, 2005a and b).

1.7. Project management structure

The Belgian government commissioned the International Polar Foundation (IPF-www.polarfoundation.org) to coordinate the design and construction phases of the new Belgian research station between 2005 and 2008, under the supervision of the Federal Ministry of Foreign Affairs and Science Policy. The IPF was also commissioned to find the necessary private funding for the concept and building phase.

The use of sustainable technology as the primary energy source, without compromising functionality, comfort or safety demands, implies an integrated design methodology similar to the one used in applied technology projects (cfr. industry & space). The project management has been structured according to this method.

In the first phase of the project an extensive analysis of Antarctic construction history, including the latest projects that will emerge during the IPY, was conducted. A technology survey identified new and proven technologies appropriate for the project. The outcome of these studies, lessons learned and proven solutions were integrated in the requirements and specifications of the new station.

On the conceptual design level a verification method with four major lines of approach (environment, human factors including safety, technology and cost) is used to evaluate and steer all conceptual decision-making. All prime project partners work together from the start of the iterative design process thereby guaranteeing that the different fields of interest are taken care of in a homogeneous way.

The construction and inauguration of the station is foreseen in 2007-2008, on the occasion of the fourth "International Polar Year" (IPY), at the same time being the 50th anniversary of the construction of the former Roi Baudouin base (1957-1959).

Once the station is in place, Belpo will be in charge of management and maintenance of the station and the follow-up of station activities.

2. DESCRIPTION OF THE PROPOSED ACTIVITY

2.1. Location

The new station will be built in Dronning Maud Land, at the foot of the Sør Rondane Mountains. It will be situated 173 km inland from the former Roi Baudouin base, Breid Bay (1958-1967) and 55 km from the former (1986-1992) Japanese Asuka station (**Fig. 1.1** and **1.2**). The nearest stations will be the Japanese Syowa station (684 km) and the Russian Novolazarevskaya station (431 km).

The proposed construction site is situated approximately 1 km north of Utsteinen Nunatak, on a small relatively flat exposed granite ridge (71°57'S 023°20'E). The ridge - oriented in a north-south direction - is 700 m long, approximately 16 m wide and protrudes 20 m above the surrounding snow surface.

Utsteinen Nunatak is a few kilometres north of the Sør Rondane Mountains. This granite rock consists of two peaks with maximum elevation of 1564 m a.s.l. Around the Nunatak there are some blue ice fields and some seasonally frozen surface lakes. The SE side of Utsteinen has a large wind scoop.

The construction site is also situated in the exit area of the Gunnestadbreen, one of the major outlet glaciers of the Sør Rondane, giving access to the inland Plateau (Japanese Dome Fuji Station: 765 km; German Heinz Kohnen Station: 807 km).

Once the station is operational, station personnel and scientists will use the DROMLAN air link to access the station and the Sør Rondane region and to bring in small items of equipment. The annual re-provisioning of the station will take place via ship unloading at Breid Bay and overland tractor transport via Romnaesfjellet.

Monitoring research will take place in the vicinity of the station and field research will be carried out at a maximum distance of 200 km from the station, the limit for logistic support. Within this radius one can visit the whole mountain range, up to the polar plateau (Nansenisen) and down the inland slope to Breid Bay (the grounding line and the ice shelf of the continental margin).

2.2. Site selection

2.2.1 Utsteinen selection

Belgian research activities in Antarctica started with the installation of a research station during the IGY in 1957. At that time, the Roi Baudouin base (1958-1967) was situated at the coast in Breid Bay (Eastern Dronning Maud Land) on the ice shelf. Large accumulation rates and ice shelf motion made the construction of a new base necessary in 1964. This second station was eventually closed in 1967. Research activities were concentrated on the coastal zone, but also on the Sør Rondane Mountains, that were extensively studied during that period.

The interest in the area was revived two decades later by the Japanese who, in 1986, installed Asuka Station at the foot of the Sør Rondane Mountains, 173 km inland from the Roi Baudouin base. This station was also built on the snow surface and due to high accumulation rates and strong katabatic winds the base was only active for a period of 6 years before it had to be closed. The strong katabatic winds were coming from major outlet glaciers in the eastern part of the Sør Rondane Mountains. Mean wind speed at Asuka was 12 m/s, creating a constant snow drift, even in summer. At that time, research was primarily focussed on the area near the station and the nearby Sør Rondane Mountains.

Renewed interest in the area, relatively far away from any other research station in Antarctica, revived the idea of a new research station within proximity of the Sør Rondane Mountains. However, in view of the short operational period associated with the Roi Baudouin base and Asuka station, a sustainable solution was sought, i.e. to have a construction on bedrock and not on a snow surface so that it would last longer.

Furthermore, the area should be protected from strong katabatic winds. However, from a sustainability point of view, the use of alternative energy as a major power source was preferred. Therefore, the site should have relatively low wind speeds (at least lower than Asuka), but preferably constant and from a more or less constant direction.

It was clear from the beginning that the western part of the Sør Rondane mountain range would be the most suitable area as it is more protected from the fierce katabatic winds and offers an easy and safe access to the polar plateau via Gunnefjellbreen, one of the many outlet glaciers through the mountain range.

Prior to the BELARE 2004 site survey a number of potential sites were selected within the western sector of the Sør Rondane mountains on the basis of terrain knowledge, satellite imagery, topographic maps and aerial photographs collected by the Japanese Antarctic Research Expedition and on the basis of a number of characteristics, such as accessibility (both by small aircraft and overland traverse), presence of water (either abundance of snow or the presence of supra-glacial lakes), exposed and flat bedrock to enable a stable construction (and not on frozen regolith), protection from katabatic winds.

Utsteinen was found to be a suitable candidate. The immediate surroundings of the Nunatak itself are not suited to build a station due to difficult accessibility and a large wind scoop. However geological field work demonstrated the existence of a small ridge north of this Nunatak that was relatively flat and consisted of exposed granitic bedrock.



Fig. 2.1: View of Utsteinen Ridge from Utsteinen Nunatak. Picture looking to the North.

The small dots to the left of the ridge are the BELARE 2004 expedition camp.



Fig. 2.2: Close-up view of Utsteinen Ridge and Utsteinen Nunatak in the back. Picture is looking to the South.

During the site survey the Utsteinen site was found to be particularly favourable because of the following features:

- **Site stability:** the site itself is relatively flat, consisting of weathered granite (no moraine deposits). There is no wind scoop;
- **Local accessibility:** the rock itself protrudes only a few meters above the snow surface and is therefore easily accessible by vehicles. The surrounding area is relatively flat and consists of soft snow; good conditions for small aircraft operations.
- **Global access:** because of its northern position compared to the mountain range, it is closer to any other access route from the coast and Asuka Station, and in the proximity of potential landing sites for bigger aircraft (blue ice fields);
- **Water:** the presence of soft snow guarantees a large supply of water;
- **Wind:** the site receives significantly less wind than the central or eastern part of the Sør Rondane or Asuka Station. The wind direction is constant, although more wind variability might have been expected in such a protected area; the constant direction is an important factor with respect to the use of wind energy as a power source.
- **Access to the Sør Rondane region:** the site lies to the north of the Sør Rondane Mountains and only 5 km from Gunnestadbreen, a major outlet glacier of the Sør Rondane that offers easy and safe access to the polar plateau.

Utsteinen Ridge has been chosen as the site for the new station because it meets the requirements of the proposed research activities, site conditions and environmental and safety considerations.

An overview of the other potential sites surveyed during the BELARE 2004 expedition is given in **Section 3.2.**

2.2.2 Construction site selection

Consistent with the philosophy of the project, solutions are preferred that make best use of the available terrain conditions therefore minimizing impact on the environment during construction (and removal) of the station. The ridge was subdivided in 3 sections: Northern, Middle and Southern:

- **The Northern section** (furthest away from the Nunatak) is more exposed to the wind and has a less favourable orientation versus the prevailing wind. For anchoring, the terrain conditions are similar to the Southern section.
- **The Middle section** is the lowest part of the ridge. Only few rock outcrops rise above the surrounding snow. Due to its low position the wind speed in this area is lower compared with the other sections, but the area accumulates more snow. Anchoring conditions are uncertain and the geological characteristics of the ridge are less favourable (highly eroded area). The ridge geometry at the east side (steep slope) would result in very deep sub-surface anchoring points.
- **The Southern section** of the ridge has similar terrain conditions as the Northern section but it has a better alignment versus the prevailing wind (approximately 90°) and is in general more protected against the wind.

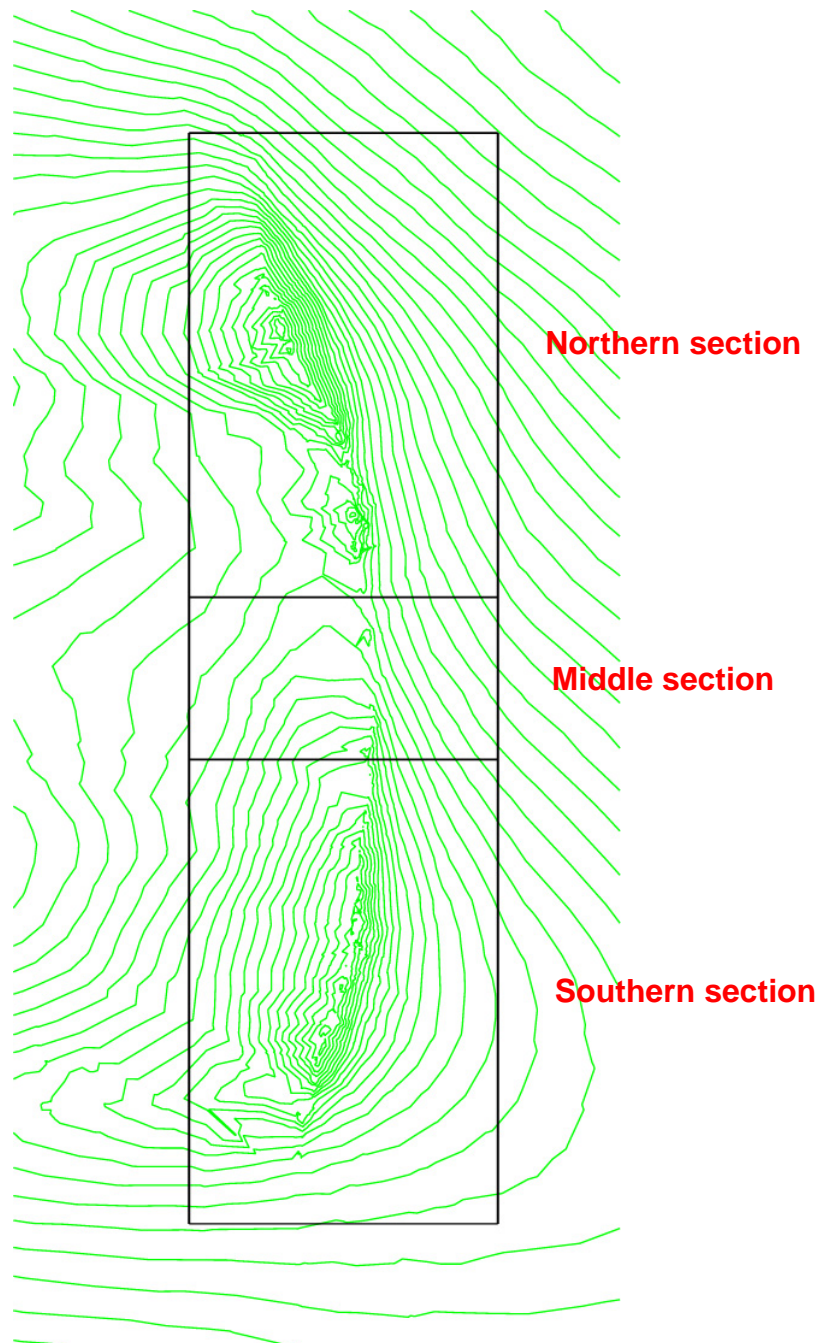


Fig. 2.3: Overview of the different ridge sections (Northern, Middle and Southern section)
(contour interval of 1 m)

Taking into account the parameters mentioned above the decision was taken to focus the survey on the Southern section of the ridge.

A number of possible station areas were identified in the Southern section, which was therefore divided from North to South into 3 sectors (01-03) of 100 m each. All sectors have good anchoring conditions, with sector 03 being slightly less favourable due to its “mixed character”: while sectors 01 and 02 consist mainly of big bedrock granite slabs, sector 03 has more permafrost patches and loose material. Sector 02 is best aligned to the prevailing wind direction, has the lowest wind speed and best accessibility due to the regular shaped lee-side and less steep snow surface.

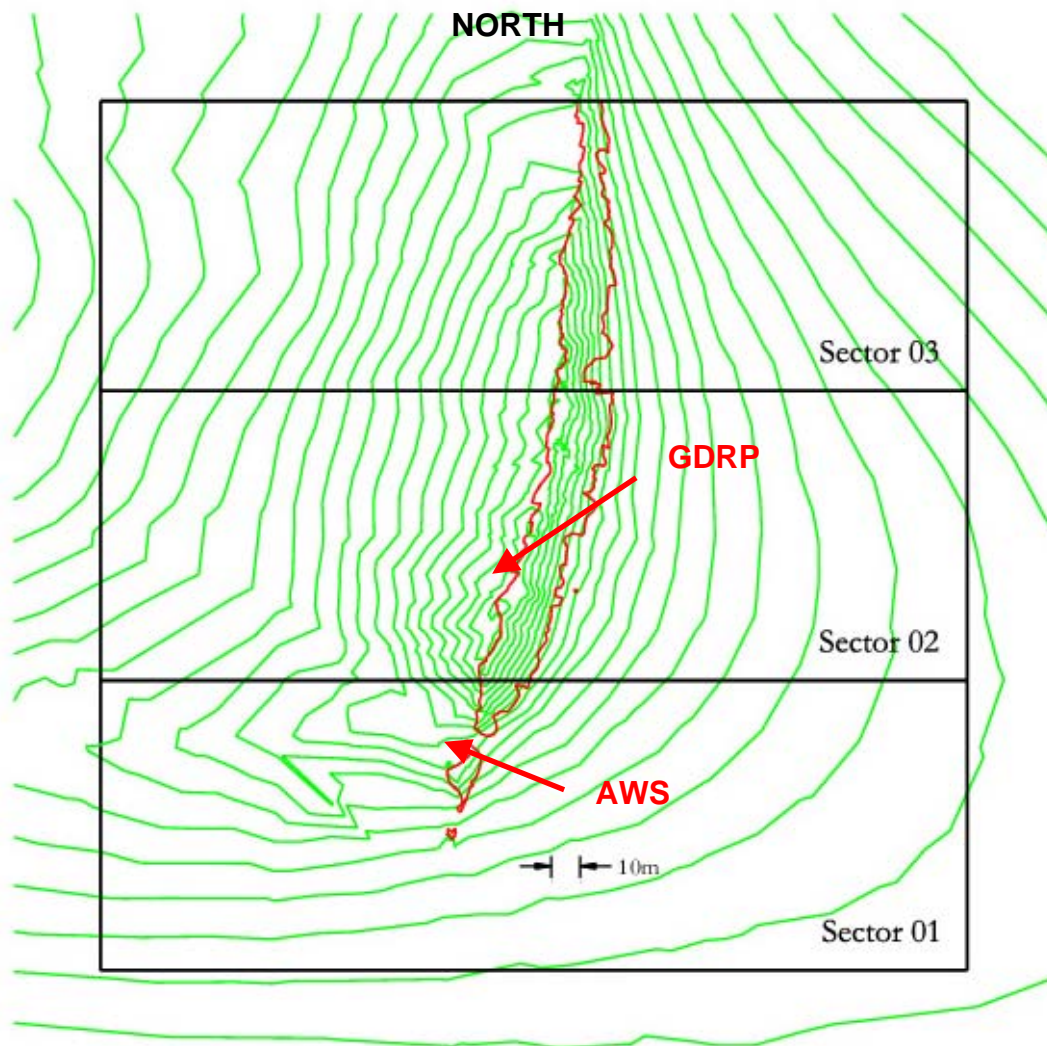


Fig. 2.4: Overview of different ridge sectors in the Southern section.
 Ridge building integration study area: sectors 01 to 03 (contour interval of 1 m).
 (GDRP = Geodetic Reference Point); (AWS = Automatic Weather Station)

The Northern half of Sector 02 was selected as the preferred station area; it is the best compromise between the major influential parameters:

- Good alignment versus the prevailing wind direction (best available incoming airflow characteristics)
- Wind speedup is less extreme than alternative positions.
- Excellent snow-clearing characteristics will prevent snow accumulation on the building
- Good anchoring conditions with a majority of anchoring points directly on the granite bedrock
- Anchoring points are easily accessible and in the snow-free area
- Installing (and removal) of the anchoring points will have minimum impact on the terrain.

2.3. Principal characteristics of the proposed activity

The activities covered by the Final CEE are:

- construction, operation and maintenance of the new Belgian research station,
- building and operation of the temporary camp required during the construction phase,

- transport and movement of cargo and personnel to the station site south of 60°S.

Note that the DROMLAN air-link and scientific activities have not been included in the evaluation. Scientific projects will be subjected to EIA before being allowed to proceed.

2.3.1. General specifications of the station

The project consists of the construction, operation and maintenance of the new Belgian station at Utsteinen Ridge as a station for scientific research and monitoring.

The construction of the station is planned in the austral summer of 2007-2008. In this period the station will be built, system acceptance tests will be performed and finally it will be handed over to the Belgian Science Office at the end of the season.

Characteristics of the station:

- Austral summer station: open from November to February.
- Full-year monitoring and remote sensing capability.
- The station is designed for optimal use by 12 people accommodated in the main building.
- The use of a station "extension" will make it possible to accommodate another 8 people. This extension consists of heated shelters used for sleeping only.
- The station's facilities (kitchen, the sanitary installations, offices ...) are designed to cope with the larger occupation as mentioned above.
- Expected design life: 25 years minimum.
- Accommodation (living, technical, research, storage): 900 m².
- There will be laboratory facilities as well as mobile units to be used for field work
- The station has a hybrid design: the main building is above the ground-level and anchored into snow-free rock area. The adjacent garage/storage building is mainly constructed under the surrounding snow surface. Both buildings are inter-connected by a weather protected corridor.
- Activities (construction, operation and decommissioning) will comply with the requirements of the Environmental Protocol. The environmental impact will be minimal.
- The system design of the station is developed based on sustainable technology and high energy efficiency. Nevertheless safety, health, comfort, functionality and cost are equally important design drivers.
- The facilities will use renewable energy as the primary energy source thereby minimising the use of fossil fuels.
- The station will have a comprehensive energy management regime.
- Limited amounts of fuel will be transported to the station mainly for vehicle use.
- To assure a constant energy supply two back-up generators will be installed.
- The station will have a comprehensive waste management regime.
- The waste treatment will include the treatment of grey and black water and recycling capability for non-potable water applications.
- By design the station has extended upgrade capability. It will be easy to integrate new state of the art technologies. The station will be upgradeable to a full year station with minimal effort.
- The station has been designed for low maintenance.
- Recycling and lifetime maintenance strategies will reduce the running costs.
- The design and layout of the facilities will minimise snow management.
- The building will be designed for easy repair and damage control; a risk contingency plan will be developed.
- The manual handling and multiple handling of all stores and equipment will be minimised across all operations, including annual relief, normal operation and eventual decommissioning of the facilities.

Four staff personnel will be present during the whole summer season. Some scientists will occupy the station for some weeks every summer for servicing and maintaining the monitoring equipment and for environmental sampling; others will use the station as a hub for scientific expeditions in the field.

Logistic functions and tasks of the station will grow depending on the needs of the research work.

2.3.2. Shipping and logistics

Once the station is operational, station personnel and scientists will use the DROMLAN link for access to the station and the Sør Rondane region in general. The yearly station provisioning by ship (Ice class) - via unloading at Breid Bay - will be as much as possible co-organised and shared with the other nations active in Dronning Maud Land.

Also for the construction period DROMLAN will provide transport for the construction team members. For the cargo, sea transport is organised by the DROMSHIP (DROnning Maud land SHIPing network), a non-profit international project formed by a group of national Antarctic operators including Finland, Germany, Norway, Sweden and Belgium. The purpose of this cooperation is to secure shipping transport for the national Antarctic operators involved through the IPY-period (season 2006/07 through 2008/09). As a result predictability both for the operational and economic planning process is ensured. Furthermore the cost sharing reduces the investments significantly.

BELARE 2004 focussed on the building site selection. To establish the logistic chain the BELARE 2005 expedition aimed for the survey of the ship unloading site and over-land transport route from the coast to the building site. An air and oversnow reconnaissance survey of Breid Bay and ice shelf area during this expedition was carried out to assess the local situation. Breid Bay was used as a ship loading/unloading area during the Belgian (1958-1960) and Belgian-Dutch (1964-1966) expeditions to Base Roi Baudouin and during the Japanese Antarctic Research (JARE) expeditions to the now abandoned Asuka station (1986-1991).





Fig. 2.5: Unloading at Breid Bay (Pictures taken during BELARE 2006)

The reconnaissance team mapped the approximately 200 km access route and identified a preferred and a back-up unloading site (see **Fig. 2.6**). The east route (1) is the preferred route and consists in an almost straight line from BEL-L0 (see **Table 2.1** for coordinates) to the station site. BEL-L0 was the preferred unloading site for helicopters, used by the Japanese expeditions. Although there are no crevasses or other obstacles in the last 80km of the route the occurrence of large sastrugi obstructs the transport. For the east route a new (BEL-L0 NEW) reference point was established closer to the preferred unloading site. At point BEL-RAMP access to the fast ice is possible by means of a local recess in the terrain which forms a stable and gentle slope.

Alternative unloading sites and access routes were also identified. For the east route this is Polarhav Bay (point BEL-LD) where unloading can be done directly on the ice shelf (the ice cliff being less than 15m high). Satellite images show that sometimes the fast ice completely disappears in this area. Another unloading area can be found to the west (point BEL-LC) where a few ramps were detected. In this case, a more western route using the former Japanese L0 point (indicated as BEL L0) will be used. The west route (2) would provide the shortest way to the construction site. The terrain conditions are similar to the ones that can be found on the east route. Between both east and west options a large crevasse area was found near the edge of the ice shelf. This area was also surveyed.

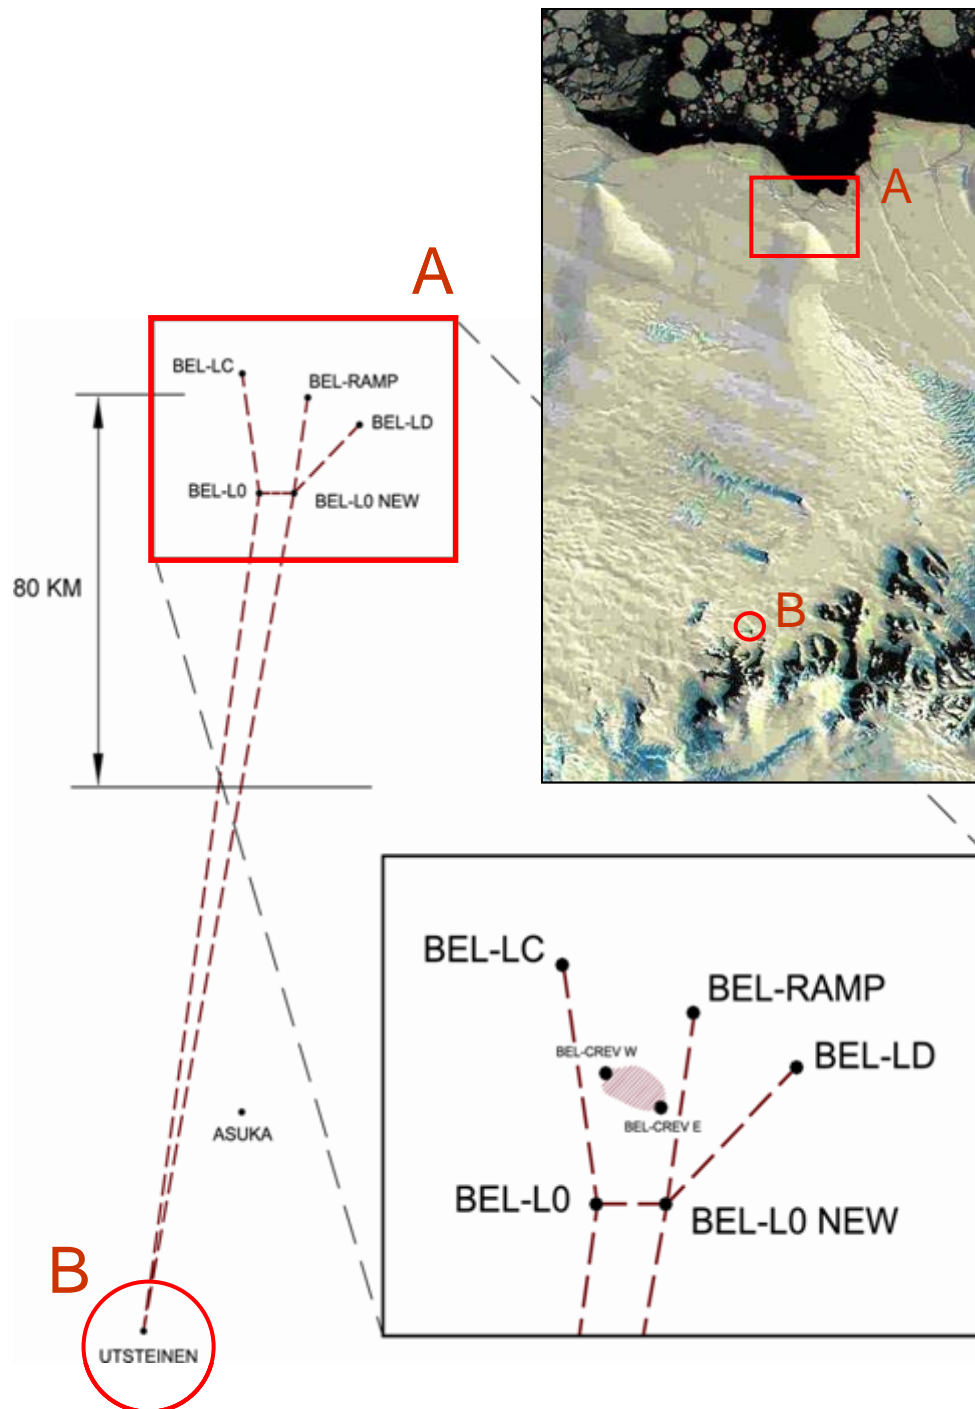


Fig. 2.6: Overview of access routes (eastern and western) from Utsteinen to Breid Bay and unloading site.

BEL-L0	S 70°29'50"	E 24°00'37"
BEL-L0 NEW	S 70°30'00"	E 24°12'00"
BEL-RAMP	S 70°20'26"	E 24°14'18"
BEL-LC	S 70°18'25"	E 23°52'32"
BEL-LD	S 70°23'06"	E 24°31'47"
BEL-CREV E	S 70°25'04"	E 24°10'43"
BEL-CREV W	S 70°23'08"	E 24°01'08"

Table 2.1: Coordinates of major survey points

To limit the number of lay-days of the ship for unloading (for budget and safety reasons) an inland depot area was identified at a safe distance from the edge of the ice shelf. Transport containers will weigh maximum 8 ton for safe movement across the sea ice and easy handling.

BELARE 2006, the building site and access route preparation expedition, was the third consecutive expedition in the preparatory phase of the construction of the new station. Its major objectives were the preparation of the construction site, the validation of the logistic chain between the off loading site at the coast to the building site and the transport of equipment and supplies such as food and fuel to prepare the following (building) season. In the process the building team core members participating in the expedition acquired valuable experience in various fields of activities. SWEDARP (SWEDish Antarctic Research Program) and BELARE agreed to cooperate during this season to share information and knowledge in Antarctic logistics. They worked with SWEDARP Logistics in transport, maintenance and work around the station.

The ship offloading in Breid Bay is the most critical link in the logistic chain. Of the three off-loading sites identified during the BELARE 2005 expedition two are suited for offloading directly on the ice shelf (preferred scenario) and one site has a natural ramp making offloading on the sea ice possible. Alternative positions were surveyed.

The team set up a temporary field depot at the new location where all cargo from the ship could be collected at a safe distance from the ice shelf edge. The team traced and marked the route from the coast to Utsteinen by GPS and physical markers (bamboo stakes). Only two of the four planned traverses were carried out. This proved sufficient to bring a minimum required amount of equipment and materials to the construction site. All equipment, supplies and waste were removed from the depot site and taken to Utsteinen. Waste was adequately stored awaiting removal during the next season by ship.



Fig. 2.7: Picture of the BELARE 2006 traverse.

As agreed with the Japanese NIPR a traverse was made to Seal Nunatak near the former Asuka station site (approximately 60km North from Utsteinen), to recover equipment and fuel. The fuel was taken to Brattnipane, a site 20km East from Utsteinen, where a fuel depot was installed in preparation of next season's JARE expedition. On this occasion the team recovered 2 bulldozers stored at Seal Nunatak, which were reconditioned and will be used during the coming construction season.

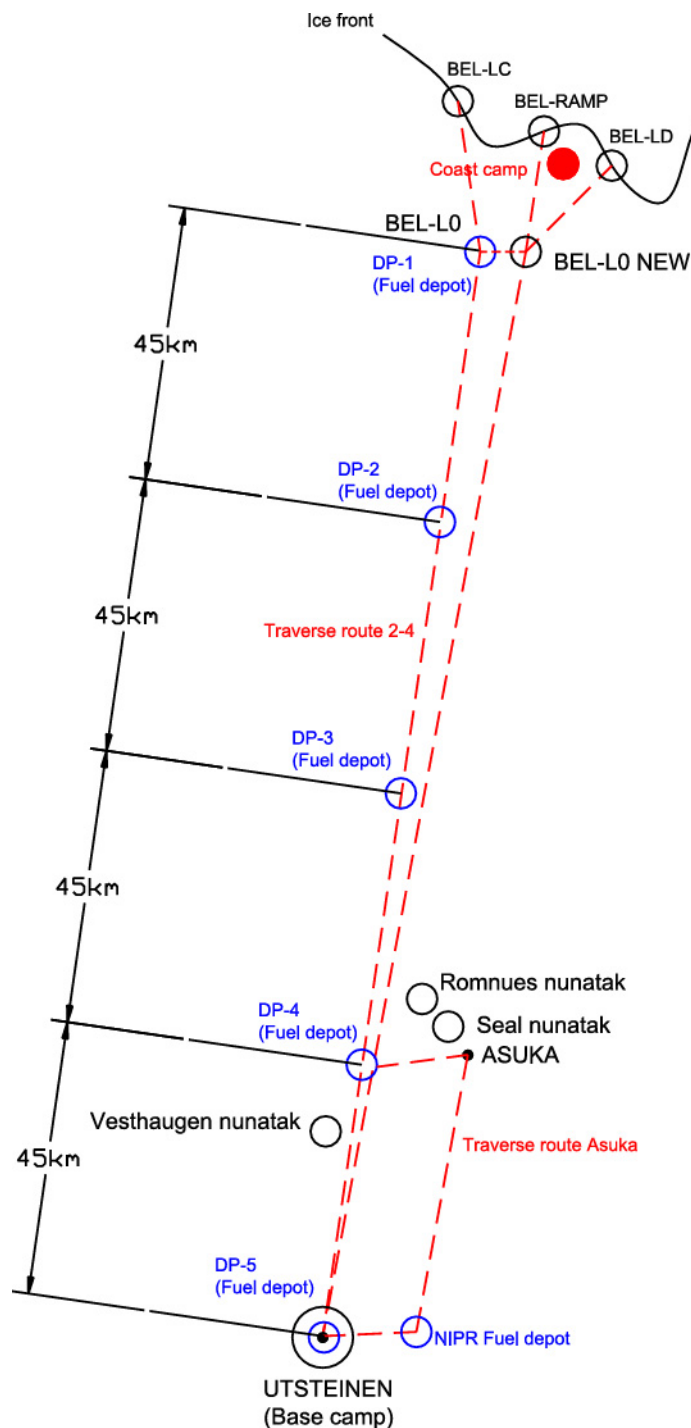


Fig. 2.8: Overview logistic route points with fuel depots from Breid Bay and unloading site to Utsteinen.

All logistic support equipment on site is new, apart from the recovered Japanese material, and includes two snow tractors with cranes (one with snow blower), two bulldozers from Asuka station and various generators, air compressors, etc. All logistic support equipment will be maintained on site.

Fuel transported for the construction base camp during BELARE 2006:

- LPG gas (cooking) = > 8 bottles of 48 kg each
- Polar diesel (heating) = > quantity used for BELARE 2006 is 300 litres
- 60 litre BP benzene (for traverses)
- ARGON = > 1 bottle of 50 litre (for welding)

The base camp has 220 AC power supply from:

- One 10kVA generator
- Two 2kVA generators
- BC-WPU (Base Camp Wind Power Unit) which is linked to a 6kW (installed) turbine

The containers will remain on the transport sledges during winter. The sledges are parked protected from the prevailing wind at the west side of the ridge. Items that can tolerate extreme temperatures will remain inside the containers. The remaining equipment was stored underground (in a covered trench).

BELARE 2007 planning:

Phase 1 activities: November 2007

1. Prepare base camp at Utsteinen (construction site)
2. Recover machines including vehicles, generators, etc.
3. Activate wind turbine for base camp power supply
4. Start work on anchoring points of the station and wind turbines

Phase 2 activities: December 2007

1. Continue work on the anchoring points of the station
2. Construction garage building
3. Reconnaissance to the coast = > route and Breid Bay unloading site conditions (traverse 01).
4. Installation of fuel depots along the access route (traverse 02) (**Fig. 2.8**):
 - DP1 at L0: 35 drums Polar diesel, 2 drums JET fuel, 1 drum petrol.
 - DP2 at km 45: 35 drums Polar diesel.
 - DP3 at km 90: 35 drums Polar diesel, 1 drums petrol.
 - DP4 at km 135: 35 drums Polar diesel.
 - DP5 at Utsteinen: 50 drums Polar diesel, 18 drums JET fuel, 10 drums petrol
5. Transport of materials stored at the coast camp (from BELARE2006) to the base camp (traverse 03).

Phase 3 activities: January 2008

1. Arrival ship = > unloading
2. Over land traverses to building site (traverse 04 to 09)
3. Construction metal structure
4. Start wood construction

After collecting the full cargo load on the inland depot site (which will have a camp facility) the transport to the actual site will start. The estimated unloading time to the inland depot area is 5 days while the first load arriving at the construction site will be approximately 7 days after ship arrival (weather conditions permitting), the last load will arrive 20 days later.

Phase 4 activities: February 2008

1. Finalise wood construction
2. Building interior and systems
3. Installation wind turbines
4. Installation stand-alone facilities
5. Testing

Phase 5 activities: 01-10 March 2008

1. Testing
2. Opening event
3. Prepare for winter

Time	IN	OUT	ON SITE
November 2007	10	0	10
December 2007	10	0	20
January 2008	20	5	35
February 2008	10	20	25
March 2008	30	55	0

Table 2.2: Summary of personnel movements

1	Logistics Support Equipment (LSE)	Large vehicles, sledges, snowmobiles ... to be used for the building and operational phases. Some of this equipment will become redundant when the building is finished and will be removed from Antarctica.
2	Construction Support Equipment (CSE)	Equipment specifically for the building process (shelters, tools, generators, lifting equipment...) except for vehicles (see 1). Some of this equipment will become redundant when the building is finished and will be removed from Antarctica.
3	Construction Support Supplies (CSS)	Spare parts, food ... Except for fuel (see 5) specifically foreseen for the building process itself.
4	Operational Support Equipment (OSE)	Work shop tools, spare parts, appliances ... required to run the station.
5	Operational Support Supplies (OSS)	Spare parts, food ... except for fuel (see 5) needed to support the first period of the operational phase of the station.
6	Fuel (FL)	Different kind of fuels (octane 95, Polar diesel ...) needed for the vehicles, emergency generator, powered tools and snowmobiles.
7	Building Construction Materials (BCM)	All construction materials that are part of the buildings and its auxiliaries.
8	Waste (W)	All kinds of waste resulting from the activities (human waste, food waste, packaging materials ...).
9	Scientific Equipment (SE)	Instruments and other equipment for initial science projects
10	Excess Material (EM)	Equipment and material redundant when the building is finished. Will be removed from Antarctica.

Table 2.3: Categories of transport needs

BELARE - DROMSHIP									
				BELARE2006		BELARE2007		BELARE2008	
	Category	Type	Unit	IN	OUT	IN	OUT	IN	OUT
1	Drum Fuel	Polar diesel	N° drums	190	/	50	/	10	/
2		JET A1	N° drums	20	/	0	/	20	/
3		Petrol	N° drums	10	/	0	/	20	/
4	Total weight fuel drums (drum = 0,2 ton)		Tons	44		10		10	
5	Bulk Fuel	Polar diesel	Tons	0	/	0	/	10	/
6		JET A1	Tons	0	/	0	/	0	/
7		Petrol	Tons	0	/	0	/	0	/
8	Total weight bulk fuel		Tons	0		0		10	
9	Container based cargo	Containers 20' (net weight 3,2t)	N°	12	0	55	0	2	59
10		Net payload	Tons	5	0	5	0	5	1
11		Total weight	Tons	98,4	0	451	0	16,4	247,8
12		Containers 40' (net weight 6t)	N°	1	0	2	0	0	3
13		Net payload	Tons	10	0	10	0	0	2
14		Total weight	Tons	16	0	32	18	0	24
15		Freeze/cool 20' (net weight 6t)	N°	0	0	2	0	0	2
16		Net payload	Tons	0	0	5	0	0	2
17		Total weight	Tons	0	0	22	0	0	16
18		Tanktainer 20' (net weight 6t)	N°	0	0	0	0	1	0
19		Net payload	Tons	0	0	0	0	0	0
20		Total weight	Tons	0	0	0	0	6	0
21	Total weight container based cargo		Tons	114,4	0	505	18	22,4	287,8
22	Normal Cargo	loads	N°	0	0	5	0	0	0
23		weight per load	Tons	0	0	5	0	0	0
24	Total weight normal cargo		Tons	0	0	25	0	0	0
25	Vehicles	Sledges	N°	8	0	4	0	0	0
26		Weight sledge	Tons	3,7	0	3,7	0	5	3,7
27		Total weight	Tons	29,6	0	14,8	0	0	0
28		Vehicles (N°) - snow tractors	N°	2	0	2	0	0	2
29		Weight	Tons	8,5	9	8,5	0	0	8,5
30		Total weight	Tons	17	0	17	0	0	17
31		Vehicles (N°) - bulldozer type	N°	0	0	1	0	0	1
32		Weight vehicle	Tons	9	9	9	9	9	9
33		Total weight	Tons	0	0	9	0	0	9
34	Total weight vehicles		Tons	46,6	0	40,8	0	0	26
35	total weight		Tons	205	0	581	18	42,4	314
36		Passengers IN	N°	4	/	10	/	2	/
37		Passengers OUT	N°	/	0	/	10	/	0

Table 2.4: Ship transport needs for construction (movement of goods and personnel 2006/2007/2008)

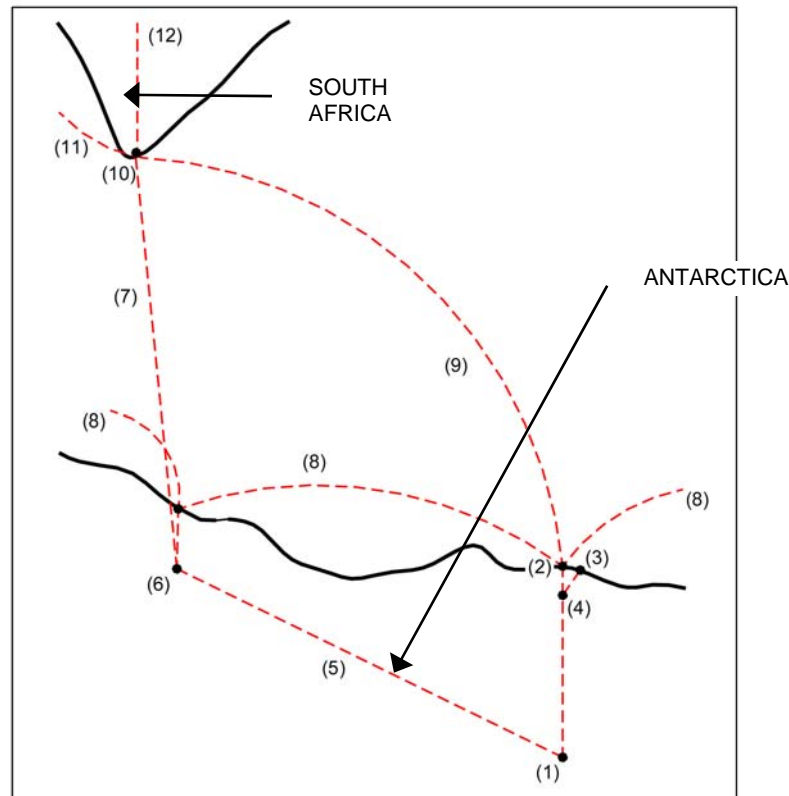


Fig. 2.9: Scheme of different transport routes for the proposed activity (cargo discharge at coast, construction, operation and science):

- (1) Utsteinen construction site; (2) Preferred unloading site (Bleid Bay); (3) Alternative unloading site in Bleid Bay (Polarhav Bay); (4) L0 point (Ice rise); (5) Flight-route from Novolazarevskaya station;
- (6) Novolazarevskaya; (7) Flight-route from Cape Town; (8) Supply shipping combined with other stations;
- (9) Direct sea route from Cape Town; (10) Cape Town; (11) Cape Town sea route to Europe;
- (12) Cape Town air route to Europe.

2.4. Station description

As already said the new Belgian station is a compact and efficient facility to support the scientific field work. Key features are its low-emission character and the low demand on resources to operate it. The station has been designed to anticipate the evolution towards automated scientific experiments and logistic support to field work in the wide area.

2.4.1. Station programme

User scenarios

Prior to the actual design process of the station a comprehensive study covering the wide spectrum of characteristics typical to the Antarctic building tradition was done. This study, with the valuable support and feedback of different polar institutes and individuals experienced in the field, led to an exhaustive specification and requirement list including guidelines and lessons learned. The approach, as for the whole of this project, was fourfold: environment, human factors, technology and cost. A key-element to define the programme (and energy needs) were the user scenarios. These gave a detailed insight on how people will live and work in and out of the station.

Building surface and basic layout

The extensive study of the user scenario's resulted in a building programme that foresees in a total building surface of $\pm 900 \text{ m}^2$. Taking into account the requirements of the building programme and the terrain conditions it was decided to construct two major building units separate from stand-alone facilities for specific scientific activities.

The air-conditioned main building is the living area of the station and has a usable floor space of approximately 445 m^2 . The "garage/storage" building consists of 2 building volumes of each 220 m^2 . These accommodate secondary functions such as work shops and storage of supplies and spare parts as well as removable laboratory facilities.

The station will provide an efficient and pleasant living/working environment for the crew but the programme is also developed elaborately to optimise energy efficiency needs and the specific technical demands imposed by the winter close-down of the station.

Main building

The main building has a concentric architecture laid out around a "technical core" (see **Fig. 2.10**). All temperature-sensitive installations and equipment, such as the waste water treatment system, the station control system and the batteries for energy storage are concentrated in this area of the building. A second concentric layer around the technical core consists of space for active systems such as the kitchen, sanitary and laundry. It also has storage for fragile office equipment during winter. A third concentric layer consists of "passive" areas, for example, the living and sleeping rooms. The fourth and last of the containment levels is the insulated outer shell.

The core-based architecture allows a "feed-through-the-wall" concept for water supply, drainage and other services resulting in compactness and a high level of system integration. This has positive repercussions on key-features such as energy preservation, reliability, maintenance and cost. From an energy point of view all "internal gains" of the building are centralised in the building layout thereby reducing the additional heating load required (note that for most of the summer the building simulations show that no additional heating is required).

The building will be optimised for typical summer season conditions but also for winter close-down. Close-down preparation work will be practical and easy. For example drainage of the water tubes will be very straightforward. For winter each individual layer is "sealed" thereby creating a number of temperature-controlled buffer zones against the cold exterior environment. This makes it possible to maintain all layers at a guaranteed minimum temperature with minimal energy supply, protecting installations and whole year active systems located in the technical core as well as the appliances located in the second layer. The "passive" area (third layer) acts as an additional buffer zone. All building zones will be monitored for temperature routinely.

The building layout will guarantee good acoustic comfort. The distribution of noise sources and the layout of the functionalities and storages (acting as buffer-zones) in the building have been reviewed for compatibility with the user scenarios to assure there is minimal disturbance caused by the activities. Wind-induced noise (turbulence areas on the building) has also been studied and a number of noise limiting measures are applied.

The access to the building is at the garage level on the west side (lee-side) of the ridge. A tube that is partly buried under the adjacent snow surface protects the entrance door and moves the entrance away from the ridge summit where the natural wind speed-up is higher. The position of the tube also takes into account the snow accumulation/erosion characteristics due to the presence of the building. This is the reason why the entrance module is interfacing with the southern garage building unit (see further). Note that the flexible building concept allows the access tube to be repositioned if this becomes necessary.

The entrance has a lock with self-closing doors that can only be used consecutively. The aim is to reduce heat loss through the entrance. Once through the lock, people enter an area where exterior clothing equipment or supplies can be left.

Once inside the garage building people enter the main building through an insulated lock that's a structural part of the main building itself. This level of the main building has doors to both garage building units. Once the main building level is reached the entrance gives access to different parts of the main building, including:

- the storage and kitchen areas,
- the sanitary facilities,
- the laundry,
- the lab/ sick bay,
- the office area,
- the living area.
- the technical core

The concept of the building makes it possible to enter or take out all technical systems in an efficient way. To make this possible an over-head rail system attached to the main building roof allows heavy equipment or spare parts to be carried directly from the entrance lock at the garage level to for example the technical core.

The sanitary facilities include toilets and a bathroom with 3 showers. The sleeping area has a flexible layout but there are also a number of dedicated rooms for the station crew. The technical core is a crew-only area and during normal conditions no access is required.

Very important to the building concept is the common living space with annexed kitchen. Here people meet and eat together. This room, as most of the third layer, has a multifunctional and flexible character. It can be used as a "quiet corner" for reading but can be transformed into a meeting space. In general flexibility is a key-element in the design. While some areas of the building have dedicated functions there still is a lot of flexibility in sub-dividing the building space for alternative layouts to cope with changing needs.

A dedicated area near the building entrance, with easy access for a stretcher, can rapidly be transformed into a sick bay in case of illness or injury. If required this area can easily be upgraded into a small and well equipped hospital room. The room is designed following best practice guidelines for sterility and efficiency.

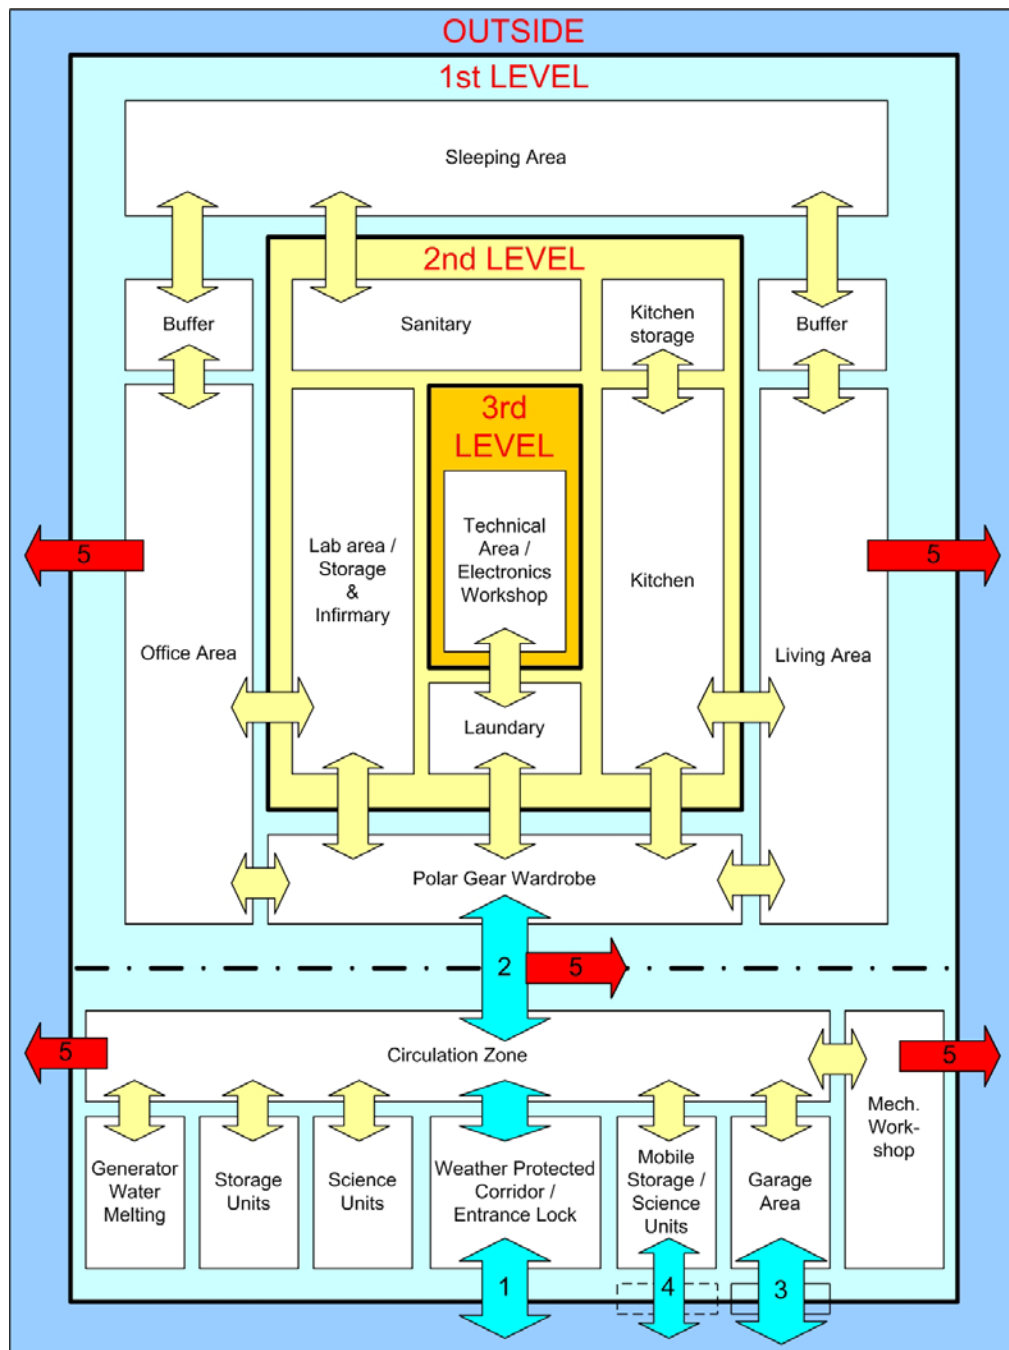


Fig. 2.10: Building programme - functional relations and thermal layers (abstract)

- (1) Entrance (no vehicles); (2) weather protected connection corridor between building volumes;
 (3) Entrance vehicles; (4) access removable units; (5) Emergency exits

The garage/storage building

As mentioned this building is an under-snow surface construction connected by an aerodynamically shaped and weather-protected staircase to the main building, and follows the design philosophies of minimal environmental and visual disturbance, best comfort and energy efficiency. This construction protects the crew against bad weather conditions (note that there is increased wind speed in this part of the site) and minimises walking distances to supplies and other facilities.

Tubing and cabling between the main building and garage building are integrated, minimising the heat load required for water tubing and facilitates maintenance. A simple lift system will help to carry heavy loads from garage/storage to the main building.

The garage/storage building consists of 2 parts separated by the entrance unit of the main building. Each part, identical in construction, has specific functionalities. The northern garage unit is used as storage of food supplies, has the scientific facilities and also integrates the snow melting device. The southern garage unit is used for the storage of spare parts, has a mechanical workshop and garage area accessible with large snow vehicles. It also integrates the emergency power generators.

Both units have a minimum internal height of 3.7 m which allows the access of 20 feet containers on transport sledges. Most functionalities are organised in these containers and all of them can be removed if required. All container doors face a “catwalk” for good accessibility.

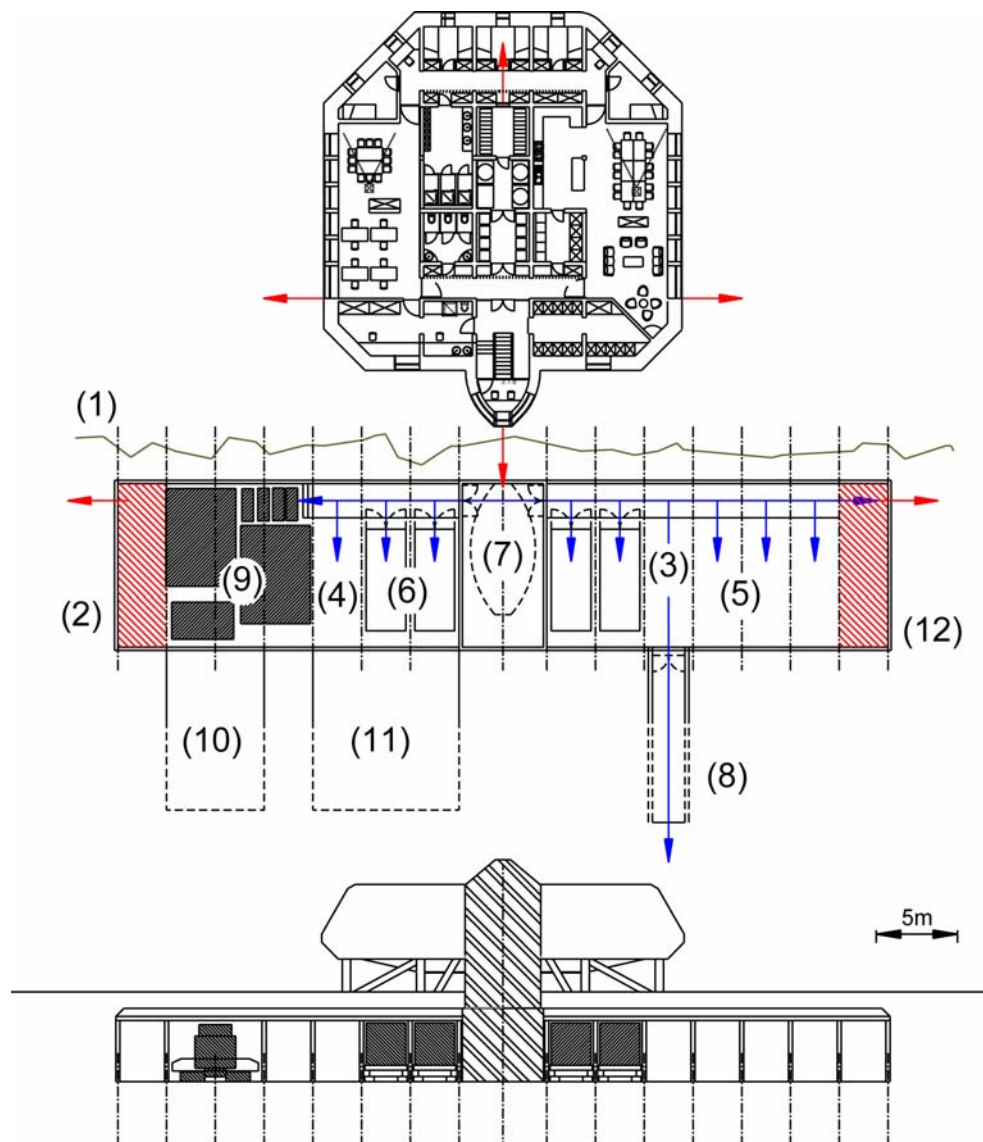


Fig. 2.11: Main and Garage/storage building (Emergency exits shown in red)

- (1) Utsteinen Ridge – granite bedrock; (2) Emergency power unit (north-side); (3) Entrance lock unit; (4) Mechanical workshop unit; (5) Storage/lab units (ISO-norm containers); (6) Removable storage units (ISO-norm containers); (7) Staircase to main building; (8) Entrance to west (people only); (9) Garage area (repairs/maintenance); (10) Entrance ramp garage (regular use); (11) Access ramp to removable units (sporadic use); (12) Snow melting unit

Accessibility

Emergency exits are foreseen on the east, west, north and south side of the main building assuring good evacuation possibilities (**Fig. 2.11**). The normal entrance of the station is located at the west side of the garage building and consists of a small people entrance (8) used on a daily basis and a large vehicle entrance (10). Removable panels will allow access for 20 feet transport sledge-based units (11) that will be removed every few years, for example full waste containers. During the summer season vehicles will remain outside except for maintenance or other practical reasons. The use of the large entrance therefore is limited. Both entrances are located to make best use of the aerodynamic characteristics of the site in order to keep them snow-free. The garage/storage building also has two emergency exits.

Psychological aspects

The building will have excellent natural light conditions but also the contact with the environment from inside the building is considered very important to create a good living atmosphere. It is no coincidence that the site survey teams (BELARE 2004, 2005) were struck by the sheer beauty of the area and recommended good visual contact with the surrounding landscape and, especially, with Utsteinen Nunatak and the Sør Rondane mountains beyond. Preliminary energy calculations predict a maximum of 30% glassed surface on each side of the building, giving passive solar gains. Design of the window layout will take the panoramic view into consideration. A triple glazed window system is under evaluation. In addition to the main glazed surfaces an additional array of small “portholes” located at eye-height for a seated person will allow visual contact with the environment from separate rooms regardless the building’s internal organisation. This concept will not compromise the integration of energy related systems in the outer building surface.



Fig. 2.12: Contact with the environment
(looking to the South - approximately from station’s living room)

Staff

The main station building is designed for use by 12 people. This number optimises the energy efficiency of the building. The use of a station “extension”, however, will make it possible to accommodate another 8 people. The extension consists of stand-alone heated shelters used for sleeping only. The station’s main facilities such as kitchen, sanitary installations and offices are designed to cope with the larger group. The minimal support team will be 4 people, including:

- Station leader/physician
- Electrical engineer/electrician
- Mechanic/cook
- Field support guide

Visitors will receive a briefing on arrival on the guidelines and rules of the station. The typical visitor may stay a week or more. In this period they may leave with a field party or remain at the station.

2.4.2. Station design


Development of building type

The combined characteristics of rock anchoring, natural snow-free conditions and nearby snow-covered surfaces, all present on the Utsteinen North Ridge, make it possible to have under-snow surface facilities very close to the station’s above-ground main building; the result being a hybrid design maximally exploiting the on-site potential.

In the process of defining possible building designs for the main building 11 alternatives were identified (both integrated on and above the ground). All the designs answered the minimum functional requirements as defined by the programme. For these proposals a total of 37 options were mapped and evaluated using a trade-off concentrating on accessibility for construction and dismantling, anchoring conditions, orientation versus prevailing wind, orientation versus sun, compactness, energy efficiency (based on preliminary simulations), operational accessibility and expected snow accumulation. From this first study six solutions were selected for further evaluation, mainly focusing on the snow accumulation characteristics of the buildings that were assessed by means of wind tunnel simulations (models at 1/100 scale). The prevailing wind at Utsteinen is from the sector E-SSE (see **Section 4.4.2**). The prevailing direction for wind speeds higher than 15 m/s, lies within the sector E-ESE. The wind tunnel test showed that symmetrical building designs with above-ground integration gave the best overall performance, and three building designs were selected. Since these designs mainly differed in the use of one or two storeys and were almost symmetrical, further selection concentrated on the orientation of the building versus the prevailing wind and the number of storeys to be used.



Station on rock (Wasa)

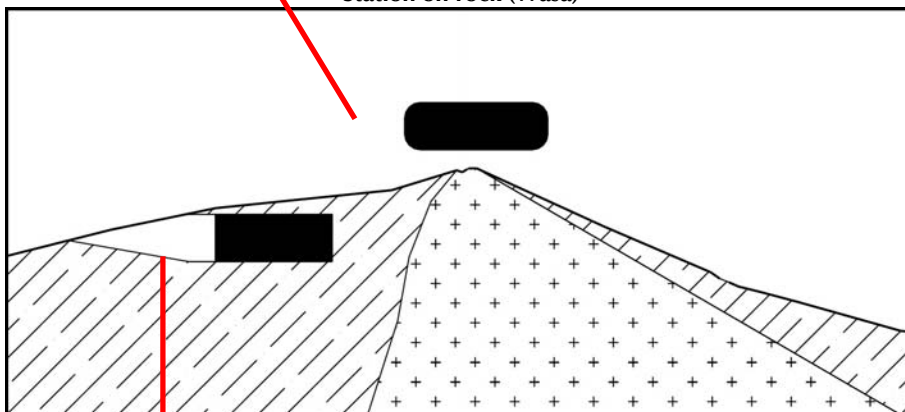

Hybrid design Belgian station



Station on ice/snow (Neumayer II)

Fig. 2.13: Hybrid concept of the proposed new Belgian station: a combined design of a rock anchored station and a station built directly on the snow/ice surface.

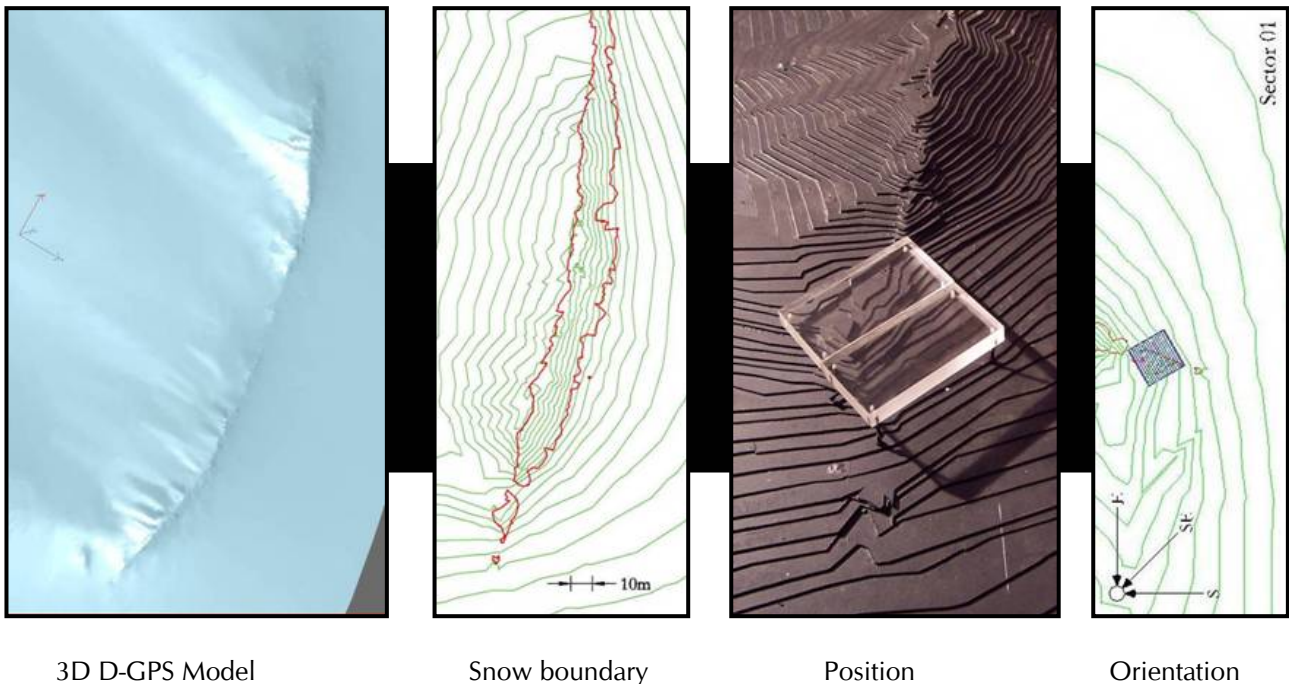


Fig. 2.14: Development of building type study.

The step by step approach identified 11 building designs and 37 terrain integration alternatives.

The overall building concept is also defined by the integration of the energy systems. A solution was found in a 1.5 storey type of building with an almost symmetric footprint. This design incorporates the principal characteristics of the remaining proposals. The final building geometry is a design that provides an answer to various often contradictory requirements and is unavoidably an “optimised” compromise.

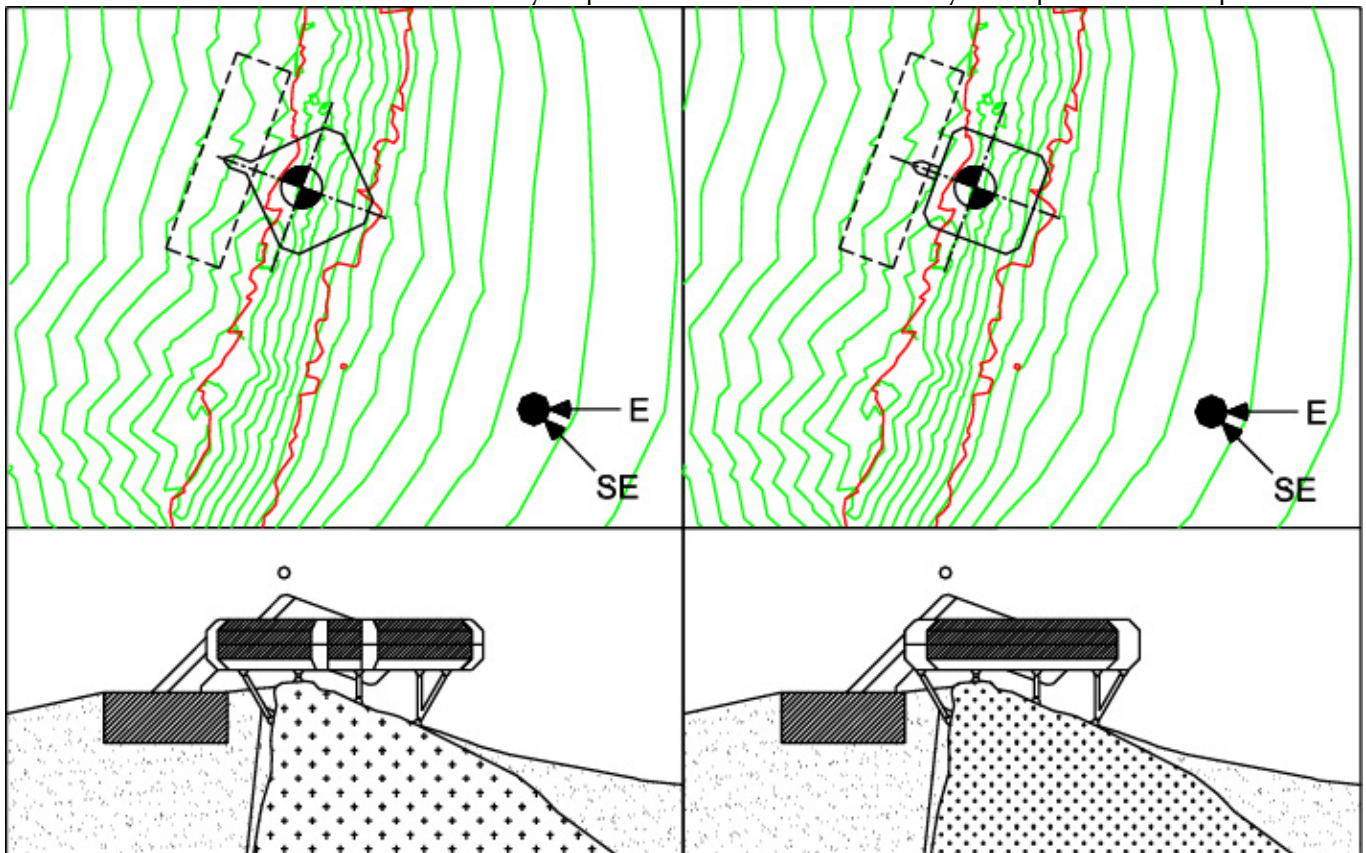


Fig. 2.15: Main building integration variants.

The variant with 45° angle versus prevailing wind (left) is the preferred solution.

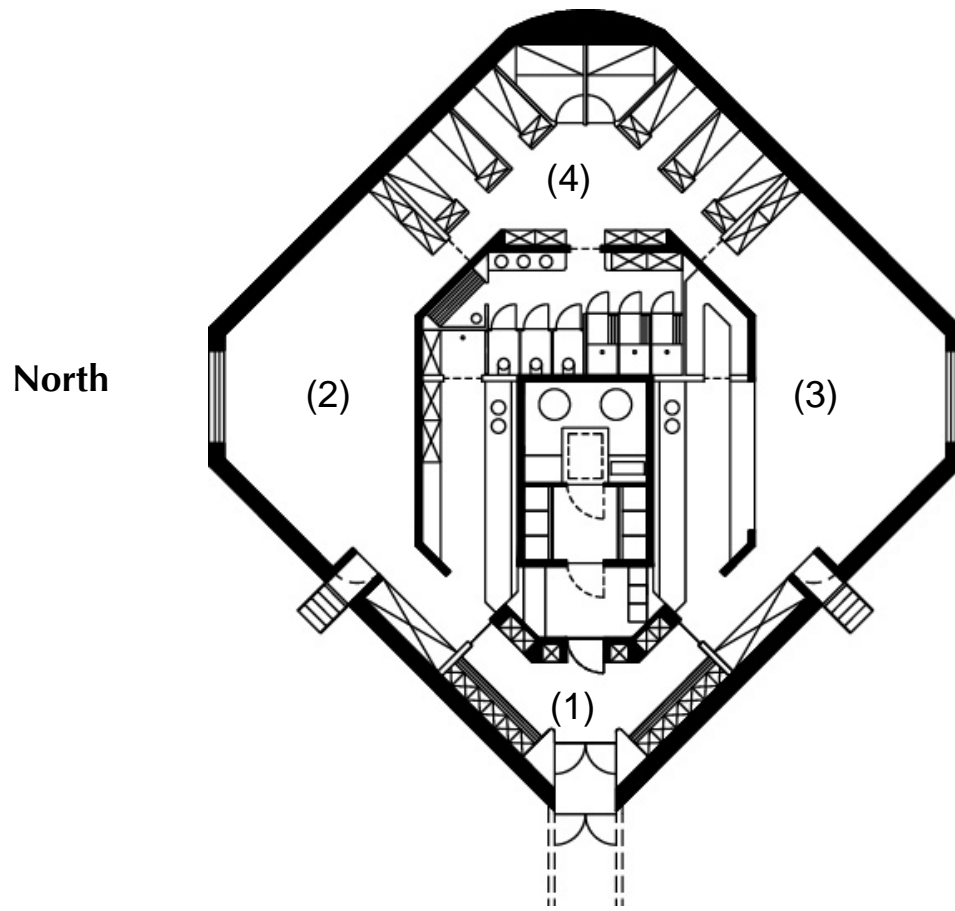
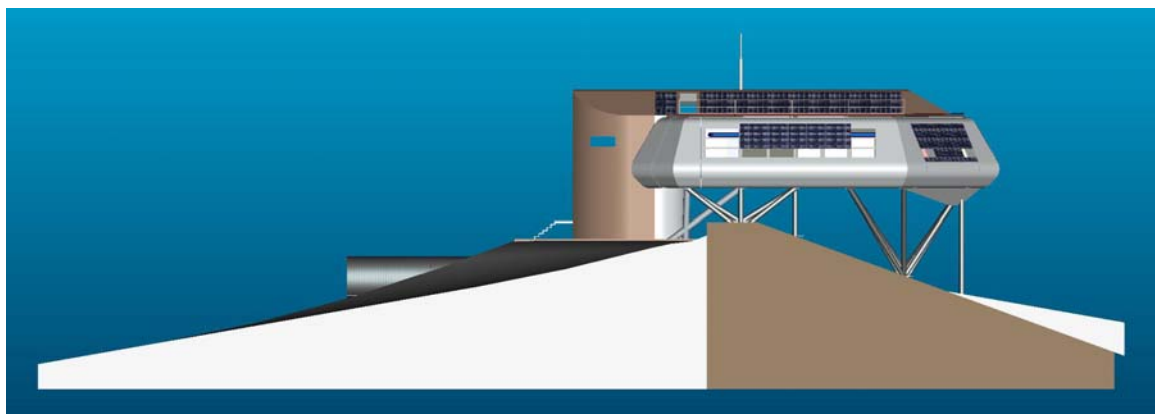


Fig. 2.16: Main building programme – preliminary layout for 45° integration variant
garage/storage building (under-snow):

- (1) Entrance wardrobe and laundry + access to technical area; (2) Office area + lab; (3) Living area with kitchen;
(4) Noise-buffered sleeping area + bathroom.



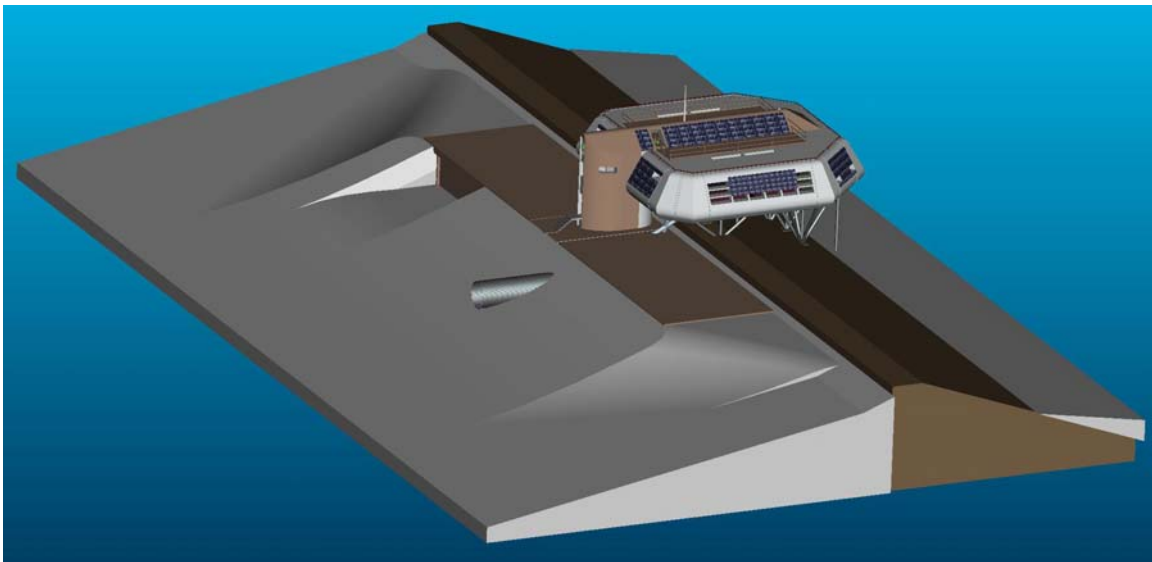
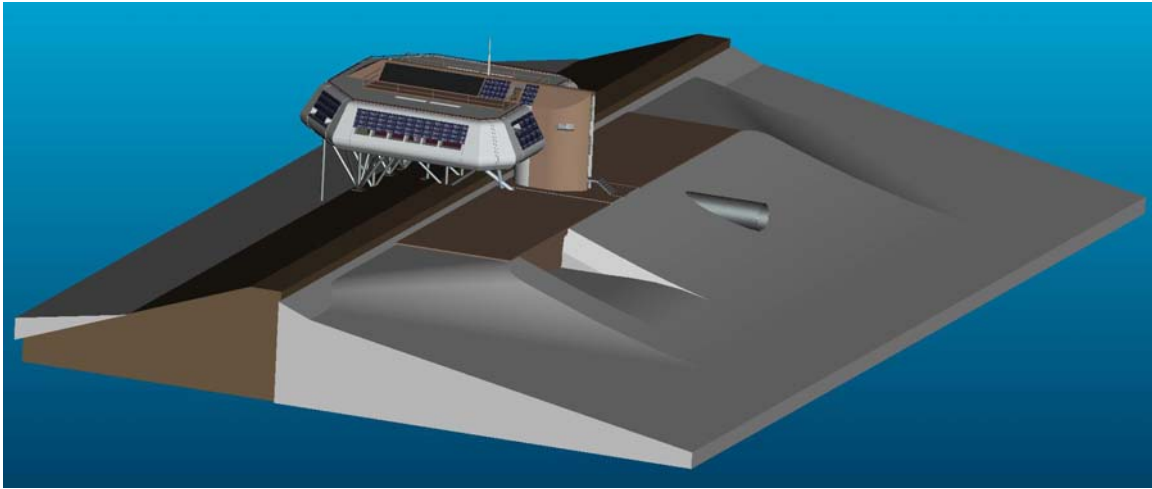


Fig. 2.17: Building concept: impression of buildings integrations on-site.

2.4.3. Anchoring the building

A detailed survey of the selected construction area was conducted during BELARE 2005 (see **Section 2.2.2**) to map the site for anchoring. **Fig. 2.18 and 2.19** show the boundary of the exposed rock surface and a typical cross section through the ridge and adjacent snow/ice area. Consistent with the sustainable character of the project the baseline for selecting anchoring points was to favour direct anchoring in the bedrock making best use of the available exposure. Making use of 3D measuring equipment - with 5 mm precision - the team identified 74 bedrock anchoring surfaces. These articulated surfaces are integrated into a 3D CAD system to define definitive anchoring points and minimising as much as possible the impact on the terrain (**Fig. 2.20**). During BELARE 2006 the final position of the building was verified on

the surveyed area. A detailed topographic survey using D-GPS (differential GPS measuring instrument) was conducted to finalise the design of the anchoring system.

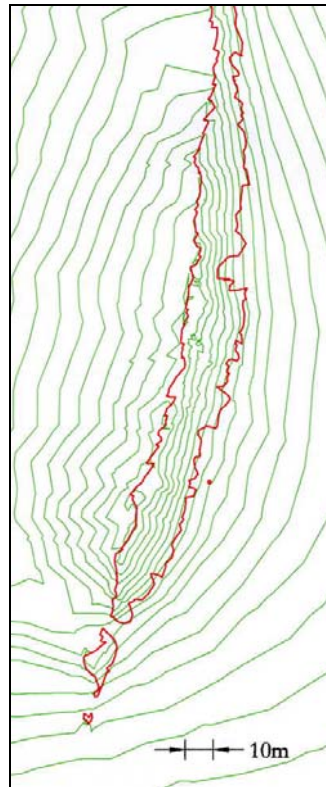


Fig. 2.18: Topographic model: snow-free area (Snow boundary = red)
Contour interval of 1 m.

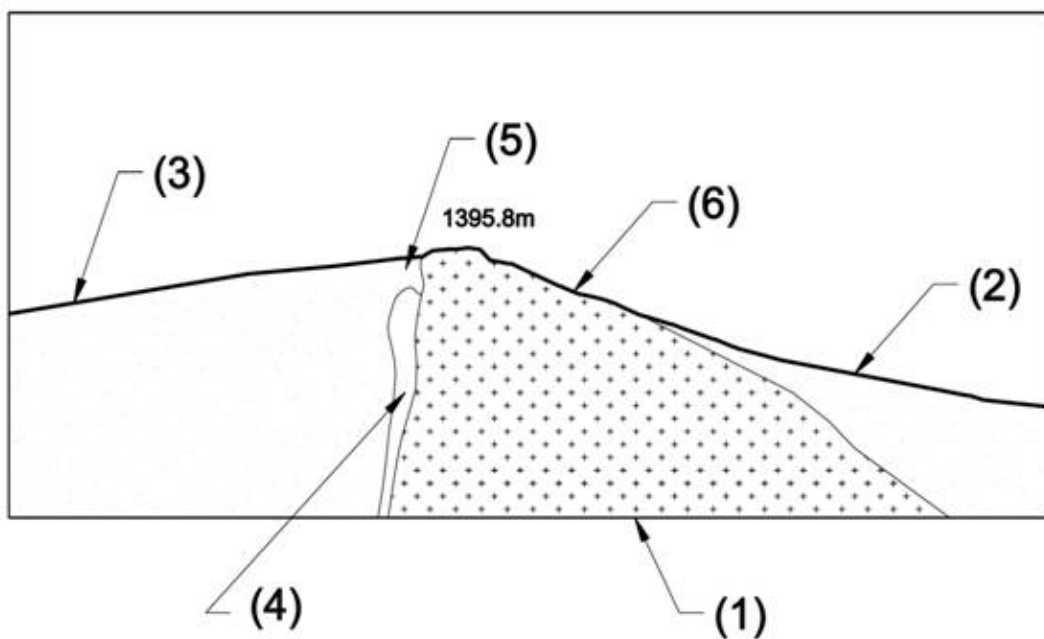


Fig. 2.19: Utsteinen Ridge characteristics:
(1) Utsteinen Ridge – granite bedrock; (2) Compacted snow (west-side); (3) Compacted snow (east-side);
(4) 'randkluft' (gap); (5) Snow-bridge; (6) Exposed rock surface


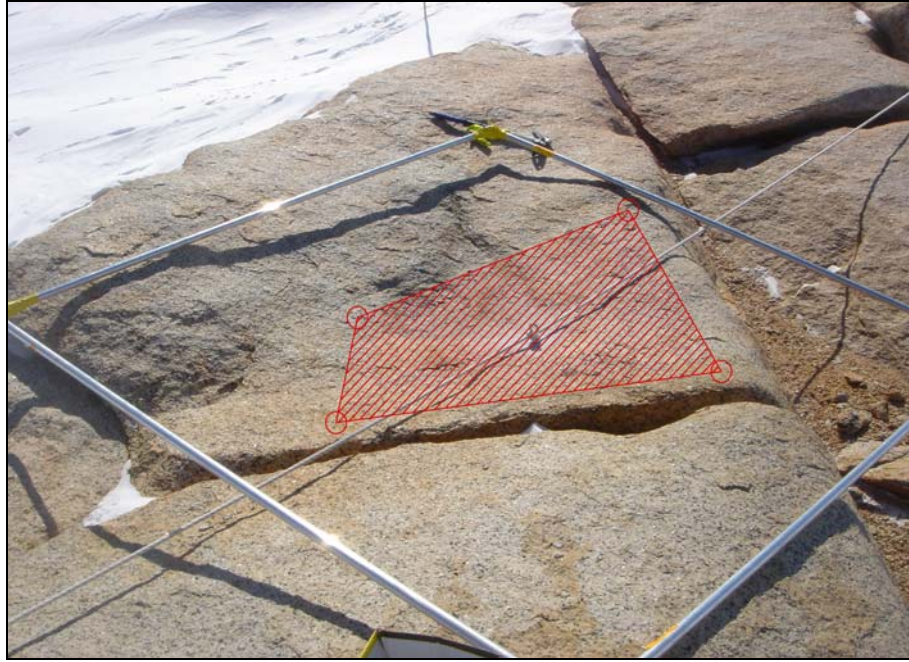


Fig. 2.20: Anchoring points survey: 3D surface measurements
(red area corresponds to flat rock surface)


2.4.4. Building support concept

The integration of an above-ground building on the ridge implies that there is a considerable difference in support post height. In the proposed design the building centre of gravity is located near the ridge summit in the area where the support posts are the lowest (a 2m high air gap was defined by wind-tunnel testing). These support posts support a steel support frame that is integrated in the building skin. To assemble this basic structure a N-S oriented frame under the building is mounted first. This acts as a stability point around which the rest of the building is laid out. The building extends to the west where it is supported by articulated posts to the bedrock's relative vertical surface on the west side of the ridge. To the east side the building has a number of articulated support posts that become gradually longer. Both east and west side supports are interconnected with a rigid beam structure.

This construction provides a number of benefits: Although the building has been shaped to reduce wind-induced lifting forces it is impossible to completely avoid this effect due the variability of the wind. Furthermore the thermal dilatation transfers (in W and E directions) originating from the high temperature difference is limited in length and thus in effect. This approach made it possible to optimise the overall building-support concept resulting in less airflow disturbance underneath the building (porosity), a crucial parameter to enhance the building's aerodynamic performance for snow accumulation as well as to reduce wind-induced noise and vibrations.

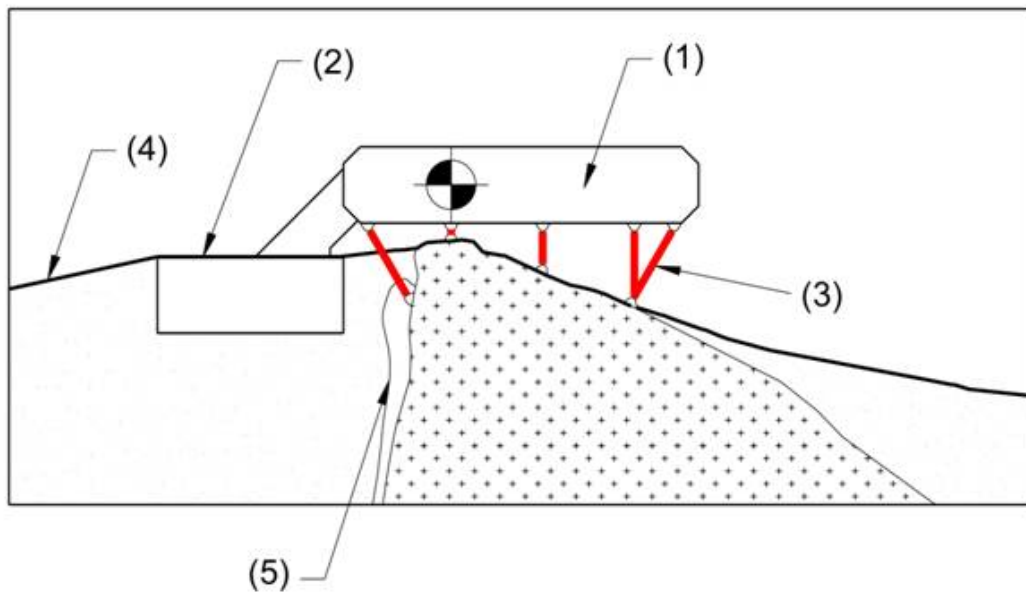

view from the South

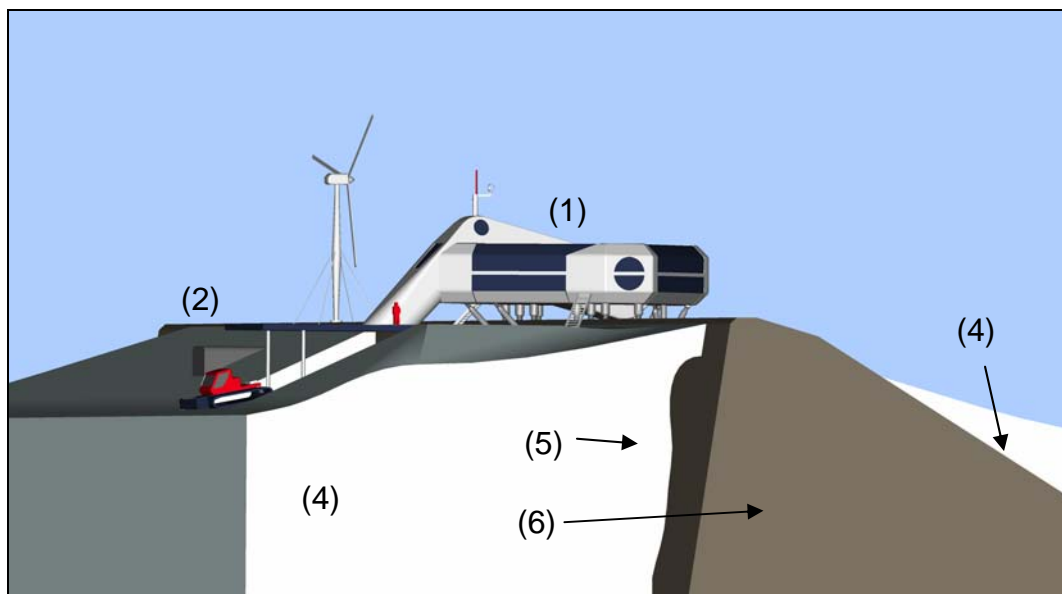

view from the South-West

Fig. 2.21: building support concept:

- (1) Above-the-ground building; (2) Under-surface building; (3) Articulated posts for support;
 (4) Compacted snow (terrain adaptation); (5) 'randkluft' (gap); (6) Ridge.

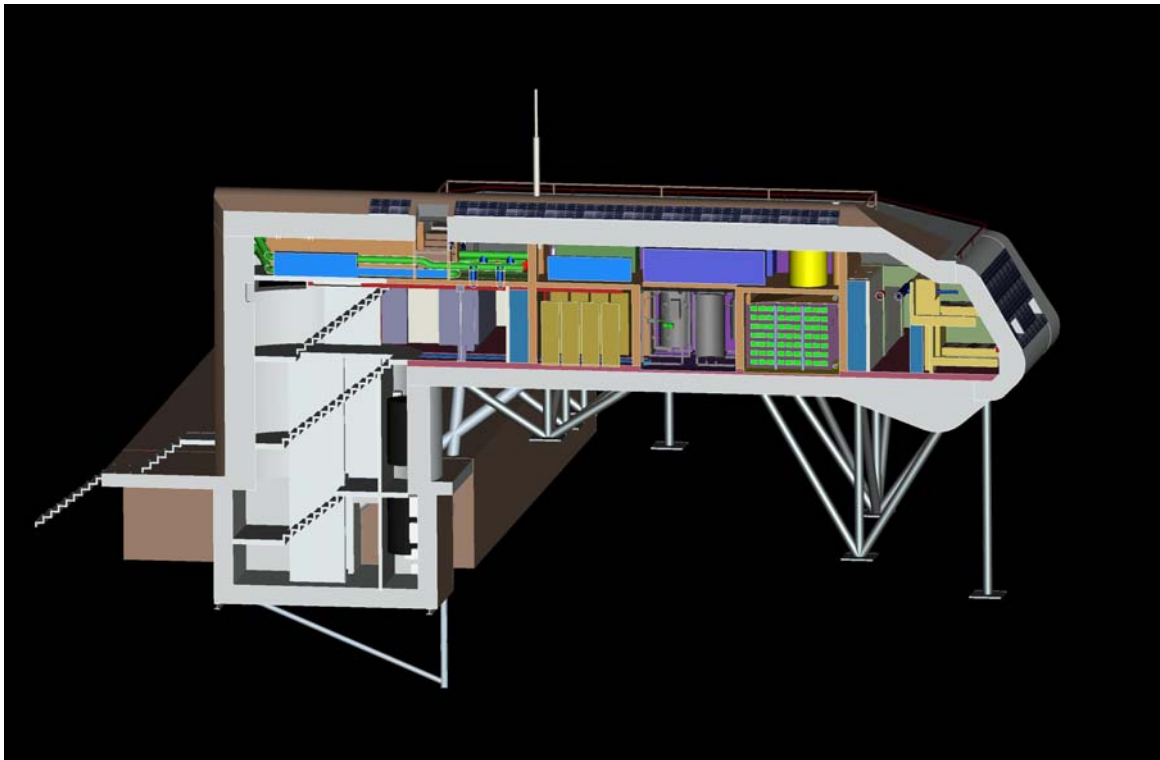


Fig. 2.22: Building concept: main building and connection to garage/storage building.

2.4.5. Aerodynamic studies carried out at the von Karman Institute

Wind conditions have a major impact on the structural aspects of the building but also heavily influence operations, comfort and energy efficiency. Aerodynamic testing is used to:

- limit the expected snow accumulation in the lee of the building;
- prevent snow accumulation upwind of the building;
- limit erosional effects at the lee-side of the building
- control wind-induced forces on the building;
- set mechanical engineering specifications;
- enhance the comfort inside (and outside) the building by reducing noise and vibrations;
- validate the numeric wind model to assess wind power potential;
- assign positions for stand-alone facilities such as for example the wind turbines.

Test approach:

In a first phase validation tests on the aerodynamic test method were conducted to assure the realistic simulation of snow drift, snow accumulation and snow erosion in the wind tunnel. A good correlation between the building free model used in the wind tunnel, the computer model (CFD) and the field measurements was found and from this the testing parameters were identified. From this the concept proposals were tested mainly with respect to snow accumulation properties. From this result a final building design was selected. In the last phase the forces on the structure are measured in detail and the building was further developed to balance wind loads (general and local) versus snow accumulation/erosion characteristics.

The selected design generates manageable snow accumulation and erosion features for the prevalent wind direction. It also prevents snow build-up on the windward side of the building. Such a snow build

up would continuously change the incoming airflow characteristics creating unpredictable behaviour in terms of long term snow accumulation.

The worst case testing (blocked air gap) proved the robustness of the design: it will take a long time before the resulting accumulation compromises the functionality of the base allowing the station staff enough time to intervene. The geometry and position of the garage roof is very important in the aerodynamic concept. It limits for example considerably the lift forces on the building as well as it creates an almost horizontal snow-free surface at the lee side of the station, that will result in the snow accumulation zone to recede away from the base.

The vortex path generated by the building has positive and negative side-effects depending on the relative position of the garage building and its entrance. The erosion regions are exploited enabling a low maintenance entrance.

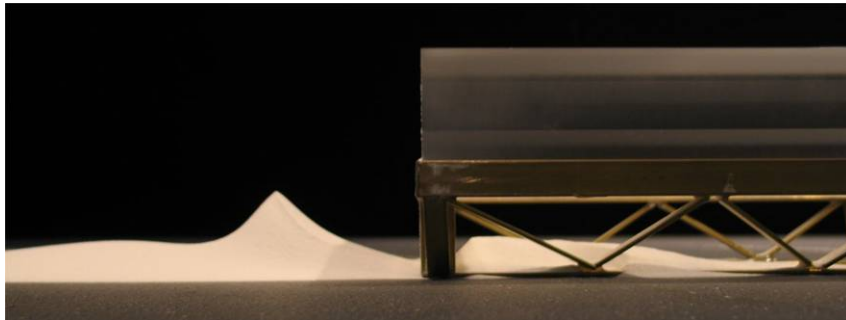


Fig. 2.23: WTT-1 - Snowdrift model validation


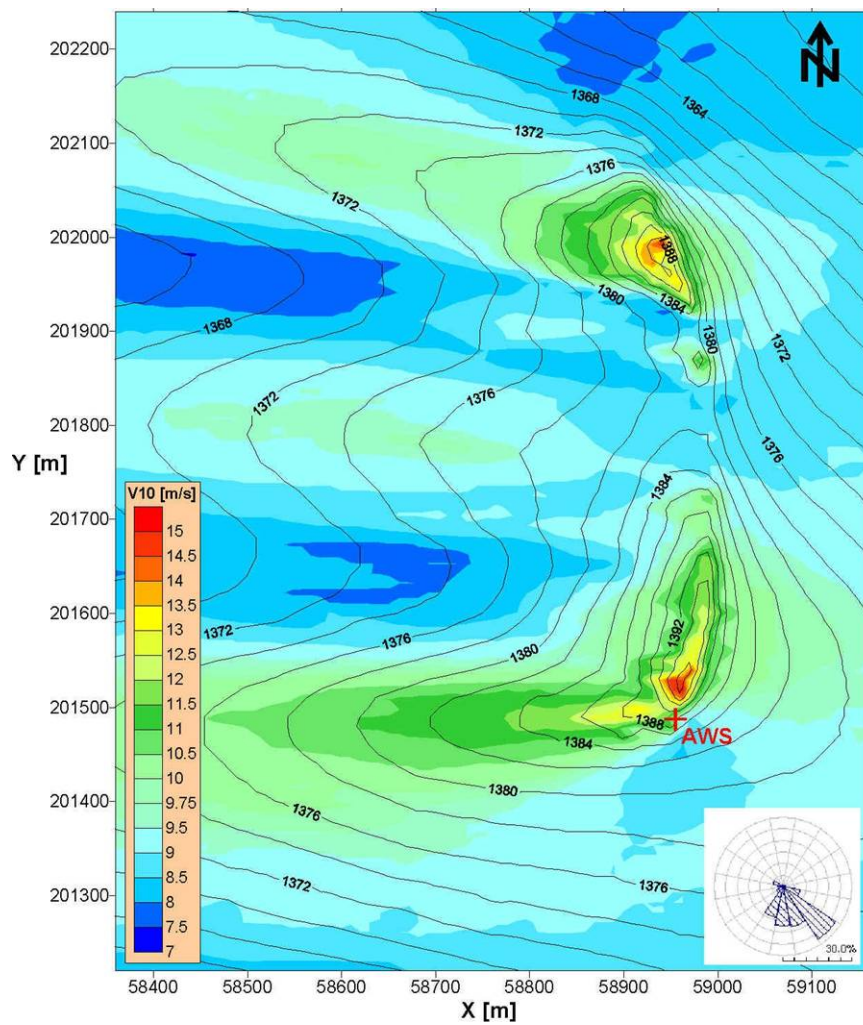


Fig. 2.24: Terrain model (contour lines in m a.s.l.) and simulated wind field (m/s)

Speed-up contour map

Test 60: Concept 9 optimized, Wind 101, pillars at 1m

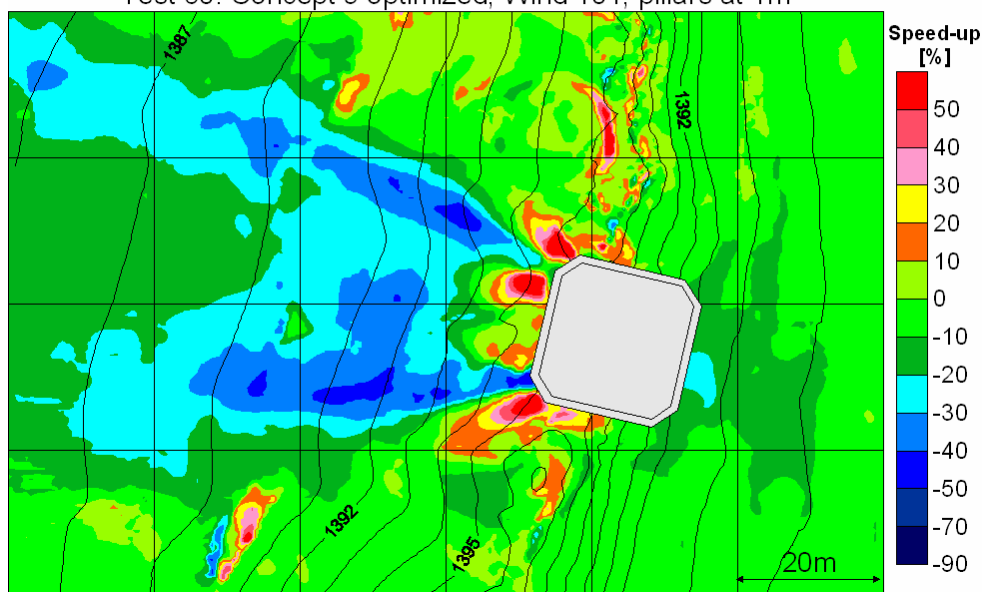

Speed-up contour map

Test 63: Concept 9 optimized, Wind 101, pillars at 1m

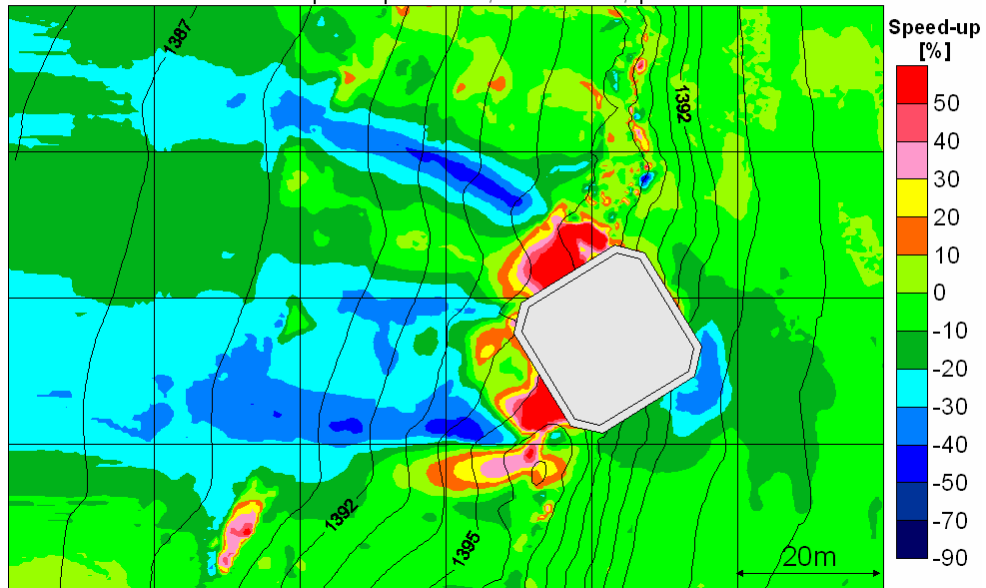


Fig. 2.25: Wind speed up map (in %) due to building integration showing accumulation zones (blue) and erosion areas (red). Both integration variants are shown, (geometries not optimised) without garage/storage building.



Fig. 2.26: WTT-3: Sand erosion testing with garage building integrated.

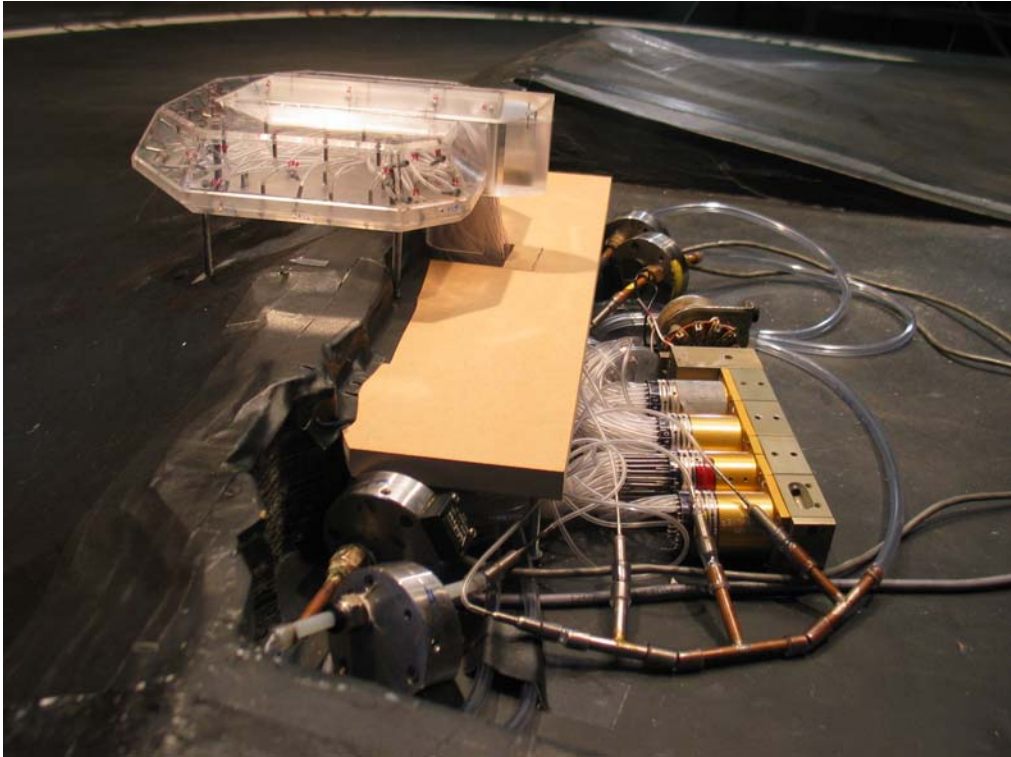


Fig. 2.27 :Instrumented wind tunnel tests.

2.4.6. Station surroundings

The diagram below shows the organization for the different elements to be integrated in the base vicinity. This layout illustrates the relation of the base main building(s) versus the areas with a designated function.

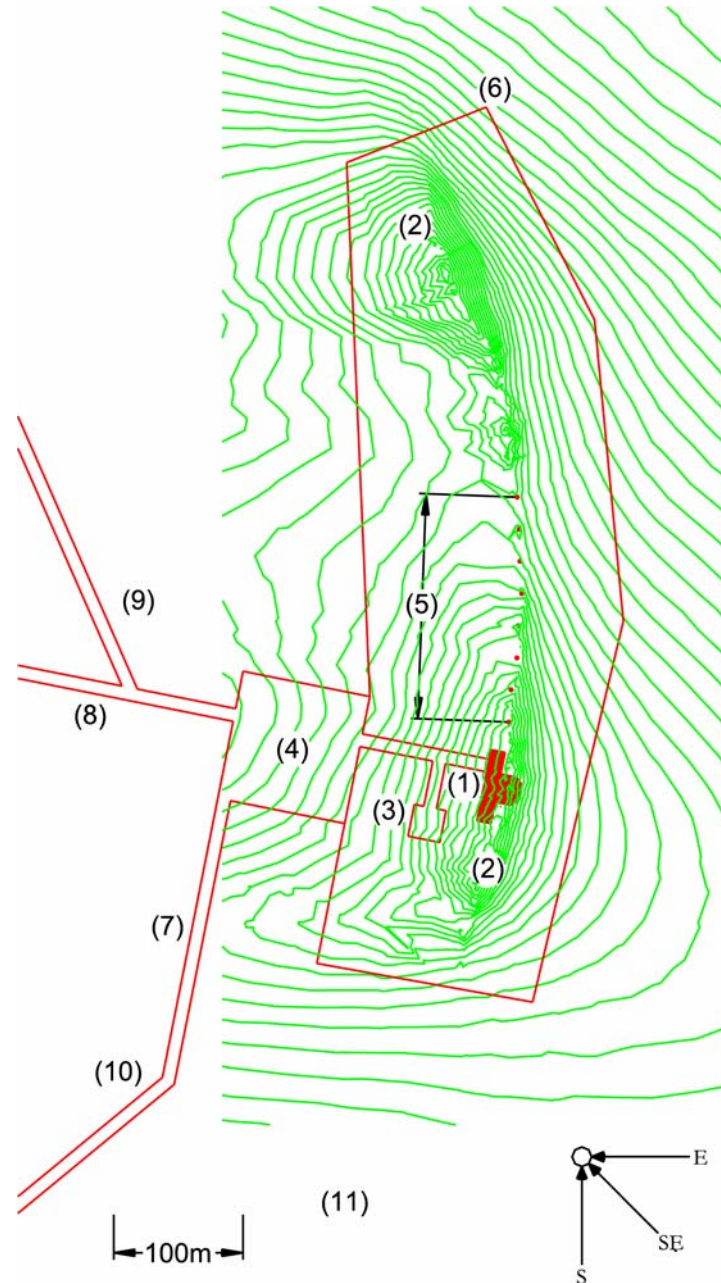


Fig. 2.28: Boundaries of construction area, station operation, landing strip:

- (1) Station; (2) "Stay-out" zone with stand-alone scientific facilities & AWS; (3) Snow collecting zone;
- (4) Parking outside; (5) Wind turbine positions; (6) Access allowed zone; (7) Emergency shelter;
- (8) Access to fuel depot (at 1000m) and small Nunatak (2000m); (9) Access to snow landing strip (2000m N-W);
- (10) Access routes to various areas (Gunnestadbreen, coast route, mountains east, mountains west, Utsteinen Nunatak);
- (11) Utsteinen Nunatak.

Fuel depot

Storage of fuel and oils in the garage/storage building will be kept to a minimum and will have secondary containment. The fuel depot is located on a safe distance and out of the main wind direction to the lee-side of the ridge (West). Initially fuel storage will be in 200 litre drums with a long-term objective of using 12 m³ capacity sledge-based double skin (bunded) fuel tanks. Bulk fuel tanks will be equipped with automatic monitoring system. At the refuelling points located in designated positions measures will be taken to avoid and eventually retain spills.

Estimated fuel consumption (construction period):

Polar diesel:

- Back-up generators: 8,000 litres
- Overland transport: 36,000 litres

Jet A1:

- Aircraft 8,000 litres

Gasoline (unleaded 95):

- Snowmobiles and other equipment: 2,000 litres

White gas/propane (stoves)

- To be defined

Estimated fuel consumption per year (operational):

Polar diesel:

- Back-up generators: 0-1,500 litres
- Overland transport: 5,000 litres

Jet A1:

- Aircraft 4,000 litres

Gasoline (unleaded 95):

- Snowmobiles and other equipment: 2,000 litres

White gas/propane (stoves)

- To be defined

Emergency shelter

A stand-alone, under-snow emergency shelter for 20 people will be constructed from insulated wooden panels. This will consist of a living area (sleeping and communication), a technical area (generator and water melting) and storage (food, emergency clothing). The site is out of the wind path of the station on the lee-side of the ridge (see Fig. 2.28).

Stand-alone scientific facilities

Two small stand alone scientific facilities will be located on the ridge, one to the south and one to the extreme north of the station. Both facilities will have data connection to the station, the south facility will have electrical power directly from the station while the north one will have its own power supply (solar panels/ small wind turbine/ batteries). The ridge provides good accessibility and anchoring conditions which facilitates the integration of equipment. The science dedicated area is up-wind of the station to prevent disturbance of the measurements. There also is an alternative position on a small unnamed nunatak 2 km to the west of the ridge.

Landing strip

A seasonal 1000 m x 50 m landing strip will be formed 2 km from the station and 3 km from Utsteinen Nunatak. The snow will be levelled at the start of each season to remove any significant sastrugi or

bumps that form over winter or any that form during the season. The landing strip and approach route will be marked and these markers will be removed at the end of each season. A small fuel depot will be maintained near the landing strip and aircraft tiedowns installed.

Flight approach and take-off paths will be prepared to avoid overflight of Utsteinen Nunatak or the Sør Rondane mountains to minimise any disturbance of breeding bird populations. A Jeppesen diagram will be prepared and submitted to COMNAP for inclusion in AFIM.

2.4.7. Water generation and disposal

Water generation

Efficient water housekeeping requires water consumption to be kept under control. An important element in this is the selection of low water use equipment. For example the use of latest technology laundry and dishwasher machinery will reduce water demand but also measures such as the use of recycled water for dish washing combined with fresh water for rinsing in the same machine will be beneficial.

The water supply for the station will result from a combination of solutions. The initial system will use snow drift and the (resulting) snow accumulation caused by the building and the ridge. The collected snow will be automatically dumped into (the lower positioned) snow collector located in the garage/storage building. Snow accumulation measurements prove that especially in January snow drift accumulation will not be sufficient to provide the required quantity and snow will be collected using a snow tractor from a dedicated area (see **Fig. 2.28**).

The station has solar thermal panels which will be used to heat the thermal buffer. The excess heat will be used to melt the snow thereby limiting the use of electrical energy to pumping the water. This system is very economic. In addition electrical heating, eventually backed-up with waste heat originating from co-generation (multiple sources possible), can be used in the system. A water buffer tank in the main building will accommodate five days supply and the hot water storage will also be inside the main building. Both water storage systems are part of the thermal buffer mass of the building.

Grey and black water

The waste water treatment plant consists of a grey and black water system (black water includes urine and human solid waste). The proposed design minimises water demand by reducing fresh water consumption. Water coming from the snow melting facility, stored in a buffer tank, will be used for all potable functions such as cooking. Other building functions will use recycled water, for example toilets. The Water Treatment Unit (WTU) has been designed as a modular system that can be extended in future. In an initial configuration there will be:

- 2 redundant influent buffers collecting all grey and black water produced;
- an anaerobic reactor with ultra-filtration unit;
- a Membrane Aerobic Bioreactor;
- a chlorine unit;
- an active carbon treatment unit;
- a UV-treatment unit; and
- a tank for hygienic water.

Future extension could include a reverse osmosis unit (giving up to 90% recycling).

In the current configuration a small quantity of treated water will be released into the 'randkluft', a natural formed gap between rock and snow/ice mass at the west side of the ridge, via an insulated and heated pipe. Note that this can be done north and south of the station and that the water will never be disposed

at the snow surface or onto surface rock. An overview of the expected effluent quality of the treated water is given in **Section 12, Table 12.3**.

Air exchange (venting) will use bacterial filters on the outlets adding an additional level of containment to the system. Very low quantities of CO₂ will be produced by the waste water treatment system. The production of methane is avoided in the bioreactor. This will create a higher output of residue but the surplus is very acceptable. The residues will be dried, sealed and stored in sterile containers together with the other waste that will be removed from the site during ship re-supply.

2.4.8. Energy

Reliability

The use of sustainable technology as the primary energy source without compromising functionality, comfort or safety requires a cautious approach in the system engineering. Making best use of co-generation and enhancing energy efficiency implies a high level of integration but this could have a major disadvantage: vulnerability of the whole system for partial break-downs. Therefore in the conceptual design the following approach has been used:

- Reliability: where possible subsystems are composed of modules built up from proven technology extended to (relatively) new technology for highest efficiency. The minimum functionality of the subsystem is assured by the core system.
- Independency: the interaction (e.g. co-generation) of subsystems does not compromise the functioning of the individual subsystems.
- Redundancy: detailed Failure Mode Effect Analysis (FMEA) of the whole building is used as an input to the design process. Safety measures, maintenance and other applicable strategies are tailored according to this.

Prior to the concept phase of the project an extensive technology survey was conducted looking at potential solutions for energy generation, distribution, storage and sustainable energy system in general. Such a survey was also applied for most aspects of the building physics such as Heating, Ventilation, Air Conditioning (HVAC)... Brainstorms for possible solutions were backed-up by preliminary energy simulations taking into account the on-site weather data (wind/sun/temperature), user (consumer) profiles, user scenarios, materials used, the building geometry and orientation.

User profiles

Base energy “modes” identified for energy consumption, basic overview:

	Profiles	Days	
1	Winter	215	Remote sensing & monitoring
2	Unmanned start-up	30	Remote waste water system start-up + gradual heating of building
3	Manned start-up	5	Staff arrive (+ visitors) - air transport available
4	Summer high 1	25	Science activities (nominal use) - air transport available
5	Summer low	60	Science activities (nominal use) - air transport NOT available
6	Summer high 2	25	Science activities (nominal use) - air transport available
7	Manned close down	5	Preparing for over wintering - air transport available

Table 2.5: Base energy “modes” identified for energy consumption

The number of people on the base will vary depending on the time of the season and the scientific activities planned. There will be a minimum support staff of 4 people. This number may increase depending on the support required for the scientific work. In a season with a high level of activity the average number of people stationed at the base is estimated to be approximately 50% of the total number because many of them will be performing field research. In November and February when most air transport is available the occupation is highest. In these periods most people will stay for a maximum of 1 month at the base. Also during summer the weather conditions can force the crew to stay inside the buildings. In the energy budgets these “events” have been taken into account.

Energy generation system overview

The energy generation side of the system consists of different elements that function separately or combined depending on the demands and circumstances. The station site has a sheltered nature (see **Section 4.4** for weather data) but the site still provides sufficient wind to use wind energy as a major electrical energy source.

A cluster of 8 relatively small wind turbines (6kW) positioned on the ridge in (N-S direction) with an interval of 25 m. All the wind turbines are located north of the station (the first at 50 m) and are supported by a guy wire system for robustness and minimal-impact anchoring. These turbines can be lowered for maintenance and repairs without the assistance of heavy equipment. From a technical point of view this is not obligatory but this option can be envisaged to minimise the risk of damage during winter. The mechanical modifications to the wind turbines, which were selected for their robustness, are limited to few reinforcements and better sealing to counter snow drift intrusion. The turbines will also provide extra power to the station during the winter thereby reducing the required battery capacity needed for monitoring (building & science) and to maintain the buildings inside temperature under control.

On the building different solar power systems are used. They are solar thermal (20m²) and photovoltaic panels (90m²). The distribution of the different panel types is defined by the user profiles (energy needs) and the position of the sun during the day. The photovoltaic system will be capable of providing up to 10% of the electrical load and will reduce the number of batteries required.

Although power supply at the station is based on renewable energy and wind and solar radiation studies show that both are reliable energy sources, it may happen that occasionally the power supply can be insufficient. Therefore a number of measures are taken:

The station is equipped with two back-up generators. With the current user profiles as a baseline the Polar diesel consumption is estimated at 200 litres fuel per season. It goes without saying that a minimum consumption is unavoidable since the emergency generators will be functionally checked on a regular base. A double-walled fuel tank can store 5000 litres which will provide sufficient autonomy for a full season at 100% use. In normal conditions the generators are expected to be used at a very low rate as the systems mentioned do not rely on the generators to be operational. The use of redundancy in the generator park adds another safety level and allows maintenance to be done during operations; also it provides flexibility to cope with energy use variations.

Installed power overview

1. Wind energy:

- 8 positions used for 6kW wind turbines
- 1 spare position for upgrade (upgrade)

2. Solar electric energy:

- 90m² building mounted photovoltaic panels (9kW)
- 200m² stand-alone photovoltaic panels (20kW)

3. Solar thermal collectors:

- Combined functions (solar thermal buffer): 20m²

4. Solar passive energy:

- 15% of glazed surface in building vertical and roof surfaces

5. Emergency power supply:

- Uninterrupted Power Supply (UPS - 5kW for 10 minutes)
- 2 generators 30kW running on Polar diesel

6. Not taken into consideration here:

- Power facilities for stand-alone scientific facilities.

Heating, ventilation and air conditioning (HVAC)

Most of the heating and ventilation as well as the snow melting and water heating are done with passive solar energy and waste heat recovery. Solar thermal collectors supply almost all the necessary heat for snow melting and sanitary hot water production.

The HVAC is composed of a balanced ventilation system and redundant electric wall heating. The ventilation group is provided with a high efficiency heat and up to 90% moisture recovery.

Energy storage

Electricity storage

A (typical) problem with renewable energy is its intermittent character. The energy stored in the buffer battery pack will be reduced as much as is reasonably feasible by the following measures:

- It has been decided to rely on photovoltaic as well as wind energy production as primary electricity sources.
- Electricity consumption will be matched to electricity production by demand side management.

Heat storage

It is essential to enhance the heat-storage capacity of the building since by nature the thermal mass of the building will be very small. Heat storage tanks will be placed in the inner core of the building, guaranteeing the recuperation of the convection losses of the storage tanks for space heating. Phase change materials will be used to add thermal mass acting around the comfort temperature.

Demand side management

An intelligent and robust control system (industrial type) will monitor the building and, according to demand, steer the different processes in the building. The system keeps energy use coordinated as much as possible with energy supply. One of the measures the system will be able to take to anticipate power peaks will be to use 'switch-off or power-on' sequences for non-critical items e.g. battery chargers, freezers, heating equipment. Therefore a double electric circuit is foreseen: one that can be switched off and one that has guaranteed power.

Reducing energy usage

All building elements are studied with energy efficiency in mind. Equipment selection and the use of passive systems will be maximised. Some examples:

- External light will be captured using photon collectors to provide light in technical rooms and other building spaces.

- The selection of low energy-use equipment.
- The use of water-efficient spray water taps.
- “Presence detector” systems for unoccupied rooms.
- Self closing doors in the entrance area.
- Aerodynamic studies to identify high thermal losses on building skin (more insulation required).

Alternative systems that can be integrated in the future

- Hydrogen production and storage plant linked to the wind turbines (excess wind power used to generate hydrogen by electrolysis and storage for later use instead of higher buffer battery capacity).

2.4.9. Emissions

In normal operation the station will generate very low emissions. Even in the exceptional case when the emergency generators are used for powering the whole station the emission will be relatively low thanks to the very energy efficient nature of the building.

Very low quantities of CO₂ will be produced by the waste water treatment system. The aerobic bioreactor is tuned to avoid production of methane.

Hydrogen emissions will be caused by the batteries, a special venting system ensures the evacuation of these gases.

Most emissions will originate from vehicles. Thanks to the very compact layout of the station’s different buildings and the direct connection between the main building and the garage/storage vehicle movements are limited and mainly needed for logistic supply and science related tasks.

The plan in the near future is to replace 2-stroke with 4-stroke snowmobiles. These machines consume significantly less than 2-stroke machines and are getting more common on the market. Most field missions to the mountain area will probably use this equipment.

2.4.10. Communications

Today’s standard communications will be used including satellite telephone, satellite data-link and radio (VHF) for small distances. Field parties will get individual satellite phones (Iridium).

2.4.11. Testing and validation

The main building will be pre-assembled in Belgium where a comprehensive testing programme will be conducted to validate the station’s performance and robustness. The fact that the main building will be erected in an almost identical manner as on site will allow running a test programme that not only looks at the mechanical aspects but also tests the functionality of all active subsystems. Furthermore breakdown scenarios identified in the FMEA of the building and its subsystems will be validated, by simulating as realistically as possible, the emergency response and damage control scenarios identified. By doing this the project team intends to limit the time needed for debugging on site (where not all specialised staff will be present). Another aspect judged to be important is that most of the delicate assembly and construction tasks will be possible in best conditions rather than on site where weather conditions and human factors are more critical.

2.4.12. Transport

After the testing in Belgium, the building will be disassembled and packed for shipment. The units remain partially assembled and will be dimensioned for easy handling and to meet transport requirements. The pre-assembled building units will be mounted in the ISO-norm containers in such a way that transport damage caused by shocks and vibrations of the over-land transport over the ice-shelf will be avoided.

2.4.13. Construction on site

As a baseline, the assembly on site will be done using as much as possible mechanical (bolted) interfaces only, thereby avoiding on-site welding or the use of adhesives as much as possible. This will also facilitate the decommissioning and recycling of the different components in a later phase. Pre-assembled building units dimensions and weight will favour easy and safe handling rather than size. Construction techniques will be rationalised using a minimum of different tools. The construction method will be studied to cope with the extremely short time period available for on site assembly.

2.4.14. Materials

Material selection is done according to environmental and safety parameters established along ecological building guidelines. In the material selection process the following parameters will get priority:

- maximum durability (station lifetime)
- materials suitable for recycling

Exceptions to this baseline were allowed after thorough analysis has demonstrated that the material has major technical advantages enhancing the overall efficiency of the building.

The structure is mainly built out of insulated, prefabricated wooden panels. It will have an exterior stainless steel support structure and approximately 75% will be clad in stainless steel. The other exposed surfaces will be of wood.

No environmentally harmful substances will be used. Special attention has been paid to the off-gassing characteristics of the materials used in the building in order to create a clean and healthy environment. Also in the context of fire protection the building materials will not emit toxic fumes. The station has a light-weight construction that will facilitate transport and construction. The light structure however has also a low thermal mass and thus the built-in heat buffering capacity is limited.

2.4.15. Upgradeability

Studying different Antarctic stations and the way they evolved in time has helped in the design and to set up upgrade strategies for the building and its facilities. In the retained philosophy there's no extension in floor space of the main building foreseen. The building is not only designed for a specific integrated energy concept but also it is not the intention of the Belgian government to enlarge the station. The building design allows an easy upgrade to a full-year station (this will hardly have an effect on the hardware) and the flexible design allows to accommodate more people inside the building if required. An essential part of the upgrade capability are measures to update the equipment and the facilities with minimal impact on the required construction and resources (reference industrial facilities). This is applicable for example to the cable management concept, the modular architecture of active systems and the thorough standardization of mechanical interfaces throughout the building. In a nutshell: improving the existing building without enlarging it.

2.4.16. Best practice strategies

The different systems in the building will be designed according to best practice guidelines. These will, for example, include measures to ensure that no disturbance is caused to communications and scientific equipment in and near the building. There will be down-time management plans; a maintenance and a spare part strategy will be in place.

2.4.17. Documentation

A key-factor in safe and efficient operations is documentation. To manage the station, a technical data-package, following standard industrial procedures, will be applied. The data-package will consist among other things of user and maintenance manuals, assembly drawings and instructions, spare part lists and emergency procedures. Two identical sets, both on paper and electronic, of this data-package will be kept on the station as well as in Brussels to assure easy communication on technical issues.

2.4.18. Decommissioning

The station will be designed as 'state of the art' with respect to sustainable development, energy consumption and waste disposal, with a foreseen lifetime of a minimum of 25 years. The station is also designed so that it can be easily decommissioned, disassembled and removed. If dismantling of the station is required, no significant remnants of the occupation will be left, in order to meet the requirements of the Environmental Protocol and relevant Belgian domestic law. The eventual clean-up of the removed station will be subject to an EIA.

2.4.19. Minimum Impact Objectives

Design Criteria

The station design has a maximum target energy load of 40 kW, excluding research equipment and support vehicles. The station is designed to be constructed, operated and decommissioned using:

- fossil fuels for transport and construction only
- solar / wind for construction, one wind turbine is operational during the construction and solar PV panels are used to generate electricity
- solar / wind for building functions and scientific equipment (operational)

The facilities are designed to minimise use of fossil fuels and to maximise the use of renewable energy where practical. The station has been designed to have a minimum environmental impact during construction, operation and decommissioning.

Construction and Operation

The method of construction, operation and decommissioning have been planned to meet the requirements of the Environmental Protocol and relevant Belgian domestic law.

A waste management regime that includes the treatment of human waste will be implemented.

Construction, operation and decommissioning will be managed under the framework of an Environmental Management Plan.

The station construction, operation and decommissioning has been planned to minimise health and safety risks during all stages. Belspo, IPF staff and contractors will have relevant training and will be provided with the necessary equipment and personal protection to reduce the likelihood of major health or safety incidents.

The construction team and any contractors will be managed by the IPF Project Leader. The key-construction team will already be involved in the pre-construction in Brussels in order to become acquainted with the construction itself. Staff and contractors will be briefed prior to departing for Antarctica to ensure that they understand and fully comply with the relevant provisions of the Environmental Protocol, its Annexes and Belgian law that might affect them or their work.

2.5. Area of disturbance

2.5.1. Area of operations

The area of operations around the new station will include the buildings, (research) facilities and cargo depot within the station perimeter. This area will be about 1 km² excluding the snow landing strip and access routes (see also **Fig. 2.28**: boundaries of construction area, station operation, landing strip).

A 1000 m x 50 m snow landing strip will be levelled at the start of each season. This will remove any significant sastrugi or bumps that form over winter or any that form during the season. The landing strip and approach route will be marked and these markers will be removed at the end of each season.

The scientific field activities during the period November-February are in a range of maximum 200 km from the station, up to the polar plateau and down to coastal Breid Bay.

There will be an additional disturbance by the yearly movement of station personnel and small amounts of cargo to and from the station using the DROMLAN air-network and the annual re-provisioning of and waste removal from the station using ship transport to Breid Bay, (un)loading at the ice shelf and the transport of cargo via tracked vehicles. See also **Fig. 2.7** and **2.8**: scheme of different transport routes for the proposed activity (cargo discharge at coast, construction, operation and science).

2.5.2. Duration & Intensity

The construction of the new station is likely to take 4 months, depending on weather conditions and transport availability. It will include the main building, a garage/storage building, an emergency building and the huts for geophysical observations.

The construction will then be handed over to Belspo, who will supply other necessary scientific equipment starting from 2008-2009, the first planned scientific and logistic operations season. Scientific equipment will be installed at the station as required by the scientific demand and evolution of the research programme.

A minimum lifetime of the station of 25 years is foreseen.

2.5.3. Standard Procedures

A number of policies and standard procedures are being developed to manage operations in Antarctica. The policies and procedures are integral to safe and efficient operations and include minimum standards for staff, equipment and working conditions.

Policies will be designed to lessen inherent risks of working in Antarctica and to minimise environmental effects.

The Station leader in Antarctica, in close cooperation with Belspo, will oversee Search and Rescue (SAR), medical response and other emergencies in accordance with an Emergency Response and Contingency Plan. The plan includes among other things:

- responsibilities and chain-of-command;
- Health and Safety issues;
- medical support and evacuation procedures;
- emergency communications procedures; and
- route marking and navigation.

2.5.4. Fuel depot

A fuel depot consisting of 200 litre fuel drums will be located near the station. See also **Section 2.4.6**.

For the construction of the station emergency fuel depots will be placed along the access route from the coast to the station (**Fig. 2.8**).

2.6. Description of Construction Camp

The construction camp will be installed on the same spot as the base camps of the BELARE 2004, 2005 and 2006 expeditions. During these expeditions a covered trench was made to store the equipment used by the survey expeditions in winter. Two large heated Weatherhaven tents are currently available on site. All procedures will be in place as described elsewhere in this document. The early team that flies in at the beginning of November will install the base camp. A weather protected work shop will be installed using the equipment on site from the BELARE 2006 expedition. Note that this is only equipment and not construction material. The team will prepare the site and start to install the mechanical anchoring points on the ridge as well as the validation of the traverse route to the coast route and organize the coast camp and emergency fuel depots.

Sea-ice conditions allow ship arrival and unloading in the first week of January. The construction team will be responsible for the logistics (unloading and over-land transport) and the construction of the building. The construction camp will be extended to accommodate the larger group using the emergency building unit that will come in by ship and will be pre-assembled.

Kitchen/eating room	Weatherhaven shelter
Office/briefing/meeting room	Weatherhaven shelter
Sleeping accommodations	Small tents
Sanitary facilities	Weatherhaven shelter
Food storage (construction)	ISO-norm container 20'
Weather protected workshop	Weatherhaven shelter
	ISO-norm container 20'
	ISO-norm container 20'
	ISO-norm container 20'
Waste collecting	ISO-norm container 20'
	ISO-norm container 20'

Table 2.6: Overview of the construction camp facilities

2.7. Waste collection and disposal

A Waste Management Plan (WMP) will be prepared that will comply with all the requirements of Annex III of the Environmental Protocol. The plan will comprise aspects of the reduction of waste generated, handling and storage of waste in Antarctica, disposal of waste removed from Antarctica, and education and training of staff.

There will be two parts to the WMP. The first part will cover the construction of the station and associated activities. The second part will be the plan for the ongoing operation of the station and will be regularly reviewed and updated.

The following elements will form part of the Waste Management Plan:

- Management and Responsibilities
- Minimisation of Waste
- Waste Storage and Handling
- Waste Equipment
- Waste Disposal
- Prohibited Products

Waste

On the station all wastes will be handled and stored according to Belgian environmental, health and safety guidelines. All waste will be removed from the station for appropriate reuse, recycling, treatment or disposal in Cape Town South Africa.

In both main building and garage/storage buildings the wastes will be collected in designated areas. There will be different types of rubbish bins (or other appropriate receptacle) to separate the wastes at the source. Successively the bins will be emptied in larger transport boxes located in a 20' ISO-norm container located in the garage/storage building. This container will be removed from the building when a ship re-supply is organised. The full container can be exchanged for an empty one when unloading on the sea-ice or the ice shelf. Also the transport boxes are designed to be taken out of the container in order to transport them by cargo-sling (helicopter unloading at the ice shelf will always be an option). In the logistic preparation of the station's supply a first logical step is to get rid of packing material as much as possible. The incoming goods will be stored in the transport boxes mentioned above. The empty boxes already on site will be reused. A garbage compactor will be used to compact the solid waste if required.

Fuel drums

The empty drums will be reused on site or taken out of Antarctica but they will not be compacted so that they can be recycled in Cape Town. It is not the intention to use fuel drums for storing solid waste. This would contaminate the waste with fuel/oil (processing issue), furthermore it would require more time and effort from the crew on site.

Hazardous products

Procurement guidelines will be used to make sure that the most appropriate products are selected, limiting the quantity of hazardous products to the strict minimum. The products and their empty packaging will be stored in specific areas according to best practice standards. This storage will also be monitored by the building safety system.

3. ALTERNATIVES TO PROPOSED ACTIVITY

Several alternative locations and designs have been examined for the construction of the new station, taking into account scientific, environmental, logistical, engineering, health and safety requirements.

3.1. Do not go alternative

The Belgian Science Policy, guided by the conclusions of the Evaluation panel of foreign Experts (Belspo, 2002) takes the view that there are compelling scientific and logistical grounds for the construction of a new station.

With the construction of Base Roi Baudouin on a floating ice shelf near the Breid Bay Polynia in 1958 on the occasion of the IGY, Belgium joined a number of countries (Norway, Japan, South Africa and Russia) in opening up this part of Eastern Antarctica (Dronning Maud Land) for exploration and scientific research. Conceptually these expeditions followed the footsteps of the famous Norwegian-British-Swedish Antarctic Expedition (1949-1952) at Maudheim (71°03'S; 010°55'W) which pioneered modern scientific research and international collaboration in Antarctica. After the withdrawal of Belgium in 1967 and the closing of the Roi Baudouin base, its role was temporarily taken over by Japan with the establishment of Asuka Station (1986-1992). Although this station was situated 122 km inland from the Belgian station, the Breid Bay Polynia was still used as access area to this part of the Southern continent. With the closing of Asuka station in 1992, the 20-30 degrees east sector of Antarctica became again a vast territory having experienced only brief periods of systematic investigation.

In 1985 Belgium resumed its scientific activities with emphasis on Antarctica's role in the earth system. Since then Belgian research projects have been run for many years in conjunction with other National Operators, usually based at their facilities and utilizing their logistics. Although this situation led to a number of important and sustainable collaborations with other countries, this was not a comfortable situation as Belgium could not give an adequate return for the support, while it limited the areas of research to those of the host countries.

With the establishment of the DROMLAN Network an instrument became available for multiple visits to Dronning Maud Land during the summer season and to optimise the use of a scientific platform in this region. Making use of modern technology to reduce energy consumption and waste disposal as well as technical staff, Belgium decided to offer to the international scientific community a new state of the art Antarctic research station allowing geophysical monitoring and field research in an area where the closest permanent research stations are situated at a distance of 684 km (Syowa) and 431 km (Novolazarevskaya). With the establishment of this new research station Belgium also wants to take up its full responsibilities with respect to environmental monitoring and protection of Antarctica.

It is very unlikely that there will be increased activity by the Belgian scientific research community if the project does not happen. The use of existing research stations, such as Novolazarevskaya and Syowa, could be an option, but the distance of these facilities from the proposed area of research would require a greater use of flight or over-snow vehicles to gain access to research sites. The proposed technologically advanced station, benefiting from modern efficient and low energy technologies, is likely to have no more impact than using existing facilities.

Belgium considers this decision in line with its position as one of the original signatories of the Antarctic Treaty. The "Do not go alternative" is considered as opposed to the philosophy of the growing importance of Antarctica's key role in Global Change and increased concern about the state of its environment.

3.2. Alternative locations

As well as the Utsteinen Nunatak site (see **Section 2.2.1**), several other possible construction sites were identified from aerial photographs and surveyed during the BELARE 2004 expedition (**Fig. 3.1**):

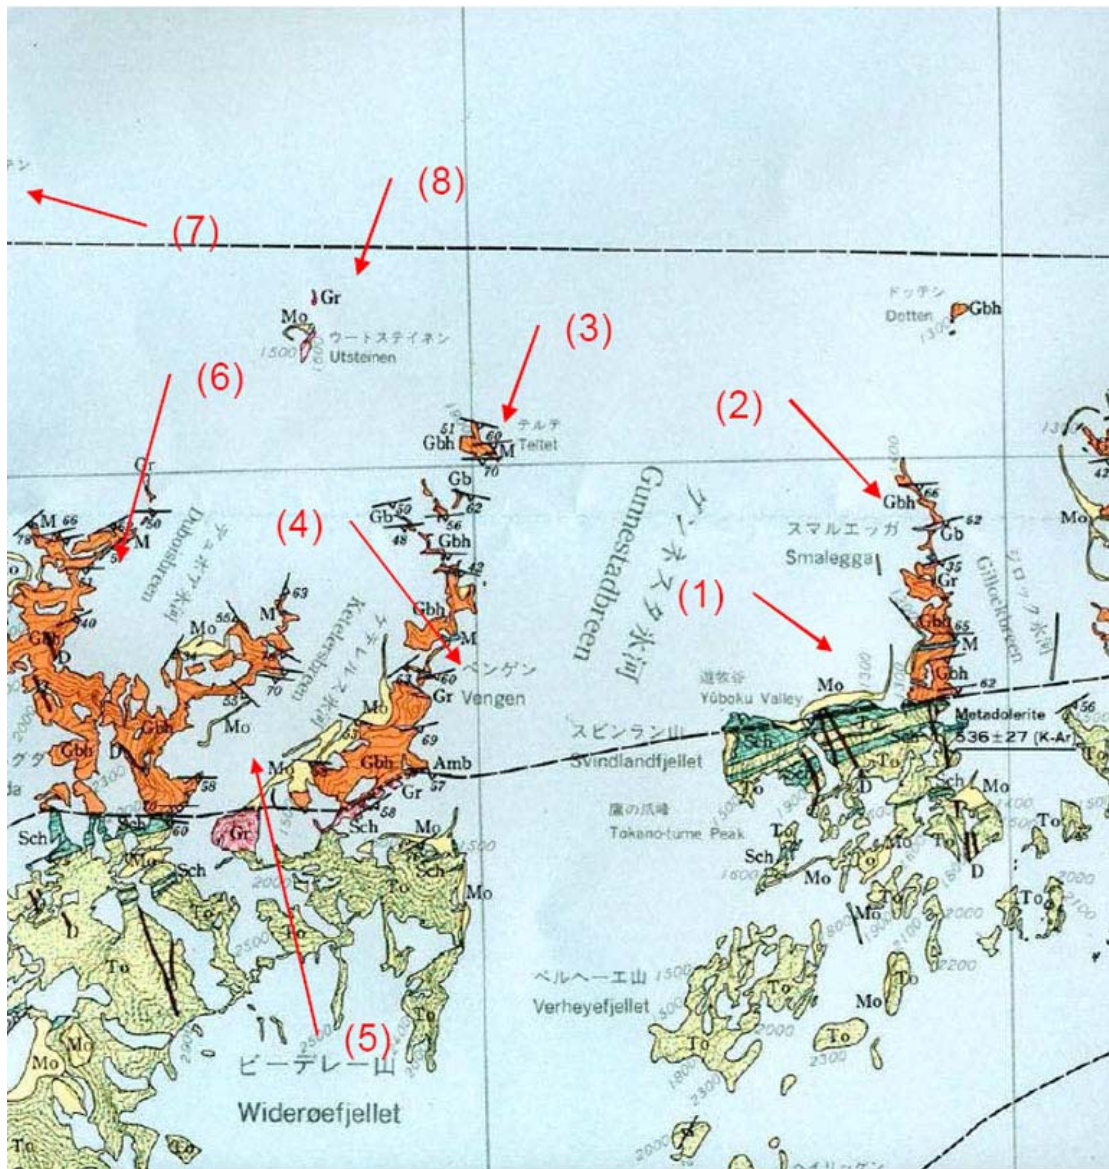


Fig. 3.1: Part of the geological map in the vicinity of Utsteinen, with Gunnestadbrean lying in the centre giving access to the polar plateau. Overview of the alternative sites and Utsteinen:

- (1) Jan Valley - Southern Smalegga; (2) Northern part of Smalegga; (3) Teltet; (4) Vengen - South of Teltet; (5) Valleys inside the mountain range; (6) Northern part of Vikinghøgda; (7) Pingvinane; (8) Utsteinen.

(Source: NIPR, Tokyo, Japan, 1997)

Jan Valley

Situated in southern Smålegga it is the most eastern site visited, lying protected from the wind within a small valley. Some supraglacial lakes are present but frozen over early in the season (as is the case with Utsteinen). There is no exposed and flat bedrock in the vicinity, only moraines and ice-cored moraines. The site is more protected than Utsteinen from the wind, but the wind direction changes frequently. The latter prevents the use of wind as an energy source for the station. Accessibility is more difficult, as the ice is sloping and very slippery and dispersed rocks are found; there is a good access for small aircraft.

Vengen

Situated south of Teltet; a small ridge of exposed bedrock was present. Access is more difficult due the presence of large wind scoops. Wind direction varies frequently and gusts are quite common. The ridge is very small and cannot sustain large building facilities.

Northern part of Vikinghøgda

This site consists of a flat surface of exposed bedrock and is easily accessible. The site has one major disadvantage, i.e. the snow surface surrounding the site is an erosional surface (with a lot of sastrugi). The latter hampers the use of snow for water production. The erosional surface also suggests major action of katabatic winds and wind gusts in particular.

Other valleys

Valleys that are within the mountain range suffer from similar problems to those encountered with the sites at Jan Valley or Vengen, i.e. poor accessibility and the lack of exposed bedrock (and not moraine). Another factor is the lack of wind for energy use through summer.


Analysis of the alternative sites indicates that substantially more work will be required to construct a station, consequentially, there is likely to be a greater environmental impact during construction and possibly during operation. The alternative locations for the site of the new station have been rejected because there are no scientific, operational or environmental benefits.

3.3. Alternative designs/technologies

Within the design constraints outlined in **Section 2.4**, several designs for the station were considered. Each design was evaluated for environmental effect, logistic implications for construction and operation, decommissioning and ability to meet the planned scientific programme. In order to evaluate alternative design proposals a number of key parameters were used (see also **Section 2.4.2: Station design**):

1. Accessibility for construction
2. Anchoring conditions
3. Orientation versus prevailing wind
4. Orientation versus sun
5. Compactness
6. Energy efficiency
7. Accessibility operational
8. Expected snow accumulation
9. Compatibility with program

In the process a weighted trade-off table was used.

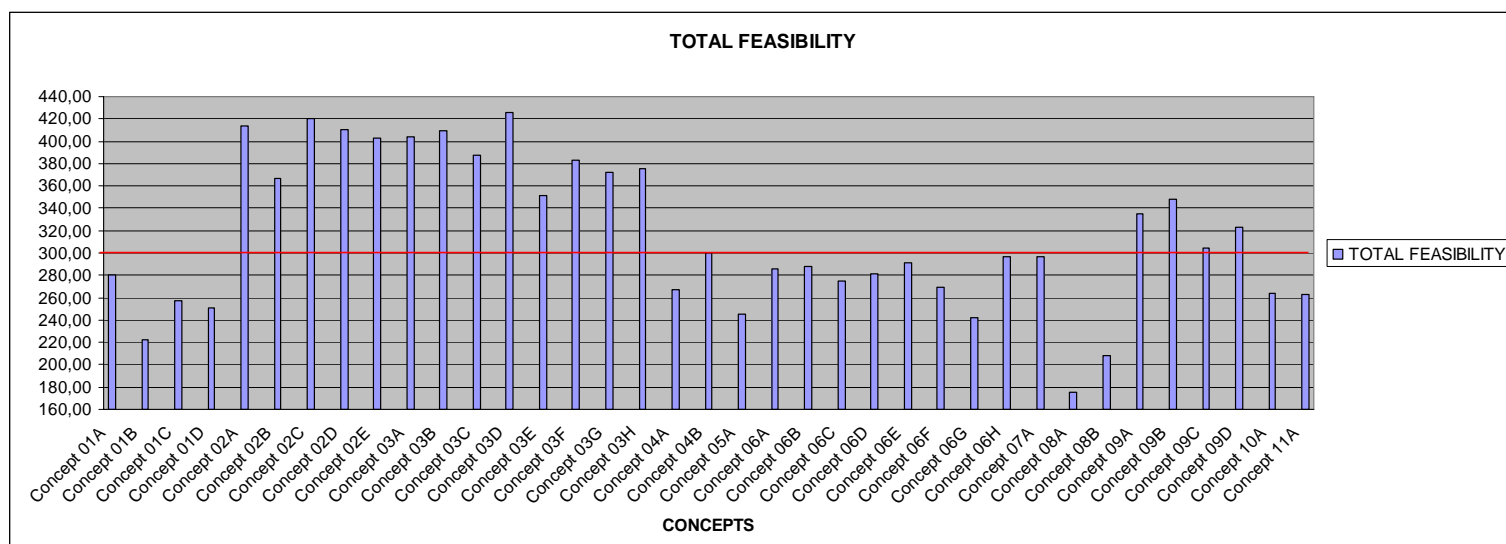

Tabel 3.1: Design trade-off

The overall performance (total feasibility) of the different concept proposals is summarised in **Table 3.1** above. Note that with the outcome of this study no less than 6 alternative designs were selected for further elaboration. Further analysis reduced the choice to three designs, and the best features of these were combined into the final layout. Aerodynamic tests (see **Section 2.4.5**) were used in the final choice to determine which design had the least effect on snow accumulation, consistent with operating and maintaining the station.

The final three designs had, in all other respects, similar environmental costs and benefits and had no significant environmental advantage over the chosen design.

3.4. Alternative transport

The construction site can be accessed by different means; the diagram in **Ffig. 3.2** illustrates the possibilities.

All transport will transit in Cape Town South Africa. Both goods and passengers can be flown in or go by ship. The following list summarizes the different possible scenarios:

Air transport only

1. Cape-Town => Novolazarevskaya => Utsteinen

Air transport + over land transport

2. Cape-Town => Blue ice field => Over land transport to Utsteinen
3. Cape-Town => Novolazarevskaya => Over land transport to Utsteinen

Ship transport + over land transport

4. Cape-Town => Breid Bay => Over land transport to Utsteinen
5. Cape-Town => Other stations => Breid Bay => Over land transport to Utsteinen
6. Cape-Town => Coast at Novolazarevskaya => Over land transport to Novolazarevskaya => Over land transport to Utsteinen

Ship transport + air transport

7. Cape-Town => Coast at Novolazarevskaya => Over land transport to Novolazarevskaya => air transport to Utsteinen

Preferred scenario:

Scenario 1 for passengers, scenario 5 for cargo.

Environmental issues:

The various scenarios present different environmental issues. All the overland components will produce more emissions than the shortest route, from Breid Bay to the proposed site. The operation phase will not normally require a dedicated vessel to service and where possible, sharing of logistics will be used, such as during ship transport to Antarctica.

The alternatives to the proposed ship-overland route to the site for station construction will not bring any environmental benefits and these have been rejected.

4. INITIAL ENVIRONMENTAL REFERENCE STATE OF THE SØR RONDANE

4.1 Location

The proposed site (Lat.: 71°57'S; Long.: 23°21'E; alt.: 1397 m) of the Belgian Antarctic station lies in the Western part of the Sør Rondane Mountains in Dronning Maud Land. It is situated at the foot of the mountains, approximately 1 km north of Utsteinen Nunatak on a small relatively flat granite ridge ('Utsteinen Ridge'), protruding through the snow. The ridge – oriented in a more or less N-S direction – is 700 m long and a few meters wide and rises 20 m above the surrounding snow surface in the accumulation zone. A number of blue ice fields occur in the vicinity as summer meltwater lakes.

Utsteinen Nunatak is a few kilometres north of the Sør Rondane Mountains. This granite rock consists of two peaks and culminates at an elevation of 1564 m a.s.l. The SE side of Utsteinen has a large wind scoop. The area has been briefly visited by Belgian (1958-1967) and later by Japanese (1987-1991) field expeditions and more recently by the site survey expeditions in preparation of the new station, in 2004, 2005 and 2006/07. Although the Utsteinen area itself is pristine, a small number of depots and litter can be found elsewhere in the Sør Rondane, left by field parties during the pre-Madrid Protocol period. Drawing up an inventory and clean up of these artefacts of previous human activities will be on the agenda of Belgian activities, once the station is installed.



Fig 4.1: Field depot and litter left behind by previous expeditions.

The ice sheet to the north of the Sør Rondane rises smoothly from the grounding line situated a few tens of kilometres south of the coastline of Breid Bay towards the first nunataks, where the surface attains 900 – 1000 m a.s.l. This inland slope area is well known and relatively crevasse free due to the damming effect of the mountains and has been used in the past by Belgian and Japanese expedition members as a main route from the coast towards the interior. It is situated entirely within the accumulation zone (average mass balance of 0.4 m of ice: Pattyn et al., 1992)

Breid Bay is a prominent feature on satellite images, situated over a (for Antarctica) relatively shallow continental shelf (200-300m). A coastal polynia is also a feature of the Bay, characterised by the frequent occurrence of open water or low ice concentration between the fast ice and the pack ice throughout the year (Ishikawa, 1996). In summer an open water lead along the coast allows ice strengthened cargo ships to reach the coastline. Breid Bay is composed of several smaller inlets, in which the fast ice frequently stays until January.

The ice shelf of Breid Bay moves in a NW direction at a relatively slow speed of some 50 m/yr. Base Roi Baudouin was situated on this ice shelf at a distance of 11 km from one of the inlets (Leopold III Bay) and at an altitude of 38 m. Further to the east between the Roi Baudouin ice shelf and the ice rise further to the east (Derwael ice rise), the sea floor has a depth of 400-700 m and the movement of the ice shelf is much greater reaching values of 200-350 m/yr (Pattyn et al., 2005).

4.2 Geology

4.2.1 Geology of the western Sør Rondane

Geological and geomorphological surveys of the western part of the mountains including the site area of the new base were performed by Belgian expeditions during 1958 to 1967 (Van Autenboer, 1969). Following the reconnaissance survey in 1984, Japanese expeditions conducted field surveys until 1991 (Kojima and Shiraishi, 1986; Shiraishi et al., 1991, 1992) (see also **Fig. 3.1**).

The Sør Rondane Mountains are underlain by the late Proterozoic to Paleozoic igneous-metamorphic complex which is related to the formation of the Gondwana Super-continent. Outcrops in the western part of the Sør Rondane Mountains are represented by various kinds of metamorphic and plutonic rocks and minor mafic (dolerite) dykes. Amphibolite-facies gneisses derived from semi-pelitic and volcanic rocks are the dominant metamorphic rocks. Thin layers and lenses of calcareous and mafic rocks also occur in many places. Plutonic rocks which range from granite to diorite are sporadically distributed as masses and stocks of km size. Foliation of the gneisses generally strikes E-W and dips monoclinaly to the south. The most remarkable major structural feature in the surrounding area is a pronounced E-W trending shear zone (Main Shear Zone). All rock types except for some granites and dyke rocks in the surrounding area show various degree of mylonitization.

4.2.2 Geology of the proposed station site

The outcrop of the proposed new station site is a northern extension of the Utsteinen Nunatak in the south (Van Autenboer and Loy, 1966). The outcrop, approx. 700 m long and 20-30 m wide, is predominantly composed of massive coarse-grained granite with minor xenolithic blocks of metamorphic rocks covering less than 10% of the outcrop. Exotic rocks and sediments (till and moraine) are negligible on the surface of the outcrop. In general granitic rocks tend to be easily weathered chemically and mechanically. However the granite in the present site is rather fresh suggesting recent (probably Holocene) exposure on surface. A set of joint system trending NNW and NE is dominant and the long and narrow outline of the outcrop is controlled by the NNW joint.

The granite is a part of the “Pingvinane granite” which is found in the Pingvinane Nunataks 10 km west of the site (Shiraishi et al., 1992). It is a typical alkali granite with coarse-grained equigranular texture.

Mafic schlieren of 10-20 cm long are found in some places. The granite is composed mainly of K-feldspar (35-50 vol.%), quartz (20-45 vol.%), plagioclase (20-45 vol.%), hornblende and biotite (2-5 vol.%) with or without clinopyroxene (Li et al., 2003 a, b). Accessory minerals are Fe-Ti oxides, titanite, apatite and zircon. The Pingvinane granite generally has low magnetic values (3 to 8 10^{-4} SIU) corresponding to the ilmenite series (Shiraishi et al., 1992). The intrusive age of the granite is considered to be ~ 500 Ma estimated by the similar rock type in Pingvinane Nunataks. The granite contains xenolithic blocks and lenses up to several meters long in places. The boundary to the granite is sharp. They are quartz-feldspathic hornblende gneiss and amphibolite with banded and migmatitic structure.

Most of the granite along the ridge is relatively fresh and weathering only occurs over the top few centimetres. However, in some areas along the ridge the granite is more deeply weathered. The weathered zones can easily be observed from the three-dimensional view of the topography of the ridge as well, as they occur in the low-lying areas. Here, the wind has weathered a large part of the rocks away. Due to the deeper weathering, the lower zones of the ridge cannot support a construction without significant anchoring. The higher areas have therefore been selected for the construction site as they have much better anchoring conditions (see **Section 2.2.2**).

4.3 Glaciology

Glaciological investigations were carried out by Belgian (1958-1967) and Japanese (1987-1991) field parties both on the ice shelf and in the mountains. They estimated, among other things, the total mass flux of ice through the mountain range (Van Autenboer and Decleir, 1974, 1978) and mapped the subglacial topography of the central Sør Rondane (Pattyn and Decleir, 1995). However, many parameters relating to the physical behaviour of glaciers in the mountain range and with respect to the adjacent ice shelf are still unknown. Even less is known about the large and fast flowing ice streams contouring the damming mountain range. This makes the 20-30 degrees east sector one of the least known areas of the Antarctic ice sheet.

Since most of the ice flow coming from the polar plateau is blocked by the mountain range, many sheltered areas exist that are characterised by slow ice movements, as is the case with the proposed construction site. However, only a few measurements with respect to ice dynamics and mass balance have been carried out in the immediate vicinity of the Utsteinen site.

Table 4.1 lists accumulation rates and displacements measured between 2004 and 2005 for stakes set up close to Utsteinen Ridge (within 300 m). Since snow density measurements were not carried out, values are given in cm snow depth. Highest accumulation rates of around 45 cm/year (stakes I, II and IV) are found east and west of the ridge. In the northern part, accumulation is half this value (20 cm/year), while in the south (stake V), ablation rules at a rate of approximately 10 cm/year. Here the snow layer is relatively thin and the stake lies in the proximity of a blue ice field.

Stake nr	Accumulation (cm snow/year)	Displacement (cm/year)
I (West)	42	5.5
II (West)	43.5	14.1
III (North)	24.5	8.7
IV (East)	47	26.2
V (South)	-9	8.0

Table 4.1: Snow accumulation and horizontal displacement obtained for the 5 stake positions near Utsteinen Ridge.

Minimum displacement is found to be 5 cm/year (stake I) and maximum displacement amounts to 26 cm/year (stake IV). These low values indicate that the whole area around the ridge is stable and hardly influenced by the overall motion of the ice sheet.

Ice thickness measurements were carried out along an east-west transect across the ridge. Ice thickness rapidly increases to 200 m in depth away from the ridge over a horizontal distance of 500 m. Furthermore, the ridge is asymmetric in shape. The western part is deeper than the eastern side at the same distance from the ridge. Such asymmetry is also observed near the ridge extending from Utsteinen Nunatak. Further away from the nunataks previous Belgian measurements (Van Autenboer and Decler, 1978) indicate ice thicknesses of more than 1000m and a subglacial bedrock close to or even below sea level.

4.4 Climate

4.4.1 Air temperature

The temperature record from the AWS, installed during 2005 at the site of the new station (**Fig. 4.2**), is analogous to the 1987-91 series from Asuka station, situated 55 km further north-east and 466 m lower in height. Average annual temperature at the site is -18°C , varying between -8°C (December) and -25°C (September). This implies that the daily maximum does not exceed zero in summer, while the daily minimum reaches -36°C in winter (**Fig. 4.3**). Although this temperature regime is relatively mild as compared to the lower lying Asuka Station and to the temperatures observed at Base Roi Baudouin (-15°C , close to sea level and 173 km further north), the yearly variation of the temperature curve shows the typical coreless winter character of the more continental stations. It is characterized by a rapid drop in temperature in fall, a first minimum in May, a second (more important) minimum in August-September and a very steep rise towards the December-January maximum. This coreless winter results from the specific radiation conditions during the polar night. At the new site the sun stays permanently below the horizon from May 16 to July 28 (73 days) but some twilight remains around noon, even at Midwinter.

Month	Pst (hPa)	Tm (degC)	Tx (degC)	Tn (degC)	Vm (m/s)	Vx (m/s)	D (deg)	D
Jan-05	834.7	-8.7	-3.0	-16.8	4.9	19.2	99.5	E
Feb-05	825.0	-12.3	-7.0	-20.2	6.6	28.6	105.9	ESE
Mar-05	827.1	-15.5	-7.2	-24.1	5.8	26.7	123.1	ESE
Apr-05	824.4	-19.7	-11.8	-29.1	5.6	31.1	134.9	SE
May-05	824.2	-22.0	-15.2	-31.4	6.2	23.2	125.3	SE
Jun-05	831.0	-21.0	-13.9	-32.4	8.2	28.9	118.3	ESE
Jul-05	823.5	-23.2	-15.8	-30.8		32.9		
Aug-05	821.0	-23.3	-15.4	-34.0	5.1	18.8	122.5	ESE
Sep-05	818.2	-24.4	-16.8	-33.0	5.9	30.7	113.2	ESE
Oct-05	823.1	-21.0	-14.5	-35.5	5.2	26.5	124.3	SE
Nov-05	832.9	-15.0	-9.9	-20.9	4.5	20.9	99.4	E
Dec-05	842.1	-8.4	-1.4	-17.5	4.5	18.3	98.1	E
2005	827.1	-18.0	-1.4	-35.5	5.9	32.9	116.2	ESE

Table 4.2: Meteorological observations from Utsteinen automatic weather station (AWS) in 2005. Monthly mean air pressure (Pst), air temperature (Tm), monthly maximum (Tx) and minimum (Tn) air temperatures, monthly mean wind speed (Vm) and wind direction (D), and monthly maximum wind speed (Vx). Mean wind speed in July is not given due to lack of measurements (temporary instrument failure).

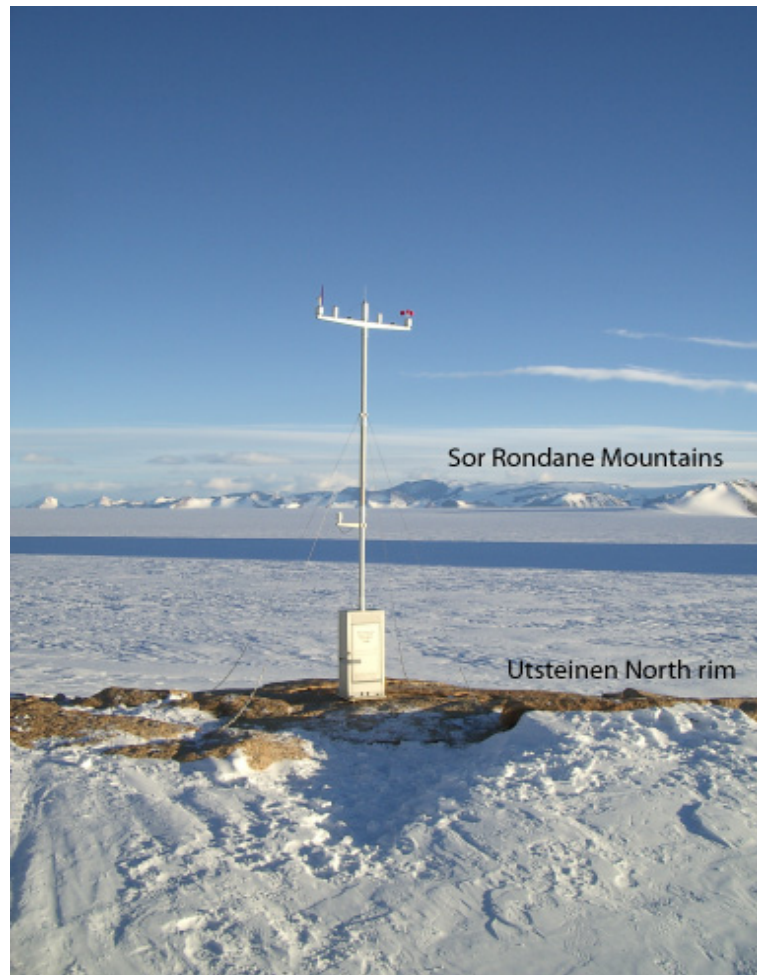


Fig 4.2: Automatic Weather Station, installed during the BELARE 2005 expedition on Utsteinen Ridge, with the Sør Rondane Mountains in the background.

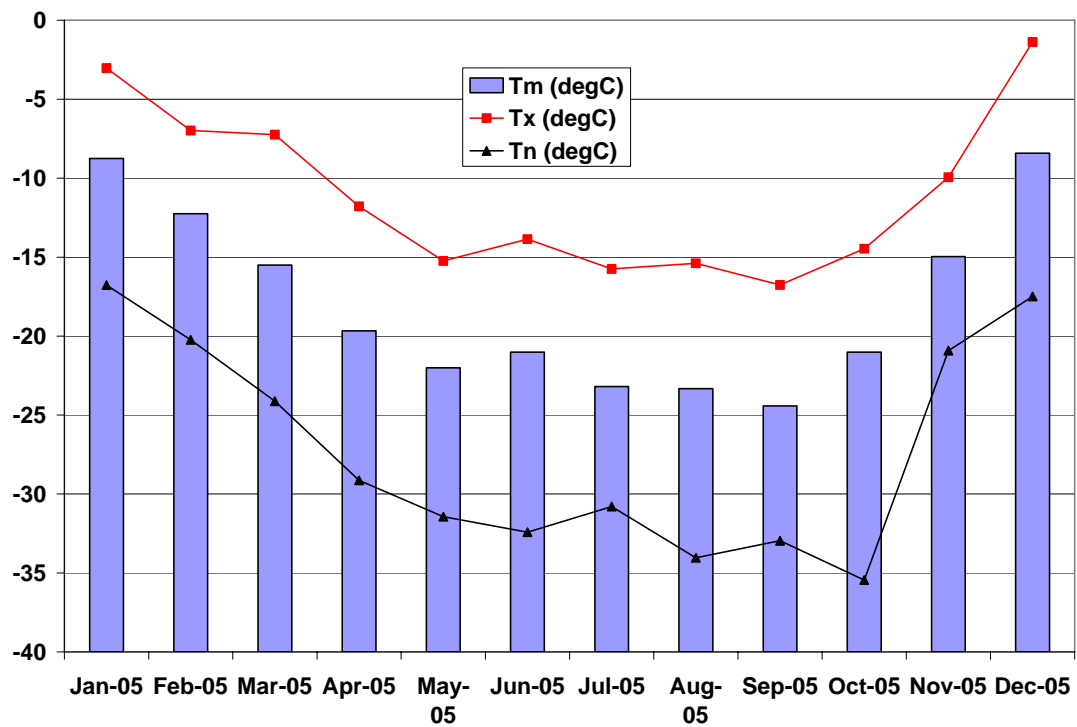


Fig 4.3: Monthly mean air temperature (Tm) at Utsteinen in 2005. Monthly minima (Tn) and maxima (Tx) are given as well.

4.4.2 Wind speed and direction

Utsteinen Ridge benefits from the protection of the mountains and is, due to its position at the western side of the range, less influenced by high katabatic wind speeds. Nevertheless, the site is not over-protected as it protrudes northwards from the northern rim of nunataks and therefore benefits from a more constant wind flow that might be useful from an energy production point of view. The mean wind speed recorded at Utsteinen is 6 m/s, which is half the mean wind speed recorded at Asuka Station, situated 55 km to the northeast. Mean summer wind speeds are around 4.5 m/s (**Fig. 4.3**).

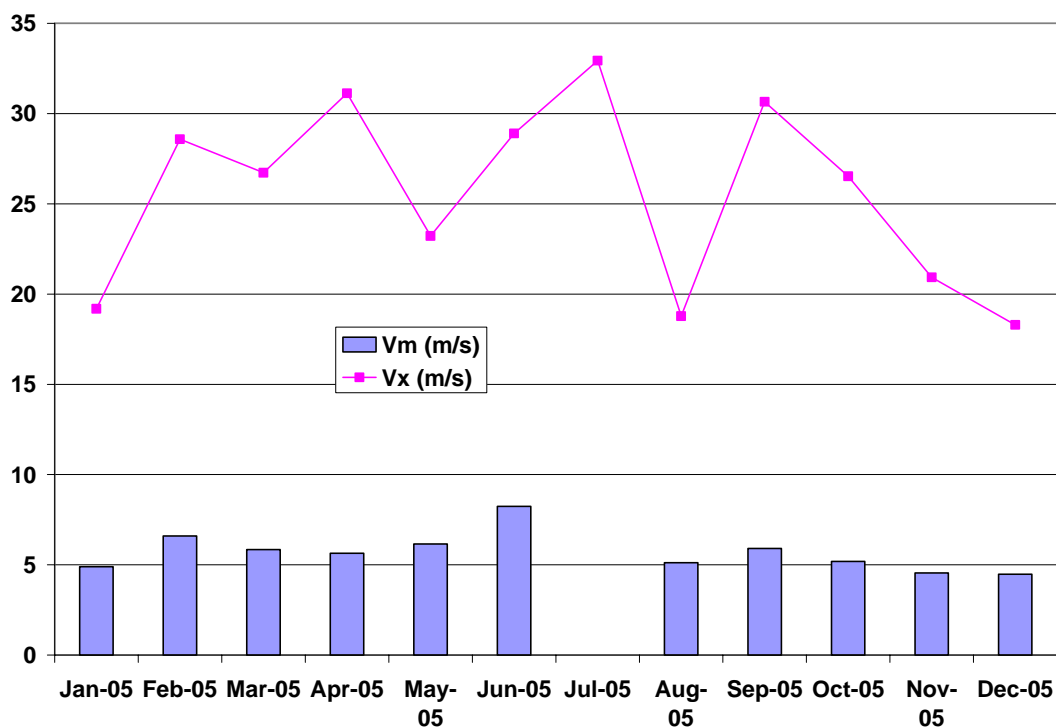


Fig 4.4: Monthly mean wind speed (Vm) at the Utsteinen site in 2005. Maximum recorded wind gusts (Vx) are given as well.

The main wind direction at Utsteinen is from the east, which is a katabatic wind regime coming from Jenningsbreen, one of the major outlet glaciers that cut through the range. Somewhat less frequent are winds from the SE direction, coming from Gunnestadbreen, the outlet glacier that lies closest to the site (**Fig. 4.5**). The whole sector E to SSE accounts for more than 90% of winds at Utsteinen. More variable winds occur only at very low wind speeds, which shows that the katabatic wind regime is dominant. Higher wind speeds (> 15 m/s) mostly come from the E and ESE (80%). The near absence of a northerly component indicates that near the surface the climate is seldom reached by cyclones or air masses associated with the low pressure trough bordering Antarctica.

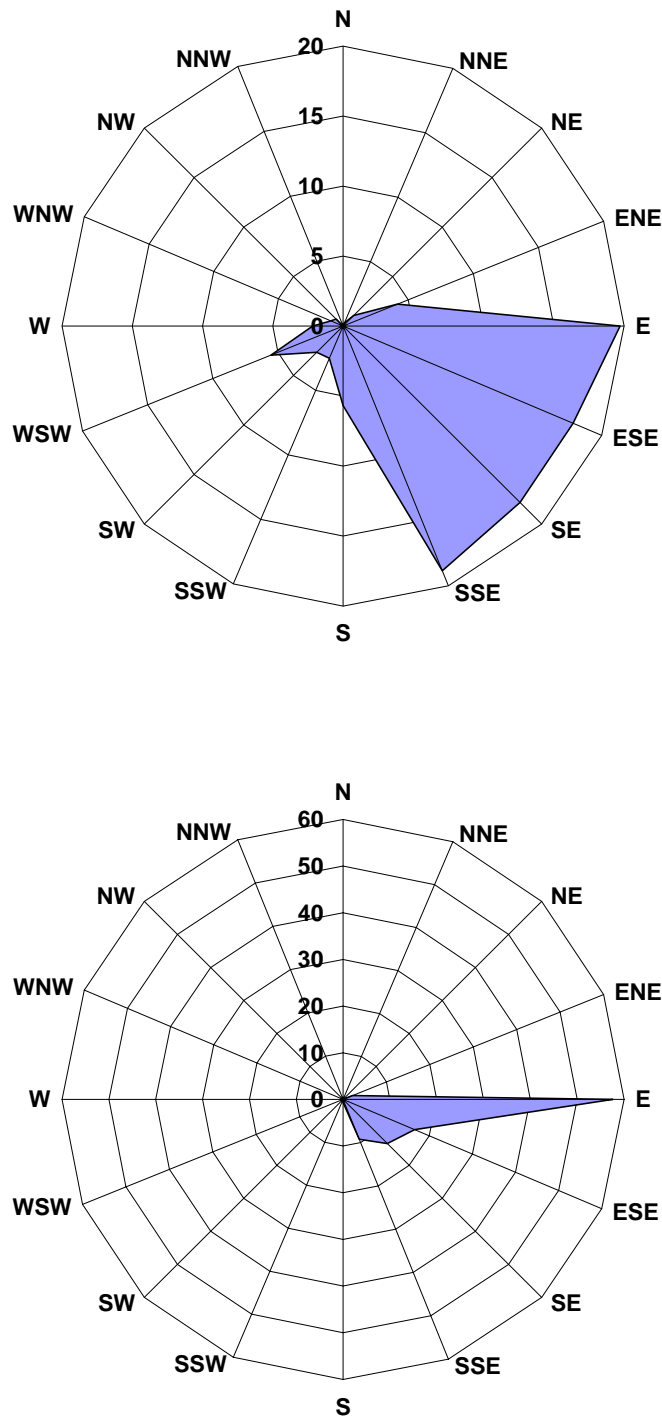


Fig 4.5: Frequency of winds (upper panel) and winds stronger than 15 m/s (bottom panel). Values are given in %.

4.4.3 Atmospheric pressure

Atmospheric pressure variations at Utsteinen are relatively constant in time while oscillating around a mean value of 827 hPa, which underscores the fact that coastal cyclonic activity hardly influences the site. With the exception of low pressure values in August and September, all variations are within 20 hPa. The yearly pressure curve lacks the double minima observed at most coastal stations (**Fig. 4.6**).

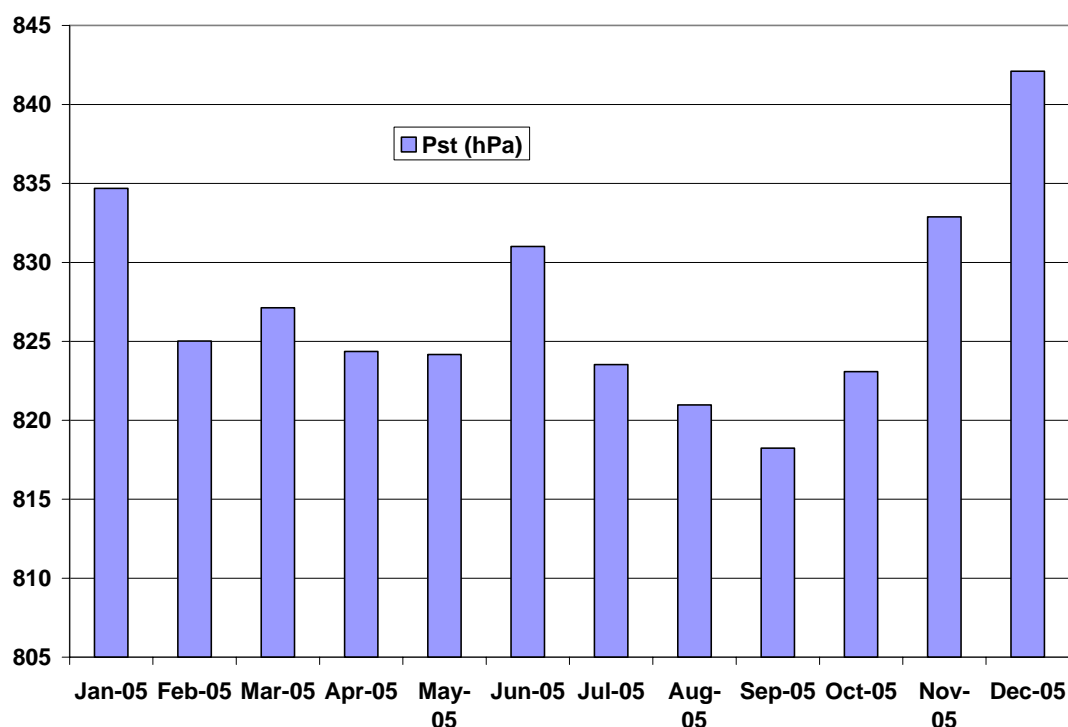


Fig 4.6: Monthly mean atmospheric pressure observed at Utsteinen during 2005.

4.4.4 Conclusion:

The one year record of the AWS at Utsteinen confirms what was already known from reports of field parties in the past, i.e. the relatively mild climate (high temperature and low wind speed) of the western part of the Sør Rondane is optimal for summer field work. The yearly climatic variation, on the other hand, suggests a continental climate at this location. Considering the very few AWS stations in the continental interior, the climatic record of the new Belgian station will contribute to a better understanding of the East Antarctic climate.

4.5 Chemical baseline monitoring

The Environmental Protocol includes requirements to undertake regular and effective monitoring of the impacts of ongoing activities and verification of the predicted impacts. Environmental monitoring is also required to facilitate early detection of possible unforeseen effects of activities.

A chemical baseline study was performed on soil, snow/ice and lichen samples taken from the Utsteinen Ridge during the BELARE 2004 and BELARE 2005 site survey expeditions, in order to obtain reliable data about the initial clean state of the environment and to establish the “footprint” of the station.

Sampling was performed following the guidelines from the COMNAP and SCAR “Antarctic Environmental Monitoring Handbook” (COMNAP, 2000) and analysed for the following indicators:

- Soil: total carbon, organic and inorganic carbon; total petroleum hydrocarbons (TPH); metals (Al, Cr; K, Sb, Co, Se, As, Cu, Ag, Ba, Fe, Na, Be, Pb, Tl, Cd, Mg, V, Ca, Mn, Zn, Ni, S, Hg); polycyclic aromatic hydrocarbons
- Snow/ice: metals (Al, Cr; K, Sb, Co, Se, As, Cu, Ag, Ba, Fe, Na, Be, Pb, Tl, Cd, Mg, V, Ca, Mn, Zn, Ni, S, Hg); total petroleum hydrocarbons (TPH); particulates

- Lichens: metals (Al, Cr; K, Sb, Co, Se, As, Cu, Ag, Ba, Fe, Na, Be, Pb, Tl, Cd, Mg, V, Ca, Mn, Zn, Ni, S, Hg)

An overview of the soil and snow samples and analyses results are given in **Tables 12.4, 12.5 and 12.6**.

Sample results show that the Utsteinen site is indeed pristine, with no indication of previous human impact. The pristine nature of the Utsteinen site is therefore a major advantage to assess the potential anthropogenic impact on the Antarctic environment. The general objectives of the monitoring programme are:

- detect, measure and monitor future environmental changes,
- verify predictions on the effect of human activities,
- detect possible unforeseen effects of human activities,
- assess the consequences of regulatory mechanisms and operating and managing facilities,
- establish the environmental status of the Antarctic environment.

The data collected at Utsteinen site during BELARE 2004, 2005 and 2006 visits can be put in context by comparison with data collected elsewhere in Antarctica. There was significant variation between different studies and different locations for snow/ice/meltwater data, which may be due to different sampling and measurement methods, e.g. for Pb: 0.035 - 0.203 ppb (Utsteinen, acid leach; BELARE 2004, 2005), 0.00348 ppb (King George Island; Hong et. al., 2002), 0.003 ppb (Brunt Ice Shelf; Suttie and Wolff, 1993), 0.15 ppb (Greywater Gully, Dry Valleys; NIWA. 2002).

Analyses of Utsteinen lichen samples can be compared with samples from the Bunger Hills (Wilkes Land), Henriksenskjera and Vasskilsata (Dronning Maud Land), Signy Island (South Orkney Islands) and Rothera Point (Antarctic Peninsula) (Poles Apart, 1997; Poles Apart, 1999; BAS, 1995a; BAS 1995b). Concentrations for Cu, Zn, Pb and Cd were in the same broad range, with the Utsteinen samples at the lower end of the range. Some Utsteinen samples had significantly higher Al concentrations than samples from Signy.

Analysis of soil samples from Utsteinen give results of the same order of magnitude as samples collected from a clean area within ASPA No.129 (Rothera Point, Adelaide Island) near Rothera station and also at Leonie Island, about 5km from Rothera station (K. Hughes, personal communication) but the concentrations at Utsteinen are lower for all comparable elements. This is likely to be due to the negligible anthropogenic input to the soils at Utsteinen compared to Rothera and also to the different composition of local bedrock.

4.6 Biological baseline monitoring

Biological research studies conducted in the Sør Rondane area are limited in number and were non-existent at the construction site prior to the BELARE expeditions. For this reason, and also as a result of comments made by some Parties, a biological baseline survey of the Utsteinen site (Ridge and Nunatak) was initiated during the BELARE 2004 and 2005 campaigns and finalised during the BELARE 2006 expedition. The survey covered all aspects of flora and fauna (including micro-organisms).

As with the chemical baseline data, biological baseline data obtained will allow the accurate monitoring of possible future impacts of the station and associated human activities on the biodiversity of this region. Moreover, on a long-term scale, it may also be possible to detect future climate changes.

The monitoring included a survey of the different lichen and bryophyte species on the ridge and the Nunatak, a detailed analysis (including counts) of the snow petrels (*Pagodroma nivea*) and an analysis of the possible presence of different groups of micro-organisms such as bacteria, algae, rotifers and

tardigrades. A total of 202 samples were collected at Utsteinen and its surroundings during January and beginning of February 2007 (**Table 12.7**).

This monitoring resulted in, among other data, a detailed mapping of lichens and bryophytes on the Utsteinen Ridge.

4.6.1 Flora

A total of 21 lichen species was collected on the Utsteinen Ridge and the Nunatak (**Table 12.8**). Several of them still need further identification and may represent new species. Two species, *Candelaria murrayi* and *Rinodina sp.*, were observed (in very small quantities near the snow petrel nests) on the eastern side of the Nunatak only, whereas three other species (*Rhizocarpon cf. geographicum*, unidentified lichen 1 and 2) were collected on the ridge only. Only one species of bryophyte (*Schistidium antarctici*) was present on the ridge and the Nunatak (identification confirmed by Dr. R. Ochyra).

Based on a topographic grid, a map was designed to plot the different lichen species and the single bryophyte on the ridge. The ridge was divided into 23 parcels, 30 m long and as wide as the ridge for each section (**Fig. 4.7**). The limits of the parcels were marked permanently in the field with metal screws fixed in the rock along the western side. Twenty-four numbered screws were fixed in total, starting with 0 at the southern end of the ridge (71°57'03.8"S, 23°20'47.2"E, alt. 1377 m) and finishing with 23 at its most northern tip (71°56'42.5"S, 23°20'41.2"E, alt. 1357 m) (**Fig. 4.7**). The width of each parcel corresponds to the maximum rocky width of the ridge for this parcel (e.g.: parcel 1 = 30 m × 8 m).

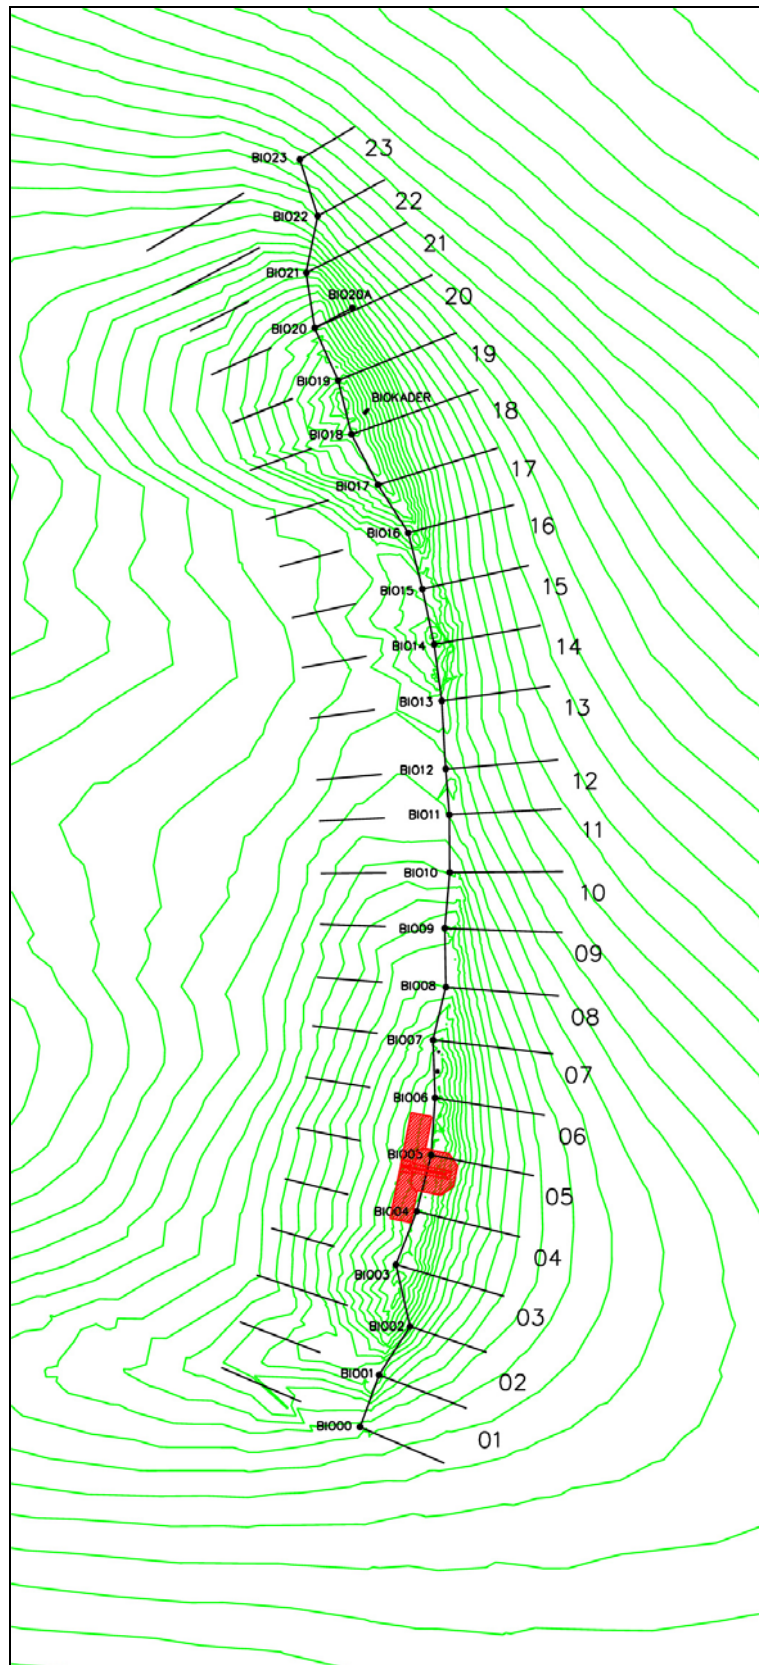


Fig 4.7: Grid map of the Utsteinen Ridge.
Position of metal screws on the Utsteinen Ridge and the parcels, including positioning of the station

For each of the parcels, a complete survey of the lichen and bryophyte species was performed (**Table 12.9**). The abundance of each species within each parcel was also evaluated. For this purpose, three categories were taken into consideration: a. species covering up to 1 dm² (+), b. species covering between 1 dm² and 1 m² (++) and c. species covering more than 1 m² (+++). The indication of the abundance of each species needs to be considered cautiously. A lot of lichen communities were covered by snow during the survey in January-February 2007. The percentage snow cover is therefore included for each parcel. The three abundance categories give however a reliable idea on the distribution of each species on the different parts of the ridge. From each of the four corners of each parcel, pictures were taken, giving a good view of the snow cover and the available rocky substrate (boulders, gravel). Pictures of the most interesting lichens communities were also taken. These results will be useful for future comparisons to assess the impact of human activities and/or climatic change.

The lichens are abundant on the ridge, especially along the cracks and on the gravel whereas the more exposed rocky surfaces are almost devoid of lichens. **Table 12.9** shows that the parcels 17 to 21 present the richest flora with 16 to 18 species, whereas the parcels 11 to 15 (between 71°56'54.5"S, 23°20'50.7"E and 71°56'49.7"S, 23°20'48.8"E) connecting the two main parts of the ridge have the lowest diversity with only 1 to 5 species. This can easily be explained by the fact that the parcels of the connecting pass are narrower with greater snow cover. Parcels 17 to 21 (from 71°56'48.6"S, 23°20'47.9"E to 71°56'44.5"S, 23°20'41.8"E) need careful protection from any human activities in the near and far future. Parcels 1 to 15 are most likely to be impacted by the construction of the research station and related human activities, whereas the other parcels are expected to be less influenced as they are situated farther away from the construction site. It is highly likely that the lichen communities of parcels 16 to 23 will not change significantly in the near future and these plots have therefore been chosen as reference plots for comparison with parcels 1 to 15 to evaluate the impact of future human activities on the biodiversity of the ridge.

The western side of the Nunatak has only 4 species of lichens (**Table 12.10, Fig. 4.8**). "*Lecanora* sp.2" is the only species that is abundant on this side and the other species occur only very rarely in this area. Although 13 species have been recorded on the northern side, the lichen communities are sparsely distributed on the rocky slope. The southern side is not accessible owing to a wind scoop so no data are available from this rocky slope. Finally, the richest part of the Nunatak is the eastern side where 18 species have been recorded. However, the lichens are abundant only at the base of the rocky slope under the petrel colony and at the northern part of this side where lichen vegetation, similar to the one on the ridge, was observed.

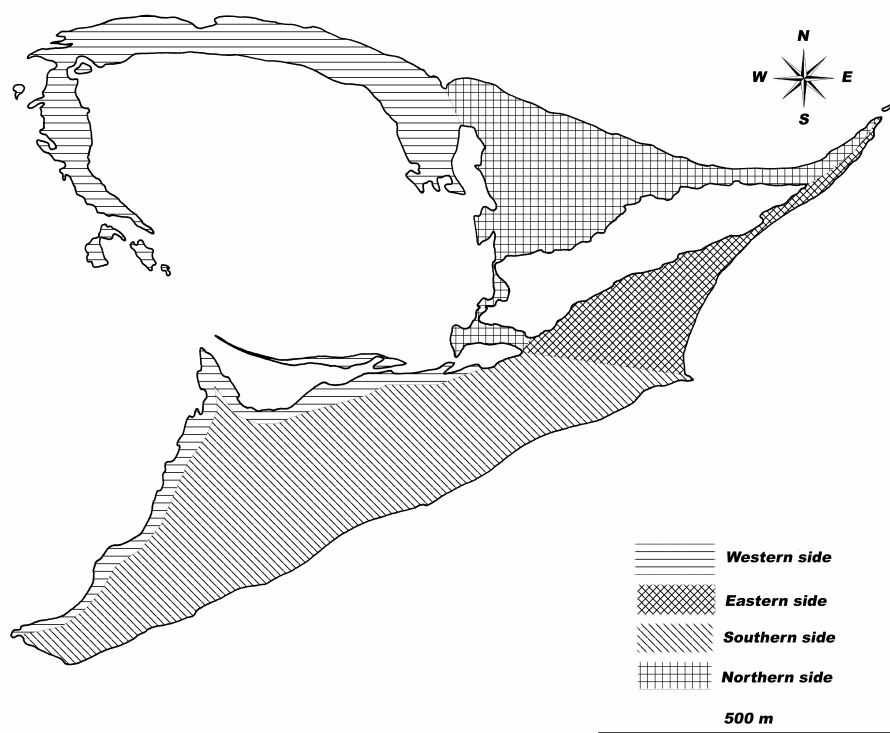


Fig 4.8: Map of the Utsteinen Nunatak

Taxonomical notes: some of the lichen species collected in January-beginning of February 2007 have not yet been identified. The identity of some taxa is currently rather unclear and therefore restricted to the generic level such as for instance *Bacidia* sp., or to a group of closely related species (e.g. *Xanthoria* gr. *candelaria*). Some are only tentatively named ("cf.") awaiting more detailed analyses. Two species are so far completely unnamed ("unidentified species "1" and "2"). Several of these lichens might represent new species.

The presence of *Caloplaca regalis* was reported in the Draft CEE. The specimen has been carefully examined and was identified as *Xanthoria elegans*. Moreover, during the fieldwork in 2007, we were not able to find *Caloplaca regalis*, but only the similar *Xanthoria elegans*. The reporting of *Caloplaca regalis* in the Draft CEE should therefore be considered as a possible misidentification for *Xanthoria elegans*. The identification of the specimens has been confirmed by Dr. D. Øvstedal, a renowned Antarctic lichen specialist.



Fig 4.9: The lichen *Xanthoria* gr. *candelaria* (eastern side of Utsteinen Nunatak)



Fig 4.10: A crack covered by the lichens *Buellia frigida*, *Phycia caesia*, *Umbilicaria aprina* and *Xanthoria elegans* (eastern side of Utsteinen Nunatak)



Fig 4.11: The lichen *Usnea* cf. *sphacelata* on Utsteinen Ridge.



Fig 4.12: The bryophyte *Schistidium antarctici* on Utsteinen Ridge.

4.6.2 Vertebrate Fauna

Published data on the breeding distribution of Antarctic (sea)birds in the Sør Rondane region are very limited. The observed vertebrate fauna during BELARE 2004-2005-2006 in the vicinity of the station consists of only three bird species: Snow petrel (*Pagodroma nivea*), South Polar skua (*Catharacta maccormicki*) and Wilson's storm-petrel (*Oceanites oceanicus*). The last was observed during January 2007 only. Antarctic petrel (*Thalassoica antarctica*) has been observed previously (Van Autenboer, 1964).

The snow petrel is the only breeding bird close to the construction site. The entire colony is restricted to Utsteinen Nunatak, at a distance of about 1 km from the new station construction site.

There may be breeding colonies of Weddell seals (*Leptonychotes weddellii*) at various locations on the fast ice beside the ice front of Prinsesse Ragnhild Kyst. The offlying pack ice may support breeding populations of crabeater seal (*Lobodon carcinophaga*), Ross seal (*Ommatophoca rossii*) and leopard seal (*Hydrurga leptonyx*). During summer, coastal waters may be visited by baleen whales and toothed whales. These whale species do not breed in the region but visit the area to feed.

There are no observations of penguin rookeries at Breid Bay, neither from all the working years of the Roi Baudouin base nor during the BELARE expeditions (2004-2006).

Snow petrel (*Pagodroma nivea*)

Snow petrels are probably the most abundant species in the interior of Dronning Maud Land (Shirihai, 2002). In general, the average colony size is small. Only some colonies are of 1.000 or more breeding pairs. Snow petrels breed amongst others on areas of exposed rock which may be as much as 400 km from the open sea during the breeding season. The colony farthest inland is at Tottanfjella in the Heimefrontfjella (Croxall et al, 1995, Johansson et al, 2004). The colonies situated at Svarthamaren in the Mühlig-Hoffmanfjella, in Heimefrontfjella and Vestfjella range from 50 to 2000 pairs. Also in the western part of the Sør Rondane a significant number of colonies similar to or larger than the one situated at Utsteinen, described below, have been reported by field parties (Van Autenboer, 1964).

A map indicating the area covered by the snow petrel nests is given in **Fig. 4.13**. The evaluation of the number of these nests was very difficult due to the steep slopes. Most nests are hidden in deep cavities between big boulders of granite. Therefore, a transect from the base to the top of the eastern side of the Nunatak through the main part of the colony was made in order to count the nests, after which an extrapolation was made to evaluate the total number of nesting couples.

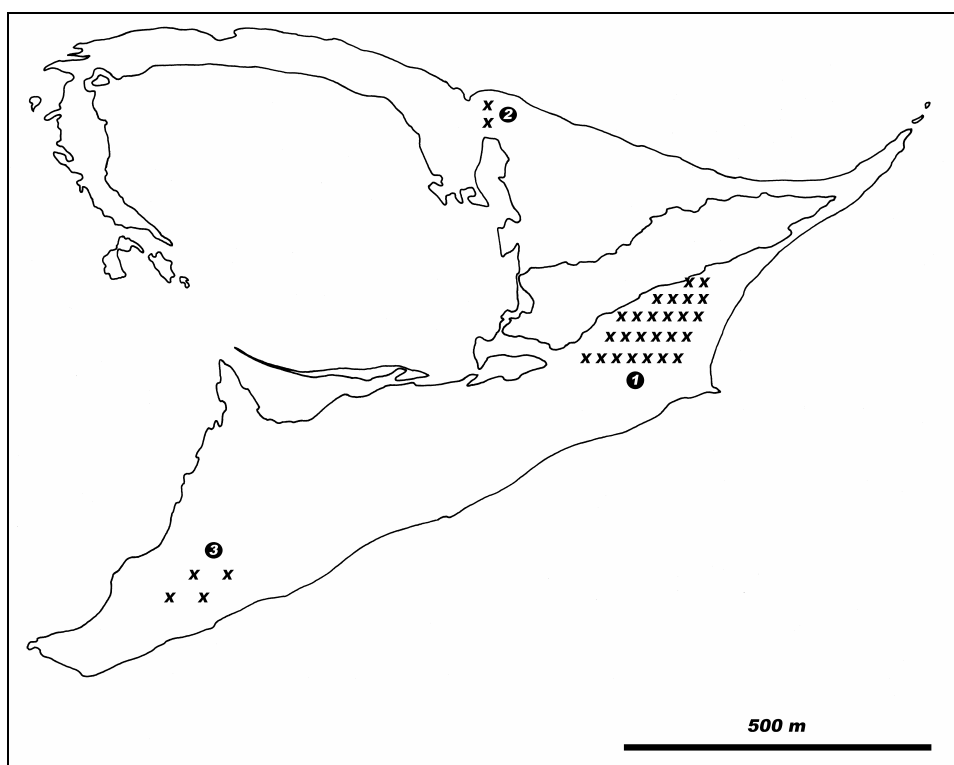


Fig 4.13: Snow petrel colony on Utsteinen Nunatak. The "X" indicate the breeding areas on the Nunatak



Fig 4.14: Eastern side of Utsteinen Nunatak

25 nests were found along the proposed transect and the total number of nesting pairs on the northern part of the eastern side of the Nunatak was calculated as a minimum of 100 (**Fig. 4.13, n°1**). On the northern side of the Nunatak, only a small area was occupied by about 10 additional pairs (**Fig. 4.13, n°2**). The southern side was not accessible owing to a wind scoop, but snow petrels were also breed on this steep slope. Observations made with binoculars from the wind scoop, led to an estimate of 40 nesting pairs on this slope (**Fig. 4.13, n°3**). There seem to be no snow petrel nests located on the western side of the Nunatak. In total, the snow petrel colony on the Nunatak is estimated as a minimum of 150 breeding pairs.



Fig 4.15: Snow petrel on the eastern side of Utsteinen Nunatak.

Snow petrels return to nest sites in November, about the time of the proposed start of station activities. One egg is laid in late November to mid-December and incubated for 41-49 days. The chick remains in

the nest for an additional 7 weeks. Snow petrel chicks leave the nest in late February to mid-May, when the proposed station will have closed for the winter.

Data from Utsteinen Nunatak breeding site will be forwarded to the SCAR Bird Biology Expert Group in order to update the database on the breeding distribution of snow petrels. The breeding site will not be visited except for approved scientific research.

Weddell seal (*Leptonychotes weddellii*)

Weddell seals breed along the Princess Ragnhild coast. During BELARE 2005 and 2006 an estimated 200 seals including females and pups were spotted at Breid Bay.

The breeding cycle of Weddell seal along the Prinsesse Ragnhild Kyst has yet to be determined. Work at Drescher Inlet indicates that peak pupping in is likely to be late-October (Reijnders et al., 1990).



Fig 4.16: Weddell seal mother and pup at Breid Bay

4.6.3 Invertebrate Fauna

During Japanese Research Expeditions (JARE), several terrestrial invertebrate species were discovered living in the western and central part of the Sør Rondane Mountains, including one springtail and several mite species (Hiruta and Ohyama, 1995). Most of these areas supported rookeries of snow petrel, indicating a relationship between the rookeries, plant communities and soil animals.

During the BELARE 2006 expedition, only one springtail was observed in the cushions of the moss on the northern side of the Nunatak. Additionally, one mite species was present on the ridge.

4.6.4 Micro-organisms, including algae

Frozen samples of soil and gravel that are likely to contain terrestrial micro-algae, bacteria, cyanobacteria and eggs and/or dormant stages of rotifers and tardigrades were collected from different parts of the ridge and the Nunatak.

Water samples were taken from the lakes surrounding the Nunatak (**Fig. 4.17**) in order to collect micro-organisms such as planktonic cyanobacteria, protists, bacteria and rotifers (**Fig. 4.18** and **4.19**).



Fig 4.17: Northern side of Utsteinen Nunatak with a frozen lake

Samples will be studied using culture methods and culture-independent methods. Results will be published in a separate report and made available via the Belspo website www.belspo.be/antar.

Currently, 4 species (so far unidentified) of bdelloid rotifer and two species of tardigrades have been found. Several terrestrial species of unicellular and filamentous cyanobacteria have been observed in the samples from the ridge where there are abundant.



Fig 4.18: Results of filtering lake water showing algae or cyanobacteria on the filter



Fig 4.19: Two cyanobacteria (a colony of *Nostoc* sp. on the left and big filaments of an unidentified *Oscillatoriaceae* on the left and above) with a species of bdelloid rotifer.

Diatoms (*Bacillariophyta*) were one of the target groups during this sampling campaign. Although 12 samples have been processed, so far no single diatom valve could be found. These results will be similarly published in a separate report and made available via the Belspo website www.belspo.be/antar.

The green algae, *Prasiola* sp. was also observed in areas below the nests that may be nutrient enriched.



Fig 4.20: The green alga *Prasiola* sp. (eastern side of Utsteinen Nunatak).

4.6.5 Sampling trips in the Sør Rondane mountains

This survey included a sampling trip to the Teltet Nunatak (71°59'51.7''S, 23°30'56.7''E, alt. 1450 m) and to a 'dry valley' (72°06'59.8''S, 23°09'29.5''E, alt. 1700 m) in the Sør Rondane mountains south of Utsteinen Nunatak.



Fig 4.21: A "dry valley" in the Sør Rondane Mountains

Samples of lichens, soil and gravel were collected from both of these localities. Water samples were also taken from a lake close to Vengen (72°04'18.0''S, 23°23'03.5''E, alt. 1360 m) on the way from Utsteinen to the dry valley.

The results reveal the presence of three lichen species on the Teltet Nunatak and five in the dry valley. No bryophytes were found during these exploration trips. Analyses of the samples for micro-organisms have not yet been performed.



Fig 4.22: *Umbilicaria decussata* in the dry valley.

4.7 Tourism

There has been very limited non-governmental activity in the Sør Rondane region. One or two expeditions have visited, notably a four man expedition in 1996–1997 to climb peaks lying to the west of Byrdreen in the eastern Sør Rondane. The expedition was serviced by a non-governmental organisation that also searched for alternative blue-ice runways in the Sør Rondane region. The mountains of the Sør Rondane continue to have an interest for expeditions, however, the costs associated with reaching the area tend to restrict this type of activity.

4.8 Protected Areas and Historic Sites and Monuments

There are no Antarctic Specially Protected or Managed areas (ASPAs or ASMAs) or Historic Sites and Monuments in the region of the proposed Belgium Station. The nearest ASPAs are ASPA Nr 142 (Svarthamaren, Mühlig-Hofmannfjella (71°54'S; 05°10'E)) to the west and ASPA Nr 141 (Yukidori Valley, Langhovde, Lützow-Holmbukta (69°14'S; 33°45'E)) to the east.

The DROMLAN link has been used for access to the Sør Rondane region for preliminary studies. The link may be used for some of the building crew during the construction phase or scientists and station staff during the operational phase. The following Historic Site and Monument is situated near to the Novolazarevskaya airfield used by the DROMLAN link:

Historic Site and Monument No. 44: A plaque erected at the temporary Indian station, Dakshin Gangotri, 70°45'S 11°38'E, marks the First Indian Antarctic Expedition.

4.9 Prediction of the future environmental reference state in the absence of the proposed activity

The site of the new station is on the north ridge of Utsteinen Nunatak. There has been previous human activity in the area resulting from survey and research programmes run at Asuka (Japan) and Roi Baudouin (Belgium) stations. There have also been three recent visits to the area by Belspo/IPF in order to identify possible sites for the new station and to collect baseline data.

Although there are some records of previous operations in the proposed station area, no signs of such human activities were recorded at Utsteinen area.

In the absence of the proposed activity, the pristine state of the region will be maintained and the aesthetic and wilderness values will be unaffected. It is likely that periglacial processes will continue at the site shaping the geomorphology of the region and breeding bird species will continue to occupy suitable nest sites.

The ice shelves of Prinsesse Ragnhild Kyst, where unloading of construction materials will take place, are an active ice front that continually refreshes itself.

5. LIKELY IMPACTS, ASSESSMENT, MINIMISATION AND MITIGATION OF THE PROPOSED ACTIVITIES

The following section identifies the direct effects on the environment of the proposed station construction, operation and logistic support activities described in **Section 2**. The Source–Pathway–Receptor process has been used to assess origins and outputs of activities and their likely environmental effects. Minimisation and mitigation measures to reduce these impacts are then described. The assumption is made that the minimisation and mitigation measures described will be applied. Finally, a summary of the impacts and mitigating measures is given in the impact matrix **Table 5.5** in **Section 5.13**.

The main sources of direct impacts are:

- construction activities
- emissions and fuel spills
- grey water
- noise
- impacts resulting from visitor disturbance

Indirect impacts are described in **Section 6**.

5.1 Methodologies

Likely Impacts are assessed qualitatively in **Sections 5.3-5.12** using the criteria outlined below. These criteria are used in the impact matrix in **Section 5.13**.

Nature

The nature of the impact caused by the activity on potential receptors.

Scope

The geographical area affected by the impact in local, regional or continental terms.

Persistence

The duration of the impact and whether it is likely to be short-term (minutes–hours), medium-term (days–weeks), long-term (months–years), permanent or unknown. There may be a lag time between when the output occurs and the time of the impacts.

Intensity

The overall severity of the impact is assessed in relative terms (low, medium or high) where **Low intensity** is defined as impacts that have minimal effect on natural functions or processes, and these effects are reversible; **Medium intensity** is defined as impacts that effect natural functions or processes but these processes are not subject to long term changes. These effects are reversible; and **High intensity** is defined as impacts that have a long term or permanent effect on natural functions or processes, which are likely to be irreversible.

Probability

The likelihood of the impact occurring. This is assessed as low (<25% probability), medium (25–75% probability), high (>75% probability).

Importance

The overall importance of the impact is assessed in relative terms (low, medium or high).

Description of effect.

This categorises qualitatively the direct, indirect and cumulative effects of the specific impact. Three types of impact categories are specified in Article 3 of Annex I of the Environmental Protocol and the CEP (2005) definition of each category is adopted for this CEE.

- (1) Direct Effects: Any first order effect, impact or consequence that may be associated with an activity. For example, acute toxicity effects (mortality) in marine birds, or in intertidal limpets, or in pelagic krill caused by exposure to toxic constituents of petroleum products spilt at sea.
- (2) Indirect and Second Order Effects: Any second order effect, impact or consequence that may be causally associated with an activity. For example, particulate emissions from combustion leading to melting of ice or snow that subsequently causes loss of ice or snow algae habitat.
- (3) Cumulative Impacts: Effects, impact, or consequences that may come from similar or varied sources, but that are additive, antagonistic or synergistic in their effect, impact or consequence. For example, disturbance to nesting skuas caused by existing scientific use and by a proposed use.

5.2 Source, Pathways and Receptors

The Source-Pathway-Receptor principle has been used for the identification and likely result of impacts resulting from activities. This is in accord with the Environmental Protocol, which recognises that impacts may be greater, for example, where waste products are carried to areas of high ablation (Environmental Protocol Annex III, Art 4(2)).

The proposed location of the station is in an area of limited rock outcrops, where there is the possibility of waste produced or emissions generated in one area, flowing along a pathway to another. The Protocol recognises ice as a pathway but here are also transient pathways such as seasonal melt water that may carry pollutants between sources and receptors.

5.3 Atmospheric Emissions

The station has been designed for minimum energy requirement and maximum use of renewable resources. The fossil fuel requirement for operation of the station will, therefore, be kept as low as possible. There may be greater fossil fuel requirements during the construction phase until the station becomes operational.

Fuels used will include:

- Polar diesel, Jet A1 (air transport, tractors, heating)
- Unleaded gasoline (snowmobiles, generators)
- White gas (small stoves)
- Propane (larger stoves)
- Lubricants and hydraulic oils (mechanical equipment and vehicles)

Atmospheric emissions during the construction of the station will come primarily from the combustion of fossil fuels during the transport of materials and the construction of the station. A minor amount of fugitive emissions will occur during fuelling activities. During the operational phase, transport and fuel spills will be the main source of emissions.

There will be no open burning of waste and no contained incineration.

The geographical area affected will include the route of the ship, the unloading site at Breid Bay, the traverse route, aircraft flight routes and the station area. Areas visited during scientific fieldwork will also be affected.

Estimate of fuel usage

The major use of fuel during the construction phase will be for transport. Fuel will be used for ship transport to the ice edge, by the tractors to transport materials to the station, and, locally, at the station by vehicles and generators. Fuel will also be used for flights for the input of personnel.

The operational phase will require fuel for the annual re-supply of the station by ship, local transport from the ship to the station (by helicopter and/or tractors) and for local and scientific field transport. It is envisaged that the fuel requirements for station operation (excluding transport) will be minimal and the ultimate aim is to operate the station using only renewable energy sources.

There are limited data available to estimate fuel use for the above activities. Figures from other station construction activities by other national operators have been used to estimate fuel consumption:

Fuel type and use	Construction (litres)	Operation (litres) per year
Jet A1 (Flight within Antarctica)	8,000	4,000
Polar diesel (Land transport)	36,000	5,000
Polar diesel (Power Generation)	8,000	0-1,500
Unleaded Gasoline (Land Transport)	2,000	2,000
White gas / propane (Cooking and heating)	To be defined	To be defined

Table 5.1: Estimates of fuel use for construction and operation of the station (litres)

Fuel amounts are relatively low compared to other Antarctic operations because of the small scale of the proposed station and the philosophy to minimise fuel requirements.

Fuel consumption for shipping has not been included because it falls under the DROMSHIP arrangement. Fuel use during DROMLAN intercontinental flight has also not been included. Fuel consumption during these activities will be reported by the operators to the relevant authorities.

Air transport within Antarctica

Air transport used in the construction and operation of the Belgian research station will be negotiated on a year by year basis, using the DROMLAN network. During the construction phase there will be an estimated number of 7 return flights from Novolazarevskaya to bring in up to 40 passengers and a small amount of cargo. During the operational phase the frequency of flights will be reduced by half. The impact of local air transport will depend on the amount of people and cargo transported, but the use of existing logistics has environmental benefits.

Ship activity at the coast

The time the supply ship will spend berthed at the coast during unloading operations will depend on a variety of factors including sea ice and weather conditions, and the speed at which construction materials can be moved to the station location. Emission calculations have been based on an estimated period of 10 days during which there will be ship and vehicle activity at the coastline.

In the operational phase, re-supply of the station by ship should take around 1–2 days only.

Emissions at the coastline will be rapidly dispersed and are unlikely to have any significant impact on wildlife, marine systems or air quality.

Traverse route

Fuel will be used by vehicles in transporting construction materials, stores and personnel between the ship and the station location. There will be emissions to air along the route to the station that will be repeated each year but at a reduced level once the station is operational. Emissions to air will be rapidly dispersed although there may be local areas of increased concentration where tractors stop, fuel or are allowed to idle for long periods.

Ship unloading during the operational phase may be assisted by helicopter depending on the facilities available on the ship.

Station

Emissions to air at the station location will be greatest during the construction phase due to increased vehicle activity and the use of fossil fuels by the construction camp. Once operational, emissions to air will reduce significantly, although there will continue to be limited vehicle and flight activity at the station in support of scientific work and to re-supply the station. Aircraft will land at a snow landing strip located 2 km NW of the station area. Very low quantities of CO₂ will be produced by the waste water treatment system.

Fall out from combustion products generated in the station area may result in impacting the flora and breeding bird colonies on Utsteinen Nunatak and the surrounding snow and ice. There is the possibility of cumulative impacts to these systems during the lifetime of the station. The Sør Rondane are noted for strong and persistent winds. At Utsteinen Nunatak they are from an E to SSE direction (see **Section 4.4 Climate**) so emissions to air will normally be dispersed away from the Nunatak and the Sør Rondane generally.

Heavy particulates, such as carbon soot, may deposit a short distance down-wind from the station and may have an impact on future ice-related research. Studies at other stations have shown that downwind contamination of snow and ice rapidly reduces to background levels within 10 km of the origin (Suttie and Wolff, 1993).

Predicted atmospheric emissions

Based on the estimates of fuel use given above and in **Table 5.1**, atmospheric emissions have been calculated and are shown in **Table 5.2**:

Emission	Construction (tonnes)			Totals (tonnes)
	Air transport	Land transport	Generators	
CO ₂	20.352	102.624	21.760	144.736
CO	0.033	0.087	0.018	0.138
NO _x	0.080	1.219	0.258	1.557
N ₂ O	0.0014	0.0071	0.0015	0.0100
SO _x	0.051	0.257	0.054	0.362
CH ₄	0.0006	0.0074	0.0016	0.0095
VOC	0.005	0.173	0.037	0.215

Calculated annual atmospheric emissions for the construction of the station

Emission	Operation (tonnes)			Totals (tonnes)
	Air transport	Land transport	Generators	
CO ₂	10.176	18.304	4.080	32.560
CO	0.017	0.015	0.003	0.035
NO _x	0.040	0.217	0.048	0.306
N ₂ O	0.0007	0.0013	0.0003	0.0022
SO _x	0.025	0.046	0.010	0.081
CH ₄	0.0003	0.0013	0.0003	0.0019
VOC	0.002	0.031	0.007	0.040

Calculated annual atmospheric emissions for the operation of the station

Table 5.2: Calculated atmospheric emissions

Notes: Weight fraction of Sulphur in fuel used for SO_x calculation = 0.3% by weight for Jet-A1 and 0.02% by weight for unleaded gasoline ; Density of Jet-A1 = 0.795 kg l⁻¹; Density of unleaded gasoline = 0.735 kg l⁻¹ (Emission factors from Shah and Pope, 1994)

There is a high level of uncertainty in the estimation of emissions from the above activities and emissions will vary depending on temperature and specific fuel and engine characteristics.

Impact of emissions

Use of fossil fuels will generate combustion products including CO₂, SO₂, NO_x and particulate matter. The impacts from these emissions will depend on the location at which they are generated. As most of the emissions will be from transport, they will be rapidly dispersed.

Impacts will only occur during the summer months, and are of a relatively low intensity. The predicted impacts are contamination of snow, ice and rock surfaces which may affect biota. This may result in a loss in scientific value of the affected areas. Particulate matter may remain in the snow/ice for thousands of years and could affect a down-stream environment on release to the ocean. Measurements at the proposed site indicate that there is relatively little ice movement (see **Section 4.3**).

Emissions during passage to Antarctica by ship and aircraft will be rapidly dispersed and are unlikely to have any significant impact on wildlife, marine or air quality.

Atmospheric emissions are cumulative and certain gases emitted may contribute to regional and global atmospheric pollution.

Minimisation and Mitigation

When negotiating the use of shipping and aircraft, environmental considerations will be taken into account. For example, a supply vessel which uses Marine Gas Oil (not heavy fuel oils) and which complies with MARPOL Annex VI on air emissions would be preferred. The overall environmental impact of 'sharing' shipping and aircraft facilities is very much reduced compared to having dedicated facilities.

During the unloading and construction phase the quantity and quality of emissions to air will be minimised by the use of energy conservation practices, including minimal use of vehicles and aircraft, not leaving vehicles and aircraft idling for long periods, and use of clean fuels where ever practicable (such as low sulphur fuels).

During the construction phase it is planned to use twelve sledges and six vehicles, including 3 tractors to transport materials from the ship to the construction site, so that the tractors can run almost continuously during the operation. Sledges will be pre-loaded at the coast ready for pick-up and a loaded sledge can then be exchanged for an empty sledge at the construction site without any delay. This will also give plenty of time for the loading and unloading of sledges, thus reducing the probability of accidents and mistakes. In addition, it will reduce idling time and will reduce the potential for increased concentrations of emissions at loading and unloading points.

Vehicles will be chosen based on their fuel efficiency and environmental performance where possible. They will be maintained to high standards and serviced regularly. Where practical, catalytic converters will be fitted to reduce output of contaminants. Only two heavy vehicles will be used during the operational phase.

The station has been designed with a low energy requirement with a focus on using solar or wind generation wherever possible to minimise the use of fossil fuels during operation. There will be a continuous process during the operation of the station to reduce its energy requirement by the use of energy conservation measures and investigation of alternative energy solutions to further reduce the use of fossil fuels.

The station site is also being designed to minimise the requirement for mechanised transport for station operations.

5.4 Fuel and Oil Spills

A variety of fuels and lubricating and hydraulic oils will be used during the transport, construction and operation of the station. The type of fuels and oils include Jet A1, unleaded gasoline, white gas, propane and minor quantities of oils.

Most fuels will be transported in 200 litre tight-head drums. Small cans (20 litres) will be used at the station and during field work for storage and transportation of smaller quantities of fuel.

Fuel and oil spills may occur during maintenance and fuelling of aircraft, vehicles, generators, stoves and heaters, and by leakage from fuel drums or small cans. Fuelling of vehicles and leakage from damaged drums are the most likely sources of fuel spills. Most spills are likely to be less than 5 litres.

The maximum risk is the loss of the storage fuel tank in the station. Damage to the supply vessel at the coast could lead to a large fuel spill.

Fuel is relatively volatile and spills will rapidly evaporate but a waxy residue may remain. There will be some fugitive emissions dependent on the scale of the spill. Fuel spills on snow will migrate downwards to an ice layer where the fuel will be encapsulated and remain in the ice until point of release. Released contaminants could, therefore, affect a downstream environment, most likely marine, in the future. Once released in the ocean, the fuel would rapidly disperse.

Spills on rock exposures may have a biological effect on cryptogamic flora. Fuel spills may also lead to contamination of any soil layer. Spills during the transport and construction phases may have an indirect effect on the scientific value of the area during the operational phase. Over time, fuel spills will contribute to the cumulative effects of the station.

Minimisation and Mitigation

Standard procedures will be developed for the transport, handling, transfer and use of fuels (see also **Section 2.4.17**: documentation). The underlying structure of these procedures will be the prevention of

fuel spills by use of the correct equipment, minimising handling and transfer of fuels, secondary containment and staff training.

Fuel drum depots will be clearly marked to avoid loss of fuel or collision with drums. The station storage tank will be double-skinned and will have a leak detecting system.

Minimisation of spills during fuelling activities, the most likely time for minor spills, will be managed by identifying fuelling points that have suitable absorbent mats, spill containment and clean-up equipment. Proprietary secondary containment drum stands will be used for fuel transfers, for example when fuelling snowmobiles and stoves.

An Oil Spill Contingency Plan, based on COMNAP and SCALOP guidelines, will be prepared for the transport and construction phases, and a separate plan prepared for operation of the station. Staff involved in refuelling operations will be trained appropriately and spill response exercises will be held. Fuel handling and spill response procedures will be regularly audited. All spills will be reported to the Project Manager (construction) or Station Manager (operation) and will be recorded for monitoring purposes.

5.5 Domestic Waste Water ('Grey' water)

Domestic waste water (grey water) will result from washing, food preparation and ablution activities. It does not include any solid waste from human, food, or garbage wastes.

There are limited data for grey water output at stations. Mäkitalo (1992) and Markland (1990) recorded average waste water output of 60 litres per day per person at Wasa Station, Basen Nunatak, a seasonally occupied permanent facility with sauna, showers and low-water consumption dishwashers and washing machines. Neumayer II station (Germany), Ekström Ice Shelf, estimated an average of 117 litres per day per person (Enss, 2004). Neumayer II is a year-round station with a winter population of 10–12, rising to 25–30 in summer. The year round US Amundsen–Scott South Pole station estimates 95 litres per day per person (summer population of 230–235; NSF, 2004).

The proposed station will be designed to minimise generation of grey water with a further objective of no grey water output. All grey water will be filtered and treated at the station before disposal to a designated area on the lee-side of Utsteinen Ridge where there is a naturally formed fissure between the rock outcrop and permanent ice (randkluft). Discharge sites will be marked and the locations recorded.

Residues from filtration will be collected and removed from Antarctica. Due to the use of the 'randkluft', there will be no surface discharge of treated water either to the snow surface or to exposed rock outcrops. Discharging treated water into the 'randkluft' will contain it in a restricted area where it will freeze. Treated water will be discharged through an insulated pipe to a depth beyond which the surrounding ice remains permanently frozen. There will be local thawing as treated water is discharged but this is unlikely to have any effect on the rock face of the 'randkluft'. **Section 4.3** shows that there is limited ice movement and discharged water is unlikely to be transported to other areas. An overview of the expected effluent quality of the treated water is given in **Section 12, Table 12.3**.

The direct effect of treated water disposal will be contamination of the underlying snow and ice. Treated water will have a local scope and low intensity but a long-term persistence and is therefore assessed to be of low–medium importance. Contaminated ice may eventually flow to the coast over a period of tens of thousands of years, where it will be diluted and dispersed as it enters the marine environment. The indirect and cumulative effect will be the spread of the contaminated area and a reduction in scientific value of the contaminated ice.

Minimisation and Mitigation

The station design will specify no treated water output. This will be achieved by two processes. The first is to reduce the water requirement of the station by only using consumer units that have low to extremely low water needs. Second, all grey water output will be collected, treated and, as far as practicable, recycled. The recycled water will be used for non-potable applications.

It is recognised that technologies for zero water output are still relatively unproven. During construction and the initial period of operation, all grey water will be collected, filtered and treated as far as practicable but there will be a limited treated water discharge. The construction camp will be organised so that grey water is collected at designated locations for filtering and treatment before disposal.

5.6 Solid Waste

Construction phase

Substantial quantities of non-hazardous solid waste will be generated during the construction of the station. The largest part of this will be packaging and construction materials, including metals, plastics, glass and wood.

Construction will also generate limited quantities of hazardous waste, such as adhesives, batteries, solvents, oily wastes and paints. Solid sewage and food garbage will also be generated. Estimates for the amounts of wastes that may be generated during construction of the station are given in **Table 5.3**.

Empty fuel drums	220	drums
Packaging materials	5	20' container loads
Kitchen/food	2	20' container loads
Hazardous waste	1	20' container loads
Others	2	20' container loads

Table 5.3: Estimated amount of waste generated during construction of the station.

If not securely contained, waste materials may be blown away by strong winds, buried by snow fall or scavenged by skuas. If not properly managed, solid waste may have a direct effect as litter or have a biological effect on fauna. Solid waste may also have an indirect effect on the future scientific value of the area.

Minimisation and Mitigation

Minimisation will be achieved by

- Prefabrication of structures before shipping to Antarctica.
- Reduction of packaging where practicable.
- No prohibited products (listed in Annex III of the Environmental Protocol) brought to Antarctica.
- Sorting and labelling of all waste and putting into a designated shipping container ready for removal and to prevent wind dispersal or scavenging.
- Removal from Antarctica and reused, recycled or correctly disposed by licensed contractors.
- Weekly inspections will be made to retrieve any litter around the construction area or blown downwind.
- Solid sewage waste and food waste will be stored securely and removed from Antarctica.

A Waste Management Plan will be prepared for construction activities.

Operational phase

Solid wastes will be generated during the operational phase and will fall into the following categories as defined in Annex III (Art. 8) of the Environmental Protocol:

- Sewage (Group 1)
- Garbage (Groups 3 and 4: metals, plastic, paper, wood, glass, etc.)
- Fuel drums (Group 4)
- Food waste (Group 3 or 4)
- Hazardous or special waste (Group 2: oils, oily rags, etc.; Group 4: batteries.)
- Scientific waste

Data from year round stations indicate an annual solid waste output of 2–3 m³ per person (Enss, 2004; NSF, 2004; BAS, 2005). The likely output from the proposed summer only station will be less than 1 m³ per person.

If not correctly managed, some waste may be scattered by winds or buried by snowfall. Wastes could be scavenged by the local avian population or contaminate exposed rock surfaces and flora if not contained.

Activities at remote scientific sites will generate human waste that may, occasionally, be disposed of locally.

Minimisation and Mitigation

A Waste Management Plan (WMP) will be prepared to document the procedures for the collection, storage, reduction, recycling and disposal of wastes (see **Section 2.7**). A principle measure in the WMP will be minimisation of packaging brought to Antarctica as this has been shown to be a primary source of solid wastes (Enss, 2004; BAS, 2005). Waste items will be reused and recycled as much as possible. The WMP will also deal with the disposal of wastes outside Antarctica, which is likely to be through a licensed waste contractor in Cape Town.

The amount of hazardous materials brought to the station will be kept to an absolute minimum.

The proximity of breeding bird species requires that food wastes are managed particularly carefully. Only certified poultry food products will be brought into Antarctica and all food wastes will be stored in secure containers prior to removal. Poultry products will normally only be used at the main station and will not be used at field research camps.

Solid sewage waste will initially be shipped out of Antarctica. However, it is planned that a treatment system, which is integrated with the water recycling system, will be used in the future. Solid waste from the bio-digester will be collected and stored in shipping containers for removal from Antarctica. Wherever practical, human waste generated at remote scientific camps will be returned to the station for correct disposal.

All waste will be sorted and stored in a shipping container at the station. A member of each summer team will be designated as Waste Management Officer, responsible for implementing correct waste procedures. All station personnel will be briefed on waste management procedures and there will be regular inspections to collect any litter around the station and identify any potential sources of litter.

5.7 Noise

Noise will be generated by:

- Ship and cargo activity at the ice shelf
- Station operation

- Scientific activity
- Aircraft operation
- Land transport
- Wind turbines

Breeding bird species that nest in the Sør Rondane nunataks and seals breeding on the fast ice adjacent to the ice shelf may be disturbed by noise. The coastal lead may be used by feeding birds, seals and whales. Disturbance may result in a temporary increase in metabolic rate and consequent energy expenditure.

Breeding birds in the Sør Rondane nunataks are at the extreme edge of their range. Noise (or physical) disturbance resulting from the station, wind turbines, transport or scientific activity may result in loss of eggs or chicks through abandonment of nests, raiding by skuas and general disturbance. In severe cases noise can lead to the mortality of entire breeding communities. The nearest breeding birds are on Utsteinen Nunatak, around 1 km away from the station.

General activity and, in particular, vehicle use may generate noise in the station area. Scientific activities that require generators or other mechanical equipment may also generate noise. A wind farm at 350 metres has a noise level around 35–45 dBA. This is slightly more than a quiet bedroom at 20 dBA and slightly less than a busy general office at 60 dBA (WWF, 2000). It is unlikely that there will be significant disturbance to the birds from activities at the station.

Minimisation and Mitigation

Disturbance by ship and cargo activity at the shelf front is unavoidable. Selection of the unloading site should take account of known seal haul-out locations, especially if these are breeding sites, and the seasonality of breeding activity. Vehicle and helicopter movements at the ice edge should be kept to a minimum.

Aircraft noise will be minimised by using aircraft only when required and by keeping to minimum height and spatial separations unless weather, mechanical or operational changes during a flight require descent to lower altitudes for safety.

Resolution XXVII-2 provides recommended spatial and height distances for over flight of wildlife and guidance for crossing coastlines. Flight approach plans will be prepared for the station to avoid over flight of any of the nunataks which have known breeding bird sites. Flight plans will be abandoned and modified for future use if there is any indication of disturbance caused by flight activity.

By avoiding over flight and maintaining minimum height and spatial separations when in the vicinity of wildlife, there is a low probability of disturbance to wildlife caused by aircraft noise.

The station will be designed to operate from renewable resources, and generator use will be minimal. Other activities will be conducted in such a way as to minimise noise. Vehicles will be routinely serviced to minimise noise output. Noise from the workshop and garage will be attenuated as these facilities will be sited underground.

5.8 Light Pollution

The construction and operation of the station in a previously unoccupied area will generate light. For most of the operating season, the station will be in 24 hour daylight and there will be no impact. If the station is open during periods of dark there is the possibility of disturbing breeding bird species or affecting light-sensitive scientific programmes.

Minimisation and Mitigation

External lighting will be designed to minimise stray light emission, particularly above the horizontal. Station windows will have blinds fitted if the base operates during dark periods to prevent disorientating returning snow petrels.

5.9 Flora and Fauna

Lichens are abundant on the ridge, especially along the cracks and on the gravel, and on the eastern side of the Nunatak at the base of the rocky slope under the petrel colony. However, there are very few lichen growths on the rock exposure where the proposed station will be sited (BELARE, 2004, 2006; for detailed mapping see par. 4.6). The growths on the southern part of the ridge at the station site are likely to be affected by construction, but this and the subsequent operation activities will not affect the flora on the northern part or on the Nunatak itself, except for possible uptake of emissions to air. Due to the narrowness of the ridge (the width of the ridge equals the station dimensions) and the constant wind direction perpendicular to the ridge, this uptake is thought to be small, but will be carefully monitored in the future.

Activity at the shelf ice edge from ship and cargo operations may have a minor impact on seals. At the likely ship arrival time in January, the Weddell seal breeding season will have finished. However, there may be seals hauled out on the ice that may be disturbed by noise and general activity.

The colony of breeding snow petrels on Utsteinen Nunatak may be impacted by the construction of the station but this will be transitory. Activity will be less during operation of the station and breeding petrels are less likely to be disturbed. Birds have been known to fly into the blades of wind turbines, but it has been shown that strikes are highly unlikely to occur in good visibility conditions and in poor visibility birds are less likely to be in the vicinity of turbines. Most birds fly over or around turbines (WWF, 2000). During the field visit in 2005, birds were observed to fly on either side of the rock ridge where the turbines will be sited, rather than above it (personal observation).

Minimisation and Mitigation

Noise and physical activity at the station during the most sensitive petrel breeding periods will be kept to a minimum. Aircraft will not over fly the station and the landing strip will be sited at least 2 km from the Nunatak.

Visits to the Nunatak by station staff will be restricted during breeding periods and all staff will be given guidance on minimising disturbance to the petrel colony, any skua nest sites and lichen growth.

Ship, cargo handlers and construction staff will be instructed in minimising disturbance to seals, birds or penguins that are hauled out or feeding at the ice edge. It is possible that not all Weddell seal pups will have weaned by late-December and logistical activity at Breid Bay will need to take account of this. However, past experience has shown that ship operations caused little apparent disturbance. The choice of berthing and unloading sites will be made by a field team that will have previously flown into the station. A location will be selected to have the minimum impact on wildlife, consistent with safe berthing and unloading practices. The presence of numbers of nursing Weddell seal pups will cause alternative sites to be investigated. Ship transits of the coastline will be kept to a minimum, consistent with safe working practices, to minimise effects on wildlife that may be feeding in the coastal polynia.

5.10 Physical Disturbance, Aesthetic Values

The construction of a station on the ridge at Utsteinen Nunatak, an area of outstanding wilderness, will have a minor visual impact in the locality but only within line of sight.

There will be some disturbance to the rock ridge as the station legs and wind turbines will be anchored to the rock. Also there may be some local disturbance to loose rocks which may be used for heat storage. These will be left unaltered at the site after the station is decommissioned.

Station construction and operation will require an amount of snow management. The garage building will be located below the snow surface and this will necessitate significant snow moving during the construction phase. Introducing a new above surface structure to the ridge at Utsteinen Nunatak may cause minor local changes to snow deposition and wind effects but these will be temporary for the duration of the station.

The use of vehicles will leave tracks and a snow landing strip will be maintained during the summer months. Water will be from melting snow and this may require some stockpiling of clean snow during some periods. The likely effect of the presence of the station on the snow/ice environment is likely to be minor and transitory.

Minimisation and Mitigation

The station is being designed to have a minimal visual impact. Extensive wind tunnel testing has been conducted to find the optimal situation for the station with respect to snow management. The layout of fuel tanks and other equipment at the station site will be designed to keep visual impact and effect on snow accumulation to a minimum. Marked vehicle routes will be used to minimise the amount of tracks made. A seasonal snow landing strip, located NW of the station, will only be groomed for flights and as conditions require. Landing strip markers will be removed at the end of the summer operating season.

5.11 Introduction of alien species and translocation of diseases

Construction and operation of the station, linked to support by rapid inter-continental air transport, presents a moderate risk of the introduction of alien species or translocation of diseases into Antarctica. Introduction may occur through imported food or contaminated packaging and equipment entering the environment.

Scavenging of unsecured food wastes by skuas is a simple pathway for alien species or diseases to enter the system. Soil and seeds may be introduced by unclean footwear or equipment, resulting in the accidental transfer of non-native organisms to the Antarctic.

Antarctic bird populations are susceptible to infection by disease. Highly contagious viral diseases, such as morbillivirus, Newcastle disease and influenza, immunosuppressant diseases, such as infectious bursal disease, morbillivirus and retrovirus, and agricultural and zoonotic diseases, such as brucellosis, tuberculosis and leptospirosis are considered to be the greatest potential risk to the health of Antarctic wildlife.

Minimisation & mitigation

Strict observation of Environmental Protocol Annex II Art. 4(5)-(6) and Appendices will ensure the prevention of introduction and translocation of species and disease. The following practices will be implemented to minimise the introduction of alien species and diseases:

- poultry products must be certified clear of Newcastle's and other contagious diseases;
- proper food handling and secure storage procedures at the station and in field camps;
- poultry waste separated and contained in secure storage for disposal at an appropriate reception facility outside the Antarctic Treaty Area;
- as far as practicable, all clothing (particularly foot wear), scientific instruments, mechanical and field equipment to be cleaned before importing into Antarctica.

- tracked and wheeled vehicles in particular to be steam cleaned before importation.

The New Zealand Biosecurity Workshop (Non-native Species in the Antarctic. Workshop held 10–12 April, 2006) provides useful guidance and its recommendations will be included in management protocols, particularly for the use of aircraft. The As a result, the probability of introducing alien species or translocation of diseases will therefore be extremely low.

5.12 Adjacent and Associated Ecosystems

Two features of the proposed activities are likely to impact associated ecosystems:

- Emissions to air (see **Section 5.3**): contribution to regional and global air pollution burdens.
- Removal of waste to South Africa (see **Section 5.6**): increased landfill in Cape Town; indirect effect of contamination of soil and groundwater; and disease transfer during sewage handling.

5.13 Impact Matrix

An impact matrix (**Table 5.5**) has been prepared to summarise the environmental impacts of the construction and operation of the proposed station at Utsteinen Nunatak. Activities which will have an impact are identified and the duration and output of the activity are stated. The scope, persistence, intensity, probability and importance are ranked according to the criteria described in **Section 5.1**. These criteria are summarised in **Table 5.4** below.

<i>Heading</i>	<i>Content</i>	<i>Detail</i>
Activity		
Nature	Type of activity	
Duration	Time period of activity	Listed in days, weeks, months etc.
Output		
	Description of potential results of activity that may cause impact	
Impact		
Scope	Geographical area affected	Local, regional, continental (L, R, C)
Persistence	Duration of impact	Short (minutes–hours), medium (days–weeks), long (months–years), permanent, unknown (S, M, L, P, U)
Intensity	Severity of impact	Low, medium, high (L, M, H)
Probability	Likelihood of impact occurring	Low (< 25%), medium (25–75%), high (> 75%) (L, M, H)
Importance	Importance of impact	Low, medium, high (L, M, H)
Effects		
Direct	Qualitative description of what is directly, indirectly and cumulatively impacted by the Activity/Output.	
Indirect		
Cumulative		

Table 5.4: Criteria for ranking scope, persistence, intensity, probability and importance of the activity

The final two columns in the impact matrix describe the predicted impacts and indicate the measures that will be put in place to mitigate or prevent them from occurring.

Table 5.5: Impact matrix, showing preventative or mitigating measures

<i>Nature</i>	<i>Duration</i>	<i>Output</i>	<i>Scope</i>	<i>Persist.</i>	<i>Intens.</i>	<i>Prob.</i>	<i>Imp.</i>	<i>Predicted Impacts</i>	<i>Mitigation</i>
Shipping									
Shipping and cargo handling	10 days for construction; 1–2 days per year during operation	Atmospheric emissions	L	M–L	L	H	M–H	Cumulative contribution to regional and global air pollution; contamination of snow / ice and biota	Minimise ship movements; use ship which uses MGO; maintain engines to high standard; shared use of ship
		Noise / physical disturbance of wildlife	L	S	M	L	L–M	Disturbance of wildlife decrease in colony size; loss of biodiversity	Staff briefed on minimising disturbance of fauna
		Grey water, food, solid waste, human waste	L	S–L	L	H	L	Contamination of local marine environment; potential introduction of alien species and diseases	Prepare Waste Management Plan; poultry products retained on-board; wastes stored or discharged according to MARPOL
Aircraft									
Aircraft flight and landing	Repeated during season (Nov–Feb)	Atmospheric emissions	L	M–L	L	H	M–H	Cumulative contribution to regional and global air pollution; contamination of snow / ice and biota	Minimise flight operations; shared air logistics; maintain engines to high standard; minimal ground running.
Fuelling	Repeated during season (Nov–Feb)	Fuel spill: <200 litre. Oil: <5 litre	L	M–L	H	M–H	M–H	Cumulative contamination of snow and ice; reduction in scientific value	Care and attention during fuelling Use of spill mats; Oil Spill Contingency plan prepared
Over flight of bird or seal breeding colonies	<1 hr per flight	Noise	L	S	M	L	L–M	Cumulative if repeated. Disturbance of wildlife; decrease in colony size; loss of biodiversity	Aircrews to follow Resolution XXVII-2 Aircrews to follow local wildlife avoidance guidelines
Vehicles									
Running snow vehicles / generator / stoves	Repeatedly throughout season	Atmospheric emissions	L	M–L	L	H	L–M	Cumulative contribution to regional contamination of local ecosystems (lichens) & snow	Maintain equipment to high standard; minimal use; do not leave vehicles idling

<i>Nature</i>	<i>Duration</i>	<i>Output</i>	<i>Scope</i>	<i>Persist.</i>	<i>Intens.</i>	<i>Prob.</i>	<i>Imp.</i>	<i>Predicted Impacts</i>	<i>Mitigation</i>
		Noise	L	S	M	L	L–M	Cumulative if repeated. Disturbance of wildlife decrease in colony size; loss of biodiversity	Minimise vehicle activity in vicinity of wildlife; maintain minimal distances so that wildlife not disturbed
Fuelling	Repeated during season (Nov-Feb)	Fuel spill: <200 litre. Oil: <5 litre	L	M–L	H	M–H	M–H	Cumulative contamination of snow and ice ; reduction in scientific value	Care and attention during fuelling Use of spill mats ; Oil Spill Contingency plan prepared
Station									
Snow clearing	<100 hr per season	Physical disturbance	L	S–M	L	H	M	Aesthetic; cause of ablation; loss of scientific value	
Waste generation	Throughout season	Grey water and sewage	L	S–L	L	H	L	Contamination of snow and ice; loss of scientific value	Primary treatment and filtration before disposal; record disposal site
		Hazardous and non-Hazardous waste	L	M–L	L–M	H	M–H	Indirect effect of waste disposal outside Antarctica; contamination of snow if not stored securely	Prepare Waste Management Plan; remove waste from Antarctica; minimise packaging; recycle / reuse where possible.
		Introduction of alien species	L–R	P	H	L	H	Spread of alien diseases; loss of biodiversity	Clean equipment and clothing prior to departure; use certified poultry products; poultry waste stored securely.
Wind turbines	Throughout season; small turbine in winter	Noise	L	S–M	M	L	L–M	Disturb birds; decrease in colony size	
		Bird strikes	L	L	H	L	H	Damage or death of birds	
Light	Periods of darkness (minimal)	Disturbance of birds	L	L	L	M	L	Disturbance and disorientation of birds; decrease in colony size	Use blinds; minimal use of outside lights; lights to be angled below the horizontal
Science									
Site visits	Throughout season	Litter/waste	L–R	M–P	L	L	L–M	Spread of waste; expansion of 'footprint; loss of scientific value	Staff briefed on minimising impacts
		Trampling (rock)	L	M–P	L	L	M	Damage to lichens; disturbance of breeding birds	Staff to follow Recommendation XVIII-1

6. INDIRECT & CUMULATIVE IMPACTS

The station will be designed to have a low environmental footprint with low energy consumption and minimal waste output. It is therefore unlikely to have any significant indirect impacts.

All impacts if repeated, however, have the potential to become cumulative. The only significant cumulative impacts that may result from the construction and operation of the station are emissions to air (**Section 5.3**), fuel spills (**Section 5.4**) and local discharge of treated water (**Section 5.5**).

These cumulative impacts may affect the biota in the region and reduce the scientific value of the area. Outputs that lead to cumulative impacts, such as emissions to air or discharge of grey water, can be measured but it may only be possible to gauge their cumulative impact by measuring deviation from baseline data over time.

7. MONITORING AND VERIFICATION

Baseline data was collected during the BELARE 2004, 2005 and 2006 site survey expeditions, in order to obtain reliable information about the initial clean state of the environment and to establish the “footprint” of the station (see **Section 4.5**).

Monitoring is one of the key components of the planned science at the new station (see **Section 1.3**). A monitoring program will be developed to integrate with other work undertaken by national operators and using the Practical Guidelines for Developing and Designing Monitoring Programmes in Antarctica (COMNAP, 2005b). Monitoring activities may include the following:

- Collection of air, water, soil, lichen, snow and ice samples in the immediate vicinity of the station for analysis
- Investigation of bacteria of human origin in Utsteinen Nunatak
- Changes in breeding population of spp (snow petrel or Antarctic skua)
- Changes in snow deposition characteristics
- Effect on breeding seal population due to ship activity (Weddell seal)
- Introduction of non-native biota, diseases or toxic substances

Monitoring will be designed to investigate the potential impacts of the activity, so that adverse effects will be discovered in good time, allowing for modification of the activity to remove or reduce the impact. This work will also increase knowledge about human interaction with the Antarctic environment.

Information on the operation of the station will also be recorded for monitoring purposes. This includes fuel consumption data, fuel spills, station population, waste generation, waste disposal routes etc. This information will be used to validate the CEE and establish if the impacts are as predicted. Recommended mitigation measures will be reviewed as information about the extent and intensity of impacts becomes available.

Parameter	Period
Station occupation dates and numbers	Annually
Flights	Annually
Vehicle hours run	Annually
Waste generation	Annually
Waste disposal	Annually
Fuel consumption	Annually
Fuel spills	As required
Snow deposition/erosion characteristics	Annually
Lichen distribution survey on the Ridge and Nunatak	every 3-5 years
Soil / snow / ice / lichen samples on the Ridge and Nunatak	every 3-5 years
Bacteria of human origin on Utsteinen Ridge and Nunatak	every 3-5 years
Monitoring of snow petrel, skua	every year

Table 7.1: Planning monitoring programmes

8. GAPS IN KNOWLEDGE AND UNCERTAINTIES

The following major gaps and uncertainties in the assessment of the environmental impacts of the construction and operation of the Belgian research station are:

- Unpredictability of sea ice extent at Breid Bay and local weather conditions during construction of the station. May lead to delay in completion of construction.
- Exact conditions at unloading site.
- Location of breeding species in a 200 km range – penguins, seals.
- Changes in future scientific and logistic activities.

9. ENVIRONMENTAL MANAGEMENT PLAN

An Environmental Management Plan (EMP) will be prepared prior to the start of construction that will contain the following elements:

- Statement of Intent to follow Belspo environmental policies and procedures.
- Definitions of roles and responsibilities of parties involved in carrying out the proposed transport and construction activities and for specified project personnel.
- Description of general environmental management activities which will provide the framework for implementation of the recommended mitigation measures.
- Plan for implementation of recommended mitigation measures for specific environmental impacts.

Statement of Intent

Standard policies and procedures will be developed for the various activities including waste management, fuelling operations, field operations and operation of equipment (see also **Section 2.4.17**). The underlying structure of these procedures will be to ensure safety and the prevention of environmental impacts by correct use of equipment, proper maintenance and safe operation.

Roles and responsibilities

Protection of the environment is a management responsibility that starts with senior personnel in Belspo/IPY and is implemented by personnel in Antarctica.

Senior managers at Belspo/IPF will be identified as responsible for overall environmental performance during the transport and construction phases. Senior management control may change for the operational phase. A member of the Antarctic field team will be identified as having overall responsibility to monitor implementation of environmental requirements in Antarctica.

General Environmental Management Activities

This section outlines recommended environmental management activities before and during the transport and construction phases. Belspo will be in charge of environmental management during the operational phase.

Before the project commences

- Belspo will obtain all relevant clearances and necessary approvals from authorities prior to commencing the operation.
- IPF will brief all contractors and crew on sensitive aspects of the environment and expected environmental conduct.
- IPF will brief all contractors and crew on the requirements of the EMP.
- IPF will be responsible for the training of all personnel involved in the activities on emergency procedures and implementation of the EMP.

During transport and construction

- IPF will report environmental incidents or accidents to Belspo.
- The IPF Project Manager will ensure that the Environmental Management Plan is implemented by the construction team.

After transport and construction phases have been completed

- IPF will complete a report summarising environment, health and safety issues, incidents/accidents and observations.
- IPF shall ensure that any contractual requirements, including any reporting or follow up activities required, are completed to Belspo's satisfaction.

Plan for Implementation of Mitigation Measures

The IPF Project Manager will be responsible for implementing the mitigation measures identified in **Sections 5.3–5.12** and in the impact matrix in **Section 5.13** during the construction of the research station. During station operation the Belspo Station Manager will be responsible for the implementation of mitigation measures.

Implementation is not a static process and the Managers will be responsible for reviewing and updating minimization and mitigation measures during the construction and operational phases as conditions change.

10. CONCLUSION

Belgium considers its decision to construct a new research station in Antarctica to be in line with its position as one of the original signatories of the Antarctic Treaty. The “Do not go” alternative is considered as opposed to the philosophy of growing importance of Antarctica’s key role in Global Change and increased concern of the state of its environment.

The station will be situated at the foot of the Sør Rondane Mountains, Dronning Maud Land, having access to all geographical regions (polynia, coast, ice shelf, ice sheet, marginal mountain area and dry valleys, inland plateau) within a radius of 200 km.

The station concept is unique in several ways. Situated on a small exposed rock surface completely surrounded by snow, the station will have a hybrid design that exploits this ‘island’ effect to the maximum extent. The main building will be anchored on the snow-free granitic ridge, while the garage/storage building will be constructed under the adjacent snow surface.

The design of the station is based on sustainable technology and high energy efficiency, using renewable energy as the primary energy source, thereby limiting the use of fossil fuels to transport and field work.

The main building has a concentric architecture laid out around a "hot technical core" for temperature-sensitive installations and equipment. Second and third concentric layers will contain respectively the active and passive living spaces. When closed down for winter each individual layer will be "sealed" thereby creating a number of temperature-controlled buffer zones against the cold exterior environment.

The CEE has identified and evaluated potential impacts that may be generated during construction and operation of the station. Some activities have been assessed as potentially having a high importance in the impact matrices. These activities will be avoided or, where this is impossible such as emissions from fuel burn, will be minimised and mitigated by the procedures described. These activities will form the focus of staff training, monitoring (**Section 7**) and the Environmental Management Plan (**Section 9**).

Due to its ‘Island’ position and the remarkable constant wind direction, fall out from emission products at the station will be dispersed away from the nunatak and mountain areas. This and the sustainable concept of the station assure a low environmental footprint with minimal waste output.

Belgium therefore concludes that the global scientific importance and value to be gained by the construction and operation of the new Belgian station in the 1072 km empty sector between the Japanese Syowa station and the Russian Novolazarevskaya station outweighs the more than minor and transitory impacts the station construction and operation will have on the Antarctic environment and fully justifies the launch of this project.

11. REFERENCES

- Alberts, F.G. (Ed) (1995): Geographic names of the Antarctic. 2nd Edition. Washington, National Science Foundation. NSF 95-157.
- BAS (1995a): Initial Environmental Evaluation for Expansion of Rothera Research Station, Rothera Point, Adelaide Island, Antarctica.
- BAS (1995b): Initial Environmental Evaluation for Redevelopment of Signy Research Station, Signy Island, South Orkney Islands, Antarctica.
- BAS (2005): Proposed construction and operation of Halley VI research station, Brunt Ice Shelf, Antarctica: Draft Comprehensive Environmental Evaluation (CEE). Cambridge, British Antarctic Survey [unpublished].
- Belspo (2002): The Belgian Antarctic Programme 1985 – 2002. Findings of the evaluation panel: Final report. (http://www.belspo.be/belspo/BePoles/links/publ_en.stm)
- COMNAP (2000): Antarctic Environmental Monitoring Handbook. COMNAP/SCAR.
- COMNAP (2005a): Guidelines for Environmental Impact Assessment in Antarctica. COMNAP/ATCM.
- COMNAP (2005b): Practical Guidelines for Developing and Designing Monitoring Programmes in Antarctica
- Croxall J.P., Steele W.K., McInnes S.J. and Prince P.A. (1995): Breeding distribution of the Snow Petrel *Pagodroma Nivea*. *Marine ornithology*, vol. 23, no. 2, 69-99.
- Enss, D. (2004): Draft Comprehensive Environmental Evaluation: Rebuild and operation of the wintering station Neumayer III at retrogradation of the present Neumayer station II. Bremerhaven, Alfred Wegener Institute [unpublished].
- Hiruta S. and Ohyama Y. (1995): A preliminary report on terrestrial invertebrates in the Asuka station area, Antarctica. *Proc. NIPR Symp. Polar Biol.*, 8, 188-193.
- Hong, S., A. Lluberas, G. Lee, J. K Park (2002): Natural and anthropogenic heavy metal deposition to the snow in King George Island, Antarctic Peninsula.
- Ishikawa, T., Ukita, J., Oshima, K.I., Wakatsuchi, M., Yamanouchi, T., Ono, N. (1996): Coastal Polynyas off East Queen Maud Land Observed from NOAA AVHRR Data. In: *Journal of Oceanography*, Vol. 52, 389-398.
- Johan Berte (2004). End of Mission Report BELARE 2004 (Expedition) BF1.ISA.RP.004v3 [unpublished]. (<http://www.polarfoundation.org/index.php?s=3&rs=home&uid=73&lg=en#media>)
- Johan Berte (2005) End of Mission Report BELARE 2005 (Expedition): BF1.ISA.RP.032v3 [unpublished]. (<http://www.polarfoundation.org/index.php?s=3&rs=home&uid=73&lg=en#media>)
- Johansson, P. and Thor, G. (2004): Observations on the birds of the Vestfjella and Heimefrontfjella, Dronning Maud Land, Antarctica, 1991/92 and 2001/02. *Marine Ornithology* 32: 43-46.
- Kojima, S. and Shiraishi, K. (1986): Note on the geology of the western part of the Sør Rondane Mountains, East Antarctica. *Mem Natl Inst. Polar Res., Spec. Issue*, 43, 116-132.

- Li, Z., Tainosho, Y., Kimura, J., Shiraishi, K. and Owada, M. (2003 a): Pan-African alkali granitoid from the Sør Rondane Mountains, East Antarctica. *Gondwana Research*, 6, No.4, 595-605.
- Li, Z., Tainosho, Y., Shiraishi, K. and Owada, M. (2003 b): Chemical characteristics of fluorinebearing biotite of early Paleozoic plutonic rocks from the Sør Rondane Mountains, East Antarctica. *Geochemical Journal*, 37, 145-161.
- Mäkitalo, L-I. (1992): Cold climate building research at Wasa Station. Swedish Antarctic Research Programme 1991/92: a cruise report. O. Melander. M.L. Carlsson (eds).
- Markland, S. (1990): Water conservation and recipient influence at Wasa. In: Cold climate research at Wasa. Swedish Antarctic Research Programme 1988/89: a cruise report. A. Karlqvist (ed).
- NIWA (2002): Lake Vanda Monitoring Report Number 7. NIWA Client Report CHC02/57
- NSF (2004): Project ICECUBE: Comprehensive Environmental Evaluation. Washington, National Science Foundation [unpublished].
- Pattyn, F. and Decleir, H. (1995): Subglacial Topography in the Central Sør Rondane Mountains, East Antarctica: Configuration and Morphometric Analysis of Valley Cross Profiles. *Antarctic Record*, Vol. 39. No. 1, 1-24.
- Pattyn, F., De Brabander, S. and Huyghe, A. (2005): Basal and thermal control mechanisms of the Ragnhild glaciers, East Antarctica. *Annals of Glaciology* 40, in press.
- Pattyn, F., Decleir, H. and Huybrechts, P. (1992): Glaciation of the Central Part of the Sør Rondane, Antarctica: Glaciological Evidence. In: Recent Progress in Antarctic Earth Science. Y Yoshida et al. ed. Terra Scientific Publishing Company (TERRAPUB), Tokyo, 669-678.
- Poles Apart (1997): Initial Environmental Evaluation for Dronning Maud Land Air Link. Produced for Polar Logistics, Isle of Man.
- Poles Apart (1999): Bunker Hills Blue Ice Runway Initial Environmental Evaluation. Produced for Polar Logistics, Isle of Man.
- Reijnders, Peter J. H., J. Plötz, J. Zegers and M. Gräfe. (1990): Breeding biology of Weddell seals (*Leptonychotes weddellii*) at Drescher Inlet, Riiser Larsen ice shelf, Antarctica. *Polar Biol.* Vol 1 No. 4 301-306
- Shah, A. and P. Pope, (eds) (1994): Methods for estimating atmospheric emissions from E&P operations. E&P Forum, London. Report No. 2.59/197.
- Sheppard et al. (1997): Heavy metal content of meltwaters from the Ross Dependency, Antarctica. *New Zealand Journal of Marine and Freshwater Research*. Vol. 31, 313-325.
- Shiraishi, K., Asami, M., Ishizuka, H., Kojima, H., Kojima, S., Osanai, Y., Sakiyama, T., Takahashi, Y., Yamazaki, M. and Yoshikura, S. (1991): Geology and metamorphism of the Sør Rondane Mountains, East Antarctica. In: Geological Evolution of Antarctica. Thomson, M.R.A., Crame, J.A. and Thomson, J.W. ed. Cambridge University Press, Cambridge, 77-82.
- Shiraishi, K., Osanai, Y., Tainosho, Y., Takahashi, Y., Tsuchiya, N., Yanai, K. and Moriwaki, K. (1992): Geological map of Wiederoeffjella, Sør Rondane Mountains, Antarctica. *Antarctic Geol. Map Ser.*, Sheet 32 (with explanatory text 14p.). Natl Inst. Polar Res.
- Shirihai, H. (2002): A complete Guide to Antarctic Wildlife, Alula Press Oy, Finland, 510 p.

- Suttie, E.D. and Wolff, E.W. (1993): The local disposition of heavy metal emissions for point sources in Antarctica. *Atmospheric Environment*, 27A(12), 1833–1841.
- Van Autenboer, T. (1964): The Geomorphology and Glacial Geology of the Sør Rondane, Dronning Maud Land, Antarctica. *Mededelingen van de Kon. Vl. Academie der Wetenschappen*. Jg. XXVI, Nr 8.
- Van Autenboer, T. (1969): Geology of the Sør Rondane Mountains. In: *Geologic Maps of Antarctica*, ed. V.C. Bushnell and C. Craddock, Pl. VIII. Antarctic Map Folio Series, Folio 12. Washington, DC., American Geographical Society.
- Van Autenboer, T. and Declair, H. (1974): Mass transport measurements in the Sør Rondane, Dronning Maud Land, Antarctica. *Service Geologique de Belgique, Professional Paper*, 6, 1-25.
- Van Autenboer, T. and Declair, H. (1978): Glacier Discharge in the Sør Rondane, a contribution to the mass balance of Dronning Maud Land, Antarctica. *Zeitschrift für Gletscherkunde und Glazialgeologie*. Bd 14, H. 1, 1-16.
- Van Autenboer, T. and Loy, W. (1966): The Geology of the Sør Rondane, Antarctica. Data Report: Central Part of the Range. Centre National de Recherches Polaires de Belgique. Brussels. 61 pp.
- WWF, (2000): WWF-UK. Renewable Energy Policy for the UK. <http://www.wwf.org.uk>

12. TABLES

AFIM	Antarctic Flight Information Manual
ATCM	Antarctic Treaty Consultative Meeting
AWS	Automatic Weather Station
Belspo	Belgian Federal Science Policy Office
BELARE	Belgian Antarctic Research Expedition
CEE	Comprehensive Environmental Evaluation
CEP	Committee for Environmental Protection
COMNAP	Council of Managers of National Antarctic Programs
EIA	Environmental Impact Assessment
EMP	Environmental Management Plan
EOMR	End of Mission report
FMEA	Failure Mode Effect Analysis
GDRP	Geodetic Reference Point
HVAC	Heating, Ventilation, Air Conditioning
IPF	International Polar Foundation
MEUR	Million Euro
SCAR	Scientific Committee on Antarctic Research
UPS	Uninterrupted Power Supply
VHF	Very High Frequency
VOC	Volatile Organic Carbon
WMP	Waste Management Plan

Table 12.1: Acronyms used in the Final CEE

<i>Site</i>	<i>Latitude</i>	<i>Longitude</i>
Basen Nunatak	73°05'S	014°30'W
Belgica Mountains	72°35'S	031°15'E
Breid Bay	70°15'S	024°15'E
Byrdreen	71°45'S	26°00'E
Derwael ice rise	70°15'S	026°30'E
Ekström Ice Shelf	70°37'S	008°22'W
Enderby Land	60°30'S	53°00'E
Gunnestadreen	72°03'S	23°50'E
Jenningsreen	71°57'S	24°22'E
Leopold III Bay	70°20'S	024°13'E
Nansenisen	72°40'S	024°00'E
Novolazarevskaya Station (Russian Federation)	71°46'S	011°50'E
Pingvinane	72°00'S	25°00'E
Polarhav Bay	70°18'S	024°40'E
Prinsesse Ragnhild Kyst	70°30'S	027°00'E
Queen Fabiola Mountains	71°30'S	35°40'E
Roi Baudouin Research Station (Belgium)	70°26'S	024°18'E
Romnaesfjellet	71°28'S	023°56'E
Sør Rondane	72°00'S	025°00'E
Seal or Selungen Nunatak	71°32'S	024°04'E
Syowa Station (Japan)	69°00'S	039°35'E
Utsteinen Nunatak	71°57'S	023°20'E
Alberts, F.G. (Ed) 1995. <i>Geographic names of the Antarctic</i> . 2nd Edition. Washington, National Science Foundation. NSF 95-157. Moriwaki, K. (2000). <i>Gazetteer of Eastern Dronning Maud Land, Antarctica</i> . First Edition. National Institute of Polar Research, Tokyo, 225 pp.		

Table 12.2: Site Coordinates

Parameter		
CODt	g/l	45
EC	mS/cm	2,5
pH	-	8,3
TOC	g/L	0
Sulphate	mg/L	80
Phosphate	mg/L	24
Ammonium	g/L	0
Fluoride	mg/L	0.5
Chloride	mg/L	96
Nitrates	mg/L	78
Mg	mg/L	4
K	mg/L	125
Ca	mg/L	11
Na	mg/L	95
Turbidity	-	5,0
Total coliform		< 100
E.coli		0
Enterococci		< 10

Table 12.3: Expected effluent quality of the bio membrane reactor after final ozone, peroxide and chlorine treatment

Sample ID	Date sampling	Latitude (S)	Longitude (E)	Altitude (m)
1	28/11/2004	71°57.027'	023°20.478'	1373
2	28/11/2004	71°57.013'	023°20.492'	1382
3	28/11/2004	71°56.586'	023°20.508'	1385
4	28/11/2004	71°56.561'	023°20.513'	1372
5	28/11/2004	71°56.529'	023°20.505'	1365
6	28/11/2004	71°56.533'	023°20.509'	1363
7	28/11/2004	71°56.491'	023°20.486'	1367
8	28/11/2004	71°56.481'	023°20.469'	1372
9	28/11/2004	71°56.468'	023°20.447'	1377
10	28/11/2004	71°56.449'	023°20.423'	1369
1'	22/11/2005	71°57.033'	023°20.802'	-
2'	22/11/2005	71°57.023'	023°20.821'	-
3'	22/11/2005	71°57.016'	023°20.822'	-
4'	22/11/2005	71°57.006'	023°20.828'	-
5'	22/11/2005	71°57.005'	023°20.847'	-
6'	22/11/2005	71°57.002'	023°20.843'	-
7'	22/11/2005	71°57.000'	023°20.845'	-
8'	22/11/2005	71°56.997'	023°20.852'	-
9'	22/11/2005	71°56.994'	023°20.847'	-
10'	22/11/2005	71°56.981'	023°20.844'	-
11'	22/11/2005	71°56.972'	023°20.842'	-

Table 12.4: Overview soil samples

Sample ID	Date sampling	Latitude (S)	Longitude (E)	Altitude (m)
1	28/11/2004	71°56.705'	023°20.838'	1365
2	28/11/2004	71°56.789'	023°20.930'	1366
3	28/11/2004	71°56.852'	023°20.978'	1363
4	28/11/2004	71°56.984'	023°21.181'	1374
5	28/11/2004	71°57.100'	023°20.845'	1381
6	28/11/2004	71°57.015'	023°20.569'	1381
7	28/11/2004	71°56.854'	023°20.743'	1372
8	28/11/2004	71°56.773'	023°20.651'	1382
9	28/11/2004	71°56.699'	023°20.536'	1380
10	28/11/2004	71°56.817'	023°19.150'	1359

Table 12.5: Overview snow samples

Table 12.6: Analyses results chemical baseline monitoring

<i>Snow</i>													
Dissolved fraction (filtration after storage, filtered on 0.45µm))													
	Be	Mo	Ag	Cd	Sn	Sb	Hg	Tl	Pb	Al	V	Cr	Mn
	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L
snow 1	0,002	0,014	0,072	0,011	0,028	0,010	0,007	<0.001	0,070	1,330	0,008	0,033	0,252
snow 2	0,001	0,011	0,009	0,006	0,030	0,005	0,004	<0.001	0,015	1,370	0,006	0,029	0,095
snow 3	0,004	0,014	0,012	0,018	0,041	0,008	0,002	<0.001	0,028	1,217	0,006	0,037	0,115
snow 4	0,002	0,037	0,016	0,013	0,021	0,005	0,008	<0.001	0,032	1,680	0,006	0,043	0,205
snow 5	0,001	0,035	0,015	0,038	0,024	0,011	0,007	<0.001	0,037	1,299	0,007	0,109	0,097
snow 6	0,001	0,014	0,020	0,025	0,018	0,008	0,005	<0.001	0,040	0,970	0,008	0,048	0,420
snow 7	0,002	0,013	0,018	0,015	0,015	0,007	0,007	<0.001	0,069	0,740	0,004	0,022	0,435
snow 8	0,001	0,011	0,013	0,012	0,023	0,003	0,005	<0.001	0,052	1,000	0,005	0,022	0,131
snow 9	0,001	0,006	0,013	0,015	0,013	0,004	0,004	<0.001	0,037	0,470	0,007	0,010	0,093
snow 10	0,004	0,007	0,013	0,009	0,019	0,004	0,004	<0.001	0,030	1,981	0,008	0,027	0,453
	Fe	Co	Ni	Cu	Zn	As	Se	Ba	Ca	K	Mg	Na	S
	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L
snow 1	0,543	0,009	0,089	0,234	2,832	0,006	0,020	0,0001	0,0689	0,0435	0,0276	0,1788	0,1204
snow 2	0,646	0,006	0,038	0,035	1,066	0,004	0,020	0,0001	0,0348	0,0100	0,0197	0,0990	0,0459
snow 3	0,350	0,005	0,056	0,147	2,325	0,004	0,010	0,0001	0,0461	0,0395	0,0128	0,0940	0,0412
snow 4	0,350	0,006	0,064	0,118	1,299	0,004	0,020	0,0004	0,0655	0,0100	0,0267	0,1931	0,0429
snow 5	0,520	0,006	0,100	0,261	3,012	0,013	0,024	0,0005	0,1242	0,0624	0,0228	0,1322	0,0450
snow 6	0,410	0,007	0,080	0,216	3,193	0,013	0,026	0,0002	0,0883	0,0035	0,0284	0,1854	0,0514
snow 7	0,340	0,015	0,137	0,107	2,280	0,014	0,010	0,0002	0,0780	0,0100	0,0203	0,1508	0,0271
snow 8	0,360	0,005	0,082	0,125	1,750	0,001	0,022	0,0002	0,0487	0,0397	0,0197	0,1307	0,0555
snow 9	0,210	0,005	0,056	0,093	2,880	0,009	0,025	0,0001	0,0250	0,0038	0,0129	0,0744	0,0334
snow 10	0,396	0,014	0,074	0,101	1,441	0,002	0,010	0,0001	0,0679	0,0564	0,0173	0,0837	0,0353

Acid leachable fraction (unfiltered, acidified 0.5% HNO3)														
	Be	Mo	Ag	Cd	Sn	Sb	Hg	Tl	Pb	Al	V	Cr	Mn	
	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	
snow 1	0,002	0,014	0,071	0,023	0,165	0,011	0,011	<0.001	0,203	8,62	0,022	0,033	0,442	
snow 2	0,001	0,011	0,009	0,006	0,039	0,006	0,004	<0.001	0,038	5,49	0,009	0,030	0,136	
snow 3	0,040	0,011	0,013	0,023	0,060	0,008	0,002	<0.001	0,074	4,55	0,014	0,060	0,205	
snow 4	0,004	0,023	0,020	0,013	0,038	0,005	0,017	<0.001	0,036	4,79	0,020	0,048	0,380	
snow 5	0,002	0,050	0,015	0,041	0,042	0,011	0,010	<0.001	0,093	5,30	0,014	0,137	0,142	
snow 6	0,002	0,045	0,020	0,026	0,031	0,011	0,005	<0.001	0,068	3,37	0,011	0,065	0,577	
snow 7	0,003	0,047	0,018	0,017	0,017	0,007	0,01	<0.001	0,095	3,88	0,010	0,022	0,526	
snow 8	0,003	0,017	0,013	0,013	0,023	0,003	0,005	<0.001	0,074	7,83	0,016	0,026	0,222	
snow 9	0,004	0,019	0,015	0,016	0,018	0,004	0,004	<0.001	0,064	3,03	0,013	0,063	0,121	
snow 10	0,004	0,031	0,015	0,009	0,020	0,004	0,002	<0.001	0,035	9,16	0,025	0,042	0,605	
	Fe	Co	Ni	Cu	Zn	As	Se	Ba	Ca	K	Mg	Na	S	Particulates
	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	µg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L
snow 1	6,200	0,013	0,092	0,281	3,290	0,014	0,020	0,0002	0,0728	0,0442	0,0251	0,1788	0,1204	6
snow 2	1,590	0,006	0,054	0,036	1,086	0,004	0,025	0,0001	0,0333	0,010	0,0177	0,0990	0,0459	4
snow 3	2,670	0,008	0,056	0,154	2,325	0,005	0,010	0,0005	0,0433	0,0313	0,0121	0,0940	0,0412	5
snow 4	3,190	0,010	0,086	0,121	1,322	0,006	0,024	0,0007	0,0678	0,0658	0,0268	0,1931	0,0429	3
snow 5	5,190	0,010	0,133	0,261	3,074	0,015	0,024	0,0004	0,1209	0,0735	0,0234	0,1322	0,0450	3
snow 6	2,650	0,014	0,095	0,220	4,743	0,017	0,047	0,0004	0,0878	0,0174	0,0246	0,1854	0,0514	6
snow 7	3,860	0,020	0,171	0,129	2,300	0,016	0,010	0,0002	0,0730	0,0157	0,0185	0,1508	0,0271	9
snow 8	4,440	0,008	0,097	0,128	1,799	0,003	0,022	0,0002	0,0491	0,0612	0,0212	0,1307	0,0555	4
snow 9	3,170	0,013	0,098	0,119	3,010	0,010	0,024	0,0001	0,0255	0,0181	0,0126	0,0744	0,0334	3
snow 10	9,205	0,020	0,064	0,117	1,478	0,003	0,010	0,0003	0,0613	0,0573	0,0174	0,0837	0,0353	7

Soil																
samples	Be	Mo	Cd	Sn	Sb	Hg	Tl	Pb	V	Cr	Co	Ni	Cu			
	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g			
soil1	0,43	14,59	0,17	1,96	0,010	0,035	0,64	10,1	80,8	39,7	12,7	20,8	38,1			
soil7	0,32	3,15	0,27	1,55	0,014	0,054	0,41	10,7	67,2	31,4	10,6	17,3	29,2			
soil1'	0,030	54,6	0,074	0,362	-	0,040	0,227	4,4	57,6	32,2	10,7	17,2	40,1			
soil2'	0,072	12,8	0,519	0,679	-	0,060	0,08	1,8	35,8	21,9	7,0	8,0	47,2			
soil3'	0,197	20,1	0,065	1,233	-	0,013	0,286	5,2	44,4	25,0	8,7	16,1	29,6			
soil4'	0,068	3,5	0,024	0,675	-	0,003	0,156	2,1	29,1	15,7	5,9	8,5	12,0			
soil5'	0,053	4,4	0,082	0,153	-	0,013	0,18	2,8	40,7	24,3	7,5	12,8	20,3			
soil6'	0,030	4,8	0,042	0,747	-	0,015	0,25	2,4	51,3	29,3	10,6	17,4	29,0			
soil7'	0,099	5,0	0,179	0,390	-	0,096	0,213	2,6	49,0	30,3	11,0	17,0	29,6			
soil8'	0,041	5,6	0,068	1,168	-	0,038	0,225	2,1	50,3	29,3	9,8	14,9	25,4			
soil9'	0,079	4,0	0,151	0,371	-	0,031	0,269	3,4	45,0	26,0	9,6	13,8	24,3			
soil10'	0,070	8,7	0,030	0,513	-	0,013	0,29	2,8	59,7	28,2	12,0	18,3	182,6			
soil11'	0,070	7,4	0,066	1,407	-	0,069	0,258	4,3	63,6	33,9	12,6	19,5	57,3			
samples	Zn	As	Se	Al	Ba	Ca	Fe	K	Mg	Mn	Na	P	S	Sr	POC	PIC
	µg/g	µg/g	µg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	%	%
soil1	73,0	1,40	0,38	26,0	0,2	10,3	51,9	12,4	15,4	0,616	1,505	3,07	2,00	0,092	1,19	0,003
soil7	44,1	1,96	0,43	19,0	0,1	11,6	35,6	7,0	11,9	0,412	0,922	3,88	1,88	0,107	3,89	0,030
soil1'	101,1	-	-	17,5	-	-	41,4	-	-	0,458	-	-	-	-	-	-
soil2'	103,7	-	-	14,3	-	-	33,6	-	-	0,412	-	-	-	-	-	-
soil3'	127,1	-	-	17,3	-	-	40,6	-	-	0,567	-	-	-	-	-	-
soil4'	83,3	-	-	11,4	-	-	28,2	-	-	0,412	-	-	-	-	-	-
soil5'	70,8	-	-	12,6	-	-	30,3	-	-	0,380	-	-	-	-	-	-
soil6'	105,6	-	-	17,4	-	-	39,6	-	-	0,576	-	-	-	-	-	-
soil7'	102,6	-	-	16,9	-	-	38,2	-	-	0,537	-	-	-	-	-	-
soil8'	122,6	-	-	20,1	-	-	52,8	-	-	0,746	-	-	-	-	-	-
soil9'	151,1	-	-	19,8	-	-	53,2	-	-	0,860	-	-	-	-	-	-
soil10'	102,5	-	-	17,9	-	-	40,7	-	-	0,544	-	-	-	-	-	-
soil11'	184,5	-	-	23,0	-	-	57,1	-	-	0,752	-	-	-	-	-	-

Lichens																
samples	Be	Mo	Cd	Sn	Sb	Hg	Tl	Pb	V	Cr	Co	Ni	Cu			
	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g			
lichens1	0,01	4,67	0,06	0,06	0,004	0,340	0,02	0,39	0,85	0,63	0,20	0,72	5,55			
lichens2	0,17	1,49	0,13	0,41	0,014	0,116	0,14	3,33	10,99	7,24	2,45	4,67	4,79			
lichens3	0,04	0,32	1,01	0,17	0,008	0,008	0,04	1,46	2,64	1,18	0,38	0,78	7,61			
lichens4	0,04	2,14	0,07	0,02	0,002	0,234	0,06	1,31	2,50	1,85	0,45	0,96	5,57			
lichens5	0,00	0,35	1,19	0,02	0,008	0,017	0,01	0,05	0,16	0,07	0,05	0,30	12,32			
samples	Zn	As	Se	Al	Ba	Ca	Fe	K	Mg	Mn	Na	P	S	Sr		
	µg/g	µg/g	µg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g	mg/g		
lichens1	21,4	0,68	0,98	0,252	0,003	1,06	0,48	4,56	0,48	0,017	0,140	2,46	2,26	0,010		
lichens2	21,1	0,57	0,23	4,852	0,029	3,43	10,66	2,00	2,57	0,158	0,145	1,05	0,88	0,024		
lichens3	19,4	0,50	1,02	1,121	0,007	8,86	2,84	1,09	0,59	0,038	0,331	2,95	0,81	0,064		
lichens4	18,4	0,95	1,15	1,220	0,006	0,94	2,99	5,58	0,83	0,050	0,078	2,84	2,84	0,006		
lichens5	11,6	2,49	3,85	0,018	0,002	4,91	0,06	5,53	1,36	0,004	3,874	8,78	5,37	0,089		

SITES		N° of the samples following by a capital letter indicating the nature of them (see legend)
UTSTEINEN RIDGE (see Fig. 4.7)	Not localised in the parcels	1L to 16L, 17G + L, 18L, 19L, 20B, 21L, 22B, 23L, 28L, 29L, 30L, 31L, 32L, 58L, 59L, 60L, 61L, 62L
	Parcel 1	76L, 77L, 78L
	Parcel 2	79L, 80L, 81L
	Parcel 3	82L, 83L, 84L, 85M, 86L, 87L, 88L, 89L, 90L, 91L, 92L, 93L, 94L
	Parcel 4	95L, 96L, 97L, 98L, 99L
	Parcel 5	100L, 101L, 102L
	Parcel 6	-
	Parcel 7	103L, 104L, 105L, 106L
	Parcel 8	107L, 108L, 109L, 110L
	Parcel 9	-
	Parcel 10	-
	Parcel 11	-
	Parcel 12	-
	Parcel 13	-
	Parcel 14	111L
	Parcel 15	112L, 113L
	Parcel 16	130L, 131L, 132L, 133L
	Parcel 17	134L, 135L, 136L, 137L, 138M, 139L, 140L, 141L, 142L
	Parcel 18	143L, 155L, 156L, 157L, 158L, 159M, 160M, 161L, 162M
	Parcel 19	163L, 164M, 165L, 166B
	Parcel 20	167B, 168L, 169B, 170L, 171L, 172G + M, 173L, 174L, 175L, 176G + M, 177L, 178L, 179L, 180L, 181L, 189L
	Parcel 21	182L, 183G + M, 184L
	Parcel 22	185L, 186L
	Parcel 23	187L, 188L
UTSTEINEN NUNATAK (see Fig. 4.9)	Eastern side	33M, 34M, 35L, 36M, 37L, 38L, 39L, 40M, 44M, 45L, 46L, 47L, 48L, 49M, 50M, 51M, 52L, 53L, 54G, 55G, 56L, 57L, 199L, 200L, 201L, 202L
	Northern side	65FW, 66FW, 67B, 68M, 69L, 70B, 71L, 72L, 73L, 74L, 75L, 190W, 191W + FW
	Western side	24G, 25L, 26M, 27L, 41G + W, 42G, 43G + W, 63FW, 64M, 192M, 193M, 194L, 195M, 196M, 197G, 198W + FW, 115M, 116M, 117G + W, 118FW
	Southern side	-
TELTET NUNATAK	71°59'51.7"S 23°30'56.7"E	114G, 119G, 120L, 121L, 122L, 123L, 124L, 125L, 126L, 127L, 128L, 129L
VENGEN	72°04'18.0"S 23°23'03.5"E	154FW-G + W
DRY VALLEY	72°06'59.8"S 23°09'29.5"E	144G + W, 145S, 146G, 147L, 148L, 149L, 150L, 151L, 152L, 153G + W

Legend: L = lichens, G = gravel, B = bryophyte, M = microbial mats or algae, W = water, FW = filtered water, S = soil. See fig. 1 for the localisation of the parcels of the ridge and fig. 2 for the delimitation of the four sides of the Utsteinen nunatak.

Table 12. 7: List of samples collected by D. Ertz during BELARE 2006

Birds (exhaustive list)
- Snow Petrel [<i>Pagodroma nivea</i> (G. Forster, 1777)]
- South Polar Skua [<i>Catharacta maccormicki</i> (Saunders, 1893)]
- Wilson's Storm-Petrel [<i>Oceanites oceanicus</i> (Kuhl, 1820)]
Lichens (exhaustive list)
- <i>Bacidia</i> sp.
- <i>Buellia frigida</i> Darb.
- <i>Caloplaca</i> gr. <i>citrina</i> (Hoffm.) Th. Fr.
- <i>Candelariella flava</i> (C.W. Dodge & Baker) Castello & Nimis
- <i>Candelaria murrayi</i> Poelt
- cf. <i>Carbonea vorticosa</i> (Flörke) Hertel
- <i>Lecanora</i> sp. 1
- <i>Lecanora</i> sp. 2
- <i>Lecidella</i> sp.
- <i>Physcia caesia</i> (Hoffm.) Fűrnr.
- <i>Physcia dubia</i> (Hoffm.) Lettau
- <i>Pseudephebe minuscula</i> (Nyl. ex Arnold) Brodo & D. Hawksw.
- <i>Rhizocarpon</i> cf. <i>geographicum</i> (L.) DC.
- <i>Rinodina</i> sp.
- <i>Umbilicaria aprina</i> Nyl.
- <i>Umbilicaria decussata</i> (Vill.) Zahlbr.
- <i>Usnea</i> cf. <i>sphacelata</i> R. Br.
- <i>Xanthoria</i> gr. <i>candelaria</i> (L.) Th. Fr.
- <i>Xanthoria elegans</i> (Link) Th. Fr.
- Unidentified lichen 1
- Unidentified lichen 2
Bryophyte (exhaustive list)
- <i>Schistidium antarctici</i> (Cardot) L.I. Savicz & Smirnova
Invertebrate fauna (list not exhaustive)
- One unidentified springtail species.
- One unidentified mite species.
Micro-organisms including algae (list not exhaustive)
- <i>Nostoc</i> sp. and several other unidentified, terrestrial and aquatic cyanobacteria.
- <i>Prasiola</i> sp. (green alga).
- one unidentified species of bdelloid rotifer.

Table 12.8: List of taxa recorded at Utsteinen during BELARE 2006 – 2007

PARCELS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	Total
Maximum width of the rocky parcels (m)	8	19.5	21.5	25	22	21	17.5	17.5	12	10	6.5	10.5	6.5	12	13	10.5	20.5	35	39	32.5	29	15	14	
% of the snow cover	60	30	20	20	45	55	40	40	45	60	70	85	70	40	45	30	40	40	40	30	25	45	75	
<i>Bacidia</i> sp.	++	++	+++	+++	+++	+++	++	++	+++	++	++	-	-	-	-	+	+	++	+	+	+	-	-	17
Buellia frigida	-	++	-	-	-	-	-	++	-	-	-	-	-	-	++	-	+++	+++	+++	+	+++	-	-	8
<i>Caloplaca</i> gr. <i>citrina</i>	-	-	+	+	++	+	+	++	-	-	-	-	-	-	-	+	+	+	+++	+	++	+++	+	14
Candelariella flava	++	++	+++	+++	++	+++	+	++	+	-	-	+	-	-	+	++	+++	+++	+++	+++	++	++	+	19
cf. Carbonea vorticosa	++	++	+++	+++	+++	++	++	++	++	++	+++	++	+++	+++	++	++	+	++	+++	+++	++	++	++	23
<i>Schistidium antarctici</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	+++	+++	++	++	-	4
<i>Lecanora</i> sp. 1	-	-	++	+	+	-	-	+	-	-	-	-	-	-	++	-	+	+	-	+	+	-	-	9
<i>Lecanora</i> sp. 2	-	-	-	-	+	+	-	+	-	+	-	-	-	-	-	++	+	+	+	+	+	+	-	11
<i>Lecidella</i> sp.	++	++	+++	++	++	+	+	-	++	++	+++	++	-	++	-	++	+	++	++	+	+	+	++	20
Physcia caesia	-	-	+	++	++	-	-	++	-	-	-	-	-	-	-	-	+	++	+++	+++	+++	++	-	10
Physcia dubia	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	++	+	+	++	++	-	-	5
Pseudephebe minuscula	+	+++	+++	++	+++	++	++	++	-	+	-	+	-	+	+	++	+++	+++	+++	+++	+++	+++	++	20
<i>Rhizocarpon</i> cf. <i>geographicum</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	+	++	-	-	-	-	-	2
Umbilicaria aprina	+	+	-	+	+	-	-	+	+	+	-	-	-	-	-	++	+++	+++	+++	++	+++	++	-	14
Umbilicaria decussata	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	+	+	-	-	-	2
<i>Usnea</i> cf. <i>sphacelata</i>	+	-	+	++	+	++	+	++	-	-	-	-	-	-	-	-	++	+++	+++	+++	+++	++	-	13
<i>Xanthoria</i> gr. <i>candelaria</i>	-	-	+	+	+	-	-	+	-	-	-	-	-	-	-	-	++	++	++	+	+	+	-	10
<i>Xanthoria elegans</i>	+	+	+	+	-	-	-	-	+	-	-	+	-	-	-	+	++	+	+	+	+	-	-	12
Unidentified lichen 1	-	+	+	-	-	-	+	-	-	-	-	-	-	-	-	-	-	+	-	-	-	-	-	4
Unidentified lichen 2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	+	-	-	-	1
Total	8	9	12	12	12	8	8	12	6	6	3	5	1	3	5	9	16	17	16	18	16	11	5	

Table 12.9: Distribution and abundance of lichens and bryophyte per parcel of the grid map of Utsteinen Ridge

UTSTEINEN NUNATAK	Eastern side	Northern side	Western side	Southern side	Total
Bacidia sp.	+	-	-	?	1
Buellia frigida	+	+	-	?	2
<i>Caloplaca</i> gr. <i>citrina</i>	+	-	+	?	2
Candelariella flava	+	+	+	?	3
Candelaria murrayi	+	-	-	?	1
cf. Carbonea vorticosa	+	+	-	?	2
<i>Schistidium antarctici</i>	+	+	-	?	2
<i>Lecanora</i> sp. 1	-	+	-	?	1
<i>Lecanora</i> sp. 2	+	+	+	?	3
Lecidella sp.	+	+	-	?	2
Physcia caesia	+	+	-	?	2
Physcia dubia	+	+	-	?	2
Pseudephebe minuscula	+	-	-	?	1
Rinodina sp.	+	-	-	?	1
Umbilicaria aprina	+	+	-	?	2
Umbilicaria decussata	+	-	-	?	1
<i>Usnea</i> cf. <i>sphacelata</i>	+	+	-	?	2
<i>Xanthoria</i> gr. <i>candelaria</i>	+	+	+	?	3
<i>Xanthoria elegans</i>	+	+	-	?	2
Total	18	13	4	?	

Legend: - : absent, + : present. "*Schistidium antarctici*" is the only species of moss (bryophyte), whereas the other taxa are lichens.

Table 12.10: Lichens and bryophyte species on Utsteinen Nunatak

13. COMMENTS RECEIVED ON THE DRAFT CEE

We thank all parties for their constructive comments on the Draft CEE and for consideration by the Committee for Environmental Protection (CEP) at ATCM XXIX. The relevant extracts from the CEP IX report and individual responses are given below.

13.1. Report of the Committee for Environmental Protection (CEP IX), paragraphs 24-32 and Appendix 1

Item 6: Environmental Impact Assessment

6a) Consideration of Draft CEEs forwarded to the CEP in accordance with paragraph 4 of Article 3 of the Protocol

- 24) Belgium made a presentation on WP 25 Construction and operation of the new Belgian Research Station in Dronning Maud Land, Antarctica. Draft Comprehensive Environmental Evaluation (CEE) and the accompanying IP 22 with the same title, which contained the full draft CEE document. Belgium also provided electronic and colour printed copies of the draft CEE.
- 25) The station will be situated near the Utsteinen Nunatak, at the foot of the Sør Rondane Mountains, Dronning Maud Land. The draft CEE had been approved and endorsed by the Belgian Federal Ministries of Environment, Foreign Affairs and Science Policy. These ministries concluded that the global scientific importance and value to be gained by the construction and operation of the new Belgian station in the 1072 km-wide empty sector between the Japanese Syowa station and the Russian Novolazarevskaya station outweighs the more than minor and transitory impacts the station construction and operation will have on the Antarctic environment, and fully justifies the launch of this project.
- 26) The draft CEE was released by the Belgian Federal Science Policy (Belspo) on 10 February 2006 and notification of the report was sent to all Parties to the Protocol on Environmental Protection via diplomatic channels.
- 27) Many Members commended Belgium for the quality of the draft CEE document and for the innovative station design. A number of Members raised questions relating to fuel storage, solid waste management, monitoring of station impacts (including on flora and fauna), water generation, emergency facilities, the potential impacts of the nearby airstrip and the criteria used for assessing the intensity of environmental impacts. Belgium welcomed the feedback and undertook to address these issues when preparing the Final CEE.
- 28) The Committee agreed that the draft CEE provided a comprehensive description and evaluation of the proposed activity and likely environmental impacts, and was therefore consistent with the requirements of Annex I to the Protocol.
- 29) The Committee also noted that there were no other facilities in the area that Belgium could share or take over. The construction of a new station was therefore justified.
- 30) ASOC also thanked Belgium for an excellent CEE but expressed its concern about the cumulative impacts on the Antarctic wilderness and other intrinsic values of Antarctica resulting from the establishment of new stations in near-pristine areas. The 'no-go' alternative had to be considered carefully, and the alternative to proceed had to be justified on scientific grounds.
- 31) Many Members and ASOC noted that the proposed station and other new stations in Antarctica were a model for sustainable management because they relied on renewable energy and they could be dismantled after use.

- 32) The CEP's advice to the ATCM on the draft CEE for 'Construction and operation of the new Belgian Research Station in Dronning Maud Land, Antarctica' is in Appendix 1.

Appendix 1
CEP ADVICE TO ATCM XXIX ON THE DRAFT CEE CONTAINED IN
ATCM XXIX-WP 25 & IP 22 (Belgium)

The Committee for Environmental Protection,

With regard to the draft Comprehensive Environmental Evaluation for the *Construction and operation of the new Belgian Research Station, Dronning Maud Land, Antarctica*,

Having fully considered the draft CEE circulated by Belgium on February 10, 2006, as reported in paragraphs 24-32 of the CEP IX Final Report, and

Having noted the comments provided by the Parties to Belgium, and the response of Belgium to those comments,

Provides the following advice to the ATCM:

The draft CEE and the process followed by Belgium conform to the requirements of Article 3 of Annex I to the Environmental Protocol;

The draft CEE is thorough, well-structured and comprehensive and provides an appropriate assessment of the impacts of the proposed project;

The information contained in the draft CEE supports its conclusion that the proposed activity will have a more than minor or transitory impact on the Antarctic environment, but that the scientific importance to be gained by the construction and operation of Princess Elisabeth Station, Utsteinen Nunatak, outweighs the impact the station will have on the Antarctic environment and fully justifies the activity proceeding;

The draft CEE demonstrates that Belgium has considered environmental issues as a high priority in the planning of the station, and that the facility will provide a benchmark for environmentally sound operations at isolated locations in Antarctica;

Furthermore, it is clear that there are no existing facilities in this area of Antarctica which could usefully be used by or transferred to Belgium as an alternative to the construction of a new station;

Belgium will address the questions raised by Parties in advance of and during the discussion in the CEP in the Final CEE and in the further development of the project.

The CEP recommends that the ATCM endorse these views.

13.2 Germany – Federal Environmental Agency

—Original Message—

From: Neumann, Antje [mailto:antje.neumann@uba.de]

Sent: donderdag 4 mei 2006 14:24

To: De Lichtervelde Alexandre

Cc: 504-9 Pfanne, Thomas Werner Gustav; Szelinski, Bert-Axel; VANCAUWENBERGHE Maaïke

Subject: AW: German Comments to the Belgian draft CEE

Comments

Preliminary Remarks

The Kingdom of Belgium has decided to establish a new summer station on solid bedrock close to the Utsteinen Nunatak in the east of the Antarctic continent. The construction work is due to take place in 2007/08 during the International Polar Year (IPY). Under the Environmental Protection Protocol to the Antarctic Treaty other countries are now able to state their views on the draft Comprehensive Environmental Evaluation (CEE) which has now been produced.

The Federal Environmental Agency has submitted the study for public examination in accordance with §16 Paragraphs 1 and 2 of the German Implementing Statute to the Implementation of the Environmental Protection Protocol of 4 October 1991 to the Antarctic Treaty (AUG). It has also passed the study on to those agencies within whose terms of reference it is also applicable, and to a polar and ocean research institute, the Alfred-Wegener-Institut für Polar- und Meeresforschung. The Federal Agency for Nature Conservation and the commission of independent scientific experts which has been set up in accordance with §6 AUG have responded by stating their own positions.

The Federal Environmental Office has a statutory requirement to take into consideration the positions expressed in these comments, and has consequently issued the following statement:

General details

The plans for the station envisage a “hybrid construction” located on the eastern part of the Antarctic continent approximately 173 km from the edge of the ice shelf and remaining in service for 25 years. The term “hybrid construction” refers to a combination of the two principles normally used for buildings in the Antarctic: the living and working quarters are to be constructed above the ground on stilts on the exposed rock of a small outcrop, while the storage area and the vehicles will be located “underground” in a “snow cave”.

The station would be mainly powered by renewable energy, relying on a combination of solar and wind power, with wind serving as the main energy source. The three smaller wind generators, each with an output of 15 kW and located 100 m apart, may later be supplemented by two additional generators.

Location

The foundations for the station would be in solid bedrock in a largely undisturbed area. In choosing a site the nature conservation considerations should be carefully weighed against the expected value of the scientific knowledge to be gained. In addition to the station building itself, other installations for dealing with transport logistics and energy production are also planned. The combination of drilling and anchorages required at this site could eventually lead to damage through erosion. The intended method of wastewater disposal (pp. 40, 76, 77; Tab. 12.3), using a crevice in the ice and rock, could also erode the rock as a result of repeated freezing and thawing.

Ideally the Final CEE should include more details about additional measures for avoiding and minimising these effects. In some respects previous CEEs specified rigorous standards, for example with regard to the choice of fuels and the precautionary measures to be undertaken, which could possibly be applied to greater effect in this current CEE too.

Flora and fauna

Another major problem area concerns the three types of lichens that exist in this area. The study mentions that *Caloplaca regalis* is found at this location. So far this species has only been known to exist in the western Antarctic north of 68° S, which means that the area around the intended station

forms its most southerly habitat. If it is actually found there this would indicate a need for increased protection. Maps prepared by experts and showing the location of moss and lichens are highly advisable when determining the eventual choice of site.

There are also indications that a small colony of snow petrels (*Pagodroma nivea*), which has not yet been examined in any detail, exists approximately 1 km from the planned station. Although the CEE mentions in Section "5. Likely impacts ..." possible negative consequences for local snow petrels as a result of operating the wind generators, it also considers that this is unlikely (p. 80). According to the details currently available little information has been obtained about the impact of wind generators on birds in the Antarctic. There appear to be hardly any findings regarding the flight behaviour of snow petrels in reduced visibility close to their breeding grounds. Moreover, given the small size of the local population (around 50 breeding pairs?), even a limited number of bird strikes would affect their survival. Therefore the plausibility of the statement contained in the CEE that "Most birds fly over or around turbines" (p. 80) should be improved by indicating the planned bird deterrent devices (p. 80), (for example, are there any plans to paint the turbine blades or to install noise-making devices?).

Although observations are to be carried out at a later stage to detect possible changes in the breeding population (p. 80), research to establish basic data ought to be conducted also prior to the planned commencement of construction in order to provide for effective monitoring. The CEE does not, however, indicate whether such a survey has been planned.

The study should also provide more details about the installation and alignment of the planned landing strip, in order to be able to assess any possible disturbance to the colony of snow petrels as a result of the expected aircraft movements.

Weddell seals inhabit the sea ice and the permanent ice in Breid Bay throughout the year, and this also where they raise their young, adjacent to the edge of the ice shelf, which would also be where the logistical work of landing construction materials and the regular delivery of supplies and removal of waste materials would be taking place. The young are born from mid-October to the end of November/early December, with the more southerly population giving birth later. Although most of the planned logistical activities are likely to take place outside this period, in some cases there may be some overlap. Along the coastline formed by the edge of the ice shelf there is also a coastal polynia which is favourable to other types of seals, penguins and, in the summer months, whales too.

To comply with the Environmental Protection Protocol efforts should be made to ensure that the seals and other animals in the locality receive due consideration when logistical activities in Breid Bay are being planned.

Summary

The area earmarked for the station has experienced relatively little human influence. For the reasons stated above it would be preferable if alternative sites could again be considered.

In our view, during the construction and subsequent operation of the station, the CEE could specify other more far-reaching measures than those already stated, as a means of avoiding or minimising any adverse impact.

Because of the very small size of the snow petrel colony referred to previously, and its extreme environmental situation, any interference could have serious effects, in a worst-case scenario even leading to the loss of the local population. For this reason, prior to the start of any building work and before the wind generators come into operation, a survey to determine basic data about the local population of snow petrels (and skuas) is strongly recommended.

In addition, mapping of the moss and lichens to determine the extent of *Caloplaca regalis* at the planned site of the station would be extremely useful.

Similarly any logistical activities in Breid Bay should also give due consideration to the requirements of the local seal population.

13.3 Australia – Australian Antarctic Division

—Original Message—

From: Tom Maggs [mailto:Tom.Maggs@aad.gov.au]
Sent: vrijdag 2 juni 2006 0:42
To: VANCAUWENBERGHE Maaïke
Cc: VANCAUWENBERGHE Maaïke; Ewan McIvor; Rebecca Malcolm
Subject: Belgium's draft CEE [Sec = Unclassified]

Comments

I am sending some comments on the draft CEE you circulated earlier this year - thanks for the opportunity to comment.

Overall we are impressed with the design, particularly the efforts to recycle water, manage waste, and generate power from renewable sources.

We are pleased to see a high ratio of operational support staff to science staff. In combination with low impact technologies that means a high environmental efficiency. The inclusion of the baseline data in your draft CEE is very helpful.

Regarding fuel storage, we suggest a means of detecting leaks between the skins of the double-skinned 12000 litre fuel tanks.

We note that breeding Snow Petrels and South Polar Skuas are known within 1km of the proposed site, and recommend a GPS survey of the ice free areas to map nesting sites and determine local populations, as a basis for the monitoring program you have suggested. This could provide valuable baseline data for future research and against which to measure the impacts of station activities, such as human disturbance, habitat disturbance, and bird strikes.

The RiSCC program has prepared a protocol for researchers to minimise potential introduction and spread of alien species. That may be a worthwhile guide for air transport operations. A particular risk is the exposure of native birds to imported poultry products. Australia does not permit poultry products off-station - you may want to consider the alien risks in your management protocols for the new station.

The plan to use bird deterrents in conjunction with the wind turbines is an excellent mitigation measure. We would be very interested in further details - as you know we have two large turbines at Mawson station, but have not found a bird deterrent that does not compromise the turbines' efficiency.

We have found that the ISO14001 approach to the environmental management of our stations has been extremely valuable, and would be happy to discuss it with you at the ATCM if you are interested.

13.4 Responses

Choice of site and site survey (raised by Australia, Germany, UK, ASOC)

The Belgian Federal Ministries of Foreign Affairs, Environment and Science Policy, guided by a panel of foreign experts, carefully and extensively considered the issues of constructing a station in the relatively infrequently visited area of the Sør Rondane. These issues were outlined in **Section 1.1** and **3.1** of the Draft CEE and there seems no advantage to reviewing alternative sites.

During the BELARE 2006 expedition, the biological baseline monitoring of the Utsteinen site (Ridge and Nunatak) – initiated during the BELARE 2005 expedition – was finalised. A thorough inventory has been carried out of all aspects of flora and fauna (lichen and bryophyte species, birds, invertebrates, micro-organisms, algae) on both Utsteinen Ridge and the Nunatak. Results are included in **Section 4.6**. As a result of this detailed mapping, a reference area has been indicated to determine the possible future impacts of the station on the environment.

Water generation (raised by CEP IX, India)

Two methods of water production are being investigated:

1. Passive accumulation, relying on natural snow accumulation to provide a source of water.
2. Active accumulation. Active methods may be used to enhance accumulation to increase the amount of snow available for melting.

The use of recycled water and the low water use equipment indicates that a limited amount of meltwater will be required.

Proposed landing strip (raised by CEP IX, France, Germany)

The landing strip at Utsteinen will be prepared yearly for ski equipped aircraft operations as outlined in **Sections 2.4.6, 2.5.1** and **5.3**. It will be situated at 2 km from the station and 3 km from Utsteinen Nunatak. An updated site plan has been included in this Final CEE (**Fig. 2.28**) and analysis of potential impacts assessed in **Section 5**.

Precautionary Measures (raised by Germany)

The comments on choice of fuels and precautionary measures have been noted and additional detail included in the relevant minimisation and mitigation sections.

Criteria used for assessing the intensity of environmental impacts (raised by CEP IX, Argentina)

The criteria used for assessing environmental impacts were taken from: 1992. COMNAP *The Antarctic Environmental Process: Practical Guidelines*. SCAR, Cambridge. The variables are subjective, although COMNAP has subsequently updated the guidelines (*ATCM Guidelines for Environmental Impact Assessment in Antarctica*. 2005).

Low intensity is defined as impacts that have minimal effect on natural functions or processes, and these effects are reversible.

Medium intensity is defined as impacts that effect natural functions or processes but these processes are not subject to long-term changes. These effects are reversible.

High intensity is defined as impacts that have a long term or permanent effect on natural functions or processes and which are likely to be irreversible.

Station Foundations (raised by Germany)

It is correct to say that drilling anchorages will lead to some damage but the anchors will be capped following installation and further erosion will not occur.

Waste Disposal (raised by CEP IX, France, Germany, India)

Treated waste water will be discharged through a pipe that extends into a crevice between the rock of Utsteinen Ridge and the adjacent ice sheet to a depth beyond which ice remains permanently frozen. There will be local thawing as treated water is discharged but this is unlikely to have any effect on the rock side of the crevice.

Solid waste resulting from construction, station operation and from the bio-digesters will be collected and stored in ISO containers. These containers will be removed from Antarctica during the re-supply of the station and the waste recycled or disposed by licensed operators outside Antarctica.

Effect of wind generators on breeding bird populations (raised by Australia, Germany)

The statement that “Most birds fly over or around turbines” was taken from research done in the UK, particularly by the RSPB, that has indicated that in the UK wind turbines have no measurable effect on bird mortality. It has also been shown that strikes are highly unlikely to occur during good visibility conditions and in poor visibility birds are less likely to be in the vicinity of the turbines (reference: Blood Hill Wind Farm; Renewable Energy Case Study, ETSU 1995, Birds and Wind Turbines: Can They Co-exist? ETSU 1996b).

Logistical activities in Breid Bay (raised by Germany)

The breeding cycle of Weddell seal along the Prinsesse Ragnhild Kyst has yet to be determined. Work at Drescher Inlet indicates that peak pupping in is likely to be late-October (Reijnders, Peter J. H., J. Plötz, J. Zegers and M. Gräfe. 1990. Breeding biology of Weddell seals (*Leptonychotes weddellii*) at Drescher Inlet, Riiser Larsen ice shelf, Antarctica. Polar Biol. Vol 1 No. 4 301-306).

It is possible, therefore, that not all pups will have weaned by late-December and logistical activity at Breid Bay will need to take account of this. The choice of berthing and unloading sites will be made by a field team that will have previously flown into the station. A location will be used that will have the minimum impact on wildlife and the presence of numbers of nursing Weddell seal pups will cause alternative sites to be investigated. Ship transits of the coastline will be kept to a minimum, consistent with safe working practices, to minimise effects on wildlife that may be feeding in the coastal polynia.

Fuel transport and storage (raised by CEP IX, Australia, Russia)

Fuel will be transferred from the coast to the station site in 200 litre fuel drums. After use these will be removed from Antarctica for reuse or recycling. There will be a double-skinned storage tank in the garage building that will have a leak detecting system.

The station fuel depot will be placed about 1500m west of Utsteinen Ridge, beside a small nunatak. A small depot will be installed near the landing strip during summer operations.

Safety and emergency facilities (raised by CEP IX, UK)

The original design allowed for a working population of 12 persons, however, the draft CEE states that this may increase by 8 at peak times. The extra people will be accommodated in Weatherhaven tents. The Emergency shelter will be able to accommodate up to 20 people as described in **Section 2.4.6**.

Introduction and spread of alien species (raised by Australia)

The translocation and introduction of alien species is taken very seriously by Belspo. Note has been made of the useful New Zealand Biosecurity Workshop (*Non-native Species in the Antarctic*. Workshop held 10–12 April, 2006) and its recommendations will be included in management protocols, particularly for the use of aircraft.

ISO14001 approach to environmental management (raised by Australia)

Belspo is very interested in this idea and thanks Australia for the offer to discuss the issues, which they will follow up in due course.



www.belspo.be/antar



BELGIAN SCIENCE POLICY

Wetenschapsstraat 8 rue de la Science - 1000 Bussels - www.belspo.be