



**ENERMAX**  
POWER. INNOVATION. DESIGN.



ELC-LMT360-W-ARGB

**ARGB**  
**LIQMAX III**  
ARGB VERSION



# LIQMAX III


ARGB VERSION

- The luminous addressable RGB fan and Aurabelt™ water block design
- TDP 360W Support
- Central Coolant Inlet (CCI) combined with patented Shunt-Chanel Technology (SCT) design
- Exclusive dual-convex blades




## Features


- Show your own uniqueness
  - The luminous addressable RGB fan and Aurabelt™ water block
  - 2 ways to control RGB lighting effects
  - White AIO CPU cooler
- Enhanced cooling performance
  - The combination of dual-chamber pump and CCI plus SCT technology
  - Dual Chamber water block design (patented)
  - Central Coolant Inlet (CCI) design combined with patented Shunt-Chanel Technology (SCT) cold plate
  - Exclusive dual-convex blades
- More durable and stable
  - Anti-vibration rubber pad on four-side fan frame
- User-friendly and compatibility
  - 400 mm weaved tubing
  - All-in-one bracket plate

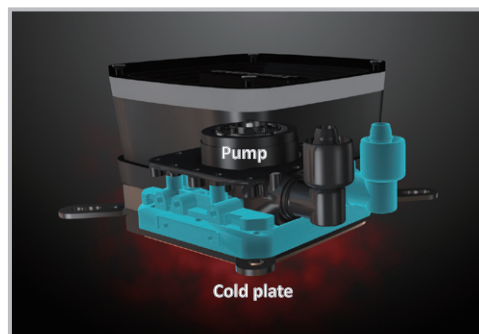


Dual Chamber water block design (patented)

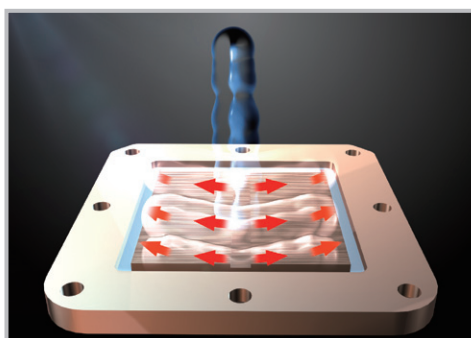

Central Coolant Inlet (CCI) design combined with patented Shunt-Chanel Technology (SCT) cold plate

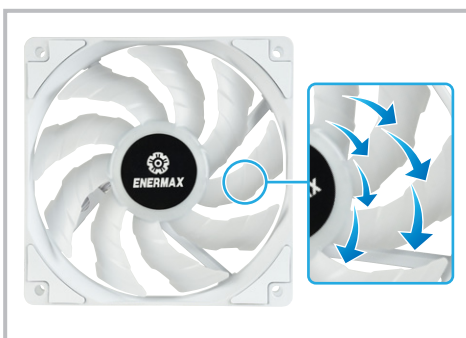

Exclusive dual-convex blades

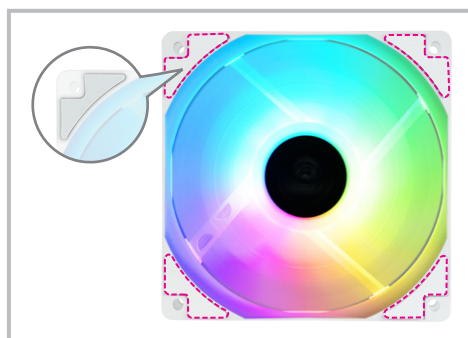

Anti-vibration rubber pad on four-side fan frame



The Aurabelt™ water block with 16.8 million color options


Through Motherboard Software

By Included ENERMAX RGB controller

2 ways to control RGB lighting effects

## Dimension

unit : mm

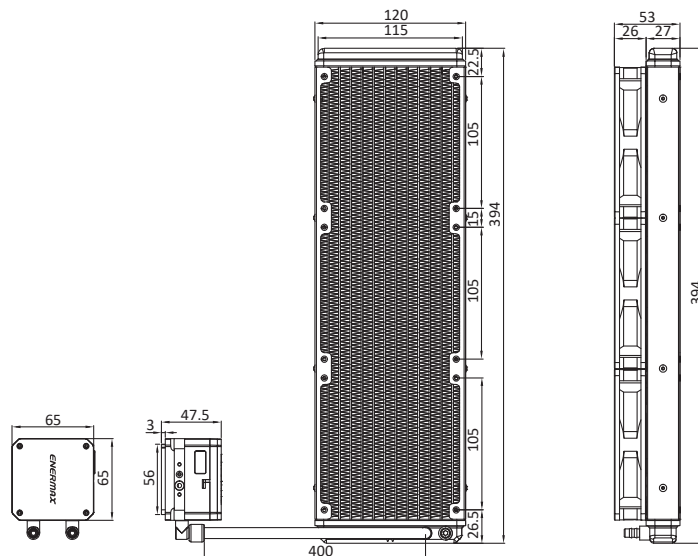

## Specifications

Model		ELC-LMT360-W-ARGB
Compatible Socket		Intel® LGA 2066/2011-3/2011/1366/1200/1156/1155/1151/1150 AMD® AM4/AM3+/AM3/AM2+/AM2/FM2+/FM2/FM1
Material		Copper Base with Aluminum Radiator
Pump	Bearing	Ceramic Bearing
	MTBF	50,000 hrs
	Motor Speed	3100 RPM ± 10%
	Rated Voltage	12V
Water Block	Rated Current - Pump	0.4A [or 0.53A if not connected to 4 pin RGB LED connector (5V/D/-/G)]
	Rated Current - RGB LED	0.18A
Tube	Material	Rubber
	Length	400 mm
Weight (W/O fan)		968 g
Fan	Dimension	120 x 120 x 25 mm
	MTTF	≥ 50,000 hr
	Speed	500-1600 rpm
	Rated Voltage	12V
	Rated Current-Fan	0.17A
	Rated Voltage - RGB LED	5V
	Rated Current - RGB LED	0.36A
	Air Flow	22.5~72.1 CFM
	Static Pressure	0.2~1.98 mm-H2O
	Noise Level	14~27 dBA
Connector		4 pin PWM connector 3 pin ARGB connector (5V/DG)
Thermal Grease		Dow Corning® TC-5121C
Warranty		2 Years
Logistic information		
Bar code	EAN	4713157725387
	UPC	819315025383
Box dimension		448 x 205 x 137 mm
Gross Weight / unit		2.192 kg
Carton dimension		467x 292x 440 mm
Q'ty / carton		4pcs
Gross Weight / carton		9.788 kg