


# Delock Slot bracket 1 x 19 pin USB 3.1 pin header female internal > 2 x USB Type-C™ female external Low Profile

## Description

This slot bracket by Delock expands the PC by two external USB Type-C™ ports and can be mounted in Mini PCs due to the low profile bracket. The cable of the slot bracket can be connected internally to the motherboard with a 19 pin USB 3.1 pin header. Thus the internal connection will be lead outside, in order to connect devices with USB Type-C™ connector to the computer.

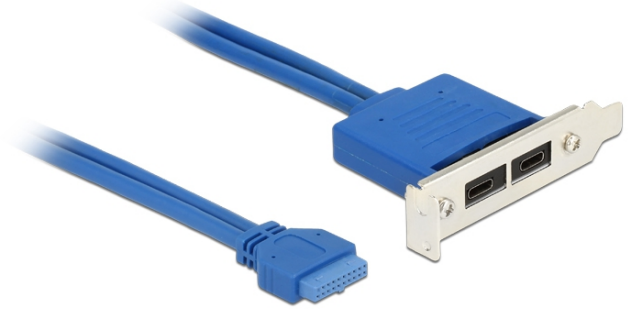

ca. 30 cm

## Note

For the connection of two USB devices at once, which need more than 750 mA each, an additional power supply is necessary.

## Specification

- Connector:
  - internal: 1 x 19 pin SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) pin header female
  - external: 2 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
- For the installation in a low profile PC
- Pitch distance: 2.00 mm
- Screw type: M3
- Cable gauge:
  - 28 AWG data line
  - 24 AWG power line
- Cable diameter: ca. 5.5 mm
- Data transfer rate up to:
  - SuperSpeed USB 10 Gbps,
  - SuperSpeed USB 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Backward compatible to 19 pin USB 3.0 pin header with a data transfer rate of up to 5 Gbps
- Power output: max. 1.5 A
- Voltage: 5 V
- Slot bracket: low profile
- Cable colour: blue
- Cable length incl. connector: ca. 30 cm

## System requirements

- PC with a free low profile slot
- Mainboard with a free 19 pin USB 3.1 pin header male

## Package content

- Slot bracket

## Item no. 84929

EAN: 4043619849291

Country of origin: China

Package: • Zip poly bag

Images



Interface	
External:	2 x USB Type-C™ Buchse
Internal:	1 x 19 pin USB 3.1 pin header female
Technical characteristics	
Data transfer rate:	SuperSpeed USB 10 Gbps
Physical characteristics	
Pitch distance:	2.00 mm
Cable colour:	blue
Cable length:	30 cm
Cable diameter:	5.5 mm
Conductor gauge:	28 AWG data line 24 AWG power line
Screw type:	M3
Slot bracket:	low profile