
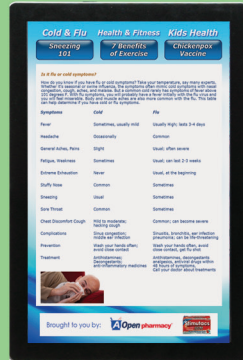


All-in-One Touchscreen Healthcare Computing Solution

warmTOUCH

WT19P-TA
Turnkey Solution
Includes

OS & Heart Touch Advance
Digital Signage Software

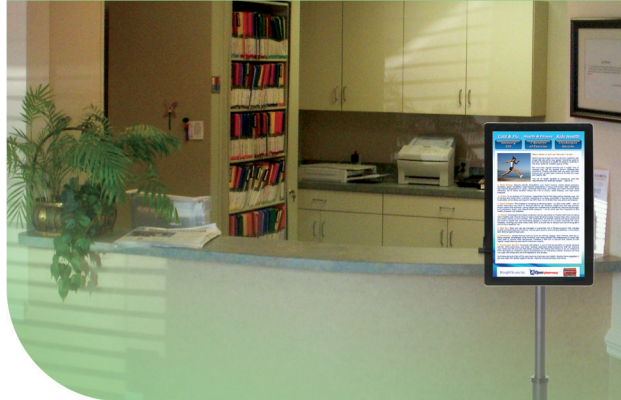


Features:

- Touch panel creates an interactive experience in waiting rooms
- Simple installation and management in an all-in-one design
- Resistive touch screen can be used with gloves
- Capable of connecting an external PC (or media player) & used as an independent LCD display
- Built-in robust VESA (>30Kg) mounting holes for stand or wall mount
- Space saving integrated 19 inch hardened acrylic LCD screen
- Lockable function keys
- Can be used in landscape or portrait mode
- Built-in air filter for increased reliability in open areas
- Includes the energy efficient Dual Core Intel® Atom™ 330
- Includes 2GB DDR-II memory, 160GB 2.5" SATA HDD & ODD
- Integrated media card reader, 1.3MP webcam, microphone and speakers
- Ultra quiet cooling technology : Idle ≤ 24dB

Heart Touch Advance Software

- Display interactive content in waiting areas
- Supports pictures, videos, flash, webpages, Powerpoint presentations
- Easy content update via management system
- Scrolling marquee allows you to deliver your messages
- Designed for touchscreens



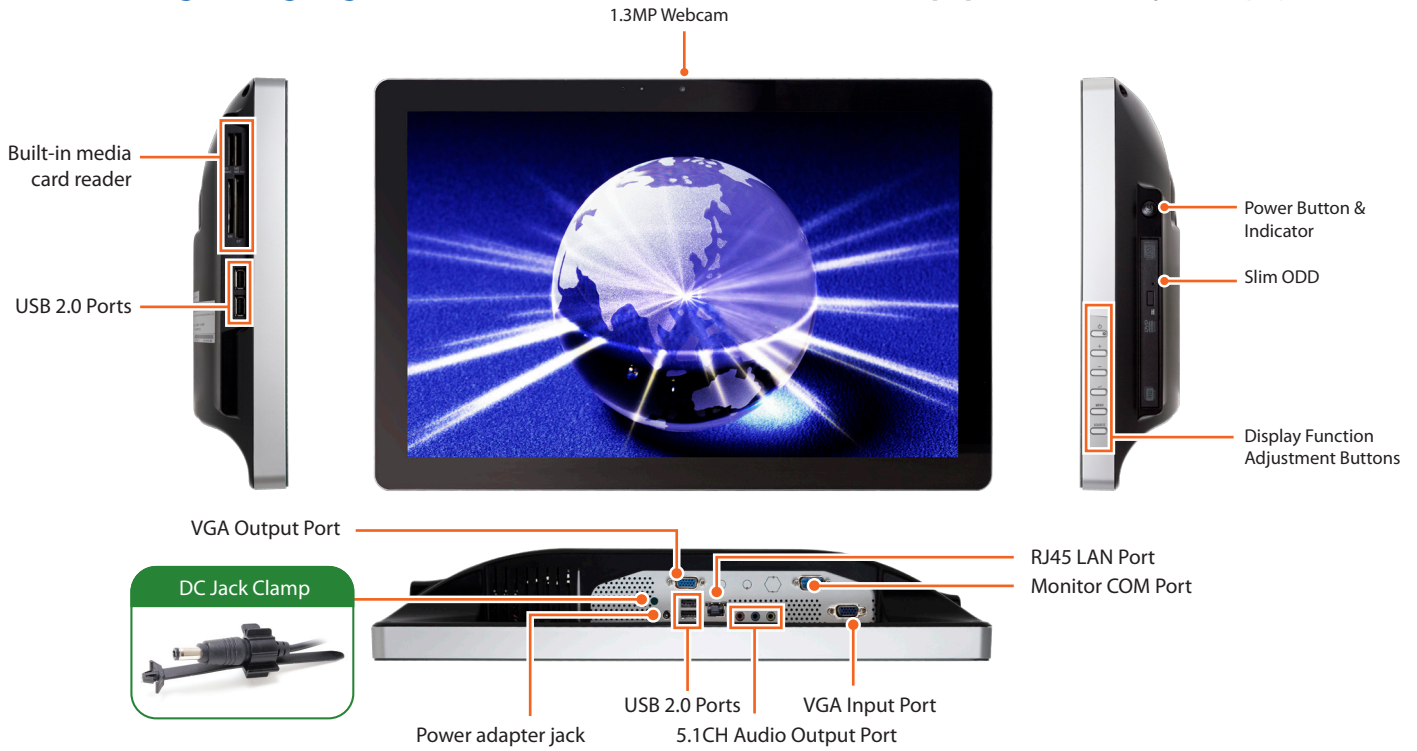

Specifications

| Model name | | WT19P-TA | | Model name | | WT19P-TA | | |
|-------------------------------|--|--|--|--------------------------------|--|---------------------|-----|--|
| Product SKU | | | | Product Specifications | | | | |
| Part Number | | warmTOUCH system only 91.WT100.T150 | warmTOUCH turnkey solution w/Windows XP Embedded & Hearttouch 791.WT100.T150 | Rear Panel IO | DC 19V Jack | x 1 | | |
| Product Specifications | | | | | VGA Port | x 1 | | |
| Housing Material | | SECC t=0.8mm | | | USB 2.0 Port | x 2 (Rear and Side) | | |
| Housing Color | | Black | | | RJ45 LAN Jack | x 1 | | |
| Dimension | WxHxD(mm) | 305.9(H) x 460(W) x 84.7(D)mm | | | Audio Set | Line-In | x 1 | |
| | WxHxD(inch) | 12"(H) x 18.11"(W) x 3.33"(D) | | | | Line-Out | x 1 | |
| Volume(liters) | 11.5L | | Mic-In | | | x 1 | | |
| Weight(Kg/Pound) | | Around 6.31Kg; 13.9 lbs (N.W.) | | | Upgrade for Antenna Port | x 3 | | |
| Form Factor | | AOpen All in One Form Factor | | | Kensington Lock Hole | x 1 | | |
| CPU | Socket | BGA | | | COM Port(Display monitor only) | x 1 | | |
| | Type | Intel ATOM 330 1.6GHz Dual Core CPU | | CPU Thermal Module | AOpen Silent Tek Thermal Module | | | |
| | FSB | 533 MHz | | Noise | 24dB | | | |
| Chipset | NB | Intel 945GC Chipset | | Adapter | 65W (19V, 3.42A) AC Adapter | | | |
| | SB | ICH7 | | Input Voltage | AC 100 ~ 240V | | | |
| Memory | Dual Channel | Single Channel | | Environment | | | | |
| | Type | DDRII Long-DIMM x 1 | | MTBF | 40,000hrs | | | |
| | DDR | 533 | | Operating Temperature | 0 ~ 40°C (32 ~ 104°F) | | | |
| | Memory(Max) | 2GB(2GB) | | Storage Temperature | -20 ~ 60°C (-4 ~ 140°F) | | | |
| Graphics | Chip | Intel GMA 950 | | Relative Humidity | 90% RH (40°C non-Condensing) | | | |
| | VGA Output | x 1 (Duplex Screen) | | Operating Vibration | 0.5G | | | |
| | VGA Input (Monitor) | x 1 | | Non-Operating Vibration | 10~500Hz, X=0.2, Y=0.74, Z=1.04Gm 3Axes, 4hr/Axis | | | |
| Expansion Slot | mini Card Slot | x 1 | | Operating Shock | TBD | | | |
| Audio | Type | Realtek HD Audio Codec ALC662 | | Non-Operating Drop | 76CM | | | |
| | Channel | 5.1 Channel | | Optional Accesories | | | | |
| LAN | | Realtek Gigabit Ethernet | | miniCard Module | TV Tuner (ATSC) | 90.MA610.0110 | | |
| USB 2.0 | | x 4 (Rear and Side) | | | 802.11b/g Wireless | 90.MA658.0010 | | |
| Storage | S-ATA Connector | x 1 (for 2.5" HDD) | | Other | Wireless Antenna (B) | 59.8EX01.0010 | | |
| Security | Kensington Lock Hole | x 1 (Rear) | | Certification | | | | |
| Storage | Slim ODD(Super Multi) | x 1 | | FC | Tested To Comply With FCC Standards FOR HOME OR OFFICE USE | | | |
| | 2.5" SATA II HDD | 160GB x 1 | | UL | LISTED I.T.E. E216813 | | | |
| | Multi in 1 card Reader | x 1 | | CE | | | | |
| Side IO | Power Button and Power indicator (blue) | x 1 | | | | | | |
| Touch Panel | | | 5-Wire Resistive | | | | | |

All specifications and information contained in this document are subject to change without prior notice.

AOpen America Inc.

<http://usa.aopen.com>

Tel: 1-408-586-1201

Fax: 1-408-586-1210