




DUCTLESS MINI-SPLIT
COOLING AND HEATING
SYSTEMS

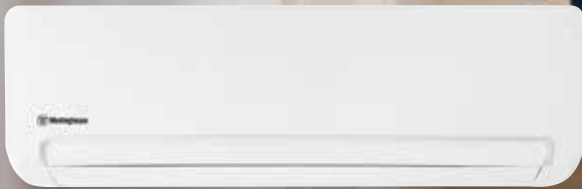

Comfort, **W**henever, **W**herever you need

Westinghouse mini-split systems provide a comfortable environment, operating much quieter than a window unit and more energy efficient than a central heating or cooling system. Sleek wall mounted indoor units connect to an outdoor condenser unit, standard with a base pan heater for low temperature climates. Each system comes packed with standard features!

STANDARD FEATURES

- Wireless Remote Control included with Indoor Unit
- Base Pan Heater
- LED Display on Front Panel
- LED Dimmer
- 5 Indoor Fan Speeds
- LCD Backlit Wireless Remote Controller
- "I feel" Setting - uses sensor in remote, not wall unit. Ambient temp sensed at location of handheld remote.
- Heating down to -4°F (-20°C)
- °F & °C convertible
- 2 Ways Draining Connection (Left or Right)
- Compressor Intelligent Pre-heating
- Smart Function - The unit chooses 1 of 4 run modes depending on room temperature.
- Super Function - In cooling mode, the unit will operate for 15 minutes at high speed with a set temp of 61°F.
- Auto Restart
- Auto Defrost
- Auto Cleaning
- Quiet Mode
- 24 Hours Timer
- Removable and Washable Panel
- Louver Position Memory
- Washable High Definition Filter
- Vertical Auto Swing Louver



115V ENTRY TIER SINGLE-ZONE SYSTEMS

SYSTEMS S09SZA1, S12SZA1



WHS09WMA11S
WHS09SZA11S



WHS12WMA11S
WHS12SZA11S

These systems work best in smaller spaces such as sunrooms, bedrooms, and small offices that need individual temperature control. Spot cooling or heating is easy with these 115V heat pumps, no special wiring required.

Wired Wall Mount Controller WWRCS

Control your separate system(s) from one central location. Sold separately.



TECHNICAL SPECIFICATIONS			115V Entry Tier Single-Zone Systems	
SYSTEM			S09SZA1	S12SZA1
Indoor Unit			WHS09WMA11S	WHS12WMA11S
Outdoor Unit			WHS09SZA11S	WHS12SZA11S
Wireless Remote Control			Included with Indoor Unit	
Wired Remote Controller (Option)			WWRCS	WWRCS
PERFORMANCE				
Type			Inverter, Single	Inverter, Single
Rated Cooling Capacity (95°F)	Btu/h		9000	12000
Rated Heating Capacity (47°F)	Btu/h		10000	13200
Cooling Capacity Range (95°F)	Btu/h		1200 - 10000	2500 - 13500
Heating Capacity Range (47°F)	Btu/h		1200 - 10000	2500 - 14500
SEER	Btu/hW		19.3	17.9
HSPF	Btu/hW		10.5	9.4
Rated Input-Cooling	W		818	1200
Rated Input-Heating	W		837	1179
EER for Cooling			11.00	10.00
COP for Heating	W/W		3.5	3.28
Moisture Removal	pints/h (L/h)		1.9 (0.9)	2.54 (1.2)
SOUND				
Indoor Sound Pressure (S/H/M/L/Q)	dB (A)		39 / 36 / 33 / 30 / 26	40 / 36 / 33 / 30 / 26
Outdoor Sound pressure (High)	dB (A)		53	54
Airflow (S/H/M/L/Q)	m3/h		680 / 580 / 480 / 380 / 352	700 / 645 / 596 / 469 / 424
	CFM		400 / 341 / 283 / 224 / 207	412 / 380 / 351 / 276 / 250
ELECTRICAL				
Voltage, Frequency, Phase		V/Hz/Ph	115 / 60 / 1	115 / 60 / 1
Rated Current	Cooling	A	7.4	10.8
	Heating	A	7.4	10.6
MCA		A	13.5	16.5
Max. Breaker Size		A	20	25
OUTDOOR OPERATING TEMPERATURE RANGE				
Cooling	°F		5 - 115	5 - 115
	°C		-15 - 46	-15 - 46
Heating	°F		-4 - 75	-4 - 75
	°C		-20 - 24	-20 - 24
SIZE & WEIGHT				
Net Dimensions (W x H x D)	Indoor Unit	in	29 5/16 x 10 5/8 x 8 7/16	32 1/16 x 10 5/8 x 8 7/16
		mm	745 x 270 x 214	815 x 270 x 214
	Outdoor Unit	in	28 1/8 x 19 x 9 7/16	28 1/8 x 19 x 9 7/16
		mm	715 x 482 x 240	715 x 482 x 240
Net Weight	Indoor Unit	lb (kg)	19 (8.5)	20 (9)
	Outdoor Unit	lb (kg)	63 (28.5)	65 (29.5)
LINESET REQUIREMENTS				
Liquid Pipe		in (mm)	1/4 (6.35)	1/4 (6.35)
Gas Pipe		in (mm)	3/8 (9.52)	3/8 (9.52)
Max. Pipe Length (Total)		ft (m)	66 (20)	66 (20)
Max. Elevation (IDU higher than ODU)		ft (m)	33 (10)	33 (10)
Max. Elevation (ODU higher than IDU)		ft (m)	16 (5)	16 (5)
Pre-charge Pipe Length		ft (m)	25 (7.5)	25 (7.5)
ADDITIONAL DATA				
Refrigerant (R410A) Weight		lb (g)	1 lb 14 oz (840)	2 lb 3 oz (1000)



208-230V ENTRY TIER SINGLE-ZONE SYSTEMS

SYSTEMS S09SZA2, S12SZA2, S18SZA2, S24SZA2, S30SZA2, S36SZA2 (rel. Q4 2020)



WHS09WMA21S
WHS09SZA21S



WHS12WMA21S
WHS12SZA21S



WHS18WMA21S
WHS18SZA21S

TECHNICAL SPECIFICATIONS

208-230V Entry Tier Single-Zone Systems

SYSTEM		S09SZA2	S12SZA2
Indoor Unit		WHS09WMA21S	WHS12WMA21S
Outdoor Unit		WHS09SZA21S	WHS12SZA21S
Wireless Remote Control		Included with Indoor Unit	
Wired Remote Controller (Option)		WWRCS	WWRCS
PERFORMANCE			
Type		Inverter, Single	Inverter, Single
Rated Cooling Capacity (95°F)	Btu/h	9000	12000
Rated Heating Capacity (47°F)	Btu/h	10000	13000
Cooling Capacity Range (95°F)	Btu/h	4500 - 10000	5500 - 13500
Heating Capacity Range (47°F)	Btu/h	4500 - 10000	5500 - 13500
SEER	Btu/hW	16.3	16.7
HSPF	Btu/hW	9.1	9.0
Rated Input-Cooling	W	857	1121
Rated Input-Heating	W	860	1121
EER for Cooling		10.50	10.70
COP for Heating	W/W	3.41	3.4
Moisture Removal	pints/h (L/h)	1.90 (0.9)	2.53 (1.2)
SOUND			
Indoor Sound Pressure (S/H/M/L/Q)	dB (A)	39 / 36 / 33 / 29 / 26	40 / 36 / 33 / 30 / 26
Outdoor Sound pressure (High)	dB (A)	54	54
Airflow (S/H/M/L/Q)	m ³ /h	680 / 580 / 480 / 380 / 352	700 / 645 / 596 / 469 / 424
	CFM	400 / 341 / 283 / 224 / 207	412 / 380 / 351 / 276 / 250
ELECTRICAL			
Voltage, Frequency, Phase		V/Hz/Ph	208-230 / 60 / 1
Rated Current	Cooling	A	3.8
	Heating	A	4.0
MCA	A	10	10
Max. Breaker Size	A	15	15
OUTDOOR OPERATING TEMPERATURE RANGE			
Cooling	°F	32 - 115	32 - 115
	°C	0 - 46	0 - 46
Heating	°F	-4 - 75	-4 - 75
	°C	-20 - 24	-20 - 24
SIZE & WEIGHT			
Net Dimensions (W x H x D)	Indoor Unit	in	29 5/16 x 10 5/8 x 8 7/16
		mm	745 x 270 x 214
	Outdoor Unit	in	28 1/8 x 19 x 9 7/16
		mm	715 x 482 x 240
Net Weight	Indoor Unit	lb (kg)	19 (8.5)
	Outdoor Unit	lb (kg)	55 (25)
LINESET REQUIREMENTS			
Liquid Pipe	in (mm)	1/4 (6.35)	1/4 (6.35)
Gas Pipe	in (mm)	3/8 (9.52)	3/8 (9.52)
Max. Pipe Length (Total)	ft (m)	66 (20)	66 (20)
Max. Elevation (IDU higher than ODU)	ft (m)	33 (10)	33 (10)
Max. Elevation (ODU higher than IDU)	ft (m)	16 (5)	16 (5)
Pre-charge Pipe Length	ft (m)	25 (7.5)	25 (7.5)
ADDITIONAL DATA			
Refrigerant (R410A) Weight	lb (g)	1 lb 13 oz (830)	2 lb 3 oz (1000)

These 208-230V systems can be installed anywhere in your home, the larger capacities can handle bigger areas, while still operating much quieter than a window a/c unit and more energy efficient than a central heating or cooling system. Cool or heat only the areas you want. Don't waste energy on rooms that are not occupied.

208-230V Entry Tier Single-Zone Systems			
S18SZA2	S24SZA2	S30SZA2	S36SZA2
WHS18WMA21S	WHS24WMA21S	WHS30WMA21S	WHS36WMA21S
WHS18SZA21S	WHS24SZA21S	WHS30SZA21S	WHS36SZA21S
Included with Indoor Unit			
WWRCS	WWRCS	WWRCS	
Inverter, Single	Inverter, Single	Inverter, Single	
18000	24000	30000	
20000	24400	31000	
6500 - 19500	8000 - 26500	11500 - 33500	
6000 - 21500	8000 - 26500	11500 - 33500	
17.6	17.6	18.8	
10.1	9.8	12.3	
1651	2286	2900	
2000	2271	2700	
10.90	10.50	10.34	
2.93	3.15	3.37	
4.23 (2)	5.1 (2.4)	6.34 (3)	
45 / 43 / 40 / 38 / 35	48 / 45 / 40 / 38 / 36	50 / 45 / 43 / 40 / 38	
56	58	60	
1005 / 901 / 750 / 660 / 580	1080 / 980 / 820 / 760 / 650	1880 / 1435 / 1200 / 1000 / 850	
592 / 530 / 441 / 388 / 341	636 / 577 / 483 / 447 / 383	1107 / 845 / 706 / 589 / 500	
208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	
7.4	10.5	12.8	
9.0	10.4	12.0	
15	20	25	
20	30	35	
32 - 115	32 - 115	5 - 115	
0 - 46	0 - 46	-15 - 46	
-4 - 75	-4 - 75	-4 - 75	
-20 - 24	-20 - 24	-20 - 24	
36 x 12 3/8 x 9 5/16	42 11/16 x 12 3/8 x 9 5/16	50 3/8 x 14 3/16 x 10 1/4	
915 x 315 x 236	1085 x 315 x 236	1280 x 360 x 260	
31 7/8 x 23 x 11	33 7/8 x 25 9/16 x 12 3/16	34 13/16 x 31 5/16 x 14 7/16	
810 x 585 x 280	860 x 650 x 310	885 x 795 x 366	
28 (12.5)	31 (14)	40 (18)	
86 (39)	110 (50)	128 (58)	
1/4 (6.35)	3/8 (9.52)	3/8 (9.52)	
1/2 (12.7)	5/8 (15.88)	5/8 (15.88)	
66 (20)	66 (20)	66 (20)	
33 (10)	33 (10)	33 (10)	
16 (5)	16 (5)	16 (5)	
25 (7.5)	25 (7.5)	25 (7.5)	
3 lb 1 oz (1400)	3 lb 9 oz (1630)	4 lb 9 oz (2070)	

COMING SOON



WHS24WMA21S
WHS24SZA21S



WHS30WMA21S
WHS30SZA21S

Wired Wall Mount Controller
WWRCS

Control your separate system(s) from one central location. Sold separately.



208-230V MID TIER SINGLE-ZONE SYSTEMS

SYSTEMS P09SZA2, P12SZA2, P18SZA2, P24SZA2



WHS09WMA21S
WHS09SZA21S



WHS12WMA21S
WHS12SZA21S

Our Single-Zone Mid Tier systems offer the same feature-packed standard options as our Entry Tier systems, but with better energy efficiency ratings. Many local utility companies and state programs offer rebates on select ENERGY STAR® qualified units to encourage customers to invest in energy efficient ductless mini-split systems.

TECHNICAL SPECIFICATIONS

SYSTEM		P09SZA2	P12SZA2
Indoor Unit		WHP09WMA21S	WHP12WMA21S
Outdoor Unit		WHPO9SZA21S	WHP12SZA21S
Wireless Remote Control		Included with Indoor Unit	
Wired Remote Controller (Option)		WWRCU	WWRCU
PERFORMANCE			
Type		Inverter, Single	Inverter, Single
Rated Cooling Capacity (95°F)	Btu/h	9000	12000
Rated Heating Capacity (47°F)	Btu/h	9500	13000
Cooling Capacity Range (95°F)	Btu/h	3600 - 10000	4000 - 13500
Heating Capacity Range (47°F)	Btu/h	3600 - 10500	4000 - 14000
SEER	Btu/hW	22.5	22.0
HSPF	Btu/hW	10.7	10.5
Rated Input-Cooling	W	655	920
Rated Input-Heating	W	720	1110
EER for Cooling		13.74	13.04
COP for Heating	W/W	3.87	3.43
Moisture Removal	pints/h (L/h)	1.9 (0.9)	2.54 (1.2)
SOUND			
Indoor Sound Pressure (S/H/M/L/Q)	dB (A)	42 / 39 / 32 / 29 / 26	42 / 39 / 32 / 29 / 26
Outdoor Sound pressure (High)	dB (A)	53	53
Airflow (S/H/M/L/Q)	m ³ /h	650 / 580 / 500 / 420 / 380	670 / 620 / 530 / 430 / 380
	CFM	383 / 341 / 294 / 247 / 224	394 / 365 / 312 / 253 / 224
ELECTRICAL			
Voltage, Frequency, Phase		V/Hz/Ph	208-230 / 60 / 1
Rated Current	Cooling	A	2.9
	Heating	A	4.3
MCA	A	10	5.0
Max. Breaker Size	A	15	10
OUTDOOR OPERATING TEMPERATURE RANGE			
Cooling	°F	5 - 115	5 - 115
	°C	-15 - 46	-15 - 46
Heating	°F	-4 - 75	-4 - 75
	°C	-20 - 24	-20 - 24
SIZE & WEIGHT			
Net Dimensions (W x H x D)	Indoor Unit	in	33 7/16 x 10 5/8 x 8 7/16
		mm	850 x 270 x 215
	Outdoor Unit	in	28 1/8 x 19 x 9 7/16
		mm	715 x 482 x 240
Net Weight	Indoor Unit	lb (kg)	20 (9)
	Outdoor Unit	lb (kg)	60 (27)
LINESET REQUIREMENTS			
Liquid Pipe	in (mm)	1/4 (6.35)	1/4 (6.35)
Gas Pipe	in (mm)	3/8 (9.52)	3/8 (9.52)
Max. Pipe Length (Total)	ft (m)	66 (20)	66 (20)
Max. Elevation (IDU higher than ODU)	ft (m)	33 (10)	33 (10)
Max. Elevation (ODU higher than IDU)	ft (m)	16 (5)	16 (5)
Pre-charge Pipe Length	ft (m)	25 (7.5)	25 (7.5)
ADDITIONAL DATA			
Refrigerant (R410A) Weight	lb (g)	2 lb 2 oz (950)	2 lb 9 oz (1160)
Energy Star Certified		Yes	Yes



Westinghouse Mid Tier Single-Zone systems are ENERGY STAR® certified. These heat pumps use about 5% less energy than conventional new models.

208-230V Mid Tier Single-Zone Systems		
	P18SZA2	P24SZA2
	WHP18WMA21S	WHP24WMA21S
	WHP18SZA21S	WHP24SZA21S
	Included with Indoor Unit	
	WWRCU	WWRCU
	Inverter, Single	Inverter, Single
	18000	23400
	19000	26000
	6500 - 19500	8000 - 26500
	6500 - 20000	8000 - 26500
	23.3	21.0
	11.6	10.5
	1385	1870
	1638	2500
	13.00	12.51
	3.4	3.05
	3.2 (1.5)	5.1 (2.4)
	48 / 45 / 41 / 37 / 34	50 / 47 / 42 / 36 / 33
	55	58
	1100 / 1000 / 820 / 780 / 650	1200 / 1100 / 950 / 750 / 625
	647 / 589 / 483 / 459 / 383	706 / 647 / 559 / 441 / 368
	208-230 / 60 / 1	208-230 / 60 / 1
	6.3	8.3
	7.2	11.1
	15	20
	20	30
	5 - 115	5 - 115
	-15 - 46	-15 - 46
	-4 - 75	-4 - 75
	-20 - 24	-20 - 24
	44 1/4 x 12 3/8 x 9 5/16	44 1/4 x 12 3/8 x 9 5/16
	1130 x 315 x 237	1130 x 315 x 237
	33 7/8 x 25 9/16 x 12 3/16	34 13/16 x 31 5/16 x 14 7/16
	860 x 650 x 310	885 x 795 x 366
	32 (14.5)	32 (14.5)
	99 (45)	134 (61)
	1/4 (6.35)	3/8 (9.52)
	1/2 (12.7)	5/8 (15.88)
	66 (20)	66 (20)
	33 (10)	33 (10)
	16 (5)	16 (5)
	25 (7.5)	25 (7.5)
	3 lb 7 oz (1550)	4 lb 12 oz (2150)
	Yes	Yes



WHP18WMA21S
WHP18SZA21S



WHP24WMA21S
WHP24SZA21S

Wired Wall Mount Controller
WWRCU

Control your separate system(s) from one central location. Sold separately.




208-230V MULTI-ZONE SYSTEMS

SYSTEMS P18M2A2, P24M3A2, P36M4A2

Zoned cooling and heating saves on energy throughout your home! One outdoor unit can power from 2 to 4 indoor units, and each zone can be controlled independently for maximum comfort! Ductless technology is much more efficient than central air, where duct losses can account for up to 30% of your energy bill.

208-230V Multi-Zone Indoor Unit Model Number		WHP09WMA21S	WHP12WMA21S	WHP18WMA21S	WHP24WMA21S
Rated Cooling Capacity (95 °F)	Btu/h	9000	12000	18000	23400
Rated Heating Capacity (47 °F)	Btu/h	9500	13000	19000	26000
Indoor Sound Pressure (S/H/M/L/Q)	dB (A)	42 / 39 / 32 / 29 / 26	42 / 39 / 32 / 29 / 26	48 / 45 / 41 / 37 / 34	50 / 47 / 42 / 36 / 33
Airflow Indoor Unit (S/H/M/L/Q)	m3/h	650 / 580 / 500 / 420 / 380	670 / 620 / 530 / 430 / 380	1100 / 1000 / 820 / 780 / 650	1200 / 1100 / 950 / 750 / 625
	CFM	383 / 341 / 294 / 247 / 224	394 / 365 / 312 / 253 / 224	647 / 589 / 483 / 459 / 383	706 / 647 / 559 / 441 / 368
Voltage, Frequency, Phase	V/Hz/Ph	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1
Net Dimensions (W x H x D)	in	33 7/16x10 5/8x8 7/16	33 7/16x10 5/8x8 7/16	44 1/4x12 3/8x9 5/16	44 1/4x12 3/8x9 5/16
	mm	850 x 270 x 215	850 x 270 x 215	1130 x 315 x 237	1130 x 315 x 237
Net Weight	lb (kg)	20 (9)	20 (9)	32 (14.5)	32 (14.5)
Liquid Pipe	in (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	3/8 (9.52)
Gas Pipe	in (mm)	3/8 (9.52)	3/8 (9.52)	1/2 (12.7)	5/8 (15.88)

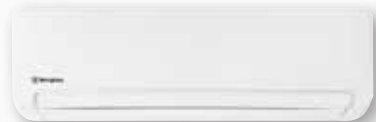

WHP09-12WM2A21S



WHP18-24WM2A21S


Wired Wall Mount Controller

WWRCU

Control all zones from one central location. Sold separately.



Cool or heat only one room, or up to 4 rooms simultaneously on one system

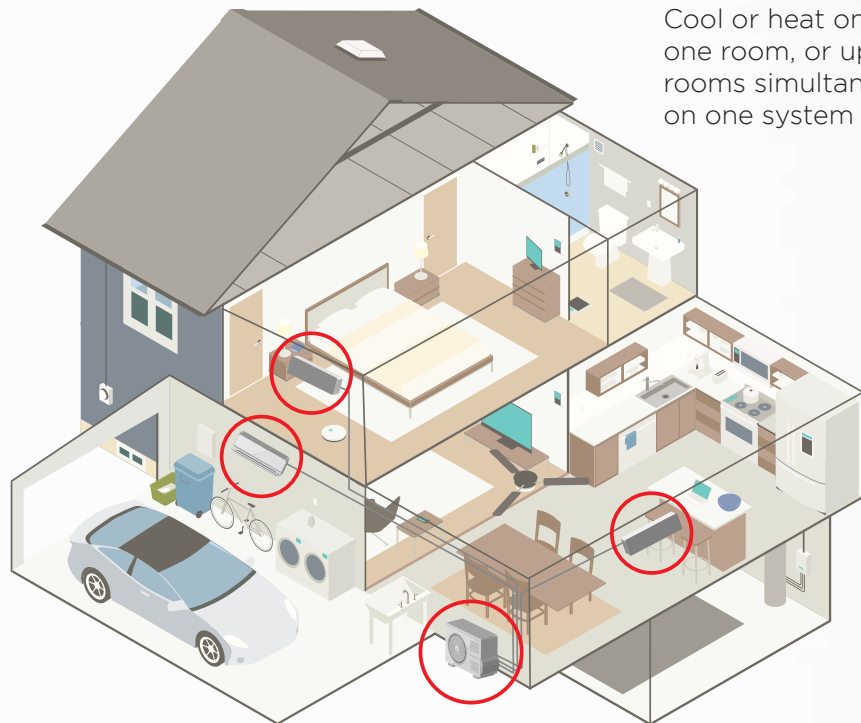

TECHNICAL SPECIFICATIONS

208-230V Multi-Zone Outdoor Units

SYSTEM		P18M2A2	P24M3A2	P36M4A2	
Outdoor Unit		WHP18M2A2IS	WHP24M3A2IS	WHP36M4A2IS	
Wireless Remote Control		Included with Indoor Unit			
Wired Remote Controller (Option)		WWRCU	WWRCU	WWRCU	
PERFORMANCE					
Type		Inverter, Multi	Inverter, Multi	Inverter, Multi	
Rated Cooling Capacity (95°F)	Btu/h	18000	24000	32000	
Rated Heating Capacity (47°F)	Btu/h	18000	24000	36000	
Cooling Capacity Range (95°F)	Btu/h	7500 - 24000	8000 - 30200	12000 - 42000	
Heating Capacity Range (47°F)	Btu/h	5800 - 28700	5200 - 37000	8000 - 52000	
SEER	Btu/hW	22.0	22.0	21.0	
HSPF	Btu/hW	11.0	11.0	11.0	
Rated Input-Cooling	W	1440	1920	2550	
Rated Input-Heating	W	1530	1920	3120	
EER for Cooling		12.50	12.50	12.55	
COP for Heating	W/W	3.45	3.66	3.38	
SOUND					
Outdoor Sound pressure (High)	dB (A)	55	59	59	
ELECTRICAL					
Voltage, Frequency, Phase	V/Hz/Ph	208-230 / 60 / 1	208-230 / 60 / 1	208-230 / 60 / 1	
Rated Current	Cooling	A	6.5	8.7	
	Heating	A	6.9	8.7	
MCA	A	21	25	32.2	
Max. Breaker Size	A	30	30	50	
OUTDOOR OPERATING TEMPERATURE RANGE					
Cooling	°F	14 - 115	14 - 115	14 - 115	
	°C	-10 - 46	-10 - 46	-10 - 46	
Heating	°F	-13 - 75	-13 - 75	-13 - 75	
	°C	-25 - 24	-25 - 24	-25 - 24	
SIZE & WEIGHT					
Net Dimensions (W x H x D)	Outdoor Unit	in	33 7/8 x 26 3/8 x 12 3/16	37 3/8 x 33 1/16 x 13 3/8	37 3/8 x 41 5/16 x 13 3/8
		mm	860 x 670 x 310	950 x 840 x 340	950 x 1050 x 340
Net Weight	Outdoor Unit	lb (kg)	117 (53)	159 (72)	188 (85.5)
LINESET REQUIREMENTS					
Liquid Pipe	in (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	
Gas Pipe	in (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	
Max. Pipe Length (Total)	ft (m)	164 (50)	197 (60)	246 (75)	
Max. Pipe Length (Each)	ft (m)	82 (25)	66 (20)	66 (20)	
Max. Elevation (IDU higher than ODU)	ft (m)	49 (15)	49 (15)	49 (15)	
Max. Elevation (ODU higher than IDU)	ft (m)	49 (15)	49 (15)	49 (15)	
Pre-charge Pipe Length	ft (m)	49 (15)	74 (22.5)	98 (30)	
ADDITIONAL DATA					
Refrigerant (R410A) Weight	lb (g)	3 lb 15 oz (1800)	5 lb 1 oz (2300)	6 lb 10 oz (3000)	
Energy Star Certified		Yes	Yes	Yes	



WHP18M2A2IS



WHP24M3A2IS



WHP36M4A2IS




Westinghouse Multi-Zone systems are ENERGY STAR® certified. These heat pumps use about 5% less energy than conventional new models.



MULTI-ZONE ALLOWABLE COMBINATIONS


Choose an outdoor unit and combination of indoor units that best fits your application.

WHP18M2A21S

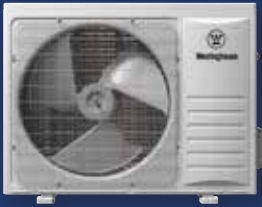


ZONE 1	ZONE 2	TOTAL
9	12	21
9	9	18

WHP36M4A21S







ZONE 1	ZONE 2	ZONE 3	ZONE 4	TOTAL
18	24			42
12	24	+	+	36
9	24	+	+	33
12	18	+	+	30
18	18	+	+	36
9	12	24		45
9	9	24		42
12	12	18		42
9	12	18		39
9	9	18	+	36
9	18	18		45
9	9	12	+	30
9	12	12	+	33
12	12	12	+	36
9	9	9	18	45
9	9	9	12	39
9	9	12	12	42
9	12	12	12	45
9	9	9	9	36

WHP24M3A21S




ZONE 1	ZONE 2	ZONE 3	TOTAL
12	18		30
9	18		27
9	12	+	21
12	12	+	24
9	9	12	30
9	9	9	27

9k	
12k	
18k	
24k	

NOTE: These tables are not for system capacity selection

Allowable connected IDU capacity is from 80% to 130% of ODU capacity.
 "+" represents available circuit for future expansion when connecting this combination.
 ■ : Allowed combination, but IDU capacity will be decreased.
 (ODU capacity > connected IDU capacities)

MODEL NOMENCLATURE

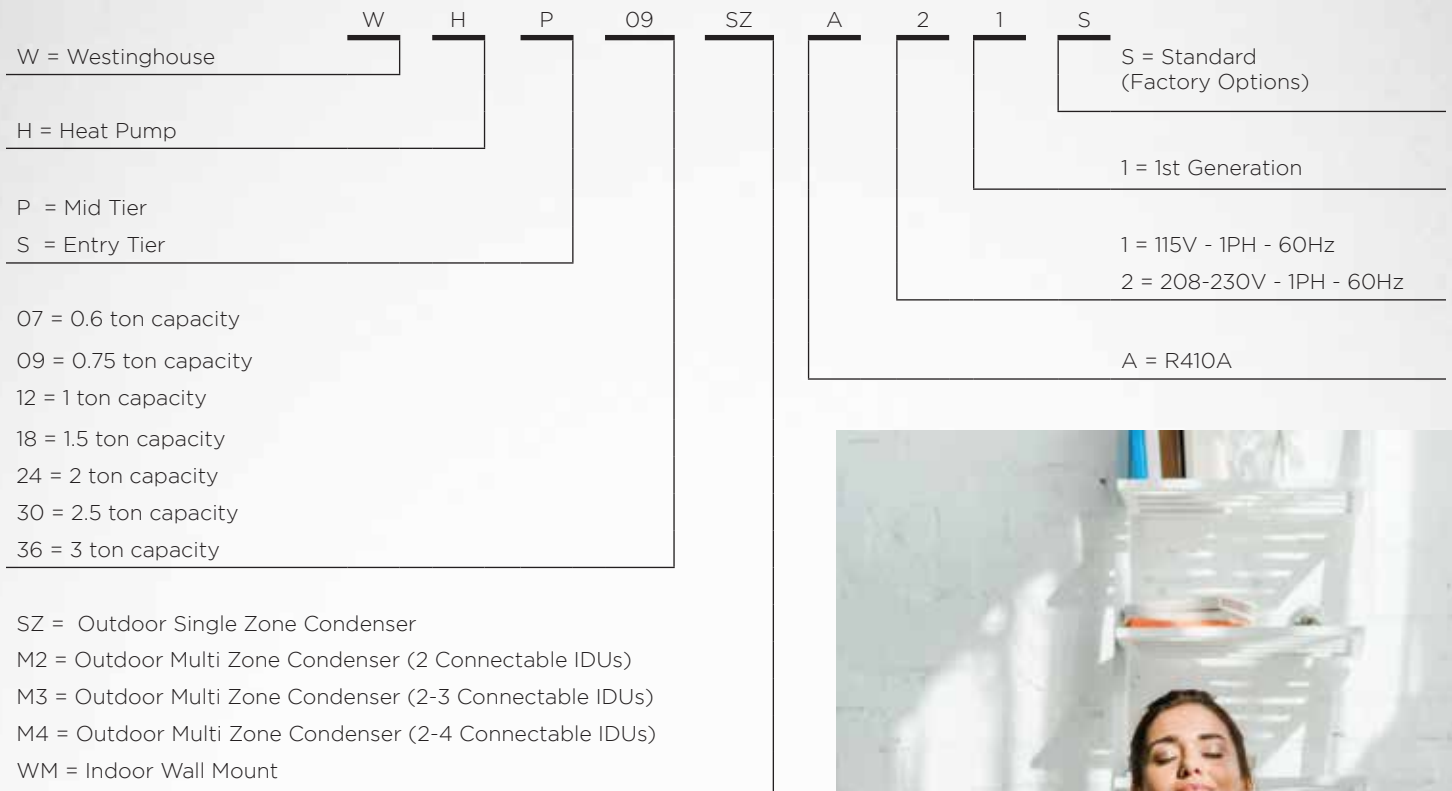

WARRANTY



We offer a limited warranty. See Warranty Statement for details, call (888) 888-3424 or email warranty@WestinghouseAC-USA.com.





OUR PROMISE

For more than 130 years, Westinghouse has stood for innovative, reliable, high-quality products and customer service. A combination of groundbreaking technology and rock-solid dependability has made Westinghouse one of the world's most trusted brands. When you see Westinghouse, consumers know they are getting a product packed with features that make their lives easier, a product that has all the latest thinking, while providing years of value.



Distributed by:



WestinghouseAC-USA.com | (888) 888-3424 | info@WestinghouseAC-USA.com