

### C5051 / C5045 / C5035 / C5030





Advanced made simple for you.

Business Can be simple



### MORE POWERFUL. YET SIMPLER THAN EVER.

That's the way your business communications should be. Direct, intuitive, and most of all, user-centric. This is why we have built the next generation of multifunctional devices: the **imageRUNNER ADVANCE C5000 series**.

We believe that documents can be printed in an easier, faster, better, safer and greener way. Being advanced is about continually improving every possible facet so we get maximum efficiency.

Imagine a printer that does its part to reduce waste while raising productivity. A machine smart enough to remember individual preferences and increase output without compromising on quality. A multifunctional device capable of accessing the world of Cloud computing – while simplifying business processes.

This is the new imageRUNNER ADVANCE C5000 series.




## ImageRUNNER ADVANCE NEW HEIGHTS

Cloud computing is gaining acceptance with more and more companies across the globe. Businesses today look to Cloud computing for on-demand scalability. Costly infrastructure, setups and administrative burden are a thing of the past with proper implementation of Cloud Computing technology.

Canon's imageRUNNER ADVANCE maximizes office productivity by allowing users to access Cloud services right from imageRUNNER ADVANCE devices. Users can scan and store their paper documents, or choose to retrieve and print their documents stored in their Cloud service.

Scan-to-Cloud and Print-from-Cloud is simple with Canon's imageRUNNER ADVANCE - all that is needed is an imageRUNNER ADVANCE multifunctional device (MFD); no drivers, additional software or personal computers are required. With the Cloud Scan and Cloud Print support of Google™ Docs and Microsoft™ SharePoint Online, imageRUNNER ADVANCE systems are the perfect way to scan and print through Cloud services.





### Important Note:

- Machine upgrades may be required to support Google™ Docs and Microsoft™ SharePoint Online Cloud services via the imageRUNNER ADVANCE devices. Internet connectivity is required.
- \*\* Users of Google™ Docs and Microsoft™ SharePoint Online Cloud services are advised to evaluate the benefits and risks of Cloud services and their data security needs.
- \*\*\* Availability of the Google™ Docs and Microsoft™ SharePoint Online Cloud services on the imageRUNNER ADVANCE devices varies by country or region. For more information, please contact your local Canon Sales Office.

### ADVANCED USABILITY AND CONVENIENCE



### Intuitive User Interface

The new imageRUNNER ADVANCE C5000 interface provides you with a more pleasant navigation experience on an 8.4" full color, high-resolution TFT touchscreen.



### Configurable Quick Menu

Complex, frequently used settings can be easily configured to run at the touch of a button. This streamlines every individual's workflow, and increases productivity by letting you accomplish more in less time.



### Customizable Menu

The size, the number of icons, and even the wallpaper displayed on the menu can be changed to suit individual or workgroup needs and preferences.

Meet the multifunctional device that is optimized for convenience and speed - your way.



### The Canon imageRUNNER ADVANCED C5000 series is simply *simpler* to use.

### Step-by-step Tutorial

The inbuilt onscreen tutorial helps you explore the full capabilities of the imageRUNNER ADVANCE C5000 series, and enables you to learn and use more advanced functions with ease.

# In the second seco

### Plug and Print Capability

With standard USB input and optional media connectivity options such as Secure Digital (SD) or CompactFlash (CF) Cards, you can walk up to any imageRUNNER ADVANCE C5000 series with your thumbdrive or memory card to scan and print on the spot.







Innovative Toner System

To maintain the ongoing productivity of your business, the imageRUNNER ADVANCE C5000 series features a toner system that can be replaced - even when your device is delivering printouts.



Hassle-free Paper Loading


With an in-built auto paper sensor, the imageRUNNER ADVANCE C5000 series is intelligent enough to detect paper sizes accurately. This reduces paper jams and misfeeds, translating to higher productivity.

### ADVANCED PRINT QUALITY

Quality prints that truly shine.

### ADVANCED imageCHIP System Architecture

To meet and exceed the demands of today's businesses, Canon has developed a dual processor system. The image processor board works with the scanner, adjust images, and ensures superior image quality and ultra-fast processing. The information processor boards controls user interface and coordinates device networking and connectivity. The result is higher quality printouts with lesser wait.

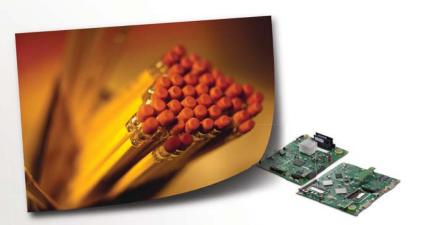

### **High Resolution Brilliant Printouts**

Combine the E-Drum imagePRESS technology with a 1200x1200 dpi printing resolution, and you will get sharp and vivid printouts, image consistency and high speed printing. Add to that the pQ Toner and an intelligent controller, and the imageRUNNER ADVANCE C5000 series truly brings you the crispest, most vibrant color printouts.





### Genuine Adobe PostScript 3

The imageRUNNER ADVANCED C5000 series supports Genuine Adobe PostScript 3 printing capability, enabling you to deliver the desired output quality without worrying about font compatibility. True PostScript capability means that you will work seamlessly with PostScript workflows to achieve faster and higher quality prints compared to emulations. You will also enjoy improved office productivity with direct PDF printing and full support of Adobe fonts. In addition, Genuine Adobe PostScript 3 also supports the Pantone Color System, which is essential in the creative and publishing industries.

### **Fiery Print Controllers**

For jobs that demand an exceptionally high level of productivity and advanced color management workflow control, Canon provides powerful Fiery print controller options – imagePASS-B1 and ColorPASS-GX300 (only for iR-ADV C5051). Both controllers are Variable Data Printing (VDP) ready and support a variety of VDP languages.







Advanced technology becomes simple with the Canon imageRUNNER ADVANCE. Simply add the modular units you need to further extend the functions of your device.



### **Professional Looking Documents**

With Canon's optional accessories, it is easy to impress and inspire with professional-grade reports and presentations. Simply select the settings you want, ranging from automatic stapling, punching, collating and even booklet creation functions. For a compact footprint, internal stapling and collating units are also available as options.

### High Speed Scanning


Canon's revolutionary Duplex Color Image Reader features a proprietary image sensor. This allows you to create 100 to 150 crystalclear reproductions of black & white and color documents each time you press the button.

### 4-Line Fax

The imageRUNNER ADVANCE C5000 series supports optional Super G3 fax functionality for high-speed fax transactions. The 4-line fax feature is capable of handling large volumes of fax documents, while ensuring lesser busy signals and greater connectivity. You can also save cost and space by consolidating multiple fax devices into one shared device.

### Remote Fax Collaboration

With the optional Remote Fax Kit, you can also fax through other fax-capable imageRUNNER ADVANCE devices in the network, even if the one you are using does not have a fax-board installed. This translates to significant cost-savings and convenience.

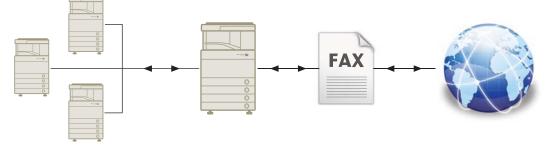

Remote Fax Kit installed device

Fax-enabled device

### ADVANCED DOCUMENT WORKFLOW

A healthy document workflow means a healthy business. With imageRUNNER ADVANCE C5000 series, you will find the most advanced, yet simple workflow.

### Scan and Send

In one simple operation, you can distribute scanned documents to multiple destinations, such as email, fax destinations and network folders. The wide range of formats include standard High Compression PDF, Adobe PDF Reader Extensions, Searchable PDF, Encrypted PDF, XPS, and even the latest Office Open XML.



### Adobe Reader Extensions

Enjoy Adobe Reader functionality without the extra cost of additional software licenses. With its inherent Adobe Reader Extensions PDF capability, you can share and review documents electronically - free-of-charge.

### Advanced Box

Canon's new built-in document sharing solution simply makes sense. Multiple users can collaborate easily on a shared folder and access files from PCs or other networked imageRUNNER ADVANCE systems. Personal folders are also available for more sensitive documents. What's more, you can also preview the documents before printing them.



### iW Function Flow

iW Function Flow is an imageRUNNER ADVANCE series core MEAP application that can transform time-consuming, multiple step tasks into simple workflows for each user. Scanning, e-mailing, faxing, and archiving can be done in one operation, all from a single button on the device control panel. The imageRUNNER ADVANCE series supports a new version of Function Flow that supports MEAP Connectors.

### **MEAP Connectors**

MEAP Connectors bridge your Canon imageRUNNER ADVANCE and enable document transmission to external systems. The software development kit (MEAP SDK) also enables third party vendors to develop systems based on your requirements. You can even create your own workflow tasks using the MEAP Connector using the PC-based Function Flow Editor tool.



### Adobe LiveCycle® Rights Management

You can create a Policy Protected PDF document from the device by integrating it to the Adobe LiveCycle<sup>®</sup> Rights Management ES Server. When opened, a protected PDF file will contact the server to authenticate and update itself. What this does is to ensure that no unauthorized users will be able to open it, and that the latest updated version is always shown when opening the file.

### ADOBE LIVECYCLE RIGHTS MANAGEMENT ES



# ADVANCED MANAGEMENT

Be in control, wherever you are. The imageRUNNER ADVANCE makes it easy to monitor and optimize your company's output.

### Centralized Remote Control

Using the Remote User Interface, your IT managers and system administrators will be able to control and manage output devices without having to travel to each machine to check or update their status.

### eMaintenance

Take control of your Canon devices while reducing administration burdens with eMaintenance. With less downtime and easy maintenance, you will have more uptime — and greater productivity.

\* eMaintenance works with most Canon copiers, printers and multifunctional devices. For more information on what models are supported, please contact Canon.

# ADVANCEI SECURIT

Safeguard your business' sensitive documents without compromising on quality or speed.

Card Authentication controls access of devices in the office to authorized users with the use of optional ID cards.

Document Scan Lock embeds hidden tracking information in a document to restrict unauthorized copying or scanning, and track the origin.

> **Department ID** restricts machine usage to those users with a valid ID and password.

Access Management System allows restriction of various features of copy, print, fax, scan, Mail Box by user, group or job function. You can even limit access for specific functions such as Color Copying.

drive, and permanently removes it by overwriting when the job is complete.

HDD Encryption and Erase encrypts information before it is written to the hard

> iEEE2600 Standard Conformity meets the industry requirements for hardcopy security in medical, finance,

and other office environments.

Removable HDD Option enables hard disk drive to be removed and placed in a secure location when not in use.

# ADVANCED RESPONSIBILITY

Much of the above features are geared towards efficiency and waste reduction. At Canon, we believe in doing our part for the environment.

Changing our behavior to change our environment. By encouraging digital previews, we reduce unnecessary prints and reduce mistakes. Administrators can also help encourage use of duplex settings and control color usage easily.

The imageRUNNER ADVANCE consists of green technologies. Our pQ toner lowers energy consumption by minimizing heat and power requirements. Our RAPID fusing technology saves 75% more power usage than previous models. In Sleep Mode, power consumption is at a low 1.5W, or less. Even when a USB card reader is installed, the machine is able to go to deep sleep to save energy. The list goes on.

Higher efficiency for lower emissions. Through the Life Cycle Assessment (LCA) System, Canon has reduced CO<sub>2</sub> emissions by more than 30% over previous models. From manufacturing to energy use and even transportation, every aspect is optimized for efficiency.

imageRUNNER ADVANCE uses 100% recycled plastic in certain parts of machine. In addition, we subject ourselves to the most stringent standards, restricting the use of 24 hazardous substances (where EU RoHS directives restrict only six).



With a Canon imageRUNNER ADVANCE C5000 series multifunctional device, you will see a significant advancement in the way your business communication is performed. So move your business forward. Make it faster, smoother, and safer with an imageRUNNER ADVANCE.

To arrange for a demonstration, simply contact any of our sales staff in the relevant contact overleaf. It's that simple.

SPECIFICATIO		eRUNNER ADVANCE <b>C5000</b> Series
Туре	Desktop	
Maximum Original Size	A3	
Copy Sizes	Cassette	305 x 457mm, A3, A4, A4R, A5R
		Custom Size 139.7 x 182mm to 304.8 x 457.2mm
		Optional Envelope Feeder, COM10 No.10, Monarch, DL, ISO-B5, ISO-C5
	Stack Bypass	A5R - SRA3 (320 x 450mm), Envelopes
	Stack Dypass	Custom Size 99 x 140mm to 320 x 457mm
Resolution	Reading	600dpi x 600dpi
	Copying	600dpi x 600dpi
	Printing	1200dpi x 1200dpi (text/line only)
Copy/Print Speed	A4	C5051: 51ppm (B&W/Color)
		C5045: 45ppm (B&W/Color) C5035: 35ppm (B&W/Color)
		C5030: 30ppm (B&W/Color)
	A3	C5051: 26ppm (B&W/Color)
		C5045: 26ppm (B&W/Color)
		C5035: 18ppm (B&W/Color)
		C5030: 18ppm (B&W/Color)
Magnification	Zoom	25-400%
First Copy Time	Black-and-White	4.0sec (51/45ppm model), 5.5sec (35/30ppm model)
Warm-Up Time	Full Color 38 seconds	6.5sec (51/45ppm model), 8.9sec (35/30ppm model)
Multiple Copies/Prints	1 to 999 sheets	
Duplexing	Standard automatic	stackless
Paper Weight	Cassette	52 to 209gsm
-	Stack Bypass	52 to 256gsm
	Duplex	52 to 209gsm
Paper Capacity	Standard	550 sheets x2 cassettes (80gsm)
	Optional	Stack Bypass: 100 sheets (80gsm)
	Optional Paper Deck	550 sheets x2 cassettes (80gsm) 2,700 sheets (80gsm)
	Total capacity	5,000 sheets
CPU	1.2GHz	
Memory		I Maximum: 2.5GB RAM
Hard Disk Drive		ailable Disk Space: 10GB)
		Available Disk Space: 115GB)
Interface	Ethernet (1000BaseT/100Base-TX/10Base-T) Wireless LAN (IEEE802.11b/g, Optional), USB2.0	
Power Supply	220-240V AC, 50/	
Power Consumption		ippm), 1.3kW max (35/30ppm)
Dimensions (WxDxH)		
	620 x 760 x 982m	m (with 1PDS) / 1230mm (with 1PDS & CFU)
	620 x 735 x 938m	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU)
	620 x 735 x 938m 620 x 735 x 826m	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU)
Weight	620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 11PDS)
	620 x 735 x 938m 620 x 735 x 826m	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 11PDS)
Print Specification PDL	620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with Approx.153kg (with UFRII (Standard), P	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) n DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional)
Print Specification PDL Resolution	620 x 735 x 938m 620 x 735 x 826m Approx.170kg (witi Approx.153kg (witi UFRII (Standard), P 1200dpi x 1200dp	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 1 1PDS) n DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi
Print Specification PDL Resolution Memory	620 x 735 x 938m 620 x 735 x 826m Approx.170kg (witi Approx.153kg (witi UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 11PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi it RAM)
Print Specification PDL Resolution Memory	620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) n DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi iit RAM) ailable Disk Space: 10GB)
Print Specification PDL Resolution Memory Hard Disk	620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB (	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 11PDS) n DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) i (Text/Line only), 600dpi x 600dpi it RAM) ailable Disk Space: 10GB) Available Disk Space: 115GB)
Print Specification PDL Resolution Memory Hard Disk CPU	620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB (	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) n DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi iit RAM) ailable Disk Space: 10GB)
Print Specification PDL Resolution	620 x 735 x 938m 620 x 735 x 826m Approx 170kg (with Approx 155kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80CB (Aw Maximum 250GB Canon Custom Proo	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) n DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) i (Text/Line only), 600dpi x 600dpi it RAM) aliable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 10, OCR2
Print Specification PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts	620 x 735 x 938m (620 x 735 x 926m Approx.170kg (witl Approx.150kg (witl UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 800B (Uses Main ur Standard 800B (Maximu 250GB Canon Custom Pro Roman 136 Roman93, Bitmapi PCL	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 11PDS) 12DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) Esesor, 1.2GHz (Uses Main unit CPU) 10, 0CR2 [Windows 2000/XP/Server2003/Vista/Server2008/Win7]
Print Specification PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts PCL Fonts	620 x 735 x 938m 620 x 735 x 826m Approx. 1708 (with Approx. 153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Roman 136 Roman93, Bitmap)	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi itt RAM) allable Disk Space: 10GB) Available Disk Space: 115GB) zessor, 1.2GHz (Uses Main unit CPU) 10, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7,
Print Specification PPL Resolution Memory Hard Disk CPU CPU SP Fonts CL Fonts Supported OS	620 x 735 x 938m (20 x 735 x 826m Approx.1708 ( with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Av Maximum 250GB ( Canon Custom Pro Roman 136 Roman 93, Bitmap PCL Adobe PostScript 3	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 11PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi it RAM) ailable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSK (10.4.9 or later)
Print Specification PPL Resolution Memory Hard Disk CPU CPU SP Fonts CL Fonts Supported OS	620 x 735 x 938m (20 x 735 x 926m Approx.170kg (witl Approx.150kg (witl Approx.150kg (witl UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 800B (Waximum 250GB Maximum 250GB Canon Custom Prov Roman 136 Roman93, Bitmapi PCL Adobe PostScript 3 Windows 2000/XP	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) n (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 105GB) Available Disk Space: 115GB) Exessor, 1.2GHz (Uses Main unit CPU) 0, 0CR2 (Windows 2000/XP/Server2003/Vista/Server2008/Win7 (Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.4.9 or later) /Server2003/Vista/Server2008/Win7/Linux,
Print Specification PDL Resolution Hard Disk CPU PSF Fonts PCL Fonts Supported OS UFR II	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB (A Maximum 250GB K Canon Custom Pro Roman 136 Roman93, Bitmapi PCL Adobe PostScript 3 Windows 2000/XF Mac OSX (10.4.9 o	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) n (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 105(B) essor, 1.2GHz (Uses Main unit CPU) sessor, 1.2GHz (Uses Main unit CPU) (0, OCR2 (Windows 2000/XP/Server2003/Vista/Server2008/Win7 (Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.4.9 or later) /Server2003/Vista/Server2008/Win7/Linux,
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts CL Fonts Supported OS UFR II Mac-PPD	620 x 735 x 938m 620 x 735 x 826m Approx.170kg (witi Approx.153kg (witi UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB (Aw Maximum 250GB (Ac Maximum 250GB, Canon Custom Pro Roman 136 Roman93, Bitmapi PCL Adobe PostScript 3 Windows 2000/XF Mac 05X (10.4;9 o Mac 05 9.1 or later; Ethermet (1000Bas	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover & CFU) h 1PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (it RAM) ailable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 10, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7, Windows 2000/XP/Server2003/Vista/Server2008/Win7, Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.2.8 or later) e-1/100Base-TX/10Base-T)
Print Specification PPDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface	620 x 735 x 938m 620 x 735 x 826m 620 x 735 x 826m Approx. 1704g (witi Approx. 153kg (witi UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Roman 136 Roman93, Bitmapi PCL Adobe PostScript 3 Windows 2000/XF Mac OSS (10.4.9 o Mac OSS (10.4.9 o Mac OSS (10.4.9 o Mac OSS (10.1.900Bas Wireless LAN (IEEE	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) n DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi iit RAM) aliable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 10, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Server2003/Vista/Server2008/Win7/Linux, 1ater) Mac OSX (10.2.8 or later) e-17100Base-TX/10Base-T) 302.11b/g, Optional), USB2.0
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts CL Fonts Supported OS UFR II Mac-PPD	620 x 735 x 938m (20 x 735 x 926m (20 x 735 x 826m (20 x 735 x 826m) (20 x 735 x 826m) (20 x 735 x 826m) (20 x 735 x 826m) (20 x 1200dp) (20 x	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) n (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) essor, 1.2GHz (Uses Main unit CPU) 0, 0CR2 [Windows 2000/XP/Server2003/Vista/Server2008/Win7] Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.2.8 or later) e-T/1008ase-TX/108ase-T) e-T/1008ase-TX/108ase-T) 602.11b/g, Optional), USB2.0 00/WSD/IPV/IPS/SM8/FTP), IPV6,
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.170kg (witi Approx.153kg (witi UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB (A Maximum 250GB (A Maximum 250GB , A Maximum 250GB (A Maximum 250GB ) Maximum 250GB ) Maximum 250GB (A Maximum 250GB ) Maximum 250GB )	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover & CFU) h 1PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (it RAM) ailable Disk Space: 10GB) Available Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 10, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7, Windows 2000/XP/Server2003/Vista/Server2008/Win7, Vindows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.2.8 or later) =*/100Base-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPPS/SMB/FTP), IPV6, ley), AppleTalk
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol	620 x 735 x 938m 620 x 735 x 826m 620 x 735 x 826m Approx.1708 (with Approx.1508 (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Roman 136 Roman93, Bitmapi PCL Adobe PostScript 3 Windows 2000/XF Mac OSX (10.4.9 o Mac OS 9.1 or later, Ethermet (1000BX (10.4.9 o Mac OS 9.1 or later, Ethermet (1000BX (10.4.9 o Mac OS 9.1 or later, Ethermet (1000BX (10.4.9 o Mac OS 9.1 or later, Ethermet (1000BX, 10.4.9 o Mac OS 9.1 or later, Ethermet (10.4.9.0 o Mac OS 9.1 or later, Ethermet (10.4.9.0 o Ma	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover & CFU) h 1PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (it RAM) ailable Disk Space: 10GB) Available Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 10, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7, Windows 2000/XP/Server2003/Vista/Server2008/Win7, Vindows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.2.8 or later) =*/100Base-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPPS/SMB/FTP), IPV6, ley), AppleTalk
Print Specification PPL Resolution Hard Disk CPU S5 Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Av Maximum 250GB (Av Maximum 250GB (Canon Custom Pro Roman 136 Roman93, Bitmap PCL Adobe PostScript 3 Windows 2000/XP Mac OS y.1 or later, Ethermet (1000Bas Wireless LAN (IEEE TCP/IP (LP/Port9) IPX/SPX (NDS, Bin Network TWAIN Dri (75 to 600dpi 24b)	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 11PDS) DADF) CL 5C/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSK (10.4.9 or later) /Server2003/Vista/Server2008/Win7/Linux, rlater) Mac OSX (10.2.8 or later) e-T/100Base-TX/10Base-T) 00.VVSD/IPP/IPPS/SMB/FTP), IPv6, ley), AppleTalk ver
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories imagePASS-B1	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.1708 (witl Approx.1504 (witl UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Roman 136 Roman 93, Bitmapi PCL Adobe PostScript 3 Windess 2000/XF Mac OSX (10.4.9 o Mac OS 9.1 or later Ethermet (1000Bx (10.4.9 o Mac OS 9.1 or later Ethermet (100DBx, Bind Wireless LAN (IEEE TCP/IP (LPD/Port9) IPX/SPX (NDS, Bind Network TWAIN Dri (75 to 600dpi 24bi	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) 11PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi it RAM) ailable Disk Space: 10GB) Available Disk Space: 115GB) Sessor, 1.2GHz (Uses Main unit CPU) 10, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.4.9 or later) /Server2003/Vista/Server2008/Win7/Linux, 'later) Mac OSX (10.2.8 or later) e-T/100Base-TX/10Base-T] 00/WSD/IPP/IPPS/SMB/FTP), IPV6, Iery), AppleTalk ver t color/8bit grayscale/2bit Black & White)
Print Specification PDL Resolution PDL Resolution PS Fonts PCL Fonts PCL Fonts UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories imagePASS-B1 PDL	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Av Maximum 250GB (Av Maximum 250GB (Canon Custom Pro Roman 136 Roman93, Bitmap Cacon Custom Pro Roman 136 Roman93, Bitmap PCL Adobe PostScript 3 Windows 2000/XP Mac 05X (10.4.9 o Mac 05X (10.4.9 o Mac 05X 0.1 ater, Ethermet (1000Bas Wireless LAN (IEEE TCP/IP (LP/Port9) IPX/SPX (NDS, Bino Network TWAIN Dri (75 to 600dpi 24bi	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) n (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) cl. 5c/6 (Optional), Adobe PostScript 3 (Optional) i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) essor, 1.2GHz (Uses Main unit CPU) 0, OCR2 [Windows 2000/XP/Server2003/Vista/Server2008/Win7] Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.4.9 or later) e-T/100Base-TX/10Base-T) 802.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPv6, Jery), AppleTalk ver t color/8bit grayscale/2bit Black & White)
Print Specification PPL Resolution Hard Disk CPU 25 Fonts PCL Fonts Supported OS UJFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories imagePASS-B1 PDL Resolution	G20 x 735 x 938m G20 x 735 x 938m G20 x 735 x 826m Approx.170kg (witi Approx.153kg (witi UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB (A Maximum 250GB (A Maximum 250GB, GA Maximum 250GB,	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover & CFU) h 1PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi iit RAM) ailable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 10, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Vindows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.2.8 or later) e-T/1008ase-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPPS/SMB/FTP), IPV6, leyp, AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi
Print Specification PDL Resolution Memory Hard Disk CPU 55 Fonts PCL Fonts PCL Fonts Supported OS JFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessoriess mage PASS-B1 PDL Resolution Memory	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m 40 pprox. 1704g (with Approx. 1504g (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Standard 80GB (Aw Maximum 250GB ( Canon Custom Pro Roman 136 Roman93, Bitmapi PCL Adobe PostScript 3 Windows 2000/XF Mac OSS (10.4.9 o Mac OSS (10.4.9 o Ma	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover & CFU) h 1PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi iit RAM) ailable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 10, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Vindows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.2.8 or later) e-T/1008ase-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPPS/SMB/FTP), IPV6, leyp, AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi
Print Specification PDL Resolution PDL Resolution PDL Resolution PDU PS Fonts PCL PD Therface PD Therface PD Therface PD Therface PD Therface PDL Resolution PDL Resolution PCL	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.170kg (witi Approx.153kg (witi UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80CB (Av Maximum 2S0GB (Uses Mainum 2S0GB (Canon Custom Pro Roman 136 Roman93, Bitmap) PCL Adobe PostScript 3 Windows 2000/XP Mac OSX (10.4, 90 Mac	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) Essor, 1.2GHz (Uses Main unit CPU) Sessor, 1.2GHz (Uses Main unit CPU) (0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Kindows 2000/XP/Server2003/Vista/Server2008/Win7/ Kindows 2000/XP/Server2003/Vista/Server2008/Win7/ Linux, fater) Mac OSX (10.2.8 or later) e-T/100Base-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption)
Print Specification PPL Resolution Memory Hard Disk CPU 25 Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories imagePASS-B1 PDL Resolution Memory Hard Disk CPU	620 x 735 x 938m           620 x 735 x 938m           620 x 735 x 826m           620 x 735 x 826m           Approx.170kg (with Approx.153kg (with Approx.153kg (with Approx.153kg (with X1200dp) x 1200dp) x 1200dp) x 1200dp) x 1200dp) x 1200dp) x 1200dp x 136           Canon Custom Pro           Roman 93, Bitmapi PCL           Adobe PostScript 3           Windows 2000/XF           Mac OSS (10.4.9 o           Mac OS 9.1 or later, Ethermer (1000Bas Wireless LAN (IEEE TCP/IP (LPD/Ports))           TPX/SPX (NDS, Binn Network TWAIN DF)           PCL5c/6, Adobe Pc           1200dpi x 1200dp           Sta04 x 1200dp           Mac OS4 (10.4.9 o           Mac OS5 1 or later, TCP/IP (LPD/Ports)           PX/SPX (NDS, Binn Network TWAIN DF)           Catoge Stander (10.000Bas Wireless LAN (IEEE Stander (10.000Bas Wireless (10.000Bas Wireless LAN (IEEE Stander (10.000Bas Wireless (10.000B	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) ((Text/Line only), 600dpi x 600dpi iti RAM) ailable Disk Space: 10GB) Available Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Visdows 2000/XP/Server2003/Vista/Server2008/Win7 Visdows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.2.8 or later) e-T/1008ase-TX/10Base-T) 802.11b/g, Optional), USB2.0 00/WSD/IPPI/IPPS/SMB/FTP), IPv6, legy, AppleTalk ver t color/Bbit grayscale/2bit Black & White) sScript 3 i, 600dpi x 600dpi ption) 40 1.86GHz
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories image PASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.170kg (witi Approx.153kg (witi UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80CB (Av Maximum 2SOGB (Av Maximum 2SOGB (Canon Custom Pro- Roman 136 Roman93, Bitmapi PCL Adobe PostScript 3 Windows 2000/XP Mac OSX (10.4, 90 Mac OSX.101.490 Mac OSX.101.490	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) essor, 1.2GHz (Uses Main unit CPU) (Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.4.9 or later) Server2003/Vista/Server2008/Win7/Linux, fater) Mac OSX (10.2.8 or later) =-7/100Base-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption)
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Vetwork Protocol Pull Scan Optional Accessories imagePASS-B1 PPL Resolution Memory Hard Disk CPU PS Fonts CL Fonts CCL Fonts	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m 740 x 735 x 826m 940 x 735 x 826m 940 x 735 x 826m 940 x 735 x 826m 940 x 1200dp 940	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADE cover) / 1074mm (with Platen cover & CFU) 1 PDS) DADF) CL 5C/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) Cl 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2008/Win7/Linux, Tater) Mac OSX (10.4.9 or later) /Server2003/Vista/Server2008/Win7/Linux, Tater) Mac OSX (10.2.8 or later) e-T/100Base-TX/10Base-T] 00/WSD/IPP/IPPS/SMB/FTP), IPv6, ley), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz s /Server2003/Server2008/Vista/Vista SP1,
Print Specification PPDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessoriess image PASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS	G20 x 735 x 938m G20 x 735 x 938m G20 x 735 x 826m Approx.170kg (with Approx.153kg (with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dpi ZGB (Uses Main ur Standard 80GB (Av Maximum 250GB (GA) Maximum 250GB (GA) Maximum 250GB (GA) Roman 3.6 Roman 3	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADE cover) / 1074mm (with Platen cover & CFU) 11PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi aliable Disk Space: 115GB) essor, 1.2GHz (Uses Main unit CPU) 0, OCR2 [Windows 2000/XP/Server2003/Vista/Server2008/Win7] Windows 2000/XP/Server2003/Vista/Server2008/Win7 [Windows 2000/XP/Server2003/Vista/Server2008/Win7] Mac OSX (10.4, 9 or later) 7/5erver2003/Vista/Server2008/Win7/Linux, 1ater) Mac OSX (10.2.8 or later) e-T/100Base-TX/10Base-T) 502.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPV6, Jery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz 5
Print Specification PDL Resolution PDL Resolution PDU Resolution PDU PS Fonts PSU	G20 x 735 x 938m G20 x 735 x 938m G20 x 735 x 826m Approx.170kg (with Approx.153kg (with UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Mainu Standard 80GB (Av Maximum 250GB (Av Maximum 250GB (Canon Custom Pro Roman 136 Roman93, Bitmap PCL Adobe PostScript 3 Windows 2000/XF Mac OSX (10.4, 90 Mac OSX.10.4, 90 Mac OSX.10, 4, 90 Mac OSX.10, 4, 90 Mac OSX.10, 4, 90 Mac OSX.10, 3, 9 or Ethernet 1000Base	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover) / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) essor, 1.2GHz (Uses Main unit CPU) (Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7, Mac OSX (10.4.9 or later) /Server2003/Vista/Server2008/Win7/Linux, rlater) Mac OSX (10.2.8 or later) e:7/100Base-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz S /Server2003/Server2008/Vista/Vista SP1, later -7/100Base-TX/10Base-T), USB
Print Specification Print Specification Print Specification Print Specification Print Specification Print Pr	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m 740 x 735 x 826m 940 x 735 x 826m 940 x 735 x 826m 940 x 735 x 826m 940 x 1200dp 940	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADE cover) / 1074mm (with Platen cover & CFU) 11PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi aliable Disk Space: 115GB) essor, 1.2GHz (Uses Main unit CPU) 0, OCR2 [Windows 2000/XP/Server2003/Vista/Server2008/Win7] Windows 2000/XP/Server2003/Vista/Server2008/Win7 [Windows 2000/XP/Server2003/Vista/Server2008/Win7] Mac OSX (10.4, 9 or later) 7/5erver2003/Vista/Server2008/Win7/Linux, 1ater) Mac OSX (10.2.8 or later) e-T/100Base-TX/10Base-T) 502.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPV6, Jery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz 5
Print Specification PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories ImagePASS-B1 PDL Hard Disk CPU PS Fonts PCL Fonts Supported OS Interface Network Protocol GolorpASS-GX300 (0)	620 x 735 x 938m           620 x 735 x 938m           620 x 735 x 826m           620 x 735 x 826m           Approx.170kg (with           Approx.153kg (with           UFRII (Standard), P           1200dpi x 1200dp           2GB (Uses Main ur           Standard 80GB (Av           Maximum 250GB (Av           Maximum 250GB (Av           Maximum 250GB (Av           Maximum 250GB (Av           Max 053, Bitmap           PCL           Adobe PostScript 3           Windows 2000/XF           Mac 055 9.1 or later,           Ethermet (1000Bas           Wireless LAN (IEEE           TCP/IP (LPD/Port9')           1200dpi x 1200dp           512MB-512MB (C           80GB           Intel Celeron-M M4           136 Adobe PS Font           80 Agfa fonts           Windows 2000/XP           Bitable DS Font           80 Agfa fonts           Windows 2000/XP           CP/IP (LPD/Port9')           TCP/IP (LPD/Port9')           PCLSc/6, Adobe PS font           80 Agfa fonts           Windows 2000/XP           TCP/IP (LPD/POR9')           Potional	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 10GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) dessor, 1.2GHz (Uses Main unit CPU) (Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Kac OSX (10.4.9 or later) e:7/100Base-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz S /Server2003/Server2008/Vista/Vista SP1, later -7/100Base-TX/10Base-T), USB
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol PUI Scan Optional Accessories Image PASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS Interface Network Protocol ColorPASS-GX300 (O) PDL	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.170kg (witi Approx.153kg (witi UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80CB (Av Maximum 2SOGB (Av Maximum 2SOGB (Av Maximum 2SOGB (Av Maximum 2SOGB, Cash Canon Custom Pro Roman 136 Roman93, Bitmap PCL Adobe PostScript 3 Windows 2000/XF Mac OSX (10.4, 90 Mac OSX (10.4, 90 PCL 2004/JX (100Bas Intel Celeron-M M4 136 Adobe PS Font 130 Adobe PS Font 130 Adobe PS Font 130 Adobe PS Font 140 SX (10.3, 9 or Ethernet 1000Base TCP/IP (LPD/Port97) 1000Base TCP/IP (LPD/Port97) 1000Base	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 105GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) (0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Mac OSX (10.4.9 or later) e-T/100Base-TX/10Base-T) 802.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz S /Server2003/Server2008/Vista/Vista SP1, later -/100Base-TX/10Base-T), USB 00/IPP/SMB/FTP), Apple Talk
Print Specification PPL Resolution Memory Hard Disk CPU SP Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories imagePASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS Interface Network Protocol ColorPASS-GX300 (O) PDL Resolution	620 x 735 x 938m           620 x 735 x 938m           620 x 735 x 826m           620 x 735 x 826m           620 x 735 x 826m           Approx.170kg (with           Approx.153kg (with           UFRII (Standard), P           1200dpi x 1200dp           2GB (Uses Main ur           Standard 80GB (Aw           Maximum 250GB (A           Roman 3.6           Roman 3.6           Roman 3.7           Adobe PostScript 3           Windows 2000/XF           Mac OS 9.1 or later,           Ethermet (1000Bas           Wireless LAN (IEEE           TCP/IP (LPD/Ports)           PCL5c/6, Adobe Pc           1200dpi x 1200dp           Stadard 80 Agfa fonts           Windows 2000/XF           Mac OS 9.10.3.9 or           Ethermet 1000Base           TCP/IP (LPD/Ports)           PCLSc/6, Adobe PS Fonts           80 Agfa fonts           Windows 2000/XF           Mac OSX 10.3.9 or           Ethermet 1000Base           TCP/IP (LPD/Ports)           Pilonal for CSS11           31200dpi x 1200dp	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 105GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) (0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Mac OSX (10.4.9 or later) e-T/100Base-TX/10Base-T) 802.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz S /Server2003/Server2008/Vista/Vista SP1, later -/100Base-TX/10Base-T), USB 00/IPP/SMB/FTP), Apple Talk
Print Specification Print Specification Prob Resolution Memory Hard Disk CPU PS Fonts PCL Fonts CPU UFR II Mac-PPD Interface Vetwork Protocol Pull Scan Optional Accessories ImagePASS-B1 PDL Hard Disk CPU PSF onts PCL Fonts Supported OS Interface Network Protocol ColorPASS-GX300 (O PDL Resolution Memory	620 x 735 x 938m           620 x 735 x 938m           620 x 735 x 826m           620 x 735 x 826m           Approx.170kg (with           Approx.153kg (with           UFRII (Standard), P           1200dpi x 1200dp           2GB (Uses Main ur           Standard 80GB (Av           Maximum 250GB (Av           Maximum 250GB (Av           Maximum 250GB (Av           Maximum 250GB (Av           Max 053 x 10.49.90           Mac 053 9.1 or later,           Ethermet (1000Bas           Wirdlevs 2000/XF           Mac 053 9.1 or later,           Ethermet (100DBas           Virgles 200dpi x 1200dp           75 to 60dpi 24bi           75 to 60dpi 24bi           76 Sto 60dpi 200/XF           Mac 053 2000/XF           Max 053 9.1 or later,           PCLSc/6, Adobe Pc           1200dpi x 1200dp           Standbe 55 font           80 Agfa fonts           Windows 2000/XF           Windows 2000/XF           Adobe PostScript 3           1200dpi x 1200dp           2GB	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 105GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) (0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Mac OSX (10.4.9 or later) e-T/100Base-TX/10Base-T) 802.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz S /Server2003/Server2008/Vista/Vista SP1, later -/100Base-TX/10Base-T), USB 00/IPP/SMB/FTP), Apple Talk
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories Image PASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts Supported OS Interface Network Protocol ColorPASS-GX300 (O) PDL Resolution Memory Hard Disk CPU PDL Resolution Memory Hard Disk CalorPASS-GX300 (O) PDL	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m 620 x 735 x 826m 620 x 735 x 826m 620 x 735 x 826m 620 x 735 x 826m 1200dpi x 1200dpi x 100 x	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with Platen cover / 1074mm (with Platen cover & CFU) n 1PDS) DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line only), 600dpi x 600dpi aliable Disk Space: 105GB) Available Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) (0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Mac OSX (10.4.9 or later) e-T/100Base-TX/10Base-T) 802.11b/g, Optional), USB2.0 00/WSD/IPP/IPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz S /Server2003/Server2008/Vista/Vista SP1, later -/100Base-TX/10Base-T), USB 00/IPP/SMB/FTP), Apple Talk
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories imagePASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS Interface Network Protocol ColorPASS-CX300 (O) PDL Resolution Memory Hard Disk CPU PDL Resolution Memory Hard Disk COL PDL Resolution Memory Hard Disk CPU PDL	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m 620 x 735 x 826m 620 x 735 x 826m 620 x 735 x 826m 620 x 735 x 826m 1200dpi x 1200dpi x 100 x	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADE cover) / 1074mm (with Platen cover & CFU) 1PDS) DADF) CL 5c/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line x), 72003/Vista/Server2008/Win7/ Windows 2000/XP/Server2003/Vista/Server2008/Win7/ Mac OSX (10.4.9 or later) (Textre2003/Vista/Server2008/Win7/Linux, later) Mac OSX (10.2.8 or later) =7/100Base=TX/10Base=T) 00/WSD/IPP/IPS/SMB/FTP), IPV6, ley), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi piton) 40 1.86GHz S /Server2003/Server2008/Vista/Vista SP1, later /Server2003/Server2008/Vista/Vista SP1, later /Server2003/Server2008/Vista/Vis
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol PUI Scan Optional Accessories Image PASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts Supported OS Interface Network Protocol ColorPASS-GX300 (O) PDL Resolution Memory Hard Disk CPU PDL Resolution Memory Hard Disk CPU PDL Resolution Memory Hard Disk COJORASS-GX300 (O) PDL Resolution Memory Hard Disk CCI Fonts Supported OS	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m 620 x 735 x 826m Approx.170kg (wit Approx.153kg (wit UFRII (Standard), P 1200dpi x 1200dp 2GB (Uses Main ur Standard 80GB (Av Maximum 2SOGB (A	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADE cover) / 1074mm (with Platen cover & CFU) n 1PDS) 1DADF) CL Sc/6 (Optional), Adobe PostScript 3 (Optional) (Text/Line only), 600dpi x 600dpi (Text/Line x 1560 x 2000/XP/Server2003/Vista/Server2008/Win7/ Mac OSX (10.2.8 or later) e-1/100Base-TX/10Base-T) 302.11b/g, Optional), USB2.0 00/WSD/IPP/IPPS/SMB/FTP), IPv6, lery), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz S /Server2003/Server2008/Vista/Vista SP1, later -/100Base-TX/10Base-T), USB 00/IPP/SMB/FTP), Apple Talk
Print Specification Print Specification PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol Pull Scan Optional Accessories ImagePASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS Interface Network Protocol ColorPASS-CK300 (O PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported DS Interface Network Protocol ColorPASS-CK300 (O PDL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m 620 x 735 x 826m 620 x 735 x 826m 620 x 735 x 826m 94000 x 735 x 826m 94000 x 120004 74000 x 120004 74000 x 120004 74000 x 12000 7400 x 12000 7400 x 12000 7400 x 12000 7400 x 12000 7400 x 12000 7400 x 12000 75 x 120004 75 x 120004	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADE cover) / 1074mm (with Platen cover & CFU) 11PDS) DADF) CL 5C/6 (Optional), Adobe PostScript 3 (Optional) i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi aliable Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2008/Win7/Linux, *later) Mac OSX (10.4.9 or later) e-T/100Base-TX/10Base-T) 00/WSD/IPP/IPPS/SMB/FTP), IPV6, ley), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz 5 /Server2003/Server2008/Vista/Vista SP1, later /Server2003/Server2008/Vista/Vista SP1, later /so0dpi x 600dpi pion pinales 600dpi pinales 600dpi pin
Print Specification PPL Resolution Memory Hard Disk CPU PS Fonts PCL Fonts Supported OS UFR II Mac-PPD Interface Network Protocol PUI Scan Optional Accessories Image PASS-B1 PDL Resolution Memory Hard Disk CPU PS Fonts Supported OS Interface Network Protocol ColorPASS-GX300 (O) PDL Resolution Memory Hard Disk CPU PDL Resolution Memory Hard Disk CPU PDL Resolution Memory Hard Disk COJORASS-GX300 (O) PDL Resolution Memory Hard Disk CCI Fonts Supported OS	620 x 735 x 938m 620 x 735 x 938m 620 x 735 x 826m Approx.170kg (with Approx.153kg (with Approx.153kg (with DFRII (Standard), P 1200dpi x 1200dpi x 1200dpi x Standard 80CB (Av Maximum 250GB (Uses Main ur Standard 80CB (Av Maximum 250GB (Caron 136) Roman 136 Roman 93, Bitmap) PCL Adobe PostScript 3 Windows 2000/XF Mac 05X (10.4.9 o Mac 05X (10.4.9 o Stabel 1200dpi x 1200dpi x 1200dp 25GB Intel Celeron-M M4 136 Adobe PS Font 80 Agfa fonts Windows 2000/XF Wac 05X 10.3.9 or Ethernet 1000Base Intel Core2 Duo Xee 136 Adobe PS Font N/A Windows 2000/XF Mac 05X 10.3.9 or	m (with 1PDS) / 1230mm (with 1PDS & CFU) m (with DADF) / 1186mm (with DADF & CFU) m (with DADE cover) / 1074mm (with Platen cover & CFU) 11PDS) DADF) CL 5C/6 (Optional), Adobe PostScript 3 (Optional) i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi i (Text/Line only), 600dpi x 600dpi aliable Disk Space: 115GB) cessor, 1.2GHz (Uses Main unit CPU) 0, OCR2 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2003/Vista/Server2008/Win7 Windows 2000/XP/Server2008/Win7/Linux, *later) Mac OSX (10.4.9 or later) e-T/100Base-TX/10Base-T) 00/WSD/IPP/IPPS/SMB/FTP), IPV6, ley), AppleTalk ver t color/8bit grayscale/2bit Black & White) stScript 3 , 600dpi x 600dpi ption) 40 1.86GHz 5 /Server2003/Server2008/Vista/Vista SP1, later /Server2003/Server2008/Vista/Vista SP1, later /so0dpi x 600dpi pion pinales 600dpi pinales 600dpi pin

Scan Speed (A4, 300dpi) Scan Resolution Destinations Address Book File Format Universal Send Advan Feature Set-D1 File Format					
Scan Resolution Destinations Address Book File Format Universal Send Advan Feature Set-D1 File Format	Send Specification (Standard) Scan Speed (A4, 300dpi) 70ipm (Color/B&W), 100ipm for Duplex scan by optional 1PDS				
Address Book File Format <b>Universal Send Advan</b> Feature Set-D1 File Format	100dpi, 150dpi, 200 x 100dpi, 200dpi, 200 x 400dpi, 300dpi, 400dpi, 600dpi				
File Format Universal Send Advan Feature Set-D1 File Format	E-Mail/Internet FAX (SMTP), PC (SMB, FTP), iWDM, WebDAV				
Universal Send Advan Feature Set-D1 File Format	LDAP, Local (Max.1800)				
Feature Set-D1 File Format	TIFF, JPEG, PDF, XPS, High compression PDF/XPS, PDF/A-1b, Optimize PDF for Web				
File Format	ced				
Hadarana Canad Canadi	Outline PDF (Trace & Smooth), Sea	archable PDF/XPS,			
	Reader Extensions PDF, Office Open XML				
Universal Send Securi Feature Set-D1	ty				
File Format	Encrypted PDF, Device Signature P	DE/XPS			
Optional Image Read					
		Duplex Color Image Reader Unit-B1 (1PDS)			
Paper Size	A3, A4, A4R, A5, A5R				
Paper Weight	Single sided original	42 to 128gsm			
Max. Number of	Double sided original	50 to 128gsm			
Originals	100 sheets (80gsm) for 2-sided Double pass ADF 150 sheets (80gsm) for 1PDS				
Document Scanning	2-sided Double pass ADF Copy	A4 46ipm 600dpi (Color/B&W)			
Speed (max.)	2-sided Double pass ADF Scan	A4 46ipm 300dpi (Color/B&W)			
	1PDS Copy	A4 51/70ipm 600dpi (Color/B&W)			
	1PDS Scan	A4 70ipm 300dpi (Color/B&W),			
	2 1 1 2 1 1 2 2 2	100ipm 300dpi for Duplex scan			
Dimensions (W x D x H)	2-sided Double pass ADF	620 x 536 x 137mm			
Moight	1PDS	618 x 603 x 180mm			
Weight	2-sided Double pass ADF 1PDS	Approx. 8.7kg			
Cassette Feeding Unit		Approx. 26.8kg			
Type	2 Front-loading adjustable drawers	S			
Paper Size	305 x 457mm, A3, A4, A4R, A5R				
	Custom Size 139.7 x 182 mm to 3	04.8 x 457.2 mm			
Paper Weight	52 to 209gsm				
Paper Capacity	550 sheets (80gsm) x 2 cassettes				
Dimensions (W x D x H)	620 x 700 x 251mm				
Weight	Approx. 27.5 kg				
Paper Deck Unit B1					
Paper Size	A4				
Paper Weight Paper Capacity	52 to 163gsm				
Dimensions (W x D x H)	2,700 sheets (80gsm) 372 x 603 x 473mm				
Weight	Approx. 37 kg				
Inner Finisher A1	Approx. ST Ng				
	One stack tray (Optional 2nd Tray)				
Tray Capacity	A4, A5, A5R	A4-A5R: 500 sheets			
	A3, A4R	A3, A4R: 500 sheets			
Staple Position	Corner, Double				
Staple Capacity					
51 1 AV 5 10					
		ontional trav)			
		1300 on upper tray, 1700 on lower tray			
	A3, A4R				
Staple Position	Corner, Double, Booklet stitch (Bo				
Staple Capacity	A4	50 sheets (80gsm)			
	A3, A4R	30 sheets (80gsm)			
	Paper Size				
	staple Capacity				
-	Staple Einicher				
Weight					
	Booklet Finisher				
Other Optional Access					
	[Color Image Reader Unit-B2, Printer Cover-C1, IR Pedestal (New), Inner 2way Tray-F1, Inner Finisher Additional Tray-A1, Buffer Pass Unit-G1, External 2 Hole Puncher-B1, Copy Tray-11, Utility Tray-A1, Envelope Feeder Attachment-D1, Tab Feeding Attachment Kit-B1, Key Switch Unit-A2, Copy Card Reader Attachment-B1, Card Reader-C1, CSTI-LATER UNIT32 2000, Reader Heater Unit-G1, Cassette Heater Unit-37, PCL Printer Kit-AE1, PS Printer Kit-AE1, Barcode Printing Kit-D1, Encrypted Printing Software-D1, Direct Print Kit (for PDF)-H1, Direct Print Kit (for XPS)-H1, Universal Send Digital User Signature Kit-C1, Super G3 FAX Board- AE1, Super G3 2nd Line Fax Board-AE1, Super G3 3rd/Ath Line Fax Board-AE1, Remote Fax Kit-A1, Expansion Bus-F1, IPSec Board-B2, Wireless LAN Board-B1, Web Access Software-H1, 2.Sinch/R80G HDD-C1, 2.Sinch/2SOGB HDD-C1, Removable HDD Kit-AC1, HDD Mirroring Kit-D1, HDD Data Encryption & Mirroring Kit-C1, Secure Watermark-B1, Data Erase Kit-C1, Additional Memory Type B (S12MB), USB Device Port-B1, Multimedia Reader/Writer-A1, Serial Interface				
	AE1, Super G3 2nd Line Fax Boar Remote Fax Kit-A1, Expansion Bu Web Access Software-H1, 2.5in Removable HDD Kit-AC1, HDD Mit Kit-C1, Secure Watermark-B1, D	rd-AE1, Super G3 3rd/4th Line Fax Board-AE1 s-F1, IPSec Board-B2, Wireless LAN Board-B1 ch/80GB HDD-C1, 2.5inch/250GB HDD-D1 roring Kit-D1, HDD Data Encryption & Mirroring ata Erase Kit-C1, Additional Memory Type I			
These specifications are s express or implied, are m the information in this br check the prevailing spec	AE1, Super G3 2nd Line Fax Boa Remote Fax Kit-AI, Expansion Bu Web Access Software-H1, 2.5in Removable HDD Kit-AC1, HDD Kit-C1, Secure Watermark-B1, D (S12MB), USB Device Port-B1, Kit-K1, Copy Control Interface H MANAGEMENT SYSTEM KIT-B1, 51 Remote Operation Sit-C1 Voice Operation Sit-C1 voice Operation Sit-C1 ade of the fitness of this product have bee ubject to change without notice. Th ade of the fitness of this product for ochure be considered pard of our bury	rd-AE1, Super G3 3rd/4th Line Fax Board-AE1 s-F1, IPSec Board-B2, Wireless LAN Board-B1 ch/80GB HDD-C1, 2.5inch/250GB HDD-D1 roring Kit-D1, HDD Data Encryption & Mirroring ata Erase Kit-C1, Additional Memory Type I			
Number of Trays Tray Capacity Staple Position Staple Capacity Dimensions (W x D x H) Weight <b>Staple Finisher C1 / Br</b> Number of Trays Tray Capacity Staple Position Staple Capacity Booklet Stitch Specifications (Booklet Finisher only) Dimensions (W x D x H) Weight	A3, A4R Corner, Double A4: 50 sheets A3: 30 sheets 865 x 540 x 234mm Approx. 11.5kg (Approx. 13kg with <b>ooklet Finisher C1</b> 2 Trays A4, A5, A5R A3, A4R Corner, Double, Booklet stitch (Boo A4 A3, A4R Paper Size Staple Capacity Staple Finisher Booklet Finisher Booklet Finisher Booklet Finisher	A3, A4R: 500 sheets optional tray) 1300 on upper tray, 1700 on lower tray (550 on upper tray, 650 on lower tray oktet Finisher only) [50 sheets (80gsm)			







To integrate more capabilities into your imageRUNNER ADVANCE device, simply speak with your friendly Canon representative.

Canon Delighting You Always

### SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS

Canon Singapore Pte. Ltd. 1 HarbourFront Avenue #04-01, Keppel Bay Tower, Singapore 098632 Tel: +65-6799 8888 | Fax: +65-6799 8882

www.canon-asia.com www.canon.com.sg

### **CANON SALES SUBSIDIARIES & BUSINESS PARTNERS**

### Afghanistan:

Megaplus Afghanistan Limited House No. 233, Street No. 4, Charagh Ali, Qilla-e-Fatehullah, Kabul, Afghanistan Tel: 93-700 228 832 / 93-700 979 511 Fax: 93-202 201 259 Email: info@megaplus.com.af

### Bangladesh:

Flora Limited Adamjee Court Annex-2 (4<sup>th</sup> Floor) 119-120 Motijheel Commercial Area Dhaka 1000 Bangladesh Tel: 880-2-716-2742-46 / 225 Fax: 880-2-955-0030 www.floralimited.com

#### Brunei:

Interhouse Company No. 5-7 Bunut Jaya Complex Spg 574 Jalan Tutong BF1320 P.O. Box 423, Seri Complex Bandar Seri Begawan BA 1779 Brunei Darussalam Tel: 673-2-653-001 Fax: 673-2-653-003

### Cambodia:

Royal Cambodia Co., Ltd #437 Preah Monivong Blvd Phnom Penh Kingdom of Cambodia Tel: 855-23-428955 Fax: 855-23-722961

### Hong Kong:

Canon Hongkong Co. Ltd 19F, The Metropolis Tower 10 Metropolis Drive Hunghom, Hong Kong Tel: 852-3191-2388 Fax: 852-2369-3800 www.canon.com.hk

### India:

Canon India Private Limited 2<sup>nd</sup> Floor, Tower A & B Cyber Greens, DLF Phase III Gurgaon – 122002 Haryana, India Tel: 91-124-416 0000 Fax: 91-124-416 0011 www.cano.co.in

### Indonesia:

PT Samafitro Jalan Ir. H Juanda No.8 Jakarta 10120, Indonesia Tel: 62-21-345 8989 Fax: 62-21-345 6699 www.samafitro.co.id

### Malaysia:

Canon Marketing (Malaysia) Sdn Bhd Block D, Peremba Square Saujana Resort Section U2, 40150 Shah Alam Selangor Darul Ehsan, Malaysia Tel: 60-3-7844 6000 / 7845 0055 Fax: 60-3-7844 6196 / 6198 www.canon.com.my

### Maldives:

Simdi Company Pvt Ltd. G.Manaam Building, 2/1 Neeloafaru Magu, Male' 20-129, Maldives Tel: 960-333 4421 Fax: 960-333 4424

#### Myanmar:

Myanmar Golden Rock International Co., Ltd Level 6, FJV Commercial Centre No: 422-426, Strand Road Botataung Township Yangon, Myanmar Tel: 95-1-202092 to 96 Fax: 95-1-202079 Email: sales@mgr.com.mm

#### Nepal:

International Electronics Concern (P) Ltd Kha 14, 1st Floor Haratibhawan Putalisadak Ramshah Path, Kathmandu, Nepal P.O. Box 12588 Tel: 977-1-442 1991 Fax: 977-1-442 1909

### Pakistan:

Shirazi Trading Company (Pvt.) Ltd 8<sup>th</sup> Floor, Adamjee House I.I. Chundrigar Road Karachi 74000 Pakistan Tel: 92-21-3241 (7659), (7737) or (7746) Fax: 92-21-(3241 7747), (3242 0417) or (3242 0418) www.shirazitrading.com.pk

### **Philippines:**

Canon Marketing (Philippines), Inc. Ground Floor Commerce and Industry Plaza. Campus Ave. Cor. Park Ave., McKinley Hill Fort Bonifacio, Taguig City Tel: 632-884-9000 Fax: 632-894-4174 www.canon.com.ph

### Sri Lanka:

Metropolitan Office (Pvt) Ltd 12, Magazine Road Colombo 08 Sri Lanka Tel: 94-11-470 0200 Fax: 94-11-470 0267

#### Thailand:

Canon Marketing (Thailand) Co. Ltd 10<sup>th</sup> Floor Bangkok City Tower 179/34-45 South Sathorn Road Bangkok 10120 Tel: 66-2-344 9999 Fax: 66-2-344 9960 www.cano.co.th

### Vietnam:

Canon Singapore Pte Ltd Ho Chi Minh City Representative Office Floor 6, Saigon Centre Building 65 Le Loi, Ben Nghe Ward, District 1 Ho Chi Minh City, Vietnam Tel: 848-3820 0466 Fax: 848-3820 0477 www.canon.com.vn

### Hanoi City Representative Office: 15 Nguyen Chi Thanh, Ba Dinh

Hanoi, Vietnam Tel: 844-3771 1677 Fax: 844-3771 1678 www.canon.com.vn

Specifications are subject to change without notice. Option names and availability may vary by region. Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and other countries. All other brand and product names are trademarks and/or registered trademarks of their respective owners.