


Overview


HP ProBook 6555b Notebook PC

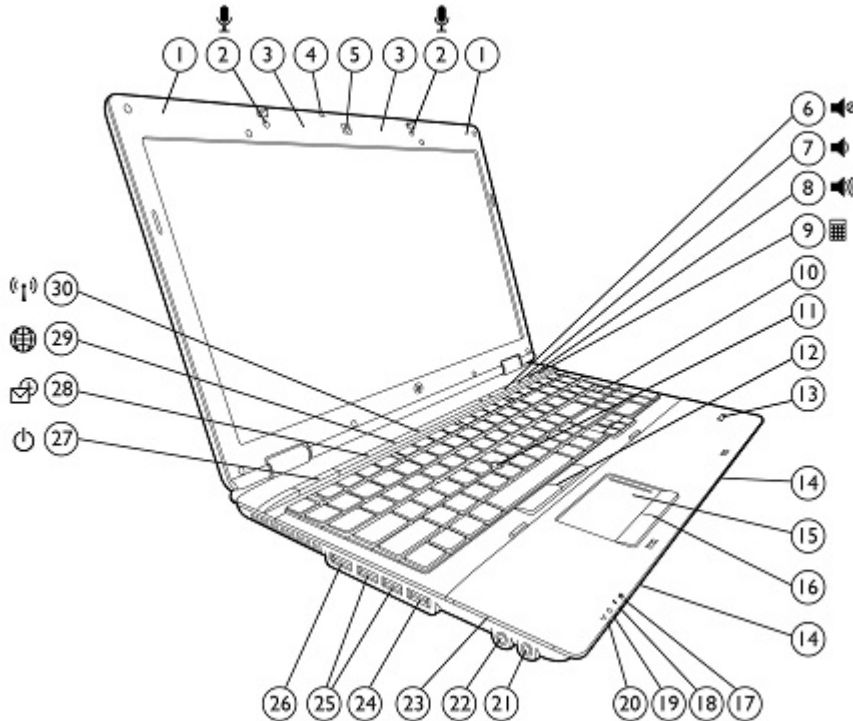


- | | |
|--|--|
| 1. WWAN antennas (select models) | 16. Touchpad pick buttons |
| 2. Dual-microphone array with optional webcam only* | 17. Hard drive activity / HP 3D DriveGuard LED indicator |
| 3. WLAN antennas | 18. Battery charging LED indicator |
| 4. Webcam LED indicator | 19. Power/standby LED indicator |
| 5. Optional 2 MP webcam | 20. Wireless on/off LED indicator |
| 6. Volume mute button with LED indicator | 21. Stereo headphone/line out |
| 7. Volume down button with LED indicator | 22. Stereo microphone/line in |
| 8. Volume up button with LED indicator | 23. ExpressCard/54 slot or optional Smart Card Reader |
| 9. Calculator button | 24. eSATA/USB combo port |
| 10. Separate numeric keypad | 25. (2) USB 2.0 port |
| 11. Optional pointstick | 26. DisplayPort |
| 12. Pointstick pick buttons (with optional pointstick) | 27. Power button with LED indicator |
| 13. Optional HP Fingerprint Sensor | 28. QuickLook button |
| 14. Stereo speakers | 29. QuickWeb button |
| 15. Touchpad with scroll zone | 30. Wireless on/off button with LED indicator |

* Models without webcam have single integrated microphone on left side of display panel.

Overview

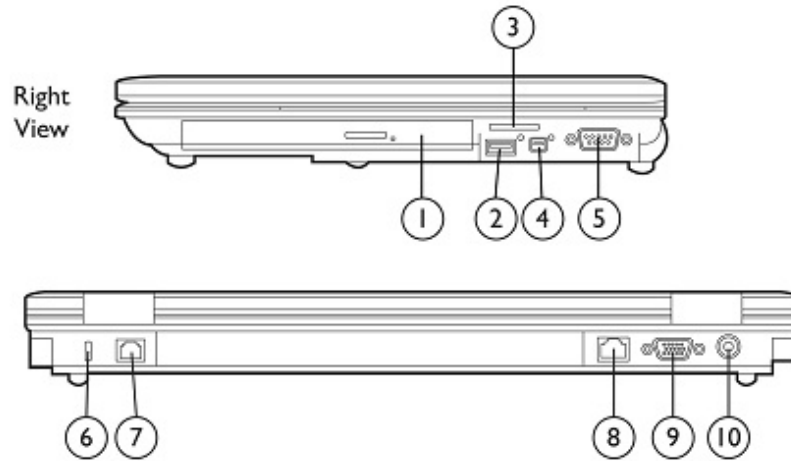

- | | |
|---|-----------------------------------|
| 1. Upgrade Bay (optical drive or second hard drive) | 6. Lock slot |
| 2. (1) USB 2.0 port | 7. RJ-11/modem port |
| 3. Media Card Reader | 8. RJ-45/Ethernet port |
| 4. 1394a port | 9. VGA/external monitor connector |
| 5. Serial port | 10. Power connector |

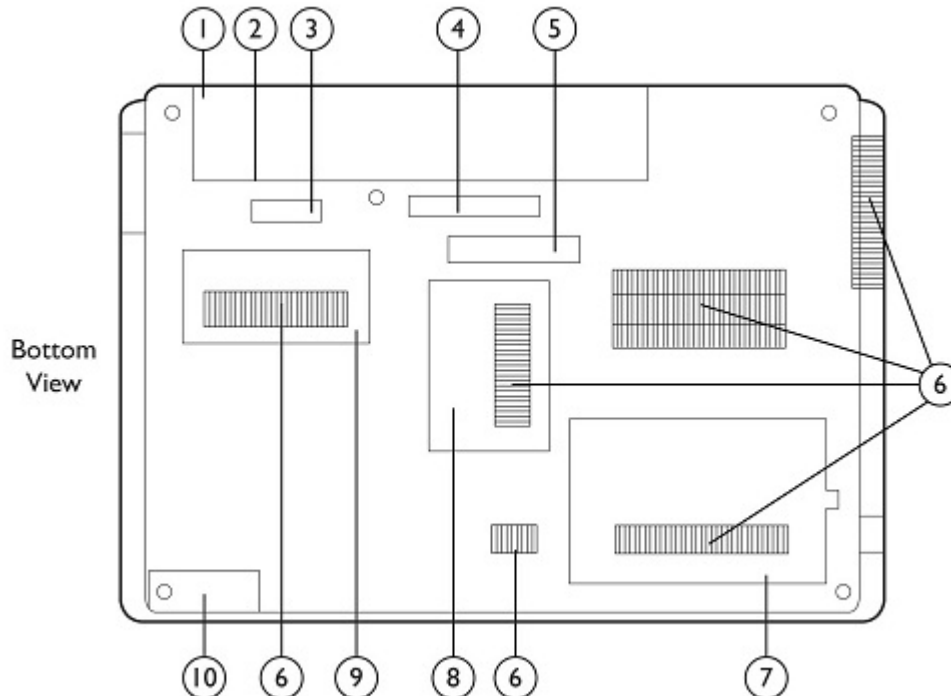

- | | |
|---|---|
| 1. Battery bay | 6. Vents |
| 2. SIM slot for WWAN (select models) – inside battery bay | 7. Hard drive bay |
| 3. Battery release latch | 8. Memory module compartment |
| 4. Docking connector | 9. WLAN/WWAN module compartment (select models) |
| 5. Secondary battery connector | 10. Bluetooth module compartment |

Overview

At A Glance

- Genuine Windows 7 versions, Genuine Windows Vista versions, Genuine Windows Vista Business available through downgrade rights from Windows 7, or FreeDOS
- New AMD architecture
 - ATI Mobility Radeon™ 4250 HD Graphics
 - AMD Phenom™ II Quad-Core, Triple-Core, or Dual-Core Mobile Processor, AMD Turion™ II Dual-Core Mobile Processor, or AMD Athlon™ II Dual-Core Processor
- Widescreen LED-backlit HD or HD+ display 15.6-inch diagonal
- Starting at 2.51 kg / 5.5 lb
- Flexible wireless connectivity options:
 - Integrated HP un2420 EV-DO/HSPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology with GPS
 - Integrated Broadcom 802.11 a/b/g/n, b/g/n, or b/g (Russia/Ukraine only) wireless LAN module
 - Bluetooth® v2.1+EDR
- Touchpad with scroll zone; optional pointstick
- Full-sized spill-resistant keyboard with drains; full separate numeric keypad
- Touch-sensitive controls for HP QuickLook 3, HP QuickWeb, wireless on/off, mute, volume down, volume up; calculator button
- Choice of 9-cell (93 WHr) or HP Long Life 6-cell (51 WHr) battery
- HP Long Life 3-cell (47 WHr) Battery available as after-market option
- Optional external batteries: HP Ultra-Capacity Battery, HP Extended Life Battery
- Optional integrated 2 MP Webcam with dual-microphone array
- Choice of 7200 rpm user-removable hard drive up to 500 GB with HP 3D DriveGuard protection, or 128 GB Solid State Drive
- Upgrade Bay for optical drive
- Media Card Reader
- New eSATA/USB 2.0 combo port
- Reliability with HP 3D DriveGuard, magnesium alloy support structure, HP DuraFinish, and spill-resistant keyboard with drains
- Security features including HP ProtectTools with Central Management, Computrace LoJack Pro ready, HP SpareKey, HP Disk Sanitizer, TPM 1.2;* optional Smart Card Reader (replaces ExpressCard slot), optional HP Fingerprint Sensor, and optional HP Privacy Filter
- HP Power Assistant allows you to conserve power, stretch battery run-time, accurately monitor your reported power need, and report workforce power consumption.
- HP QuickLook 3 for instant access to e-mail, calendar, and contacts; HP QuickWeb for fast access to the web
- HP DayStarter displays your calendar and battery charge while Windows starts up
- HP Support Assistant helps maintain your PC performance and resolve problems with automated updates and tuneups, onboard diagnostics, and guided assistance.
- Options include HP Advanced Docking Station, HP Docking Station, HP USB 2.0 Docking Station, and HP Essential USB 2.0 Port Replicator
- BFR/PVC-free**, ENERGY STAR qualified and EPEAT Gold registered in the U.S. EPEAT status varies by country please see epeat.net.

* TPM module disabled where not permitted by law (for example, Russia and China).

** This notebook is brominated flame retardant and polyvinyl chloride-free (BFR/PVC-free) on notebooks that are non-WWAN; meeting the evolving definition of 'BFR/PVC-free' as set forth in the "iNEMI Position Statement on the 'Definition of Low-Halogen' Electronics (BFR/CFR/PVC-Free)". Plastic parts contain < 1000 ppm (0.1%) of bromine [if the Br source is from BFRs] and < 1000 ppm (0.1%) of chlorine [if the Cl source is from CFRs or PVC or PVC copolymers]. Power supply and power cords are not BFR/PVC-free. Service parts after purchase may not be BFR/PVC-free.

Standard Features (availability may vary by country)

Processors

AMD Phenom II Quad-Core Mobile Processor N950 (2.1 GHz, 35W, 2 MB L2 cache)
AMD Phenom II Quad-Core Mobile Processor N930 (2.0 GHz, 35W, 2 MB L2 cache)
AMD Phenom II Triple-Core Mobile Processor N850 (2.2 GHz, 35W, 1.5 MB L2 cache)
AMD Phenom II Triple-Core Mobile Processor N830 (2.1 GHz, 35W, 1.5 MB L2 cache)
AMD Phenom II Dual-Core Mobile Processor N640 (2.9 GHz, 35W, 2 MB L2 cache)
AMD Phenom II Dual-Core Mobile Processor N620 (2.8 GHz, 35W, 2 MB L2 cache)
AMD Turion II Dual-Core Mobile Processor N530 (2.5 GHz, 35W, 2 MB L2 cache)
AMD Turion II Dual-Core Mobile Processor P520 (2.3 GHz, 25W, 2 MB L2 cache)
AMD Athlon II Dual-Core Processor for Notebook PCs P340 (2.2 GHz, 25W, 1 MB L2 cache)
AMD Athlon II Dual-Core Processor for Notebook PCs P320 (2.1 GHz, 25W, 1 MB L2 cache)

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

Operating System

Preinstalled

Genuine Windows 7 Professional Edition 32*
Genuine Windows 7 Professional Edition 64*
Genuine Windows 7 Home Premium Edition 32*
Genuine Windows 7 Home Basic Edition 32* (select countries)
Genuine Windows Vista Business 32**
Genuine Windows Vista Home Basic 32**
FreeDOS

Supported

Genuine Windows 7 Enterprise 32*
Genuine Windows 7 Enterprise 64*
Genuine Windows 7 Ultimate 32*
Genuine Windows 7 Ultimate 64*
Genuine Windows Vista Enterprise 32**
Genuine Windows Vista Enterprise 64**

Certified

SuSE Linux Enterprise Desktop 11

* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

** Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

Chipset

AMD M880G Chipset

Graphics

ATI Mobility Radeon HD 4250
Microsoft DirectX 10.1 capable

Standard Features (availability may vary by country)

Display	Internal	15.6-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution) 15.6-inch diagonal LED-backlit HD+ WVA anti-glare (1600 x 900 resolution)
	External	HP Privacy Filter support Up to 32-bit per pixel color depth DisplayPort supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz DVI-D (single link) video signal available through DVI port in optional HP Docking Station (sold separately) supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

Memory	Standard	DDR3 PC3-10600 SDRAM (1333 MHz)* Two SODIMM slots supporting dual-channel memory 2048 MB and 4096 MB SODIMMs
	Maximum Dual-channel	Upgradeable to 8192 MB with 4096 MB SODIMMs in slots 1 and 2 Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

* Memory speed is processor dependent.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Communications	Integrated Marvell Gigabit Ethernet PCI Controller (10/100/1000 NIC)* 56K V.92 modem** * The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required. ** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.
-----------------------	---

Standard Features (availability may vary by country)

Wireless Devices

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

HP un2420 EV-DO/HSPA Mobile Broadband Module Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications such as Computrace LoJack Pro Premium for HP ProtectTools.

NOTE: Separately purchased mobile network operator service is required.

Two 850/900/1575/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.

All 802.11 integrated wireless LAN options

Wi-Fi Certified*

Cisco Compatible Extensions support

Wired Equivalent Privacy (WEP) support up to 128-bit keys

Wi-Fi Protected Access (WPA) and WPA2 support

802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP

Advanced Encryption Standard (AES) support

Dual antennas integrated in the display enclosure

Broadcom 4322AGN 802.11a/b/g/n WiFi Adapter

Integrated support for 802.11 a, b, g, and n

Up to 300 mbps data rate

Broadcom 4313GN 802.11b/g/n WiFi Adapter

Integrated support for 802.11 b, g, and n

Up to 72 mbps data rate

Broadcom 4312G 802.11b/g WiFi Adapter (Russia/Ukraine only)

Integrated support for 802.11 b and g

Up to 54 mbps data rate

HP Integrated Module with Bluetooth 2.1+EDR Wireless Technology

Bluetooth Specification v2.1+EDR compliant

Works with a wide range of Bluetooth devices

Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, 12 function keys, and 19.05 x 19.05 mm key pitch (center-to-center spacing). U.S. and International key layouts are available. Other features include hotkeys for instant access to power conservation and brightness. The HP ProBook 6555b Includes a separate numeric keypad.

Standard Features (availability may vary by country)

Touch-sensitive controls Touch-sensitive controls provide easy access to the following features: HP QuickLook 3, HP QuickWeb, wireless on/off, volume mute, volume up, volume down. The HP ProBook 6555b also features a calculator button

Pointing device Touchpad with scroll zone, two pick buttons
Optional pointstick with two additional pointstick buttons

Expansion card slots

ExpressCard/54 slot	Supports ExpressCard/54 and ExpressCard/34
or	
Optional Integrated Smart Card Reader (replaces ExpressCard/54 slot)	Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
Media Card Reader	Supports SD (Secure Digital), HC-SD (High Capacity Secure Digital), MultiMedia Card, HS-MultiMedia Card (MultiMedia Card Plus), Sony Memory Stick, Sony Memory Stick Pro, Memory Stick Duo*, Picture card

Additionally, the following cards are supported via passive adapters (sold separately): Mini-Secure Digital (Mini-SD), Transflash (Micro-SD), Reduced size Multimedia card (RS-MultiMedia Card), Reduced size Dual voltage Multimedia card, MultiMedia Card Mobile Cards, MultiMedia Card Micro Cards, Memory Stick Duo (MS Duo)*, Memory Stick Duo Pro (MS Duo Pro)*, Memory Stick M2 Micro

* Memory Stick Duo Adapters are required and sold separately. Inserting a Memory Stick Duo Card directly into your notebook could damage the memory card and/or notebook.

Internal Storage

Hard drives	250/320/500 GB 7200 rpm SMART SATA II 320 GB 7200 rpm SMART SATA II Self Encrypting Drive
NOTE:	These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 10 GB is reserved for the system recovery software.
HP 3D DriveGuard (Windows only)	The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.
Solid State Drive	128 GB

Upgrade Bay

Fixed 12.7 mm SATA optical drive	DVD+/-RW SuperMulti DL LightScribe Drive DVD-ROM Drive
Weight saver	

Standard Features (availability may vary by country)

Interfaces	ExpressCard/54 slot	One (or optional Smart Card Reader)
	External monitor	Two – (1) DisplayPort, (1) VGA
	1394a	One
	Stereo microphone in	One
	Stereo headphone/line out	One
	Power connector	One
	RJ-11/modem	One
	RJ-45/Ethernet	One
	USB 2.0	Three
	eSATA/USB 2.0 combo	One
	Serial port	One
	Docking connector	One
	Secondary battery connector	One

Audio/Visual

HD audio (HP Premier Sound)
Integrated stereo speakers
Integrated microphone (dual-microphone array when equipped with optional 2 MP webcam)
Touch-sensitive controls for volume up, volume down, and mute
Stereo headphone/line out
Stereo microphone/line in

Optional 2 MP webcam

- Supports videoconferencing and still image capture
- Large image sensor for excellent color matching and good low light sensitivity
- Up to 30 frames/sec
- Fixed focus lens
- Video capture at VGA, 1.3 Mpixel, and 2 Mpixel resolutions
- 16-bit true color (camera sensors output YCrCb format among others)

Standard Features (availability may vary by country)

Software	Preinstalled software with Windows operating system	HP Recovery Manager (available with Windows 7 or Vista only) HP Support Assistant (available with Windows 7 or Vista only) HP ProtectTools Security Manager HP ProtectTools for Central Management HP Quick Launch Buttons Software HP QuickLook 3 HP QuickWeb HP Power Assistant HP Connection Manager 3.1 HP Wireless Assistant HP DayStarter Microsoft Office 2010 preloaded (purchase of a Product Key required to activate a full Office 2010 suite)* McAfee Total Protection* PDF Complete Special Edition** Intervideo WinDVD – DVD Player (select models) Roxio Creator Business (select models) HP Webcam Software (select models) Skype WinZip 14.5 trial
	Additional software available from the web	HP SoftPaq Download Manager

* Microsoft Office 2010 Preloaded includes reduced functionality versions of Word and Excel. Purchase of Product Key required to activate full Office 2010 suite available at participating resellers/retailers and <http://www.office.com>.

** 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

*** 60 day trial; purchase license afterwards for full functionality

HP Recovery Manager	Models shipped with Windows 7 or Windows Vista include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 10 GB of the hard drive is reserved for the system recovery software.
----------------------------	--

Standard Features (availability may vary by country)

Security

Standard Features

HP ProtectTools Security Manager
Enhanced Pre-Boot Security
HP SpareKey
One-Step Logon
Setup Password
TPM 1.2 Embedded Security Chip*
TPM Enhanced DriveLock*
HP Disk Sanitizer
Lock slot
Support for Computrace** LoJack Pro for HP ProtectTools

Optional Features

Smart Card Reader Compatible with ISO 7816 compliant Smart Cards PC/SC interface support (replaces ExpressCard/54 slot)

HP Fingerprint Sensor Enhanced sensor scans the fingerprint to uniquely identify and authenticate a person.

HP Privacy Filter Narrows viewing area so that screen data is visible only to persons directly in front of the monitor.

Computrace LoJack Pro Premium for HP ProtectTools with GPS Tracking** Subscription based security solution providing the ability to track, initiate physical recovery, conduct asset management, and perform remote data delete by utilizing GPS technology. GPS functionality requires HP un2420 EV-DO/HSPA Mobile Broadband Module.

* TPM module disabled where use is restricted by law; for example, Russia and China.

** The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription with terms ranging from one to five years.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

HP ProtectTools Security Manager with Central Management

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The following modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup:

- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Computrace LoJack Pro for HP ProtectTools

HP ProtectTools is now capable of being centrally managed from a single control point. HP ProtectTools is management ready out of the box, in partnership with Digital Persona, and provides features that customers expect from a centrally managed security solution, such as user provisioning, credential reset, and system and network revocation. Central Management is available in two feature levels:

- Digital Persona Pro Enterprise: Designed for environments with Active Directory. For

Standard Features (availability may vary by country)

large businesses, as well as smaller businesses utilizing an active directory based infrastructure. Gives IT Managers the ability to create role based security policies, provision users, and create login policies based on passwords, biometrics or smart cards. Management features also include remote credential recovery in case the user forgets the password, loses the smart card, or cannot use the fingerprint reader for any reason. In addition, advanced auditing capabilities are also built in.

- Digital Persona Workgroup Manager: Designed for environments without Active Directory. This option can be used by smaller businesses as well as workgroups within large organizations. Workgroup Manager offers features similar to Digital Persona Pro Enterprise, but without active directory integration. Workgroup activation is built into HP ProtectTools, and activation of up to 5 seats is completely free.

Power Supply

External 90-watt Smart AC adapter, 1.8 meter (6-foot) power cord included.
Total length including external AC adapter is 3.66 meter (12 feet).
HP Fast Charge*

*HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to the 9-cell primary battery, the 12-cell Ultra-Capacity batteries, or the HP Long Life Battery.

Battery

Primary battery	HP 9-cell (93 WHr) Li-Ion battery HP 6-cell (55 WHr) Li-Ion battery HP Long Life 6-cell (51 WHr) battery*
Optional HP Long Life Battery*	3-cell (47 WHr) Li-Ion battery
Optional HP Extended Life Battery	8-cell (52 WHr) Li-Ion battery
Optional HP Ultra-Capacity Battery	12-cell (95 WHr) Li-Ion battery

* The 3-year limited warranty on the HP Long Life Battery is only available on platforms with a 3-year system warranty. The HP Long Life Battery will carry a limited 1-year warranty on platforms with a 1-year system warranty.

Battery Life

	HP 9-cell (93 WHr) Primary	HP 6-cell (55 WHr) Primary
Primary battery	Up to 8 hours	Up to 4 hours 30 minutes
Primary battery and optional HP Extended Life Battery	Up to 11 hours 30 minutes	Up to 9 hours
Primary battery and optional HP Ultra-Capacity Battery	Up to 15 hours 45 minutes	Up to 13 hours 30 minutes

System Standby Time

Up to 1 week

Standard Features (availability may vary by country)

Power Conservation ATI PowerPlay technology
 Hibernation
 Standby
 ACPI compliance

Docking and Stands HP 90W Docking Station
 HP 120W Advanced Docking Station
 HP USB 2.0 Docking Station
 HP Essential USB 2.0 Port Replicator
 HP Dual Hinge Notebook Stand
 HP Display & Notebook Stand
 HP Adjustable Display Stand
 HP Adjustable Dual Display Stand

NOTE: Some HP Docking stations may not support every feature of some HP Notebook models. Please refer to the individual docking station documentation for specific information about supported features.

Service and Support HP Services offers 1-year warranty options depending on country;
 1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Options (availability may vary by country)

NOTE: Options/capabilities listed in the QuickSpecs represent those capabilities available through Base Units or Build to Order configurations. The various product features and capabilities will vary in terms of configurable vs. aftermarket options (AMOs). There may be options and capabilities available through CTO that are not available as AMOs.

Memory	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA

Storage	HP Upgrade Bay SATA DVD+/-RW SuperMulti DL LightScribe Drive	AK869AA
	HP 250 GB Pocket Media Drive	FE477AA
	HP External USB Drive CD/DVD R/RW	FS943AA
	HP Upgrade Bay SATA 500 GB 7200 rpm Hard Drive	AU097AA
	HP Primary SATA 500 GB 7200 rpm Hard Drive	AU098AA
	HP Primary SATA 320 GB 7200 rpm Hard Drive	AS282AA

Expansion Solutions	HP 90W Docking Station	VB041AA
	HP 120W Advanced Docking Station	NZ222AA
	HP USB 2.0 Docking Station	AY052AA
	HP Essential USB 2.0 Port Replicator	AQ731AA
	HP Dual Hinge Notebook Stand	AW661AA
	HP Display & Notebook Stand	AW662AA
	HP Adjustable Display Stand	AW663AA
HP Adjustable Dual Display Stand	AW664AA	

Power	HP Smart 65W Travel AC Adapter	AU155AA
	HP 90W Smart AC Adapter	ED495AA
	HP 90W Smart Combo Adapter	AJ652AA
	HP Long Life 3-Cell Battery	AU213AA
	HP 6-Cell Li-Ion Primary Battery	KU531AA
	HP 9-Cell Li-Ion Primary Battery	AT908AA
	HP Extended Life Battery	AJ359AA
	HP Ultra-Capacity Battery	AT486AA

Options (availability may vary by country)

Carrying Cases	HP Basic Carrying Case	AJ078AA
	HP Business Nylon Case	BP848AA
	HP Professional Slim Top Load Case	AY530AA
	HP Executive Leather Case	RR316AA
	HP Business Nylon Backpack	BP849AA
	HP Deluxe Roller Case	GD405AA
	HP Basic Backpack	AM863AA
	HP Basic Messenger Carrying Case	AP355AA
	HP Professional Series Carrying Case	AT886AA
	HP Professional Series Backpack	AT887AA
	HP Professional Series Designer Tote	AT889AA
	HP Professional Series Slip Case	AT890AA
HP Elite Series Designer Tote	AT891AA	
<hr/>		
Security	HP Notebook Combination Lock	AY475AA
	HP Docking Station Cable Lock	AU656AA
	HP 14.0-inch Display Privacy Filter	AU100AA
	HP 15.6-inch Display Privacy Filter	AU103AA
	HP ExpressCard Smart Card Reader	AJ451AA
<hr/>		
Input/Output Devices	HP USB Optical Travel Mouse	RH304AA
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP Bluetooth ExpressCard Mouse	GK872AA

Memory

DDR3 PC3-10600 SDRAM (1333 MHz)*
Two SODIMM slots supporting dual-channel memory
SODIMM sizes supported: 1024 MB, 2048 MB and 4096 MB

- Standard Memory**
- 2048 MB (1024 MB x 2)
 - 2048 MB (2048 MB x 1)
 - 3072 MB (2048 MB + 1024 MB)
 - 4096 MB (2048 MB x 2)
 - 4096 MB (4096 MB x 1)

Optional Memory Upgrades Support for up to 8192 MB of memory with the installation of optional DDR3 SDRAM memory kits. Both memory slots are user-accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
2048 MB	1024 MB	1024 MB
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
4096 MB	4096 MB	Empty
8192 MB	4096 MB	4096 MB

* Memory speed is processor dependent.

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP-branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Memory Upgrades	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA

Storage

Upgrade Bay Drive Support

	Quantity Supported	Drive Bay
DVD+/-RW SuperMulti DL LightScribe Drive	One	Upgrade Bay
DVD-ROM Drive	One	Upgrade Bay
Weight Saver	One	Upgrade Bay

Internal Storage Device

	Quantity Supported	Drive Bay
Hard Drives		
500 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 7200 rpm SMART SATA II Self Encrypting Hard Drive	One	Dedicated hard drive bay
250 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
160 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
Solid State Drive		
128 GB Solid State Drive	One	Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxWxD)	34.8 mm (at front) x 371.4 mm x 248.0 mm 1.37 in (at front) x 14.62 in x 9.76 in
	Weight	HP ProBook 6555b: Starting at 2.51 kg (5.5 lb) with weight saver (no optical drive) Starting at 2.64 kg (5.81 lb) with DVD-ROM drive
NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery and hard drive.		
Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	18.5 V
	Average Operating Power	19.49 W
	Max Operating Power	< 90 W
Temperature	Operating	0° to 35° C (32° to 95° F) (not writing optical) 5° to 35° C (41° to 95° F) (writing optical)
	Non-operating	20° to 60° C (–4° to 140° F)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 38.7° C (101.6° F) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	–15.24 to 3,048 m (–50 to 10,000 ft)
	Non-operating	–15.24 to 12,192 m (–50 to 40,000 ft)
Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered Gold in United States**
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KCC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes

Technical Specifications

SABS	Yes
UKRSERTCOMPUTER	Yes

* Configurations of the HP ProBook 6555b that are ENERGY STAR qualified are identified as HP ProBook 6555b ENERGY STAR on HP websites and on www.energystar.gov.

** EPEAT Registered Gold in U.S. EPEAT registration varies by country. See www.epeat.net for registration status by country.

NOTE: For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

HP 90W Smart AC Adapter	Dimensions	12.7 x 5.0 x 2.9 cm (5.00 x 1.97 x 1.1 in)		
	Weight	370 g (0.82 lb)		
	Input	100 to 240 VAC		
		Input Efficiency	83% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
	Output	Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version 2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version	
		Output power	90W	
		DC output	19.0V	
	Connector	Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
	Environmental Design	3 pin/grounded, mates with interchangeable cords		
		Operating temperature	0° to 40° C (32° to 104° F)	
		Non-operating (storage) temperature	-20° to 65° C (-4° to 149° F)	
		Altitude	0 to 3,048 m (0 to 10,000 ft)	
		Humidity	20% to 80%	
EMI and Safety Certifications	Storage Humidity	10% to 90%		
	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF– over 200,000 hours at 25°C ambient condition.			

NOTE: Unless otherwise noted, temperature limits listed in the following component specifications relate to the internal temperatures of these components and not to the environment in which the PC is operating.

Technical Specifications

Optional HP Ultra-Capacity Battery	Dimensions (H x W x L)	3.33 x 15.25 x 26.88 cm (1.3 x 6.0 x 10.6 in)		
	Weight	0.803 kg (1.77 lb)		
	Cells/Type	12-cell Lithium-Ion		
	Energy	Watt-hour Capacity	95 WHr	
	Temperature	Operating (Charging)	0° to 45° C (32° to 113° F)	
		Operating (Discharging)	-10° to 60° C (14° to 140° F)	
		Non-operating	-20° to 60° C (-4° to 140° F)	
	Battery Re-Charge Time	Smart Adapter	3 to 4 hours	
System ON		4 to 5 hours (depending on system power consumption)		
Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery			
<hr/>				
Optional HP Extended Life Battery	Dimensions (H x W x L)	2.5 x 10.0 x 22.0 cm (1.0 x 3.9 x 8.7 in)		
	Weight	0.455 kg (1.00 lb)		
	Cells/Type	8-cell Lithium-Ion		
	Energy	Watt-hour Capacity	52 WHr	
	Temperature	Operating (Charging)	0° to 45° C (32° to 113° F)	
		Operating (Discharging)	-10° to 60° C (14° to 140° F)	
		Non-operating	-20° to 60° C (-4° to 140° F)	
	Battery Re-Charge Time	System in OFF mode or Standby	3 hours	
System ON		3 to 5 hours (depending on system power consumption)		
HP Fast Charge Technology		Charges the battery up to 90% within 90 minutes when system is OFF		
Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery			
<hr/>				
Optional HP Long Life 3-cell 47 WHr Lithium-Ion Battery	Dimensions (H x W x L)	2.0 x 5.3 x 20.4 cm (0.8 x 2.1 x 8.0 in)		
	Weight	0.32 kg (0.71 lb)		
	Cells/Type	3-cell Lithium-Ion		
	Energy	Watt-hour Capacity	47 WHr	
	Temperature	Operating (Charging)	0° to 45° C (32° to 113° F)	
		Operating (Discharging)	-10° to 60° C (14° to 140° F)	
		Non-operating	-20° to 60° C (-4° to 140° F)	
	Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours	
System ON		3 to 5 hours (depending on system power consumption)		
HP Fast Charge Technology		Charges the battery up to 90% within 90 minutes when system is OFF		

Technical Specifications

9-Cell (93 WHr) Lithium-Ion battery	Dimensions (H x W x L)	0.8 x 2.9 x 8.3 in (2.0 x 7.3 x 21.0 cm)		
	Weight	1.07 lb (0.488 kg)		
	Cells/Type	9-cell Lithium-Ion		
	Energy	Watt-hour Capacity	93 WHr	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (-10° to 60° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
Battery Re-Charge Time	System in OFF mode or Standby	3 to 4 hours		
	System ON	4 to 6 hours (depending on system power consumption)		

6-Cell (55 WHr) Lithium-on battery	Dimensions (H x W x L)	2.0 x 5.3 x 20.4 cm (0.8 x 2.1 x 8.0 in)		
	Weight	0.32 kg (0.71 lb)		
	Cells/Type	6-cell Lithium-Ion		
	Energy	Watt-hour Capacity	55 WHr	
	Temperature	Operating (Charging)	0° to 45° C (32° to 113° F)	
		Operating (Discharging)	-10° to 60° C (14° to 140° F)	
		Non-operating	-20° to 60° C (-4° to 140° F)	
Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours		
	System ON	3 to 5 hours (depending on system power consumption)		
	HP Fast Charge Technology Charges the battery up to 90% within 90 minutes when system is OFF			

HP Long Life 6-cell 51 WHr Lithium-Ion Primary battery	Dimensions (H x W x L)	2.0 x 5.3 x 20.3 cm (0.8 x 2.1 x 8.0 in)		
	Weight	0.331 kg (0.73 lb)		
	Cells/Type	6-cell Lithium-Ion		
	Energy	Watt-hour Capacity	51 WHr	
	Temperature	Operating (Charging)	0° to 45° C (32° to 113° F)	
		Operating (Discharging)	-10° to 60° C (14° to 140° F)	
		Non-operating	-20° to 60° C (-4° to 140° F)	
Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours		
	System ON	3 to 5 hours (depending on system power consumption)		

Technical Specifications

Displays

15.6-inch LED HD (1366 x 768) anti-glare	Active Area (W x H)	34.4 x 19.4 cm (13.54 x 7.59 in)	
	Diagonal Size	39.6cm (15.6 in)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.252 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	100 ppi	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

15.6-inch LED HD+ WVA (1600 x 900) anti-glare	Active Area (W x H)	34.4 x 19.4 cm (13.54 x 7.59 in)	
	Diagonal Size	39.6 cm (15.6 in)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.215 mm
		Format	1600 x 900
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	118 ppi	
	Viewing Angle	±60° Horizontal, ± 50° Vertical (minimum) or ±70° Horizontal, ±60° Vertical (typical)	

Internal Storage

Technical Specifications

500 GB 7200 rpm SATA Hard Drive	Drive Weight	115 g (0.25 lbs)	
	Capacity	500 GB	
	Height	9.5 mm (0.37 in)	
	Width	70 mm (2.75 in)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	0° to 60° C (32° to 140° F) [case temp]	
Features	ATA Security		

320 GB 7200 rpm SATA Hard Drive	Drive Weight	115 g (0.25 lbs)	
	Capacity	320 GB	
	Height	9.5 mm (0.37 in)	
	Width	70 mm (2.75 in)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	0° to 60° C (32° to 140° F) [case temp]	
Features	ATA Security		

Technical Specifications

250 GB 7200 rpm SATA Hard Drive

Drive Weight	115g (0.25 lbs)
Capacity	250 GB
Height	9.5 mm (0.37 in)
Width	70 mm (2.75 in)
Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
Seek Time (typical reads, including settling)	Single Track 1.5 ms
	Average 11 ms
	Maximum 22 ms
Rotational Speed	7200 rpm
Logical Blocks	488,397,168
Operating Temperature	0° to 60° C (32° to 140° F) [case temp]
Features	ATA Security

128 GB 2.5-inch SATA Solid State Drive

Weight	80.1 Grams
Capacity	128 GB
Height	9.5 mm (0.37 in)
Width	70 mm (2.75 in)
Interface	SATA
Performance	Maximum Sequential Read 220 MB/s
	Maximum Sequential Write 200 MB/s
Logical Blocks	250,069,680
Operating Temperature	0° to 70°C (32° to 158°F) [case temp]
Features	ATA Security; ATA-7 ;SATA 2.6; DIPM

Technical Specifications

DVD-ROM Drive	Access Times	Random	< 110 ms CD (typical) < 110 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM	Up to 3,600 KB/s
		8X-DVD	Up to 10,800 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5 GB	
	Transport	Tray Loading	

DVD+/-RW SuperMulti DL LightScribe Drive	Access Times	Random	< 150ms CD (typical) < 160 ms DVD (typical)
		Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, LightScribe	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

Technical Specifications

Audio

Hardware	Implementation	IDT 92HD75B High Definition CODEC
	Touch-Sensitive Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, one microphone on configurations without optional webcam; dual-microphone array when equipped with optional webcam

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Security

HP Fingerprint Sensor (optional)	Mobile Voltage Operation	3.0V-3.6V Single Supply
	Operating Temperature	0° - 70°C (32° - 158°F)
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	High-Rate Image Capture	Up to 240 image frames /sec
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)
	Detection Matrix	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

Communications

Technical Specifications

Integrated Marvell 10/100/1000 NIC	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	Power Management	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption
	Performance Features	TCP/IP/UDP Checksum Offload (configurable)
	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite
	Interface	PCI Express x1
	NIC Device Driver Name	Marvell Yukon 88E8072 PCI-E Gigabit Ethernet Controller

V.92 56K Data/Fax Modem Form Factor	MDC 1.5 Daughtercard
Power Management Support	APM Revision 1.2, ACPI
Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A

Technical Specifications

Fax Mode Capabilities	Bell 103J TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

HP un2420 EV-DO/HSPA Mobile Broadband Module

Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 – CS4 and MSC1 – MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
Maximum Data Rates	UMTS (HSPA) – 7.2 Mbps (Download), 2.0 Mbps (Upload) CDMA (EVDO Release A) – 3.1 Mbps (Download), 1.8 Mbps (Upload)
GPS	Standalone GPS enabled
GPS Bands	L1 – 1575.42 MHz
Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
Maximum Power Consumption	2500mA (peak); 1000mA (average)
Power Consumption, Sleep Mode	5 mA
Power Management	USB selective suspend Integrated notebook wireless button
Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express MiniCard, USB 2.0 interface
Weight	11.5 g

Technical Specifications

Dimensions (Length x Width x Thickness)	51 x 30 x 5 mm (2.01 x 1.18 x 0.18 in)
Voltage, Operating	3.3v +/- 10%
Temperature, Operating (from TIA/EIA/IS-98-D)	-30° to 60° C (-22° to 140° F) (full RF performance) -30° to 75° C (-22° to 167° F) (reduced RF performance)
Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 85° C (-40° to 185° F)
Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
Configuration Utilities	HP Connection Manager
LED Activity	LED Off – Radio Off; Solid LED On – Radio On

Broadcom 4312G 802.11b/g WiFi Adapter (Russia/Ukraine only)

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP
Frequency Band	2.4 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK) ²	17 dBm , nominal
Output Power (for OFDM; power varies by data rate) ²	15 dBm , nominal
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)

Technical Specifications

Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express Half-MiniCard
Weight	6 g (0.013 lb)
Dimensions	4.75 x 26.8 x 30 mm (0.19 x 1.06 x 1.18 in)
Operating Voltage	3.3v +/- 10%
Temperature	Operating -10° to 65° C (14° to 149° F) Non-operating -40° to 80° C (-40° to 176° F)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 3,048 m (0 to 10,000 ft) Non-operating 15,240 m (0 to 50,000 ft)
Configuration Utility⁴	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none">• Microsoft Windows XP Wireless Network Connection Manager• Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) Microsoft Windows Vista <ul style="list-style-type: none">• Microsoft Windows Vista Wireless Network Connection Manager• Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions.
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON <ol style="list-style-type: none">1. Check latest software/driver release for updates on supported security features.2. Maximum output power may vary by country according to local regulations.3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

**Broadcom 4322AGN
802.11a/b/g/n
WiFi Adapter**

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP
Frequency Band	2.4 GHz and 5 GHz

Technical Specifications

Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps
Frequency Support	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz bands
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK)²	17 dBm
Output Power (for OFDM; power varies by data rate)²	15 dBm
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	270 Mbps: -61dBm, , 54 Mbps: -72 dBm, 11 Mbps: -85 dBm , 1 Mbps: -92 dBm
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express Half-MiniCard
Weight	6 g (0.013 lb)
Dimensions	4.75 x 26.8 x 30 mm (0.19 x 1.06 x 1.18 in)
Operating Voltage	3.3v +/- 10%
Temperature	Operating -10° to 65° C (14° to 149° F) Non-operating -40° to 80° C (-40° to 176° F)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 3,048 m (0 to 10,000 ft) Non-operating 15,240 m (0 to 50,000 ft)
Configuration Utility⁴	Microsoft Windows XP Choice of Configuration Utility:

Technical Specifications

- Microsoft Windows XP Wireless Network Connection Manager
- Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)

Microsoft Windows Vista

- Microsoft Windows Vista Wireless Network Connection Manager
- Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions.

LED Activity

LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Broadcom 4313GN 802.11b/g/n WiFi Adapter

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Win7, Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6.5, 7.2, 13, 14.4, 19.5, 21.7, 26, 28.9, 39, 43.3, 52, 57.8, 58.5, 65, 72.2Mbps
Frequency Support	20 MHz: 2.4 GHz bands
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points

Technical Specifications

Output Power (for CCK) ²	17 dBm , nominal	
Output Power (for OFDM; power varies by data rate) ²	15 dBm , nominal	
Power Consumption	Idle associated: 250 mW avg (CLKREQ enabled) Idle unassociated: 425 mW avg Transmit/Receive 20 MHz channel: 5.5 W (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ³	72.2 Mbps: -71 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, usually mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista and Win7. 	

HP Integrated Module with Bluetooth 2.1+EDR Wireless Technology

Bluetooth Specification	2.1+EDR Compliant
Dimensions	30 x 6.5 x 3.25 mm (1.18 x 0.26 x 0.13 in)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate

Technical Specifications

Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
Antenna	Internally integrated within module
Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Temperature	Operating -20° to 70° C (-4° to 158° F) Non-operating -40° to 80° C (- 40° to 176° F)
Humidity	Operating 10% to 90% Non-operating 5% to 95%
Altitude	Operating 4,572 m (15,000 ft) Non-operating 12,192 m (40,000 ft)
Bluetooth Profiles Supported	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2,3} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

Technical Specifications

¹ indicates the profile is supported by Microsoft Windows XP SP2

² indicates the profile is part of Windows Vista

Environmental Data **Eco-Label Certifications** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT – Gold where HP registers commercial notebook products. See <http://www.epeat.net> for registration status in your country.

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	10.93W	11.11W	10.68W
Sleep (Energy Star low power mode)	0.71W	0.77W	0.68W
Off	0.57W	0.63W	0.56W

Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	37 BTU/hr	38 BTU/hr	37 BTU/hr
Sleep	2 BTU/hr	3 BTU/hr	2 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

**Declared Noise Emissions
(in accordance with
ISO 7779 and ISO 9296)**

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.0	22.5
Fixed Disk (random writes)	3.0	22.6

System fan is usually off except when charging the battery

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:
Li-ion

Technical Specifications

Additional information

High capacity Lithium-Ion battery

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 95.1% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated carton – 360 g
 - Cardboard & misc. – 365 g
- Internal:
 - Polyethylene low density – 15 g
 - EPE - Expanded Polyethylene – 90 g
- The Corrugated carton packaging material is made from 70% – 80% recycled content.
- The Cardboard & misc. packaging material is made from 70% – 80% recycled content.
- The Polyethylene low density packaging material is made from 0% recycled content.
- The EPE –Expanded Polyethylene packaging material is made from 70% – 80% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel

Technical Specifications

	<p>efficiency.</p> <ul style="list-style-type: none">● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment (http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none">● Asbestos● Certain Azo Colorants● Certain Brominated Flame Retardants – may not be used as flame retardants in plastics● Cadmium● Chlorinated Hydrocarbons● Chlorinated Paraffins● Formaldehyde● Halogenated Diphenyl Methanes● Lead carbonates and sulfates● Lead and Lead compounds● Mercuric Oxide Batteries● Ozone Depleting Substances● Polybrominated Biphenyls (PBBs)● Polybrominated Biphenyl Ethers (PBBEs)● Polybrominated Biphenyl Oxides (PBBOs)● Polychlorinated Biphenyl (PCB)● Polychlorinated Terphenyls (PCT)● Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.● Radioactive Substances● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)● Nickel finishes that release greater than 0.5 µgrams/cm²/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.
End-of-life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>
Hewlett-Packard Corporate Environmental Information	<p>For more information about HP's commitment to the environment: Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Environment website</p>

Technical Specifications

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2012 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Phenom, Turion, and Athlon are registered trademarks or trademarks of AMD Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.