

The models and dimensions
2020



The definitive guide to the definitive kitchen

The world of Gaggenau is within your hands.

Our products perform exceptionally, are technologically advanced, built without compromise and designed to be appreciated by both the hand and the eye.

This comprehensive handbook will enable the smooth, we would not say effortless, creation of the kitchen for your client. It is all here, clearly and cleanly presented, easy to find and utterly complete. See for yourself.

The difference is Gaggenau.

The oven EB 333	2	EB 333
The ovens 400 series	8	Ovens 400 series
The ovens 200 series	52	Ovens 200 series
The Vario cooktops	90	Vario cooktops
The cooktops	148	Cooktops
The extractors	222	Extractors
The cooling appliances	312	Cooling appliances
The dishwashers washing machine tumble dryer	382	Dishwashers Washing machine
Energy Label Home Connect The accessories	416	Energy Label Home Connect Accessories





EB 333 111

Stainless steel
Width 90 cm

Included in the price

- 1 baking tray, enamelled pyrolysis-safe
- 1 rotisserie spit
- 1 wire rack
- 1 grill tray with wire rack
- 1 plug-in core temperature probe

Special accessories

BA 018 105

Pull-out system
Fully extendable telescopic rails and enamelled cast iron frame.

BA 028 115

Baking tray, enamelled
30 mm deep.

BA 038 105

Wire rack, chromium-plated
Without opening, with feet.

BA 058 115

Heating element for baking stone and
Gastronorm roaster.

BA 058 133

Baking stone.
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).

Not in combination with pull-out
system.

BA 090 100

Black rotary knobs for EB 333, set of 2
Stainless steel knobs with black
coating.

BS 020 002

Pizza paddle, set of 2.

GN 340 230

Gastronorm roaster in cast aluminium.
GN 2/3, height 165 mm, non-stick.

Oven

EB 333

- One-piece front-hinged door with 3 mm precision crafted stainless steel front door panel
- Cushioned door opening and closing system
- Diagonally positioned light sources for optimal interior lighting
- Pyrolytic system
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function
- Automatic programmes
- Core temperature probe with estimation of cooking time
- Hot air fan rotates in both directions for ideal heat distribution
- TFT touch display
- Panel-free appliance with control module behind glass
- Electronic temperature control from 30 °C to 300 °C
- Net volume 83 litres

Heating methods

Hot air.
Eco hot air.
Top + bottom heat.
Top + 1/3 bottom heat.
Top heat.
1/3 top + bottom heat.
Bottom heat.
Hot air + bottom heat.
Hot air + 1/3 bottom heat.
Full surface grill + circulated air.
Full surface grill.
Compact grill.
Baking stone function.
Roaster function.
Dough proofing.
Defrosting.
Keeping warm.

Handling

Rotary knob and TFT touch display operation.
Clear text display.
Option to save individual recipes (incl. core temperature probe).
Personalisation of automatic programmes.
Information key with use indicators.
Front-hinged door with 90° door opening angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.
Automatic programmes.
Rotisserie spit.
Baking stone socket.
Actual temperature display.
Rapid heating.
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
60 W halogen light on the top.
2 x 10 W halogen light on the side.
Enamelled side shelf supports with 3 tray levels, pyrolysis-safe.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Thermally insulated door with quintuple glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning



Pyrolytic system.
Gaggenau enamel.
Heated catalyser to clean the oven air.

Planning notes

The door panel surface of the appliance extends 40 mm from the furniture cavity. The outer edge of the door handle extends 90 mm from the furniture cavity. For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account. To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing. The mains socket needs to be planned outside the built-in niche. The LAN port can be found at the back on the upper left side.

Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Total connected load 5.4 kW.
Plan a connection cable.
Plan a LAN cable.

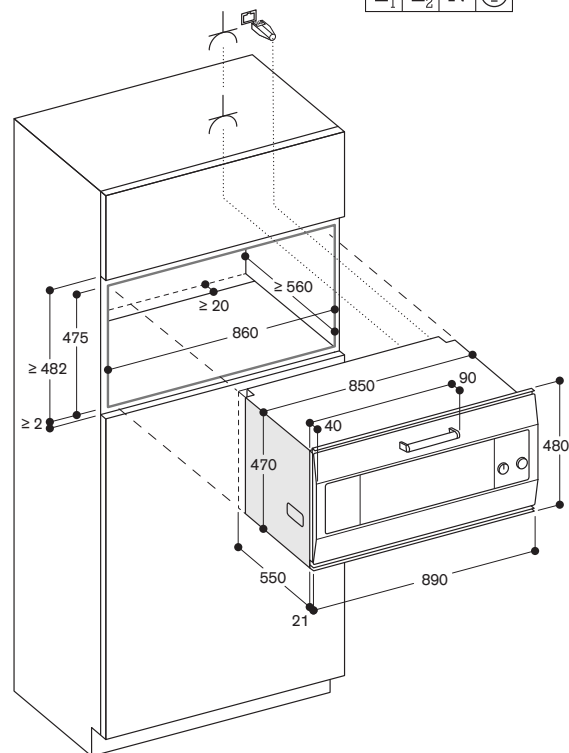

Socket

measurements in mm

Advice: Not every illustrated accessory fits to every oven. For exact allocation see page 6.

BA 090 100
Stainless steel knobs with black coating.



BA 018 105
Pull-out system
Fully extendable telescopic rails and enamelled cast iron frame.




BA 028 115
Baking tray, enamelled
30 mm deep.



BA 038 105
Wire rack, chromium-plated
Without opening, with feet.



BA 058 115
Heating element for baking stone and
Gastronorm roaster



BA 058 133
Baking stone
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately). Not in combina-
tion with pull-out system.



BS 020 002
Pizza paddle, set of 2.



GN 340 230
Gastronorm roaster in cast aluminium
GN 2/3, height 165 mm, non-stick
For roasting in oven with roasting
function.
Lower and upper part can also be
used separately, height 100 and
65 mm.
For ovens with heating element
BA 056 115 or BA 058 115 and
pull-out system BA 016 or BA 018
(both to be ordered separately) and
Combi-steam and steam ovens.



Accessories and special accessories EB 333



EB 333

Black rotary knobs for oven			Oven
BA 090 100	Stainless steel knobs with black coating		◦
Baking tray, enamelled			
BA 028 115	30 mm deep		•/◦
Pull-out rack			
BA 018 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame		◦
Baking stone			
BA 058 133	incl. baking stone support and pizza paddle (heating element must be ordered separately)		◦
Gastronorm roaster, cast aluminium			
GN 340 230	GN 2/3, height 165 mm, non-stick		◦
	For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 421)		
Wire rack, chromium-plated			
BA 038 105	no opening, with feet		•/◦
Part No. 706321	for grill tray ET-Nr. 687055, with opening and feet		•/◦
Grill tray, enamelled			
Part No. 687055	with feet and rotisserie spit attachment, 30 mm deep		•/◦
Heating element			
BA 058 115	Necessary accessory for baking stone BA 058 133		◦
Pizza paddle			
BS 020 002	Set of 2		◦

• Standard.

◦ Special accessory.



Appliance type	Oven	
Stainless steel	EB 333	
Dimensions		
Width	(cm)	90
Appliance dimensions W x H x D ¹	(mm)	890 x 480 x 550
Door panel extension from furniture cavity	(mm)	21
Niche dimensions W x H x D	(mm)	860 x 475 x 560
Net weight	(kg)	79
Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)		
Net volume	(l)	83
Number of cooking compartments		1
Interior dimensions W x H x D	(mm)	624 x 315 x 403
Energy efficiency class with eco hot air		A
Energy Efficiency Index (EEI)		95.6
Energy consumption with top / bottom heat	(kWh)	1.32
Energy consumption with eco hot air	(kWh)	0.86
Heat source		electric
Heating methods		
Temperature range	(°C)	30–300
Hot air / Eco hot air / top + bottom heat		• / • / •
Top heat / bottom heat / hot air + bottom heat		• / • / •
Top + 1/3 bottom heat		•
1/3 top + bottom heat		•
Hot air + 1/3 bottom heat		•
Full surface grill + circulated air		•
Full surface grill		•
Compact grill		•
Baking stone function		•
Roaster function		•
Dough proofing / defrosting / keeping warm		• / • / •
Handling		
TFT touch display		•
Controls at the top / centered / at the bottom		• / – / –
Automatic door opening		–
Clear text display	(No. of languages)	44
Individual recipes		50
Door opening angle	(°)	90
Features		
Electronic temperature control		•
Three-Point core temperature probe		•
Automatic programmes		•
Rotisserie spit		•
Baking stone socket		•
Roasting function		•
Actual temperature display		•
Rapid heating		•
Cooking time, cooking time end, timer, stopwatch		•
Long-term timer		•
Halogen light on the top	(W)	60
Halogen light on the side	(W)	2 x 10
Tray levels	(No.)	3
Digital services (Home Connect) either via LAN or wireless via WiFi. ³		• ³
Accessories		
Enamelled baking tray		1
Size of largest baking tray	(cm ²)	1.780
Wire rack		1
Enamelled grill tray / wire rack for grill tray		1/1
Glass tray		–
Safety		
Thermally insulated door with multiple glazing		5-fold
Child lock / door lock / safety shut-off		• / • / •
Cooled housing with temperature protection		•
Cleaning		
Pyrolytic system		•
Gaggenau enamel		•
Heated air cleaning catalyser		•
Connection		
Total connected load	(kW)	5.38

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche. ² Special accessory, see page 5–6.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



The ovens 400 series

Checklist for appliance combinations 400 series	10
Planning notes for ovens and oven combinations	14
Ovens 400 series	16
Combi-steam ovens 400 series	22
Combi-microwave ovens 400 series	28
Fully automatic espresso machine 400 series	30
Vacuuming drawers 400 series	32
Warming drawers 400 series	34
Accessories special accessories 400 series	38
Technical specifications 400 series	44

Checklist for appliance combinations 400 series

This checklist provides the most relevant parameters for the perfect combination and ordering of ovens, Combi-steam ovens, Combi-microwave ovens, fully automatic espresso machine, vacuuming drawers, warming drawers and dishwashers.

In general:

- All appliances shown can be obtained with stainless-steel-backed full glass doors.
- When several appliances are listed (BS/BM and DV/WS), the first appliance is shown.

Vertical combinations

When planning and ordering please note that

- The door hinges of the appliances must be on the same side.
- The door hinge (right-/left-hinged) is not reversible.
- The width of the appliances is identical.
- The control modules of the two appliances should meet each other in the middle of the combination.
- No further appliances may be fitted above the BS.
- Only appliances with controls at the top can be installed above a dishwasher. The niche for appliances that are installed above it must be 56 cm wide. The dishwasher is 60 cm wide. A stainless-steel-backed full glass door can be obtained as a special accessory.

Horizontal combinations

When planning and ordering please note that

- The door hinges need to be placed on the outside in order to use the full available door opening angle.
- The door hinge (right-/left-hinged) is not reversible.
- A minimum clearance of 10 mm between the two doors must be observed.
- Combi-steam ovens, Combi-microwave ovens and fully automatic espresso machine in combination with a vacuuming drawer or a warming drawer (14 cm in height) have the same total height as a 60 cm wide oven.
- The control modules are either all at the top or all at the bottom.

BO Ovens
 BS Combi-steam ovens
 BM Combi-microwave ovens
 CM Fully automatic espresso machine
 DV Vacuuming drawers
 WS Warming drawers
 DF Dishwashers

Vertical combination, 76 cm / 30" wide appliances



- BS 484/BM 484
- BO 480
- WS 482



- BX 480
- WS 482

Combination of 4, 76 cm / 30" wide appliances



- BS 485/BM 485
- BO 481



- BS 484/BM 484
- BO 480

Horizontal combination, 76 cm / 30" wide appliances



- BO 481



- BO 480

Vertical combination, 60 cm wide appliances



- BS 474/BS 454/BM 454
- BO 470/BO 450/BO 420
- WS 462



- BS 454/BS 474/BM 454
- BO 470/BO 450/BO 420
- WS 462



- BS 454/BS 474/BM 454
- BM 450
- DV 461/WS 461



- BM 454/BS 474/BS 454
- CM 450
- WS 461/DV 461



- BO 470/BO 450/BO 420
- DF



- BS 470/BS 450/BM 450
- DF



- CM 450
- DF

Horizontal combination, 60 cm wide appliances



▪ BO 471/BO 451/BO 421 ▪ BO 470/BO 450/BO 420



▪ BO 471/BO 451/BO 421 ▪ BS 470/BS 450/BM 450
▪ DV 461/WS 461



▪ BO 471/BO 451/BO 421 ▪ CM 450
▪ WS 461/DV 461



▪ BS 451/BS 471/BM 451 ▪ BM 450/BS 470/BS 450
▪ WS 461/DV 461 ▪ DV 461/WS 461



▪ BS 471/BS 451/BM 451 ▪ CM 450
▪ DV 461/WS 461 ▪ WS 461/DV 461



▪ BO 471/BO 451/BO 421 ▪ CM 450 ▪ BS 470/BS 450/BM 450
▪ WS 461/DV 461 ▪ DV 461/WS 461



▪ BM 451/BS 471/BS 451 ▪ CM 450 ▪ BS 450/BS 470/BM 450
▪ WS 461/DV 461 ▪ DV 461/WS 461 ▪ WS 461/DV 461

Combination of 4 with warming drawer, 60 cm wide appliances



▪ BS 455/BS 475/BM 455 ▪ BM 454/BS 474/BS 454
▪ BO 471/BO 451/BO 421 ▪ CM 450
▪ DV 461/WS 461

Checklist for appliance combinations 400 series

Vertical combination, 60 cm / 30" wide appliances

This checklist provides the most relevant parameters for the perfect combination and ordering of ovens, Combi-steam ovens, Combi-microwave ovens, fully automatic espresso machine, vacuuming drawers, warming drawers and dishwashers.

In general:

- All appliances shown can be obtained with full glass doors in Gaggenau Anthracite.
- When several appliances are listed (BS/BM), the first appliance is shown.

Vertical combinations

When planning and ordering please note that

- The door hinges of the appliances must be on the same side.
- The door hinge (right-/left-hinged) is not reversible.
- The width of the appliances is identical.
- The control modules of the two appliances should meet each other in the middle of the combination.
- No further appliances may be fitted above the BS.
- Only appliances with controls at the top can be installed above a dishwasher. The niche for appliances that are installed above it must be 56 cm wide. The dishwasher is 60 cm wide.



- BS 474/BS 454/BM 454
- BO 470/BO 420
- WS 462



- BM 454/BS 474
- BO 470/BO 420
- WS 462



- BS 474/BS 454/BM 454
- BM 450
- DV 461/WS 461



- BM 454/BS 474
- CM 450
- WS 461/DV 461



- BO 470/BO 420
- DF



- BS 470/BM 450
- DF



- CM 450
- DF

Horizontal combinations

When planning and ordering please note that

- The door hinges need to be placed on the outside in order to use the full available door opening angle.
- The door hinge (right-/left-hinged) is not reversible.
- A minimum clearance of 10 mm between the two doors must be observed.
- Combi-steam ovens, Combi-microwave ovens and fully automatic espresso machine in combination with a vacuuming drawer or a warming drawer (14 cm in height) have the same total height as a 60 cm wide oven.
- The control modules are either all at the top or all at the bottom.

- BO Ovens
- BS Combi-steam ovens
- BM Combi-microwave ovens
- CM Fully automatic espresso machine
- DV Vacuuming drawers
- WS Warming drawers
- DF Dishwashers

Horizontal combination, 60 cm wide appliances



▪ BO 471/BO 421 ▪ BO 470/BO 420



▪ BO 471/BO 421 ▪ BS 470/BM 450
▪ DV 461/WS 461



▪ BO 471/BO 421 ▪ CM 450
▪ WS 461/DV 461



▪ BS 471/BM 451 ▪ BM 450/BS 470
▪ DV 461/WS 461 ▪ WS 461/DV 461



▪ BS 471/BM 451 ▪ CM 450
▪ DV 461/WS 461 ▪ WS 461/DV 461



▪ BO 471/BO 421 ▪ CM 450 ▪ BS 470/BM 450
▪ WS 461/DV 461 ▪ DV 461/WS 461



▪ BM 451/BS 471 ▪ CM 450 ▪ BS 470/BM 450
▪ WS 461/DV 461 ▪ WS 461/DV 461 ▪ DV 461/WS 461

Combination of 4 with warming drawer, 60 cm wide appliances



▪ BS 475/BM 455 ▪ BM 454/BS 474
▪ BO 471/BO 421 ▪ CM 450
▪ DV 461/WS 461

Planning notes for the installation of ovens and oven combinations 400 and 200 series

General notes

Installation behind kitchen furniture doors

Appropriate measures must be taken to prevent these types of doors from closing when the appliance is heating or while it is cooling down (fan operation).

Combination of ovens and Vario cooling 400 series appliances

Please check the planning notes in the information for Vario cooling 400 series appliances in order to prevent the refrigerator door from colliding with the oven.

Installation side by side

When appliances are installed side by side, the clearance between the appliances must be at least 10 mm (corresponds to the standard outside measurement of the furniture cavity of 600 or 762 mm). The door hinges need to be placed outside in order to use the full available door opening angle.

Necessary air cross section at the door edges

Gaggenau ovens are cooled with fresh air at the top edge and side edges of the door. Hot air is blown out at the door bottom edge. Combi-steam ovens and Combi-microwave ovens have the air inlet at the side edges of the door and the hot air and steam outlets at the top edge of the door. In order to prevent appliances from overheating and to ensure that they cool down as required after operation, appropriate minimum cross sections of free space must be maintained from kitchen furniture edges.

The measurements given in the drawing apply to all appliances. The following must also be observed:

The area above the appliances
BS:


No other electrical appliances should be installed above the BS. It is recommended that a horizontal handle is not fitted on furniture above the BS.

Where the edge of a kitchen unit protrudes more than 20 mm from the front edge of the furniture cavity, the edge of the kitchen furniture panel must be steam resistant as is the case above a dishwasher. Steam may possibly penetrate into the compartment.


The area below the appliances
DV / WS:

It must be ensured that there is sufficient access to the lower edge of the vacuuming drawer and warming drawer, if the thickness of the kitchen furniture door is greater than 20 mm in front of the furniture cavity.

When installed next to each other

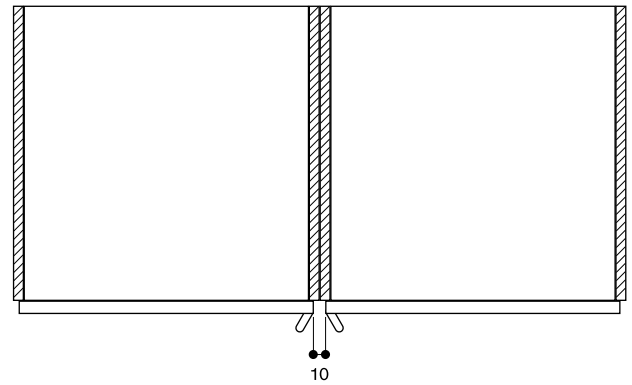


Cross section of the top/bottom door edge gaps

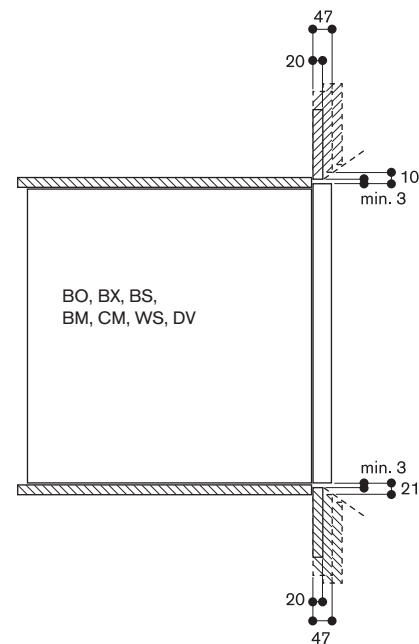

At the sides

In cases where kitchen furniture door thicknesses are greater or where sidewalls protrude up to 34 mm from front of the edge of the furniture cavity, the minimum distance on the hinge side is sufficient for the air supply and a door opening angle of 120° . Above that, a distance of 10 mm or even more is required.

The handle side may, if required, be covered by a side panel provided that the minimum distance is maintained.

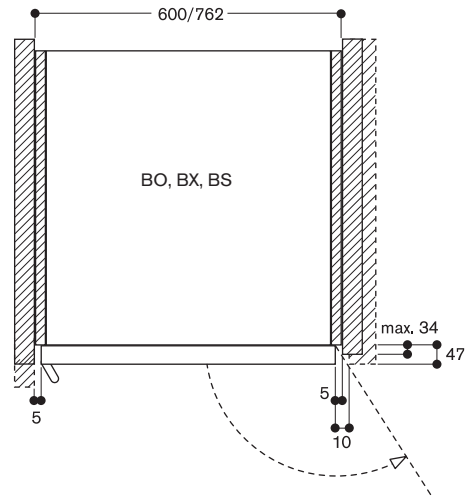Air inlet cross section at the door edges



Controls centered

Right-hinged

BX 480 112

Stainless steel-backed full glass door
Width 76 cm

Left-hinged

BX 481 112

Stainless steel-backed full glass door
Width 76 cm

Included in the price

- 2 baking trays, enamelled pyrolysis-safe
- 1 rotisserie spit
- 2 wire racks
- 2 grill trays with wire rack
- 1 plug-in core temperature probe

Special accessories

BA 018 105

Pull-out system

Fully extendable telescopic rails and enamelled cast iron frame.

BA 028 115

Baking tray, enamelled
30 mm deep.

BA 038 105

Wire rack, chromium-plated
Without opening, with feet.

BA 058 115

Heating element for baking stone and
Gastronorm roaster.

BA 058 133

Baking stone.

Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).

Not in combination with pull-out system.

BS 020 002

Pizza paddle, set of 2.

GN 340 230

Gastronorm roaster in cast aluminium.
GN 2/3, height 165 mm, non-stick.

Double oven 400 series

BX 480/BX 481

- Pyrolytic system
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function
- Core temperature probe with estimation of cooking time
- TFT touch display
- Electronic temperature control from 30 °C to 300 °C
- 2 x 110 litres net volume

Heating methods

- Hot air.
- Eco hot air.
- Top + bottom heat.
- Top + 1/3 bottom heat.
- Top heat.
- 1/3 top + bottom heat.
- Bottom heat.
- Hot air + bottom heat.
- Hot air + 1/3 bottom heat.
- Full surface grill + circulated air.
- Full surface grill.
- Compact grill.
- Baking stone function.
- Roaster function.
- Dough proofing.
- Defrosting.
- Keeping warm.

Handling

- Rotary knob and TFT touch display operation.
- Clear text display.
- Information key with use indicators.
- Side-opening door opens up to 180° angle.

Features

- Three-point core temperature probe with automatic shut-off and estimation of cooking time.
- Rotisserie spit (lower oven).
- Baking stone socket.
- Actual temperature display.
- Rapid heating.
- Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
- 60 W halogen light on the top.
- 10 W halogen light on the side.
- Enamelled side shelf supports with 5 tray levels, pyrolysis-safe.

Safety

- Thermally insulated door with quadruple glazing.
- Child lock.
- Safety shut-off.
- Cooled housing with temperature protection.

Cleaning

- Pyrolytic system.
- Gaggenau enamel.
- Heated catalyser to clean the oven air.



Planning notes

Door hinge not reversible.
The facade of the appliance extends 47 mm from the furniture cavity.
Consider the overhang when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 90° door opening angle.
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.
The mains socket needs to be planned outside the built-in niche.

Please read the installation details regarding oven combination on page 14 – 15.

Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Total connected load 9.2 kW.
Plan a connection cable.

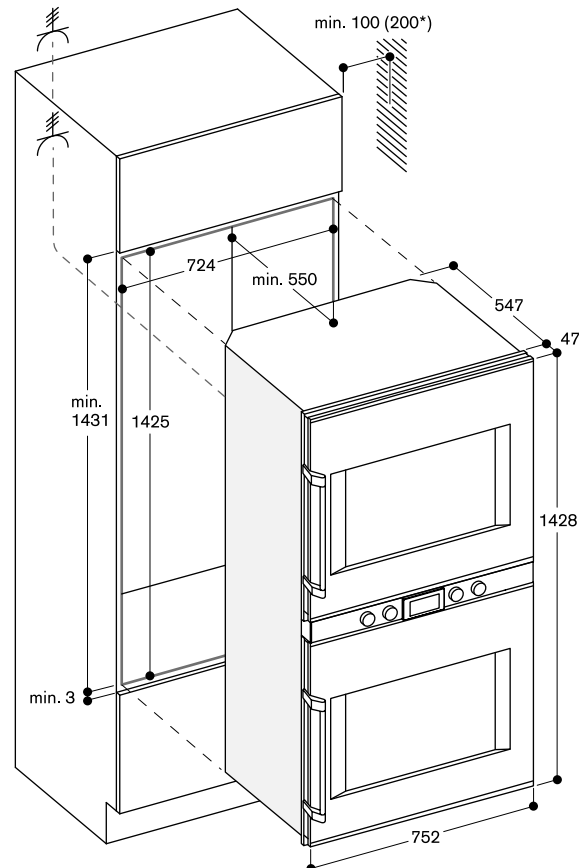

* 200 mm in conjunction with BA 018



Controls at the top

Right-hinged

BO 480 112

Stainless steel-backed full glass door
Width 76 cm

Left-hinged

BO 481 112

Stainless steel-backed full glass door
Width 76 cm

Included in the price

- 1 baking tray, enamelled pyrolysis-safe
- 1 rotisserie spit
- 1 wire rack
- 1 grill tray with wire rack
- 1 plug-in core temperature probe

Special accessories

BA 018 105

Pull-out system

Fully extendable telescopic rails and enamelled cast iron frame.

BA 028 115

Baking tray, enamelled

30 mm deep.

BA 038 105

Wire rack, chromium-plated

Without opening, with feet.

BA 058 115

Heating element for baking stone and Gastronorm roaster.

BA 058 133

Baking stone.

Incl. baking stone support and pizza paddle (heating element must be ordered separately).

Not in combination with pull-out system.

BS 020 002

Pizza paddle, set of 2.

GN 340 230

Gastronorm roaster in cast aluminium. GN 2/3, height 165 mm, non-stick.

Oven 400 series

BO 480/BO 481

- Handleless door / automatic door opening
- Pyrolytic system
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function
- Automatic programmes
- Core temperature probe with estimation of cooking time
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C to 300 °C
- Net volume 110 litres

Heating methods

Hot air.

Eco hot air.

Top + bottom heat.

Top + 1/3 bottom heat.

Top heat.

1/3 top + bottom heat.

Bottom heat.

Hot air + bottom heat.

Hot air + 1/3 bottom heat.

Full surface grill + circulated air.

Full surface grill.

Compact grill.

Baking stone function.

Roaster function.

Dough proofing.

Defrosting.

Keeping warm.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes (incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to 180° angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Rotisserie spit.

Baking stone socket.

Actual temperature display.

Rapid heating.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

60 W halogen light on the top.

2 x 10 W halogen light on the side.

Enamelled side shelf supports with 5 tray levels, pyrolysis-safe.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Thermally insulated door with quadruple glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Pyrolytic system.

Gaggenau enamel.

Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.

The facade of the appliance extends 47 mm from the furniture cavity.

Consider the overhang when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 90° door opening angle.

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 14 – 15.



Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 5.5 kW.

Plan a connection cable.

Plan a LAN cable.

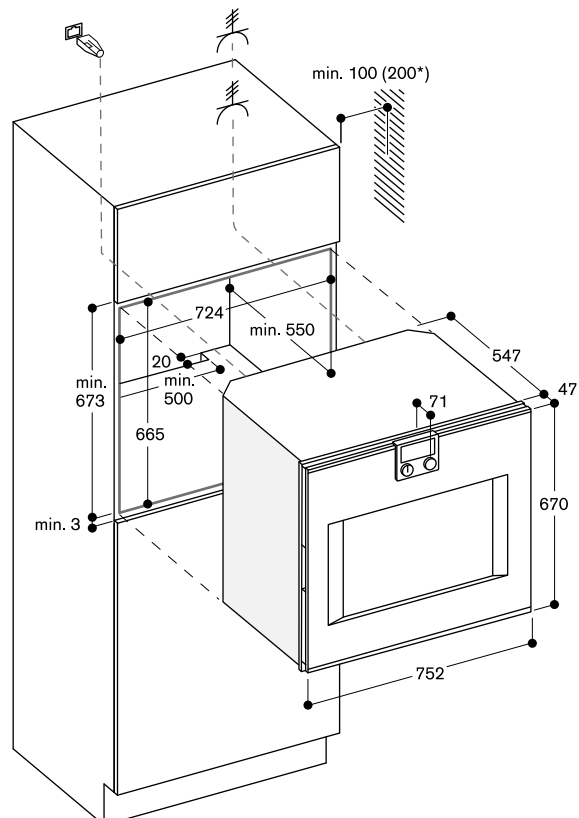

* 200 mm in conjunction with BA 018



Controls at the top

Right-hinged

BO 470 112

Stainless steel-backed full glass door
Width 60 cm

BO 470 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Left-hinged

BO 471 112

Stainless steel-backed full glass door
Width 60 cm

BO 471 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Included in the price

- 2 baking trays, enamelled pyrolysis-safe
- 1 rotisserie spit
- 1 glass tray
- 1 wire rack
- 1 grill tray with wire rack
- 1 plug-in core temperature probe

Special accessories

BA 016 105

Pull-out system
Fully extendable telescopic rails and enamelled cast iron frame.

BA 026 105

Grill tray, enamelled
30 mm deep.

BA 026 115

Baking tray, enamelled
15 mm deep.

BA 036 105

Wire rack, chromium-plated
Without opening, with feet.

BA 046 115

Glass tray
24 mm deep.

BA 056 115

Heating element for baking stone and
Gastronorm roaster.

BA 056 133

Baking stone.
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).
Not in combination with pull-out system.

BS 020 002

Pizza paddle, set of 2.

GN 340 230

Gastronorm roaster in cast aluminium.
GN2/3, height 165 mm, non-stick.

Oven 400 series

BO 470/BO 471

- Handleless door / automatic door opening
- Pyrolytic system
- 17 heating methods with core temperature probe, rotisserie spit and baking stone function
- Automatic programmes
- Core temperature probe with estimation of cooking time
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C to 300 °C
- Net volume 76 litres

Heating methods

Hot air.

Eco hot air.

Top + bottom heat.

Top + 1/3 bottom heat.

Top heat.

1/3 top + bottom heat.

Bottom heat.

Hot air + bottom heat.

Hot air + 1/3 bottom heat.

Full surface grill + circulated air.

Full surface grill.

Compact grill.

Baking stone function.

Roaster function.

Dough proofing.

Defrosting.

Keeping warm.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes (incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to 180° angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Rotisserie spit.

Baking stone socket.

Actual temperature display.

Rapid heating.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

60 W halogen light on the top.

2 x 10 W halogen light on the side.

Enamelled side shelf supports with 4 tray levels, pyrolysis-safe.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Thermally insulated door with quadruple glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Pyrolytic system.
Gaggenau enamel.
Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.
The facade of the appliance extends 47 mm from the furniture cavity.
Consider the overhang when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 90° door opening angle.
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.
The mains socket needs to be planned outside the built-in niche.
The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 14 – 15.


Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.7 kW.

Plan a connection cable.

Plan a LAN cable.

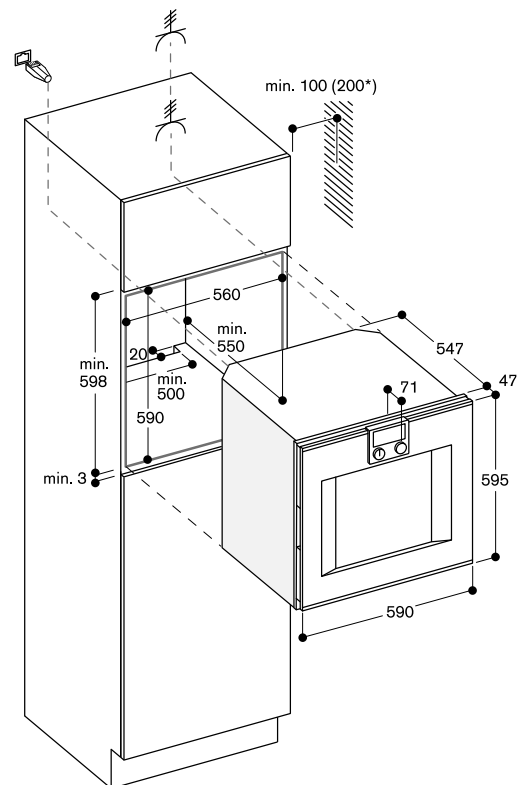

* 200 mm in conjunction with BA 016



Controls at the top

Right-hinged

BO 450 112

Stainless steel-backed full glass door
Width 60 cm

Left-hinged

BO 451 112

Stainless steel-backed full glass door
Width 60 cm

Included in the price

- 1 baking tray, enamelled pyrolysis-safe
- 1 glass tray
- 1 wire rack
- 1 plug-in core temperature probe

Special accessories

BA 016 105

Pull-out system

Fully extendable telescopic rails and enamelled cast iron frame.

BA 026 115

Baking tray, enamelled

15 mm deep.

BA 036 105

Wire rack, chromium-plated

Without opening, with feet.

BA 046 115

Glass tray

24 mm deep.

BA 056 115

Heating element for baking stone and Gastronorm roaster.

BA 056 133

Baking stone.

Incl. baking stone support and pizza paddle (heating element must be ordered separately).

Not in combination with pull-out system.

BA 226 105

Grill tray, enamelled

30 mm deep.

BS 020 002

Pizza paddle, set of 2.

GN 340 230

Gastronorm roaster in cast aluminium.

GN 2/3, height 165 mm, non-stick.

Oven 400 series

BO 450/BO 451

- Handleless door / automatic door opening
- Pyrolytic system
- 13 heating methods with core temperature probe and baking stone function
- Automatic programmes
- Core temperature probe with estimation of cooking time
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C to 300 °C
- Net volume 76 litres

Heating methods

Hot air.

Eco hot air.

Top + bottom heat.

Top heat.

Bottom heat.

Hot air + bottom heat.

Full surface grill + circulated air.

Full surface grill.

Compact grill.

Baking stone function.

Roaster function.

Dough proofing.

Defrosting.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes

(incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to

180° angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Baking stone socket.

Actual temperature display.

Rapid heating.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

60 W halogen light on the top.

10 W halogen light on the side.

Enamelled side shelf supports with

4 tray levels, pyrolysis-safe.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Thermally insulated door with quadruple glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Pyrolytic system.

Gaggenau enamel.

Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.

The facade of the appliance extends 47 mm from the furniture cavity.

Consider the overhang when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 90° door opening angle.

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the lower right hand corner of the housing.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 14 – 15.


Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.7 kW.

Plan a connection cable.

Plan a LAN cable.

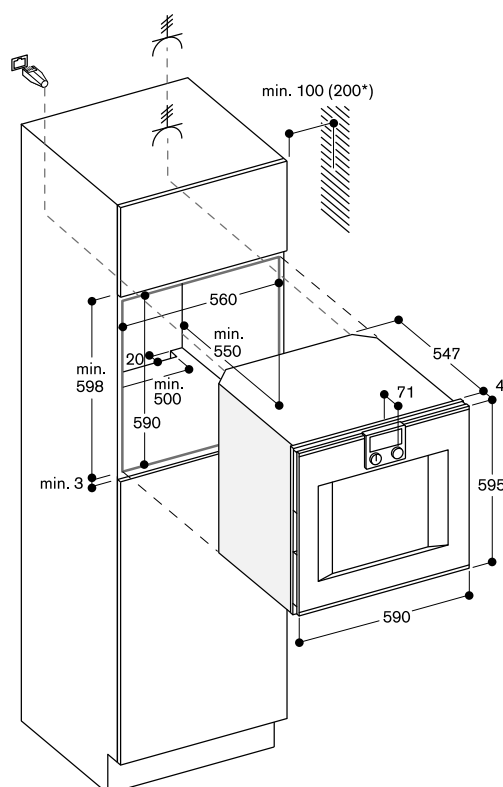

* 200 mm in conjunction with BA 016



Controls at the top

Right-hinged

BO 420 112

Stainless steel-backed full glass door
Width 60 cm

BO 420 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Left-hinged

BO 421 112

Stainless steel-backed full glass door
Width 60 cm

BO 421 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Included in the price

- 1 baking tray, enamelled pyrolysis-safe
- 1 glass tray
- 1 wire rack

Special accessories

BA 016 105

Pull-out system
Fully extendable telescopic rails and enamelled cast iron frame.

BA 026 115

Baking tray, enamelled
15 mm deep.

BA 036 105

Wire rack, chromium-plated
Without opening, with feet.

BA 046 115

Glass tray
24 mm deep.

BA 056 115

Heating element for baking stone and
Gastronorm roaster.

BA 056 133

Baking stone.
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).
Not in combination with pull-out system.

BA 226 105

Grill tray, enamelled
30 mm deep.

BS 020 002

Pizza paddle, set of 2.

GN 340 230

Gastronorm roaster in cast aluminium.
GN2/3, height 165 mm, non-stick.

Oven 400 series

BO 420/BO 421

- Handleless door / automatic door opening
- Pyrolytic system
- 9 heating methods, with baking stone function
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 50 °C to 300 °C
- Net volume 76 litres

Heating methods

Hot air.

Eco hot air.

Top + bottom heat.

Top heat.

Bottom heat.

Hot air + bottom heat.

Full surface grill + circulated air.

Full surface grill.

Baking stone function.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes.

Information key with use indicators.

Side-opening door opens up to
180° angle.

Features

Baking stone socket.

Actual temperature display.

Rapid heating.

Timer functions: cooking time, cooking
time end, timer, stopwatch, long-term
timer.

60 W halogen light on the top.

Enamelled side shelf supports with
4 tray levels, pyrolysis-safe.

Home network integration for digital
services (Home Connect) either via
cable connection LAN (recommended)
or wireless via WiFi.

The use of the Home Connect
functionality depends on the Home
Connect services, which are not
available in every country. For further
information please check:
home-connect.com.

Please read additional information on
Home Connect on page 420.

Safety

Thermally insulated door with
quadruple glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature
protection.

Cleaning

Pyrolytic system.

Gaggenau enamel.

Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.

The façade of the appliance extends
47 mm from the furniture cavity.

If the handle (optional accessory) is
retrofitted, the outer edge of the door
handle extends 94 mm from the
furniture cavity.

Consider the overhang, incl. the door
handle where applicable, when
planning to open drawers next to the
appliance.

When planning a corner solution, pay
attention to the 90° door opening angle.
To achieve the 550 mm installation
depth, the connection cable needs to
follow the slanted edge on the lower
right hand corner of the housing.
The mains socket needs to be planned
outside the built-in niche.
The LAN port can be found at the back
on the upper right side.

Please read the installation details
regarding oven combination on
page 14 – 15.

Connection


Energy efficiency class A at a range
of energy efficiency classes from
A+++ to D.

Total connected load 3.7 kW.

Plan a connection cable.

Plan a LAN cable.



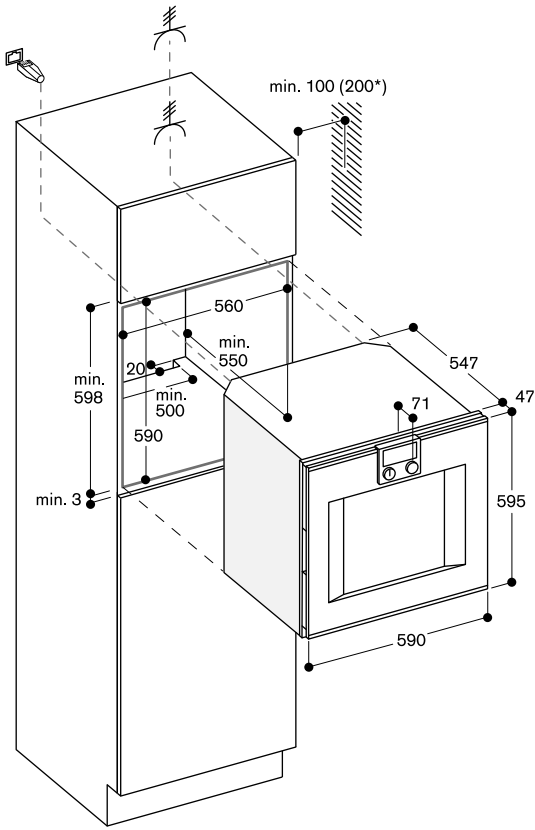



Controls at the bottom

Right-hinged

BS 484 112

Stainless steel-backed full glass door
Width 76 cm

Left-hinged

BS 485 112

Stainless steel-backed full glass door
Width 76 cm

Included in the price

- 1 Cooking container, stainless steel, perforated
- 1 Cooking container, stainless steel, unperforated
- 1 wire rack
- 1 plug-in core temperature probe
- 1 outlet hose (3 m long)
- 1 water inlet hose (3 m long)
- 4 cleaning cartridge

Installation accessories

GF 111 100

Water descaling system

GF 121 110

Filter cartridge

GZ 010 011

Extension for water inlet and outlet
(2 m long)

Special accessories

BA 010 301

Triple telescopic pull-out rack
For combi-steam oven.

BA 020 360

Cooking container, stainless steel, unperforated, 40 mm deep, 5l.

BA 020 370

Cooking container, stainless steel, perforated, 40 mm deep, 5l.

BA 020 380

Cooking container, non-stick, unperforated, 40 mm deep, 5l.

BA 020 390

Cooking container, non-stick, perforated, 40 mm deep, 5l.

CL S10 040

Cleaning cartridges, set of 4
For combi-steam ovens.

GN 010 330

Adapter for gastronorm insert and roaster.

GN 114 130

Gastronorm insert, stainless steel,

GN 1/3

Unperforated, 40 mm deep, 1.5l.

GN 114 230

Gastronorm insert, stainless steel,

GN 2/3

Unperforated, 40 mm deep, 3l.

GN 124 130

Gastronorm insert, stainless steel,

GN 1/3

Perforated, 40 mm deep, 1.5l.

GN 124 230

Gastronorm insert, stainless steel,

GN 2/3

Perforated, 40 mm deep, 3l.

GN 340 230

Gastronorm roaster in cast aluminium.

GN 2/3, height 165 mm, non-stick.

Combi-steam oven 400 series

BS 484/BS 485

- Handleless door / automatic door opening
- Fixed inlet and outlet water connection
- Cleaning system, fully automatic
- Large cavity
- 2 LED light sources
- External steam generation
- Steaming without pressure
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
- Sous-vide cooking with accurate temperature regulation
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam
- Automatic programmes
- Core temperature probe with estimation of cooking time
- Hot air fan rotates in both directions for ideal heat distribution
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C bis 230 °C
- Net volume 50 litres

Heating methods

Hot air + 100 % humidity.

Hot air + 80 % humidity.

Hot air + 60 % humidity.

Hot air + 30 % humidity.

Hot air + 0 % humidity.

Low temperature cooking.

Sous-vide cooking.

Full surface grill level 1 + humidity.

Full surface grill level 2 + humidity.

Full surface grill + circulated air.

Dough proofing.

Defrosting.

Regenerating.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes (incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to

180° angle.

Features

Full surface grill 2 kW behind glass ceramic.

Steam removal.

Misting.

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Actual temperature display.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

Automatic boiling point detection.

Capacity display for filter cartridge (if connected to GF 111 100 descaling system).

2 x LED light on the side.

Hygienic stainless steel cooking interior.

3 tray levels.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Cleaning programme, fully automatic.

Descaling programme for the steam generator.

Drying programme.

Automatic drying of the cavity at the end of the cooking process.

Strainer filter, removable.

Demo cleaning programme.

Planning notes

Door hinge not reversible.

No other electrical appliances should be installed above the BS.

At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").

Inlet hose can be extended once.

The outlet hose must not be longer than a maximum of 5 m.

The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.

The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.

The descaling system GF 111 100 (3) must be installed when connecting the appliance if the water hardness exceeds 7° dH.

The facade of the appliance extends 47 mm from the furniture cavity.

Consider the overhang when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 90° door opening angle.

The mains socket needs to be planned outside the built-in niche.

Please read the installation details regarding oven combination on page 14 – 15.

Connection


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.15 kW.

Connecting cable 1.8 m with plug.

Plan a LAN cable.




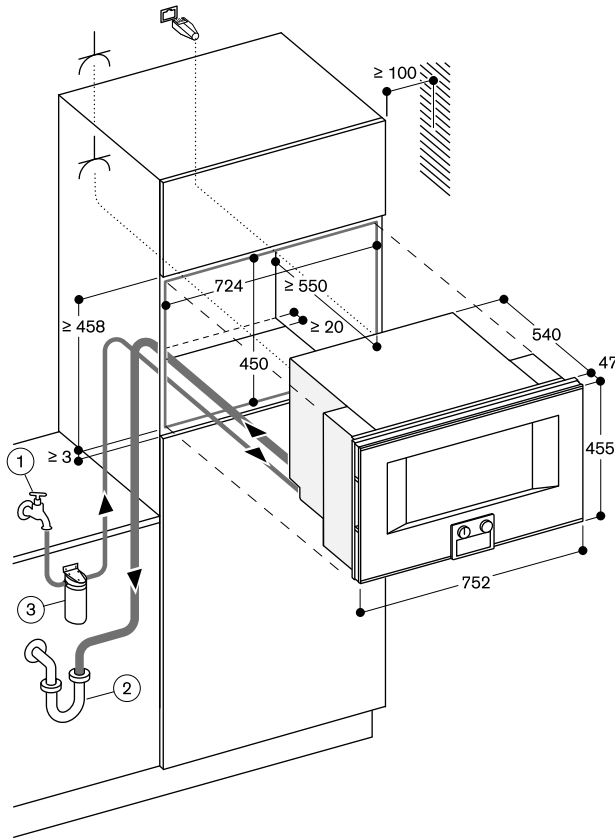

Socket


measurements in mm

Side view of BS 484/485 above BO

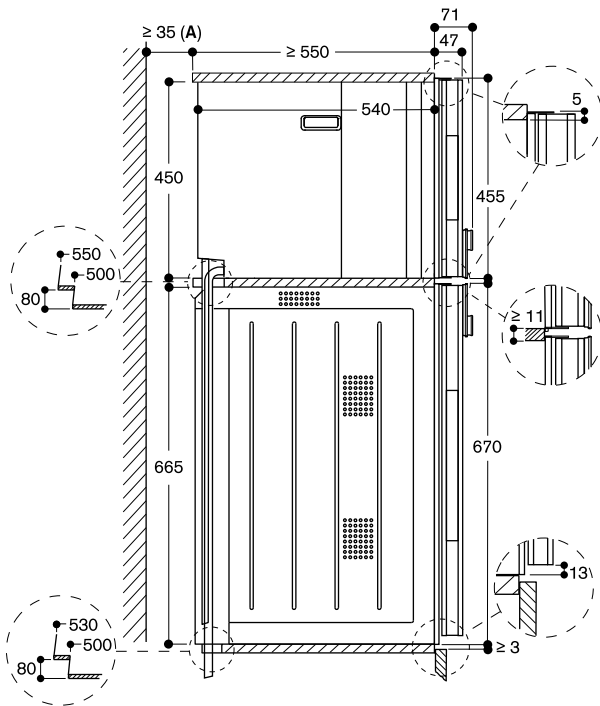


A: Only required if the water hoses for the BS steam oven cannot be accommodated in the corner recesses of the appliances.

measurements in mm

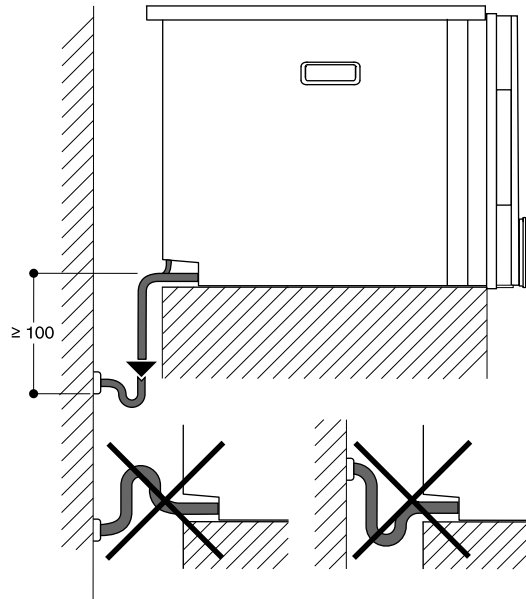

measurements in mm

View from rear

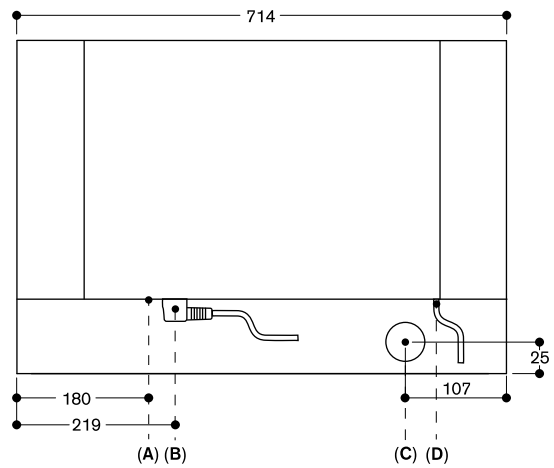

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

measurements in mm



Controls at the top

Right-hinged

BS 470 112

Stainless steel-backed full glass door
Width 60 cm

BS 470 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Left-hinged

BS 471 112

Stainless steel-backed full glass door
Width 60 cm

BS 471 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Controls at the bottom

Right-hinged

BS 474 112

Stainless steel-backed full glass door
Width 60 cm

BS 474 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Left-hinged

BS 475 112

Stainless steel-backed full glass door
Width 60 cm

BS 475 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Included in the price

- 1 Cooking container, stainless steel, perforated
- 1 Cooking container, stainless steel, unperforated
- 1 wire rack
- 1 plug-in core temperature probe
- 1 outlet hose (3 m long)
- 1 water inlet hose (3 m long)
- 4 cleaning cartridge

Installation accessories

GF 111 100

Water descaling system

GF 121 110

Filter cartridge

GZ 010 011

Extension for water inlet and outlet
(2 m long)

Special accessories

BA 010 301

Triple telescopic pull-out rack
For combi-steam oven.

BA 020 360

Cooking container, stainless steel, unperforated, 40 mm deep, 5 l.

BA 020 370

Cooking container, stainless steel, perforated, 40 mm deep, 5 l.

BA 020 380

Cooking container, non-stick, unperforated, 40 mm deep, 5 l.

BA 020 390

Cooking container, non-stick, perforated, 40 mm deep, 5 l.

Combi-steam oven 400 series

BS 470/BS 471/BS 474/BS 475

- Handleless door / automatic door opening
- Fixed inlet and outlet water connection
- Cleaning system, fully automatic
- Large cavity
- 2 LED light sources
- External steam generation
- Steaming without pressure
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
- Sous-vide cooking with accurate temperature regulation
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam
- Automatic programmes
- Core temperature probe with estimation of cooking time
- Hot air fan rotates in both directions for ideal heat distribution
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C bis 230 °C
- Net volume 50 litres

Heating methods

Hot air + 100 % humidity.

Hot air + 80 % humidity.

Hot air + 60 % humidity.

Hot air + 30 % humidity.

Hot air + 0 % humidity.

Low temperature cooking.

Sous-vide cooking.

Full surface grill level 1 + humidity.

Full surface grill level 2 + humidity.

Full surface grill + circulated air.

Dough proofing.

Defrosting.

Regenerating.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes (incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to

180° angle.

Features

Full surface grill 2 kW behind glass ceramic.

Steam removal.

Misting.

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Actual temperature display.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

Automatic boiling point detection.

Capacity display for filter cartridge

(if connected to GF 111 100 descaling system).

2 x LED light on the side.

Hygienic stainless steel cooking interior.

3 tray levels.

CL S10 040

Cleaning cartridges, set of 4

For combi-steam ovens.

GN 010 330

Adapter for gastronorm insert and roaster.

GN 114 130

Gastronorm insert, stainless steel, GN 1/3

Unperforated, 40 mm deep, 1.5 l.

GN 114 230

Gastronorm insert, stainless steel, GN 2/3

Unperforated, 40 mm deep, 3 l.

GN 124 130

Gastronorm insert, stainless steel, GN 1/3

Perforated, 40 mm deep, 1.5 l.

GN 124 230

Gastronorm insert, stainless steel, GN 2/3

Perforated, 40 mm deep, 3 l.

GN 340 230

Gastronorm roaster in cast aluminium.

GN 2/3, height 165 mm, non-stick.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Cleaning programme, fully automatic. Descaling programme for the steam generator.

Drying programme.

Automatic drying of the cavity at the end of the cooking process.

Strainer filter, removable.

Demo cleaning programme.

Planning notes

Door hinge not reversible.

No other electrical appliances should be installed above the BS.

At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").

Inlet hose can be extended once.

The outlet hose must not be longer than a maximum of 5 m.

The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.

The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.

The descaling system GF 111 100 (3) must be installed when connecting the appliance if the water hardness exceeds 7° dH.

The facade of the appliance extends 47 mm from the furniture cavity.

Consider the overhang when planning to open drawers next to the appliance. When planning a corner solution, pay attention to the 90° door opening angle. The mains socket needs to be planned outside the built-in niche.

Please read the installation details regarding oven combination on page 14 – 15.

Connection


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.15 kW.

Connecting cable 1.8 m with plug.

Plan a LAN cable.




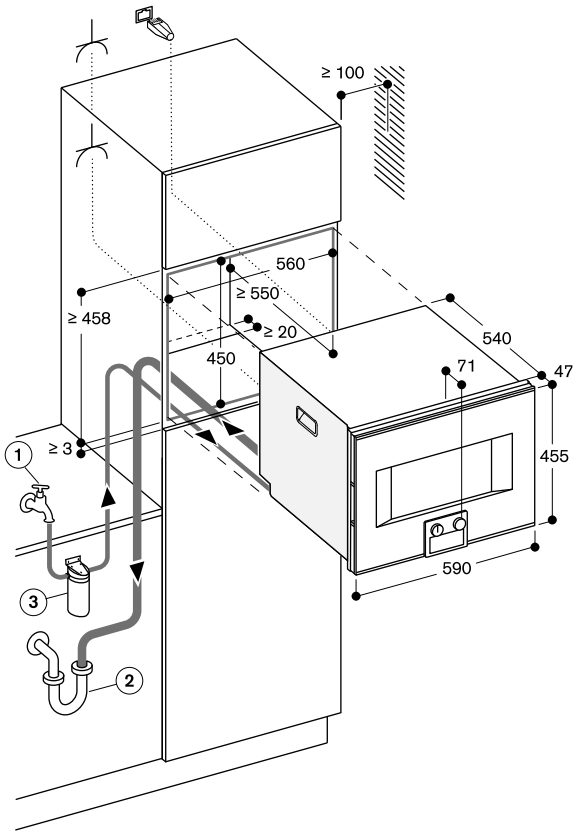

Socket


measurements in mm

Side view of BS 474/475 above BO

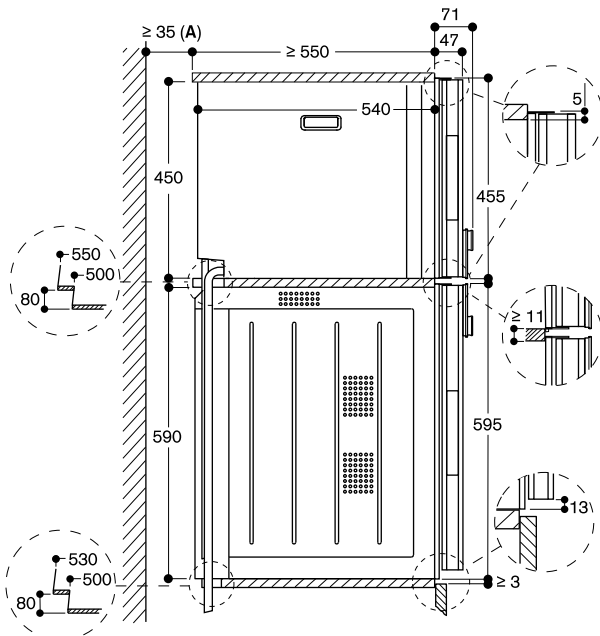


A: Only required if the water hoses for the BS steam oven cannot be accommodated in the corner recesses of the appliances.

measurements in mm

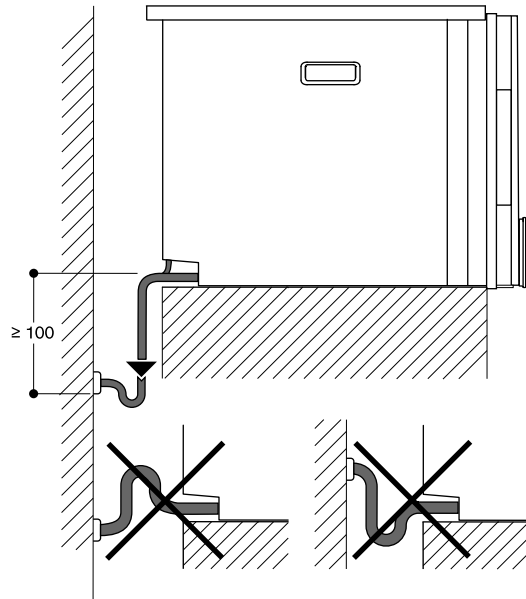

measurements in mm

View from rear

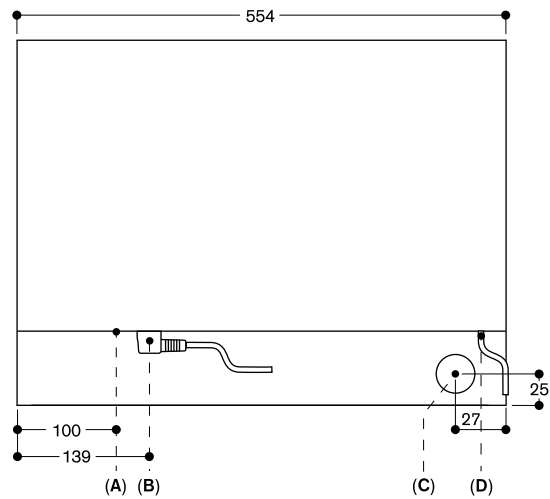

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

measurements in mm



Controls at the top

Right-hinged

BS 450 111

Stainless steel-backed full glass door
Width 60 cm

BS 450 101

Full glass door in Gaggenau Anthracite
Width 60 cm

Left-hinged

BS 451 111

Stainless steel-backed full glass door
Width 60 cm

BS 451 101

Full glass door in Gaggenau Anthracite
Width 60 cm

Controls at the bottom

Right-hinged

BS 454 111

Stainless steel-backed full glass door
Width 60 cm

BS 454 101

Full glass door in Gaggenau Anthracite
Width 60 cm

Left-hinged

BS 455 111

Stainless steel-backed full glass door
Width 60 cm

BS 455 101

Full glass door in Gaggenau Anthracite
Width 60 cm

Included in the price

- 1 Cooking container, stainless steel, perforated
- 1 Cooking container, stainless steel, unperforated
- 1 wire rack
- 1 plug-in core temperature probe
- 4 cleaning cartridge

Special accessories

BA 010 301

Triple telescopic pull-out rack
For combi-steam oven.

BA 020 360

Cooking container, stainless steel,
unperforated, 40 mm deep, 5l.

BA 020 370

Cooking container, stainless steel,
perforated, 40 mm deep, 5l.

BA 020 380

Cooking container, non-stick,
unperforated, 40 mm deep, 5l.

BA 020 390

Cooking container, non-stick,
perforated, 40 mm deep, 5l.

CL S10 040

Cleaning cartridges, set of 4
For combi-steam ovens.

GN 010 330

Adapter for gastronorm insert and
roaster.

GN 114 130

Gastronorm insert, stainless steel,
GN 1/3
Unperforated, 40 mm deep, 1.5l.

Combi-steam oven 400 series

BS 450/BS 451/BS 454/BS 455

- Handleless door / automatic door opening
- Water tank for fresh and waste water
- Cleaning system, fully automatic
- Large cavity
- 2 LED light sources
- External steam generation
- Steaming without pressure
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
- Sous-vide cooking with accurate temperature regulation
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam
- Automatic programmes
- Core temperature probe with estimation of cooking time
- Hot air fan rotates in both directions for ideal heat distribution
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C bis 230 °C
- Net volume 50 litres

Heating methods

Hot air + 100 % humidity.

Hot air + 80 % humidity.

Hot air + 60 % humidity.

Hot air + 30 % humidity.

Hot air + 0 % humidity.

Low temperature cooking.

Sous-vide cooking.

Full surface grill level 1 + humidity.

Full surface grill level 2 + humidity.

Full surface grill + circulated air.

Dough proofing.

Defrosting.

Regenerating.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes (incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to 180° angle.

Features

Full surface grill 2 kW behind glass ceramic.

2 removable 1.7 litre water tanks.

Misting.

Water level warning.

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Actual temperature display.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

Automatic boiling point detection.

2 x LED light on the side.

Hygienic stainless steel cooking interior.

3 tray levels.

GN 114 230

Gastronorm insert, stainless steel,
GN 2/3

Unperforated, 40 mm deep, 3l.

GN 124 130

Gastronorm insert, stainless steel,
GN 1/3

Perforated, 40 mm deep, 1.5l.

GN 124 230

Gastronorm insert, stainless steel,
GN 2/3

Perforated, 40 mm deep, 3l.

GN 340 230

Gastronorm roaster in cast aluminium.
GN 2/3, height 165 mm, non-stick.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Cleaning programme, fully automatic. Descaling programme for the steam generator.

Drying programme.

Automatic drying of the cavity at the end of the cooking process.

Strainer filter, removable.

Water tank, dishwasher-safe.

Demo cleaning programme.

Planning notes

Door hinge not reversible.

No other electrical appliances should be installed above the BS.

The facade of the appliance extends 47 mm from the furniture cavity.

Consider the overhang when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 90° door opening angle.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the lower left side.

Please read the installation details regarding oven combination on page 14 – 15.

Connection


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.15 kW.

Connecting cable 1.8 m with plug.

Plan a LAN cable.




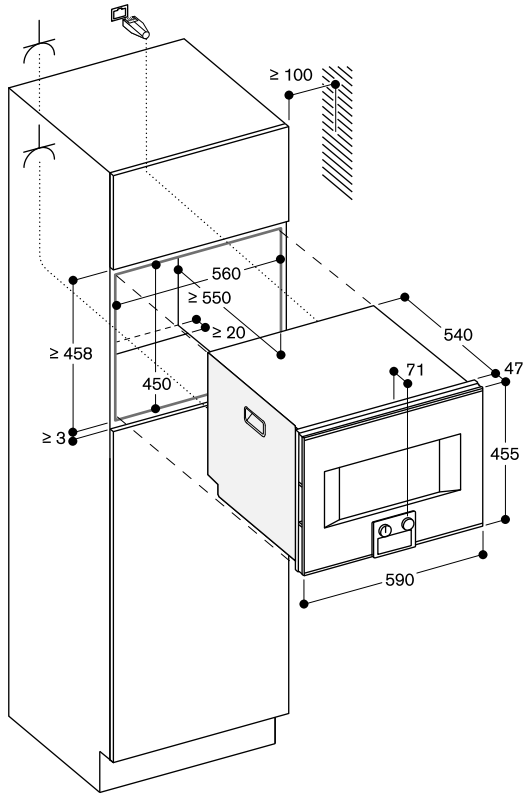

Socket

measurements in mm

Side view of BS 454/455 above BO

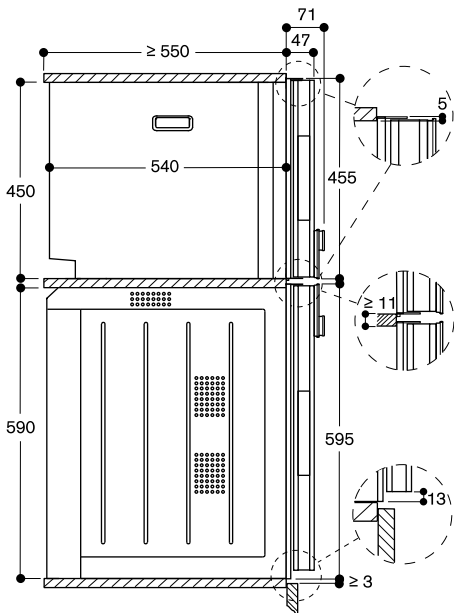

measurements in mm



Controls at the bottom

Right-hinged

BM 484 110

Stainless steel-backed full glass door
Width 76 cm

Left-hinged

BM 485 110

Stainless steel-backed full glass door
Width 76 cm

Included in the price

- 1 combination wire rack
- 1 glass tub

Combi-microwave oven 400 series
BM 484/BM 485

- Handleless door / automatic door opening
- Single operation and combination of microwave, grill and oven
- Sequential operation of up to 5 modes incl. programming of combined operation and rest time
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control
- Interior volume 36 litres

Programmes

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.
Oven operation with 4 heating methods:
Hot air 40 °C and from 100 °C to 250 °C,
Full surface grill + hot air from 100 °C to 250 °C,
Full surface grill + circulated air from 100 °C to 250 °C,
Full surface grill with 3 levels of intensity, maximum output 2000 W.
Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.
15 automatic programmes with weight indication, customisable:
4 defrosting programmes
4 cooking programmes
7 combination programmes
Option to save individual recipes.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Clear text display.
Information key with use indicators.
Side-opening door opens up to 180° angle.

Features

Innowave.
Rapid heating.
4 tray levels.
Actual temperature display.
60 W halogen light on the side.

Safety

Thermally insulated door with triple glazing.
Triple door lock.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with glass ceramic base.
Interior back wall with catalytic coating.

Planning notes


Door hinge not reversible.
The door panel surface of the appliance extends 47 mm from the furniture cavity.
If the handle (optional accessory) is retrofitted, the outer edge of the door handle extends 94 mm from the furniture cavity.
Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 110° door opening angle.
The mains socket needs to be planned outside of the built-in niche.

Please read the installation details regarding oven combination on page 14 – 15.

Connection


Total connected load 3.1 kW.
Connection cable 1.5 m without plug.

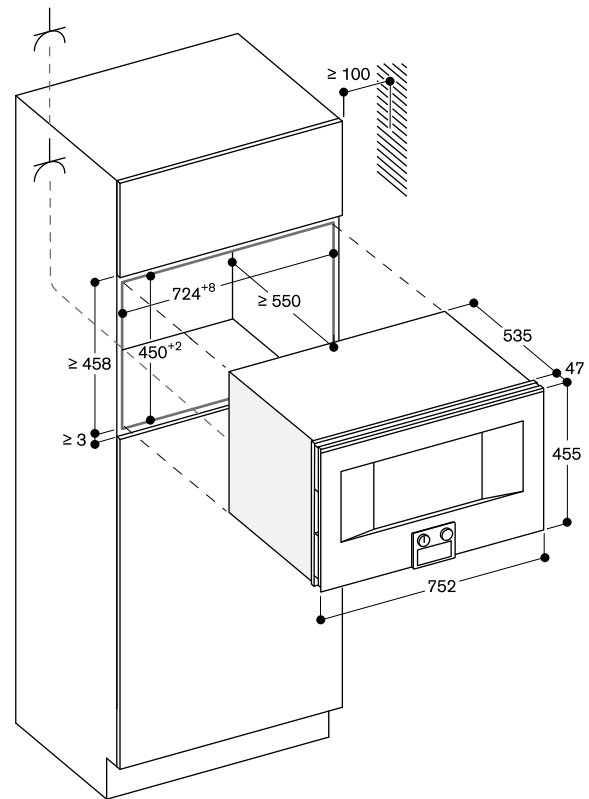

Socket

measurements in inches (mm)

Side view of BM 484/485 above BO

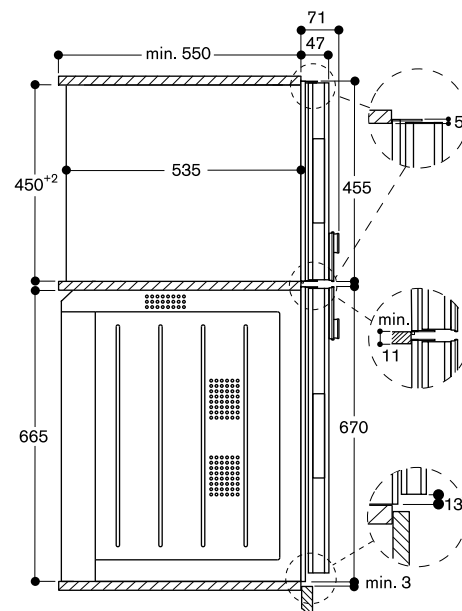



Controls at the top

Right-hinged

BM 450 110

Stainless steel-backed full glass door
Width 60 cm

BM 450 100

Full glass door in Gaggenau Anthracite
Width 60 cm

Left-hinged

BM 451 110

Stainless steel-backed full glass door
Width 60 cm

BM 451 100

Full glass door in Gaggenau Anthracite
Width 60 cm

Controls at the bottom

Right-hinged

BM 454 110

Stainless steel-backed full glass door
Width 60 cm

BM 454 100

Full glass door in Gaggenau Anthracite
Width 60 cm

Left-hinged

BM 455 110

Stainless steel-backed full glass door
Width 60 cm

BM 455 100

Full glass door in Gaggenau Anthracite
Width 60 cm

Included in the price

- 1 combination wire rack
- 1 glass tub

Combi-microwave oven 400 series BM 450/BM 451/BM 454/BM 455

- Handleless door / automatic door opening
- Single operation and combination of microwave, grill and oven
- Sequential operation of up to 5 modes incl. programming of combined operation and rest time
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control
- Interior volume 36 litres

Programmes

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.
Oven operation with 4 heating methods:
Hot air 40 °C and from 100 °C to 250 °C,
Full surface grill + hot air from 100 °C to 250 °C,
Full surface grill + circulated air from 100 °C to 250 °C,
Full surface grill with 3 levels of intensity, maximum output 2000 W.
Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.
15 automatic programmes with weight indication, customisable:
4 defrosting programmes
4 cooking programmes
7 combination programmes
Option to save individual recipes.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Clear text display.
Information key with use indicators.
Side-opening door opens up to 180° angle.

Features

Innowave.
Rapid heating.
4 tray levels.
Actual temperature display.
60 W halogen light on the side.

Safety

Thermally insulated door with triple glazing.
Triple door lock.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with glass ceramic base.
Interior back wall with catalytic coating.

Planning notes

Door hinge not reversible.
Plan the niche without back wall.
The door panel surface of the appliance extends 47 mm from the furniture cavity.
If the handle (optional accessory) is retrofitted, the outer edge of the door handle extends 94 mm from the furniture cavity.
Consider the overhang, incl. the door handle where applicable, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 110° door opening angle.


The mains socket needs to be planned outside of the built-in niche.

Please read the installation details regarding oven combination on page 14 – 15.

Connection

Total connected load 3.1 kW.


Connection cable 1.5 m without plug.

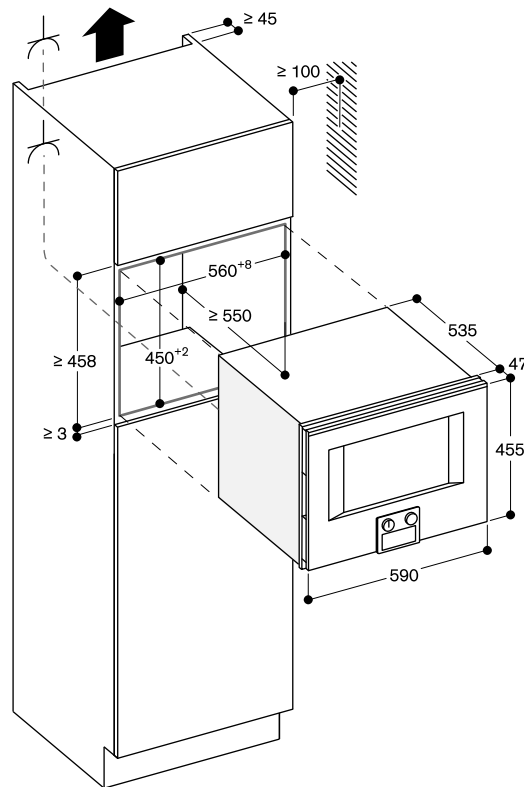

⚡ Socket

measurements in mm

Side view of BS 454/455, BM 454/455 above BO

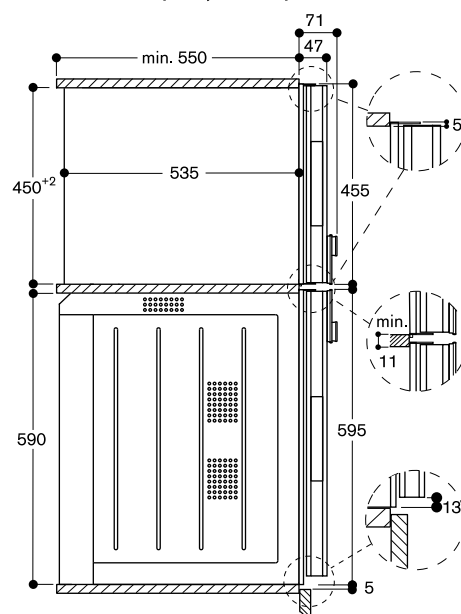



Controls at the top

CM 450 112

Stainless steel-backed full glass door
Width 60 cm

CM 450 102

Full glass door in Gaggenau Anthracite
Width 60 cm

Included in the price

- 1 assembly screws
- 1 scoop
- 1 test strip
- 1 milk container (insulated)
- 1 connection hose for milk frother
- 1 milk pipe

Fully automatic espresso machine 400 series

CM 450

- Handleless door / automatic door opening
- Continuous flow heater means no waiting time and constant brewing temperature
- Aroma brewing technology for a full aroma
- Single portion cleaning
- TFT touch display
- Panel-free appliance with surface control module
- One-touch operation
- Personalisation function
- 7 light settings
- Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
Espresso / 2 x Espresso.
Espresso Macchiato / 2 x Espresso Macchiato.
Coffee / 2 x Coffee.
Americano / 2 x Americano.
Caffe Latte / 2 x Caffe Latte.
Latte Macchiato / 2 x Latte Macchiato.
Cappuccino / 2 x Cappuccino.
Flat White / 2 x Flat White.
Milk froth / 2 x Milk froth.
Warm milk / 2 x Warm milk.
Hot water / 2 x Hot water.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Clear text display.
Personalisation function, option to save 8 individualised beverages.
4 beverage size settings, volume can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
3 coffee temperature levels.
10 hot water temperature levels.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 7 cm to 15 cm.
Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with 19 bar pressure.
Double grinding and brewing cycles for extra intensity for single beverage order. For double beverage order, two grinding and brewing cycles.
Beverage dispenser with integrated milk system.
Insulated stainless steel milk container for up to 0.5 litres.
Integrated lightning with LEDs.
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Removable 2.4 litre water tank.
Electronic water filter exchange indicator.
Electronic fill level control for drip tray and container for coffee residue.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Child lock.

Cleaning

Fully automatic rinse programme when machine is turned on/off.
Automatic steam cleaning of the milk system after every beverage.
Automatic cleaning and descaling programme.
Emptying programme to prepare the appliance for holiday or transportation.
Empty-grinding function to remove coffee residues from the system when switching bean types.
Removable brewing unit.
Dishwasher-safe coffee residue container and drip tray.
Dishwasher-safe beverage dispenser.

Planning notes

Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
The door panel surface of the appliance extends 47 mm from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
The LAN port can be found at the back on the lower right side.


Special accessories (order as spare parts):

- Part No. 17000705 Water filter
- Part No. 00311819 Descaling tablets
- Part No. 00311769 Cleaning tablets
- Part No. 00636455 Door hinge restrictor (92° opening angle)
- Part No. 11015223 Bean container with lid

Please read the installation details regarding oven combination on page 14 – 15.

Connection

Total connected load 1.6 kW.
Connection cable 1.7 m with plug.
Plan a LAN cable.

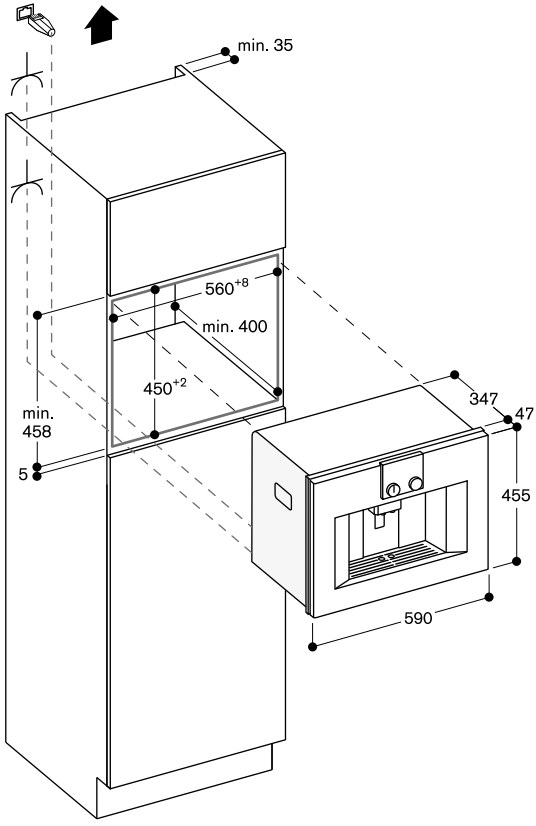



DV 461 110

Stainless steel-backed glass front
Width 60 cm, Height 14 cm

DV 461 100

Glass front in Gaggenau Anthracite
Width 60 cm, Height 14 cm

Included in the price

- 50 Vacuuming bags, small
- 50 Vacuuming bags, big
- 1 Raised vacuuming platform
- 1 Adaptor f. vacuuming outside the chamber
- 1 Vacuuming hose
- 1 Adaptor for bottle plugs
- 3 Plugs for vacuuming of bottles

Special accessories

BA 080 670

Vacuuming bags, small,
180 mm x 280 mm, 100 pcs.

BA 080 680

Vacuuming bags, large,
240 mm x 350 mm, 100 pcs.

Vacuuming drawer 400 series

DV 461

- Integrable in 14 cm high niche
- Hygienic stainless steel vacuuming chamber, applicable height up to 80 mm
- 3 vacuuming levels for vacuuming in the chamber, max. 99%
- 3 vacuuming levels for vacuuming outside the chamber, max. 90%
- Automatic connection recognition for vacuuming outside the chamber
- Handleless drawer
- Cushioned closing system

Application

Vacuuming for sous-vide cooking.
Vacuuming for fast marinating and flavouring.

Vacuuming for extended storage.

Vacuuming of vacuuming containers outside the chamber.

Vacuuming of liquids in bottles outside the chamber.

Handling

Touch key operation.

Recessed grip at the front bottom of the drawer.

Features

Net volume 7 litres.

Capacity load max. 10 kg.

Maximum size of vacuuming bags

W 240 mm x L 350 mm.

3 heat-sealing levels for different strengths of bag material.

Sealing bar, non-stick coating, removable.

Safety glass cover, opens automatically after vacuuming.

Raised vacuuming platform, 44 mm, deployable.

Utility space in vacuuming chamber, W 210 mm x L 275 mm.

Membrane for avoiding reflux of liquids during vacuuming outside the chamber.

Drying programme for vacuuming pump.

Warning function.

Planning notes

The panel surface of the appliance extends 47 mm from the furniture cavity.

Installation of BS/BM/CM directly above DV in 59 cm niche without intermediate floor.

Built-in under worktop or in single niche.


The socket can be planned behind the appliance.

Please read the installation details regarding oven combination on page 14 – 15.


Connection

Total connected load 0.32 kW.

Connection cable 1.5 m, pluggable.

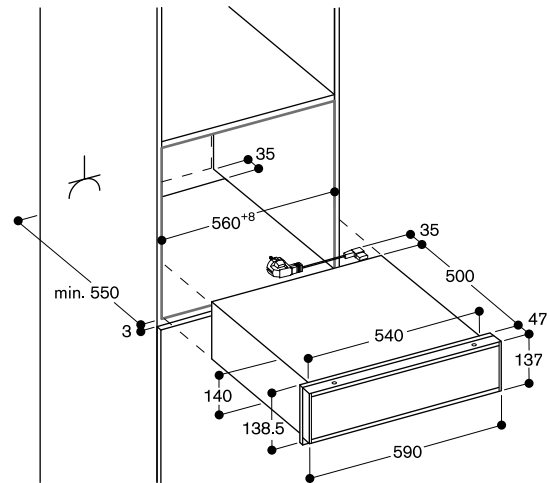

Side view of DV 461 below BS, BM, CM

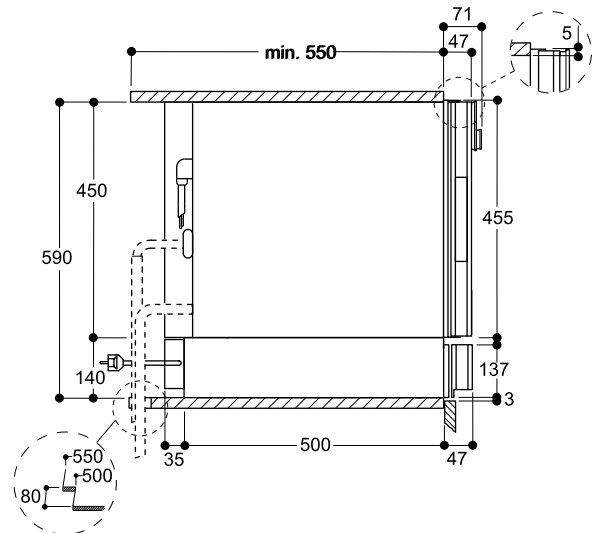

**DV 061 100***

Fully integrated
Width 60 cm, Height 14 cm

* Suitable for 400 and 200 series

Included in the price

50 Vacuuming bags, small
50 Vacuuming bags, big
1 Raised vacuuming platform
1 Adaptor f. vacuuming outside the chamber
1 Vacuuming hose
1 Adaptor for bottle plugs
3 Plugs for vacuuming of bottles

Special accessories**BA 080 670**

Vacuuming bags, small,
180 mm x 280 mm, 100 pcs.

BA 080 680

Vacuuming bags, large,
240 mm x 350 mm, 100 pcs.

Vacuating drawer 400 series**DV 061**

- Integrable in 14 cm high niche
- Hygienic stainless steel vacuuming chamber, applicable height up to 80 mm
- 3 vacuuming levels for vacuuming in the chamber, max. 99%
- 3 vacuuming levels for vacuuming outside the chamber, max. 90%
- Automatic connection recognition for vacuuming outside the chamber
- Cushioned closing system

Application

Vacuuming for sous-vide cooking.
Vacuuming for fast marinating and flavouring.
Vacuuming for extended storage.
Vacuuming of vacuuming containers outside the chamber.
Vacuuming of liquids in bottles outside the chamber.

Handling

Touch key operation.

Features

Net volume 7 litres.
Capacity load max. 10 kg.
Maximum size of vacuuming bags
W 240 mm x L 350 mm.
3 heat-sealing levels for different strengths of bag material.
Sealing bar, non-stick coating, removable.
Safety glass cover, opens automatically after vacuuming.
Raised vacuuming platform, 44 mm, deployable.
Utility space in vacuuming chamber, W 210 mm x L 275 mm.
Membrane for avoiding reflow of liquids during vacuuming outside the chamber.
Drying programme for vacuuming pump.
Warning function.


Planning notes

Attention: To open the fully integrated variant, a handle or a recessed grip is required.
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
Installation of BS/BM/CM directly above DV in 59 cm niche without intermediate floor.
Built-in under worktop or in single niche.
The socket can be planned behind the appliance.

Please read the installation details regarding oven combination on page 14 – 15.

Connection

Total connected load 0.32 kW.
Connection cable 1.5 m, pluggable.

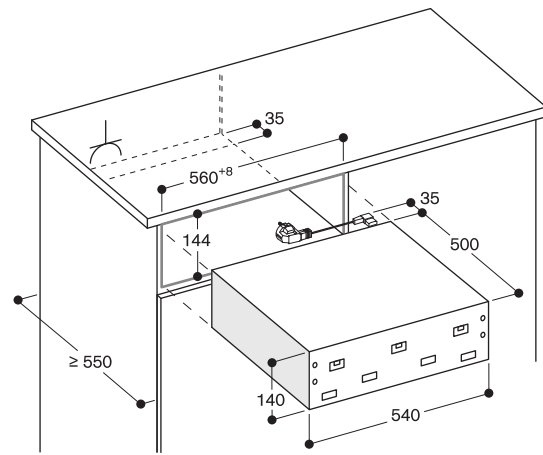

⚡ Socket

measurements in mm



WS 482 110

Stainless steel-backed glass front
Width 76 cm, Height 21 cm

Warming drawer 400 series
WS 482

- Handleless drawer
- Bright interior light
- Cushioned closing system
- Hygienic stainless steel interior with glass bottom
- 4 power levels in the temperature range 40 °C to 80 °C (glass surface)
- Also for preparing and cooking meals, and for keeping meals warm

Heating methods

Defrosting of meals/proving of yeast dough.
Preheating of small beverage containers.
Keeping meals warm/slow cooking meals.
Warming ovenware.

Handling

Rotary knob operation.
Recessed grip at the front bottom of the drawer.

Features

Net volume 38 litres.
Volume capacity: Dinner service for 10 people including ø24 cm plates and soup bowls, additional bowls and a serving dish depending on size.
Max. load 25 kg.
Usable interior dimensions W 606 x H 132 x D 480 mm.
Heating under glass bottom for easy cleaning.
Fan for even heat distribution for fast warming ovenware.
Status display, visible in the glass front.
Glass bottom made of safety glass.


Planning notes

The panel surface of the appliance extends 47 mm from the furniture cavity.
Installation of BO/BS above WS with dimensionally stable intermediate shelf.
Installation of BS above WS in 66.5 cm niche with intermediate floor (gap of 7 mm between WS and BS).
The socket can be planned behind the appliance.


Please read the installation details regarding oven combination on page 14 – 15.

Connection


Total connected load 0.81 kW.
Connection cable 1.5 m, pluggable.

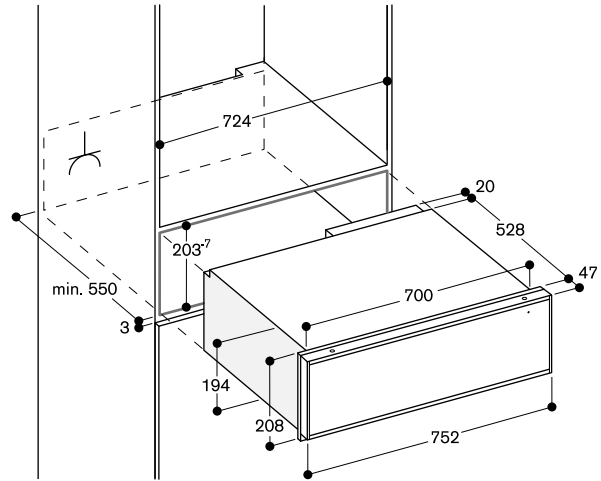

Side view of WS 482 below BO 480

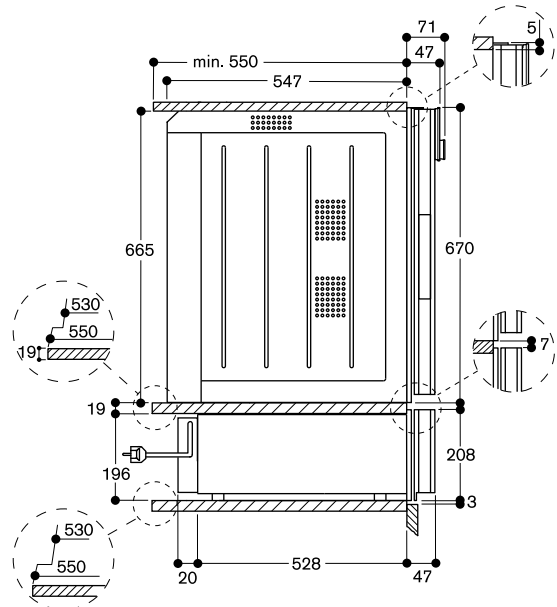

Side view of WS 482 below BS 484/485

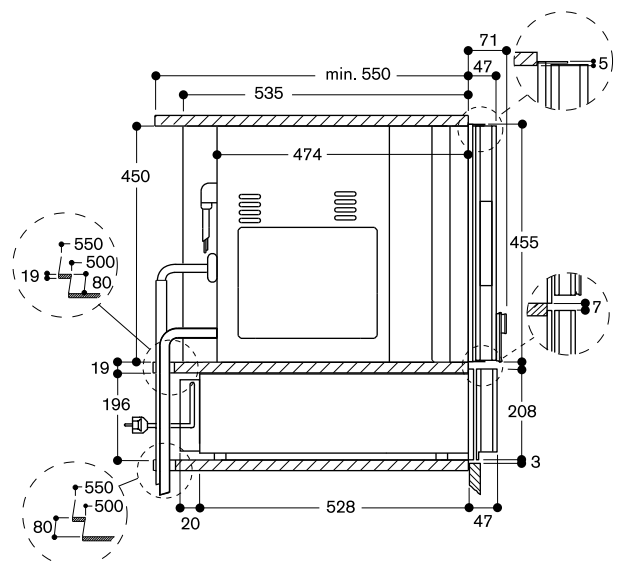

**WS 461 110**

Stainless steel-backed glass front
Width 60 cm, Height 14 cm

WS 461 100

Glass front in Gaggenau Anthracite
Width 60 cm, Height 14 cm

Warming drawer 400 series**WS 461**

- Handleless drawer
- Bright interior light
- Cushioned closing system
- Hygienic stainless steel interior with glass bottom
- 4 power levels in the temperature range 40 °C to 80 °C (glass surface)
- Also for preparing and cooking meals, and for keeping meals warm

Heating methods

Defrosting of meals/proving of yeast dough.
Preheating of small beverage containers.
Keeping meals warm/slow cooking meals.
Warming ovenware.

Handling

Rotary knob operation.
Recessed grip at the front bottom of the drawer.

Features

Net volume 19 litres.
Volume capacity: Dinner service for 6 people including ø24 cm plates and soup bowls, additional bowls and a serving dish depending on size.
Max. load 25 kg.
Usable interior dimensions W 475 x H 86 x D 458 mm.
Heating under glass bottom for easy cleaning.
Fan for even heat distribution for fast warming ovenware.
Status display, visible in the glass front.
Glass bottom made of safety glass.



Planning notes

The panel surface of the appliance extends 47 mm from the furniture cavity.
Installation of BS/BM/CM directly above WS in 59 cm niche without intermediate floor.
The socket can be planned behind the appliance.

Please read the installation details regarding oven combination on page 14 – 15.

Connection

Total connected load 0.81 kW.
Connection cable 1.5 m, pluggable.

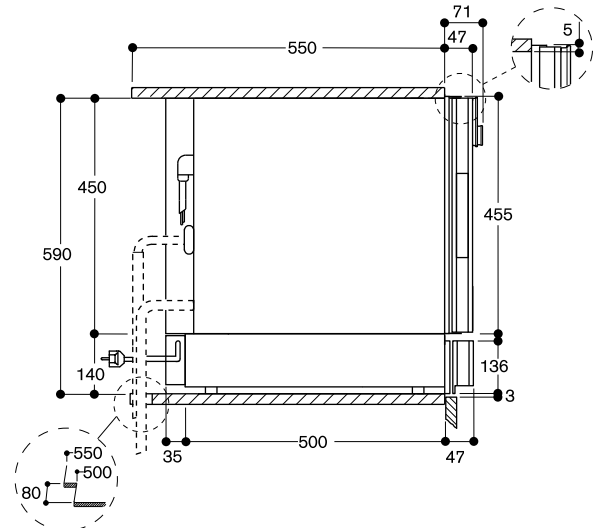**Side view of WS 461 below BS, BM, CM**



WS 462 110

Stainless steel-backed glass front
Width 60 cm, Height 29 cm

WS 462 100

Glass front in Gaggenau Anthracite
Width 60 cm, Height 29 cm

Warming drawer 400 series

WS 462

- Handleless drawer
- Bright interior light
- Cushioned closing system
- Hygienic stainless steel interior with glass bottom
- 4 power levels in the temperature range 40 °C to 80 °C (glass surface)
- Also for preparing and cooking meals, and for keeping meals warm

Heating methods

Defrosting of meals/proving of yeast dough.
Preheating of small beverage containers.
Keeping meals warm/slow cooking meals.
Warming ovenware.

Handling

Rotary knob operation.
Recessed grip at the front bottom of the drawer.

Features

Net volume 51 litres.
Volume capacity: Dinner service for 12 people including ø24 cm plates and soup bowls, additional bowls and a serving dish depending on size.
Max. load 25 kg.
Usable interior dimensions W 475 x H 236 x D 458 mm.
Heating under glass bottom for easy cleaning.
Fan for even heat distribution for fast warming ovenware.
Status display, visible in the glass front.
Glass bottom made of safety glass.


Planning notes

The panel surface of the appliance extends 47 mm from the furniture cavity.
The socket can be planned behind the appliance.


Please read the installation details regarding oven combination on page 14 – 15.

Connection

Total connected load 0.81 kW.
Connection cable 1.5 m, pluggable.

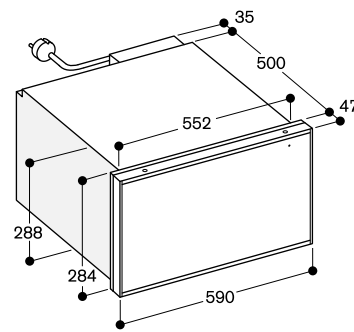

Side view of WS 462 below BO

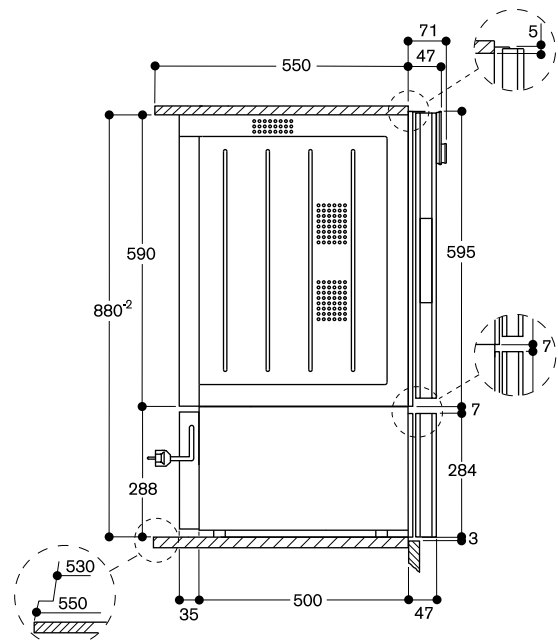

Accessories and special accessories 400 series

Advice: Not every illustrated accessory fits to every oven. For exact allocation see page 40 – 43.

BA 010 301

Triple telescopic pull-out rack
For combi-steam oven.



BA 016 105

Pull-out system
Fully extendable telescopic rails and
enamelled cast iron frame.



BA 018 105

Pull-out system
Fully extendable telescopic rails and
enamelled cast iron frame.

BA 020 360

Cooking container, stainless steel,
unperforated, 40 mm deep, 5l.



BA 020 370

Cooking container, stainless steel,
perforated, 40 mm deep, 5l.




BA 020 380

Cooking container, non-stick,
unperforated, 40 mm deep, 5l.



BA 020 390

Cooking container, non-stick,
perforated, 40 mm deep, 5l.



BA 026 115

Baking tray, enamelled
15 mm deep.




BA 028 115

Baking tray, enamelled
30 mm deep.

BA 036 105

Wire rack, chromium-plated
Without opening, with feet.



BA 038 105

Wire rack, chromium-plated
Without opening, with feet.

BA 046 115

Glass tray
24 mm deep.




BA 226 105

Grill tray, enamelled
30 mm deep.



BA 056 115

Heating element for baking stone and
Gastronorm roaster



BA 058 115

Heating element for baking stone and
Gastronorm roaster

BA 056 133

Baking stone
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).
Not in combination with pull-out system.



BA 058 133

Baking stone
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).
Not in combination with pull-out system.


BS 020 002

Pizza paddle, set of 2



GN 010 330

Adapter for gastronorm insert and
roaster.



GN 114 130

Gastronorm insert, stainless steel,
GN 1/3
Unperforated, 40 mm deep, 1.5l.

**GN 114 230**

Gastronorm insert, stainless steel,
GN 2/3
Unperforated, 40 mm deep, 3l.

**GN 124 130**

Gastronorm insert, stainless steel,
GN 1/3
Perforated, 40 mm deep, 1.5l.

**GN 124 230**

Gastronorm insert, stainless steel,
GN 2/3
Perforated, 40 mm deep, 3l.

**GN 340 230**

Gastronorm roaster in cast aluminium
GN 2/3, height 165 mm, non-stick.
For roasting in oven with roasting
function.
Lower and upper part can also be
used as separate ovenproof dishes,
height 100 and 65 mm.
For ovens with heating element
BA 056 115 or BA 058 115 and
pull-out system BA 016 or BA 018
(both to be ordered separately) and
for Combi-steam ovens with adapter
GN 010 330 and pull-out system
BA 010 301 (both to be ordered
separately).

**CL S10 040**

Cleaning cartridges, set of 4.
For Combi-steam oven.

**GF 111 100**

Descaling and neutralising filter,
for first installation.
Descaling system, recommended to be
installed if water hardness exceeds
7 °dH or carbon hardness 5 °dH.
Filter head with integrated non-return
valve and filter.
Width 130 mm, Height 265 mm,
Depth 121 mm.
Water inlet 1.5 m with 3/4" connection.

**GF 121 110**

Filter cartridge

**GZ 010 011**

Extension for water inlet and outlet
(2 m long).

**BA 080 670**

Vacuuming bags, small
180 x 280 mm, 100 pcs.

**BA 080 680**

Vacuuming bags, large
240 x 350 mm, 100 pcs.



Accessories and special accessories 400 series



BX 480/BX 481

Baking tray, enamelled		Double oven
BA 026 115	15 mm deep	
BA 028 115	30 mm deep	• (2x)/°
Pull-out rack		
BA 016 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame	
BA 018 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame	°
BA 010 301	Triple telescopic pull-out rack for combi-steam oven.	
Baking stone		
BA 056 133	incl. baking stone support and pizza paddle (heating element must be ordered separately)	
BA 058 133	incl. baking stone support and pizza paddle (heating element must be ordered separately)	°
Cooking container, steam oven		
BA 020 360	Cooking container, stainless steel, unperforated, 40 mm deep, 5 l.	
BA 020 370	Cooking container, stainless steel, perforated, 40 mm deep, 5 l.	
BA 020 380	Cooking container, non-stick, unperforated, 40 mm deep, 5 l.	
BA 020 390	Cooking container, non-stick, perforated, 40 mm deep, 5 l.	
GN 114 130	GN 1/3, unperforated, 40 mm deep, 1.5 l	
GN 114 230	GN 2/3, unperforated, 40 mm deep, 3 l	
GN 124 130	GN 1/3, perforated, 40 mm deep, 1.5 l	
GN 124 230	GN 2/3, perforated, 40 mm deep, 3 l	
Gastronorm roaster, cast aluminium		
GN 340 230	GN 2/3, height 165 mm, non-stick For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 421)	°
GN-Adapter		
GN 010 330	Adapter for gastronorm insert.	
Glass tray		
BA 046 115	24 mm deep	
Wire rack		
BA 036 105	no opening, with feet	
BA 038 105	no opening, with feet	• (2x)/°
Part No. 672921	for grill trays BA 226 105, with opening, and feet	
Part No. 706321	for grill tray ET-Nr. 687055, with opening and feet	• (2x)/°
Grill tray, enamelled		
BA 226 105	30 mm deep	
Part No. 687055	with feet and rotisserie spit attachment, 30 mm deep	• (2x)/°
Heating element		
BA 056 115	Necessary accessory for baking stone BA 056 133	
BA 058 115	Necessary accessory for baking stone BA 058 133	°
Pizza paddle		
BS 020 002	Set of 2	°
Cleaning and care		
CL S10 040	Cleaning cartridges, set of 4	
Part No. 17002490	Descaling tablets, for combi steam ovens, set of 4.	
Part No. 17000705	Water filter cartridge	
Part No. 00311819	Descaling tablets	
Part No. 00311769	Cleaning tablets	
Vacuuming bags		
BA 080 670	Vacuuming bags, small, 180 x 280 mm, 100 pcs.	
BA 080 680	Vacuuming bags, large, 240 x 350 mm, 100 pcs.	
Water connection		
GF 111 100	Descaling and neutralising filter, for first installation	
GF 121 110	Filter cartridge for GF 111 100	
GZ 010 011	Extension for water inlet and outlet hose	

• Standard.

° Special accessory.



BO 480/BO 481



BO 470/BO 471



BO 450/BO 451



BO 420/BO 421



BS 484/BS 485



BS 470/BS 471
BS 474/BS 475



BS 450/BS 451
BS 454/BS 455

Oven	Oven	Oven	Oven	Combi-steam oven	Combi-steam oven	Combi-steam oven
•/°	• (2x)/°	•/°	•/°			
°	°	°	°		°	°
°	°	°	°		°	°
				•/°	•/°	•/°
				•/°	•/°	•/°
				°	°	°
				°	°	°
				°	°	°
				°	°	°
°	°	°	° (without roaster function)	°	°	°
				°	°	°
	•/°	•/°	•/°			
	•/°	•/°	•/°			
•/°	•/°	°	°			
•/°	°	°	°			
°	°	°	°			
°	°	°	°			
				•/°	•/°	•/°
				°	°	°
				°	°	°
				°	°	°

Accessories and special accessories 400 series



BM 484/BM 485

Baking tray, enamelled		Combi-microwave oven
BA 026 115	15 mm deep	
BA 028 115	30 mm deep	
Pull-out rack		
BA 016 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame	
BA 018 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame	
BA 010 301	Triple telescopic pull-out rack for combi-steam oven.	
Baking stone		
BA 056 133	incl. baking stone support and pizza paddle (heating element must be ordered separately)	
BA 058 133	incl. baking stone support and pizza paddle (heating element must be ordered separately)	
Cooking container, steam oven		
BA 020 360	Cooking container, stainless steel, unperforated, 40 mm deep, 5 l.	
BA 020 370	Cooking container, stainless steel, perforated, 40 mm deep, 5 l.	
BA 020 380	Cooking container, non-stick, unperforated, 40 mm deep, 5 l.	
BA 020 390	Cooking container, non-stick, perforated, 40 mm deep, 5 l.	
GN 114 130	GN 1/3, unperforated, 40 mm deep, 1.5 l	
GN 114 230	GN 2/3, unperforated, 40 mm deep, 3 l	
GN 124 130	GN 1/3, perforated, 40 mm deep, 1.5 l	
GN 124 230	GN 2/3, perforated, 40 mm deep, 3 l	
Gastronorm roaster, cast aluminium		
GN 340 230	GN 2/3, height 165 mm, non-stick For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 421)	
GN-Adapter		
GN 010 330	Adapter for gastronorm insert.	
Glass tray		
BA 046 115	24 mm deep	
Wire rack		
BA 036 105	no opening, with feet	
BA 038 105	no opening, with feet	
Part No. 672921	for grill trays BA 226 105, with opening, and feet	
Part No. 706321	for grill tray ET-Nr. 687055, with opening and feet	
Grill tray, enamelled		
BA 226 105	30 mm deep	
Part No. 687055	with feet and rotisserie spit attachment, 30 mm deep	
Heating element		
BA 056 115	Necessary accessory for baking stone BA 056 133	
BA 058 115	Necessary accessory for baking stone BA 058 133	
Pizza paddle		
BS 020 002	Set of 2	
Cleaning and care		
CL S10 040	Cleaning cartridges, set of 4	
Part No. 17002490	Descaling tablets, for combi steam ovens, set of 4.	
Part No. 17000705	Water filter cartridge	
Part No. 00311819	Descaling tablets	
Part No. 00311769	Cleaning tablets	
Vacuuming bags		
BA 080 670	Vacuuming bags, small, 180 x 280 mm, 100 pcs.	
BA 080 680	Vacuuming bags, large, 240 x 350 mm, 100 pcs.	
Water connection		
GF 111 100	Descaling and neutralising filter, for first installation	
GF 121 110	Filter cartridge for GF 111 100	
GZ 010 011	Extension for water inlet and outlet hose	

• Standard.

◦ Special accessory.



BM 450/BM 451
BM 454/BM 455

Combi-microwave oven



CM450

Fully automatic espresso machine



DV 461
DV 061

Vacuuming drawer



WS 482

Warming drawer



WS 462
WS 461

Warming drawer

-
-
-

-
-

Ovens 400 series



Appliance type		Double oven	Oven
Side-opening door right-hinged / left-hinged		BX 480/BX 481	BO 480/BO 481
Stainless steel-backed full glass door		BX 480/481 112	BO 480/481 112
Full glass door in Gaggenau Anthracite			
Dimensions			
Width	(cm)	76	76
Appliance dimensions W x H x D ¹	(mm)	752 x 1.428 x 547	752 x 670 x 547
Door panel extension from furniture cavity	(mm)	47	47
Niche dimensions W x H x D	(mm)	724 x 1.425 x 550	724 x 665 x 550
Net weight	(kg)	152	77
Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)			
Net volume	(l)	110 per cooking compartment	110
Number of cooking compartments		2	1
Interior dimensions W x H x D	(mm)	624 x 435 x 403	624 x 435 x 403
Energy efficiency class with eco hot air		A per cooking compartment	A
Energy Efficiency Index (EEI)		96 above, 121 below	96
Energy consumption with top / bottom heat	(kWh)	1.53 per cooking compartment	1.53
Energy consumption with eco hot air	(kWh)	0.97 above, 1.22 below	0.97
Heat source		electric	electric
Heating methods			
Temperature range	(°C)	30–300	30–300
Hot air / Eco hot air / top + bottom heat		•/•/•	•/•/•
Top heat / bottom heat / hot air + bottom heat		•/•/•	•/•/•
Top + 1/3 bottom heat		•	•
1/3 top + bottom heat		•	•
Hot air + 1/3 bottom heat		•	•
Full surface grill + circulated air		•	•
Full surface grill		•	•
Compact grill		•	•
Baking stone function		•	•
Roaster function		•	•
Dough proofing / defrosting / keeping warm		•/•/•	•/•/•
Handling			
TFT touch display		•	•
Controls at the top / centered / at the bottom		- / • / -	• / - / -
Automatic door opening		-	•
Clear text display	(No. of languages)	25	44
Individual recipes		-	50
Door opening angle	(°)	180	180
Features			
Electronic temperature control		•	•
Three-Point core temperature probe		• (bottom only)	•
Automatic programmes		-	•
Rotisserie spit		• (bottom only)	•
Baking stone socket		•	•
Roasting function		•	•
Actual temperature display		•	•
Rapid heating		•	•
Cooking time, cooking time end, timer, stopwatch		•	•
Long-term timer		•	•
Halogen light on the top	(W)	60 per cooking compartment	60
Halogen light on the side	(W)	10 per cooking compartment	2 x 10
Tray levels	(No.)	5	5
Digital services (Home Connect) either via LAN or wireless via WiFi ³		-	• ³
Accessories			
Enamelled baking tray		1 per cooking compartment	1
Size of largest baking tray	(cm ²)	1.780	1.780
Wire rack		1 per cooking compartment	1
Enamelled grill tray / wire rack for grill tray		1/1 per cooking compartment	1/1
Glass tray		-	-
Safety			
Thermally insulated door with multiple glazing		4-fold	4-fold
Child lock / door lock / safety shut-off		• / - / •	• / • / •
Cooled housing with temperature protection		•	•
Cleaning			
Pyrolytic system		•	•
Gaggenau enamel		•	•
Heated air cleaning catalyser		•	•
Connection			
Total connected load	(kW)	9.2	5.52

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche. ² Special accessory, see pages 38–43.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Oven	Oven	Oven
BO 470/BO 471	BO 450/BO 451	BO 420/BO 421
BO 470/471 112	BO 450/451 112	BO 420/421 112
BO 470/471 102		BO 420/421 102
60	60	60
590 x 595 x 547	590 x 595 x 547	590 x 595 x 547
47	47	47
560 x 590 x 550	560 x 590 x 550	560 x 590 x 550
64	56	56
76	76	76
1	1	1
475 x 383 x 414	475 x 383 x 414	475 x 383 x 414
A	A	A
96	96	96
1.25	1.25	1.25
0.83	0.83	0.83
electric	electric	electric
30-300	30-300	50 - 300
•/•/•	•/•/•	•/•/•
•/•/•	•/•/•	•/•/•
•	-	-
•	-	-
•	-	-
•	•	•
•	•	•
•	•	-
•	•	•
•	•	-
•/•/•	•/•/-	-/-/-
•	•	•
•/-/-	•/-/-	•/-/-
•	•	•
44	44	44
50	50	50
180	180	180
•	•	•
•	•	-
•	•	-
•	-	-
•	•	•
•	•	-
•	•	•
•	•	•
•	•	•
•	•	•
60	60	60
2 x 10	10	-
4	4	4
• ³	• ³	• ³
2	1	1
1.200	1.200	1200
1	1	1
1/1	BA 226 105 ² /672 921 ²	BA 226 105 ² /672 921 ²
1	1	1
4-fold	4-fold	4-fold
•/•/•	•/•/•	•/•/•
•	•	•
•	•	•
•	•	•
3.7	3.7	3.7

Combi-steam ovens 400 series



Appliance type		Combi-steam oven	Combi-steam oven
Side-opening door right-hinged / left-hinged		BS 484/BS 485	BS 470/BS 471
Stainless steel-backed full glass door		BS 484/BS 485 112	BS 470/BS 471 112
Full glass door in Gaggenau Anthracite			BS 470/BS 471 102
Dimensions			
Width	(cm)	76	60
Appliance dimensions W x H x D ¹	(mm)	752 x 455 x 540	590 x 455 x 540
Door panel extension from furniture cavity	(mm)	47	47
Niche dimensions W x H x D	(mm)	724 x 450 x 550	560 x 450 x 550
Net weight	(kg)	53	47
Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)			
Net volume	(l)	50	50
Number of cooking compartments		1	1
Interior dimensions W x H x D	(mm)	501 x 246 x 406	501 x 246 x 406
Energy efficiency class with hot air + 30 % humidity		A	A
Energy Efficiency Index (EEI)		94.7	94.7
Energy consumption with hot air + 30 % humidity	(kWh)	0.72	0.72
Heat source	(min)	electric	electric
Heating methods			
Temperature range	(°C)	30–230	30–230
Hot air + 100 % humidity		•	•
Hot air + 80 % humidity		•	•
Hot air + 60 % humidity		•	•
Hot air + 30 % humidity		•	•
Hot air + 0 % humidity		•	•
Low temperature cooking		•	•
Sous-vide cooking		•	•
Full surface grill level 1 + humidity		•	•
Full surface grill level 2 + humidity		•	•
Full surface grill + circulated air		•	•
Dough proofing		•	•
Defrosting		•	•
Regenerating		•	•
Handling			
TFT touch display		•	•
Controls at the top / at the bottom		- / •	• / -
Automatic door opening		•	•
Clear text display	(No. of languages)	44	44
Individual recipes		50	50
Door opening angle	(°)	180°	180°
Features			
Steaming without pressure		•	•
Electronic temperature control		•	•
Full surface grill behind glass ceramic	(W)	2.000	2.000
Steam removal / misting		• / •	• / •
Three-Point core temperature probe		•	•
Automatic programmes		•	•
Actual temperature display		•	•
Cooking time, cooking time end, timer, stopwatch		•	•
Long-term timer		•	•
Automatic boiling point detection		•	•
Capacity display for filter cartridge		•	•
Water tank capacity / water level warning	(l)	- / -	- / -
LED light on the side	(W)	2 x 10	2 x 10
Tray levels / stainless steel cooking interior	(No.)	3 / •	3 / •
Digital services (Home Connect) either via LAN or wireless via WiFi. ³		•	•
Accessories			
Size of largest baking tray	(cm ²)	810	810
Wire rack		1	1
Cooking container, stainless steel, 40 mm, perforated / unperforated		1/1	1/1
Cleaning cartridge		4	4
Descaling tablets		Part No. 17002490	Part No. 17002490
Safety			
Thermally insulated door with multiple glazing		3-fold	3-fold
Child lock / door lock / safety shut-off		• / • / •	• / • / •
Cooled housing with temperature protection		•	•
Cleaning			
Cleaning programme		•	•
Descaling programme / drying programme		• / •	• / •
Automatic drying of the cavity at the end of the cooking process.		•	•
Connection			
Total connected load	(kW)	3.15	3.15
Fixed inlet and outlet water connection		•	•

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche. ² Special accessory, see pages 38 – 45.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Combi-steam oven
BS 474/BS 475
BS 474/BS 475 112
BS 474/BS 475 102

Combi-steam oven
BS 450/BS 451
BS 450/BS 451 111
BS 450/BS 451 101

Combi-steam oven
BS 454/BS 455
BS 454/BS 455 111
BS 454/BS 455 101

60
590 x 455 x 540
47
560 x 450 x 550
47

60
590 x 455 x 540
47
560 x 450 x 550
47

60
590 x 455 x 540
47
560 x 450 x 550
47

50
1
501 x 246 x 406
A
94.7
0.72
electric

50
1
501 x 246 x 406
A
94.7
0.60
electric

50
1
501 x 246 x 406
A
94.7
0.60
electric

30-230
•
•
•
•
•
•
•
•
•
•
•
•
•
•
•

30-230
•
•
•
•
•
•
•
•
•
•
•
•
•
•
•

30-230
•
•
•
•
•
•
•
•
•
•
•
•
•
•
•

-/•
•
44
50
180°

•/-
•
44
50
180°

-/•
•
44
50
180°

•
•
2.000
•/•
•
•
•
•
•
•
-/-
2 x 10
3 /•
•

•
•
-
- /•
•
•
•
•
•
•
1.7 /•
2 x 10
3 /•
•

•
•
-
- /•
•
•
•
•
•
•
1.7 /•
2 x 10
3 /•
•

810
1
1/1
4
Part No. 17002490

810
1
1/1
4
Part No. 17002490

810
1
1/1
4
Part No. 17002490

3-fold
•/•/•
•

3-fold
•/•/•
•

3-fold
•/•/•
•

•
•/•
•

•
•/•
•

•
•/•
•

3.15
•

3.15
-

3.15
-

Combi-microwave ovens 400 series



Appliance type		Combi-microwave oven	Combi-microwave oven	Combi-microwave oven
Side-opening door right-hinged / left-hinged		BM 484/BM 485	BM 450/BM 451	BM 454/BM 455
Stainless steel-backed full glass door		BM 484/485 110	BM 450/451 110	BM 454/455 110
Full glass door in Gaggenau Anthracite			BM 450/451 100	BM 454/455 100
Dimensions				
Width	(cm)	76	60	60
Appliance dimensions W x H x D ¹	(mm)	752 x 455 x 535	590 x 455 x 535	590 x 455 x 535
Door panel extension from furniture cavity	(mm)	47	47	47
Niche dimensions W x H x D	(mm)	724 x 450 x 550	560 x 450 x 550	560 x 450 x 550
Net weight	(kg)	50	46	46
Volumen				
Capacity	(l)	36	36	36
Interior dimensions W x H x D	(mm)	445 x 236 x 348	445 x 236 x 348	445 x 236 x 348
Heating methods / Programmes				
Maximum microwave output	(W)	1.000	1.000	1.000
Microwave output levels	(No.)	5	5	5
Hot air with temperature range	(°C)	40, 100–250	40, 100–250	40, 100–250
Full surface grill + hot air with temperature range	(°C)	100–250	100–250	100–250
Full surface grill + circulated air with temperature range	(°C)	100–250	100–250	100–250
Full surface grill as quartz grill with levels of intensity	(No.)	3	3	3
Maximum grill output	(W)	2.000	2.000	2.000
Maximum Hot air output	(W)	1.950	1.950	1.950
Maximum microwave output for combination with grill and oven	(W)	600	600	600
Sequential operation of up to 5 modes incl. programming of combined operation and rest time		•	•	•
Automatic weight feature	(No.)	15	15	15
Handling				
TFT touch display		•	•	•
Controls at the top / at the bottom		•/–	•/–	–/•
Automatic door opening		•	•	•
Clear text display	(No. of languages)	25	25	25
Individual recipes		50	50	50
Door opening angle		180°	180°	180°
Features				
Electronic temperature control		•	•	•
Actual temperature display		•	•	•
Rapid heating		•	•	•
Innowave		•	•	•
Cooking time, switch-off time, short-term timer, stop watch		•/•/•/•	•/•/•/•	•/•/•/•
Long-term timer		•	•	•
Interior lighting, side	(W)	60	60	60
Rack levels	(No.)	4	4	4
Accessories				
Glass tray		•	•	•
Wire rack		•	•	•
Glass rod		•	•	•
Safety				
Thermally insulated door with multiple glazing		•	•	•
Child lock / safety shut-off		•/•	•/•	•/•
Triple door lock		•	•	•
Cooled housing with temperature protection		•	•	•
Cleaning				
Catalytic special enamelling at interior back wall		•	•	•
Stainless steel interior with ceramic base.		•	•	•
Connection				
Total connected load	(kW)	3.1	3.1	3.1

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.



Appliance type		Fully automatic espresso machine
Stainless steel-backed glass front		CM 450 112
Full glass door in Gaggenau Anthracite		CM 450 102
Dimensions		
Width	(cm)	60
Appliance dimensions W x H x D ¹	(mm)	590 x 455 x 444
Door panel extension from furniture cavity	(mm)	47
Niche dimensions W x H x D	(mm)	560 x 450 x 550
Net weight	(kg)	22
Typ of beverage		
		Ristretto / 2 x Ristretto
		Espresso / 2 x Espresso
		Espresso Macchiato / 2 x Espresso Macchiato
		Coffee / 2 x coffee
		Americano / 2 x Americano
		Caffe Latte / 2 x Caffe Latte
		Latte Macchiato / 2 x Latte Macchiato
		Cappuccino / 2 x Cappuccino
		Flat White / 2 x Flat White
		Milk froth / 2 x Milk froth
		Warm milk / 2 x Warm milk
		Hot water / 2 x Hot water
Handling		
TFT touch display		•
Controls at the top		•
Automatic door opening		•
Clear text display	(No. of languages)	25
Beverages can be personalised and memorised	(No.)	8
Beverage size settings	(No.)	3
Coffee strength levels	(No.)	8
Coffee temperature levels	(No.)	3
Hot water temperature levels	(°C)	10
Coffee-milk ratio levels		•
Height adjustable coffee dispenser up to	(cm)	15
Programmable basic settings		
- Lighting scenarios	(No.)	7
- Capacity unit	(ml/fl.oz.)	•
- Adjustability of dispensing per type and size of beverage to match the cup size		•
- Standby after	(min, h)	5 min to 12 h
- Water hardness	(No. of levels)	4, water-softening system
- Water filter		•
Features		
Aroma brewing technology		•
Grinding unit with ceramic discs		•
Automatic adjustment of ground coffee quantity		•
Continuous flow heater		•
Pump pressure	(bar)	19
Integrated milk system		•
Insulated milk container	(l)	0.5
Bean container	(g)	500
Separate container for second ground coffee type		•
Grinding level control		•
Volume of adjustable brewing chamber	(g)	8 to 12
Double grinding and brewing cycles for extra intensity for one beverage		•
Double grinding and brewing cycles for two beverages		•
Removable water tank	(l)	2.4
Water filter cartridge for water tank		1
Single portion cleaning		•
Electronic water filter exchange indicator		•
Electronic fill level control for milk, water and coffee beans		•
Electronic fill level control for drip tray and coffee residues container		•
Integrated LED lighting		•
Fresh water-function to refill the water tank with fresh water		•
Safety		
Child lock		•/•
Aqua stop with guarantee.		•
Cleaning		
Fully automatic rinse programme when switching on/off		•/•
Automatic quick rinsing of milk system		•
Automatic cleaning and descaling programme		•
Automatic cleaning programme		•
Automatic descaling programme		•
Removable brewing unit		•
Coffee residue container and drip tray removable and dishwasher-safe		•
Beverage dispenser removable and dishwasher-safe		•
Emptying programme to prepare the appliance for holiday or transportation		•
Empty-grinding function, if using a new type of beans		•
Connection		
Total connected load	(kW)	1.6
Fixed inlet and outlet water connection		-

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.

Vacuuming drawer 400 series



Appliance type		Vacuuming drawer
Stainless steel-backed glass front		DV 461 110
Glass front in Gaggenau Anthracite		DV 461 100
Fully integrated		DV 061 100
Dimensions		
Width	(cm)	60
Appliance dimensions W x H x D ¹	(mm)	590 x 140 x 532
Door panel extension from furniture cavity	(mm)	47
Niche dimensions W x H x D	(mm)	560 x 140 x 550
Net weight	(kg)	31
Volume		
Net volume	(l)	7
Interior dimensions W x H x D	(mm)	210 x 95 x 275
Maximum size of vacuuming bags W x L	(mm)	240 x 350
Usage		
Vacuuming levels		3, max. 99 %
Heat-sealing levels		3
Vacuuming of bags and containers		•
Vacuuming of vacuuming containers and bottles		•
Vacuuming of liquids		•
Drying program for vacuuming pump		•
Warning function		•
Handling		
Sensor Control		•
Handleless drawer		•
Recessed grip		•
Push-to-open system		–
Cushioned closing system		•
Features		
Stainless steel vacuuming chamber		•
Maximum load	(kg)	10
Applicable height	(mm)	80
Safety glass cover		•
Sealing bar, non-stick, removable		•
Raised vacuuming platform		•
Connection with tube for vacuuming outside the chamber		•
Utility space in vacuuming chamber, W x L	(mm)	210 x 275
Membrane avoiding reflow of liquids during external vacuuming		•
Vacuuming bags, small, 180 mm x 280 mm	(pcs.)	50
Vacuuming bags, large, 240 mm x 350 mm	(pcs.)	50
Plug for vacuuming bottles	(pcs.)	3
Adaptor for bottle plugs		•
Connection		
Total connected load	(kW)	0.32

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.



Appliance type	Warming drawer		Warming drawer		Warming drawer	
Stainless steel-backed glass front	WS 482 110		WS 461 110		WS 462 110	
Full glass door in Gaggenau Anthracite			WS 461 100		WS 462 100	
Dimensions						
Width	(cm)	76	60		60	
Appliance dimensions W x H x D ¹	(mm)	752 x 208 x 548	590 x 140 x 535		590 x 288 x 535	
Door panel extension from furniture cavity	(mm)	47	47		47	
Niche dimensions W x H x D	(mm)	724 x 203 x 550	560 x 140 x 550		560 x 288 x 550	
Net weight	(kg)	29	18		23	
Volume						
Net volume	(l)	38	19		51	
Interior dimensions W x H x D	(mm)	606 x 132 x 480	475 x 86 x 458		475 x 236 x 458	
Number of table settings	(No.)	10	6		12	
Heating methods						
Defrosting of meals / proving of yeast dough		•	•		•	
Preheating of small beverage containers		•	•		•	
Keeping meals warm / slow cooking meals		•	•		•	
Warming ovenware		•	•		•	
Hot air + bottom heat		•	•		•	
Temperature range 40 °C to 80 °C (glass surface)	(power levels)	4	4		4	
Handling						
Rotary knob		•	•		•	
Status display, visible in the glass front		•	•		•	
Handleless drawer		•	•		•	
Recessed grip		•	•		•	
Cushioned closing system		•	•		•	
Features						
Interior light		•	•		•	
Maximum load	(kg)	25	25		25	
Stainless steel interior with glass bottom		•	•		•	
Fan for even heat distribution		•	•		•	
Connection						
Total connected load	(kW)	0.81	0.81		0.81	

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.



The ovens 200 series

Checklist for appliance combinations 200 series	54
Ovens 200 series	56
Combi-steam ovens 200 series	60
Steam ovens 200 series	66
Combi-microwave ovens 200 series	68
Microwave ovens 200 series	70
Fully automatic espresso machines 200 series	72
Vacuuming drawers 200 series	74
Warming drawers 200 series	75
Accessories special accessories 200 series	78
Technical specifications 200 series	82

Checklist for appliance combinations 200 series

This checklist provides the most relevant parameters for the perfect combination and ordering of ovens, Combi-steam ovens, steam ovens, Combi-microwave ovens, microwaves, fully automatic espresso machines, warming drawers and dishwashers.

When several appliances are listed (BSP/BMP), the first appliance is shown.

Vertical combinations

When planning and ordering please note that

- The door hinges of the appliances must be on the same side.
- The door hinge (right-/left-hinged) is not reversible.
- No further appliances may be fitted above the BSP.
- Only appliances with controls at the top can be installed above a dishwasher. The niche for appliances that are installed above it must be 56 cm wide. The dishwasher is 60 cm wide.

Horizontal combinations

When planning and ordering please note that

- The door hinges can be located on either the inside or outside, without the full door opening angle being restricted.
- The door hinge (right-/left-hinged) cannot be reversed retrospectively.
- A minimum clearance of 10 mm between the two doors must be observed.
- Combi-steam ovens, steam ovens, Combi-microwave ovens, microwaves and fully automatic espresso machines in combination with a warming drawer (14 cm in height) have the same total height as a 60 cm wide ovens.

BOP Ovens
 BSP Combi-steam ovens/steam ovens
 BMP Combi-microwave ovens/
 microwaves
 CMP Fully automatic espresso
 machine
 WSP Warming drawers
 DF Dishwashers

Please read additional planning notes on page 14 – 15.

All appliances shown can be obtained in these appliance colors:



Gaggenau Anthracite



Gaggenau Metallic



Gaggenau Silver

Vertical combination, 60 cm wide appliances



- BSP 2.0/BMP 250
- BOP 2.0
- WSP 222



- BMP 224
- BOP 2.0
- WSP 222



- BSP 2.0/BMP 250
- BMP 250
- WSP 221



- BMP 250/BSP 2.0
- CMP 250
- WSP 221



- BMP 224
- CMP 250
- WSP 221



- BOP 2.0
- DF



- BSP 2.0/BMP 250
- DF



- CMP 250
- DF

Horizontal combination, 60 cm wide appliances



• BOP 2.1 • BOP 2.0



• BOP 2.1 • BSP 2.0/BMP 250
• DVP 221/WSP 221



• BOP 251 • CMP 250
• WSP 221/DVP 221



• BMP 251/BSP 2.1 • BMP 250/BSP 2.0
• WSP 221/DVP 221 • DVP 221/WSP 221



• BMP 251/BSP 2.1 • CMP 250
• DVP 221/WSP 221 • WSP 221/DVP 221



• BOP 251 • CMP 250 • BMP 250/BSP 2.0
• WSP 221/DVP 221 • DVP 221/WSP 221



• BMP 251/BSP 2.1 • CMP 250 • BMP 250/BSP 2.0
• WSP 221/DVP 221 • DVP 221/WSP 221 • WSP 221/DVP 221

Combination of 4 with warming drawer, 60 cm wide appliances



• BOP 2.1 • BMP 250/BSP 2.0 • BMP 250/BSP 2.0
• DVP 221/WSP 221 • WSP 221/DVP 221



• BMP 251/BSP 2.1 • BMP 250/BSP 2.0
• BOP 2.1 • CMP 250
• WSP 221/DVP 221



Controls at the top

Right-hinged

BOP 250 102

Full glass door in Gaggenau Anthracite
Width 60 cm

BOP 250 112

Full glass door in Gaggenau Metallic
Width 60 cm

BOP 250 132

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BOP 251 102

Full glass door in Gaggenau Anthracite
Width 60 cm

BOP 251 112

Full glass door in Gaggenau Metallic
Width 60 cm

BOP 251 132

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 baking tray, enamelled pyrolysis-safe
- 1 glass tray
- 1 wire rack
- 1 plug-in core temperature probe

Special accessories

BA 016 105

Pull-out system
Fully extendable telescopic rails and enamelled cast iron frame.

BA 026 115

Baking tray, enamelled
15 mm deep.

BA 036 105

Wire rack, chromium-plated
Without opening, with feet.

BA 046 115

Glass tray
24 mm deep.

BA 056 115

Heating element for baking stone and
Gastronorm roaster.

BA 056 133

Baking stone.
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).
Not in combination with pull-out
system.

BA 226 105

Grill tray, enamelled
30 mm deep.

BS 020 002

Pizza paddle, set of 2.

GN 340 230

Gastronorm roaster in cast aluminium.
GN2/3, height 165 mm, non-stick.

Oven 200 series

BOP 250/BOP 251

- Flush installation
- Pyrolytic system
- 13 heating methods with core temperature probe and baking stone function
- Automatic programmes
- Core temperature probe with estimation of cooking time
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C to 300 °C
- Net volume 76 litres

Heating methods

Hot air.
Eco hot air.
Top + bottom heat.
Top heat.
Bottom heat.
Hot air + bottom heat.
Full surface grill + circulated air.
Full surface grill.
Compact grill.
Baking stone function.
Roaster function.
Dough proofing.
Defrosting.

Handling

Rotary knob and TFT touch display operation.
Clear text display.
Option to save individual recipes (incl. core temperature probe).
Personalisation of automatic programmes.
Information key with use indicators.
Side-opening door opens up to 110° angle.

Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.
Automatic programmes.
Baking stone socket.
Actual temperature display.
Rapid heating.
Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.
60 W halogen light on the top.
Enamelled side shelf supports with 4 tray levels, pyrolysis-safe.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Thermally insulated door with quintuple glazing.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Pyrolytic system.
Gaggenau enamel.
Heated catalyser to clean the oven air.


Planning notes

Door hinge not reversible.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
The outer edge of the door handle extends 72 mm from the furniture cavity.
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.
Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the 110° door opening angle.
For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.
To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.
The mains socket needs to be planned outside the built-in niche.
The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 14 – 15.

Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Total connected load 3.7 kW.
Plan a connection cable.
Plan a LAN cable.

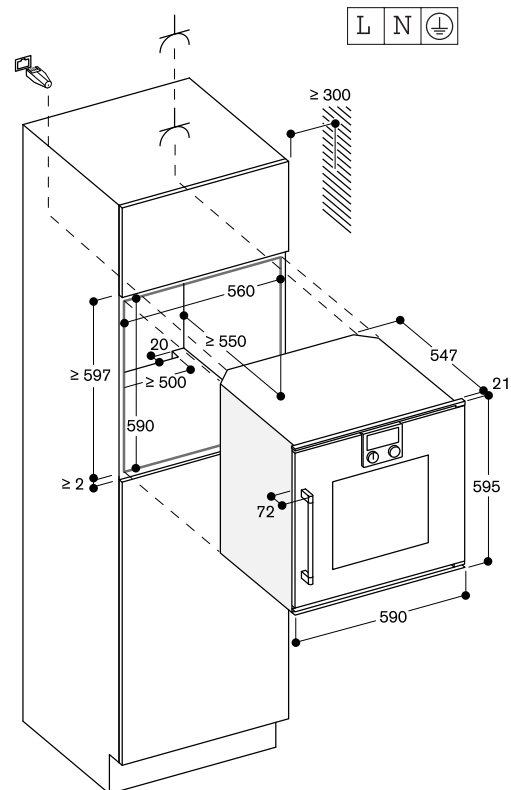

measurements in mm



Controls at the top

Right-hinged

BOP 220 102

Full glass door in Gaggenau Anthracite
Width 60 cm

BOP 220 112

Full glass door in Gaggenau Metallic
Width 60 cm

BOP 220 132

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BOP 221 102

Full glass door in Gaggenau Anthracite
Width 60 cm

BOP 221 112

Full glass door in Gaggenau Metallic
Width 60 cm

BOP 221 132

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 baking tray, enamelled pyrolysis-safe
- 1 glass tray
- 1 wire rack

Special accessories

BA 016 105

Pull-out system
Fully extendable telescopic rails and enamelled cast iron frame.

BA 026 115

Baking tray, enamelled
15 mm deep.

BA 036 105

Wire rack, chromium-plated
Without opening, with feet.

BA 046 115

Glass tray
24 mm deep.

BA 056 115

Heating element for baking stone and
Gastronorm roaster.

BA 056 133

Baking stone.
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).

Not in combination with pull-out
system.

BA 226 105

Grill tray, enamelled
30 mm deep.

BS 020 002

Pizza paddle, set of 2.

GN 340 230

Gastronorm roaster in cast aluminium.
GN 2/3, height 165 mm, non-stick.

Oven 200 series

BOP 220/BOP 221

- Flush installation
- Pyrolytic system
- 9 heating methods, with baking stone function
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 50 °C to 300 °C
- Net volume 76 litres

Heating methods

Hot air.

Eco hot air.

Top + bottom heat.

Top heat.

Bottom heat.

Hot air + bottom heat.

Full surface grill + circulated air.

Full surface grill.

Baking stone function.

Handling

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes.

Information key with use indicators.

Side-opening door opens up to 110° angle.

Features

Baking stone socket.

Actual temperature display.

Rapid heating.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

60 W halogen light on the top.

Enamelled side shelf supports with 4 tray levels, pyrolysis-safe.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Thermally insulated door with quintuple glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Pyrolytic system.

Gaggenau enamel.

Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

The outer edge of the door handle extends 72 mm from the furniture cavity. Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 110° door opening angle. For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm. The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 14 – 15.


Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.7 kW.

Plan a connection cable.

Plan a LAN cable.

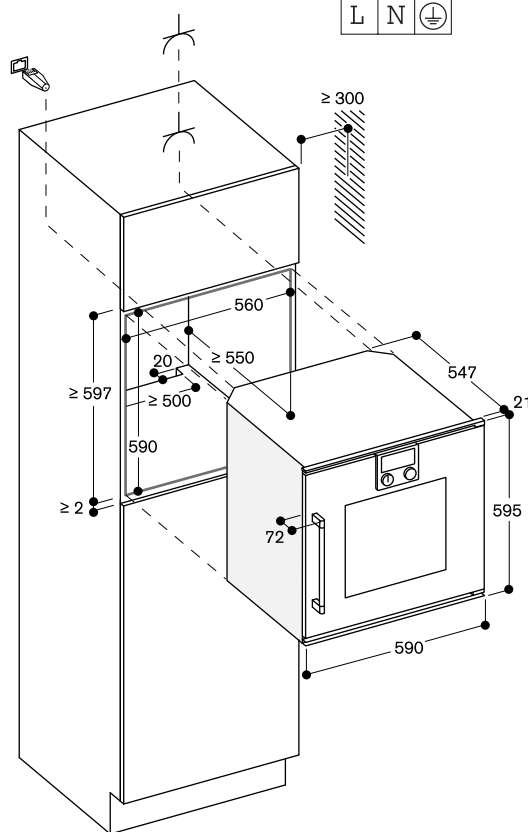

measurements in mm



Controls at the top

Right-hinged

BOP 210 102

Full glass door in Gaggenau Anthracite
Width 60 cm

BOP 210 112

Full glass door in Gaggenau Metallic
Width 60 cm

BOP 210 132

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BOP 211 102

Full glass door in Gaggenau Anthracite
Width 60 cm

BOP 211 112

Full glass door in Gaggenau Metallic
Width 60 cm

BOP 211 132

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 baking tray, enamelled pyrolysis-safe
- 1 wire rack
- 1 glass tray

Special accessories

BA 036 102

Wire rack, chromium-plated
Without opening, with feet.

BA 046 115

Glass tray
24 mm deep.

BA 056 115

Heating element for baking stone and
Gastronorm roaster.

BA 056 130

Baking stone.
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).

Not in combination with pull-out system.

BA 216 102

Quadruple telescopic pull-out rack
For oven BOP 210/BOP 211.

BA 226 102

Grill tray, enamelled
37 mm deep.

BA 226 112

Baking tray, enamelled
24 mm deep.

BS 020 002

Pizza paddle, set of 2.

Oven 200 series

BOP 210/BOP 211

- Flush installation
- 9 heating methods, with baking stone function
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 50 °C to 300 °C
- Net volume 76 litres

Heating methods

Hot air.

Eco hot air.

Top + bottom heat.

Top heat.

Bottom heat.

Hot air + bottom heat.

Full surface grill + circulated air.

Full surface grill.

Baking stone function.

Handling

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes.

Information key with use indicators.

Side-opening door opens up to 110° angle.

Features

Baking stone socket.

Actual temperature display.

Rapid heating.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

60 W halogen light on the top.

Chromium-plated wire racks on the side with 4 rack levels.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Thermally insulated door with triple glazing.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Gaggenau enamel.

Heated catalyser to clean the oven air.

Planning notes

Door hinge not reversible.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

The outer edge of the door handle extends 72 mm from the furniture cavity.

Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 110° door opening angle.

For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 15 mm.

The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.

To achieve the 550 mm installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the upper right side.

Please read the installation details regarding oven combination on page 14 – 15.

Connection


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.7 kW.

Plan a connection cable.

Plan a LAN cable.



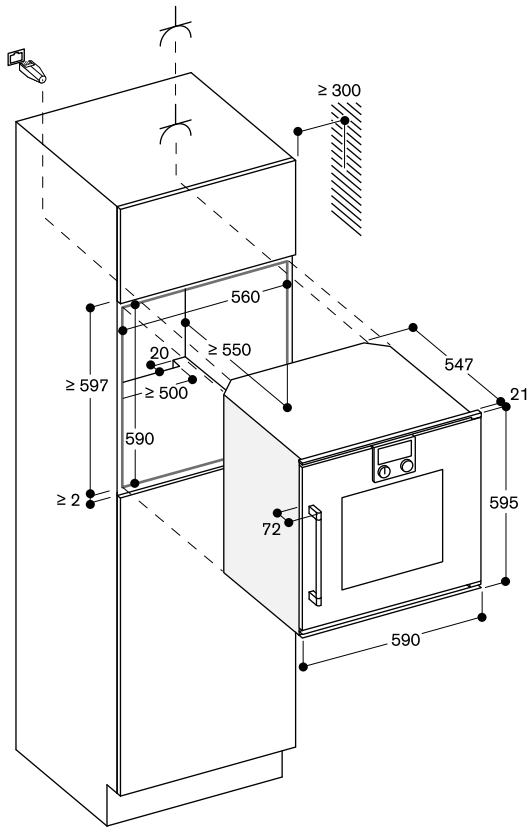

measurements in mm



Controls at the top

Right-hinged

BSP 270 101

Full glass door in Gaggenau Anthracite
Width 60 cm

BSP 270 111

Full glass door in Gaggenau Metallic
Width 60 cm

BSP 270 131

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BSP 271 101

Full glass door in Gaggenau Anthracite
Width 60 cm

BSP 271 111

Full glass door in Gaggenau Metallic
Width 60 cm

BSP 271 131

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 Cooking container, stainless steel, perforated
- 1 Cooking container, stainless steel, unperforated
- 1 wire rack
- 1 plug-in core temperature probe
- 1 outlet hose (3 m long)
- 1 water inlet hose (3 m long)
- 4 cleaning cartridge

Installation accessories

GF 111 100

Water descaling system

GF 121 110

Filter cartridge

GZ 010 011

Extension for water inlet and outlet
(2 m long)

Special accessories

BA 010 301

Triple telescopic pull-out rack
For combi-steam oven.

BA 020 360

Cooking container, stainless steel,
unperforated, 40 mm deep, 5 l.

BA 020 370

Cooking container, stainless steel,
perforated, 40 mm deep, 5 l.

BA 020 380

Cooking container, non-stick,
unperforated, 40 mm deep, 5 l.

BA 020 390

Insert, non-stick, perforated, 40 mm
deep, 5 l.

CL S10 040

Cleaning cartridges, set of 4
For combi-steam ovens.

GN 010 330

Adapter for gastronorm insert and
roaster.

GN 114 130

Gastronorm insert, stainless steel,
GN 1/3

Unperforated, 40 mm deep, 1.5 l.

Combi-steam oven 200 series

BSP 270/BSP 271

- Flush installation
- Fixed inlet and outlet water connection
- Cleaning system, fully automatic
- Large cavity
- LED light source
- External steam generation
- Steaming without pressure
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
- Sous-vide cooking with accurate temperature regulation
- Full surface grill combinable with circulated air up to 230 °C and steam
- Automatic programmes
- Core temperature probe with estimation of cooking time
- Hot air fan rotates in both directions for ideal heat distribution
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C bis 230 °C
- Net volume 50 litres

Heating methods

Hot air + 100 % humidity.

Hot air + 80 % humidity.

Hot air + 60 % humidity.

Hot air + 30 % humidity.

Hot air + 0 % humidity.

Low temperature cooking.

Sous-vide cooking.

Full surface grill level 1 + humidity.

Full surface grill level 2 + humidity.

Full surface grill + circulated air.

Dough proofing.

Defrosting.

Regenerating.

Handling

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes
(incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to
110° angle.

Features

Full surface grill 2 kW.

Steam removal.

Misting.

Three-point core temperature probe
with automatic shut-off and estimation
of cooking time.

Automatic programmes.

Actual temperature display.

Timer functions: cooking time, cooking
time end, timer, stopwatch, long-term
timer.

Automatic boiling point detection.

LED light on the side.

Hygienic stainless steel cooking interior.

3 tray levels.

Home network integration for digital
services (Home Connect) either via
cable connection LAN (recommended)
or wireless via WiFi.

The use of the Home Connect
functionality depends on the Home
Connect services, which are not
available in every country.

GN 114 230

Gastronorm insert, stainless steel,
GN 2/3

Unperforated, 40 mm deep, 3 l.

GN 124 130

Gastronorm insert, stainless steel,
GN 1/3

Perforated, 40 mm deep, 1.5 l.

GN 124 230

Gastronorm insert, stainless steel,
GN 2/3

Perforated, 40 mm deep, 3 l.

GN 340 230

Gastronorm roaster in cast aluminium.

GN 2/3, height 165 mm, non-stick.

For further information please check:
home-connect.com.

Please read additional information on
Home Connect on page 420.

Safety

Child lock.

Safety shut-off.

Cooled housing with temperature
protection.

Cleaning

Cleaning programme, fully automatic.
Descaling programme for the steam
generator.

Drying function.

Automatic drying of the cavity at the
end of the cooking process.

Strainer filter, removable.

Demo cleaning programme.

Planning notes

Door hinge not reversible.

No other electrical appliances should
be installed above the BS.

At no point may the outlet hose be
positioned higher than the bottom
edge of the appliance. The outlet hose
must also be at least 100 mm lower
than the appliance outlet (see drawing
"drainage connection").

Inlet hose can be extended once.

The outlet hose must not be longer
than a maximum of 5 m.

The water connection (1) for the inlet
hose must always be accessible and not
located directly behind the appliance.

The connection of the outlet hose to the
siphon (2) must not be directly behind
the appliance and should be accessible.

The descaling system GF 111 100 (3)
must be installed when connecting the
appliance if the water hardness
exceeds 7° dH.

The door panel surface of the appliance
extends 21 mm from the furniture cavity.
The outer edge of the door handle
extends 72 mm from the furniture cavity.

Necessary lateral gap between
appliance door and furniture panel of
min. 5 mm.

Consider the overhang, incl. the door
handle, when planning to open
drawers next to the appliance.

When planning a corner solution, pay
attention to the 110° door opening angle.
The mains socket needs to be planned
outside the built-in niche.

Please read the installation details
regarding oven combination on
page 14 – 15.

Connection


Energy efficiency class A at a range
of energy efficiency classes from
A+++ to D.

Total connected load 3.15 kW.

Connecting cable 1.8 m with plug.

Plan a LAN cable.




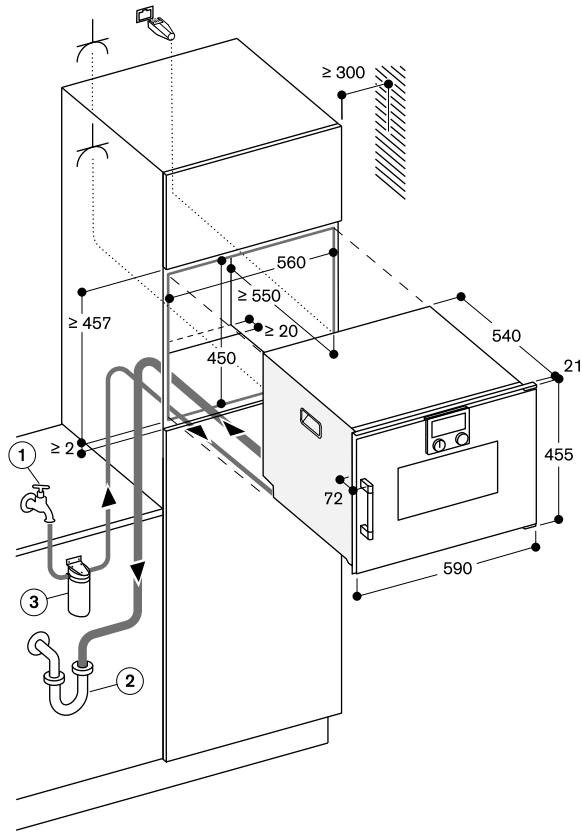


Socket

measurements in mm

Side view of BSP 260/270 above BOP

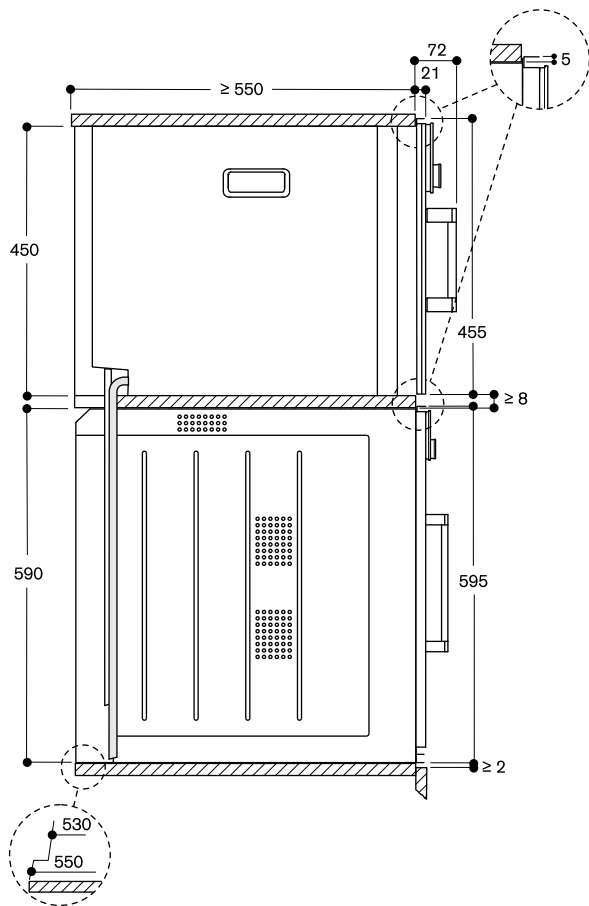


measurements in mm

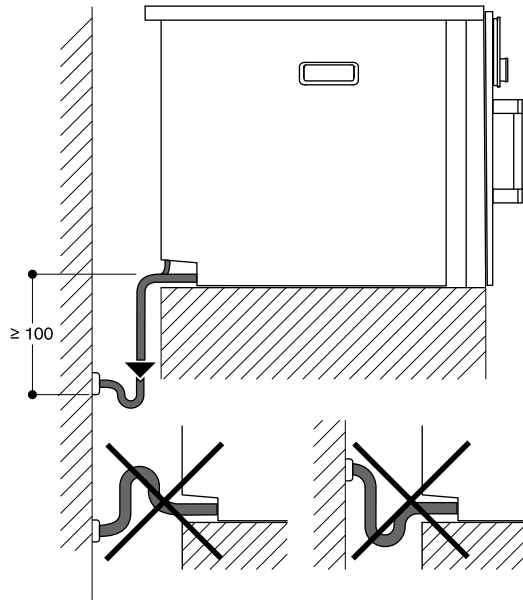

measurements in mm

View from rear

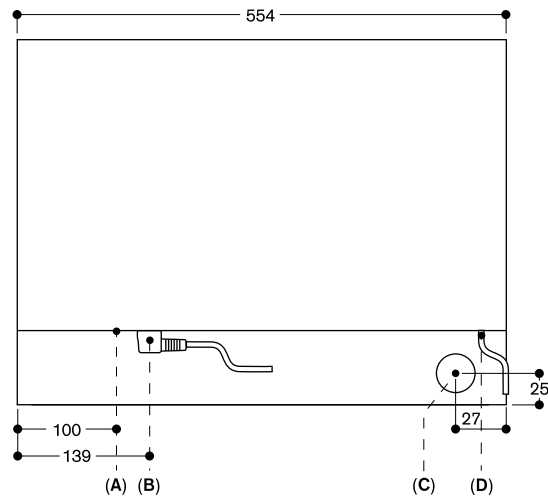

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

measurements in mm



Controls at the top

Right-hinged

BSP 260 101

Full glass door in Gaggenau Anthracite
Width 60 cm

BSP 260 111

Full glass door in Gaggenau Metallic
Width 60 cm

BSP 260 131

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BSP 261 101

Full glass door in Gaggenau Anthracite
Width 60 cm

BSP 261 111

Full glass door in Gaggenau Metallic
Width 60 cm

BSP 261 131

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 Cooking container, stainless steel, perforated
- 1 Cooking container, stainless steel, unperforated
- 1 wire rack
- 1 plug-in core temperature probe
- 1 outlet hose (3 m long)
- 1 water inlet hose (3 m long)

Installation accessories

GF 111 100

Water descaling system

GF 121 110

Filter cartridge

GZ 010 011

Extension for water inlet and outlet
(2 m long)

Special accessories

BA 010 301

Triple telescopic pull-out rack
For combi-steam oven.

BA 020 360

Cooking container, stainless steel, unperforated, 40 mm deep, 5 l.

BA 020 370

Cooking container, stainless steel, perforated, 40 mm deep, 5 l.

BA 020 380

Cooking container, non-stick, unperforated, 40 mm deep, 5 l.

BA 020 390

Insert, non-stick, perforated, 40 mm deep, 5 l.

GN 010 330

Adapter for gastronorm insert and roaster.

GN 114 130

Gastronorm insert, stainless steel, GN 1/3

Unperforated, 40 mm deep, 1.5 l.

GN 114 230

Gastronorm insert, stainless steel, GN 2/3

Unperforated, 40 mm deep, 3 l.

Combi-steam oven 200 series

BSP 260/BSP 261

- Flush installation
- Fixed inlet and outlet water connection
- Large cavity
- LED light source
- External steam generation
- Steaming without pressure
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
- Sous-vide cooking with accurate temperature regulation
- Full surface grill combinable with circulated air up to 230 °C and steam
- Automatic programmes
- Core temperature probe with estimation of cooking time
- Hot air fan rotates in both directions for ideal heat distribution
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C bis 230 °C
- Net volume 50 litres

Heating methods

Hot air + 100 % humidity.

Hot air + 80 % humidity.

Hot air + 60 % humidity.

Hot air + 30 % humidity.

Hot air + 0 % humidity.

Low temperature cooking.

Sous-vide cooking.

Full surface grill level 1 + humidity.

Full surface grill level 2 + humidity.

Full surface grill + circulated air.

Dough proofing.

Defrosting.

Regenerating.

Handling

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes

(incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to

110° angle.

Features

Full surface grill 2 kW.

Steam removal.

Misting.

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Actual temperature display.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

Automatic boiling point detection.

LED light on the side.

Hygienic stainless steel cooking interior.

3 tray levels.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.

GN 124 130

Gastronorm insert, stainless steel, GN 1/3

Perforated, 40 mm deep, 1.5 l.

GN 124 230

Gastronorm insert, stainless steel, GN 2/3

Perforated, 40 mm deep, 3 l.

GN 340 230

Gastronorm roaster in cast aluminium.

GN 2/3, height 165 mm, non-stick.

For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Cleaning aid.

Descaling programme for the steam generator.

Drying function.

Automatic drying of the cavity at the end of the cooking process.

Grease filter, dishwasher-safe.

Strainer filter, removable.

Planning notes

Door hinge not reversible.

No other electrical appliances should be installed above the BS.

At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 100 mm lower than the appliance outlet (see drawing "drainage connection").

Inlet hose can be extended once.

The outlet hose must not be longer than a maximum of 5 m.

The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.

The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.

The descaling system GF 111 100 (3) must be installed when connecting the appliance if the water hardness exceeds 7° dH.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

The outer edge of the door handle extends 72 mm from the furniture cavity.

Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 110° door opening angle. The mains socket needs to be planned outside the built-in niche.

Please read the installation details regarding oven combination on page 14 – 15.

Connection


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.15 kW.

Connecting cable 1.8 m with plug.

Plan a LAN cable.




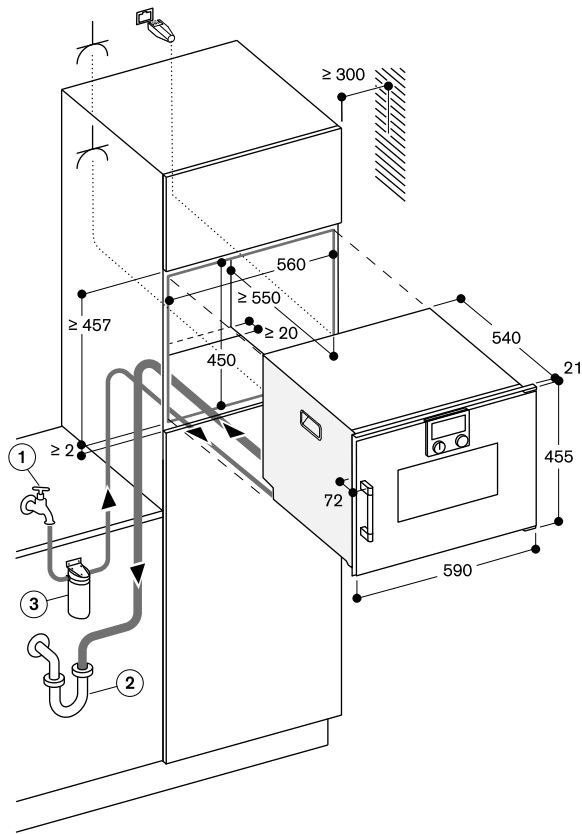


Socket

measurements in mm

Side view of BSP 260/270 above BOP

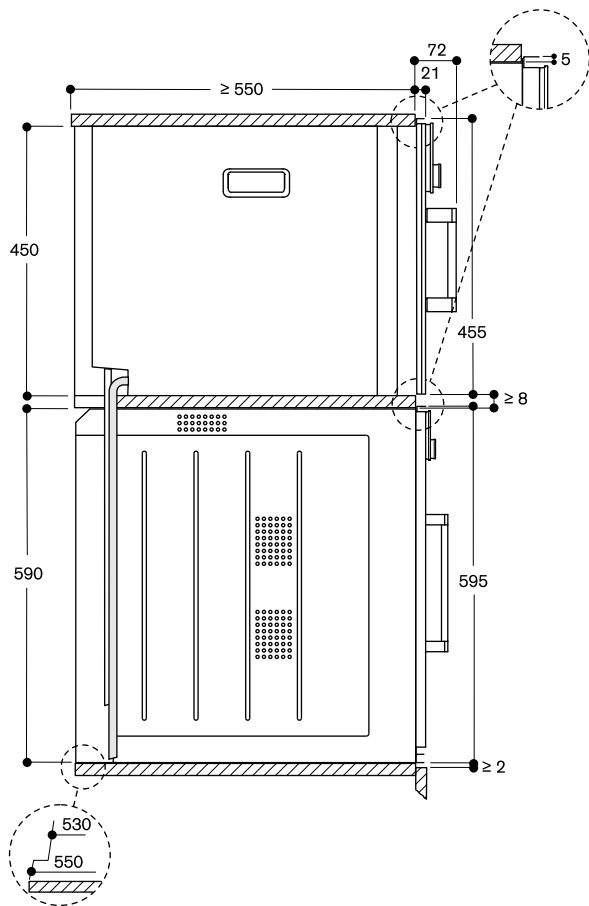


measurements in mm

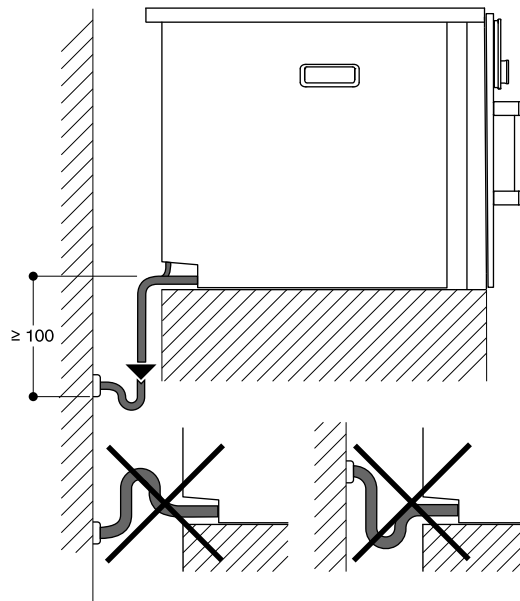

measurements in mm

View from rear

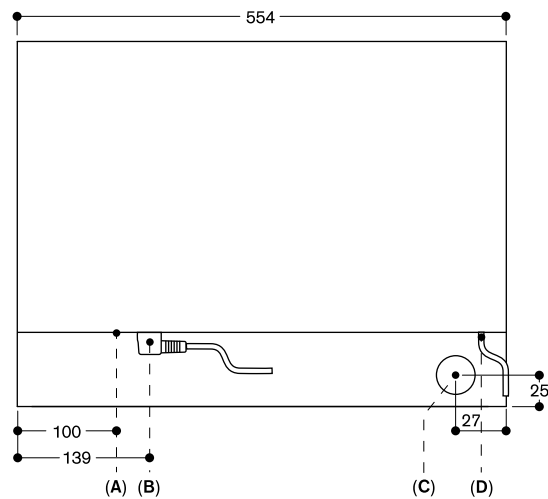

- A: LAN connection
- B: Electric terminal box
- C: Water outlet
- D: Cold water inlet

measurements in mm



Controls at the top

Right-hinged

BSP 250 101

Full glass door in Gaggenau Anthracite
Width 60 cm

BSP 250 111

Full glass door in Gaggenau Metallic
Width 60 cm

BSP 250 131

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BSP 251 101

Full glass door in Gaggenau Anthracite
Width 60 cm

BSP 251 111

Full glass door in Gaggenau Metallic
Width 60 cm

BSP 251 131

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 Cooking container, stainless steel, perforated
- 1 Cooking container, stainless steel, unperforated
- 1 wire rack
- 1 plug-in core temperature probe

Special accessories

BA 010 301

Triple telescopic pull-out rack
For combi-steam oven.

BA 020 360

Cooking container, stainless steel, unperforated, 40 mm deep, 5l.

BA 020 370

Cooking container, stainless steel, perforated, 40 mm deep, 5l.

BA 020 380

Cooking container, non-stick, unperforated, 40 mm deep, 5l.

BA 020 390

Insert, non-stick, perforated, 40 mm deep, 5l.

GN 010 330

Adapter for gastronorm insert and roaster.

GN 114 130

Gastronorm insert, stainless steel, GN 1/3
Unperforated, 40 mm deep, 1.5l.

GN 114 230

Gastronorm insert, stainless steel, GN 2/3
Unperforated, 40 mm deep, 3l.

GN 124 130

Gastronorm insert, stainless steel, GN 1/3
Perforated, 40 mm deep, 1.5l.

GN 124 230

Gastronorm insert, stainless steel, GN 2/3
Perforated, 40 mm deep, 3l.

GN 340 230

Gastronorm roaster in cast aluminium. GN 2/3, height 165 mm, non-stick.

Combi-steam oven 200 series

BSP 250/BSP 251

- Flush installation
- Water tank for fresh and waste water
- Large cavity
- LED light source
- External steam generation
- Steaming without pressure
- Hot air 30 °C to 230 °C can be combined with chosen humidity level of 0%, 30%, 60%, 80% or 100%
- Sous-vide cooking with accurate temperature regulation
- Full surface grill combinable with circulated air up to 230 °C and steam
- Automatic programmes
- Core temperature probe with estimation of cooking time
- Hot air fan rotates in both directions for ideal heat distribution
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C bis 230 °C
- Net volume 50 litres

Heating methods

Hot air + 100 % humidity.

Hot air + 80 % humidity.

Hot air + 60 % humidity.

Hot air + 30 % humidity.

Hot air + 0 % humidity.

Low temperature cooking.

Sous-vide cooking.

Full surface grill level 1 + humidity.

Full surface grill level 2 + humidity.

Full surface grill + circulated air.

Dough proofing.

Defrosting.

Regenerating.

Handling

Rotary knob and TFT touch display operation.

Clear text display.

Option to save individual recipes (incl. core temperature probe).

Personalisation of automatic programmes.

Information key with use indicators.

Side-opening door opens up to 110° angle.

Features

Full surface grill 2 kW.

2 removable 1.7 litre water tanks.

Water level warning.

Three-point core temperature probe with automatic shut-off and estimation of cooking time.

Automatic programmes.

Actual temperature display.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

Automatic boiling point detection.

LED light on the side.

Hygienic stainless steel cooking interior.

3 tray levels.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.

For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Cleaning aid.

Descaling programme for the steam generator.

Drying function.

Automatic drying of the cavity at the end of the cooking process.

Water tank, dishwasher-safe.

Grease filter, dishwasher-safe.

Strainer filter, removable.

Planning notes

Door hinge not reversible.

No other electrical appliances should be installed above the BS.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

The outer edge of the door handle extends 72 mm from the furniture cavity.

Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 110° door opening angle.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the lower left side.

Please read the installation details regarding oven combination on page 14 – 15.


Connection


Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.15 kW.

Connecting cable 1.8 m with plug.

Plan a LAN cable.




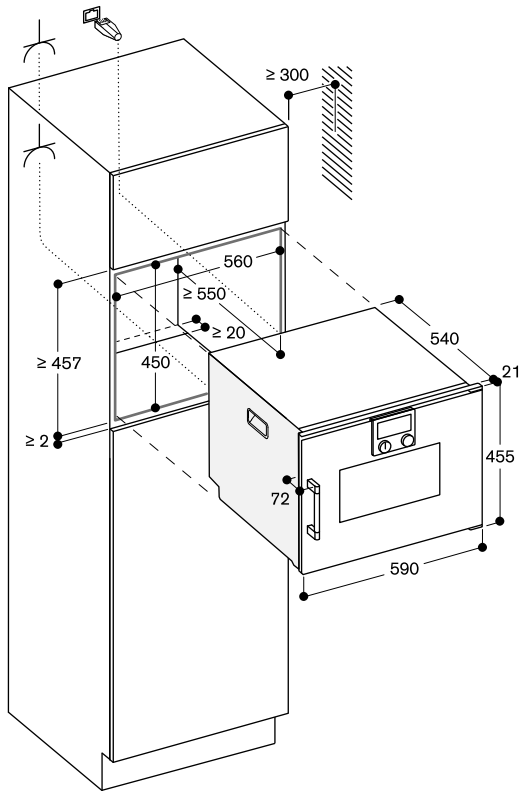

Socket

measurements in mm

Side view of BSP 220/250 above BOP

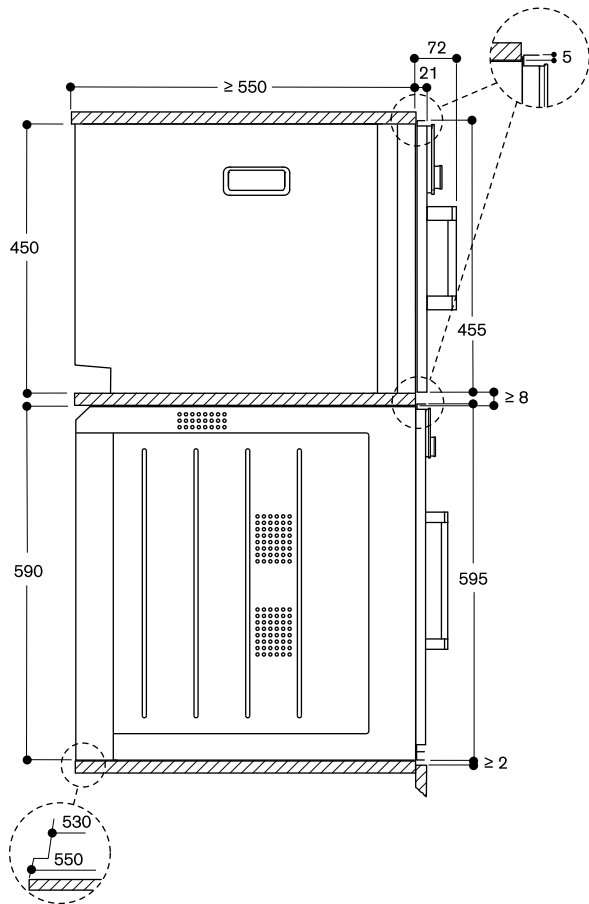

measurements in mm



Controls at the top

Right-hinged

BSP 220 101

Full glass door in Gaggenau Anthracite
Width 60 cm

BSP 220 111

Full glass door in Gaggenau Metallic
Width 60 cm

BSP 220 131

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BSP 221 101

Full glass door in Gaggenau Anthracite
Width 60 cm

BSP 221 111

Full glass door in Gaggenau Metallic
Width 60 cm

BSP 221 131

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 Cooking container, stainless steel, perforated
- 1 Cooking container, stainless steel, unperforated
- 1 wire rack

Special accessories

BA 020 380

Cooking container, non-stick, unperforated, 40 mm deep, 5l.

BA 020 390

Insert, non-stick, perforated, 40 mm deep, 5l.

BA 220 360

Cooking container, stainless steel, unperforated, 35 mm deep, 5l.

BA 220 370

Cooking container, stainless steel, perforated, 35 mm deep, 5l.

CL S30 040

Descaling tablets, set of 4.

For combi-steam ovens and steam ovens.

GN 010 330

Adapter for gastronorm insert and roaster.

GN 114 130

Gastronorm insert, stainless steel, GN 1/3

Unperforated, 40 mm deep, 1.5l.

GN 114 230

Gastronorm insert, stainless steel, GN 2/3

Unperforated, 40 mm deep, 3l.

GN 124 130

Gastronorm insert, stainless steel, GN 1/3

Perforated, 40 mm deep, 1.5l.

GN 124 230

Gastronorm insert, stainless steel, GN 2/3

Perforated, 40 mm deep, 3l.

Steam oven 200 Series

BSP 220/BSP 221

- Flush installation
- Water tank
- Large cavity
- LED light source
- External steam generation
- Steaming without pressure with 100% humidity from 30 °C to 100 °C
- Sous-vide cooking with accurate temperature regulation
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control from 30 °C bis 100 °C
- Net volume 58 litres

Heating methods

100 % humidity.

Sous-vide cooking.

Dough proofing.

Defrosting.

Regenerating.

Low temperature steaming.

Handling

Rotary knob and TFT touch display operation.

Clear text display.

Information key with use indicators.

Side-opening door opens up to 110° angle.

Features

Removable 1.7 litre water tank.

Water level warning.

Actual temperature display.

Timer functions: cooking time, cooking time end, timer, stopwatch, long-term timer.

Automatic boiling point detection.

LED light on the side.

Hygienic stainless steel cooking interior. 3 tray levels.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Cleaning aid.

Descaling programme for the steam generator.

Planning notes

Door hinge not reversible.

No other electrical appliances should be installed above the BS.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

The outer edge of the door handle extends 72 mm from the furniture cavity.

Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.

When planning a corner solution, pay attention to the 110° door opening angle.

The mains socket needs to be planned outside the built-in niche.

The LAN port can be found at the back on the lower left side.

Please read the installation details regarding oven combination on page 14 – 15.


Connection

Total connected load 2.75 kW.

Connecting cable 1.8 m with plug.

Plan a LAN cable.




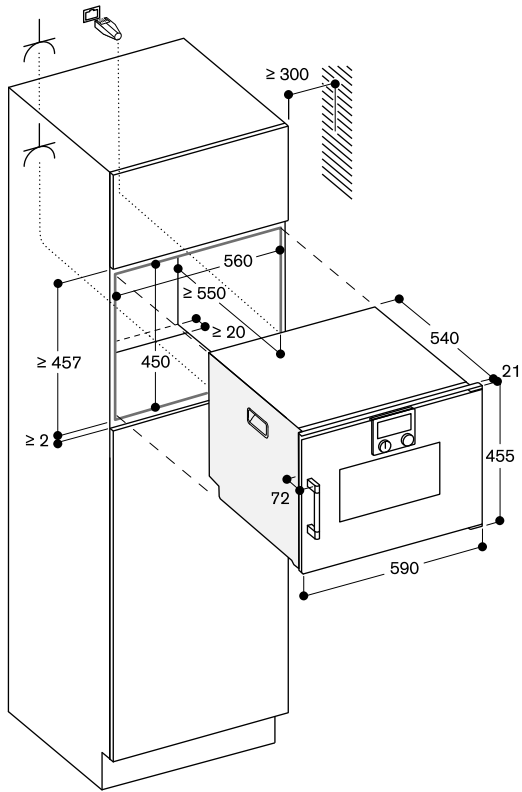

Socket

measurements in mm

Side view of BSP 220/250 above BOP

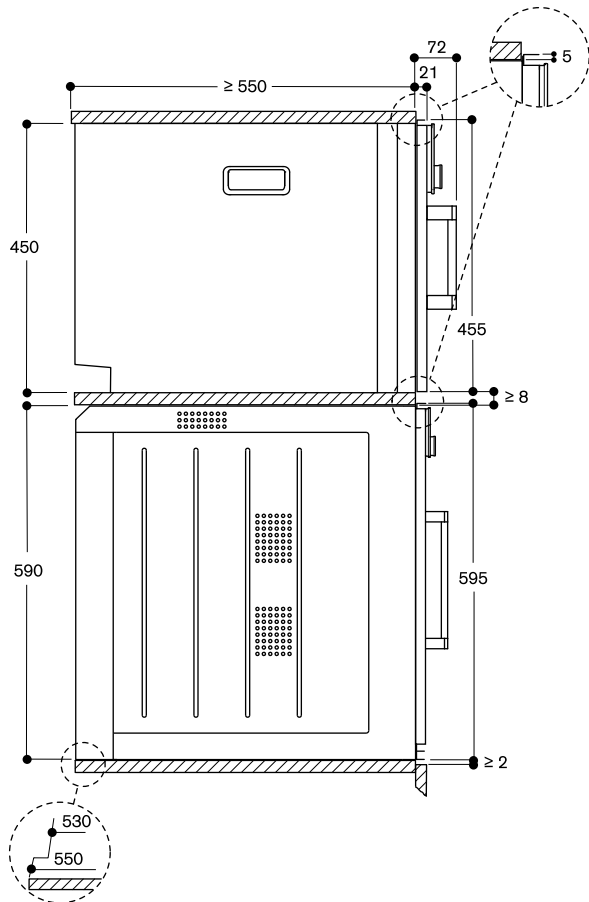

measurements in mm



Controls at the top

Right-hinged

BMP 250 100

Full glass door in Gaggenau Anthracite
Width 60 cm

BMP 250 110

Full glass door in Gaggenau Metallic
Width 60 cm

BMP 250 130

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BMP 251 100

Full glass door in Gaggenau Anthracite
Width 60 cm

BMP 251 110

Full glass door in Gaggenau Metallic
Width 60 cm

BMP 251 130

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 combination wire rack
- 1 glass tub

Combi-microwave oven 200 series

BMP 250/BMP 251

- Flush installation
- Single operation and combination of microwave, grill and oven
- Sequential operation of up to 5 modes incl. programming of combined operation and rest time
- TFT touch display
- Panel-free appliance with surface control module
- Electronic temperature control
- Interior volume 36 litres

Programmes

Microwave operation with 5 output levels: 1000, 600, 360, 180, 90 W.

Oven operation with 4 heating methods:

Hot air 40 °C and from 100 °C to 250 °C,

Full surface grill + hot air from 100 °C to 250 °C,

Full surface grill + circulated air from 100 °C to 250 °C,

Full surface grill with 3 levels of intensity, maximum output 2000 W.

Heating methods with microwave output levels 600, 360, 180 and 90 W freely combinable.

15 automatic programmes with weight indication, customisable:

4 defrosting programmes

4 cooking programmes

7 combination programmes

Option to save individual recipes.

Handling

Rotary knob and TFT touch display operation.

Clear text display.

Information key with use indicators.

Side-opening door opens up to 110° angle.

Features

Innowave.

Rapid heating.

4 tray levels.

Actual temperature display.

60 W halogen light on the side.

Safety

Thermally insulated door with triple glazing.

Triple door lock.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with glass ceramic base.

Interior back wall with catalytic coating.

Planning notes

Door hinge not reversible.

Plan the niche without back wall.

Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

The outer edge of the door handle extends 72 mm from the furniture cavity.

Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.


When planning a corner solution, pay attention to the 110° door opening angle. The mains socket needs to be planned outside of the built-in niche.


Please read the installation details regarding oven combination on page 14 – 15.

Connection

Total connected load 3.1 kW.

Connection cable 1.5 m without plug.




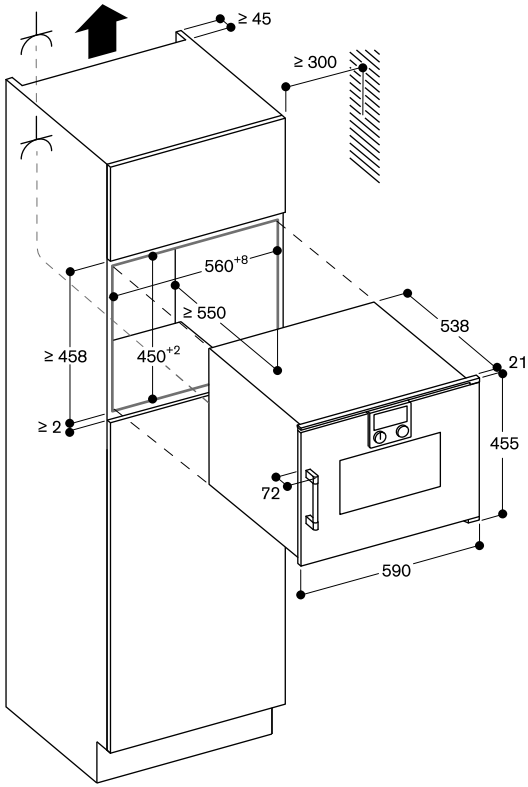

∇ Socket

measurements in mm

Side view of BMP over BOP

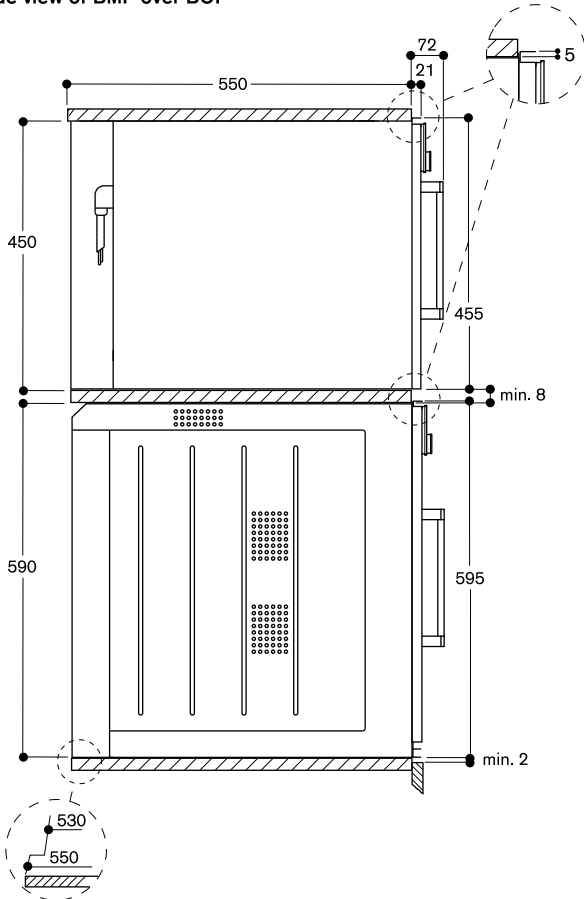



Controls at the bottom

Right-hinged

BMP 224 100

Full glass door in Gaggenau Anthracite
Width 60 cm

BMP 224 110

Full glass door in Gaggenau Metallic
Width 60 cm

BMP 224 130

Full glass door in Gaggenau Silver
Width 60 cm

Left-hinged

BMP 225 100

Full glass door in Gaggenau Anthracite
Width 60 cm

BMP 225 110

Full glass door in Gaggenau Metallic
Width 60 cm

BMP 225 130

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 glass tray
- 1 wire rack

Microwave oven 200 series

BMP 224/BMP 225

- Flush installation
- Handleless door / automatic door opening
- Single operation and combination of microwave and grill
- Sequential operation of up to 5 modes incl. programming of combined operation and rest time
- TFT touch display
- Electronic temperature control
- Interior volume 21 litres

Programmes

Microwave operation with 5 output levels: 900, 600, 360, 180, 90 W.

Full surface grill with 3 levels of intensity, maximum output 1300 W.

Full surface grill with microwave output levels 360, 180 and 90 W combinable. 10 automatic programmes with weight indication:

3 defrosting programmes

4 cooking programmes

3 combination programmes

Option to save individual recipes.

Handling

Automatic door opening.

Rotary knob and TFT touch display operation.

Clear text display.

Information key with use indicators.

Side-opening door opens up to 110° angle.

Features

Innowave.

Actual temperature display.

25 W interior light.

Hygienic stainless steel interior with glass ceramic base.

Safety

Thermally insulated door with double glazing.

Triple door lock.

Child lock.

Safety shut-off.

Cooled housing with temperature protection.

Planning notes

Door hinge not reversible.

Minimum installation height 85 cm (top edge of niche bottom).

Height-adjustable feet.

Installation of BMP above BOP with intermediate shelf.

Necessary lateral gap between appliance door and furniture panel of min. 5 mm.

The door panel surface of the appliance extends 21 mm from the furniture cavity.

When planning a corner solution, pay attention to the 90° door opening angle.

Please read the installation details regarding oven combination on page 14 – 15.


Connection

Total connected load 2.0 kW.

Connection cable 1.7 m, pluggable.




Installation in a tall cupboard

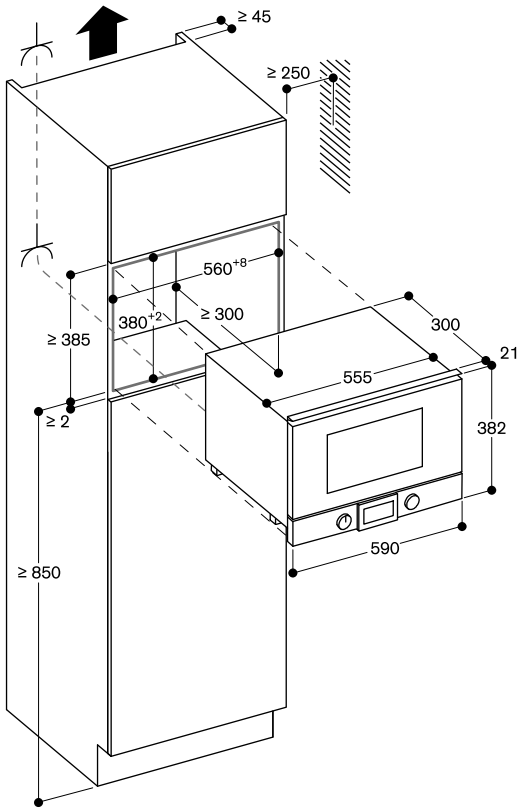


Socket
measurements in mm

Installation in a wall-hanging cupboard

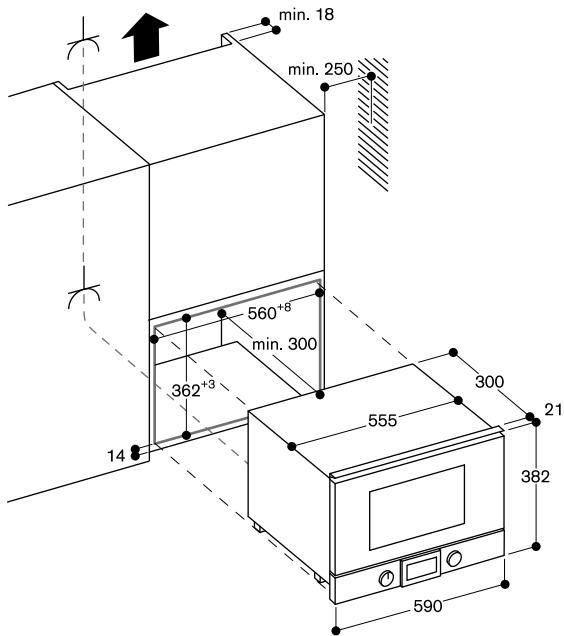

Side view of BMP 224/225 over BOP

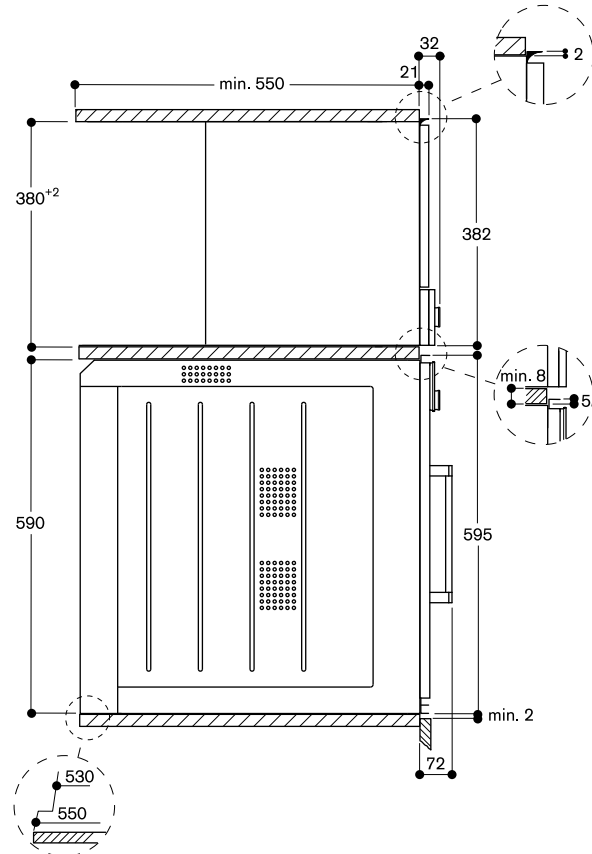



Controls at the top

CMP 250 102

Full glass door in Gaggenau Anthracite
Width 60 cm

CMP 250 112

Full glass door in Gaggenau Metallic
Width 60 cm

CMP 250 132

Full glass door in Gaggenau Silver
Width 60 cm

Included in the price

- 1 assembly screws
- 1 scoop
- 1 test strip
- 1 milk container (insulated)
- 1 connection hose for milk frother
- 1 milk pipe

Fully automatic espresso machine 200 series CMP 250

- Handleless door / cushioned door closing system
- Continuous flow heater means no waiting time and constant brewing temperature
- Aroma brewing technology for a full aroma
- Single portion cleaning
- TFT touch display
- Panel-free appliance with surface control module
- One-touch operation
- Personalisation function
- 7 light settings
- Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
Espresso / 2 x Espresso.
Espresso Macchiato / 2 x Espresso Macchiato.
Coffee / 2 x Coffee.
Americano / 2 x Americano.
Caffe Latte / 2 x Caffe Latte.
Latte Macchiato / 2 x Latte Macchiato.
Cappuccino / 2 x Cappuccino.
Flat White / 2 x Flat White.
Milk froth / 2 x Milk froth.
Warm milk / 2 x Warm milk.
Hot water / 2 x Hot water.

Handling

Door with cushioned door closing system.
Rotary knob and TFT touch display operation.
Clear text display.
Personalisation function, option to save 8 individualised beverages.
4 beverage size settings, volume can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
3 coffee temperature levels.
10 hot water temperature levels.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 7 cm to 15 cm.
Easy access to water tank, milk and coffee bean container behind the door.

Features

Maintenance-free grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with 19 bar pressure.
Double grinding and brewing cycles for extra intensity for single beverage order.
For double beverage order, two grinding and brewing cycles.
Beverage dispenser with integrated milk system.
Insulated stainless steel milk container for up to 0.5 litres.
Integrated lighting with LEDs.
Removable bean container with aroma protecting lid for 500 g allows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Removable 2.4 litre water tank.

Electronic water filter exchange indicator.
Electronic fill level control for drip tray and container for coffee residue.

Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Child lock.

Cleaning

Fully automatic rinse programme when machine is turned on/off.
Automatic steam cleaning of the milk system after every beverage.
Automatic cleaning and descaling programme.
Emptying programme to prepare the appliance for holiday or transportation.
Empty-grinding function to remove coffee residues from the system when switching bean types.
Removable brewing unit.
Dishwasher-safe coffee residue container and drip tray.
Dishwasher-safe beverage dispenser.

Planning notes

Ideal installation height 95 cm to 145 cm (top edge of niche bottom).
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 350 mm.
Door opening angle appr. 155° - mounting distance to the wall has to be at least 650 mm.
Door opening angle appr. 92° - mounting distance to the wall has to be at least 100 mm (spare part No. 00636455).
Installation directly above 14 cm high warming drawer in 59 cm standardised niche.
The LAN port can be found at the back on the lower right side.


Special accessories (order as spare parts):

Part No. 17000705 Water filter
Part No. 00311819 Descaling tablets
Part No. 00311769 Cleaning tablets
Part No. 00636455 Door hinge restrictor (92° opening angle)
Part No. 11015223 Bean container with lid

Please read the installation details regarding oven combination on page 14 – 15.

Connection

Total connected load 1.6 kW.
Connection cable 1.7 m with plug.
Plan a LAN cable.

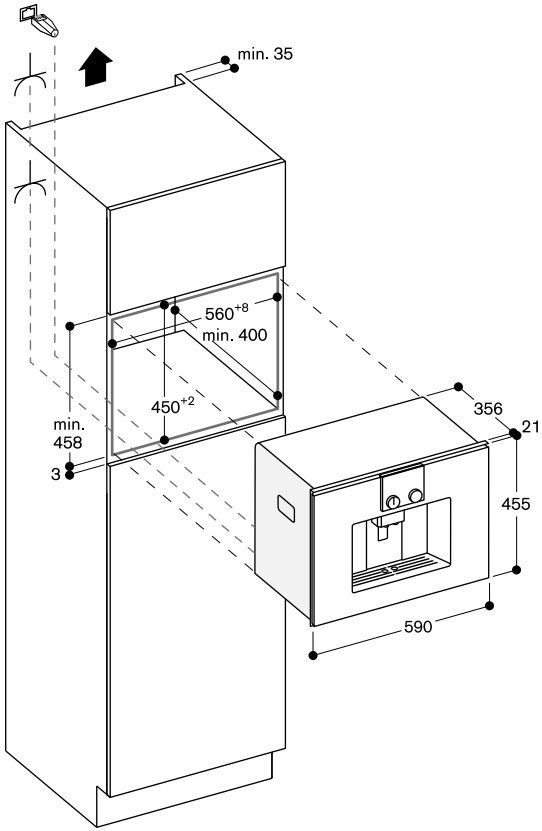



DVP 221 100

Glass front in Gaggenau Anthracite
Width 60 cm, Height 14 cm

DVP 221 110

Glass front in Gaggenau Metallic
Width 60 cm, Height 14 cm

DVP 221 130

Glass front in Gaggenau Silver
Width 60 cm, Height 14 cm

Included in the price

- 50 Vacuuming bags, small
- 50 Vacuuming bags, big
- 1 Raised vacuuming platform
- 1 Adaptor f. vacuuming outside the chamber
- 1 Vacuuming hose
- 1 Adaptor for bottle plugs
- 3 Plugs for vacuuming of bottles

Special accessories

BA 080 670

Vacuuming bags, small,
180 mm x 280 mm, 100 pcs.

BA 080 680

Vacuuming bags, large,
240 mm x 350 mm, 100 pcs.

Vacuuming drawer 200 series

DVP 221

- Integrable in 14 cm high niche
- Hygienic stainless steel vacuuming chamber, applicable height up to 80 mm
- 3 vacuuming levels for vacuuming in the chamber, max. 99%
- 3 vacuuming levels for vacuuming outside the chamber, max. 90%
- Automatic connection recognition for vacuuming outside the chamber
- Flush installation
- Handleless drawer
- Push-to-open system

Application

Vacuuming for sous-vide cooking.
Vacuuming for fast marinating and flavouring.
Vacuuming for extended storage.
Vacuuming of vacuuming containers outside the chamber.
Vacuuming of liquids in bottles outside the chamber.

Handling

Touch key operation.

Features

Net volume 7 litres.
Capacity load max. 10 kg.
Maximum size of vacuuming bags W 240 mm x L 350 mm.
3 heat-sealing levels for different strengths of bag material.
Sealing bar, non-stick coating, removable.
Safety glass cover, opens automatically after vacuuming.
Raised vacuuming platform, 44 mm, deployable.
Utility space in vacuuming chamber, W 210 mm x L 275 mm.
Membrane for avoiding reflow of liquids during vacuuming outside the chamber.
Drying programme for vacuuming pump.
Warning function.


Planning notes

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
The panel surface of the appliance extends 21 mm from the furniture cavity.
Installation of BS/BM/CM directly above DV in 59 cm niche without intermediate floor.
Built-in under worktop or in single niche.
The socket can be planned behind the appliance.

Please read the installation details regarding oven combination on page 14 – 15.

Connection


Total connected load 0.32 kW.
Connection cable 1.5 m, pluggable.

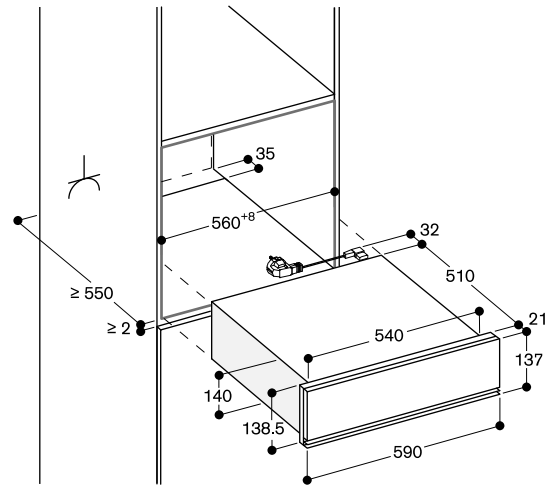

Socket

measurements in mm

Side view DVP 221 below BSP, BMP, CMP

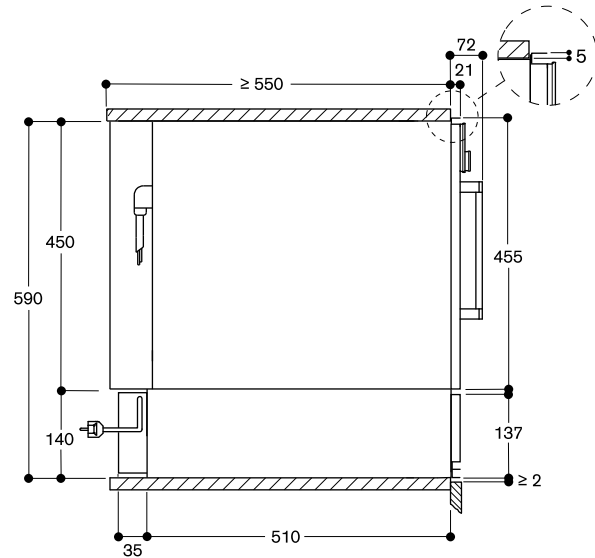

measurements in mm

**WSP 221 100**

Glass front in Gaggenau Anthracite
Width 60 cm, Height 14 cm

WSP 221 110

Glass front in Gaggenau Metallic
Width 60 cm, Height 14 cm

WSP 221 130

Glass front in Gaggenau Silver
Width 60 cm, Height 14 cm

Warming drawer 200 series**WSP 221**

- Flush installation
- Handleless drawer
- Push-to-open system
- Hygienic stainless steel interior with glass bottom
- 4 power levels in the temperature range 40 °C to 80 °C (glass surface)
- Also for preparing and cooking meals, and for keeping meals warm

Heating methods

Defrosting of meals/proving of yeast dough.
Preheating of small beverage containers.
Keeping meals warm/slow cooking meals.
Warming ovenware.

Handling

Rotary knob operation.

Features

Net volume 20 litres.
Volume capacity: Dinner service for 6 people including ø24 cm plates and soup bowls, additional bowls and a serving dish depending on size.
Max. load 25 kg.
Usable interior dimensions W 468 x H 92 x D 458 mm.
Heating under glass bottom for easy cleaning.
Fan for even heat distribution for fast warming ovenware.
Status display, visible in the glass front.
Glass bottom made of safety glass.



Planning notes

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.
The door panel surface of the appliance extends 21 mm from the furniture cavity.
Installation of BSP/BMP/CMP directly above WSP in 59 cm niche without intermediate floor.
The socket can be planned behind the appliance.

Please read the installation details regarding oven combination on page 14 – 15.

Connection

Total connected load 0.81 kW.
Connection cable 1.5 m, pluggable.

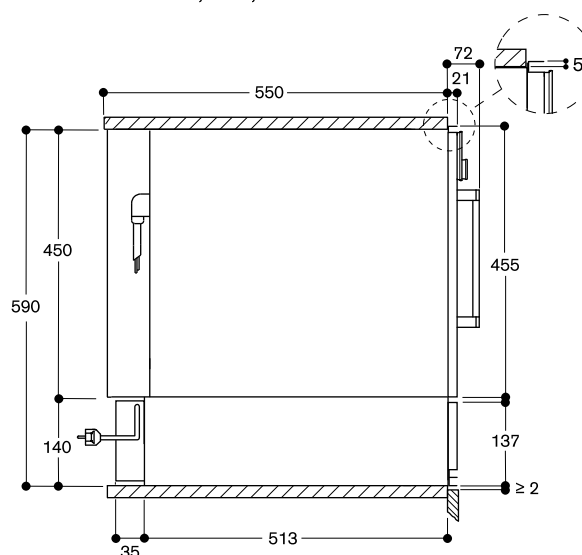**WSP 221 below BSP, BMP, CMP**

measurements in mm



WSP 222 100

Glass front in Gaggenau Anthracite
Width 60 cm, Height 29 cm

WSP 222 110

Glass front in Gaggenau Metallic
Width 60 cm, Height 29 cm

WSP 222 130

Glass front in Gaggenau Silver
Width 60 cm, Height 29 cm

Warming drawer 200 series

WSP 222

- Flush installation
- Handleless drawer
- Push-to-open system
- Hygienic stainless steel interior with glass bottom
- 4 power levels in the temperature range 40 °C to 80 °C (glass surface)
- Also for preparing and cooking meals, and for keeping meals warm

Heating methods

Defrosting of meals/proving of yeast dough.

Preheating of small beverage containers.

Keeping meals warm/slow cooking meals.

Warming ovenware.

Handling

Rotary knob operation.

Features

Net volume 52 litres.

Volume capacity: Dinner service for 12 people including ø 24 cm plates and soup bowls, additional bowls and a serving dish depending on size.

Max. load 25 kg.

Usable interior dimensions
W 468 x H 242 x D 458 mm.

Heating under glass bottom for easy cleaning.

Fan for even heat distribution for fast warming ovenware.

Status display, visible in the glass front.

Glass bottom made of safety glass.

Planning notes

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.

The door panel surface of the appliance extends 21 mm from the furniture cavity.


The socket can be planned behind the appliance.

Please read the installation details regarding oven combination on page 14 – 15.


Connection

Total connected load 0.81 kW.

Connection cable 1.5 m, pluggable.

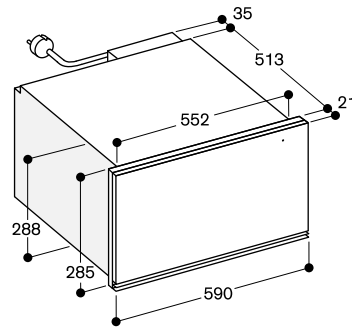

WSP 222 below BOP

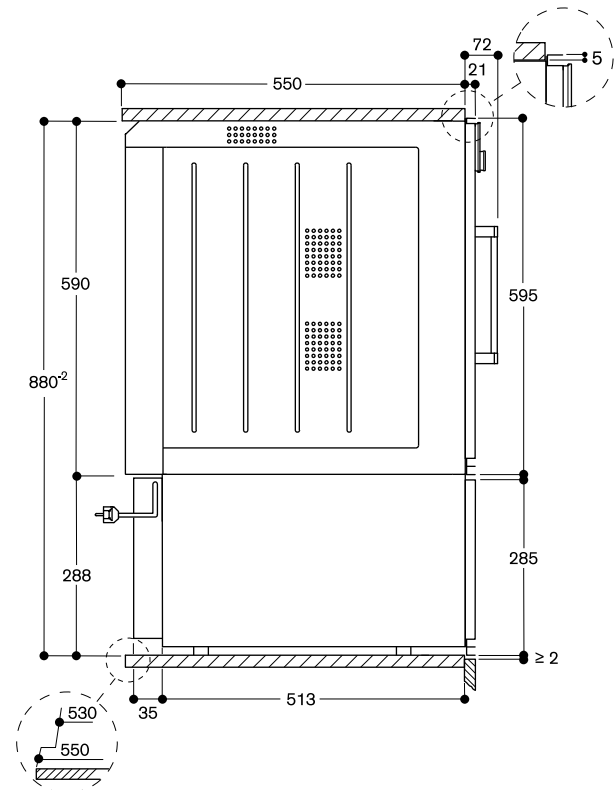


measurements in mm

Accessories and special accessories 200 series

Advice: Not every illustrated accessory fits to every oven. For exact allocation see page 80 – 81.

BA 010 301
Triple telescopic pull-out rack
For combi-steam oven.



BA 016 105
Pull-out system
Fully extendable telescopic rails and enamelled cast iron frame.



BA 020 360
Cooking container, stainless steel,
unperforated, 40 mm deep, 5l.




BA 020 370
Cooking container, stainless steel,
perforated, 40 mm deep, 5l.



BA 020 380
Cooking container, non-stick,
unperforated, 40 mm deep, 5l.




BA 020 390
Cooking container, non-stick,
perforated, 40 mm deep, 5l.



BA 026 115
Baking tray, enamelled
15 mm deep.



BA 036 105
Wire rack, chromium-plated
Without opening, with feet.

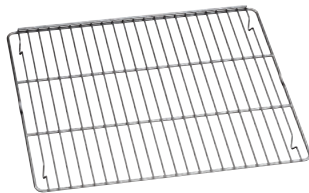


BA 046 115
Glass tray
24 mm deep.




BA 226 105
Grill tray, enamelled
30 mm deep.



BA 216 102
Quadruple telescopic pull-out rack
For ovens BOP 210/BOP 211.



BA 056 115
Heating element for baking stone and
Gastronorm roaster.



BA 056 130
Baking stone
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).
Not in combination with pull-out
system.



BA 056 133
Baking stone
Incl. baking stone support and pizza
paddle (heating element must be
ordered separately).
Not in combination with pull-out
system.

BA 220 360
Cooking container, stainless steel,
unperforated, 35 mm deep, 5l.



BA 220 370
Cooking container, stainless steel,
perforated, 35 mm deep, 5l.




BS 020 002
Pizza paddle, set of 2



GN 010 330

Adapter for gastronorm insert and roaster.

**GN 114 130**

Gastronorm insert, stainless steel, GN 1/3
Unperforated, 40 mm deep, 1.5l.

**GN 114 230**

Gastronorm insert, stainless steel, GN 2/3
Unperforated, 40 mm deep, 3l.

**GN 124 130**

Gastronorm insert, stainless steel, GN 1/3
Perforated, 40 mm deep, 1.5l.

**GN 124 230**

Gastronorm insert, stainless steel, GN 2/3
Perforated, 40 mm deep, 3l.

**GN 340 230**

Gastronorm roaster in cast aluminium GN 2/3, height 165 mm, non-stick.
For roasting in oven with roasting function.

Lower and upper part can also be used as separate ovenproof dishes, height 100 and 65 mm.

For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (both to be ordered separately).

**CL S10 040**

Cleaning cartridges, set of 4.
For Combi-steam oven.

**BA 080 670**

Vacuuming bags, small
180 x 280 mm, 100 pcs.

**BA 080 680**

Vacuuming bags, large
240 x 350 mm, 100 pcs.



Accessories and special accessories 200 series



BOP 250/BOP 251



BOP 220/BOP 221

			Oven	Oven
Baking tray, enamelled				
	BA 026 115	15 mm deep	•/°	•/°
Pull-out rack				
	BA 016 105	Pull-out system with fully extendable telescopic pull-out rack and pyrolysis-safe cast frame	°	°
	BA 216 102	Quadruple fully extendable telescopic pull-out rack. For oven BOP 210/BOP 211.		
	BA 010 301	Triple telescopic pull-out rack for combi-steam oven.		
Oven surfaces with catalytic special enamelling				
	Part No. 664048	Oven ceiling, for retrofitting		
	Part No. 664248	Oven back wall, for retrofitting		
Baking stone				
	BA 056 130	incl. baking stone support and pizza paddle (heating element must be ordered separately)		
	BA 056 133	incl. baking stone support and pizza paddle (heating element must be ordered separately)	°	°
Cooking container, steam oven				
	BA 020 360	Cooking container, stainless steel, unperforated, 40 mm deep, 5 l.		
	BA 020 370	Cooking container, stainless steel, perforated, 40 mm deep, 5 l.		
	BA 020 380	Cooking container, non-stick, unperforated, 40 mm deep, 5 l.		
	BA 020 390	Cooking container, non-stick, perforated, 40 mm deep, 5 l.		
	BA 220 360	Cooking container, stainless steel, unperforated, 37.5 deep, 5 l.		
	BA 220 370	Cooking container, stainless steel, perforated, 37.5 deep, 5 l.		
	GN 114 130	GN 1/3, unperforated, 40 mm deep, 1.5 l		
	GN 114 230	GN 2/3, unperforated, 40 mm deep, 3 l		
	GN 124 130	GN 1/3, perforated, 40 mm deep, 1.5 l		
	GN 124 230	GN 2/3, perforated, 40 mm deep, 3 l		
Gastronorm roaster, cast aluminium				
	GN 340 230	GN 2/3, height 165 mm, non-stick For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (See also page 421).	°	° (without roaster function)
GN-Adapter				
	GN 010 330	Adapter for gastronorm insert.		
Glass tray				
	BA 046 115	24 mm deep	•/°	•/°
Wire rack				
	BA 036 105	no opening, with feet	•/°	•/°
	Part No. 435794	for grill tray BA 226 102, angled, no opening		
	Part No. 672921	for grill tray BA 226 105, with opening, and feet	°	°
Grill tray, enamelled				
	BA 226 105	30 mm deep	°	°
Heating element				
	BA 056 115	Necessary accessory for baking stone BA 056 133	°	°
Pizza paddle				
	BS 020 002	Set of 2	°	°
Cleaning and care				
	CL S10 040	Cleaning cartridges, set of 4.		
	Part No. 17002490	Descaling tablets, for combi steam ovens, set of 4.		
	Part No. 17000705	Water filter cartridge		
	Part No. 00311819	Descaling tablets		
	Part No. 00311769	Cleaning tablets		
Vacuuming bags				
	BA 080 670	Vacuuming bags, small, 180 mm x 280 mm, 100 pcs.		
	BA 080 680	Vacuuming bags, large, 240 mm x 350 mm, 100 pcs.		
Water connection				
	GF 111 100	Descaling and neutralising filter, for first installation		
	GF 121 110	Filter cartridge for GF 111 100		
	GZ 010 011	Extension for water inlet and outlet hose		

• Standard.

° Special accessory.



BOP 210/BOP 211

Oven



BSP 270/BSP 271

Combi-steam oven



BSP 260/BSP 261

Combi-steam oven



BSP 250/BSP 251

Combi-steam oven



BSP 220/BSP 221

Steam oven



CMP 250

Fully automatic espresso machine



DVP 221

Vacuuming drawer

o

o

o

o

o

o

o

•/o

•/o

o

o

o

o

o

o

o

•/o

•/o

o

o

o

o

o

o

o

•/o

•/o

o

o

o

o

o

o

o

•/o

•/o

o

o

o

o

o

o

o

o

o

o

o

o

o

•/o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

o

Ovens 200 series



Appliance type		Oven	Oven
Side-opening door right-hinged / left-hinged		BOP 250/BOP 251	BOP 220/BOP 221
Full glass door in Gaggenau Anthracite		BOP 250/251 102	BOP 220/221 102
Full glass door in Gaggenau Metallic		BOP 250/251 112	BOP 220/221 112
Full glass door in Gaggenau Silver		BOP 250/251 132	BOP 220/221 132
Dimensions			
Width	(cm)	60	60
Appliance dimensions W x H x D ¹	(mm)	590 x 595 x 547	590 x 595 x 547
Door panel extension from furniture cavity	(mm)	21	21
Niche dimensions W x H x D	(mm)	560 x 590 x 550	560 x 590 x 550
Net weight	(kg)	57	57
Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)			
Net volume	(l)	76	76
Number of cooking compartments		1	1
Interior dimensions W x H x D	(mm)	487 x 383 x 405	487 x 383 x 405
Energy efficiency class with eco hot air		A	A
Energy Efficiency Index (EEI)		96	96
Energy consumption with top / bottom heat	(kWh)	1.25	1.25
Energy consumption with eco hot air	(kWh)	0.83	0.83
Heat source		electric	electric
Heating methods			
Temperature range	(°C)	30–300	50–300
Hot air / Eco hot air / top + bottom heat		•/•/•	•/•/•
Top heat / bottom heat / hot air + bottom heat		•/•/•	•/•/•
Full surface grill + circulated air		•	•
Full surface grill		•	•
Compact grill		•	–
Baking stone function		•	•
Roaster function		•	–
Dough proofing / defrosting / keeping warm		•/•/–	–/–/–
Handling			
TFT touch display		•	•
Controls at the top / at the bottom		•/–	•/–
Clear text display	(No. of languages)	44	44
Individual recipes		50	50
Door opening angle		110°	110°
Features			
Electronic temperature control		•	•
Three-point core temperature probe		•	–
Automatic programmes		•	–
Baking stone socket		•	•
Roasting function		•	–
Actual temperature display		•	•
Rapid heating		•	•
Cooking time, cooking time end, timer, stopwatch		•	•
Long-term timer		•	•
Halogen light on the top	(W)	60	60
Tray levels	(No.)	4	4
Digital services (Home Connect) either via LAN or wireless via WiFi.		• ³	• ³
Accessories			
Enamelled baking tray		1	1
Size of largest baking tray	(cm ²)	1.200	1.200
Wire rack		1	1
Enamelled grill tray / wire rack for grill tray		BA 226 105 ² /672 921 ²	BA 226 105 ² /672 921 ²
Glass tray		1	1
Safety			
Thermally insulated door with multiple glazing		5-fold	5-fold
Child lock / safety shut-off		•/•	•/•
Cooled housing with temperature protection		•	•
Cleaning			
Pyrolytic system		•	•
Catalytic coating on back wall / ceiling		–	–
Gaggenau enamel		•	•
Heated air cleaning catalyser		•	•
Grease filter in front of hot air fan		–	–
Connection			
Total connected load	(kW)	3.7	3.7

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.

² Special accessory, see pages 78–81.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Oven

BOP 210/BOP 211
 BOP 210/211 102
 BOP 210/211 112
 BOP 210/211 132

60
 590 x 595 x 547
 21
 560 x 590 x 550
 53

76
 1
 487 x 383 x 405
 A
 96
 1.25
 0.83
 electric

50-300
 •/•/•
 •/•/•
 •
 •
 -
 •
 -
 - / - / -

•
 •/-
 44
 50
 110°

•
 -
 -
 •
 -
 •
 •
 •
 •
 60
 4
 •³

1
 1.350
 1
 1/-
 BA 046 115²

3-fold
 •/•
 •

-
 664 248² / 664 048²
 •
 •
 -

3.7

Combi-steam ovens and steam ovens 200 series



Appliance type		Combi-steam oven	Combi-steam oven
Side-opening door right-hinged / left-hinged		BSP 270/BSP 271	BSP 260/BSP 261
Full glass door in Gaggenau Anthracite		BSP 270/BSP 271 101	BSP 260/BSP 261 101
Full glass door in Gaggenau Metallic		BSP 270/BSP 271 111	BSP 260/BSP 261 111
Full glass door in Gaggenau Silver		BSP 270/BSP 271 131	BSP 260/BSP 261 131
Dimensions			
Width	(cm)		
Appliance dimensions W x H x D ¹	(mm)	590 x 455 x 540	590 x 455 x 540
Door panel extension from furniture cavity	(mm)	21	21
Niche dimensions W x H x D	(mm)	560 x 450 x 550	560 x 450 x 550
Net weight	(kg)	36	34
Volume / energy efficiency (to EU regulations EN 60350-1, 65/2014 and 66/2014)			
Net volume	(l)	50	50
Number of cooking compartments		1	1
Interior dimensions W x H x D	(mm)	501 x 246 x 406	501 x 248 x 406
Energy efficiency class with hot air + 30 % humidity		A	A
Energy Efficiency Index (EEI)		94.7	94.7
Energy consumption with hot air + 30 % humidity	(kWh)	0.72	0.72
Heat source		electric	electric
Heating methods			
Temperature range	(°C)	30 – 230	30 – 230
Hot air + 100 % humidity		•	•
Hot air + 80 % humidity		•	•
Hot air + 60 % humidity		•	•
Hot air + 30 % humidity		•	•
Hot air + 0 % humidity		•	•
100 % humidity		–	–
Low temperature cooking		•	•
Low temperature steaming		–	–
Sous-vide cooking		•	•
Full surface grill level 1 + humidity		•	•
Full surface grill level 2 + humidity		•	•
Full surface grill + Umluft		•	•
Dough proofing		•	•
Defrosting		•	•
Regenerating		•	•
Handling			
TFT touch display		•	•
Controls at the top / at the bottom		•/–	•/–
Clear text display	(No. of languages)	44	44
Individual recipes		50	50
Door opening angle		110°	110°
Features			
Steaming without pressure		•	•
Electronic temperature control		•	•
Full surface grill behind glass ceramic		2000	2000
Three-Point core temperature probe		•	•
Automatic programmes		•	•
Actual temperature display		•	•
Cooking time, cooking time end, timer, stopwatch		•	•
Long-term timer		•	•
Electronic boiling point detection		•	•
Water tank capacity / water level warning	(l)	1.7/•	1.7/•
LED light on the side	(W)	10	10
Tray levels / stainless steel cooking interior	(No.)	3/•	3/•
Digital services (Home Connect) either via LAN or wireless via WiFi. ³		•	•
Accessories			
Size of largest baking tray	(cm ²)	810	810
Wire rack		1	1
Cooking container, stainless steel, 40 mm, perforated / unperforated		1/1	1/1
Cleaning cartridge		4	–
Descaling tablets		Part No. 17002490	Part No. 17002490
Safety			
Thermally insulated door with multiple glazing		3-fold	3-fold
Child lock / safety shut-off		•/•	•/•
Cooled housing with temperature protection		•	•
Cleaning			
Cleaning aid / drying programme		•/•	•/•
Descaling aid / descaling programme		–/•	–/•
Automatic drying of the cavity at the end of the cooking process.		•	•
Grease filter in front of hot-air fan		–	•
Connection			
Total connected load	(kW)	3.15	3.15

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche. ² Special accessory, see pages 78 - 81.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Combi-steam oven	Steam oven
BSP 250/BSP 251	BSP 220/BSP 221
BSP 250/BSP 251 101	BSP 220/BSP 221 101
BSP 250/BSP 251 111	BSP 220/BSP 221 111
BSP 250/BSP 251 131	BSP 220/BSP 221 131

60	60
590 x 455 x 540	590 x 455 x 540
21	21
560 x 450 x 550	560 x 450 x 550
36	34

50	58
1	1
501 x 248 x 406	501 x 248 x 406
A	
94.7	
0.72	
electric	

30 – 230	30 – 100
•	–
•	–
•	–
•	–
•	–
–	•
•	–
–	•
•	•
•	–
•	–
•	–
•	•
•	•
•	•

•	•
•/–	•/–
44	44
50	–
110°	110°

•	•
•	•
2000	–
•	–
•	•
•	•
•	–
•	•
1.7/•	1.7/•
10	10
3/•	3/•
•	•

810	810
1	1
1/1	1/1
–	–
Part No. 17002490	Part No. 17002490

3-fold	3-fold
•/•	•/•
•	•

•/•	•/–
–/•	–/•
•	•
•	–

3.15	2.75
------	------

Combi-microwave ovens and microwaves 200 series



Appliance type		Combi-microwave oven	Microwave
Side-opening door right-hinged / left-hinged		BMP 250/BMP 251	BMP 224/BM 225
Full glass door in Gaggenau Anthracite		BMP 250/251 100	BMP 224/225 100
Full glass door in Gaggenau Metallic		BMP 250/251 110	BMP 224/225 110
Full glass door in Gaggenau Silver		BMP 250/251 130	BMP 224/225 130
Dimensions			
Width	(cm)	60	60
Appliance dimensions W x H x D ¹	(mm)	590 x 455 x 538	590 x 382 x 300
Door panel extension from furniture cavity	(mm)	21	21
Niche dimensions W x H x D	(mm)	560 x 450 x 550	560 x 380 x 320
			560 x 362 x 300 (wall cabinet)
Net weight	(kg)	41	20
Volume			
Capacity	(l)	36	21
Interior dimensions W x H x D	(mm)	445 x 236 x 348	350 x 220 x 270
Heating methods / Programmes			
Maximum microwave output	(W)	1.000	900
Microwave output levels	(No.)	5	5
Hot air with temperature range	(°C)	40, 100–250	–
Full surface grill + hot air with temperature range	(°C)	100–250	–
Full surface grill + circulated air with temperature range	(°C)	100–250	–
Full surface grill as quartz grill with levels of intensity	(No.)	3	3
Maximum grill output	(W)	2.000	1.300
Hot air output	(W)	1.950	–
Maximum microwave output for combination with grill and oven	(W)	600	360
Sequential operation of up to 5 modes incl. programming of combined operation and rest time		•	•
Automatic weight feature	(No.)	15	10
Handling			
TFT touch display		•	•
Controls at the top / at the bottom		•/–	–/•
Automatic door opening		•	•
Clear text display	(No. of languages)	25	25
Individual recipes		50	50
Door opening angle		110°	110°
Features			
Electronic temperature control		•	•
Actual temperature display		•	–
Rapid heating		•	–
Innowave		•	•
Cooking time, switch-off time, short-term timer, stop watch		•/•/•/•	•/–/–/–
Long-term timer		•	–
Interior lighting, side	(W)	60	25
Rack levels	(No.)	4	–
Accessories			
Glass tray		•	•
Wire rack		•	•
Glass rod		•	•
Safety			
Thermally insulated door with multiple glazing		•	•
Child lock / safety shut-off		•/•	–/•
Triple door lock		•	•
Cooled housing with temperature protection		•	•
Cleaning			
Catalytic special enamelling at interior back wall		•	–
Stainless steel interior with ceramic base		•	•
Connection			
Total connected load	(kW)	3.1	1.99

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.



Appliance type		Fully automatic espresso machine
Glass front in Gaggenau Anthracite		CMP 250 102
Glass front in Gaggenau Metallic		CMP 250 112
Glass front in Gaggenau Silver		CMP 250 132
Dimensions		
Width	(cm)	60
Appliance dimensions W x H x D ¹	(mm)	590 x 455 x 426
Door panel extension from furniture cavity	(mm)	21
Niche dimensions W x H x D	(mm)	560 x 450 x 550
Net weight	(kg)	20
Typ of beverage		
		Ristretto / 2 x Ristretto
		Espresso / 2 x Espresso
		Espresso Macchiato / 2 x Espresso Macchiato
		Coffee / 2 x coffee
		Americano / 2 x Americano
		Caffe Latte / 2 x Caffe Latte
		Latte Macchiato / 2 x Latte Macchiato
		Cappuccino / 2 x Cappuccino
		Flat White / 2 x Flat White
		Milk froth / 2 x Milk froth
		Warm milk / 2 x Warm milk
		Hot water / 2 x Hot water
Handling		
TFT touch display		•
Controls at the top		•
Automatic door opening		
Clear text display	(No. of languages)	25
Beverages can be personalised and memorised	(No.)	8
Beverage size settings	(No.)	3
Coffee strength levels	(No.)	8
Coffee temperature levels	(No.)	3
Hot water temperature levels	(°C)	
Coffee-milk ratio levels		•
Height adjustable coffee dispenser up to	(cm)	15
Programmable basic settings		
- Lighting scenarios	(No.)	7
- Capacity unit	(ml/fl.oz.)	•
- Adjustability of dispensing per type and size of beverage to match the cup size		•
- Standby after	(min, h)	5 min to 12 h
- Water hardness	(No. of levels)	4, water-softening system
- Water filter		•
Features		
Aroma brewing technology		•
Grinding unit with ceramic discs		•
Automatic adjustment of ground coffee quantity		•
Continuous flow heater		•
Pump pressure	(bar)	19
Integrated milk system		•
Insulated milk container	(l)	0.5
Bean container	(g)	500
Separate container for second ground coffee type		•
Grinding level control		•
Volume of adjustable brewing chamber	(g)	8 to 12
Double grinding and brewing cycles for extra intensity for one beverage		•
Double grinding and brewing cycles for two beverages		•
Removable water tank	(l)	2.4
Water filter cartridge for water tank		1
Single portion cleaning		•
Electronic water filter exchange indicator		•
Electronic fill level control for milk, water and coffee beans		•
Electronic fill level control for drip tray and coffee residues container		•
Integrated LED lighting		•
Fresh water-function to refill the water tank with fresh water		•
Safety		
Child lock		•
Aqua stop with guarantee		
Cleaning		
Fully automatic rinse programme when switching on/off		•/•
Automatic quick rinsing of milk system		•
Automatic cleaning and descaling programme		•
Automatic cleaning programme		•
Automatic descaling programme		•
Removable brewing unit		•
Coffee residue container and drip tray removable and dishwasher-safe		•
Beverage dispenser removable and dishwasher-safe		•
Emptying programme to prepare the appliance for holiday or transportation		•
Empty-grinding function, if using a new type of beans		•
Connection		
Total connected load	(kW)	1.6
Fixed inlet and outlet water connection		-

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.

Vacuuming drawers 200 series



Appliance type	Vacuuming drawer	
Glass front in Gaggenau Anthracite		DVP 221 100
Glass front in Gaggenau Metallic		DVP 221 110
Glass front in Gaggenau Silver		DVP 221 130
Dimensions		
Width	(cm)	60
Appliance dimensions W x H x D ¹	(mm)	590 x 140 x 542
Door panel extension from furniture cavity	(mm)	21
Niche dimensions W x H x D	(mm)	560 x 140 x 550
Net weight	(kg)	30
Volume		
Net volume	(l)	7
Interior dimensions W x H x D	(mm)	210 x 95 x 275
Maximum size of vacuuming bags W x L	(mm)	240 x 350
Usage		
Vacuuming levels		3, max. 99 %
Heat-sealing levels		3
Vacuuming of bags and containers		•
Vacuuming of vacuuming containers and bottles		•
Vacuuming of liquids		•
Drying program for vacuuming pump		•
Warning function		•
Handling		
Sensor Control		•
Handleless drawer		•
Recessed grip		–
Push-to-open system		•
Cushioned closing system		–
Features		
Stainless steel vacuuming chamber		•
Maximum load	(kg)	10
Applicable height	(mm)	80
Safety glass cover		•
Sealing bar, non-stick, removable		•
Raised vacuuming platform		•
Connection with tube for vacuuming outside the chamber		•
Utility space in vacuuming chamber, W x L	(mm)	210 x 275
Membrane avoiding reflow of liquids during external vacuuming		•
Vacuuming bags, small, 180 mm x 280 mm	(pcs.)	50
Vacuuming bags, large, 240 mm x 350 mm	(pcs.)	50
Plug for vacuuming bottles	(pcs.)	3
Adaptor for bottle plugs		•
Connection		
Total connected load	(kW)	0.32

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.



Appliance type	Warming drawer		Warming drawer	
Glass front in Gaggenau Anthracite	WSP 221 100		WSP 222 100	
Glass front in Gaggenau Metallic	WSP 221 110		WSP 222 110	
Glass front in Gaggenau Silver	WSP 221 130		WSP 222 130	
Dimensions				
Width	(cm)	60	60	
Appliance dimensions W x H x D ¹	(mm)	590 x 140 x 548	590 x 288 x 548	
Door panel extension from furniture cavity	(mm)	21	21	
Niche dimensions W x H x D	(mm)	560 x 140 x 550	560 x 288 x 550	
Net weight	(kg)	16	20	
Volume				
Net volume	(l)	20	52	
Interior dimensions W x H x D	(mm)	468 x 92 x 458	468 x 242 x 458	
Number of table settings	(No.)	6	12	
Heating methods				
Defrosting of meals / proving of yeast dough		•	•	
Preheating of small beverage containers		•	•	
Keeping meals warm / slow cooking meals		•	•	
Warming ovenware		•	•	
Hot air + bottom heat		•	•	
Temperature range 40 °C to 80 °C (glass surface)	(power levels)	4	4	
Handling				
Rotary knob		•	•	
Status display, visible in the glass front		•	•	
Handleless drawer		•	•	
Push-to-open system		•	•	
Features				
Maximum load	(kg)	25	25	
Stainless steel interior with glass bottom		•	•	
Fan for even heat distribution		•	•	
Connection				
Total connected load	(kW)	0.81	0.81	

• Standard. – Not available.

¹ Appliance depth: the immersion depth of the appliance in the niche.



The Vario cooktops

Vario cooktops 400 series	92
Cut-out dimensions for appliance combinations in the 400 series	122
Installation with appliance cover in the 400 series	127
Vario cooktops 200 series	128
Cut-out dimensions for appliance combinations in the 200 series	136
Accessories special accessories	138
Technical specifications	140



CX 492 111

Black glass ceramic
Stainless steel frame
Width 90 cm

Included in the price

1 wireless plug-in core temperature probe for cooktop

Special accessories

CA 060 300

Cooking sensor for temperature regulation within pots

GN 232 110

Teppan Yaki plate made of multi ply material,
GN 1/1

For full surface induction cooktops.

GN 232 230

Teppan Yaki plate made of multi ply material,
GN 2/3

For full surface induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Full surface induction cooktop 400 series

CX 492

- One single big cooking surface
- Free positioning of cookware
- All sizes and formats of cookware can be used
- TFT touch display for an intuitive control of all functions
- Cooking sensor function for temperature control in pots
- Professional cooking functions
- Max. power output for big cookware of up to 5.5 kW
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

One unique cooking surface of 3200 cm².

Up to 6 items of cookware can be placed simultaneously on the cooktop.

Handling

Easy to use colour graphic TFT touch display with use indications.

Electronic power control in 17 output levels.

Features

Cooking sensor function.

Professional cooking function.

Dynamic cooking function.

Teppan Yaki function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Individual pot detection.

Cooking timer for each cooking position.

Stopwatch.

Short-term timer.

Information key with use indicators.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.

Residual heat indication.

Child lock.

Safety shut-off.

Pause function.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.


If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance. Appliance can be snapped into the worktop from above. Appliance weight: approx. 31 kg.


Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 7.4 kW.

Connecting cable 1.5 m without plug.



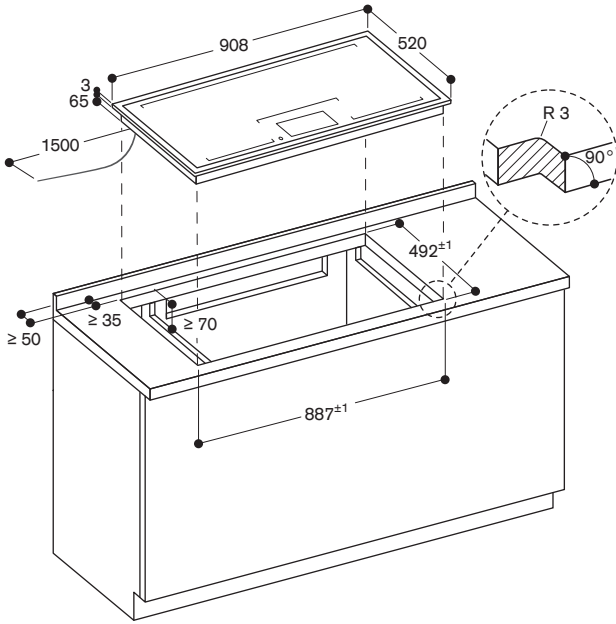


measurements in mm

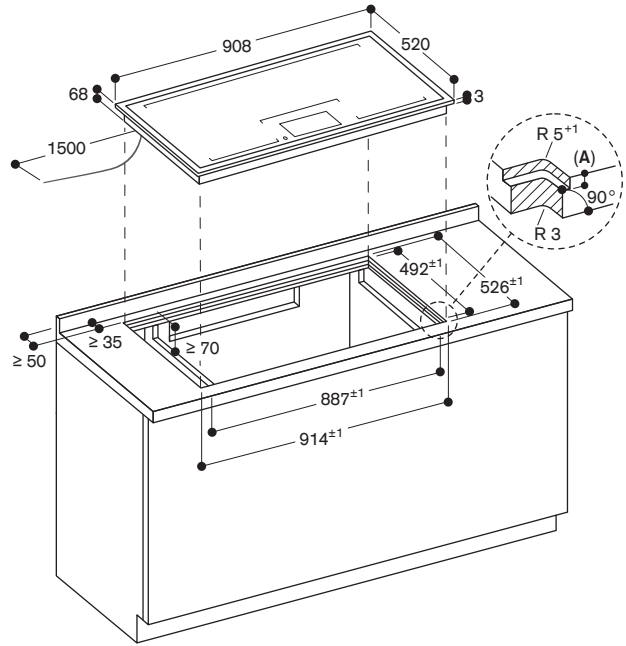


A: 3.5^{0.5}
measurements in mm

View from above

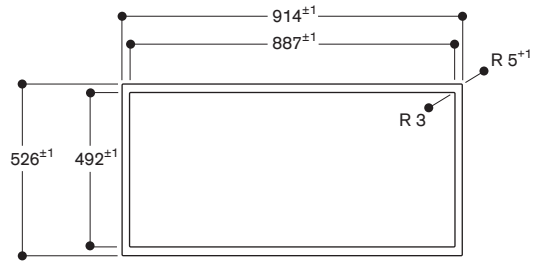


measurements in mm

Longitudinal section

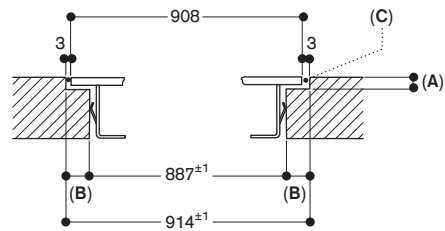

A: 3.5^{0.5}
B: 13.5
C: Fill with silicone
measurements in mm

Cross-section

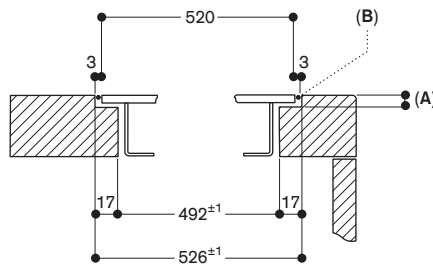

A: 3.5^{0.5}
B: Fill with silicone
measurements in mm



CX 482 111

Black glass ceramic
Stainless steel frame
Width 80 cm

Included in the price

1 wireless plug-in core temperature probe for cooktop

Special accessories

CA 060 300

Cooking sensor for temperature regulation within pots

GN 232 110

Teppan Yaki plate made of multi ply material,

GN 1/1

For full surface induction cooktops.

GN 232 230

Teppan Yaki plate made of multi ply material,

GN 2/3

For full surface induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 series

Island hood 200 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Full surface induction cooktop 400 series

CX 482

- One single big cooking surface
- Free positioning of cookware
- All sizes and formats of cookware can be used
- TFT touch display for an intuitive control of all functions
- Cooking sensor function for temperature control in pots
- Professional cooking functions
- Max. power output for big cookware of up to 5.5 kW
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

One unique cooking surface of 2750 cm².

Up to 5 items of cookware can be placed simultaneously on the cooktop.

Handling

Easy to use colour graphic TFT touch display with use indications.

Electronic power control in 17 output levels.

Features

Cooking sensor function.

Professional cooking function.

Dynamic cooking function.

Teppan Yaki function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Individual pot detection.

Cooking timer for each cooking position.

Stopwatch.

Short-term timer.

Information key with use indicators.

Power management.

Cooktop-based ventilation control

(with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check:

home-connect.com.

home-connect.com.

home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.

Residual heat indication.

Child lock.

Safety shut-off.

Pause function.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Appliance can be snapped into the worktop from above.


Appliance weight: approx. 27 kg.


Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 7.4 kW.

Connecting cable 1.5 m without plug.



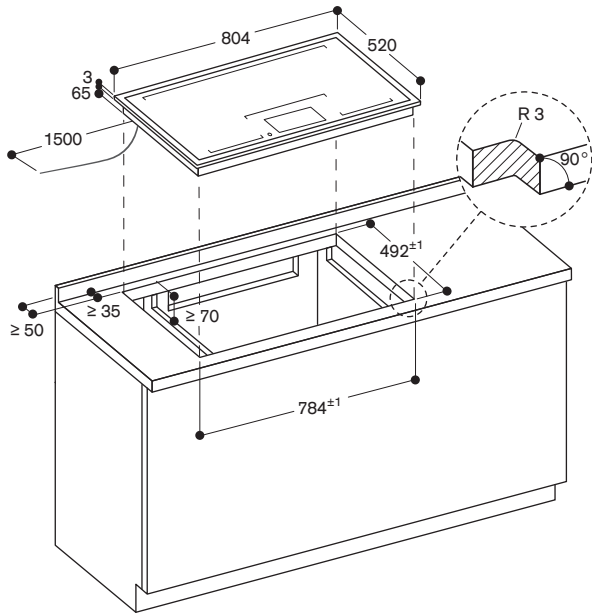


measurements in mm

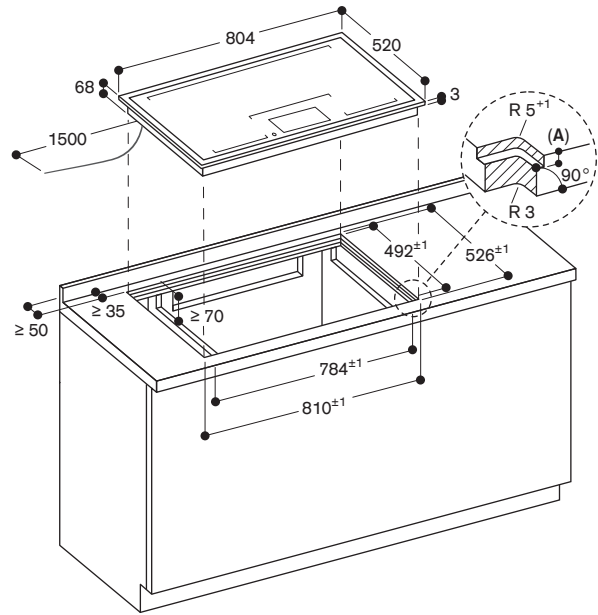

A: 3.5^{0.5}


measurements in mm

View from above

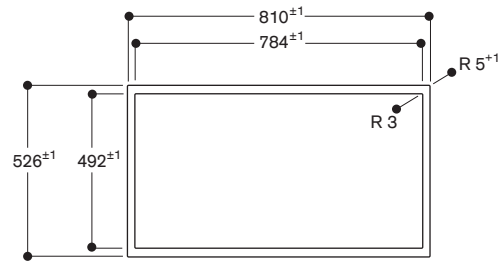

measurements in mm

Longitudinal section

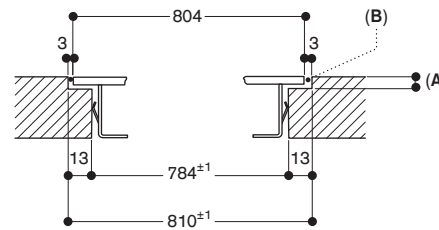


A: 3.5^{0.5}

B: Fill with silicone

measurements in mm

Cross-section

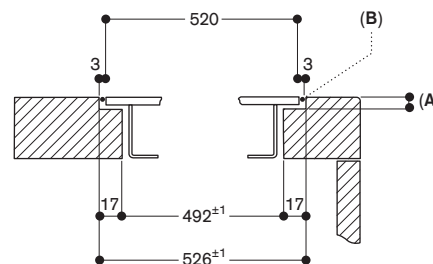

A: 3.5^{0.5}

B: Fill with silicone

measurements in mm



VI 492 113

Stainless steel frame
Width 90 cm

Installation accessories

VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

WP 400 001

Wok pan made of multiple-layer material
With round bottom and handle,
ø 36 cm, 6 litres, height 10 cm.

WZ 400 001

Wok attachment for wok pan
Only for Vario induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario flex induction cooktop 400 series

VI 492

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Frying sensor function for temperature control in pans
- Large cooking zone for pots up to ø 32 cm
- Ideal for the original wok pan with round bottom, with wok ring
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).
1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
Electronic power control in 12 output levels.
User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.
Pot detection.
2-stage residual heat indication.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.
The horizontal positioning of the knobs may be aligned with the specific cooking areas and zones.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.


Please read additional planning notes on page 122 – 127.


If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 25 kg.

Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 11.1 kW.
Connecting cable 1.5 m without plug.



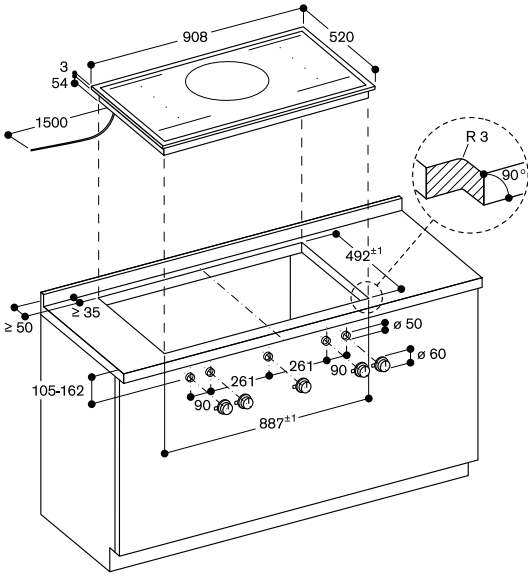


measurements in mm

Installation of the control knob; surface mounting

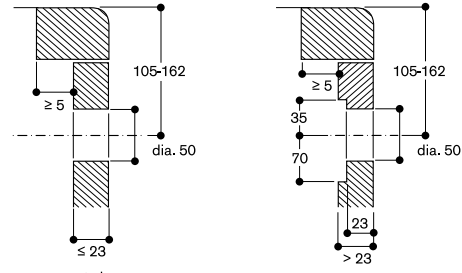


measurements in mm

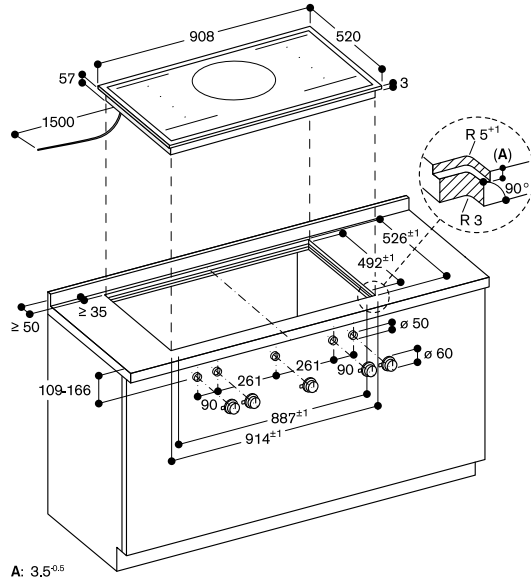


measurements in mm

Installation of the control knob; flush installation

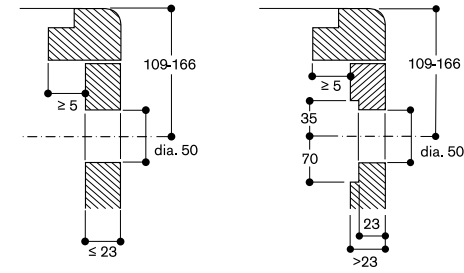


measurements in mm

View from above

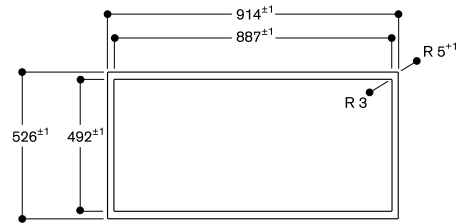

measurements in mm


Longitudinal section

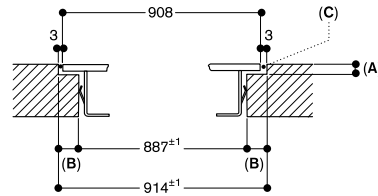

- A: 3.5^{0.5}
- B: 13.5
- C: Fill with silicone

measurements in mm

Cross-section

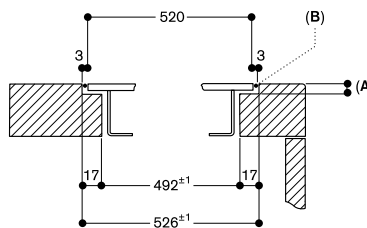

- A: 3.5^{0.5}
- B: Fill with silicone

measurements in mm



VI 482 113

Stainless steel frame
Width 80 cm

Installation accessories

VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario flex induction cooktop 400 series VI 482

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 32 cm width
- Frying sensor function for temperature control in pans
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x32 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x32 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control in 12 output levels.

User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.

Frying sensor function.

Booster function.

Stopwatch.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.

Pot detection.

2-stage residual heat indication.

Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.

The horizontal positioning of the knobs may be aligned with the specific cooking areas.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.


Please read additional planning notes on page 122 – 127.


If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance. Appliance can be snapped into the worktop from above. Appliance weight: approx. 20 kg.

Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.



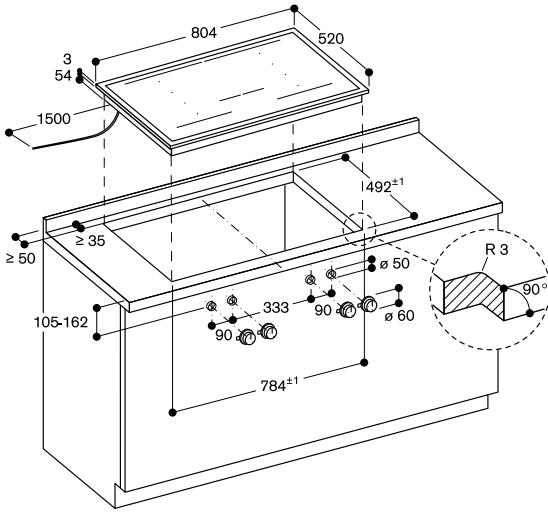


measurements in mm

Installation of the control knob; surface mounting

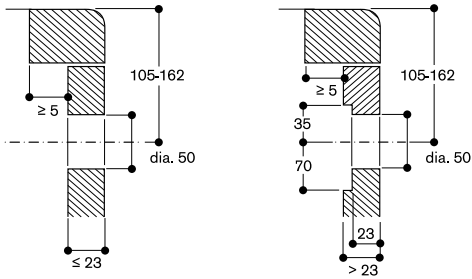


measurements in mm

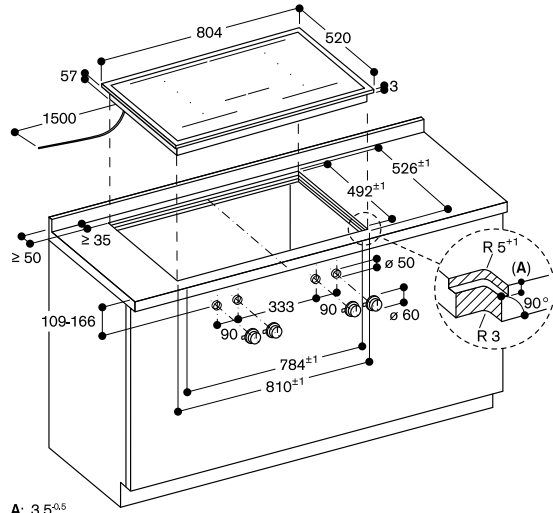


measurements in mm

Installation of the control knob; flush installation

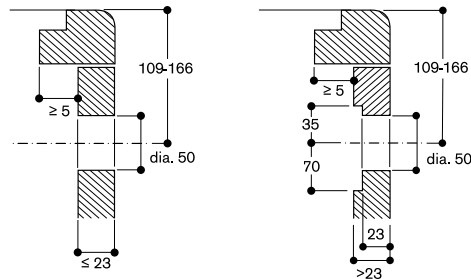


measurements in mm

View from above

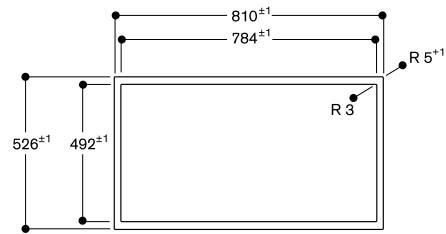

measurements in mm


Longitudinal section

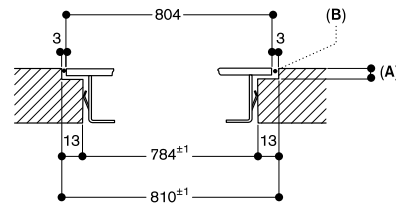

A: 3.5^{0.5}
B: Fill with silicone

measurements in mm

Cross-section

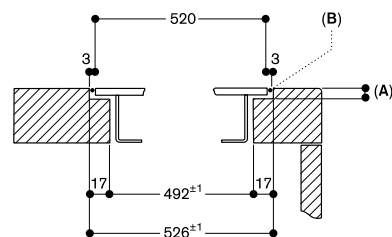

A: 3.5^{0.5}
B: Fill with silicone

measurements in mm



VI 462 113

Stainless steel frame
Width 60 cm

Installation accessories

VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario flex induction cooktop 400 series VI 462

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Frying sensor function for temperature control in pans
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings.
Electronic power control in 12 output levels.
User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.
Pot detection.
2-stage residual heat indication.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.
The horizontal positioning of the knobs may be aligned with the specific cooking areas.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.


Please read additional planning notes on page 122 – 127.


If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 18 kg.

Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.



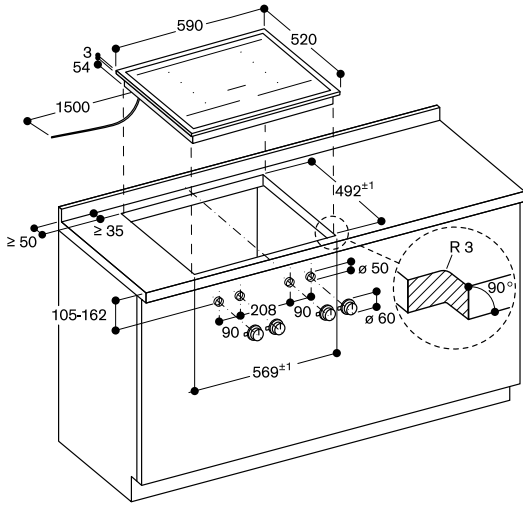


measurements in mm

Installation of the control knob; surface mounting

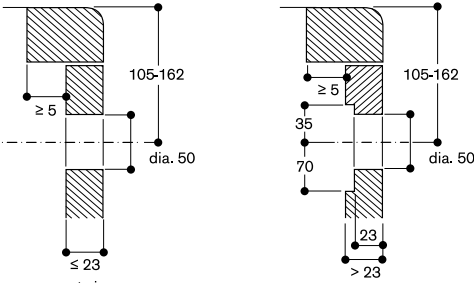


measurements in mm

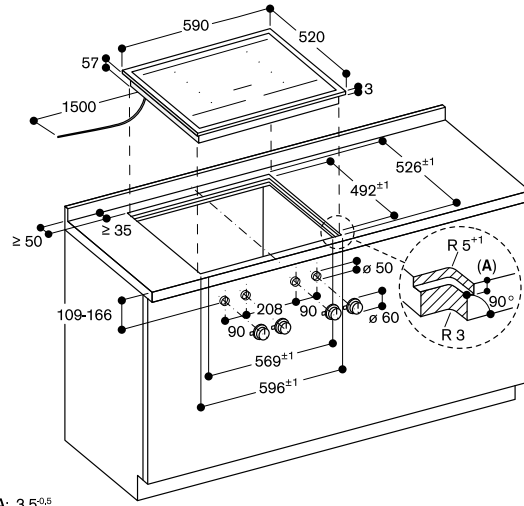

A: 3,5^{0,5}


measurements in mm

Installation of the control knob; flush installation

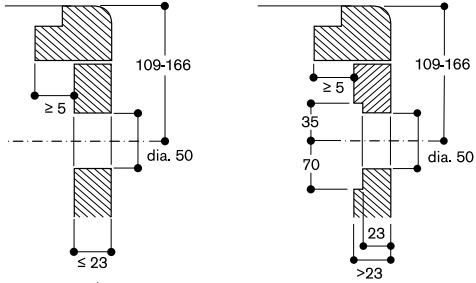


measurements in mm

View from above

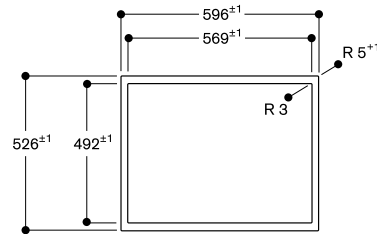

measurements in mm


Longitudinal section

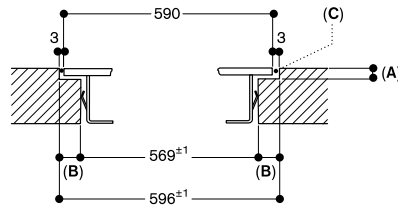

A: 3,5^{0,5}
B: 13,5
C: Fill with silicone

measurements in mm

Cross-section

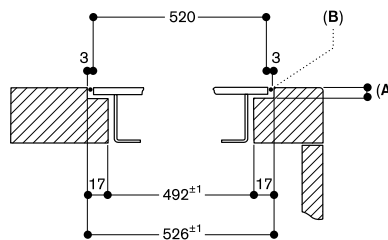

A: 3,5^{0,5}
B: Fill with silicone

measurements in mm



VI 414 113

Stainless steel frame
Width 38 cm

Installation accessories

VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

WP 400 001

Wok pan made of multiple-layer material
With round bottom and handle,
ø 36 cm, 6 litres, height 10 cm.

WZ 400 001

Wok attachment for wok pan
Only for Vario induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario induction cooktop 400 series

VI 414

- 32 cm cooking zone with booster function
- Ideal for the original wok pan with round bottom, with wok ring
- Frying sensor function for temperature control in pans
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control in 12 output levels. User friendly control with bicoloured display (white / orange).

Features

Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.
Pot detection.
2-stage residual heat indication.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Appliance can be snapped into the worktop from above. Appliance weight: approx. 10 kg.

Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 3.7 kW.
Connecting cable 1.5 m without plug.



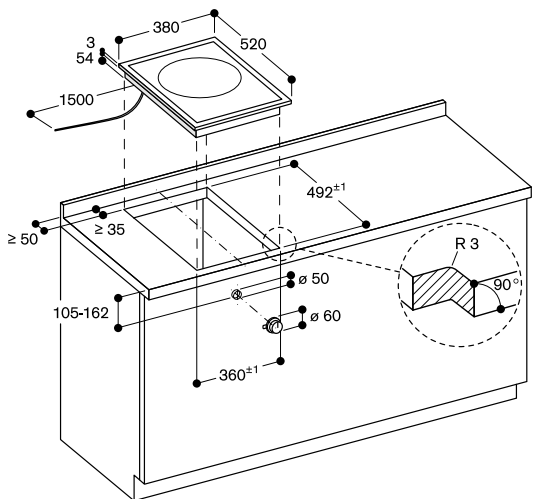


measurements in mm

Installation of the control knob; surface mounting

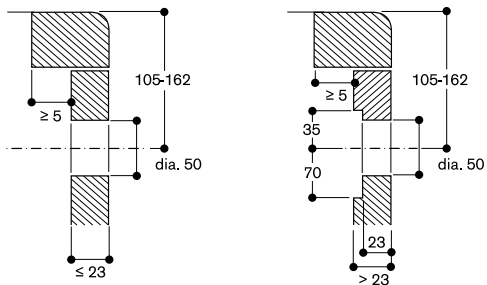


measurements in mm

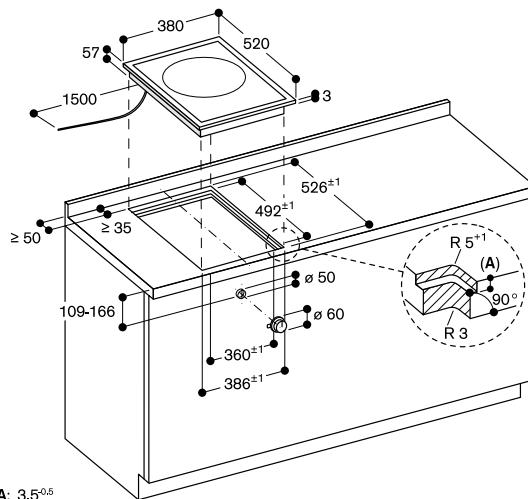

A: 3.5^{0.5}


measurements in mm

Installation of the control knob; flush installation

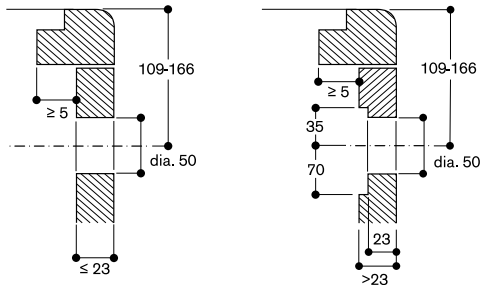


measurements in mm

View from above



measurements in mm

Longitudinal section

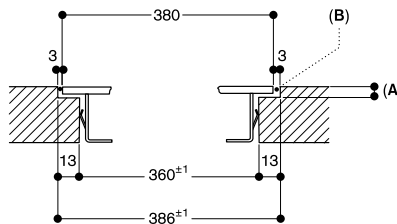


A: 3.5^{0.5}

B: Fill with silicone

measurements in mm

Cross-section

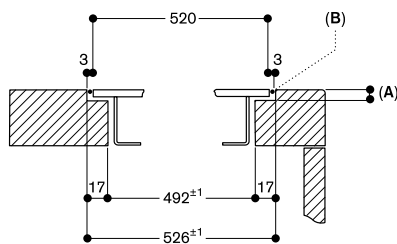

A: 3.5^{0.5}

B: Fill with silicone

measurements in mm



VI 422 113

Stainless steel frame
Width 38 cm

Installation accessories

VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario flex induction cooktop 400 series VI 422

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Frying sensor function for temperature control in pans
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

2 flex induction cooking areas
19x24 cm (2200 W, with booster 3700 W), linked together 38x24 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control in 12 output levels.

User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.
Pot detection.
2-stage residual heat indication.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary. The horizontal positioning of the knobs may be aligned with the specific cooking areas. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.


If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Appliance can be snapped into the worktop from above. Appliance weight: approx. 10 kg.

Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 3.7 kW.
Connecting cable 1.5 m without plug.



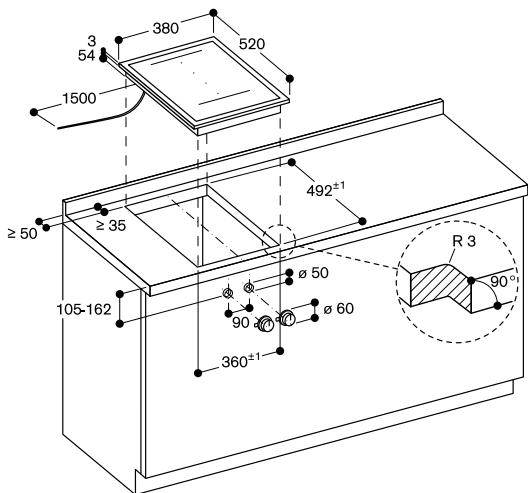


measurements in mm

Installation of the control knob; surface mounting

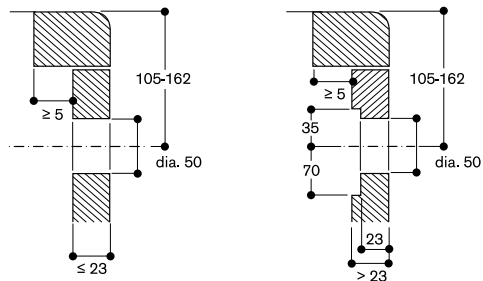


measurements in mm

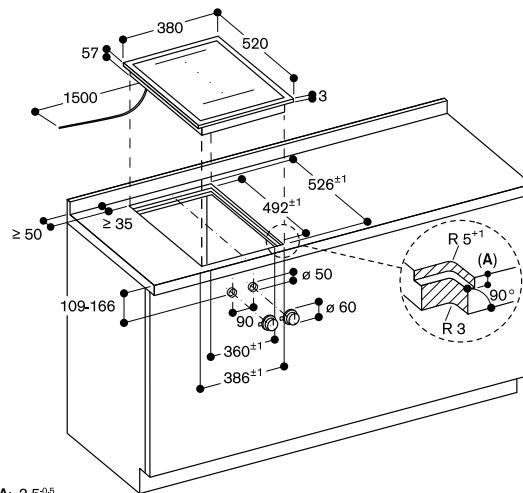

A: 3.5^{0.5}


measurements in mm

Installation of the control knob; flush installation

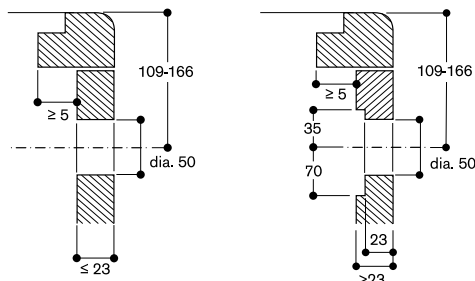


measurements in mm

View from above



measurements in mm


Longitudinal section

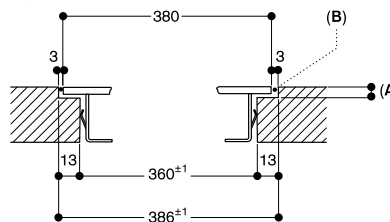

A: 3.5^{0.5}
B: Fill with silicone

measurements in mm

Cross-section

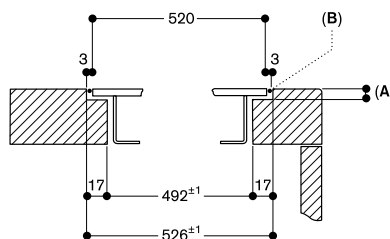

A: 3.5^{0.5}
B: Fill with silicone

measurements in mm



VG 491 111F

Stainless steel
Width 90 cm
Liquid gas 28 – 37 mbar

VG 491 211

Stainless steel
Width 90 cm
Natural gas 20 mbar

Included in the price

1 wok attachment ring

Installation accessories

VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

Special accessories

WP 400 001

Wok pan made of multiple-layer material
With round bottom and handle,
ø 36 cm, 6 litres, height 10 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario gas cooktop 400 series

VG 491

- Five multi-ring burners, up to 18 kW
- Full electronic power level regulation on 12 levels
- Precise and reproducible flame size
- Automatic fast ignition, electronic flame monitoring with automatic re-ignition
- Simmer function for cooking on a very low output level
- Solid smooth-surface cast iron pan supports
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

VG 491 111F

- 1 multi-ring wok burner (300 W – 5800 W), suitable for pots up to max. ø 32 cm.
- 2 two-ring high output burners (165 W – 4000 W), suitable for pots up to max. ø 28 cm.
- 2 two-ring standard burners (165 W – 2000 W), suitable for pots up to max. ø 24 cm.

VG 491 211

- 1 multi-ring wok burner (300 W – 6000 W), suitable for pots up to max. ø 32 cm.
- 2 two-ring high output burners (165 W – 4000 W), suitable for pots up to max. ø 28 cm.
- 2 two-ring standard burners (165 W – 2000 W), suitable for pots up to max. ø 24 cm.

Handling

Control knobs with illuminated ring, cooking zone and output level markings. One-handed operation.
Full electronic control in 12 output levels for exact power level regulation plus simmer function.
Automatic fast ignition.

Features

Simmer function.
Three-part cast iron pan support with flat, continuous pot surface.
Brass burner rings.

Safety

Electronic flame monitoring with automatic re-ignition.
Residual heat indication.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
The horizontal positioning of the knobs may be aligned with the specific burners.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).


If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
Special nozzles can be ordered as spare parts.
Plan for an electrical connection (the appliance is not operable without power supply).
Air intake from above.
No intermediate shelf required.
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.
A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
Installation in a 90 cm wide lower cabinet is required.
The combination with VL 414 is not recommended, since the air extraction from the centre burner cannot be guaranteed due to the distance.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 32 kg.


Connection

Total connected load gas
17.8/18.0 kW.
Total connected load electric
15.0/15.0 W.
Connecting cable 1.4 m with plug.

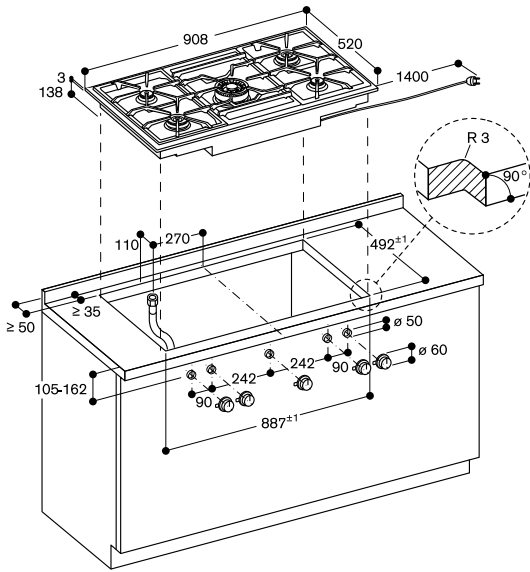


measurements in mm

Installation of the control knob; surface mounting

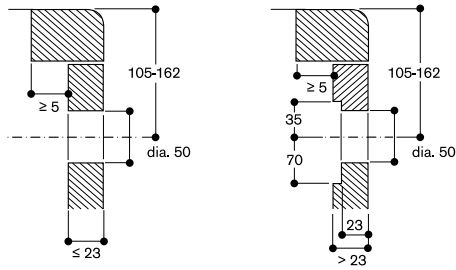


measurements in mm

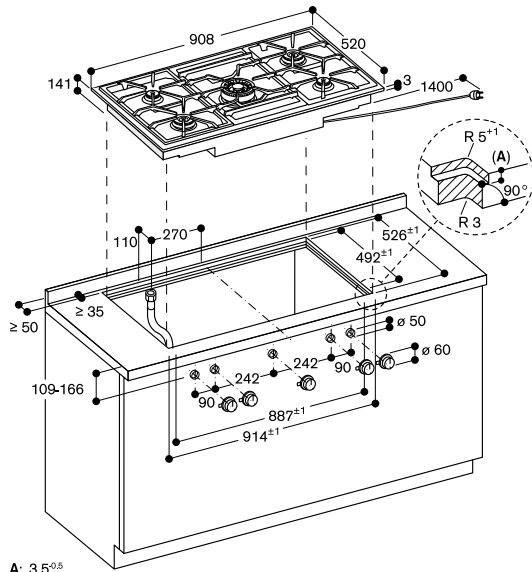


measurements in mm

Installation of the control knob; flush installation

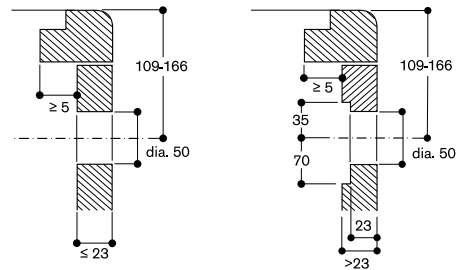


measurements in mm

View from above

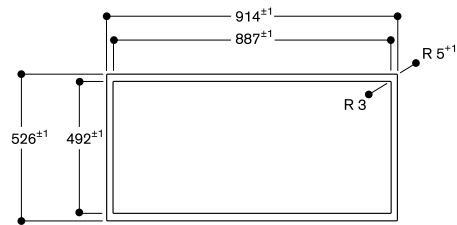

measurements in mm


Longitudinal section

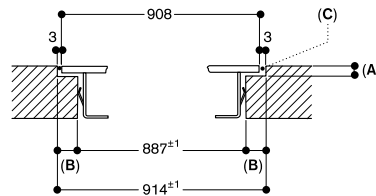

- A: 3.5^{±0.5}
- B: 13.5
- C: Fill with silicone

measurements in mm

Cross-section

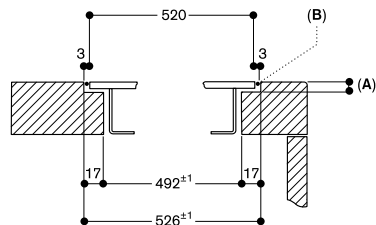

- A: 3.5^{±0.5}
- B: Fill with silicone

measurements in mm



VG 415 111F

Stainless steel
Width 38 cm
Liquid gas 28 – 37 mbar
Wok burner with up to 5.8 kW

VG 415 211

Stainless steel
Width 38 cm
Natural gas 20 mbar
Wok burner with up to 6 kW

Included in the price

1 wok attachment ring

Installation accessories

VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA 440 010

Stainless steel appliance cover with mounting strip

Special accessories

WP 400 001

Wok pan made of multiple-layer material
With round bottom and handle,
ø 36 cm, 6 litres, height 10 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario gas wok 400 series

VG 415

- Multi-ring burner with up to 6 kW
- Full electronic power level regulation on 12 levels
- Precise and reproducible flame size
- Automatic fast ignition, electronic flame monitoring with automatic re-ignition
- Simmer function for cooking on a very low output level
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

VG 415 111F

1 multi-ring wok burner
(300 W – 5800 W), suitable for pots up to max. ø 32 cm.

VG 415 211

1 multi-ring wok burner
(300 W – 6000 W), suitable for pots up to max. ø 32 cm.

Handling

Control knobs with illuminated ring, cooking zone and output level markings. One-handed operation.
Full electronic control in 12 output levels for exact power level regulation plus simmer function.
Automatic fast ignition.

Features

Simmer function.
Cast iron pan support with flat, continuous pot surface.
Brass burner rings.

Safety

Electronic flame monitoring with automatic re-ignition.
Residual heat indication.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed.


Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. Special nozzles can be ordered as spare parts.
Plan for an electrical connection (the appliance is not operable without power supply).
Air intake from above.
No intermediate shelf required.
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
If operated next to the downdraft ventilation VL 414, the air baffle AA 414 is recommended to ensure maximum performance of the cooktop.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 15 kg.

Connection


Total connected load gas 5.8/6.0 kW.
Total connected load electric 15.0/15.0 W.
Connecting cable 1.4 m with plug.

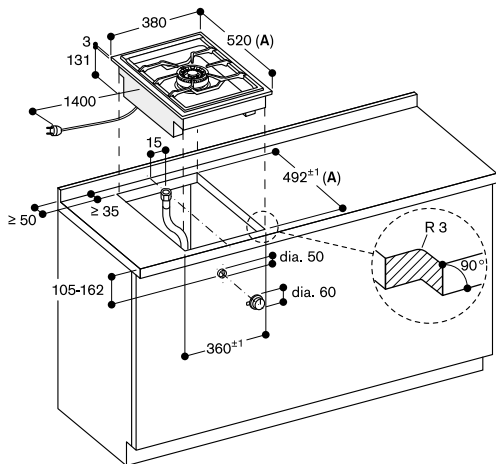


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Installation of the control knob; surface mounting

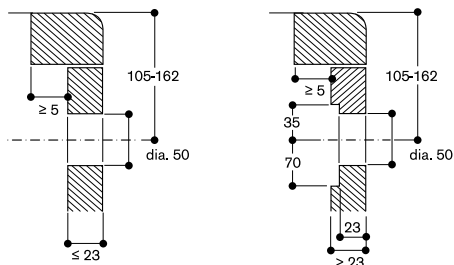

measurements in mm

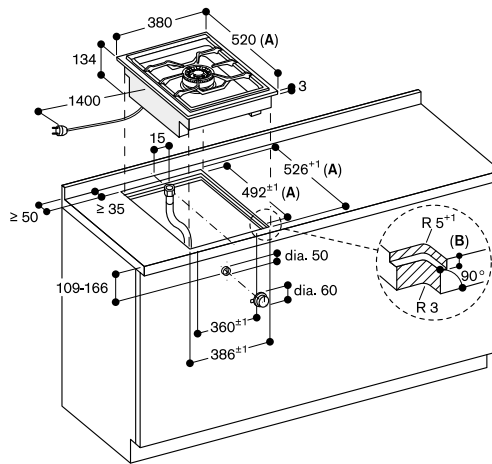


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

B: 3.5^{±0.5}


measurements in mm

Installation of the control knob; flush installation

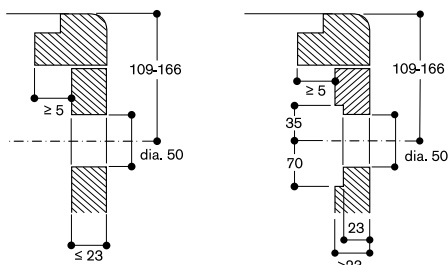

measurements in mm


View from above



A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Longitudinal section

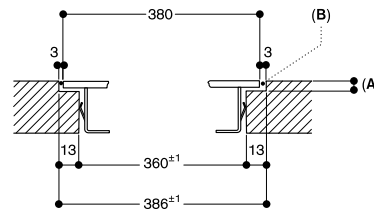


A: 3.5^{±0.5}

B: Fill with silicone

measurements in mm

Cross-section

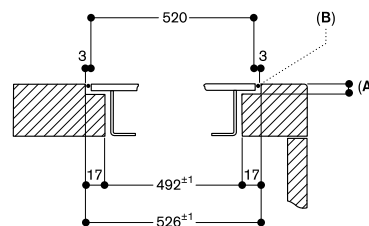

A: 3.5^{±0.5}

B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

measurements in mm



VG 425 111F

Stainless steel
Width 38 cm
Liquid gas 28 – 37 mbar

VG 425 211

Stainless steel
Width 38 cm
Natural gas 20 mbar

Installation accessories

VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA 440 010

Stainless steel appliance cover with mounting strip

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario gas cooktop 400 series

VG 425

- Multi-ring burner with up to 4 kW
- Full electronic power level regulation on 12 levels
- Precise and reproducible flame size
- Automatic fast ignition, electronic flame monitoring with automatic re-ignition
- Simmer function for cooking on a very low output level
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

VG 425 111F

1 two-ring high output burner (165 W – 4000 W), suitable for pots up to max. ø 28 cm.

1 two-ring standard output burner (165 W – 2000 W), suitable for pots up to max. ø 24 cm.

VG 425 211

1 two-ring high output burner (165 W – 4000 W), suitable for pots up to max. ø 28 cm.

1 two-ring standard output burner (165 W – 2000 W), suitable for pots up to max. ø 24 cm.

Handling

Control knobs with illuminated ring, cooking zone and output level markings. One-handed operation. Full electronic control in 12 output levels for exact power level regulation plus simmer function. Automatic fast ignition.

Features

Simmer function.
Cast iron pan support with flat, continuous pot surface.
Brass burner rings.

Safety

Electronic flame monitoring with automatic re-ignition.
Residual heat indication.
Safety shut-off.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Special nozzles can be ordered as spare parts.

Plan for an electrical connection (the appliance is not operable without power supply).

Air intake from above.

No intermediate shelf required.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.

A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

If operated next to the downdraft ventilation VL 414, the air baffle AA 414 is recommended to ensure maximum performance of the cooktop.

With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.

Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.

Appliance can be snapped into the worktop from above.


Appliance weight: approx. 14 kg.

Connection

Total connected load gas 6.0/6.0 kW.

Total connected load electric 15.0/15.0 W.


Connecting cable 1.4 m with plug.

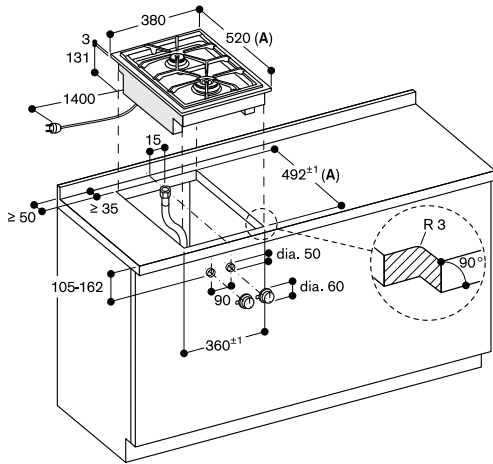


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Installation of the control knob; surface mounting

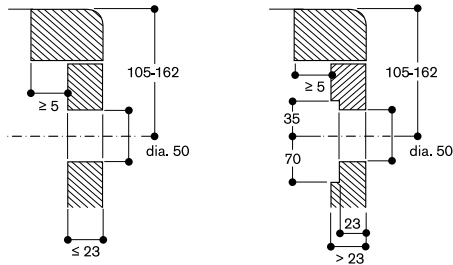

measurements in mm

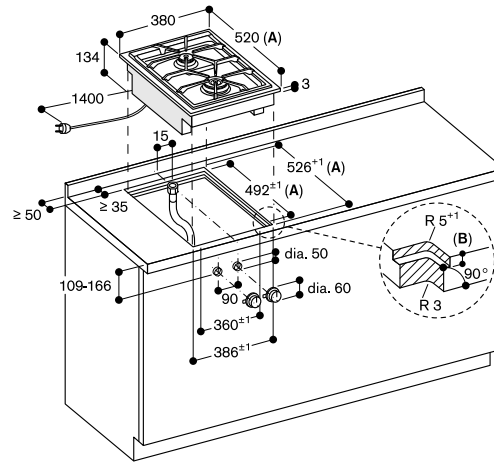


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

B: 3.5^{±0.5}


measurements in mm

Installation of the control knob; flush installation

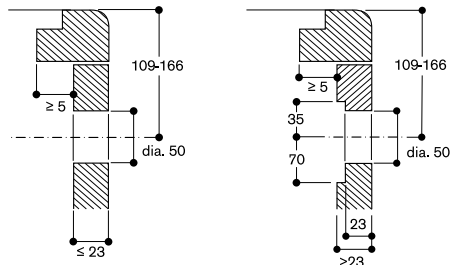

measurements in mm


View from above



A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Longitudinal section

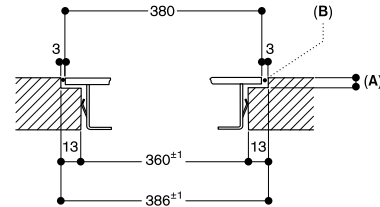


A: 3.5^{±0.5}

B: Fill with silicone

measurements in mm

Cross-section

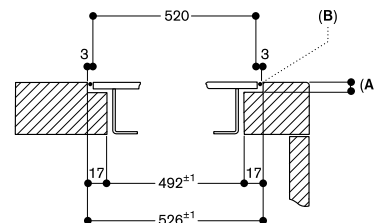

A: 3.5^{±0.5}

B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

measurements in mm



VP 414 111

Stainless steel
Width 38 cm

Included in the price

2 spatula

Installation accessories**VA 420 000**

Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA 440 010

Stainless steel appliance cover with mounting strip

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario Teppan Yaki 400 series**VP 414**

- Cooking directly on the hard-chromed metal surface, without any pots or pans
- Exact temperature control up to 240 °C
- Optimum heat distribution
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

Usable area W 31 x D 44 cm.

Handling

Control knobs with illuminated ring, cooking zone and temperature markings.

Electronic temperature control from 120 °C to 240 °C.

Features

Two zones, each 1500 W, can be operated together as a complete surface or each half separately. Keeping warm setting. Cleaning stage.

Even with traces of use, always easy to clean like a cast pan.

Safety

Safety shut-off.
Pre-heat and residual heat indicator.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.


If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.


Please read additional planning notes on page 122 – 127.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. A minimum lateral clearance of at least 40 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted. Appliance can be snapped into the worktop from above. Appliance weight: approx. 12 kg.

Connection

Total connected load 3.0 kW.
Connecting cable 1.5 m without plug.




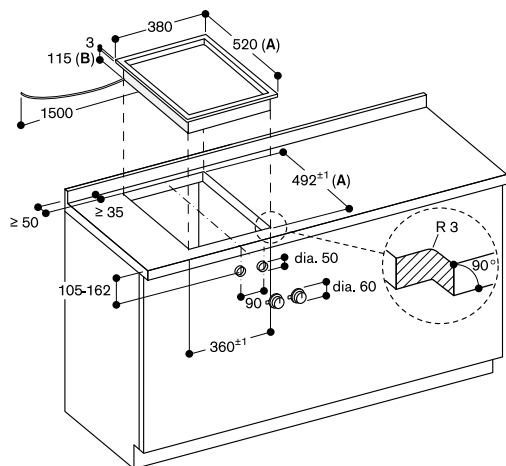


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
 B: 130 mm in the area of the cable clamp (left, on the rear side)

measurements in mm

Installation of the control knob; surface mounting

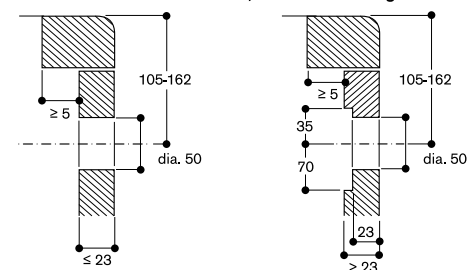


measurements in mm

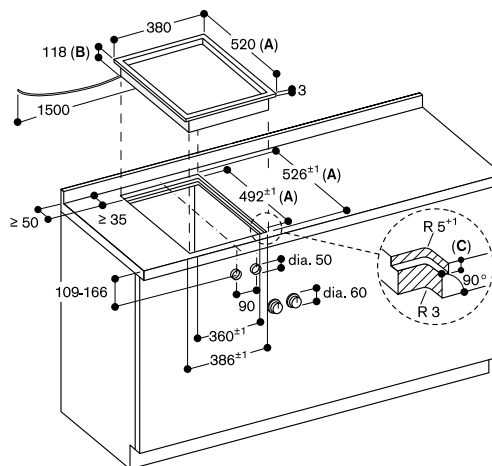

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
 B: 133 mm in the area of the cable clamp (left, on the rear side)
 C: 3.5^{±0.5}


measurements in mm

Installation of the control knob; flush installation

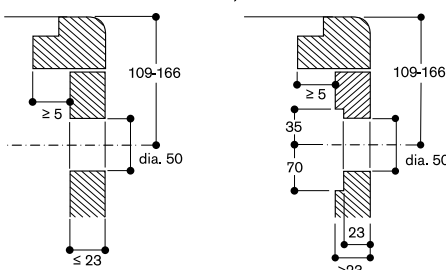

measurements in mm


View from above



A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm


Longitudinal section

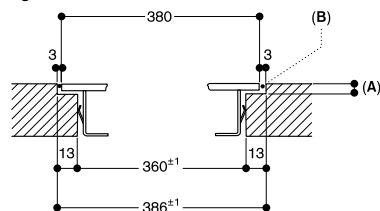

A: 3.5^{±0.5}
 B: Fill with silicone

measurements in mm

Cross-section

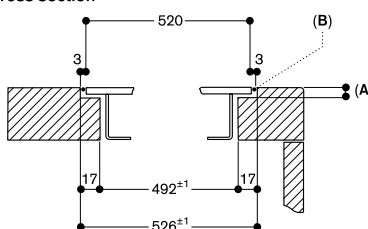

A: 3.5^{±0.5}
 B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

measurements in mm



VR 414 111
Stainless steel
Width 38 cm

Included in the price

- 1 cast pan, half size
- 1 grease collecting insert
- 2 cast grills
- 1 lava stone
- 1 cleaning brush

Installation accessories

VA 420 000
Connection strip for combination with other Vario appliances of the 400 series for flush mounting

VA 420 010
Connection strip for combination with other Vario appliances of the 400 series for surface mounting

VA 440 010
Stainless steel appliance cover with mounting strip

Special accessories

LV 030 000
Lava stone for refilling

VA 461 000
Cast pan, enamelled, half size
For Vario electric grill 400 series.
For simultaneous frying and grilling on two separate surfaces.

Combinable with:

Ceiling ventilation 400 series
Ceiling ventilation AC 250
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario electric grill 400 series

VR 414

- Two zones can be operated together or separately
- Cast pan, half size, for simultaneous frying and grilling on two separate surfaces
- Open cast grill, lava stone
- Solid stainless steel control knob
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic control in 12 output levels.

Features

Cooktop, lava stone trough and grease collecting insert from stainless steel. Two zones, each 1500 W, can be operated together as a complete surface or each half separately. Two-part cast grill.

Safety

Safety shut-off.
Pre-heat and residual heat indicator.

Planning notes


Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
If installing with the appliance cover VA 440 take into account the additional space required for the depth.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.


Please read additional planning notes on page 122 – 127.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. A minimum lateral clearance of at least 100 mm from adjacent heat-sensitive furniture or from the wall must be observed. Appliance can be snapped into the worktop from above. Appliance weight: approx. 26 kg.

Connection

Total connected load 3.0 kW.
Connecting cable 1.5 m without plug.




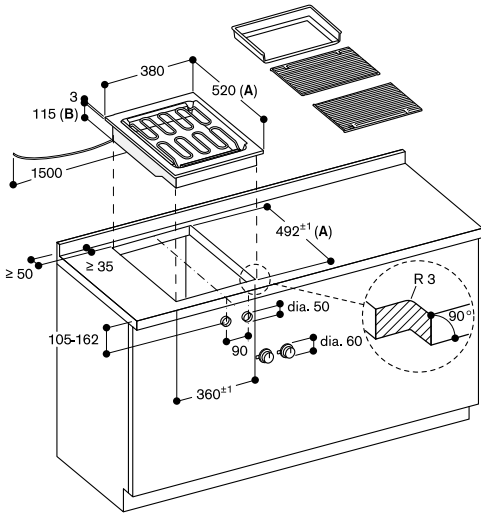


A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
 B: 130 mm in the area of the cable clamp (left, on the rear side)

measurements in mm

Installation of the control knob; surface mounting

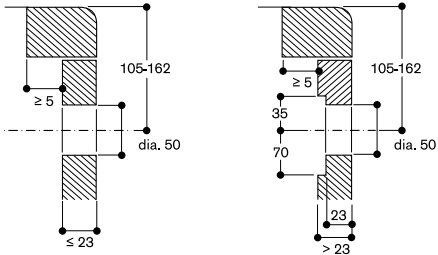


measurements in mm

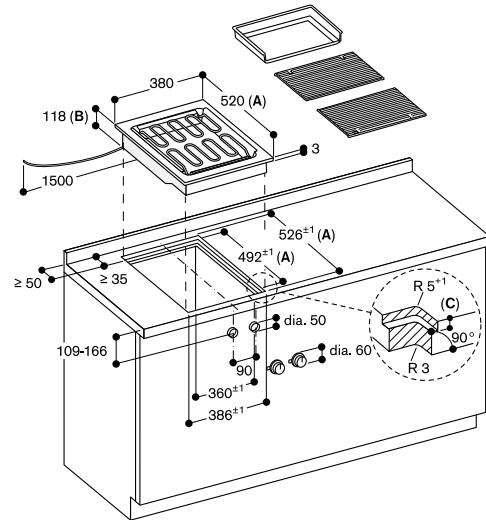

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
 B: 133 mm in the area of the cable clamp (left, on the rear side)
 C: 3.5^{±0.5}


measurements in mm

Installation of the control knob; flush installation

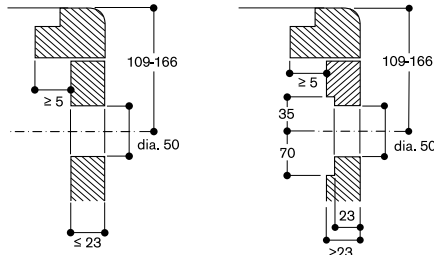

measurements in mm


View from above



A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm


Longitudinal section

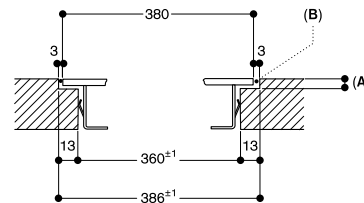

A: 3.5^{±0.5}
 B: Fill with silicone

measurements in mm

Cross-section

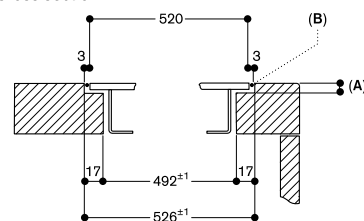

A: 3.5^{±0.5}
 B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

measurements in mm



VL 414 111
stainless steel
Width 11 cm
Air extraction / Air recirculation
Without motor and control knob

Necessary installation accessories

AA 490 111
Stainless steel control knob

AD 724 041
Round duct connection additional
adapter for VL 414 on the side
Metal zinc coated
Necessary for installation to left or
right side of VL.

AD 724 042
Connection piece for round pipe
DN 150 For VL 414
For installation to left or right side of
VL additional adapter AD 724 041 is
necessary.

AD 854 046
Flat duct system with guidance fins
Connecting piece VL 414 for DN 150 flat
Allows for long duct runs with highest
efficiency due to soft duct shape and
conducting fins within the duct bends
Compact installation height even with
DN 150 allows integration in floor
constructions

Installation accessories

VA 420 000
Connection strip for combination with
other Vario appliances of the
400 series for flush mounting

VA 420 010
Connection strip for combination with
other Vario appliances of the
400 series for surface mounting

Special accessories

AA 414 010
Ventilation moulding for VL 414 next to
gas appliance.

Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.

Combinable with:

Vario cooktops 400 series
VI 46x
VI 42x
VG 42x
VP 4xx
VR 4xx

Vario downdraft ventilation 400 series VL 414

- Highly efficient ventilation system at the cooktop
- Flexible power distribution, precise extraction of cooking vapours only at the open ventilation elements
- Can be combined perfectly with other Vario appliances of the 400 series
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Motorless, can be combined with Gaggenau BLDC remote fan units

Output

Power levels depend on the remote fan unit, see table on page 302 – 303.

Features

Manual opening of the ventilation element.
Closing element made of stainless steel, dishwasher-safe.
Metal grease filter, dishwasher-safe.
No connecting piece included.

Consumption data

Consumption data is referred to a configuration with the remote fan unit AR 403 122.
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 53.2 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class C.
Sound level min. 56 dB / max. 68 dB normal mode.

Planning notes

Refer to the table on page 299 for the matching remote fan units for air recirculation or air extraction mode.
Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.
For each VL one remote fan unit is recommended.
Maximum cooktop width between two VL: 60 cm.
Appliance can be snapped into the worktop from above. Additional fixing by clamps accessible from bottom up, clamping range 30-50 mm.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured.


Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
If operated next to gas appliances, the ventilation moulding AA 414 010 is recommended to ensure maximum performance of the cooktop.
If installed next to gas appliances, flat ducts must not be used for the piping up to the fan unit.
If installed next to VP 414, the flat duct must not be positioned underneath the VP 414.

Please read additional planning notes on page 238 – 241.

Please read the installation details regarding air ducting on page 206.

Connection

Connection cable 2.0 m between ventilation element VL 414 and control knob AA 490.

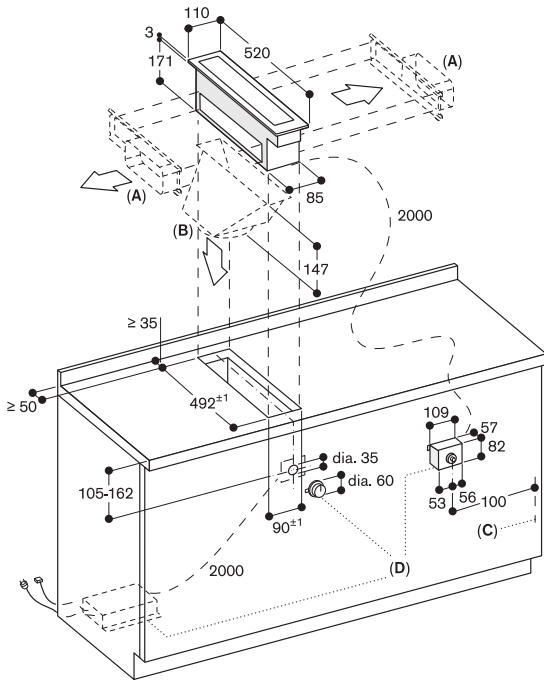


- A: DN 150 flat duct pipe connection piece, left/right with AD 854 046 or DN 150 round duct pipe connection piece, left/right with AD 724 042 + AD 724 041
- B: DN 150 round duct pipe connection piece, bottom with AD 724 042
- C: Cable access, right-hand side
- D: Vario ventilation control knob AA 490



See separate planning notes for
 - Positioning the control knob
 - Configuring the flexible power distribution

measurements in mm

VL 414 with AD 724 042/041

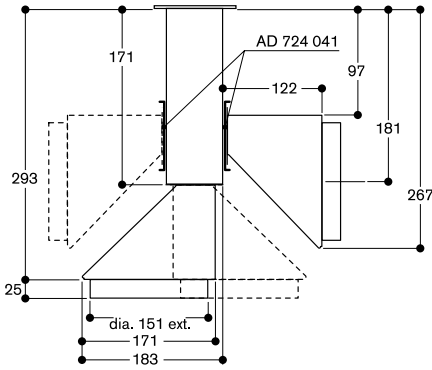

AD 854 046

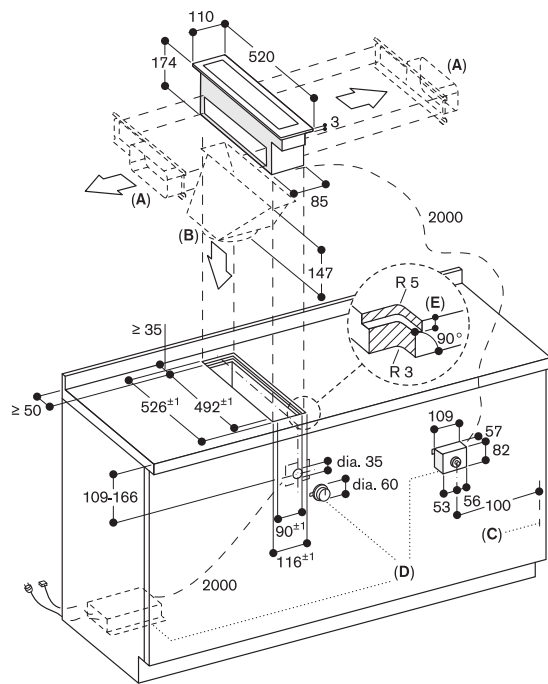


- A: DN 150 flat duct pipe connection piece, left/right with AD 854 046 or DN 150 round duct pipe connection piece, left/right with AD 724 042 + AD 724 041
- B: DN 150 round duct pipe connection piece, bottom with AD 724 042
- C: Cable access, right-hand side
- D: Vario ventilation control knob AA 490
- E: 3.5°^{0.5}

See separate planning notes for
 - Positioning the control knob
 - Configuring the flexible power distribution


measurements in mm

View from above



measurements in mm


Cross-section

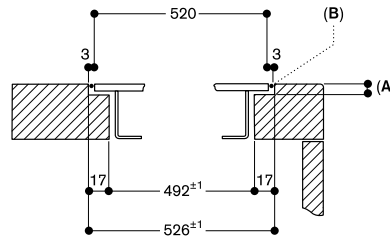

- A: 3.5°^{0.5}
- B: Fill with silicone

measurements in mm

Longitudinal section

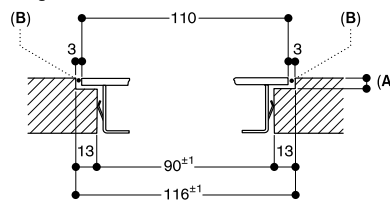

- A: 3.5°^{0.5}
- B: Fill with silicone

measurements in mm



AA 490 111
stainless steel

Special accessories

AA 400 510
Window contact switch
Can be combined with motorless
appliances 400 series.

Vario control knob ventilation 400 series AA 490

- Solid stainless steel control knob
- Can be combined perfectly with other Vario appliances of the 400 series
- Motorless, can be combined with Gaggenau BLDC remote fan units

Handling

Control knob with illuminated ring and output marking.

Features


3 electronically controlled power levels and 1 intensive mode.
Run-on function, 6 min.

Planning notes

The separate electronics housing is to be installed so that it is accessible.
Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 10 W.
Connecting cable 1.8 m, pluggable.

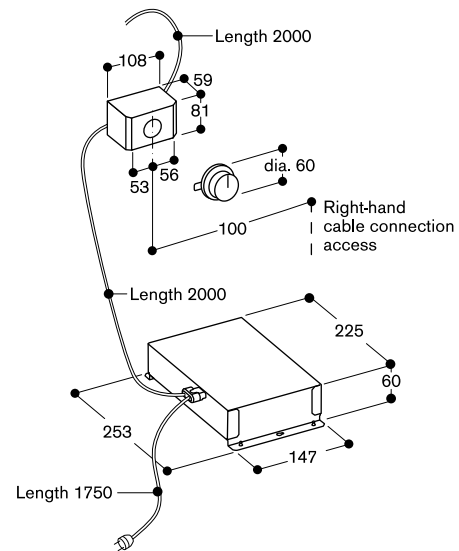



AL 400 121
Stainless steel
Width 120 cm
Air extraction / Air recirculation
Motorless
AL 400 191
Stainless steel
Width 90 cm
Air extraction / Air recirculation
Motorless

Necessary installation accessories
AD 754 045
Connection piece for 2 aluflex pipes DN 150 round
Fitting AL 400, front or back side.
AD 854 043
Connecting piece for 2 flat ducts DN 150
Fitting AL 400, bottom side.
AD 854 045
Connecting piece for 2 flat ducts DN 150
Fitting AL 400, front or back side.

Installation accessories
AA 010 410
Air exhaust grille air recirculation
Stainless steel-coloured, 90 cm, including installation fittings, height adjustable.
AA 409 401
Furniture support for table ventilation AL 400 90 cm
Can be combined with table ventilation AL 400.
Recommended as bearer for the worktop, instead of a cabinet frame.
AA 409 431
Furniture support for table ventilation AL 400 120 cm
Can be combined with table ventilation AL 400.
Recommended as bearer for the worktop, instead of a cabinet frame.

AD 704 048
Air collector box DN 150 round pipe 2 x DN 150 round duct air intake.
To connect 1x AL 400 to AR 403 / AR 413 or AR 401.
AD 704 049
Air collector box DN 150 flat duct 2 x DN 150 flat duct air intake.
To connect 1 x AL 400 to remote fan AR 403/AR 413 bottom side.

Special accessories
AA 400 510
Window contact switch
Can be combined with motorless appliances 400 series and Vario downdraft ventilation 200 series.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:
All Vario cooktops 400 series
All cooktops 400 series
Cooktops 200 series
CI 2xx, CE 2xx

Good to know:
The hood can be as large as the cooktop(s).

Table ventilation 400 series
AL 400

- Extendable table ventilation, when not in use can be completely lowered into the worktop
- Can be combined perfectly with other Vario appliances of the 400 series
- Dimmable, neutral white surface LED light for ideal illumination of the cooktop
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Motorless, can be combined with Gaggenau BLDC remote fan units

Output
Power levels depend on the remote fan unit, see table on page 302 – 303.

Features
3 electronically controlled power levels and 1 intensive mode.
Interval ventilation, 6 min.
Run-on function, 6 min.
Grease filter saturation indicator.
Cartridge-type filter, dishwasher-safe.
Neutral white surface LED light (3600 K), continuously dimmable.
Lamp output 4x 5 W.
Illuminance 191 lx.
Spare covers for closing air outlets.
No connecting piece included.


Consumption data
Consumption data is referred to a configuration AL 400 191 with the remote fan unit AR 400 142.
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 45.5 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class E.
Grease filter efficiency class C.
Sound level min. 45 dB / max. 61 dB normal mode.

Planning notes
Refer to the table on page 298 for the matching remote fan units for air recirculation or air extraction mode.
Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.
Connection to the respective appliances via network cable.
AL 400 121 (AL 400 191)
For operation with 4 (3) Vario 200 series cooktops, 3 (2) Vario 400 series cooktops or a cooktop configuration of up to 120 cm (92 cm) wide.
Operation of Vario cooking appliances only possible without appliance cover.
Max. output of cooktops 18 kW.
In combination with the cooktop CI 290, installation in 60 cm deep worktops is possible.
Installation is possible in worktops made of stone, synthetics or solid wood.
Heat resistance and watertight sealing of the cut edges must be observed.
Concerning other materials please consult the worktop manufacturer.

The remaining surface of the worktop (min. 50 mm) between the cut-outs must be reinforced with a support. It is recommended to use furniture support AA 409 401/431.
Ovens that do not exceed the maximum allowed cabinet temperature can be combined with the table ventilation if built-in situation permits.
To avoid smoke when frying/grilling refer to the manuals of VR/VP.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Please read additional planning notes on page 230 – 232.


Connection
Total connected load 65 W
Connecting cable 1.7 m, pluggable.
Network cable 1.2 m.

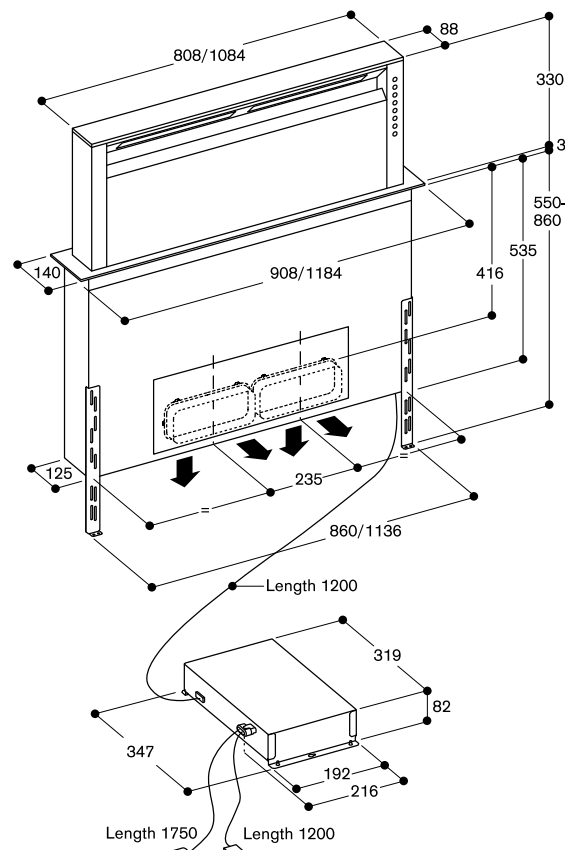


Pipe connection piece 2 x DN 150 front/rear
Flat duct using AD 854 045
Round duct using AD 754 045

Pipe connection piece 2 x DN 150 bottom
Flat duct using AD 854 043


AL 400 connection positions DN 150

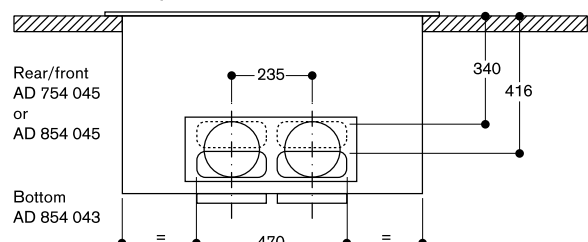


AA 010 410 air exhaust grille

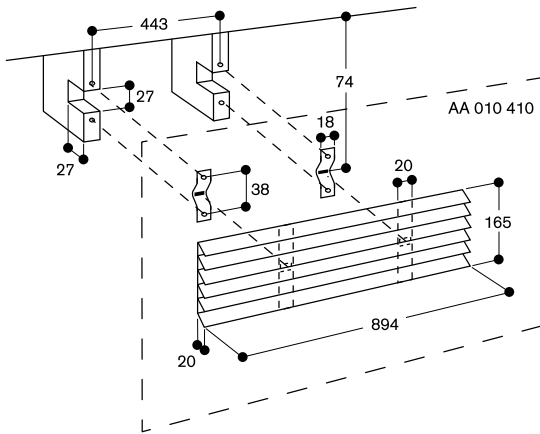


AD 754/854 045 and AD 854 043

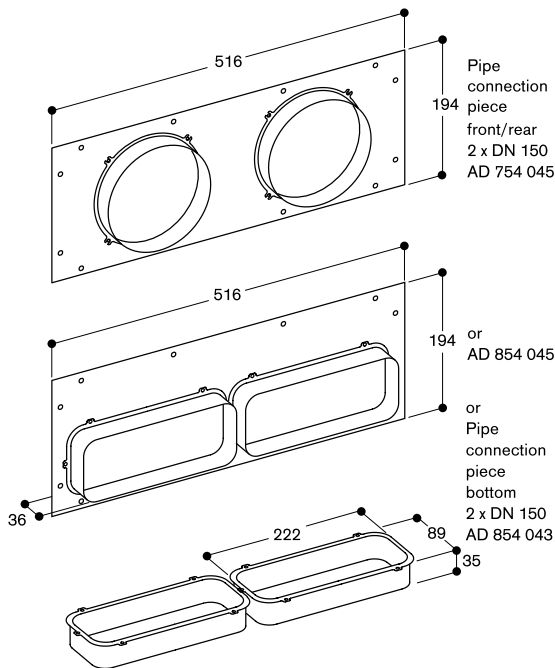


AA 409 401/431 furniture support

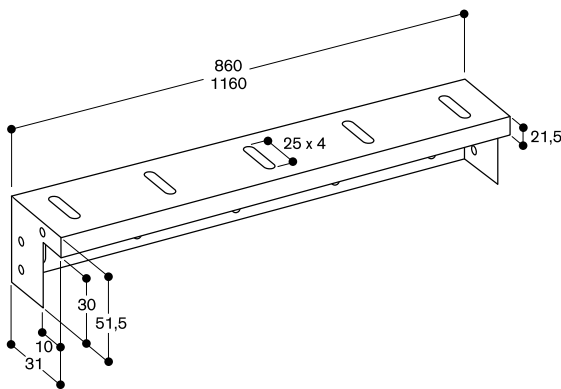


AL 400 installed flush

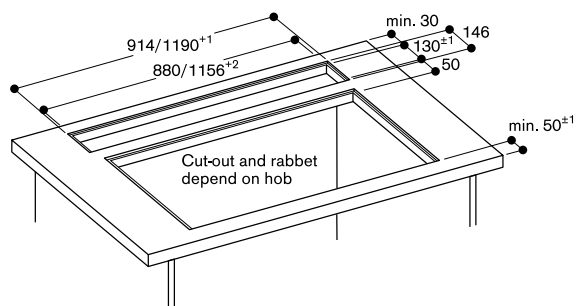


Longitudinal section

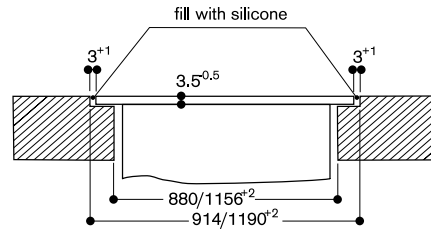


Cross-section

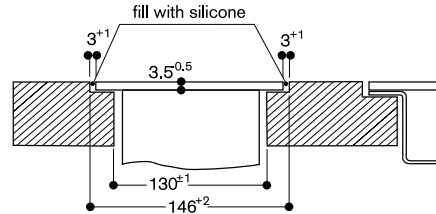


AL 400 cut-out flush-mounted

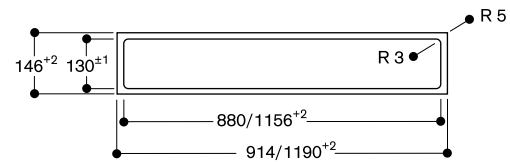

AL 400 cut-out for surface mounting



Cross-section of upper cabinet for AL 400 (without back wall) with AR 413; connection at the bottom



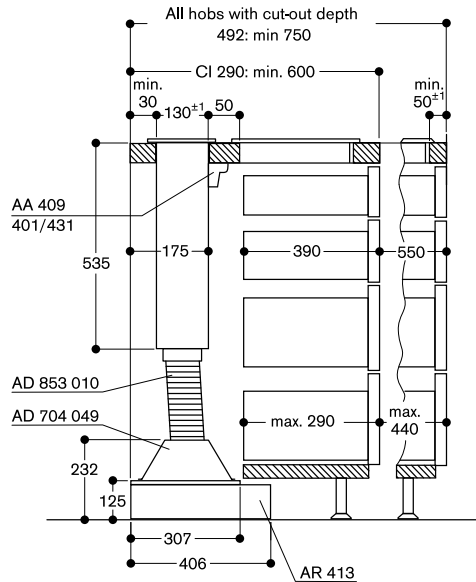


Cut-out dimensions for appliance combinations in the 400 series. Surface mounting.


The drawings listed below show the cut-out dimensions for appliance combinations in the 400 series for a surface mounting. While taking into consideration the previous page and the drawings specified below, the installer can define the suitable cut-out dimensions. The combinations listed here are only sample combinations.

The connection strip VA 420 010 must be provided for surface mounting combinations.


Sample combinations without VL 414 ventilation element:

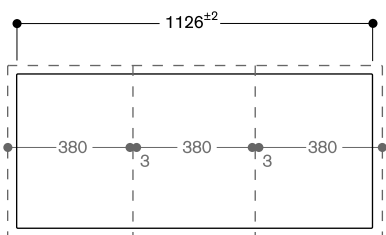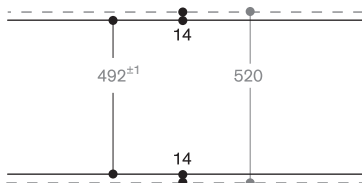

380	Appliance
3	Connection strip
380	Appliance
3	Connection strip
380	Appliance
1146	
-20	Overhang
1126 ^{±2}	Cut-out


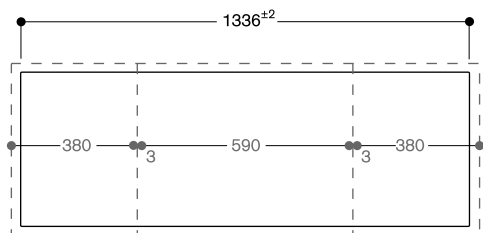


380	Appliance
3	Connection strip
590	Appliance
3	Connection strip
380	Appliance
1356	
-20	Overhang
1336 ^{±2}	Cut-out

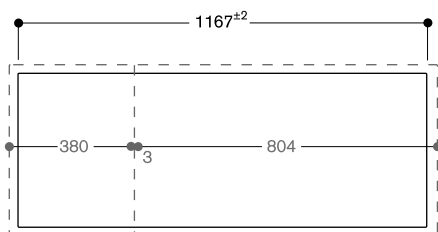


380	Appliance
3	Connection strip
804	Appliance
1187	
-20	Overhang
1167 ^{±2}	Cut-out


Sample combinations with VL 414 ventilation element:

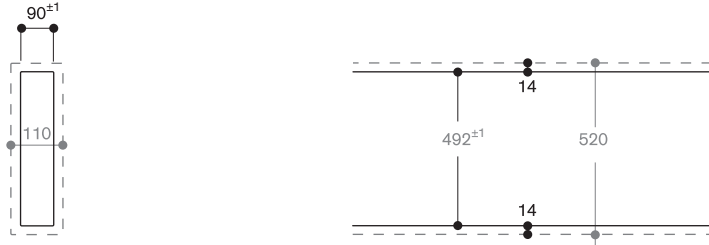

380	Appliance
3	Connection strip
110	VL
3	Connection strip
380	Appliance
<hr/>	
876	
-20	Overhang
856±2	Cut-out

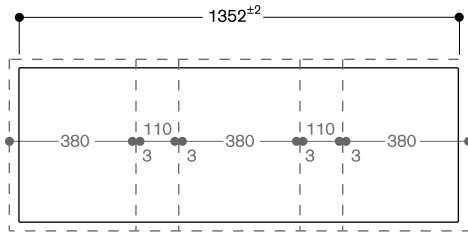

380	Appliance
3	Connection strip
110	VL
3	Connection strip
380	Appliance
3	Connection strip
110	VL
3	Connection strip
380	Appliance
<hr/>	
1372	
-20	Overhang
1352±2	Cut-out

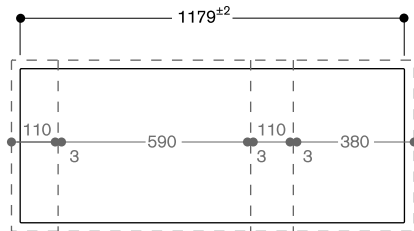




110	VL
3	Connection strip
590	Appliance
3	Connection strip
110	VL
3	Connection strip
380	Appliance
<hr/>	
1199	
-20	Overhang
1179±2	Cut-out

Cut-out dimensions for appliance combinations in the 400 series. Flush mounting.


The drawings listed below show the cut-out dimensions for appliance combinations in the 400 series for a flush mounting. While taking into consideration the previous page and the drawings specified below, the installer can define the suitable cut-out dimensions. The combinations listed here are only sample combinations.

The connection strip VA 420 000 must be provided for flush mounted combinations.


Sample combinations without VL 414 ventilation element:

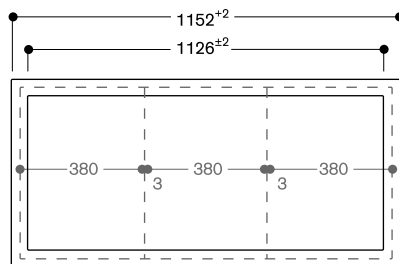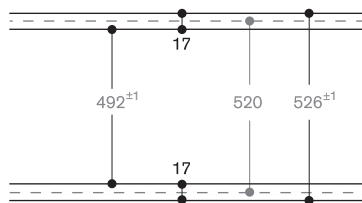

380	Appliance
3	Connection strip
380	Appliance
3	Connection strip
380	Appliance
<hr/>	
1146	
-20	Overhang
1126±2	Cut-out
+20	Overhang
+6	Silicone joint
1152±2	Cut-out with groove



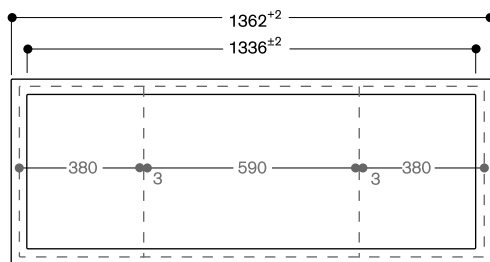


380	Appliance
3	Connection strip
590	Appliance
3	Connection strip
380	Appliance
<hr/>	
1356	
-20	Overhang
1336±2	Cut-out
+20	Overhang
+6	Silicone joint
1362±2	Cut-out with groove

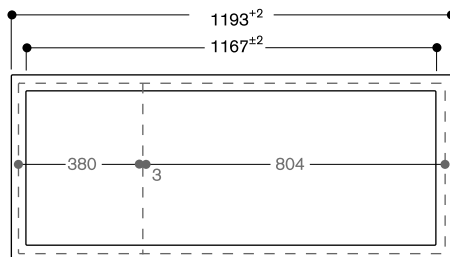


380	Appliance
3	Connection strip
804	Appliance
<hr/>	
1187	
-20	Overhang
1167±2	Cut-out
+20	Overhang
+6	Silicone joint
1193±2	Cut-out with groove


Sample combinations with VL 414 ventilation element:

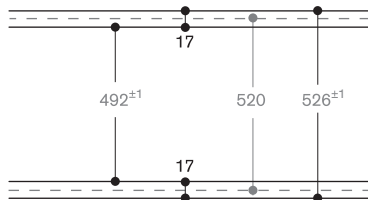

380	Appliance
3	Connection strip
110	VL
3	Connection strip
380	Appliance
<hr/>	
876	
-20	Overhang
<hr/>	
856±2	Cut-out
+20	Overhang
+6	Silicone joint
<hr/>	
882±2	Cut-out with groove

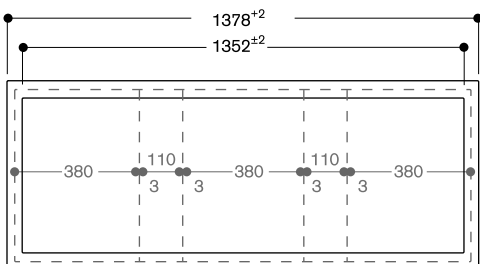

380	Appliance
3	Connection strip
110	VL
3	Connection strip
380	Appliance
3	Connection strip
110	VL
3	Connection strip
380	Appliance
<hr/>	
1372	
-20	Overhang
<hr/>	
1352±2	Cut-out
+20	Overhang
+6	Silicone joint
<hr/>	
1378±2	Cut-out with groove

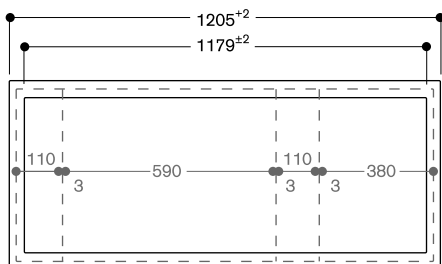


110	VL
3	Connection strip
590	Appliance
3	Connection strip
110	VL
3	Connection strip
380	Appliance
<hr/>	
1199	
-20	Overhang
<hr/>	
1179±2	Cut-out
+20	Overhang
+6	Silicone joint
<hr/>	
1205±2	Cut-out with groove

All measurements in mm.

Cut-out dimensions for appliance combinations in the 400 series. Calculator for calculating the width of the cut-out.

Calculation of the width of the cut-out for a surface mounting

Example using a combination of VI 414, VI 422, VP 414 and 2 VL 414.

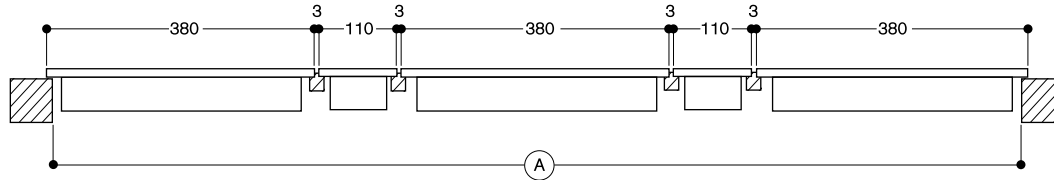


		Example		Your combination
Total width of all appliances	in mm	$(3 \times 380) + (2 \times 110)$	1.360
+ Number of connection strips	x 3 mm	4 x 3	+ 12
- Lateral appliance projection	(10 mm / side)	20	- 20	- 20
(A) Total width of the cut-out	(in mm)		1.352 +/- 2 +/- 2

Cut-out depth based on the installation situation with or without appliance cover/filler strip.

Calculation of the width of the cut-out for a flush mounting

Example using a combination of VI 414, VI 422, VP 414 and 2 VL 414.

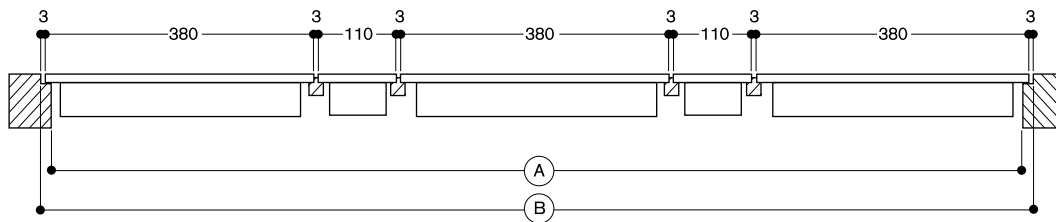


		Example		Your combination
Total width of all appliances	in mm	$(3 \times 380) + (2 \times 110)$	1.360
+ Number of connection strips	x 3 mm	4 x 3	+ 12
- Lateral appliance projection	(10 mm / side)	20	- 20	- 20
(A) Total width of the cut-out	(in mm)		1.352 +/- 2 +/- 2
+ Lateral appliance projection	(10 mm / side)	20	+ 20	+ 20
+ Silicone joint (3 mm circumference)		2 x 3	+ 6	+ 6
(B) Total width with groove	(in mm)		1.378 + 2 0/+ 2

Cut-out depth based on the installation situation with or without appliance cover/filler strip.


If installing with the VA 440 appliance cover, take into account the additional space required for the depth. Furthermore, you must ensure that there is an asymmetrical alignment in the cut-out depth.

Installation with appliance cover, surface mounting

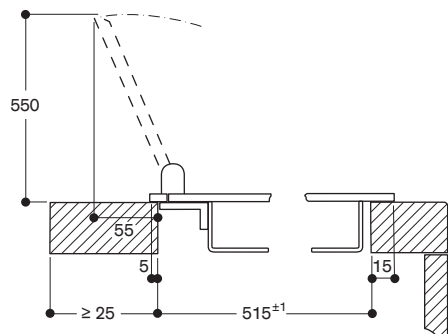

measurements in mm


Installation with appliance cover, flush mounting

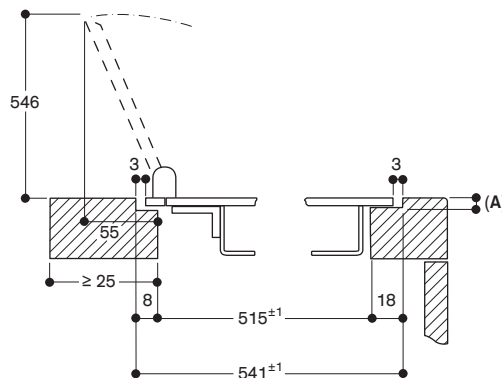

A: 3.5^{0.5}


measurements in mm

Installation with appliance cover, surface mounting

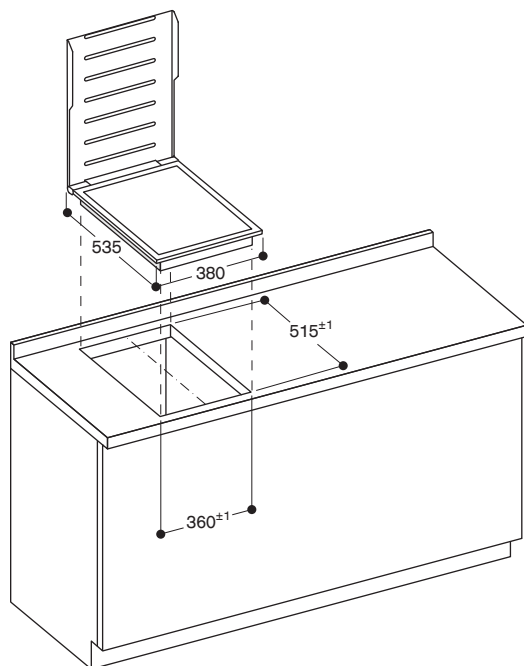

measurements in mm

Installation with appliance cover, flush mounting

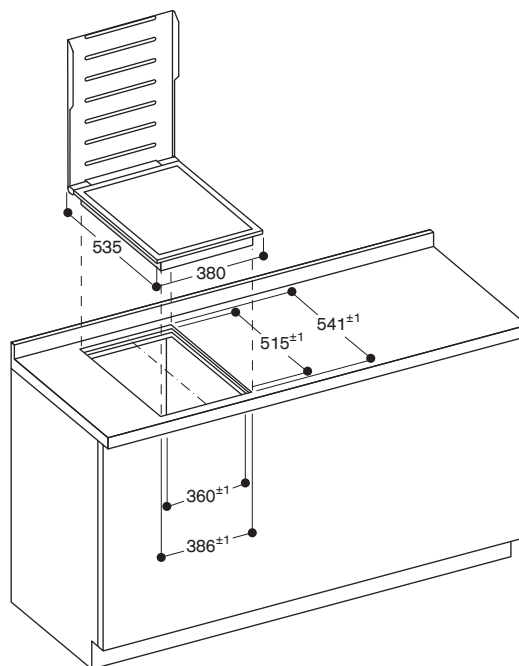

measurements in mm



VI 262 120

Black control panel
Width 60 cm

Included in the price

1 glass scraper

Installation accessories

VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series

VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario flex induction cooktop 200 series VI 262

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation

Cooking zones

2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring.
Integrated control panel.
Electronic power control in 9 output levels.

Features

Cooking area marking.
Flex function for rectangular cooking areas.
Frying sensor function.
Pot detection.
Booster function for each cooking area.

Safety

Residual heat indication.
Operation indicator.
Safety shut-off.

Planning notes



Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 206.


Please read additional planning notes on page 136.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.

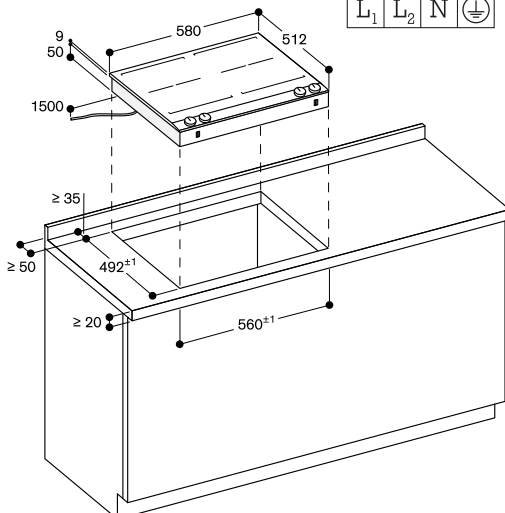

measurements in mm



VI 242 120

Black control panel
Width 38 cm

Included in the price

1 glass scraper

Installation accessories

VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series

VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario flex induction cooktop 200 series VI 242

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation

Cooking zones

2 flex induction cooking areas 19x24 cm (2200 W, with booster 3700 W), linked together 38x24 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring.
Integrated control panel.
Electronic power control in 9 output levels.

Features

Cooking area marking.
Flex function for rectangular cooking areas.
Frying sensor function.
Pot detection.
Booster function for both cooking areas.

Safety

Residual heat indication.
Operation indicator.
Safety shut-off.

Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 9 kg.

Please read the installation details regarding air ducting on page 206.

Please read additional planning notes on page 136.

Connection

Total connected load 3.7 kW.
Connecting cable 1.5 m without plug.

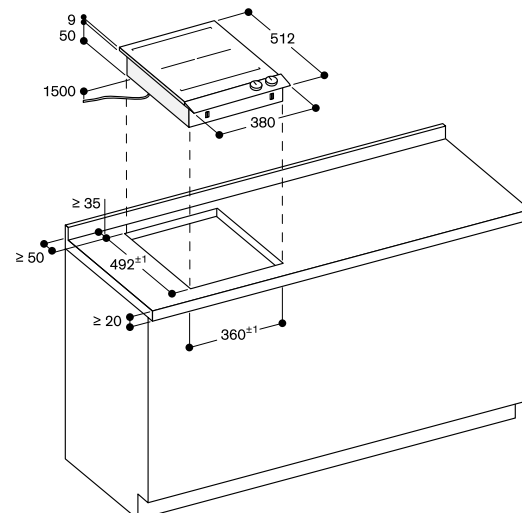

measurements in mm



VI 232 120

Black control panel
Width 28 cm

Included in the price

1 glass scraper

Installation accessories

VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series

VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

VD 200 020

Black appliance cover

Combinable with:

Ceiling ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario flex induction cooktop 200 series

VI 232

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation

Cooking zones

2 flex induction cooking areas 19x21 cm (2200 W, with booster 3700 W), linked together 38x21 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring.
Integrated control panel.
Electronic power control in 9 output levels.

Features

Cooking area marking.
Flex function for rectangular cooking areas.
Frying sensor function.
Pot detection.
Booster function for both cooking areas.

Safety

Residual heat indication.
Operation indicator.
Safety shut-off.

Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 9 kg.

Please read the installation details regarding air ducting on page 206.

Please read additional planning notes on page 136.

Connection

Total connected load 3.7 kW.
Connecting cable 1.5 m without plug.

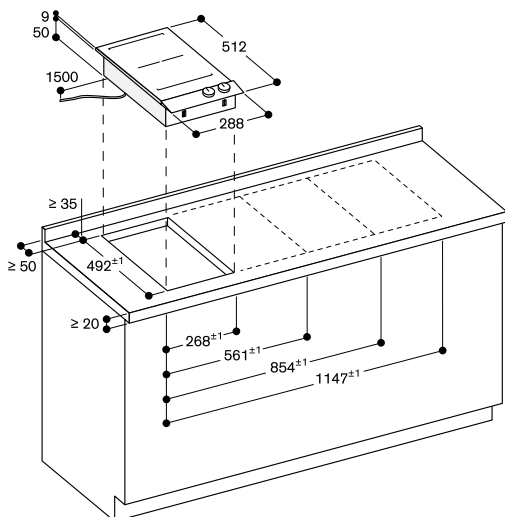

measurements in mm



VG 264 120F

Black control panel
Width 60 cm
Liquid gas 28 – 37 mbar

VG 264 220

Black control panel
Width 60 cm
Natural gas 20 mbar

Installation accessories

VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series

VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series

Combinable with:

Ceiling ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario gas cooktop 200 series

VG 264

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
- Solid smooth-surface cast pan supports for easy and safe positioning of cookware
- Up to 9.8 kW on 4 burners

Cooking zones

2 high output burner (560 W - 3000 W), suitable for pots up to max. \varnothing 22 cm.
2 standard burners (380 W – 1900 W), suitable for pots up to max. \varnothing 20 cm.

Handling

Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features

Two-part cast iron pan support with continuous pot surface.
Enamelled burner cover.

Safety

Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.

Planning notes

VG 264 120F

Special nozzles for natural gas 20 mbar can be ordered as spare parts.

VG 264 220


Special nozzles for liquid gas 28-30/37 mbar can be ordered as spare parts.

Special nozzles for natural gas 20 mbar can be ordered as spare parts.
No intermediate shelf required.
Appliance can be snapped into the worktop from above.
A minimum lateral clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
Appliance weight: approx. 16 kg.

Please read additional planning notes on page 136.

Connection


Total connected load gas 9.8/9.8 kW.
Total connected load electric 10.0/10.0 W.
Connecting cable 1.5 m with plug.

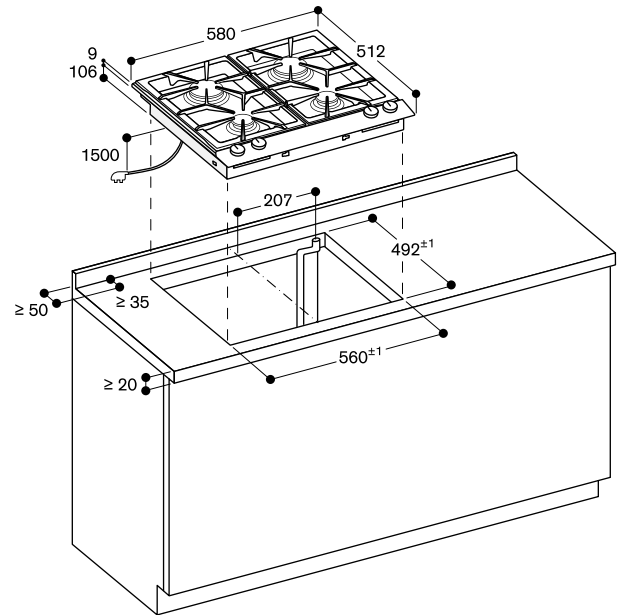

Minimum distance from the appliance cut-out to the side wall 150 mm.

measurements in mm

Gas connection

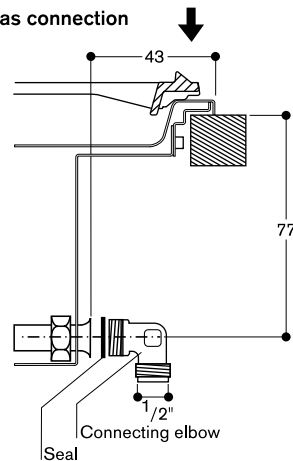



VG 231 120F
 Black control panel
 Width 28 cm
 Liquid gas 28 – 37 mbar
 Wok burner with up to 5.8 kW

VG 231 220
 Black control panel
 Width 28 cm
 Natural gas 20 mbar
 Wok burner with up to 6 kW

Included in the price
 1 wok attachment ring

Installation accessories
VV 200 010
 Stainless steel connection strip for combination with other Vario appliances of the 200 series

VV 200 020
 Black connection strip for combination with other Vario appliances of the 200 series

Special accessories
VD 200 020
 Black appliance cover

WP 400 001
 Wok pan made of multiple-layer material
 With round bottom and handle,
 ø36 cm, 6 litres, height 10 cm.

Combinable with:
 Ceiling ventilation 400 and 200 series
 Island- and wall-mounted hood 400 series
 Downdraft ventilation 400 series
 Flat kitchen hood 200 series
 Canopy extractor 200 series

Good to know:
 the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario gas wok 200 series
VG 231

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
- Multi-ring burner of solid, heat-resistant brass as used in professional kitchen
- Total output up to 6 kW

Cooking zones
 VG 231 120F
 1 multi-ring wok burner (300 W – 5800 W), suitable for pots up to max. ø30 cm.

VG 231 220
 1 multi-ring wok burner (300 W – 6000 W), suitable for pots up to max. ø30 cm.

Handling
 Control knobs with illuminated ring.
 Integrated control panel.
 One-handed operation.
 Electric ignition.
 To close the cover, the cast iron pan support can be easily reversed.

Features
 Cast iron pan support.
 Brass burner rings.

Safety
 Thermoelectric safety pilot.
 Residual heat indication.
 Operation indicator.


Planning notes
 VG 231 120F
 Special nozzles for natural gas 20 mbar can be ordered as spare parts.

VG 231 220
 Special nozzles for liquid gas 28-30/37 mbar can be ordered as spare parts.


Special nozzles for natural gas 20 mbar can be ordered as spare parts.
 Appliance can be snapped into the worktop from above.
 A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
 With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
 Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
 Appliance weight: approx. 11 kg.

Please read additional planning notes on page 136.

Connection
 Total connected load gas 5.8/6.0 kW.
 Total connected load electric 10.0/10.0 W.
 Connecting cable 1.5 m with plug.

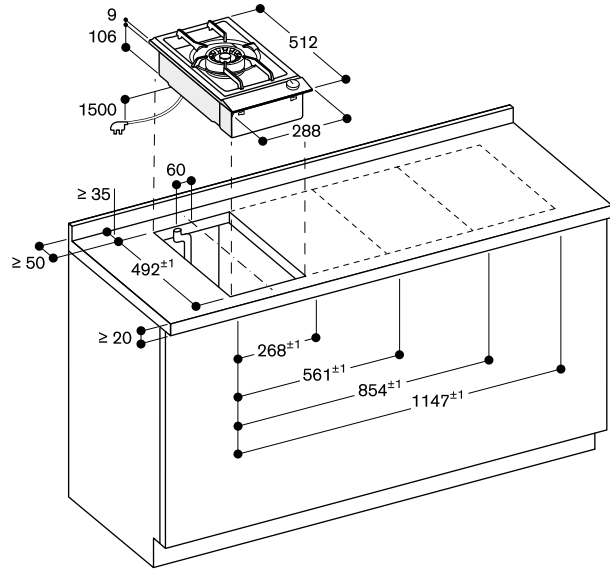

Minimum distance from the appliance cut-out to the side wall 150 mm.
 measurements in mm

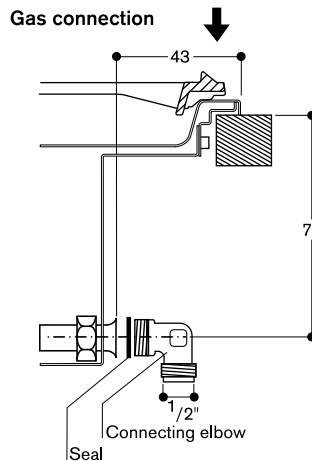



VG 232 120F

Black control panel
Width 28 cm
Liquid gas 28 – 37 mbar

VG 232 220

Black control panel
Width 28 cm
Natural gas 20 mbar

Installation accessories

VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series

VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series

Special accessories

VD 200 020

Black appliance cover

Combinable with:

Ceiling ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario gas cooktop 200 series

VG 232

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
- Solid smooth-surface cast pan supports for easy and safe positioning of cookware

Cooking zones

1 high output burner (560 W - 3000 W), suitable for pots up to max. \varnothing 22 cm.
1 standard burner (380 W – 1900 W), suitable for pots up to max. \varnothing 20 cm.

Handling

Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features

Cast pan support with continuous pot surface.
Enamelled burner cover.

Safety

Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.

Planning notes

VG 232 120F
Special nozzles for natural gas 20 mbar can be ordered as spare parts.

VG 232 220


Special nozzles for liquid gas 28-30/37 mbar can be ordered as spare parts.

Special nozzles for natural gas 20 mbar can be ordered as spare parts.
Appliance can be snapped into the worktop from above.
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
Appliance weight: approx. 9 kg.

Please read additional planning notes on page 136.

Connection


Total connected load gas 4.9/4.9 kW.
Total connected load electric 10.0/10.0 W.
Connecting cable 1.5 m with plug.

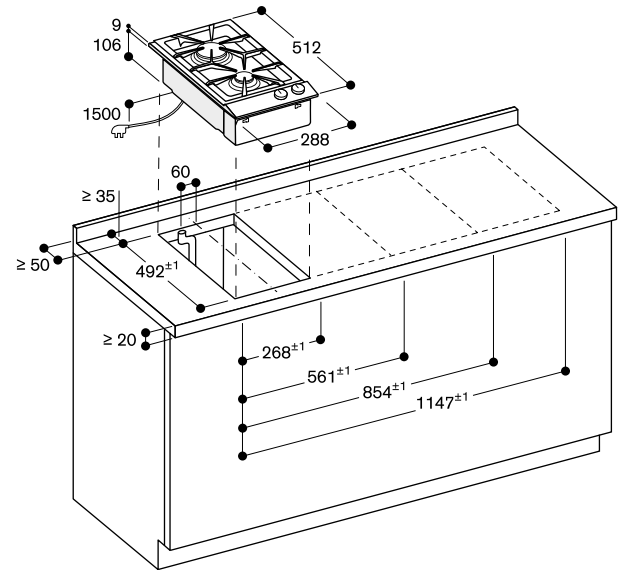

Minimum distance from the appliance cut-out to the side wall 150 mm.

measurements in mm

Gas connection

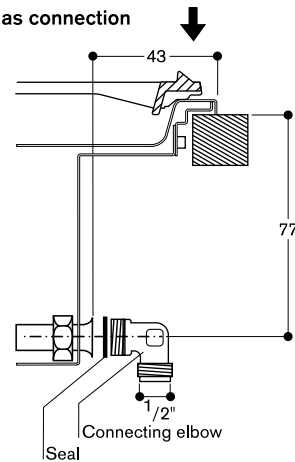



VP 230 120
Black control panel
Width 28 cm

Included in the price
2 spatula

Installation accessories
VV 200 010
Stainless steel connection strip for combination with other Vario appliances of the 200 series
VV 200 020
Black connection strip for combination with other Vario appliances of the 200 series

Special accessories
VD 200 020
Black appliance cover

Combinable with:
Ceiling ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Downdraft ventilation 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:
the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario Teppan Yaki 200 series
VP 230

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation
- Cooking directly on the metal surface, without any pots or pans
- Exact temperature control up to 240 °C
- Keeping warm setting

Cooking zones
Useable area: 844 cm².

Handling
Control knobs with illuminated ring.
Integrated control panel.
Electronic temperature control from 140 °C to 240 °C.


Features
Heating element with 1800 W.
Keeping warm setting.
Cleaning stage.
Stainless steel frame seamlessly welded with the stainless steel surface.

Safety
Pre-heat and residual heat indicator.
Operation indicator.
Safety shut-off.

Planning notes
The distance from the upper edge of the work surface to the upper edge of the intermediate shelf must be at least 150 mm.
Appliance can be snapped into the worktop from above.
A minimum lateral clearance of at least 30 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
Intermediate shelf required; after installation, this shelf must only be removed using tools to guarantee the touch protection from below.
Appliance weight: approx. 9 kg.

Please read additional planning notes on page 136.

Connection
Total connected load 1.8 kW.
Connecting cable 1.8 m without plug.

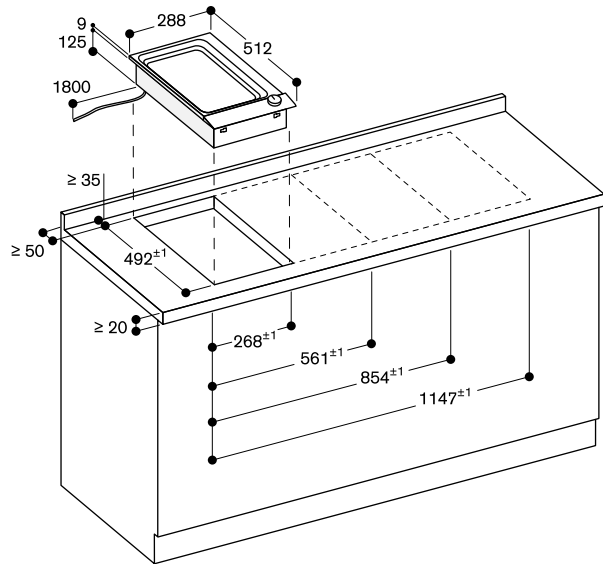

measurements in mm



VR 230 120

Black control panel
Width 28 cm

Included in the price

- 1 grease collecting insert
- 1 cast grill
- 1 lava stone
- 1 cleaning brush

Installation accessories

VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series

VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series

Special accessories

LV 030 000

Lava stone for refilling

VD 200 020

Black appliance cover

Combinable with:

- Ceiling ventilation 400 series
- Ceiling ventilation AC 250
- Island- and wall-mounted hood 400 series
- Flat kitchen hood 200 series
- Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Vario electric grill 200 series

VR 230

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Control panel for comfortable and secure operation
- 2 zones, separately controlled
- Open cast grill, lava stone

Handling

Control knobs with illuminated ring.
Integrated control panel.
9 switching levels.

Features

2 separately controllable swing-out grilling elements (1500 W).
Join function.
Cast grill.
Stainless steel lavastone container and grease collecting insert, dishwasher-safe.

Safety

Pre-heat and residual heat indicator.
Operation indicator.
Safety shut-off.


Planning notes

Appliance can be snapped into the worktop from above.
A minimum clearance of at least 200 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
Appliance weight: approx. 17 kg.

Please read additional planning notes on page 136.

Connection

Total connected load 3.0 kW.
Connecting cable 1.8 m without plug.

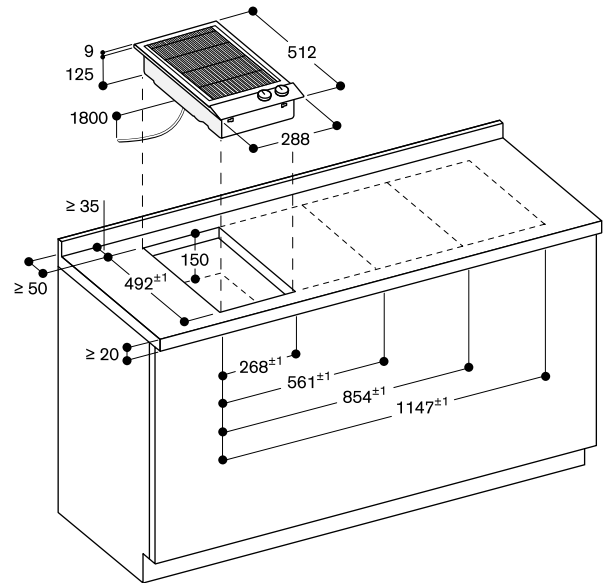

measurements in mm



VL 200 120
 Black control panel
 Width 15 cm
 Air extraction / Air recirculation
 Motorless

Installation accessories
AD 410 040
 Flexibel connecting piece for VL 200
 DN 150 flat

AD 851 041
 Connecting piece VL 200 for extension
 with flat duct DN 150 for extra deep
 worktop

VV 200 010
 Stainless steel connection strip for
 combination with other Vario
 appliances of the 200 series

VV 200 020
 Black connection strip for combination
 with other Vario appliances of the
 200 series

Special accessories
LS 041 001
 Ventilation moulding for VL200 next to
 gas appliance
 Stainless steel

**Installation accessories for the air
 recirculation ducts you will find at the
 pages 282 – 294.**

Combinable with:
 Vario cooktops 200 series
 VI 23x
 VI 26x
 VG 232
 VG 26x
 VP 23x
 VR 23x
 VP 2xx

**Vario downdraft ventilation 200 series
 VL 200**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Highly efficient ventilation system at the cooktop integrated in the worktop
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Minimal planning and easy installation
- Low-noise system with the motor AR410 110
- Air extraction or air recirculation system

Output
 Power levels depend on the remote fan unit, see table on page 302 – 303.

Features
 Control knobs with illuminated ring.
 3 electronically controlled power levels and 1 intensive mode.
 Automatic function with sensor-controlled run-on function.
 Large-scale metal grease filter with high grease absorption.
 Grease filter, dishwasher-safe.
 Grease filter and activated charcoal filter saturation indicator.
 Airflow-optimised interior for efficient air circulation.
 Interval ventilation, 6 min.
 Enamelled ventilation grille, dishwasher-safe.
 Air exhaust bend included in delivery.
 Overflow 250 ml capacity.

Consumption data
 Consumption data is referred to a configuration with the remote fan unit AR 403 122.
 Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
 Energy consumption 48.3 kWh/year.
 Ventilation efficiency class A.
 Illumination efficiency class -.
 Grease filter efficiency class B.
 Sound level min. 56 dB / max. 71 dB normal mode.


Planning notes
 Air recirculation mode in combination with remote fan unit with AR 410 110 or AR 413 122.
 Air extraction in combination with remote fan unit AR 400 142, AR 401 142 or AR 403 122.
 Please refer to page 306 for recommended configurations of downdraft ventilations and remote fan units and the needed ducting elements.
 For each VL one remote fan unit is recommended.
 Maximum cooktop width between 2 VL: 60 cm.
 If installed next to gas appliances, the ventilation moulding LS041 001 is recommended to ensure maximum performance of the cooktop.
 When having installed the ventilation moulding LS 041 001 the wok pan WP400 001 can not be used.
 Air recirculation is not recommended in combination with Vario electric grill.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


Please read additional planning notes on page 136.

Please read the installation details regarding air ducting on page 262 – 265.


Connection
 Connecting cable 1.7 m between VL and remote fan unit.

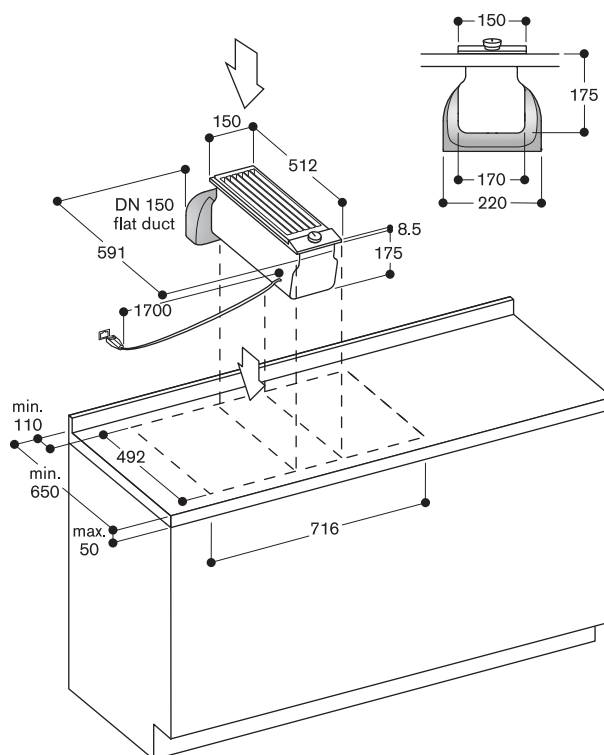

AD 410 040: Flexibel connecting piece for VL 200, DN 150 flat

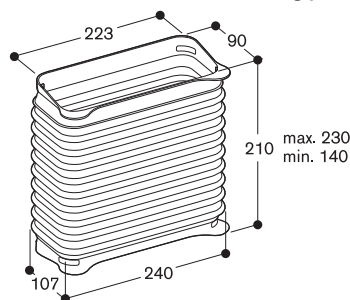

AD 851 041: Connecting piece VL 200 for extension with flat duct DN 150 for extra deep worktop




Cut-out dimensions for cooktop combinations in the 200 series


The drawings below show the cut-out dimensions for cooktop combinations of the 200 series. The technician can find the suitable cut-out dimensions for the combinations most frequently used by referring to the previous pages and the drawings below.

Cut-out dimensions for the Vario 200 series


288	Appliance
- 20	Overhang
268	Cut-out




380	Appliance
- 20	Overhang
360	Cut-out




288	Appliance
5	VV 200
288	Appliance
581	
- 20	Overhang
561	Cut-out




288	Appliance
5	VV 200
288	Appliance
5	VV 200
288	Appliance
874	
- 20	Overhang
854	Cut-out



288	Appliance
5	VV 200
288	Appliance
5	VV 200
288	Appliance
5	VV 200
288	Appliance
1167	
- 20	Overhang
1147	Cut-out

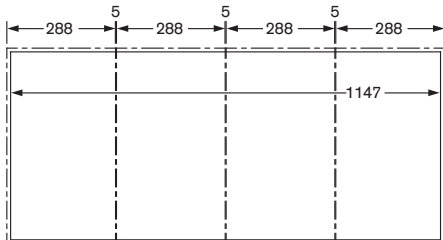


288	Appliance
5	VV 200
580	Appliance
873	
- 20	Overhang
853	Cut-out

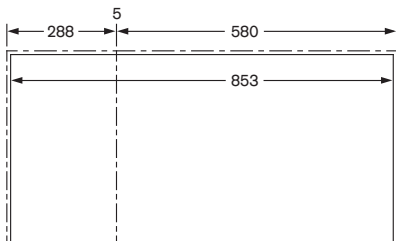


Cut-out dimensions for the Vario 200 series with downdraft


288	Appliance
5	VV 200
150	VL 200
5	VV 200
288	Appliance
736	
- 20	Overhang
(10 + 10)	
716	Cut-out




380	Appliance
5	VV 200
150	VL 200
5	VV 200
380	Appliance
920	
- 20	Overhang
(10 + 10)	
900	Cut-out

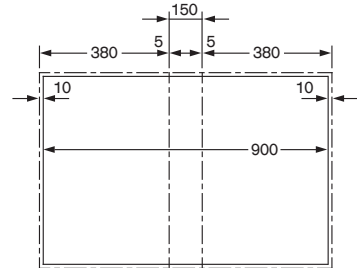


288	Appliance
5	VV 200
150	VL 200
443	
- 20	Overhang
(10 + 10)	
423	Cut-out



150	VL 200
5	VV 200
580	Appliance
5	VV 200
150	VL 200
890	
- 20	Overhang
(10 + 10)	
870	Cut-out

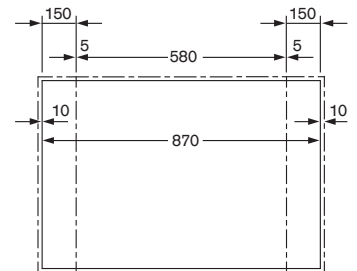

288	Appliance
5	VV 200
150	VL 200
5	VV 200
580	Appliance
5	VV 200
150	VL 200
1183	
- 20	Overhang
(10 + 10)	
1163	Cut-out

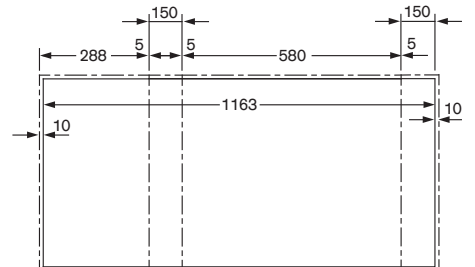

Accessories and special accessories for Vario cooktops 400 series

CA 414 110F

Socket



LV 030 000

Lava stone for refilling



VA 440 010

Stainless steel appliance cover with mounting strip



VA 461 000

Cast pan, enamelled, half size
For Vario electric grill 400 series.
For simultaneous frying and grilling on two separate surfaces.

WP 400 001

Wok pan made of multiple-layer material
With round bottom and handle,
ø36 cm, 6 litres, height 10 cm.



WZ 400 001

Wok attachment for wok pan



AA 414 010

Ventilation moulding for use in combination with gas cooktops



VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting



VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting



AD 724 042

Connection piece for round pipe
DN 150

For VL 414

For installation to left or right side of VL additional adaptor AD 724 041 is necessary.



AD 724 041

Round duct connection

additional adaptor for

VL 414 on the side

Metal zinc plated

DN 150 round

One piece needed for each VL 414

to be connected to round ducts

DN 150 to the left/right.



AD 854 046

Flat duct system with conducting fins

Connection piece VL 414 for DN 150

flat rectangular

Allows for long duct runs with highest

efficiency due to soft duct shape and

conducting fins within the duct bends

Compact installation height even with

DN 150 allows integration in floor

constructions




LV 030 000
Lava stone for refilling



VD 200 020
Black appliance cover



LS 041 001
Air baffle for VL 200 next to gas appliance



VV 200 010
Stainless steel connection strip for combination with other Vario appliances of the 200 series.



VV 200 020
Black connection strip for combination with other Vario appliances of the 200 series.



Vario induction cooktops 400 series



Appliance type	Full surface induction cooktop	Full surface induction cooktop
Stainless steel frame 3 mm for surface or flush installation	CX 492 111	CX 482 111
Dimensions		
Width (cm)	90	80
Operation		
TFT touch display / Twist-Pad control / Sensor control	•/-/-	•/-/-
Bicoloured display (white/orange)	-	-
Knobs in furniture front / integrated control panel	-/-	-/-
Cooking zones		
Number of cooking zones or items of cookware	6	5
Full surface induction cooktop	•	•
Flex induction cooking areas 19x23 cm (2200, with booster 3700 W) / linked together 38x23 cm (3300, with booster 3700 W)	-	-
Flex induction cooking areas 19x24 cm (2200, with booster 3700 W) / linked together 38x24 cm (3300, with booster 3700 W)	-	-
Automatic extension up to 30cm/32cm width (3300, with booster 3700 W)	-	-
Induction cooking zone ø 21 cm (2200, with booster 3700 W) / ø 26 cm (2600, with booster 3700 W) / ø 32 cm (3300, with booster 3700 W)	-	-
Features		
Number of output levels	17	17
Flex function for rectangular cooking areas	-	-
Cooking sensor function / frying sensor function	•/-	•/-
Number of frying sensor functions	-	-
Professional cooking function	•	•
Booster function for pots / pans	•/•	•/•
Keep warm function	•	•
Number of cooking timers	6	5
Short-term timer	•	•
Stopwatch	•	•
Residual heat indicator	•	•
Child lock / safety shut-off / display cleaning protection	•/•/•	•/•/•
Options menu	•	•
Hood control	• ²	• ²
Integrated WiFi module for digital services (Home Connect).	• ³	• ³
Accessories		
Teppan Yaki plate made of multi ply material, GN1/1 (for full surface induction)	GN 232 110 ¹	GN 232 110 ¹
Teppan Yaki plate made of multi ply material, GN2/3 (for full surface induction)	GN 232 230 ¹	GN 232 230 ¹
Frying sensor pan ø 15 cm	-	-
Frying sensor pan ø 19 cm	-	-
Frying sensor pan ø 21 cm	-	-
Frying sensor pan ø 28 cm	-	-
Cooking sensor	• / CA 060 300 ¹	• / CA 060 300 ¹
Wok attachment for for wok pan	-	-
Wok pan	-	-
Connection		
Total connected load electric (kW)	7.4	7.4

• Standard. - Not available.

¹ Special accessories.

² In Combination with suitable hood.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Flex induction cooktop	Flex induction cooktop	Flex induction cooktop	Flex induction cooktop	Induction Wok
VI 492 113	VI 482 113	VI 462 113	VI 422 113	VI 414 113
90	80	60	38	38
•/-/-	-/-•	-/-•	-/-•	-/-•
•	•	•	•	•
•/-	•/-	•/-	•/-	•/-
5	4	4	2	1
-	-	-	-	-
4	4	4	-	-
-	-	-	2	-
-	-/2	1/ -	-	-
1	-	-	-	1
12	12	12	12	12
•	•	•	•	•
-/•	-/•	-/•	-/•	-/•
5	4	4	2	1
-	-	-	-	-
•/-	•/-	•/-	•/-	•/-
-	-	-	-	-
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
-/•/-	-/•/-	-/•/-	-/•/-	-/•/-
•	•	•	•	•
• ²	• ²	• ²	• ²	• ²
• ³	• ³	• ³	• ³	• ³
-	-	-	-	-
-	-	-	-	-
GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹
GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹
GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹
GP 900 004 ¹	GP 900 004 ¹	GP 900 004 ¹	-	GP 900 004 ¹
-	-	-	-	-
WZ 400 001 ¹	-	-	-	WZ 400 001 ¹
WP 400 001 ¹	-	-	-	WP 400 001 ¹
11.1	7.4	7.4	3.7	3.7

EB 333

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Extractors

Cooling appliances

Dishwashers | Washing machine

Energy Label | Home Connect | Accessories

Vario induction cooktops 200 series



Appliance type	Flex induction cooktop	Flex induction cooktop	Flex induction cooktop
Surface-mounted / flush installation / welded	VI 262 120	VI 242 120	VI 232 120
Dimensions	• / - / -	• / - / -	• / - / -
Width (cm)	60	38	28
Operation			
TFT touch display / Twist-Pad control / Sensor control	- / - / -	- / - / -	- / - / -
Bicoloured display (white/orange)	-	-	-
Knobs in furniture front / integrated control panel	- / •	- / •	- / •
Cooking zones / combinations			
Number of cooking zones or items of cookware	4	2	2
Full surface induction cooktop	-	-	-
Flex induction cooking areas 19x21 cm (2200, with booster 3700 W) / linked together 38x21 cm (3300, with booster 3700 W)	-	-	2
Flex induction cooking areas 19x23 cm (2200, with booster 3700 W) / linked together 38x23 cm (3300, with booster 3700 W)	4	-	-
Flex induction cooking areas 19x24 cm (2200, with booster 3700 W) / linked together 38x24 cm (3300, with booster 3700 W)	-	2	-
Features			
Number of output levels	9	9	9
Flex function for rectangular cooking areas	•	•	•
Cooking sensor function / frying sensor function	- / •	- / •	- / •
Number of frying sensor functions	4	2	2
Professional cooking function	-	-	-
Booster function for pots / pans	• / -	• / -	• / -
Keep warm function	-	-	-
Number of cooking timers	-	-	-
Short-term timer	-	-	-
Stopwatch	-	-	-
Residual heat indicator	•	•	•
Child lock / safety shut-off / display cleaning protection	- / • / -	- / • / -	- / • / -
Options menu	-	-	-
Hood control	-	-	-
Integrated WiFi module for digital services (Home Connect).	-	-	-
Accessories			
Frying sensor pan ø 15 cm	GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹
Frying sensor pan ø 19 cm	GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹
Frying sensor pan ø 21 cm	GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹
Frying sensor pan ø 28 cm	-	-	-
Cooking sensor	-	-	-
Black appliance cover	-	-	VD 200 020 ¹
Connection			
Total connected load (kW)	7.4	3.7	3.7

• Standard. - Not available.

¹ Special accessory.



Appliance type	Gas cooktop	Gas cooktop	Gas wok	Gas wok	Gas cooktop	Gas cooktop
	VG 491 111F	VG 491 211	VG 415 111F	VG 415 211	VG 425 111F	VG 425 211
Frame brushed stainless steel 3 mm / brushed / shot blasted	•/-/-	•/-/-	•/-/-	•/-/-	•/-/-	•/-/-
Surface-mounted / flush installation / welded	•/•/-	•/•/-	•/•/-	•/•/-	•/•/-	•/•/-
Liquid gas 50 mbar / liquid gas 28-37 mbar / natural gas 20 mbar	-/•/-	-/•/•	-/•/-	-/•/•	-/•/-	-/•/•
Dimensions						
Width (cm)	90	90	38	38	38	38
Operation						
Knobs in furniture front / integrated control panel	•/-	•/-	•/-	•/-	•/-	•/-
Cooking zones						
Number of cooking zones	5	5	1	1	2	2
Multi-ring wok burner (300 – 5800 W)	1	-	1	-	-	-
Multi-ring wok burner (300 – 6000 W)	-	1	-	1	-	-
Two-ring high output burner (165 – 4000 W)	2	2	-	-	1	1
Two-ring standard output burner (165 – 2000 W)	2	2	-	-	1	1
Features						
Number of output levels	12	12	12	12	12	12
Electronic output control	•	•	•	•	•	•
Automatic fast ignition / Electric ignition	•/-	•/-	•/-	•/-	•/-	•/-
Electronic flame monitoring with automatic re-ignition	•	•	•	•	•	•
Simmer function	•	•	•	•	•	•
Residual heat indication	•	•	•	•	•	•
Safety shut-off	•	•	•	•	•	•
Cast pan support	3-part	3-part	1-part	1-part	1-part	1-part
Accessories						
Wok attachment ring	•	•	•	•	-	-
Wok pan	WP 400 001 ¹	WP 400 001 ¹	WP 400 001 ¹	WP 400 001 ¹	-	-
Stainless steel appliance cover	-	-	VA 440 010 ¹	VA 440 010 ¹	VA 440 010 ¹	VA 440 010 ¹
Connection						
Total connected load gas (up to) (kW)	17.8	18.0	5.8	6.0	6.0	6.0
Total connected load electric (W)	15.0	15.0	15.0	15.0	15.0	15.0

• Standard. - Not available.

¹ Special accessory.

Vario gas cooktops 200 series



Appliance type	Gas cooktop	Gas cooktop
	VG 264 120F	VG 264 220
Frame brushed stainless steel 3 mm / brushed / shot blasted	-/-•	-/-•
Surface-mounted / flush installation / welded	•/-/-	•/-/-
Liquid gas 28-37 mbar / natural gas 20 mbar	• ² /-	-/• ³
Dimensions		
Width	(cm) 60	60
Operation		
Knobs in furniture front / integrated control panel	-/•	-/•
Cooking zones		
Number of cooking zones	4	4
Multi-ring wok burner (300 - 5800W)	-	-
Multi-ring wok burner (300 - 6000W)	-	-
High output burner (560 – 3000 W)	2	2
Standard burner (380 – 1900 W)	2	2
Features		
Number of output levels	9	9
Electronic output control	-	-
Automatic fast ignition / Electric ignition	-/•	-/•
Electronic flame monitoring with automatic re-ignition	-	-
Simmer function	-	-
Residual heat indication	•	•
Safety shut-off	-	-
Cast pan support	2-part	2-part
Accessories		
Wok attachment ring	-	-
Wok pan	-	-
Black appliance cover	-	-
Connection		
Total connected load gas (up to)	(kW) 9.8	9.8
Total connected load electric	(W) 4.0	4.0

• Standard. – Not available.

¹ Special accessory.

² Nozzles for natural gas 20 mbar can be ordered as spare parts.

³ Nozzles for liquid gas 28-30/37 mbar can be ordered as spare parts.

⁴ Nozzles for liquid gas 50 mbar can be ordered as spare parts.



Gas wok	Gas wok	Gas cooktop	Gas cooktop
VG 231 120F	VG 231 220	VG 232 120F	VG 232 220
-/-•	-/-•	-/-•	-/-•
•/-/-	•/-/-	•/-/-	•/-/-
• ² /-	-/• ³	• ² /-	-/• ³
28	28	28	28
-/•	-/•	-/•	-/•
1	1	2	2
1	-	-	-
-	1	-	-
-	-	1	1
-	-	1	1
9	9	9	9
-	-	-	-
-/•	-/•	-/•	-/•
-	-	-	-
-	-	-	-
•	•	•	•
-	-	-	-
1-part	1-part	1-part	1-part
•	•	-	-
WP 400 001 ¹	WP 400 001 ¹	-	-
VD 200 020 ¹	VD 200 020 ¹	VD 200 020 ¹	VD 200 020 ¹
5.8	6.0	4.9	4.9
1.0	1.0	2.0	2.0

Vario special cooktops 400 and 200 series



Appliance type	Teppan Yaki	Electric grill
	VP 414 111	VR 414 111
Frame brushed stainless steel 3 mm / brushed / shot blasted	•/-/-	•/-/-
Surface-mounted / flush installation / welded	•/•/-	•/•/-
Dimensions		
Width (cm)	38	38
Operation		
Knobs in furniture front / integrated control panel	•/-	•/-
Cooking zones		
Number of cooking zones	2	2
Output (kW)	2 x 1.5	2 x 1.5
Temperature range (C°)	120 – 240	-
Features		
Number of output levels	12	12
Electronic temperature control	•	•
Cleaning setting	•	-
Two zones can be operated together / separately	•/•	•/•
Cast grill	-	2
Stainless steel container with lava stones	-	•
Grease collecting insert	-	•
Hard-chromed cooking surface	•	-
Stainless steel sandwich cooking surface	-	-
Keeping warm function	•	-
Residual heat indicator	•	•
Child lock / safety shut-off	-/•	-/•
Accessories		
Cast pan, half size	-	•
Stainless steel appliance cover	VA 440 010 ¹	VA 440 010 ¹
Black appliance cover	-	-
Cleaning brush	-	•
Spatula	2	-
Connection		
Total connected load (kW)	3.0	3.0

• Standard. -Not available.

¹ Special accessory.



Teppan Yaki	Electric grill
VP 230 120	VR 230 120
-/-/•	-/-/•
•/-/-	•/-/-
28	28
-/•	-/•
1	2
1.8	2 x 1.5
140 – 240	-
10	9
•	-
-	-
-/•	-/•
-	1
-	•
-	•
•	-
•	-
•	•
-/•	-/•
-	-
-	-
VD 200 020 ¹	VD 200 020 ¹
-	•
2	-
1.8	3.0



The cooktops

Gas cooktops	150
Induction cooktops	156
Flex induction cooktop with downdraft ventilation 400 series	164
Flex induction cooktop with integrated ventilation system 200 series	174
Planning notes for induction cooktops	206
Glass ceramic cooktops	207
Accessories special accessories	210
Technical specifications	212



CG 492 111F

Stainless steel
Width 100.2 cm
Liquid gas 28 – 37 mbar
Wok burner with up to 5.8 kW

CG 492 211

Stainless steel
Width 100.2 cm
Natural gas 20 mbar
Wok burner with up to 6 kW

Included in the price

1 wok attachment ring

Necessary installation accessories

CA 429 410
Frame set including decorative frame (to be welded in) and holding frame

Special accessories

WP 400 001
Wok pan made of multiple-layer material
With round bottom and handle, ø 36 cm, 6 litres, height 10 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Gas cooktop 400 series

CG 492

- Five multi-ring burners, up to 18 kW
- Full electronic power level regulation on 12 levels
- Precise and reproducible flame size
- Automatic fast ignition, electronic flame monitoring with automatic re-ignition
- Simmer function for cooking on a very low output level
- Solid smooth-surface cast iron pan supports on the same level as the worktop
- Solid stainless steel control knob

Cooking zones

CG 492 111F
1 multi-ring wok burner (300 W – 5800 W), suitable for pots up to max. ø 32 cm.
2 two-ring high output burners (165 W – 4000 W), suitable for pots up to max. ø 28 cm.
2 two-ring standard burners (165 W – 2000 W), suitable for pots up to max. ø 24 cm.

CG 492 211

1 multi-ring wok burner (300 W – 6000 W), suitable for pots up to max. ø 32 cm.
2 two-ring high output burners (165 W – 4000 W), suitable for pots up to max. ø 28 cm.
2 two-ring standard burners (165 W – 2000 W), suitable for pots up to max. ø 24 cm.

Handling

Control knobs with illuminated ring, cooking zone and output level markings. One-handed operation.
Full electronic control in 12 output levels for exact power level regulation plus simmer function.
Automatic fast ignition.

Features

Simmer function.
Three-part cast iron pan support with flat, continuous pot surface, on the same level as the worktop.
Brass burner rings.

Safety

Electronic flame monitoring with automatic re-ignition.
Residual heat indication.
Safety shut-off.

Planning notes

The frame set (necessary installation accessory) can be sent in advance to the manufacturer of the stainless steel or granite worktop for fitting.
Special nozzles can be ordered as spare parts.
Plan for an electrical connection (the appliance is not operable without power supply).
The horizontal positioning of the knobs may be aligned with the specific burners.
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).
Minimum worktop depth 70 cm.


Air intake from above.

No intermediate shelf required.
Due to the separate frame welded into the worktop, all parts remain fully accessible.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.
The appliance can be fixed from above. A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed. Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
The combination with VL 414 is not recommended, since the air extraction from the centre burner cannot be guaranteed due to the distance.
Appliance weight: approx. 35 kg.


Connection

Total connected load gas
17.8/18.0 kW.
Total connected load electric
15.0/15.0 W.
Connecting cable 1.4 m with plug.

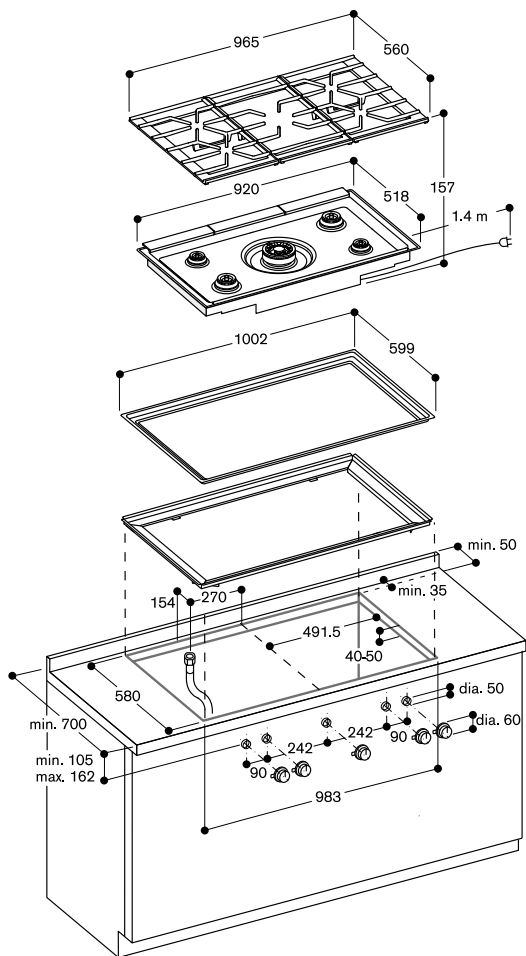


For further installation options, see the installation instructions


View from above

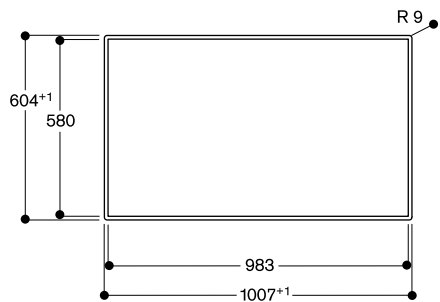


Cross-section

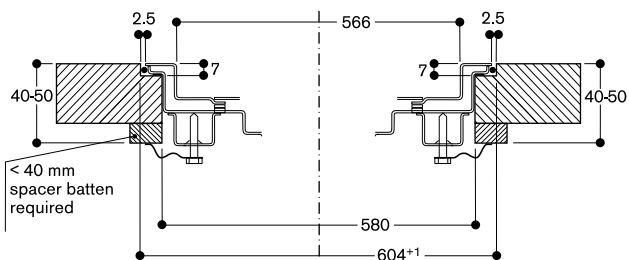

Longitudinal section

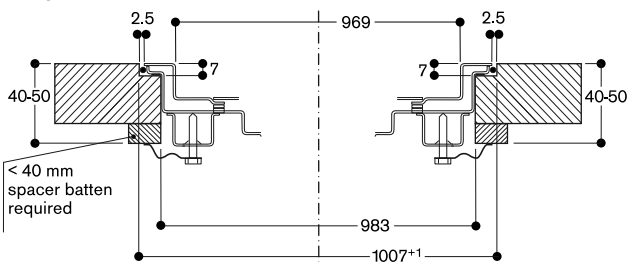

Installation of the control knob





VG 295 150F

Width 90 cm

Liquid gas 28 – 37 mbar

Wok burner with up to 5.8 kW

VG 295 250

Width 90 cm

Natural gas 20 mbar

Wok burner with up to 6 kW

Included in the price

1 wok attachment ring

Special accessories

WP 400 001

Wok pan made of multiple-layer material

With round bottom and handle, ø 36 cm, 6 litres, height 10 cm.

Combinable with:

Ceiling ventilation 400 series

Ceiling ventilation AL 230, AL 270

Island- and wall-mounted hood 400 series

Flat kitchen hood 200 series

Canopy 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Gas cooktop 200 series

VG 295

- Control panel for comfortable and secure operation
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
- Multi-ring burner of solid, heat-resistant brass as used in professional kitchen
- Solid smooth-surface cast iron pan supports
- Up to 17.8 kW on 5 burners

Cooking zones

1 multi-ring wok burner

(300 W – 5800 W), suitable for pots up to max. ø 32 cm.

2 two-ring high output burners

(170 W – 4000 W), suitable for pots up to max. ø 28 cm.

2 two-ring standard burners

(170 W – 2000 W), suitable for pots up to max. ø 24 cm.

Handling

Control knobs with illuminated ring.

Integrated control panel.

One-handed operation.

Electric ignition.

Features

Three-part cast iron pan support with flat, continuous pot surface.

Brass burner rings.

Safety

Thermoelectric safety pilot.

Residual heat indication.

Operation indicator.

Planning notes

Special nozzles for natural gas 20 mbar can be ordered as spare parts.

No intermediate shelf required.

Appliance can be snapped into the worktop from above.

Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.

Installation in a 90 cm wide lower cabinet is required.

A minimum lateral clearance of at least 300 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.

Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.

Appliance weight: approx. 29 kg.


Connection

Total connected load gas

17.8/18.0 kW.


Total connected load electric 10 W.

Connecting cable 1.5 m with plug.

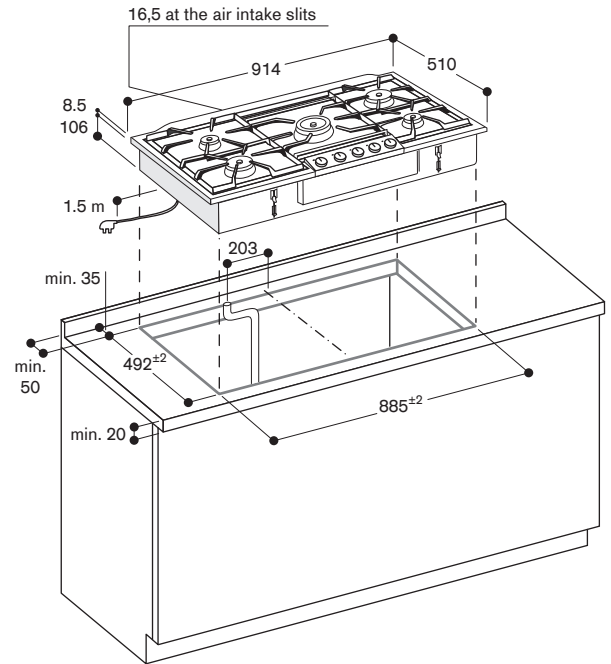

Minimum distance from the appliance cut-out to the side wall 300 mm.

Gas connection

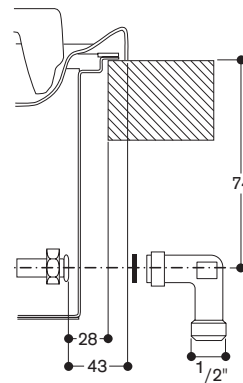

**CG 291 210**

Stainless steel
Width 90 cm
Natural gas 20 mbar
Nozzles for liquid gas 28-30/37 mbar included

Included in the price

1 cross support for espresso
1 wok attachment ring

Special accessories**WP 400 001**

Wok pan made of multiple-layer material
With round bottom and handle,
ø36 cm, 6 litres, height 10 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Gas cooktop 200 series**CG 291**

- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
- Multi-ring burner with up to 5 kW

Cooking zones

1 multi-ring wok burner (300 W – 5000 W).
1 high output burner (500 W - 3000 W), suitable for pots up to max. ø 26 cm.
2 standard burners (350 W – 1750 W), suitable for pots up to max. ø 20 cm.
1 economy burner (330 W – 1000 W), suitable for pots up to max. ø 14 cm.

Handling

Control knobs with cooking zone and output level markings for 9 levels.
One-handed operation.
Electric ignition.

Features

Three-part cast iron pan support with continuous pot surface.
Enamelled burner cover.

Safety


Thermoelectric safety pilot.

Planning notes

The cooktop can be surface-mounted.
Special nozzles can be ordered as spare parts.
Installation in a 85 cm niche or a 88 cm niche with the included spacers.
Air intake from above.
Intermediate shelf is required.
Appliance must be fixed from underneath.
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.
Appliance weight: approx. 17 kg.

Connection

Total connected load gas 12.5 kW.
Connecting cable 1.0 m without plug.

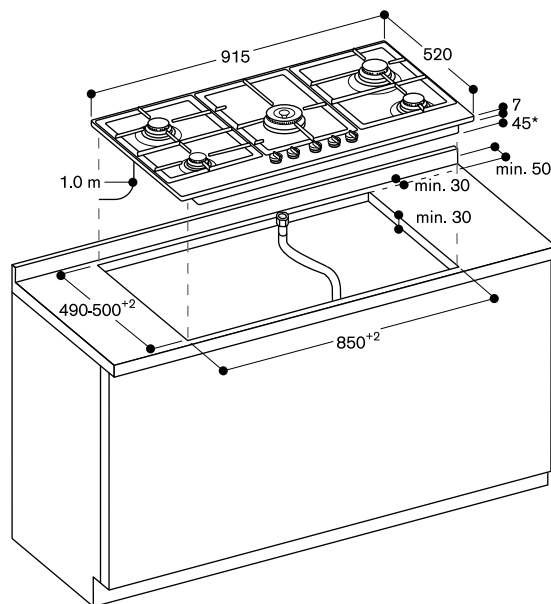

* 61 mm in the area of the gas connection at the back right



CG 261 210

Stainless steel

Width 60 cm

Natural gas 20 mbar

Nozzles for liquid gas 28-30/37 mbar included

Included in the price

1 cross support for espresso

1 wok attachment ring

Special accessories

WP 400 001

Wok pan made of multiple-layer material

With round bottom and handle, ø 36 cm, 6 litres, height 10 cm.

Combinable with:

Ceiling ventilation 400 and 200 series

Island- and wall-mounted hood 400 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Gas cooktop 200 series

CG 261

- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size
- Up to 9.75 kW with burners in a diamond-shaped arrangement

Cooking zones

1 multi-ring wok burner (1550 W – 4000 W).

1 high output burner (500 W - 3000 W), suitable for pots up to max. ø 26 cm.

1 standard burner (290 W – 1750 W), suitable for pots up to max. ø 20 cm.

1 economy burner (330 W – 1000 W), suitable for pots up to max. ø 16 cm.

Handling

Control knobs with cooking zone and output level markings for 9 levels.

One-handed operation.

Electric ignition.

Features

Two-part cast iron pan support with continuous pot surface.

Enamelled burner cover.

Safety

Thermoelectric safety pilot.

Planning notes

The cooktop can be surface-mounted.

Special nozzles can be ordered as spare parts.

Installation in a 56 cm standard niche.

Air intake from above.

Intermediate shelf is recommended.

Allow for a gas connection when planning drawer depth.

Appliance must be fixed from underneath.


A minimum clearance of at least 100 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.

Appliance weight: approx. 12 kg.

Connection

Total connected load gas 9.75 kW.

Connecting cable 1.0 m without plug.

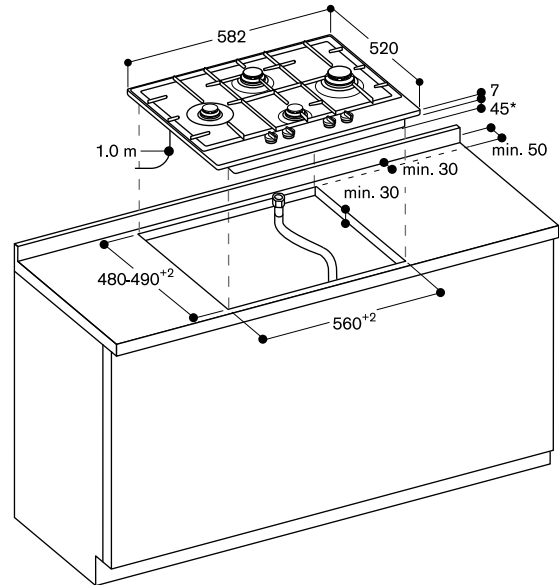

* 56 mm in the area of the gas connection at the back right



CX 492 101

Black glass ceramic
Frameless
Width 90 cm

Included in the price

1 wireless plug-in core temperature probe for cooktop

Special accessories

CA 060 300

Cooking sensor for temperature regulation within pots

GN 232 110

Teppan Yaki plate made of multi ply material,

GN 1/1

For full surface induction cooktops.

GN 232 230

Teppan Yaki plate made of multi ply material,

GN 2/3

For full surface induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 and 200 series

Island- and wall-mounted hood 400 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Full surface induction cooktop 400 series

CX 492

- One single big cooking surface
- Free positioning of cookware
- All sizes and formats of cookware can be used
- TFT touch display for an intuitive control of all functions
- Cooking sensor function for temperature control in pots
- Professional cooking functions
- Max. power output for big cookware of up to 5.5 kW
- Frameless for flush mounting

Cooking zones

One unique cooking surface of 3200 cm².

Up to 6 items of cookware can be placed simultaneously on the cooktop.

Handling

Easy to use colour graphic TFT touch display with use indications.

Electronic power control in 17 output levels.

Features

Cooking sensor function.

Professional cooking function.

Dynamic cooking function.

Teppan Yaki function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Individual pot detection.

Cooking timer for each cooking position.

Stopwatch.

Short-term timer.

Information key with use indicators.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.

Residual heat indication.

Child lock.

Safety shut-off.

Pause function.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. Appliance must be fixed from underneath. Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out. Appliance weight: approx. 31 kg.


Please read the installation details regarding air ducting on page 206.


Please read additional planning notes on page 122 – 127.

Connection

Total connected load 7.4 kW.

Connecting cable 1.5 m without plug.




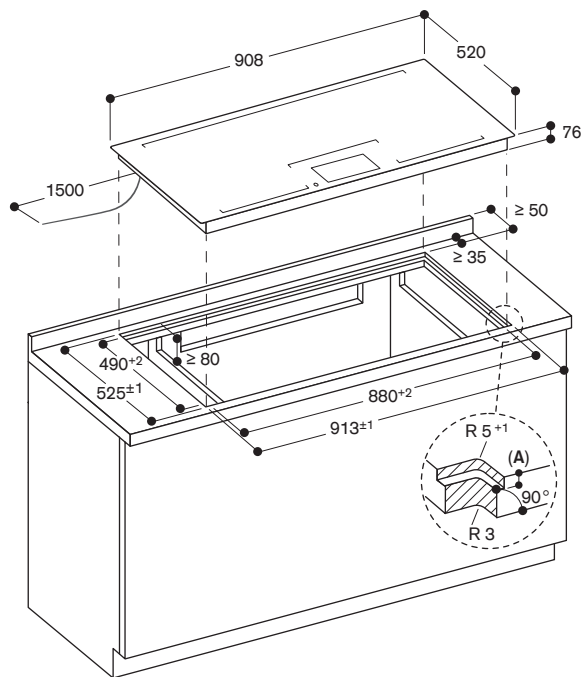

A: 6,5^{+0,5}


measurements in mm

View from above

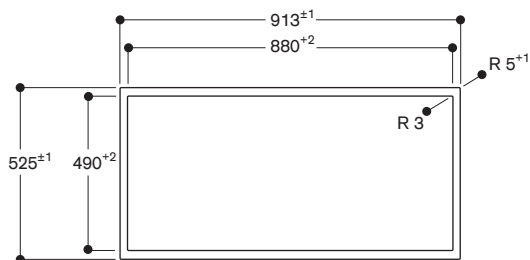

measurements in mm

Longitudinal section

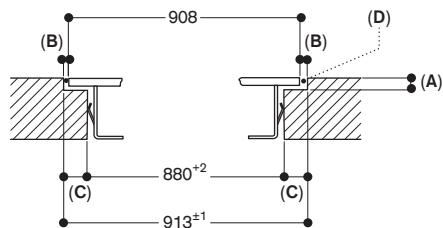


A: 6,5^{+0,5}

B: 2,5
C: 16,5
D: Fill with silicone

measurements in mm

Cross-section

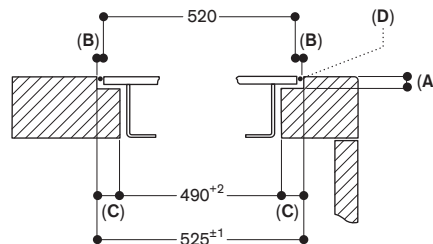

A: 6,5^{+0,5}

B: 2,5

C: 17,5

D: Fill with silicone

measurements in mm



CX 492 111

Black glass ceramic
Stainless steel frame
Width 90 cm

Included in the price

1 wireless plug-in core temperature probe for cooktop

Special accessories

CA 060 300

Cooking sensor for temperature regulation within pots

GN 232 110

Teppan Yaki plate made of multi ply material,
GN 1/1

For full surface induction cooktops.

GN 232 230

Teppan Yaki plate made of multi ply material,
GN 2/3

For full surface induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Full surface induction cooktop 400 series

CX 492

- One single big cooking surface
- Free positioning of cookware
- All sizes and formats of cookware can be used
- TFT touch display for an intuitive control of all functions
- Cooking sensor function for temperature control in pots
- Professional cooking functions
- Max. power output for big cookware of up to 5.5 kW
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

One unique cooking surface of 3200 cm².

Up to 6 items of cookware can be placed simultaneously on the cooktop.

Handling

Easy to use colour graphic TFT touch display with use indications.

Electronic power control in 17 output levels.

Features

Cooking sensor function.

Professional cooking function.

Dynamic cooking function.

Teppan Yaki function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Individual pot detection.

Cooking timer for each cooking position.

Stopwatch.

Short-term timer.

Information key with use indicators.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.

Residual heat indication.

Child lock.

Safety shut-off.

Pause function.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.


If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance. Appliance can be snapped into the worktop from above. Appliance weight: approx. 31 kg.


Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 7.4 kW.

Connecting cable 1.5 m without plug.



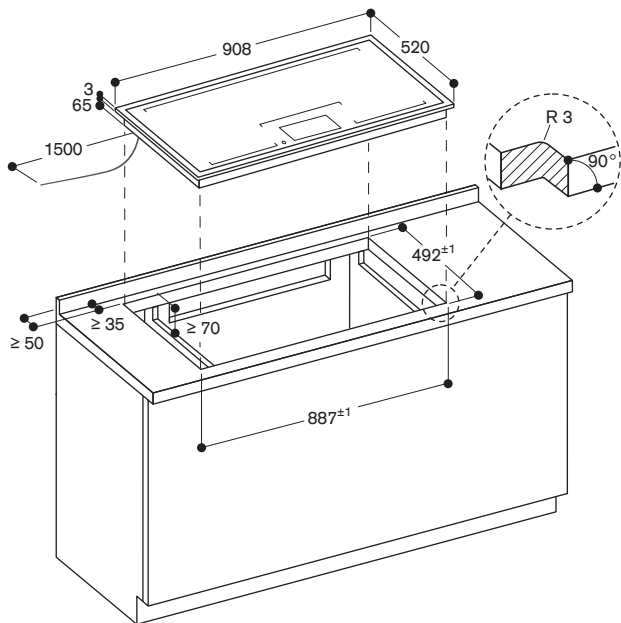


measurements in mm

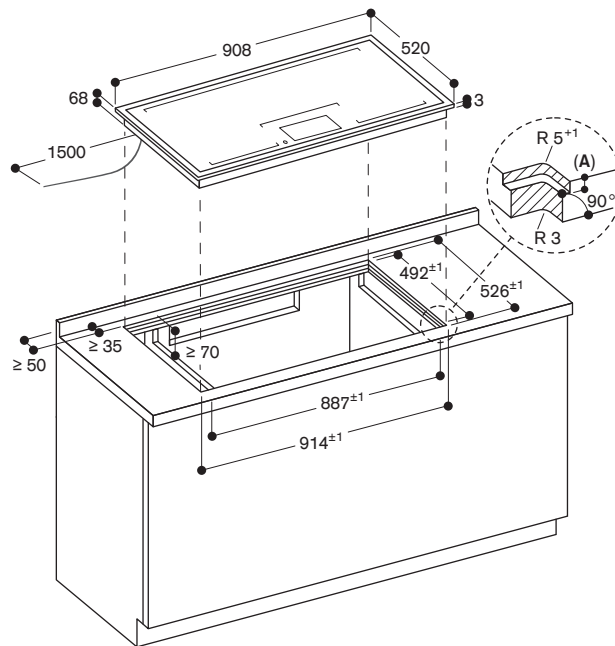


A: 3.5^{0.5}
measurements in mm

View from above

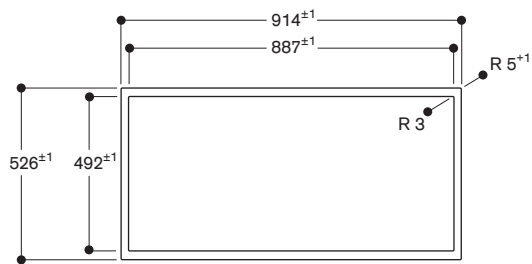


measurements in mm

Longitudinal section

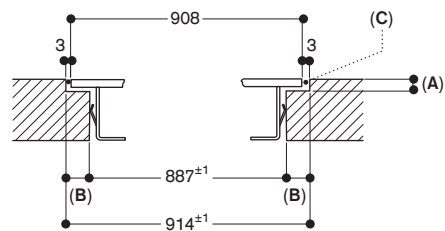

A: 3.5^{0.5}
B: 13.5
C: Fill with silicone
measurements in mm

Cross-section

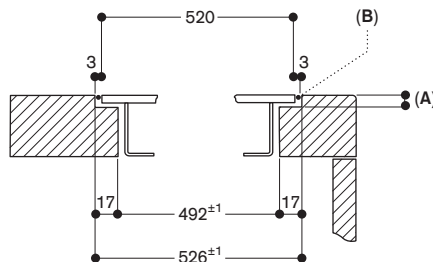

A: 3.5^{0.5}
B: Fill with silicone
measurements in mm



CX 482 101

Black glass ceramic
Frameless
Width 80 cm

Special accessories

CA 060 300

Cooking sensor for temperature regulation within pots

GN 232 110

Teppan Yaki plate made of multi ply material,
GN 1/1

For full surface induction cooktops.

GN 232 230

Teppan Yaki plate made of multi ply material,
GN 2/3

For full surface induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Island hood AI 240
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Full surface induction cooktop 400 series

CX 482

- One single big cooking surface
- Free positioning of cookware
- All sizes and formats of cookware can be used
- TFT touch display for an intuitive control of all functions
- Cooking sensor function for temperature control in pots
- Professional cooking functions
- Max. power output for big cookware of up to 5.5 kW
- Frameless for flush mounting

Cooking zones

One unique cooking surface of 2750 cm².
Up to 5 items of cookware can be placed simultaneously on the cooktop.

Handling

Easy to use colour graphic TFT touch display with use indications.
Electronic power control in 17 output levels.

Features

Cooking sensor function.
Professional cooking function.
Dynamic cooking function.
Teppan Yaki function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Individual pot detection.
Cooking timer for each cooking position.
Stopwatch.
Short-term timer.
Information key with use indicators.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
Residual heat indication.
Child lock.
Safety shut-off.
Pause function.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.


The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. Appliance must be fixed from underneath. Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out. Appliance weight: approx. 26 kg.


Please read the installation details regarding air ducting on page 206.

Please read additional planning notes on page 122 – 127.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.




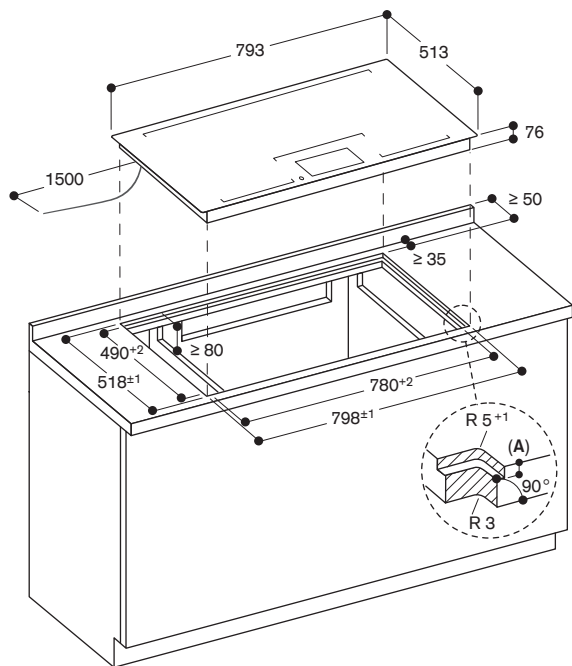

A: $6.5^{+0.5}$


measurements in mm

View from above

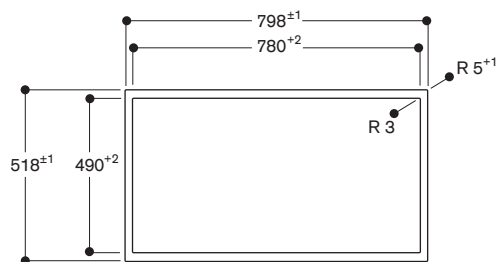

measurements in mm

Longitudinal section

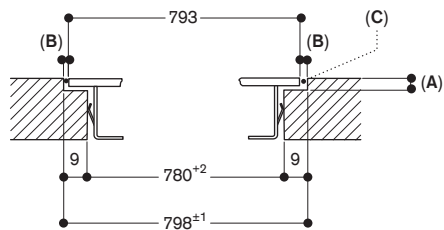


A: $6.5^{+0.5}$

B: 2.5

C: Fill with silicone

measurements in mm

Cross-section

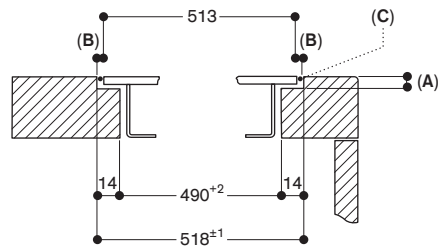

A: $6.5^{+0.5}$

B: 2.5

C: Fill with silicone

measurements in mm



CX 482 111

Black glass ceramic
Stainless steel frame
Width 80 cm

Included in the price

1 wireless plug-in core temperature probe for cooktop

Special accessories

CA 060 300

Cooking sensor for temperature regulation within pots

GN 232 110

Teppan Yaki plate made of multi ply material,

GN 1/1

For full surface induction cooktops.

GN 232 230

Teppan Yaki plate made of multi ply material,

GN 2/3

For full surface induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 series

Island hood 200 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Full surface induction cooktop 400 series

CX 482

- One single big cooking surface
- Free positioning of cookware
- All sizes and formats of cookware can be used
- TFT touch display for an intuitive control of all functions
- Cooking sensor function for temperature control in pots
- Professional cooking functions
- Max. power output for big cookware of up to 5.5 kW
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

One unique cooking surface of 2750 cm².

Up to 5 items of cookware can be placed simultaneously on the cooktop.

Handling

Easy to use colour graphic TFT touch display with use indications.

Electronic power control in 17 output levels.

Features

Cooking sensor function.

Professional cooking function.

Dynamic cooking function.

Teppan Yaki function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Individual pot detection.

Cooking timer for each cooking position.

Stopwatch.

Short-term timer.

Information key with use indicators.

Power management.

Cooktop-based ventilation control

(with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.

Residual heat indication.

Child lock.

Safety shut-off.

Pause function.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Please read additional planning notes on page 122 – 127.


If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance. Appliance can be snapped into the worktop from above. Appliance weight: approx. 27 kg.


Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 7.4 kW.

Connecting cable 1.5 m without plug.



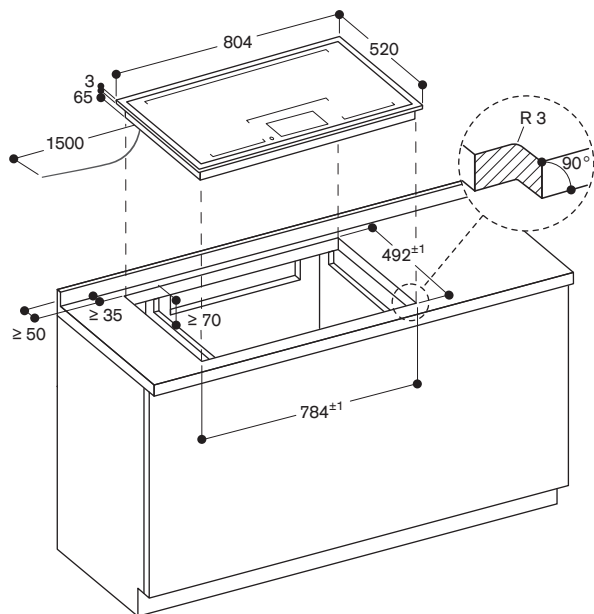


measurements in mm

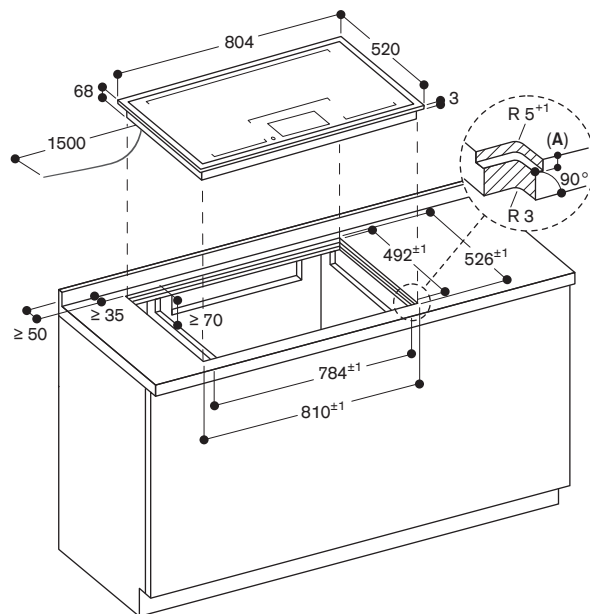

A: 3.5^{0.5}


measurements in mm

View from above

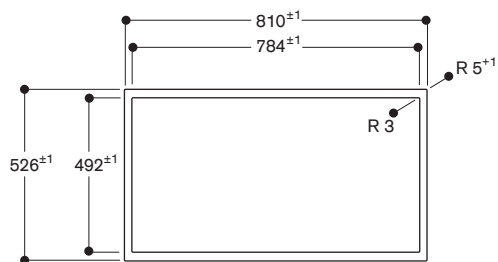

measurements in mm

Longitudinal section

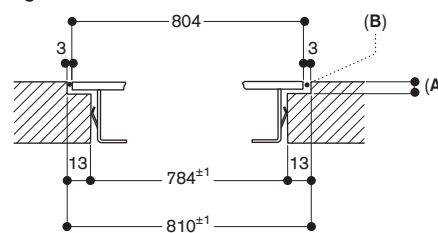


A: 3.5^{0.5}

B: Fill with silicone

measurements in mm

Cross-section

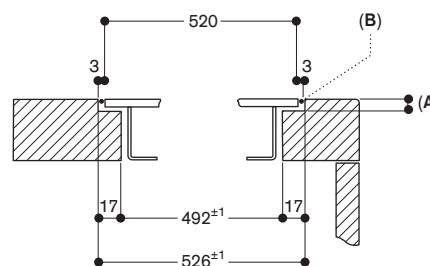

A: 3.5^{0.5}

B: Fill with silicone

measurements in mm



VI 492 103
Frameless
Width 90 cm

Special accessories

GP 900 001
Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002
Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003
Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004
Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

WP 400 001
Wok pan made of multiple-layer
material
With round bottom and handle,
ø 36 cm, 6 litres, height 10 cm.

WZ 400 001
Wok attachment for wok pan
Only for Vario induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the
cooktop(s) or it has to be as large as
the cooktop(s). Please check the
requirements in chapter ventilation.

Flex induction cooktop 400 series VI 492

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Frying sensor function for temperature control in pans
- Large cooking zone for pots up to ø32 cm
- Ideal for the original wok pan with round bottom, with wok ring
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Frameless for flush mounting

Cooking zones

2 flex induction cooking areas 20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas 20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W).

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control in 12 output levels. User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.
Pot detection.
2-stage residual heat indication.
Safety shut-off.

Planning notes

The horizontal positioning of the knobs may be aligned with the specific cooking areas. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).


The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.


If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Appliance can be snapped into the worktop from above. Appliance weight: approx. 25 kg.

Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 11.1 kW.
Connecting cable 1.5 m without plug.



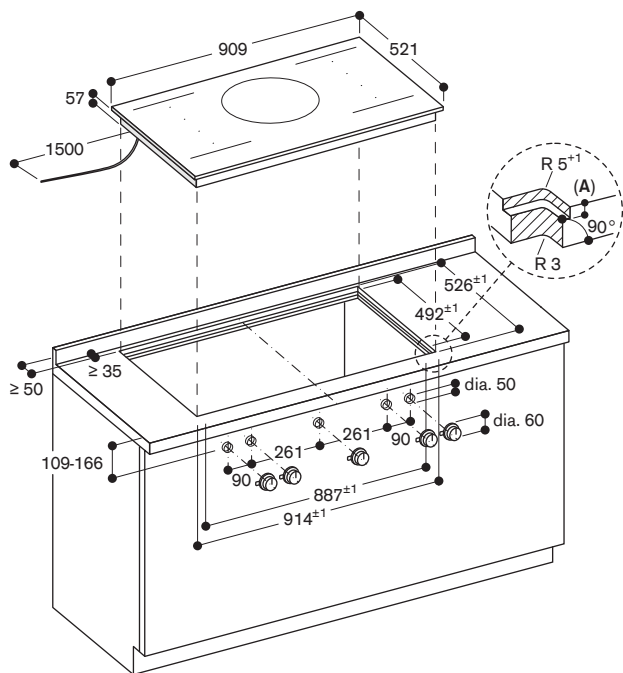


A: $6.5^{+0.5}$
measurements in mm

Installation of the control knob; flush installation

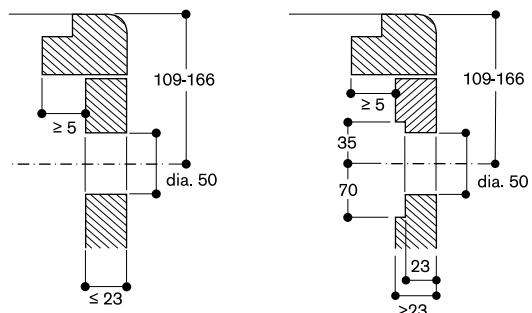


measurements in mm

View from above

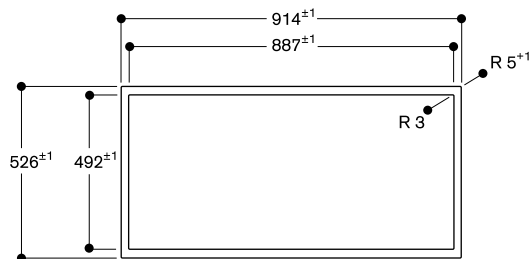

measurements in mm


Longitudinal section

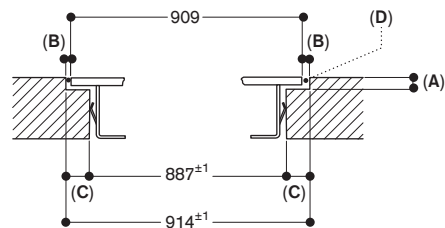

A: $6.5^{+0.5}$
B: 2.5
C: 13.5
D: Fill with silicone

measurements in mm

Cross-section

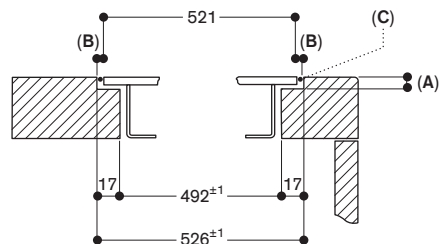

A: $6.5^{+0.5}$
B: 2.5
C: Fill with silicone

measurements in mm



VI 482 103

Frameless

Width 80 cm

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 400 series

VI 482

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Frying sensor function for temperature control in pans
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Frameless for flush mounting

Cooking zones

2 flex induction cooking areas 20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x32 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas 20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x32 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control in 12 output levels.

User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.

Frying sensor function.

Booster function.

Stopwatch.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.

Pot detection.

2-stage residual heat indication.

Safety shut-off.

Planning notes

The horizontal positioning of the knobs may be aligned with the specific cooking areas.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400001 cannot be used with this appliance.

Appliance can be snapped into the worktop from above.


Appliance weight: approx. 20 kg.


Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.


Connecting cable 1.5 m without plug.



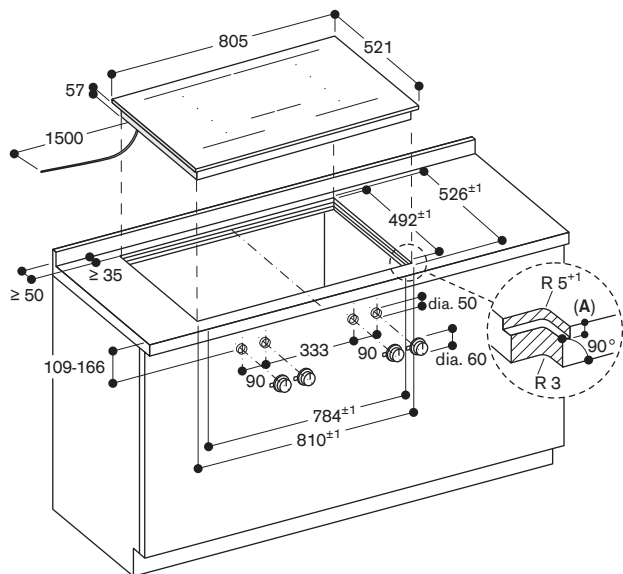


A: $6.5^{+0.5}$
measurements in mm

Installation of the control knob; flush installation

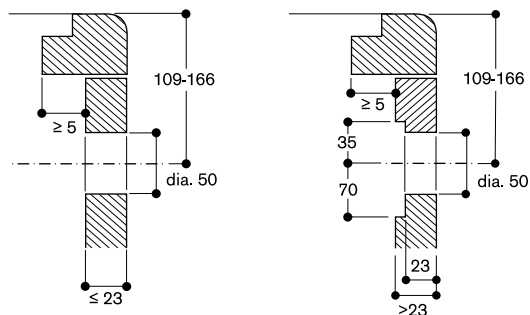


measurements in mm

View from above

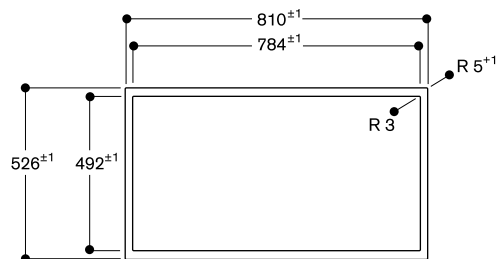


measurements in mm

Longitudinal section

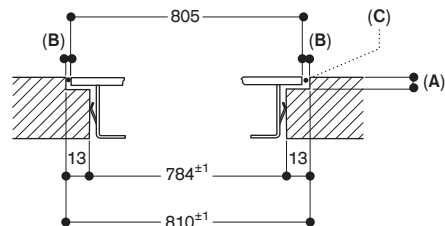

A: $6.5^{+0.5}$
B: 2.5
C: Fill with silicone
measurements in mm

Cross-section

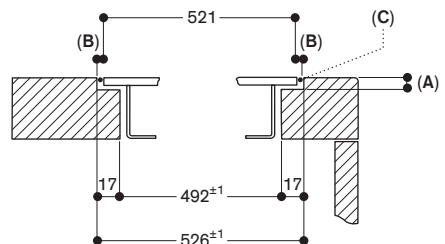

A: $6.5^{+0.5}$
B: 2.5
C: Fill with silicone
measurements in mm



VI 462 103

Frameless

Width 60 cm

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 400 series

VI 462

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Frying sensor function for temperature control in pans
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Frameless for flush mounting

Cooking zones

2 flex induction cooking areas 20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas 20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control in 12 output levels.

User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.

Frying sensor function.

Booster function.

Stopwatch.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.

Pot detection.

2-stage residual heat indication.

Safety shut-off.

Planning notes

The horizontal positioning of the knobs may be aligned with the specific cooking areas.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Installation is possible in worktops made of stone, synthetics or solid wood.

Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.

Appliance can be snapped into the worktop from above.


Appliance weight: approx. 18 kg.


Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.


Connecting cable 1.5 m without plug.



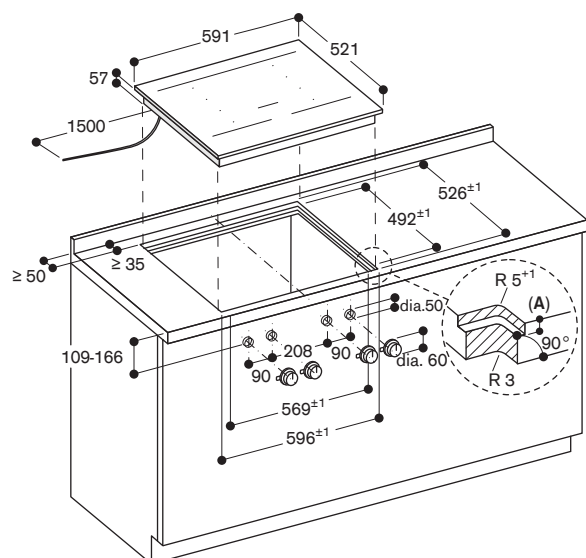


A: $6.5^{+0.5}$
 measurements in mm

Installation of the control knob; flush installation

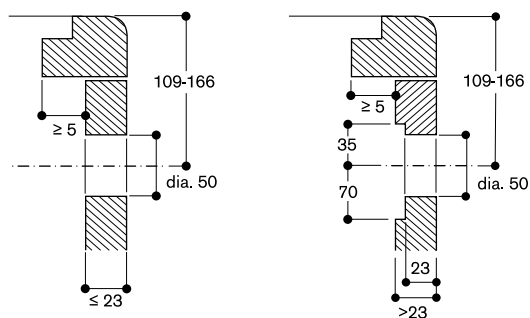


measurements in mm

View from above

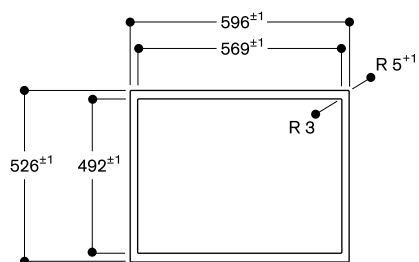

measurements in mm


Longitudinal section

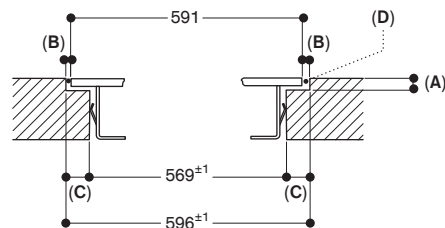

A: $6.5^{+0.5}$
 B: 2.5
 C: 13.5
 D: Fill with silicone

measurements in mm

Cross-section

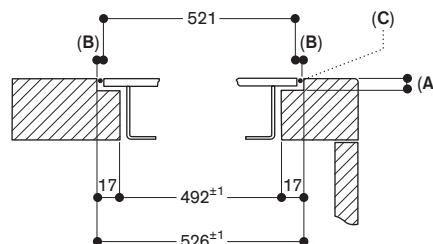

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone

measurements in mm



VI 414 103

Frameless

Width 38 cm

Special accessories

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

WP 400 001

Wok pan made of multiple-layer
material

With round bottom and handle,
ø 36 cm, 6 litres, height 10 cm.

WZ 400 001

Wok attachment for wok pan
Only for Vario induction cooktops.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the
cooktop(s) or it has to be as large as
the cooktop(s). Please check the
requirements in chapter ventilation.

Induction cooktop 400 series

VI 414

- 32 cm cooking zone with booster function
- Ideal for the original wok pan with round bottom, with wok ring
- Frying sensor function for temperature control in pans
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Frameless for flush mounting
- For combination within the set CVL 410

Cooking zones

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control in 12 output levels. User friendly control with bicoloured display (white / orange).

Features

Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.
Pot detection.
2-stage residual heat indication.
Safety shut-off.

Planning notes

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured.

Do not use discontinuous lining. The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 11 kg.


Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 3.7 kW.

Connecting cable 1.5 m without plug.




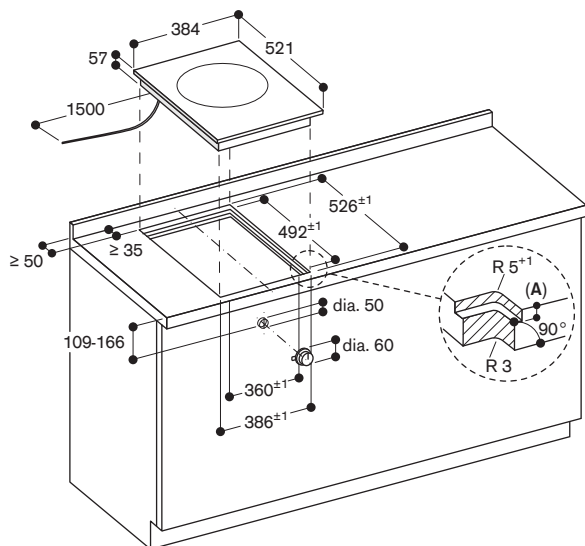

A: $6.5^{+0.5}$


measurements in mm

View from above




measurements in mm

Installation of the control knob; flush installation

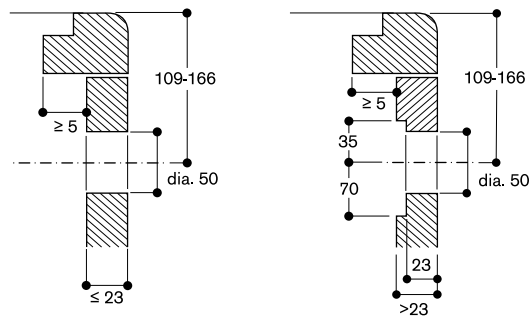

measurements in mm

Longitudinal section

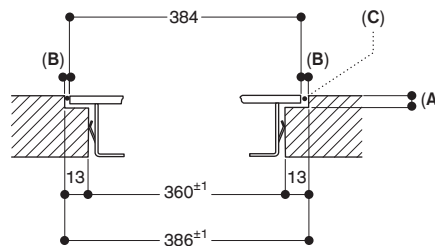


A: $6.5^{+0.5}$

B: 2.5

C: Fill with silicone

measurements in mm

Cross-section

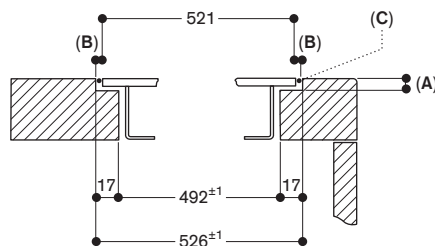

A: $6.5^{+0.5}$

B: 2.5

C: Fill with silicone

measurements in mm



VI 422 103

Frameless
Width 38 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material

For flex induction cooktop.

CA 052 300

Griddle plate in cast aluminium
Non-stick.

For flex induction cooktop.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 400 series

VI 422

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Frying sensor function for temperature control in pans
- Easy control of all functions with bicoloured display
- Solid stainless steel control knob
- Frameless for flush mounting
- For combination within the sets CVL 410 / 420

Cooking zones

2 flex induction cooking areas
20x24 cm (2200 W, with booster 3700 W), linked together 40x24 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control in 12 output levels.

User friendly control with bicoloured display (white / orange).

Features

Flex function for rectangular cooking areas.

Frying sensor function.

Booster function.

Stopwatch.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Operation indicator.

Pot detection.

2-stage residual heat indication.

Safety shut-off.

Planning notes

The horizontal positioning of the knobs may be aligned with the specific cooking areas.

The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured.

Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 10 kg.


Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 3.7 kW.

Connecting cable 1.5 m without plug.




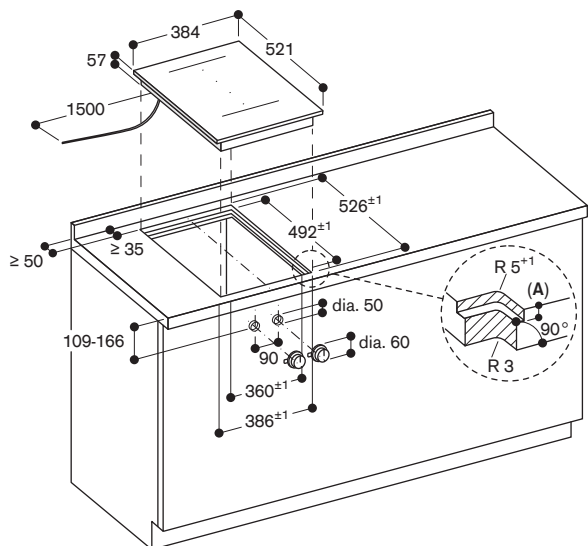

A: $6.5^{+0.5}$


measurements in mm

View from above




measurements in mm

Installation of the control knob; flush installation

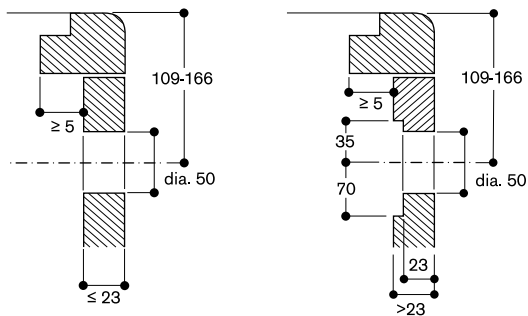

measurements in mm

Longitudinal section

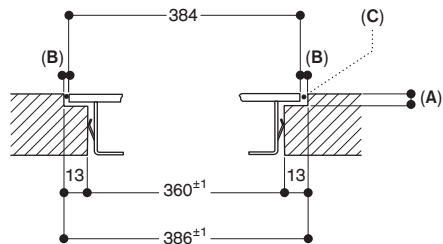


A: $6.5^{+0.5}$

B: 2.5

C: Fill with silicone

measurements in mm

Cross-section

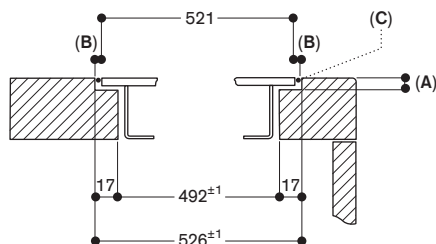

A: $6.5^{+0.5}$

B: 2.5

C: Fill with silicone

measurements in mm



CVL 410 103

For flush mounting
Width 87.7 cm
Air extraction / Air recirculation
Delivery without motor and without ducting

Consists of:

Induction wok 400 series
VI 414 103
Flex induction cooktop 400 series
VI 422 103
Downdraft ventilation 400 series
VL 410 111
Vario control knob ventilation 400 series
AA 490 111
2 Connection strips for combination within SETs
2x VA 422 000

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Flex induction cooktop with downdraft ventilation 400 series

CVL 410

- For flush mounting
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Large cooking zone for pots up to $\varnothing 32$ cm
- Ideal for the original wok pan with round bottom, with wok ring
- Solid stainless steel control knob
- Easy control of cooktop functions with bicoloured display
- Highly efficient ventilation system at the cooktop
- Motorless, can be combined with Gaggenau BLDC remote fan units
- Air extraction or air recirculation system

Cooking zones

2 flex induction cooking areas 20x24 cm (2200 W, with booster 3700 W), linked together 40x24 cm (3300 W, with booster 3700 W).
1 induction cooking zone $\varnothing 21$ cm (2200 W, with booster 3700 W), automatically switches to $\varnothing 26$ cm (2600 W, with booster 3700 W) and to $\varnothing 32$ cm (3300 W, with booster 3700 W).

Performance of ventilation system

Power levels depend on the remote fan unit, see table on page 302 – 303.

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control of the cooking zone in 12 output levels. User friendly control of cooktop functions with bicoloured display (white / orange). Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

Features

Flex function for rectangular cooking areas.
32 cm cooking zone.
Wok function.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Run-on function, 6 min.
Manual opening of the ventilation element.
Closing element made of stainless steel, dishwasher-safe.
Metal grease filter, dishwasher-safe.

Consumption data of downdraft ventilation

Consumption data is referred to a configuration with the remote fan unit AR 403 122.
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 42.7 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class C.
Sound level min. 56 dB / max. 68 dB normal mode.

Safety

Operation indicator.
Pot detection.
2-stage residual heat indication.
Safety shut-off.

Planning notes

Refer to the table on page 218 for the matching remote fan units for air recirculation or air extraction mode. When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

The horizontal positioning of the knobs may be aligned with the specific cooking areas and downdraft ventilation.


The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Appliance can be snapped into the worktop from above.


Please read the installation details regarding air ducting on page 178 – 179.

Connection


Total connected load 7.41 kW (2x3.7 kW cooktops and 0.01 kW control knob ventilation).
Connecting cable cooktops 1.5 m without plug.
Connecting cable downdraft ventilation 1.8 m, pluggable.
Connection cable 2.0 m between ventilation element VL 410 and control knob AA 490.

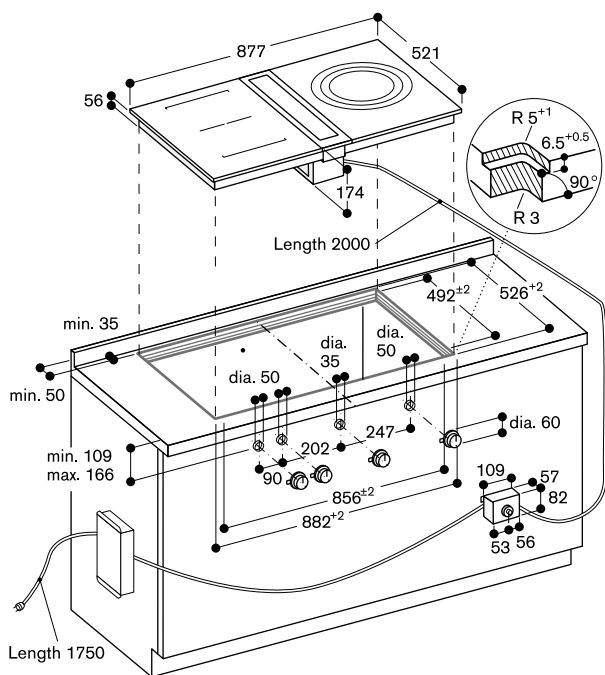


Cross-section

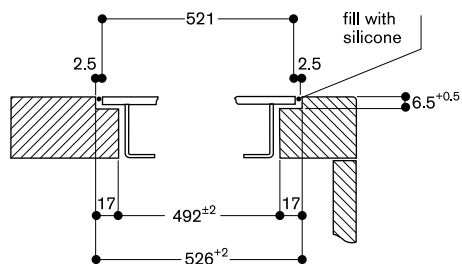


Longitudinal section

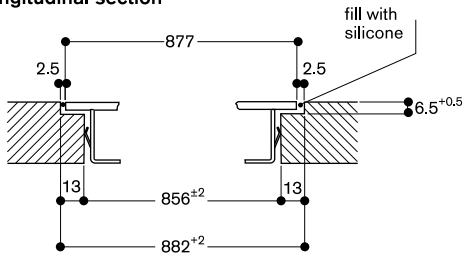

View from above

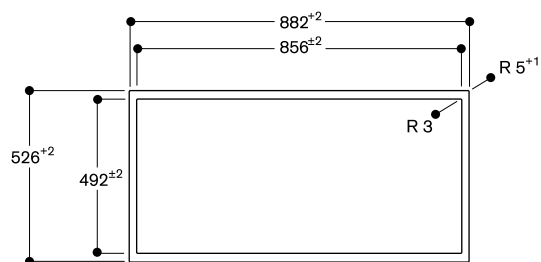


Induction cooktops VI 414 & VI 422

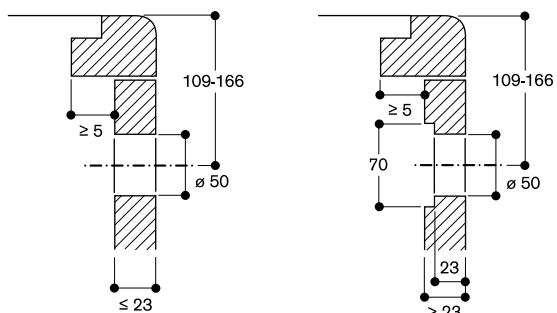

measurements in mm

VL 410 downdraft ventilation

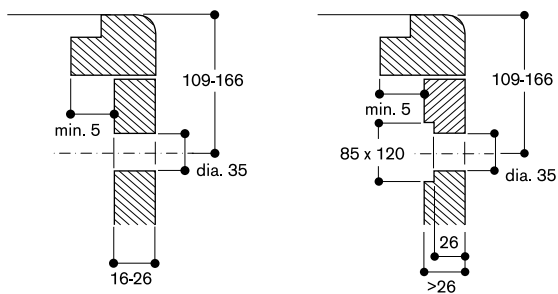



CVL 420 103

For flush mounting

Width 87.7 cm

Air extraction / Air recirculation

Delivery without motor and without ducting

Consists of:

Flex Induction cooktop 400 series

VI 422 103

Flex induction cooktop 400 series

VI 422 103

Downdraft ventilation 400 series

VL 410 111

Vario control knob ventilation 400 series

AA 490 111

2 Connection strips for combination within SETs

2x VA 422 000

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Flex induction cooktop with downdraft ventilation 400 series

CVL 420

- For flush mounting
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Solid stainless steel control knob
- Easy control of cooktop functions with bicoloured display
- Highly efficient ventilation system at the cooktop
- Motorless, can be combined with Gaggenau BLDC remote fan units
- Air extraction or air recirculation system

Cooking zones

2 flex induction cooking areas 20x24 cm (2200 W, with booster 3700 W), linked together 40x24 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas 20x24 cm (2200 W, with booster 3700 W), linked together 40x24 cm (3300 W, with booster 3700 W).

Performance of ventilation system

Power levels depend on the remote fan unit, see table on page 302 – 303.

Handling

Control knobs with illuminated ring, cooking zone and output level markings. Electronic power control of the cooking zone in 12 output levels. User friendly control of cooktop functions with bicoloured display (white / orange). Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

Features

Flex function for rectangular cooking areas.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Run-on function, 6 min.
Manual opening of the ventilation element.
Closing element made of stainless steel, dishwasher-safe.
Metal grease filter, dishwasher-safe.

Consumption data of downdraft ventilation

Consumption data is referred to a configuration with the remote fan unit AR 403 122.
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 42.7 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class C.
Sound level min. 56 dB / max. 68 dB normal mode.

Safety

Operation indicator.
Pot detection.
Individual residual heat indicators.
Safety shut-off.


Planning notes

Refer to the table on page 218 for the matching remote fan units for air recirculation or air extraction mode. When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch. The horizontal positioning of the knobs may be aligned with the specific cooking areas and downdraft ventilation. The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear). The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining. Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out. Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Appliance can be snapped into the worktop from above.


Please read the installation details regarding air ducting on page 178 – 179.

Connection


Total connected load 7.41 kW (2x3.7 kW cooktops and 0.01 kW control knob ventilation).
Connecting cable cooktops 1.5 m without plug.
Connecting cable downdraft ventilation 1.8 m, pluggable.
Connection cable 2.0 m between ventilation element VL 410 and control knob AA 490.

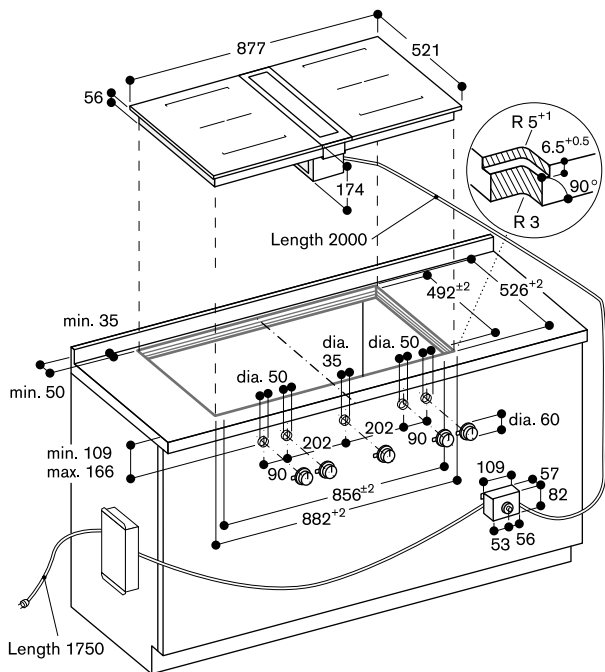


Cross-section

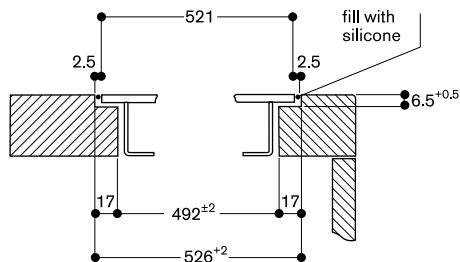


Longitudinal section

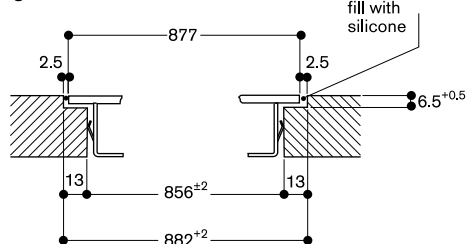

View from above

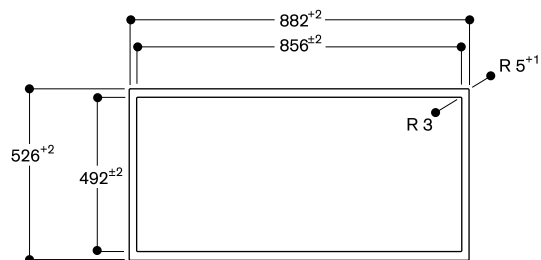


Induction cooktops VI 414 & VI 422

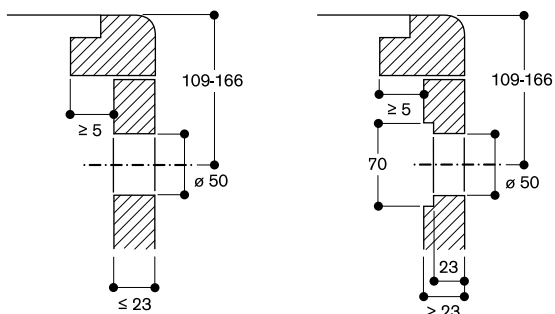

measurements in mm

VL 410 downdraft ventilation

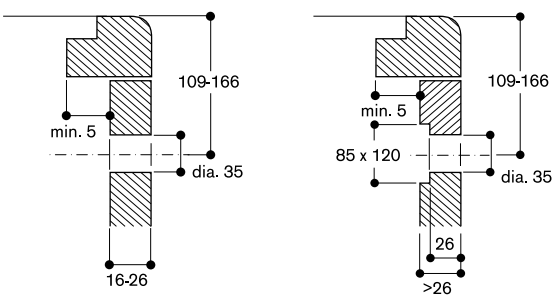

Good to know – for correct planning and installation

- For depth measurements, take account of the depth of the furniture cavity and worktop overhangs of the kitchen furniture.
- With the Vario downdraft ventilation, the ducting can be connected on the right, left or downwards
- For optimum air circulation, we recommend ducts with DN 150.
- 2 flat or 2 round ducts must be connected with a pipe connector.
- To connect 2 duct bends together (e.g. a 90° horizontal duct bend and a 90° vertical duct bend), a piece of flat duct is required, which can be shortened to the required length by cutting it to size.
- It is also important that ducting is well sealed in order to prevent air leaks, e.g. by using the adhesive tape for sealing the ducts AD 990 090 (UV- and heat-resistant).
- The flex induction cooktop with downdraft ventilation is not part of the SET.
- For further planning examples for the flex induction cooktop with downdraft ventilation refer to the planning examples of VL 414 (page 238 – 241).
- Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.

Planning example 1 (air extraction)

Configuration for CVL 410/420 with AR 403 122 (air extraction), min. 60 cm worktop depth

Combination

Flex induction cooktop with downdraft ventilation in combination with AR 403 122 remote fan unit (air extraction).



Good to know

- Full drawers can be installed beneath the flex induction cooktop with downdraft ventilation 400 series.
- The connection piece DN 150 is included with the remote fan unit.

List of components

- 1 x AR 403 122 (remote fan unit plinth 400 series)
- 1 x AD 854 046 (connection piece for VL, 150)
- 2 x AD 852 040 (flat duct connecting piece 150)
- 1 x AD 852 030 (flat duct 90 vertical 150)
- 2 x AD 852 032 (flat duct 15° horizontal 150)
- 1 x AD 852 010 (flat duct 150)
- 1 x AD 852 041 (flat duct adapter round 150)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (remote fan unit and accessories): SET1ADAR40.

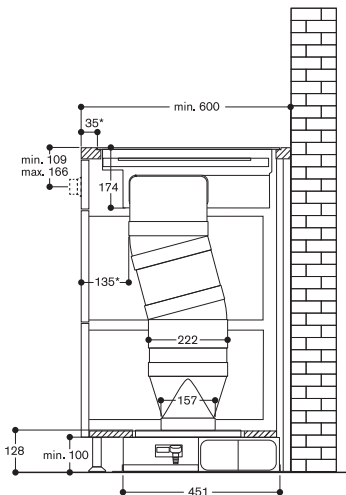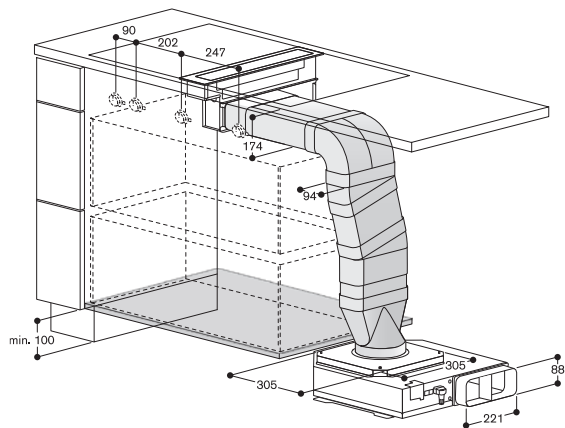

* Recommended measurement, can be adjusted.

Planning example 2 (air extraction)

Configuration for CVL 410/420 with AR 403 122 (air extraction), min. 71cm worktop depth

Combination

Flex induction cooktop with downdraft ventilation in combination with AR 403 122 remote fan unit (air extraction).



Good to know

- Short drawers can be installed beneath the flex induction cooktop with downdraft ventilation 400 series.
- The connection piece DN 150 is included with the remote fan unit.

List of components

- 1 x AR 403 122 (remote fan unit plinth 400 series)
- 1 x AD 854 046 (connection piece for VL, 150)
- 1 x AD 852 031 (flat duct 90 horizontal 150)
- 1 x AD 852 010 (flat duct 150)
- 1 x AD 852 030 (flat duct 90 vertical 150)
- 1 x AD 852 041 (flat duct adapter round 150)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (remote fan unit and accessories): SET2ADAR40.

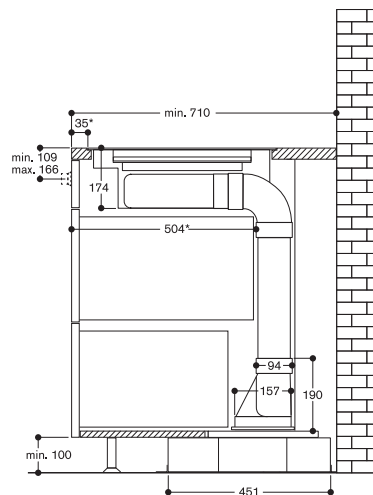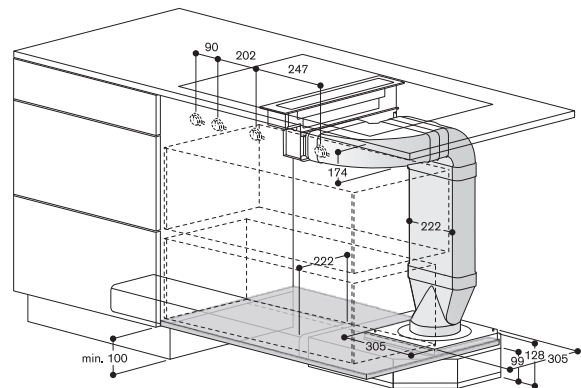

* Recommended measurement, can be adjusted.

Planning example 1 (air recirculation)

Configuration for CVL 410/420 with AR 413 122 (air recirculation), min. 68 cm worktop depth

Combination

Flex induction cooktop with downdraft ventilation in combination with AR 413 122 remote fan unit (air recirculation).



Good to know

- Short drawers can be installed beneath the flex induction cooktop with downdraft ventilation 400 series.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 700 cm²).
- Installation w/o ventilation grille possible. The recommended minimum distance between filter openings and cupboard wall if there is no ventilation grille directly in front: 15 cm.
- Filter can be changed from front.
- The connection piece DN 150 is included with the remote fan unit.

List of components

- 1 x AR 413 122 (remote fan unit plinth 400 series)
- 1 x AD 854 046 (connection piece for VL, 150)
- 1 x AD 852 031 (flat duct 90 horizontal 150)
- 1 x AD 852 010 (flat duct 150)
- 1 x AD 852 030 (flat duct 90 vertical 150)
- 1 x AD 852 041 (flat duct adapter round 150)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (remote fan unit and accessories): SET1ADAR41.

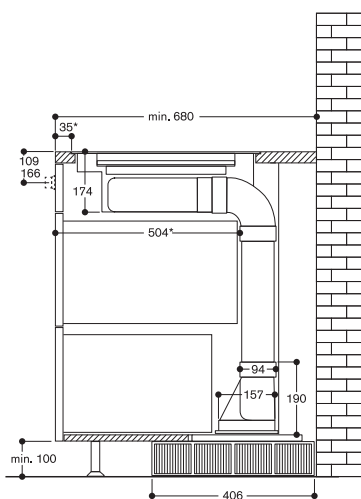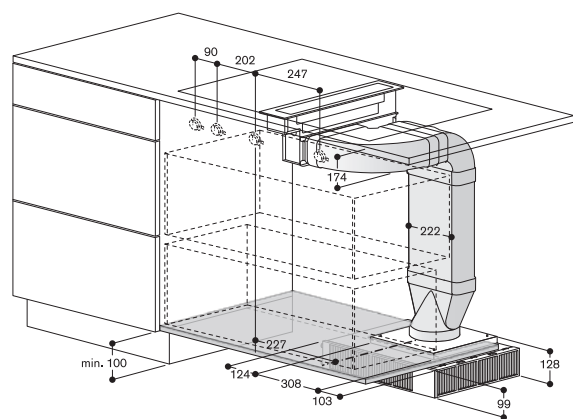

* Empfohlenes Maß, kann angepaßt werden.

Planning example 2 (air recirculation)

Configuration for CVL 410/420 with AR 413 122 (air recirculation), min. 90 cm worktop depth

Combination

Flex induction cooktop with downdraft ventilation in combination with AR 413 122 remote fan unit (air recirculation).



Good to know

- Short drawers can be installed beneath the flex induction cooktop with downdraft ventilation 400 series.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 700 cm²).
- The ventilation grille is situated at the rear. The recommended minimum distance between filter openings and cupboard wall if there is no ventilation grille directly in front: 15 cm.
- Filter can be changed from rear.
- The connection piece DN 150 is included with the remote fan unit.

List of components

- 1 x AR 413 122 (remote fan unit plinth 400 series)
- 1 x AD 854 046 (connection piece for VL, 150)
- 1 x AD 852 031 (flat duct 90 horizontal 150)
- 1 x AD 852 010 (flat duct 150)
- 1 x AD 852 030 (flat duct 90 vertical 150)
- 1 x AD 852 041 (flat duct adapter round 150)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (remote fan unit and accessories w/o ventilation grille): SET2ADAR41.

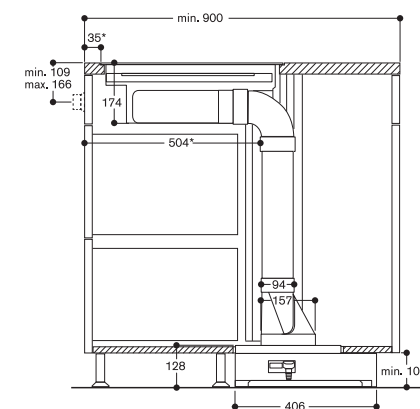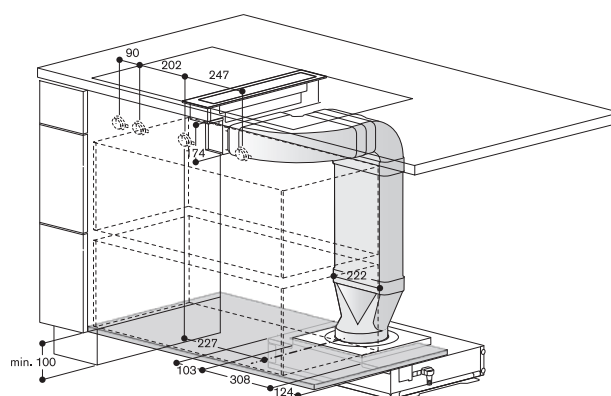

* Recommended measurement, can be adjusted.



CV 282 101

Frameless for flush mounting
Width 80 cm
Air extraction / Air recirculation
Delivery without ducting

Necessary installation accessories

CA 082 010
Kit unducted air recirculation
CA 082 020
Kit ducted air recirculation
CA 084 010
4 acoustic filters for air extraction mode

Special accessories

CA 051 300
Teppan Yaki plate made of multi ply material
For flex induction cooktop.
CA 052 300
Griddle plate in cast aluminium
Non-stick.
For flex induction cooktop.
CA 060 300
Cooking sensor for temperature regulation within pots
For flex induction cooktop.
CA 282 111
4 activated charcoal filters with high efficient odour reduction for air recirculation mode.
GP 900 001
Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.
GP 900 002
Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.
GP 900 003
Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Flex induction cooktop with integrated ventilation system 200 series CV 282

- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Highly efficient ventilation system integrated in the cooktop
- Fully automatic ventilation system functions
- Large-scale metal grease filter, easy to remove, dishwasher-safe
- Energy-saving, low-noise fan
- Air extraction or air recirculation system
- Integrated activated charcoal filter easily removeable from above for air recirculation system
- Twist-Pad control with removable, black magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
20x24 cm (2200 W, with booster 3700 W), linked together 40x24 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas
20x24 cm (2200 W, with booster 3700 W), linked together 40x24 cm (3300 W, with booster 3700 W).

Performance of ventilation system

Performance and noise level, output level 3/Intensive:
Air output according to EN 61591.
Sound power level according to EN 60704-3.
Air extraction:
532 / 636 m³/h.
70 / 74 dB (A) re 1 pW.
Air recirculation:
497 / 627 m³/h.
67 / 72 dB (A) re 1 pW.

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control of the cooking zone in 17 output levels.
Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

Features

Flex function for rectangular cooking areas.
Automatic pot detection when the cooktop is switched on.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA060300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Automatic sensor-controlled performance adjustment of the ventilation system.
Automatic activation of the ventilation system when a cooking zone is used.
Interval ventilation, 6 min.
Sensor-controlled run-on function.
Grease filter and air recirculation filter saturation indicator.

Removable, dishwasher-safe grease filter unit.
High-grade black zinc die-casted cover for ventilation system, dishwasher-safe. Fan technology with highly efficient, brushless DC motor (BLDC).
Airflow-optimised interior for efficient air circulation.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Memory function.
Options menu.
Power management.

Home network integration for digital services (Home Connect) wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 56.9 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class B.
Sound level min. 61 dB / max. 70 dB normal mode.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.
Detachable, dishwasher-safe two-stage overflow protection.
Removable overflow container, 0.9-litre capacity, dishwasher-safe.

Planning notes


Bottom cabinet width: min. 60 cm.
Worktop depth: min. 60 cm with unducted recirculation, min. 65 cm with ducted recirculation/extraction.
Immersion depth 227 mm.
The unducted recirculation set CA082010 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.
The air outlet on the backside of the appliance can directly be accessed with a flat duct element (DN 150).
In air extraction a one-way flap with a maximum opening pressure of 65 Pa should be installed.
For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm².
For recirculation installations planned at external walls that are non-isolated, a ducted planning is suggested.
The pressuredrop resistant blower allows for ductings up to 8 m with 3x90° bows while keeping sufficient performance.
Appliance must be fixed from underneath.
Appliance weight: approx. 32 kg.


The appliance must be freely accessible from below.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured.
Do not use discontinuous lining.
Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Please read the installation details regarding air ducting on page 184 – 185.

Connection


Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.



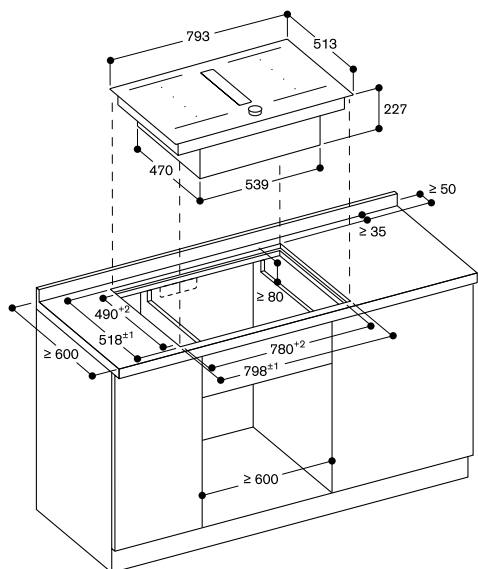


measurements in mm


View from above




Longitudinal section



Cross section




Front view

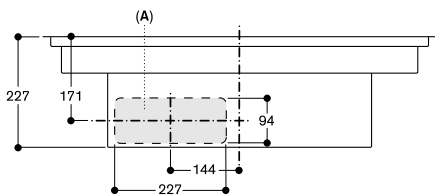

A: Connected directly at the rear


measurements in mm

Side view of CV 282 101 with unducted recirculation (CA 082 010)

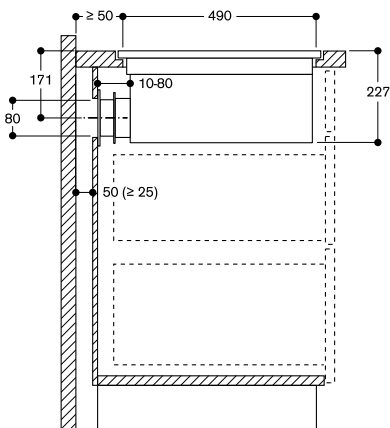


measurements in mm

Front view - furniture cut-out for unducted recirculation flush (CA 082 010)

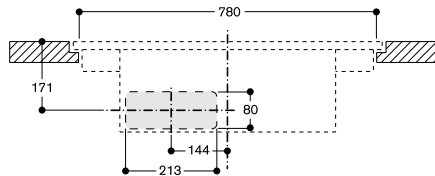


measurements in mm

Front view of CV 282 with ducted recirculation (CA 082 020)

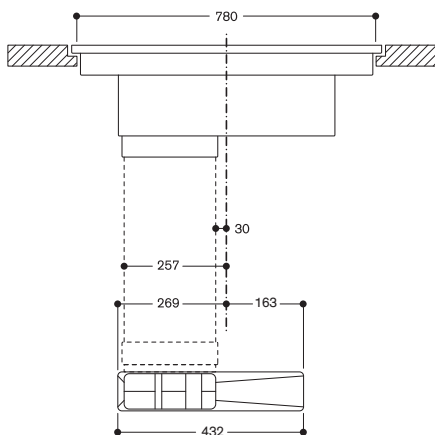


measurements in mm

Side view of CV 282 with ducted recirculation (CA 082 020) and standard flat duct bend 90°

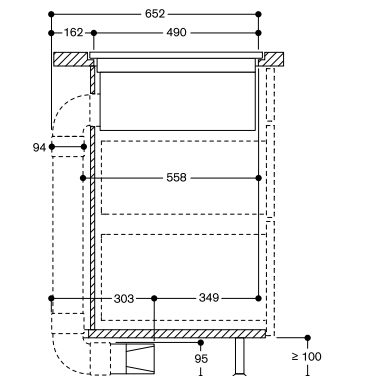


measurements in mm

Side view of CV 282 with extraction (CA 084 010) and standard flat duct bend 90°

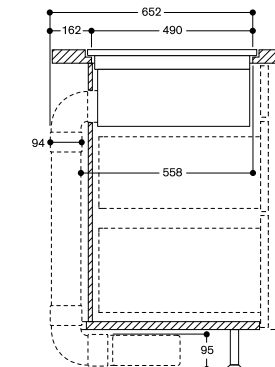

measurements in mm

Side view of CV 282 with ducted recirculation (CA 082 020) and short flat-duct bend, 90° (AD 857 033)

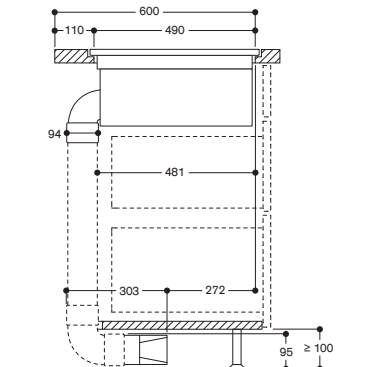

measurements in mm



CV 282 111

Stainless steel frame
Width 80 cm
Air extraction / Air recirculation
Delivery without ducting

Necessary installation accessories

CA 082 010
Kit unducted air recirculation
CA 082 020
Kit ducted air recirculation
CA 084 010
4 acoustic filters for air extraction mode

Special accessories

CA 051 300
Teppan Yaki plate made of multi ply material
For flex induction cooktop.
CA 052 300
Griddle plate in cast aluminium
Non-stick.
For flex induction cooktop.
CA 060 300
Cooking sensor for temperature regulation within pots
For flex induction cooktop.
CA 282 111
4 activated charcoal filters with high efficient odour reduction for air recirculation mode.
GP 900 001
Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.
GP 900 002
Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.
GP 900 003
Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Flex induction cooktop with integrated ventilation system 200 series CV 282

- Sturdy stainless steel frame
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Highly efficient ventilation system integrated in the cooktop
- Fully automatic ventilation system functions
- Large-scale metal grease filter, easy to remove, dishwasher-safe
- Energy-saving, low-noise fan
- Air extraction or air recirculation system
- Integrated activated charcoal filter easily removeable from above for air recirculation system
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

Performance of ventilation system

Performance and noise level, output level 3/Intensive:
Air output according to EN61591.
Sound power level according to EN 60704-3.
Air extraction:
532 / 636 m³/h.
70 / 74 dB (A) re 1 pW.
Air recirculation:
497 / 627 m³/h.
67 / 72 dB (A) re 1 pW.

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.
Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

Features

Flex function for rectangular cooking areas.
Automatic pot detection when the cooktop is switched on.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA060300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Automatic sensor-controlled performance adjustment of the ventilation system.
Automatic activation of the ventilation system when a cooking zone is used.
Interval ventilation, 6 min.
Sensor-controlled run-on function.
Grease filter and air recirculation filter saturation indicator.

Removable, dishwasher-safe grease filter unit.
High-grade black zinc die-casted cover for ventilation system, dishwasher-safe. Fan technology with highly efficient, brushless DC motor (BLDC).
Airflow-optimised interior for efficient air circulation.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Memory function.
Options menu.
Power management.

Home network integration for digital services (Home Connect) wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 56.9 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class B.
Sound level min. 61 dB / max. 70 dB normal mode.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.
Detachable, dishwasher-safe two-stage overflow protection.
Removable overflow container, 0.9-litre capacity, dishwasher-safe.

Planning notes


Bottom cabinet width: min. 60 cm.
Worktop depth: min. 60 cm with unducted recirculation, min. 65 cm with ducted recirculation/extraction.
Immersion depth 223 mm.
The unducted recirculation set CA082010 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.
The air outlet on the backside of the appliance can directly be accessed with a flat duct element (DN 150).
In air extraction a one-way flap with a maximum opening pressure of 65 Pa should be installed.
For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm².
For recirculation installations planned at external walls that are non-isolated, a ducted planning is suggested.
The pressuredrop resistant blower allows for ductings up to 8 m with 3x90° bows while keeping sufficient performance.
Appliance must be fixed from underneath.
Appliance weight: approx. 33 kg.


The appliance must be freely accessible from below.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Please read the installation details regarding air ducting on page 184 – 185.

Connection


Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.



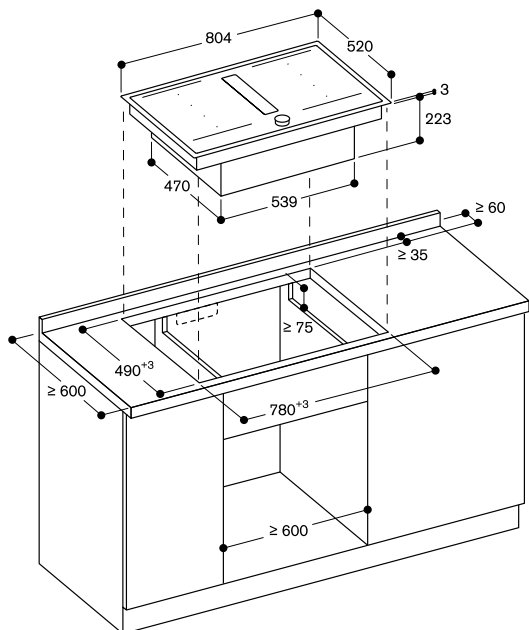

measurements in mm


Front view

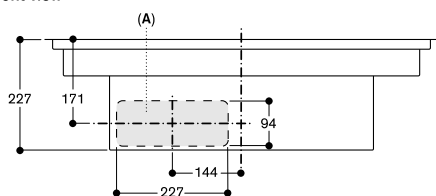

A: Connected directly at the rear


measurements in mm

Side view of CV 282 111 with unducted recirculation (CA 082 010)

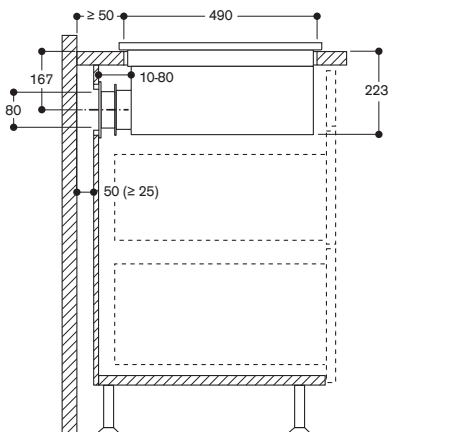


measurements in mm

Front view - furniture cut-out for unducted recirculation surface mounting (CA 082 010)

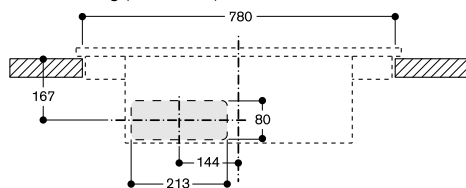


measurements in mm

Side view of CV 282 with ducted recirculation (CA 082 020) and standard flat duct bend 90°

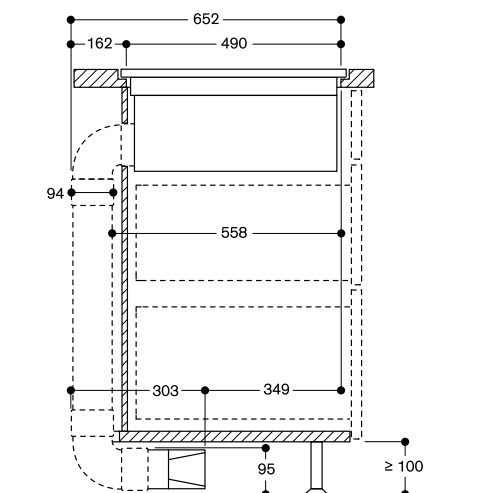


measurements in mm

Front view of CV 282 with ducted recirculation (CA 082 020)

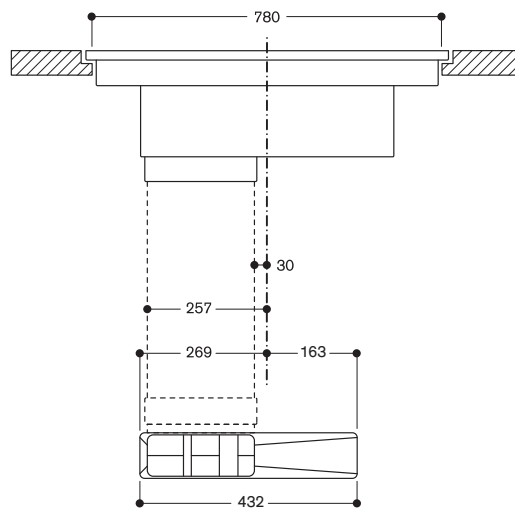


measurements in mm

Side view of CV 282 with extraction (CA 084 010) and standard flat duct bend 90°

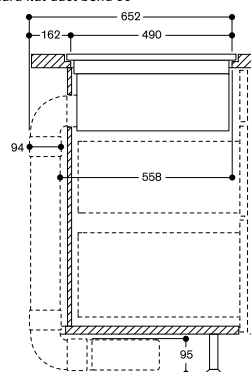

measurements in mm

Side view of CV 282 with ducted recirculation (CA 082 020) and short flat-duct bend, 90° (AD 857 033)

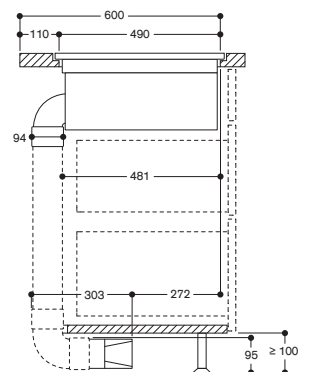

measurements in mm

Planning examples for flex induction cooktop with integrated ventilation system 200 series

Good to know – for correct planning and installation

- For depth measurements, take account of the depth of the furniture cavity and worktop overhangs of the kitchen furniture.
- The air extraction ducting can be connected to below or to the rear. The respective connecting pieces are available for this purpose.
- The appliance must be accessible from underneath.


Air recirculation

- Installation with air recirculation kits (CA 082 010 or CA 082 020)
- Filters can be replaced from above.
- Allow accessibility from below.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm²).
- The unducted recirculation set CA 082 010 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.

Planning example 1

CV 282 with unducted air recirculation (CA 082 010)

Wall installation, worktop depth 60 cm, Vertical aperture of min. 25 mm behind the backpanel of the furniture. Suggested for ideal performance are 50 mm.

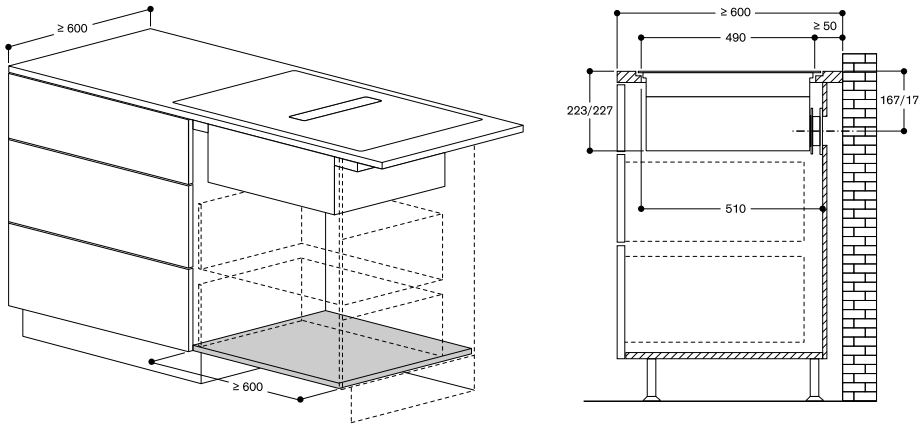


List of components:

- 1 x CA 082 010 Recirculation kit

Planning example 2

CV 282 with unducted air recirculation (CA 082 010)

Island installation, worktop depth 120 cm, Vertical aperture of min. 25 mm behind the back panel of the furniture. Suggested for ideal performance are 50 mm.

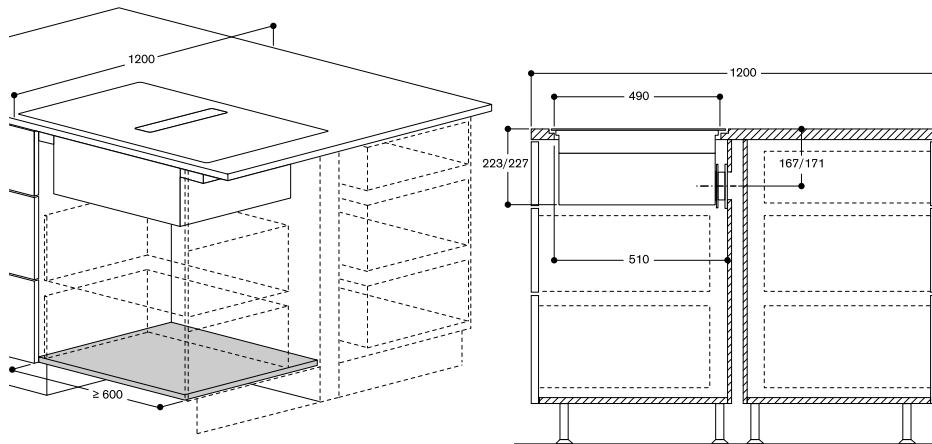


List of components:

- 1 x CA 082 010 Recirculation kit

Planning example 3

CV 282 with ducted recirculation

Island installation, worktop depth 90 cm

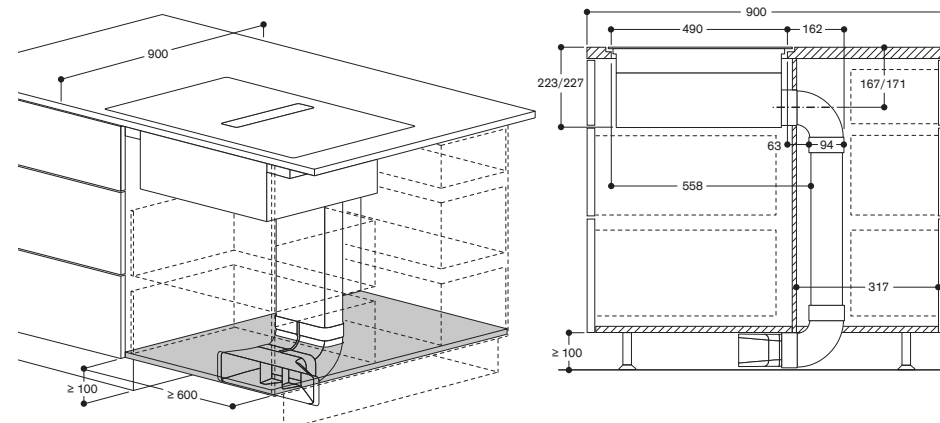

List of components:



- 1 x CA 082 020 Recirculation kit
- 1 x AD 852 010 Flat duct DN 150 (1 meter)
- 2 x AD 852 030 Flat duct bend 90° vertical DN150 flat
- 1 x AD 990 090 Adhesive tape

Air extraction

- Appliance is directly accessible with male flat duct DN 150.
- For all extraction installations please foresee acoustic filter (CA 084 010)
- Maximum length of the air extraction ducting system 8 m to assure good performance.
- For optimum air circulation, we recommend ducts with DN 150. Ducting and connection pieces are available as special accessories.
- Two flat ducts must be connected with a pipe connector.
- It is also important that ducting is well sealed in order to prevent air leaks, e.g. by using the adhesive tape AD 990 090 (UV- and heat-resistant).

Planning example 4**CV 282 with air extraction installation**



Wall installation, worktop depth 60 cm, direct connection to flat wall outlet.

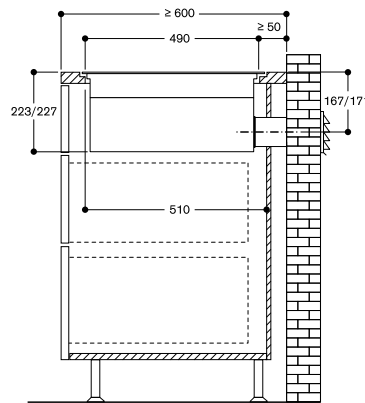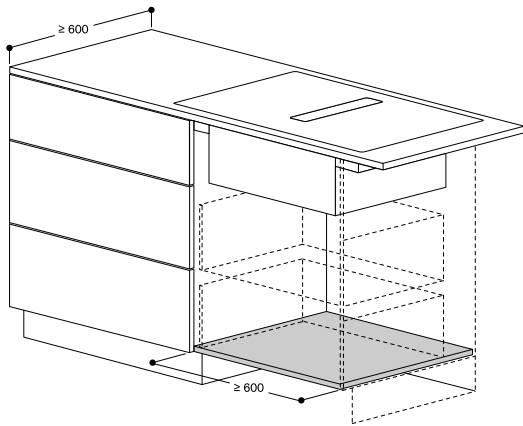**List of components:**

- 1 x CA 084 010 Extraction kit
- 1 x AD 852 010 Flat duct DN 150 (1 meter)
- 1 x AD 850 050 Wall outlet DN150 flat
- 1 x AD 990 090 Adhesive tape

Planning example 5**CV 282 with air extraction installation**



Wall or island installation, worktop depth 70 cm, ducting directed to the outside via the cellar.

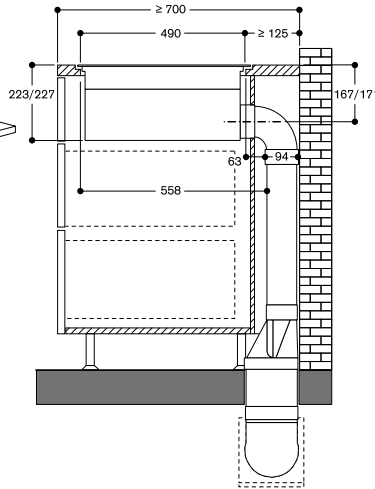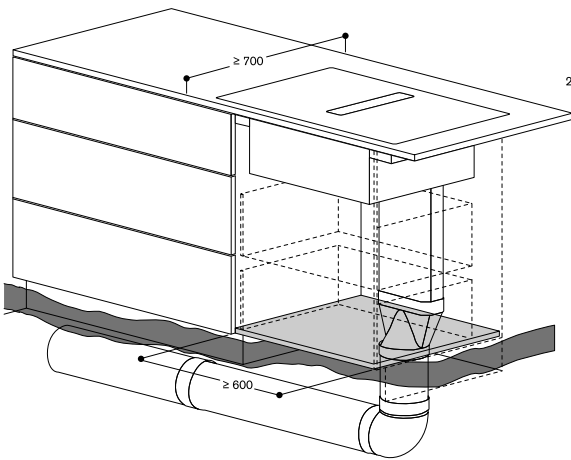**List of components:**

- 1 x CA 084 010 Extraction kit
- 1 x AD 852 010 Flat duct DN 150 (1 meter)
- 1 x AD 852 030 Flat duct bend 90° vertical DN150 flat
- 1 x AD 852 041 Flat duct adapter round DN150 to DN150 flat
- 3 x AD 752 010 Round duct DN150
- 1 x AD 752 030 Duct bend 90° DN150
- 1 x AD 754 090 Pipe connector DN150
- 1 x AD 750 053 Wall outlet with telescopic duct DN150
- 1 x AD 990 090 Adhesive tape

Planning example 6**CV 282 with air extraction installation**

Wall installation, worktop depth 70 cm, ducting behind the cabinet and in the plinth.

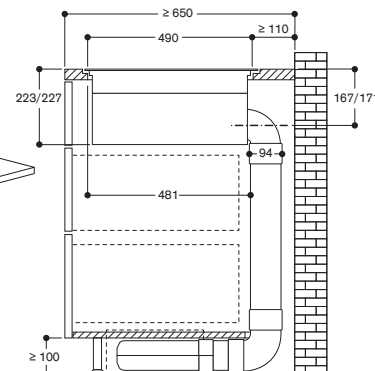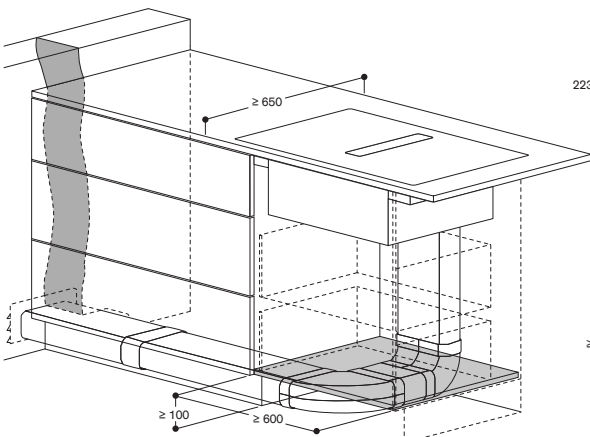**List of components:**

- 1 x CA 084 010 Extraction kit
- 4 x AD 852 010 Flat duct DN 150 (1 meter)
- 1 x AD 852 030 Flat duct bend 90° vertical DN150 flat
- 1 x AD 852 031 Flat duct bend 90° horizontal
- 2 x AD 852 040 Flat duct pipe connector DN150 flat
- 1 x AD 850 050 Wall outlet DN150 flat
- 1 x AD 857 033 Short flat duct bend 90° vertical DN150°
- 1 x AD 990 090 Adhesive tape



CI 292 102

Frameless
Width 90 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material

For flex induction cooktop.

CA 052 300

Wire rack/le plate in cast aluminium
Non-stick.

For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series

Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 292

- Frameless for flush mounting
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Professional cooking function for splitting the cooktop into predefined heat areas
- Cooking sensor function for temperature control in pots
- Frying sensor function for temperature control in pans
- Large cooking zone for pots up to ø 32 cm
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas
20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W).

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.

User friendly control with bicoloured display (white / orange).

Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.

Professional cooking function.

Cooking sensor function (in use with cooking sensor CA 060 300).

Frying sensor function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Stopwatch.

Cooking timer for up to 99 minutes.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.

Operation indicator.

Pot detection.

2-stage residual heat indication.

Child lock.

Safety shut-off.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Appliance must be fixed from underneath.


Appliance weight: approx. 27 kg.


Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 11.1 kW.

Connecting cable 1.5 m without plug.




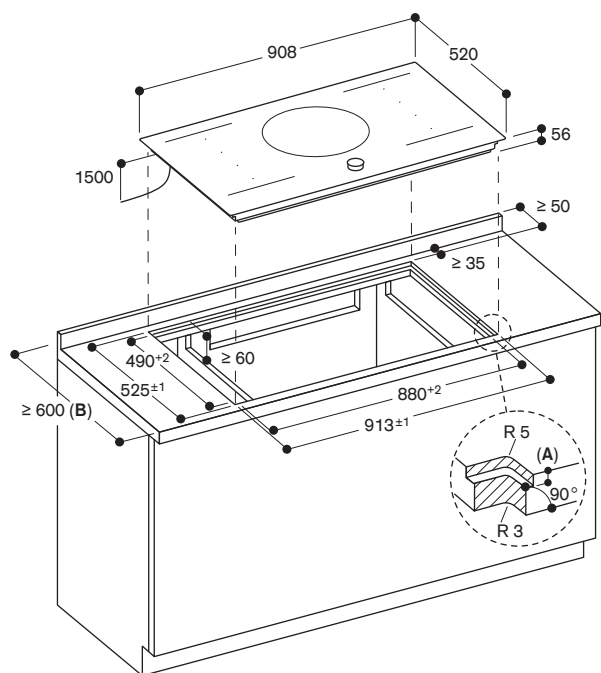

A: $6.5^{+0.5}$
 B: Please check the installation manual in case the worktop depth is below 600 mm.


measurements in mm

View from above

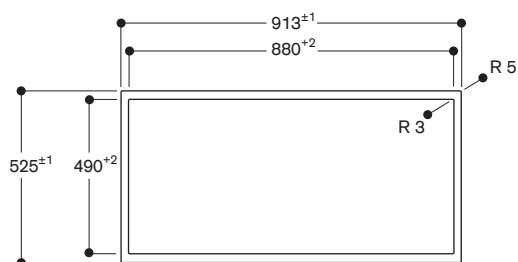

measurements in mm


Longitudinal section

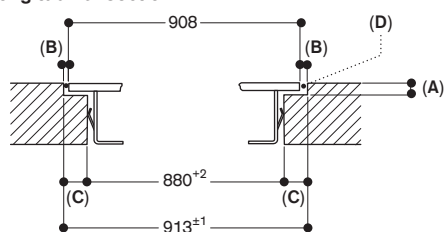

A: $6.5^{+0.5}$
 B: 2.5
 C: 16.5
 D: Fill with silicone

measurements in mm

Cross-section

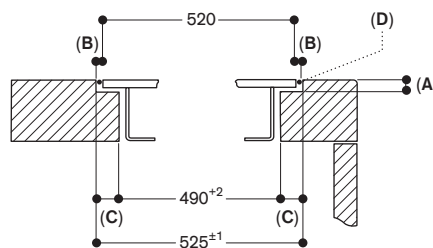

A: $6.5^{+0.5}$
 B: 2.5
 C: 17.5
 D: Fill with silicone
 measurements in mm



CI 292 112

Stainless steel frame
Width 90 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material

For flex induction cooktop.

CA 052 300

Wire rack/plate in cast aluminium
Non-stick.

For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series

Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 292

- Sturdy stainless steel frame
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Professional cooking function for splitting the cooktop into predefined heat areas
- Cooking sensor function for temperature control in pots
- Frying sensor function for temperature control in pans
- Large cooking zone for pots up to ø 32 cm
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas
19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

1 induction cooking zone ø 21 cm (2200 W, with booster 3700 W), automatically switches to ø 26 cm (2600 W, with booster 3700 W) and to ø 32 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.

User friendly control with bicoloured display (white / orange).

Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.

Professional cooking function.

Cooking sensor function (in use with cooking sensor CA 060 300).

Frying sensor function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Stopwatch.

Cooking timer for up to 99 minutes.

Short-term timer.

Options menu.

Power management.

Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.

Operation indicator.

Pot detection.

2-stage residual heat indication.

Child lock.

Safety shut-off.

Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Appliance must be fixed from underneath.


Appliance weight: approx. 27 kg.


Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 11.1 kW.

Connecting cable 1.5 m without plug.



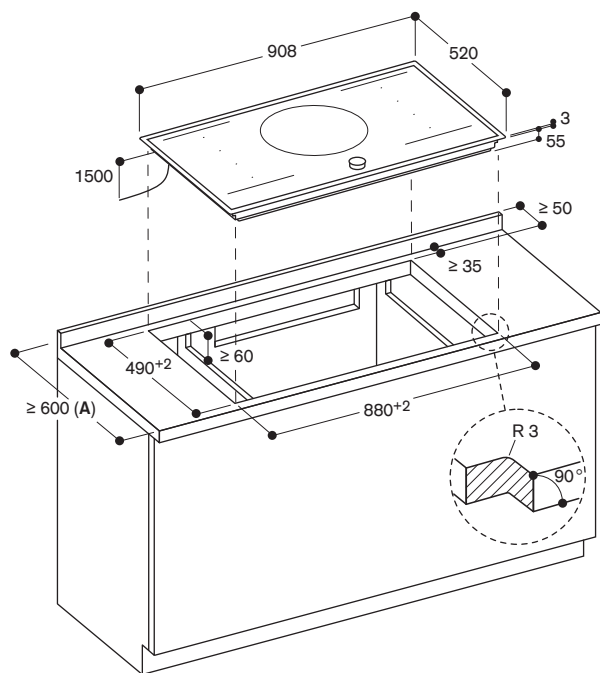

A: Please check the installation manual in case the worktop depth is below 600 mm.

measurements in mm



CI 283 103

Frameless
Width 80 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material
For flex induction cooktop.

CA 052 300

Wire rack/plate in cast aluminium
Non-stick.
For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series

Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Island- and wall-mounted hood AI 240/AW 240
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 283

- Frameless for flush mounting
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Professional cooking function for splitting the cooktop into predefined heat areas
- Cooking sensor function for temperature control in pots
- Frying sensor function for temperature control in pans
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
20x21 cm (2200 W, with booster 3700 W), linked together 40x21 cm (3300 W, with booster 3700 W).
1 induction cooking zone ø 24 cm (2200 W, with booster 3700 W).
1 induction cooking zone ø 18 cm (1800 W, with booster 3100 W).
1 induction cooking zone ø 15 cm (1400 W, with booster 2200 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.


Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Appliance must be fixed from underneath.
Appliance weight: approx. 18 kg.

Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.




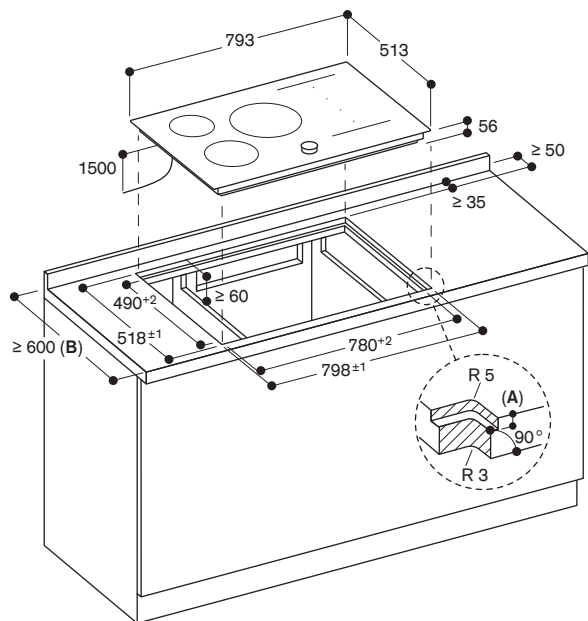

A: $6.5^{+0.5}$
 B: Please check the installation manual in case the worktop depth is below 600 mm.


measurements in mm

View from above

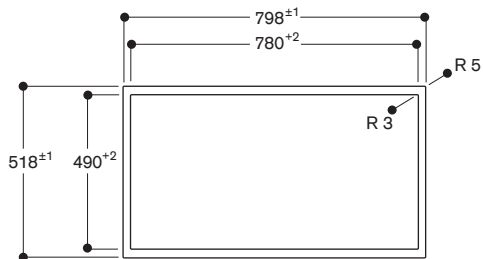

measurements in mm


Longitudinal section

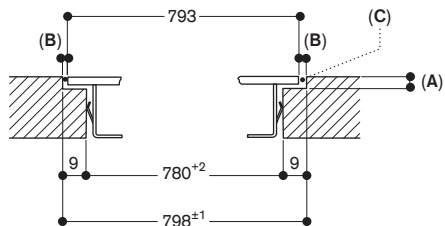

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone

measurements in mm

Cross-section

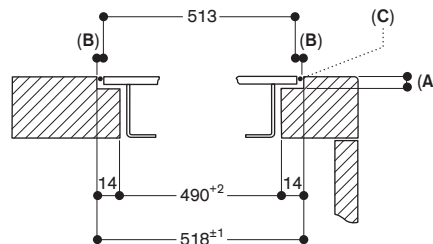

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone

measurements in mm



CI 283 113

Stainless steel frame
Width 80 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material
For flex induction cooktop.

CA 052 300

Wire rack/plate in cast aluminium
Non-stick.
For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series

Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Island- and wall-mounted hood AI 240/AW 240
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 283

- Sturdy stainless steel frame
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas
- Professional cooking function for splitting the cooktop into predefined heat areas
- Cooking sensor function for temperature control in pots
- Frying sensor function for temperature control in pans
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
19x21 cm (2200 W, with booster 3700 W), linked together 38x21 cm (3300 W, with booster 3700 W).
1 induction cooking zone ø 24 cm (2200 W, with booster 3700 W).
1 induction cooking zone ø 18 cm (1800 W, with booster 3100 W).
1 induction cooking zone ø 15 cm (1400 W, with booster 2200 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.


Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Appliance must be fixed from underneath.
Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.



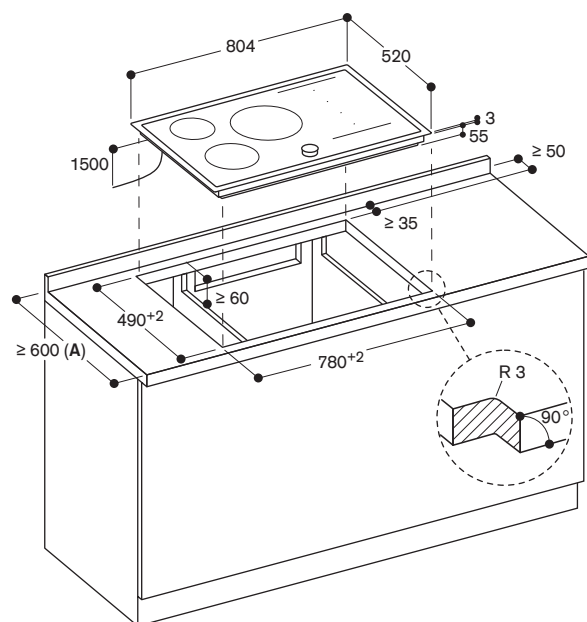

A: Please check the installation manual in case the worktop depth is below 600 mm.

measurements in mm



CI 282 102

Frameless
Width 80 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material
For flex induction cooktop.

CA 052 300

Wire rack/plate in cast aluminium
Non-stick.
For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series

Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 and 200 series
Island- and wall-mounted hood 400 series
Island- and wall-mounted hood AI 240/AW 240
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 282

- Frameless for flush mounting
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Cooking sensor function for temperature control in pots
- Professional cooking function for splitting the cooktop into predefined heat areas
- Frying sensor function for temperature control in pans
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas 20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas 20x23 cm (2200 W, with booster 3700 W), linked together 40x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.


Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Appliance must be fixed from underneath.
Appliance weight: approx. 16 kg.

Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.




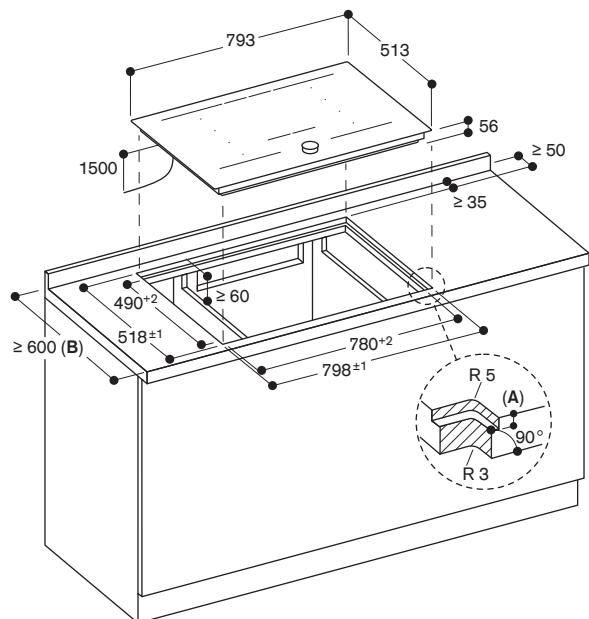

A: $6.5^{+0.5}$
 B: Please check the installation manual in case the worktop depth is below 600 mm.


measurements in mm

View from above

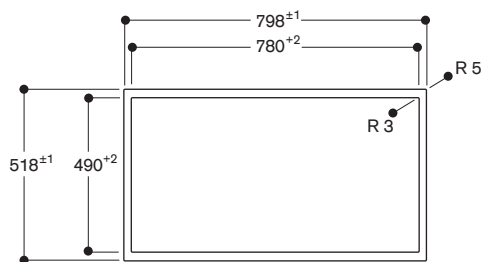

measurements in mm


Longitudinal section

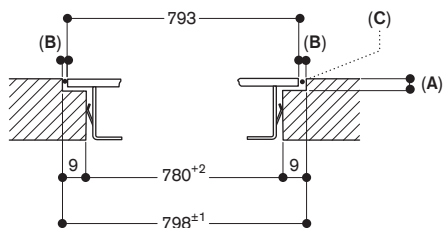

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone

measurements in mm

Cross-section

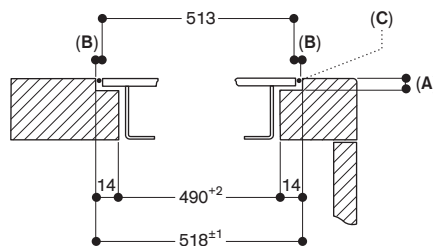

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone

measurements in mm



CI 282 112

Stainless steel frame
Width 80 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material
For flex induction cooktop.

CA 052 300

Wire rack/plate in cast aluminium
Non-stick.
For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series
Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Island- and wall-mounted hood
AI 240/AW 240
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 282

- Sturdy stainless steel frame
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Cooking sensor function for temperature control in pots
- Professional cooking function for splitting the cooktop into predefined heat areas
- Frying sensor function for temperature control in pans
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
19x22.5 cm (2200 W, with booster 3700 W), linked together 38x22.5 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas
19x22.5 cm (2200 W, with booster 3700 W), linked together 38x22.5 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Cooking sensor function (in use with cooking sensor CA060300).
Professional cooking function.
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.


Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Appliance must be fixed from underneath.
Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.



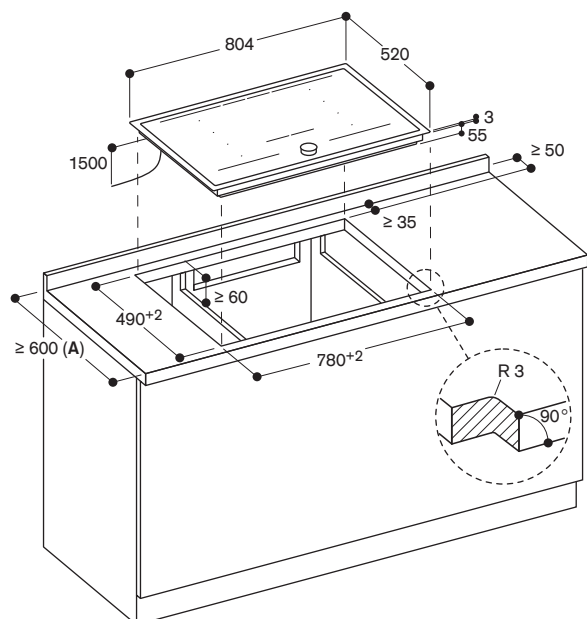

A: Please check the installation manual in case the worktop depth is below 600 mm.

measurements in mm



CI 272 103

Frameless
Width 70 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material

For flex induction cooktop.

CA 052 300

Wire rack/le plate in cast aluminium Non-stick.

For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series

Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 and 200 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 272

- Frameless for flush mounting
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Cooking sensor function for temperature control in pots
- Professional cooking function for splitting the cooktop into predefined heat areas
- Frying sensor function for temperature control in pans
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.


Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Appliance must be fixed from underneath.
Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.




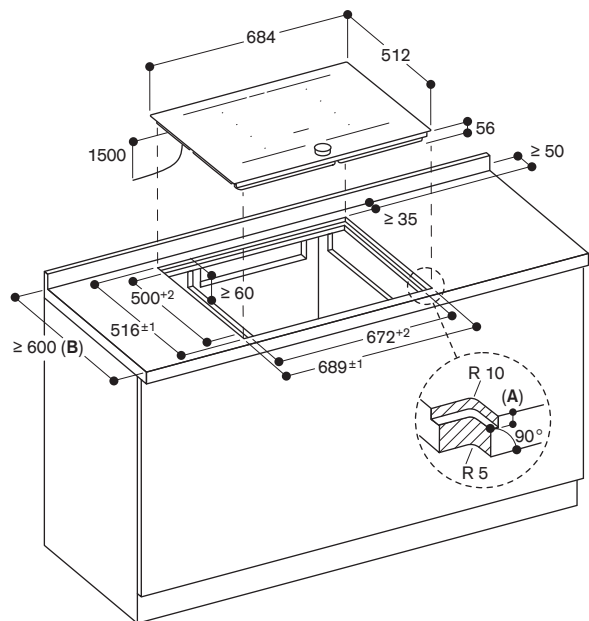

A: $6.5^{+0.5}$
 B: Please check the installation manual in case the worktop depth is below 600 mm.


measurements in mm

View from above

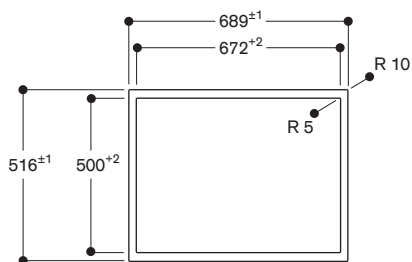

measurements in mm


Longitudinal section

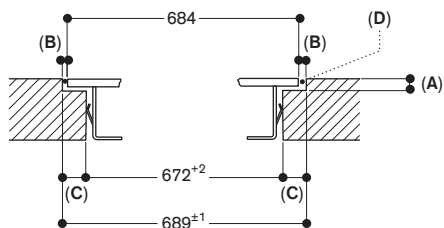

A: $6.5^{+0.5}$
 B: 2.5
 C: 8.5
 D: Fill with silicone

measurements in mm

Cross-section

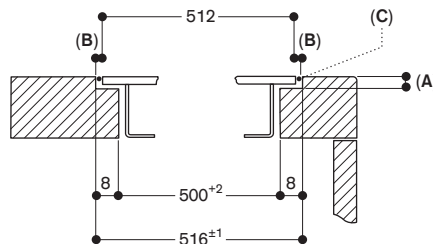

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone

measurements in mm



CI 272 113

Stainless steel frame
Width 70 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material

For flex induction cooktop.

CA 052 300

Wire rack/plate in cast aluminium
Non-stick.

For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series

Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series

Table ventilation 400 series

Island- and wall-mounted hood 400 and 200 series

Flat kitchen hood 200 series

Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 272

- Sturdy stainless steel frame
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Cooking sensor function for temperature control in pots
- Professional cooking function for splitting the cooktop into predefined heat areas
- Frying sensor function for temperature control in pans
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
19x22.5 cm (2200 W, with booster 3700 W), linked together 38x22.5 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas
19x22.5 cm (2200 W, with booster 3700 W), linked together 38x22.5 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.


Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Appliance must be fixed from underneath.
Appliance weight: approx. 17 kg.

Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.



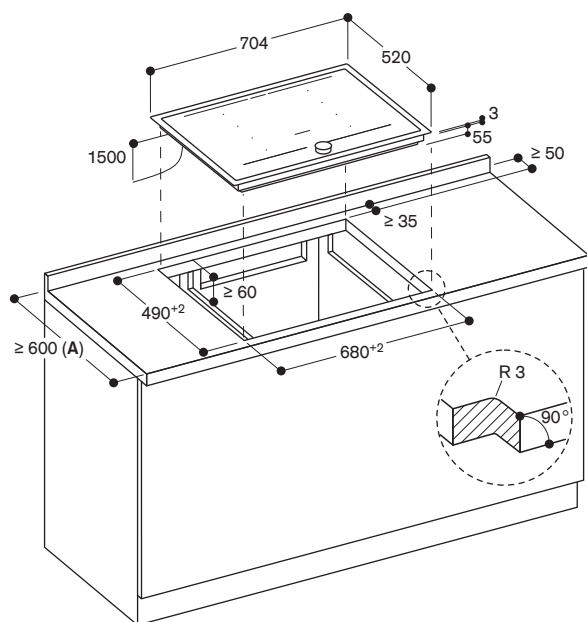

A: Please check the installation manual in case the worktop depth is below 600 mm.

measurements in mm



CI 262 105
 Frameless
 Width 60 cm

Special accessories

CA 051 300
 Teppan Yaki plate made of multi ply material
 For flex induction cooktop.

CA 052 300
 Wire rack/plate in cast aluminium
 Non-stick.
 For flex induction cooktop.

CA 060 300
 Cooking sensor for temperature regulation within pots

CA 230 100
 Black magnetic knob for induction cooktop 200 series
 Stainless steel knob with black coating.

GP 900 001
 Stainless steel frying sensor pan
 Non-stick coating, ø 15 cm.

GP 900 002
 Stainless steel frying sensor pan
 Non-stick coating, ø 19 cm.

GP 900 003
 Stainless steel frying sensor pan
 Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
 Table ventilation 400 series
 Island- and wall-mounted hood 400 and 200 series
 Flat kitchen hood 200 series
 Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 262

- Frameless for flush mounting
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Cooking sensor function for temperature control in pots
- Professional cooking function for splitting the cooktop into predefined heat areas
- Frying sensor function for temperature control in pans
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).
 2 flex induction cooking areas
 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.
 User friendly control with bicoloured display (white / orange).
 Cooking zone and cooking area marking.
 Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
 Professional cooking function.
 Cooking sensor function (in use with cooking sensor CA 060 300).
 Frying sensor function.
 Booster function for pots.
 Booster function for pans.
 Keep warm function.
 Stopwatch.
 Cooking timer for up to 99 minutes.
 Short-term timer.
 Options menu.
 Power management.
 Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
 Operation indicator.
 Pot detection.
 2-stage residual heat indication.
 Child lock.
 Safety shut-off.


Planning notes


Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
 Appliance must be fixed from underneath.
 Appliance weight: approx. 16 kg.

Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.
 Connecting cable 1.5 m without plug.




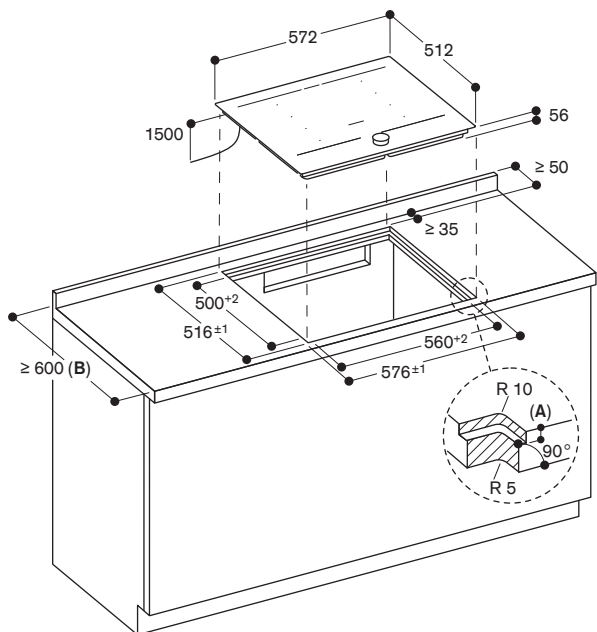

A: $6.5^{+0.5}$
 B: Please check the installation manual in case the worktop depth is below 600 mm.


measurements in mm

View from above

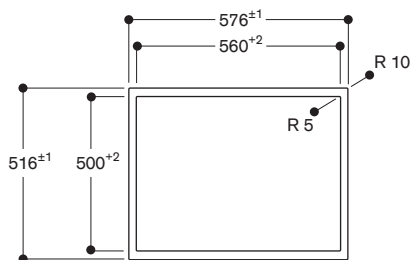


measurements in mm

Longitudinal section

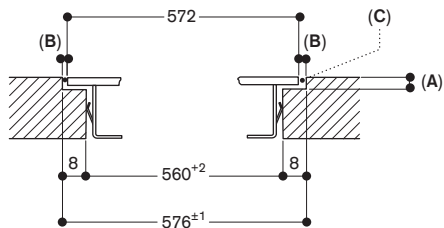

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone
 measurements in mm

Cross-section

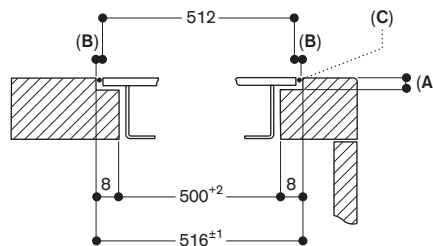

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone
 measurements in mm



CI 262 115

Stainless steel frame
Width 60 cm

Special accessories

CA 051 300

Teppan Yaki plate made of multi ply material
For flex induction cooktop.

CA 052 300

Wire rack/plate in cast aluminium
Non-stick.
For flex induction cooktop.

CA 060 300

Cooking sensor for temperature regulation within pots

CA 230 100

Black magnetic knob for induction cooktop 200 series

Stainless steel knob with black coating.

GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 and 200 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Flex induction cooktop 200 series

CI 262

- Sturdy stainless steel frame
- Flex function for combining the rectangular cooking areas
- Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
- Cooking sensor function for temperature control in pots
- Professional cooking function for splitting the cooktop into predefined heat areas
- Frying sensor function for temperature control in pans
- Twist-Pad control with removable magnetic knob
- Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas
19x22.5 cm (2200 W, with booster 3700 W), linked together 38x22.5 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

2 flex induction cooking areas
19x22.5 cm (2200 W, with booster 3700 W), linked together 38x22.5 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.
Cooktop-based ventilation control (with suitable hood).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.



Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance.
Appliance must be fixed from underneath.
Appliance weight: approx. 16 kg.

Please read the installation details regarding air ducting on page 206.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.

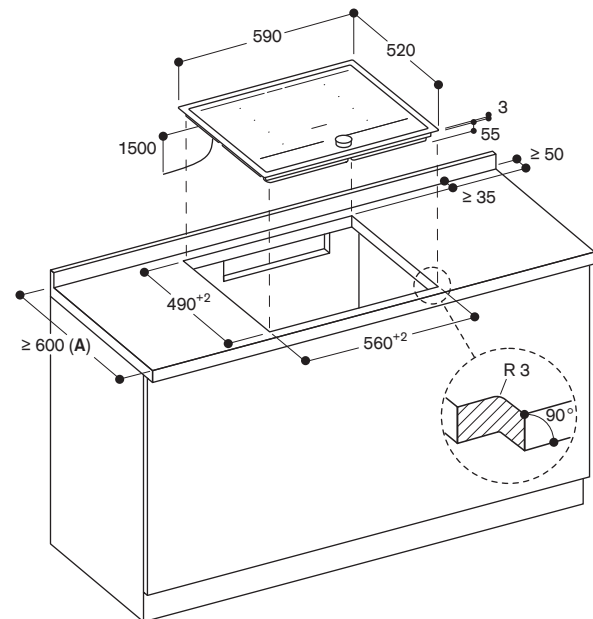

A: Please check the installation manual in case the worktop depth is below 600 mm.

measurements in mm

**CI 261 114**

Stainless steel frame
Width 60 cm

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 and 200 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Induction cooktop 200 series**CI 261**

- Sturdy stainless steel frame
- Oval roasting zone switches on automatically
- Sensor control with direct selection of output level

Cooking zones

1 induction cooking zone \varnothing 18 cm (1800 W, with booster 3100 W), automatically switches to a 18x28 cm roasting zone (2000 W, with booster 3700 W).
1 induction cooking zone \varnothing 21 cm (2200 W, with booster 3700 W).
1 induction cooking zone \varnothing 18 cm (1800 W, with booster 3100 W).
1 induction cooking zone \varnothing 15 cm (1400 W, with booster 2200 W).

Handling

Sensor control with direct selection of output level.
Cooking zone marking.
Electronic power control in 17 output levels.

Features

Booster function for each cooking zone.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.



Planning notes

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. The wok pan WP 400 001 cannot be used with this appliance. Intermediate shelf is recommended. Appliance must be fixed from underneath. Appliance weight: approx. 14 kg.

Please read additional planning notes on page 206.

Connection

Total connected load 7.4 kW.
Connecting cable 1.5 m without plug.

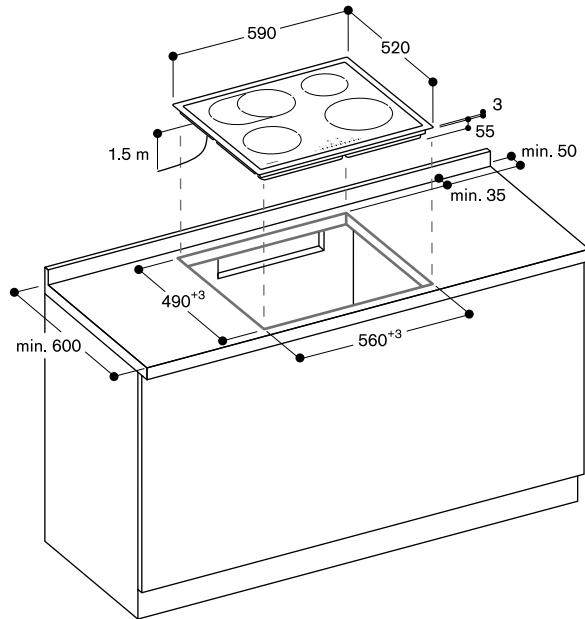

Installation notes for induction cooktops and glass ceramic


Applies to CI 26./27./28./29., CX 492/482, VI 414/422/462/482/492, VI 232/242/262 and CE 261/291.

Intake air ducting

Induction cooktops have a cooling fan to protect the appliance's electronics from overheating. In the case of insufficient air circulation in the cabinet, the appliance's output will be reduced to prevent electronic damage.

A Air duct behind a cabinet or built-in oven

An open cross-section of a minimum of 20 mm is needed across the full width and full height of the cabinet. Cabinets with a closed bottom also need a respective cross-section in the air duct area.

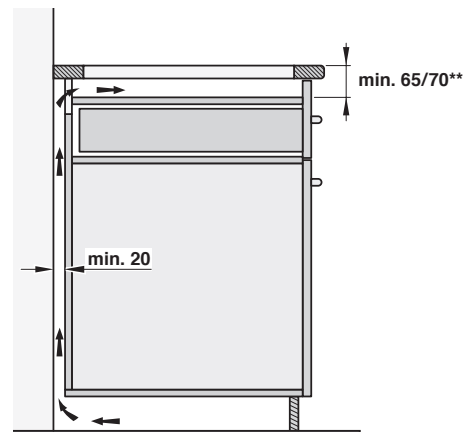


B Intake through the cabinet's back wall

In the cabinet's back wall, plan a recess of at least 45 mm in height from the worktop's bottom edge.

The minimum width is

- 300 mm for a 30 cm induction cooktop
- 350 mm for a 40 cm induction cooktop
- 550 mm for a Vario cooktop or a 60 cm to 80 cm induction cooktop
- 820 mm for a 90 cm induction cooktop

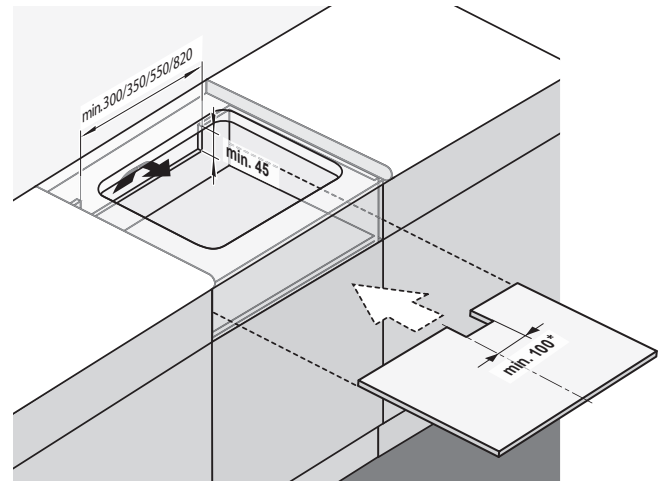

Intermediate shelf

To prevent the content of drawers underneath the cooktop from heating up, the use of an intermediate shelf is recommended for glass ceramic cooktops, except for cooktops with 90 cm width.


Width of cut-out at least

- 100 mm for a 60 to 80 cm induction cooktop

* does not apply to 90 cm cooktops

** min. 65 mm for cooktops with frame as well as VI 462/482/492 for surface mounting and min. 70 mm for cooktops without frame, for CX 482/492 with frame as well as for VI 462/482/492 for flush mounting.

For CX 482/492 without frame 80 mm

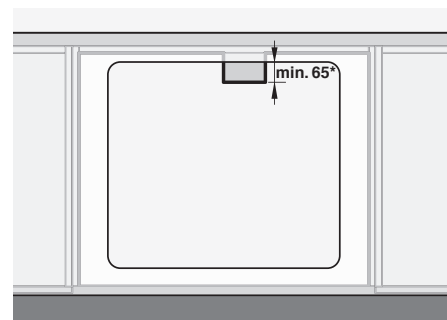

Combination with other appliances

Installation above dishwasher or washing machine is not permitted.

Combination with AL 400

In addition to the measures mentioned above, the following unobstructed cross sections must be planned between the cabinet and the AL 400 to allow for proper intake and exhaust air circulation for the induction cooktop.

A In front of the air duct

20 mm distance between the back side of drawers, an oven or the cabinet's interior wall.

B Adjacent to the air duct

The resulting gap between the air duct and the cabinet's side wall needs to remain open.

C At the housing's rear edge

The resulting cross section between the housing and the wall, as well as between the housing and the floor, must remain open.

**CE 291 101**

Frameless
Width 90 cm

Included in the price

1 glass scraper

Special accessories**GP 900 003**

Stainless steel frying sensor pan
Non-stick coating, \varnothing 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Glass ceramic cooktop 200 series**CE 291**

- Frameless for flush mounting
- Frying sensor function
- Three-ring cooking zone up to 27 cm
- Large roasting zone
- Sensor control with direct selection of output level

Cooking zones

2 Super-Quick cooking zones \varnothing 18 cm (1800 W); together they convert to 18x41.5 cm (4400 W) roasting zone.
1 Super-Quick cooking zone \varnothing 12 cm (750 W), converts to \varnothing 21 cm (2100 W, with booster 2600 W) cooking zone.
1 Super-Quick cooking zone \varnothing 14.5 cm (1050 W), converts to \varnothing 21 cm (2200 W) or \varnothing 27 cm (3080 W) cooking zone.
1 Super-Quick cooking zone \varnothing 14.5 cm (1200 W, with booster 1600 W).

Handling

Sensor control with direct selection of output level.
Cooking zone marking.
Electronic power control in 17 output levels.

Features

Frying sensor function for \varnothing 21 cm cooking zone.
Booster function.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.

Safety

Main switch.
Operation indicator.
2-stage residual heat indication.
Child lock.
Safety shut-off.

Planning notes




Immersion depth 51 mm, depth at plug socket 51 mm.
The cooktop must not be installed lower than the top edge of the worktop. Under the plug socket, a 10 mm clearance must be observed from side panels or from intermediate shelf.
The cooktop must be freely accessible from underneath to be able to detach the cooktop's base in a downward direction.
Installation possible in a 60 cm wide lower cabinet.
Appliance must be fixed from underneath.
Cooktop clamping range: 20 – 50 mm.
Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.
Appliance weight: approx. 13 kg.

Please read the installation details regarding air ducting on page 206.

Please read additional planning notes on page 122 – 127.




Connection

Total connected load 11.0 kW.
Plan a connection cable.

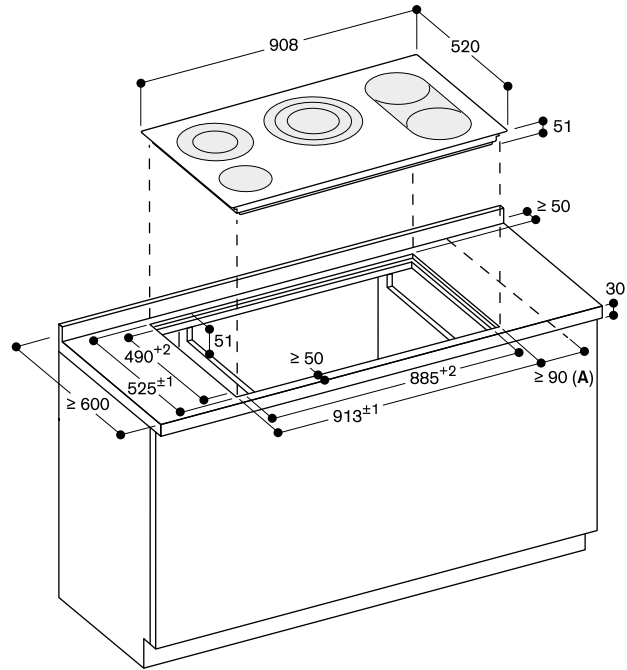

A: Minimum distance from the hob cut-out to the wall.

measurements in mm

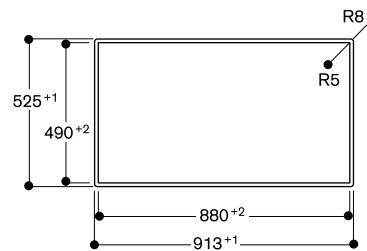View from above**Longitudinal section****Cross section**



CE 291 111

Stainless steel frame
Width 90 cm

Included in the price

1 glass scraper

Special accessories

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Glass ceramic cooktop 200 series

CE 291

- Sturdy stainless steel frame
- Frying sensor function
- Three-ring cooking zone up to 27 cm
- Large roasting zone
- Sensor control with direct selection of output level

Cooking zones

2 Super-Quick cooking zones ø 18 cm (1800 W); together they convert to 18x41.5 cm (4400 W) roasting zone.
1 Super-Quick cooking zone ø 12 cm (750 W), converts to ø 21 cm (2100 W, with booster 2600 W) cooking zone.
1 Super-Quick cooking zone ø 14.5 cm (1050 W), converts to ø 21 cm (2200 W) or ø 27 cm (3080 W) cooking zone.
1 Super-Quick cooking zone ø 14.5 cm (1200 W, with booster 1600 W).

Handling

Sensor control with direct selection of output level.
Cooking zone marking.
Electronic power control in 17 output levels.

Features

Frying sensor function for ø 21 cm cooking zone.
Booster function.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.

Safety

Main switch.
Operation indicator.
2-stage residual heat indication.
Child lock.
Safety shut-off.

Planning notes



Immersion depth 49 mm, depth at plug socket 50 mm.
Under the plug socket, a 10 mm clearance must be observed from side panels or from intermediate shelf.
The cooktop must be freely accessible from underneath to be able to detach the cooktop's base in a downward direction.
Installation possible in a 60 cm wide lower cabinet.
Appliance must be fixed from underneath.
Cooktop clamping range: 20 – 50 mm.
Appliance weight: approx. 13 kg.

Please read the installation details regarding air ducting on page 206.

Please read additional planning notes on page 122 – 127.

Connection

Total connected load 11.0 kW.
Plan a connection cable.

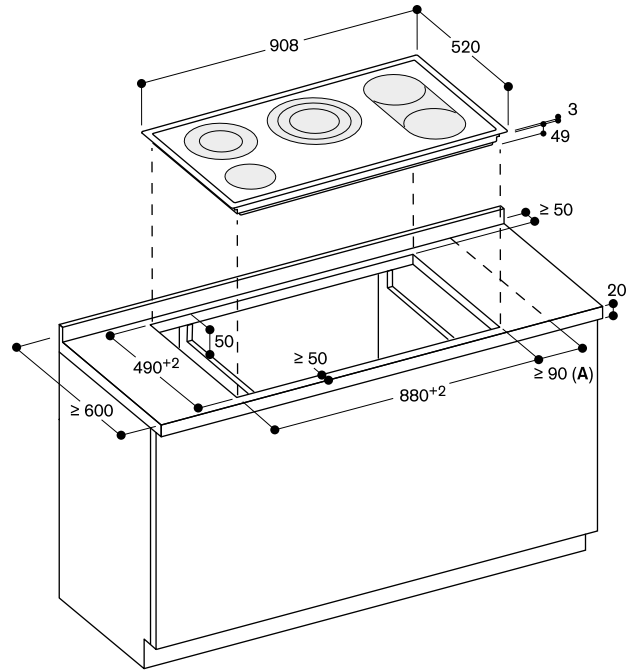

A: Minimum distance from the hob cut-out to the wall.

measurements in mm

**CE 261 114**

Stainless steel frame
Width 60 cm

Included in the price

1 glass scraper

Combinable with:

Ceiling ventilation 400 and 200 series
Table ventilation 400 series
Island- and wall-mounted hood 400 and 200 series
Flat kitchen hood 200 series
Canopy extractor 200 series

Good to know:

the hood has to be larger than the cooktop(s) or it has to be as large as the cooktop(s). Please check the requirements in chapter ventilation.

Glass ceramic cooktop 200 series**CE 261**

- Sturdy stainless steel frame
- Sensor control with direct selection of output level

Cooking zones

1 Super-Quick cooking zone \varnothing 17 cm (1800 W), switches to 17 x 26.5 cm (2600 W) roasting zone.
1 Super-Quick cooking zone \varnothing 14.5 cm (1200 W), converts to \varnothing 21 cm (2100 W, with booster function 3000 W) cooking zone.
1 Super-Quick cooking zone \varnothing 18 cm (2000 W).
1 Super-Quick cooking zone \varnothing 14.5 cm (1200 W).

Handling

Sensor control with direct selection of output level.
Cooking zone marking.
Electronic power control in 17 output levels.

Features

Booster function.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.

Safety

Main switch.
Operation indicator.
2-stage residual heat indication.
Child lock.
Safety shut-off.

Planning notes




Immersion depth 49 mm, depth at plug socket 50 mm.
Under the plug socket, a 10 mm clearance must be observed from side panels or from intermediate shelf.
The cooktop must be freely accessible from underneath to be able to detach the cooktop's base in a downward direction.
Installation possible in a 60 cm wide lower cabinet.
Appliance must be fixed from underneath.
Cooktop clamping range: 20 – 50 mm.
Appliance weight: approx. 8 kg.

Please read the installation details regarding air ducting on page 206.

Please read additional planning notes on page 122 – 127.

Connection

Total connected load 8.3 kW.
Plan a connection cable.

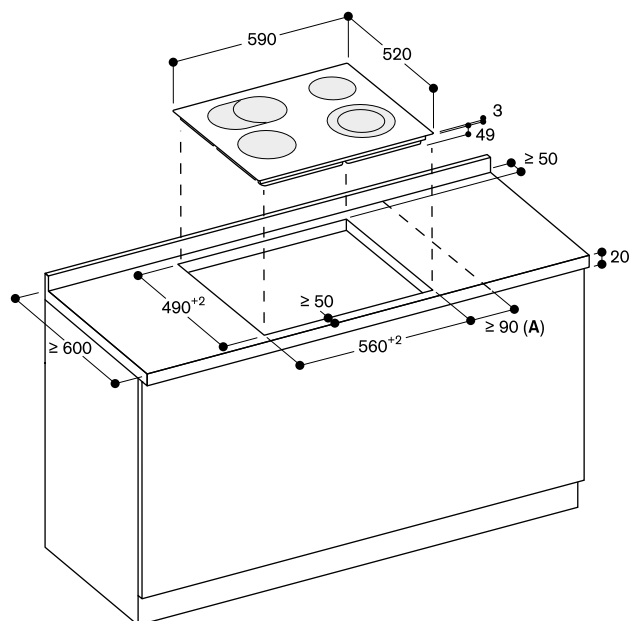

A: Minimum distance from the hob cut-out to the wall.

measurements in mm

Accessories and special accessories for cooktops

GN 232 110

Teppan Yaki plate made of multi ply material,
GN 1/1
For full surface induction cooktop.



GN 232 230

Teppan Yaki plate made of multi ply material,
GN 2/3
For full surface induction cooktop.



CA 051 300

Teppan Yaki plate made of multi ply material
For flex induction cooktops.



CA 052 300

Griddle plate in cast aluminium
Non-stick.
For flex induction cooktops.



GP 900 001

Stainless steel frying sensor pan
Non-stick coating, ø 15 cm.

GP 900 002

Stainless steel frying sensor pan
Non-stick coating, ø 19 cm.

GP 900 003

Stainless steel frying sensor pan
Non-stick coating, ø 21 cm.

GP 900 004

Stainless steel frying sensor pan
Non-stick coating, ø 28 cm.



WP 400 001

Wok pan made of multiple-layer material
With round bottom and handle,
ø 36 cm, 6 litres, height 10 cm.

WZ 400 001

Wok attachment for wok pan



CA 060 300

Cooking sensor for temperature regulation within pots.



CA 230 100

Black magnetic knob for induction cooktop 200 series.
Stainless steel knob with black coating.



CA 414 110F

Socket



CA 429 410

Frame set including decorative frame (to be welded in) and holding frame



VA 420 000

Connection strip for combination with other Vario appliances of the 400 series for flush mounting



VA 420 010

Connection strip for combination with other Vario appliances of the 400 series for surface mounting




CA 082 010

Kit unducted air recirculation for CV 282 consists of 4 activated charcoal filters with high efficient odour reduction and telescopic connector



CA 082 020

Kit ducted air recirculation for CV 282 consists of 4 activated charcoal filters with high efficient odour reduction, diffusor and adhesive tape




CA 084 010

4 acoustic filters for air extraction mode for CV 282



CA 282 111

4 recirculation replenishment filters for CV 282



AD 857 033

Short flat duct bend 90° vertical DN150



Gas cooktops 400 series



Appliance type	Gas cooktop	Gas cooktop
	CG 492 111F	CG 492 211
Frame brushed stainless steel 3 mm / brushed / shot blasted	-/-/-	-/-/-
Surface-mounted / flush installation / welded	-/•/•	-/•/•
Liquid gas 50 mbar / liquid gas 28-37 mbar / natural gas 20 mbar	-/•/-	-/-/•
Dimensions		
Width	(cm) 100	100
Operation		
Knobs in furniture front / integrated control panel	•/-	•/-
Cooking zones		
Number of cooking zones	5	5
Multi-ring wok burner (300 - 5800W)	1	-
Multi-ring wok burner (300 - 6000W)	-	1
Two-ring high output burner (165 - 4000 W)	2	2
Two-ring standard burner (165 - 2000 W)	2	2
Features		
Number of output levels	12	12
Electronic output control	•	•
Automatic fast ignition / Electric ignition	•/-	•/-
Electronic flame monitoring with automatic re-ignition	•	•
Simmer function	•	•
Residual heat indication	•	•
Safety shut-off	•	•
Cast pan support	3-part	3-part
Accessories		
Wok attachment ring	•	•
Wok pan	WP 400 001 ¹	WP 400 001 ¹
Stainless steel appliance cover	-	-
Connection		
Total connected load gas (up to)	(kW) 17.8	18.0
Total connected load electric	(W) 15.0	15.0

• Standard. - Not available.

¹ Special accessory.



Appliance type	Gas cooktop	Gas cooktop	Gas cooktop	Gas cooktop
	VG 295 120F	VG 295 220	CG 291 210	CG 261 210
Frame brushed stainless steel 3 mm / brushed / shot blasted	-/-/•	-/-/•	-/•/-	-/•/-
Surface-mounted / flush installation / welded	•/-/-	•/-/-	•/-/-	•/-/-
Liquid gas 28-37 mbar / natural gas 20 mbar	• ² /-	-/• ³	-/• ⁵	-/• ⁵
Dimensions				
Width (cm)	90	90	90	60
Operation				
Knobs in furniture front / integrated control panel	-/•	-/•	-/•	-/•
Cooking zones				
Number of cooking zones	5	5	5	4
Multi-ring wok burner (1550 – 4000 W)	-	-	-	1
Multi-ring wok burner (300 - 5800W)	-	-	1	-
Multi-ring wok burner (300 - 5800W)	1	-	-	-
Multi-ring wok burner (300 - 6000W)	-	1	-	-
Two-ring high output burner (170 – 4000 W)	2	2	-	-
Two-ring standard burner (170 – 2000 W)	2	2	-	-
High output burner (500 – 3000 W)	-	-	1	1
Standard burner (290 – 1750 W)	-	-	-	1
Standard burner (350 – 1750 W)	-	-	2	-
Economy burner (330 – 1000 W)	-	-	1	1
Features				
Number of output levels	9	9	9	9
Electronic output control	-	-	-	-
Automatic fast ignition / Electric ignition	-/•	-/•	-/•	-/•
Electronic flame monitoring with automatic re-ignition	-	-	-	-
Simmer function	-	-	-	-
Residual heat indication	•	•	-	-
Safety shut-off	-	-	-	-
Cast pan support	3-part	3-part	3-part	2-part
Accessories				
Wok attachment ring	•	•	•	•
Wok pan	WP 400 001 ¹	WP 400 001 ¹	WP 400 001 ¹	WP 400 001 ¹
Stainless steel appliance cover	-	-	-	-
Connection				
Total connected load gas (up to)	(kW) 17.8	18.0	12.5	9.75
Total connected load electric	(W) 5.0	5.0	1.0	1.0

• Standard. – Not available.

¹ Special accessory.

² Nozzles for liquid gas 28-30/37 mbar are included.

³ Nozzles for liquid gas 50 mbar are included.

⁴ Nozzles for liquid gas 50 mbar can be ordered as spare parts.

⁵ Nozzles for liquid gas 28-30/37 mbar are included.

⁶ Nozzles for liquid gas 50 mbar are included.

Induction cooktops 400 series



Appliance type	Full surface induction cooktop	Full surface induction cooktop
Frameless for flush mounting	CX 492 101	CX 482 101
Stainless steel frame 3 mm for surface or flush installation	CX 492 111	CX 482 111
Dimensions		
Width	(cm) 90	80
Operation		
TFT touch display / Twist-Pad control / Sensor control	•/-/-	•/-/-
Bicoloured display (white/orange)	-	-
Knobs in furniture front / integrated control panel	-/-	-/-
Cooking zones / combinations		
Number of cooking zones or items of cookware	6	5
Full surface induction cooktop	•	•
Flex induction cooking areas 19 x 24 cm (2200, with booster 3700 W) / linked together 38 x 24 cm (3300, with booster 3700 W)	-	-
Flex induction cooking areas 19 x 23 cm (2200, with booster 3700 W) / linked together 38 x 23 cm (3300, with booster 3700 W)	-	-
Flex induction cooking areas 19 x 21 cm (2200, with booster 3700 W) / linked together 38 x 21 cm (3300, with booster 3700 W)	-	-
Automatic extension up to 30cm/32cm width (3300, with booster 3700 W)		
Induction cooking zone ø 21 cm (2200, with booster 3700 W) / ø 26 cm (2600, with booster 3700 W) / ø 32 cm (3300, with booster 3700 W)	-	-
Induction cooking zone ø 18 cm (1800, with booster 3100 W) / Roaster zone 18 x 28 cm (2000, with booster 3700 W)	-	-
Induction cooking zone ø 28 cm (2400, with booster 3700 W)	-	-
Induction cooking zone ø 24 cm (2200, with booster 3700 W)	-	-
Induction cooking zone ø 21 cm (2200, with booster 3700 W)	-	-
Induction cooking zone ø 19 cm (1800, with booster 3100 W)	-	-
Induction cooking zone ø 15 cm (1400, with booster 2200 W)	-	-
Features		
Number of output levels	17	17
Flex function for rectangular cooking areas	-	-
Cooking sensor function / frying sensor function	•/-	•/-
Number of frying sensor functions	-	-
Professional cooking function	•	•
Booster function for pots / pans	•/•	•/•
Keep warm function	•	•
Number of cooking timers	6	5
Short-term timer	•	•
Stopwatch	•	•
Residual heat indicator	•	•
Child lock / safety shut-off / display cleaning protection	•/•/•	•/•/•
Options menu	•	•
Hood control	• ²	• ²
Home network integration for digital services (Home Connect) wireless via WiFi.	• ³	• ³
Accessories		
Teppan Yaki plate made of multi ply material, GN1/1	GN 232 110 ¹	GN 232 110 ¹
Teppan Yaki plate made of multi ply material, GN2/3	GN 232 230 ¹	GN 232 230 ¹
Teppan Yaki plate made of multi ply material (for flex induction)	-	-
Griddle plate in cast aluminium (for flex induction)	-	-
Frying sensor pan ø 15 cm	-	-
Frying sensor pan ø 19 cm	-	-
Frying sensor pan ø 21 cm	-	-
Frying sensor pan ø 28 cm	-	-
Wok attachment for for wok pan		
Wok pan		
Cooking sensor	• / CA 060 300 ¹	• / CA 060 300 ¹
Black magnetic knob for induction cooktop series 200	-	-
Connection		
Total connected load electric	(kW) 7.4	7.4

• Standard. - Not available.

¹ Special accessories.

² In Combination with suitable hood.

³ The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country.



Induction cooktop VI 492 103	Induction cooktop VI 482 103	Induction cooktop VI 462 103	Induction cooktop VI 422 103	Induction cooktop VI 414 103
---------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------

90	80	60	38	38
-/-•	-/-•	-/-•	-/-•	-/-•
•	•	•	•	•
•/-	•/-	•/-	•/-	•/-
5	4	4	2	1
-	-	-	-	-
-	-	-	2	-
4	4	4	-	-
-	-	-	-	-
-	-/2	1/-	-	-
1	-	-	-	1
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
12	12	12	12	12
•	•	•	•	-
-/•	-/•	-/•	-/•	-/•
5	4	4	2	1
-	-	-	-	-
•/-	•/-	•/-	•/-	•/-
-	-	-	-	-
-	-	-	-	-
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
-/•/-	-/•/-	-/•/-	-/•/-	-/•/-
•	•	•	•	•
• ²	• ²	• ²	• ²	• ²
• ³	• ³	• ³	• ³	• ³
-	-	-	-	-
-	-	-	-	-
CA 051 300 ¹	CA 051 300 ¹	CA 051 300 ¹	CA 051 300 ¹	CA 051 300 ¹
CA 052 300 ¹	CA 052 300 ¹	CA 052 300 ¹	CA 052 300 ¹	CA 052 300 ¹
GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹
GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹
GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹
GP 900 004 ¹	GP 900 004 ¹	GP 900 004 ¹	-	GP 900 004 ¹
WZ 400 001 ¹	-	-	-	WZ 400 001 ¹
WP 400 001 ¹	-	-	-	WP 400 001 ¹
-	-	-	-	-
-	-	-	-	-
11.1	7.4	7.4	3.7	3.7

Induction cooktops 200 series



Appliance type	Flex induction cooktop
Frameless for flush mounting	CI 292 102
Stainless steel frame	CI 292 112
Dimensions	
Width	(cm) 90
Operation	
TFT touch display / Twist-Pad control / Sensor control	-/•/-
Bicoloured display (white/orange)	•
Knobs in furniture front / integrated control panel	-/-
Cooking zones / combinations	
Number of cooking zones or items of cookware	5
Full surface induction cooktop	-
Flex induction cooking areas 19 x 24 cm (2200, with booster 3700 W) / linked together 38 x 24 cm (3300, with booster 3700 W)	-
Flex induction cooking areas 19 x 23 cm (2200, with booster 3700 W) / linked together 38 x 23 cm (3300, with booster 3700 W)	4
Flex induction cooking areas 19 x 21 cm (2200, with booster 3700 W) / linked together 38 x 21 cm (3300, with booster 3700 W)	-
Automatic extension up to 30cm/32cm width (3300, with booster 3700 W)	-
Induction cooking zone ø 21 cm (2200, with booster 3700 W) / ø 26 cm (2600, with booster 3700 W) / ø 32 cm (3300, with booster 3700 W)	1
Induction cooking zone ø 18 cm (1800, with booster 3100 W) / Roaster zone 18 x 28 cm (2000, with booster 3700 W)	-
Induction cooking zone ø 28 cm (2400, with booster 3700 W)	-
Induction cooking zone ø 24 cm (2200, with booster 3700 W)	-
Induction cooking zone ø 21 cm (2200, with booster 3700 W)	-
Induction cooking zone ø 19 cm (1800, with booster 3100 W)	-
Induction cooking zone ø 15 cm (1400, with booster 2200 W)	-
Features	
Number of output levels	17
Flex function for rectangular cooking areas	•
Cooking sensor function / frying sensor function	•/•
Number of frying sensor functions	5
Professional cooking function	•
Booster function for pots / pans	•/•
Keep warm function	•
Number of cooking timers	5
Short-term timer	•
Stopwatch	•
Residual heat indicator	•
Child lock / safety shut-off / display cleaning protection	•/•/•
Options menu	•
Hood control	• ²
Home network integration for digital services (Home Connect) wireless via WiFi.	• ³
Accessories	
Teppan Yaki plate made of multi ply material, GN1/1	-
Teppan Yaki plate made of multi ply material, GN2/3	-
Teppan Yaki plate made of multi ply material (for flex induction)	CA 051 300 ¹
Griddle plate in cast aluminium (for flex induction)	CA 052 300 ¹
Frying sensor pan ø 15 cm	GP 900 001 ¹
Frying sensor pan ø 19 cm	GP 900 002 ¹
Frying sensor pan ø 21 cm	GP 900 003 ¹
Frying sensor pan ø 28 cm	GP 900 004 ¹
Cooking sensor	CA 060 300 ¹
Black magnetic knob for induction cooktop series 200	CA 230 100 ¹
Connection	
Total connected load electric	(kW) 11.1

• Standard. – Not available.

¹ Special accessories.

² In Combination with suitable hood.

³ The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country.



Flex induction cooktop	Flex induction cooktop	Flex induction cooktop	Induction cooktop	Induction cooktop
CI 283 103	CI 282 102	CI 272 103	CI 262 105	
CI 283 113	CI 282 112	CI 272 113	CI 262 115	CI 261 114
80	80	70	60	60
-/•/-	-/•/-	-/•/-	-/•/-	-/-•
•	•	•	•	-
-/-	-/-	-/-	-/-	-/-
5	4	4	4	4
-	-	-	-	-
-	2	-	-	-
-	4	4	4	-
2	-	-	-	-
-	2/-	1/-	1/-	-
-	-	-	-	-
-	-	-	-	1
-	1	-	-	-
1	-	-	1	1
-	-	-	-	1
1	-	-	-	1
1	1	-	1	1
17	17	17	17	17
•	•	•	•	-
•/•	•/•	•/•	•/•	-/-
2	4	4	4	-
-	•	•	•	-
•/•	•/•	•/•	•/•	•/-
•	•	•	•	-
5	4	4	4	4
•	•	•	•	•
•	•	•	•	-
•	•	•	•	-
•/•/•	•/•/•	•/•/•	•/•/•	•/•/-
•	•	•	•	•
• ²	• ²	• ²	• ²	-
• ³	• ³	• ³	• ³	-
-	-	-	-	-
CA 051 300 ¹	CA 051 300 ¹	CA 051 300 ¹	CA 051 300 ¹	-
CA 052 300 ¹	CA 052 300 ¹	CA 052 300 ¹	CA 052 300 ¹	-
GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹	GP 900 001 ¹	-
GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹	GP 900 002 ¹	-
GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹	GP 900 003 ¹	-
-	GP 900 004 ¹	GP 900 004 ¹	GP 900 004 ¹	-
-	CA 060 300 ¹	CA 060 300 ¹	CA 060 300 ¹	-
CA 230 100 ¹	CA 230 100 ¹	CA 230 100 ¹	CA 230 100 ¹	-
7.4	7.4	7.4	7.4	7.4

EB 333

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Extractors

Cooling appliances

Dishwashers | Washing machine

Energy Label | Home Connect | Accessories

Induction cooktops 400 and 200 series



Appliance type	Flex induction cooktop with downdraft ventilation	Flex induction cooktop with downdraft ventilation
Width (cm)	87.7	87.7
Frameless for flush installation	CVL 420 103	CVL 410 103
Stainless steel frame	-	-
Dimensions		
Width on worktop (cm)	87.7	87.7
Immersion depth (cm)	17.4	17.4
Net weight (kg)	24	24
Operation		
Sensor control / touch keys	- / •	- / •
Twist-Pad control	-	-
Knobs in furniture front	•	•
Cooking zones / combinations		
Number of cooking zones or items of cookware	4	3
Flex induction cooking areas 19x23 cm (2200 / 3700 W) / linked together 38x23 cm (3300 / 3700 W)	-	-
Flex induction cooking areas 19x24 cm (2200 / 3700 W) / linked together 38x24 cm (3300 / 3700 W)	-	2
Induction cooking zone	-	1
ø 21 cm (2200, with booster 3700 W) /	-	-
ø 26 cm (2600, with booster 3700 W) /	-	-
ø 32 cm (3300, with booster 3700 W)	-	-
Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive		
Air extraction (m³/h)	-	-
Air recirculation (m³/h)	-	-
Air extraction with AR 400 142 for inside installation	300/440/550/640	300/440/550/640
Air extraction with AR 401 142 for outside wall mounting	310/450/560/650	310/450/560/650
Air extraction with AR 403 122 for plinth installation	290/390/510/630	290/390/510/630
Air extraction with AR 400 132 for inside installation	307/419/505/610	307/419/505/610
Air recirculation with AR 413 122 for plinth installation	260/360/470/590	260/360/470/590
Air recirculation with AR 410 110 for cupboard installation	327/395/463/555 327/395/463/555	327/395/463/555 327/395/463/555
Consumption data according to EU regulation 65/2014		
Energy efficiency class	A	A
Energy consumption (kWh/year)	42.7	42.7
Ventilation efficiency class	A	A
Illumination efficiency class	-	-
Grease filter efficiency class	C	C
Sound level min. / max. normal mode (dB(A))	53/68	53/68
Features cooking		
Electronic output control	•	•
Number of output levels	12	12
Pot detection	•	•
Residual heat indicator	•	•
Flex function for rectangular cooking areas	•	•
Cooking timer: Number of cooking zones	-	--
Short-term timer	•	•
Stopwatch	•	•
Booster function: Number of cooking zones	4	3
Booster function for pots / pans	• / -	• / -
Frying sensor function: Number of cooking zones	4	3
Keep warm function	-	-
Child lock / safety shut-off / pause function	- / • / -	- / • / -
Memory function	-	-
Options menu	•	•
Cooking sensor (CA 060 300)	-	-
Professional cooking function	-	-
Integrated WiFi module for digital services (Home Connect)	-	-
Frying sensor pan for ø 15 cm cooking zone	GP 900 001 ¹	GP 900 001 ¹
Frying sensor pan for ø 18 cm cooking zone	GP 900 002 ¹	GP 900 002 ¹
Frying sensor pan for ø 21 cm cooking zone	GP 900 003 ¹	GP 900 003 ¹
Frying sensor pan for ø 28 cm cooking zone	-	GP 900 004 ¹
Features ventilation		
Power levels	3 plus intensive	3 plus intensive
Fan technologie	BLDC (fan unit separately)	BLDC (fan unit separately)
Fan	- (fan unit separately)	- (fan unit separately)
Fan output (W)	- (fan unit separately)	- (fan unit separately)
Fully automatic ventilation system functions	-	-
Automatic function	-	-
Run-on function automatic	-	-
Run-on function (min)	• / 6 min.	• / 6 min.
Interval ventilation (min)	-	-
Grease filter saturation indicator	-	-
Activated charcoal filter saturation indicator	-	-
Grease filter art	Metal grease filter	Metal grease filter
Grease filter units	1	1
Overflow container	-	-
Exhaust air connection bottom / side / back	• / • / -	• / • / -
Recirculation Module	depending on fan unit	depending on fan unit
Exhaust air connection piece DN 150 flat duct	AD 854 046 ¹	AD 854 046 ¹
Acoustic filter for air extraction mode	-	-
Connection		
Total connected load electric (kW)	7.41 (fan unit separately)	7.41 (fan unit separately)
Connecting cable length (m)	2x 1.5 + 1x 1.8	2x 1.5 + 1x 1.8

• Standard. - Not available. ¹ Special accessories. ² Values refers to the configuration VL 414 with the remote fan unit AR 403 122.



Flex induction cooktop with integrated ventilation system

Flex induction cooktop with integrated ventilation system

80
CV 282 101
-

80
CV 282 111
•

79.3
22.7
20

80.4
22.3
20

-/•
•
-

-/•
•
-

4
4

4
4

-
-

4
-

359/470/532/636
297/390/497/627

359/470/532/636
297/390/497/627

-
-
-
-
-

-
-
-
-
-

A
56.9
A
-
B
61/70

A
56.9
A
-
B
61/70

•
17
•
•
•
•
4
•
•
4
•/•
4
•
•/•/•
•
•
•
•
•

•
17
•
•
•
•
4
•
•
4
•/•
4
•
•/•/•
•
•
•
•
•

GP 900 001¹
GP 900 002¹
GP 900 003¹
-

GP 900 001¹
GP 900 002¹
GP 900 003¹
-

3 plus intensive
BLDC
1
174
•
•
• / 20-30 min.
• / 6 min.
•
•

3 plus intensive
BLDC
1
174
•
•
• / 20-30 min.
• / 6 min.
•
•

Metal grease filter
2
•

Metal grease filter
2
•

-/-/•
CA 082 010¹, CA 082 020¹
-
CA 084 010¹

-/-/•
CA 082 010¹, CA 082 020¹
-
CA 084 010¹

7.4
1.50

7.4
1.50

Glas ceramic cooktops 200 series



Appliance type	Glass ceramic cooktop	Glass ceramic cooktop
Frameless for flush installation	CE 291 101	
Stainless steel frame	CE 291 111	CE 261 114
Dimensions		
Width	(cm) 90	60
Operation		
TFT touch display / Twist-Pad control / Sensor control	-/-/•	-/-/•
Control knob in furniture front / integrated control panel	-/-	-/-
Cooking zones / combinations		
Number of cooking zones	5	4
Super-Quick cooking zone ø 18 cm (1800 W) / together convertible to roasting zone 18 x 41.5 cm (4400 W)	2	-
Super-Quick cooking zone ø 18 cm (2000 W)	-	1
Super-Quick cooking zone ø 17 cm (1800 W) / Roaster zone 17 x 26.5 cm (2600 W)	-	1
Super-Quick cooking zone ø 14.5 cm (1200 W, with booster 1600 W)	1	-
Super-Quick cooking zone ø 14.5 cm (1200 W)	-	1
Super-Quick cooking zone ø 14.5 cm (1050 W) / ø 21 cm (2200 W) / ø 27 cm (3080 W)	1	-
Super-Quick cooking zone ø 14.5 cm (1200 W) / ø 21 cm (2100 W, with booster 3000 W)	-	1
Super-Quick cooking zone ø 12 cm (750 W) / ø 21 cm (2100 W, with booster 2600 W)	1	-
Features		
Number of output levels	17	17
Number of frying sensor functions	1 x 21 cm	-
Booster function: Number of cooking zones	2	1
Number of cooking timers	5	4
Residual heat indicator	•	•
Child lock / safety shut-off / display cleaning protection	•/•/-	•/•/-
Options menu	•	•
Accessories		
Frying sensor pan for ø 21 cm cooking zone	GP 900 003 ¹	-
Connection		
Total connected load electric	(kW) 11.0	8.3

• Standard. – Not available.

¹ Special accessories.



The extractors

Ceiling ventilation 400 series	224
Table ventilations 400 series	228
Downdraft ventilation 400 series	234
Island hoods 400 series	242
Wall-mounted hoods 400 series	243
Remote fan units 400 series	246
Checklist for ventilation 400 and 200 series	252
Planning notes	254
Ceiling ventilation 200 series	256
Downdraft ventilations 200 series	261
Remote fan units for downdraft ventilation 200 series	266
Table ventilation 200 series	270
Island hoods 200 series	272
Wall-mounted hoods 200 series	274
Flat kitchen hoods 200 series	278
Canopy extractors 200 series	280
Accessories special accessories	282
Technical specifications	296



AC 402 181

Stainless steel
Filter module
Air extraction / Air recirculation
Motorless

Installation accessories

AD 754 048

Air collector box DN 150 round pipe
Metal zinc plated
2 x DN 150 round duct air intake.
1 x DN 150 cylindrical duct air outlet.

AD 854 048

Air collector box DN 150 flat duct
Metal zinc plated with plastic
2 x DN 150 flat duct air intake.
1 x DN 150 flat duct air outlet.

Special accessories

AA 010 810

Air recirculation module inclusive
1 activated charcoal filter with high
efficient odour reduction due to
increased surface

AA 010 811

Air recirculation module inclusive
1 activated charcoal filter.
For air recirculation.
Stainless steel.

AA 012 811

Air recirculation module inclusive
1 activated charcoal filter.
For air recirculation.
White.

AA 200 110

1 activated charcoal filter with high
efficient odour reduction due to
increased surface. For air recirculation
module AA 200 812/816 and
AA 010 811/AA 012 811.

AA 200 112

1 regenerable activated charcoal filter
For air recirculation module
AA 200 812/816 and AA 010 811/
AA 012 811.

**Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.**

Combinable with:

All Vario cooktops 400 series
All Vario cooktops 200 series
All cooktops 400 series
All cooktops 200 series

Good to know:

the hood has to be larger than
the cooktop(s).

Vario ceiling ventilation 400 series AC 402

- Discreet integration into the architecture of the kitchen
- Flexible by dimension, performance and ventilation mode
- Room ventilation
- Modular ceiling ventilation which can be configured individually by separate components such as filter module, control modules and light module
- Motorless, can be combined with Gaggenau BLDC remote fan units
- Highly efficient patented rim extraction
- Planned and easy to clean underside with covered filters

Output

Noise level depends on the built-in situation.

Features

Rim extraction filter, dishwasher-safe.
Installation frame for thread rods (threaded rods included in delivery).
Connecting pipe DN 150 round.

Consumption data

Consumption data is referred to a configuration with the remote fan unit AR 400 142.
Energy efficiency class B at a range of energy efficiency classes from A+++ to D.
Energy consumption 60.6 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class E.
Grease filter efficiency class B.
Sound level min. 50 dB / max. 65 dB normal mode.

Planning notes

The ceiling ventilation has to be handled as a room ventilation when distance to cooktop is larger than 120 cm since the direct capture of vapours will be limited. The needed airflow is given by an air exchange rate of 10 to 12 times the room volume. Please refer to page 226 – 227 for recommended configurations of ceiling ventilations and remote fan units and the resulting dimensions. Refer to the table on page 296 for the matching remote fan units for air recirculation or air extraction mode. For air recirculation an external air recirculation module is required. Max. 3 filter modules to be connected to remote fan unit AR 400 142. When installing remote fan unit within the ceiling or furniture block it must remain accessible through the ceiling cutout or another maintenance access. Please ensure when installing the exhaust air ducting that no sharp bends are caused and that the cross-section of the ducting is not constricted in any way. When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the hood's power supply line needs a suitable safety switch.



AC 482 181

Stainless steel
Control module with light

AC 462 181

Stainless steel
Control module without light

Vario ceiling ventilation 400 series AC 482/AC 462

- Control module of ceiling ventilation with light
- Individual integration of light elements into the configuration of the ceiling ventilation

Output

Power levels depend on the remote fan unit, see table on page 302 – 303.

Features

7-key infrared remote control, backup keys for operation also on the control module.
3 electronically controlled power levels and 1 intensive mode.
Interval ventilation, 6 min.
Run-on function, 6 min.
Grease filter saturation indicator.

Planning notes

Connection to the respective appliances via network cable. When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch. Fixing at the filter module.

Connection

Total connected load 355 – 1160 W.
Connecting cable 1.75 m, pluggable.



Vario ceiling ventilation 400 series

AC 472

- Light module of ceiling ventilation
- Individual integration of light elements into the configuration of the ceiling ventilation

Features

Connection to the respective appliances via network cable.


Planning notes

Please refer to page 232 - 233 for recommended configurations of ceiling ventilations and remote fan units and the resulting dimensions. Fixing at the filter module.

Connection


Total connected load 50 W.
Connecting cable 1.75 m, pluggable.
Network cable 2 m.

AC 472 181
Stainless steel
Light module
For completing control module with light

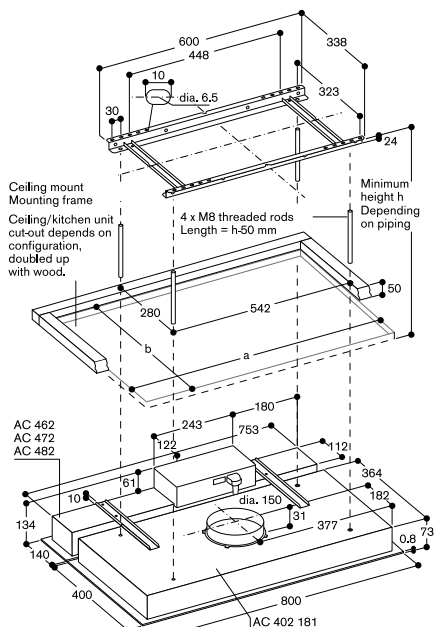


For multiple configurations:
Ceiling deflection around cut-out: max. + 3 mm.
Support is required in the middle to prevent deflection upwards when fastening the modules.
The required threaded rods, nuts and ceiling bolts are supplied as standard.

Minimum installation height including flat duct DN 150

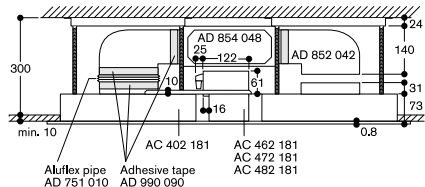


AC 402 with air recirculation module

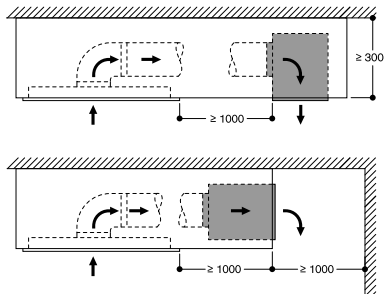


measurements in mm


Necessary installation space F3-CL-L1

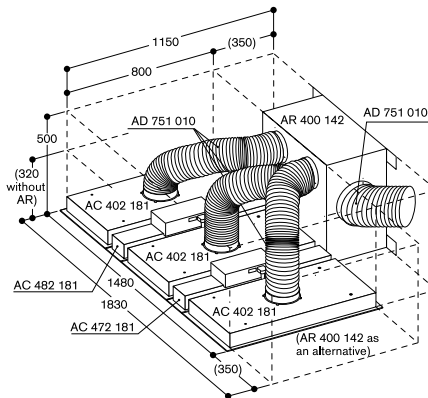


Necessary installation space F2-CL

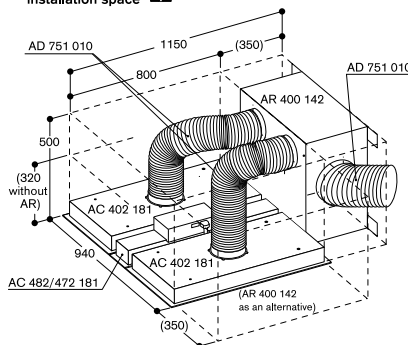


Necessary installation space FL2-CL-L1

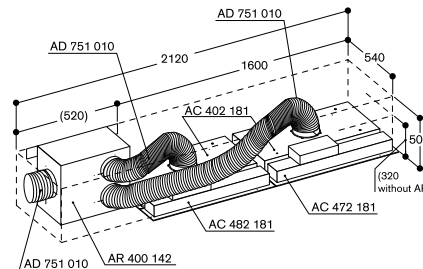

AC 402 Ceiling fixture and position of connecting piece DN 150

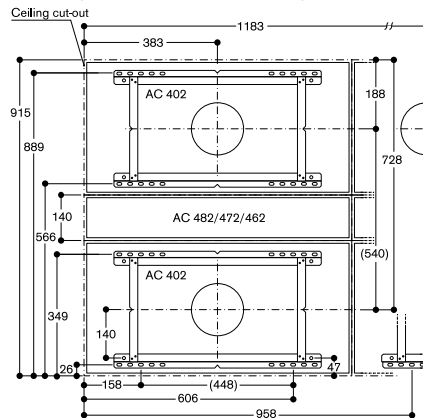

AC 402 Further possible ceiling fixture

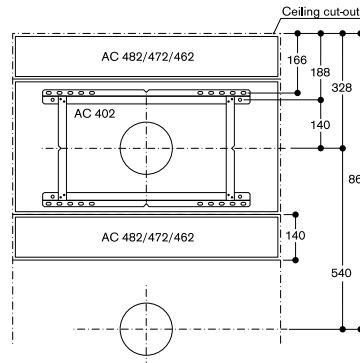

Planning as a cooktop ventilation wall/island (W/I) up to max. 120 cm distance to the cooktop.

For larger distances planning as room ventilation (R) with air exchange rates 10 to 12 times the room volume.

The given airflow of the remote fan units will be reduced by the different ducting types between filter modules and AR 400/401/403 as well as by the further ducting. For additional ducting chose the configuration with higher airflow.

Bold print: favoured configuration

Regular print: possible configuration

Other: – Not possible due to performance or ducting reasons

Respect the positioning of the remote fan units and the run of the ducts.



Modules of ceiling ventilation:

F = Filter module (FL = in-line configuration)

CL = Control module with light




CO = Control module without light

L = Light module

<p>Minimal construction height including installation frame</p> <p>Structure within ceiling/furniture element</p> <p>Air collector box, if needed</p>	<p>160</p>  <p>Minimal construction height with aluflex pipe straight through the ceiling. Remote fan unit separately placed. (AD 754 048) 2 x DN 150 round duct → 1 x DN 150 round duct</p>	
 <p>Maximal width of cooktop Cooktop ventilation, max. distance 120 cm: W = Cooktop ventilation wall I = Cooktop ventilation island Room ventilation, distance > 120 cm R = Maximal width of cooktop</p>	<p>Ceiling cutout a x b (frame size) mm</p>	<p>Remote fan unit inside installation (unobstructed airflow fan unit alone)</p> <p>Remote fan unit outside installation wall/roof (unobstructed airflow fan unit alone)</p>
Range of remote fan units according to EN 61591: 830–910 m³/h		
<p>FL1-CL FL1-CO</p>  <p>W: 80 cm I: 60 cm, no VR, VP R: -</p>	<p>765 x 515 (800 x 540)</p>	<p>No air collector box necessary</p> <p>1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h)</p> <p>1x AR 401 142 (910 m³/h)</p>
<p>FL1-CLL1</p>  <p>W: 80 cm I: 60 cm, no VR, VP R: -</p>	<p>765 x 660 respect direction! (800 x 680)</p>	<p>1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h)</p> <p>1x AR 401 142 (910 m³/h)</p>
Range of remote fan units according to EN 61591: 830–1820 m³/h		
<p>FL2-CLL1</p>  <p>W: 120 cm, VR, VP centered I: 90 cm, no VR, VP R: -</p>	<p>1.565 x 515 (1.600 x 540)</p>	<p>1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)</p> <p>1x AR 401 142 (910 m³/h) 2x AR 401 142 (1820 m³/h)</p>
<p>F2-CL F2-CO</p>  <p>W: - I: 80 cm R: 60 cm, 10x air exchange rate, no VR, VP</p>	<p>915 x 765 respect direction! (940 x 800)</p>	<p>1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)</p> <p>1x AR 401 142 (910 m³/h) 2x AR 401 142 (1820 m³/h)</p>
<p>F2-CLL2</p>  <p>W: - I: 80 cm R: 60 cm, 10x air exchange rate, no VR, VP</p>	<p>1.200 x 765 (1220 x 800)</p>	<p>1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)</p> <p>1x AR 401 142 (910 m³/h) 2x AR 401 142 (1820 m³/h)</p>
Range of remote fan units according to EN 61591: 830–1820 m³/h		
<p>F3-CLL1</p>  <p>W: - I: 120 cm, VR, VP centered R: 120 cm, 10x air exchange rate, 12x with VR, VP</p>	<p>1.455 x 765 (1.480 x 800)</p>	<p>2 AR: divide airflow of center modules with air collector box</p> <p>1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)</p> <p>2x AR 401 142 (1820 m³/h)</p>
Range of remote fan units according to EN 61591: 1660–1820 m³/h		
<p>F4-CO</p>  <p>W: - I: 120 cm, VR, VP centered R: 120 cm, 10x air exchange rate 12x with VR, VP</p>	<p>1.715 x 765 (1.740 x 800)</p>	<p>2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)</p> <p>2x AR 401 142 (1820 m³/h)</p>
<p>FL4-CLL1</p>  <p>W: - I: 120 cm, VR, VP centered R: 120 cm, 10x air exchange rate, 12x with VR, VP</p>	<p>2 cutouts 765 x 915 with 35 mm distance Total cutout 1.565 x 915 with division bar. (1.600 x 940)</p>	<p>2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)</p> <p>2x AR 401 142 (1820 m³/h)</p>
<p>F4-CLL2</p>  <p>W: - I: 160 cm, VR, VP centered R: 160 cm, 10x air exchange rate, 12x with VR, VP</p>	<p>1.995 x 765 (2.020 x 800)</p>	<p>2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)</p> <p>2x AR 401 142 (1820 m³/h)</p>

¹ Do not use air collector boxes.

Pipe connection piece with 3x DN 150 directly to AR 400 142.

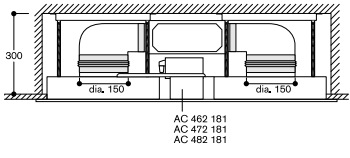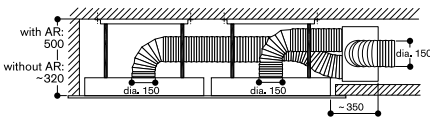300		with/without AR 400: 350		without AR 400: 320 incl. AR 400 vertically placed: 500	
 <p>Remote fan unit AR 400 horizontally placed with air collector box in the ceiling. 2 AR 400 placed opposite of each other (AD 854 048) 2 x DN 150 flat duct → 1 DN 150 flat duct</p>		 <p>AR 400 horizontally or AR 401 separately placed. Aluflex pipe DN 150/200 2 AR 400 placed opposite of each other (AD 754 048) 2 x DN 150 round duct → 1 x DN 200 round duct</p>		 <p>Easiest ducting with aluflex pipe DN 150 AR 400 placed vertically or separately.</p>	
Remote fan unit inside installation (unobstructed airflow fan unit alone)	Remote fan unit outside installation wall/roof (unobstructed airflow fan unit alone)	Remote fan unit inside installation (unobstructed airflow fan unit alone)	Remote fan unit outside installation wall/roof (unobstructed airflow fan unit alone)	Remote fan unit inside installation (unobstructed airflow fan unit alone)	Remote fan unit outside installation wall/roof (unobstructed airflow fan unit alone)
No air collector box necessary		No air collector box necessary			
1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 400 142 (830 m³/h)	
1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 400 142 (830 m³/h)	
1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 400 142 (830 m³/h)	2x AR 400 142 (1660 m³/h)
1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 400 142 (830 m³/h)	2x AR 400 142 (1660 m³/h)
1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 403 122 (890 m³/h) 1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	1x AR 401 142 (910 m³/h)	1x AR 400 142 (830 m³/h)	2x AR 400 142 (1660 m³/h)
2 AR: divide airflow of center modules with air collector box		2 AR: divide airflow of center modules with air collector box			
1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	2x AR 401 142 (1820 m³/h)	1x AR 400 142 (830 m³/h) 2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	2x AR 401 142 (1820 m³/h)	1x AR 400 142 (830 m³/h) ¹ 2x AR 400 142 (1660 m³/h)	
2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	2x AR 401 142 (1820 m³/h)	2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	2x AR 401 142 (1820 m³/h)	2x AR 400 142 (1660 m³/h)	
2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	2x AR 401 142 (1820 m³/h)	2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	2x AR 401 142 (1820 m³/h)	2x AR 400 142 (1660 m³/h)	
2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	2x AR 401 142 (1820 m³/h)	2x AR 403 122 (1780 m³/h) 2x AR 400 142 (1660 m³/h)	2x AR 401 142 (1820 m³/h)	2x AR 400 142 (1660 m³/h)	



AL 400 121
Stainless steel
Width 120 cm
Air extraction / Air recirculation
Motorless
AL 400 191
Stainless steel
Width 90 cm
Air extraction / Air recirculation
Motorless

Necessary installation accessories
AD 754 045
Connection piece for 2 aluflex pipes DN 150 round
Fitting AL 400, front or back side.
AD 854 043
Connecting piece for 2 flat ducts DN 150
Fitting AL 400, bottom side.
AD 854 045
Connecting piece for 2 flat ducts DN 150
Fitting AL 400, front or back side.

Installation accessories
AA 010 410
Air exhaust grille air recirculation
Stainless steel-coloured, 90 cm, including installation fittings, height adjustable.
AA 409 401
Furniture support for table ventilation AL 400 90 cm
Can be combined with table ventilation AL 400.
Recommended as bearer for the worktop, instead of a cabinet frame.
AA 409 431
Furniture support for table ventilation AL 400 120 cm
Can be combined with table ventilation AL 400.
Recommended as bearer for the worktop, instead of a cabinet frame.

AD 704 048
Air collector box DN 150 round pipe 2 x DN 150 round duct air intake.
To connect 1x AL 400 to AR 403 / AR 413 or AR 401.
AD 704 049
Air collector box DN 150 flat duct 2 x DN 150 flat duct air intake.
To connect 1 x AL 400 to remote fan AR 403/AR 413 bottom side.

Special accessories
AA 400 510
Window contact switch
Can be combined with motorless appliances 400 series and Vario downdraft ventilation 200 series.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:
All Vario cooktops 400 series
All cooktops 400 series
Cooktops 200 series
CI 2xx, CE 2xx

Good to know:
the hood can be as large as the cooktop(s).

Table ventilation 400 series AL 400

- Extendable table ventilation, when not in use can be completely lowered into the worktop
- Can be combined perfectly with other Vario appliances of the 400 series
- Dimmable, neutral white surface LED light for ideal illumination of the cooktop
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Motorless, can be combined with Gaggenau BLDC remote fan units

Output
Power levels depend on the remote fan unit, see table on page 302 – 303.

Features
3 electronically controlled power levels and 1 intensive mode.
Interval ventilation, 6 min.
Run-on function, 6 min.
Grease filter saturation indicator.
Cartridge-type filter, dishwasher-safe.
Neutral white surface LED light (3600 K), continuously dimmable.
Lamp output 4x 5 W.
Illuminance 191 lx.
Spare covers for closing air outlets.
No connecting piece included.


Consumption data
Consumption data is referred to a configuration AL 400 191 with the remote fan unit AR 400 142.
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 45.5 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class E.
Grease filter efficiency class C.
Sound level min. 45 dB / max. 61 dB normal mode.

Planning notes
Refer to the table on page 298 for the matching remote fan units for air recirculation or air extraction mode.
Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.
Connection to the respective appliances via network cable.
AL 400 121 (AL 400 191)
For operation with 4 (3) Vario 200 series cooktops, 3 (2) Vario 400 series cooktops or a cooktop configuration of up to 120 cm (92 cm) wide.
Operation of Vario cooking appliances only possible without appliance cover.
Max. output of cooktops 18 kW.
In combination with the cooktop CI 290, installation in 60 cm deep worktops is possible.
Installation is possible in worktops made of stone, synthetics or solid wood.
Heat resistance and watertight sealing of the cut edges must be observed.
Concerning other materials please consult the worktop manufacturer.

The remaining surface of the worktop (min. 50 mm) between the cut-outs must be reinforced with a support. It is recommended to use furniture support AA 409 401/431.
Ovens that do not exceed the maximum allowed cabinet temperature can be combined with the table ventilation if built-in situation permits.
To avoid smoke when frying/grilling refer to the manuals of VR/VP.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Please read additional planning notes on page 230 – 232.


Connection
Total connected load 65 W
Connecting cable 1.7 m, pluggable.
Network cable 1.2 m.

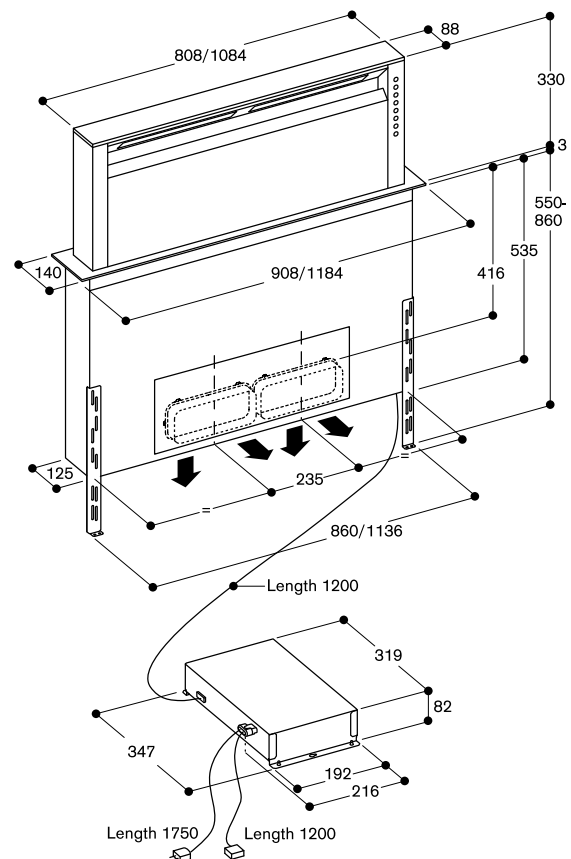


Pipe connection piece 2 x DN 150 front/rear
Flat duct using AD 854 045
Round duct using AD 754 045

Pipe connection piece 2 x DN 150 bottom
Flat duct using AD 854 043


AL 400 connection positions DN 150

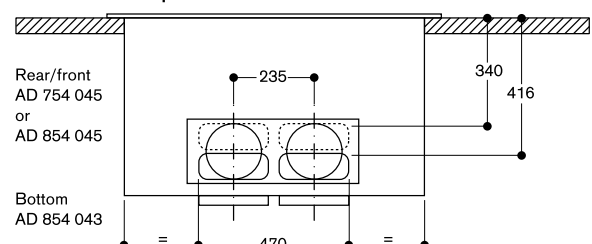


AA 010 410 air exhaust grille

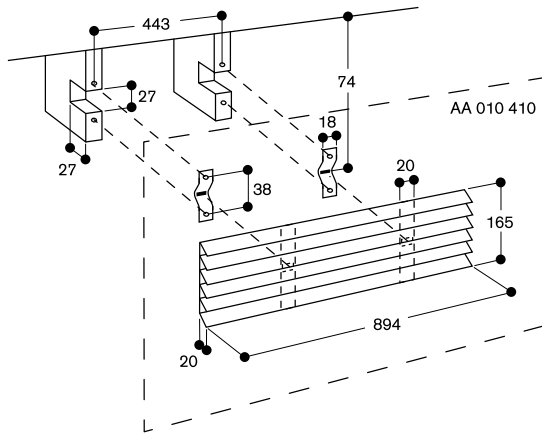


AD 754/854 045 and AD 854 043

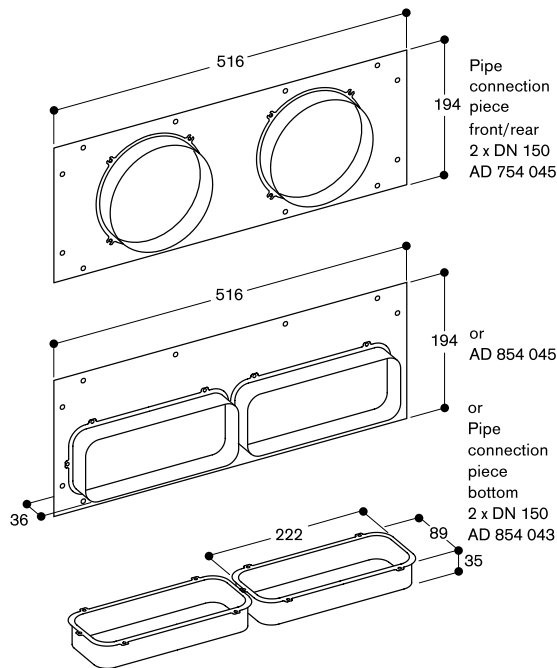


AA 409 401/431 furniture support

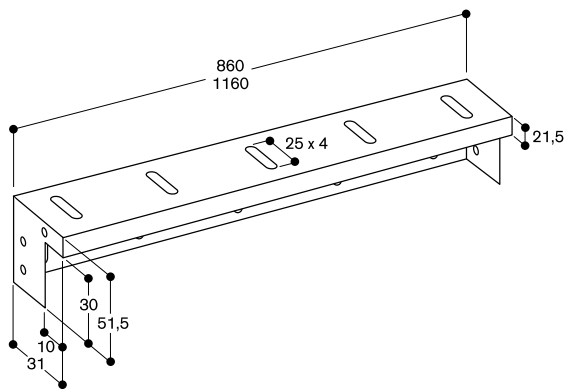


AL 400 installed flush

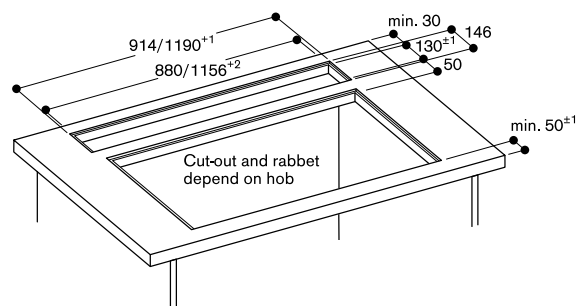


Longitudinal section

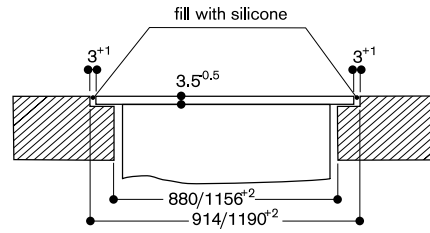


Cross-section

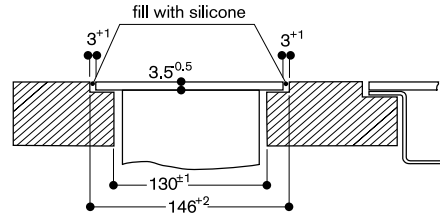


AL 400 cut-out flush-mounted

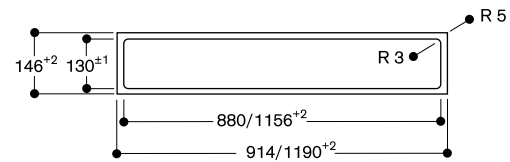

AL 400 cut-out for surface mounting



Cross-section of upper cabinet for AL 400 (without back wall) with AR 413; connection at the bottom

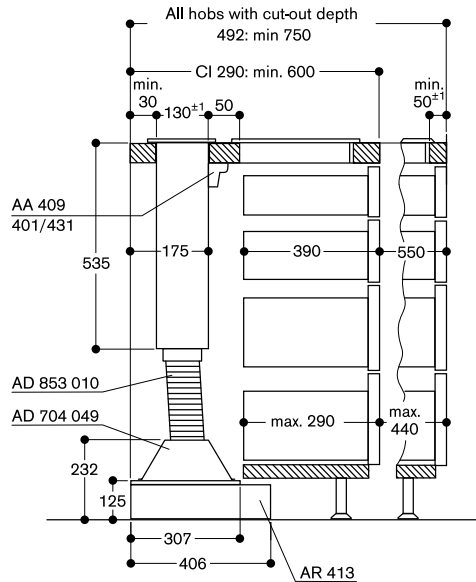

Good to know – for correct planning and installation

- The ducting can essentially be connected to the front, rear or below with the AL 400 table ventilation. The respective connecting pieces are available for this purpose.
- Plastic ducts can be used for installation behind a gas appliance. The maximum permitted performance of the cooktops is 18 kW.
- We recommend ducts with DN 150 for optimal air circulation.
- 2 flat ducts and 2 round ducts must be connected using a pipe connector.
- 2 bends (e.g. 90° horizontal with 90° vertical) require one flat duct pipe for connection, which can be shortened to the required length by cutting.
- It is equally important to ensure proper sealing of the ducting to avoid air leakages, for example with adequate adhesive tape.
- To ensure a sufficient vapour catch behaviour the AL 400 121 is recommended with two remote fan units. Due to energy restrictions for extraction mode in Europe the AL 400 121 is recommended to be installed in air recirculation.
- Vario cooktops with intensive vapour formation like Vario Teppan Yaki or Vario electric grill should be placed central in front of the ventilation appliance; in case of Vario electric grill air recirculation is not recommended.
- Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.

Planning example 1

1 x AL 400 with AR 403 122 (air extraction) / AR 413 122 (air recirculation)

Connection to the front with flat duct or aluflex pipe, DN 150; cabinet installation

Combination

1 x AL 400 table ventilation combined with 1 x AR 403 122 / AR 413 122 remote fan unit

Good to know


- The air collector box can be screwed directly to the remote fan unit. The reducing piece supplied is not needed in this case.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm² for each remote fan unit).

List of accessories 1

- 1 x AD 754 045 (connection pieces for round duct, 2 x DN 150)
- 2 x AD 852 042 (Flat duct adapter round 90°)
- 1 x AD 704 049 (Air collector box DN 150 flat duct)
- 1 x AD 853 011 (Flat duct system flex pipe)
- 1 x AD 990 090 (adhesive tape for bonding the ducts)

Order as set (appliances and accessories)

Width 90 cm: SET1AL4104 (air recirculation), SET1AL4204 (air extraction)

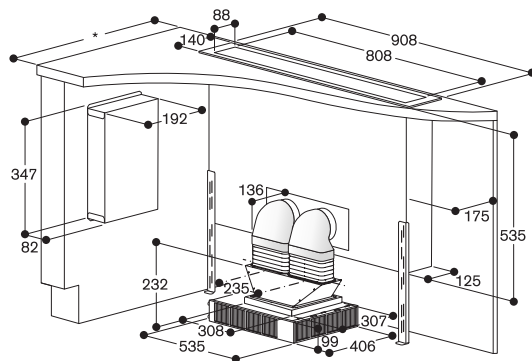

* All cooktops with cut-out depth 492: min. 750

Planning example 2

1 x AL 400 with AR 400 142

Connection to the front with flat or aluflex pipe, DN 150; cabinet installation

Combination

1 x AL 400 table ventilation combined with 1 x AR 400 142 remote fan unit

Good to know


- The remote fan unit can be connected alternately to the front or rear.
- Depending on the ducting type selected, connecting pieces are available for flat ducts or round ducts.
- A round duct or aluflex pipe is required additionally in configuration 1 depending on the cabinet height.

List of accessories 1

- 1 x AD 854 045 (connecting pieces for flat duct, 2 x DN 150)
- 2 x AD 852 042 (flat duct transition round 90°)
- If necessary 1 x AD 752 010 (round duct, DN 150), depending on cabinet height
- 1 x AD 990 090 (adhesive tape for bonding the ducts)

Order as set (appliances and accessories)

Width 90 cm: SET1AL4401

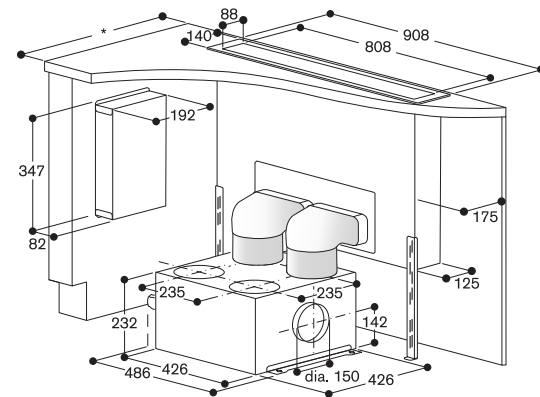


* All cooktops with cut-out depth 492: min. 750

List of accessories 2

- 1 x AD 754 045 (connecting pieces for round duct, 2 x DN 150)
- 2 x AD 751 010 (aluflex pipe round, DN 150)

Order as set (appliances and accessories)

Width 90 cm: SET1AL4402

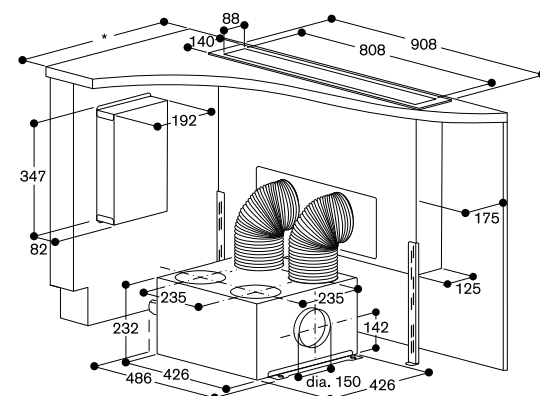

* All cooktops with cut-out depth 492: min. 750

Planning example 3**1 x AL 400 with AR 403 122 (air extraction) / AR 413 122 (air recirculation)**

Connection downward with flex duct, DN 150, cabinet installation

Combination

1 AL 400 table ventilation combined with 1 x AR 403 122 / AR 413 122 remote fan unit

Good to know


- The air collector box can be screwed directly on the remote fan unit. The reducing piece supplied is not needed in this case.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm² for each remote fan unit).

List of accessories 1

- 1 x AD 854 043 (connecting pieces for flat duct downward, 2 x DN 150)
- 1 x AD 704 049 (air collector box for AL 400)
- 1 x AD 853 011 (Flat duct Flexduct, DN 150)
- 1 x AD 990 090 (Adhesive tape for bonding the ducts)

Order as set (appliances and accessories)

Width 90 cm: SET1AL4103 (air recirculation), SET1AL4203 (air extraction)

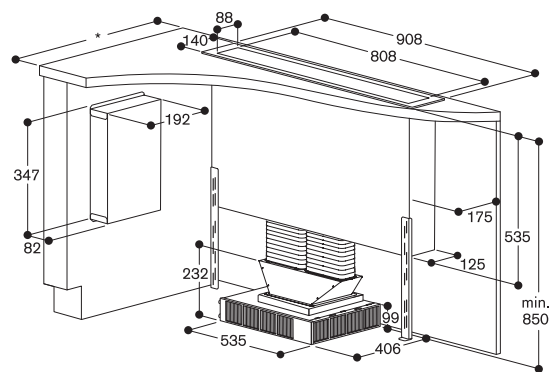

* All cooktops with cut-out depth 492: min. 750

Planning example 4**1 x AL 400 with AR 400 142**

Connection downward with flat and round duct, DN 150; cellar installation

Combination

1 x AL 400 table ventilation combined with 1 x AR 400 142 remote fan unit

Good to know


- The AR 400 142 remote fan unit can also be installed in an adjoining room, for example a cellar, as an alternative to cabinet installation
- Suitable threaded rods or suspension elements must be used for this configuration on the customer side; these can be attached to the retaining brackets, which are included ex works with the remote fan unit.

List of accessories 1

- 1 x AD 854 043 (connecting pieces for flat duct downward, 2 x DN 150)
- 2 x AD 852 041 (flat duct transition round)
- 2 x AD 751 010 (aluflex pipe round, DN 150)
- 1 x AD 990 090 (adhesive tape for bonding the ducts)
- 4 x threaded rods or suspension elements

Order as set (appliances and accessories)

Width 90 cm: SET1AL4403

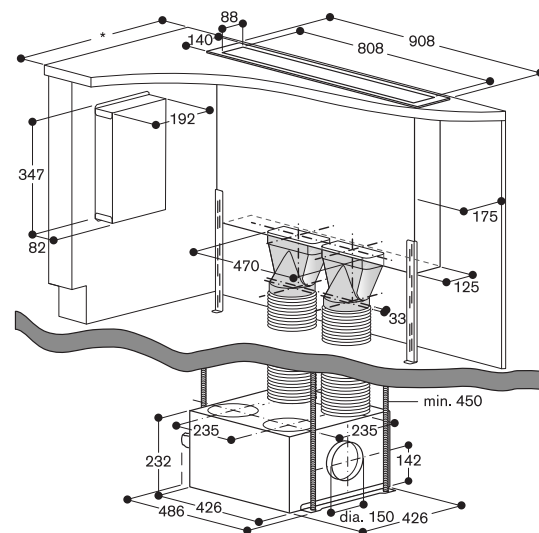

* All cooktops with cut-out depth 492: min. 750

Planning example 5

1 x AL 400 with AR 401 142

Connection downward with flat and round duct, DN 150; installation on outside wall

Combination

1 x AL 400 table ventilation combined with 1 x AR 401 142 remote fan unit

Good to know


- The AR 401 142 remote fan unit for installation on the outside wall is the ideal solution for compact air extraction.
- The ducting can be directed to outside via the cellar in this case. A minimum distance must simply be maintained for the air exhaust downwards on the AR 401 142 (100 cm). Distance ground to central line of the pipe: 60 cm.
- Local building regulations must be observed for the cellar breakout (especially with respect to the topic of fire safety).
- The ducting can of course also be implemented in the plinth area of the kitchen cabinets.

List of accessories 1

- 1 x AD 854 043 (connecting pieces for flat duct downwards, 2 x DN 150)
- 2 x AD 852 041 (flat duct transition round 90°)
- 2 x AD 751 010 (aluflex pipe round, DN 150); possibly additional ducts depending on the exhaust air ducting (aluflex or Naber round duct, DN 150)
- 1 x AD 704 048 (air collector box for AL 400)
- 1 x AD 702 052 (telescopic wall duct, DN 200)

Order as set (appliances and accessories)

Width 90 cm: SET1AL4801

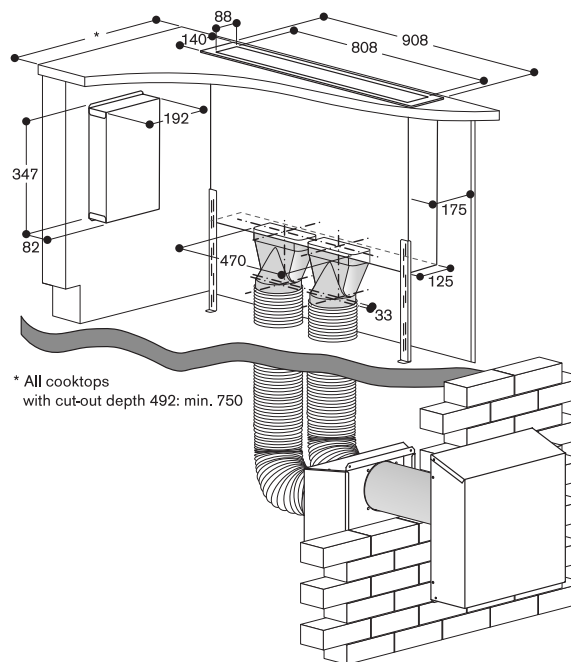

Planning example 6

1 x AL 400 121 with 2 x AR 413 122

Connection to the front with flat duct

Combination

1 AL 400 121 table ventilation combined with 2 x AR 413 122 remote fan unit

Good to know


- If the AL 400 121 is installed in air recirculation mode and intensive cooking (e.g. Vario Teppan Yaki) is involved, we recommend to use a second remote fan unit AR 413 122 to support the vapour catch behaviour
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm² for each remote fan unit).

List of accessories 1

- 1 x AD 754 045 (connection pieces for round duct, 2 x DN 150)
- 2 x AD 852 042 (flat duct adapter round 90°)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 031 (flat duct bend 90° horizontal)
- 2 x AD 852 041 (flat duct adapter round, DN 150)
- 1 x AD 990 090 (adhesive tape for bonding the ducts)

Order as set (appliances and accessories)

Width 120 cm: SET2AL4105 (air recirculation)

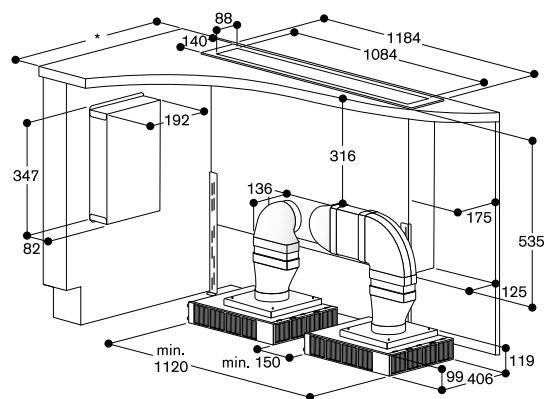



VL 414 111
stainless steel
Width 11 cm
Air extraction / Air recirculation
Without motor and control knob

Necessary installation accessories

AA 490 111
Stainless steel control knob

AD 724 041
Round duct connection additional
adapter for VL 414 on the side
Metal zinc coated
Necessary for installation to left or
right side of VL.

AD 724 042
Connection piece for round pipe
DN 150 For VL 414
For installation to left or right side of
VL additional adapter AD 724 041 is
necessary.

AD 854 046
Flat duct system with guidance fins
Connecting piece VL 414 for DN 150 flat
Allows for long duct runs with highest
efficiency due to soft duct shape and
conducting fins within the duct bends
Compact installation height even with
DN 150 allows integration in floor
constructions

Installation accessories

VA 420 000
Connection strip for combination with
other Vario appliances of the
400 series for flush mounting

VA 420 010
Connection strip for combination with
other Vario appliances of the
400 series for surface mounting

Special accessories

AA 414 010
Ventilation moulding for VL 414 next to
gas appliance.

Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.

Combinable with:

Vario cooktops 400 series
VI 46x
VI 42x
VG 42x
VP 4xx
VR 4xx

Vario downdraft ventilation 400 series VL 414

- Highly efficient ventilation system at the cooktop
- Flexible power distribution, precise extraction of cooking vapours only at the open ventilation elements
- Can be combined perfectly with other Vario appliances of the 400 series
- Precision crafted 3 mm stainless steel
- For surface mounting with a visible edge or for flush mounting
- Motorless, can be combined with Gaggenau BLDC remote fan units

Output

Power levels depend on the remote fan unit, see table on page 302 – 303.

Features

Manual opening of the ventilation element.
Closing element made of stainless steel, dishwasher-safe.
Metal grease filter, dishwasher-safe.
No connecting piece included.

Consumption data

Consumption data is referred to a configuration with the remote fan unit AR 403 122.
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 53.2 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class C.
Sound level min. 56 dB / max. 68 dB normal mode.

Planning notes

Refer to the table on page 299 for the matching remote fan units for air recirculation or air extraction mode.
Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.
For each VL one remote fan unit is recommended.
Maximum cooktop width between two VL: 60 cm.
Appliance can be snapped into the worktop from above. Additional fixing by clamps accessible from bottom up, clamping range 30-50 mm.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
Additional instructions for flush mounting: Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured.


Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
If operated next to gas appliances, the ventilation moulding AA 414 010 is recommended to ensure maximum performance of the cooktop.
If installed next to gas appliances, flat ducts must not be used for the piping up to the fan unit.
If installed next to VP 414, the flat duct must not be positioned underneath the VP 414.

Please read additional planning notes on page 238 – 241.

Please read the installation details regarding air ducting on page 206.

Connection

Connection cable 2.0 m between ventilation element VL 414 and control knob AA 490.

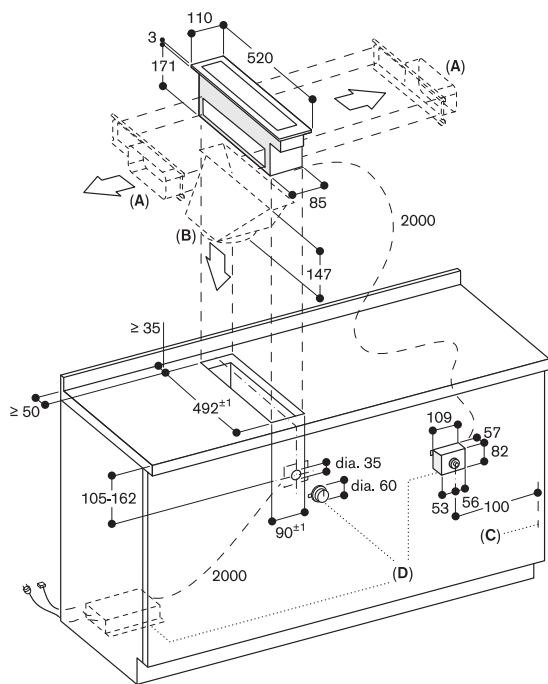


- A: DN 150 flat duct pipe connection piece, left/right with AD 854 046 or DN 150 round duct pipe connection piece, left/right with AD 724 042 + AD 724 041
- B: DN 150 round duct pipe connection piece, bottom with AD 724 042
- C: Cable access, right-hand side
- D: Vario ventilation control knob AA 490



See separate planning notes for
 - Positioning the control knob
 - Configuring the flexible power distribution

measurements in mm

VL 414 with AD 724 042/041

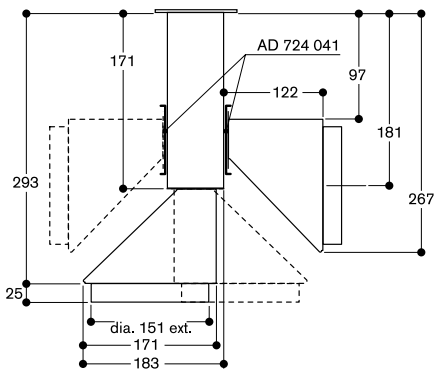

AD 854 046

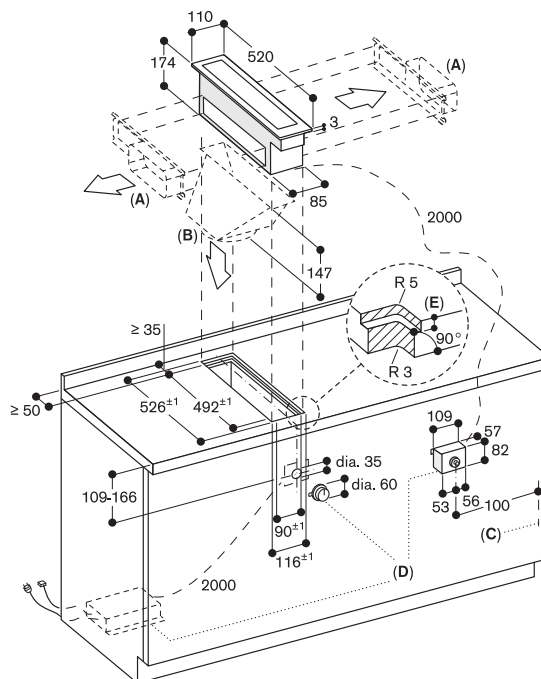


- A: DN 150 flat duct pipe connection piece, left/right with AD 854 046 or DN 150 round duct pipe connection piece, left/right with AD 724 042 + AD 724 041
- B: DN 150 round duct pipe connection piece, bottom with AD 724 042
- C: Cable access, right-hand side
- D: Vario ventilation control knob AA 490
- E: 3.5^{0.5}

See separate planning notes for
 - Positioning the control knob
 - Configuring the flexible power distribution


measurements in mm

View from above




measurements in mm

Cross-section

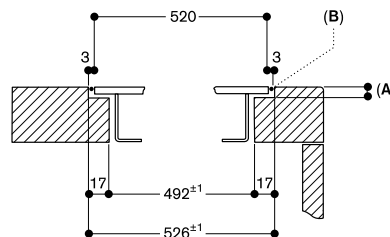

- A: 3.5^{0.5}
 - B: Fill with silicone
- measurements in mm

Longitudinal section

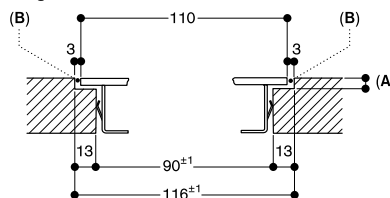

- A: 3.5^{0.5}
 - B: Fill with silicone
- measurements in mm



AA 490 111
stainless steel

Special accessories

AA 400 510
Window contact switch
Can be combined with motorless
appliances 400 series.

Vario control knob ventilation 400 series AA 490

- Solid stainless steel control knob
- Can be combined perfectly with other Vario appliances of the 400 series
- Motorless, can be combined with Gaggenau BLDC remote fan units

Handling

Control knob with illuminated ring and output marking.

Features


3 electronically controlled power levels and 1 intensive mode.
Run-on function, 6 min.

Planning notes

The separate electronics housing is to be installed so that it is accessible.
Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 10 W.
Connecting cable 1.8 m, pluggable.

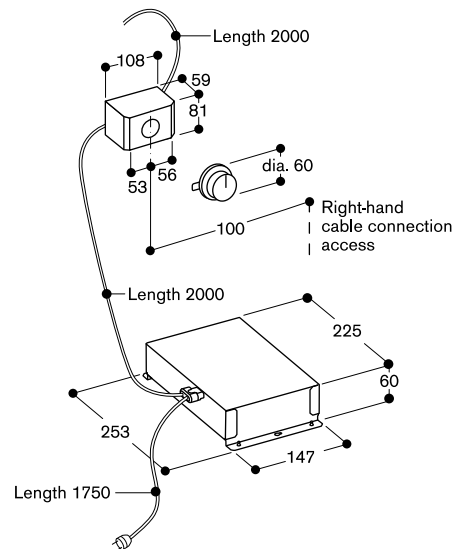

Good to know – for correct planning and installation

- For depth measurements, take account of the depth of the furniture cavity and worktop overhangs of the kitchen furniture.
- With the Vario downdraft ventilation, the ducting can be connected on the right, left or downwards.
- If the system is installed next to a gas appliance, ducts made of plastic (e.g. the flat duct system) must not be used, because of heat generation. In such cases, we recommend the use of aluflex pipes.
- Please note that flat ducts cannot be installed on the right or left of the following appliances due to their depth: Vario Teppan Yaki, Vario electric grill, Vario deep fryer, Vario steamer. For these, we recommend connection either to the other side or in a downward direction.
- For optimum air circulation, we recommend ducts with DN 150.
- 2 flat or 2 round ducts must be connected with a pipe connector.
- To connect 2 duct bends together (e.g. a 90° horizontal duct bend and a 90° vertical duct bend), a piece of flat duct is required, which can be shortened to the required length by cutting it to size.
- It is also important that ducting is well sealed in order to prevent air leaks, e.g. by using the adhesive tape by using the adequate adhesive tape.
- Vario cooktops with intensive vapour formation like Vario Teppan Yaki or Vario electric grill should be placed centrally in the cooktop configuration. In case of Vario electric grill air recirculation is not recommended.
- Secure the control unit to the side panel of the cabinet, not to the base of the cabinet or the kitchen floor.

Planning example 1

1 x VL 414 with AR 400 142 (Air extraction)

Flat duct with 2 x 90° duct bends or flat duct with 1 x 90° duct bend

Combination

1 x downdraft ventilation VL 414 in combination with 1 x AR 400 142 remote fan unit


Good to know

Connecting to the AR 400 remote fan unit is possible at all four air intakes.

List of accessories 1

- 1 x AD 854 046 (connecting piece for VL 414, DN 150)
- 1 x AD 852 031 (flat duct with horizontal 90° duct bend)
- 1 x AD 852 030 (flat duct with vertical 90° duct bend)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 041 (flat duct adapter round)
- 1 x AA 490 111 (Vario control knob)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)


Order as set (appliances and accessories): SET1VL4401.

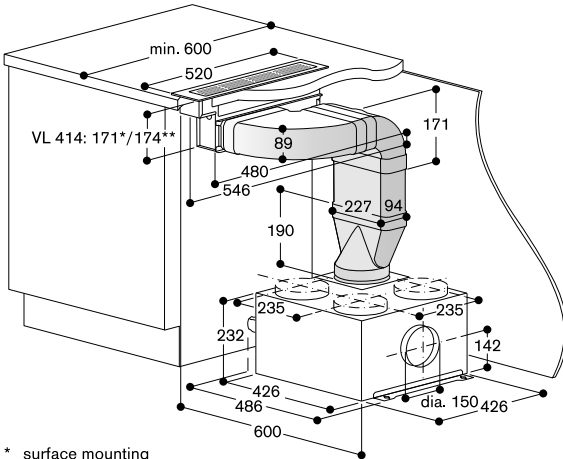

List of accessories 2

- 1 x AD 854 046 (connecting piece for VL 414, DN 150)
- 1 x AD 852 042 (flat duct adapter round 90°)
- 1 x AD 751 010 (aluflex pipe, DN 150)
- 1 x AA 490 111 (Vario control knob)
- 1 x AD 990 090 (adhesive tape for bonding the ducts)

Order as set (appliances and accessories): SET1VL4403 (air extraction).

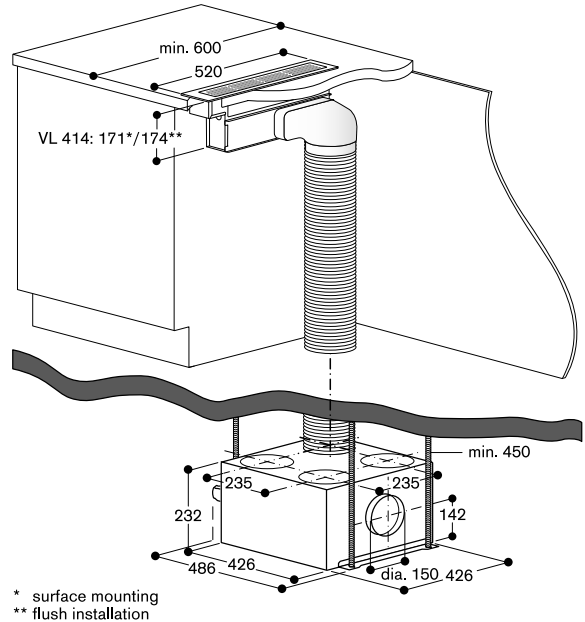

Planning example 2**1 x VL 414 with AR 413 122 (Air recirculation)**

Flat duct with 2 x 90° duct bends or flat duct with 1 x 90° duct bend

Combination

1 x downdraft ventilation in combination with 1 x AR 413 122 remote fan unit.


Good to know

- The remote fan unit can be turned in all directions, depending on the desired direction for the exhaust air or filter removal.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm²). For this, we recommend the air exhaust grille AA 010 410.
- The connecting piece DN 150 is included with the remote fan unit.
- The recommended minimum distance between filter openings and cupboard wall if there is no ventilation grille directly in front: 15 cm.

List of accessories 1

- 1 x AD 854 046 (connecting piece for VL 414, DN 150)
- 1 x AD 852 031 (flat duct with horizontal 90° duct bend)
- 1 x AD 852 030 (flat duct with vertical 90° duct bend)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 041 (flat duct adapter round)
- 1 x AA 490 111 (Vario control knob)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (appliances and accessories): SET1VL4101.

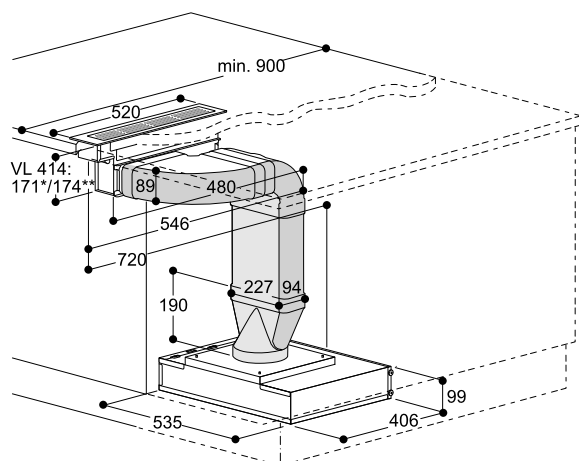


* surface mounting
** flush mounting

List of accessories 2

- 1 x AD 854 046 (connecting piece for VL 414, DN 150)
- 1 x AD 852 030 (flat duct with vertical 90° duct bend)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 041 (flat duct adapter round)
- 1 x AA 490 111 (Vario control knob)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (appliances and accessories): SET1VL4102.

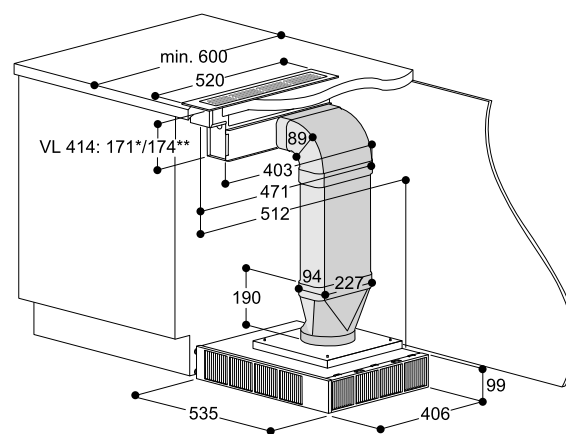

* surface mounting
** flush mounting

Planning example 3

1 x VL 414 with AR 403 122 (Air extraction)

Flat duct with 2 x 90° duct bends or flat duct with 1 x 90° duct bend

Combination

1 x downdraft ventilation in combination with 1 x AR 403 122 remote fan unit


Good to know

The connecting piece DN 150 is included with the remote fan unit.

List of accessories 1

- 1 x AD 854 046 (connecting piece for VL 414, DN 150)
- 1 x AD 852 031 (flat duct with horizontal 90° duct bend)
- 1 x AD 852 030 (flat duct with vertical 90° duct bend)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 041 (flat duct adapter round)
- 1 x AA 490 111 (Vario control knob)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)


Order as set (appliances and accessories): SET1VL4201.

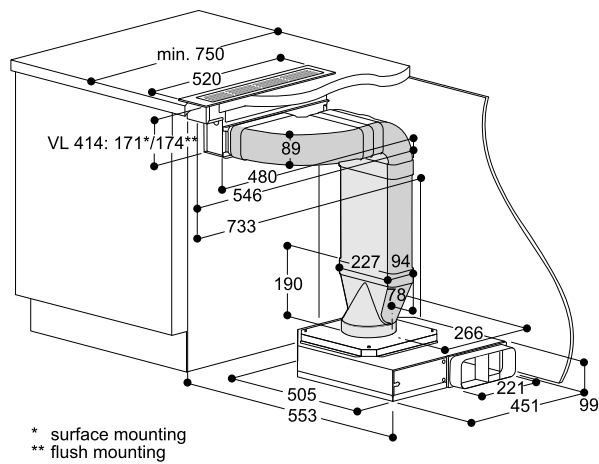

List of accessories 2

- 1 x AD 854 046 (connecting piece for VL 414, DN 150)
- 1 x AD 852 030 (flat duct with vertical 90° duct bend)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 041 (flat duct adapter round)
- 1 x AA 490 111 (Vario control knob)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (appliances and accessories): SET1VL4202.

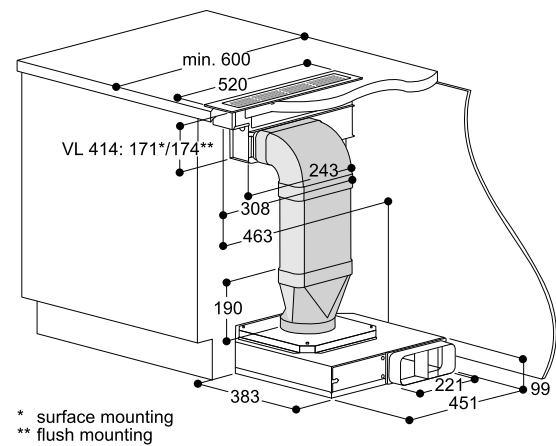

Planning example 4**1 x VL with AR 410 110 (Air recirculation)**

Flat duct with 2 x 90° bends

Combination

1 x downdraft ventilation in combination with 1 x AR 410 110 remote fan unit

Good to know

The charcoal filter exchange is possible from both sides.

Allow accessibility to the charcoal filters in the lower cabinet for replacing the filter.


It is possible to position the remote fan unit direct on the floor or fix it with the retaining brackets with a cut-out in the furniture base.

For configuration 2 is depending on the depth of the island a second flat duct AD 852 010 needed.

For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm²).**List of accessories 1**

- 1 x AD 854 046 (connecting piece for VL 414, DN150)
- 1 x AD 852 031 (flat duct with horizontal 90° duct bend)
- 1 x AD 852 030 (flat duct with vertical 90° duct bend)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 040 (flat duct connecting piece)
- 1 x AA 490 111 (Vario control knob)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (appliances and accessories): SET1VL4103.

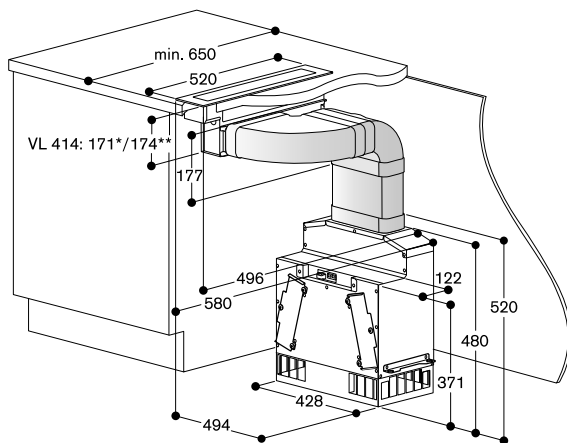


* surface mounting
** flush installation

List of accessories 2

- 1 x AD 854 046 (connecting piece for VL 414, DN150)
- 1 x AD 852 031 (flat duct with horizontal 90° duct bend)
- 1 x AD 852 030 (flat duct with vertical 90° duct bend)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 040 (flat duct connecting piece)
- 1 x AA 490 111 (Vario control knob)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (appliances and accessories): SET1VL4103.

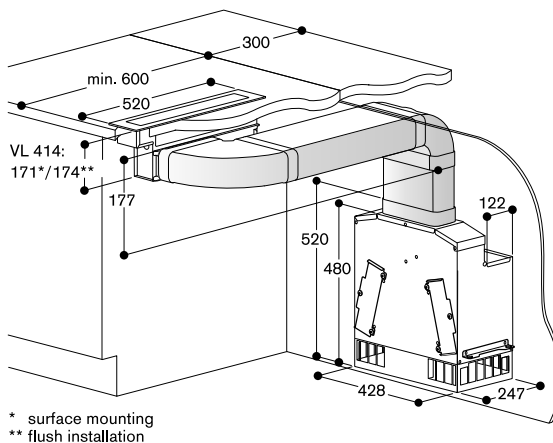

* surface mounting
** flush installation



AI 442 160

Stainless steel
Width 160 cm
Air extraction / Air recirculation
Motorless
Delivery without chimney

AI 442 120

Stainless steel
Width 120 cm
Air extraction / Air recirculation
Motorless
Delivery without chimney

AI 442 100

Stainless steel
Width 100 cm
Air extraction / Air recirculation
Motorless
Delivery without chimney

Necessary installation accessories

AD 442 016

Stainless steel air extraction chimney, including installation tower
Length: 620 mm

AD 442 026

Stainless steel air extraction chimney, including installation tower
Length: 860 mm

AD 442 116

Stainless steel air recirculation chimney, including installation tower
Length: 620 mm

AD 442 126

Stainless steel air recirculation chimney, including installation tower
Length: 860 mm

Special accessories

AA 400 510

Window contact switch
Can be combined with motorless appliances 400 series and Vario downdraft ventilation 200 series.

AA 442 110

2 activated charcoal filter with high efficient odour reduction due to increased surface. For air recirculation module AA 442 810
Activated charcoal filter for air recirculation module AA 442 810.

AA 442 810

Air recirculation module inclusive 2 activated charcoal filters with high efficient odour reduction due to increased surface
For air recirculation.
Can be combined with island and wall-mounted hood AI/AW 442.

AD 442 396

Ceiling collar for chimneys
Stainless steel

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:

All Vario cooktops 400 series
All Vario cooktops 200 series
All cooktops 400 series
All cooktops 200 series

Good to know:

the hood has to be larger than the cooktop(s).

Island hood 400 series

AI 442

- Professional technology hood combined with classic Gaggenau design
- Highly efficient extraction of cooking vapours due to large vapour collection area
- Motorless, can be combined with Gaggenau BLDC remote fan units
- Angled baffle filter with high grease absorption
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Dimmable, neutral white surface LED light for ideal illumination of the cooktop
- Air extraction or air recirculation system
- Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odor reduction as in air extraction mode and long replacement intervals

Output

Power levels depend on the remote fan unit, see table on page 302 – 303.

Features

2 control panels
3 electronically controlled power levels and 1 intensive mode.
Automatic function with sensor-controlled run-on function.
Grease filter saturation indicator.
Baffle filter, dishwasher-safe.
Neutral white surface LED light (3500 K), continuously dimmable.
Lamp output 4 x 10 W.
Illuminance 1390 lx.

Consumption data

Consumption data is referred to a configuration AI 442 160/120/100 with the remote fan unit AR 400 143.
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 53.5/53.3/52.4 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class B.
Grease filter efficiency class B.
Sound level min. 45/44/44 dB / max. 62/62/61 dB normal mode.


Planning notes

Refer to the table on page 300 for the matching remote fan units for air recirculation or air extraction mode.
The two-part chimney including the mounting kit must be ordered as an installation accessory.
Connection to the respective appliances via network cable.
Clearance above gas appliances min. 70 cm.
Clearance above electric appliances min. 60 cm.
Air recirculation module with 2 activated charcoal filters is installed in the inner chimney. Special air recirculation chimneys are available for this.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Please read additional planning notes on page 244 – 245.


Connection

Total connected load 50 W
Connecting cable 1.8 m, pluggable.

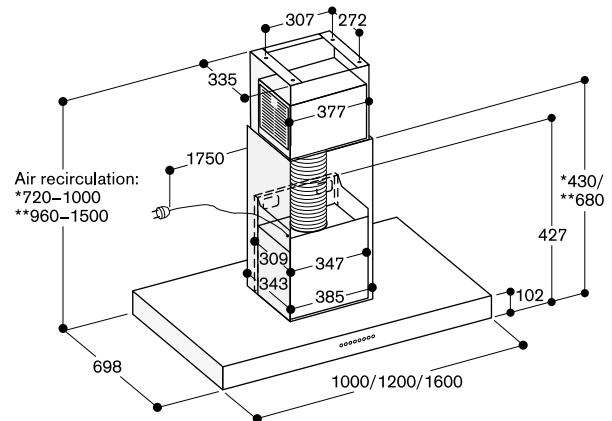

* With air recirculation chimney AD 442 116, suitable for ceiling heights from 2.35 m to 2.60 m.

** With air recirculation chimney AD 442 126, suitable for ceiling heights from 2.60 m to 3.10 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

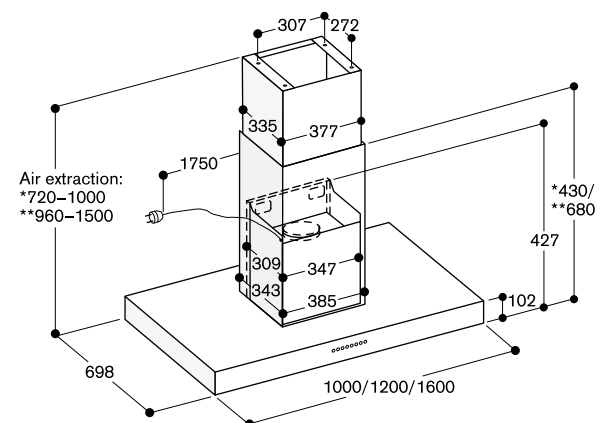

* With air extraction chimney 442 016, suitable for ceiling heights from 2.35 m to 2.60 m.

** With air extraction chimney AD 442 026, suitable for ceiling heights from 2.60 m to 3.10 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

**AW 442 160**

Stainless steel
Width 160 cm
Air extraction / Air recirculation
Motorless
Delivery without chimney

AW 442 120

Stainless steel
Width 120 cm
Air extraction / Air recirculation
Motorless
Delivery without chimney

AW 442 190

Stainless steel
Width 90 cm
Air extraction / Air recirculation
Motorless
Delivery without chimney

Necessary installation accessories**AD 442 012**

Stainless steel chimney for air extraction
Length: 620 mm

AD 442 022

Stainless steel chimney for air extraction
Length: 860 mm

AD 442 112

Stainless steel chimney for air recirculation
Length: 620 mm

AD 442 122

Stainless steel chimney for air recirculation
Length: 860 mm

Special accessories**AA 400 510**

Window contact switch
Can be combined with motorless appliances 400 series and Vario downdraft ventilation 200 series.

AA 442 110

2 activated charcoal filter with high efficient odour reduction due to increased surface. For air recirculation module AA 442 810

Activated charcoal filter for air recirculation module AA 442 810.

AA 442 810

Air recirculation module inclusive 2 activated charcoal filters with high efficient odour reduction due to increased surface
For air recirculation.

Can be combined with island and wall-mounted hood AI/AW 442.

AD 442 392

Ceiling collar for chimneys
Stainless steel

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:

All Vario cooktops 400 series
All Vario cooktops 200 series
All cooktops 400 series
All cooktops 200 series

Good to know:

the hood has to be larger than the cooktop(s).

Wall-mounted hood 400 series**AW 442**

- Professional technology hood combined with classic Gaggenau design
- Highly efficient extraction of cooking vapours due to large vapour collection area
- Motorless, can be combined with Gaggenau BLDC remote fan units
- Angled baffle filter with high grease absorption
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Dimmable, neutral white surface LED light for ideal illumination of the cooktop
- Air extraction or air recirculation system
- Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odor reduction as in air extraction mode and long replacement intervals

Output

Power levels depend on the remote fan unit, see table on page 302 – 303.

Features

2 control panels
3 electronically controlled power levels and 1 intensive mode.
Automatic function with sensor-controlled run-on function.
Grease filter saturation indicator.
Baffle filter, dishwasher-safe.
Neutral white surface LED light (3500 K), continuously dimmable.
Lamp output 4 x 10 W.
Illuminance 1010 lx.
Easy mounting system for simple installation and alignment.

Consumption data

Consumption data is referred to a configuration AW 442 160/120/190 with the remote fan unit AR 400 143. Energy efficiency class B/A/A at a range of energy efficiency classes from A+++ to D.
Energy consumption 57.7/48.1/40.8 kWh/year.
Ventilation efficiency class A/A/A.
Illumination efficiency class B/B/A.
Grease filter efficiency class A/B/B.
Sound level min. 47/47/47 dB / max. 64/64/63 dB normal mode.


Planning notes

Refer to the table on page 301 for the matching remote fan units for air recirculation or air extraction mode. The two-part chimney must be ordered as an installation accessory. Connection to the respective appliances via network cable. Clearance above gas appliances min. 70 cm. Clearance above electric appliances min. 60 cm. Air recirculation module with 2 activated charcoal filters is installed in the inner chimney. Special air recirculation chimneys are available for this. When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


Please read additional planning notes on page 244 – 245.

Connection

Total connected load 50/40/30 W
Connecting cable 1.8 m, pluggable.

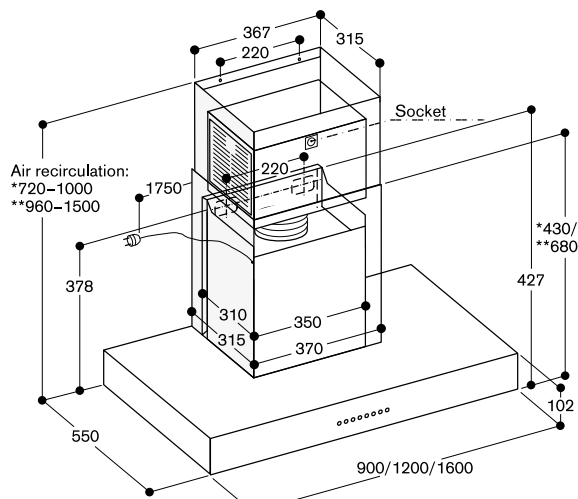

- * With air recirculation chimney AD 442 112, suitable for ceiling heights from 2.35 m to 2.60 m.
- ** With air recirculation chimney AD 442 122, suitable for ceiling heights from 2.60 m to 3.10 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

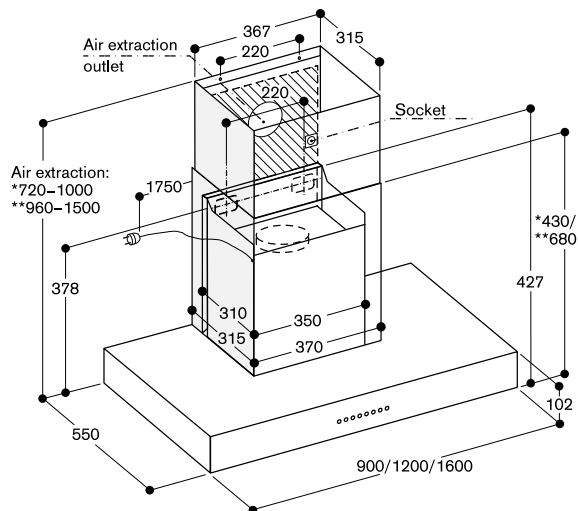

- * With air extraction chimney 442 012, suitable for ceiling heights from 2.35 m to 2.60 m.
- ** With air extraction chimney AD 442 022, suitable for ceiling heights from 2.60 m to 3.10 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

Planning example 1

1 x AI 442 with AR 400 143


Round duct, DN 150

Good to know

- The AR 400 143 remote fan unit is ideal for space-saving installation for assembly in the AI 442.
- Two chimney lengths are available depending on the height of the room.
- The minimum distance to the cooktop is 600 mm, and 700 mm for gas appliances.
- The necessary mounting kits are included as accessories with the chimney.
- The appropriate installation accessories are available for air extraction and air recirculation, see the list of accessories.
- The minimum height of AI 442 is increased by 2 cm with the installation of the ceiling collar.

List of accessories 1 (air extraction)

- 1 x AR 400 143 (remote fan unit for AI 442 / AW 442 chimney installation)
- 1 x AD 442 016 (stainless steel chimney for air extraction for room height of 2.35 m to 2.60 m)
or 1 x AD 442 026 (stainless steel chimney for air extraction for room height of 2.60 m to 3.10 m)
- 1-2 x AD 752 010 (round duct, DN 150), depending on room height
- 1 x AD 990 090 (adhesive tape for bonding the ducts)
- Optional : 1 x AD 442 396 (stainless steel ceiling collar for island hood)

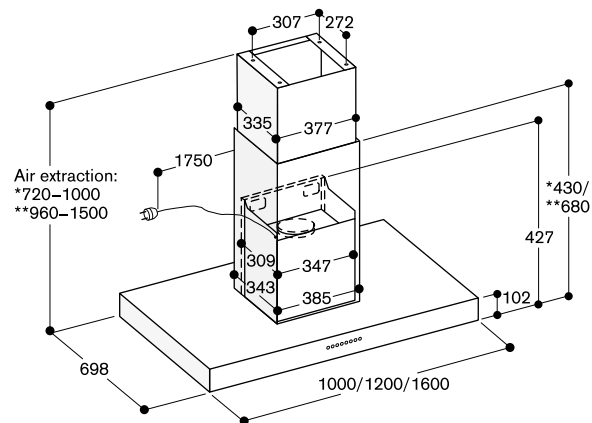


* With air extraction chimney 442 016, suitable for ceiling heights from 2.35 m to 2.60 m.

**With air extraction chimney AD 442 026, suitable for ceiling heights from 2.60 m to 3.10 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.

List of accessories 2 (air recirculation)

- 1 x AR 400 143 (remote fan unit for AI 442 / AW 442 chimney installation)
- 1 x AA 442 810 (air recirculation module with activated charcoal filter)
- 1 x AD 442 116 (stainless steel chimney for air recirculation for room height of 2.35 m to 2.60 m) or 1 x AD 442 126 (stainless steel chimney for air extraction for room height of 2.60 m to 3.10 m)
- Optional : 1 x AD 442 396 (stainless steel ceiling collar for island hood)

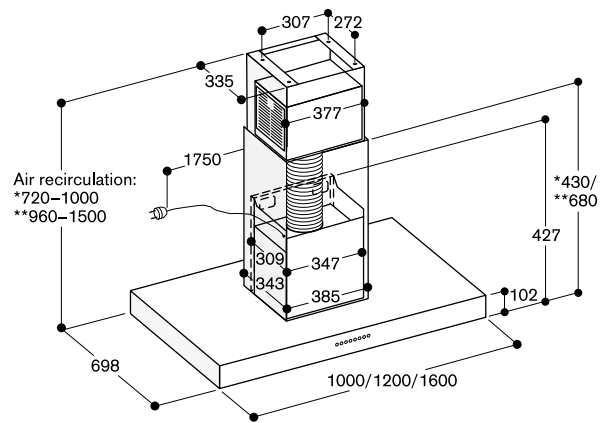

* With air recirculation chimney AD 442 116, suitable for ceiling heights from 2.35 m to 2.60 m.

**With air recirculation chimney AD 442 126, suitable for ceiling heights from 2.60 m to 3.10 m; Specifications refer to the distance of 1.60 m from the floor to the lower edge of the hood.



AR 400 142

Metal housing
 Max. air output 830 m³/h
 Air extraction
 Inside installation

Special accessories

AA 400 510
 Window contact switch
 Can be combined with motorless
 appliances 400 series.

Installation accessories for the air
 recirculation ducts you will find at the
 pages 282 – 294.

Remote fan unit 400 series

AR 400

- Powerful remote fan unit to combine with motorless appliances 400 series
- Efficient BLDC technology

Output

3 performance output levels and intensive mode:
 Air output according to EN 61591.
 Sound power and sound pressure depending on built-in situation.
 Air extraction:
 670 / 830 m³/h.
 Power levels depend on the motorless appliances, see table on page 302 – 303.

Features


3 electronically controlled power levels and one intensive mode.
 Fan technology with highly efficient, brushless DC motor (BLDC).
 Steel housing, zinc-plated.
 Pipe connection pieces on intake side:
 1 x DN 150 round, 4 x DN 150 round.
 Pipe connection pieces on output side:
 1x DN 150 round.
 Spare cover for closing air intake.
 Retaining bracket for installation on the ceiling or side of a cupboard enclosed.

Planning notes

Remote fan unit in combination with motorless appliances 400 series.
 Connection to the respective appliances via network cable.
 Installation in the plinth with cut-out for the air ducting in the furniture base.
 Installation in a separate room allows for a reduced noise level in the kitchen.
 For installation in the cellar or an adjoining room, please refer to the planning information on page 230 – 231 and 238.
 When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 240 W.
 Connecting cable 1.8 m, pluggable.
 Network cable 5 m.

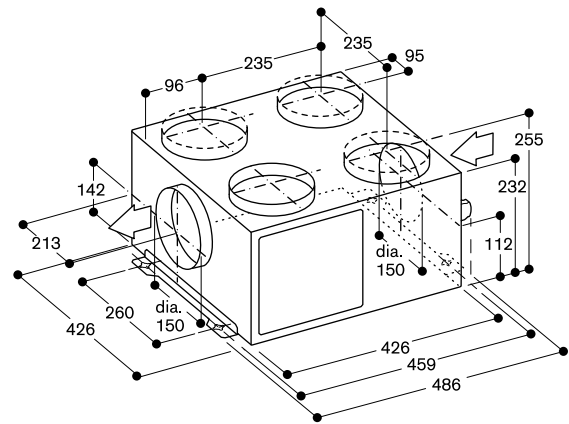

**AR 400 143**

Metal housing
 Max. air output 970 m³/h
 Air extraction / Air recirculation
 Installation in the chimney of
 AI/AW 442

Special accessories

AA 400 510
 Window contact switch
 Can be combined with motorless
 appliances 400 series.

Installation accessories for the air
 recirculation ducts you will find at the
 pages 282 – 294.

Remote fan unit 400 series**AR 400**

- Powerful remote fan unit to combine with motorless appliances 400 series
- Efficient BLDC technology
- Compact and space-saving due to the installation in the duct cover of AI/AW 442 island/wall hood

Output

3 performance output levels and intensive mode:
 Air output according to EN 61591.
 Sound power and sound pressure depending on built-in situation.
 Air extraction:
 640 / 970 m³/h.
 Power levels depend on the motorless appliances, see table on page 302 – 303.

Features


3 electronically controlled power levels and one intensive mode.
 Fan technology with highly efficient, brushless DC motor (BLDC).
 Including sound insulation to minimise the noise level.
 Steel housing, zinc-plated.
 Pipe connection pieces on output side:
 1x DN 150 round.

Planning notes

Remote fan unit in combination with the motorless AI/AW 442.
 Connection to the respective appliances via network cable.
 Installation in the chimney of AI/AW 442.
 When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 230 W.
 Connecting and network cable included in delivery.





AR 401 142

Stainless steel
Max. air output 910 m³/h
Air extraction
Outside wall mounting

Installation accessories

AD 702 052
Telescopic wall-duct
Connection piece DN 200 round

Special accessories

AA 400 510
Window contact switch
Can be combined with motorless appliances 400 series.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Remote fan unit 400 series

AR 401

- Powerful remote fan unit to combine with motorless appliances 400 series
- Efficient BLDC technology

Output

3 performance output levels and intensive mode:
Air output according to EN 61591.
Sound power and sound pressure depending on built-in situation.
Air extraction:
720 / 910 m³/h.
Power levels depend on the motorless appliances, see table on page 302 – 303.

Features


3 electronically controlled power levels and one intensive mode.
Fan technology with highly efficient, brushless DC motor (BLDC).
Including sound insulation to minimise the noise level.
Stainless steel housing.
Pipe connection pieces on intake side: 1x DN 200 round.
Retaining bracket for installation on an outside wall enclosed.

Planning notes

Remote fan unit in combination with motorless appliances 400 series.
Connection to the respective appliances via network cable.
Installation in an exterior area allows for a reduced noise level in the kitchen.
Installation on an outside wall.
Control box must be installed indoors.
Acceptable temperature range for installation of the control box:
-25 to 60 °C.
Distance for free air space from ground (or other object) to center of the pipe: min 60 cm.
When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 180 W.
Connecting cable 1.8 m, pluggable.
Network cable 5 m.

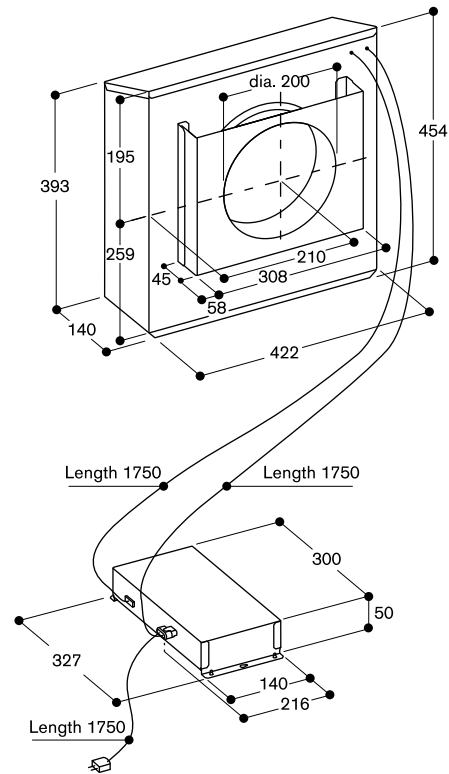



AR 410 110
Metal housing
Max. air output 665 m³/h
Air recirculation
Installation in the cupboard

Special accessories

AA 010 410
Air exhaust grille air recirculation
Stainless steel-coloured, 90 cm,
including installation fittings, height
adjustable.

AA 410 110
2 activated charcoal filter
For air recirculation.
Combinable with remote fan unit
AR 410 110.

AA 410 112
2 regenerable activated charcoal filter
For air recirculation.
Combinable with remote fan unit
AR 410 110.

Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.

Remote fan unit 400 and 200 series AR 410

- Powerful remote fan unit to combine with Vario downdraft ventilation 400 and 200 series
- Efficient BLDC technology
- Particularly quiet due to patented noise insulation
- Compact, space-saving installation in the cabinet for Vario downdraft ventilation

Output

Performance output level 3/Intensive:
Air output according to EN 61591.
Sound power and sound pressure
depending on built-in situation.
Performance output level 3/Intensive:
Air output according to EN 61591.
Sound power and sound pressure
depending on built-in situation.
Air recirculation:
575 / 665 m³/h.
Power levels depend on the
motorless appliances, see table on
page 302 – 303

Air recirculation:
575 / 665 m³/h.
Power levels depend on the
motorless appliances, see table on
page 302 – 303.

Features


3 electronically controlled power levels
and 1 intensive mode.
Fan technology with highly efficient,
brushless DC motor (BLDC).
Including sound insulation to minimise
the noise level.
Steel housing, zinc-plated.
Pipe connection piece on intake side:
1 x DN 150 flat duct.
Retaining bracket for installation at the
furniture base enclosed.
2 activated charcoal filters enclosed ex
factory.
The activated charcoal filter is suitable
for the preparation of fish and seafood
due to special treatment.
Filter replacement interval: 1 year
depending on cooking frequency.

Planning notes


Powerful remote fan unit to combine
with Vario downdraft ventilation 400
and 200 series.
Connection to the respective
appliances via network cable.
Installation in a cupboard possible with
a cut-out in the furniture base or
behind the cupboard positioned on the
floor. Please refer to the planning
information on page 241 and 263 – 265.
To replace the filter the remote fan unit
must be accessible.
The activated charcoal filter exchange
is possible from both sides.


Connection

Total connected load 170 W.
Connecting cable 1.8 m, pluggable.
Network cable 2 m.

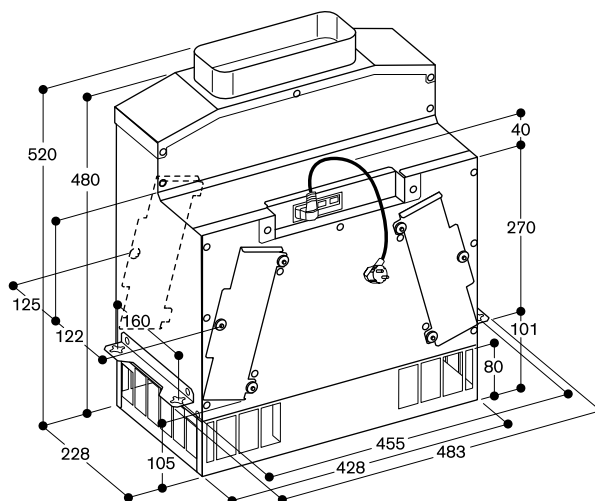

Filter exchange

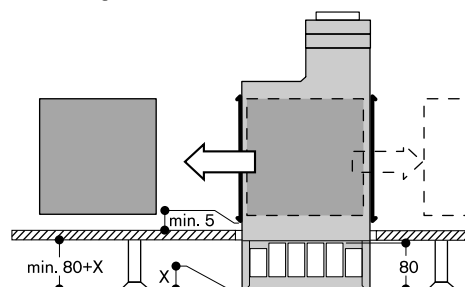



AR 403 122

Metal housing
Max. air output 890 m³/h
Air extraction
Plinth installation

Special accessories

AA 400 510

Window contact switch
Can be combined with motorless appliances 400 series and Vario downdraft ventilation 200 series.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Remote fan unit 400 and 200 series

AR 403

- Powerful remote fan unit to combine with motorless appliances 400 series and Vario downdraft ventilation 200 series
- Efficient BLDC technology
- Compact and space-saving installation in a 10 cm high plinth

Output

3 performance output levels and intensive mode:

Air output according to EN 61591.
Sound power and sound pressure depending on built-in situation.

3 performance output levels and intensive mode:

Air output according to EN 61591.
Sound power and sound pressure depending on built-in situation.

Air extraction:

730 / 890 m³/h.

Power levels depend on the motorless appliances, see table on page 302 – 303.

Air extraction:

730 / 890 m³/h.

Power levels depend on the motorless appliances, see table on page 302 – 303.

Features

3 electronically controlled power levels and 1 intensive mode.

Fan technology with highly efficient, brushless DC motor (BLDC).

Steel housing, zinc-plated.

Pipe connection pieces on intake side:
1 x DN 150 round.

Pipe connection pieces on output side:
1x DN 150 flat duct.

Retaining bracket for installation on the ceiling or side of a cupboard enclosed.

Planning notes

Remote fan unit in combination with motorless appliances 400 series and Vario downdraft ventilation 200 series.

Connection to the respective appliances via network cable.

Installation in the plinth with cut-out for the air ducting in the furniture base.

Connection of AL 400 with an air collector box (AD 704 048/049).


When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


Connection

Total connected load 180 W.

Connecting cable 1.8 m, pluggable.

Network cable 2 m.

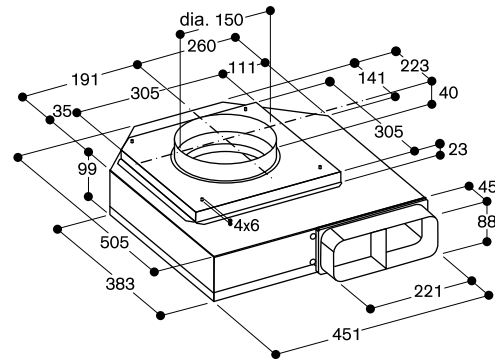

**AR 413 122**

Metal housing
Max. air output 760 m³/h
Air recirculation
Plinth installation

Installation accessories**AA 010 410**

Air exhaust grille air recirculation
Stainless steel-coloured, 90 cm,
including installation fittings, height
adjustable.

Special accessories**AA 413 111**

2 activated charcoal filter
For air recirculation.
Combinaible with remote fan unit
AR 413 122.

Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.

Remote fan unit 400 and 200 series**AR 413**

- Powerful remote fan unit to combine with motorless appliances 400 series and Vario downdraft ventilation 200 series
- Efficient BLDC technology
- Compact and space-saving installation in a 10 cm high plinth

Output

3 performance output levels and intensive mode:

Air output according to EN 61591.
Sound power and sound pressure
depending on built-in situation.

3 performance output levels and intensive mode:

Air output according to EN 61591.
Sound power and sound pressure
depending on built-in situation.

Air recirculation:

620 / 760 m³/h.

Power levels depend on the
motorless appliances, see table on
page 302 – 303

Air recirculation:

620 / 760 m³/h.

Power levels depend on the
motorless appliances, see table on
page 302 – 303.

Features

3 electronically controlled power levels
and 1 intensive mode.

Fan technology with highly efficient,
brushless DC motor (BLDC).
Steel housing, zinc-plated.

Pipe connection pieces on intake side:
1 x DN 150 round.

Retaining bracket for installation on the
ceiling or side of a cupboard enclosed.
2 activated charcoal filters enclosed ex
factory.

Filter is suitable for the preparation of
fish and seafood due to special
treatment.

Filter replacement interval:
1 year depending on cooking
frequency.

Planning notes

Remote fan unit in combination with
motorless appliances 400 series and
Vario downdraft ventilation 200 series.

Connection to the respective
appliances via network cable.

Installation in the plinth with cut-out for
the air ducting in the furniture base.

Filter replacement interval: 1-1.5 years
depending on cooking frequency.

It must be possible to remove the plinth
to replace the filter.



Recommended minimum gap between
filter openings and cupboard wall if
there is no ventilation grille directly in
front: 15 cm.

Connection

Total connected load 180 W.

Connecting cable 1.8 m, pluggable.

Network cable 2 m.

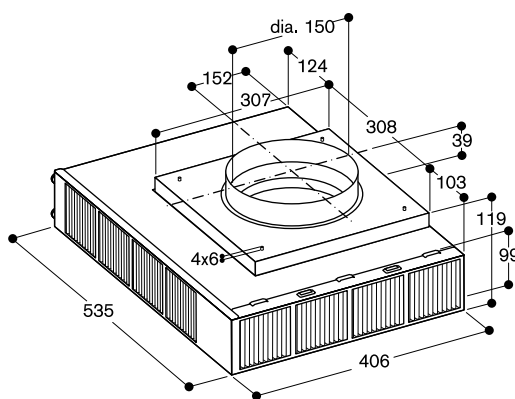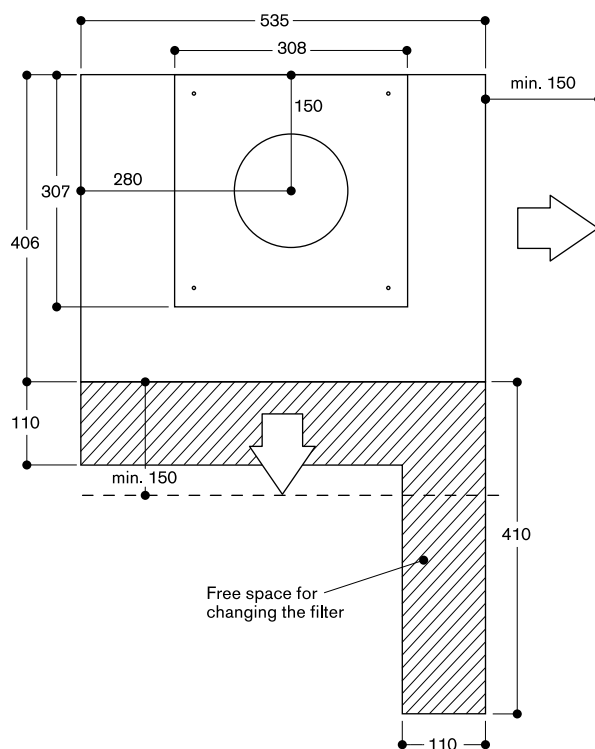**View from above**

Checklist for the modular ventilation appliances 400 series



• AC 402 181



• AC 482 181
• AC 462 181
• AC 472 181



• AR 400 142



• AR 401 142



• AR 403 122



• AL 400 191
• AL 400 121




• AR 400 142



• AR 401 142



• AR 403 122



• AR 413 122



• VL 414 111



• AA 490 111




• AR 400 142



• AR 401 142



• AR 403 122



• AR 413 122



• AR 410 110



• AI 442/AW 442



• AR 400 142



• AR 401 142



• AR 400 143

The external remote fan units have a network cable that is used to connect the motorless appliances of the 400 series and the motorless Vario downdraft ventilation 200 series.

Up to two remote fan units can be connected (e.g. with Vario ceiling ventilation 400 series), whereby an additional network cable is connected from one remote fan unit to the other remotefan unit.

Other control options

The external remote fan unit has an additional switching output (potential free contact) that can be used to connect other appliances, such as a ventilation system that is available at the site.

The respective ventilation planner is then responsible for the effective operation of the entire ventilation system.

The guarantee of electrical function is maintained as long as the respective specifications are observed.



Free hanging lift hood
• AC 270 101



Integrated
• AC 250 121



Surface mounted
• AC 230 101



• VL 200 120



• AR 400 142



• AR 401 142



• AR 403 122



• AR 413 122



• AR 410 110



• AI 240 191 / AW 240 191



• AW 250 192



• AF 210 162
• AF 210 192



• AC 200 161
• AC 200 181
• AC 200 191

General planning notes

The aim of good ventilation system planning is to extract cooking vapours out of the kitchen area as completely and quickly as possible. To help you plan and install your system correctly, here are a few important notes on system planning from our ventilation experts.

The planning of a ventilation system is significantly determined by the air requirement and air output. The air requirement must be contrasted with the corresponding air output that a ventilation appliance can produce, while taking account of the influence of all the ventilation components involved.

Air requirement needed:

Please observe the local applicable building regulations when configuring ventilation solutions. The air output of a complete ventilation system must be designed according to the air requirement needed. For this, the size of the kitchen and a corresponding air change rate for the volume of space are often used as the basis for planning. We recommend this method only if the distance between the ventilation system and the cooktop is greater than 1.20 m, that is to say, for ceiling ventilation.

- For air extraction operation, the air requirement for the air exchange rate is calculated using a factor of 10.
- However, the calculation is made using a factor of 12 in kitchens where special cooking appliances such as the electric grill, Teppan Yaki or wok are used.
- For air recirculation, the air requirement for the air exchange rate is generally calculated using a factor of 12.

If the distance between the ventilation system and the cooktop is less than 1.20 metres, the factors listed below must be taken into account to ensure that most of the cooking vapours are trapped as soon as they rise from the cooktop:

- **The size and architecture of the kitchen:** As the size of the room increases, the movements of air in the room also increase and, as a result, the air requirement becomes greater.
- **The cooking appliances:** The choice of cooktop is the decisive influencing factor. Every cooktop produces different types and amounts of cooking vapours. The wider the cooktop, the higher the output of the ventilation system should be. Above all, the ventilation system must have a sufficient reserve capacity, if special Vario cooking appliances, such as a Teppan Yaki, wok or electric grill, are to be installed, because such appliances can be expected to produce a higher amount of cooking vapours. We therefore also recommend that these special cooking appliances are installed, if possible, in the centre of the cooktop configuration and not at the edge.
- **The type of ventilation system:** Every type of ventilation system has particular characteristics which influence the air requirement needed. Ventilation systems, such as downdraft ventilation and table ventilation, are characterised by extracting vapours directly from the cooktop. As they rise up, the cooking vapours can therefore not spread as far in the ambient air. In this case, the air output required is usually less than for those types of ventilation system that are 80 cm or further away from the cooktop.
- **The operation mode:** All Gaggenau ventilation systems can be operated both in exhaust air mode and air recirculation mode. It should be noted that, in air recirculation mode, the additional activated charcoal air filter leads to a reduction in air output in comparison to exhaust air mode. The larger the surface of the activated charcoal air filter, the more the ventilation system bears comparison in its extraction and noise behaviour with an exhaust air solution. In air extraction mode, the actual air output depends not only on the fan output, but also significantly on the duct system.

Important influencing factors on the air output:

- The fans: Gaggenau ventilation systems are equipped with particularly powerful fans, or they can be combined with correspondingly powerful remote fan units for exhaust air or air recirculation mode. These fans are also very pressure-stable. They overcome possible pressure losses caused by a ducting system and work highly effectively at a low noise level.
- Ducting and installation: To achieve optimum results, the following points should be observed during installation:
 1. Install duct bends with a minimum clearance of 30 cm from the exhaust air opening.
 2. Avoid reductions in cross sections.
 3. For duct bends, use bends that are as wide as possible.
 4. Only install ducts that have a smooth and flat inner surface.
 5. Use exhaust air pipes with a diameter of at least 125 mm.
 6. Pay attention to the use of a short ducting paths as possible.
 7. Fit wall outlets that have wide fins, wide-meshed grilles and a low back-pressure.
 8. Ensure sufficient supply air.



AC 270 101

Gaggenau Black
Width 105 cm
Air recirculation
Delivery with ceiling mounting plate

Special accessories

AA 200 121

3 activated charcoal filter
For air recirculation.

Can be combined with ceiling ventilation AC 230 and AC 270.

AA 200 122

3 regenerable activated charcoal filter
For air recirculation.

Can be combined with ceiling ventilation AC 230 and AC 270.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:

All the Vario 400 series and 200 serie except with the Vario Grill
All cooktops 400 series
All cooktops 200 series

Good to know:

the hood has to be larger than the cooktop(s).

Ceiling ventilation 200 series

AC 270

- Height adjustable ceiling ventilation, when not in use it can be completely lifted onto the ceiling or integrated in the ceiling
- Precision crafted, solid aluminium design
- Energy-saving, low-noise fan
- Rim extraction
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Easy installation on the ceiling with provided ceiling mounting plate
- Easy maintenance of the filters
- Dimmable, neutral white LED light for ideal illumination of the cooktop
- Air recirculation

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.

Sound power level according to EN 60704-3.

Odour reduction for air recirculation in accordance with EN 61591.

Air recirculation:

515 / 680 m³/h.

67 / 74 dB (A) re 1 pW.

Odour reduction: > 90 %

Features

3 electronically controlled power levels and 1 intensive mode.

Remote control is included in delivery.

Automatic function with sensor-controlled run-on function.

Interval ventilation, 6 min.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

3 metal grease filters, dishwasher-safe.

3 activated charcoal filters.

The activated charcoal filter is suitable for the preparation of fish and seafood due to special treatment.

Protection against allergen particles due to special treatment.

Gaggenau Black anodized aluminium.

Fan technology with highly efficient, brushless DC motor (BLDC).

Easy mounting system for simple installation and alignment.

Neutral white LED light (3500 K), continuously dimmable.

Light colour in different white tones (2700 – 5000 K) can be adjusted via Home Connect.

Lamp output 6 x 3 W.

Illuminance 1156 lx continuously dimmable.

Cooktop-based ventilation control (with suitable cooktop).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Planning notes

Installation directly on the ceiling with provided ceiling mounting plate.

The ceiling ventilation has to be handled as a room ventilation when distance to cooktop is larger than 120 cm since the direct capture of vapours will be limited. The needed airflow is given by an air exchange rate of 10 to 12 times the room volume. A suitable load-bearing substructure is required for securing the extractor hood. Never fit the appliance directly onto plasterboard or similar lightweight construction materials.

Clearance above gas appliances min. 70 cm (more than total load gas 12 kW min. 75 cm).

Clearance above electric appliances min. 70 cm.


Air recirculation is not recommended in combination with Vario electric grill.

Appliance weight: approx. 69 kg.

Connection


Total connected load 250 W.

Plan a connection cable.

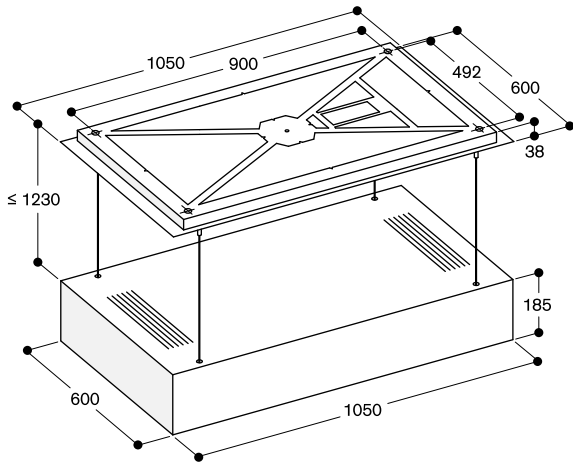

measurements in mm

Flush integration in the ceiling

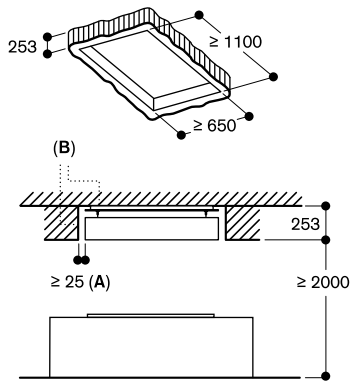

A: ≥ 25 mm all around
 B: Depending on the cooking method, residual moisture may escape from the ceiling ventilation even after use. For preventive purposes, we recommend treating the recess in the ceiling with an anti-mould paint.

measurements in mm



AC 250 121

Gaggenau Light Bronze

Width 120 cm

Air extraction / Air recirculation

Included in the price

1 Remote control

Special accessories

AA 010 811

Air recirculation module inclusive

1 activated charcoal filter

Stainless steel

For air recirculation.

AA 012 811

Air recirculation module inclusive

1 activated charcoal filter

White

For air recirculation.

AA 200 110

1 activated charcoal filter with high efficient odour reduction due to increased surface.

For air recirculation module

AA 200 812/816 and AA 010 811/

AA 012 811.

AA 200 112

1 regenerable activated charcoal filter

For air recirculation module

AA 200 812/816 and AA 010 811/

AA 012 811.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:

All the Vario 400 series

All the Vario 200 series

All cooktops 400 series

All cooktops 200 series

Good to know:

the hood has to be larger than the cooktop(s).

Ceiling ventilation 200 series

AC 250

- Discreet integration into the architecture of the kitchen
- Energy-saving, low-noise fan
- Rim extraction
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Easy and time saving installation directly in the ceiling
- Easy maintenance of the filters
- Air extraction / Air recirculation

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.

Sound power level according to EN 60704-3.

Odour reduction for air recirculation in accordance with EN 61591.

Air extraction:

458 / 933 m³/h.

56 / 70 dB (A) re 1 pW.

Air recirculation:

419 / 637 m³/h.

63 / 72 dB (A) re 1 pW.

Features

3 electronically controlled power levels and 1 intensive mode.

Remote control is included in delivery.

Automatic function with sensor-controlled run-on function.

Interval ventilation, 6 min.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

Metal grease filter, dishwasher-safe.

Massive aluminium anodized

Gaggenau Light Bronze filter cover.

Fan technology with highly efficient, brushless DC motor (BLDC).

Turnable blower, air outlet on all four sides possible.

Connecting pipe DN 150 round.

Cooktop-based ventilation control (with suitable cooktop).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Consumption data

Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.

Energy consumption 35.2 kWh/year.

Ventilation efficiency class A.

Grease filter efficiency class E.

Sound level min. 41 dB / max. 56 dB normal mode.

Planning notes

For installation in suspended ceiling. The ceiling ventilation has to be handled as a room ventilation when distance to cooktop is larger than 120 cm since the direct capture of vapours will be limited. The needed airflow is given by an air exchange rate of 10 to 12 times the room volume. A suitable load-bearing substructure is required for securing the extractor hood. Never fit the appliance directly onto plasterboard or similar lightweight construction materials.

Recommended minimum gap between appliance and external filter module: 100 cm.

For air recirculation an external air recirculation module is required. Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 65 cm.

Air recirculation is not recommended in combination with Vario electric grill.

Please ensure when installing the exhaust air ducting that no sharp bends are caused and that the cross-section of the ducting is not constricted in any way.


When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Appliance weight: approx. 37 kg.

Connection


Total connected load 250 W.

Connecting cable 1.3 m with plug.

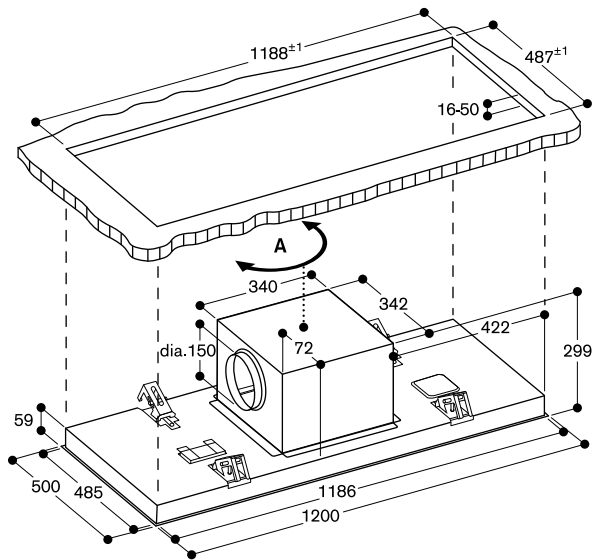

A: The ventilator outlet can be turned in all four directions.
measurements in mm

AC 250 with air recirculation module

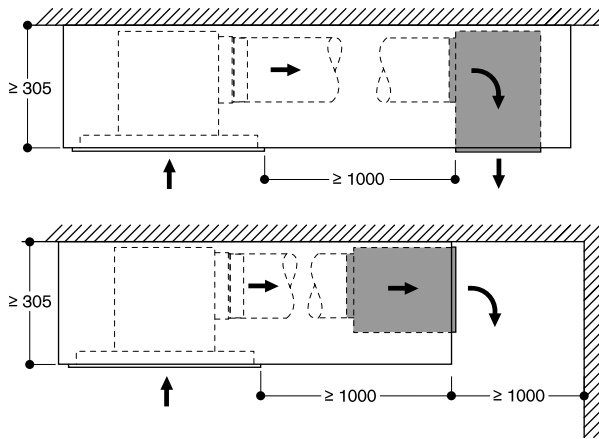

measurements in mm



AC 230 101

Gaggenau Light Bronze
Width 105 cm
Air recirculation

Special accessories

AA 200 121

3 activated charcoal filter
For air recirculation.
Can be combined with ceiling
ventilation AC 230 and AC 270.

AA 200 122

3 regenerable activated charcoal filter
For air recirculation.
Can be combined with ceiling
ventilation AC 230 and AC 270.

Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.

Combinable with:

All the Vario 400 series and 200 serie
except with the Vario Grill
All cooktops 400 series
All cooktops 200 series

Good to know:

the hood has to be larger than
the cooktop(s).

Ceiling ventilation 200 series

AC 230

- Perfect and harmonic integration into the architecture of the kitchen
- Precision crafted, solid aluminium design
- Energy-saving, low-noise fan
- Rim extraction
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Easy and time saving installation directly on the ceiling
- Easy maintenance of the filters
- Air recirculation

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.

Sound power level according to EN 60704-3.

Odour reduction for air recirculation in accordance with EN 61591.

Air recirculation:

579 / 762 m³/h.

67 / 73 dB (A) re 1 pW.

Odour reduction: > 90 %

Features

3 electronically controlled power levels and 1 intensive mode.

Remote control is included in delivery.

Automatic function with sensor-controlled run-on function.

Interval ventilation, 6 min.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

3 metal grease filters, dishwasher-safe.

3 activated charcoal filters.

The activated charcoal filter is suitable for the preparation of fish and seafood due to special treatment.

Protection against allergen particles due to special treatment.

Gaggenau Light Bronze anodized aluminium.

Fan technology with highly efficient, brushless DC motor (BLDC).

Cooktop-based ventilation control (with suitable cooktop).

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.


Please read additional information on Home Connect on page 420.

Planning notes

Installation directly on the ceiling.
The ceiling ventilation has to be handled as a room ventilation when distance to cooktop is larger than 120 cm since the direct capture of vapours will be limited. The needed airflow is given by an air exchange rate of 10 to 12 times the room volume. A suitable load-bearing substructure is required for securing the extractor hood. Never fit the appliance directly onto plasterboard or similar lightweight construction materials.
Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).
Clearance above electric appliances min. 65 cm.
Air recirculation is not recommended in combination with Vario electric grill.
Appliance weight: approx. 41 kg.

Connection

Total connected load 140 W.
Plan a connection cable.

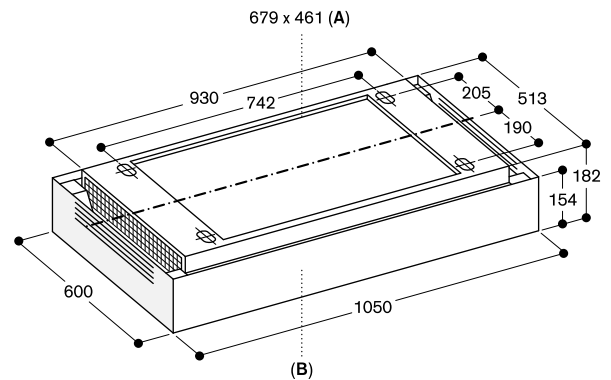

A: Area for cable outlet on the ceiling
B: Front of appliance

measurements in mm

**VL 200 120**

Black control panel
Width 15 cm
Air extraction / Air recirculation
Motorless

Installation accessories**AD 410 040**

Flexibel connecting piece for VL 200
DN 150 flat

AD 851 041

Connecting piece VL 200 for extension
with flat duct DN 150 for extra deep
worktop

VV 200 010

Stainless steel connection strip for
combination with other Vario
appliances of the 200 series

VV 200 020

Black connection strip for combination
with other Vario appliances of the
200 series

Special accessories**LS 041 001**

Ventilation moulding for VL 200 next to
gas appliance
Stainless steel

**Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.**

Combinable with:

Vario cooktops 200 series
VI 23x
VI 26x
VG 232
VG 26x
VP 23x
VR 23x
VP 2xx

**Vario downdraft ventilation 200 series
VL 200**

- Can be combined with the cooktops of the Vario 200 series to a harmonic unity
- Highly efficient ventilation system at the cooktop integrated in the worktop
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Minimal planning and easy installation
- Low-noise system with the motor AR 410 110
- Air extraction or air recirculation system

Output

Power levels depend on the remote fan unit, see table on page 302 – 303.

Features

Control knobs with illuminated ring.
3 electronically controlled power levels and 1 intensive mode.
Automatic function with sensor-controlled run-on function.
Large-scale metal grease filter with high grease absorption.
Grease filter, dishwasher-safe.
Grease filter and activated charcoal filter saturation indicator.
Airflow-optimised interior for efficient air circulation.
Interval ventilation, 6 min.
Enamelled ventilation grille, dishwasher-safe.
Air exhaust bend included in delivery.
Overflow 250 ml capacity.

Consumption data

Consumption data is referred to a configuration with the remote fan unit AR 403 122.
Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 48.3 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class B.
Sound level min. 56 dB / max. 71 dB normal mode.

Planning notes

Air recirculation mode in combination with remote fan unit with AR 410 110 or AR 413 122.

Air extraction in combination with remote fan unit AR 400 142, AR 401 142 or AR 403 122.
Please refer to page 306 for recommended configurations of downdraft ventilations and remote fan units and the needed ducting elements.

For each VL one remote fan unit is recommended.

Maximum cooktop width between 2 VL: 60 cm.

If installed next to gas appliances, the ventilation moulding LS 041 001 is recommended to ensure maximum performance of the cooktop.

When having installed the ventilation moulding LS 041 001 the wok pan WP 400 001 can not be used.

Air recirculation is not recommended in combination with Vario electric grill.




When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Please read additional planning notes on page 136.

Please read the installation details regarding air ducting on page 262 – 265.


Connection

Connecting cable 1.7 m between VL and remote fan unit.

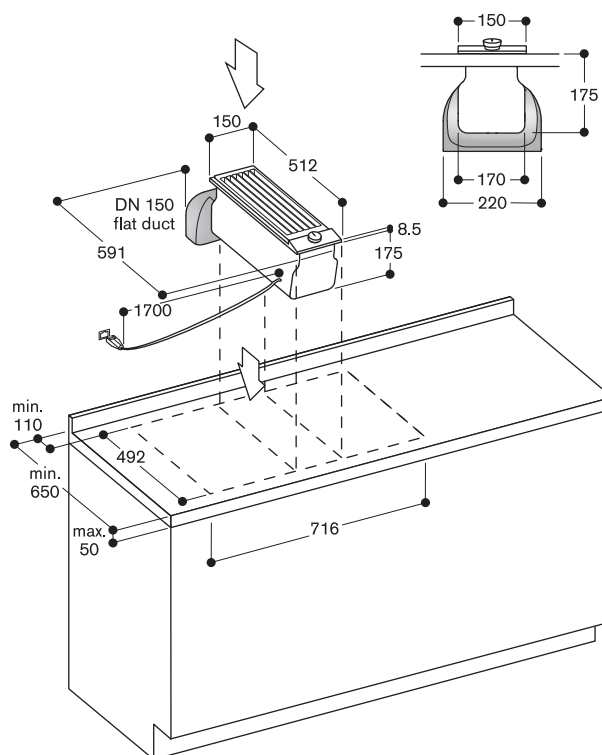
**AD 410 040: Flexibel connecting piece for VL 200, DN 150 flat****AD 851 041: Connecting piece VL 200 for extension with flat duct DN 150 for extra deep worktop**

Good to know – for correct planning and installation


- For depth measurements, take account of the depth of the furniture cavity and worktop overhangs of the kitchen furniture.
- With the Vario downdraft ventilation, the ducting can be connected to below or to the rear (in option). The respective connecting pieces are available for this purpose.
- Maximum distance between the Vario downdraft ventilation and the remote fan unit: Cable length in between 1.7 m
- For optimum air circulation, we recommend ducts with DN 150.
- 2 flat or 2 round ducts must be connected with a pipe connector.
- To connect 2 duct bends together (e.g. a 90° horizontal duct bend and a 90° vertical duct bend), a piece of flat duct is required, which can be shortened to the required length by cutting it to size.
- It is also important that ducting is well sealed in order to prevent air leaks, e.g. by using the adequate adhesive tape.
- Vario cooktops with intensive vapour formation like Vario Teppan Yaki, Vario electric grill should be placed central; in case of Vario electric grill air recirculation is not recommended.

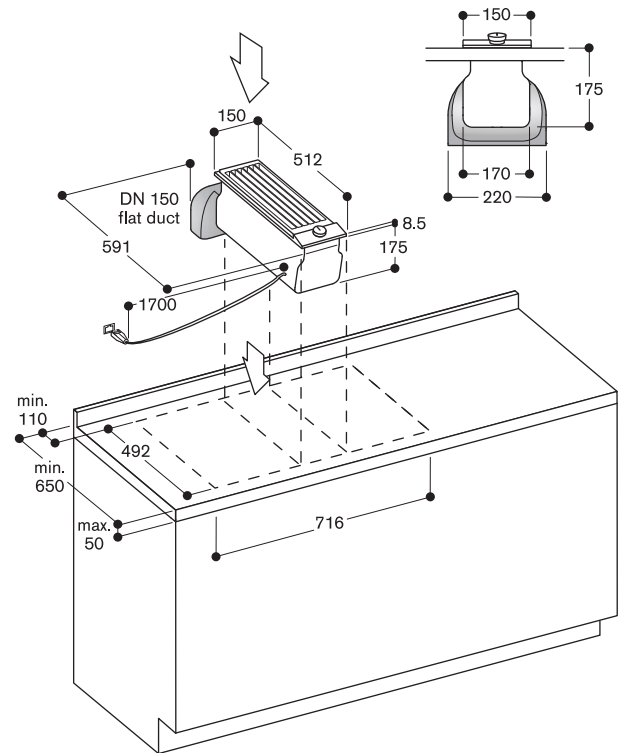

AD 410 040: Flexibel connecting piece for VL 200, DN 150 flat

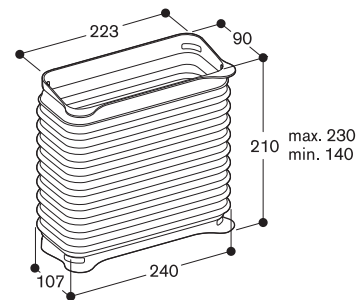

AD 851 041: Connecting piece VL 200 for extension with flat duct DN 150 for extra deep worktop



Planning example 1 (air recirculation)
VL 200 with AR 410 110 remote fan unit

Wall installation, worktop depth 65 cm, access to the filters for replacement from the front.



Good to know

- Allow accessibility to the charcoal filters in the lower cabinet for their replacement.
- Additionally, if the plinth is higher than 80 mm, the external remote fan unit has to be elevated to enable access to the filters. If the plinth is 80 mm high, the remote fan unit can be placed directly on the floor.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm²).

List of components

- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 410 040 (flexibel connecting piece for VL 200, DN 150 flat)

Order as set (appliances and accessories): SET1VL2301

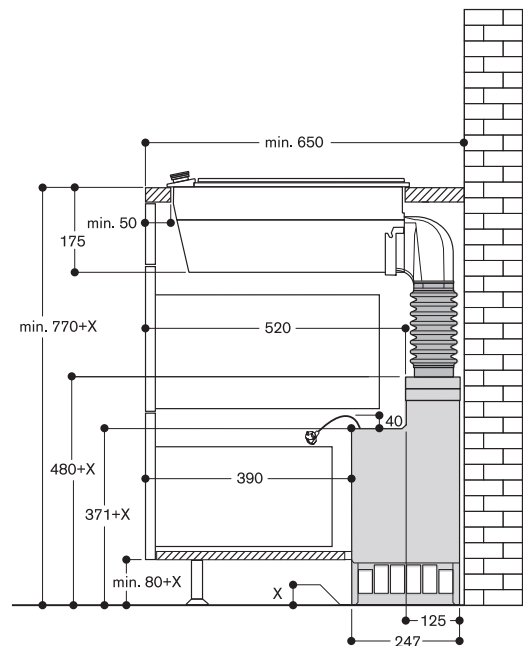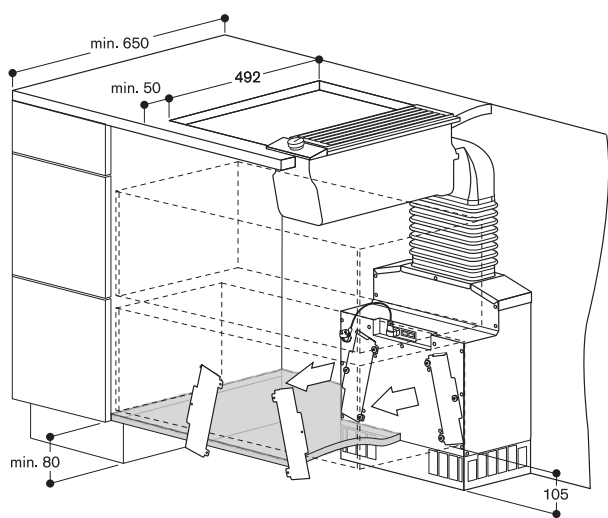

Planning example 2 (air recirculation)
VL 200 with AR 410 110 remote fan unit

Island installation, access to the filter for replacement from the front or the back.



Good to know

- Allow accessibility to the charcoal filters in the lower cabinet for their replacement.
- Additionally, if the plinth is higher than 80 mm, the external remote fan unit has to be elevated to enable access to the filters. If the plinth is 80 mm high, the remote fan unit can be placed directly on the floor.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm²).

List of components

- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 851 041 (connecting piece for extension with flat duct for extra deep worktop)
- 1 x AD 852 030 (flat duct bend 90° vertical)
- 1 x AD 852 010 (flat duct)
- 1 x AD 410 040 (flexibel connecting piece for VL 200, DN 150 flat)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (appliances and accessories): SET1VL2302

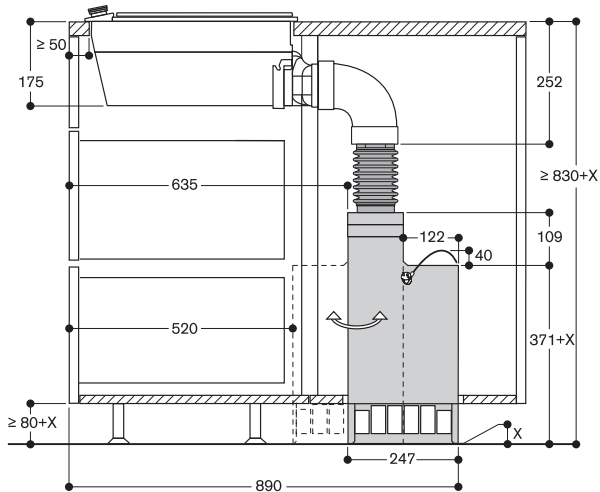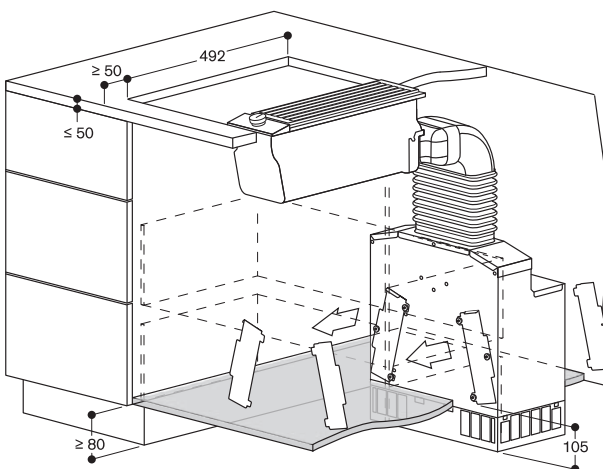

Planning example 3 (air recirculation)

VL 200 with AR 413 122 remote fan unit

Island installation, access to the filter for replacement from the front.



Good to know

- The remote fan unit can be turned in all directions, depending on the desired direction for the exhaust air or filter removal.
- Allow accessibility to the charcoal filters in the lower cabinet for their replacement.
- The recommended minimum distance between filter openings and cupboard wall if there is no ventilation grille directly in front: 15 cm.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm²).
- The connection piece DN 150 is included with the remote fan unit.

List of components wall installation

- 1 x AR 413 122 (remote fan unit plinth)
- 1 x AD 410 040 (flexibel connecting piece for VL 200, DN 150 flat)
- 1 x AD 852 010 (flat duct)
- 1 x AD 852 041 (flat duct adapter round)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (appliances and accessories): SET1VL2101

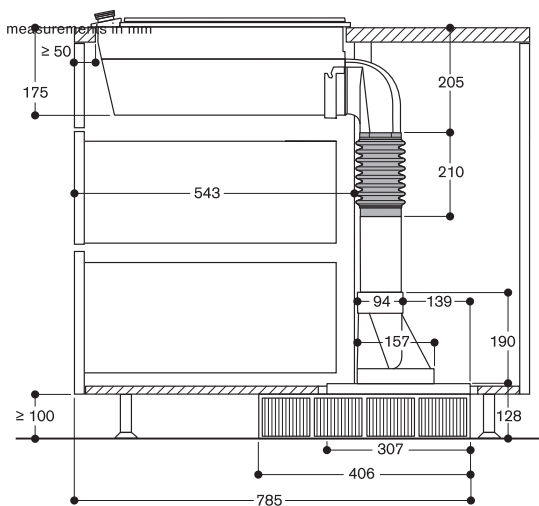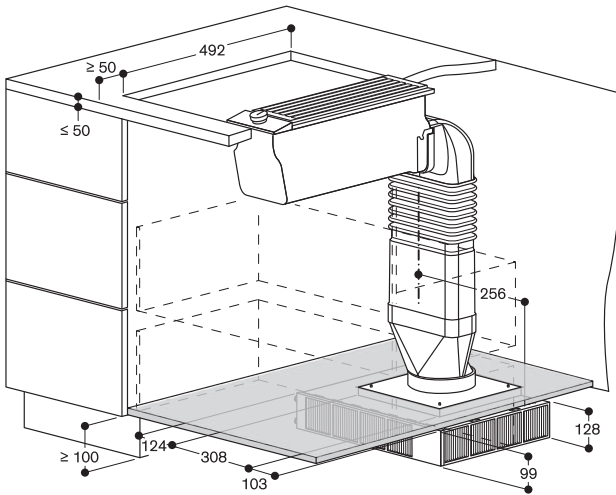

Planning example 4 (air extraction)



VL 200 with AR 403 122 remote fan unit

Island installation, connection from the right side.

List of accessories wall installation

- 1 x AR 403 122 (remote fan unit plinth)
- 1 x AD 851 041 (connecting piece for extension with flat duct for extra deep worktop)
- 1 x AD 852 030 (Flat duct bend 90° vertical)
- 1 x AD 852 010 (flat duct)
- 1 x AD 410 040 (flexibel connecting piece for VL 200, DN 150 flat)
- 1 x AD 852 041 (flat duct adapter round)
- 1 x AD 990 090 (adhesive tape for sealing the ducts)

Order as set (appliances and accessories): SET1VL2201

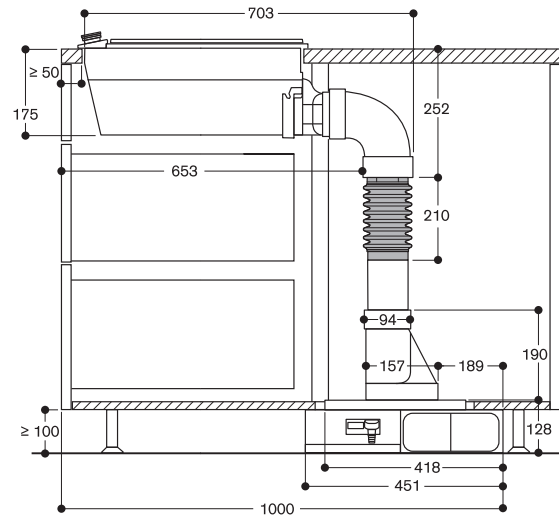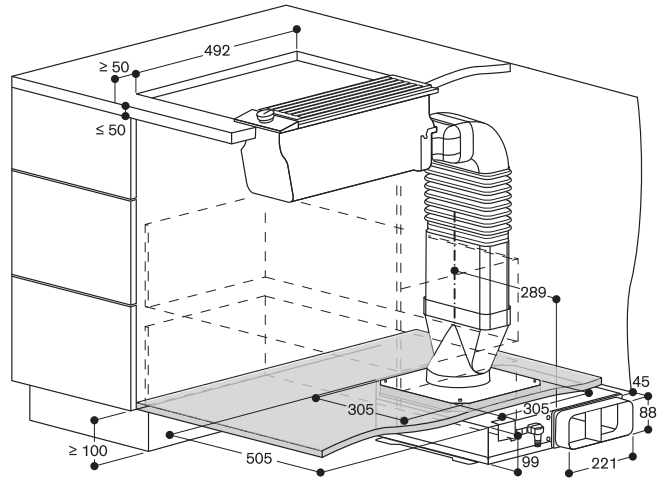

Planning example 5 (air recirculation) - Metal

VL 200 with AR 410 110 remote fan unit

Island installation, access to the filter for replacement from the front or the back.



Good to know

- Allow accessibility to the charcoal filters in the lower cabinet for their replacement.
- Additionally, if the plinth is higher than 80 mm, the external remote fan unit has to be elevated to enable access to the filters. If the plinth is 80 mm high, the remote fan unit can be placed directly on the floor.
- For optimum performance, the recirculated air requires sufficient space to escape (outflow surface area of at least 440 cm²).

List of components

- 1 x AR 410 110 (remote fan unit air recirculation)
- 1 x AD 851 041 (connection piece for extension with flat duct for extra deep worktop)
- 1 x AD 854 000 (flat duct bend connecting piece, metal, DN 150 flat)
- 1 x AD 854 030 (flat duct bend 90° vertical, metal, DN 150 flat)
- 1 x AD 410 040 (flexibel connecting piece for VL 200, DN 150 flat)
- 1 x AD 990 091 (adhesive tape for sealing the ducts, aluminium)

Order as set (appliances and accessories): SET1VL2303

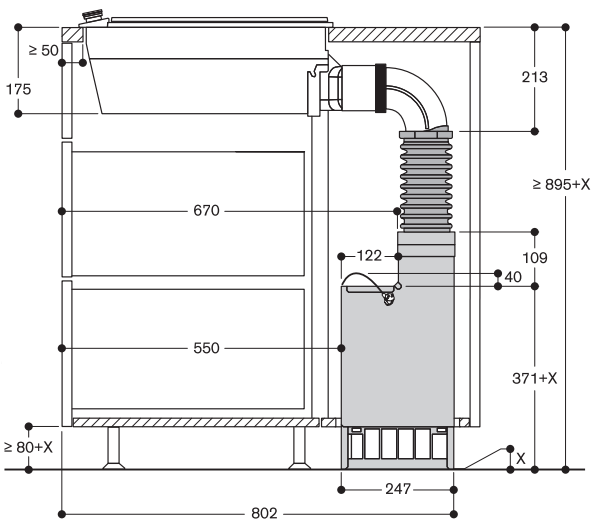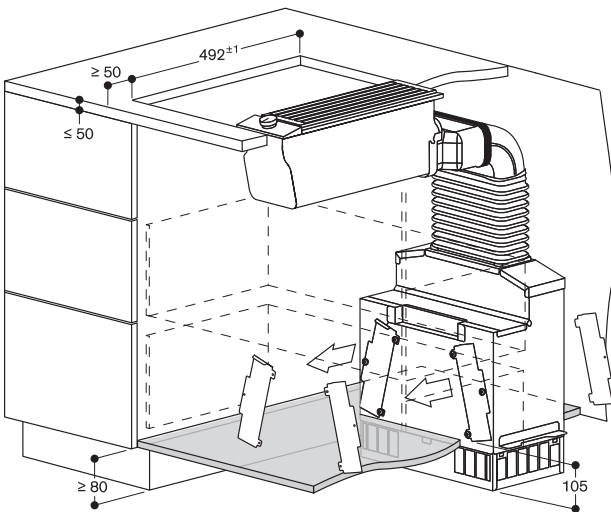

Planning example 6 (air extraction) - Metal



VL 200 with AR 403 122 remote fan unit

Island installation, connection from the right side.

List of accessories

- 1 x AR 403 122 (remote fan unit plinth)
- 1 x AD 858 010 (flat duct flex pipe, metal, DN 150)
- 1 x AD 854 041 (flat duct adapter round, metal, DN 150 flat/round)
- 1 x AD 990 091 ((adhesive tape for sealing the ducts, aluminium)

Order as set (appliances and accessories): SET1VL2102

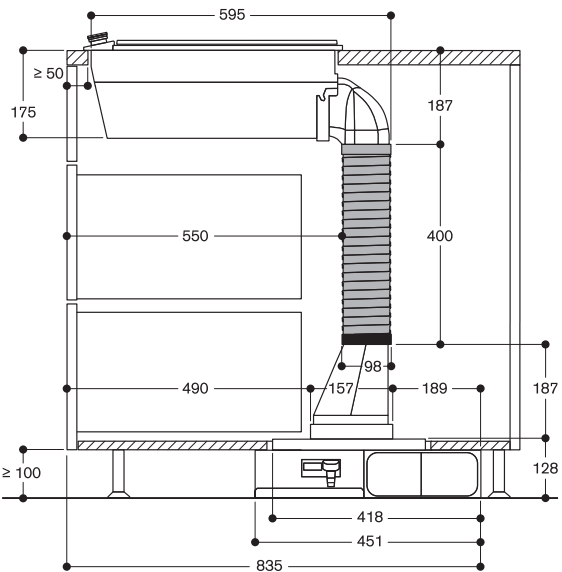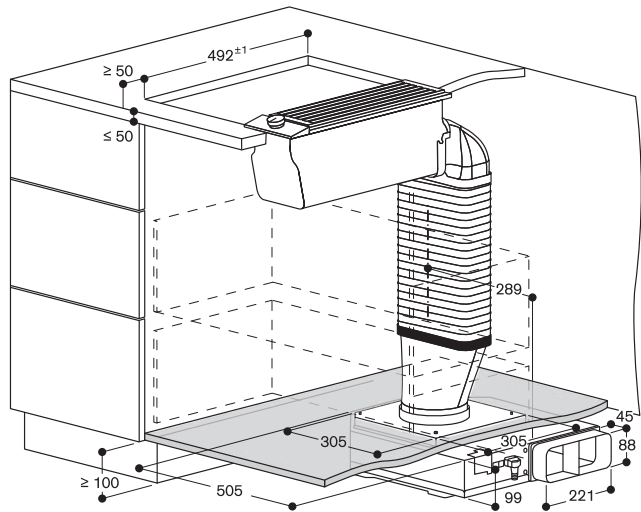



AR 410 110

Metal housing
Max. air output 665 m³/h
Air recirculation
Installation in the cupboard

Special accessories

AA 010 410

Air exhaust grille air recirculation
Stainless steel-coloured, 90 cm, including installation fittings, height adjustable.

AA 410 110

2 activated charcoal filter
For air recirculation.
Combinable with remote fan unit AR 410 110.

AA 410 112

2 regenerable activated charcoal filter
For air recirculation.
Combinable with remote fan unit AR 410 110.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Remote fan unit 400 and 200 series AR 410

- Powerful remote fan unit to combine with Vario downdraft ventilation 400 and 200 series
- Efficient BLDC technology
- Particularly quiet due to patented noise insulation
- Compact, space-saving installation in the cabinet for Vario downdraft ventilation

Output

Performance output level 3/Intensive:
Air output according to EN 61591.
Sound power and sound pressure depending on built-in situation.

Performance output level 3/Intensive:
Air output according to EN 61591.
Sound power and sound pressure depending on built-in situation.

Air recirculation:
575 / 665 m³/h.
Power levels depend on the motorless appliances, see table on page 302 – 303.

Air recirculation:
575 / 665 m³/h.
Power levels depend on the motorless appliances, see table on page 302 – 303.

Features


3 electronically controlled power levels and 1 intensive mode.
Fan technology with highly efficient, brushless DC motor (BLDC). Including sound insulation to minimise the noise level.
Steel housing, zinc-plated.
Pipe connection piece on intake side: 1 x DN 150 flat duct.
Retaining bracket for installation at the furniture base enclosed.
2 activated charcoal filters enclosed ex factory.
The activated charcoal filter is suitable for the preparation of fish and seafood due to special treatment.
Filter replacement interval: 1 year depending on cooking frequency.

Planning notes


Powerful remote fan unit to combine with Vario downdraft ventilation 400 and 200 series.
Connection to the respective appliances via network cable.
Installation in a cupboard possible with a cut-out in the furniture base or behind the cupboard positioned on the floor. Please refer to the planning information on page 241 and 263 – 265.
To replace the filter the remote fan unit must be accessible.
The activated charcoal filter exchange is possible from both sides.


Connection

Total connected load 170 W.
Connecting cable 1.8m, pluggable.
Network cable 2 m.

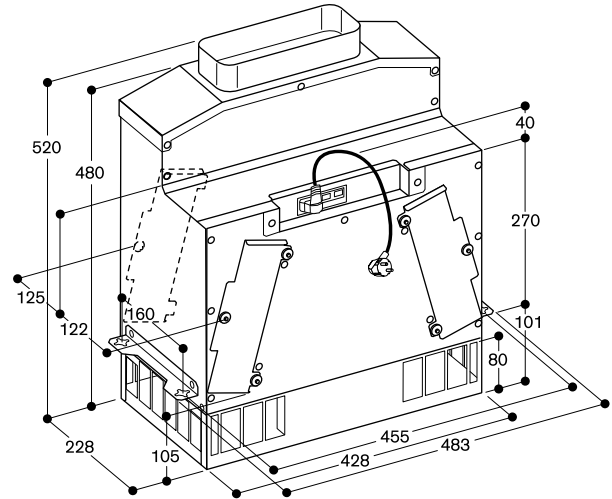

Filter exchange

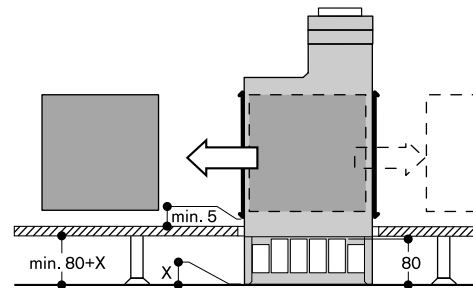



AR 403 122
Metal housing
Max. air output 890 m³/h
Air extraction
Plinth installation

Special accessories

AA 400 510
Window contact switch
Can be combined with motorless appliances 400 series and Vario downdraft ventilation 200 series.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Remote fan unit 400 and 200 series

AR 403

- Powerful remote fan unit to combine with motorless appliances 400 series and Vario downdraft ventilation 200 series
- Efficient BLDC technology
- Compact and space-saving installation in a 10 cm high plinth

Output

3 performance output levels and intensive mode:

Air output according to EN 61591. Sound power and sound pressure depending on built-in situation.

3 performance output levels and intensive mode:

Air output according to EN 61591. Sound power and sound pressure depending on built-in situation.

Air extraction:

730 / 890 m³/h.

Power levels depend on the motorless appliances, see table on page 302 – 303.

Air extraction:

730 / 890 m³/h.

Power levels depend on the motorless appliances, see table on page 302 – 303.

Features

3 electronically controlled power levels and 1 intensive mode.

Fan technology with highly efficient, brushless DC motor (BLDC).

Steel housing, zinc-plated.

Pipe connection pieces on intake side: 1 x DN 150 round.

Pipe connection pieces on output side: 1x DN 150 flat duct.

Retaining bracket for installation on the ceiling or side of a cupboard enclosed.

Planning notes

Remote fan unit in combination with motorless appliances 400 series and Vario downdraft ventilation 200 series.

Connection to the respective appliances via network cable.

Installation in the plinth with cut-out for the air ducting in the furniture base.

Connection of AL 400 with an air collector box (AD 704 048/049).


When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


Connection

Total connected load 180 W.

Connecting cable 1.8 m, pluggable.

Network cable 2 m.

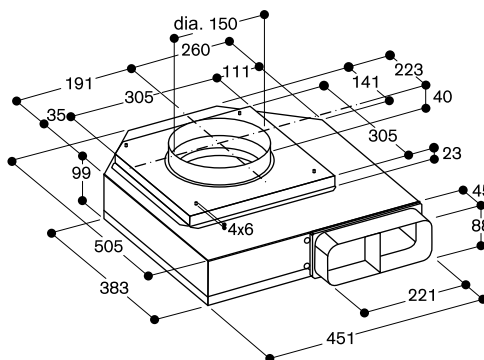



AR 413 122

Metal housing
Max. air output 760 m³/h
Air recirculation
Plinth installation

Installation accessories

AA 010 410

Air exhaust grille air recirculation
Stainless steel-coloured, 90 cm,
including installation fittings, height
adjustable.

Special accessories

AA 413 111

2 activated charcoal filter
For air recirculation.
Combinable with remote fan unit
AR 413 122.

Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.

Remote fan unit 400 and 200 series

AR 413

- Powerful remote fan unit to combine with motorless appliances 400 series and Vario downdraft ventilation 200 series
- Efficient BLDC technology
- Compact and space-saving installation in a 10 cm high plinth

Output

3 performance output levels and intensive mode:

Air output according to EN61591.
Sound power and sound pressure depending on built-in situation.

3 performance output levels and intensive mode:

Air output according to EN61591.
Sound power and sound pressure depending on built-in situation.

Air recirculation:
620 / 760 m³/h.
Power levels depend on the motorless appliances, see table on page 302 – 303.

Air recirculation:
620 / 760 m³/h.
Power levels depend on the motorless appliances, see table on page 302 – 303.

Features

3 electronically controlled power levels and 1 intensive mode.

Fan technology with highly efficient, brushless DC motor (BLDC).
Steel housing, zinc-plated.

Pipe connection pieces on intake side:
1 x DN 150 round.

Retaining bracket for installation on the ceiling or side of a cupboard enclosed.
2 activated charcoal filters enclosed ex factory.

Filter is suitable for the preparation of fish and seafood due to special treatment.

Filter replacement interval:
1 year depending on cooking frequency.

Planning notes

Remote fan unit in combination with motorless appliances 400 series and Vario downdraft ventilation 200 series.
Connection to the respective appliances via network cable.

Installation in the plinth with cut-out for the air ducting in the furniture base.


Filter replacement interval: 1-1.5 years depending on cooking frequency.

It must be possible to remove the plinth to replace the filter.


Recommended minimum gap between filter openings and cupboard wall if there is no ventilation grille directly in front: 15 cm.

Connection

Total connected load 180 W.
Connecting cable 1.8 m, pluggable.
Network cable 2 m.

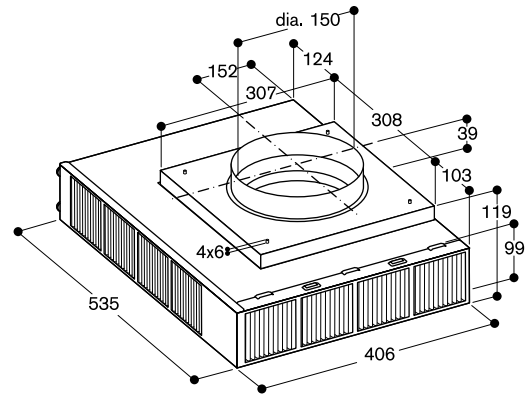

View from above

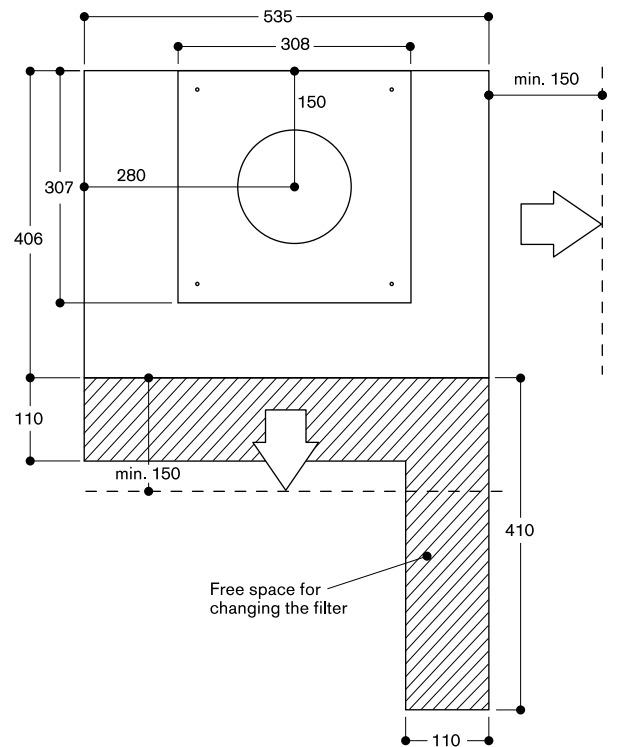



AL 200 180

Gaggenau Black
Width 80 cm
Air extraction / Air recirculation
Delivery without ducting

Installation accessories

AA 200 910

Installation kit for fan unit at a distance (3m maximum).

VA 200 080

Kit for installation table ventilation and cooktop in a single worktop cut-out.

Special accessories

AA 200 100

Activated charcoal filters
For air recirculation module
AA 200 880 and AA 200 890.

AA 200 880

Air recirculation module including activated charcoal filters
Combinable with the table ventilation AL 200 180
Odour reduction: > 90 %.

Suitable for the preparation of fish and seafood due to special treatment.
Protection against allergen particles due to special treatment.

AA 200 882

Regenerable air recirculation module including activated charcoal filters
Combinable with the table ventilation AL 200 180
Odour reduction: > 75 %.
Easy removal of the air recirculation module from the top of the table ventilation for regenerating.
Regenerable in the oven at 200 °C.
Extended change interval of the activated charcoal filter: regenerable up to 30 times.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:

Cooktops 200 series CI 282/283 10x
Cooktops 400 series CX 482 10x

Table ventilation 200 series

AL 200

- Extendable table ventilation, when not in use can be completely lowered into the worktop
- Perfect in combination with frameless induction cooktops 80 cm wide for flush mounting
- Transparent ventilation screen for discreet integration in the kitchen space
- Ambient lighting thru the glass edges
- Guided Air technology ensures high vapour catch rate across the whole cooktop

Output

Performance and noise level, output level 3/Intensive:
Air output according to EN 61591.
Sound power level according to EN 60704-3. Odour reduction for air recirculation in accordance with EN 61591.
Air extraction:
501 / 775 m³/h.
62 / 70 dB (A) re 1 pW.
Air recirculation:
447 / 562 m³/h
65 / 70 dB(A) re 1 pW
Odour reduction: 90%

Features

Cooktop-based ventilation control.
Automatic function with sensor-controlled run-on function.
3 electronically controlled power levels and 1 intensive mode.
Grease filter saturation indicator.
Activated charcoal filter saturation indicator.
2 large-scale metal grease filters included, easy to remove, dishwasher-safe.
Overflow capacity 170 ml in grease filter. Additional capacity 600 ml in the remote fan unit.
Activated charcoal filter easily removable from above for air recirculation system.
Gaggenau Black anodized aluminium frame.
1 user interface to set the power levels and 1 user interface to control the Guided Air technology.
Fan technology with highly efficient, brushless DC motor (BLDC).
Flexible installation of the fan unit at the front (for a compact wall solution), at the back (without loss of drawer space), or at a distance from the appliance.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.
Energy consumption 36.9 kWh/year.
Ventilation efficiency class A.
Illumination efficiency class -.
Grease filter efficiency class B.
Sound level min. 39 dB / max. 62 dB normal mode.

Planning notes

Compatible with frameless cooktops 400 series (CX 482) or 200 series (CI 282 / CI 283), in a single worktop cut-out.
For installation in a single worktop cut-out the installation accessory must be placed between the appliances. This includes a connection strip and furniture supports that ensure cabinet stability.
The table ventilation can be installed in the cabinet or between two (e.g. for an island installation deeper than 100 cm).
Width of the cabinets 90 cm, 100 cm or 120 cm.
No upper cabinets should be installed above the table ventilation to maintain optimum performance.
The following distance should be observed:

- 50 cm left and right of the table ventilation to the wall or neighbouring tall cabinets.
- 5 cm from the table ventilation frame to the wall.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer. To install the fan unit at a distance, an installation kit is required (with spare covers for closing air outlets).
Maximum distance 3 m.


In air extraction mode a one-way flap with a maximum opening pressure of 65 Pa should be installed.
In air extraction mode, always ensure adequate fresh air in the room if the appliance is being operated at the same time as a chimney-vented fireplace.

For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm².
For air recirculation an air recirculation module is required.

Please read the installation details regarding air ducting on page 206.

Connection


Total connected load 300 W.
Connecting cable 1.3 m, pluggable.
Power consumption standby/display off 0.4 W.
Please check the user manual for how to switch off the WiFi module.
Connection cable 1.3 m, pluggable.

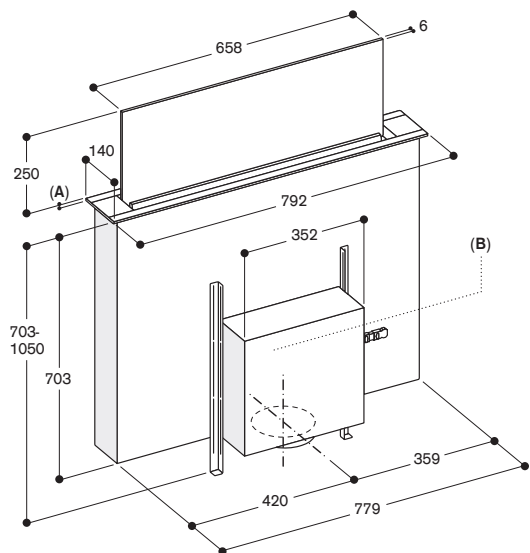

A: 5.5
 B: Flexible installation of the fan unit at the front, at the back or at a distance from the appliance (installation kit required)

measurements in mm


Cross-section

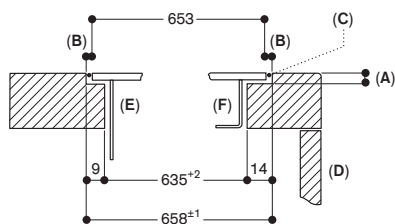

A: 6.5^{+0.5}
 B: 2.5
 C: Fill with silicone
 D: Front
 E: Table ventilation
 F: Induction cooktop

measurements in mm


Longitudinal section

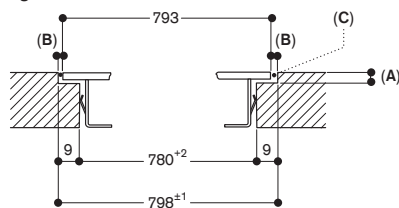


A: 6.5^{+0.5}
 B: 2.5
 C: Fill with silicone

measurements in mm

Compatible with frameless cooktops 400 series (CX 482) or 200 series (CI 282 / CI 283)

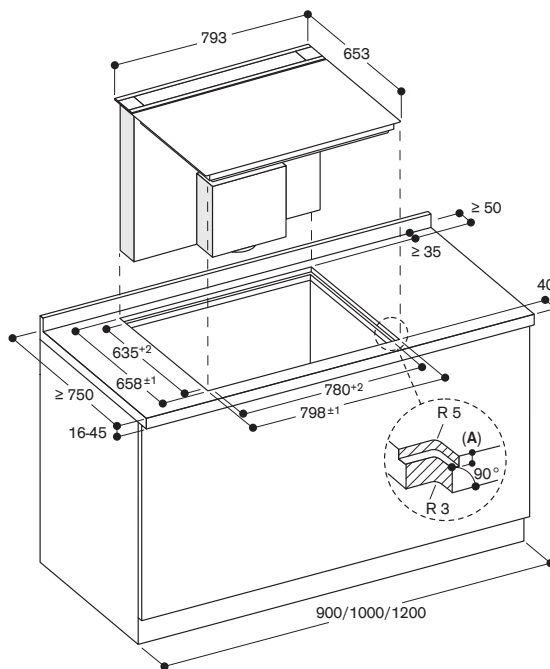

A: 6.5^{+0.5}
 measurements in mm

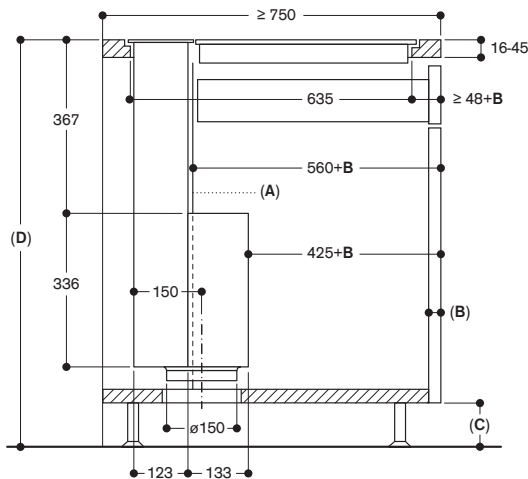


A: Cabinet back panel
 B: Front thickness
 C: ≥ 60 mm for air recirculation
 ≥ 100 mm for air extraction with ducting in the plinth
 D: ≥ 850 mm for air extraction with ducting in the plinth

measurements in mm

View from above

Compatible with frameless cooktops 400 series (CX 482) or 200 series (CI 282 / CI 283)

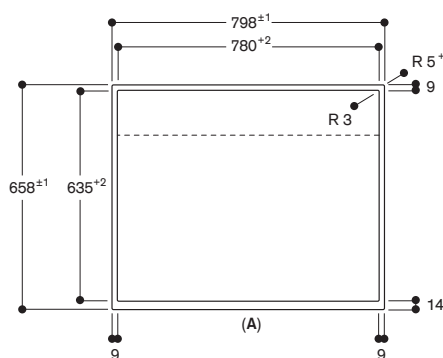

A: Front
 measurements in mm



AI 240 191

Stainless steel with glass control panel
Gaggenau Anthracite
Width 90 cm
Air extraction / Air recirculation
Delivery with mounting kit and chimney

Installation accessories

AD 200 326

Stainless steel chimney extension-
Length: 1100 mm

AD 220 396

Ceiling collar for chimneys
Stainless steel

AD 223 346

Extension for mounting kit 500 mm

Special accessories

AA 200 110

1 activated charcoal filter with high efficient odour reduction due to increased surface. For air recirculation module AA200812/816 and AA010811/AA012811.

AA 200 112

1 regenerable activated charcoal filter
For air recirculation module
AA200812/816 and AA010811/
AA012811.

AA 200 816

Air recirculation module inclusive
1 activated charcoal filter with high efficient odour reduction due to increased surface

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:

Cooktops 200 series
CE 261
CI 26x
CI 27x
CI 28x.

Island hood 200 series

AI 240

- Stainless steel hood with glass cover fitting to oven 200 series
- Highly efficient vapour collection by recessed filters
- Energy-saving, low-noise fan
- Perforated sheet metal filter with high grease absorption
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Dimmable, neutral white LED light for ideal illumination of the cooktop
- Air extraction or air recirculation system

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN61591.

Sound power level according to EN 60704-3.

Odour reduction for air recirculation in accordance with EN61591.

Air extraction:

641 / 988 m³/h.

64 / 72 dB (A) re 1 pW.

Air recirculation:

448 / 530 m³/h.

69 / 72 dB (A) re 1 pW.

Odour reduction air recirculation 85 %.

Features

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

Perforated sheet metal filter, dishwasher-safe.

Interval ventilation, 6 min.

Cooktop-based ventilation control (with suitable cooktop).

Neutral white LED light (3500 K), continuously dimmable.

Light colour in different white tones (2700 – 5000 K) can be adjusted via Home Connect.

Lamp output 4x3 W.

Illuminance 650 lx continuously dimmable.

Fan technology with highly efficient, brushless DC motor (BLDC).

Integrated sound insulation for quiet operation.

Airflow-optimised vapour collection area with slightly inward facing filters.

The package includes an one-way flap.

Easy mounting system for simple installation and alignment.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Energy consumption 48.8 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 43 dB / max. 64 dB normal mode.

Planning notes

The package includes the mounting kit and the two-part chimney with the dimensions from 664 mm to 844 mm.

Individual planning solutions can be implemented using the special accessory chimney extension

AD 200 326 in combination with extension for mounting kit AD 223 346.

Clearance above gas appliances

min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 55 cm.


The air recirculation module with activated charcoal filter can be installed on the inner chimney.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection

Total connected load 272 W.


Connecting cable 1.3 m with plug.

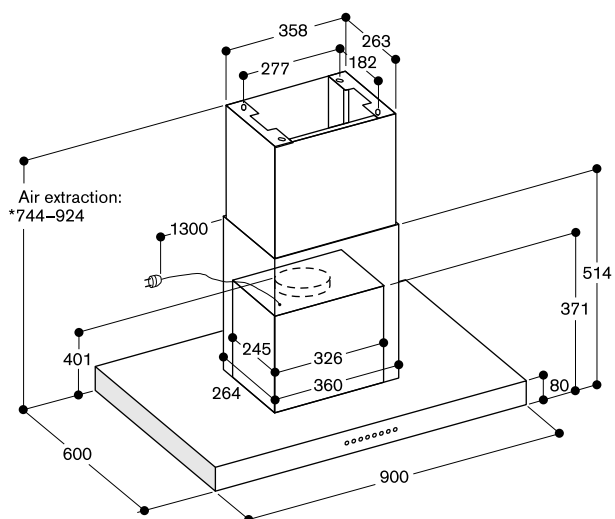

Air extraction:
*744-924


* Suitable for ceiling heights from 2.34 m to 2.52 m;
Specifications refer to the distance of 1.60 m from
the floor to the lower edge of the hood.

AI 240 with AA 200 816

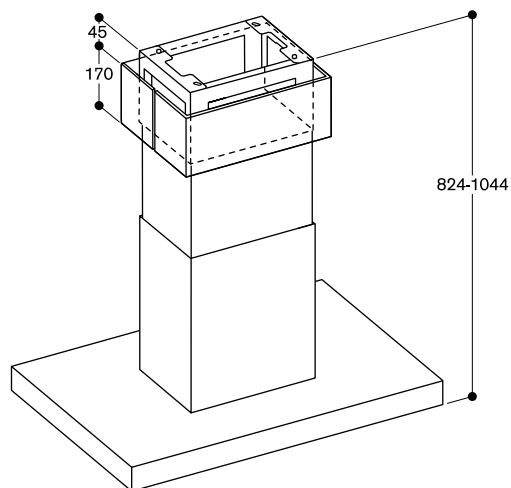

* Suitable for ceiling heights from 2.42 m to 2.64 m;
Specifications refer to the distance of 1.60 m from
the floor to the lower edge of the hood.

AI 240 with AD 200 326 and AD 223 346

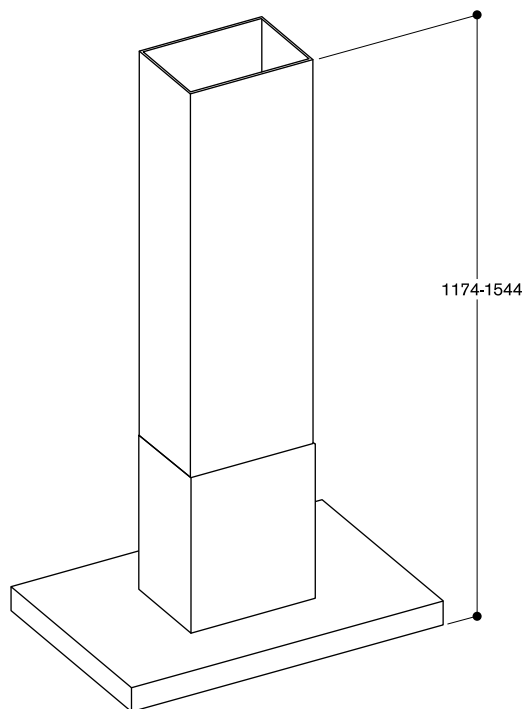

* Suitable for ceiling heights from 2.78 m to 3.15 m;
Specifications refer to the distance of 1.60 m from the
floor to the lower edge of the hood.



AW 240 191

Stainless steel with glass control panel
Gaggenau Anthracite
Width 90 cm
Air extraction / Air recirculation
Delivery with mounting kit and chimney

Installation accessories

AD 200 322

Stainless steel chimney extension-
Length: 1000 mm

AD 200 392

Ceiling collar for chimneys
Stainless steel

Special accessories

AA 200 110

1 activated charcoal filter with high efficient odour reduction due to increased surface.

For air recirculation module

AA 200 812/816 and AA 010 811/
AA 012 811.

AA 200 112

1 regenerable activated charcoal filter

For air recirculation module

AA 200 812/816 and AA 010 811/
AA 012 811.

AA 200 812

Air recirculation module inclusive
1 activated charcoal filter with high efficient odour reduction due to increased surface

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:

Cooktops 200 series

CE 261

CI 26x

CI 27x

CI 28x

Cooktops 400 series

CX 482.

Wall-mounted hood 200 series

AW 240

- Stainless steel hood with glass cover fitting to oven 200 series
- Highly efficient vapour collection by recessed filters
- Energy-saving, low-noise fan
- Perforated sheet metal filter with high grease absorption
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Dimmable, neutral white LED light for ideal illumination of the cooktop
- Air extraction or air recirculation system

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.

Sound power level according to EN 60704-3.

Sound pressure level according to EN 60704-2-13.

Odour reduction for air recirculation in accordance with EN 61591.

Air extraction:

618 / 970 m³/h.

64 / 73 dB (A) re 1 pW.

51 / 60 dB (A) re 20 µPa.

Air recirculation:

383 / 476 m³/h.

69 / 74 dB (A) re 1 pW.

56 / 61 dB (A) re 20 µPa.

Odour reduction air recirculation 79 %.

Features

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Activated charcoal filter saturation indicator.

Perforated sheet metal filter, dishwasher-safe.

Interval ventilation, 6 min.

Cooktop-based ventilation control (with suitable cooktop).

Neutral white LED light (3500 K), continuously dimmable.

Light colour in different white tones (2700 – 5000 K) can be adjusted via Home Connect.

Lamp output 3x3 W.

Illuminance 551 lx continuously dimmable.

Fan technology with highly efficient, brushless DC motor (BLDC).

Integrated sound insulation for quiet operation.

Airflow-optimised vapour collection area with slightly inward facing filters.

The package includes an one-way flap.

Easy mounting system for simple installation and alignment.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Energy consumption 44.5 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 44 dB / max. 64 dB normal mode.

Planning notes

The package includes the two-part chimney with the dimensions from 572 mm to 874 mm. Individual planning solutions can be implemented using the special accessory chimney extension AD 200 322 or by shortening the lower edge of the inner chimney.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 55 cm.


The air recirculation module with activated charcoal filter can be installed on the inner chimney.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection


Total connected load 269 W.

Connecting cable 1.3 m with plug.

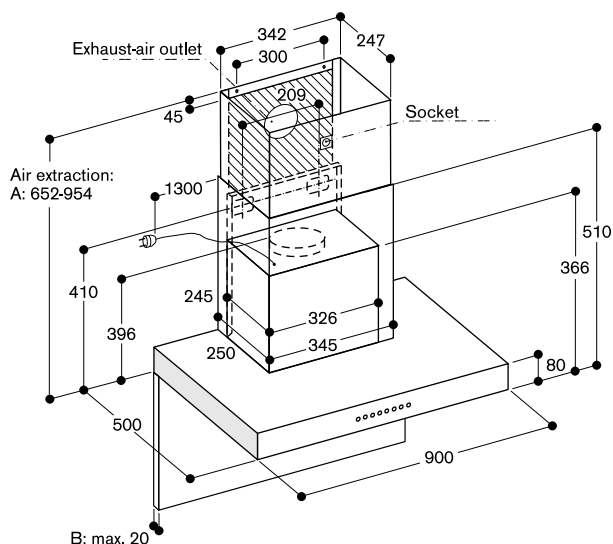


A: Suitable for ceiling heights from 2.25 m to 2.55 m;
 Specifications refer to the distance of 1.60 m from the floor
 to the lower edge of the hood.
 B: Note the maximum thickness of the back panel.

AW 240 with AA 200 812

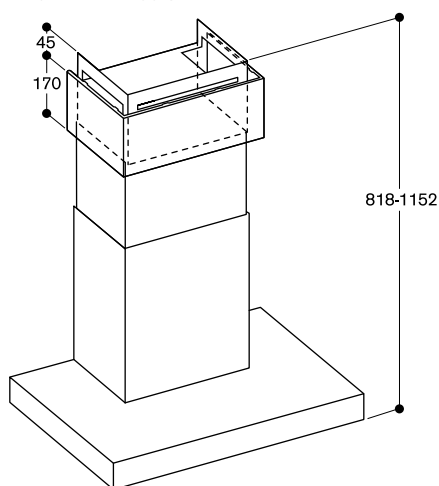

* Suitable for ceiling heights from 2.45 m to 2.75 m;
 Specifications refer to the distance of 1.60 m from the floor
 to the lower edge of the hood.

AW 240 with AD 200 322

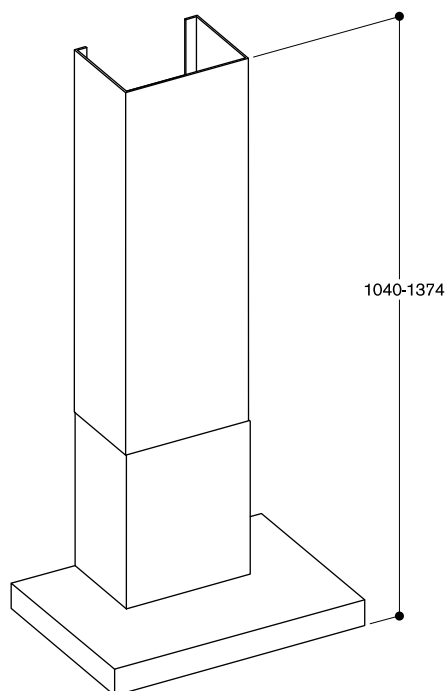

* Suitable for ceiling heights from 2.64 m to 2.97 m;
 Specifications refer to the distance of 1.60 m from the floor
 to the lower edge of the hood.



AW 250 192

Full glass front in Gaggenau Anthracite
Width 90 cm
Air extraction / Air recirculation
Delivery without chimney

Installation accessories

AD 200 012

Stainless steel air extraction chimney
Length: 573-843 mm.

Special accessories

AA 250 112

2 regenerable activated charcoal filter
For air recirculation.

Extended change interval of the activated charcoal filter: regenerable up to 30 times.

Regenerable in the oven at 200 °C.

AA 250 113

2 activated charcoal filter
For air recirculation.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Combinable with:

Cooktops 200 series
CE 261
CI 26x
CI 27x
CI 28x

Wall-mounted hood 200 series

AW 250

- Angled vapour screen provides particularly generous free space above the cooktop
- Filter cover with easy to clean glass front
- Glass cover fitting to oven 200 series
- Energy-saving, low-noise fan
- Vapours can be caught efficiently thanks to two suction areas on the underside and front
- The glass trayel can be extended forward to increase the area for catching vapours during particularly intensive cooking
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Dimmable ambient lighting allows light to be adjusted individually
- Air extraction or air recirculation system

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN61591.

Sound power level according to EN60704-3.

Odour reduction for air recirculation in accordance with EN61591.

Air extraction:

529 / 990 m³/h.

57 / 70 dB (A) re 1 pW.

Air recirculation:

461 / 670 m³/h.

68 / 78 dB (A) re 1 pW.

Odour reduction air recirculation 95%.

Features

3 electronically controlled power levels and 1 intensive mode.

Automatic function with

sensor-controlled run-on function.

Grease filter and activated charcoal filter saturation indicator.

Interval ventilation, 6 min.

Cooktop-based ventilation control (with suitable cooktop).

Metal grease filter, dishwasher-safe.

Glass filter cover in Gaggenau Anthracite.

2 activated charcoal filter fitted in appliance ex factory.

Neutral white LED light (3500 K), continuously dimmable.

Lamp output 2x3 W.

Illuminance 519 lx.

Indirect LED light (3.000 K), dimmable.

Fan technology with highly efficient, brushless DC motor (BLDC).

Integrated sound insulation for quiet operation.

Easy to clean inner frame.

Easy mounting system for simple installation and alignment.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Consumption data

Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.

Energy consumption 36.7 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 43 dB / max. 57 dB normal mode.

Planning notes

The ventilation appliance is supplied for air recirculation mode only without a chimney. The special accessory AD 200 012 is available for potential air extraction mode.

Clearance above gas appliances min. 60 cm (more than total load gas 12 kW min. 70 cm).

Clearance above electric appliances min. 45 cm.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Connection


Total connected load 270 W.

Connecting cable 1.3 m with plug.

Power consumption standby/display off 0.5 W.

Please check the user manual for how to switch off the WiFi module.


Air extraction

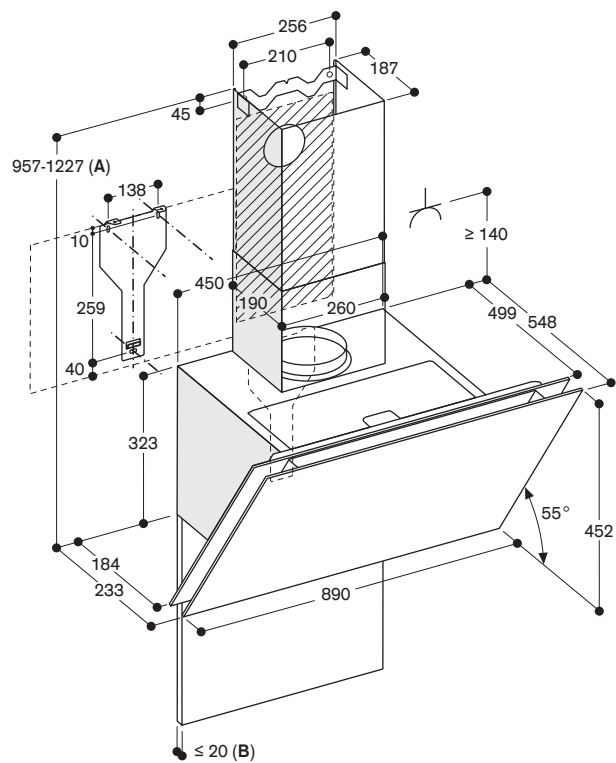


A: Air extraction
 B: Note the maximum thickness of the back panel.
 ⚡ Socket

measurements in mm

Side view

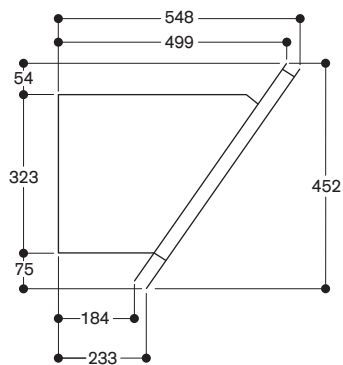

Air recirculation

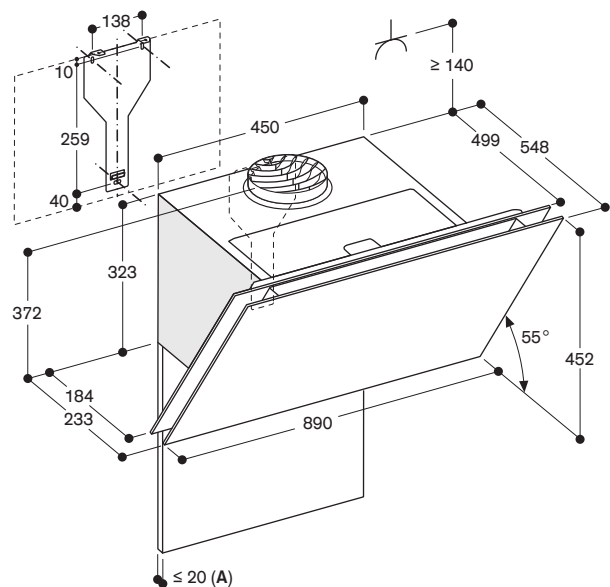

A: Note the maximum thickness of the back panel.
 ⚡ Socket

measurements in mm



AF 210 192

Stainless steel handle bar
Width 90 cm

Air extraction / Air recirculation

AF 210 162

Width 60 cm

Stainless steel handle bar

Air extraction / Air recirculation

Installation accessories

AA 210 460

Lowering frame for 60 cm
flat kitchen hood

AA 210 492

Lowering frame for 90 cm
flat kitchen hood

AA 210 491

Assembly kit for 90 cm upper cabinet
Can be combined with the 90 cm wide
flat kitchen hood 200 series in
combination with a 90 cm upper cabinet.
For left/right assembly in upper cabinets.
For assembly in the upper cabinet.
If the lowering frame AA 210 492 is
used, the assembly kit is not needed.

Special accessories

AA 210 110

1 activated charcoal filter with high
efficient odour reduction due to
increased surface. For air recirculation
module AA 211 812.

AA 211 812

Patented air recirculation module
including 1 activated charcoal filter
with high efficient odour reduction due
to increased surface
For air recirculation

Installation accessories for the air
recirculation ducts you will find at the
pages 282 – 294.

Flat kitchen hood 200 series

AF 210

- Unobtrusive visor hood design thanks to integrated glass sheet in the steam screen
- Especially quiet operation thanks to integrated sound insulation
- Steam screen extends by touching the handle bar
- Especially high air output
- Energy-saving, low-noise fan
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapours
- Dimmable, neutral white LED light for ideal illumination of the cooktop
- The patented lowering frame allows the visor hood to disappear completely into the upper cabinet
- Air extraction or air recirculation system
- Air recirculation module with activated charcoal filter: quiet and highly efficient air recirculation solution with odour reduction as in air extraction mode and long replacement intervals

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591.

Sound power level according to EN 60704-3.

Odour reduction for air recirculation in accordance with EN 61591.

Appliance width 90cm

Air extraction:

517 / 965 m³/h

57 / 71 dB(A) re 1 pW

Air recirculation:

506 / 876 m³/h

62 / 69 dB(A) re 1 pW

Odour reduction air recirculation: >90%

Appliance width 60cm

Air extraction:

515 / 953 m³/h

57 / 71 dB(A) re 1 pW

Air recirculation

497 / 885 m³/h

62 / 69 dB(A) re 1 pW

Odour reduction air recirculation: >90%

Features

Controls at front.

3 electronically controlled power levels and 1 intensive mode.

Automatic function with sensor-controlled run-on function.

Grease filter saturation indicator.

Stainless steel grease filter, dishwasher-safe.

Neutral white LED light (3500 K), continuously dimmable.

Lamp output 3 x 1.5W.

Illuminance 355 lx.

Light can be switched on separately.

Fan technology with highly efficient, brushless DC motor (BLDC).

Integrated sound insulation for quiet operation.

The fan is activated when the steam screen is extended.

Patented technology for extension of the steam screen.

Extendable steam screen 198 mm.

Airflow-optimised interior for efficient air circulation and ease of cleaning.

Patented easy mounting system for simple installation.

The package includes an one-way flap.

Appliance width 90 cm combinable with:

Vario cooktops 400 series

VI 41x

VI 42x

VI 46x

VI 48x

VI 49x

VG 41x

VG 42x

VG 49x

VP 41x

VR 41x

Vario cooktops 200 series

VI 23x

VI 24x

VI 26x

VG 23x

VG 26x

VG 27x

Cooktops 400 series

CX 48x

CX 49x

CG 49x

Cooktops 200 series

CI 26x

CI 27x

CI 28x

CI 29x

CE 261

CE 291

CG 26x

CG 29x

VG 29x

Good to know:

the hood can be as large as the
cooktop(s)

Appliance width 60 cm combinable with:

Vario cooktops 400 series

VI 41x

VI 42x

VI 46x

VG 41x

VG 42x

VP 41x

VR 41x

Vario cooktops 200 series

VI 23x

VI 24x

VI 26x

VG 23x

VG 26x

Cooktops 200 series

CI 26x

CE 261

CG 26x

Good to know:

the hood can be as large as the
cooktop(s)

Consumption data

Consumption data is referred to
AF 210 192 / 162.

Energy efficiency class A at a range
of energy efficiency classes from
A+++ to D.

Energy consumption

41.4 / 40.3 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class B.

Sound level min. 41/42 dB /

max. 57 dB normal mode.

Planning notes

For air recirculation an external air
recirculation module is required.

Patented air recirculation module with
activated charcoal filter can be
installed in the upper cabinet. The
activated carbon filter can be changed
from the front by simply pulling out the
activated charcoal filter.

The door of the upper cabinet must be
fully open in order to change the
activated charcoal filter.

To be installed in an upper cabinet
without base.

The required cavity depth of the upper
cabinet together with the lowering
frame measures 335 mm.

The required cavity height of the upper
cabinet together with the lowering
frame measures 600 mm.

Clearance above gas appliances
min. 65 cm (more than total load gas
12 kW min. 70 cm).




Clearance above electric appliances
min. 43 cm.

When installing a ventilation hood with
air extraction mode and a chimney-vented
fireplace, the power supply line of the
ventilation appliance needs a suitable
safety switch.


Connection

Total connected load 266/264 W

Connecting cable 1.8 m, pluggable.

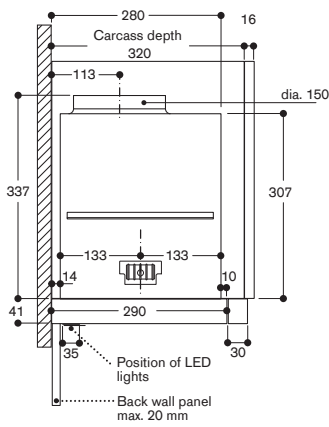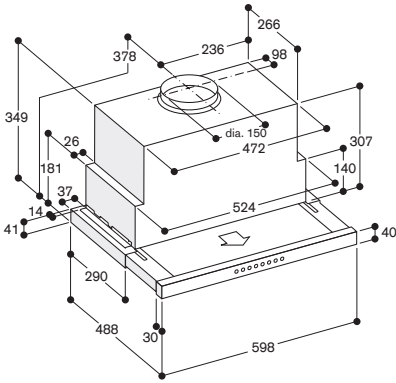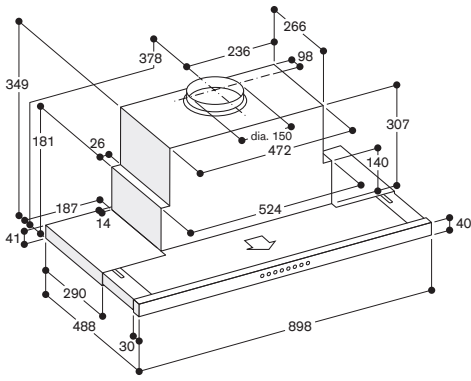


Upper cabinet for AF 210

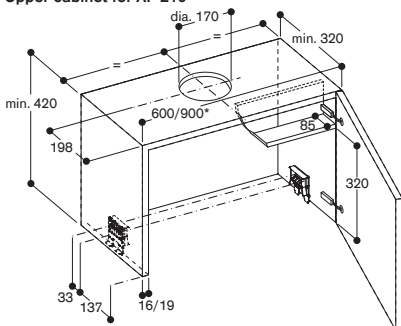


* for upper cabinets measuring 90 cm, the AA 210 491 installation set is required in addition

Upper cabinet for AF210 with assembly kit AA 210 491

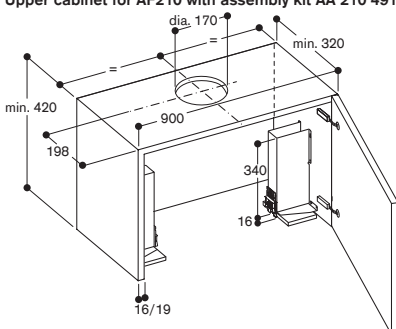


View of upper cabinet from above with AA 211 812

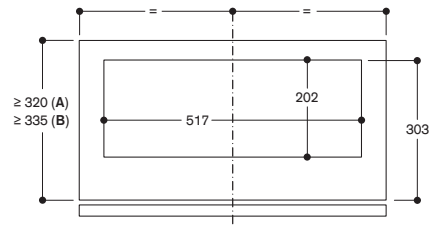


A: Appliance only
B: Appliance with lowering frame
measurements in mm

Cross-section of upper cabinet for AF210 with AA 211 812

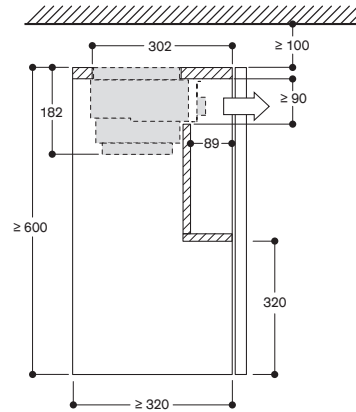


measurements in mm

Cross-section of upper cabinet for AF210 with AA 211 812 and AA 210 492/460 lowering frame

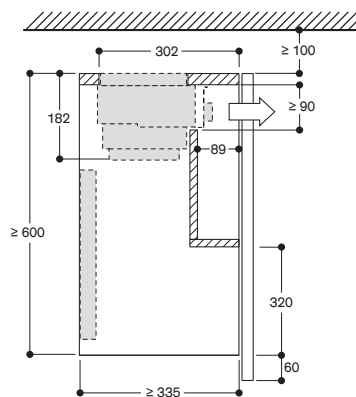

measurements in mm

Upper cabinet for AF 210 with lowering frame

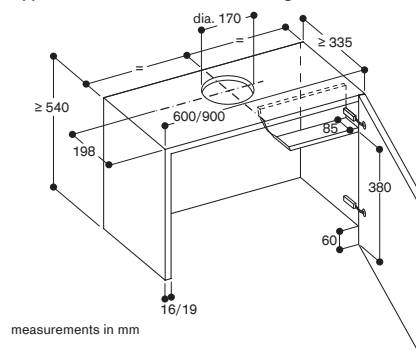

measurements in mm



AC 200 191

Stainless steel and glass

Width 86 cm

Air extraction / Air recirculation

AC 200 181

Stainless steel and glass

Width 70 cm

Air extraction / Air recirculation

AC 200 161

Stainless steel and glass

Width 52 cm

Air extraction / Air recirculation

Special accessories

AA 200 510

Remote control for canopy extractor

AC200

AA 210 110

1 activated charcoal filter with high efficient odour reduction due to increased surface. For air recirculation module AA211812.

AA 211 812

Patented air recirculation module including 1 activated charcoal filter with high efficient odour reduction due to increased surface
For air recirculation.

Installation accessories for the air recirculation ducts you will find at the pages 282 – 294.

Appliance width 86 cm combinable with:

Vario cooktops 400 series

VI 41x

VI 42x

VI 46x

VI 48x

VI 49x

VG 41x

VG 42x

VG 49x

VP 41x

VR 41x

Vario cooktops 200 series

VI 23

VI 24x

VI 26x

VG 23x

VG 26x

VG 27x

Cooktops 400 series

CX 48x

CX 49x

CG 49x

Cooktops 200 series

CI 26x

CI 27x

CI 28x

CI 29x

CE 261

CE 291

CG 26x

CG 29x

VG 29x

Good to know:

the hood can be as large as the cooktop(s)

Canopy extractor 200 series

AC 200

- Can be integrated invisibly in upper cabinet
- Energy-saving, low-noise fan
- Rim extraction with flat and easy-to-clean glass cover
- Dimmable, neutral white LED light for ideal illumination of the cooktop
- Air extraction or air recirculation system
- Energy efficiency class A++

Output

Performance and noise level, output level 3/Intensive:

Air output according to EN61591.

Sound power level according to EN 60704-3.

Odour reduction for air recirculation in accordance with EN 61591.

Appliance width 86 cm

Air extraction:

610 / 800 m³/h.

64 / 70 dB (A) re 1 pW.

Air recirculation:

540 / 790 m³/h.

72 / 77 dB (A) re 1 pW.

Odour reduction air recirculation 94 %.

Appliance width 70 cm

Air extraction:

575 / 775 m³/h.

64 / 70 dB (A) re 1 pW.

Air recirculation:

540 / 740 m³/h.

73 / 78 dB (A) re 1 pW.

Odour reduction air recirculation 93 %.

Appliance width 52 cm

Air extraction:

540 / 730 m³/h.

64 / 70 dB (A) re 1 pW.

Air recirculation:

530 / 690 m³/h.

72 / 77 dB (A) re 1 pW.

Odour reduction air recirculation 92 %.

Features

3 electronically controlled power levels and 1 intensive mode.

Remote control is available as a special accessory.

Interval ventilation, 6 min.

Run-on function, 6 min.

Grease filter saturation indicator.

Metal grease filter, dishwasher-safe.

Glas filter cover.

Neutral white LED light (4000 K), dimmable.

Lamp output 2x 1 W.

Illuminance 266 lx.

Fan technology with highly efficient, brushless DC motor (BLDC).

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.

Energy consumption

31.4/30.3/29.6 kWh/year.

Ventilation efficiency class A.

Illumination efficiency class A.

Grease filter efficiency class D.

Sound level min. 41/42/44 dB / max. 64/65/67 dB normal mode.

Appliance width 70 cm combinable with:

Vario cooktops 400 series

VI 41x

VI 42x

VI 46x

VG 41x

VG 42x

VP 41x

VR 41x

Vario cooktops 200 series

VI 23x

VI 24x

VI 26x

VG 23x

VG 26x

VG 27x

Cooktops 200 series

CI 26x

CI 27x

CE 261

CG 26x

Good to know:

the hood can be as large as the cooktop(s)

Appliance width 52 cm combinable with:

Vario cooktops 400 series

VI 41x

VI 42x

VG 41x

VG 42x

VP 41x

VR 41x

Vario cooktops 200 series

VI 23

VI 24x

VG 23x

VG 26x

Cooktops 200 series

CI 26x

CE 261

CG 26x

Good to know:

the hood can be as large as the cooktop(s)

Planning notes

Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the filter drawer.

The door of the upper cabinet must be fully open in order to change the activated charcoal filter.

Can be integrated invisibly in upper cabinet.

Vario cooktops with intensive production of vapours like VR/VP should be placed in the middle beneath the hood (in this case air recirculation is not recommended).

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).


Clearance above electric appliances min. 50 cm.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


Connection

Total connected load 172 W


Connecting cable 1.0 m with plug.

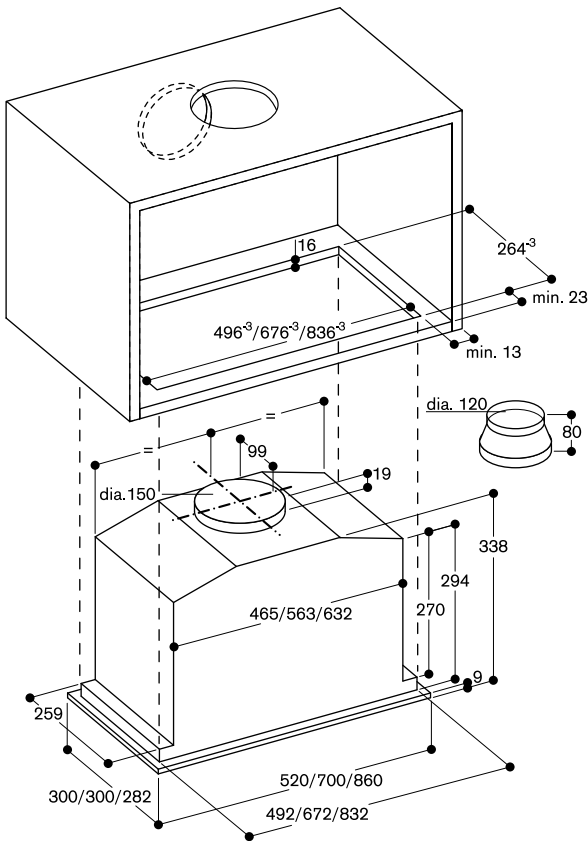

View of upper cabinet from above with AC 200 and AA 211 812

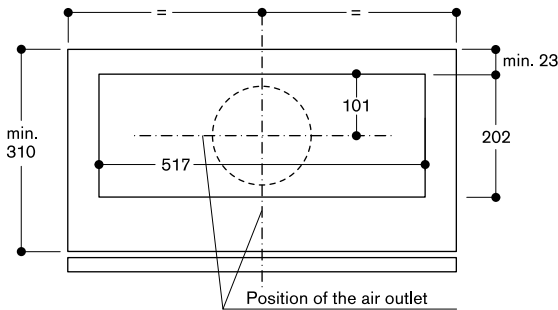

Cross-section of upper cabinet with AC 200 and AA 211 812

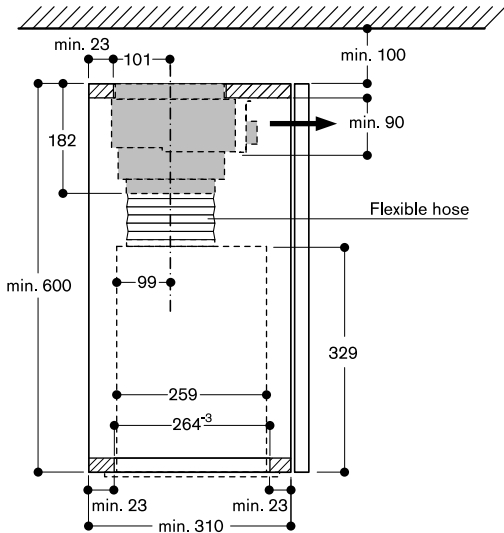

Air recirculation module with activated charcoal filter

AA 442 810

Air recirculation module with activated charcoal filter

For air recirculation.

Can be combined with island and wall-mounted hood AI 442/AW 442.

Odour reduction comparable to air extraction mode (95%).


Noise reduction of up to 3 dB when compared to conventional air recirculation filter systems.

Extended change interval for the activated charcoal filter

(approx. 1–1.5 years depending on cooking frequency).

For installation on the inner chimney.

Consisting of filter bracket, 2 activated charcoal filter, flexible hose and 2 hose clamps.

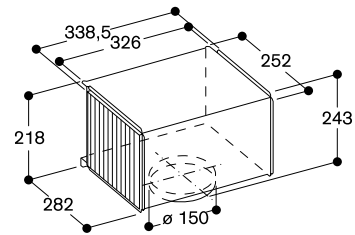

AA 200 812

For air recirculation.

Can be combined with wall-mounted hoods AW 240


Odour reduction comparable to air extraction mode (95%).

Noise reduction of up to 3 dB when compared to conventional recirculation filter systems.

Extended change interval for the activated charcoal filter.

For installation on the external chimney or internal chimney.

Includes design panel, wall fastening, activated charcoal filter, flexible hose and 2 hose clamps.



AA 200 816

For air recirculation.

Can be combined with island hoods AI 240.


Odour reduction comparable to air extraction mode (95%).

Noise reduction of up to 3 dB when compared to conventional air recirculation filter systems.

Extended change interval for the activated charcoal filter.

For installation on the internal chimney.

Includes design panel, activated charcoal filter, flexible hose and 2 hose clamps.



AA 211 812

Patented air recirculation module including 1 activated charcoal filter with high efficient odour reduction due to increased surface

For air recirculation.

Can be combined with flat kitchen hood series 200/canopy extractor 200 series.


Odour reduction comparable to air extraction mode (95%).

Noise reduction of up to 3 dB when compared to conventional air recirculation filter systems.

Extended change interval for the activated charcoal filter.

For assembly in the upper cabinet.


Consisting of filter housing with design panel, activated charcoal filter, flexible hose and 2 hose clamps.

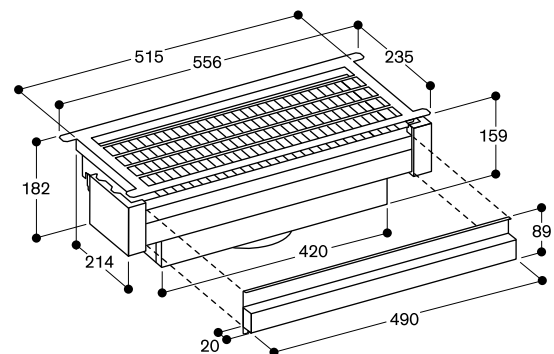

Removable filter panel

AA 010 811
Stainless steel
AA 012 811
White

For air recirculation.
Can be combined with ceiling ventilation AC 250 and AC 402.
Odour reduction comparable to air extraction mode (95%).
Comprises design panel, wall mount, activated charcoal filter, flexible pipe and 2 hose clamps.
Pipe connection to the front, sideways or at the top.
Connecting pipe DN 150 round.
Recommended minimum gap between filter openings and wall: 100 cm.

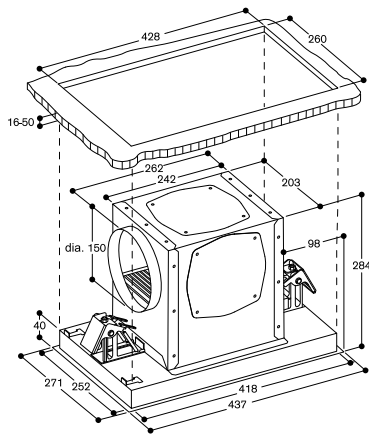

AD 442 392 for AW 442
AD 442 396 for AI 442
AD 200 392 for AW 240
AD 220 396 for AI 240
Ceiling collar for air chimneys
Stainless steel/aluminium-lacquered

Covers the fixing screws of wall and island air chimneys as well as uneven gaps at not exactly horizontal ceilings. Allows the installation of customised one-piece wall chimneys and island chimneys without telescope.

Features

Ceiling fixture for duct and clip-on cover in the color of chimney.

Planning notes



Available for most of the Gaggenau chimney dimensions to fit with standard chimneys.



Extension for mounting kit for island hood AI 240

AD 223 346

For a chimney height of 1100–1500 mm. Appliance height is dependent on the structure (cabinet height).



* height-adjustable in 10 mm increments
measurements in mm

AA 210 492

Lowering frame for 90 cm flat kitchen hood

AA 210 460

Lowering frame for 60 cm flat kitchen hood



Can be combined with flat kitchen hood series 200.

The patented lowering frame allows the flat kitchen hood to disappear completely into the upper cabinet.



For assembly directly on the kitchen wall or reinforced upper cabinet.

For assembly in the upper cabinet. The required cavity depth of the upper cabinet together with the lowering frame measures 335 mm.

In combination with a back wall panel > 5 mm the lowering frame needs to be lined and the cavity depths must be adapted accordingly.

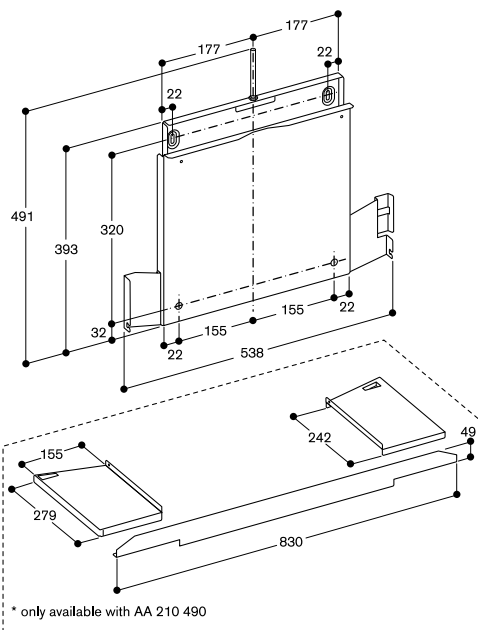

* only available with AA 210 490

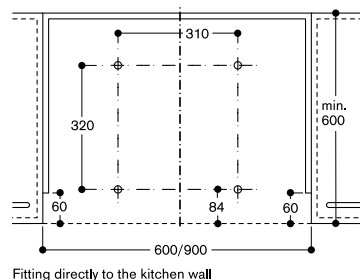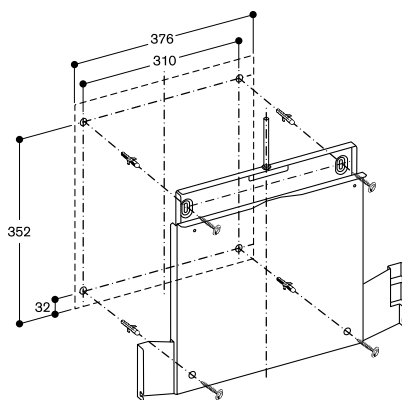

Fitting directly to the kitchen wall

AA 210 491

Assembly kit for 90 cm upper cabinet


Can be combined with the 90 cm wide flat kitchen hoods 200 series.

Flat kitchen hood of 200 series

For left/right assembly in upper cabinets.

For assembly in the upper cabinet.


If the lowering frame AA 210 492 is used, the assembly kit is not needed

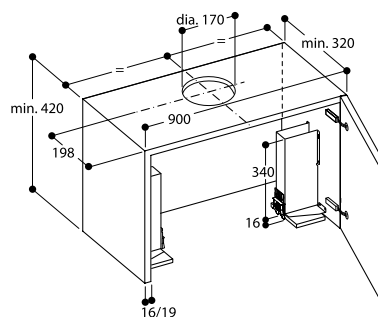

AA 400 510

Window contact switch

Can be combined with motorless appliances 400 series.
 When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.
 The window contact switch is suitable for this purpose.
 The ventilation appliance only works when the window is open if a window contact switch is connected. The lighting works even if the window is closed.

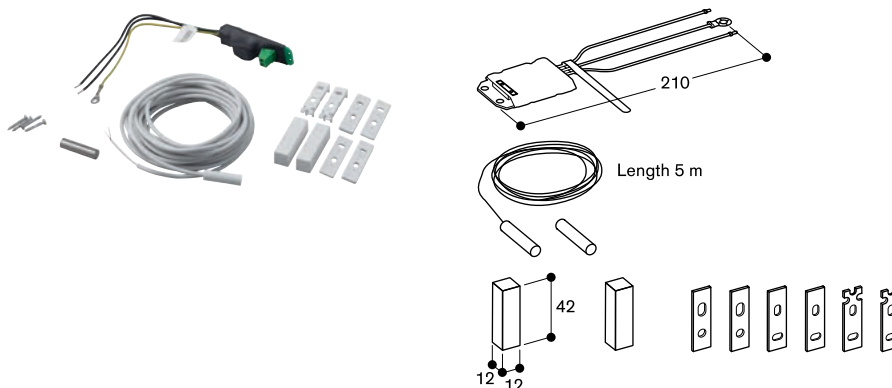

AA 200 510

**Remote control for canopy extractor
AC 200**



Wall outlet

Wall outlets are available that are suitable for providing a clean, efficient and unobtrusive method of routing ducting through outside walls. The aperture should always correspond to, or be bigger than, the nominal width of the type of pipe used.

AD 700 051

Wall outlet

Stainless steel
 DN 200 round


Little loss of airflow due to large stainless steel outlet louvers.

Features

Weatherproof stainless steel louvers.
 Integrated one-way flap.
 Connecting piece DN 200 round

Planning notes

For use with telescopic wall-duct
 AD 702
 Wall breakthrough \varnothing 210 mm



AD 850 050

Wall outlet

Stainless steel
 DN 150 flat


Little loss of airflow due to large stainless steel outlet louvers.
 Compact dimensions by flat structure.
 Connecting piece flat duct DN 150.

Features

Weatherproof stainless steel louvers.
 Integrated one-way flap.

Planning notes

Direct connection of flat duct DN 150 without pipe connector.



AD 702 052



Telescopic wall-duct
DN 200 round

Features

Connecting piece DN 200 round.
Integrated one-way flap.

Planning notes

For use with wall outlet AD 700 051 or
remote fan unit AR 401.



AD 750 054

Wall outlet with telescopic duct
Stainless steel/plastic
DN 150 round


Optimal temperature insulation.
Hermetically sealed by an optimized
built-in heat retention system. Flat stain-
less steel cover with minimal effect to
the aesthetics of the building exterior
facade.

Features

Weatherproof stainless steel louvres.
3-times insulating Backflow system.
Magnetic opening and closing.
Defined opening pressure (65 Pa)
prevents rattling.
Full opening even at low flow rates.
Telescopic wall duct 350 - 500 mm for
round pipe connection piece DN 150.


Planning notes

Conform to blower-door test.
For connection of round pipe DN 150
or flat pipe DN 150. Wall breakthrough
ø 155 mm.

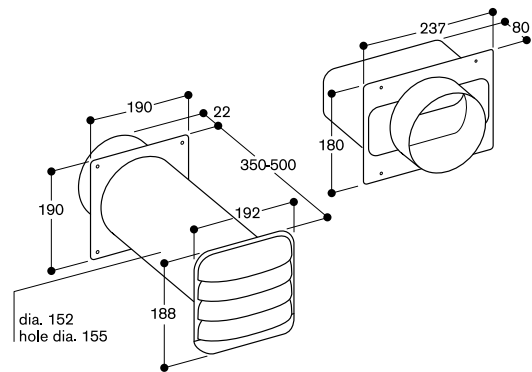

AA 010 410

Air exhaust grille air recirculation
Stainless steel-coloured, 90 cm,
including installation fittings, height
adjustable.

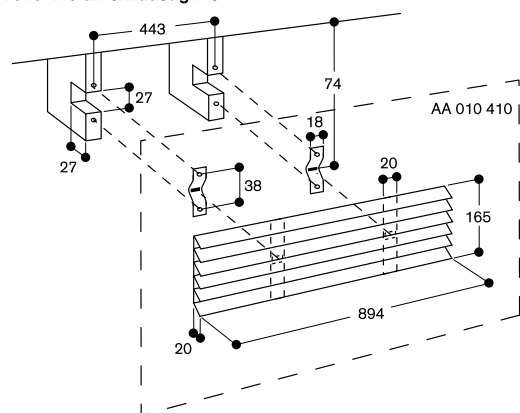**AA 010 410 air exhaust grille**

Excellent performance thanks to optimal ducting and installation.

Intelligently selecting and installing the duct system not only has a very positive effect on the output of the ventilation system; it also minimises the noise generated. It is therefore decisive for the efficiency of the entire ventilation system.

The duct type.

In Gaggenau's accessories catalogue, customers can select the type of duct appropriate to their needs, whether aluflex pipe, round duct or a flat duct system. Depending on the duct type, they can choose from the nominal sizes DN 150 and DN 200. For maximum output with minimal noise, the diameter should always be as large as possible.

For straight ducting, the use of plastic or metal ducts with smooth, level inner surfaces is recommended. These enable a laminar flow of air during extraction, without air turbulence. For sections that are not straight and for bends, aluflex pipe are preferred because they make it possible to avoid hard edges.

Where space limitations are a concern, the first choice is the Gaggenau flat duct system. The remarkable design with special conducting fins in the bends and junction pieces allow for a very low height and large nominal size, thus ensuring very efficient air circulation. This also applies in situations where there are many bends. We strongly discourage the use of other flat ducts due to the high output losses in duct bends, duct corners and junction pieces.

Spiral and corrugated ducts should definitely not be used. In addition to displaying the worst flow conditions, these types also tend to flutter and thus generate noise.

The duct diameter.

A good guideline here is: The duct diameter should be as large and constant as possible, while the ducting should be as short and straight as possible. The wall outlet must correspond to the duct diameter.


The building regulations.

Please observe the local applicable building regulation when configuring ventilation solutions.



The metal ducts are particularly suitable for Vario downdraft and Table ventilation in countries with increased fire protection requirements.

The metal ducts are non-combustible and suitable for all combinations.

AD 852 010
Flat duct
Plastic
DN 150 flat
Length 1000 mm



AD 854 010
Flat duct
Metal
DN 150 flat
Length 1000 mm



Features

Sealing is pre-assembled on each side.


Planning notes

Suitable for flat duct bends.

To connect 2 flat ducts, a flat duct connecting piece is required.

If the removal of the seal is necessary, the connection must be fastened and sealed with aluminium adhesive tape.


AD 852 040
Flat duct pipe connector
Plastic
DN 150 flat



Planning notes

Flat duct pipe connector necessary for: Combination of 2 flat ducts and direct connection of flat duct to AD 854 046 and AD 854 048, also direct connection remote fan AR 403.

AD 854 040
Flat duct connecting piece
Metal
DN 150 flat
To connect 2 flat ducts.




Planning notes

Suitable for flat duct and flat duct flex.

AD 852 030

Flat duct bend 90° vertical
Plastic
DN 150 flat




Planning notes

For connecting 2 duct bends together (e.g. 90° horizontal duct bend and a 90° vertical duct bend), a piece of flat duct is required, which can be shortened to the required length by cutting it to size.

AD 854 030

Flat duct bend 90° vertical
Metal
DN 150 flat




Planning notes

Suitable for flat duct and flat duct flex.

AD 852 031

Flat duct bend 90° horizontal
Plastic
DN 150 flat


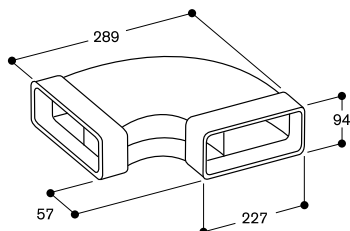


Planning notes

For connecting 2 duct bends together (e.g. 90° horizontal duct bend and a 90° vertical duct bend), a piece of flat duct is required, which can be shortened to the required length by cutting it to size.

AD 854 031

Flat duct bend 90° horizontal
Metal
DN 150 flat




Planning notes

Suitable for flat duct and flat duct flex.

AD 852 032

Flat duct bend 15° horizontal
Plastic
DN 150 flat




Planning notes

Suitable for providing compensation in cases where there is a slight offset in the duct guide or for duct guides which are not seated square in cramped spaces.

AD 854 000

Flat duct bend connecting piece
Metal
DN 150 flat
To connect 2 flat duct bends.




Planning notes

If the removal of the seal is necessary, the connection must be fastened and sealed with aluminium adhesive tape.

AD 853 011

Flat duct system flex pipe
Plastic
DN 150 flat
Length: 1000 mm


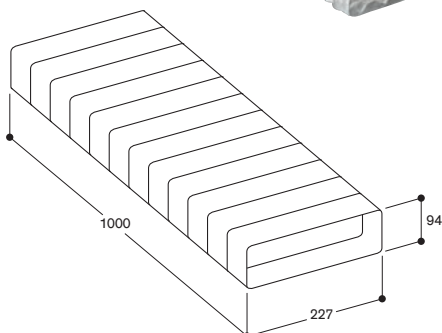


Planning notes

Recommended for the combination with the air collector box AD 704 049 and AL 400 downwards.

AD 858 010

Flat duct flex pipe
Metal
DN 150 flat
Length 1000 mm

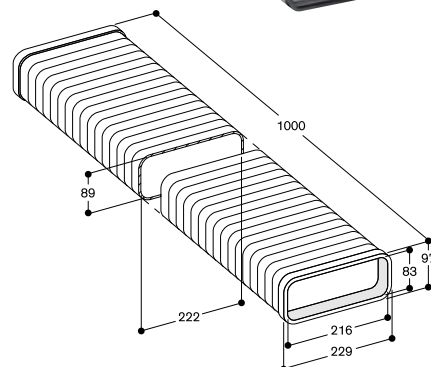

Planning notes


Suitable for flat duct bends.
Flat duct flex pipe can be shortened.
Useful for bends (<90°) or for parallel offsetting.
If the removal of the seal is necessary, the connection must be fastened and sealed with aluminium adhesive tape.

AD 852 042

Flat duct adapter round 90°
 Plastic
 DN 150 flat

Planning notes


Direct connection to aluflex pipe.

**AD 854 032**

Flat duct adapter round 90°
 Metal
 DN 150 flat/round
 Transition from flat duct to round duct.

Planning notes


Suitable for flat duct and flat duct flex.
 Suitable for round duct and aluflex pipe.

**AD 852 041**

Flat duct adapter round
 Plastic
 DN 150 flat

Planning notes


Connection to the round adapter of a remote fan unit or wall box.
 In combination with aluflex pipe, the pipe connector RV is necessary.

**AD 854 041**

Flat duct adapter round
 Metal
 DN 150 flat/round
 Transition from flat duct to round duct.

Planning notes

Suitable for flat duct and flat duct flex.
 Suitable for round duct and aluflex pipe.

**AD 990 090**

Adhesive tape for duct components
 Plastic
 10 m/roll

Planning notes


In order that ducting is well sealed and air leaks are consequently prevented, the adhesive tape AD 990 090 is necessary at all pipe connection piece points. The adhesive tape is heat- and UV-resistant.

**AD 990 091**



Adhesive tape for duct components
 Aluminium
 Width 50 mm
 10 m/roll

Planning notes


Useful for all connections of duct components.



AD 754 045
 Connection piece for 2 aluflex pipes
 DN 150 round
 Fitting AL 400, front or back side.

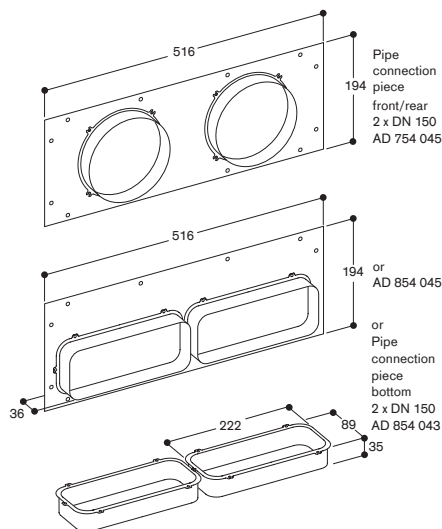


AD 854 045
 Connecting piece
 AL 400 for flat duct, 2 x DN 150
 Metal zinc plated
 DN 150 flat

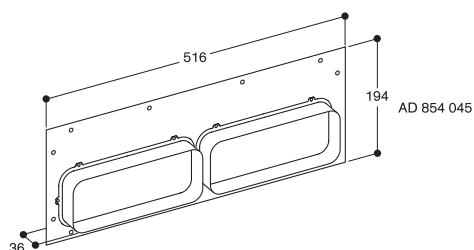


Planning notes
 Can be fitted on the front or back side of the AL 400.

AD 854 043
 Connecting piece
 AL 400 for flat duct, 2 x DN 150
 Metal zinc plated
 DN 150 flat

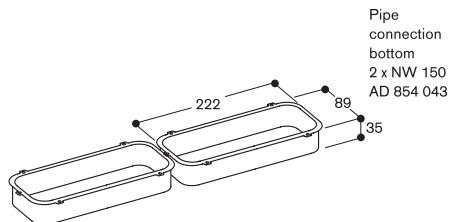


Planning notes
 Can be fitted on the underside of the AL 400.
 Set of two.

AD 854 046
 Flat duct connecting piece for VL 414
 Metal zinc plated with plastic
 DN 150 flat

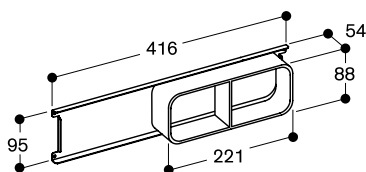

Planning notes
 One piece needed for each VL 414 to be connected to flat ducts.
 Outlet to the left/right possible.


Ventilation moulding
AA 414 010
 Ventilation moulding for VL 414 next to gas appliance.



Ventilation moulding
LS 041 001
 Ventilation moulding for VL 200 next to gas appliance.





AD 410 040
 Flexibel connecting piece for VL 200
 DN 150 flat



AD 851 041

Connecting piece VL 200 for extension with flat duct DN 150 for extra deep worktop




AD 854 048

Air collector box DN 150 flat duct


Planning notes

For connecting two filter modules AC 402, integrate a controle module with or without light in between:
2 x DN 150 flat duct air intake.
1 x DN 150 flat duct air outlet.

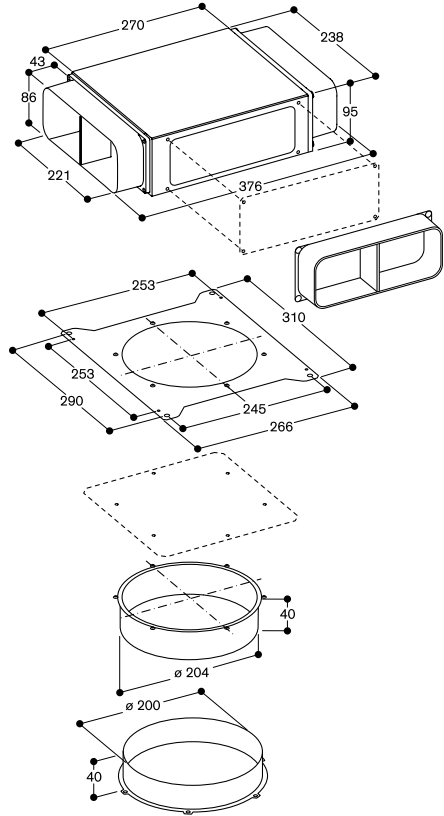

AD 751 010

Aluflex pipe
Aluminium
DN 150 round

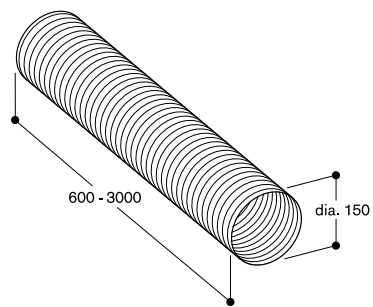


Planning notes

Recommended only for routing ducting through air paths which are not in a straight line or for round wall and floor apertures. 2 hose clamps enclosed. For combination with all adapters, press the pipe wall flat at the ends. 2 aluflex pipes must be connected with a pipe connection piece for aluflex pipes.

AD 752 010


Round duct
Plastic
DN 150 round

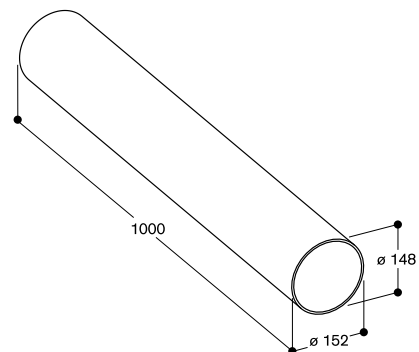

Planning notes


2 round ducts must be connected with the pipe connector AD 754 090.

AD 754 090
 Pipe connector for plastic pipe
 Plastic
 DN 150 round




Planning notes
 2 round ducts must be connected with the pipe connector AD 754 090.

AD 704 040
 Pipe adapter DN 200/150 round
 Metal zinc plated
 DN 200 round
 Reduce DN 200 connection to DN 150 connection.




Planning notes
 Can be combined with telescopic wall-duct DN 200 and pipe connector DN 150.

AD 752 030
 Duct bend 90°
 Plastic
 DN 150 round



AD 752 070
 Condensation trap
 Plastic
 DN 150 round




Planning notes
 Recommended under vertical pipe sections. Installation on the bottom end of the pipe.

AD 724 042
 Connection piece for round pipe
 DN 150



Planning notes
 For VL 414
 For installation to left or right side of VL additional adaptor AD 724 041 is necessary.

AD 724 041
 Round duct connection additional adaptor for VL 414 on the side
 Metal zinc plated
 DN 150 round

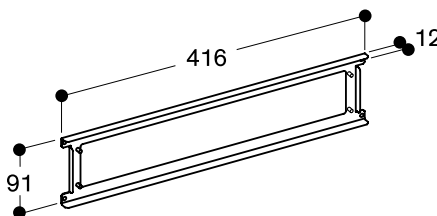


Planning notes
 One piece needed for each VL to be connected to round ducts DN 150 to the left/right.

AD 754 048

Air collector box DN 150 round pipe

Planning notes

For connecting two filter modules AC 402, integrate a controle module with or without light in between:
2 x DN 150 round duct air intake.
1 x DN 150 round duct air outlet.

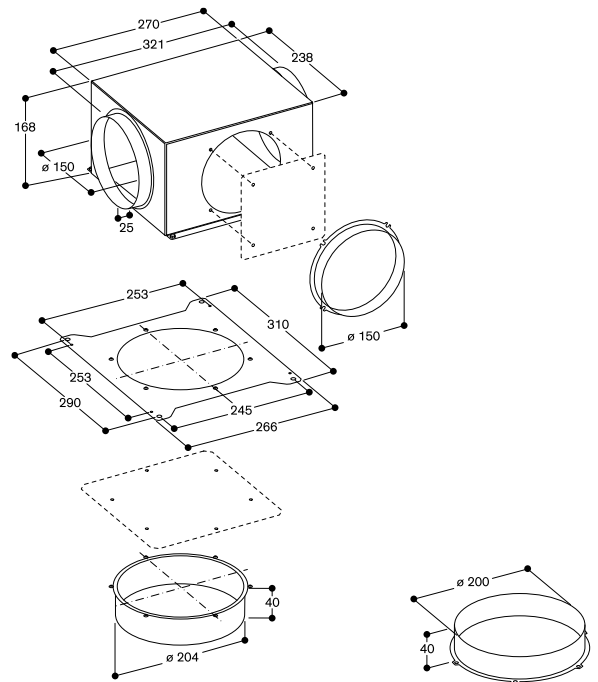


AD 704 048

Air collector box round duct for AL 400
Metal zinc plated
DN 150 round

Planning notes

2 x DN 150 round duct air intake.
To connect 1 x AL 400 to AR 403/413.
1 x DN 200 air outlet.
To connect 1 x AL 400 to AR 403/413 or AR 401.

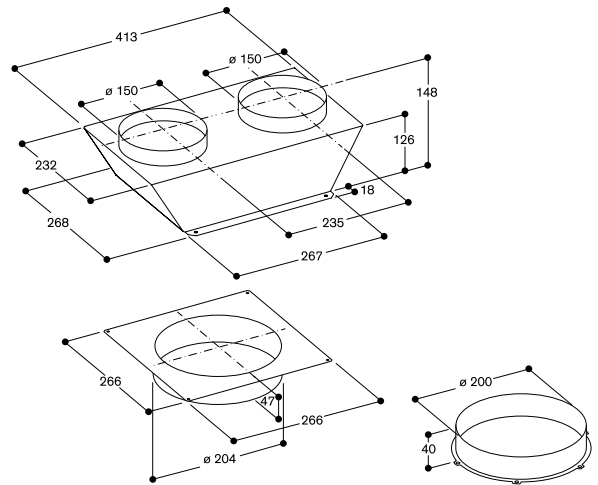


AD 704 049

Air collector flat duct for AL 400
Metal zinc plated
DN 150 flat

Planning notes

2 x DN 150 flat duct air intake
To connect 1 x AL 400 to remote fan AR 403/AR 413 bottom side.
To connect the AL 400 and the remote fan AR 403/AR 413 the flex duct AD 853 011 is possible and can be shortened to the appropriate length.
The package includes four cable straps for fixing the flex duct AD 853 011.

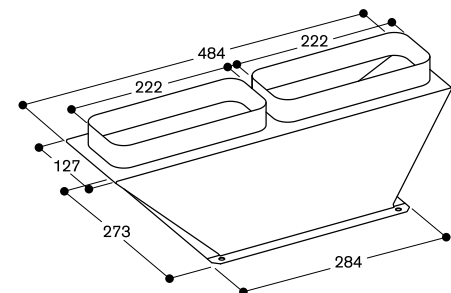



Appliance type	Ceiling ventilation	Ceiling ventilation	Ceiling ventilation
Stainless steel	Filter module	Control module	Control module
Air extraction / air recirculation	AC 402 181	AC 482 181	AC 462 181
Compatible with (air extraction):	• / • AR 400 142 / AR 401 142 / AR 403 122		
Compatible with (air recirculation):	AR 400 142 and AA 010 811 or AA 012 811		
Dimensions			
Width of overall frame	(cm) 80	80	80
Depth of overall frame	(cm) 40	14	14
Height	(cm) 10.5	13.5	13.5
Net weight	(kg) 8	9.5	9.5
Consumption data according to EU regulation 65 / 2014			
Energy efficiency class		B ³	
Energy consumption	kWh/year	60.6 ³	
Ventilation efficiency class		A ³	
Illumination efficiency class		E ³	
Grease filter efficiency class		B ³	
Sound level min. / max. normal mode	dB(A)	50/65 ³	
Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive		Airflow per remote fan unit with one filter module²	
Air extraction with AR 400 142 for inside installation	(m ³ /h)	300/460/570/720	–
Air extraction with AR 401 142 for outside installation	(m ³ /h)	340/510/640/750	–
Air extraction with AR 403 122 for inside installation	(m ³ /h)	370/490/640/780	
Air recirculation with AR 400 142 and AA 010 811 or AA 012 811	(m ³ /h)	260/400/500/570	
Features			
Infrared remote control		•	•
Power levels		3 plus intensive	3 plus intensive
Run-on function		•/6 min.	•/6 min.
Interval ventilation		•/6 min.	•/6 min.
Grease filter saturation indicator		–/•	–/•
Grease filter art	Rim extraction		
Grease filter units	2		
Art of lighting		LED	
Exhaust air connection bottom / side / top / back	–/–/•/–		
Exhaust air connection piece DN 150 round duct	•		
Exhaust air connection piece DN 150 flat duct	AD 852 042 ¹		
Connecting cable length	(m)	1.75	1.75
Network cable length			
Minimum clearance above cooking position			
For gas appliances with total connected load gas of less / more than 12 kW	(cm)	70/70	70/70
For electric appliances	(cm)	70	70
Connection			
Total connected load	(W)	depending on fan unit	depending on fan unit
Radio frequency interference-suppressed		•	•

• Standard. – Not available.

¹ Special accessory.

² For configurations with more than one filter module per fan unit up to 70 m³/h can be added.

³ Values refers to the configuration AC 402 181 (1x), AC 482 181 (1x), with the remote fan unit AR 400 142.



Ceiling ventilation

Light module
AC 472 181

80
14
13.5
9.5

-
-

LED

1.75
2

70/70
70

•



Appliance type	Table ventilation	Table ventilation
Stainless steel	AL 400 121	AL 400 191
Air extraction / air recirculation	•/•	•/•
Compatible with (air extraction):	2x AR 400 142 / 2x AR 401 142 / 2x AR 403 122	AR 400 142 / AR 401 142 / AR 403 122
Compatible with (air recirculation):	2x AR 413 122 / 2x AR 410 110	AR 413 122
Dimensions		
Height of overall frame	(cm) 0.3	0.3
Surface mounting / flush mounting	•/•	•/•
Extending height	(cm) 33	33
Width on worktop	(cm) 118.4	90.8
Width in lower cabinet	(cm) 113.6	86
Depth on worktop	(cm) 14	14
Height in lower cabinet surface mounting / flush mounting	(cm) 55–86	55–86
Net weight	(kg) 46	38
Consumption data according to EU regulation 65 / 2014		
Energy efficiency class		A ²
Energy consumption	kWh/year	45.5 ²
Ventilation efficiency class		A ²
Illumination efficiency class		E ²
Grease filter efficiency class		C ²
Sound level min. / max. normal mode	dB(A)	45/61 ²
Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive		
	with 2 remote fan units	with 2 ducts
Air extraction with AR 400 142 for inside installation	(m ³ /h) 540/820/1020/1140	310/485/600/765
Air extraction with AR 401 142 for outside wall mounting	(m ³ /h) 550/800/1000/1200	295/450/560/660
Air extraction with AR 403 122 for plinth installation	(m ³ /h) 560/750/980/1240	300/460/530/660
Air recirculation with AR 413 122 for plinth installation	(m ³ /h) 610/845/1080/1375	310/425/555/715
Air recirculation with AR 410 110 for cupboard installation	(m ³ /h) 740/890/1015/1210	
Features		
Extendable ventilation unit	•	•
Power levels	3 plus intensive	3 plus intensive
Automatic function	–	–
Run-on function	(min) •/6 min.	•/6 min.
Interval ventilation	(min) •/6 min.	•/6 min.
Grease filter saturation indicator	•	•
Grease filter art	Cartridge-type filter	Cartridge-type filter
Grease filter units	3	2
Grease drain channel	•	•
Art of lighting	LED	LED
Lamp output	(W) 4 x 5	4 x 5
Illuminance	(lx) 191	191
Lighting colour	(Kelvin) 3600	3600
Exhaust air connection bottom / side / top / back	•/–/•	•/–/•
Exhaust air connection piece DN 150 cylindrical duct	AD 754 045 ¹	AD 754 045 ¹
Exhaust air connection piece DN 150 flat duct	AD 854 045 ¹ , AD 854 043 ¹	AD 854 045 ¹ , AD 854 043 ¹
Connecting cable length	(m) 1.75	1.75
Connection		
Total connected load	(W) depending on fan unit	depending on fan unit
Radio frequency interference-suppressed	•	•

• Standard. – Not available.

¹ Special accessory.

² Values refers to the configuration AL 400 with the remote fan unit AR 400 142.

³ Values refers to the configuration VL 414 with the remote fan unit AR 403 122.



Appliance type	Downdraft	
Stainless steel	VL 414 111	
Air extraction / air recirculation	•/•	
Compatible with (air extraction):	AR 400 142 / AR 401 142 / AR 403 122	
Compatible with (air recirculation):	AR 410 110	
Dimensions		
Height of overall frame	(cm)	0.3
Surface mounting / flush mounting	•/•	
Extending height	(cm)	
Width on worktop	(cm)	11
Width in lower cabinet	(cm)	8.5
Depth on worktop	(cm)	52
Height in lower cabinet surface mounting / flush mounting	(cm)	17.1/17.4
Net weight	(kg)	4
Consumption data according to EU regulation 65 / 2014		
Energy efficiency class	A+ ³	
Energy consumption	kWh/year	53.2 ³
Ventilation efficiency class	A ³	
Illumination efficiency class	-	
Grease filter efficiency class	C ³	
Sound level min. / max. normal mode	dB(A)	53/68 ³
Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive		
		1 x VL 414
Air extraction with AR 400 142 for inside installation	(m ³ /h)	280/430/535/625
Air extraction with AR 401 142 for outside wall mounting	(m ³ /h)	300/450/560/645
Air extraction with AR 403 122 for plinth installation	(m ³ /h)	315/420/546/675
Air recirculation with AR 413 122 for plinth installation	(m ³ /h)	275/370/490/635
Air recirculation with AR 410 110 for cupboard installation	(m ³ /h)	325/385/465/560
Features		
Extendable ventilation unit		
Power levels	3 plus intensive	
Automatic function	-	
Run-on function	(min)	•/6 min.
Interval ventilation	(min)	•/6 min.
Grease filter saturation indicator	•	
Grease filter art	Metal grease filter	
Grease filter units	1	
Grease drain channel	•	
Art of lighting	-	
Lamp output	(W)	-
Illuminance	(lx)	-
Lighting colour	(Kelvin)	-
Exhaust air connection bottom / side / top / back	•/•/-	
Exhaust air connection piece DN 150 cylindrical duct	AD 724 042 ¹	
Exhaust air connection piece DN 150 flat duct	AD 854 046 ¹	
Connecting cable length	(m)	1.5
Connection		
Total connected load	(W)	depending on fan unit
Radio frequency interference-suppressed	•	



Appliance type	Island hood	Island hood	Island hood
Stainless steel	AI 442 160	AI 442 120	AI 442 100
Air extraction / air recirculation	• / •	• / •	• / •
Compatible with (air extraction):	AR 400 142 / AR 401 142 / AR 400 143	AR 400 142 / AR 401 142 / AR 400 143	AR 400 142 / AR 401 142 / AR 400 143
Compatible with (air recirculation):	AR 400 143 and AA 442 810	AR 400 143 and AA 442 810	AR 400 143 and AA 442 810
Dimensions with chimney			
Width	(cm) 160	120	100
Depth	(cm) 70	70	70
Height, air extraction / air recirculation, min.–max.	(cm) 72–150	72–150	72–150
Net weight, min.–max.	(kg) 52	40	35
Weight air extraction duct, min.–max.	(kg) 8–14	8–14	8–14
Consumption data according to EU regulation 65 / 2014			
Energy efficiency class	A ¹	A ¹	A ¹
Energy consumption	kWh/year 53.5 ¹	53.3 ¹	52.4 ¹
Ventilation efficiency class	A ¹	A ¹	A ¹
Illumination efficiency class	B	B	B
Grease filter efficiency class	B ¹	B ¹	B ¹
Sound level min. / max. normal mode	dB(A) 45/62 ¹	44/62 ¹	44/61 ¹
Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive			
Air extraction with AR 400 142 for inside installation	(m ³ /h) 310/495/625/805	330/500/625/785	325/495/620/790
Air extraction with AR 400 143 for chimney of AI / AW 442	(m ³ /h) 370/530/645/935	340/515/640/920	340/525/640/930
Air extraction with AR 401 142 for outside wall mounting	(m ³ /h) 335/510/640/750	335/510/645/745	335/510/645/750
Air recirculation with AR 400 143 for chimney of AI / AW 442	(m ³ /h) 355/510/620/875	325/490/610/880	320/500/615/865
Features			
Power levels	3 plus intensive	3 plus intensive	3 plus intensive
Automatic function	•	•	•
Run-on function	(min) • /integrated	• /integrated	• /integrated
Interval ventilation	(min) –	–	–
Grease filter saturation indicator	•	•	•
Grease filter art	Baffle filter	Baffle filter	Baffle filter
Grease filter units	6	4	4
Grease drain channel	•	•	•
Art of lighting	LED	LED	LED
Lamp output	(W) 4 x 10	4 x 10	4 x 10
Illuminance	(lx) 1.390	1.390	1.390
Lighting colour	(Kelvin) 3500	3500	3500
Exhaust air connection piece	(ø mm) 150	150	150
Exhaust air connection piece, top / side / rear / front S = specially produced	• /S/S/S	• /S/S/S	• /S/S/S
Connecting cable length	(m) 1.75	1.75	1.75
Minimum clearance above cooking position			
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 70	70	70
For electric appliances	(cm) 60	60	60
Connection			
Total connected load	(W) depending on fan unit	depending on fan unit	depending on fan unit
Radio frequency interference-suppressed	•	•	•

• Standard. – Not available.

¹ Values refers to the configuration AI / AW 442 with the remote fan unit AR 400 143.

² Not know before going to print



Appliance type	Wall-mounted hoods	Wall-mounted hoods	Wall-mounted hoods
Stainless steel	AW 442 160	AW 442 120	AW 442 190
Air extraction / air recirculation	•/•	•/•	•/•
Compatible with (air extraction):	AR 400 142 / AR 401 142 / AR 400 143	AR 400 142 / AR 401 142 / AR 400 143	AR 400 142 / AR 401 142 / AR 400 143
Compatible with (air recirculation):	AR 400 143 and AA 442 810	AR 400 143 and AA 442 810	AR 400 143 and AA 442 810
Dimensions with chimney			
Width	(cm) 160	120	90
Depth	(cm) 55	55	55
Height, air extraction / air recirculation, min.–max.	(cm) 72–150	72–150	72–150
Net weight, min.–max.	(kg) 40	32	26
Weight air extraction duct, min.–max.	(kg) 7–11	7–11	7–11
Consumption data according to EU regulation 65 / 2014			
Energy efficiency class	B ¹	A ¹	A ¹
Energy consumption	kWh/year 57.7 ¹	48.1 ¹	40.8 ¹
Ventilation efficiency class	A ¹	A ¹	A ¹
Illumination efficiency class	B	B	A
Grease filter efficiency class	A ¹	B ¹	B ¹
Sound level min. / max. normal mode	dB(A) 47/64 ¹	47/64 ¹	47/63 ¹
Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive			
Air extraction with AR 400 142 for inside installation	(m ³ /h) 315/490/605/755	315/490/615/755	315/480/610/750
Air extraction with AR 400 143 for chimney of AI / AW 442	(m ³ /h) 330/500/615/890	325/505/615/885	325/500/610/875
Air extraction with AR 401 142 for outside wall mounting	(m ³ /h) 325/495/625/730	320/485/615/720	320/490/605/710
Air recirculation with AR 400 143 for chimney of AI / AW 442	(m ³ /h) 315/485/600/830	300/460/570/775	300/460/590/760
Features			
Power levels	3 plus intensive	3 plus intensive	3 plus intensive
Automatic function	•	•	•
Run-on function	(min) •/integrated	•/integrated	•/integrated
Interval ventilation	(min) –	–	–
Grease filter saturation indicator	•	•	•
Grease filter art	Baffle filter	Baffle filter	Baffle filter
Grease filter units	4	4	4
Grease drain channel	•	•	•
Art of lighting	LED	LED	LED
Lamp output	(W) 4 x 10	3 x 10	2 x 10
Illuminance	(lx) 1.140	940	710
Lighting colour	(Kelvin) 3500	3500	3500
Exhaust air connection piece	(ø mm) 150	150	150
Exhaust air connection piece, top / side / rear / front S = specially produced	•/S/S/S	•/S/S/S	•/S/S/S
Connecting cable length	(m) 1.75	1.75	1.75
Minimum clearance above cooking position			
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 70	70	70
For electric appliances	(cm) 60	60	60
Connection			
Total connected load	(W) depending on fan unit	depending on fan unit	depending on fan unit
Radio frequency interference-suppressed	•	•	•



Appliance type	Inside	Inside
Stainless steel		
Metal zinc plated	AR 400 142	AR 400 143
Air extraction / air recirculation	• / -	• / -
Dimensions		
Width	(cm) 42.6	33.3
Depth	(cm) 42.6	24
Height	(cm) 23.2	23.2
Net weight	(kg) 14	5
Installation possibility		
Slanted roof (not Eternit)		
Outside wall		
Inside wall	•	
Bottom cupboard	•	
Chimney hood AI / AW 442		•
Attic	•	
Cellar	•	
Air extraction performance (EN 61591) with fan units. power level 1 / 2 / 3 / Intensive		
Air extraction	(m³/h) 350/530/670/830	350/535/665/1005
Air recirculation	(m³/h)	
Max. back pressure at 0 m³/h	(Pa) 500	480
Features		
Power levels	3 plus intensive	3 plus intensive
Fan technology	BLDC	BLDC
Fans	(No) 1	1
Fan output	(W) 240	230
Sound insulation	•	•
Retaining bracket	•	-
Pipe connection piece intake side	(ø mm) 5 x 150	
Pipe connection piece output side	(ø mm) 1 x 150	1 x 150
Spare cover for closing air intake	•	-
Activated charcoal filter	-	-
Connecting cable length	(m) 1.75	-
Network cable length	(m) 5	-
Ratings in combination with extraction element		
Radio frequency interference-suppressed	•	•

• Standard. - Not available.



Outside wall	Inside	Plinth	Plinth
AR 401 142	AR 410 110	AR 403 122	AR 413 122
• / -	- / •	• / -	- / •
42.2	42.8	45.1	40.6
45.3	22.8	50.5	53.5
14	52	9.5	9.9
14	12	9	9
•			
•			
	•	•	•
	•	•	•
		•	
		•	
475/700/880/1050		400/535/700/875	
	350/500/580/675		400/530/705/900
640	380	770	610
3 plus intensive	3 plus intensive	3 plus intensive	3 plus intensive
BLDC	BLDC	BLDC	BLDC
1	1	1	1
180	170	180	180
•	•	-	-
•	•	•	•
1 x 200	1 x 150 flat	1 x 150 1 x 150 flat	1 x 150
-	-	-	-
-	•	-	•
1.75	1.75	1.75	1.75
5	2	2	2
•	•	•	•



Appliance type	Ceiling ventilation	Ceiling ventilation	Ceiling ventilation
Gaggenau Light Bronze	AC 250 121	AC 230 101	
Gaggenau Black			AC 270 101
Air extraction / air recirculation	• / •	- / •	- / •
Dimensions			
Width of overall frame	(cm) 120	105	105
Depth of overall frame	(cm) 50	60	60
Height	(cm) 30	18	25
Net weight	(kg) 37	40	76
Consumption data according to EU regulation 65 / 2014			
Energy efficiency class	A+	-	-
Energy consumption	kWh/year 35.2	-	-
Ventilation efficiency class	A	-	-
Illumination efficiency class	-	-	-
Grease filter efficiency class	E	-	-
Sound level min. / max. normal mode	dB(A) 41/56	-	-
Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive			
Air extraction	(m³/h) 265/331/458/933	-	-
Air recirculation	(m³/h) 197/313/419/637	293/426/579/762	190/357/515/680
Max. back pressure at 0 m³/h	(Pa) 416	-	-
Sound power level (EN 60704-3) max/Int			
Air extraction mode	(dB(A) re 1 pW) 56/70	-	-
Air recirculation mode	(dB(A) re 1 pW) 63/72	67/73	67/74
Features			
Remote control	•	•	•
Power levels	3 plus intensive	3 plus intensive	3 plus intensive
Run-on function	• / integrated	• / integrated	• / integrated
Interval ventilation	• / 6 min.	• / 6 min.	• / 6 min.
Grease filter saturation indicator	•	•	•
Activated charcoal filter saturation indicator	•	•	•
Grease filter art	Cartridge-type filter	Cartridge-type filter	Cartridge-type filter
Grease filter units	2	3	3
Art of lighting	-	-	LED
Lamp output	(W) -	-	17.9
Illuminance	(lx) -	-	1156
Lighting colour	(Kelvin) -	-	3500
Colour range (adjustable with Home Connect)	(Kelvin) -	-	2700 - 5000
Exhaust air connection piece	(ø mm) 150	-	-
Exhaust air connection piece, top / side / rear / front	- / • / • / •	-	-
Connecting cable length	(m) 1.3	-	-
Cooktop-based ventilation control	• ¹	• ¹	• ¹
Home network integration for digital services (Home Connect) wireless via WiFi.	• ²	• ²	• ²
Minimum clearance above cooking position			
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 65/70	65/70	70/75
For electric appliances	(cm) 65	65	70
Connection			
Total connected load	(W) 250	140	250
Radio frequency interference-suppressed	•	•	•

• Standard. - Not available.

¹ In Combination with suitable cooktop.

² The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Appliance type		Island hood
Gaggenau Black		AL 200 180
Air extraction/ air recirculation		•/•
Compatible with frameless cooktops		CX 482 CI 282 / 283
Dimensions with chimney		
Width	(cm)	80
Surface mounting / flush mounting		- / •
Extending height	(cm)	25
Width in worktop	(cm)	79.2
Depth in worktop	(cm)	14
Width in lower cabinet	(cm)	77.9
Height in lower cabinet surface	(cm)	70.3
Net weight	(kg)	48
Consumption data according to EU regulation 65/2014		
Energy efficiency class		A
Energy consumption	kWh/year	36.9
Ventilation efficiency class		A
Illumination efficiency class		-
Grease filter efficiency class		B
Sound level min. / max. normal mode	dB(A)	39/62
Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive		
Air extraction	(m³/h)	223/378/501/775
Air recirculation	(m³/h)	170/362/447/562
Max. back pressure at 0 m³/h	(Pa)	
Sound power level (EN 60704-3) max/ Int		
Air extraction mode	(dB(A) re 1 pW)	62/70
Air recirculation mode	(dB(A) re 1 pW)	65/70
Features		
Power levels		3 plus intensive
Automatic function		•
Run-on function	(min)	•/ integrated
Interval ventilation	(min)	-
Grease filter saturation indicator		•
Activated charcoal filter saturation indicator		•
Grease filter art		Cartridge-type filter
Grease filter units		2
Grease drain channel		•
Ambient lighting		•
Exhaust air connection piece	(ø mm)	150
Exhaust air connection, bottom / side / rear / front		• / - / - / -
Fan output	(W)	300
Connecting cable length	(m)	1.3
Cooktop-based ventilation control		•
Home network integration for digital services (Home Connect) wireless via WiFi.		• ¹
Connection		
Total connected load	(W)	300
Radio frequency interference-suppressed		•

• Standard. - Not available.

¹ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Appliance type	Downdraft
Stainless steel	VL 200 120
Air extraction/ air recirculation	•/•
Compatible with (air extraction):	AR 403 122 / AR 400 142 / AR 401 142
Compatible with (air recirculation):	AR 413 122 / AR 410 110
Dimensions	
Surface mounting / flush mounting	•/-
Width on worktop	(cm) 15
Depth on worktop	(cm) 51
Height in lower cabinet surface mounting / flush mounting	(cm) 17.5/-
Net weight	(kg) 5
Consumption data according to EU regulation 65/2014	
Energy efficiency class	A ²
Energy consumption	kWh/year 48.3 ²
Ventilation efficiency class	A ²
Illumination efficiency class	-
Grease filter efficiency class	B ²
Sound level min. / max. normal mode	dB(A) 56/71 ²
Air extraction performance (EN 61591) with fan units, power level 1 / 2 / 3 / Intensive	
Air recirculation with AR 410 110 for cupboard installation	(m ³ /h) 360/435/500/595
Air recirculation with AR 413 122 for plinth installation	(m ³ /h) 305/410/530/665
Air extraction with AR 403 122 for plinth installation	(m ³ /h) 320/430/555/690
Air extraction with AR 400 142 for cupboard installation	(m ³ /h) 280/440/545/645
Air extraction with AR 401 142 for outside wall mounting	(m ³ /h) 305/460/575/660
Sound power level (EN 60704-3) with fan units, power level 1 / 2 / 3 / Intensive	
Air recirculation with AR 410 110 for cupboard installation	(dB(A) re 1 pW) 60/64/68/73
Air recirculation with AR 413 122 for plinth installation	(dB(A) re 1 pW) 57/64/72/78
Air extraction with AR 403 122 for plinth installation	(dB(A) re 1 pW) 56/64/71/76
Air extraction with AR 400 142 for cupboard installation	(dB(A) re 1 pW) 51/63/68/73
Air extraction with AR 401 142 for outside wall mounting	(dB(A) re 1 pW) 57/67/73/76
Features	
Power levels	3 plus intensive
Automatic function	•
Run-on function	(min) • / integrated
Interval ventilation	(min) • / 6 min.
Grease filter saturation indicator	•
Grease filter art	Metal grease filter
Grease filter units	1
Grease drain channel	•
Activated charcoal filter saturation indicator	•
Exhaust air connection bottom / side / top / back	-/-•
Flexibel connecting piece DN 150 flat	AD 410 040 ¹
Connecting piece for extension with flat duct DN150	AD 851 041 ¹
Connecting cable length	(m) 1.7
Connection	
Total connected load	(W) depending on fan unit
Radio frequency interference-suppressed	•

• Standard. – Not available.

¹ Installation accessory

² Values refers to the configuration VL 200 with the remote fan unit AR 403 122.



Appliance type	Island hood	
Stainless steel	AI 240 191	
Air extraction / air recirculation	• / •	
Dimensions with chimney		
Width	(cm)	90
Depth	(cm)	60
Height, air extraction / air recirculation, min.–max.	(cm)	74-92/82-104
Net weight	(kg)	32
Weight air extraction duct	(kg)	
Consumption data according to EU regulation 65 / 2014		
Energy efficiency class	A	
Energy consumption	kWh/year	43.2
Ventilation efficiency class	A	
Illumination efficiency class	A	
Grease filter efficiency class	B	
Sound level min. / max. normal mode	dB(A) 43/64	
Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive		
Air extraction	(m ³ /h)	291/441/641/988
Air recirculation	(m ³ /h)	195/362/448/530
Max. back pressure at 0 m ³ /h	(Pa)	436
Sound power level (EN 60704-3) max / Int		
Air extraction mode	(dB(A) re 1 pW)	64/72
Air recirculation mode	(dB(A) re 1 pW)	69/72
Features		
Power levels	3 plus intensive	
Automatic function	•	
Run-on function	(min)	• / integrated
Interval ventilation	(min)	• / 6 min.
Grease filter saturation indicator	•	
Activated charcoal filter saturation indicator	•	
Grease filter art	Cartridge-type filter	
Grease filter units	3	
Grease drain channel	-	
Art of lighting	LED	
Lamp output	(W)	4 x 3
Illuminance	(lx)	650
Lighting colour	(Kelvin)	3500
Colour range (adjustable with Home Connect)	(Kelvin)	2700 - 5000
Exhaust air connection piece	(ø mm)	150
Exhaust air connection piece, top / side / rear / front S = specially produced	• / S / S / S	
Fan output	(W)	260
Connecting cable length	(m)	1.3
Cooktop-based ventilation control	• ¹	
Home network integration for digital services (Home Connect) wireless via WiFi.	• ²	
Minimum clearance above cooking position		
For gas appliances with total connected load gas of less / more than 12 kW	(cm)	65/70
For electric appliances	(cm)	55
Connection		
Total connected load	(W)	272
Radio frequency interference-suppressed	•	

• Standard. – Not available.

¹ In Combination with suitable cooktop.

² The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Appliance type	Wall-mounted hoods	Wall-mounted hoods
Stainless steel	AW 240 191	
Glass front in Gaggenau Anthracite		AW 250 192
Air extraction / air recirculation	•/•	•/•
Dimensions with chimney		
Width	(cm) 90	90
Depth	(cm) 50	54
Height, air extraction / air recirculation, min.–max.	(cm) 65-95/82-115	96–123/45
Net weight	(kg) 21	27
Weight air extraction duct		5
Consumption data according to EU regulation 65 / 2014		
Energy efficiency class	A	A+
Energy consumption	kWh/year 44.5	36.7
Ventilation efficiency class	A	A
Illumination efficiency class	A	A
Grease filter efficiency class	B	B
Sound level min. / max. normal mode	dB(A) 44/64	43/57
Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive		
Air extraction	(m³/h) 275/422/618/970	282/394/529/990
Air recirculation	(m³/h) 185/321/383/476	196/349/461/670
Max. back pressure at 0 m³/h	(Pa) 459	453
Sound power level (EN 60704-3) max / Int		
Air extraction mode	(dB(A) re 1 pW) 64/73	57/70
Air recirculation mode	(dB(A) re 1 pW) 69/74	68/78
Features		
Power levels	3 plus intensive	3 plus intensive
Automatic function	•	•
Run-on function	(min) • / integrated	•/integrated
Interval ventilation	(min) • / 6 min.	• / 6 min.
Grease filter saturation indicator	•	•
Activated charcoal filter saturation indicator	•	•
Grease filter art	Cartridge-type filter	Cartridge-type filter
Grease filter units	3	2
Grease drain channel	-	-
Art of lighting	LED	LED
Lamp output	(W) 3 x 3	2 x 3
Illuminance	(lx) 551	460
Lighting colour	(Kelvin) 3500	3500
Colour range (adjustable with Home Connect)	(Kelvin) 2700 - 5000	2700 - 5000
Exhaust air connection piece	(ø mm) 150	150
Exhaust air connection piece, top / side / rear / front S = specially produced	• / S / S / S	•/S/S/S
Fan output	(W) 260	260
Connecting cable length	(m) 1.3	1.3
Cooktop-based ventilation control	• ¹	• ¹
Home network integration for digital services (Home Connect) wireless via WiFi.	• ²	• ²
Minimum clearance above cooking position		
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 65/70	60/70
For electric appliances	(cm) 55	45
Connection		
Total connected load	(W) 269	270
Radio frequency interference-suppressed	•	•

• Standard. – Not available.

¹ In Combination with suitable cooktop.

² The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Appliance type	Flat kitchen hood	Flat kitchen hood
Stainless steel-coloured	AF 210 192	AF 210 162
Air extraction / air recirculation	• / •	• / •
Dimensions		
Width	(cm) 90	60
Depth	(cm) 32	32
Depth when steam screen extended	(cm) 48.8	48.8
Height	(cm) 37.8	37.8
Net weight	(kg) 15	15
Consumption data according to EU regulation 65 / 2014		
Energy efficiency class	A	A
Energy consumption	kWh/year 41.4	40.3
Ventilation efficiency class	A	A
Illumination efficiency class	A	A
Grease filter efficiency class	B	B
Sound level min. / max. normal mode	dB(A) 42/57	41/57
Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive		
Air extraction	(m ³ /h) 272/384/517/965	271/386/515/953
Air recirculation	(m ³ /h) 267/372/506/876	266/364/497/885
Max. back pressure at 0 m ³ /h	(Pa) 434	455
Sound power level (EN 60704-3) max / Int		
Air extraction mode	(dB(A) re 1 pW) 57/71	57/71
Air recirculation mode	(dB(A) re 1 pW) 62/69	62/69
Features		
Glass screen	•	•
Arrangement of controls	Buttons at front	Buttons at front
Power levels	3 plus intensive	3 plus intensive
Automatic function	•	•
Run-on function	(min) • / integrated	• / integrated
Interval ventilation	(min) –	–
Grease filter saturation indicator	•	•
Grease filter art	Stainless steel grease filter	Stainless steel grease filter
Grease filter units	1	1
Grease drain channel	–	–
Art of lighting	LED	LED
Lamp output	(W) 3 x 3	2 x 3
Illuminance	(lx) 355	355
Lighting colour	(Kelvin) 3500	3500
Exhaust air connection piece	(ø mm) 150	150
Exhaust air connection piece, top / side / rear / front S = specially produced	• / - / - / -	• / - / - / -
Fans	(No.) 1	1
Fan output	(W) 260	260
Connecting cable length	(m) 1.75	1.75
Minimum clearance above cooking position		
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 65/70	65/70
For electric appliances	(cm) 43	43
Connection		
Total connected load	(W) 266	264
Radio frequency interference-suppressed	•	•

• Standard. – Not available.



Appliance type	Canopy extractor	Canopy extractor
Stainless steel-coloured	AC 200 191	AC 200 181
Air extraction / air recirculation	•/•	•/•
Dimensions		
Width	(cm) 86	70
Depth	(cm) 28.2	30
Height	(cm) 36 (housing)	36 (housing)
Net weight	(kg) 9.8	9.2
Consumption data according to EU regulation 65 / 2014		
Energy efficiency class	A++	A++
Energy consumption	kWh/year 31.4 kWh	30.3 kWh
Ventilation efficiency class	A	A
Illumination efficiency class	A	A
Grease filter efficiency class	D	D
Sound level min. / max. normal mode	dB(A) 41/64	46/64
Air extraction performance (EN 61591), power level 1 / 2 / 3 / Intensive		
Air extraction	(m³/h) 210/380/610/800	210/380/575/775
Air recirculation	(m³/h) 200/360/540/790	200/360/540/740
Max. back pressure at 0 m³/h	(Pa) 560	560
Sound power level (EN 60704-3) max / Int		
Air extraction mode	(dB(A) re 1 pW) 64/70	64/70
Air recirculation mode	(dB(A) re 1 pW) 72/77	73/78
Features		
Infrared remote control	1	1
Power levels	3 plus intensive	3 plus intensive
Automatic function	-	-
Run-on function	•/6 min.	•/6 min.
Interval ventilation	•/6 min.	•/6 min.
Grease filter saturation indicator	•	•
Grease filter art	Cartridges	Cartridges
Grease filter units	2	2
Grease drain channel	-	-
Art of lighting	LED	LED
Lamp output	(W) 2 x 1	2 x 1
Illuminance	(lx) 266	244
Lighting colour	(Kelvin) 4000	4000
Exhaust air connection piece	(ø mm) 150/120	150/120
Exhaust air connection piece, top / side / rear /front S = specially produced	•/-/-/-	•/-/-/-
Fans	(No.) 1	1
Fan output	(W) 170	170
Connecting cable length	(m) 1	1
Minimum clearance above cooking position		
For gas appliances with total connected load gas of less / more than 12 kW	(cm) 65/70	65/70
For electric appliances	(cm) 65	65
Connection		
Total connected load	(W) 172	172
Radio frequency interference-suppressed	•	•

• Standard. - Not available.

¹ Special accessory.



Canopy extractor

AC 200 161

•/•

52

30

36 (housing)

8.3

A++

29.6 kWh

A

A

D

44/64

210/365/540/730

200/360/530/690

560

64/70

72/77

1

3 plus intensive

-

•/6 min.

•/6 min.

•

Cartridges

1

-

LED

2 x 1

244

4000

150/120

•/-/-/-

1

170

1

65/70

65

172

•




The cooling appliances

Overviews	314
Vario cooling 400 series: Cooling, freezing and wine	318
Planning notes Vario cooling 400 series	334
Special accessories Vario cooling 400 series	342
Vario cooling 200 series: Cooling and freezing	346
Cooling appliances 200 series	352
Planning notes Vario cooling and cooling 200 series	359
Wine	360
Accessories special accessories	368
Technical specifications	374

Overview

Vario cooling 400 series


Niche 213 cm

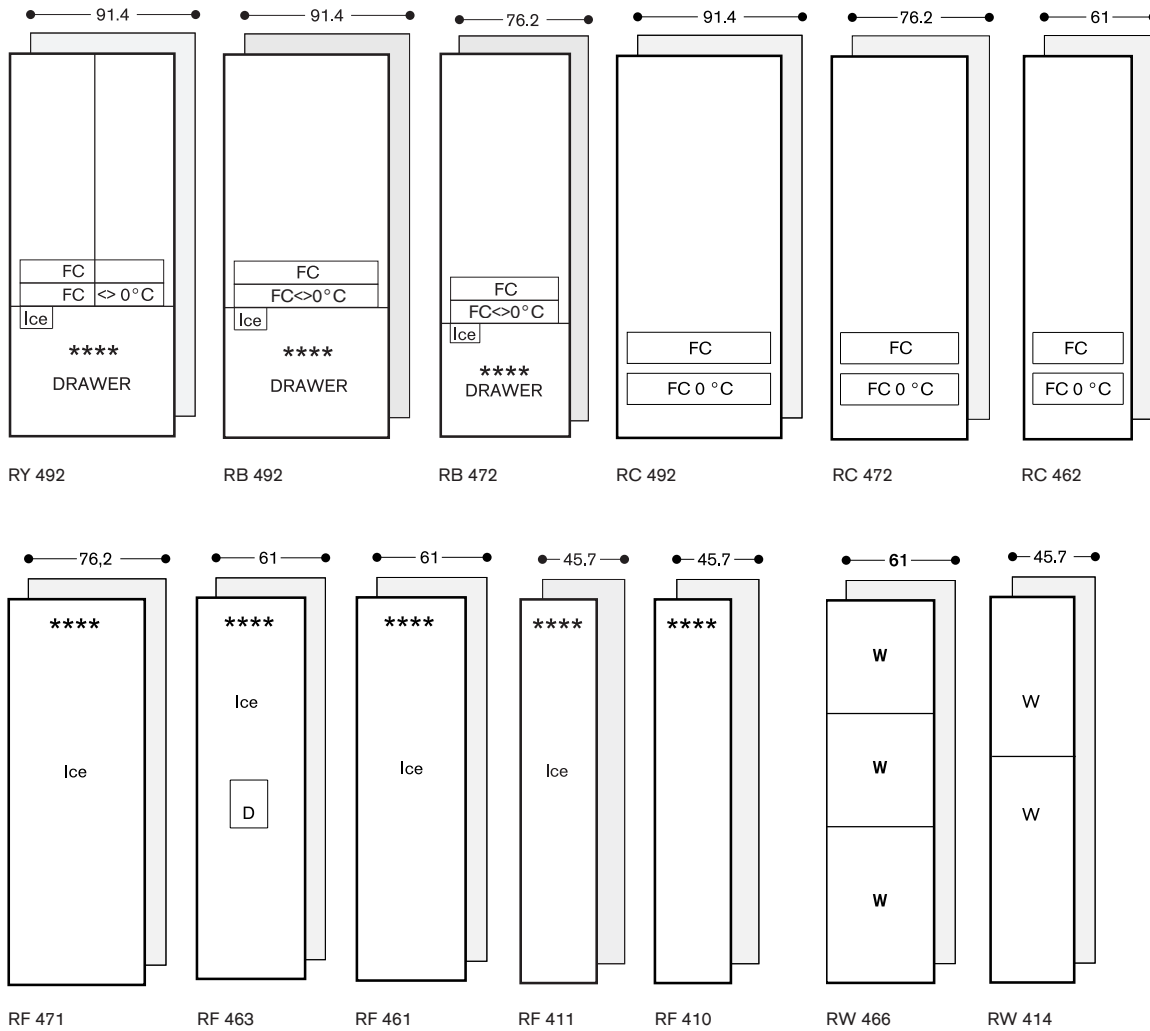

- FC: Fresh cooling
- FC <> 0°C: Fresh cooling close to 0°C
- FC 0°C: Fresh cooling 0°C
- W: Wine
- D: Ice and water dispenser
- Ice: Ice maker

Vario cooling 200 series


Niche 178 cm

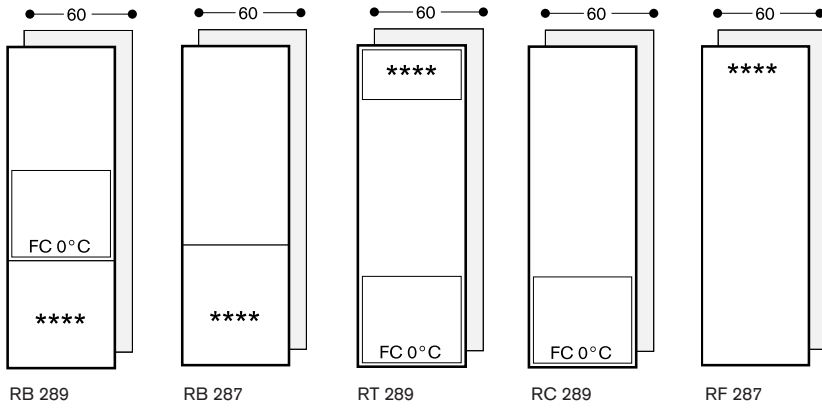


Overview

Cooling 200 series

Niche 178 cm

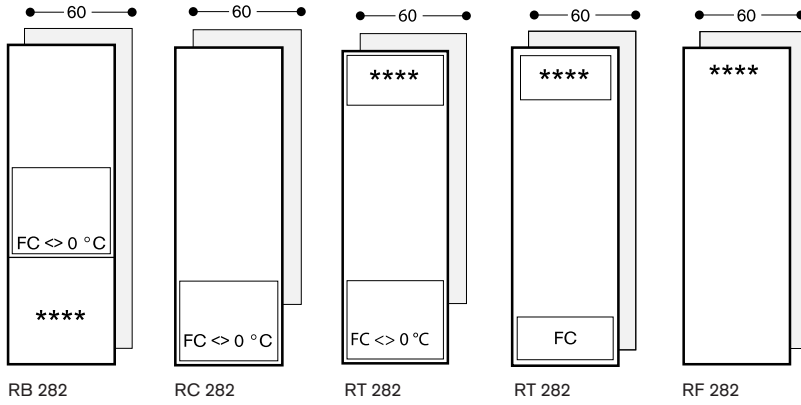


Niche 82 cm / Under-counter

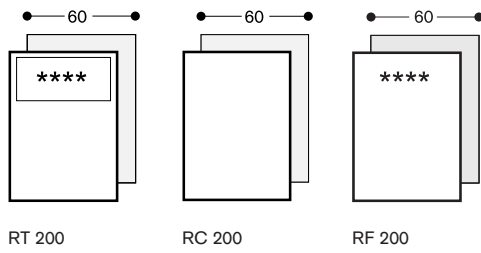


Wine climate cabinet


Niche 213 cm

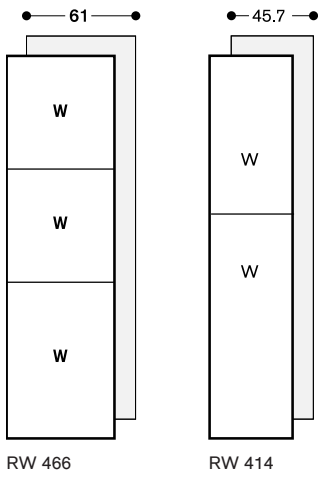


Niche 178 cm



Niche 123 cm



Niche 82 cm / Under-counter





R Y 492 305

With fresh cooling close to 0 °C
Fully integrated
Niche width 91.4 cm,
Niche height 213.4 cm
Cooling section with two doors and
one fully extendable freezing drawer

Included in the price

1 egg holder with lid
1 ice cube scoop

Installation accessories

RA 421 912

Stainless steel door panels with
handles

For RY 492, panel thickness 19 mm.

RA 423 340

Side trims, 2 pieces, for RY and RB.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount
554 mm.

RA 425 910

Handle bar, stainless steel, short
For RB/R Y 492 and R W 222,
with 2 mounts, length 810 mm, drilling
distance between the mounts 787 mm.

RA 428 912

Stainless steel door panels, handleless
For RY 492, panel thickness 19 mm.

RA 460 000

Accessory for side-by-side installation.
Not required if appliances are installed
more than 160 mm apart from each other.
Included in delivery for RF and RW.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed
with a distance greater than 16 mm and
less than 160 mm next to each other
and for all built-in situations in a very
humid environment. Not required if
appliances are installed more than
160 mm apart from each other.

RA 460 030

Connecting element for vertically split
fronts (for fridge-freezer combination).

RA 464 913

Ventilation grille stainless steel
For RB/R Y 492.

Special accessories

RA 430 100

Storage container with transparent lid,
anthracite.

RA 450 012

Activated charcoal filter for water filter
system

For RB, RY, RF.

For RF 4*1 **4 and RF 463 **4/5 from
FD 9007.

Vario fridge-freezer combination

400 series

R Y 492

- Stainless steel interior with solid anthracite aluminium elements
- Warm white and glare-free LED light spots
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- Flat stainless steel inner doors
- Almost invisible rail system for shelves and door racks for flexible positioning
- Solid anthracite aluminium door racks
- 1 fresh cooling drawer close to 0 °C with manually adjustable temperature and 1 fresh cooling drawer with manually adjustable humidity
- Integrated ice maker with fixed inlet water connection
- 1 asymmetrically split glass shelf, height adjustable
- Fully extendable freezer drawer with practical divider in anthracite
- TFT touch display
- Net volume 518 litres

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Activated charcoal air filter.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Cooling

No-Frost technology with fast cooling.
Temperature adjustable from +2 °C to +8 °C.
3 safety glass shelves, white glass, 2 of which are individually adjustable in height.
1 asymmetrically split safety glass shelf, with manual height adjustment.
4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.
Flat door rail system with fully flexible positioning of door racks.
6 height-adjustable door racks, 2 of which are extra deep.
Net volume 344 litres.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to 0 °C with transparent front, illuminated.
Cushioned closing system.
Temperature can be adjusted manually.
Ideal for meat, fish and poultry.
Net volume 34 litres.

Fresh cooling

1 fully extendable fresh cooling drawer with transparent front, illuminated.
Cushioned closing system.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.

Freezing

No-Frost technology with fast freezing at -30 °C.
Temperature adjustable from -14 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 16 kg/24 h.
Storage time after a malfunction 17 h.
2 fully extendable drawers, one of them inside. Outer drawer with synchronously running pull-out rails.
Interior lighting with 2 LED light spots, warm white light.
Net volume 140 litres.

Ice maker

Integrated in the freezer compartment, with fixed inlet water connection.
Particle filter for water inlet, integrated in ventilation grille area.
Saturation indicator shown in TFT touch display.
Can be switched off.
Ice cube production approx. 1.6 kg/24 h.
Removable ice storage container with approx. 3 kg capacity.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 346 kWh/year.
Noise level 42 dB (re 1 pW).


Planning notes

Flat hinge.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight:
Each door 67 kg.
Drawer 10 kg.
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Please read additional planning notes on page 334 – 341.

Connection

Total connected load 0.300 kW.
Connecting cable 3.0 m, pluggable.
Water inlet.
Supply hose 2.0 m with 3/4" connection.
Water pressure 2 to 8 bar.

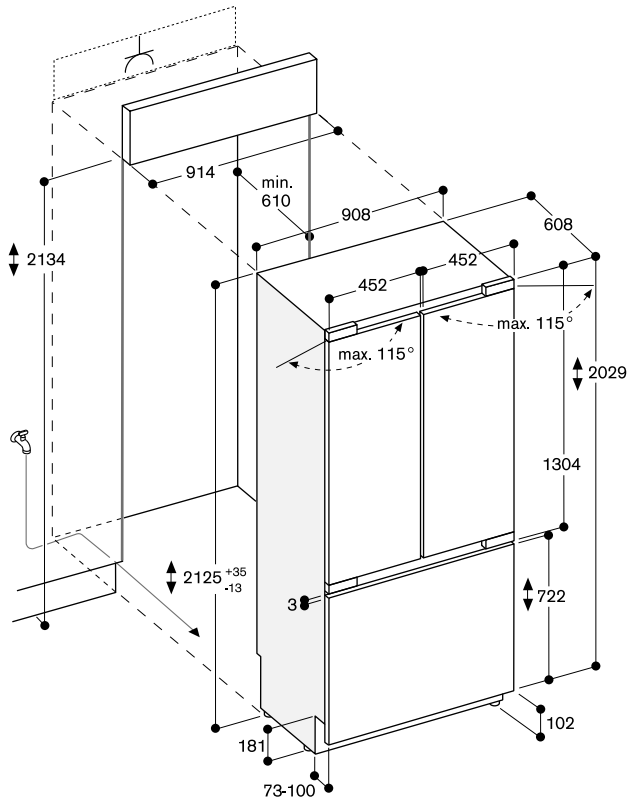

The maximum door panel dimensions are based on a clearance of 3 mm.



RB 492 305

With fresh cooling close to 0 °C
Fully integrated
Niche width 91.4 cm,
Niche height 213.4 cm
Cooling section with one door and one fully extendable freezing drawer

RB 472 305

With fresh cooling close to 0 °C
Fully integrated
Niche width 76.2 cm,
Niche height 213.4 cm
Cooling section with one door and one fully extendable freezing drawer

Included in the price

- 1 egg holder with lid
- 1 ice cube scoop

Installation accessories

RA 421 712

Stainless steel door panels with handles
For RB 472, panel thickness 19 mm.

RA 421 910

Stainless steel door panels with handles
For RB 492, panel thickness 19 mm.

RA 423 340

Side trims, 2 pieces, for RY and RB.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount 554 mm.

RA 425 710

Handle bar, stainless steel, short
For RB 472, with 2 mounts, length 658 mm, drilling distance between the mounts 637 mm.

RA 425 910

Handle bar, stainless steel, short
For RB/RY 492 and RW 222,
with 2 mounts, length 810 mm, drilling distance between the mounts 787 mm.

RA 428 712

Stainless steel door panels, handleless
For RB 472, panel thickness 19 mm.

RA 428 910

Stainless steel door panels, handleless
For RB 492, panel thickness 19 mm.

RA 460 000

Accessory for side-by-side installation.
Not required if appliances are installed more than 160 mm apart from each other.
Included in delivery for RF and RW.

Vario fridge-freezer combination 400 series

RB 492/RB 472

- Stainless steel interior with solid anthracite aluminium elements
- Warm white and glare-free LED light spots
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- Flat stainless steel inner door, full-length
- Almost invisible rail system for shelves and door racks for flexible positioning
- Solid anthracite aluminium door racks
- 1 fresh cooling drawer close to 0 °C with manually adjustable temperature and 1 fresh cooling drawer with manually adjustable humidity
- Integrated ice maker with fixed inlet water connection
- Fully extendable freezer drawer with practical divider in anthracite
- TFT touch display
- Net volume 521/418 litres

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Activated charcoal air filter.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Cooling

No-Frost technology with fast cooling.
Temperature adjustable from +2 °C to +8 °C.
3 safety glass shelves, white glass, 2 of which are individually adjustable in height.
4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.
Flat door rail system with fully flexible positioning of door racks.
3 height adjustable door racks, 1 of which is extra deep.
Net volume 381/308 litres.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed with a distance greater than 16 mm and less than 160 mm next to each other and for all built-in situations in a very humid environment. Not required if appliances are installed more than 160 mm apart from each other.

RA 460 030

Connecting element for vertically split fronts (for fridge-freezer combination).

RA 464 713

Ventilation grille stainless steel
For RB 472.

RA 464 913

Ventilation grille stainless steel
For RB/RY 492.

Special accessories

RA 430 100

Storage container with transparent lid, anthracite.

RA 450 012

Activated charcoal filter for water filter system
For RB, RY, RF.
For RF 4*1 **4 and RF 463 **4/5 from FD 9007.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to 0 °C with transparent front, illuminated.
Cushioned closing system.
Temperature can be adjusted manually.
Ideal for meat, fish and poultry.
Net volume 34/27 litres.

Fresh cooling

1 fully extendable fresh cooling drawer with transparent front, illuminated.
Cushioned closing system.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.

Freezing

No-Frost technology with fast freezing at -30 °C.
Temperature adjustable from -14 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 16/14 kg/24 h.
Storage time after a malfunction 17/17 h.
2 fully extendable drawers, one of them inside. Outer drawer with synchronously running pull-out rails.
Interior lighting with 2 LED light spots, warm white light.
Net volume 140/110 litres.

Ice maker

Integrated in the freezer compartment, with fixed inlet water connection.
Particle filter for water inlet, integrated in ventilation grille area.
Saturation indicator shown in TFT touch display.
Can be switched off.
Ice cube production approx. 1.6/1.7 kg/24 h.
Removable ice storage container with approx. 3 kg capacity.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 347/301 kWh/year.
Noise level 42 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight:
Door 41 kg.
Drawer 10 kg.
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Please read additional planning notes on page 334 – 341.

Connection

Total connected load 0.300 kW.
Connecting cable 3.0 m, pluggable.
Water inlet.
Supply hose 2.0 m with 3/4 " connection.
Water pressure 2 to 8 bar.

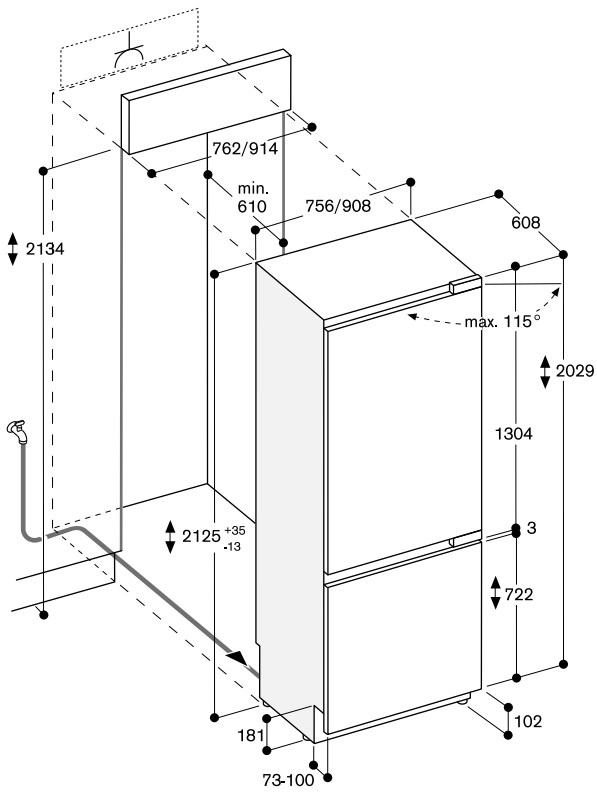

The maximum door panel dimensions are based on a clearance of 3 mm.



RC 492 305

With fresh cooling 0 °C
Fully integrated
Niche width 91.4 cm,
Niche height 213.4 cm

RC 472 305

With fresh cooling 0 °C
Fully integrated
Niche width 76.2 cm,
Niche height 213.4 cm

RC 462 305

With fresh cooling 0 °C
Fully integrated
Niche width 61 cm,
Niche height 213.4 cm

Included in the price

1 egg holder with lid

Installation accessories

RA 421 610

Stainless steel door panel with handle
For 61 cm wide appliances, panel
thickness 19 mm.

RA 421 710

Stainless steel door panel with handle
For 76.2 cm wide appliances, panel
thickness 19 mm.

RA 421 911

Stainless steel door panel with handle
For 91.4 cm wide appliances, panel
thickness 19 mm.

RA 423 140

Side trims, long.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount
554 mm.

RA 428 610

Stainless steel door panel, handleless
For 61 cm wide appliances, panel
thickness 19 mm.

RA 428 710

Stainless steel door panel, handleless
For 76.2 cm wide appliances, panel
thickness 19 mm.

RA 428 911

Stainless steel door panel, handleless
For 91.4 cm wide appliances, panel
thickness 19 mm.

RA 460 000

Accessory for side-by-side installation.
Not required if appliances are installed
more than 160 mm apart from each other.
Included in delivery for RF and RW.

Vario refrigerator 400 series

RC 492/RC 472/RC 462

- Stainless steel interior with solid anthracite aluminium elements
- Warm white and glare-free LED light spots
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level
- Flat stainless steel inner door, full-length
- Almost invisible rail system for shelves and door racks for flexible positioning
- Solid anthracite aluminium door racks
- 1 fresh cooling drawer 0 °C with temperature control from -1 °C to +3 °C and 1 fresh cooling drawer with manually adjustable humidity
- TFT touch display
- Net volume 567/463/356 litres

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Activated charcoal air filter.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Cooling

No-Frost technology with fast cooling.
Temperature adjustable from +2 °C to +8 °C.
4 safety glass shelves, white glass, 3 of which are individually adjustable in height.
1 shallow, fully extendable drawer with transparent front.
Cushioned closing system.
4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.
Flat door rail system with fully flexible positioning of door racks.
3 height adjustable door racks, 1 of which is extra deep.
Net volume 567/463/356 litres.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed with a distance greater than 16 mm and less than 160 mm next to each other and for all built-in situations in a very humid environment. Not required if appliances are installed more than 160 mm apart from each other.

RA 460 020

Connecting element for vertically split appliance fronts (for a flush front).

RA 464 611

Ventilation grille stainless steel
For 61 cm wide appliances.

RA 464 711

Ventilation grille stainless steel
For 76.2 cm wide appliances.

RA 464 911

Ventilation grille stainless steel
For 91.4 cm wide appliances.

Special accessories

RA 430 100

Storage container with transparent lid, anthracite.

Fresh cooling 0 °C

1 large, fully extendable fresh cooling 0 °C drawer with transparent front, illuminated.
Cushioned closing system.
Temperature control via central TFT display, temperature can be adjusted from -1 °C to +3 °C.
Ideal for meat, fish and poultry.
Net volume 58/47/35 litres.

Fresh cooling

1 fully extendable fresh cooling drawer with transparent front, illuminated.
Cushioned closing system.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption
151/141/131 kWh/year.
Noise level 40 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 43/24/41 kg.

Please read additional planning notes on page 334 – 341.

Connection

Total connected load 0.300 kW.
Connecting cable 3.0 m, pluggable.

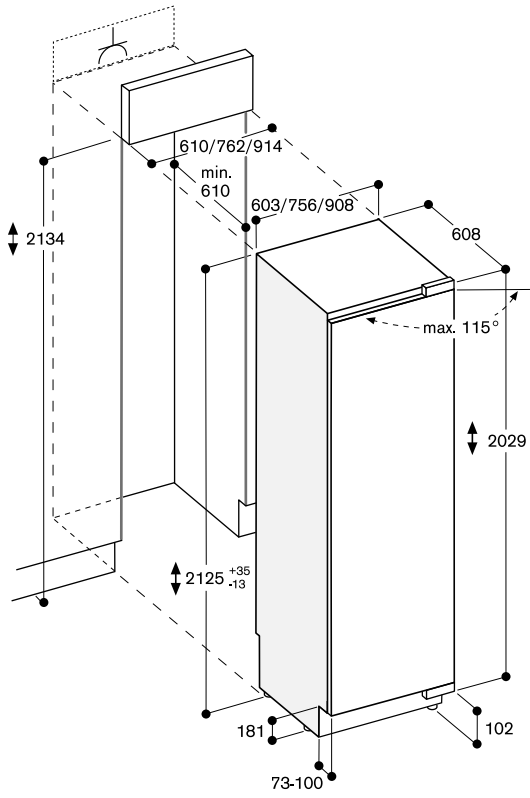

The maximum door panel dimensions are based on a clearance of 3 mm.



RF 463 306

Fully integrated, with ice and water dispenser

Niche width 61 cm,
Niche height 213.4 cm
Right-hinged

RF 463 307

Fully integrated, with ice and water dispenser

Niche width 61 cm,
Niche height 213.4 cm
Left-hinged

Included in the price

1 Accessory for side-by-side installation

Installation accessories

RA 422 610

Stainless steel door panel with handle
For RF 463, panel thickness 19 mm.

RA 423 140

Side trims, long.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount
554 mm.

RA 428 810

Stainless steel door panel, handleless
For RF 463, panel thickness 19 mm.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed
with a distance greater than 16 mm and
less than 160 mm next to each other
and for all built-in situations in a very
humid environment. Not required if
appliances are installed more than
160 mm apart from each other.

RA 460 020

Connecting element for vertically split
appliance fronts (for a flush front).

RA 464 617

Ventilation grille stainless steel
For RF 463 **4 from FD 9007 and
RF 463 **6.

RA 464 618

Ventilation grille stainless steel
For RF 463 **5 from FD 9007 and
RF 463 **7

Special accessories

RA 450 012

Activated charcoal filter for water filter
system
For RB, RY, RF.
For RF 4*1 **4 and RF 463 **4/5 from
FD 9007.

Vario freezer 400 series

RF 463

- Stainless steel interior with solid anthracite aluminium elements
- Warm white and glare-free LED light spots
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level
- Material and aesthetics of interior as for RC model
 - Glass shelves
 - Solid anthracite aluminium door racks
- Flat stainless steel inner door, full-length
- Almost invisible rail system for shelves and door racks for flexible positioning
- Ice and water dispenser in the door
- Integrated ice maker with fixed inlet water connection
- Proximity sensor for ice and water dispenser
- Illuminated dispenser for ice cubes, crushed ice and chilled water
- TFT touch display
- Net volume 300 litres

Handling

TFT touch display operation.
Clear text display.
Touch key operation for ice and water dispenser.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Freezing

No-Frost technology with fast freezing at -30 °C.
Temperature adjustable from -14 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 14 kg/24 h.
Storage time after a malfunction 10 h.
4 safety glass shelves, white glass, 2 of which are individually height adjustable.
2 fully extendable drawers with transparent front.
Brilliant LED light spots with warm white, glare-free light.

Ice and water dispenser

Warm white LED lighting.
Proximity sensor for automatic activation of light and touch keys for ice and water dispenser.
Integrated, with fixed inlet water connection.
Particle filter for water inlet, integrated in ventilation grille area.
Saturation indicator shown in TFT touch display.
Can be switched off.
Ice cube production approx. 1.4 kg/24 h.
Ice cubes and crushed ice.
Removable ice storage container with approx. 3.2 kg capacity.
Ice water supply approx. 1.5 litres.

Consumption data

Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.
Energy consumption 343 kWh/year.
Noise level 42 dB (re 1 pW).


Planning notes

Flat hinge.
Door opening angle of 115°, fixable at 90°.
For an installation with a door opening angle of 90°, the drawers have a restricted access.
Max. door panel weight 67 kg.
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Please read additional planning notes on page 334 – 341.

Connection

Total connected load 0.300 kW.
Connecting cable 3.0 m, pluggable.
Water inlet.
Supply hose 2.0 m with 3/4" connection.
Water pressure 2 to 8 bar.

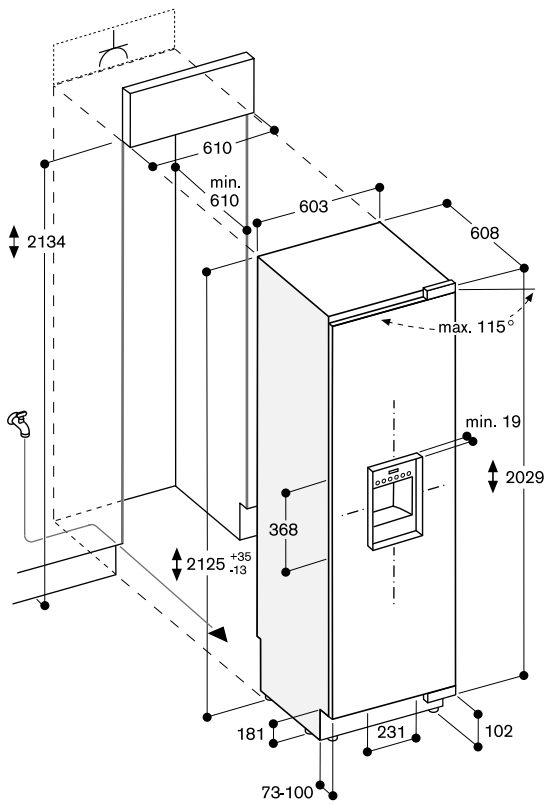

The maximum door panel dimensions are based on a clearance of 3 mm.



RF 471 305

Fully integrated, with ice maker
Niche width 76.2 cm,
Niche height 213.4 cm

RF 461 305

Fully integrated, with ice maker
Niche width 61 cm,
Niche height 213.4 cm

RF 411 305

Fully integrated, with ice maker
Niche width 45.7 cm,
Niche height 213.4 cm

Included in the price

- 1 ice cube scoop
- 1 Accessory for side-by-side installation
- 1 Ice storage container, small
- 1 Ice storage container, large

Installation accessories

RA 421 110

Stainless steel door panel with handle
For 45.7 cm wide appliances, panel thickness 19 mm.

RA 421 610

Stainless steel door panel with handle
For 61 cm wide appliances, panel thickness 19 mm.

RA 421 710

Stainless steel door panel with handle
For 76.2 cm wide appliances, panel thickness 19 mm.

RA 423 140

Side trims, long.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount 554 mm.

RA 428 110

Stainless steel door panel, handleless
For 45.7 cm wide appliances, panel thickness 19 mm.

RA 428 610

Stainless steel door panel, handleless
For 61 cm wide appliances, panel thickness 19 mm.

RA 428 710

Stainless steel door panel, handleless
For 76.2 cm wide appliances, panel thickness 19 mm.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed with a distance greater than 16 mm and less than 160 mm next to each other and for all built-in situations in a very humid environment. Not required if appliances are installed more than 160 mm apart from each other.

Vario freezer 400 series

RF 471/RF 461/RF 411

- Stainless steel interior with solid anthracite aluminium elements
- Warm white and glare-free LED light spots
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level
- Material and aesthetics of interior as for RC model
 - Glass shelves
 - Solid anthracite aluminium door racks
- Flat stainless steel inner door, full-length
- Almost invisible rail system for shelves and door racks for flexible positioning
- Integrated ice maker with fixed inlet water connection
- TFT touch display
- Net volume 429/328/226 litres

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Freezing

No-Frost technology with fast freezing at -30 °C.
Temperature adjustable from -14 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 20/18/16 kg/24 h.
Storage time after a malfunction 14/13/10 h.
4 safety glass shelves, white glass, 3 of which are individually height adjustable.
2 fully extendable drawers with transparent front.
Brilliant LED light spots with warm white, glare-free light.
Flat door rail system with fully flexible positioning of door racks.
4 height-adjustable door racks.

RA 460 020

Connecting element for vertically split appliance fronts (for a flush front).

RA 464 113

Ventilation grille stainless steel
For RF 411 **4 from FD 9007 and RF 411 **5.

RA 464 616

Ventilation grille stainless steel
For RF 461 **4 from FD 9007 and RF 461 **5.

RA 464 714

Ventilation grille stainless steel
For RF 471 **4 from FD 9007 and RF 471 **5.

Special accessories

RA 450 012

Activated charcoal filter for water filter system
For RB, RY, RF.
For RF 4*1 **4 and RF 463 **4/5 from FD 9007.

Ice maker

Integrated in the freezer compartment, with fixed inlet water connection.
Particle filter for water inlet, integrated in ventilation grille area.
Saturation indicator shown in TFT touch display.
Can be switched off.
Ice cube production approx. 1.7/1.5/1.4 kg/24 h.
Removable ice storage container with approx. 4 kg capacity.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 340/284/253 kWh/year.
Noise level 42 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge left, reversible.
Door opening angle of 115°, fixable at 90°.
In case of door opening angle of 90° the standard ice storage container cannot be removed.
A small ice storage container (RA 448 220) is available to ensure access. This change must be done prior to fixing the door.
Max. door panel weight 25/41/59 kg.
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Please read additional planning notes on page 334 – 341.

Connection

Total connected load 0.300 kW.
Connecting cable 3.0 m, pluggable.
Water inlet.
Supply hose 2.0 m with 3/4 " connection.
Water pressure 2 to 8 bar.

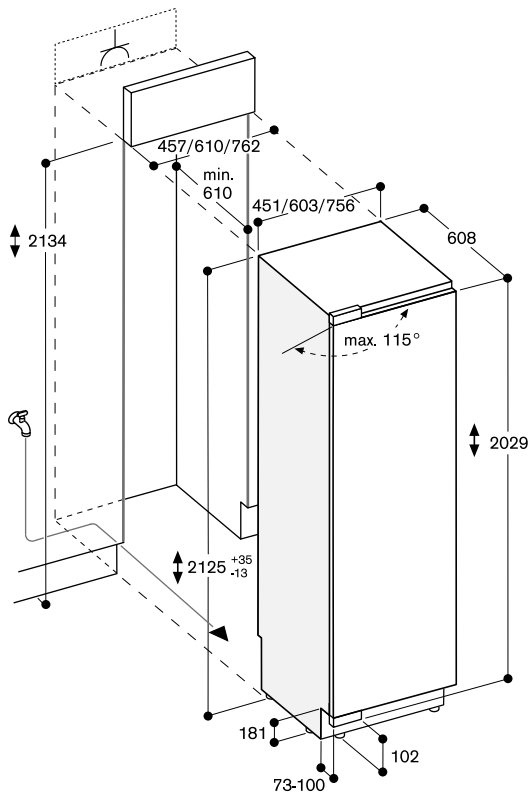

The maximum door panel dimensions are based on a clearance of 3 mm.



RF 410 304

Fully integrated

Niche width 45.7 cm,

Niche height 213.4 cm

Included in the price

- 1 Accessory for side-by-side installation
-

Installation accessories

RA 421 110

Stainless steel door panel with handle
For 45.7 cm wide appliances, panel thickness 19 mm.

RA 423 140

Side trims, long.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm, drilling distance between each mount 554 mm.

RA 428 110

Stainless steel door panel, handleless
For 45.7 cm wide appliances, panel thickness 19 mm.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed with a distance greater than 16 mm and less than 160 mm next to each other and for all built-in situations in a very humid environment. Not required if appliances are installed more than 160 mm apart from each other.

RA 460 020

Connecting element for vertically split appliance fronts (for a flush front).

RA 464 111

Ventilation grille stainless steel
For 45.7 cm wide appliances.

Vario freezer 400 series

RF 410

- Stainless steel interior with solid anthracite aluminium elements
- Warm white and glare-free LED light spots
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- The drawers in the RC and RF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level
- Material and aesthetics of interior as for RC model
 - Glass shelves
 - Solid anthracite aluminium door racks
- Flat stainless steel inner door, full-length
- Almost invisible rail system for shelves and door racks for flexible positioning
- TFT touch display
- Net volume 237 litres

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Freezing

No-Frost technology with fast freezing at -30 °C.
Temperature adjustable from -14 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 16 kg/24 h.
Storage time after a malfunction 10 h.
4 safety glass shelves, white glass, 4 of which are individually height adjustable.
2 fully extendable drawers with transparent front.
Brilliant LED light spots with warm white, glare-free light.
Flat door rail system with fully flexible positioning of door racks.
4 height-adjustable door racks.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.

Energy consumption 260 kWh/year.

Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.

Door hinge left, reversible.

Door opening angle of 115°, fixable at 90°.

For an installation with a door opening angle of 90°, the drawers have a restricted access.


Max. door panel weight 59 kg.

Please read additional planning notes on page 334 – 341.

Connection

Total connected load 0.300 kW.

Connecting cable 3.0 m, pluggable.

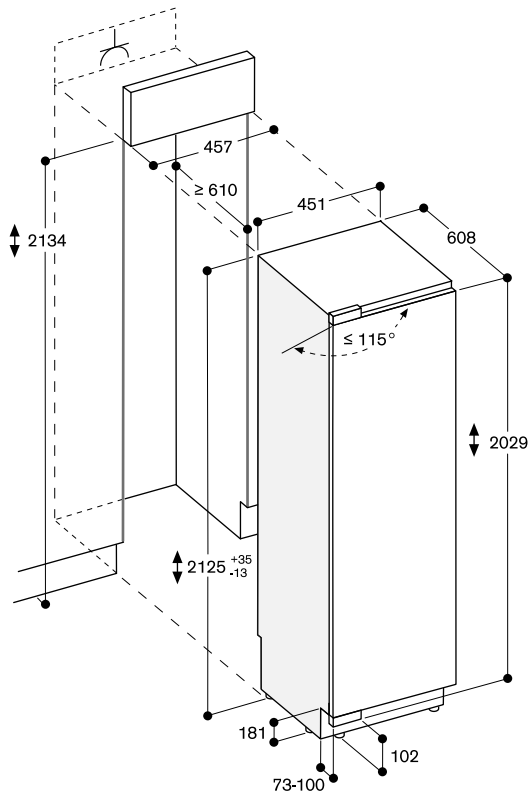

The maximum door panel dimensions are based on a clearance of 3 mm.
measurements in mm



RW 466 365

Fully integrated, with glass door
Niche width 61 cm,
Niche height 213.4 cm

RW 466 305

Fully integrated, with solid door
Niche width 61 cm,
Niche height 213.4 cm

Included in the price

1 Accessory for side-by-side
installation

Installation accessories

RA 420 010

Door lock for RW 414,
RW 464 and RW 466.

RA 421 610

Stainless steel door panel with handle
For 61 cm wide appliances, panel
thickness 19 mm.

RA 421 611

Stainless steel door panel frame with
handle
For 61 cm wide appliances, left-hinged,
panel thickness 19 mm.

RA 421 612

Stainless steel door panel frame with
handle
For 61 cm wide appliances,
right-hinged, panel thickness 19 mm.

RA 423 140

Side trims, long.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount
554 mm.

RA 428 610

Stainless steel door panel, handleless
For 61 cm wide appliances, panel
thickness 19 mm.

RA 428 611

Stainless steel door panel frame,
handleless
For 61 cm wide appliances, panel
thickness 19 mm.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed
with a distance greater than 16 mm and
less than 160 mm next to each other
and for all built-in situations in a very
humid environment. Not required if
appliances are installed more than
160 mm apart from each other.

RA 460 020

Connecting element for vertically split
appliance fronts (for a flush front).

RA 464 611

Ventilation grille stainless steel
For 61 cm wide appliances.

Vario wine climate cabinet 400 series

RW 466

- 3 independently controllable climate zones
- Consistent temperatures with exact control from +5 °C to +20 °C
- Humidity control
- Stainless steel interior
- Fully extendable bottle trays in oak wood and solid aluminium in anthracite
- Bottle trays with hidden telescopic rails
- Warm white and glare-free LED light spots
- 5 preset lighting scenarios, selectable via TFT display
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- Low-vibration operation
- TFT touch display
- Capacity 99 bottles

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Activated charcoal air filter.
UV-protection.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Features

Capacity 99 bottles
(based on 0.75/l standard bottles).
12 bottle trays,
- 9 fully extendable trays
- 3 suitable for storage of Magnum bottles.
Flexible interior configuration possible by adding or removing fully extendable bottle trays.
Storage of up to 12 Magnum bottles with standard tray configuration (12 bottle trays).
Space for max. 12 bottle trays.
2 brilliant LED light spots with warm white, glare-free light in each climate zone.
5 different lighting scenarios can be selected for individual wine presentation.
Net volume 361 litres.

Special accessories

RA 430 000

Screw hole cover set. 8 pieces.

RA 491 661

Fully extendable bottle trays with hidden telescopic rails in oak wood and solid aluminium in anthracite
For 61 cm wide appliances.

RA 492 660

Removable shelf with oak wood frame
Suitable for decanters and open bottles.

For 61 cm wide appliances.

RA 493 060

Presenter in oak wood and aluminium in anthracite for single bottle display
1 piece.

RA 498 640

Bottle support in oak wood for convenient storage of bottles on the division plate.

For 61 cm wide appliances.

Consumption data

Energy efficiency class A/A+ at a range of energy efficiency classes from A+++ to G.

Energy consumption 171/130 kWh/year.
Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight 73 kg.

The mains socket needs to be planned outside the built-in niche.


No transport/operation above 2000 m sea level.

Please read additional planning notes on page 334 – 341.


Connection

Total connected load 0.300 kW.

Connecting cable 3.0 m, pluggable.

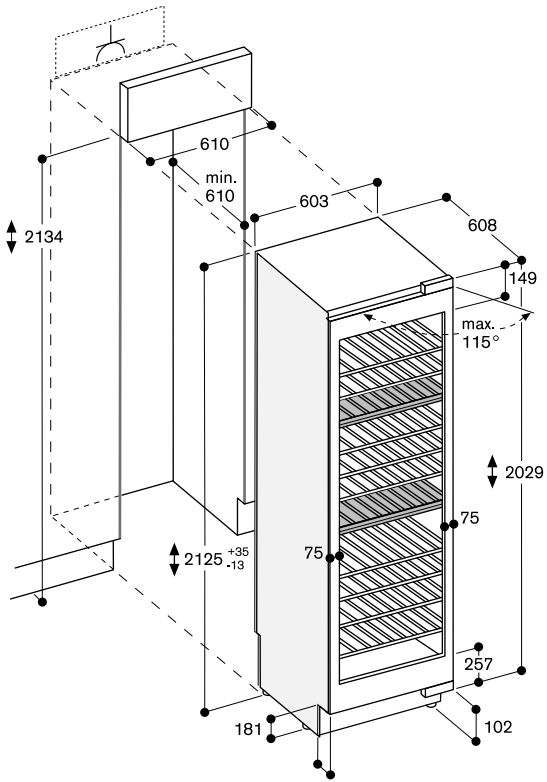


The maximum door panel dimensions are based on a clearance of 3 mm.

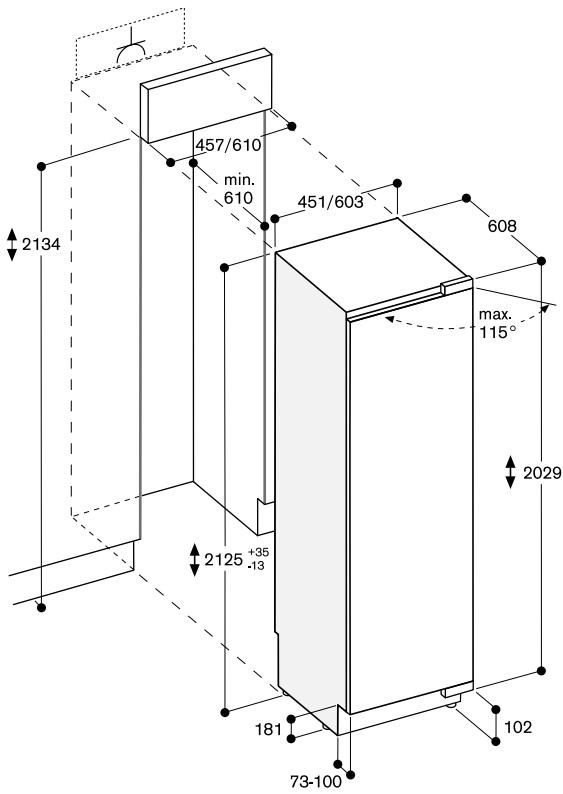

The maximum door panel dimensions are based on a clearance of 3 mm.

Bottle storage

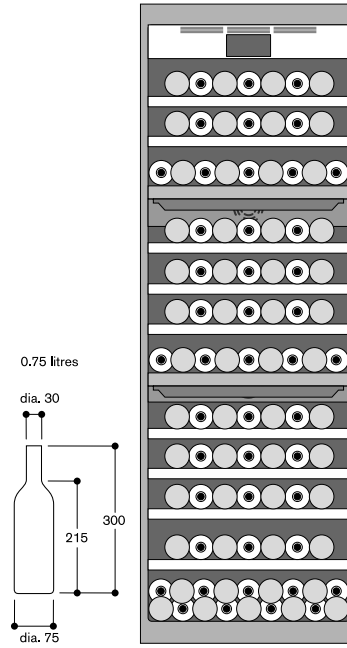



RW 414 365

Fully integrated, with glass door
Niche width 45.7 cm,
Niche height 213.4 cm

RW 414 305

Fully integrated, with solid door
Niche width 45.7 cm,
Niche height 213.4 cm

Included in the price

1 Accessory for side-by-side
installation

Installation accessories

RA 420 010

Door lock for RW 414,
RW 464 and RW 466.

RA 421 110

Stainless steel door panel with handle
For 45.7 cm wide appliances, panel
thickness 19 mm.

RA 421 111

Stainless steel door panel frame with
handle
For 45.7 cm wide appliances,
left-hinged, panel thickness 19 mm.

RA 421 112

Stainless steel door panel frame with
handle
For 45.7 cm wide appliances,
right-hinged, panel thickness 19 mm.

RA 423 140

Side trims, long.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount
554 mm.

RA 428 110

Stainless steel door panel, handleless
For 45.7 cm wide appliances, panel
thickness 19 mm.

RA 428 111

Stainless steel door panel frame,
handleless
For 45.7 cm wide appliances, panel
thickness 19 mm.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed
with a distance greater than 16 mm and
less than 160 mm next to each other
and for all built-in situations in a very
humid environment. Not required if
appliances are installed more than
160 mm apart from each other.

RA 460 020

Connecting element for vertically split
appliance fronts (for a flush front).

RA 464 111

Ventilation grille stainless steel
For 45.7 cm wide appliances.

Vario wine climate cabinet 400 series

RW 414

- 2 independently controllable
climate zones
- Consistent temperatures with exact
control from +5 °C to +20 °C
- Humidity control
- Stainless steel interior
- Fully extendable bottle trays in oak
wood and solid aluminium in
anthracite
- Bottle trays with hidden telescopic
rails
- Warm white and glare-free LED
light spots
- 5 preset lighting scenarios,
selectable via TFT display
- Opening assist for door with two
options:
 1. Push-to-open function for
integration into handleless furniture
front
 2. Pull-to-open function to facilitate
opening the door using a handle
- Low-vibration operation
- TFT touch display
- Capacity 70 bottles

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water
evaporation.
Cushioned door closing system.
Activated charcoal air filter.
UV-protection.
Rest mode certified by Star-K.
When rest mode is active, the appliance
can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital
services (Home Connect) wireless via
WiFi.

The use of the Home Connect
functionality depends on the Home
Connect services, which are not
available in every country. For further
information please check:
home-connect.com.

Please read additional information on
Home Connect on page 420.

Features

Capacity 70 bottles
(based on 0.75/l standard bottles).
12 bottle trays,
- 10 fully extendable trays
- 3 suitable for storage of Magnum
bottles.
Flexible interior configuration possible
by adding or removing fully extendable
bottle trays.
Storage of up to 6 Magnum bottles
with standard tray configuration
(12 bottle trays).
Space for max. 13 bottle trays.
2 brilliant LED light spots with warm
white, glare-free light in each climate
zone.
5 different lighting scenarios can be
selected for individual wine
presentation.
Net volume 263 litres.

Special accessories

RA 430 000

Screw hole cover set. 8 pieces.

RA 491 161

Fully extendable bottle trays with
hidden telescopic rails in oak wood
and solid aluminium in anthracite
For 45.7 cm wide appliances.

RA 492 160

Removable shelf with oak wood frame
Suitable for decanters and open
bottles.

For 45.7 cm wide appliances.

RA 493 060

Presenter in oak wood and aluminium
in anthracite for single bottle display
1 piece.

RA 498 140

Bottle support in oak wood for
convenient storage of bottles on the
divison plate.

For 45.7 cm wide appliances.

Consumption data

Energy efficiency class A/A+ at a
range of energy efficiency classes from
A+++ to G.

Energy consumption 167/127 kWh/year.
Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°,
fixable at 90°.

Max. door panel weight 76 kg.

The mains socket needs to be planned
outside the built-in niche.


No transport/operation above
2000 m sea level.

Please read additional planning notes
on page 334 – 341.


Connection

Total connected load 0.300 kW.

Connecting cable 3.0 m, pluggable.

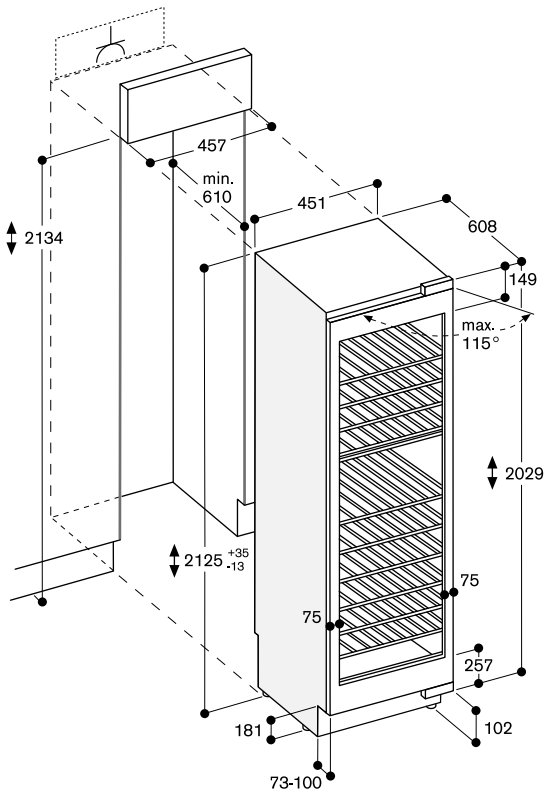


The maximum door panel dimensions are based on a clearance of 3 mm.

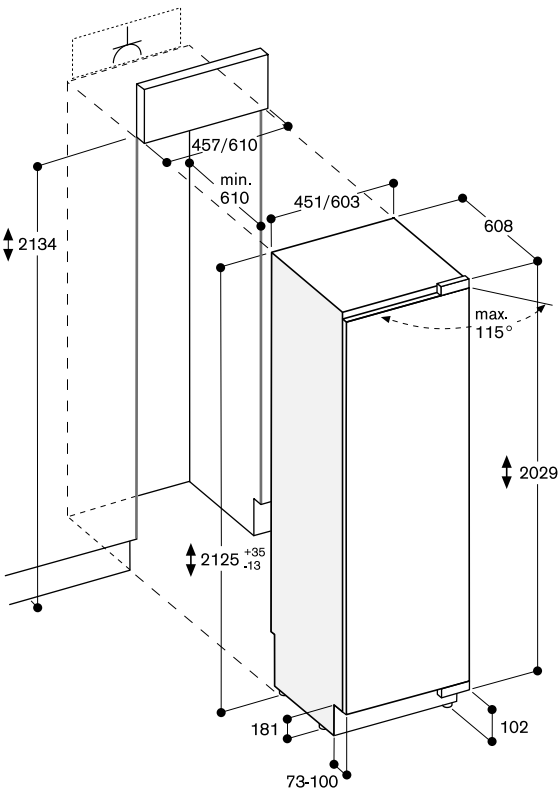

The maximum door panel dimensions are based on a clearance of 3 mm.

Bottle storage

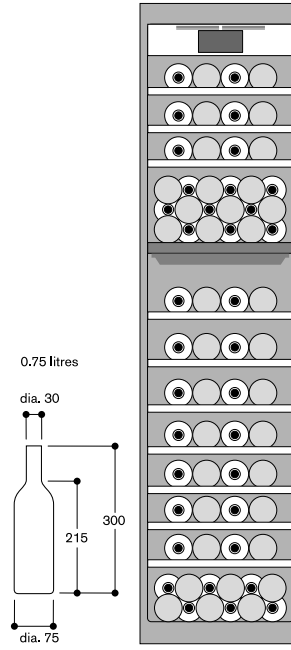

Additional planning notes for Vario cooling 400 series

The side walls of the adjacent cabinetry have to be dimensionally stable, as the Vario cooling appliances are secured in the niche with only an anti-tilt bracket on the top back and on the bottom at the side.

Vario cooling appliances can be installed handle to handle as a side-by-side combination. In this case the side-by-side installation kit RA 460 000 is required. If the distance between the appliances is greater than 16 mm or less than 160 mm or the environment very humid the additional side heating element RA 460 013 needs to be installed between the appliances to avoid condensation.

If the appliances are combined hinge to handle in a very humid environment the additional side heating element RA 460 013 is required as well. It can be omitted if the distance between the appliances is greater than 160 mm. The additional side heating element RA 460 013 does not take up any additional space. It is already included in the niche dimensions.

If the Vario cooling appliances are joined together hinge to hinge an additional stable side wall must be foreseen.

If restrictions in use are accepted (no simultaneous opening of the doors possible) the appliances can be joined together directly, using the side-by-side installation accessory RA 460 000.

When installing a Vario cooling appliance from the 400 series handleless next to a BO/BM/BS/CM from the oven 400 series, a minimum lateral distance of 30 mm is required, if the door of the Vario cooling appliance opens towards the BO/BM/BS/CM. When installing a Vario cooling appliance from the 400 series next to a BO/BM/BS from the ovens 400 series, a lateral distance of 60 mm is required, if the BO/BM/BS retrofitted handle is on the same side as the Vario cooling appliance door hinge. For the same installation next to a BOP/BMP/BSP from the ovens 200 series, a distance of 40 mm is required.


Door opening angle

To ensure correct kitchen planning it is essential to take into account the opening angle of the appliance door (plus fitted cabinet door and handle). There should be no possibility of collision with other kitchen furnishings (worktops, handles of other cabinetry etc.) or parts of the room (walls, protrusions etc.).

The space needed for the hinge and the consequential distance to the adjacent cabinetry and its handle can, depending on the panel thickness, be seen in the following drawing. The drawing assumes a panel thickness of 19 mm.


If a collision occurs, the following options are available to remedy the situation: Restrict the door opening angle to 90° (standard 115°). Pin to restrict the angle is enclosed with the appliance. Due to limitation in use, it is not recommended to install a freezer (RF 411, RF 461, RF 463, RF 471) next to a wall which requires a door angle of 90° or any other installation which require a 90° door angle. If the restrictions in use are accepted, the ice storage container must be exchanged for the small ice storage container (RA 448 220). This must be done prior fixing the door.

Fit a spacer between the appliance and the cabinetry that it would collide with. Rearrange surrounding cabinetry or appliance.

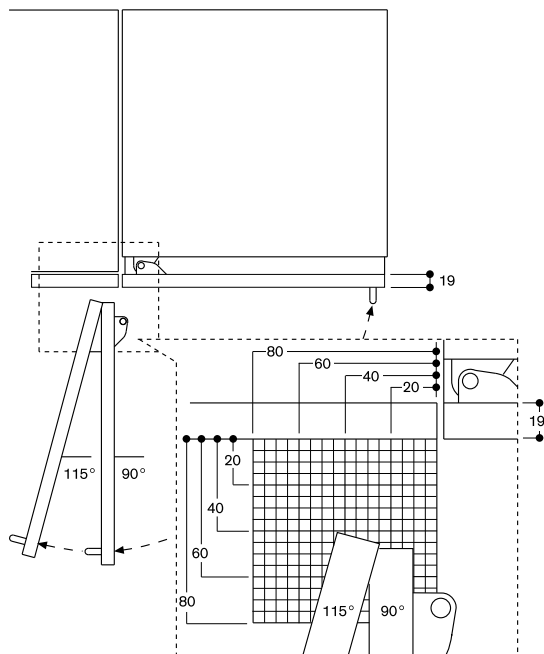


The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

Wall clearance RB 492/RV 492

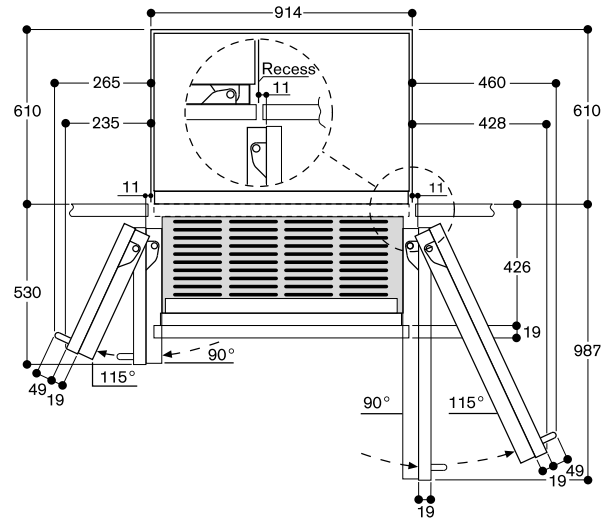

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

Wall clearance RB 472/RC/RF/RW

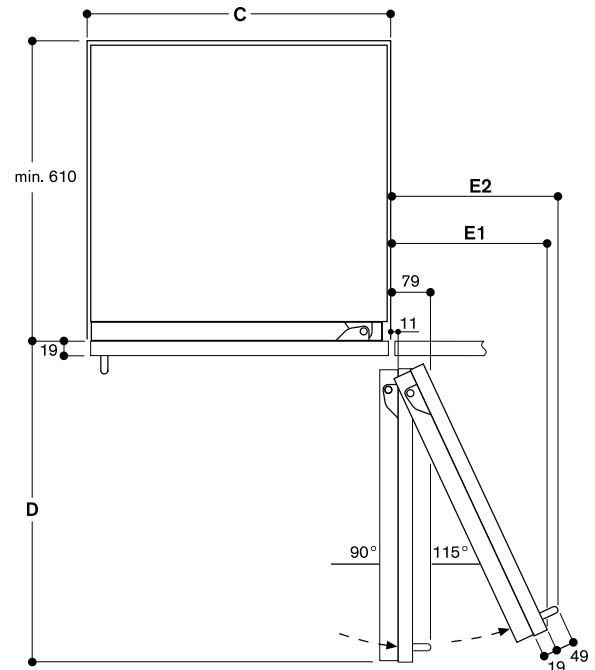

Recess width	D	E1	E2
C			
457 mm	525 mm	235 mm	265 mm
610 mm	677 mm	299 mm	330 mm
762 mm	830 mm	364 mm	395 mm
914 mm	980 mm	428 mm	460 mm

In the drawing, a unit front thickness of 19 mm and a Gaggenau unit handle of 49 mm were taken as a basis.

Notes:


- The adjustable feet have an adjustment range of +35 mm to -13 mm. The standard height displayed in the pictures is 0 mm.
- For proper ventilation of the appliance, the clearance between the floor and bottom edge of the cabinet front must be at least 100 mm.
- The panel thickness of customised doors can range from between 19 mm and 38 mm (in the picture 19 mm).

Unlike conventional built-in appliances, Vario cooling appliances stand on the floor. This means that the installation niche is a space in a line of kitchen units.

Installation niche

The specified dimensions of the installation niche must be observed to guarantee the proper installation of the appliance and the design of the cabinet front. It is particularly important that the installation niche is square. The side walls must be smooth, not have any protrusions or unevenness. Use the appropriate tools, e.g. spirit level, diagonal measurements, etc. to determine whether the installation niche is square. The side walls and the crown of the installation niche must be at least 16 mm thick.

Installation niche for an individual appliance:

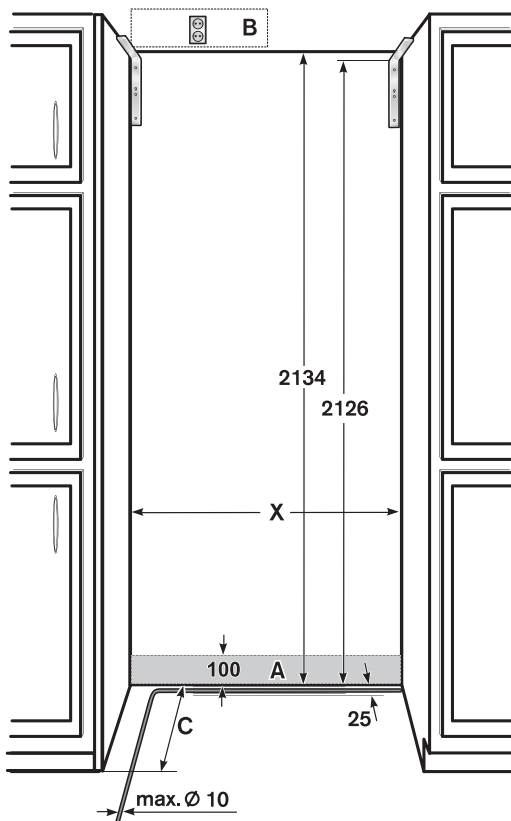

- A Area for installation the water connection
- B Area for installation the electrical connection must be outside the niche
- C Depth of installation niche, depending on kitchen design.
C = 610 mm minimum!
- X Width of installation niche, refer to the table below for more details:

Appliance type	Width of the niche X
451 mm	457 mm
603 mm	610 mm
756 mm	762 mm
908 mm	914 mm

Installation niche for a side-by-side solution:

In a side-by-side solution, there are many ways to combine the appliances. The width of the installation niche is calculated from the sum of the widths of the individual appliances. The height and depth of the installation niche correspond to the specifications for the individual appliances. It is important to comply with the dimensions in the area set aside for electric and water connections. For the precise dimensions, please refer to the details given for individual appliances.

Location

The appliance should be installed in a dry, well ventilated room. The location of the appliance should not be subject to direct sunlight or near a source of heat, such as a cooker, a radiator, etc. If installation next to a heat source is unavoidable or observe the following minimum distances from the heat source:

- 3 cm to electric or gas cookers.
- 3 cm to electric or gas ovens.
- 30 cm to an oil-fired or solid-fuel cooker.

The floor of the installation location must not give way; if required, reinforce floor. To ensure that the ice maker functions correctly, the appliance must be upright.

Surface

To ensure that the appliance is installed securely and functions properly, the surface must be level and even. The floor must consist of a hard, rigid material. The floor in the installation area must have the same height as the floor in the rest of the room. Due to the heavy weight of a fully loaded appliance, the floor beneath must be stable. If in doubt, consult an architect, structural engineer or construction expert.

Neighbouring cabinetry

The new appliance is screwed firmly in place with the neighbouring cabinet parts. Care should be taken to ensure that all cupboards onto which something is fastened, are connected firmly to the floor or the wall. The thickness of the plinth can be a maximum 19 mm.

Base area | Crown of the niche

Base area

Important!


Poor ventilation leads to damage to the appliance!
Under no circumstances is it permitted to cover the air inlets and the exhaust air outlets of the appliance in the lower base area. You must observe the minimum distance of 100 mm between the upper edge of the floor and the bottom edge of the cabinet door of the appliance. Take this into consideration also when adjusting the appliance feet.

In relation to the standard height, the maximum height of the base board is 102 mm. The plinth can be maximum 19 mm thick.

Adhesive connectors are supplied on the front panel of the appliance for fitting the base board.

The air inlets and the exhaust air outlets of the appliance are located above the base board. They must not be covered.

Base detail

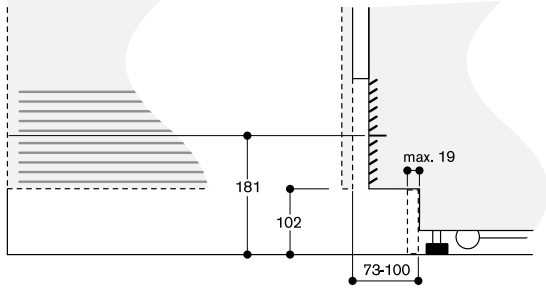

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.

For design reasons, it may be necessary to increase the distance between the upper edge of the floor and the bottom edge of the cabinet door of the appliance, so that it extends beyond the standard dimension of 102 mm. The maximum dimension is 181 mm. If this is the case, air inlets and exhaust air outlets would become visible!

Crown


The height of the cabinet door on the appliance is dependent on:

- the overall height of the appliance,
- the distance from the bottom edge of the cabinet door to the floor,
- the appliance type (one-door or multi-door appliances).

The overall height of the appliance is 2.029 mm.

The height can be adjusted within a range of -13 mm to +35 mm. You must observe the minimum distance of 100 mm between the upper edge of the floor and the bottom edge of the cabinet door of the appliance.

This height can vary depending on the conditions at the site. It is possible, e.g. for design reasons, to lengthen the cabinet door upwards by extending it beyond the top of the appliance.

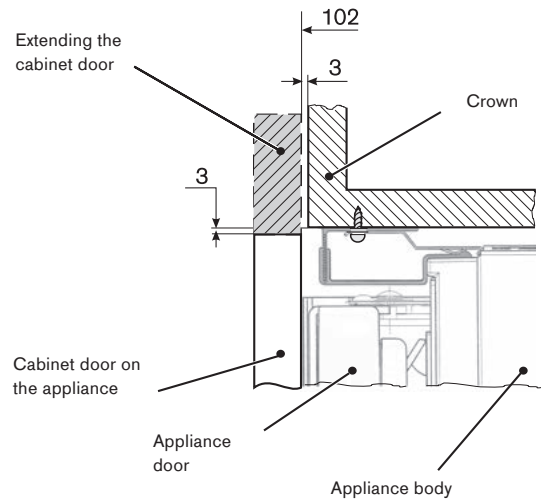

Important!

It must be ensured that the crown of the installation niche always has a depth of at least 100 mm (measured from the front edge of the appliance). Only then can the secure installation of the appliance in the installation niche be guaranteed.

The cabinetry, the height of the base board, the overall height of the kitchen and other determining dimensions of the kitchen must be taken into account, in order to plan the exact positioning of the cabinet door so that the appliance integrates perfectly into the overall picture of the kitchen.

The following diagrams show the basic dimensions of the special accessories door fronts/door front frames for various appliances.

The dimensions of the doors shown are designed for the following basic specifications:

- Height of the base board: 102 mm
- Overall height of the installation niche: 2.134 mm
- Gap: 3 mm
- Panel thickness: 19 mm


These specifications provide you with a good starting point for a variety of kitchen designs.

When designing a customised cabinet door, please ensure that the back of the cabinet door is visible to a height of 205 mm over the floor when opening the appliance door and adapt to the front design. All diagrams are also valid for doors without handle.

Important!


The following diagrams are not a substitute for detailed designs. Compliance with specified requirements relating to kitchen design is essential.

Recess width 45.7 cm

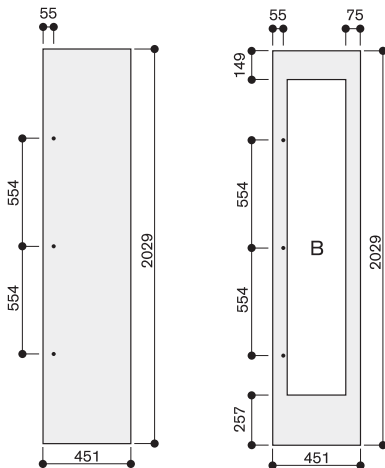


The door panel thickness is 19 mm.
The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.
B: Width of the side frame parts of the door panel can be between 65 mm and 82 mm.

Appliance width 91.4 cm

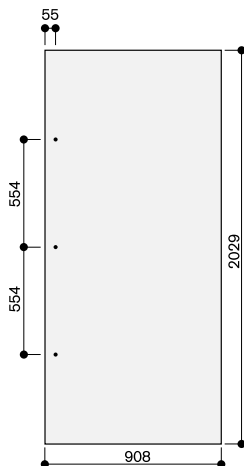


The door panel thickness is 19 mm.
The maximum door panel dimensions are based on a clearance of 3mm, based on a single recess.

Recess width 61 cm

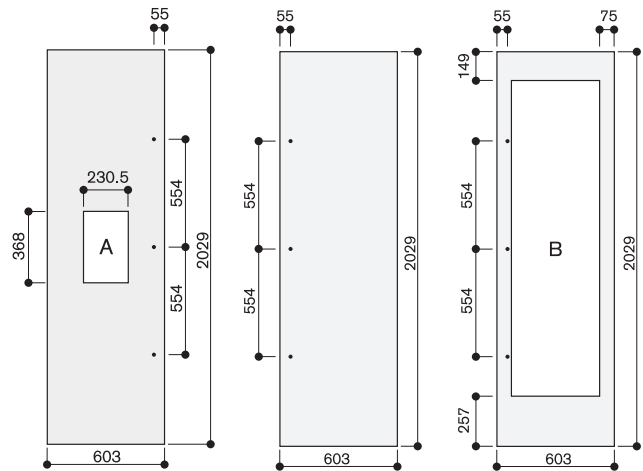


The door panel thickness is 19 mm.
The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.
A: The cut-out for the ice and water dispenser is designed so that it is horizontally and vertically centred.
B: Width of the side frame parts of the door panel can be between 65 mm and 82 mm.

Recess width 76.2 cm

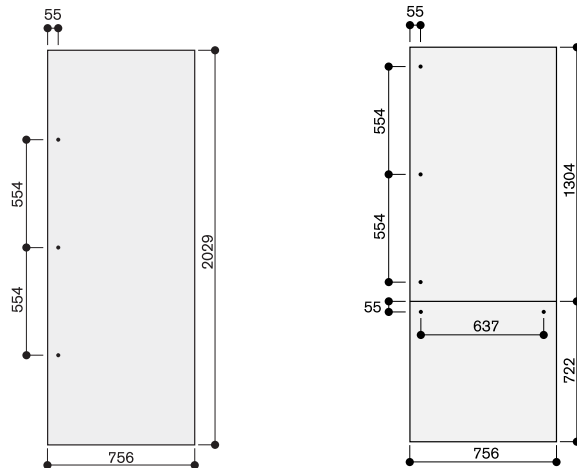


The door panel thickness is 19 mm.
The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.

Recess width 91.4 cm

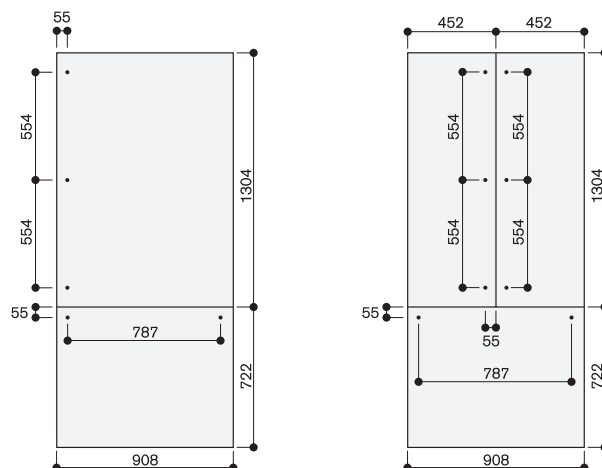


The door panel thickness is 19 mm.
The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.

Planning principle for an individual appliance

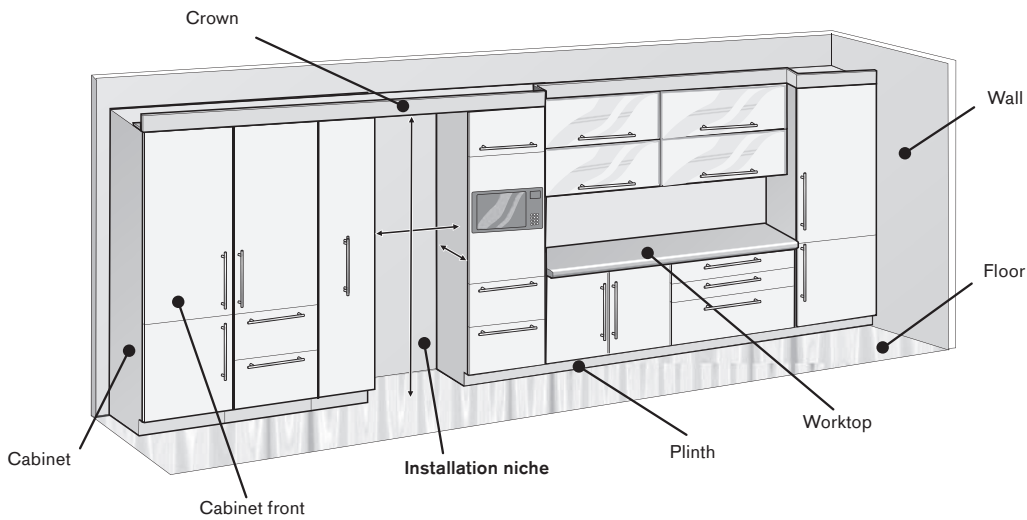

Vertical cut Installation niche

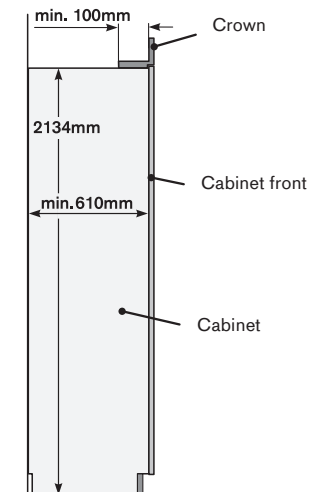

Installation niche for an individual cooling appliance (example: 762 mm wide)

In this example, the installation niche is formed by two tall cupboards (left and right) with an appropriate crown to the niche.


The cabinet door for the appliance comes in an identical design to the other kitchen fronts.


Requirements for the installation niche:

- The side walls of the installation niche must be completely even and flat along their entire depth
- Crown is at least 100 mm deep and made of a solid material (min. 16 mm thick)
- Width of the installation niche: 762 mm
- Depth of the installation niche: min. 610 mm


The side walls of the installation niche must be completely even and flat along their entire depth.

Horizontal cut Installation niche

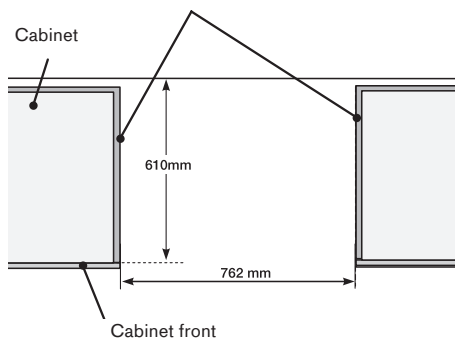

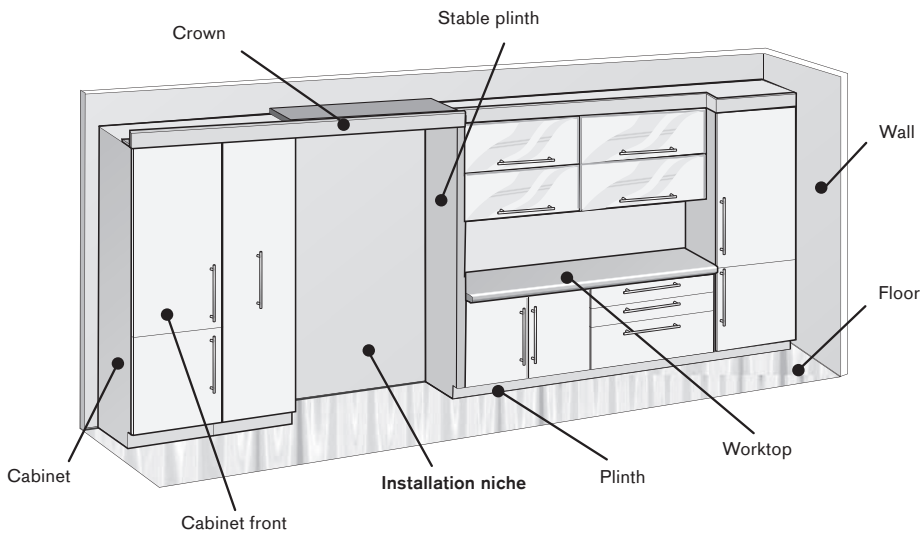

Vertical cut Installation niche

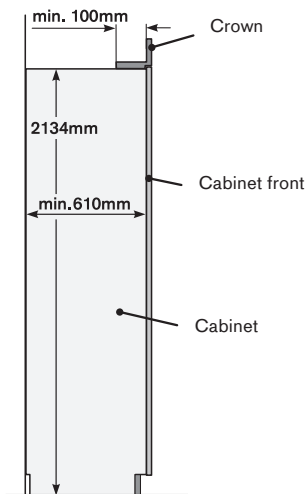

Installation niche for a side-by-side solution

- 610 mm cooling appliance (right)
- 457 mm freezer (left)

In this example, the installation niche is formed by a tall cupboard (left) and a stable plinth (right) together with an appropriate crown for the niche.


The cabinet door for both appliances comes in an identical design to the other kitchen fronts.

Requirements for the installation niche:



- The side walls of the installation niche must be completely even and flat along their entire depth
- Crown is at least 100 mm deep and made of a solid material (min. 16 mm thick)
- Width of the installation niche:
610 mm + 457 mm = 1.067 mm
- Depth of the installation niche: min. 610 mm

The side walls of the installation niche must be completely even and flat along their entire depth.

Horizontal cut Installation niche

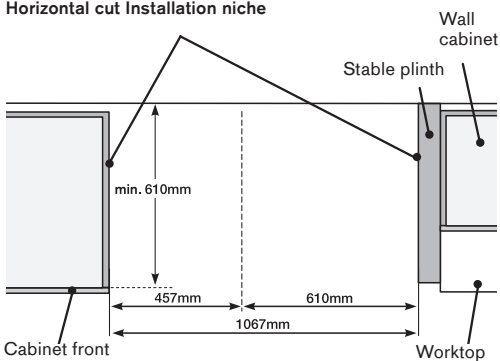

Planning examples

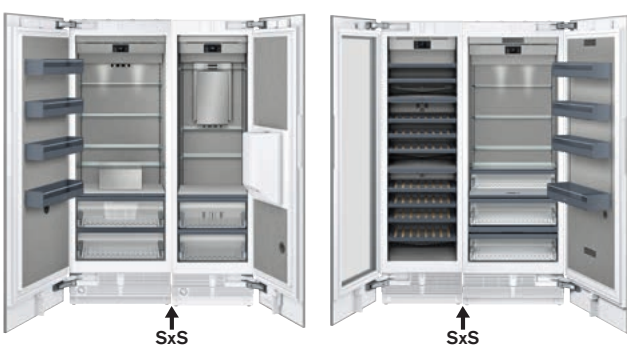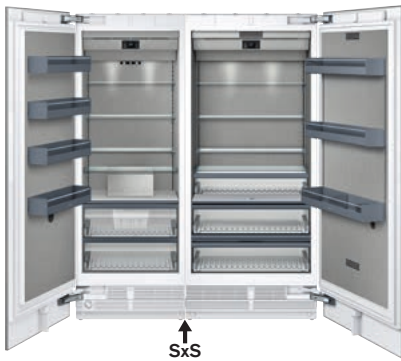

Side-by-side solution 1

RF 471 / RC 492

Usability limitations: No limitation.

Installation accessories: 1x RA 460 000 installation accessories for side-by-side installation (SxS)*.

Notes: Door hinges on the outside.

Side-by-side solution 2

RW 414 / RB 472

Usability limitations: No limitation.

Installation accessories: 1x RA 460 000 installation accessories for side-by-side installation (SxS)*.

Notes: Door hinges on the outside. Change door hinge of RW.

If using the stainless steel fronts with a handle (installation accessories), select the correct door hinges for the RW.

Side-by-side solution 3

RF 414 / RY 492

Usability limitations: Not all doors can be opened at the same time. The left door of the RY may collide with the handle of the RW.

Installation accessories: 1x RA 460 000 installation accessories for side-by-side installation (SxS)*.

Notes: Fitting the left RY doors at 90° is recommended. Change door hinge of RW. If using the stainless steel fronts with a handle (installation accessories), select the correct door hinges for the RW.

Combination of 3

RF 461 / RW 466 / RC 462

Usability limitations: The doors of RW and RC cannot be opened at the same time, but one after another.

Installation accessories: 2x RA 460 000 installation accessories for side-by-side installation (SxS)*.

Notes: All three appliances must be connected to each other before installation and pushed together into the installation niche.

Maximum distance

RF 471 / RF 463 / RW 466 / RC 472

Usability limitations: No limitation. All doors can be opened fully.

Installation accessories: 2x RA 460 000 (SxS)*.

Notes: Two separate installation niches. Clearance is large enough to open all doors at the same time. Change door hinge of RW 466.

If using the stainless steel fronts with a handle (installation accessories), select the correct door hinges for the RW.



Distance \geq 160 mm

RF 471 / RF 463 / RW 466 / RC 472

Usability limitations: The middle doors cannot be opened at the same time.

Installation accessories: 2x RA 460 000 (SxS)*.

Notes: Two separate installation niches. The clearance between the two installation niches is greater than 160 mm. Change door hinge of RW.

If using the stainless steel fronts with a handle (installation accessories), select the correct door hinges for the RW.



Distance \leq 160 mm

RF 471 / RF 463 / RW 466 / RC 472

Usability limitations: It may be necessary to open the middle doors one after the other, rather than at the same time.

Installation accessories: 2x RA 460 000 (SxS)*, 1x RA 460 013 (HE)*.

Notes: Two separate installation niches with a stable plinth between them. The clearance between the two installation niches is less than 160 mm. Therefore, an additional side heating element is required. Change door hinge of RW. If using the stainless steel fronts with handle (installation accessories), select the correct door hinges for the RW.



Combination of 4

RF 471 / RF 463 / RW 466 / RC 472

Usability limitations: If the middle door is open, then neither of the outer doors can be opened.

Installation accessories: 3x RA 460 000 installation accessories for side-by-side installation (SxS)*.

Notes: The appliances in the middle are connected side-by-side. Connecting the others will require additional side-by-side installation accessory. All four appliances must be connected to each other before installation and pushed together into the installation niche.



Combination of 4 - alternative

RF 471 / RF 463 / RW 466 / RC 472

Usability limitations: The middle doors cannot be opened at the same time.

Installation accessories: 3x RA 460 000 installation accessories for side-by-side installation (SxS)*.

Notes: The appliances in the middle are connected hinge to hinge. All four appliances must be connected to each other before installation and pushed together into the installation niche. Change door hinge of RF 471 and RW 466. If using the stainless steel fronts with handle (installation accessories), select the correct door hinges for the RW.

Footnote:

*SxS Accessory for side-by-side installation. In a very humid environment always use the additional side heating element instead of the accessory for side-by-side installation.

*HE Additional side heating element. Always required, if the distance between the appliances is greater than 16 mm or less than 160 mm.

Special accessories for Vario cooling 400 series



Appliance type	Fridge-freezer combination	Fridge-freezer combination	Fridge-freezer combination	Refrigerator
	RY 492 305	RB 492 305	RB 472 305	RC 492 305
Door panels / door panel frames				
Stainless steel door panel with handles, panel thickness 19 mm.	RA 421 912	RA 421 910	RA 421 712	RA 421 911
Stainless steel door panel without handles, panel thickness 19 mm.	RA 428 912	RA 428 910	RA 428 712	RA 428 911
Stainless steel door panel frame with handle, left-hinged, panel thickness 19 mm.				
Stainless steel door panel frame with handle, right-hinged, panel thickness 19 mm.				
Stainless steel door panel frame without handle, panel thickness 19 mm.				
RA 420 010 Door lock for RW 414 and RW 464				
Ventilation grille				
Stainless steel	RA 464 913	RA 464 913	RA 464 713	RA 464 911
Interior for wine climate cabinet				
Fully extendable bottle trays in oak wood and solid aluminium in anthracite.				
Removable shelf with oak wood frame. Suitable for decanters and open bottles.				
Presenter in oak wood and aluminium in anthracite for single bottle display. 1 piece.				
Bottle support in oak wood for convenient storage of bottles on the division plate.				
RA 430 000 Screw whole cover set. 8 Pieces.				
Handles				
RA 425 110 Handle bar, stainless steel, long. With 3 mounts, length 1.131 mm, drilling distance between each mount 554 mm.	•	•	•	•
RA 425 710 Handle bar, stainless steel, short. For RB 472 with 2 mounts, length 658 mm, drilling distance between the mounts 637 mm.			•	
RA 425 910 Handle bar, stainless steel, short. For RB/RY 492, with 2 mounts, length 810 mm, drilling distance between the mounts 787 mm.	•	•		
Miscellaneous				
RA 430 100 Storage container with transparent lid, anthracite.	•	•	•	•
RA 448 220 Ice storage container, small. For installation with a door opening angle of 90°				
RA 450 012 Activated charcoal filter for water filter system	•	•	•	
ET 636 458 Activated charcoal air filter (spare part)	•	•	•	•



Refrigerator	Refrigerator	Freezer	Freezer	Freezer	Freezer	Freezer	Freezer
RC 472 305	RC 462 305	RF 463 306	RF 463 307	RF 471 305	RF 461 305	RF 411 305	RF 410 304
RA 421 710	RA 421 610	RA 422 610	RA 422 610	RA 421 710	RA 421 610	RA 421 110	RA 421 110
RA 428 710	RA 428 610	RA 428 810	RA 428 810	RA 428 710	RA 428 610	RA 428 110	RA 428 110
RA 464 711	RA 464 611	RA 464 617	RA 464 618	RA 464 714	RA 464 616	RA 464 113	RA 464 111
•	•	•	•	•	•	•	•
•	•			•	•	•	
•	•	•	•	•	•	•	

Special accessories for Vario cooling 400 series



Appliance type	Wine climate cabinet	Wine climate cabinet	Wine climate cabinet	Wine climate cabinet
	RW 466 365	RW 414 365	RW 466 305	RW 414 305
Door panels / door panel frames				
Stainless steel door panel with handles, panel thickness 19 mm.			RA 421 610	RA 421 110
Stainless steel door panel without handles, panel thickness 19 mm.			RA 428 610	RA 428 110
Stainless steel door panel frame with handle, left-hinged, panel thickness 19 mm.	RA 421 611	RA 421 111		
Stainless steel door panel frame with handle, right-hinged, panel thickness 19 mm.	RA 421 612	RA 421 112		
Stainless steel door panel frame without handle, panel thickness 19 mm.	RA 428 611	RA 428 111		
RA 420 010 Door lock for RW 414 and RW 464	•	•	•	•
Ventilation grille				
Stainless steel	RA 464 611	RA 464 111	RA 464 611	RA 464 111
Interior for wine climate cabinet				
Fully extendable bottle trays in oak wood and solid aluminium in anthracite.	RA 491 661	RA 491 161	RA 491 661	RA 491 161
Removable shelf with oak wood frame. Suitable for decanters and open bottles.	RA 492 660	RA 492 160	RA 492 660	RA 492 160
Presenter in oak wood and aluminium in anthracite for single bottle display. 1 piece.	RA 493 060	RA 493 060	RA 493 060	RA 493 060
Bottle support in oak wood for convenient storage of bottles on the division plate.	RA 498 640	RA 498 140	RA 498 640	RA 498 140
RA 430 000 Screw whole cover set. 8 Pieces.	•	•	•	•
Handles				
RA 425 110 Handle bar, stainless steel, long. With 3 mounts, length 1.131 mm, drilling distance between each mount 554 mm.	•	•	•	•
RA 425 710 Handle bar, stainless steel, short. For RB 472 with 2 mounts, length 658 mm, drilling distance between the mounts 637 mm.				
RA 425 910 Handle bar, stainless steel, short. For RB/RY 492, with 2 mounts, length 810 mm, drilling distance between the mounts 787 mm.				
Miscellaneous				
RA 430 100 Storage container with transparent lid, anthracite.				
RA 448 220 Ice storage container, small. For installation with a door opening angle of 90°				
RA 450 012 Activated charcoal filter for water filter system				
ET 636 458 Activated charcoal air filter (spare part)	•	•	•	•



RB 289 203

With fresh cooling close to 0 °C
Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

- 2 ice packs
- 2 egg trays
- 1 wine and champagne rack
- 1 glass tray
- 1 ice cube tray
- 1 Gastronorm insert, stainless steel, GN 1/3 unperforated
- 1 Gastronorm lid, stainless steel, GN 1/3

Special accessories

- GN 114 130**
Gastronorm insert, stainless steel, GN 1/3
Unperforated, 40 mm deep, 1.5l.
- GN 114 230**
Gastronorm insert, stainless steel, GN 2/3
Unperforated, 40 mm deep, 3l.
- GN 144 130**
Gastronorm insert, non-stick, GN 1/3
Unperforated, 40 mm deep, 1.5l.
- GN 144 230**
Gastronorm insert, non-stick, GN 2/3
Unperforated, 40 mm deep, 3l.
- GN 410 130**
Gastronorm lid, stainless steel, GN 1/3.
- GN 410 230**
Gastronorm lid, stainless steel, GN 2/3.
- RA 430 100**
Storage container with transparent lid, anthracite.

Vario fridge-freezer combination 200 series RB 289

- Unique usage concept:
 - Maximum usage of interior: stepped shelf, full depth shelves as well as integrated fixtures for various containers
 - Easy access: fully extendable shelves and drawers
 - Optimal overview: intelligent lighting concept, use of glass and transparent materials
 - Efficient preparation, cooking and storage with Gaggenau appliances: integration of Gastronorm inserts
- Enlarged interior with 245 litre net volume through compressor relocation
- 4 climate zones incl. two fresh cooling drawers close to 0 °C
- Cushioned door closing system allowing a soft and controlled door closure
- Smooth running fully extendable telescopic pull-out racks and a cushioned closing system allow a soft and controlled closure of the drawers

Handling

Electronic temperature control with temperature display.
Touch keys.

Technical Features

Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Cooling

Fast cooling.
Temperature adjustable from +2 °C to +8 °C.
3 safety glass shelves, 2 of which are fully extendable and 1 height adjustable.
Wine and champagne rack for 4 bottles, can be completely folded away.
Fixture for storing glass tray.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
1 door rack with aluminium profile.
Bright interior lighting with integrated glare-free side light elements.
Stepped shelf in aluminium for optimum use of interior and for storing GN inserts.
Possible combinations:
1 x 1/3 GN
2 x 1/3 GN
3 x 1/3 GN
1 x 2/3 GN
1 x 2/3 GN and 1 x 1/3 GN
Net volume 128 litres.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to 0 °C.
Ideal for meat, fish and poultry.
1 fully extendable fresh cooling drawer close to 0 °C, humidity optimized.
Ideal for fruit and vegetables.
Activated charcoal air filter.
Net volume 56 litres.

Freezing

No-Frost technology with fast freezing.
Temperature adjustable from -16 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 12 kg/24 h.
Storage time after a malfunction 16 h.
2 freezer drawers, 1 of which extra large.
Net volume 61 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 236 kWh/year.
Noise level 41 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Appliance plinth recess 90 mm.
Max. door panel weight:
Upper door 22 kg.
Lower door 22 kg.
Necessary gap between furniture door panels 4 mm.

Please read additional planning notes on page 359.

Connection

Total connected load 0.120 kW.
Connecting cable 2.3 m with plug.

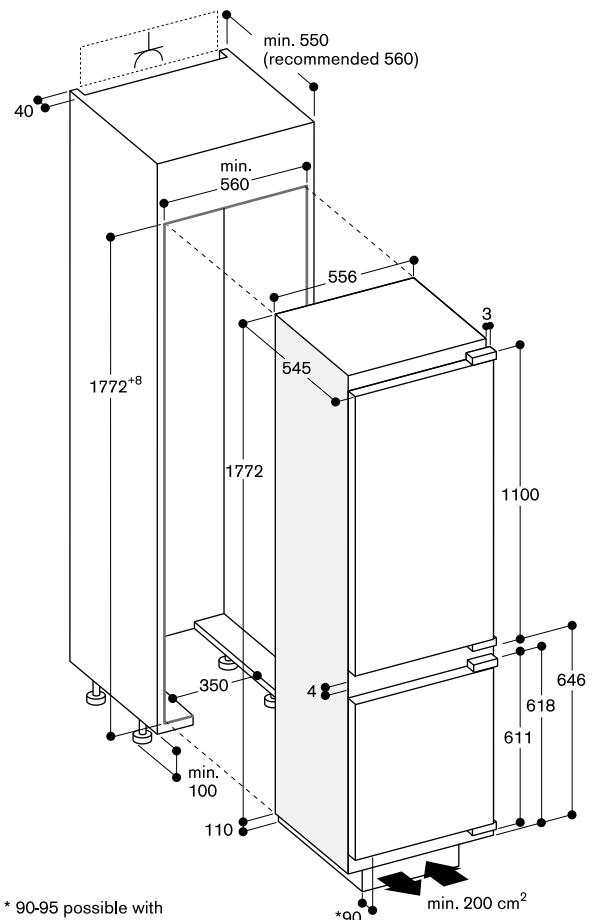

* 90-95 possible with
spare part: No. 11022849

**RB 287 203**

Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

2 ice packs
2 egg trays
1 wine and champagne rack
1 glass tray
1 ice cube tray
1 Gastronorm insert, stainless steel, GN 1/3 unperforated
1 Gastronorm lid, stainless steel, GN 1/3

Special accessories

GN 114 130
Gastronorm insert, stainless steel, GN 1/3
Unperforated, 40 mm deep, 1.5l.
GN 114 230
Gastronorm insert, stainless steel, GN 2/3
Unperforated, 40 mm deep, 3l.
GN 144 130
Gastronorm insert, non-stick, GN 1/3
Unperforated, 40 mm deep, 1.5l.
GN 144 230
Gastronorm insert, non-stick, GN 2/3
Unperforated, 40 mm deep, 3l.
GN 410 130
Gastronorm lid, stainless steel, GN 1/3.
GN 410 230
Gastronorm lid, stainless steel, GN 2/3.
RA 430 100
Storage container with transparent lid, anthracite.

**Vario fridge-freezer combination
200 series
RB 287**

- Unique usage concept:
 - Maximum usage of interior: stepped shelf, full depth shelves as well as integrated fixtures for various containers
 - Easy access: fully extendable shelves and drawers
 - Optimal overview: intelligent lighting concept, use of glass and transparent materials
 - Efficient preparation, cooking and storage with Gaggenau appliances: integration of Gastronorm inserts
- Enlarged interior with 258 litre net volume through compressor relocation
- Cushioned door closing system allowing a soft and controlled door closure
- Smooth running fully extendable telescopic pull-out racks and a cushioned closing system allow a soft and controlled closure of the drawers

Handling

Electronic temperature control with temperature display.
Touch keys.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Cooling

Fast cooling.
Temperature adjustable from +2 °C to +8 °C.
3 safety glass shelves, 2 of which are height adjustable and 1 fully extendable.
Wine and champagne rack for 4 bottles, can be completely folded away.
Fixture for storing glass tray.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
2 door racks with aluminium profile.
1 vegetable drawer.
Bright interior lighting with integrated glare-free side light elements.
Stepped shelf in aluminium for optimum use of interior and for storing GN inserts.
Possible combinations:
1 x 1/3 GN
2 x 1/3 GN
3 x 1/3 GN
1 x 2/3 GN
1 x 2/3 GN and 1 x 1/3 GN
Net volume 186 litres.

Freezing

No-Frost technology with fast freezing.
Temperature adjustable from -16 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 15 kg/24 h.
Storage time after a malfunction 25 h.
3 freezer drawers, 1 of which extra large.
Net volume 72 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 237 kWh/year.
Noise level 39 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Appliance plinth recess 90 mm.
Max. door panel weight:
Upper door 22 kg.
Lower door 22 kg.
Necessary gap between furniture door panels 4 mm.

Please read additional planning notes on page 359.

Connection

Total connected load 0.120 kW.
Connecting cable 2.3 m with plug.

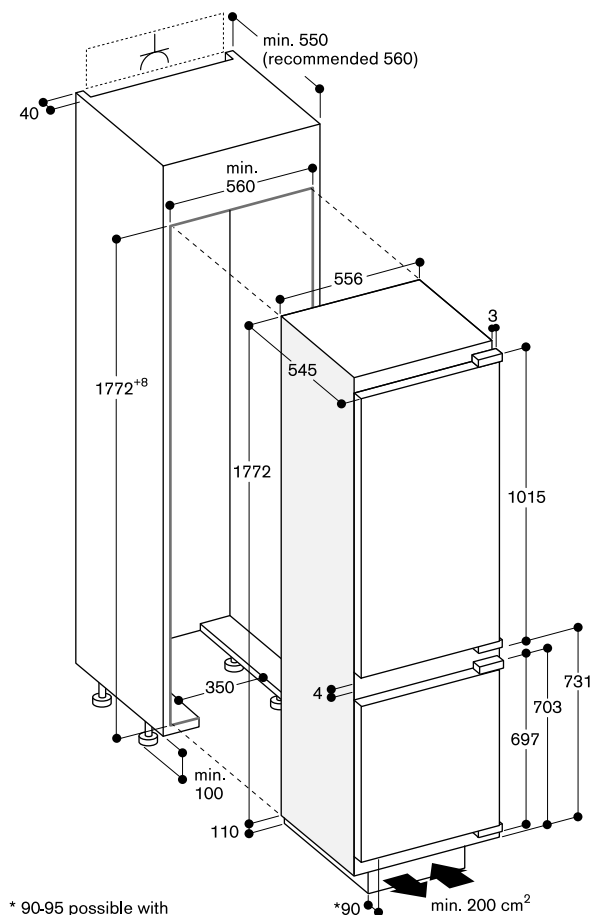

* 90° possible with
spare part: No. 11022849



RT 289 203

With fresh cooling close to 0 °C
Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

- 2 egg trays
- 1 wine and champagne rack
- 1 glass tray
- 1 ice cube tray
- 1 Gastronorm insert, stainless steel, GN 1/3 unperforated
- 1 Gastronorm lid, stainless steel, GN 1/3

Special accessories

- GN 114 130**
Gastronorm insert, stainless steel, GN 1/3
Unperforated, 40 mm deep, 1.5l.
- GN 114 230**
Gastronorm insert, stainless steel, GN 2/3
Unperforated, 40 mm deep, 3l.
- GN 144 130**
Gastronorm insert, non-stick, GN 1/3
Unperforated, 40 mm deep, 1.5l.
- GN 144 230**
Gastronorm insert, non-stick, GN 2/3
Unperforated, 40 mm deep, 3l.
- GN 410 130**
Gastronorm lid, stainless steel, GN 1/3.
- GN 410 230**
Gastronorm lid, stainless steel, GN 2/3.
- RA 430 100**
Storage container with transparent lid, anthracite.

Vario fridge-freezer combination 200 series RT 289

- **Unique usage concept:**
 - Maximum usage of interior: stepped shelf, full depth shelves as well as integrated fixtures for various containers
 - Easy access: fully extendable shelves and drawers
 - Optimal overview: intelligent lighting concept, use of glass and transparent materials
 - Efficient preparation, cooking and storage with Gaggenau appliances: integration of Gastronorm inserts
- Enlarged interior with 284 litre net volume through compressor relocation
- 4 climate zones incl. three fresh cooling drawers close to 0 °C
- Cushioned door closing system allowing a soft and controlled door closure
- Smooth running fully extendable telescopic pull-out racks and a cushioned closing system allow a soft and controlled closure of the drawers

Handling

Electronic temperature control with temperature display.
Touch keys.

Technical Features

Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Cooling

Temperature adjustable from +2 °C to +8 °C.
1 full depth safety glass shelf, fully extendable.
3 safety glass shelves, 2 of which are fully extendable and 1 height adjustable.
Wine and champagne rack for 4 bottles, can be completely folded away.
Fixture for storing glass tray.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
3 door racks with aluminium profile.
Bright interior lighting with integrated glare-free side light elements.
Stepped shelf in aluminium for optimum use of interior and for storing GN inserts.
Possible combinations:
1 x 1/3 GN
2 x 1/3 GN
3 x 1/3 GN
1 x 2/3 GN
1 x 2/3 GN and 1 x 1/3 GN
Net volume 180 litres.

Fresh cooling close to 0 °C

2 fully extendable fresh cooling drawers close to 0 °C.
Ideal for meat, fish and poultry.
1 fully extendable fresh cooling drawer close to 0 °C, humidity optimized.
Ideal for fruit and vegetables.
Activated charcoal air filter.
Net volume 77 litres.

Freezing

Fast freezing.
Storage temperature from -18 °C and lower.
4-star freezer compartment.
Freezing capacity 2 kg/24 h.
Storage time after a malfunction 14 h.
2 shelves, 1 of which removable, in safety glass.
Net volume 27 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 229 kWh/year.
Noise level 39 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Appliance plinth recess 90 mm.
Max. door panel weight 22 kg.

Please read additional planning notes on page 359.

Connection

Total connected load 0.120 kW.
Connecting cable 2.3 m with plug.

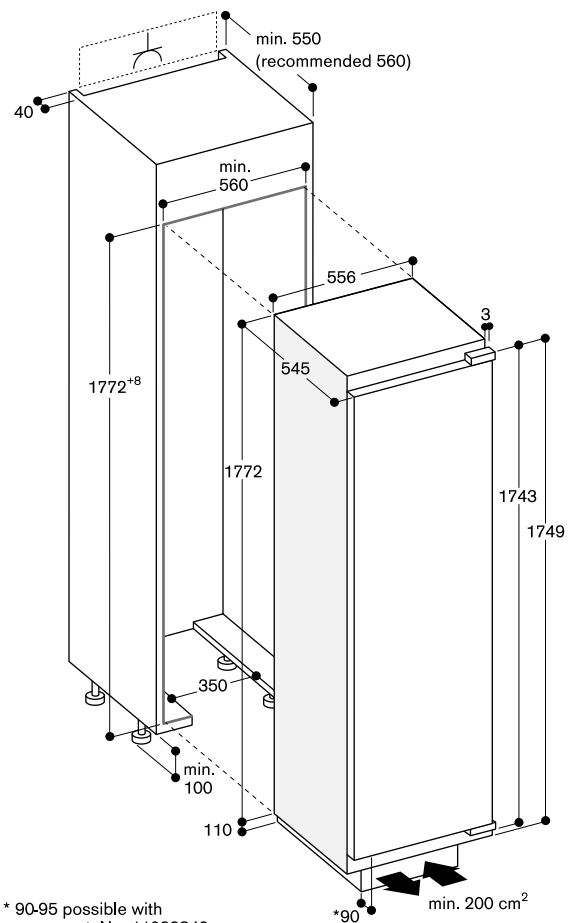

* 90-95 possible with spare part: No. 11022849

**RC 289 203**

With fresh cooling close to 0 °C
Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

2 egg trays
1 wine and champagne rack
1 glass tray
1 Gastronorm insert, stainless steel,
GN 1/3 unperforated
1 Gastronorm lid, stainless steel,
GN 1/3

Special accessories

GN 114 130
Gastronorm insert, stainless steel,
GN 1/3
Unperforated, 40 mm deep, 1.5l.
GN 114 230
Gastronorm insert, stainless steel,
GN 2/3
Unperforated, 40 mm deep, 3l.
GN 144 130
Gastronorm insert, non-stick, GN 1/3
Unperforated, 40 mm deep, 1.5l.
GN 144 230
Gastronorm insert, non-stick, GN 2/3
Unperforated, 40 mm deep, 3l.
GN 410 130
Gastronorm lid, stainless steel,
GN 1/3.
GN 410 230
Gastronorm lid, stainless steel,
GN 2/3.
RA 430 100
Storage container with transparent lid,
anthracite.

Vario refrigerator 200 series**RC 289**

- Unique usage concept:
 - Maximum usage of interior: stepped shelf, full depth shelves as well as integrated fixtures for various containers
 - Easy access: fully extendable shelves and drawers
 - Optimal overview: intelligent lighting concept, use of glass and transparent materials
 - Efficient preparation, cooking and storage with Gaggenau appliances: integration of Gastronorm inserts
- Enlarged interior with 302 litre net volume through compressor relocation
- 3 climate zones incl. three fresh cooling drawers close to 0 °C
- Combines with freezer RF 287 (Side-by-side integration)
- Cushioned door closing system allowing a soft and controlled door closure
- Smooth running fully extendable telescopic pull-out racks and a cushioned closing system allow a soft and controlled closure of the drawers

Handling

Electronic temperature control with temperature display.
Touch keys.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door alarm.

Cooling

Fast cooling.
Temperature adjustable from +2 °C to +8 °C.
2 full depth safety glass shelves, fully extendable.
4 safety glass shelves, 2 of which are fully extendable and 2 height adjustable.
Wine and champagne rack for 4 bottles, can be completely folded away.
Fixture for storing glass tray.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
2 door racks with aluminium profile.
Bright interior lighting with integrated glare-free side light elements.
Stepped shelf in aluminium for optimum use of interior and for storing GN inserts.
Possible combinations:
1 x 1/3 GN
2 x 1/3 GN
3 x 1/3 GN
1 x 2/3 GN
1 x 2/3 GN and 1 x 1/3 GN
Net volume 225 litres.

Fresh cooling close to 0 °C

2 fully extendable fresh cooling drawers close to 0 °C.
Ideal for meat, fish and poultry.
1 fully extendable fresh cooling drawer close to 0 °C, humidity optimized.
Ideal for fruit and vegetables.
Activated charcoal air filter.
Net volume 77 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 133 kWh/year.
Noise level 39 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Appliance plinth recess 90 mm.
Max. door panel weight 22 kg.

Please read additional planning notes on page 359.

Connection

Total connected load 0.120 kW.
Connecting cable 2.3 m with plug.

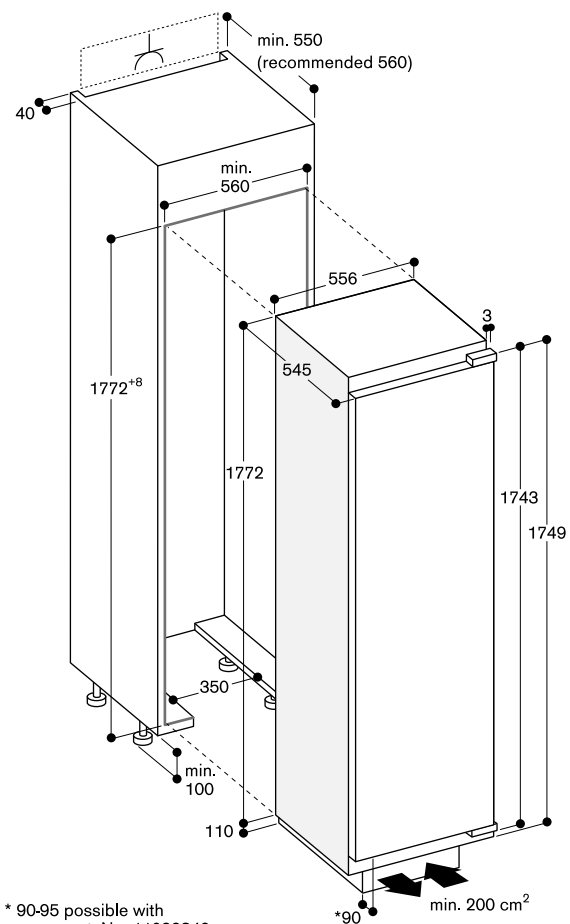

* 90-95 possible with
spare part: No. 11022849



RF 287 202

Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

2 ice packs
1 ice cube tray

Vario freezer 200 series

RF 287

- Enlarged interior with 210 litre net volume through compressor relocation
- Flexible interior configuration: all drawers and safety glass shelves can be removed
- Combines with fridge RC 289 (Side-by-side integration)
- Cushioned door closing system allowing a soft and controlled door closure

Handling

Electronic temperature control with temperature display.
Touch keys.

Technical Features

Dynamic cold air distribution.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Freezing

No-Frost technology with fast freezing.
Temperature adjustable from -16 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 18 kg/24 h.
Storage time after a malfunction 20 h.
5 freezer drawers, 1 of which extra large.
4 safety glass shelves between the freezer drawers.
2 safety glass shelves with transparent front.
All freezer drawers and safety glass shelves can be removed.
Net volume 210 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 242 kWh/year.
Noise level 42 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge left, reversible.
Door opening angle of 115°, fixable at 90°.
Appliance plinth recess 90 mm.
Max. door panel weight 22 kg.

Please read additional planning notes on page 359.

Connection

Total connected load 0.120 kW.
Connecting cable 2.3 m with plug.

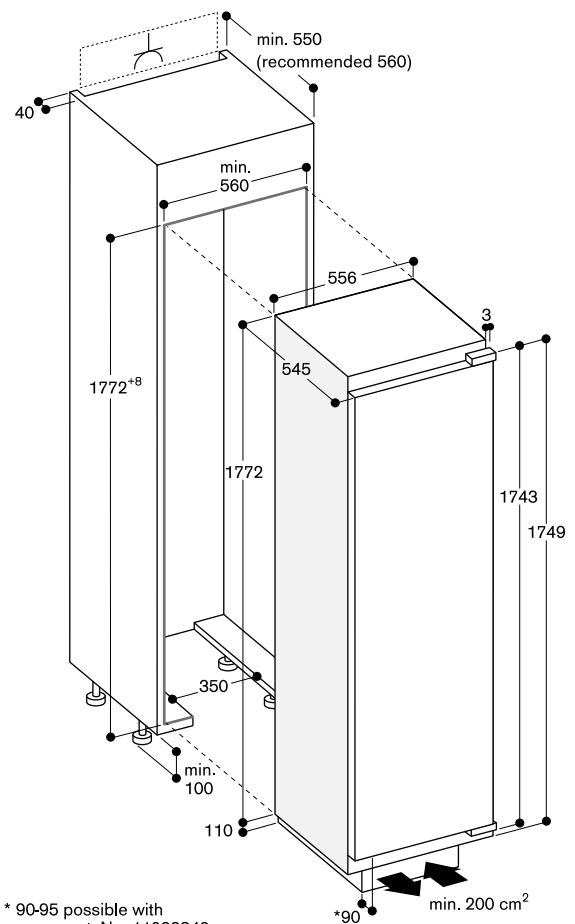

* 90-95 possible with spare part: No. 11022849



RB 282 306

With fresh cooling close to 0 °C
Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

- 2 ice packs
- 3 egg trays
- 1 wine and champagne rack
- 1 ice cube tray with lid

Special accessories

RA 430 100

Storage container with transparent lid, anthracite.

Fridge-freezer combination 200 series RB 282

- 4 climate zones incl. 2 fresh cooling drawers close to 0 °C
- Height adjustable safety glass shelves
- Door racks with aluminium profiles
- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 223 litres
- Energy efficiency class A+++

Handling

Electronic temperature control with digital display.
Touch keys.

Technical Features

Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Cooling

Fast cooling.
Temperature adjustable from +3 °C to +8 °C.
2 safety glass shelves, height adjustable, of which 1 is extendable.
1 integrated shelf.
Wine and champagne rack for 4 bottles, can be completely folded.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
1 door rack with aluminium profile.
Bright interior lighting with integrated glare-free side light element.
Net volume 101 litres.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to 0 °C, illuminated.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.
1 fully extendable fresh cooling drawer close to 0 °C, illuminated.
Ideal for meat, fish and poultry.
Net volume 55 litres.

Freezing

No-Frost technology with fast freezing.
Temperature adjustable from -16 °C to -24 °C.
4-star freezer compartment.
Defrost assistance.
Freezing capacity 13 kg/24 h.
Storage time after a malfunction 13 h.
3 freezer drawers, 1 of which extra large.
2 safety glass shelves.
Net volume 67 litres.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 162 kWh/year.
Noise level 37 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight:
Upper door 18 kg.
Lower door 18 kg.

Please read additional planning notes on page 359.

Connection

Total connected load 0.090 kW.
Connecting cable 2.3 m with plug.

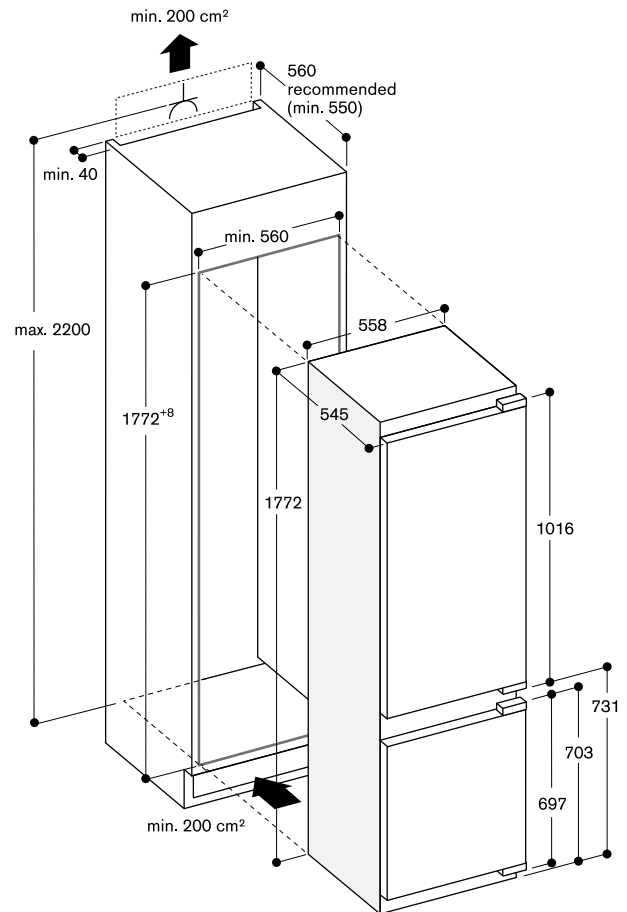

**RT 282 306**

With fresh cooling close to 0 °C
Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

3 egg trays
1 wine and champagne rack
1 ice cube tray with lid

Special accessories**RA 430 100**

Storage container with transparent lid,
anthracite.

Fridge-freezer combination 200 series**RT 282**

- 4 climate zones incl. 3 fresh cooling drawers close to 0 °C
- Height adjustable safety glass shelves
- Door racks with aluminium profiles
- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 269 litres
- Energy efficiency class A+++

Handling

Electronic temperature control with digital display.
Touch keys.

Technical Features

Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Cooling

Fast cooling.
Temperature adjustable from +3 °C to +8 °C.
5 safety glass shelves, height adjustable, of which 1 is extendable.
1 integrated shelf.
Wine and champagne rack for 4 bottles, can be completely folded away.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
4 door racks with aluminium profile.
Bright interior lighting with integrated glare-free side light element.
Net volume 171 litres.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to 0 °C, illuminated.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.
2 fully extendable fresh cooling drawers close to 0 °C, illuminated.
Ideal for meat, fish and poultry.
Net volume 83 litres.

Freezing

Storage temperature -18 °C and lower.
4-star freezer compartment.
Freezing capacity 2.5 kg/24 h.
Storage time after a malfunction 13 h.
Net volume 15 litres.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 147 kWh/year.
Noise level 36 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 22 kg.

Please read additional planning notes on page 359.

Connection

Total connected load 0.090 kW.
Connecting cable 2.3 m with plug.

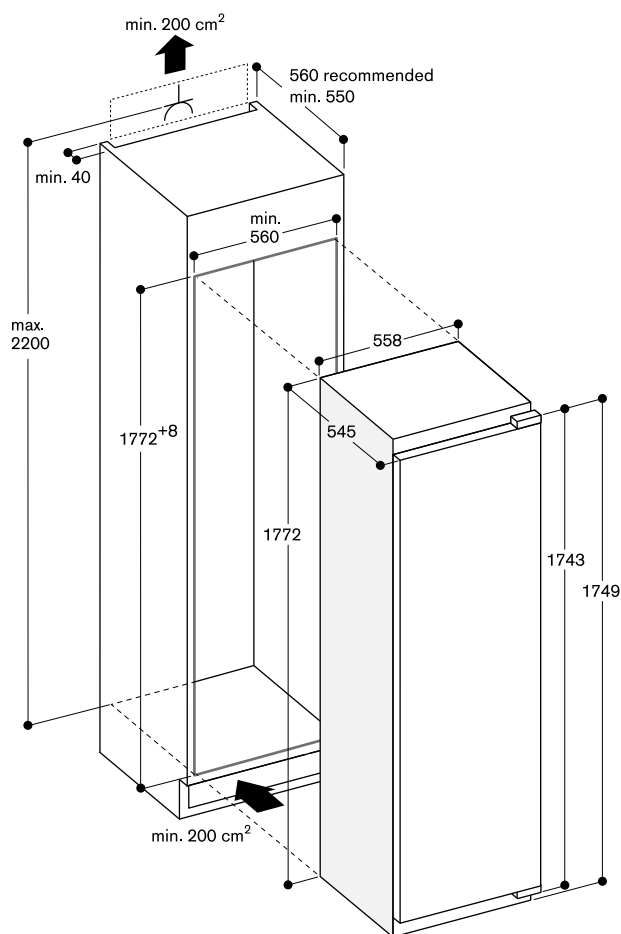



RT 282 204

With fresh cooling
Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

2 egg trays
1 wine and champagne rack
1 ice cube tray

Special accessories

RA 430 100
Storage container with transparent lid,
anthracite.

Fridge-freezer combination 200 series RT 282

- 3 climate zones incl. one fresh cooling drawer with manually adjustable humidity
- Height adjustable safety glass shelves
- Door racks with aluminium profiles
- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 286 litres

Handling

Electronic temperature control with digital display.
Touch keys.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Cooling

Temperature adjustable from +2 °C to +8 °C.
4 safety glass shelves, of which 1 is fully extendable and 4 height adjustable.
1 integrated shelf.
Wine and champagne rack for 4 bottles, can be completely folded away.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
5 door racks with aluminium profile.
1 vegetable drawer.
Bright interior lighting with integrated glare-free side light elements.
Net volume 252 litres.

Fresh cooling

1 full width fresh cooling drawer.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.

Freezing

Fast freezing.
Storage temperature -18 °C and lower.
4-star freezer compartment.
Freezing capacity 3 kg/24 h.
Storage time after a malfunction 22 h.
Net volume 34 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 209 kWh/year.
Noise level 36 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 22 kg.

Please read additional planning notes on page 359.

Connection

Total connected load 0.090 kW.
Connecting cable 2.3 m with plug.

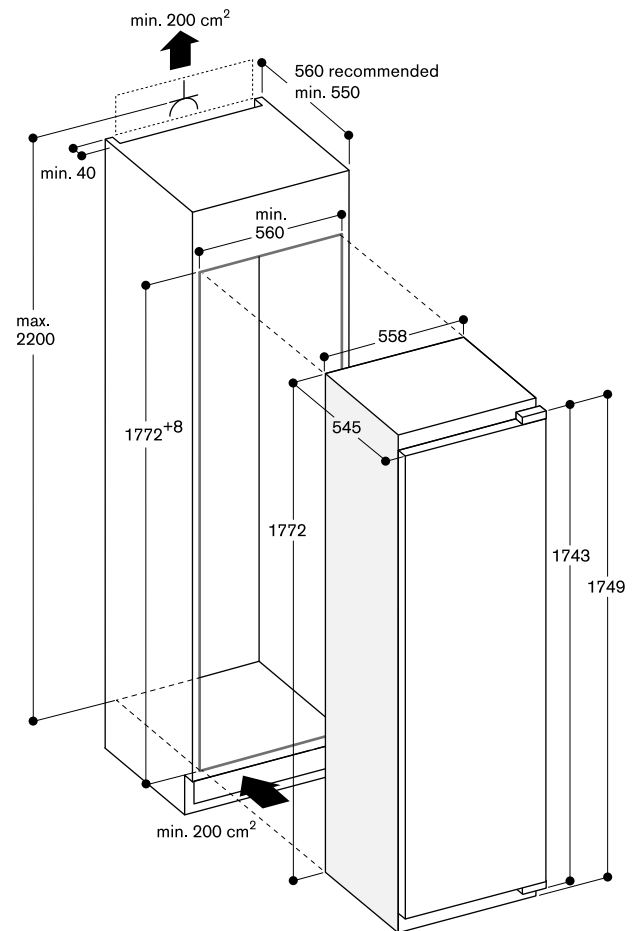

**RC 282 306**

With fresh cooling close to 0 °C
Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

3 egg trays
1 wine and champagne rack

Special accessories**RA 430 100**

Storage container with transparent lid,
anthracite.

Refrigerator 200 series**RC 282**

- 3 climate zones incl. 3 fresh cooling drawers close to 0 °C
- Height adjustable safety glass shelves
- Door racks with aluminium profiles
- Combines with freezer RF 282 (side-by-side integration)
- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 289 litres
- Energy efficiency class A+++

Handling

Electronic temperature control with digital display.
Touch keys.

Technical Features

Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Cooling

Fast cooling.
Temperature adjustable from +3 °C to +8 °C.
6 safety glass shelves, height adjustable, of which 1 is extendable.
1 integrated shelf.
Wine and champagne rack for 4 bottles, can be completely folded.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
4 door racks with aluminium profile.
Bright interior lighting with integrated glare-free side light element.
Net volume 206 litres.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to 0 °C, illuminated.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.
2 fully extendable fresh cooling drawers close to 0 °C, illuminated.
Ideal for meat, fish and poultry.
Net volume 83 litres.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 88 kWh/year.
Noise level 36 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 22 kg.
For a side-by-side installation every appliance must be planned in its own niche.

Please read additional planning notes on page 359.

Connection

Total connected load 0.090 kW.
Connecting cable 2.3 m with plug.

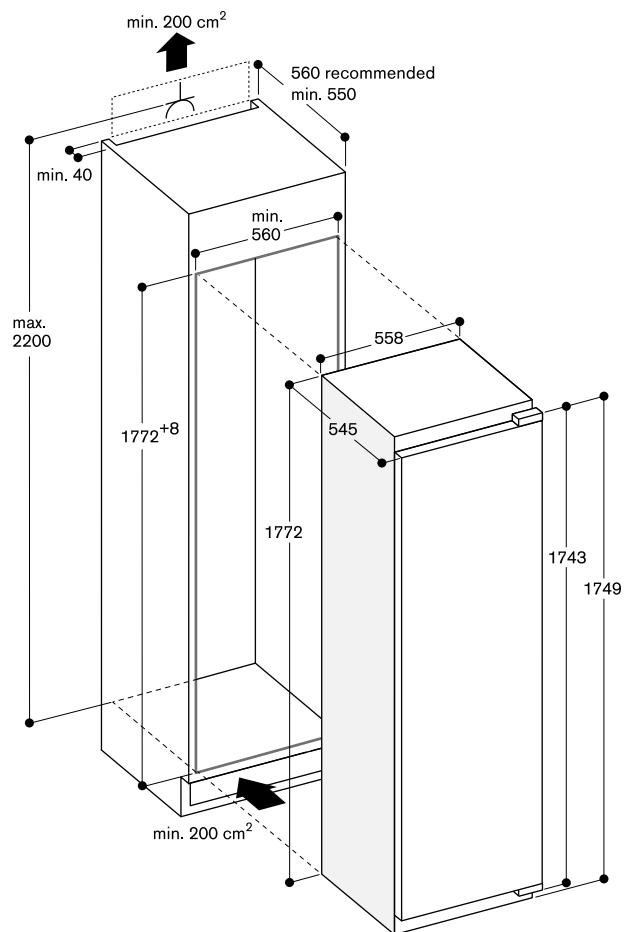



RF 282 305

Fully integrated
Niche width 56 cm,
Niche height 177.5 cm

Included in the price

2 ice packs
1 ice cube tray

Freezer 200 series

RF 282

- Flexible interior configuration: all drawers and safety glass shelves can be removed
- Combines with fridge RC282 (side-by-side integration)
- Combines with wine climate cabinet RW 282 (side-by-side integration)
- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 211 litres

Handling

Electronic temperature control with temperature display.
Touch keys.

Technical Features

Dynamic cold air distribution.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.

Freezing

No-Frost technology with fast freezing.
Temperature adjustable from -14 °C to -24 °C.
4-star freezer compartment.
Freezing capacity 20 kg/24 h.
Storage time after a malfunction 22 h.
5 freezer drawers, 2 of which extra large.
4 safety glass shelves between the freezer drawers.
2 safety glass shelves with transparent front.
All freezer drawers and safety glass shelves can be removed.
Net volume 211 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 243 kWh/year.
Noise level 36 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge left, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 22 kg.
For a side-by-side installation every appliance must be planned in its own niche.

Please read additional planning notes on page 359.

Connection

Total connected load 0.120 kW.
Connecting cable 2.3 m with plug.

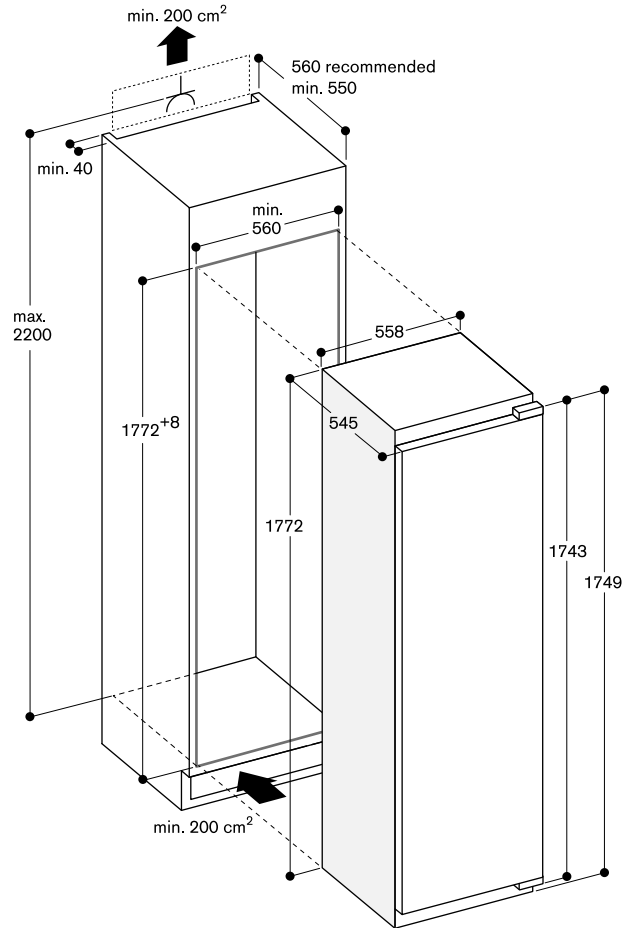

**RT 200 203**

Fully integrated, under-counter
Niche width 60 cm,
Niche height 82 cm

Included in the price

- 1 egg tray
- 1 ice cube tray

Special accessories**RA 430 100**

Storage container with transparent lid,
anthracite.

Fridge-freezer combination 200 series
RT 200

- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 123 litres

Technical Features

Automatic defrosting with defrost water evaporation.
Cushioned door closing system from 20° door opening angle, integrated in door hinge.

Cooling

2 safety glass shelves, 1 of which height adjustable.
1 pull-out drawer.
1 vegetable compartment.
1 large door rack for bottles.
2 door racks.
Bright interior lighting.
Net volume 108 litres.

Freezing

Storage temperature -18 °C and lower.
4-star freezer compartment.
Freezing capacity 2 kg/24 h.
Storage time after a malfunction 10 h.
Net volume 15 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 140 kWh/year.
Noise level 38 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 14 kg.
Height-adjustable feet.
Plinth height for niche height of 820 mm: 100 – 170 mm.
Plinth height for niche height of 870 mm: 150 – 220 mm.
The enclosed ventilation grille must be used.
The mains socket needs to be planned outside the built-in niche.

Please read additional planning notes on page 359.

Connection

Total connected load 0.090 kW.
Connecting cable 2.3 m with plug.

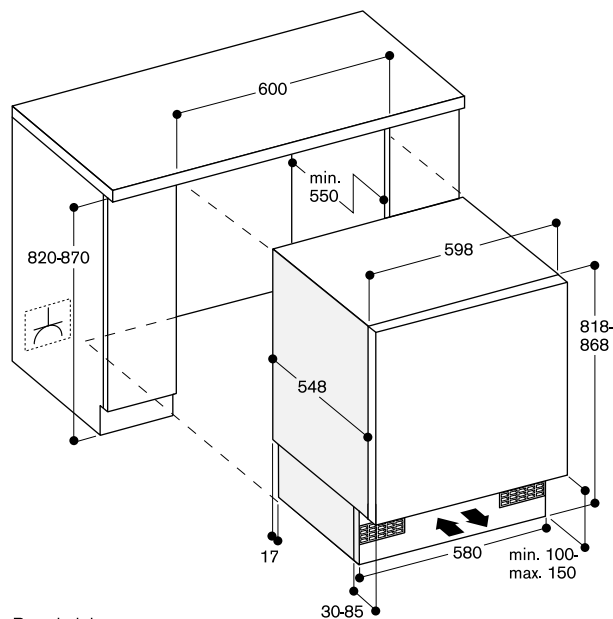**Base height:**

- 100 mm when niche height is 820 mm
- 150 mm when niche height is 870 mm



RC 200 203

Fully integrated, under-counter
Niche width 60 cm,
Niche height 82 cm

Included in the price

1 egg tray

Special accessories

RA 430 100

Storage container with transparent lid,
anthracite.

Refrigerator 200 series

RC 200

- Combines with freezer RF200 (Side-by-side)
- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 137 litres

Technical Features

Automatic defrosting with defrost water evaporation.

Cushioned door closing system from 20° door opening angle, integrated in door hinge.

Cooling

3 safety glass shelves, 2 of which height adjustable.
1 pull-out drawer.
1 vegetable compartment.
1 large door rack for bottles.
2 door racks.
Bright interior lighting.
Net volume 137 litres.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 92 kWh/year.
Noise level 38 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 14 kg.
Height-adjustable feet.
Plinth height for niche height of 820 mm: 100 – 170 mm.
Plinth height for niche height of 870 mm: 150 – 220 mm.
The enclosed ventilation grille must be used.
The mains socket needs to be planned outside the built-in niche.

Please read additional planning notes on page 359.

Connection

Total connected load 0.090 kW.
Connecting cable 2.3 m with plug.

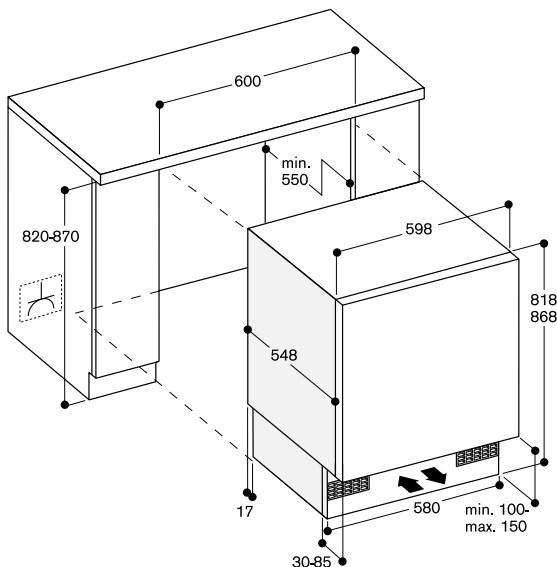

Base height:
- 100 mm when niche height is 820 mm
- 150 mm when niche height is 870 mm



Freezer 200 series

RF 200

- Combines with cooler RC 200 (Side-by-side)
- Cushioned door closing system allowing a soft and controlled door closure
- Net volume 98 litres

Technical Features

Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Malfunction signal.

Freezing

Fast freezing.
Temperature range adjustable.
4-star freezer compartment.
Freezing capacity 12 kg/24 h.
Storage time after a malfunction 23 h.
3 freezer drawers.
Net volume 98 litres.

Consumption data

Energy efficiency class A+ at a range of energy efficiency classes from A+++ to D.
Energy consumption 184 kWh/year.
Noise level 38 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 14 kg.
Height-adjustable feet.
Plinth height for niche height of 820 mm: 100 – 170 mm.
Plinth height for niche height of 870 mm: 150 – 220 mm.
The enclosed ventilation grille must be used.
The mains socket needs to be planned outside the built-in niche.

Please read additional planning notes on page 359.

Connection

Total connected load 0.090 kW.
Connecting cable 2.3 m with plug.

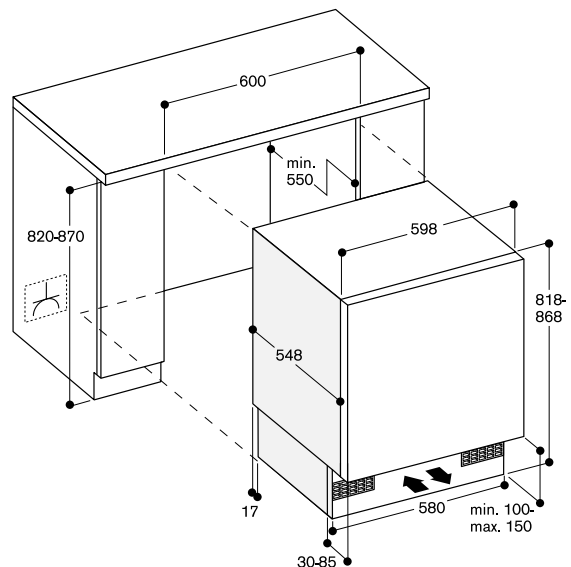

Base height:
- 100 mm when niche height is 820 mm
- 150 mm when niche height is 870 mm

Location

The appliance should be installed in a dry, well ventilated room. The location of the appliance should not be subject to direct sunlight or near a source of heat, such as an oven, a cooker or a radiator, etc.

If installation next to a heat source is unavoidable, observe the following minimum distances from the heat source:

- 3 cm to electric or gas ovens,
- 3 cm to electric or gas cooker,
- 30 cm to an oil-fired or solid-fuel cooker.

Side-by-side installation

Vario 200 and 200 series cooling appliances can be installed side by side in the following combinations, in their own kitchen units:

RW + RW

RC + RF (no other appliance next to RC model)


RW + RF (no other appliance next to RW model, except RW)

For all other combinations, a minimum clearance of 150 mm must be observed between appliances.

Clearance to adjacent furniture depending on the furniture panel thickness and radii

The panel thickness of customer-specific doors can be between 19 mm and 22 mm.

Recommended gap dimensions for flat hinges

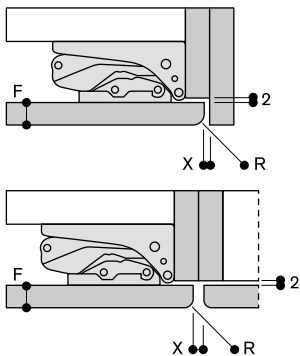

F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

F = Furniture panel thickness
 R = Radius
 X = Gap dimension

The gap dimensions recommended in the table must be adhered in order to ensure that the appliance door does not collide with anything when it is opened, and to avoid causing damage to furniture panels.

measurements in mm

Door panels

Maximum permissible door panel weight

Recess height	Number of doors	Max. permissible door panel weight
178 cm, Vario 200	1 or 2	22 kg each
178 cm, 200 series	1	22 kg
178 cm, 200 series	2	18 kg each
140 cm, 123 cm, 82 cm, 200 series	1	14 kg
178 cm, 123 cm, 200 series wine	1	20 kg

If the maximum permissible weight is exceeded, this may damage or impair the function of the hinge.

Base area

Important!

Poor ventilation leads to damage of the appliance!
 The appliance air inlet opening in the base area of the fitted kitchen must not be covered under any circumstances.
 A cross-section of at least 200 cm² must be provided for the air inlet opening.

Dimensions of the special accessories – door panel frames.

The following diagrams show the basic dimensions of the special accessories door front frames for RW 282 and RW 222.

The dimensions of the doors shown are designed for the following basic specifications:


- Panel thickness: 19 mm
- Gap: 3 mm

These specifications provide you with a good starting point for a variety of kitchen designs.

Important!

The following diagrams are not a substitute for detailed designs. Compliance with specified requirements relating to kitchen design is essential.

Recess height 178 cm

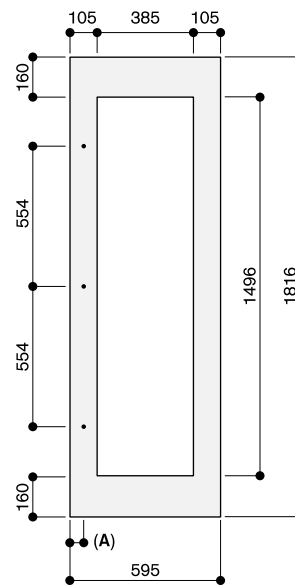


A: 52.5

The door panel thickness is 19 mm.
 The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.

measurements in mm

Recess height 122 cm

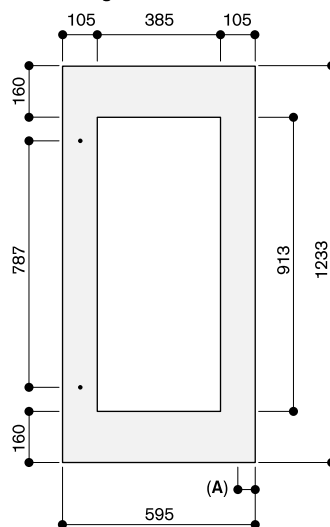

A: 52.5

The door panel thickness is 19 mm.
 The maximum door panel dimensions are based on a clearance of 3 mm, based on a single recess.

measurements in mm



RW 466 365

Fully integrated, with glass door
Niche width 61 cm,
Niche height 213.4 cm

RW 466 305

Fully integrated, with solid door
Niche width 61 cm,
Niche height 213.4 cm

Included in the price

1 Accessory for side-by-side installation

Installation accessories

RA 420 010

Door lock for RW 414,
RW 464 and RW 466.

RA 421 610

Stainless steel door panel with handle
For 61 cm wide appliances, panel thickness 19 mm.

RA 421 611

Stainless steel door panel frame with handle
For 61 cm wide appliances, left-hinged, panel thickness 19 mm.

RA 421 612

Stainless steel door panel frame with handle
For 61 cm wide appliances, right-hinged, panel thickness 19 mm.

RA 423 140

Side trims, long.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount 554 mm.

RA 428 610

Stainless steel door panel, handleless
For 61 cm wide appliances, panel thickness 19 mm.

RA 428 611

Stainless steel door panel frame, handleless
For 61 cm wide appliances, panel thickness 19 mm.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed with a distance greater than 16 mm and less than 160 mm next to each other and for all built-in situations in a very humid environment. Not required if appliances are installed more than 160 mm apart from each other.

RA 460 020

Connecting element for vertically split appliance fronts (for a flush front).

RA 464 611

Ventilation grille stainless steel
For 61 cm wide appliances.

Vario wine climate cabinet 400 series

RW 466

- 3 independently controllable climate zones
- Consistent temperatures with exact control from +5 °C to +20 °C
- Humidity control
- Stainless steel interior
- Fully extendable bottle trays in oak wood and solid aluminium in anthracite
- Bottle trays with hidden telescopic rails
- Warm white and glare-free LED light spots
- 5 preset lighting scenarios, selectable via TFT display
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- Low-vibration operation
- TFT touch display
- Capacity 99 bottles

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Activated charcoal air filter.
UV-protection.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Features

Capacity 99 bottles (based on 0.75/l standard bottles).
12 bottle trays,
- 9 fully extendable trays
- 3 suitable for storage of Magnum bottles.
Flexible interior configuration possible by adding or removing fully extendable bottle trays.
Storage of up to 12 Magnum bottles with standard tray configuration (12 bottle trays).
Space for max. 12 bottle trays.
2 brilliant LED light spots with warm white, glare-free light in each climate zone.
5 different lighting scenarios can be selected for individual wine presentation.
Net volume 361 litres.

Special accessories

RA 430 000

Screw hole cover set. 8 pieces.

RA 491 661

Fully extendable bottle trays with hidden telescopic rails in oak wood and solid aluminium in anthracite
For 61 cm wide appliances.

RA 492 660

Removable shelf with oak wood frame
Suitable for decanters and open bottles.

For 61 cm wide appliances.

RA 493 060

Presenter in oak wood and aluminium in anthracite for single bottle display
1 piece.

RA 498 640

Bottle support in oak wood for convenient storage of bottles on the division plate.

For 61 cm wide appliances.

Consumption data

Energy efficiency class A/A+ at a range of energy efficiency classes from A+++ to G.

Energy consumption 171/130 kWh/year.
Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight 73 kg.

The mains socket needs to be planned outside the built-in niche.


No transport/operation above 2000 m sea level.

Please read additional planning notes on page 334 – 341.


Connection

Total connected load 0.300 kW.

Connecting cable 3.0 m, pluggable.

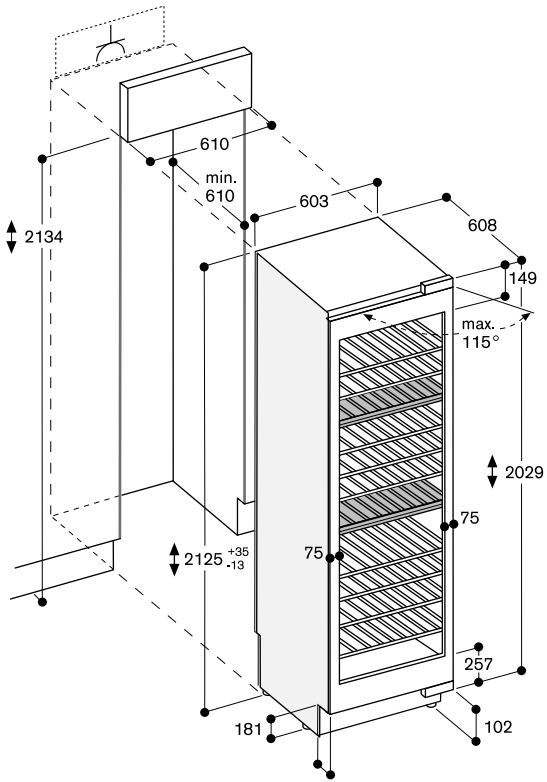


The maximum door panel dimensions are based on a clearance of 3 mm.

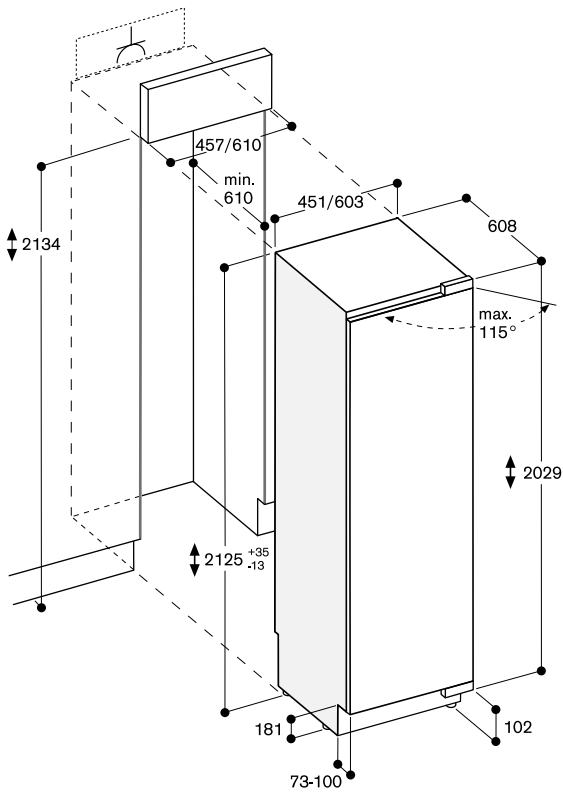

The maximum door panel dimensions are based on a clearance of 3 mm.

Bottle storage

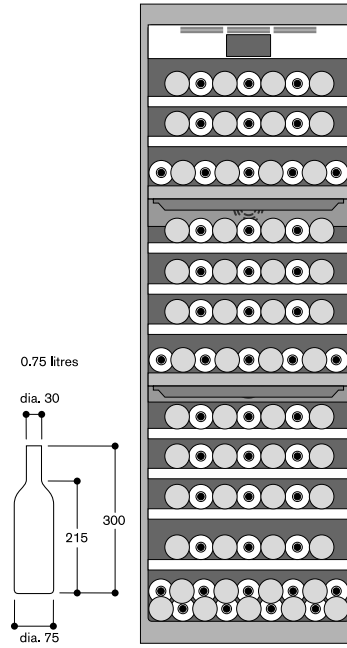



RW 414 365

Fully integrated, with glass door
Niche width 45.7 cm,
Niche height 213.4 cm

RW 414 305

Fully integrated, with solid door
Niche width 45.7 cm,
Niche height 213.4 cm

Included in the price

1 Accessory for side-by-side
installation

Installation accessories

RA 420 010

Door lock for RW 414,
RW 464 and RW 466.

RA 421 110

Stainless steel door panel with handle
For 45.7 cm wide appliances, panel
thickness 19 mm.

RA 421 111

Stainless steel door panel frame with
handle
For 45.7 cm wide appliances,
left-hinged, panel thickness 19 mm.

RA 421 112

Stainless steel door panel frame with
handle
For 45.7 cm wide appliances,
right-hinged, panel thickness 19 mm.

RA 423 140

Side trims, long.

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1131 mm,
drilling distance between each mount
554 mm.

RA 428 110

Stainless steel door panel, handleless
For 45.7 cm wide appliances, panel
thickness 19 mm.

RA 428 111

Stainless steel door panel frame,
handleless
For 45.7 cm wide appliances, panel
thickness 19 mm.

RA 460 013

Additional side heating element 230 V.
Required if appliances are installed
with a distance greater than 16 mm and
less than 160 mm next to each other
and for all built-in situations in a very
humid environment. Not required if
appliances are installed more than
160 mm apart from each other.

RA 460 020

Connecting element for vertically split
appliance fronts (for a flush front).

RA 464 111

Ventilation grille stainless steel
For 45.7 cm wide appliances.

Vario wine climate cabinet 400 series

RW 414

- 2 independently controllable climate zones
- Consistent temperatures with exact control from +5 °C to +20 °C
- Humidity control
- Stainless steel interior
- Fully extendable bottle trays in oak wood and solid aluminium in anthracite
- Bottle trays with hidden telescopic rails
- Warm white and glare-free LED light spots
- 5 preset lighting scenarios, selectable via TFT display
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- Low-vibration operation
- TFT touch display
- Capacity 70 bottles

Handling

TFT touch display operation.
Clear text display.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Activated charcoal air filter.
UV-protection.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Features

Capacity 70 bottles
(based on 0.75/l standard bottles).
12 bottle trays,
- 10 fully extendable trays
- 3 suitable for storage of Magnum bottles.
Flexible interior configuration possible by adding or removing fully extendable bottle trays.
Storage of up to 6 Magnum bottles with standard tray configuration (12 bottle trays).
Space for max. 13 bottle trays.
2 brilliant LED light spots with warm white, glare-free light in each climate zone.
5 different lighting scenarios can be selected for individual wine presentation.
Net volume 263 litres.

Special accessories

RA 430 000

Screw hole cover set. 8 pieces.

RA 491 161

Fully extendable bottle trays with hidden telescopic rails in oak wood and solid aluminium in anthracite
For 45.7 cm wide appliances.

RA 492 160

Removable shelf with oak wood frame
Suitable for decanters and open bottles.

For 45.7 cm wide appliances.

RA 493 060

Presenter in oak wood and aluminium in anthracite for single bottle display
1 piece.

RA 498 140

Bottle support in oak wood for convenient storage of bottles on the division plate.

For 45.7 cm wide appliances.

Consumption data

Energy efficiency class A/A+ at a range of energy efficiency classes from A+++ to G.

Energy consumption 167/127 kWh/year.
Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.

Door hinge right, reversible.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight 76 kg.

The mains socket needs to be planned outside the built-in niche.


No transport/operation above 2000 m sea level.

Please read additional planning notes on page 334 – 341.


Connection

Total connected load 0.300 kW.

Connecting cable 3.0 m, pluggable.

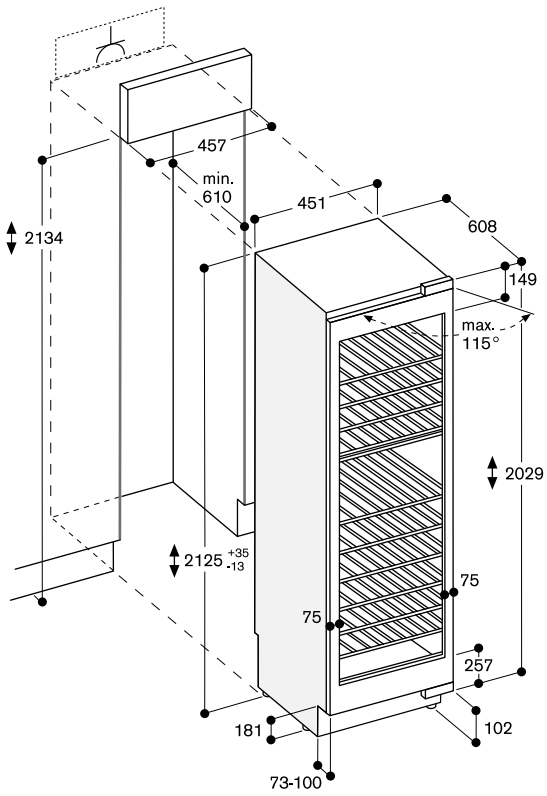


The maximum door panel dimensions are based on a clearance of 3 mm.

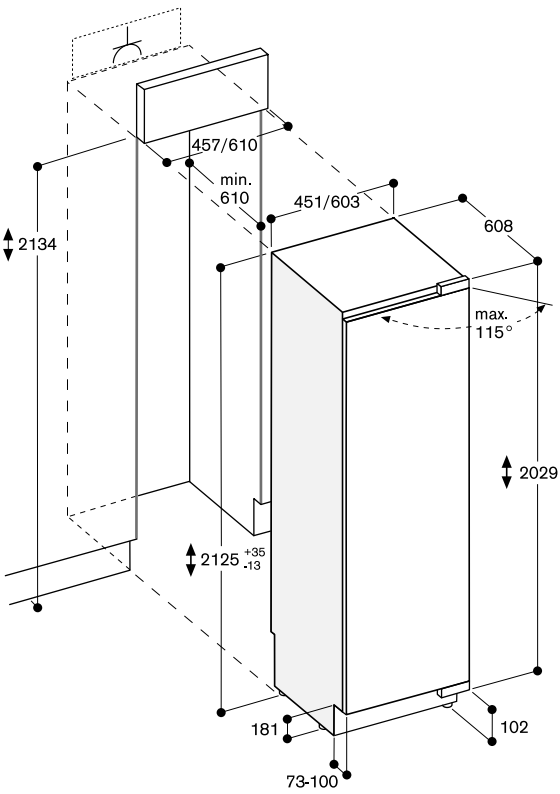

The maximum door panel dimensions are based on a clearance of 3 mm.

Bottle storage

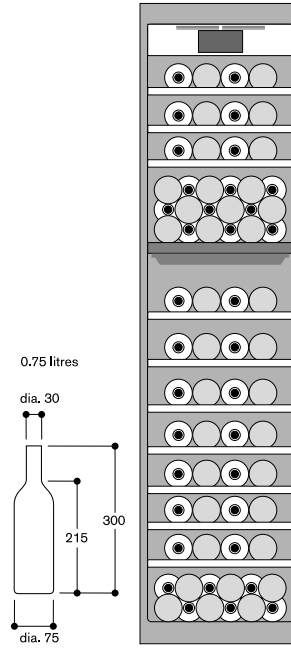



RW 282 262

Fully integrated, with glass door
Niche width 56 cm,
Niche height 177.2 cm

Special accessories

RA 050 220

Replacement activated charcoal air filter.

Wine climate cabinet 200 series

RW 282

- 2 independently controllable climate zones
- Consistent temperatures with exact control from +5 °C to +20 °C
- Humidity control
- Extendable bottle trays in beech and aluminium
- Presentation light option
- Low-vibration operation
- Combines with freezer RF287 or RF282 (side-by-side integration)
- Capacity 80 bottles

Handling

Electronic temperature control with digital display.
Touch keys.
Presentation light option in each climate zone, dimmable.
Interior lighting with automatic dimming with opening and closing of door.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system integrated in door hinge.
1 activated charcoal air filter for both climate zones.
UV-protection.
Open-door and malfunction alarm.
Child lock.

Features

Capacity 80 bottles (based on 0.75/l standard bottles).
10 bottle trays, 8 of which are extendable.
Storage of magnum bottles possible.
LED lighting.
Net volume 254 litres.

Consumption data

Energy efficiency class A at a range of energy efficiency classes from A+++ to G.
Energy consumption 163 kWh/year.
Noise level 32 dB (re 1 pW).


Planning notes

Flat hinge.
Door hinge right, reversible.
Height-adjustable feet.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 20 kg.
Door panel thickness min. 16 mm / max. 22 mm.
The mains socket needs to be planned outside the built-in niche.
For a side-by-side installation every appliance must be planned in its own niche.
The wine climate cabinet can be combined with a second wine climate cabinet or a freezer (RF287 or RF282) only. If combining the wine climate cabinet with other cooling appliances (RC, RT, RB), a clearance of min. 150 mm is to be kept between the appliances to avoid condensation.
No transport/operation above 1500 m sea level.


Please read additional planning notes on page 334 – 341.

Connection

Total connected load 0.130 kW.
Connecting cable 2.8 m with plug.

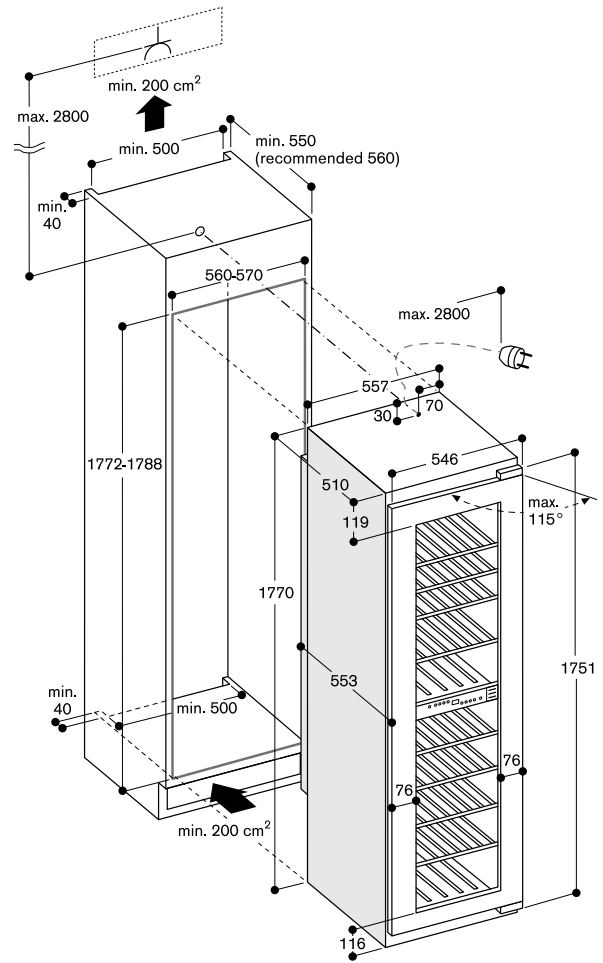

Bottle storage

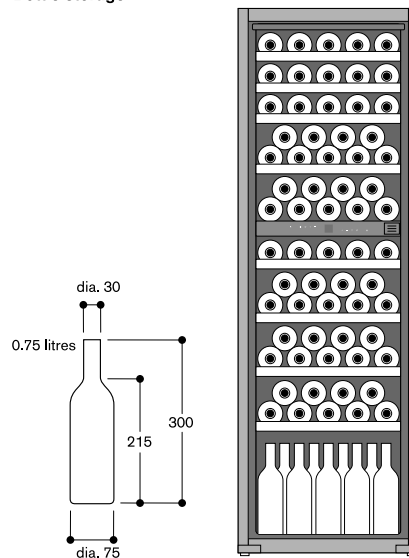

**RW 222 262**

Fully integrated, with glass door
Niche width 56 cm,
Niche height 122 cm

Installation accessories**RA 221 211**

Stainless steel door panel with handle
For RW 222, panel thickness 19 mm.

RA 425 910

Handle bar, stainless steel, short
For RB/RV 492 and RW 222,
with 2 mounts, length 810 mm, drilling
distance between the mounts 787 mm.

Special accessories**RA 050 220**

Replacement activated charcoal air
filter.

Wine climate cabinet 200 series**RW 222**

- 2 independently controllable climate zones
- Consistent temperatures with exact control from +5 °C to +20 °C
- Humidity control
- Extendable bottle trays in beech and aluminium
- Presentation light option
- Low-vibration operation
- Capacity 48 bottles

Handling

Electronic temperature control with digital display.
Touch keys.
Presentation light option in each climate zone, dimmable.
Interior lighting with automatic dimming with opening and closing of door.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system integrated in door hinge.
1 activated charcoal air filter for both climate zones.
UV-protection.
Open-door and malfunction alarm.
Child lock.

Features

Capacity 48 bottles
(based on 0.75/l standard bottles).
6 bottle trays, 4 of which are extendable.
Storage of magnum bottles possible.
LED lighting.
Net volume 158 litres.

Consumption data



Energy efficiency class A at a range of energy efficiency classes from A+++ to G.
Energy consumption 152 kWh/year.
Noise level 32 dB (re 1 pW).

Planning notes

Flat hinge.
Door hinge right, reversible.
Height-adjustable feet.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight 20 kg.
Door panel thickness min. 16 mm/max. 22 mm.
The mains socket needs to be planned outside the built-in niche.
For a side-by-side installation every appliance must be planned in its own niche.
When combining the wine climate cabinet with cooling appliances other than a second wine climate cabinet, a clearance of min. 150 mm is to be kept between the appliances to avoid condensation.
No transport/operation above 1500 m sea level.

Connection

Total connected load 0.130 kW.
Connecting cable 2.0 m with plug.

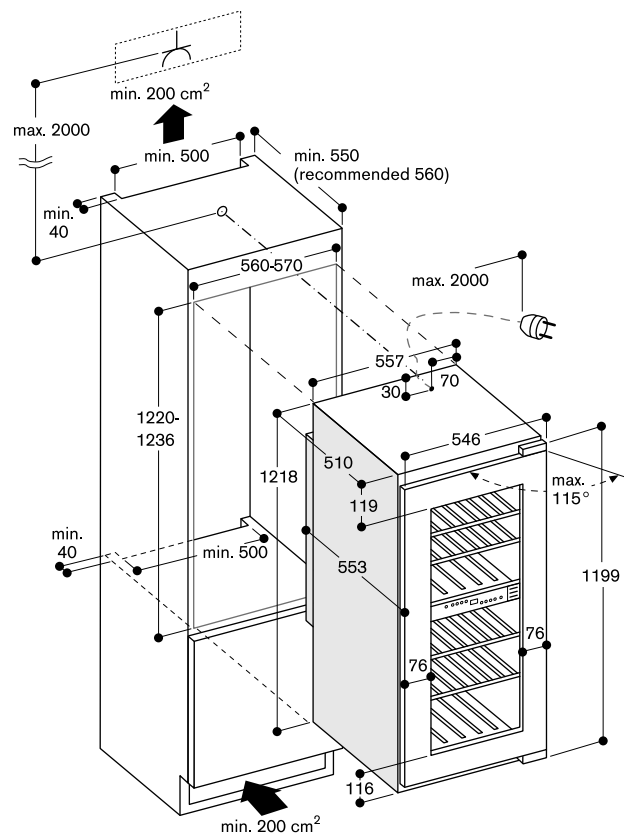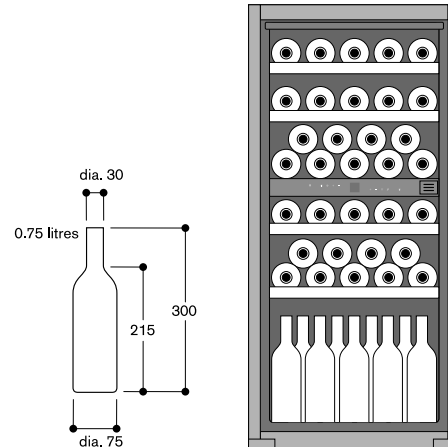**Bottle storage**



RW 404 262

Under-counter, stainless steel-framed glass door
Niche width 60 cm,
Niche height 82 cm

Special accessories

RA 050 220

Replacement activated charcoal air filter.

RA 097 600

Accessory for side-by-side installation of two under-counter wine climate cabinets

Wine climate cabinet 200 series

RW 404

- 2 independently controllable climate zones
- Consistent temperatures with exact control from +5 °C to +20 °C
- Humidity control
- Extendable bottle trays in beech and aluminium
- LED lighting
- Cushioned door closing system allowing a soft and controlled door closure
- Lockable door
- Capacity 34 bottles
- Side-by-side installation possible with special accessory

Handling

Electronic temperature control with digital display.
Touch keys.
Presentation light option in each climate zone, dimmable.
Interior lighting with automatic dimming with opening and closing of door.

Technical Features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system integrated in door hinge.
1 activated charcoal air filter for both climate zones.
UV-protection.
Open-door and malfunction alarm.
Dust filter, dishwasher-safe.

Features

Capacity 34 bottles
(based on 0.75/l standard bottles).
5 bottle trays, 3 of which are extendable.
Storage of magnum bottles possible.
LED lighting.
Net volume 94 litres.

Consumption data


Energy efficiency class A at a range of energy efficiency classes from A+++ to G.
Energy consumption 144 kWh/year.
Noise level 35 dB (re 1 pW).

Planning notes



Flat hinge.
Door hinge right, reversible.
Height-adjustable feet.
Door opening angle fixable at 95°.
For integration next to a side wall a clearance of 150 mm hinge side is necessary.
The mains socket needs to be planned outside the built-in niche.
No transport/operation above 1500 m sea level.

Connection

Total connected load 0.130 kW.
Connecting cable 2.0 m with plug.

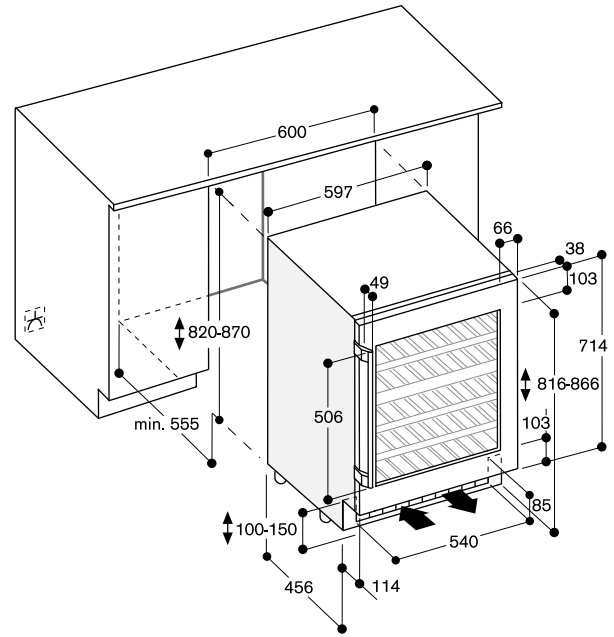

Bottle storage



Accessories and special accessories for cooling appliances

GN 114 130

Gastronorm insert, stainless steel,
GN 1/3
Unperforated, 40 mm deep, 1.5l.



GN 114 230

Gastronorm insert, stainless steel,
GN 2/3
Unperforated, 40 mm deep, 3l.



GN 144 130

Gastronorm insert, non-stick,
GN 1/3
unperforated, 40 mm deep, 1.5 l



GN 144 230

Gastronorm insert, non-stick,
GN 2/3
unperforated, 40 mm deep, 3 l



GN 410 130

Gastronorm lid, stainless steel, GN 1/3
For stainless steel gastronorm inserts.



GN 410 230

Gastronorm lid, stainless steel, GN 2/3
For stainless steel gastronorm inserts.



RA 050 220

Replacement activated charcoal
air filter.



RA 430 100

Storage container with transparent lid,
anthracite



RA 493 060

Presenter in oak wood and aluminium
in anthracite for single bottle display
1 piece.



RA 430 000

Screw shole cover set. 8 pieces.




RA 448 220

Ice storage container, small.
For installation with a door opening
angle of 90° the delivered ice storage
container must be exchanged for the
small ice storage container. This must
be done prior to fixing the door.



RA 492 160

Removable shelf with oak wood frame
Suitable for decanters and open
bottles.
For 45.7 cm wide appliances.



RA 492 660

Removable shelf with oak wood frame
Suitable for decanters and open
bottles.
For 61 cm wide appliances.



RA 498 140

Bottle support in oak wood for
convenient storage of bottles on the
division plate.
For 45.7 cm wide appliances.



RA 498 640

Bottle support in oak wood for
convenient storage of bottles on the
division plate.
For 61 cm wide appliances.



RA 421 110

Stainless steel door panel with handle
For 45.7 cm wide appliances,
panel thickness 19 mm.

**RA 428 111**

Stainless steel door panel frame,
handleless
For 45.7 cm wide appliances, panel
thickness 19 mm.

**RA 428 110**

Stainless steel door panel, handleless
For 45.7 cm wide appliances, panel
thickness 19 mm.

**RA 421 610**

Stainless steel door panel with handle
For 61 cm wide appliances,
panel thickness 19 mm.

**RA 421 111**

Stainless steel door panel frame with
handle
For 45.7 cm wide appliances,
left-hinged, panel thickness 19 mm.

**RA 428 610**

Stainless steel door panel, handleless
For 61 cm wide appliances, panel
thickness 19 mm.

**RA 421 112**

Stainless steel door panel frame with
handle
For 45.7 cm wide appliances,
right-hinged, panel thickness 19 mm.

**RA 421 611**

Stainless steel door panel frame with
handle
For 61 cm wide appliances,
left-hinged, panel thickness 19 mm.



Accessories and special accessories for cooling appliances

RA 421 612

Stainless steel door panel frame with handle
For 61 cm wide appliances, right-hinged, panel thickness 19 mm.



RA 428 611

Stainless steel door panel frame, handleless
For 61 cm wide appliances, panel thickness 19 mm.




RA 421 710

Stainless steel door panel with handle
For 76.2 cm wide appliances, panel thickness 19 mm.



RA 428 710

Stainless steel door panel, handleless
For 76.2 cm wide appliances, panel thickness 19 mm.

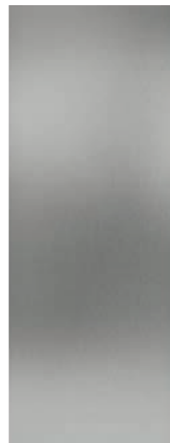

RA 421 911

Stainless steel door panel with handle
For 91.4 cm wide appliances, panel thickness 19 mm.



RA 428 911

Stainless steel door panel, handleless
For 91.4 cm wide appliances, panel thickness 19 mm.




RA 421 712

Stainless steel door panel with handle
For RB 472, panel thickness 19 mm.



RA 428 712

Stainless steel door panels, handleless
For RB 472, panel thickness 19 mm.

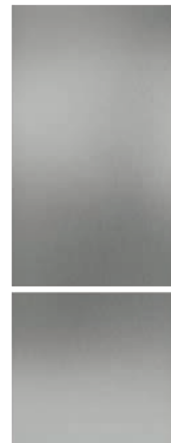


RA 421 910

Stainless steel door panels with handles
For RB 492, panel thickness 19 mm.

**RA 428 910**


Stainless steel door panels, handleless
For RB 492, panel thickness 19 mm.

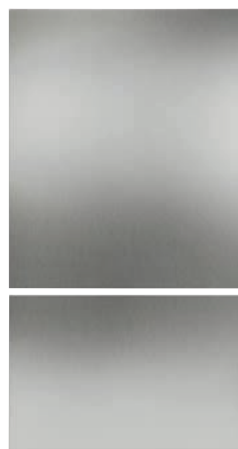**RA 421 912**

Stainless steel door panels with handles
For RY 492, panel thickness 19 mm.

**RA 428 912**

Stainless steel door panels, handleless
For RY 492, panel thickness 19 mm.

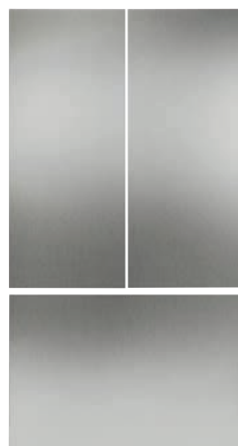**RA 422 610**

Stainless steel door panel with handle
For RF 463, panel thickness 19 mm.

**RA 428 810**

Stainless steel door panel, handleless
For RF 463, panel thickness 19 mm.

**RA 221 311**

Stainless steel door panel with handle
For RW 282, panel thickness 19 mm.

**RA 221 211**

Stainless steel door panel with handle
For RW 222, panel thickness 19 mm.



Accessories and special accessories for cooling appliances

RA 425 110

Handle bar, stainless steel, long
With 3 mounts, length 1.131 mm,
drilling distance between each
mount 554 mm.



RA 425 710

Handle bar, stainless steel, short.
For RB 472 with 2 mounts,
length 658 mm, drilling distance
between the mounts 637 mm.



RA 425 910

Handle bar, stainless steel, short
For RB/RY 492, with 2 mounts, length
810 mm, drilling distance between the
mounts 787 mm.



RA 450 012

Activated charcoal filter for water filter
system.
For RB, RY, RF
For RF 4*1 **4 and RF 463 **4/5
from FD 9007




RA 460 000

Accessory for side-by-side installation.
Not required if appliances are installed
more than 160 mm apart from each other.
Included in delivery for RF and RW.



RA 460 013

Additional side heating element 230 V.
Required if appliances are installed
with a distance greater than 16 mm and
less than 160 mm next to each other
and for all built-in situations in a very
humid environment. Not required if
appliances are installed more than
160 mm apart from each other.



RA 460 020

Connecting element for vertically split
appliance fronts (for a flush front)



RA 460 030

Connecting element for vertically split
fronts (for fridge-freezer combination)



RA 464 111

Ventilation grille stainless steel
For 45.7 cm wide appliances.



RA 464 113

Ventilation grille stainless steel
For RF 411 **4 from FD 9007 and
RF 411 **5



RA 464 611

Ventilation grille stainless steel
For 61 cm wide appliances.



RA 464 616

Ventilation grille stainless steel
For RF 461 **4 from FD 9007 and
RF 461 **5



RA 464 617

Ventilation grille stainless steel
For RF 463 **4 from FD 9007 and
RF 463 **6



RA 464 618

Ventilation grille stainless steel
For RF 463 **5 from FD 9007 and
RF 463 **7



RA 464 711

Ventilation grille stainless steel
For 76.2 cm wide appliances.



RA 464 714

Ventilation grille stainless steel
For RF 471 **4 from FD 9007 and
RF 471 **5



RA 464 713

Ventilation grille stainless steel
For RB 472.



RA 464 913

Ventilation grille stainless steel
For RB/RY 492.



RA 464 911

Ventilation grille stainless steel
For 91.4 cm wide appliances.




RA 420 010

Door lock for RW 414 and RW 466




RA 097 600

Accessory for side-by-side installation
of two under-counter wine climate
cabinets.




RA 491 161


Fully extendable bottle trays with hidden telescopic rails in oak wood and solid aluminium in anthracite
For 45.7 cm wide appliances.

**RA 491 661**


Fully extendable bottle trays with hidden telescopic rails in oak wood and solid aluminium in anthracite
For 61 cm wide appliances.

**RA 423 140**

Side trims, long.

**RA 423 340**

Side trims, 2 pieces, for RY and RB.



Vario cooling appliances 400 series



Appliance type		Fridge-freezer combination	Fridge-freezer combination	Fridge-freezer combination	Refrigerator
Fully integrated / integrated		RY 492 305	RB 492 305	RB 472 305	RC 492 305
Dimensions					
Appliance dimensions W x H x D	(cm)	90.8 x 212.5 x 60.8	90.8 x 212.5 x 60.8	75.6 x 212.5 x 60.8	90.8 x 212.5 x 60.8
Niche dimensions W x H x D	(cm)	91.4 x 213.4 x 61	91.4 x 213.4 x 61	76.2 x 213.4 x 61	91.4 x 213.4 x 61
Depth including wall clearance	(cm)	61	61	61	61
Weight when empty	(kg)	230	226	203	205
Shipping weight	(kg)	248	244	219	223
Maximum load weight	(kg)	622	616	433	564
Transport package dimensions W x H x D	(cm)	100 x 226 x 75	100 x 226 x 75	85 x 226 x 75	100 x 230 x 75
Type and configuration					
Cooling / freezing / wine		•/•/-	•/•/-	•/•/-	•/-/-
fresh cooling 0°C / fresh cooling <> 0°C / fresh cooling		-/•/•	-/•/•	-/•/•	•/-/•
Fully integrated / integrated / under-counter / free-standing		•/-/-/-	•/-/-/-	•/-/-/-	•/-/-/-
Door hinge right / left / reversible		•/•/-	•/-/•	•/-/•	•/-/•
Glass door		-	-	-	-
Full panelling / door panelling		-/°	-/°	-/°	-/°
Volume / consumption data					
Total gross volume / total net volume	(l)	633/518	637/521	517/418	669/567
- Net volume of cooling	(l)	344	347	281	509
- Net volume of fresh cooling 0°C/ Fresh cooling <> 0°C	(l)	34	34	27	58
- Net volume of freezing	(l)	132	132	102	-
Storage capacity 0.75 litre bottles	(no.)	-	-	-	-
Energy efficiency class ¹		A++	A++	A++	A++
Daily energy consumption DIN EN 153 ²	(kWh/24h)	0.947	0.950	0.822	0.413
Annual energy consumption DIN EN 153 ²	(kWh)	346	347	301	151
Daily energy consumption per 100 l of net volume ²	(kWh)	0.18	0.18	0.20	0.07
Noise level	(dB (re 1 pW))	42	42	42	40
Climate class		SN - T	SN - T	SN - T	SN - T
Handling					
TFT touch display		•	•	•	•
Opening assist for doors and freezer drawer		•	•	•	•
Clear text display	(No. of languages)	52	52	52	52
Features					
Ice cubes / Ice and water dispenser with ice cubes / crushed ice / water		•/-/-/-	•/-/-/-	•/-/-/-	-/-/-/-
Fresh cooling zones with temperature control	(no.)	•	•	•	•
Fresh cooling zones with humidity control	(no.)	•	•	•	•
Temperature / climate zones	(no.)	4	4	4	3
Temperature display internal / external		•/-	•/-	•/-	•/-
Temperature adjustable to the precise degree		•	•	•	•
No-Frost technology		•	•	•	•
Automatic defrosting: cooling / fresh cooling / freezing		•/•/•	•/•/•	•/•/•	•/•/-
Presentation light	(no.)	-	-	-	-
Lock		-	-	-	-
Humidity control		-	-	-	-
Activated charcoal air filter		•	•	•	•
Low-vibration operation		-	-	-	-
UV-protection		-	-	-	-
Stainless steel interior		-	•	•	•
Vacation mode		•	•	•	-
Malfunction, visual / audible warning signal		•/•	•/•	•/•	•/•
Door open, visual / audible warning signal or door lock indication		-/•	-/•	-/•	-/•
Digital services (Home Connect) wireless via WiFi. ³		•	•	•	•
Cooling / fresh cooling					
Fast cooling		•	•	•	•
Dynamic cold air distribution		•	•	•	•
Levels in the interior	(No.)	4	3	3	4
Containers / drawers in the interior	(No.)	2	2	2	3
Door racks	(No.)	6	3	3	3
Egg racks	(No. of eggs)	18	18	18	18
Wine					
Max. levels in the interior		-	-	-	-
Bottle tray fully extendable / extendable		-	-	-	-
Shelf fully extendable / extendable / removable		-	-	-	-
Storage of Magnum bottles possible		-	-	-	-
Suitable for decanters, open bottles and humidors		-	-	-	-
Freezing					
Fast freezing		•	•	•	-
Freezing capacity	(kg/24h)	16	16	14	-
Storage time after a malfunction	(hrs.)	17	17	17	-
Interior compartments	(no.)	-	-	-	-
Baskets, containers, drawers in the interior	(no.)	2	2	2	-
Door racks	(no.)	-	-	-	-
Ice bucket, ice cub trays	(no.)	1	1	1	-
Activated charcoal filter for water filter system		°	°	°	-
Connection					
Total connected load	(kW)	0.300	0.300	0.300	0.300
Water connection inlet		•	•	•	-

• Standard. - Not available. ° Special accessory.

¹ Values according to EU regulation 1060/2010. ² Effective consumption depends on the use/location of appliance.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.

Vario cooling appliances 400 series



Appliance type		Wine climate cabinet	Wine climate cabinet	Wine climate cabinet	Wine climate cabinet
		RW 466 365	RW 414 365	RW 466 305	RW 414 305
Dimensions					
Fully integrated / integrated					
Appliance dimensions W x H x D	(cm)	60.3 x 212.5 x 60.8	45.1 x 212.5 x 60.8	60.3 x 212.5 x 60.8	45.1 x 212.5 x 60.8
Niche dimensions W x H x D	(cm)	61 x 213.4 x 61	45.7 x 213.4 x 61	61 x 213.4 x 61	45.7 x 213.4 x 61
Depth including wall clearance	(cm)	61	61	61	61
Weight when empty	(kg)	165	140	159	139
Shipping weight	(kg)	179	152	173	152
Maximum load weight	(kg)	571	377	571	377
Transport package dimensions W x H x D	(cm)	70 x 226 x 75	55 x 226 x 75	70 x 226 x 75	55 x 226 x 75
Type and configuration					
Cooling / freezing / wine		-/-/•	-/-/•	-/-/•	-/-/•
fresh cooling 0°C / fresh cooling > 0°C / fresh cooling		-/-/-	-/-/-	-/-/-	-/-/-
Fully integrated / integrated / under-counter / free-standing		•/-/-/-	•/-/-/-	•/-/-/-	•/-/-/-
Door hinge right / left / reversible		•/-/•	•/-/•	•/-/•	•/-/•
Glass door		•	•	•	•
Full panelling / door panelling		-/°	-/°	-/°	-/°
Volume / consumption data					
Total gross volume / total net volume	(l)	441/361	310/263	441/361	310/263
- Net volume of cooling	(l)	-	-	-	-
- Net volume of fresh cooling 0°C / Fresh cooling > 0°C	(l)	-	-	-	-
- Net volume of freezing	(l)	-	-	-	-
Storage capacity 0.75 litre bottles	(no.)	99	70	99	70
Energy efficiency class ¹		A	A	A	A
Daily energy consumption DIN EN 153 ²	(kWh/24h)	0.467	0.455	0.356	0.347
Annual energy consumption DIN EN 153 ²	(kWh)	171	167	130	127
Daily energy consumption per 100 l of net volume ²	(kWh)	0.13	0.17	0.10	0.13
Noise level	(dB (re 1 pW))	42	42	42	42
Climate class		SN - T	SN - T	SN - T	SN - T
Handling					
TFT touch display		•	•	•	•
Opening assist for doors and freezer drawer		•	•	•	•
Clear text display	(No. of languages)	52	52	52	52
Features					
Ice cubes / Ice and water dispenser with ice cubes / crushed ice / water		-/-/-/-	-/-/-/-	-/-/-/-	-/-/-/-
Fresh cooling zones with temperature control	(no.)	-	-	-	-
Fresh cooling zones with humidity control	(no.)	-	-	-	-
Temperature / climate zones	(no.)	3	2	3	2
Temperature display internal / external		•/-	•/-	•/-	•/-
Temperature adjustable to the precise degree		•	•	•	•
No-Frost technology		•	•	•	•
Automatic defrosting: cooling / fresh cooling / freezing		•/-/-	•/-/-	•/-/-	•/-/-
Presentation light	(no.)	5	5	5	5
Lock		°	°	°	°
Humidity control		•	•	•	•
Activated charcoal air filter		•	•	•	•
Low-vibration operation		•	•	•	•
UV-protection		•	•	•	•
Stainless steel interior		•	•	•	•
Vacation mode		-	-	-	-
Malfunction, visual / audible warning signal		•/•	•/•	•/•	•/•
Door open, visual / audible warning signal or door lock indication		-/•	-/•	-/•	-/•
Digital services (Home Connect) wireless via WiFi. ³		•	•	•	•
Cooling / fresh cooling					
Fast cooling		-	-	-	-
Dynamic cold air distribution		-	-	-	-
Levels in the interior	(No.)	-	-	-	-
Containers / drawers in the interior	(No.)	-	-	-	-
Door racks	(No.)	-	-	-	-
Egg racks	(No. of eggs)	-	-	-	-
Wine					
Max. levels in the interior		12	13	12	13
Bottle tray fully extendable / extendable		•	•	•	•
Shelf fully extendable / extendable / removable		°	°	°	°
Storage of Magnum bottles possible		•	•	•	•
Suitable for decanters, open bottles and humidors		°	°	°	°
Freezing					
Fast freezing		-	-	-	-
Freezing capacity	(kg/24h)	-	-	-	-
Storage time after a malfunction	(hrs.)	-	-	-	-
Interior compartments	(no.)	-	-	-	-
Baskets, containers, drawers in the interior	(no.)	-	-	-	-
Door racks	(no.)	-	-	-	-
Ice bucket, ice cub trays	(no.)	-	-	-	-
Activated charcoal filter for water filter system		-	-	-	-
Connection					
Total connected load	(kW)	0.300	0.300	0.300	0.300
Water connection inlet		-	-	-	-

• Standard. - Not available. ° Special accessory.

¹ Values according to EU regulation 1060/2010. ² Effective consumption depends on the use/location of appliance.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Appliance type		Wine climate cabinet	Wine climate cabinet	Wine climate cabinet
Fully integrated / integrated		RW 282 262	RW 222 262	
Stainless steel glass door				RW 404 262
Dimensions				
Appliance dimensions W x H x D	(cm)	55.7 x 177 x 55.3	55.7 x 121.8 x 55.3	59.7 x 82-87 x 57
Niche dimensions W x H x D	(cm)	56 x 177.2 x 55	56 x 122 x 55	60 x 82-87 x 58
Depth including wall clearance	(cm)	55	55	58
Weight when empty	(kg)	87	64	51
Shipping weight	(kg)	96	71	55
Transport package dimensions W x H x D	(cm)	64 x 190 x 64	64 x 139 x 64	66 x 87 x 69
Type and configuration				
Cooling / freezing / wine		-/-•	-/-•	-/-•
fresh cooling 0°C / fresh cooling ⇔ 0°C / fresh cooling		-/-/-	-/-/-	-/-/-
Fully integrated / integrated / under-counter / free-standing		•/-/-/-	•/-/-/-	-/-/•/-
Door hinge right / left / reversible		•/-/•	•/-/•	•/-/•
Full panelling / door panelling		-/-	-/-	-/-
Volume / consumption data				
Total gross volume / total net volume	(l)	289/254	183/158	123/94
Storage capacity 0.75 litre bottles	(No.)	80	48	34
Energy efficiency class ¹		A	A	A
Daily energy consumption DIN EN 153 ²	(kWh/24h)	0.445	0.416	0.392
Annual energy consumption DIN EN 153 ²	(kWh)	162	151	144
Daily energy consumption per 100 l of net volume ²	(kWh)	0.18	0.26	0.42
Noise level	(dB (re 1pW))	32	32	35
Climate class		SN-ST	SN-ST	SN - ST
Features				
Temperature / climate zones	(No.)	2	2	2
Temperature display internal / external		•/-	•/-	•/-
Temperature adjustable to the precise degree		•	•	•
Automatic defrosting: cooling / fresh cooling / freezing		•/-/-	•/-/-	•/-/-
Presentation light		•	•	•
Lock		-	-	•
Humidity control		•	•	•
Activated charcoal air filter		•	•	•
Low-vibration operation		•	•	•
UV-protection		•	•	•
Malfunction, visual / audible warning signal		•/-	•/-	•/-
Door open, visual / audible warning signal or door lock indication		•/•	•/•	•/•
Digital services (Home Connect) wireless via WiFi. ³		-	-	-
Cooling / fresh cooling				
Dynamic cold air distribution		•	•	•
Wine				
Max. levels in the interior		10	6	5
Bottle tray fully extendable / extendable		-/•	-/•	-/•
Shelf fully extendable / extendable		-/-	-/-	-/-
Storage of Magnum bottles possible		•	•	•
Suitable for decanters, open bottles and humidors		-	-	-
Connection				
Total connected load	(kW)	0.13	0.13	0.13
Water connection inlet		-	-	-

• Standard. - Not available.

¹ Values according to EU regulation 1060/2010.

² Effective consumption depends on the use/location of appliance.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.

Vario cooling appliances 200 series



Appliance type		Fridge-freezer combination	Fridge-freezer combination	Fridge-freezer combination
Fully integrated / integrated		RB 289 203	RB 287 203	RT 289 203
Dimensions				
Appliance dimensions W x H x D	(cm)	55.6 x 177.2 x 54.5	55.6 x 177.2 x 54.5	55.6 x 177.2 x 54.5
Niche dimensions W x H x D	(cm)	56 x 177.5 x 55	56 x 177.5 x 55	56 x 177.5 x 55
Depth including wall clearance	(cm)	55	55	55
Weight when empty	(kg)	80	73	83
Shipping weight	(kg)	86	79	88
Transport package dimensions W x H x D	(cm)	63 x 198 x 66	63 x 198 x 66	63 x 198 x 66
Type and configuration				
Cooling / freezing / wine		•/•/-	•/•/-	•/•/-
fresh cooling 0°C / fresh cooling <> 0°C / fresh cooling		-/•/-	-/-/-	-/•/-
Fully integrated / integrated / under-counter / free-standing		•/-/-/-	•/-/-/-	•/-/-/-
Door hinge right / left / reversible		•/-/•	•/-/•	•/-/•
Full panelling / door panelling		-/-	-/-	-/-
Volume / consumption data				
Total gross volume / total net volume	(l)	273/245	287/258	299/284
- Net volume of cooling	(l)	128	186	180
- Net volume of fresh cooling 0°C / fresh cooling <> 0°C	(l)	56	-	77
- Net volume of freezing	(l)	61	72	27
Energy efficiency class ¹		A++	A++	A++
Daily energy consumption DIN EN 153 ²	(kWh/24h)	0.646	0.648	0.627
Annual energy consumption DIN EN 153 ²	(kWh)	236	237	229
Daily energy consumption per 100 l of net volume ²	(kWh)	0.26	0.25	0.22
Noise level	(dB (re 1pW))	41	39	39
Climate class		SN - ST	SN - T	SN - ST
Features				
Ice and water dispenser with ice cubes / crushed ice / water		-/-/-	-/-/-	-/-/-
Fresh cooling zones with humidity control	(No.)	1	-	1
Cooling zones with humidity control	(No.)	-	-	-
Temperature / climate zones	(No.)	4	2	4
Temperature display internal / external		•/-	•/-	•/-
Temperature adjustable to the precise degree		•	•	•
No-Frost technology		•	•	-
Automatic defrosting: cooling / fresh cooling system / freezing		•/•/•	•/-/•	•/•/-
Activated charcoal air filter		•	-	•
Vacation mode		-	-	-
Malfunction, visual / audible warning signal		•/•	•/•	•/•
Door open, visual / audible warning signal or door lock indication		•/•	•/•	•/•
Digital services (Home Connect) wireless via WiFi. ³		-	-	-
Cooling / fresh cooling				
Fast cooling		•	•	-
Dynamic cold air distribution		•	•	•
Levels in the interior	(No.)	5	6	6
Containers / drawers in the interior	(No.)	2	1	3
Door racks	(No.)	2	3	4
Wine and champagne rack, fold-away		•	•	•
GN insert		•	•	•
Glass tray		•	•	•
Egg racks	(No. of eggs)	14	14	14
Freezing				
Fast freezing		•	•	•
Freezing capacity	(kg/24h)	12	15	2
Storage time after a malfunction	(h)	16	25	14
Interior compartments	(No.)	-	-	2
Baskets, containers, drawers in the interior	(No.)	2	3	-
Door racks	(No.)	-	-	-
Ice cub trays	(No.)	1	1	1
Ice packs	(No.)	2	2	-
Connection				
Total connected load	(kW)	0.12	0.12	0.12
Water connection inlet		-	-	-

• Standard. - Not available. ◦ Special accessory.

¹ Values according to EU regulation 1060/2010.

² Effective consumption depends on the use/location of appliance.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Refrigerator

Freezer

RC 289 203

RF 287 202

55.6 x 177.2 x 54.5

55.6 x 177.2 x 54.5

56 x 177.5 x 55

56 x 177.5 x 55

55

55

90

74

96

80

63 x 198 x 66

63 x 198 x 66

•/•/•

-/•/-

-/•/-

-/-/-

•/•/•/•

•/•/•/•

•/•/•

-/•/•

-/-

-/-

316/302

237/210

225

-

77

-

-

210

A++

A++

0.363

0.663

133

242

0.12

0.32

39

42

SN - T

SN - T

-/-/-

-/-/-

1

-

-

-

3

1

•/-

•/-

•

•

-

•

•/•/-

-/-/•

•

-

-

-

•/•

•/•

•/•

•/•

-

-

•

-

•

-

8

-

3

-

3

-

•

-

•

-

•

-

14

-

-

•

-

18

-

20

-

7

-

5

-

-

-

1

-

2

0.12

0.12

-

-

Cooling 200 series



Appliance type		Fridge-freezer combination	Fridge-freezer combination	Fridge-freezer combination
Fully integrated / integrated		RB 282 306	RT 282 306	RT 282 204
Dimensions				
Appliance dimensions W x H x D	(cm)	55.8 x 177.2 x 54.5	55.8 x 177.2 x 54.5	55.8 x 177.2 x 54.5
Niche dimensions W x H x D	(cm)	56 x 177.5 x 55	56 x 177.5 x 55	56 x 177.5 x 55
Depth including wall clearance	(cm)	55	55	55
Weight when empty	(kg)	68	60	67
Shipping weight	(kg)	74	66	73
Transport package dimensions W x H x D	(cm)	62 x 184 x 64	62 x 184 x 64	62 x 184 x 64
Type and configuration				
Cooling / freezing / wine		•/•/-	•/•/-	•/•/-
fresh cooling 0°C / fresh cooling <> 0°C / fresh cooling		-/•/-	-/•/-	-/•/•
Fully integrated / integrated / under-counter / free-standing		•/-/-/-	•/-/-/-	•/-/-/-
Door hinge right / left / reversible		•/-/•	•/-/•	•/-/•
Full panelling / door panelling		-/-	-/-	-/-
Volume / consumption data				
Total gross volume / total net volume	(l)	267/223	298/269	288/286
- Net volume of cooling	(l)	101	171	252
- Net volume of fresh cooling 0°C / fresh cooling <> 0°C	(l)	55	83	-
- Net volume of freezing	(l)	67	15	34
Energy efficiency class ¹		A+++	A+++	A++
Daily energy consumption DIN EN 153 ²	(kWh/24h)	0.442	0.401	0.572
Annual energy consumption DIN EN 153 ²	(kWh)	161	146	209
Daily energy consumption per 100 l of net volume ²	(kWh)	0.2	0.15	0.2
Noise level	(dB (re 1pW))	37	36	36
Climate class		SN - T	SN - ST	SN - ST
Features				
Ice and water dispenser with ice cubes / crushed ice / water		-/-/-	-/-/-	-/-/-
Fresh cooling zones with humidity control	(No.)	•	•	•
Temperature / climate zones	(No.)	4	4	3
Temperature display internal / external		•/-	•/-	•/-
Temperature adjustable to the precise degree		•	•	•
No-Frost technology		•	-	-
Automatic defrosting: cooling / fresh cooling system / freezing		•/•/•	•/•/-	•/-/-
Defrost assistance freezing		•	-	-
Activated charcoal air filter		-	-	•
Vacation mode		•	-	-
Malfunction, visual / audible warning signal		•/•	•/•	-/-
Door open, visual / audible warning signal or door lock indication		•/•	•/•	-/•
Digital services (Home Connect) wireless via WiFi. ³		•	•	-
Cooling / fresh cooling				
Fast cooling		•	•	•
Dynamic cold air distribution		-	-	•
Levels in the interior	(No.)	3	6	5
Containers / drawers in the interior	(No.)	2	3	2
Door racks	(No.)	2	5	6
Wine and champagne rack, fold-away		•	•	•
Glass tray		-	-	-
Egg racks	(No. of eggs)	12	12	14
Freezing				
Fast freezing		•	-	-
Freezing capacity	(kg/24h)	13	2.5	3
Storage time after a malfunction	(h)	13	13	22
Interior compartments	(No.)	3	2	2
Baskets, containers, drawers in the interior	(No.)	3	-	-
Door racks	(No.)	-	-	-
Ice cub trays	(No.)	1	1	1
Ice packs	(No.)	2	-	-
Connection				
Total connected load	(kW)	0.09	0.09	0.09
Water connection inlet		-	-	-

• Standard. - Not available. ◊ Special accessory.


¹ Values according to EU regulation 1060/2010.

² Effective consumption depends on the use/location of appliance.

³ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Refrigerator	Freezer	Fridge-freezer combination	Refrigerator	Freezer
RC 282 306	RF 282 305	RT 200 203	RC 200 203	RF 200 203
55.8 x 177.2 x 54.5	55.8 x 177.2 x 54.5	59.8 x 82 x 54.8	59.8 x 82 x 54.8	59.8 x 82 x 54.8
56 x 177.5 x 55	56 x 177.5 x 55	60 x 82 x 55	60 x 82 x 55	60 x 82 x 55
55	55	55	55	55
70	67	34	34	36
76	73	37	36	39
62 x 184 x 64	62 x 184 x 64	67 x 89 x 61	67 x 89 x 61	67 x 89 x 61
•/-/-	-/•/-	•/•/-	•/-/-	-/•/-
-/•/-	-/-/-	-/-/-	-/-/-	-/-/-
•/-/-/-	•/-/-/-	-/-/•/-	-/-/•/-	-/-/•/-
•/-/•	-/•/•	•/-/•	•/-/•	•/-/•
-/-	-/-	-/-	-/-	-/-
313/289	235/211	131/123	139/137	114/98
206	-	108	137	-
83	-	-	-	-
-	211	15	-	98
A+++	A++	A++	A++	A+
0.238	0.665	0.381	0.230	0.504
87	243	139	92	184
0.08	0.32	0.31	0.18	0.51
36	36	38	38	38
SN - T	SN - T	SN - ST	SN - ST	SN - ST
-/-/-	-/-/-	-/-/-	-/-/-	-/-/-
•	-	-	-	-
3	1	2	1	1
•/-	•/-	-/-	-/-	•/-
•	•	-	-	-
-	•	-	-	-
•/•/-	-/-/•	•/-/-	•/-/-	-/-/-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-/-	•/•	-/-	-/-	•/•
•/•	-/•	-/-	-/-	-/-
•	-	-	-	-
•	-	-	-	-
-	-	•	•	-
7	-	3	4	-
3	-	1	1	-
5	-	5	5	-
•	-	-	-	-
-	-	-	-	-
12	-	7	7	-
-	•	•	-	•
-	20	2	-	12
-	22	10	-	23
-	7	1	-	-
-	5	-	-	3
-	-	-	-	-
-	1	1	-	1
-	2	-	-	1
0.09	0.12	0.09	0.09	0.09
-	-	-	-	-

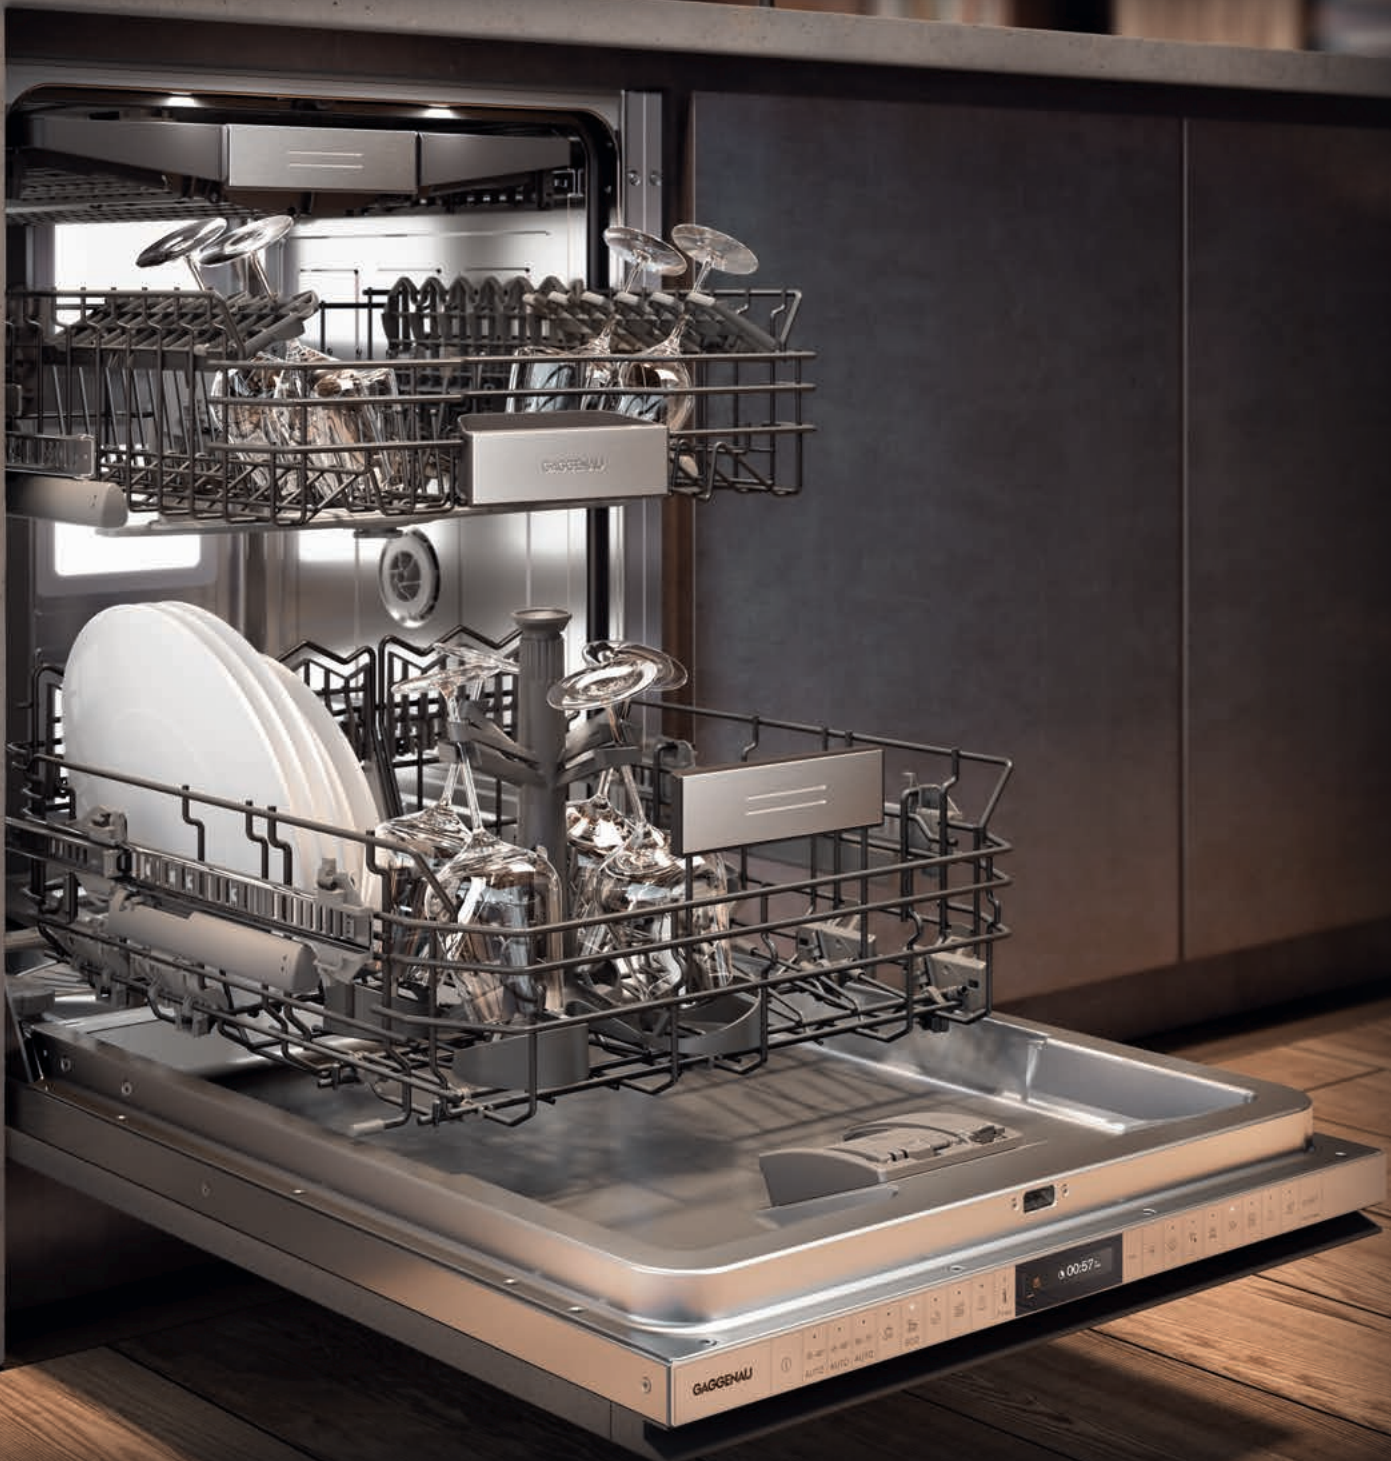

The dishwashers | washing machine | tumble dryer

Dishwashers 400 series	384
Dishwashers 200 series	388
Planning notes	400
Accessories special accessories	408
Technical specifications	410
Washing machine	412
Tumble dryer	413
Technical specifications	414



DF 481 162

Fully integrated
Height 86.5 cm

DF 480 162

Fully integrated
Height 81.5 cm

Included in the price

- 1 baking tray spray head
- 1 holder for long-stemmed glasses
- 2 GN container inserts
- 1 stainless steel trim kit

Installation accessories

DA 021 000

Hinge for all fully integrated dishwashers

GZ 010 011

Extension for water inlet and outlet (2 m long)

Special accessories

DA 041 160

Cutlery drawer with smooth running rails 3rd level above the upper basket. For large pieces of cutlery, cooking utensils and espresso cups. 13 place setting capacity with all 3 levels.

DA 042 030

Silvercare cartridge for all dishwashers

DA 043 000

Holder for long-stemmed glasses Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result. For positioning in the lower basket.

Dishwasher 400 series

DF 481/DF 480

- Optimal protection for sensitive glassware by low temperature drying with zeolite and intelligent water softening
- 8 programmes with aqua sensor and 5 options, such as Power and Intensive:
 - Clean and dry dishes in 57 minutes
 - Intensive cleaning in the lower basket while protecting glassware in the upper basket
- Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket
- TFT display for intuitive handling of all functions
- Remaining time projection onto the kitchen floor
- Perfectly illuminated interior
- Push-to-open function for perfect integration into handleless furniture fronts
- Very quiet: 43 dB
- Aqua stop
- Energy efficiency class A+++

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water. Touch key operation. Information key with use indications. Time delay up to 24 hours. Visual and acoustic end of programme indicator. Remaining time projection.

Technical Features

Perfectly illuminated interior. Glass protection with zeolite. Aqua sensor. Load sensor. Detergent recognition. Regeneration electronics. Heat exchanger. Continuous flow heater. Triple filter system. Soft lock. Aqua stop.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

8 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Intensive 70 °C.
Eco 50 °C.
Night programme.
Quick wash 45 °C (29 min.).
Pre-rinse.

5 options:
Intensive.
Power.
Half Load.
Hygiene.
Extra Dry.

Features

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.

Upper basket:

Over extension.
Rackmatic with 3 levels, adjustable in height up to 5 cm.
6 folding spines.
4 folding racks.
2 glass support bars.

Lower basket:

8 folding spines.
2 folding racks.
Dividable glass support.
Cutlery basket.
Holder for long-stemmed glasses.

Maximum dish sizes

(upper/lower basket)
for 86.5 cm high dishwashers:
29/28, 26.5/30.5 or 24/34 cm respectively.

Maximum dish sizes

(upper/lower basket)
for 81.5 cm high dishwashers:
27/25, 24.5/27.5 or 22/31 cm respectively.

12 place setting capacity.

Maximum glass loading capacity
23 wine glasses.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D. From 9.5 l water. From 0.8 kWh. Noise level 43 dB (re 1 pW).

Planning notes


Height-adjustable feet. Appliance plinth recess 100 mm (see drawing). To display the remaining time projection, a minimum plinth protrusion is required (40 mm + thickness of the furniture front). The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection. Rear feet adjustable at front. Door weight up to 10/8.5 kg. Door panel dimension dependent on plinth height of kitchen furniture. Installation and usage also with furniture handle possible. The push-to-open function remains active.

Please read additional planning notes on page 400 – 407.


Connection

Total connected load 2.4 kW. Connecting cable pluggable. Water connection with 3/4" screw joint. Connection to hot or cold water possible.


86.5 cm high dishwasher

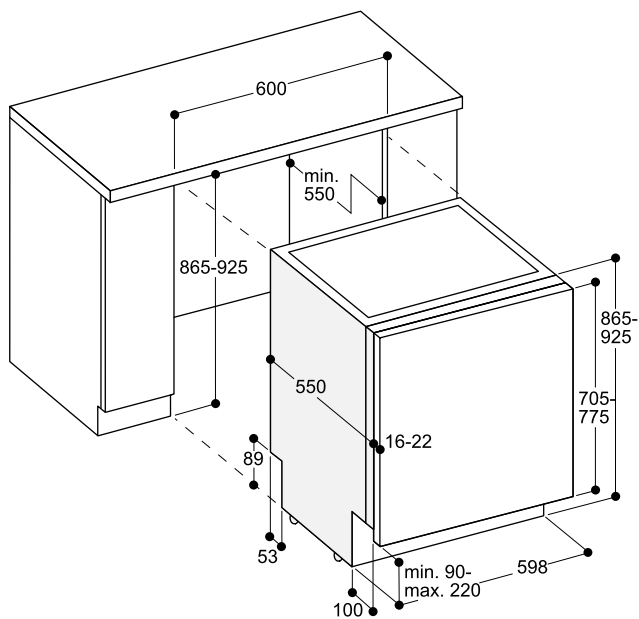

81.5 cm high dishwasher

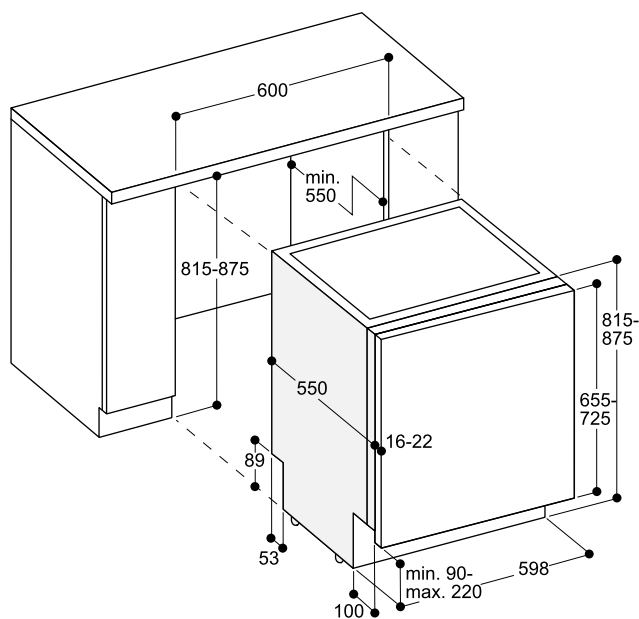

Connection dimensions for a 60 cm wide dishwasher

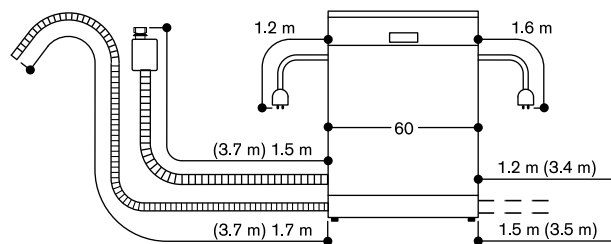

() values with extension kit



DF 481 163F

Fully integrated
With flexible hinge
Height 86.5 cm

DF 480 163F

Fully integrated
With flexible hinge
Height 81.5 cm

Included in the price

- 1 baking tray spray head
- 1 holder for long-stemmed glasses
- 2 GN container inserts
- 1 stainless steel trim kit

Installation accessories

GZ 010 011

Extension for water inlet and outlet
(2 m long)

Special accessories

DA 041 160

Cutlery drawer with smooth running rails
3rd level above the upper basket.

For large pieces of cutlery, cooking
utensils and espresso cups.
13 place setting capacity with all 3 levels.

DA 042 030

Silvercare cartridge for all dishwashers

DA 043 000

Holder for long-stemmed glasses
Offers safe positioning for up to four
long-stemmed glasses during the
dishwashing process and ensures an
optimal cleaning result.
For positioning in the lower basket.

Dishwasher 400 series

DF 481/DF 480

- Optimal protection for sensitive glassware by low temperature drying with zeolite and intelligent water softening
- 8 programmes with aqua sensor and 5 options, such as Power and Intensive:
 - Clean and dry dishes in 57 minutes
 - Intensive cleaning in the lower basket while protecting glassware in the upper basket
- Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket
- TFT display for intuitive handling of all functions
- Perfectly illuminated interior
- Push-to-open function for perfect integration into handleless furniture fronts
- Very quiet: 43 dB
- Aqua stop
- Energy efficiency class A+++

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indications.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Info-Light.

Technical Features

Perfectly illuminated interior.
Glass protection with zeolite.
Aqua sensor.
Load sensor.
Detergent recognition.
Regeneration electronics.
Heat exchanger.
Continuous flow heater.
Triple filter system.
Soft lock.
Aqua stop.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

8 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Intensive 70 °C.
Eco 50 °C.
Night programme.
Quick wash 45 °C (29 min.).
Pre-rinse.

5 options:
Intensive.
Power.
Half Load.
Hygiene.
Extra Dry.

Features

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.

Upper basket:

Over extension.
Rackmatic with 3 levels, adjustable in height up to 5 cm.
6 folding spines.
4 folding racks.
2 glass support bars.

Lower basket:

8 folding spines.
2 folding racks.
Dividable glass support.
Cutlery basket.
Holder for long-stemmed glasses.

Maximum dish sizes

(upper/lower basket)
for 86.5 cm high dishwashers:
29/28, 26.5/30.5 or 24/34 cm
respectively.

Maximum dish sizes

(upper/lower basket)
for 81.5 cm high dishwashers:
27/25, 24.5/27.5 or 22/31 cm
respectively.

12 place setting capacity.

Maximum glass loading capacity
23 wine glasses.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.
From 9.5 l water.
From 0.8 kWh.
Noise level 43 dB (re 1 pW).

Planning notes


Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
Rear feet adjustable at front.
Door weight up to 11 kg.
Door panel dimension dependent on plinth height of kitchen furniture.
Installation and usage also with furniture handle possible. The push-to-open function remains active.

Please read additional planning notes, also concerning flexible hinge, on page 400 – 407.


Connection

Total connected load 2.4 kW.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.


86.5 cm high dishwasher with flexible hinge

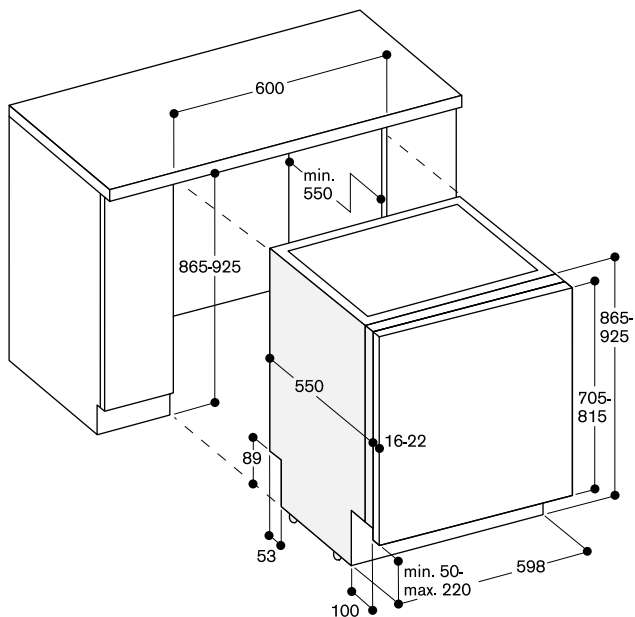

81.5 cm high dishwasher with flexible hinge

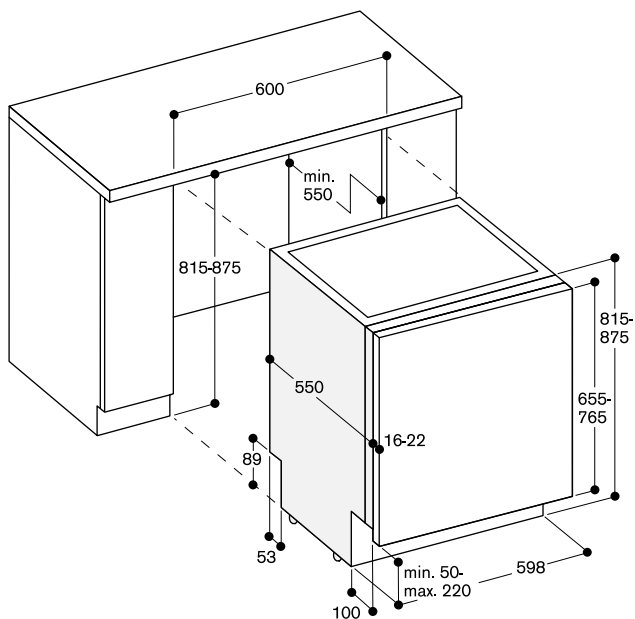

Connection dimensions for a 60 cm wide dishwasher

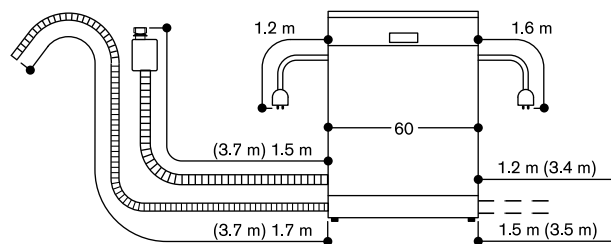

() values with extension kit



DF 271 160

Fully integrated
Height 86.5 cm

DF 270 160

Fully integrated
Height 81.5 cm

Included in the price

- 1 baking tray spray head
- 1 stainless steel trim kit

Installation accessories

DA 021 000

Hinge for all fully integrated dishwashers

GZ 010 011

Extension for water inlet and outlet (2 m long)

Special accessories

DA 041 160

Cutlery drawer with smooth running rails 3rd level above the upper basket.

For large pieces of cutlery, cooking utensils and espresso cups.

13 place setting capacity with all 3 levels.

DA 042 030

Silvercare cartridge for all dishwashers

DA 043 000

Holder for long-stemmed glasses
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.

For positioning in the lower basket.

Dishwasher 200 series

DF 271/DF 270

- Optimal protection for sensitive glassware by low temperature drying with zeolite and intelligent water softening
- 6 programmes with aqua sensor and 3 options, such as Power and Intensive:
 - Clean and dry dishes in 57 minutes
 - Intensive cleaning in the lower basket while protecting glassware in the upper basket
- Flexible basket system with smooth running rails on all levels
- TFT display for intuitive handling of all functions
- Remaining time projection onto the kitchen floor
- Bright interior lighting
- Push-to-open function for perfect integration into handleless furniture fronts
- Very quiet: 42 dB
- Energy efficiency class A+++
- Aqua stop

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indicators.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Remaining time projection.

Technical Features

Bright interior lighting.
Glass protection with zeolite.
Aqua sensor.
Load sensor.
Detergent recognition.
Regeneration electronics.
Heat exchanger.
Continuous flow heater.
Triple filter system.
Soft lock.
Aqua stop.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

6 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Eco 50 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.

3 options:
Intensive.
Power.
Half Load.

Features

Flexible basket system with smooth running rails on all levels.

Upper basket:

Over extension.
Rackmatic with 3 levels, adjustable in height up to 5 cm.
6 folding spines.
4 folding racks.
2 glass support bars.

Lower basket:

8 folding spines.
2 folding racks.
Dividable glass support.
Cutlery basket.

Maximum dish sizes

(upper/lower basket)
for 86.5 cm high dishwashers:
29/28, 26.5/30.5 or 24/34 cm respectively.

Maximum dish sizes

(upper/lower basket)
for 81.5 cm high dishwashers:
27/25, 24.5/27.5 or 22/31 cm respectively.

12 place setting capacity.

Maximum glass loading capacity
23 wine glasses.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.
From 9.5 l water.
From 0.8 kWh.
Noise level 42 dB (re 1 pW).

Planning notes


Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
To display the remaining time projection, a minimum plinth protrusion is required (40 mm + thickness of the furniture front).
The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection.
Rear feet adjustable at front.
Door weight up to 10/8.5 kg.
Door panel dimension dependent on plinth height of kitchen furniture.
Installation and usage also with furniture handle possible. The push-to-open function remains active.

Please read additional planning notes on page 400 – 407.


Connection

Total connected load 2.4 kW.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.


86.5 cm high dishwasher

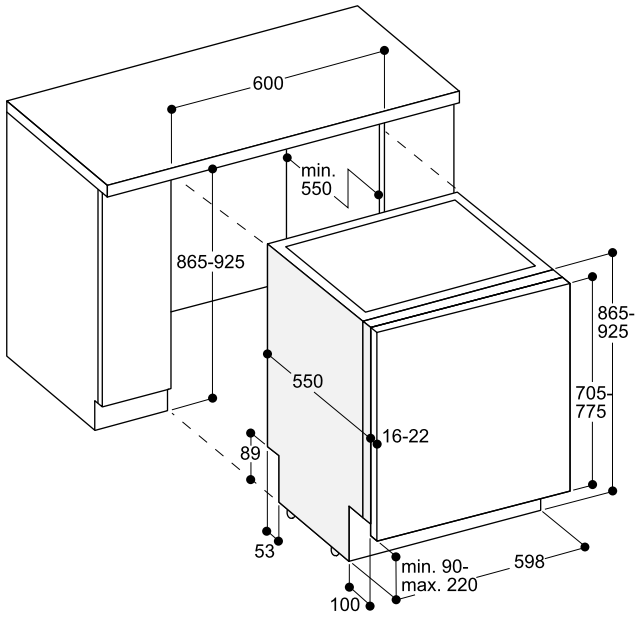

81.5 cm high dishwasher

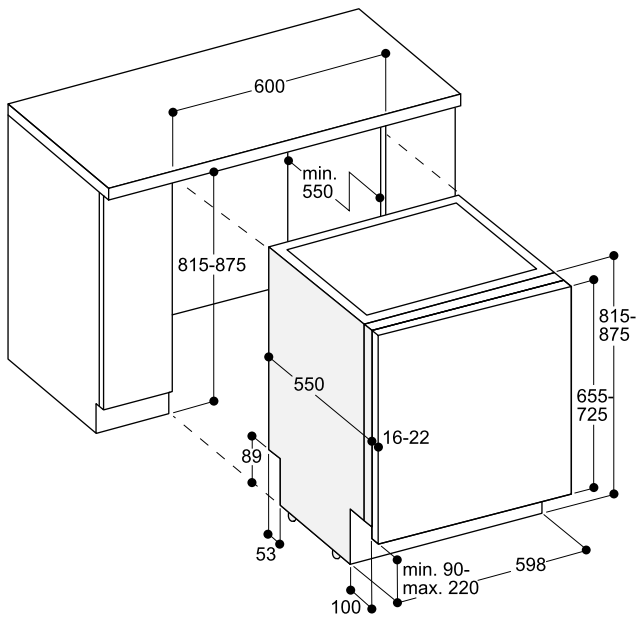

Connection dimensions for a 60 cm wide dishwasher

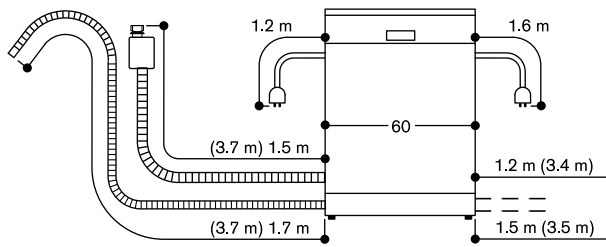

() values with extension kit



DF 271 160F

Fully integrated
With flexible hinge
Height 86.5 cm

DF 270 160F

Fully integrated
With flexible hinge
Height 81.5 cm

Included in the price

- 1 baking tray spray head
- 1 stainless steel trim kit

Installation accessories

GZ 010 011
Extension for water inlet and outlet
(2 m long)

Special accessories

DA 041 160

Cutlery drawer with smooth running rails
3rd level above the upper basket.
For large pieces of cutlery, cooking
utensils and espresso cups.
13 place setting capacity with all 3 levels.

DA 042 030

Silvercare cartridge for all dishwashers

DA 043 000

Holder for long-stemmed glasses
Offers safe positioning for up to four
long-stemmed glasses during the
dishwashing process and ensures an
optimal cleaning result.
For positioning in the lower basket.

Dishwasher 200 series

DF 271/DF 270

- Optimal protection for sensitive glassware by low temperature drying with zeolite and intelligent water softening
- 6 programmes with aqua sensor and 3 options, such as Power and Intensive:
 - Clean and dry dishes in 57 minutes
 - Intensive cleaning in the lower basket while protecting glassware in the upper basket
- Flexible basket system with smooth running rails on all levels
- TFT display for intuitive handling of all functions
- Bright interior lighting
- Push-to-open function for perfect integration into handleless furniture fronts
- Very quiet: 42 dB
- Energy efficiency class A+++
- Aqua stop

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indicators.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Info-Light.

Technical Features

Bright interior lighting.
Glass protection with zeolite.
Aqua sensor.
Load sensor.
Detergent recognition.
Regeneration electronics.
Heat exchanger.
Continuous flow heater.
Triple filter system.
Soft lock.
Aqua stop.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

6 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Eco 50 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.

3 options:
Intensive.
Power.
Half Load.

Features

Flexible basket system with smooth running rails on all levels.

Upper basket:

Over extension.
Rackmatic with 3 levels, adjustable in height up to 5 cm.
6 folding spines.
4 folding racks.
2 glass support bars.

Lower basket:

8 folding spines.
2 folding racks.
Dividable glass support.
Cutlery basket.

Maximum dish sizes

(upper/lower basket)
for 86.5 cm high dishwashers:
29/28, 26.5/30.5 or 24/34 cm
respectively.

Maximum dish sizes

(upper/lower basket)
for 81.5 cm high dishwashers:
27/25, 24.5/27.5 or 22/31 cm
respectively.

12 place setting capacity.

Maximum glass loading capacity
23 wine glasses.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.
From 9.5 l water.
From 0.8 kWh.
Noise level 42 dB (re 1 pW).

Planning notes


Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
Rear feet adjustable at front.
Door weight up to 11 kg.
Door panel dimension dependent on plinth height of kitchen furniture.
Installation and usage also with furniture handle possible. The push-to-open function remains active.

Please read additional planning notes, also concerning flexible hinge, on page 400 – 407.


Connection

Total connected load 2.4 kW.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.


86.5 cm high dishwasher with flexible hinge

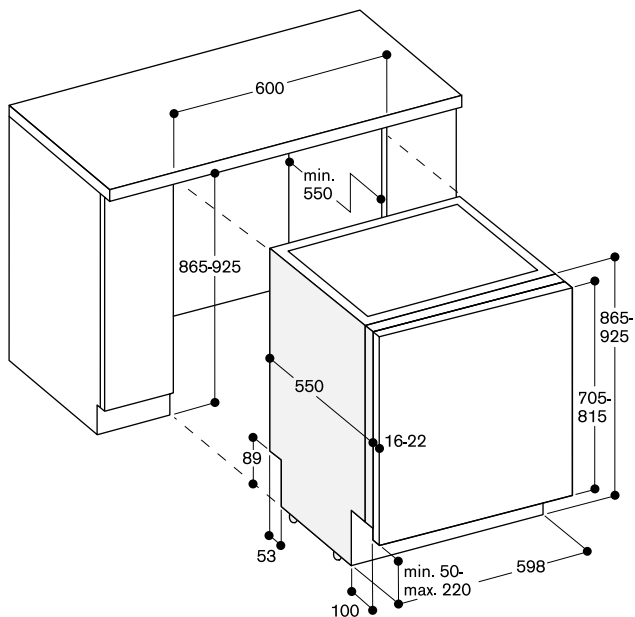

81.5 cm high dishwasher with flexible hinge

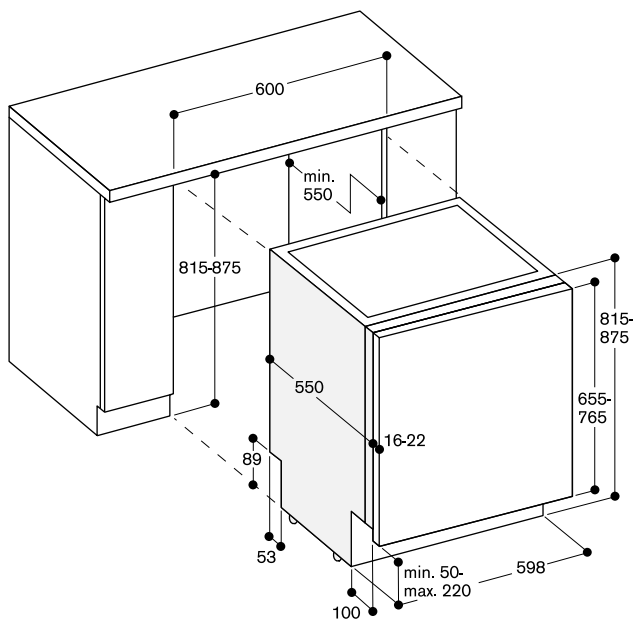

Connection dimensions for a 60 cm wide dishwasher

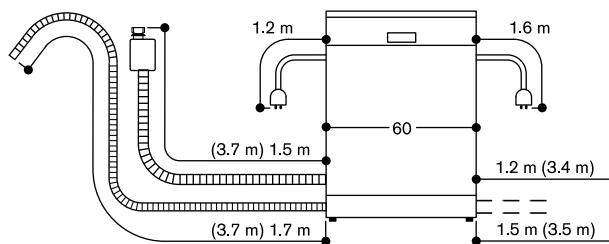

() values with extension kit



DF 261 167

Fully integrated
Height 86.5 cm

DF 260 167

Fully integrated
Height 81.5 cm

Included in the price

- 1 baking tray spray head
- 1 stainless steel trim kit

Installation accessories

DA 021 000

Hinge for all fully integrated dishwashers

DA 231 010

Stainless steel-backed full glass door for 81.5 cm high dishwashers

DA 231 110

Stainless steel-backed full glass door for 86.5 cm dishwashers

GH 045 010

Handle bar with 2 mounts, stainless steel, Length 45 cm, drilling distance 427 mm

GZ 010 011

Extension for water inlet and outlet (2 m long)

Special accessories

DA 041 061

Cutlery drawer
3rd level above the upper basket.
For large pieces of cutlery, cooking utensils and espresso cups.
14 place setting capacity with all 3 levels.

DA 042 030

Silvercare cartridge for all dishwashers

DA 043 000

Holder for long-stemmed glasses
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.
For positioning in the lower basket.

Dishwasher 200 series

DF 261/DF 260

- Optimal protection for sensitive glassware by low temperature drying with zeolite and intelligent water softening
- 6 programmes with aqua sensor and 3 options, such as Power and Intensive:
 - Clean and dry dishes in 57 minutes
 - Intensive cleaning in the lower basket while protecting glassware in the upper basket
- TFT display for intuitive handling of all functions
- Remaining time projection onto the kitchen floor
- Bright interior lighting
- Very quiet: 42 dB
- Energy efficiency class A+++
- Aqua stop

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indicators.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Remaining time projection.

Technical Features

Bright interior lighting.
Glass protection with zeolite.
Aqua sensor.
Load sensor.
Detergent recognition.
Regeneration electronics.
Heat exchanger.
Continuous flow heater.
Triple filter system.
Soft lock.
Aqua stop.

Home network integration for digital services (Home Connect) wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

6 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Eco 50 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.

3 options:
Intensive.
Power.
Half Load.

Features

Flexible basket system.

Upper basket:
Over extension.
Rackmatic with 3 levels, adjustable in height up to 5 cm.
6 folding spines.
4 folding racks.
2 glass support bars.

Lower basket:
8 folding spines.
2 folding racks.
Dividable glass support.
Cutlery basket.

Maximum dish sizes (upper/lower basket) for 86.5 cm high dishwashers: 29/28, 26.5/30.5 or 24/34 cm respectively.

Maximum dish sizes (upper/lower basket) for 81.5 cm high dishwashers: 27/25, 24.5/27.5 or 22/31 cm respectively.

13 place setting capacity.
Maximum glass loading capacity
23 wine glasses.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.
From 9.5 l water.
From 0.82 kWh.
Noise level 42 dB (re 1 pW).

Planning notes


Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
To display the remaining time projection, a minimum plinth protrusion is required (40 mm + thickness of the furniture front).
The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection.
Rear feet adjustable at front.
Door weight up to 10/8.5 kg.
Door panel dimension dependent on plinth height of kitchen furniture.

Please read additional planning notes on page 400 – 407.


Connection

Total connected load 2.4 kW.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.


86.5 cm high dishwasher

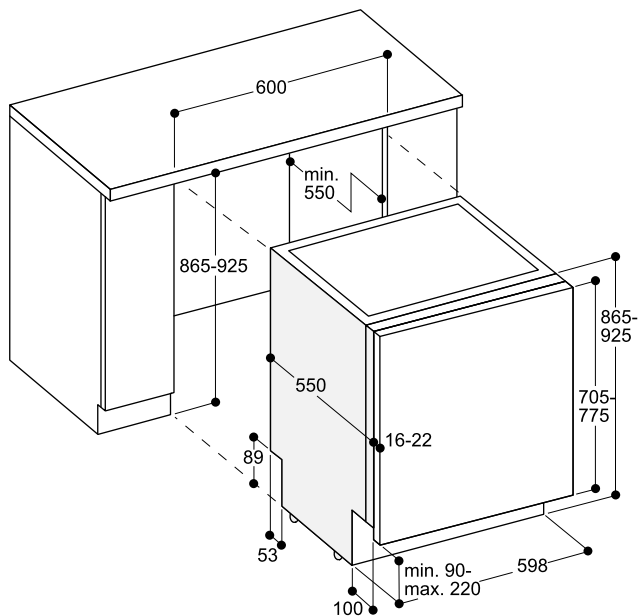

81.5 cm high dishwasher

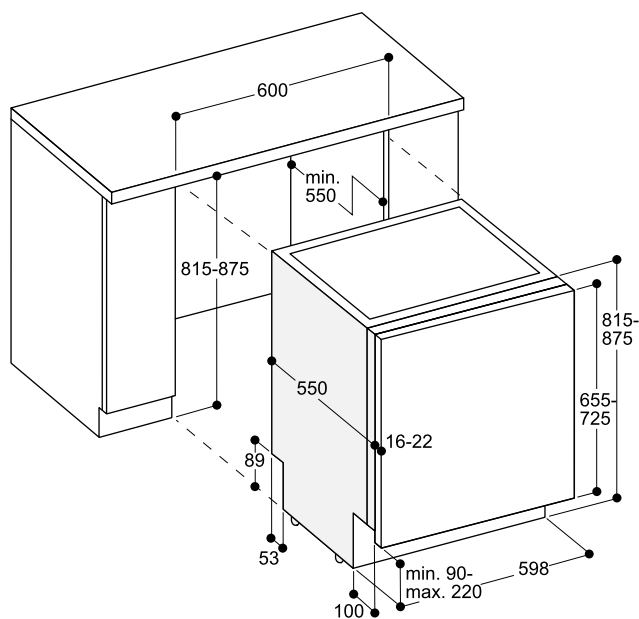

Connection dimensions for a 60 cm wide dishwasher

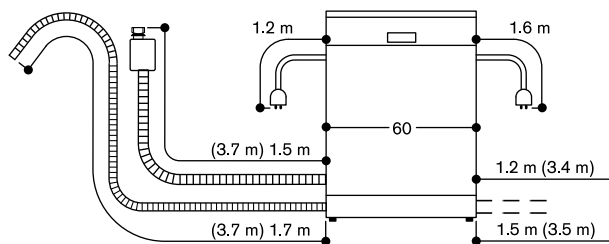

() values with extension kit



DF 251 162

Fully integrated
Height 86.5 cm

DF 250 162*

Fully integrated
Height 81.5 cm

* Only available in European countries

Included in the price

1 baking tray spray head

Installation accessories

DA 020 010

Stainless steel trim kit for 81.5 cm high dishwashers

DA 020 110

Stainless steel trim kit for 86.5 cm high dishwashers

DA 021 000

Hinge for all fully integrated dishwashers

DA 231 010

Stainless steel-backed full glass door for 81.5 cm high dishwashers

DA 231 110

Stainless steel-backed full glass door for 86.5 cm dishwashers

GH 045 010

Handle bar with 2 mounts, stainless steel, Length 45 cm, drilling distance 427 mm

GZ 010 011

Extension for water inlet and outlet (2 m long)

Special accessories

DA 041 061

Cutlery drawer
3rd level above the upper basket.
For large pieces of cutlery, cooking utensils and espresso cups.
14 place setting capacity with all 3 levels.

DA 042 030

Silvercare cartridge for all dishwashers

DA 043 000

Holder for long-stemmed glasses
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.
For positioning in the lower basket.

DA 043 060

Glass basket

Dishwasher 200 series

DF 251/DF 250

- 6 programmes with aqua sensor and 3 options, such as Power and Intensive:
 - Clean and dry dishes in 59 minutes
 - Intensive cleaning in the lower basket while protecting glassware in the upper basket
- TFT display for intuitive handling of all functions
- Bright interior lighting
- Very quiet: 44 dB
- Aqua stop

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indications.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Info-Light.

Technical Features

Bright interior lighting.
Glass protection.
Aqua sensor.
Load sensor.
Detergent recognition.
Regeneration electronics.
Heat exchanger.
Continuous flow heater.
Triple filter system.
Soft lock.
Aqua stop.
Child lock.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

6 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Eco 50 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.

3 options:
Intensive.
Power.
Extra Dry.

Features

Flexible basket system.

Upper basket:
Rackmatic with 3 levels, adjustable in height up to 5 cm.
2 folding spines.
2 folding racks.
1 knife rack.

Lower basket:
4 folding spines.
Cutlery basket.

Maximum dish sizes (upper/lower basket) for 86.5 cm high dishwashers: 29/28, 26.5/30.5 or 24/34 cm respectively.

Maximum dish sizes (upper/lower basket) for 81.5 cm high dishwashers: 27/25, 24.5/27.5 or 22/31 cm respectively.

13 place setting capacity.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
From 9.5 l water.
From 0.92 kWh.
Noise level 44 dB (re 1 pW).

Planning notes


Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
Rear feet adjustable at front.
Door weight up to 10/8.5 kg.
Door panel dimension dependent on plinth height of kitchen furniture.

Please read additional planning notes on page 400 – 407.


Connection

Total connected load 2.4 kW.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.


86.5 cm high dishwasher

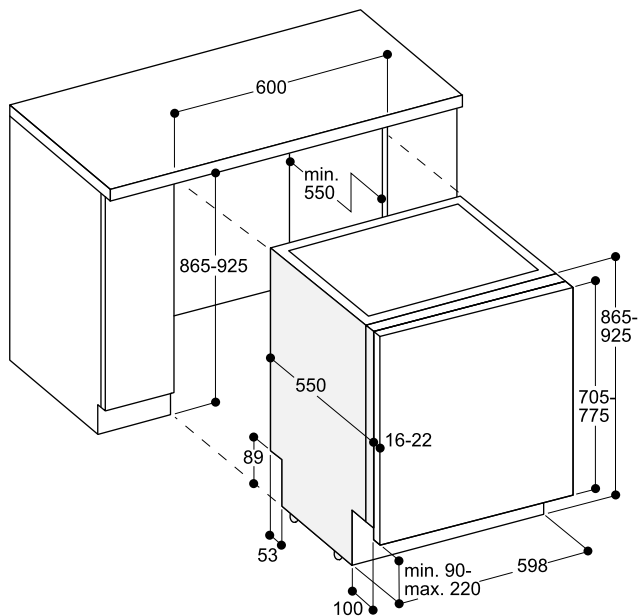

81.5 cm high dishwasher

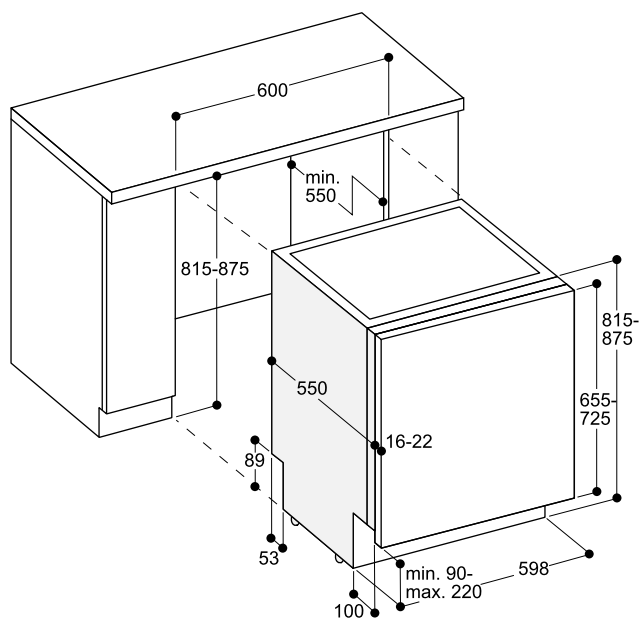

Connection dimensions for a 60 cm wide dishwasher

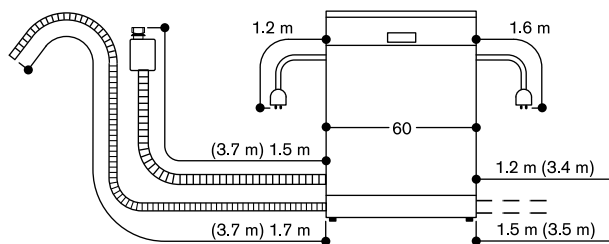

() values with extension kit



DF 250 161*

Fully integrated
Height 81.5 cm

* Not available in European countries

Included in the price

1 baking tray spray head

Installation accessories

DA 020 010

Stainless steel trim kit for 81.5 cm high dishwashers

DA 021 000

Hinge for all fully integrated dishwashers

DA 231 010

Stainless steel-backed full glass door for 81.5 cm high dishwashers

GH 045 010

Handle bar with 2 mounts, stainless steel, Length 45 cm, drilling distance 427 mm

GZ 010 011

Extension for water inlet and outlet (2 m long)

Special accessories

DA 041 061

Cutlery drawer
3rd level above the upper basket.
For large pieces of cutlery, cooking utensils and espresso cups.
14 place setting capacity with all 3 levels.

DA 042 030

Silvercare cartridge for all dishwashers

DA 043 000

Holder for long-stemmed glasses
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.
For positioning in the lower basket.

DA 043 060

Glass basket

Dishwasher 200 series

DF 250

- 6 programmes with aqua sensor and 3 options, such as Power and Intensive:
 - Clean and dry dishes in 59 minutes
 - Intensive cleaning in the lower basket while protecting glassware in the upper basket
- TFT display for intuitive handling of all functions
- Bright interior lighting
- Very quiet: 44 dB
- Aqua stop

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.
Touch key operation.
Information key with use indications.
Time delay up to 24 hours.
Visual and acoustic end of programme indicator.
Info-Light.

Technical Features

Bright interior lighting.
Glass protection.
Aqua sensor.
Load sensor.
Detergent recognition.
Regeneration electronics.
Heat exchanger.
Continuous flow heater.
Triple filter system.
Soft lock.
Aqua stop.
Child lock.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

6 programmes:
Auto 35 °C - 45 °C.
Auto 45 °C - 65 °C.
Auto 65 °C - 75 °C.
Eco 50 °C.
Quick wash 45 °C (29 min.).
Pre-rinse.

3 options:
Intensive.
Power.
Extra Dry.

Features

Flexible basket system.

Upper basket:

Rackmatic with 3 levels, adjustable in height up to 5 cm.
2 folding spines.
2 folding racks.
1 knife rack.

Lower basket:

4 folding spines.
Cutlery basket.

Maximum dish sizes
(upper/lower basket)

for 81.5 cm high dishwashers:
27/25, 24.5/27.5 or 22/31 cm respectively.

13 place setting capacity.

Consumption data

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
From 9.5 l water.
From 0.92 kWh.
Noise level 44 dB (re 1 pW).

Planning notes


Height-adjustable feet.
Appliance plinth recess 100 mm (see drawing).
Rear feet adjustable at front.
Door weight up to 8.5 kg.
Door panel dimension dependent on plinth height of kitchen furniture.

Please read additional planning notes on page 400 – 407.


Connection

Total connected load 2.4 kW.
Connecting cable pluggable.
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.

81.5 cm high dishwasher

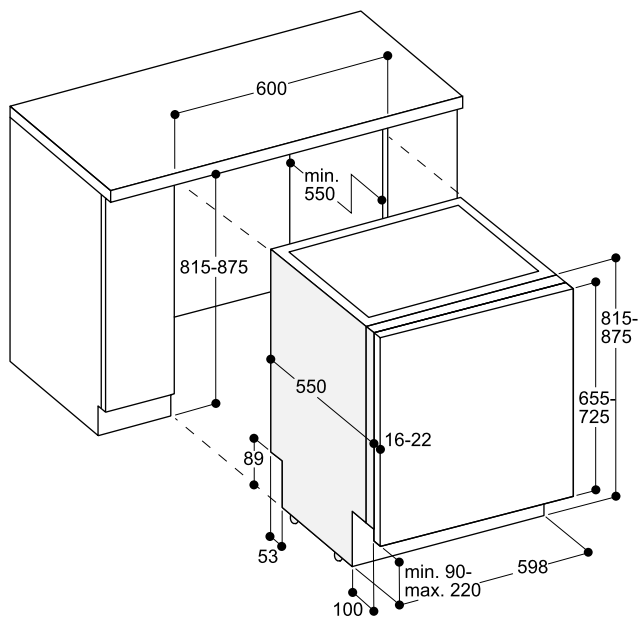

Connection dimensions for a 60 cm wide dishwasher

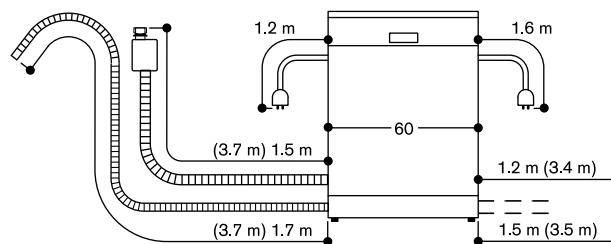

() values with extension kit



DF 250 141

Fully integrated

Height 81.5 cm, width 45 cm

Included in the price

1 baking tray spray head

Installation accessories**DA 020 010**

Stainless steel trim kit for 81.5 cm high dishwashers

DA 021 000

Hinge for all fully integrated dishwashers

GH 035 010

Handle bar with 2 mounts, stainless steel, Length 35 cm, drilling distance 327 mm

GZ 010 011

Extension for water inlet and outlet (2 m long)

Special accessories**DA 042 030**

Silvercare cartridge for all dishwashers

Dishwasher 200 series**DF 250**

- Optimal protection for sensitive glassware by low temperature drying with zeolite and intelligent water softening
- 6 programmes with aqua sensor and 2 options, Power and Intensive:
 - Clean and dry dishes in 65 minutes
 - Intensive cleaning in the lower basket while protecting glassware in the upper basket
- Flexible basket system including cutlery drawer for optimal loading
- Remaining time projection onto the kitchen floor
- Bright interior lighting
- Very quiet: 44 dB
- Aqua stop
- Energy efficiency class A+++

Handling

Display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.

Time delay up to 24 hours.

Visual and acoustic end of programme indicator.

Remaining time projection.

Technical Features

Bright interior lighting.

Glass protection with zeolite.

Aqua sensor.

Load sensor.

Detergent recognition.

Regeneration electronics.

Heat exchanger.

Continuous flow heater.

Triple filter system.

Soft lock.

Aqua stop.

Programmes

6 programmes:

Auto 35 °C - 45 °C.

Auto 45 °C - 65 °C.

Auto 65 °C - 75 °C.

Eco 50 °C.

Quick wash 45 °C (29 min.).

Pre-rinse.

2 options:

Intensive.

Power.

Features

Flexible basket system.

Cutlery drawer.

Upper basket:

Rackmatic with 3 levels, adjustable in height up to 5 cm.

3 folding spines.

1 folding rack.

Lower basket:

4 folding spines.

1 folding rack.

Glass support.

Cutlery basket.

Maximum dish sizes

(upper/lower basket)

19/25, 16.5/27.5 or 14/31 cm respectively.

10 place setting capacity.

Consumption data

Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.

From 9.5 l water.

From 0.66 kWh.

Noise level 44 dB (re 1 pW).

Planning notes

Height-adjustable feet.

Appliance plinth recess 100 mm (see drawing).

To display the remaining time projection, a minimum plinth protrusion is required (40 mm + thickness of the furniture front).

The maximum plinth height must be reduced by 30 mm to provide an optimal display of the remaining time projection.

Rear feet adjustable at front.

Door weight up to 7.5 kg.

Door panel dimension dependent on plinth height of kitchen furniture.

Please read additional planning notes on page 400 – 407.


Connection

Total connected load 2.4 kW.


Connecting cable pluggable.

Water connection with 3/4" screw joint.

Connection to hot or cold water possible.

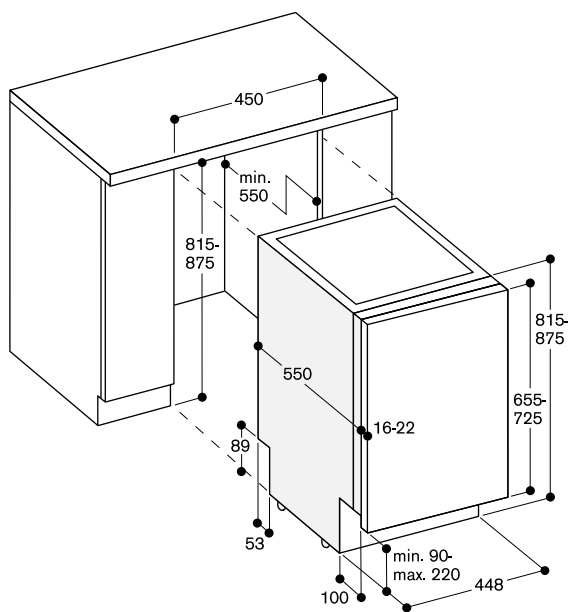

Connection dimensions for a 45 cm wide dishwasher

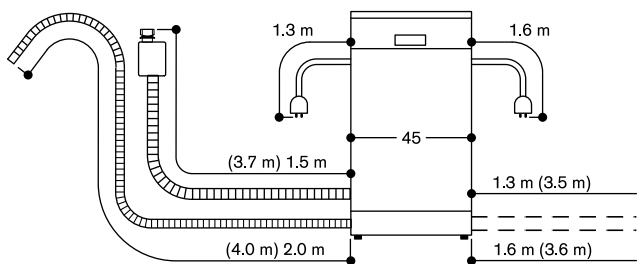

() values with extension kit

Additional planning notes for standard dishwashers (without flexible hinge)

For niche heights from 815 to 855 mm, in most cases, the 81.5 cm high dishwasher must be planned, regardless of the plinth height.


For niche heights from 885 to 925 mm, in most cases, the 86.5 cm high dishwasher must be planned, regardless of the plinth height.

If the niche height amounts to 865 or 875 mm, please note:
Whether the 81.5 cm high dishwasher or the 86.5 cm high dishwasher can be used here depends on the plinth height.

For dishwasher with remaining time projection, the maximum plinth height must be reduced by 30 mm to provide an optimal display.

Plinth height in mm	Front height 655–765 mm										Front height 705–815 mm				
	Niche height in mm →														
	815	825	835	845	855	865	875	885	895	905	915	925			
<90	1 (S)	1 (S)	1 (S)	1 (S)	1 (S)	6 (S)	6 (S)	6 (S)	6 (S)	6 (S)	6 (S)	6 (S)			
90	1	1 (S/D)	1 (S)	1 (S)	1 (S)	6	6 (S)	6 (S)	6 (S)	6 (S)	6 (S)	6 (S)			
100	1	1	1 (S/D)	1 (S)	1 (S)	1 (S) 6	6	6 (S/D)	6 (S)	6 (S)	6 (S)	6 (S)			
110	1	1	1	1 (S/D)	1 (S)	1 (S) 6	1 (S) 6	6	6 (S/D)	6 (S)	6 (S)	6 (S)			
120	1	1	1	1	1 (S/D)	1 (S) 6	1 (S) 6	6	6	6 (S/D)	6 (S)	6 (S)			
130	1	1	1	1	1	1 (S/D) 6	1 (S) 6	6	6	6	6 (S/D)	6 (S)			
140	1	1	1	1	1	1 6	1 (S/D) 6	6	6	6	6	6 (S/D)			
150	1	1	1	1	1	1 6	1 6	6	6	6	6	6			
160	1	1	1	1	1	1 6	1 6	6	6	6	6	6			
170		1	1	1	1	1	1 6	6	6	6	6	6			
180			1	1	1	1	1	6	6	6	6	6			
190				1	1	1	1		6	6	6	6			
200					1	1	1			6	6	6			
210						1	1				6	6			
220							1					6			

- 1 = 81.5 cm high dishwasher DF 480/DF 270/DF 260/DF 250, (S) = special solution
- 6 = 86.5 cm high dishwasher DF 481/DF 271/DF 261/DF 251, (S) = special solution
- (S) = special solution with folding hinge (DA 021 000) / divided kitchen furniture door
- (D) = special solution with 10 mm gap from the worktop → Spacer batten / child lock not possible

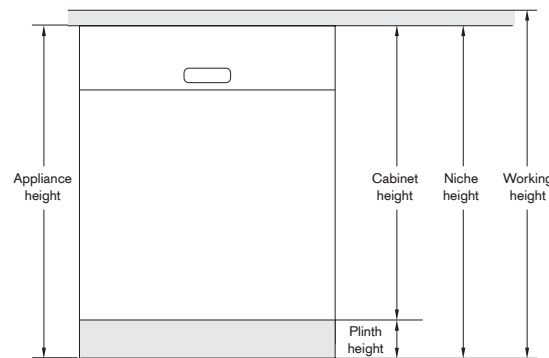

Installation chart for door panel DA 231

Undercounter

The door panels cannot be used with dishwashers with flexible hinge.


The door panel is continuously variable for height over a range of 49 mm.

Plinth height in mm	Front height 670–720 mm										Front height 720–770 mm				
	Niche height in mm →														
	815	825	835	845	855	865	875	885	895	905	915	925			
95	1					6									
105	1	1				6	6								
115	1	1	1			6	6	6							
125	1	1	1	1		6	6	6	6						
135	1	1	1	1	1	6	6	6	6	6					
145	1	1	1	1	1	1 6	6	6	6	6	6				
155		1	1	1	1	1	1 6	6	6	6	6	6			
165			1	1	1	1	1	6	6	6	6	6			
175				1	1	1	1		6	6	6	6			
185					1	1	1			6	6	6			
195						1	1				6	6			
205							1					6			
215															
225															

- 1 = 81.5 cm high dishwasher DF 260 167 / DF 250 162 / DF 250 161, door panels DA 231 010
- 6 = 86.5 cm high dishwasher DF 261 167 / DF 251 162, door panels DA 231 110

Tall unit installation of dishwashers without slanted drawer panel

The table contains the gap size required between the kitchen furniture door panel and drawer panel with reference to niche height, plinth height and panel thickness when using a standard kitchen furniture door panel for dishwashers installed below worktops.

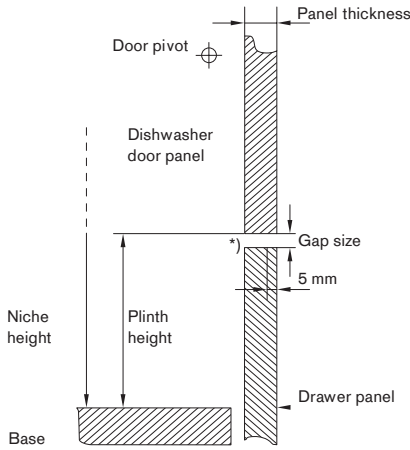


* The pivot area of the door should be at least 4 mm.

Niche height (mm)	Panel thickness (mm)		Plinth height (mm)							
	90	100	110	120	130	140	150	160	170	
815	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
825	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
835	16		10.5	11	12	13	14.5	16.5	19	
	19		12	12.5	13.5	15	16.5	18.5	22	
	22		13.5	14.5	15.5	16.5	18.5	21	24.5	
845	16			10.5	11	12	13	14.5	16.5	
	19			12	12.5	13.5	15	16.5	18.5	
	22			13.5	14.5	15.5	16.5	18.5	21	
855	16			10.5	11	12	13	14.5	16.5	
	19			12	12.5	13.5	15	16.5	18.5	
	22			13.5	14.5	15.5	16.5	18.5	21	
865	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
875	16	10.5	11	12	13	14.5	16.5	19	22.5	
	19	12	12.5	13.5	15	16.5	18.5	22	25.5	
	22	13.5	14.5	15.5	16.5	18.5	21	24.5	28.5	
885	16		10.5	11	12	13	14.5	16.5	19	
	19		12	12.5	13.5	15	16.5	18.5	22	
	22		13.5	14.5	15.5	16.5	18.5	21	24.5	
895	16			10.5	11	12	13	14.5	16.5	
	19			12	12.5	13.5	15	16.5	18.5	
	22			13.5	14.5	15.5	16.5	18.5	21	
905	16			10.5	11	12	13	14.5	16.5	
	19			12	12.5	13.5	15	16.5	18.5	
	22			13.5	14.5	15.5	16.5	18.5	21	
915	16				10.5	11	12	13		
	19				12	12.5	13.5	15		
	22				13.5	14.5	15.5	16.5		
925	16					10.5	11	12		
	19					12	12.5	13.5		
	22					13.5	14.5	15.5		

Tall unit installation of dishwashers with slanted drawer panel

The table contains the gap size required between the kitchen furniture door panel and drawer panel with reference to niche height, plinth height and panel thickness when using a standard kitchen furniture door panel for dishwashers installed below worktops.

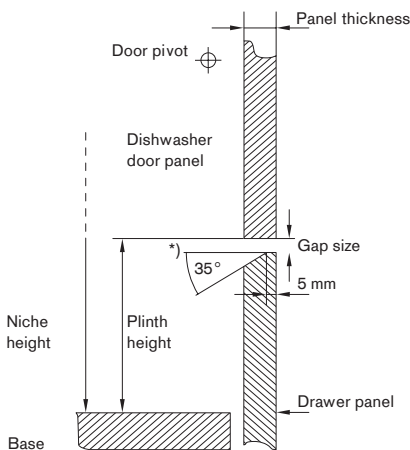

* The pivot area of the door should be at least 4 mm.

Niche height (mm)	Panel thickness (mm)		Plinth height (mm)							
	90	100	110	120	130	140	150	160	170	
815	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
825	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
835	16		6.5	6.5	7	7.5	8	9	12	
	19		7	7.5	8	8.5	9.5	11	13	
	22		7.5	7.5	8	9	9.5	11.5	14	
845	16			6.5	6.5	7	7.5	8	9	
	19			7	7.5	8	8.5	9.5	11	
	22			7.5	7.5	8	9	9.5	11.5	
855	16			6.5	6.5	7	7.5	8		
	19			7	7.5	8	8.5	9.5		
	22			7.5	7.5	8	9	9.5		
865	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
875	16	6.5	6.5	7	7.5	8	9	12	15.5	
	19	7	7.5	8	8.5	9.5	11	13	17	
	22	7.5	7.5	8	9	9.5	11.5	14	18	
885	16		6.5	6.5	7	7.5	8	9	12	
	19		7	7.5	8	8.5	9.5	11	13	
	22		7.5	7.5	8	9	9.5	11.5	14	
895	16			6.5	6.5	7	7.5	8	9	
	19			7	7.5	8	8.5	9.5	11	
	22			7.5	7.5	8	9	9.5	11.5	
905	16				6.5	6.5	7	7.5	8	
	19				7	7.5	8	8.5	9.5	
	22				7.5	7.5	8	9	9.5	
915	16					6.5	6.5	7	7.5	
	19					7	7.5	8	8.5	
	22					7.5	7.5	8	9	
925	16						6.5	6.5	7	
	19						7	7.5	8	
	22						7.5	7.5	8	

Additional planning notes for dishwashers with flexible hinge

For niche heights from 815 to 860 mm, in most cases, the 81.5 cm high dishwasher must be planned, regardless of the plinth height.

For niche heights from 880 to 925 mm, in most cases, the 86.5 cm high dishwasher must be planned, regardless of the plinth height.

If the niche height amounts between 865 and 875 mm, please note: Whether the 81.5 cm high dishwasher or the 86.5 cm high dishwasher can be used here depends on the plinth height.

If the installation of a dishwasher with **flexible hinge** is necessary or not depends on several factors.

The door panels cannot be used with dishwashers with flexible hinge.

		Front height 655–765 mm									
		Niche height in mm →									
		815	820	825	830	835	840	845	850	855	860
Plinth height in mm ↓	50	①									
	55	①	①								
60	①	①	①								
65	①	①	①	①							
70	①	①	①	①	①						
75	①	①	①	①	①	①					
80	①	①	①	①	①	①	①				
85	①	①	①	①	①	①	①	①			
90	①*	①	①	①	①	①	①	①	①	①	
95	①*	①*	①	①	①	①	①	①	①	①	①
100	①*	①*	①*	①	①	①	①	①	①	①	①
105	①*	①*	①*	①*	①	①	①	①	①	①	①
110	①*	①*	①*	①*	①*	①	①	①	①	①	①
115	①*	①*	①*	①*	①*	①*	①	①	①	①	①
120	①*	①*	①*	①*	①*	①*	①*	①	①	①	①
125	①*	①*	①*	①*	①*	①*	①*	①*	①*	①	①
130	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*	①
135	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
140	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
145	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
150	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
155	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
160	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
165		①*	①*	①*	①*	①*	①*	①*	①*	①*	①*
170			①*	①*	①*	①*	①*	①*	①*	①*	①*
175				①*	①*	①*	①*	①*	①*	①*	①*
180					①*	①*	①*	①*	①*	①*	①*
185						①*	①*	①*	①*	①*	①*
190							①*	①*	①*	①*	①*
195								①*	①*	①*	①*
200									①*	①*	①*
205										①*	①*
210											①*
215											
220											

① = 81.5 cm high dishwasher with flexible hinge DF 480 163F / DF 270 160F
 ② = 86.5 cm high dishwasher with flexible hinge DF 481 163F / DF 271 160F
 * Also possible with dishwashers without flexible hinge.

	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170
	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6						
	4	4	4	4	4.5	4.5	4.5	5	5	8						
	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11						
	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6					
	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8					
	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11					
	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6				
	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8				
	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11				
	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6			
	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8			
	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11			
	3	3	3	3	3	3.5	3.5	3.5	3.5	4	4	4	4	6		
	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8			
	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11		
	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	4	6
	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8	
	4	4	4	4	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11		
	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	4	4	4	4
	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5
	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5
	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	4	4	4
	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5
	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6
	3	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4
	3	3	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5
	3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5
	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11	
	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4	4	6
	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8
	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11
	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	4	4	4	4
	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5	5	8
	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5	11
	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	4	4	4
	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5
	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6	6.5
	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4	4
	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5	4.5	5
	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5	6
	3	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5	3.5	4
	3	3	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5
	3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5	5.5
		3	3	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5
		3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4.5	4.5
		3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5	5.5
			3	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5	3.5
			3	3	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4	4.5
			3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5	5
				3	3	3	3	3	3	3	3	3	3	3.5	3.5	3.5
				3	3	3.5	3.5	3.5	3.5	3.5	3.5	4	4	4	4	4
				3.5	3.5	3.5	4	4	4	4	4	4.5	4.5	4.5	4.5	5

Ovens 400 series

Ovens 200 series

Vario cooktops

Cooktops

Extractors

Cooling appliances

Dishwashers | Washing machine

Energy Label | Home Connect | Accessories

Accessories and special accessories for dishwashers

Flexible basket system

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and

lower basket.

For more flexibility and easier handling when loading and unloading the dishwasher.


Upper basket

6 folding spines.
4 folding racks.
2 glass support bars.
With over extension, smooth running rails and cushioned closing as well as rackmatic with 3 levels, adjustable in height up to 5 cm.
Handle for easier removal of the upper basket.



Lower basket

8 folding spines.
2 folding racks.
Dividable glass support.
Cutlery basket.
With smooth running rails and cushioned closing.
Handle for easier removal of the lower basket.

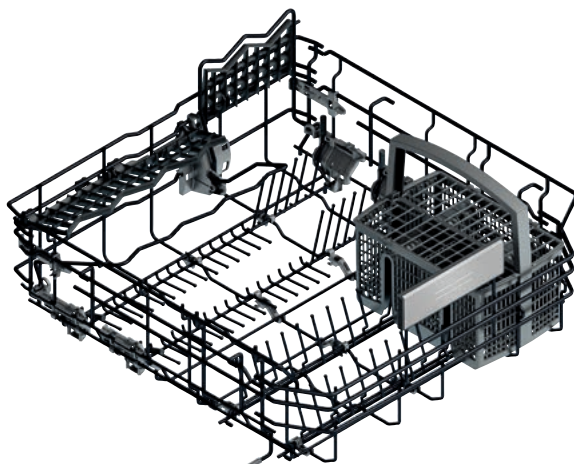

DA 020 010


Stainless steel trim kit for all 81.5 cm high dishwashers
Set of 2, for left and right.

To cover the gap between appliance and adjacent furniture and for better fixation of the appliance in the niche.
The white frame is replaced by a stainless steel trim kit.
W x D in cm: 2.2x2.0.
Height 62.2 cm.

DA 020 110

Stainless steel trim kit for 86.5 cm high dishwashers
Set of 2, for left and right.

To cover the gap between appliance and adjacent furniture and for better fixation of the appliance in the niche.
The white frame is replaced by a stainless steel trim kit.
W x D in cm: 2.2x2.0.
Height 67.2 cm.

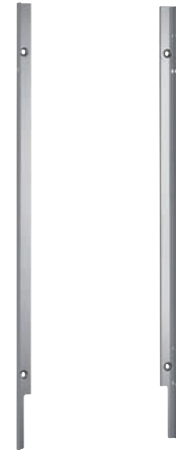


DA 021 000

Hinge for all fully integrated dishwashers

Installation solution for all dishwashers with a niche height of up to 92 cm and split furniture panel.

The hinge is fastened to the plinth of the appliance and the lower part of the split furniture panel is mounted onto it.
Height upper part of the split furniture panel:

64.5 – 68 cm for
81.5 cm high dishwashers.
69.5 – 73 cm for
86.5 cm high dishwashers.



DA 041 160

Cutlery drawer with smooth running rails

3rd level above the baskets.

For large pieces of cutlery, cooking utensils and espresso cups.

13 place setting capacity with all 3 levels.



DA 041 061


Cutlery drawer
3rd level above the baskets.
For large pieces of cutlery, cooking utensils and espresso cups.
14 place setting capacity with all 3 levels.

**DA 042 030**

Silvercare cartridge for all dishwashers
Made of aluminium to protect silverware from corrosion.
Easy use of cartridge in the cutlery basket.
W x H x D in cm: 5.5x20.2x4.1.

**DA 043 060**

Glass basket
Special basket to prevent tipping of cups or long stemmed glasses.
Fold the folding spines in the lower basket down to fit the glass basket.
Holds max. 12 long stemmed glasses or 24 cups.
Glass basket with 4 folding racks, silver-coloured.
W x H x D in cm: 49x23x26.

**DA 043 000**


Holder for long-stemmed glasses
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.
For positioning in the lower basket.

**DA 231 010**

Stainless steel-backed full glass door for 81.5 cm high dishwashers
Height adjustable by 49 mm, height 67 to 71.9 cm.
W x D in cm: 59 x 1.9.
Handle: W x D x Ø in cm: 45 x 4.9 x 1.4.

DA 231 110

Stainless steel-backed full glass door for 86.5 cm dishwashers
Height adjustable by 49 mm, height 72 to 76.9 cm.
W x D in cm: 59 x 1.9.
Handle: W x D x Ø in cm: 45 x 4.9 x 1.4.

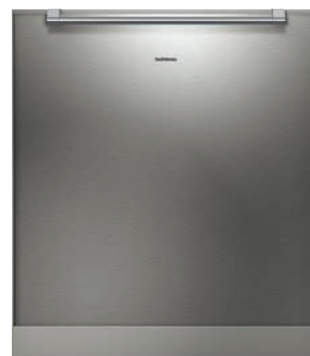**GH 035 010**

Handle bar with 2 mounts, stainless steel, Length 35 cm, drilling distance 327 mm

**GH 045 010**

Handle bar with 2 mounts, stainless steel, Length 45 cm, drilling distance 427 mm

**GZ 010 011**

Extension for water inlet and outlet (2 m long).



Dishwasher



Appliance type	Dishwasher	Dishwasher	Dishwasher
Model	Fully integrated	Fully integrated	Fully integrated
Panel colour			
Appliance height 81.5 cm	DF 480 162		DF 270 160
Appliance height 86.5 cm	DF 481 162		DF 271 160
Appliance height 81.5 cm with flexible hinge		DF 480 163F	
Appliance height 86.5 cm with flexible hinge		DF 481 163F	
Width/capacity			
Width (cm)	60	60	60
Capacity in place settings	12/13 ³	12/13 ³	12/13 ³
Dish size up to (cm)	31 ¹ /34 ²	31 ¹ /34 ²	31 ¹ /34 ²
Consumption data/noise level⁵			
Energy efficiency class	A+++	A+++	A+++
Drying efficiency class	A	A	A
Test programme	Eco 50 °C	Eco 50 °C	Eco 50 °C
Cycle time test programme (min)	195	195	195
Water consumption (l)	9.5	9.5	9.5
Energy consumption (kWh)	0.8	0.8	0.8
Total annual energy consumption (280 cycles) ⁶ (kWh)	230	230	230
Total annual water consumption (280 cycles) ⁶ (l)	2.660	2.660	2.660
Noise level (dB (re 1 pW))	43	43	42
Energy consumption off-mode/left-on mode (W)	0.5/0.5	0.5/0.5	0.5/0.5
Left on-mode duration (min)	0	0	0
Programmes			
Number of programmes + options	8 + 5	8 + 5	6 + 3
Programmes	Auto 35 °C–45 °C	Auto 35 °C–45 °C	Auto 35 °C–45 °C
	Auto 45 °C–65 °C	Auto 45 °C–65 °C	Auto 45 °C–65 °C
	Auto 65 °C–75 °C	Auto 65 °C–75 °C	Auto 65 °C–75 °C
	Intensive 70 °C	Intensive 70 °C	
	Eco 50 °C	Eco 50 °C	Eco 50 °C
	Night programme	Night programme	
	Quick wash 45 °C	Quick wash 45 °C	Quick wash 45 °C
Options	Pre-rinse Intensive	Pre-rinse Intensive	Pre-rinse Intensive
	Power (57 min.)	Power (57 min.)	Power (57 min.)
	Half Load	Half Load	Half Load
	Hygiene	Hygiene	
	Extra Dry	Extra Dry	
Features			
Glass protection with zeolite / Glass protection	•/–	•/–	•/–
Aqua sensor / Load sensor	•/•	•/•	•/•
Automatic detergent function	•	•	•
Detergent recognition	•	•	•
Regeneration electronics	•	•	•
Heat exchanger	•	•	•
Low temperature drying with Zeolite	•	•	•
Continuous flow heater	•	•	•
Electronic refill indicator for salt/rinsing agent	•/•	•/•	•/•
Inflow water indicator	•	•	•
Time remaining indicator	•	•	•
Remaining time projection	•	–	•
Info-Light	–	•	–
Bright interior lighting through illuminated backwall / through LED spots	•/–	•/–	–/•
Time delay	24 h	24 h	24 h
Digital services (Home Connect) wireless via WiFi. ⁸	•	•	•
Soft lock	•	•	•
Triple filter system	•	•	•
Cutlery drawer	DA 041 160 ⁷	DA 041 160 ⁷	DA 041 160 ⁷
Smooth running rails / Cushioned closing	•/•	•/•	•/–
Folding spines in upper/lower basket	6/8	6/8	6/8
Folding racks in upper/lower basket	4/2	4/2	4/2
Rackmatic with 3 levels	•	•	•
Aqua stop	•	•	•
Baking tray spray head / Gastronorm insert holder / Holder for longstemmed glasses / Stainless steel trim kits	•/•/•/•	•/•/•/•	•/–/–/•
Connection			
Connection to hot/cold water possible	•/•	•/•	•/•
Total connected load (kW)	2.4	2.4	2.4

• Standard. – Not available.

¹ Appliance height 81.5 cm. ² Appliance height 86.5 cm. ³ With special accessory DA 041 160. ⁴ With special accessory DA 041 061.

⁵ Values according to EU regulation 1059/2010. ⁶ Effective consumption depending on type of use of appliance. ⁷ Special accessory.

⁸ The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Dishwasher	Dishwasher	Dishwasher	Dishwasher	Dishwasher
Fully integrated	Fully integrated	Fully integrated	Fully integrated	Fully integrated
	DF 260 167 DF 261 167	DF 250 162 DF 251 162	DF 250 161	DF 250 141
DF 270 160F DF 271 160F				
60	60	60	60	45
12/13 ³	13/14 ⁴	13/14 ⁴	13/14 ⁴	10
31 ¹ /34 ²	31 ¹ /34 ²	31 ¹ /34 ²	31	31
A+++	A+++	A++	A++	A+++
A	A	A	A	A
Eco 50°C	Eco 50°C	Eco 50°C	Eco 50°C	Eco 50°C
195	195	225	210	195
9.5	9.5	9.5	9.5	9.5
0.8	0.9	0.92	0.92	0.66
230	258	262	262	188
2.660	2.660	2.660	2.660	2.660
42	42	44	44	44
0.5/0.5	0.5/0.5	0.5/0.5	0.5/0.5	0.1/0.1
0	0	0	0	0
6 + 3	6 + 3	6 + 3	6 + 3	6 + 2
Auto 35°C–45°C	Auto 35°C–45°C	Auto 35°C–45°C	Auto 35°C–45°C	Auto 35°C–45°C
Auto 45°C–65°C	Auto 45°C–65°C	Auto 45°C–65°C	Auto 45°C–65°C	Auto 45°C–65°C
Auto 65°C–75°C	Auto 65°C–75°C	Auto 65°C–75°C	Auto 65°C–75°C	Auto 65°C–75°C
Eco 50°C	Eco 50°C	Eco 50°C	Eco 50°C	Eco 50°C
Quick wash 45°C	Quick wash 45°C	Quick wash 45°C	Quick wash 45°C	Quick wash 45°C
Pre-rinse	Pre-rinse	Pre-rinse	Pre-rinse	Pre-rinse
Intensive	Intensive	Intensive	Intensive	Intensive
Power (57 min.)	Power (57 min.)	Power (59 min.)	Power (59 min.)	Power (65 min.)
Half Load	Half Load			
		Extra Dry	Extra Dry	
•/–	•/–	–/•	–/•	•/–
•/•	•/•	•/•	•/•	•/•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•	•	•	•	•
•/•	•/•	•/•	•/•	•/•
•	•	•	•	•
•	•	•	•	•
–	•	–	–	•
•	–	•	•	–
–/•	–/•	–/•	–/•	–/•
24 h	24 h	24 h	24 h	24 h
•	•	•	•	–
•	•	•	•	•
•	•	•	•	•
DA 041 160 ⁷	DA 041 160 ⁷	DA 041 061 ⁷	DA 041 061 ⁷	•
•/–	–/–	–/–	–/–	–/–
6/8	6/8	2/4	2/4	3/4
4/2	4/2	2/0	2/0	1/1
•	•	•	•	•
•	•	•	•	•
•/–/–/•	•/–/–/•	•/–/–/–	•/–/–/–	•/–/–/–
•/•	•/•	•/•	•/•	•/•
2.4	2.4	2.4	2.4	2.4

EB 333
 Ovens 400 series
 Ovens 200 series
 Vario cooktops
 Cooktops
 Extractors
 Cooling appliances
 Dishwashers | Washing machine
 Energy Label | Home Connect | Accessories



WM 260 164

Free-standing, slide-under or stackable
Width 60 cm, height 84.8 cm

Special accessories

WA 200 001

Aquastop extension for cold water inlet

Washing machine

WM 260

- Intelligent dosage system iDos 2.0 for liquid detergent and softener for a perfect washing result
- 10 kg drum with interior lighting
- Top-up function
- Dynamic Wash System: innovative washing technology for increased cleaning performance
- Combines perfectly with dryer WT260 110

Handling

Automatic programmes: Perfect washing results at the touch of a button. Illuminated rotary knob with integrated On-Off switch. Touch key operation. TFT display with clear text and symbols. Loading indicator with dosage recommendation. Programme sequence and remaining time display. Time delay up to 24 hours. Multiple signal tones.

Technical Features

Aqua sensor.
Aqua stop.
Flow-through sensor.
Anti-stain automatic.
Continuous automatic load adjustment.
Foam detection system.
Spin speed selection from 400 to 1600 rpm.
Top-up function.
Dynamic Wash System technology for increased cleaning performance.
Automatic stabilisation.
Anti-crease system.
Child lock.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

Eco 40-60.
Cottons.
Cottons Color.
Easy Care.
Quick/Mix.
Delicates/Silk.
Automatic.
Automatic Soft.
Dark Wash.
Sports.
Super 15/30.
Wool.
Memory.
Additional Programmes: Shirts, Allergy Plus, Drum Clean, Single Rinse, Spinning, Drain.
Options: Remote-Start, Intensive Plus, Speed Perfect, Rinse Plus, Less ironing, Rinse Hold, Water Plus, Silent Wash, Prewash, Stains.

Features

iDos 2.0 for fully automatic dosing of liquid detergent and softener. Volume capacity from 1 to 10 kg. Drum interior lighting. Powder detergent drawer with automatic cleaning mode after every wash cycle. Stainless steel drum with wave structure. Innovative BLDC motor technology for more performance, higher durability as well as less energy consumption and noise.

Consumption data


Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D. Water consumption 12100l/year. Energy consumption 167 kWh/year.

Planning notes


Left-hinged.
Large porthole with 180 ° opening angle. Height-adjustable feet.
Height for slide-under installation: 85 cm. Stackable under dryer WT 260 110 in combination with special accessory. With pull-out shelf 17001528, without pull-out shelf 17001527.

Connection


Total connected load 2.3 kW. Connection cable 160 cm with plug. Water connection with 3/4" screw joint.

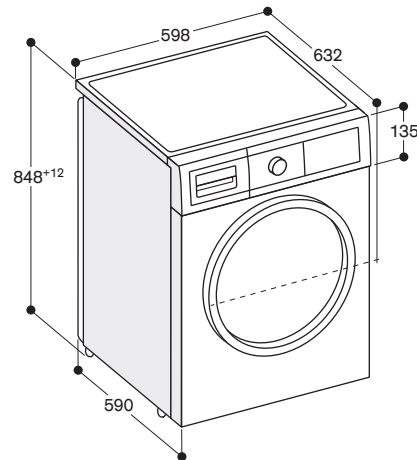

measurements in mm

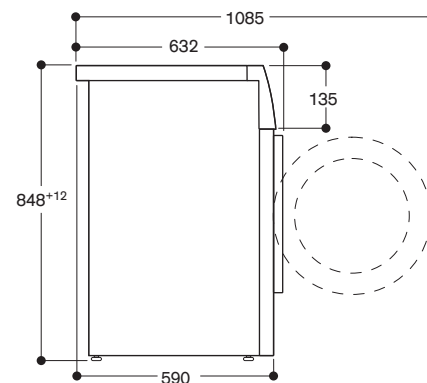

measurements in mm

**WT 260 110**

Free-standing, slide-under or stackable
Width 60 cm, height 84.2 cm

Special accessories

WA 027 400

Connection kit with extendable shelf

Tumble dryer with heat pump**WT 260**

- Heat pump technology
- Self-cleaning condenser for automatic fluff removal
- Very silent drying with only 62 db
- Steam Refresh: refreshes and removes creases from dry laundry
- Smart Dry automatically selects the right dryer program based on the last washing program

Handling

Illuminated rotary knob with integrated On-Off switch.
Touch key operation.
TFT display with clear text and symbols.
Programme sequence and remaining time display.
Time delay up to 24 hours.
Multiple signal tones.

Technical Features

Moisture and time controlled programmes.
Heat pump technology.
Self-cleaning heat exchanger.
Refresh function without previous washing cycle.
Anti-crease cycle at programme end.
Top-up function.
Child lock.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Please read additional information on Home Connect on page 420.

Programmes

Cottons.
Easy Care.
Mix.
Timed program warm.
Wool in Basket.
Business Refresh.
5 Shirts/Blouses Refresh.
1 Shirt/Blouse Refresh.
Shirts.
Towels.
Super 40.
Hygiene.
Additional Programmes: Smart Dry, Blankets, Dessous, Synthetics, Down, Wool Finish.
Options: Remote Start, Anti Crease, Easy Iron, Drying Target, Drying Target Adjustment, Spin Speed, Gentle Dry, Memory Function.

Features

Stainless steel drum with honeycomb structure.
Dry wool without shrinking or matting thanks to the included basket for woollens.
Volume capacity from 1 to 9 kg.
Drum interior lighting.

Consumption data


Energy efficiency class A+++ at a range of energy efficiency classes from A+++ to D.

Planning notes


Combines perfectly with washing machine WM 260 164.
Right-hinged, reversible.
Large porthole with 165 ° opening angle.
Height-adjustable feet.
Height for slide-under installation: 84.2 cm.
Stackable above washing machine WM 260 164 in combination with special accessory. With pull-out shelf 17001528, without pull-out shelf 17001527.

Connection

Total connected load 1.0 kW.
Connection cable 145 cm with plug.

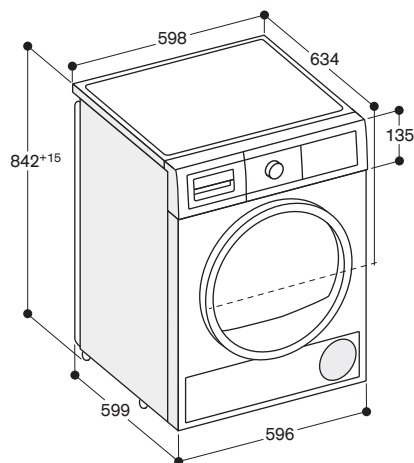

measurements in mm

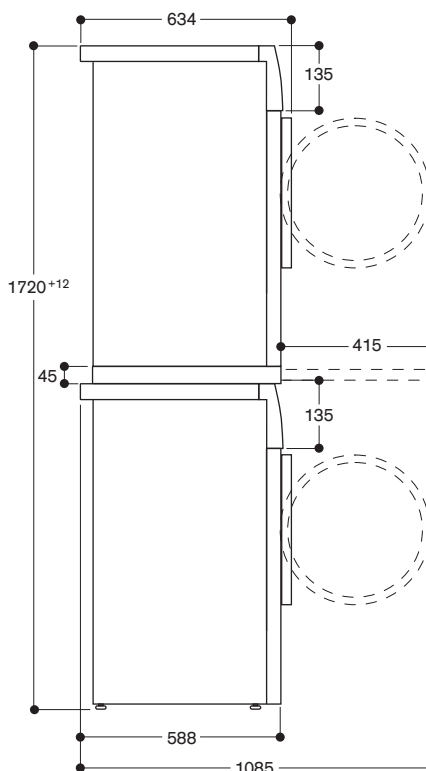Side view of WT 260 above WM 260 with connection kit accessory

measurements in mm

Washing machine



Appliance type	Washing machine	
	WM 260 164	
Panel colour	White	
Dimensions / capacity		
Width	(cm)	60
Appliance dimensions W x H x D	(mm)	598 x 848 x 632
Appliance height for under-counter	(mm)	850
Door hinge porthole / Door opening angle	Left / 180°	
Capacity	(kg)	10
Consumption data / noise level		
Energy efficiency class	A+++ -30%	
Spinning efficiency class	A	
Total annual energy consumption (220 cycles) ¹	(kWh)	164.9
Total annual water consumption (220 cycles) ¹	(l)	11220
Weighted energy consumption off-mode / left-on mode	(W)	0.1/0.5
Test programme 1	Cotton Color 60 °C	
Test programme 2	Cotton Color 40 °C	
Energy consumption test programme 1 full load / half load / test programme 2 half load	(kWh)	0.97/0.53/0.6
Spin speed test programme 1	(rpm)	1.600
Cycle time test programme 1 full load / half load / test programme 2 half load	(min)	281/248/168
Noise level washing / spinning test programme 1	(dB)	45/70
Programmes		
Washing programmes	Eco 40-60 Cottons Cotton Color Quick/Mix Delicates/Silk Wool Easy Care Super 15/30 Sports Dark Wash Automatic Automatic Soft Memory	
Additional programmes	Spinning, Easy Care Plus, Shirts, Hygiene, Drum Clean, Drain	
Options	Eco Perfect iDos 1 iDos 2 Speed Perfect Rinse Plus, Easy Iron, Rinse Hold, Water Plus, Silent Wash, Prewash, Stain Automatic	
Cleaning temperatures	(°C)	Cold/30/40/60/90
Features		
Electronic control	•	
TFT display with clear text and symbols	•	
Loading indicator	•	
Intelligent dosing system	•	
Programme sequence indicator	•	
Remaining time display	•	
Time delay	(h)	24
Top up function	•	
End of programme indicator	Display, audible	
Aqua sensor / Flow-through sensor	•/•	
Continuous automatic load adjustment / Automatic stabilisation	•/•	
Aqua stop	•	
Anti-crease system	•	
Child lock	•	
Number of tanks for iDos system	2	
Self-cleaning detergent drawer	•	
Large drum with varioSoft drum system	•	
Interior lighting	•	
Digital services (Home Connect) wireless via WiFi. ²	2.0	
Connection		
Total connected load	(kW)	2.3
Length of connection cable	(cm)	160
Length of water inlet	(cm)	150
Length of water outlet	(cm)	150
Maximum drainage height	(cm)	100

• Standard.

¹ Effective consumption depending on type of use of appliance.

² The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



Appliance type	Tumble dryer with heat pump	
	WT 260 110	
Panel colour	White	
Dimension / capacity		
Width	(cm)	60
Appliance dimensions W x H x D	(mm)	598 x 842 x 634
Appliance height for under-counter	(mm)	850
Door hinge porthole	Right, reversible	
Door opening angle	(°)	180
Capacity	(kg)	9
Consumption data / noise level		
Energy efficiency class	A+++	
Total annual energy consumption (160 cycles) ¹	(kWh)	193
Test programme	Cottons cupboard dry	
Noise level	(dB)	60
Programmes		
Programmes	Cottons	
	Easy Care	
	Mix	
	Shirts	
	Wool in Basket	
	Hygiene	
	Timed Program Warm	
	Towels	
	Super 40	
	Business	
	5 Shirts / Blouses	
	1 Shirt / Blouse	
	Smart Dry	
Options	Memory 1 and 2	
	Drying Target, Remote Start, Easy Iron, Finish in, Spin Speed, Gentle Dry	
Features		
Electronic control	•	
TFT display with clear text and symbols	•	
Programme sequence indicator	•	
Remaining time display	•	
Time delay	(h)	24
End of programme indicator	Display, audible	
Top up function	•	
Heat pump technology ¹	•	
Refresh function	•	
Self-cleaning condenser	•	
Anti-crease cycle at the end of the programme	•	
Child lock	•	
Stainless steel drum with wave structure	•	
Glass porthole	•	
Interior lighting	•	
Digital services (Home Connect) wireless via WiFi. ²	2.0	
Connection		
Total connected load	(kW)	1.0
Length of connection cable	(cm)	145
Maximum drainage height	(cm)	100

• Standard.

¹ Effective consumption depending on type of use of appliance.

² The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.



5.5 
5.5 



Energy Label | Home Connect | The accessories

Energy Label	418
Home Connect	420
Gastronorm system	421
Furniture handles	422

The new Energy Labels, why you need to know.

BSH appliances will now come with a new energy label alongside the current energy label. This information will provide you with a helpful overview of the upcoming label change on 1 March 2021.

Technology has improved the energy efficiency of appliances to such a degree that the current label no longer helps consumers differentiate between products, for instance: 88% of washing machines on the EU market are A+++. Also the energy rating itself has changed, being based on more realistic, real-world usage.

This re-calibrating of the rating will result in more differentiation and provides 'room for improvement' to allow for future technological advances to improve energy efficiency without the need for yet another new energy label. The result of this is there will be few, if any, A rated appliances.

The consumer will have questions


This will be a confusing time for the consumer and they will need to be reassured by you that appliances have not suddenly become inefficient and that purchasing a C rated appliance is actually an environmentally conscientious choice.

The current Energy Label: Valid until February 28, 2021.

By using energy-saving home appliances, we all save valuable resources as well as money. That's why your customers should consider low energy and water consumption values when they purchase a home appliance. Since 1995, the European energy label has been providing standardized information on the energy and water consumption of home appliances.

The energy label, which has had the layout depicted below since 2012, specifies the efficiency class of the

relevant appliance. It also uses language-neutral pictograms to provide additional information on the appliance, such as its noise value and capacity as well as energy and water consumption. For washing machines and dishwashers, the energy label currently identifies energy and water consumption as annual values. We'll explain the current energy label below using the example of cooling appliances.

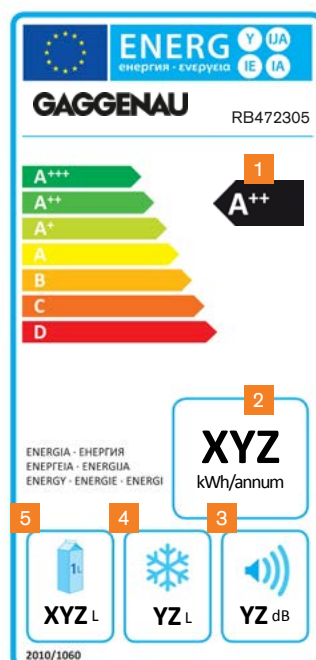

Sample energy label for fridge and freezer appliances:

In addition to the total usable volume of all freezer and refrigerator compartments, the label specifies the appliance's noise value. The energy efficiency class is particularly important for these appliances. The better the energy efficiency class, the more energy costs can be saved - especially since these devices are in continuous operation.

Key

- 1 Energy efficiency class
- 2 Energy consumption in kWh/year (measured under standard conditions)
- 3 Noise emissions expressed in dB(A) re 1 PW
- 4 Total volume of all freezer compartments
- 5 Total volume of all refrigerator compartments


The new Energy Label: Valid from March 1, 2021.

The first home appliances to have the new label will be washing machines, washer-dryers, dishwashers, cooling appliances and wine coolers. As of March 1, 2021 these appliances must show the new label when sold in shops, online, etc. As the new label has to be added to these appliances before this date, we would like to provide you with some information on the future energy label now.

The most significant change in the new energy labels is the elimination of the energy efficiency plus classes, for example A+++ . In the future, classification will be from A to G. New methods will also be used for measuring energy consumption and determining the label class. According to EU specifications, they should, where possible, take into account the real-life usage of the product and reflect the average consumer behaviour. This means, for example, that energy consumption for washing machines, washer-dryers and dishwashers will no longer be specified per year but per 100 operating cycles of the particular appliance. For these products, the duration of the test programme will also be specified. In the case of washing machines and washer-dryers, there will even be a maximum programme duration that must not be exceeded.

The test program for labelling washing machines and washer-dryers is also changing. The new “Eco 40-60” program will be displayed on the appliance panel. For dishwashers, the composition of the standard place setting will also be changed. For these and other reasons, it is not possible to directly convert the current efficiency classes to the new classes.

In addition, further product information can be retrieved directly via a QR code that is displayed on the energy label. The QR code links to a database operated by the EU from 1.3.2021. Here, data sheets for all appliances that require the new energy label can be viewed and downloaded. Access to the database is also possible via the Internet.

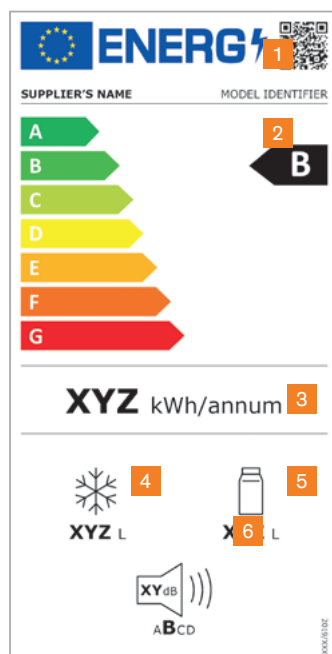

Sample energy label for fridge and freezer appliances:

The procedure for determining the energy class is now more comprehensive. It takes into account the type of appliance, its operating principle, the room temperature, and the number and size of storage compartments. The rest of the elements on the new energy label basically remain the same. Energy consumption continues to be specified in kWh as annual consumption (“annum”). The label also provides information on the total volume of all refrigerator compartments and all freezer compartments, if any, and on noise emissions and the noise emission class.

Key

- 1 QR code
- 2 Energy efficiency class
- 3 Energy consumption in kWh/year (measured under new standard conditions)
- 4 Total volume of all freezer compartments
- 5 Total volume of all refrigerator compartments
- 6 Noise emissions expressed in dB(A) re 1 PW and noise emission class

The extraordinary, becomes connected.

Gaggenau and Home Connect*



The difference is Gaggenau.

This is the beginning of the future of cooking. Aided by a digital device, the private chef can, for instance, pre-heat the oven, turn on ventilation, start the dishwasher, download digital user manuals and have a technician run a diagnostic check, all remotely.

Integrating into different home managements systems ensures the kitchen remains the heart of the digital home. The private chef can ask Amazon Alexa to prepare a cup of coffee and turn on the ventilation while checking remaining time of the oven.

- Connect: Remotely control** and monitor. Enable remote diagnosis by an online technician.
- Access: download user manuals and utilise our partnering network.
- Integration: Compatible with different home management system.

This is just the start, explore the possibilities at home-connect.com.

*The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

**Not applicable for cooktops, cooktops are not intended for unattended use – cooking process must be supervised.

The Gaggenau Gastronorm system

The Gastronorm system provides the basis for cookware in the professional kitchen. It enables a smooth continuum from the preparation and cooking stages right through to serving at the table and storage. The Gastronorm inserts from Gaggenau have been adapted to match our Vario cooling 200 series, our induction cooktops, our Combi-steam and steam ovens, our ovens as well as our dishwashers.



Prepare.
To prepare in combination with kitchen sinks in the Gastronorm format.

Keep fresh.
To keep fresh with appliances of the Vario cooling 200 series.

Cook.
To cook on induction cooktops VI, CI and CX, in our Combi-steam and steam ovens BS/BSP or our ovens BO/BOP in combination with the pull-out system BA 018/BA 016.

Keep warm.
To keep warm in the Gaggenau warming drawers WS/WSP.

Regenerate/warm up.
To regenerate in our Combi-steam and steam ovens BS/BSP as well as warming up on our induction cook-tops VI, CI and CX or in our ovens BO/BOP in combination with the pull-out systems BA 018/BA 016.

Dishwashing.
Optimal cleaning and drying of the GN inserts thanks to the GN insert holder.

Accessories in the Gaggenau Gastronorm system

For usage in the various Gaggenau appliances the following accessories in the Gaggenau Gastronorm system are available.

Gastronorm insert GN 114/124/144/154

These high-walled, sturdy inserts made from hygienic stainless steel are ideal for cooking with steam and equally practical for storage in the refrigerator or serving at the table. They are dishwasher-safe. For cooking several meals simultaneously, the cooking inserts for Combi-steam and steam ovens in the GN 2/3 format can be combined as required with smaller inserts that are available as special accessories in the GN 1/3 format.

GN 114 130
Gastronorm insert, stainless steel, GN 1/3, unperforated, 40 mm deep, 1.5l



GN 114 230
Gastronorm insert, stainless steel, GN 2/3, unperforated, 40 mm deep, 3l



GN 124 130
Gastronorm insert, stainless steel, GN 1/3, perforated, 40 mm deep, 1.5l



GN 124 230
Gastronorm insert, stainless steel, GN 2/3, perforated, 40 mm deep, 3l



Gastronorm roaster GN 340

Gastronorm roaster in cast aluminium GN 2/3, height 165 mm, non-stick. For roasting in oven with roasting function. Lower and upper part can also be used as separate ovenproof dishes, height 100 and 65 mm. For ovens with heating element BA 056 115 or BA 058 115 and pull-out system BA 016 or BA 018 (both to be ordered separately) and for Combi-steam ovens with adapter GN 010 330 and pull-out system BA 010 301 (both to be ordered separately).

GN 340 230
Gastronorm roaster, cast aluminium, GN 2/3, height 165 mm



Teppan Yaki plate GN 232

GN 232 110
Teppan Yaki plate made of multi ply material, GN 1/1
For full surface induction cooktop CX 492/482



GN 232 230
Teppan Yaki plate made of multi ply material, GN 2/3
For full surface induction cooktop CX 492/482



Furniture handles

For the individual design of your furniture fronts, Gaggenau is offering handle bars matching the Vario cooling appliances and also the 200 series ovens. Depending on the length, handle bars come with two or three mounts.

Handle bar with 2 mounts

GH 020 010

Handle bar, stainless steel,
Length 20 cm,
drilling distance 177 mm.

GH 030 010

Handle bar, stainless steel,
Length 30 cm,
drilling distance 277 mm.

GH 031 010

Handle bar, stainless steel,
match to BOP, Length 30.5 cm,
drilling distance 282 mm.

GH 045 010

Handle bar, stainless steel,
Length 45 cm,
drilling distance 427 mm.

GH 050 010

Handle bar, stainless steel,
Length 50 cm,
drilling distance 477 mm.

GH 060 010

Handle bar, stainless steel,
Length 60 cm,
drilling distance 577 mm.

GH 070 010

Handle bar, stainless steel,
Length 70 cm,
drilling distance 677 mm.

GH 080 010

Handle bar, stainless steel,
Length 80 cm,
drilling distance 777 mm.

GH 090 010

Handle bar, stainless steel,
Length 90 cm,
drilling distance 877 mm.




Handle bar with 3 mounts


GH 110 010


Handle bar, stainless steel,
Length 110 cm,
Drilling distance 538.5 mm each.

GH 140 010

Handle bar, stainless steel,
Length 140 cm,
Drilling distance 688.5 mm each.



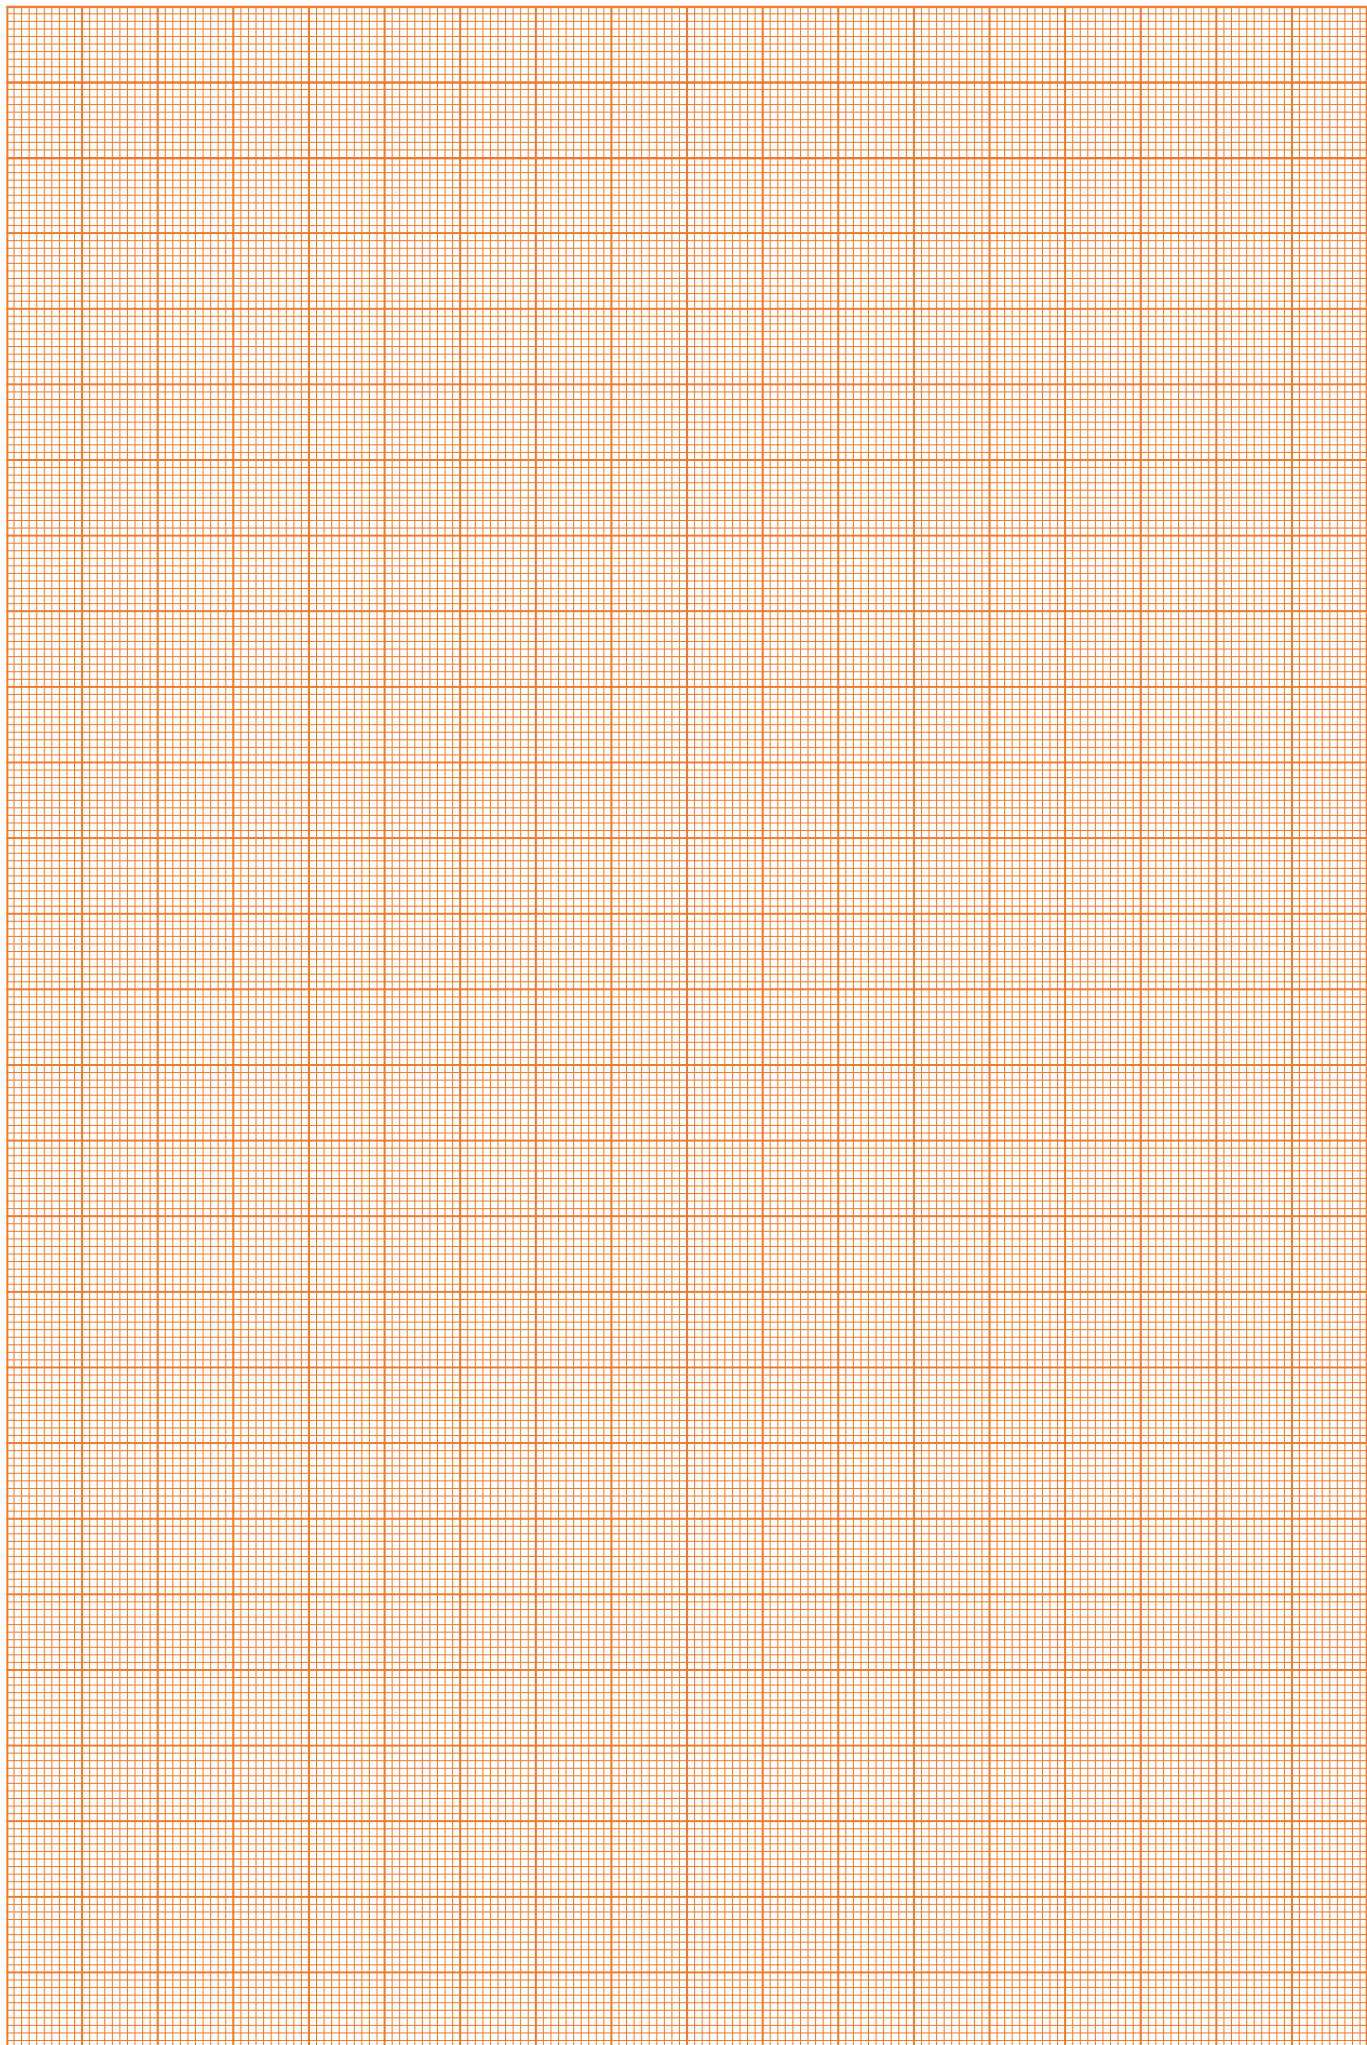

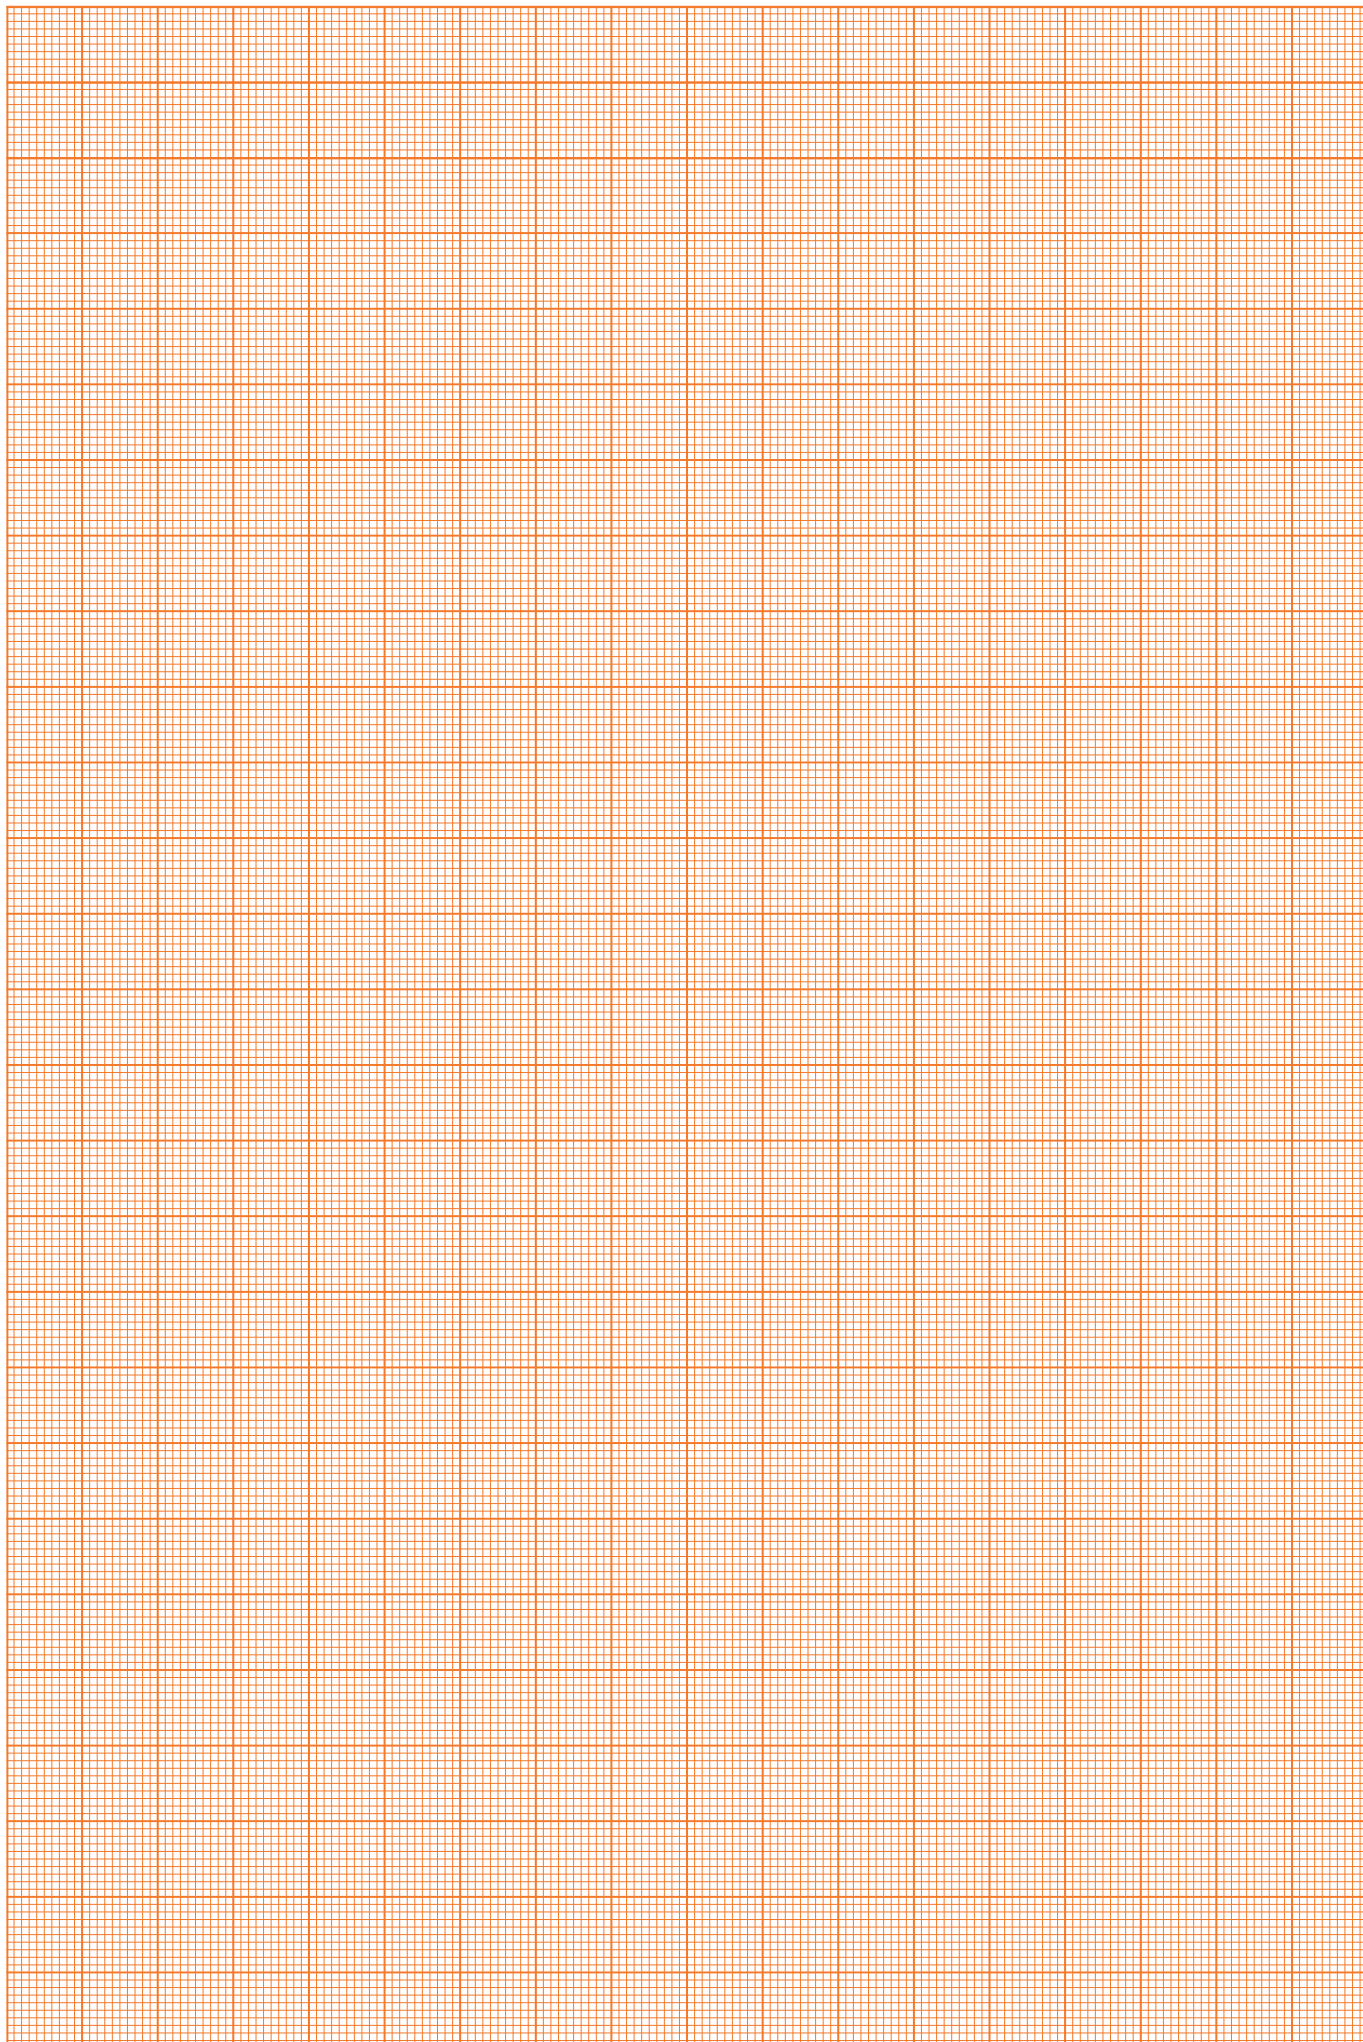

© Copyright by
BSH Hausgeräte GmbH
P.O. Box 830101
81701 Munich
Edition 2020 II.

The data and facts expressed herein are current as of July 2020. Gaggenau reserves the right to implement technical modifications that serve the purpose of progress.

The appliances are for household use only.

Certain appliances in this brochure are not available in all countries. Please contact your Gaggenau supplier for details.

The difference is Gaggenau.