

Index

General information - Features.....F2
 Technical dataF4
 Ordering codeF5
 Dimensions 2 Bolts flange (OL)F8
 Special versionF9

Type	Displacement cm ³ /rev [in ³ /rev]	Max. flow l/min [U.S. gpm]	Max. pressure cont. bar [psi]
H1CR 045	44.3 [2.67]	186 [49]	350 [5100]

H1CR series are a family of fixed displacement motors, bent axis piston design for operation in both open and closed circuit. H1CR series motors are mainly intended for installation in mechanical gearboxes such as track drive and winches gear boxes.

The proven design incorporating the lens shape valve plate, the high quality components and manufacturing techniques make the H1CR series motors able to provide up to 350 bar [5100 psi] continuous and 450 bar [6500 psi] peak performance.

Fully laboratory tested and field proven, these motors provide maximum efficiency and long life. Heavy duty bearings permit high radial and axial loads.

Flangeable valves, both for open and closed circuit, enable H1CR series motors to meet the requirements of the most different types of applications.



Simbology:

C	N/bar [lbf/psi]	Load
F_{ax max}	N [lbf]	Axial pushing load
F_{ax max}	N [lbf]	Axial pulling load
F_q	N [lbf]	Radial load
F_{q max}	N [lbf]	Maximum permissible radial load
J	kg·m ² [lbf·ft ²]	Moment of inertia
m	kg [lbs]	Weight
n_{o max}	rpm	Maximum speed
p_{nom}	bar [psi]	Maximum cont. pressure
p_{max}	bar [psi]	Maximum pressure peak

q_{max}	l/min [U.S. gpm]	Maximum flow
q_d	l/min [U.S. gpm]	External drain flow
T_k	Nm/bar [lbf.ft/psi]	Torque constant
T_{nom}	Nm [lbf.ft]	Maximum torque at pressure cont.
T_{max}	Nm [lbf.ft]	Maximum torque at pressure peak
V_g	cm ³ /rev [in ³ /rev]	Displacement
P_{max}	kW [hp]	Maximum power at p _{nom}
hm	%	Mech-hyd. efficiency
v	%	Volumetric efficiency

Hydraulic fluids:

Use fluids with mineral oil basis and anticorrosive, antioxidant and wear preventing addition agents (HL or HM). Viscosity range at operating temperature must be of 15÷40 cSt. For short periods and upon cold start, a max. viscosity of 800 cSt is allowed. Viscosities less than 10 cSt are not allowed. A viscosity range of 10÷15 cSt is allowed for extreme operating conditions and for short periods only. For further information see at Fluids and filtering section.

Temperature ranges:


The operating temperature of the oil must be within -25°C÷90°C [-13°F÷194°F]. The running of the axial piston unit with oil temperature higher than 90°C [194°F] or lower than -25°C [-13°F] is not allowed. For further information see at Fluids and filtering section.

Filtering:

A correct filtration helps to extend the service life of axial piston units. In order to ensure a correct functioning of the unit, the max. permissible contamination class is 21/19/16 according to ISO 4406:1999. For further details see at Fluids and filtering section.

Operating pressure:

The maximum permissible pressure on pressure ports is 350 bar [5100 psi] continuous and 450 bar [6500 psi] peak. If two motors are connected in series, working pressure has to be limited to following values: P1 400 bar max. [5800 psi] and P2 200 bar max. [2900 psi].

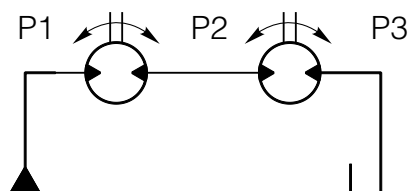

Case drain pressure:

Maximum permissible case drain pressure is 1.5 bar [22 psi]. A higher pressure can damage the main shaft seal or reduce its life.

Seals:

Seals used on standard H1CR series axial piston motors are of NBR (Acrylonitrile-Butadiene Elastomer). For special uses (high temperatures or corrosive fluids) it is possible to order the unit with FKM seals (Fluoroelastomer). In case of use of special fluids, contact Dana.

Loads on output shaft:

Main shaft has bearings that can bear both radial and axial loads. As for loads permissible values, see relevant section at Bearing life on axial piston unit Service life of bearings for axial piston units.

Minimum rotation speed:

Under “minimum rotating speed” we mean the minimum speed ensuring a smooth running of the piston motor. Operation smoothness at low speeds depends on many factors, as type of load and operating pressure. At a speed higher than 150 rpm, a smooth running is ensured almost in every case. Lower speeds are, usually, possible. For special applications please contact Dana.

Installation:


H1CR motors can be installed in various position and directions; however, installation in vertical position with shaft towards upper is not allowed. These axial piston units have separated ports and drain chambers and so must be always drained. For further detail see at General installation guidelines.

Flangeable valves:

Flangeable valves are available for motors both in open and closed loop. VSC06F, VSC09F, VSC15F AND VSC21F flushing valves are for closed loop, VCD/M overcentre valve is for open loop. For further details see at Valves section.

Relation between direction of rotation and direction of flow:

The relation between direction of rotation of shaft and direction of flow in H1CR piston motors is shown in the picture below.

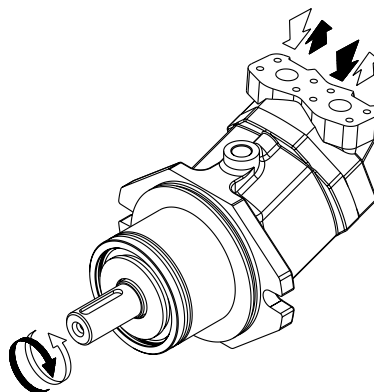

Displacement	V_g	cm ³ /rev [in ³ /rev]	44.3 [2.67]
Max. Press. cont.	p_{nom}	bar [psi]	350 [5100]
Max. Press. peak	p_{max}	bar [psi]	450 [6500]
Max. speed	n_{0 max}	rpm	4200
Max. flow	q_{max}	l/min [U.S.gpm]	186 [49]
Max. power at p_{nom}	P_{max}	kW [hp]	108 [145]
Torque constant	T_k	Nm/bar [lbf.ft/psi]	0.70 [0.036]
Max. torque cont. at p_{nom}	T_{nom}	Nm [lbf.ft]	247 [182]
Max torque peak at p_{max}	T_{max}	Nm [lbf.ft]	317 [233.6]
Moment of inertia ⁽¹⁾	J	kg·m ² [lbf.ft ²]	0.004 [0.094]
Weight ⁽¹⁾	m	kg [lbs]	20 [44.1]
External drain flow ⁽²⁾	q_d	l/min [U.S.gpm]	0.7 [0.18]

Theoretical values, without considering η_{hm} and η_v ; approximate values. Peak operations must not exceed 1% of every minute. A simultaneous maximum pressure and maximum speed not recommended. Pump values refer to open circuit operation.

Notes:

(1) Approximate values.

(2) Average values at 250 bar [3600 psi] with mineral oil at 45°C [113°F] and 35 cSt.

The following alphanumeric codes system has been developed to identify all of the configuration options for the H1CR series. Use the model code below to specify the desired features. All alphanumeric digits system of the code must be present when ordering. We advise to carefully read the catalogue before filling the ordering code.

1	2	3	4	5	6	7	8	9	10	11	12	13	14
Series	Motor	Size	Version	Mount flange	Shaft end	Port cover	Direction of rotation	Seal	Valve	Valves feature	Flushing valve	Special feature	Painting
H1CR	M	045	GE	OL	SAI	LM2	RV	V	VCDM	000	06	RD	01

1	Series	
H1CR	Plug-in fixed displacement motors for gearbox	

2	Motor	
M	Motor	

3	Size	
045	44.3 cm ³ /rev [2.67 in ³ /rev]	

4	Version	
GE	ISO 3019-2 metric.	

5	Flange	
OL	2 bolts Ø 160 mm h6 [Ø 6.3 in]	

6	Shaft end	
SAI	Splined W30x2x14x9g DIN 5480	



1	2	3	4	5	6	7	8	9	10	11	12	13	14
H1CR	M	045	G	OL	SAI	LM2	RV	V	VCDM	000	06	RD	01

7

Port cover

FM1	Frontal ports
LM2	Lateral ports
VM2	Lateral ports same side

8

Direction of rotation (viewed from shaft side)

RV	Reversible
-----------	------------

9

Seal

N	NBR
V	FKM

10

Valve

Port cover

		FM1	LM2	VM2
XXXX	None	●	●	●
VCDM	VCD/M Pilot assisted overcentre valve	–	–	●
VCR3	VCR3 Control Rotation Valve	–	–	●

11

Valve feature

Valve

		XXXX	VCDM	VCR3
000	None	●	–	–
004	Not Set 30÷350 bar [435 to 5075 psi] Piloting ratio 6.2:1 Control of rotation CW	–	●	–
005	Not Set 30÷350 bar [435 to 5075 psi] Piloting ratio 6.2:1 Control of rotation CCW	–	●	–
012	Not Set (Piloting ratio 8:1)	–	–	●

– : Not available

● : Available

Please contact Technical department for valve which require specific setting. For the technical specifications see catalogue valves.

1	2	3	4	5	6	7	8	9	10	11	12	13	14
H1CR	M	045	G	OL	SAI	LM2	RV	V	VCDM	000	06	RD	01

12		Flushing valve			Port cover		
		FM1	LM2	VM2			
XX	None	•	•	•			
06	VSC/F Flushing valve - 6 l/min [1.58 U.S. gpm]	-	•	•			
09	VSC/F Flushing valve - 10.5 l/min [2.77 U.S. gpm]	-	•	•			
15	VSC/F Flushing valve - 15 l/min [3.96 U.S. gpm]	-	•	•			
21	VSC/F Flushing valve - 20 l/min [5.28 U.S. gpm]	-	•	•			

- : Not available

• : Available


It is not possible to combine the flushing valves with valve in pos.10. For the technical specifications see catalogue valves.

13		Special feature
XX	None	
RD	Drain plugs reversed	

14		Painting
XX	None	
01	Black Painted RAL 9005	
02	Blue Painted RAL 5015	




STANDARD VERSION

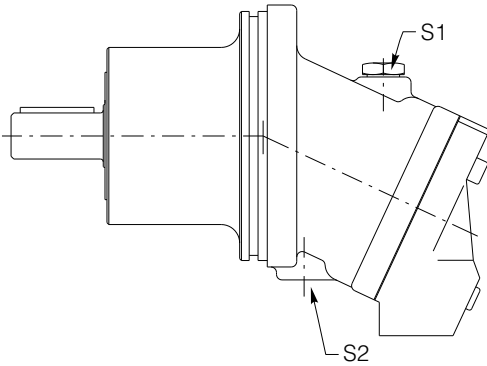

S1 - Metallic plug.
S2 - Plastic plug.

"RD" VERSION

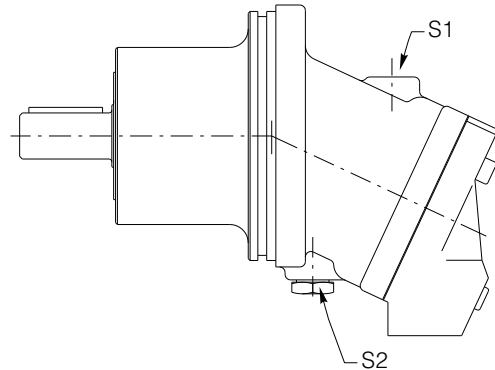

S1 - Plastic plug.
S2 - Metallic plug.

For the H1CR motors it is possible to request the drain plug reversed compared to standard.
If it is necessary the motor with this configuration, to specify in the purchase order the value "RD" (See position 13 of ordering code).



BREVINI[®]

Motion Systems

