

COMPUTER CABLES



The Netherlands: +31 (0)23 - 531 91 84
 info.nl@m-h.biz

Belgium: +32 (0)3 - 660 13 20
 info.be@m-h.biz

Germany: +49 (0)6192 - 97 91 85
 info.de@m-h.biz

www.m-hgroup.com
 www.quintis.com



| | | | | | |
|---|----|---|----|-------------------------------------|----|
| DIGITUS® Premium CAT 6 S-FTP patch cables..... | 16 | DIGITUS® Blister CAT 5e U-UTP patch cables..... | 27 | SATA Cables | 58 |
| DIGITUS® Premium CAT 6 U-UTP patch cables | 17 | USB Cables | 28 | SAS Cables..... | 61 |
| DIGITUS® Premium CAT 5e SF-UTP patch cables..... | 18 | Monitor Cables | 38 | Slot Bracket Cables..... | 64 |
| DIGITUS® Premium CAT 5e F-UTP patch cables..... | 19 | DVI & DisplayPort Cables..... | 43 | IDE Flat and Round Cables..... | 65 |
| DIGITUS® Premium CAT 5e U-UTP patch cables..... | 20 | DVI Cables..... | 44 | SCSI Cables | 67 |
| SoHo CAT 5e SF-UTP/F-UTP/ U-UTP patch cables..... | 21 | DVI & DisplayPort Cables..... | 46 | Fiber Optic Duplex Patchcables..... | 68 |
| DIGITUS® Blister CAT 6 S-FTP patch cables..... | 23 | Printer Cables..... | 48 | LWL Cables | 71 |
| DIGITUS® Blister CAT 6 U-UTP patch cables..... | 24 | Serial Cables | 51 | Wireless LAN Coaxial Cables | 72 |
| DIGITUS® Blister CAT 5e SF-UTP patch cables..... | 25 | PS/2 Cables | 54 | | |
| DIGITUS® Blister CAT 5e F-UTP patch cables..... | 26 | FireWire Cables | 56 | | |

DIGITUS® Premium CAT 6 S-FTP patch cables



CABLES

DIGITUS® Premium CAT 6 S-FTP Patch cables

- Pairs with foil and full braid shielding (PIMF) patch cables
- 4 x 2 x AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 shielded connectors

- Boot with kink protection and strain relief
- Spot length on boot
- 3 P CAT 6 Channel Link certified
- Connection 1 : 1

Ready for PoE

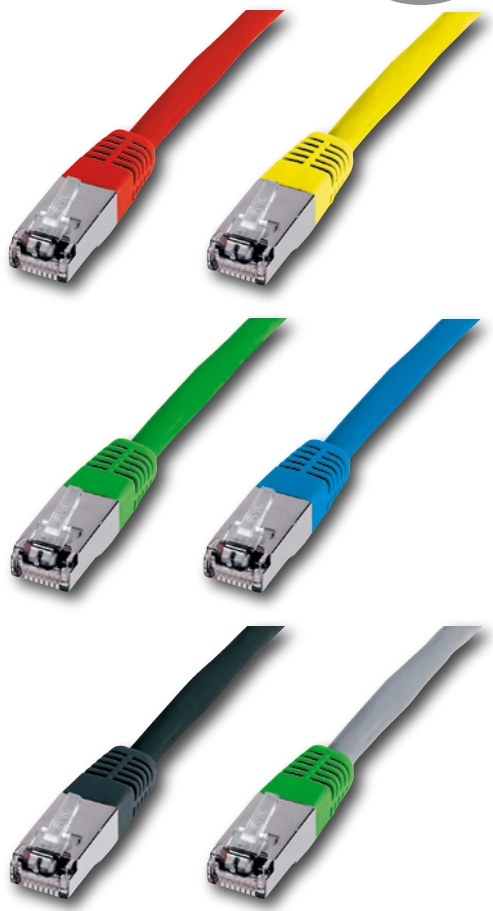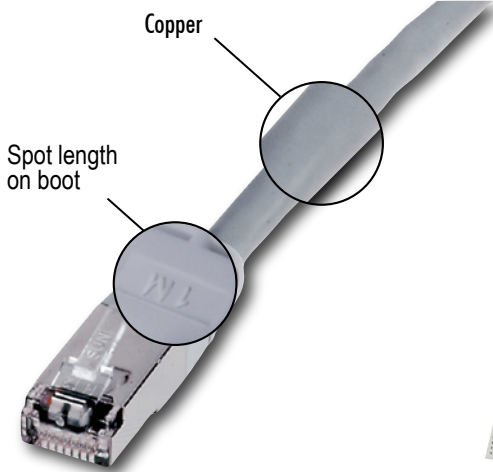

Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | crossover |
|--------|-----------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|--------------------------|
| 0,5 m | DK-1641-005 214922 | DK-1641-005/R 215059 | DK-1641-005/Y 215066 | DK-1641-005/G 215042 | DK-1641-005/B 214939 | DK-1641-005/BL 215035 | DK-1641-005-CO 215912 |
| 1,0 m | DK-1641-010 214946 | DK-1641-010/R 215103 | DK-1641-010/Y 215110 | DK-1641-010/G 215097 | DK-1641-010/B 215073 | DK-1641-010/BL 215080 | DK-1641-010-CO 215929 |
| 2,0 m | DK-1641-020 214953 | DK-1641-020/R 215165 | DK-1641-020/Y 215172 | DK-1641-020/G 215158 | DK-1641-020/B 215127 | DK-1641-020/BL 215141 | DK-1641-020-CO 215936 |
| 3,0 m | DK-1641-030 214960 | DK-1641-030/R 215219 | DK-1641-030/Y 215226 | DK-1641-030/G 215202 | DK-1641-030/B 215189 | DK-1641-030/BL 215196 | DK-1641-030-CO 215943 |
| 5,0 m | DK-1641-050 214977 | DK-1641-050/R 215264 | DK-1641-050/Y 215271 | DK-1641-050/G 215257 | DK-1641-050/B 215233 | DK-1641-050/BL 215240 | DK-1641-050-CO 215950 |
| 7,0 m | DK-1641-070 214984 | DK-1641-070/R 215301 | DK-1641-070/Y 215318 | DK-1641-070/G 215295 | DK-1641-070/B 215288 | DK-1641-070/BL 215325 | DK-1641-070-CO 215967 |
| 10,0 m | DK-1641-100 214991 | DK-1641-100/R 215363 | DK-1641-100/Y 215370 | DK-1641-100/G 215356 | DK-1641-100/B 215332 | DK-1641-100/BL 215349 | DK-1641-100-CO 215974 |
| 15,0 m | DK-1641-150 215004 | | | | | | DK-1641-150-CO 215981 |
| 20,0 m | DK-1641-200 215011 | | | | | | DK-1641-200-CO 215998 |
| 30,0 m | DK-1641-300 215028 | | | | | | DK-1641-300-CO 216001 |



DIGITUS® Premium CAT 6 U-UTP Patch cables

DIGITUS® Premium CAT 6 U-UTP Patch cables

- Unshielded CAT 6 patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 connectors
- Boot with kink protection and strain relief

- Spot length on boot
- 3P CAT 6 certified
- Connection 1 : 1

Ready for PoE

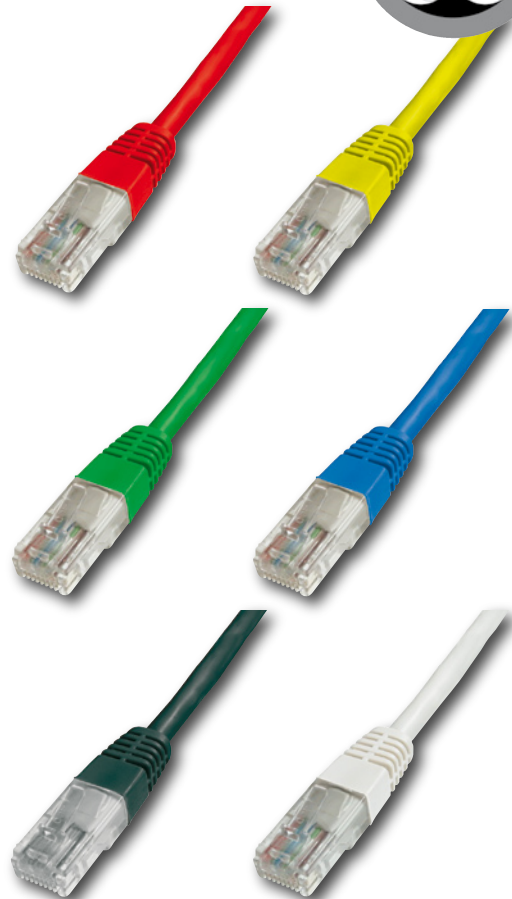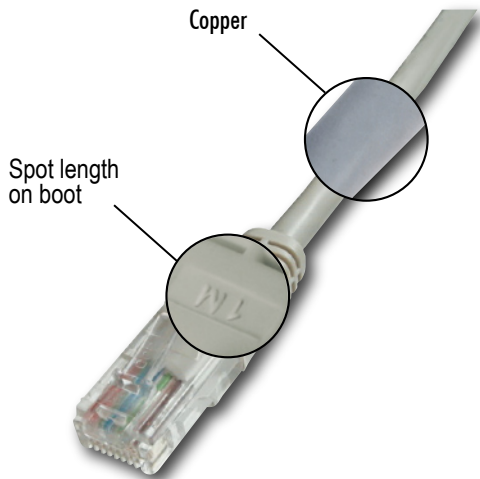

CABLES

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices

Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | white |
|--------|-----------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|--------------------------|
| 0,5 m | DK-1611-005 214205 | DK-1611-005/R 214335 | DK-1611-005/Y 214359 | DK-1611-005/G 214328 | DK-1611-005/B 214304 | DK-1611-005/BL 214311 | DK-1611-005/WH 214342 |
| 1,0 m | DK-1611-010 214212 | DK-1611-010/R 214380 | DK-1611-010/Y 214410 | DK-1611-010/G 214373 | DK-1611-010/B 214366 | DK-1611-010/BL 214403 | DK-1611-010/WH 214397 |
| 2,0 m | DK-1611-020 214229 | DK-1611-020/R 214458 | DK-1611-020/Y 214472 | DK-1611-020/G 214434 | DK-1611-020/B 214427 | DK-1611-020/BL 214441 | DK-1611-020/WH 214465 |
| 3,0 m | DK-1611-030 214236 | DK-1611-030/R 214519 | DK-1611-030/Y 214533 | DK-1611-030/G 214502 | DK-1611-030/B 214489 | DK-1611-030/BL 214496 | DK-1611-030/WH 214526 |
| 5,0 m | DK-1611-050 214243 | DK-1611-050/R 214571 | DK-1611-050/Y 214595 | DK-1611-050/G 214564 | DK-1611-050/B 214540 | DK-1611-050/BL 214557 | DK-1611-050/WH 214588 |
| 7,0 m | DK-1611-070 214250 | DK-1611-070/R 214632 | DK-1611-070/Y 214649 | DK-1611-070/G 214625 | DK-1611-070/B 214601 | DK-1611-070/BL 214618 | DK-1611-070/WH 214656 |
| 10,0 m | DK-1611-100 214267 | DK-1611-100/R 214694 | DK-1611-100/Y 214717 | DK-1611-100/G 214687 | DK-1611-100/B 214663 | DK-1611-100/BL 214670 | DK-1611-100/WH 214700 |
| 15,0 m | DK-1611-150 214274 | DK-1611-150/R 214755 | DK-1611-150/Y 214779 | DK-1611-150/G 214748 | DK-1611-150/B 214724 | DK-1611-150/BL 214731 | DK-1611-150/WH 214762 |
| 20,0 m | DK-1611-200 214281 | | | | | | |
| 30,0 m | DK-1611-300 214298 | | | | | | |



DIGITUS® Premium CAT 5e SF-UTP Patch cables

CABLES

DIGITUS® Premium CAT 5e SF-UTP Patch cables

- Foil and braid shielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 connectors
- Boot with kink protection and strain relief

- Spot length on boot
- 3P CAT 5e certified

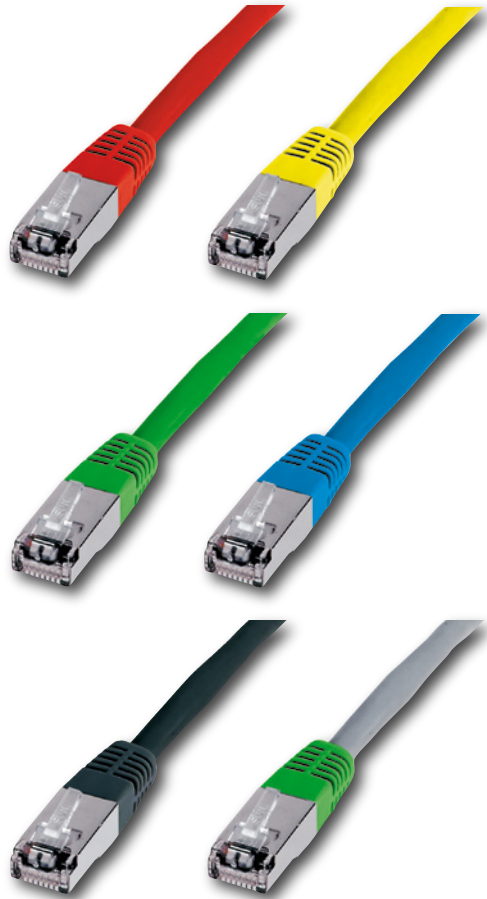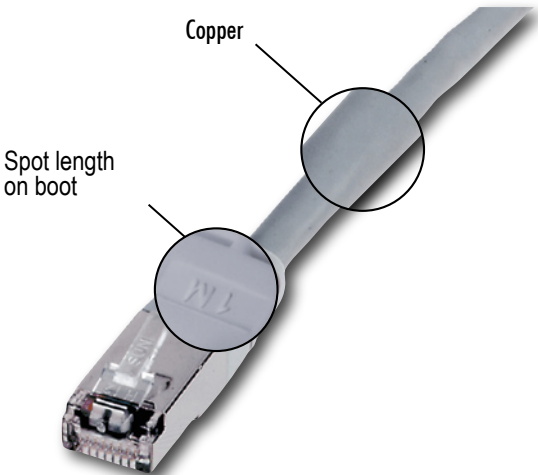

Please choose your requested product by the corresponding article number or the EAN code.



| | grey | red | yellow | green | blue | black | CROSSOVER |
|---------------------------|--------|-----------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|
| Raw Cables | 0,5 m | DK-1531-005 212249 | DK-1531-005/R 213734 | DK-1531-005/Y 213741 | DK-1531-005/G 213727 | DK-1531-005/B 213703 | DK-1531-005/BL 215820 |
| | 1,0 m | DK-1531-010 213079 | DK-1531-010/R 213789 | DK-1531-010/Y 213796 | DK-1531-010/G 213772 | DK-1531-010/B 213758 | DK-1531-010/BL 215905 |
| | 2,0 m | DK-1531-020 213086 | DK-1531-020/R 213833 | DK-1531-020/Y 213840 | DK-1531-020/G 213819 | DK-1531-020/B 213802 | DK-1531-020/BL 215837 |
| Connectors + Adapters | 3,0 m | DK-1531-030 213093 | DK-1531-030/R 213888 | DK-1531-030/Y 213895 | DK-1531-030/G 213864 | DK-1531-030/B 213857 | DK-1531-030/BL 215844 |
| | 5,0 m | DK-1531-050 213109 | DK-1531-050/R 213932 | DK-1531-050/Y 213949 | DK-1531-050/G 213925 | DK-1531-050/B 213901 | DK-1531-050/BL 215851 |
| | 7,0 m | DK-1531-070 213116 | DK-1531-070/R 213987 | DK-1531-070/Y 213994 | DK-1531-070/G 213970 | DK-1531-070/B 213956 | DK-1531-070/BL 213963 |
| Wall Plates | 10,0 m | DK-1531-100 213123 | DK-1531-100/R 214038 | DK-1531-100/Y 214045 | DK-1531-100/G 214021 | DK-1531-100/B 214007 | DK-1531-100/BL 215868 |
| | 15,0 m | DK-1531-150 213130 | DK-1531-150/R 214083 | DK-1531-150/Y 214090 | DK-1531-150/G 214076 | DK-1531-150/B 214052 | DK-1531-150/BL 215875 |
| | 20,0 m | DK-1531-200 213147 | DK-1531-200/R 214137 | DK-1531-200/Y 214144 | DK-1531-200/G 214120 | DK-1531-200/B 214106 | DK-1531-200/BL 215882 |
| Accessories + Testdevices | 30,0 m | DK-1531-300 213154 | DK-1531-300/R 214175 | DK-1531-300/Y 214182 | DK-1531-300/G 214168 | DK-1531-300/B 214151 | DK-1531-300/BL 215899 |

DIGITUS® Premium CAT 5e F-UTP Patch cables

DIGITUS® Premium CAT 5e F-UTP Patch cables

- Foil shielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 shielded connectors
- Boot with kink protection and strain relief
- Spot length on boot
- 3 P CAT 5e certified

Ready for PoE

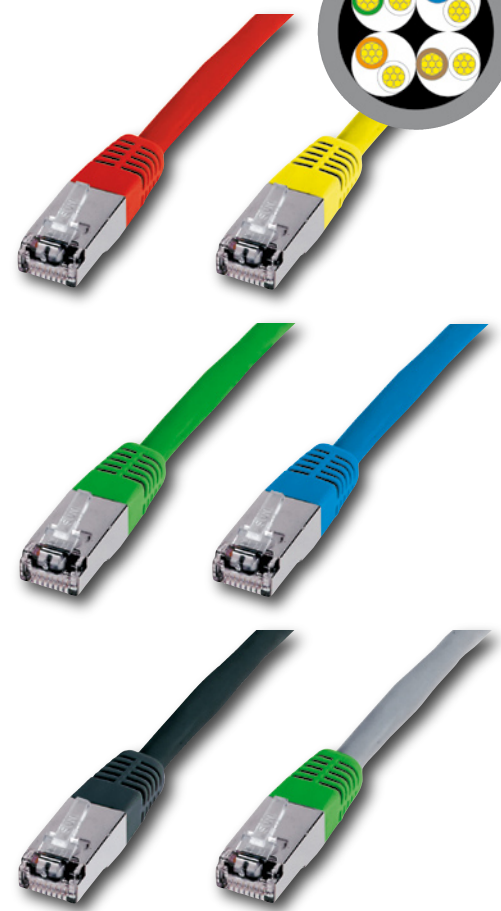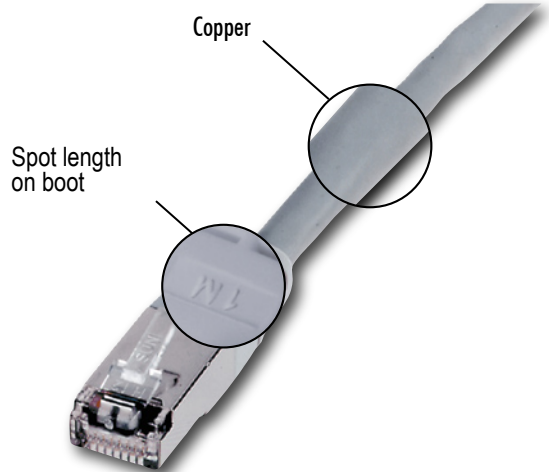

CABLES

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices

Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | crossover |
|--------|-----------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|--------------------------|
| 0,3 m | | | | | | | DK-1521-003-CO 215721 |
| 0,5 m | DK-1521-005 212232 | DK-1521-005/R 213192 | DK-1521-005/Y 213208 | DK-1521-005/G 213185 | DK-1521-005/B 213161 | DK-1521-005/BL 213178 | DK-1521-005-CO 215738 |
| 1,0 m | DK-1521-010 212966 | DK-1521-010/R 213246 | DK-1521-010/Y 213253 | DK-1521-010/G 213239 | DK-1521-010/B 213215 | DK-1521-010/BL 213222 | DK-1521-010-CO 215745 |
| 2,0 m | DK-1521-020 212973 | DK-1521-020/R 213291 | DK-1521-020/Y 213307 | DK-1521-020/G 213284 | DK-1521-020/B 213260 | DK-1521-020/BL 213277 | DK-1521-020-CO 215752 |
| 3,0 m | DK-1521-030 212980 | DK-1521-030/R 213345 | DK-1521-030/Y 213352 | DK-1521-030/G 213338 | DK-1521-030/B 213314 | DK-1521-030/BL 213321 | DK-1521-030-CO 215769 |
| 5,0 m | DK-1521-050 212997 | DK-1521-050/R 213390 | DK-1521-050/Y 213406 | DK-1521-050/G 213383 | DK-1521-050/B 213369 | DK-1521-050/BL 213376 | DK-1521-050-CO 215776 |
| 7,0 m | DK-1521-070 213000 | DK-1521-070/R 213444 | DK-1521-070/Y 213451 | DK-1521-070/G 213437 | DK-1521-070/B 213413 | DK-1521-070/BL 213420 | |
| 10,0 m | DK-1521-100 213017 | DK-1521-100/R 213499 | DK-1521-100/Y 213505 | DK-1521-100/G 213482 | DK-1521-100/B 213468 | DK-1521-100/BL 213475 | DK-1521-100-CO 215783 |
| 15,0 m | DK-1521-150 213024 | DK-1521-150/R 213543 | DK-1521-150/Y 213550 | DK-1521-150/G 213536 | DK-1521-150/B 213512 | DK-1521-150/BL 213529 | DK-1521-150-CO 215790 |
| 20,0 m | DK-1521-200 213031 | DK-1521-200/R 213598 | DK-1521-200/Y 213604 | DK-1521-200/G 213581 | DK-1521-200/B 213567 | DK-1521-200/BL 213574 | DK-1521-200-CO 215806 |
| 30,0 m | DK-1521-300 213048 | | | | | | DK-1521-300-CO 215813 |
| 50,0 m | DK-1521-500 213055 | | | | | | |




DIGITUS® Premium CAT 5e U-UTP Patch cables

CABLES

DIGITUS® Premium CAT 5e U-UTP Patch cables

- Unshielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 connectors
- Boot with kink protection and strain relief

- Spot length on boot
- 3 P CAT 5e certified
- Connection 1 : 1

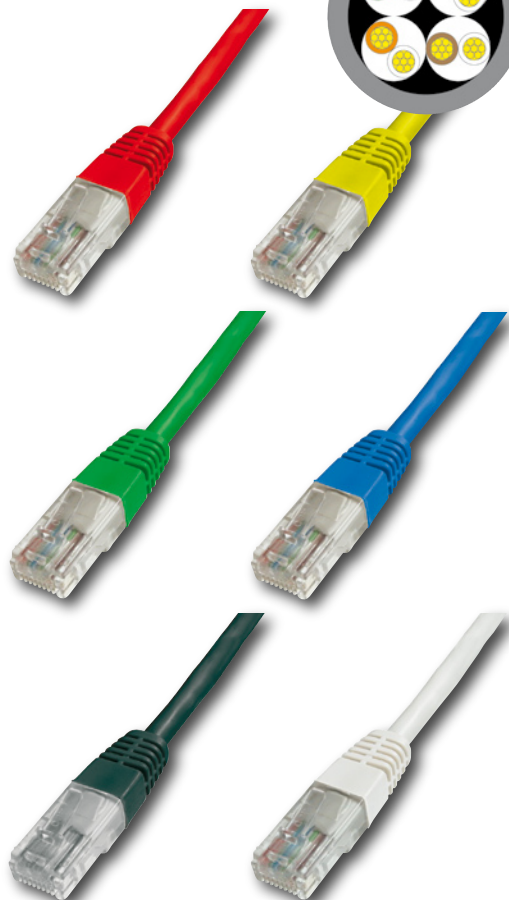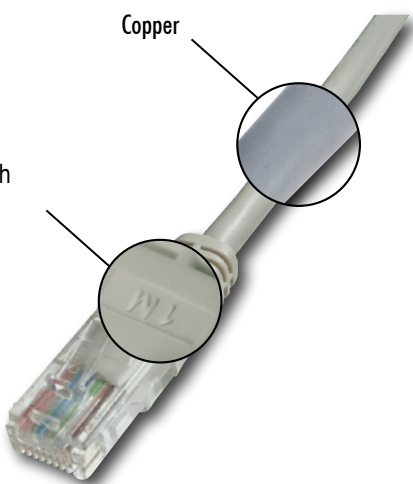


Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | white | |
|----------------------------|--------|-----------------------|-------------------------|-------------------------|-------------------------|-------------------------|-----------------------------|--------------------------|
| TV/SAT | 0,5 m | DK-1511-005 212119 | DK-1511-005/R 212287 | DK-1511-005/Y 212300 | DK-1511-005/G 212270 | DK-1511-005/B 212126 | DK-1511-005/BLACK 212263 | DK-1511-005/WH 212294 |
| | 1,0 m | DK-1511-010 212102 | DK-1511-010/R 212348 | DK-1511-010/Y 212362 | DK-1511-010/G 212324 | DK-1511-010/B 212317 | DK-1511-010/BLACK 212331 | DK-1511-010/WH 212355 |
| Raw Cables | 1,5 m | DK-1511-015 212133 | DK-1511-015/R 212409 | DK-1511-015/Y 212423 | DK-1511-015/G 212393 | DK-1511-015/B 212379 | DK-1511-015/BLACK 212386 | DK-1511-015/WH 212416 |
| | 2,0 m | DK-1511-020 212140 | DK-1511-020/R 212454 | DK-1511-020/Y 212461 | DK-1511-020/G 212447 | DK-1511-020/B 212430 | DK-1511-020/BLACK 212485 | DK-1511-020/WH 212478 |
| | 3,0 m | DK-1511-030 212157 | DK-1511-030/R 212522 | DK-1511-030/Y 212546 | DK-1511-030/G 212515 | DK-1511-030/B 212492 | DK-1511-030/BLACK 212508 | DK-1511-030/WH 212539 |
| Connectors + Adapters | 5,0 m | DK-1511-050 212164 | DK-1511-050/R 212584 | DK-1511-050/Y 212607 | DK-1511-050/G 212577 | DK-1511-050/B 212553 | DK-1511-050/BLACK 212560 | DK-1511-050/WH 212591 |
| | 7,0 m | DK-1511-070 212171 | DK-1511-070/R 212645 | DK-1511-070/Y 212669 | DK-1511-070/G 212621 | DK-1511-070/B 212614 | DK-1511-070/BLACK 212638 | DK-1511-070/WH 212652 |
| Wall Plates | 10,0 m | DK-1511-100 212188 | DK-1511-100/R 212706 | DK-1511-100/Y 212720 | DK-1511-100/G 212690 | DK-1511-100/B 212676 | DK-1511-100/BLACK 212683 | DK-1511-100/WH 212713 |
| | 15,0 m | DK-1511-150 212195 | DK-1511-150/R 212768 | DK-1511-150/Y 212775 | DK-1511-150/G 212751 | DK-1511-150/B 212737 | DK-1511-150/BLACK 212744 | DK-1511-150/WH 212782 |
| | 20,0 m | DK-1511-200 212201 | DK-1511-200/R 212829 | DK-1511-200/Y 212843 | DK-1511-200/G 212812 | DK-1511-200/B 212799 | DK-1511-200/BLACK 212805 | DK-1511-200/WH 212836 |
| Accessories + Test devices | 25,0 m | DK-1511-250 212218 | | | | | | |
| | 30,0 m | DK-1511-300 212225 | DK-1511-300/R 212928 | DK-1511-300/Y 212935 | DK-1511-300/G 212911 | DK-1511-300/B 212904 | DK-1511-300/BLACK 212959 | DK-1511-300/WH 212942 |

SoHo CAT 5e SF-UTP Patch cables

- Foil and braid shielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 connectors
- Boot with kink protection and strain relief
- Spot length on boot
- Connection 1 : 1

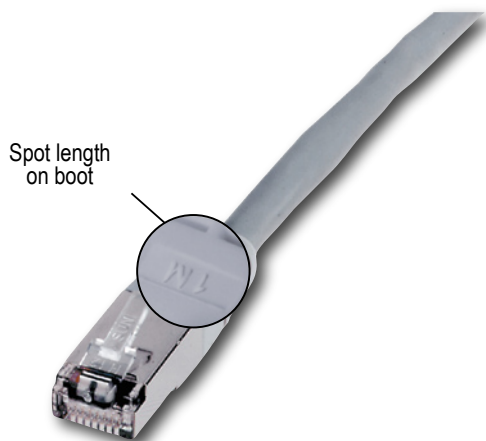


Please choose your requested product by the corresponding article number or the EAN code.

| | grau |
|--------|----------------------|
| 0,5 m | AK-1532-005 / 204022 |
| 1,0 m | AK-1532-010 / 204039 |
| 2,0 m | AK-1532-020 / 204046 |
| 3,0 m | AK-1532-030 / 204053 |
| 5,0 m | AK-1532-050 / 204060 |
| 7,0 m | AK-1532-070 / 204077 |
| 10,0 m | AK-1532-100 / 204084 |
| 15,0 m | AK-1532-150 / 204091 |
| 20,0 m | AK-1532-200 / 204107 |

SoHo CAT 5e F-UTP Patch cables

- Foil shielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 shielded connectors
- Boot with kink protection and strain relief
- Spot length on boot
- Connection 1 : 1

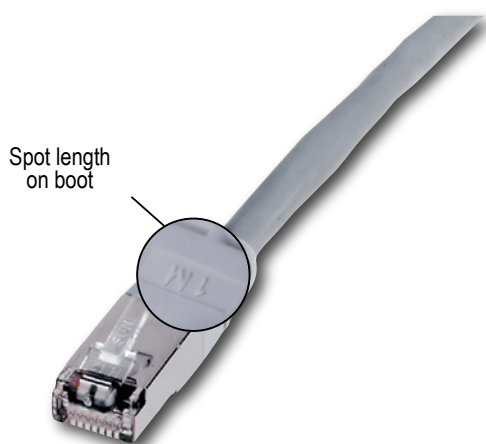

Please choose your requested product by the corresponding article number or the EAN code.

| | grau |
|--------|----------------------|
| 0,5 m | AK-1522-005 / 203001 |
| 1,0 m | AK-1522-010 / 203018 |
| 2,0 m | AK-1522-020 / 203032 |
| 3,0 m | AK-1522-030 / 203131 |
| 5,0 m | AK-1522-050 / 203124 |
| 7,0 m | AK-1522-070 / 203148 |
| 10,0 m | AK-1522-100 / 203155 |
| 15,0 m | AK-1522-150 / 203162 |
| 20,0 m | AK-1522-200 / 203179 |

SoHo CAT 5e U-UTP Patch cables

CABLES

SoHo CAT 5e U-UTP Patch cables

- Unshielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 connectors
- Boot with kink protection and strain relief
- Spot length on boot
- Connection 1 : 1

Spot length
on boot



Please choose your requested product by the corresponding article number or the EAN code.

| | grau |
|--------|----------------------|
| 0,5 m | AK-1512-005 / 203568 |
| 1,0 m | AK-1512-010 / 203575 |
| 2,0 m | AK-1512-020 / 203582 |
| 3,0 m | AK-1512-030 / 203599 |
| 5,0 m | AK-1512-050 / 203605 |
| 7,0 m | AK-1512-070 / 203612 |
| 10,0 m | AK-1512-100 / 203629 |
| 15,0 m | AK-1512-150 / 203636 |
| 20,0 m | AK-1512-200 / 203643 |


Computer
Power
Audio
Video
Telephone
TV/SAT
Raw Cables
Connectors + Adapters
Wall Plates
Accessories + Testdevices



DIGITUS® Blister CAT 6 S-FTP Patch cables

- Pairs with foil and full braid shielding (PIMF) patch cables
- 4 x 2 x AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 shielded connectors
- Boot with kink protection and strain relief
- Spot length on boot
- 3P CAT 6 Channel Link certified
- Connection 1 : 1
- In blisterpackage

Spot length on boot

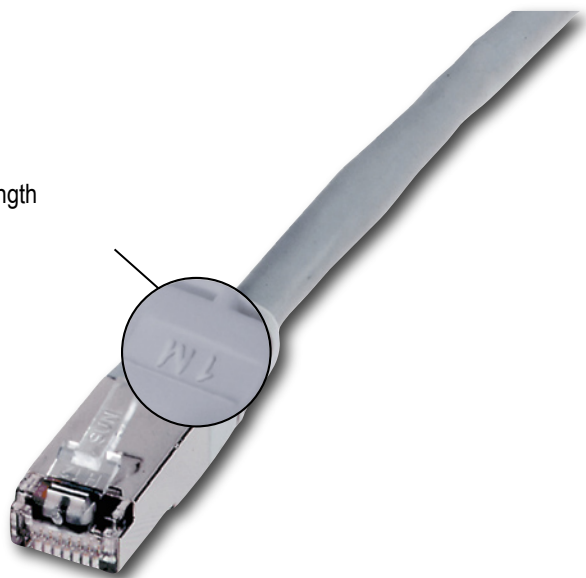

Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | crossover |
|--------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| 0,3 m | DB-214915 240587 | | | | | | |
| 0,5 m | DB-214922 217060 | DB-215059 228318 | DB-215066 228875 | DB-215042 228950 | DB-214939 225607 | DB-215035 225539 | DB-215912 218104 |
| 1,0 m | DB-214946 217107 | DB-215103 228813 | DB-215110 228899 | DB-215097 228967 | DB-215073 225614 | DB-215080 225546 | DB-215929 218111 |
| 2,0 m | DB-214953 217138 | DB-215165 228820 | DB-215172 228905 | DB-215158 228974 | DB-215127 225621 | DB-215141 225553 | DB-215936 218128 |
| 3,0 m | DB-214960 217176 | DB-215219 228837 | DB-215226 228912 | DB-215202 228998 | DB-215189 225638 | DB-215196 225560 | DB-215943 218135 |
| 5,0 m | DB-214977 217213 | DB-215264 228844 | DB-215271 228929 | DB-215257 228981 | DB-215233 225645 | DB-215240 225577 | DB-215950 218142 |
| 7,0 m | DB-214984 217251 | DB-215301 228851 | DB-215318 228936 | DB-215295 229001 | DB-215288 225652 | DB-215325 225584 | DB-215967 218159 |
| 10,0 m | DB-214991 217299 | DB-215363 228868 | DB-215370 228943 | DB-215356 229018 | DB-215332 225669 | DB-215349 225591 | DB-215974 218166 |
| 15,0 m | DB-215004 217329 | | | | | | DB-215981 218173 |
| 20,0 m | DB-215011 217367 | | | | | | DB-215998 218180 |
| 30,0 m | DB-215028 217381 | | | | | | DB-216001 218197 |

CABLES

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices

DIGITUS® Blister CAT 6 U-UTP Patch cables

CABLES

DIGITUS® Blister CAT 6 U-UTP Patch cables



- Unshielded CAT 6 patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 connectors
- Boot with kink protection and strain relief
- Spot length on boot
- 3P Cat 6 certified
- Connection 1 : 1

Computer

Power

Audio

Video

Telephone

TV/SAT


Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices

Spot length on boot

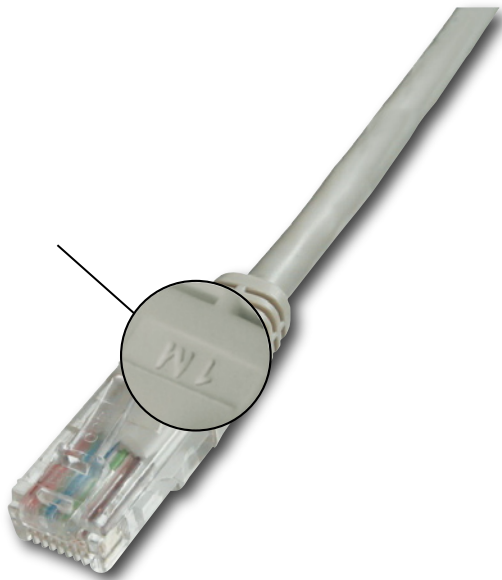

Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | white |
|-------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 0,5 m | DB-214205 | DB-214335 | DB-214359 | DB-214328 | DB-214304 | DB-214311 | DB-214342 |
| | 225096 | 232742 | 232810 | 237198 | 237266 | 237327 | 237396 |
| | DB-214212 | DB-214380 | DB-214410 | DB-214373 | DB-214366 | DB-214403 | DB-214397 |
| 1,0 m | 225119 | 232759 | 232827 | 237204 | 237273 | 237334 | 237402 |
| | DB-214229 | DB-214458 | DB-214472 | DB-214434 | DB-214427 | DB-214441 | DB-214465 |
| | 225126 | 232766 | 232834 | 237211 | 240563 | 237341 | 237419 |
| 2,0 m | DB-214236 | DB-214519 | DB-214533 | DB-214502 | DB-214489 | DB-214496 | DB-214526 |
| | 225133 | 232773 | 232841 | 237228 | 237280 | 237358 | 237426 |
| | DB-214243 | DB-214571 | DB-214595 | DB-214564 | DB-214540 | DB-214557 | DB-214588 |
| 3,0 m | 225140 | 232780 | 232858 | 237235 | 237297 | 237365 | 237433 |
| | DB-214250 | DB-214632 | DB-214649 | DB-214625 | DB-214601 | DB-214618 | DB-214656 |
| | 225157 | 232797 | 232865 | 237242 | 237303 | 237372 | 237440 |
| 4,0 m | DB-214267 | DB-214694 | DB-214717 | DB-214687 | DB-214663 | DB-214670 | DB-214700 |
| | 225164 | 232803 | 232872 | 237259 | 237310 | 237389 | 237457 |
| | DB-214274 | DB-214755 | DB-214779 | DB-214748 | DB-214724 | DB-214731 | DB-214762 |
| 5,0 m | 225171 | 240471 | 240532 | 240440 | 240389 | 240419 | 240501 |
| | DB-214281 | DB-214816 | DB-214830 | DB-214809 | DB-214786 | DB-214793 | DB-214823 |
| | 225188 | 240488 | 240549 | 240457 | 240396 | 240426 | 240518 |
| 6,0 m | DB-214298 | | | | | | |
| | 225195 | | | | | | |

DIGITUS® Blister CAT 5e SF-UTP Patch cables


DIGITUS® Blister CAT 5e SF-UTP Patch cables

- Foil and braid shielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 shielded connectors
- Boot with kink protection and strain relief

- Spot length on boot
- 3P CAT 5e certified
- Connection 1:1
- In blisterpackage



Spot length on boot

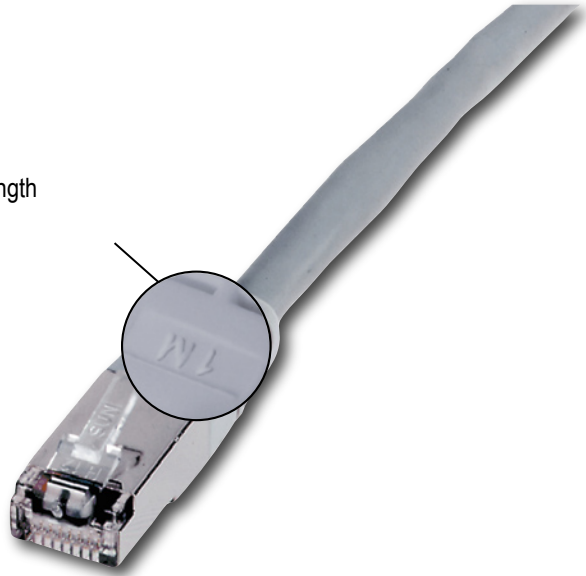

Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | crossover |
|--------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| 0,3 m | DB-213062 240112 | DB-213680 240198 | DB-213697 240150 | DB-213673 240174 | DB-213666 240136 | | |
| 0,5 m | DB-212249 219552 | DB-213734 239000 | DB-213741 239109 | DB-213727 239543 | DB-213703 239734 | DB-213710 239871 | DB-215820 225201 |
| 1,0 m | DB-213079 219569 | DB-213789 239017 | DB-213796 239116 | DB-213772 239567 | DB-213758 239758 | DB-213765 239888 | DB-215905 225218 |
| 2,0 m | DB-213086 219576 | DB-213833 239024 | DB-213840 239123 | DB-213819 239581 | DB-213802 239765 | DB-213826 239895 | DB-215837 225225 |
| 3,0 m | DB-213093 219583 | DB-213888 239031 | DB-213895 239130 | DB-213864 239598 | DB-213857 239789 | DB-213871 239901 | DB-215844 225232 |
| 5,0 m | DB-213109 219590 | DB-213932 239048 | DB-213949 239147 | DB-213925 239611 | DB-213901 239802 | DB-213918 239918 | DB-215851 225249 |
| 7,0 m | DB-213116 219606 | DB-213987 239055 | DB-213994 239154 | DB-213970 239635 | DB-213956 239819 | DB-213963 239925 | |
| 10,0 m | DB-213123 219613 | DB-214038 239062 | DB-214045 239161 | DB-214021 239659 | DB-214007 239833 | DB-214014 239932 | DB-215868 225256 |
| 15,0 m | DB-213130 219620 | DB-214083 239079 | DB-214090 239178 | DB-214076 239666 | DB-214052 239840 | DB-214069 239949 | DB-215875 225263 |
| 20,0 m | DB-213147 219637 | DB-214137 239086 | DB-214144 239185 | DB-214120 239673 | DB-214106 239857 | DB-214113 239956 | DB-215882 225270 |
| 30,0 m | DB-213154 219644 | DB-214175 239093 | DB-214182 239192 | DB-214168 239680 | DB-214151 239864 | DB-214199 239963 | DB-215899 225287 |

CABLES

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices

DIGITUS® Blister CAT 5e F-UTP Patch cables

CABLES

DIGITUS® Blister CAT 5e F-UTP Patch cables

- Foil shielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 shielded connectors
- Boot with kink protection and strain relief

- Spot length on boot
- 3P CAT 5e certified
- Connection 1:1
- In blisterpackage



Computer

Power

Audio

Video

Telephone

TV/SAT


Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices

Spot length on boot

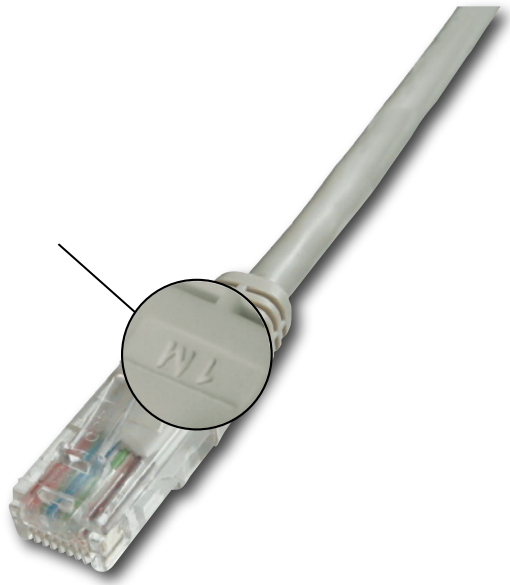

Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | crossover |
|--------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| 0,3 m | | | | | | | DB-215721 220213 |
| 0,5 m | DB-212232 217848 | DB-213192 237563 | DB-213208 238416 | DB-213185 238195 | DB-213161 238294 | DB-213178 238393 | DB-215738 220220 |
| 1,0 m | DB-212966 217855 | DB-213246 237570 | DB-213253 238072 | DB-213239 238201 | DB-213215 238300 | DB-213222 238409 | DB-215745 220237 |
| 2,0 m | DB-212973 217862 | DB-213291 237587 | DB-213307 238089 | DB-213284 238218 | DB-213260 238317 | DB-213277 238423 | DB-215752 220244 |
| 3,0 m | DB-212980 217879 | DB-213345 237594 | DB-213352 238096 | DB-213338 238225 | DB-213314 238324 | DB-213321 238430 | DB-215769 220251 |
| 5,0 m | DB-212997 217886 | DB-213390 237600 | DB-213406 238102 | DB-213383 238232 | DB-213369 238331 | DB-213376 238447 | DB-215776 220268 |
| 7,0 m | DB-213000 217893 | DB-213444 237617 | DB-213451 238119 | DB-213437 238249 | DB-213413 238348 | DB-213420 238454 | |
| 10,0 m | DB-213017 217909 | DB-213499 237624 | DB-213505 238126 | DB-213482 238256 | DB-213468 238355 | DB-213475 238461 | DB-215783 220275 |
| 15,0 m | DB-213024 217916 | DB-213543 237631 | DB-213550 238133 | DB-213536 238263 | DB-213512 238362 | DB-213529 238478 | DB-215790 220282 |
| 20,0 m | DB-213031 217923 | DB-213598 237648 | DB-213604 238140 | DB-213581 238270 | DB-213567 238379 | DB-213574 238485 | DB-215806 220299 |
| 30,0 m | DB-213048 217930 | | | | | | DB-215813 220305 |


DIGITUS® Blister CAT 5e U-UTP Patch cables



DIGITUS® Blister CAT 5e U-UTP Patch cables

- Unshielded CAT 5e patch cables
- 4 x 2 AWG 26/7, twisted pair, 100 Ohm
- 2 x RJ45 connectors
- Boot with kink protection and strain relief
- Spot length on boot
- 3P CAT 5e certified
- Connection 1:1
- In blisterpackage

Spot length on boot

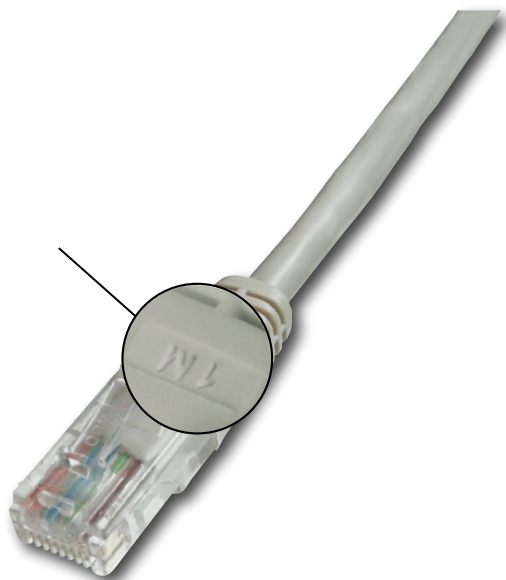

Please choose your requested product by the corresponding article number or the EAN code.

| | grey | red | yellow | green | blue | black | white |
|--------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| 0,5 m | DB-212119 217619 | DB-212287 220954 | DB-212300 220978 | DB-212270 220992 | DB-212126 221012 | DB-212263 221036 | DB-212294 221067 |
| 1,0 m | DB-212102 217633 | DB-212348 220886 | DB-212362 220985 | DB-212324 221005 | DB-212317 221029 | DB-212331 221043 | DB-212355 221074 |
| 2,0 m | DB-212140 217640 | DB-212454 220961 | DB-212461 224402 | DB-212447 225676 | DB-212430 225805 | DB-212485 226741 | DB-212478 227168 |
| 3,0 m | DB-212157 217657 | DB-212522 224228 | DB-212546 224419 | DB-212515 225683 | DB-212492 225904 | DB-212508 221050 | DB-212539 227175 |
| 5,0 m | DB-212164 217664 | DB-212584 224235 | DB-212607 224426 | DB-212577 225690 | DB-212553 225911 | DB-212560 226758 | DB-212591 227199 |
| 7,0 m | DB-212171 217671 | DB-212645 224242 | DB-212669 224433 | DB-212621 225706 | DB-212614 225928 | DB-212638 226765 | DB-212652 227212 |
| 10,0 m | DB-212188 217688 | DB-212706 224259 | DB-212720 224440 | DB-212690 225713 | DB-212676 225935 | DB-212683 226772 | DB-212713 227229 |
| 15,0 m | DB-212195 217695 | DB-212768 224273 | DB-212775 224457 | DB-212751 225720 | DB-212737 225942 | DB-212744 226789 | DB-212782 227236 |
| 20,0 m | DB-212201 217701 | DB-212829 224280 | DB-212843 224464 | DB-212812 225737 | DB-212799 225959 | DB-212805 226796 | DB-212836 227243 |
| 25,0 m | DB-212218 217718 | | | | | | |
| 30,0 m | DB-212225 217725 | DB-212928 224303 | DB-212935 224488 | DB-212911 225775 | DB-212904 225973 | DB-212959 226833 | DB-212942 227267 |

CABLES

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices



USB 3.0 connection cable, A to A

- USB 3.0 A plug <=> USB 3.0 A plug
- Molded housing
 - 9-wire cable, 3x shielded, 2x AWG28 und 2x AWG24
 - UL2725
 - Color: black

| | |
|--------------------|-------|
| 262497 / AK-112002 | 1,8 m |
| 262503 / AK-112003 | 3,0 m |



DIGITUS® Blister USB connection cable, A to B

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, unshielded, AWG30
 - UL2725
 - In blisterpackage
 - Color: beige



| | |
|--------------------|-------|
| 196464 / DB-191452 | 1,8 m |
| 196488 / DB-191445 | 3,0 m |
| 196471 / DB-191773 | 5,0 m |



USB connection cable, A to B

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, unshielded, AWG30
 - UL2725
 - Color:

| | |
|-----------------------|-------|
| 191452 / AK 672/ALG | 1,8 m |
| 191445 / AK 672-3/ALG | 3,0 m |
| 191773 / AK 672-5/ALG | 5,0 m |



DIGITUS® Blister USB connection cable, A to B

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, unshielded, AWG30
 - UL2725
 - Color: black
 - In blisterpackage



| | |
|--------------------|-------|
| 206934 / DB-180814 | 1,8 m |
| 206941 / DB-185093 | 3,0 m |
| 206958 / DB-192046 | 5,0 m |



USB connection cable, A to B

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, unshielded, AWG30
 - UL2725
 - Color: black

| | |
|----------------------|-------|
| 180814 / AK 672/AL | 1,8 m |
| 185093 / AK 672-3/AL | 3,0 m |
| 192046 / AK 672-5/AL | 5,0 m |



DIGITUS® Blister USB extension cable, A to A

- USB A plug <=> USB A jack
- Molded housing
 - 4-wire cable, unshielded, AWG30
 - UL2725
 - Color: beige
 - In blisterpackage



| | |
|--------------------|-------|
| 206965 / DB-191483 | 1,8 m |
| 206972 / DB-191490 | 3,0 m |
| 206989 / DB-191797 | 5,0 m |

USB extension cable, A to A

USB A plug <=> USB A jack

- Molded housing
- 4-wire cable, unshielded, AWG30
- UL2725
- Color: beige

| | |
|------------------------|--------|
| 191483 / AK 669-18 ALG | 1,8 m |
| 191490 / AK 669-30 ALG | 3,00 m |
| 191797 / AK 669-50/ALG | 5,00 m |



DIGITUS® Blister USB connection cable, A to A

USB A plug <=> USB B plug

- Molded housing
- 4-wire cable, unshielded, AWG30
- UL2725
- Color: black
- In blisterpackage

| | |
|--------------------|-------|
| 206996 / DB-183921 | 1,8 m |
| 207009 / DB-183938 | 3,0 m |
| 207016 / DB-192053 | 5,0 m |



USB extension cable, A to A

USB A plug <=> USB A jack

- Molded housing
- 4-wire cable, unshielded, AWG30
- UL2725
- Color: black

| | |
|-----------------------|--------|
| 183921 / AK 669-18 AL | 1,8 m |
| 183938 / AK 669-30 AL | 3,00 m |
| 192053 / AK 669-50/AL | 5,00 m |



USB connection cable, A to B

USB A plug <=> USB B plug

- Molded housing
- 4-wire cable, double shielded, 2x AWG28 und 2x AWG24
- UL2725
- Color: beige

| | |
|-------------------|-------|
| 050766 / AK 672-1 | 1,0 m |
| 064503 / AK 672 | 2,0 m |
| 050773 / AK 672-3 | 3,0 m |
| 050780 / AK 672-5 | 5,0 m |



USB extension cable, A to A

USB A plug <=> USB A jack

- Molded housing
- 4-wire cable, double shielded, 2x AWG28 and 2x AWG24
- UL2725
- Color: beige

| | |
|--------------------|-------|
| 050711 / AK 669-18 | 1,8 m |
| 050728 / AK 669-30 | 3,0 m |
| 050735 / AK 669-50 | 5,0 m |



USB connection cable, A to A

USB A plug <=> USB A plug

- Molded housing
- 4-wire cable, double shielded, 2x AWG28 und 2x AWG24
- UL2725
- Color: beige

| | |
|-------------------|-------|
| 050742 / AK 670-1 | 1,0 m |
| 064497 / AK 670 | 2,0 m |
| 083573 / AK 670-3 | 3,0 m |
| 050759 / AK 670-5 | 5,0 m |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices



USB connection cable, B to B

- USB B plug <=> USB B plug
- Molded housing
 - 4-wire cable, double shielded, 2x AWG28 und 2x AWG24
 - UL2725
 - Color: beige



| | |
|-------------------|-------|
| 050841 / AK 673-1 | 1,0 m |
| 064510 / AK 673 | 2,0 m |



DIGITUS® Blister USB connection cable, A to B

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, double shielded, AWG30
 - UL2725
 - Color: beige
 - In blisterpackage



| | |
|--------------------|-------|
| 207863 / DB-191476 | 2,0 m |
| 207870 / DB-191469 | 3,0 m |
| 207887 / DB-191780 | 5,0 m |



USB connection cable, A to B

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, double shielded, AWG30
 - UL2725
 - Color: beige



| | |
|-------------------------|-------|
| 191476 / AK 672/2 ALG | 2,0 m |
| 191469 / AK 672/3 ALG | 3,0 m |
| 191780 / AK 672/2-5/ALG | 5,0 m |



DIGITUS® Blister USB connection cable, A to B

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, double shielded, AWG30
 - UL2725
 - Color: black
 - In blisterpackaging



| | |
|--------------------|-------|
| 205715 / DB-183570 | 2,0 m |
| 207894 / DB-183587 | 3,0 m |
| 207900 / DB-192060 | 5,0 m |



USB connection cable, A to B

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, double shielded, AWG30
 - UL2725
 - Color: black



| | |
|------------------------|-------|
| 183570 / AK 672/2 AL | 2,0 m |
| 183587 / AK 672/3 AL | 3,0 m |
| 192060 / AK 672/2-5/AL | 5,0 m |



DIGITUS® Blister USB extension cable, A to A

- USB A plug <=> USB A plug
- Molded housing
 - 4-wire cable, double shielded, AWG30
 - UL2725
 - Color: beige
 - In blisterpackage




| | |
|--------------------|-------|
| 196495 / DB-191513 | 2,0 m |
| 196501 / DB-191506 | 3,0 m |
| 196518 / DB-191803 | 5,0 m |

USB extension cable, A to A

USB A plug <=> USB A jack

- Molded housing
- 4-wire cable, double shielded, AWG30
- UL2725
- Color: beige

| | |
|-----------------------|-------|
| 191513 / AK 701/2 ALG | 2,0 m |
| 191506 / AK 701/3 ALG | 3,0 m |
| 191803 / AK 701/5/ALG | 5,0 m |



DIGITUS® Blister USB extension cable, A to A

USB A plug <=> USB A jack

- Molded housing
- 4-wire cable, double shielded, AWG30
- UL2725
- Color: black
- in blisterpackaging

| | |
|--------------------|-------|
| 207948 / DB-183594 | 2,0 m |
| 207955 / DB-183600 | 3,0 m |
| 207962 / DB-192077 | 5,0 m |



USB extension cable, A to A

USB A plug <=> USB A jack

- Molded housing
- 4-wire cable, double shielded, AWG30
- UL2725
- Color: black

| | |
|----------------------|-------|
| 183594 / AK 701/2 AL | 2,0 m |
| 183600 / AK 701/3 AL | 3,0 m |
| 192077 / AK 701/5/AL | 5,0 m |



USB 2.0 connection cable, A to B

USB A plug <=> USB B plug

- Molded housing
- 4-wire cable, double shielded, 2 x AWG24, 2 x AWG28
- UL2725
- USB 2.0 compliant
- Color: beige

| | |
|---------------------|-------|
| 117797 / AK 672/2 | 2,0 m |
| 117803 / AK 672/2-3 | 3,0 m |
| 117810 / AK 672/2-5 | 5,0 m |



USB 2.0 extension cable, A to A

USB A plug <=> USB A jack

- Molded housing
- 4-wire cable, double shielded, 2x AWG24, 2x AWG28
- UL2725
- USB 2.0 compliant
- Color: beige

| | |
|-------------------|-------|
| 130260 / AK 701/2 | 2,0 m |
| 130277 / AK 701/3 | 3,0 m |
| 130284 / AK 701/5 | 5,0 m |



USB 2.0 connection cable, A to A

USB A plug <=> USB A plug

- Molded housing
- 4-wire cable, double shielded, 2 x AWG24, 2 x AWG28
- UL2725
- USB 2.0 compliant
- Color: beige

| | |
|-------------------|-------|
| 130239 / AK 700/2 | 2,0 m |
| 130246 / AK 700/3 | 3,0 m |
| 130253 / AK 700/5 | 5,0 m |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices



USB connection cable, A to B, transparent Design

USB A plug <=> USB B plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL2725
- Color: transparent



134848 / AK 672-15TP 1,5 m



USB Mini connection cable, A to B

USB A plug <=> USB (4-pin) mini B plug (Mitsumi type)

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL2725
- USB 2.0 compatible
- Color: black



082965 / AK 670M-1 1,0 m

083030 / AK 670M 2,0 m

083054 / AK 670M-3 3,0 m

083078 / AK 670M-5 5,0 m



USB Mini connection cable, A to B

USB A plug <=> USB (5-pin) mini B plug

- Molded housing
- 4-wire cable, double shielded, 2x AWG26, 2x AWG28
- UL2725
- USB 2.0 compatible
- Color: beige



122425 / AK 672M-1 1,0 m

122432 / AK 672M-2 2,0 m

122449 / AK 672M-3 3,0 m

122456 / AK 672M-5 5,0 m



USB connection cable, A to B, high quality

USB A plug <=> USB B plug

- Molded housing, metallic shielding
- 4-wire cable, double shielded, 2x AWG24, 2x AWG28
- UL2725
- USB 2.0 compatible
- Plug color: black
- Cable color: transparent



081593 / AK 672HQC 2M 2,0 m

081586 / AK 672-5HQC 5M 5,0 m



USB micro connection cable, A to A

USB A plug <=> USB micro A plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL2725
- Color: black



211518 / AK 67321 2,0 m

211525 / AK 67322 3,0 m

211532 / AK 67323 5,0 m



USB micro connection cable, A to B

USB A plug <=> USB micro B plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL2725
- Color: black



211549 / AK 67421 2,0 m

211556 / AK 67422 3,0 m

211563 / AK 67423 5,0 m

USB micro connection cable, A to A

USB micro A plug <=> USB micro A plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL2725
- USB 2.0 compatible
- Color: black




| | |
|-------------------|-------|
| 211372 / AK 67301 | 2,0 m |
| 211389 / AK 67302 | 3,0 m |
| 211396 / AK 67303 | 5,0 m |



USB micro connection cable, B to B

USB micro B plug <=> USB micro B plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL2725
- USB 2.0 compatible
- Color: black

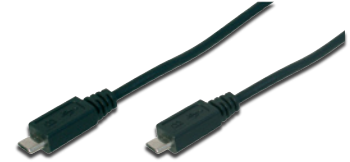

| | |
|-------------------|-------|
| 211402 / AK 67401 | 2,0 m |
| 211419 / AK 67402 | 3,0 m |
| 211426 / AK 67403 | 5,0 m |



USB micro connection cable, A to B

USB micro A plug <=> USB micro B plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL2725
- USB 2.0 compatible
- Color: black



| | |
|-------------------|-------|
| 211433 / AK 67501 | 2,0 m |
| 211440 / AK 67502 | 3,0 m |
| 211457 / AK 67503 | 5,0 m |



DIGITUS® Blister USB connection cable, A to B, premium

USB A plug <=> USB B plug

- Molded housing
- 4-wire cable, double shielded, 2x AWG28 and 2x AWG24
- UL2725
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,0m | 236214 / DB-230250 | 230250 / DK-112001 |
| 1,8m | 236221 / DB-230267 | 230267 / DK-112002 |
| 3,0m | 236238 / DB-230274 | 230274 / DK-112003 |
| 5,0m | 236245 / DB-230281 | 230281 / DK-112004 |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices



DIGITUS® Blister USB extension cable, A to A, premium

- USB A plug <=> USB A jack
- Molded housing
 - 4-wire cable, double shielded, 2x AWG24, 2x AWG28
 - UL2725
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,8m | 236252 / DB-230298 | 230298 / DK-112005 |
| 3,0m | 236290 / DB-230304 | 230304 / DK-112006 |
| 5,0m | 236306 / DB-230311 | 230311 / DK-112007 |



DIGITUS® Blister USB connection cable, A to A, premium

- USB A plug <=> USB A plug
- Molded housing
 - 4-wire cable, double shielded, 2x AWG24, 2x AWG28
 - UL2725
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,0m | 236351 / DB-230328 | 230328 / DK-112008 |
| 2,0m | 236368 / DB-230335 | 230335 / DK-112009 |
| 3,0m | 236375 / DB-230342 | 230342 / DK-112010 |
| 5,0m | 236382 / DB-230359 | 230359 / DK-112011 |



DIGITUS® Blister USB 2.0 connection cable, A to B, premium

- USB A plug <=> USB B plug
- Molded housing
 - 4-wire cable, double shielded, 2 x AWG24, 2 x AWG28
 - UL2725
 - USB 2.0 compliant
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 236467 / DB-230366 | 230366 / DK-112012 |
| 3,0m | 236474 / DB-230373 | 230373 / DK-112013 |
| 5,0m | 236481 / DB-230380 | 230380 / DK-112014 |



DIGITUS® Blister USB 2.0 extension cable, A to A, premium

- USB A plug <=> USB A jack
- Molded housing
 - 4-wire cable, double shielded, 2x AWG24, 2x AWG28
 - UL2725
 - USB 2.0 compliant
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 236641 / DB-230397 | 230397 / DK-112015 |
| 3,0m | 236658 / DB-230403 | 230403 / DK-112016 |
| 5,0m | 236665 / DB-230410 | 230410 / DK-112017 |

DIGITUS® Blister USB 2.0 connection cable, A to A, premium

USB A plug <=> USB A plug

- Molded housing
- 4-wire cable, double shielded, 2 x AWG24, 2 x AWG28
- UL2725
- USB 2.0 compliant
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,8m | 236672 / DB-230427 | 230427 / DK-112018 |
| 3,0m | 236689 / DB-230434 | 230434 / DK-112019 |
| 5,0m | 236696 / DB-230441 | 230441 / DK-112020 |

DIGITUS® Blister USB Mini connection cable, A to B, premium

USB A plug <=> USB B (4-pin) mini plug (Mitsumi type)

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL2725
- USB 2.0 compatible
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,0m | 236702 / DB-230458 | 230458 / DK-112021 |
| 2,0m | 236719 / DB-230465 | 230465 / DK-112022 |
| 3,0m | 236726 / DB-230472 | 230311 / DK-112007 |

DIGITUS® Blister USB Mini connection cable, A to B, premium

USB A plug <=> USB B (5-pin) mini plug

- Molded housing
- 4-wire cable, double shielded, 2x AWG24, 2x AWG28
- UL2725
- USB 2.0 compatible
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,0m | 236733 / DB-230489 | 230489 / DK-112024 |
| 2,0m | 236740 / DB-230496 | 230496 / DK-112025 |
| 3,0m | 236757 / DB-230502 | 230502 / DK-112026 |
| 5,0m | 236764 / DB-230519 | 230519 / DK-112027 |

DIGITUS® USB 2.0 repeater cable

- Expands the maximum permissible USB cable length by 5.0 m
- A maximum of 3 repeater cables can be combined for a total cable length of 20 m
- Compatible with USB specification revision 2.0 and 1.1
- USB A plug - USB A female, cable length 5 m
- Supports USB low speed (1.5 Mbps), full speed (12 Mbps) and high speed (480 Mbps)
- USB hot plug and play support
- Plastic housing with aluminium design
- Suitable for USB 2.0 devices with their own power supply
- Support for the following operating systems: Windows XP



233923 / DA-70130-3 USB 2.0 Repeater-Kabel



DIGITUS® USB detection cable, USB 1.1 & USB 2.0

- USB connection cable, USB A plug <=> USB B plug
- Extra bright LEDs show the USB 2.0 / USB 1.1 speed
- Status by different colors
- Stylish design
- Also for service and maintenance



166184 / DA-70750



DIGITUS® USB 2.0 LED cable set

- 3 Pcs. USB Extension cable (green, blue, red)
- USB A plug to USB A jack length 1,5m
- Integrated color LED Light
- Compliant with USB 2.0 standard
- Included USB Adapter A to B and USB A to Mini 5pin



171652 / DC USB2-LED



DIGITUS® USB printer cable

- Compatible with USB specification revision 1.1
- USB A plug <=> CENT 36-pin plug
- Supports EPP / ECP and bidirectional printing
- Data transfer up to 1,216 Mbps in ECP mode



166306 / DC USB-PM1 USB printer cable, grey



USB 1.1-> Centronics printer cable

- Compatible with USB specification revision 1.1
- USB A plug <=> CENT 36-pin plug
- Supports EPP / ECP and bidirectional printing
- Data transfer up to 1,216 Mbps in ECP mode



066910 / A-USB-P USB 1.1-> Centronics printer cable



USB 1.1 gameport adapter

The gameport adapter makes it possible to connect a standard joystick to the USB port. The joystick is connected to the adapter via a D-Sub 15-pin socket, the adapter is then connected to the USB A socket of the PC.

- Compatible with USB specification revision 1.1
- Power supply via USB bus, USB connector cable included
- 1 x USB A plug, 1 x D-Sub 15-pin female

052753 / A-USB-GAME USB gameport adapter



DIGITUS® USB retractable connector cable

- To connect USB devices to computers for example
- Suitable for service people and engineers
- Ideal when on the move (e.g. travelling, with notebooks)
- USB A -> USB B plug / plug, 1,2 m retractable wire



170365 / DA-RET-USB01 USB A => USB B plug/plug, 1,2 m rollable Cable

DIGITUS® RJ11 retractable connector cable

- To connect modems and phones for example
- Suitable for service people and engineers
- Ideal when on the move (e.g. travelling, with notebooks)
- 2 x RJ11 plug, 1,2 m retractable wire



170358 / DA-RET-RJ11 2 x RJ11 plug, 1,2 m retractable Cable

DIGITUS® RJ45 retractable connector cable

- To connect computers to a network for example
- Suitable for service people and engineers
- Ideal when on the move (e.g. travelling, with notebooks)
- 2 x RJ45 plug, 1,2 m retractable wire



170341 / DA-RET-RJ45 2 x RJ45 plug, 1,2 m retractable Cable

DIGITUS® USB docking extension cable

- Use this USB extension for extending distances
- Easy USB port access on your desk
- Elegantly styled base designed specifically to provide secure platform for USB devices that need to stand in upright position
- Comply with USB 1.1 / 2.0 version
- 1.5m cable length



166160 / DA-DEC-B USB 2.0 docking extension cable

DIGITUS® USB 2.0 IDE & SATA cable

- Supports 2,5"/3,5" IDE and SATA HDD's, 1,8" HDD's only with suitable adapter
- Supports SATA, SATA II
- Compliance with USB 2.0 (Hi-Speed)
- Compliance with USB Mass Storage Class
- Supports 480Mbps High Speed (HS) and 12Mbps Full Speed USB operation
- Supports ATA/ATAPI Ultra DMA Mode
- Supports ATA/ATAPI LBA48 bit addressing mode
- Supports dual LUN (Logic Unit Number) with automatically master/slave enumeration
- High-Speed Data Transfer, Low Power Consumption
- Red / green LED's indicating operation
- Operating System Support: Windows 98SE/ME/2000/XP/2003/Vista



221227 / DA-70148-1 USB 2.0 IDE & SATA cable

USB Mainboard adapter on slot bracket

- AK 674 = 2 x USB-A female <=> 2 x 5-pin socket conn., 2.54 mm
- AK 674-2/4 = 2 x USB-A female <=> 2 x 4-pin socket conn., 2.54 mm
- AK 674-8 = 2 x USB-A female <=> 1 x 8-pin socket conn., 2.54 mm
- AK 674-2/10 = 4 x USB-A female <=> 2 x 10-pin socket conn., (2 x 5-pin each) 2.54 mm
- 4/5-wire cable, double shielded, AWG28 • USB 2.0 compatible • Cable length: 0.25

064527 / AK 674 0.3M 0,25 m
 086345 / AK 674-2/4 0,25 m
 050865 / AK 674-8 0,25 m
 124252 / AK 674-2/10 0,25 m





VGA monitor connection cable

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug
- Molded housing
 - 13-wire cable, double shielded, AWG30
 - 2x ferrite filter
 - UL2919
 - Color: black

183617 / AK 5320XF AL 1,8 m

183624 / AK 3760XF AL 3,0 m




VGA monitor extension cable

- HD D-Sub 15-pin plug <=> HD-Sub 15-pin jack
- Molded housing
 - 13-wire cable, double shielded, AWG30
 - 2x ferrite filter
 - UL2919
 - Color: black

183631 / AK 3220XF AL 1,8 m

183648 / AK 3730XF AL 3,0 m

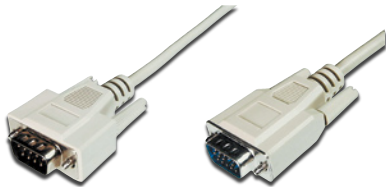


VGA monitor connection cable

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug
- Molded housing
 - 14-wire cable, shielded, AWG28
 - Color: beige

064022 / AK 532 2M 1,8 m

063575 / AK 376 3,0 m

063605 / AK 377 5,0 m

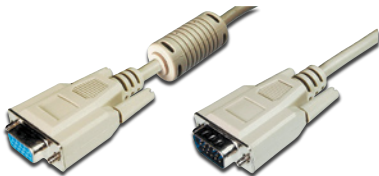

VGA monitor extension cable

- HD D-Sub 15-pin plug <=> HD-Sub 15-pin jack
- Molded housing
 - 14-wire cable, shielded, AWG28
 - Color: beige

063124 / AK 322 2M 1,8 m

063483 / AK 373 3,0 m

063544 / AK 375 10,0 m



VGA monitor connection cable

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug
- Molded housing
 - 3x coax for RGB and 4x AWG28 signal wires, double shielded
 - UL2919
 - Color: beige

064046 / AK 5320 1,8M 1,8 m

063582 / AK 3760 3M 3,0 m

063612 / AK 3770 5M 5,0 m

063636 / AK 3780 10M 10,0 m



XGA monitor connection cable

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug
- Molded housing
 - 3x coax for RGB and 7x AWG28 signal wires, double shielded
 - UL2919
 - Color: beige

064053 / AK 5320X 1,8 m

063599 / AK 3760X 3,0 m

063629 / AK 3770X 5,0 m

063643 / AK 3780X 10,0 m

VGA monitor extension cable

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin jack
- Molded housing
 - 3x coax for RGB and 4x AWG28 signal wires, double shielded
 - UL2919
 - Color: beige

| | |
|-----------------------|--------|
| 063148 / AK 3220 1,8M | 1,8 m |
| 063490 / AK 3730 3M | 3,0 m |
| 063520 / AK 3740 5M | 5,0 m |
| 063551 / AK 3750 10M | 10,0 m |



XGA monitor extension cable

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin jack
- Molded housing
 - 3x coax for RGB and 7x AWG28 signal wires, double shielded
 - UL2919
 - Color: beige


| | |
|-------------------|--------|
| 063155 / AK 3220X | 1,8 m |
| 063506 / AK 3730X | 3,0 m |
| 063537 / AK 3740X | 5,0 m |
| 063568 / AK 3750X | 10,0 m |



XGA monitor connection cable

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug
- Molded housing
 - 3x coax for RGB and 7x AWG28 signal wires, double shielded
 - 2x ferrite filter
 - UL2919
 - Color: beige


| | |
|--------------------|--------|
| 050544 / AK 5320XF | 1,8 m |
| 050513 / AK 3760XF | 3,0 m |
| 050520 / AK 3770XF | 5,0 m |
| 050537 / AK 3780XF | 10,0 m |
| 089377 / AK 3815XF | 15,0 m |
| 089407 / AK 3820XF | 20,0 m |

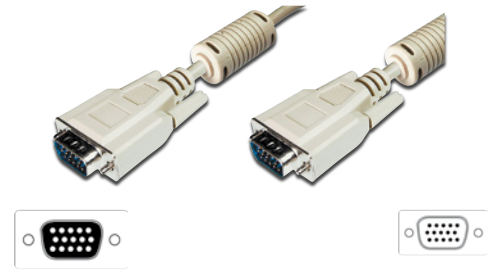

XGA monitor extension cable

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin jack
- Molded housing
 - 3x coax for RGB and 7x AWG28 signal wires, double shielded
 - 2x ferrite filter
 - UL2919
 - Color: beige

| | |
|--------------------|--------|
| 050100 / AK 3220XF | 1,8 m |
| 050483 / AK 3730XF | 3,0 m |
| 050490 / AK 3740XF | 5,0 m |
| 050506 / AK 3750XF | 10,0 m |
| 089384 / AK 3915XF | 15,0 m |
| 089391 / AK 3920XF | 20,0 m |

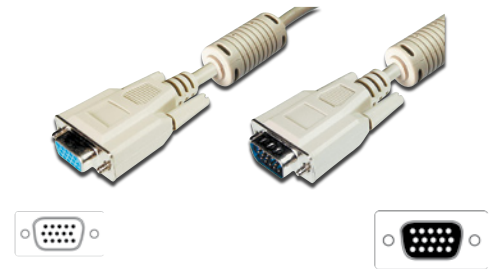

XGA monitor extension cable, high quality

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin jack
- Molded housing, metallic shielding
 - Cable 3x coaxial and 4x AWG28, double cable shielding (separate shielding of the RGB signal wires)
 - 2x ferrite filter
 - UL2919
 - Gold plated
 - Plug color: black
 - Cable color: transparent

| | |
|------------------------|--------|
| 081494 / AK 3220XF-HQC | 1,8 m |
| 081500 / AK 3730XF-HQC | 3,0 m |
| 081517 / AK 3740XF-HQC | 5,0 m |
| 081524 / AK 3750XF-HQC | 10,0 m |



XGA monitor connection cable, high quality

- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug
- Molded housing, metallic shielding
 - Cable 3x coaxial and 4x AWG28, double cable shielding (separate shielding of the RGB signal wires)
 - 2x ferrite filter
 - UL2919
 - Gold plated
 - Plug color: black
 - Cable color: transparent

| | |
|------------------------|--------|
| 081531 / AK 5320XF-HQC | 1,8 m |
| 081548 / AK 3760XF-HQC | 3,0 m |
| 081555 / AK 3770XF-HQC | 5,0 m |
| 081562 / AK 3780XF-HQC | 10,0 m |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices



VGA - BNC monitor connection cable


HD D-Sub 15-pin plug <=> 5x BNC plug

- Molded housing
- 5x 75 Ohm coaxial cables, coax RGB (Sync), shielded, AWG28
- 1x ferrite filter
- UL2919
- Color: black



064213 / AK 553/F 2,0 m

Computer

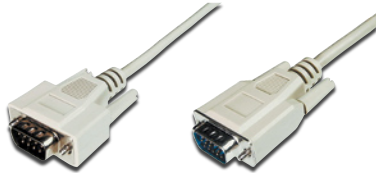

EGA / CGA / monochrome - VGA multisync monitor connection cable

D-Sub 9-pin plug <=> HD D-Sub 15-pin plug

- Molded housing
- 9-wire cable, shielded, AWG28
- Assignment: 1-1, 2-2, 3-3, 4-13, 5-14, 6-6, 7-7, 8-8, 9-10/11, S-S
- Color: beige



063902 / AK 514 2M 1,8 m

Power

Audio



VGA Y-splitter cable

HD D-Sub 15-pin plug <=> 2x HD D-Sub 15-pin jack

- Length of cable: 0.20m, shielded, AWG28
- Molded housing
- UL2919
- Gold plated
- Color: black



226611 / AK-513001 0,2 m

Video

Telephone



VGA Y-splitter cable

HD D-Sub 15-pin plug <=> HD D-Sub 15-pin jack + 3x RCA (RGB) jack

- Length of cable: 0.20m, shielded, AWG28
- Molded housing
- UL2919
- Gold plated
- Color: black



226628 / AK-513002 0,2 m

TV/SAT

Raw Cables



VGA Y-splitter cable

HD D-Sub 15-pin plug <=> DVI-(24+1) jack + HD D-Sub 15-pin jack

- Length of cable: 0.20m, shielded, AWG28
- Molded housing
- UL20726
- Gold plated
- Color: black



226635 / AK-513003 0,2 m

Connectors + Adapters

Wall Plates



DIGITUS® Blister VGA monitor connection cable, premium

HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug

- Molded housing
- 3 x Coax for RGB and 7 x AWG 28, shielded
- Plug color: black/grey
- Cable color: black

- In blisterpackage



| | DIGITUS® Blister | | DIGITUS® Polybag |
|------|--------------------|--|--------------------|
| 1,8m | 235743 / DB-229971 | | 229971 / DK-113029 |
| 3,0m | 235750 / DB-229988 | | 229988 / DK-113030 |
| 5,0m | 235767 / DB-229995 | | 229995 / DK-113031 |

Accessories + Testdevices

DIGITUS® Blister VGA monitor extension cable, premium

HD D-Sub 15-pin plug <=> HD D-Sub 15-pin jack

- Molded housing
- 3 x Coax for RGB and 7 x AWG 28, shielded
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,8m | 235804 / DB-230007 | 230007 / DK-113032 |
| 3,0m | 235811 / DB-230014 | 230014 / DK-113033 |
| 5,0m | 235828 / DB-230021 | 230021 / DK-113034 |



DIGITUS® Blister VGA monitor connection cable, premium

HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug

- Molded housing
- 3x coax for RGB and 4x AWG28 signal wires, double shielded
- UL2919
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|-------|--------------------|--------------------|
| 1,8m | 235873 / DB-230038 | 230038 / DK-113035 |
| 3,0m | 235880 / DB-230045 | 230045 / DK-113036 |
| 5,0m | 235897 / DB-230052 | 230052 / DK-113037 |
| 10,0m | 235903 / DB-230069 | 230069 / DK-113038 |



DIGITUS® Blister VGA monitor extension cable, premium

HD D-Sub 15-pin plug <=> HD D-Sub 15-pin jack

- Molded housing
- 3x coax for RGB and 4x AWG28 signal wires, double shielded
- UL2919
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|-------|--------------------|--------------------|
| 2,0m | 235958 / DB-230076 | 230076 / DK-113039 |
| 3,0m | 235965 / DB-230083 | 230083 / DK-113040 |
| 5,0m | 235972 / DB-230090 | 230090 / DK-113041 |
| 10,0m | 235989 / DB-230106 | 230106 / DK-113042 |



CABLES

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices



DIGITUS® Blister XGA monitor connection cable, premium



- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin plug
- Molded housing
 - 3x coax for RGB and 7x AWG28 signal wires, double shielded
 - 2x ferrite filter
 - UL2919
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|-------|--------------------|--------------------|
| 1,8m | 236078 / DB-230113 | 230113 / DK-113043 |
| 3,0m | 236085 / DB-230120 | 230120 / DK-113044 |
| 5,0m | 236092 / DB-230137 | 230137 / DK-113045 |
| 10,0m | 236108 / DB-230144 | 230144 / DK-113046 |
| 15,0m | | 230151 / DK-113047 |
| 20,0m | | 230168 / DK-113048 |



DIGITUS® Blister XGA monitor extension cable, premium



- HD D-Sub 15-pin plug <=> HD D-Sub 15-pin jack
- Molded housing
 - 3x coax for RGB and 7x AWG28 signal wires, double shielded
 - 2x ferrite filter
 - UL2919
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|-------|--------------------|--------------------|
| 2,0m | 236115 / DB-230175 | 230175 / DK-113049 |
| 3,0m | 236122 / DB-230182 | 230182 / DK-113050 |
| 5,0m | 236139 / DB-230205 | 230205 / DK-113051 |
| 10,0m | 236146 / DB-230212 | 230212 / DK-113052 |
| 15,0m | | 230229 / DK-113053 |
| 20,0m | | 230236 / DK-113054 |








DIGITUS® Blister VGA - BNC monitor connection cable, premium



- HD D-Sub 15-pin plug <-> 5x BNC plug
- Molded housing
 - 5x 75 Ohm coaxial cables, coax RGB (Sync), shielded, AWG28
 - 1x ferrite filter
 - UL2919
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 236160 / DB-230243 | 230243 / DK-113055 |

| Specification Feature | DVI-A | | DVI-I | | DVI-D | |
|-----------------------|--|--|--|---|---|---|
| | Single-Link | Dual-Link | Dual-Link | Dual-Link | Single-Link | Dual-Link |
| max. Band Range | 3,7 GBit/s, 165 MHz | 3,7 GBit/s, 165 MHz | 7,4 GBit/s, 330 MHz | 7,4 GBit/s, 330 MHz | 3,7 GBit/s, 165 MHz | 7,4 GBit/s, 330 MHz |
| max. Resolution | 1920 x 1200 pixel at 60 Hz HDTV resolution = 1920 x 1080 pixel | 1920 x 1200 pixel at 60 Hz HDTV resolution = 1920 x 1080 pixel | 2560 x 1600 pixel at 60 Hz HDTV resolution = 1920 x 1080 pixel | 2560 x 1600 pixel at 60 Hz HDTV resolution = 1920 x 1080 pixel | 1920 x 1200 pixel at 60 Hz HDTV resolution = 1920 x 1080 pixel | 2560 x 1600 pixel at 60 Hz HDTV resolution = 1920 x 1080 pixel |
| Color Space | 24 Bit RGB | 24 Bit RGB | 24 Bit RGB | 24 Bit RGB | 24 Bit RGB | 24 Bit RGB |
| Plug Type | DVI 12+5  | DVI 18+5  | DVI 24+5  | DVI 18+1  | DVI 24+1  | |
| Miscellaneous | cable /adapter with connected signal lines for analog video signals. Only for use of analog devices. This cable is not very common on the European market. Instead of DVI-A you can use DVI-I (Single-Link) cables as well. | cable /adapter with connected signal lines for analog and digital video signals. It's possible to use analog as well as digital devices. | cable /adapter with connected signal lines for analog and digital video signals. It's possible to use analog as well as digital devices. | cable /adapter with connected signal lines for digital video signals. Only digital devices can be used. | cable /adapter with connected signal lines for digital video signals. Only digital devices can be used. | |

DVI-D connection cable

Digital connection cable DVI (Single-Link) for Video transmission up to a max. data rate of 3,7Gbit/s. A resolution of 1920 x 1200 pixel at 60 Hz is possible.

DVI-D (18+1) plug <=> DVI-D (18+1) plug

- Molded housing
- Cable full connected, double shielded, AWG28
- 2x ferrite filter
- UL20276
- Color: black



| | |
|--------------------|-------|
| 120865 / AK 620N | 2,0 m |
| 126133 / AK 620N-3 | 3,0 m |
| 126140 / AK 620N-5 | 5,0 m |



DVI-D connection cable


Digital connection cable DVI (Dual-Link) for Video transmission up to a max. data rate of 7.4Gbit/s. A resolution of 2560x1600 pixel at 60Hz is possible.

DVI-D (24+1) plug <=> DVI-D (24+1) plug

- Molded housing
- Cable full connected, double shielded, AWG28
- 2x ferrite filter
- UL20276
- Color: black



| | |
|--------------------|------|
| 120872 / AK 621N | 2,0m |
| 126157 / AK 621N-3 | 3,0m |
| 126164 / AK 621N-5 | 5,0m |



DVI-I - VGA connection cable

The cable is suited to connect devices with DVI interfaces to older displays with HD D-Sub 15 interfaces.

DVI-I (24+5) plug <=> HD D-Sub15-pin plug

- Molded housing
- 12-wire cable, double shielded, AWG28
- 2x ferrite filter
- UL20276
- Color: black



| | |
|--------------------|-------|
| 120889 / AK 622N | 2,0 m |
| 126171 / AK 622N-3 | 3,0 m |
| 126188 / AK 622N-5 | 5,0 m |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices

DVI-D - HPC20 connection cable



- DVI-D (24+1) plug <=> HPC20 plug
- Molded housing
 - 17-wire cable, double shielded, AWG28
 - UL20276
 - Color: black



120896 / AK 623N 2,0 m

DVI-D extension cable



Digital Extension Cable DVI (Dual-Link) for Video transmission up to a max. data rate of 7.4 Gbit/s. A resolution of 2560 x 1600 pixel at 60 Hz is possible. The cable is fit for 1080P.

DVI-D (24+1) plug <=> DVI-D (24+1) jack

- Molded housing
- Cable full connected, double shielded, AWG28
- 2x ferrite filter
- UL20276
- Color: black

258506 / AK-110030 2,0 m

258513 / AK-110031 3,0 m

258537 / AK-110032 5,0 m

258544 / AK-110033 10,0 m



DVI-I connection cable



Analog/Digital connection cable DVI (Single-Link) for Video transmission up to a max. data rate of 3.7 Gbit/s. A resolution of 1920 x 1200 pixel at 60 Hz is possible. It's possible to connect analog as well as digital devices. The cable is fit for 1080P.



DVI-I (18+5) plug <=> DVI-I (18+5) plug

- Molded housing
- Cable full connected, double shielded, AWG28
- 2x ferrite filter
- UL20276
- Color: black

226314 / AK-110013 2,0 m

226321 / AK-110014 3,0 m

226338 / AK-110015 5,0 m



DVI-I connection cable



Analog/Digital connection cable DVI (Dual-Link) for Video transmission up to a max. data rate of 7.4 Gbit/s. A resolution of 2560 x 1600 pixel at 60 Hz is possible. It's possible to connect analog as well as digital devices. The cable is fit for 1080P.

DVI-I (24+5) plug <=> DVI-I (24+5) plug

- Molded housing
- Cable full connected, double shielded, AWG28
- 2x ferrite filter
- UL20276
- Color: black

226345 / AK-110019 2,0 m

226352 / AK-110020 3,0 m

226369 / AK-110021 5,0 m



DVI-I - RCA (RGB) connection cable




DVI-I (24+5) plug <=> 3x RCA (RGB) plugs

- Molded housing
- 6-wire cable, shielded, AWG28
- UL2919
- Color: black

226376 / AK-110027 1,8 m

226383 / AK-110028 3,0 m

226390 / AK-110029 5,0 m



DVI-I Y-splitter cable



Analog/Digital DVI (Dual-Link) Splitter for Video transmission up to a max. data rate of 7.4 Gbit/s.

A resolution of 2560 x 1600 pixel at 60 Hz is possible.

It's possible to connect analog as well as digital devices.

DVI-I (24+5) plug <=> DVI-I (24+5) jack + HD D-Sub 15-pin jack

- Length of cable: 0.20m, shielded, AWG30
- moulded housing
- UL20726
- Gold plated
- Color: black

226574 / AK-510001 0,2 m



DVI-I Y-splitter cable

Analog/Digital DVI (Dual-Link) Splitter for Video transmission up to a max. data rate of 7.4 Gbit/s.
A resolution of 2560 x 1600 pixel at 60 Hz is possible.
It's possible to connect analog as well as digital devices.

DVI-I (24+5) plug <=> 2x DVI-I (24+5) jack

- Length of cable: 0.20m, shielded, AWG30
- moulded housing
- UL20726
- Gold plated
- Color: black

226581 / AK-510002 0,2 m



DVI-I Y-splitter cable

Digital/Analog DVI (Dual-Link) Splitter for Video transmission.
A resolution of 2560 x 1600 pixel at 60 Hz is possible.

DVI-I (24+5) plug <=> 2x HD D-Sub 15-pin jack

- Length of cable: 0.20m, shielded, AWG30
- moulded housing
- UL20726
- Gold plated
- Color: black

226598 / AK-510003 0,2 m



DVI-I Y-splitter cable

Digital/Analog DVI (Dual-Link) Splitter for Video transmission.
A resolution of 2560 x 1600 pixel at 60 Hz is possible.

DVI-I (24+5) plug <=> 3x RCA (RGB) jack + HD D-Sub15-pin jack

- Length of cable: 0.20m, shielded, AWG30
- moulded housing
- UL20726
- Gold plated
- Color: black

226604 / AK-510004 0,2 m



DIGITUS® Blister DVI-D connection cable, premium

Digital connection cable DVI (Single-Link) for Video transmission up to a max. data rate of 3,7Gbit/s.
A resolution of 1920 x 1200 pixel at 60 Hz is possible.

DVI-D (18+1) plug <=> DVI-D (18+1) plug

- Molded housing
- Cable full connected, double shielded, AWG28k
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2.0m | 235323 / DB-229759 | 229759 / DK-110008 |
| 3.0m | 235330 / DB-229766 | 229766 / DK-110009 |
| 5.0m | 235347 / DB-229773 | 229773 / DK-110010 |



DIGITUS® Blister DVI-D connection cable, premium

Digital connection cable DVI (Dual-Link) for Video transmission up to a max. data rate of 7.4 Gbit/s.
A resolution of 2560 x 1600 pixel at 60 Hz is possible.

DVI-D (24+1) plug <=> DVI-D (24+1) plug

- Molded housing
- Cable full connected, double shielded, AWG28
- Plug color: black/grey
- 2x ferrite filter
- UL20276
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2.0m | 235385 / DB-229780 | 229780 / DK-110031 |
| 3.0m | 237082 / DB-229797 | 229797 / DK-110032 |
| 5.0m | 237099 / DB-229803 | 229803 / DK-110033 |



DIGITUS® Blister DVI-I - VGA connection cable, premium

The cable is suited to connect devices with DVI interfaces to older displays.

DVI-I (24+5) plug <=> HD D-Sub15-pin plug

- Molded housing
- 12-wire cable, double shielded, AWG28
- 2x ferrite filter
- UL20276
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2.0m | 235422 / DB-229810 | 229810 / DK-110034 |
| 3.0m | 235439 / DB-229827 | 229827 / DK-110035 |
| 5.0m | 235446 / DB-229834 | 229834 / DK-110036 |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices



DIGITUS® Blister DVI-D extension cable, premium



Digital Extension Cable DVI (Dual-Link) for Video transmission up to a max. data rate of 7.4 Gbit/s. A resolution of 2560 x 1600 pixel at 60 Hz is possible. The cable is fit for 1080P.

- DVI-D (24+1) plug <=> DVI-D (24+1) jack
- Molded housing
 - Cable full connected, double shielded, AWG28
 - 2x ferrite filter
 - UL20276
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage




| | DIGITUS® Blister | DIGITUS® Polybag |
|-------|--------------------|--------------------|
| 2,0m | 235491 / DB-229841 | 229841 / DK-110002 |
| 3,0m | 235507 / DB-229858 | 229858 / DK-110003 |
| 5,0m | 235514 / DB-229865 | 229865 / DK-110004 |
| 10,0m | 235521 / DB-229872 | 229872 / DK-110006 |

DIGITUS® Blister DVI-I connection cable, premium



Analog/Digital connection cable DVI (Single-Link) for Video transmission up to a max. data rate of 3.7 Gbit/s. A resolution of 1920 x 1200 pixel at 60 Hz is possible. It's possible to connect analog as well as digital devices. The cable is fit for 1080P.

- DVI-D (18+5) plug <=> DVI-D (18+5) plug
- Molded housing
 - Cable full connected, double shielded, AWG28
 - 2x ferrite filter
 - UL20276
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage




| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 235569 / DB-229889 | 229889 / DK-110013 |
| 3,0m | 235576 / DB-229896 | 229896 / DK-110014 |
| 5,0m | 235583 / DB-229902 | 229902 / DK-110015 |

DIGITUS® Blister DVI-I connection cable, premium



Analog/Digital connection cable DVI (Dual-Link) for Video transmission up to a max. data rate of 7.4 Gbit/s. A resolution of 2560 x 1600 pixel at 60 Hz is possible. It's possible to connect analog as well as digital devices. The cable is fit for 1080P.

- DVI-D (24+5) plug <=> DVI-D (24+5) plug
- Molded housing
 - Cable full connected, double shielded, AWG28
 - 2x ferrite filter
 - UL20276
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 235620 / DB-229919 | 229919 / DK-110019 |
| 3,0m | 235637 / DB-229926 | 229926 / DK-110020 |
| 5,0m | 235644 / DB-229933 | 229933 / DK-110021 |

DIGITUS® Blister DVI-I - RCA (RGB) connection cable, premium

Especially suited to connect a video projector.



DVI-I (24+5) plug <=> 3x RCA (RGB) plug

- Molded housing
- 6-wire cable, shielded, AWG28
- UL2919
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 235682 / DB-229940 | 229940 / DK-110027 |
| 3,0m | 235699 / DB-229957 | 229957 / DK-110028 |
| 5,0m | 235705 / DB-229964 | 229964 / DK-110029 |



DisplayPort connection cable

Cable for digital video / audio transmission up to a max. data rate of 10,8 Gbit/s.

Display port allows an innovative 2-way communication between a PC and a screen. Particularly suitably for presentation of 3D games and high-resolution graphics.

Resolution: WQXGA (2560×1600) -> 1080p compatible.

DisplayPort (20-pin) plug <=> DisplayPort (20-pin) plug


- Molded housing
- 20-wire cable, double shielded, AWG30
- Mechanical plug interlock
- Plug and Play compatible
- Support of HDCP und DPCP
- Color: black



| | |
|--------------------|-------|
| 250708 / AK-135001 | 1,0 m |
| 250722 / AK-135002 | 2,0 m |
| 250739 / AK-135003 | 3,0 m |
| 250784 / AK-135004 | 5,0 m |



ASSMANN - The World of Cables

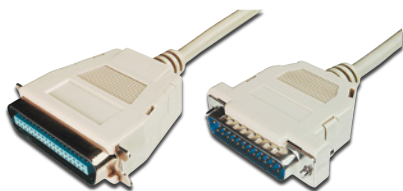

Printer connection cable, parallel

- D-Sub 25-pin plug <=> CENTRONIC 36-pin plug
- Snap hoods
- 25-wire cable, single shielded, AWG28
- Color: beige

| | |
|----------------------|--------|
| 062561 / AK 101 1,8M | 1,8 m |
| 062585 / AK 102 3M | 3,0 m |
| 062592 / AK 103 5M | 5,0 m |
| 062608 / AK 104 7M | 7,0 m |
| 062615 / AK 105 10M | 10,0 m |



Printer connection cable, parallel

- D-Sub 25-pin plug <=> CENTRONIC 36-pin plug
- Molded housing
- 25-wire cable, single shielded, AWG28
- Color: beige


| | |
|---------------------|--------|
| 062622 / AK 108 2M | 2,0 m |
| 062653 / AK 127 3M | 3,0 m |
| 062813 / AK 158 5M | 5,0 m |
| 062820 / AK 159 7M | 7,0 m |
| 062837 / AK 160 10M | 10,0 m |



Printer connection cable, IEEE 1284

- D-Sub 25-pin plug <=> Mini CENTRONIC 36-pin HP plug
- Molded housing
- UL20276, Twisted Pair cable, double shielded, AWG28
- Assignment as per IEEE 1284, supports EPP interfaces
- Color: beige

| | |
|----------------------|-------|
| 064572 / AK 706 1,8M | 1,8 m |
| 064589 / AK 707 3M | 3,0 m |

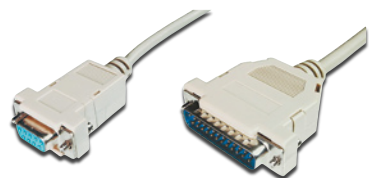

Printer connection cable, serial

- D-Sub 9-pin jack <=> D-Sub 25-pin plug hoods
- 8-wire cable, single shielded, AWG28
- Color: beige

| | |
|--------------------|-------|
| 062776 / AK 150 3M | 3,0 m |
|--------------------|-------|



Printer connection cable, IEEE 1284 bidirectional

- D-Sub 25-pin plug <=> CENTRONIC 36-pin plug
- Molded housing
- UL20276, Twisted Pair cable, double shielded, AWG28
- Assignment as per IEEE 1284, supports EPP interfaces
- Color: beige

| | |
|----------------------|-------|
| 064596 / AK 711 1,8M | 1,8 m |
| 064602 / AK 712 3M | 3,0 m |



Printer cable, IEEE 1284, bidirectional

- AK 733 1.8 m: extension cable D-Sub 25-pin plug <=> D-Sub 25-pin jack
- AK 736 1.8 m: connection cable D-Sub 25-pin plug <=> D-Sub 25-pin plug

- Molded housing
- UL20276, Twisted Pair cable, double shielded, AWG28
- Assignment as per IEEE 1284, supports EPP interfaces
- Color: beige


| | |
|----------------------|-------|
| 064626 / AK 733 1.8M | 1,8 m |
| 064657 / AK 736 1.8M | 1,8 m |



Serial / parallel connection cable

- D-Sub 25-pin plug <=> D-Sub 25-pin plug
- Snap hoods
 - 25-wire cable, single shielded, AWG28
 - Assignment 1:1
 - Color: beige


| | |
|--------------------|-------|
| 063674 / AK 401 2M | 2,0 m |
| 063889 / AK 508 3M | 3,0 m |
| 063681 / AK 402 5M | 5,0 m |

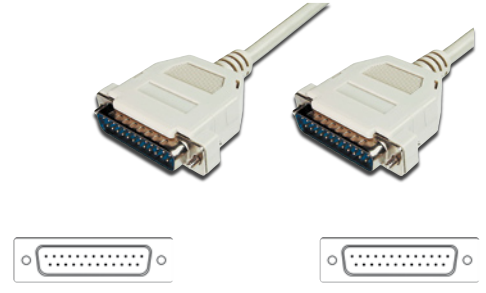

Serial / parallel extension cable

- D-Sub 25-pin plug <=> D-Sub 25-pin jack
- Snap hoods
 - 25-wire cable, single shielded, AWG28
 - Assignment 1:1
 - Color: beige


| | |
|--------------------|-------|
| 063704 / AK 404 2M | 2,0 m |
| 063971 / AK 526 3M | 3,0 m |
| 063711 / AK 405 5M | 5,0 m |

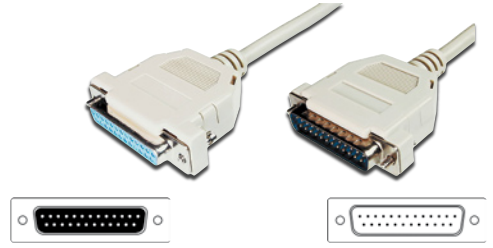

Serial / parallel extension cable

- D-Sub 25-pin <=> D-Sub 25-pin jack
- Molded housing
 - 25-wire cable, shielded, AWG28
 - Assignment 1:1
 - Color: beige


| | |
|---------------------|--------|
| 062707 / AK 135 2M | 2,0 m |
| 062875 / AK 166 3M | 3,0 m |
| 062714 / AK 136 5M | 5,0 m |
| 062882 / AK 168 10M | 10,0 m |

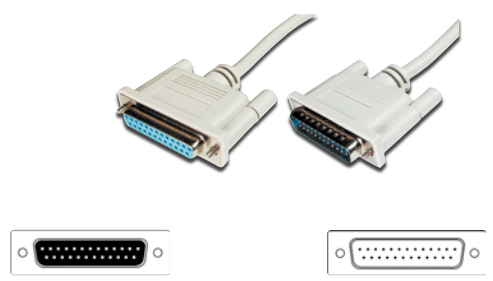

Serial / parallel connection cable

- D-Sub 25-pin plug <=> D-Sub 25-pin plug
- Molded housing
 - 25-wire cable, single shielded, AWG28
 - Assignment 1:1
 - Color: beige

| | |
|---------------------|--------|
| 062721 / AK 137 2M | 2,0 m |
| 062844 / AK 162 3M | 3,0 m |
| 062806 / AK 154 5M | 5,0 m |
| 062868 / AK 164 10M | 10,0 m |

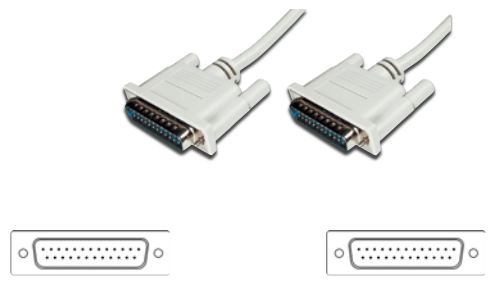

DIGITUS® Blister Printer connection cable, parallel, premium

- D-Sub 25-pin plug <=> CENTRONIC 36-pin plug
- Molded housing
 - 25-wire cable, single shielded, AWG28
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|-------|--------------------|--------------------|
| 2,0m | 234005 / DB-229223 | 229223 / DK-113001 |
| 3,0m | 234036 / DB-229247 | 229247 / DK-113002 |
| 5,0m | 234050 / DB-229254 | 229254 / DK-113003 |
| 10,0m | 234074 / DB-229261 | 229261 / DK-113004 |



DIGITUS® Blister Serial / parallel extension cable, premium

- D-Sub 25-pin plug <=> D-Sub 25-pin jack
- Molded housing
 - 25-wire cable, single shielded, AWG28
 - Assignment 1:1
 - Plug color: black/grey
 - Plug color: black
 - In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 234098 / DB-229278 | 229278 / DK-113005 |
| 3,0m | 234111 / DB-229285 | 229285 / DK-113006 |
| 5,0m | 234135 / DB-229292 | 229292 / DK-113007 |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices



DIGITUS® Blister Serial / parallel connection cable, premium



- D-Sub 25-pin plug <=> D-Sub 25-pin plug
- Molded housing
 - 25-wire cable, single shielded, AWG28
 - Assignment 1:1
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 234548 / DB-229308 | 229308 / DK-113008 |



DIGITUS® Blister Printer connection cable, serial, premium



- D-Sub 25-pin jack <=> D-Sub 25-pin plug
- Molded housing
 - 8-wire cable, single shielded, AWG28
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage




| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 3,0m | 234586 / DB-229322 | 229322 / DK-113010 |



DIGITUS® Blister Printer connection cable, IEEE 1284 bidirectional, premium



- D-Sub 25-pin plug <=> CENTRONIC 36-pin plug
- Molded housing
 - UL20276, Twisted Pair cable, double shielded, AWG28
 - Assignment as per IEEE 1284, supports EPP interfaces
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,8m | 234609 / DB-229339 | 229339 / DK-113011 |
| 3,0m | 234623 / DB-229346 | 229346 / DK-113012 |



DIGITUS® Blister Printer extension cable, IEEE 1284 bidirectional, premium



- D-Sub 25-pin plug <=> D-Sub 25-pin jack
- Molded housing
 - UL20276, Twisted Pair cable, double shielded, AWG28
 - Assignment as per IEEE 1284, supports EPP interfaces
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage




| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,8m | 234647 / DB-229353 | 229353 / DK-113013 |

Zero-modem cable

AK 149 = D-Sub 9-pin jack <=> D-Sub 25-pin plug
 AK 124 = D-Sub 9-pin jack <=> D-Sub 25-pin jack

- Snap hoods
- 9-wire cable, single shielded, AWG28
- Assignment: 1-8, 2-2, 3-3, 4-6, 5-7, 6-20, 7-5, 8-4, 9-22, S-S
- Color: beige

| | |
|--------------------|-------|
| 062769 / AK 149 3M | 3,0 m |
| 062639 / AK 124 3M | 3,0 m |

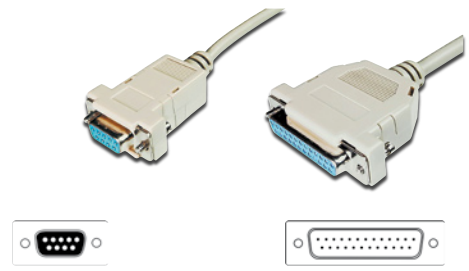

Zero-modem cable

D-Sub 9-pin jack <=> D-Sub 9-pin jack

- Snap hoods
- 8-wire cable, single shielded, AWG28
- Assignment: 1-4, 2-3, 3-2, 4-1, 5-5, 7-8, 8-7, 9-9, S-S
- Color: beige

| | |
|----------------------|-------|
| 080633 / AK 143 1,8M | 1,8 m |
| 062745 / AK 143 3M | 3,0 m |




Zero-modem cable

D-Sub 9-pin jack <=> D-Sub 25-pin plug

- Snap hoods
- 9-wire cable, single shielded, AWG28
- Assignment: 1-8, 2-3, 3-2, 4-20, 5-7, 6-6, 7-4, 8-5, 9-22, S-S
- Color: beige

| | |
|---------------------|-------|
| 076728 / AK 186/NEW | 3,0 m |
|---------------------|-------|

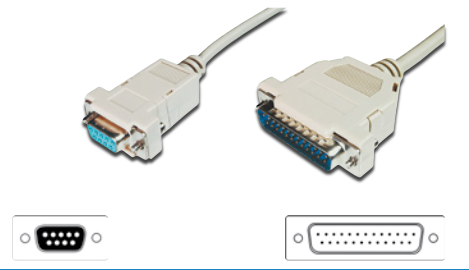


Zero-modem cable (AT)

D-Sub 9-pin jack <=> D-Sub 25-pin plug

- Snap hoods
- 9-wire cable, single shielded, AWG28
- Assignment: 1-8, 2-3, 3-2, 4-20, 5-7, 6-6, 7-4, 8-5, 9-22, S-S
- Color: beige

| | |
|-----------------------|--------|
| 062660 / AK 128 0,25M | 0,25 m |
| 062646 / AK 125 2M | 2,0 m |

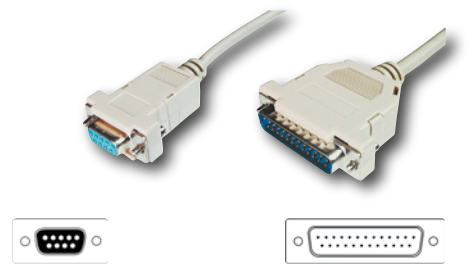

Serial doublehead datatransfer cable

D-Sub 9-pin jack <=> D-Sub 9-pin jack
 D-Sub 25-pin jack <=> D-Sub 25-pin jack

- Molded housing
- 7-wire cable, single shielded, AWG28
- Color: beige

| | |
|-----------------|-------|
| 063018 / AK 252 | 3,0 m |
|-----------------|-------|




Serial connection cable

D-Sub 9-pin jack <=> D-Sub 9-pin jack

- Molded housing
- 9-wire cable, single shielded, AWG28
- Assignment 1:1
- Color: beige

| | |
|--------------------|-------|
| 062783 / AK 152 2M | 2,0 m |
| 062929 / AK 182 3M | 3,0 m |
| 062790 / AK 153 5M | 5,0 m |

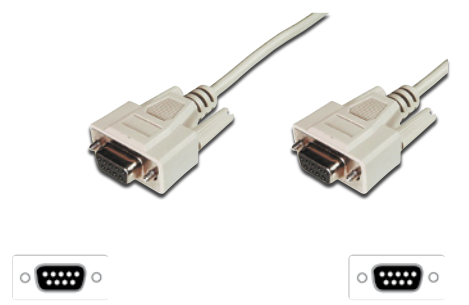

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices




Serial connection cable

- D-Sub 9-pin plug <=> D-Sub 9-pin plug
- Molded housing
 - 9-wire cable, single shielded, AWG28
 - Assignment 1:1
 - Color: beige



| | |
|--------------------|-------|
| 062677 / AK 129 2M | 2,0 m |
| 062899 / AK 174 3M | 3,0 m |

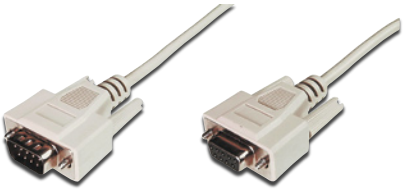


Serial extension cable

- D-Sub 9-pin plug <=> D-Sub 9-pin jack
- Molded housing
 - 9-wire cable, single shielded, AWG28
 - Assignment 1:1
 - Color: beige



| | |
|---------------------|--------|
| 062684 / AK 131 2M | 2,0 m |
| 062905 / AK 178 3M | 3,0 m |
| 062691 / AK 132 5M | 5,0 m |
| 062912 / AK 180 10M | 10,0 m |

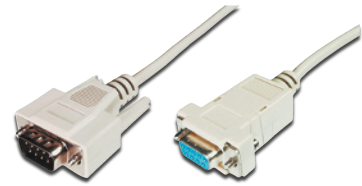

Serial connection cable

- D-Sub 9-pin plug <=> D-Sub 9-pin jack
- Snap hoods
 - Cable 9-wire, single shielded, AWG28
 - Assignment 1:1
 - Color: beige



| | |
|--------------------|-------|
| 062950 / AK 230 2M | 2,0 m |
|--------------------|-------|



Serial connection cable

- D-Sub 9-pin jack <=> D-Sub 9-pin jack
- Snap hoods
 - 9-wire cable, single shielded, AWG28
 - Assignment 1:1
 - Color: beige



| | |
|--------------------|-------|
| 062967 / AK 231 2M | 2,0 m |
|--------------------|-------|



DIGITUS® Blister Zero-Modem cable, premium



DB-229360 = D-Sub 9-pin jack <=> D-Sub 25-pin plug
 DB-229445 = D-Sub 9-pin jack <=> D-Sub 25-pin jack

- Molded housing
- 9-wire cable, single shielded, AWG28
- Assignment: 1-8, 2-2, 3-3, 4-6, 5-7, 6-20, 7-5, 8-4, 9-22, S-S

- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 3,0m | 234609 / DB-229360 | 229360 / DK-113014 |
| 3,0m | 234685 / DB-229445 | 229445 / DK-113015 |



DIGITUS® Blister Zero-Modem cable, premium



- D-Sub 9-pin jack <=> D-Sub 9-pin jack
- Molded housing
 - 8-wire cable, single shielded, AWG28
 - Assignment: 1-4, 2-3, 3-2, 4-1, 5-5, 7-8, 8-7, 9-9, S-S
 - Plug color: black/grey
 - Cable color: black
 - In blisterpackage




| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,8m | 234708 / DB-229377 | 229377 / DK-113016 |
| 3,0m | 234722 / DB-229384 | 229384 / DK-113017 |

DIGITUS® Blister Zero-Modem cable AT, premium

D-Sub 9-pin jack <=> D-Sub25-pin plug

- Molded housing
- 9-wire cable, single shielded, AWG28
- Assignment: 1-8, 2-3, 3-2, 4-20, 5-7, 6-6, 7-4, 8-5, 9-22, S-S
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 234746 / DB-229391 | 229391 / DK-113018 |



DIGITUS® Blister Serial doublehead datatransfer cable, premium

D-Sub 9-pin jack <=> D-Sub 9-pin jack D-Sub 25-pin jack <=> D-Sub 25-pin jack

- Molded housing
- 7-wire cable, single shielded, AWG28
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 3,0m | 234760 / DB-229407 | 229407 / DK-113019 |



DIGITUS® Blister Serial extension cable, premium

D-Sub 9-pin plug <=> D-Sub 9-pin jack

- Molded housing
- 9-wire cable, single shielded, AWG28
- Assignment 1:1
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|-------|--------------------|--------------------|
| 2,0m | 234791 / DB-229414 | 229414 / DK-113020 |
| 3,0m | 234814 / DB-229421 | 229421 / DK-113021 |
| 5,0m | 234838 / DB-229438 | 229438 / DK-113022 |
| 10,0m | 234852 / DB-229452 | 229452 / DK-113023 |



DIGITUS® Blister Serial connection cable, premium

D-Sub 9-pin jack <=> D-Sub 9-pin jack

- Molded housing
- 9-wire cable, single shielded, AWG28
- Assignment 1:1
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 234876 / DB-229469 | 229469 / DK-113024 |
| 3,0m | 234906 / DB-229476 | 229476 / DK-113025 |
| 5,0m | 234920 / DB-229483 | 229483 / DK-113026 |




DIGITUS® Blister Serial connection cable, premium

D-Sub 9-pin plug <=> D-Sub 9-pin plug

- Molded housing
- 9-wire cable, single shielded, AWG28
- Assignment 1:1
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 234944 / DB-229490 | 229490 / DK-113027 |
| 3,0m | 234968 / DB-229506 | 229506 / DK-113028 |



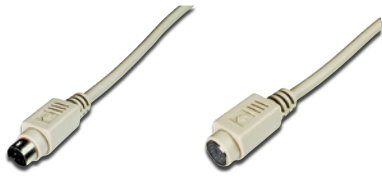

PS/2 extension cable

- MiniDIN 6-pin plug <=> MiniDIN 6-pin jack
- Molded housing
- 6-wire cable, single shielded, AWG28
- Assignment 1:1
- Color: beige

Computer



| | |
|-------------------|-------|
| 063179 / AK 323/G | 2,0 m |
| 063995 / AK 528/G | 5,0 m |

Power



PS/2 connection cable

- MiniDIN 6-pin plug <=> MiniDIN 6-pin plug
- Molded housing
- 6-wire cable, single shielded, AWG28
- Assignment 1:1
- Color: beige

Audio

Video



| | |
|--------------------|-------|
| 064534 / AK 678 2M | 2,0 m |
| 088066 / AK 678 3M | 3,0 m |
| 064541 / AK 679 5M | 5,0 m |

Telephone



PS/2 - DIN connection cable

- Keyboard Adapter Cable
- DIN 5-pin plug <=> MiniDIN 6-pin jack
- Molded housing
- 4-wire cable, single shielded, AWG28
- Assignment : 1-5, 2-1, 4-3, 5-4
- Color: beige

TV/SAT

Raw Cables




| | |
|------------------------|--------|
| 063940 / AK 5230 0,15M | 0,15 m |
|------------------------|--------|

Connectors + Adapters

Wall Plates

Accessories + Testdevices

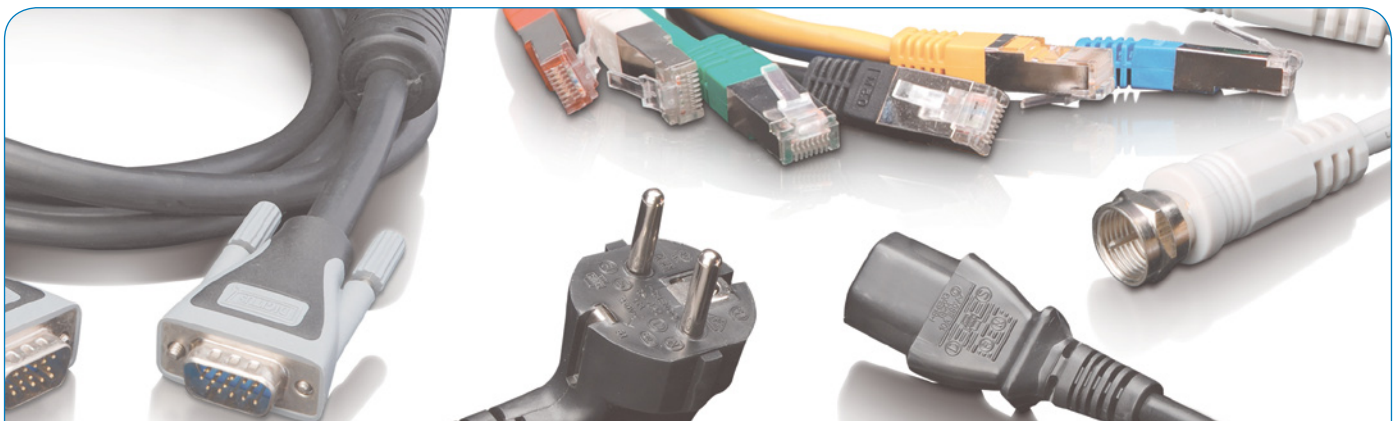

PS/2 - DIN connection cable

Keyboard Adapter Cable

DIN 5-pin jack <=> MiniDIN 6-pin plug

- Molded housing
- 4-wire cable, single shielded, AWG28
- Assignment: 1-5, 2-1, 4-3, 5-4
- Color: beige



064008 / AK 530 0,15M 0,15 m

PS/2 Notebook Y-adapter cable

Cable to connect a PS/2 keyboard and mouse to a notebook keyboard port.

MiniDIN 6-pin plug <=> 2x MiniDIN 6-pin jack

- Molded housing
- 4-wire cable, single shielded, AWG28
- Color: beige



061168 / AB NAK 0,15 m

DIGITUS® Blister PS/2 extension cable, premium

MiniDIN 6-pin plug <=> MiniDIN 6-pin jack

- Molded housing
- 6-wire cable, single shielded, AWG28
- Assignment 1:1
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 234982 / DB-229513 | 229513 / DK-103001 |
| 3,0m | 234999 / DB-229520 | 229520 / DK-103002 |

DIGITUS® Blister PS/2 connection cable, premium

MiniDIN 6-pin plug <=> MiniDIN 6-pin plug

- Molded housing
- 6-wire cable, single shielded, AWG28
- Assignment 1:1
- Plug color: black/grey
- Cable color: black
- In blisterpackage



| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 2,0m | 235026 / DB-229537 | 229537 / DK-103003 |
| 3,0m | 235040 / DB-229544 | 229544 / DK-103004 |
| 5,0m | 235064 / DB-229551 | 229551 / DK-103005 |

PS/2 connection cable, internal / external on Slot Bracket

MiniDIN 6-pin jack <=> socket connector 10-pin



051497 / AK PS2 0,25 m

CABLES

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices



FireWire IEEE 1394A connection cable

1394A 6-pin plug <=> 1394A 6-pin plug

- Molded housing
- 6-wire cable, double shielded, AWG22/28
- UL20276 and IEEE 1394A compatible
- The maximum data transfer rate is 400 Mbps
- Color: black

| | |
|---------------------|-------|
| 078074 / AK-1394-10 | 1,0 m |
| 051718 / AK-1394-18 | 1,8 m |
| 051749 / AK-1394-30 | 3,0 m |
| 051770 / AK-1394-50 | 5,0 m |



Computer



FireWire IEEE 1394A connection cable

1394A 4-pin plug <=> 1394A 6-pin plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL20276 and IEEE 1394A compatible
- The maximum data transfer rate is 400 Mbps
- Color: black

| | |
|----------------------|-------|
| 078081 / AK-1394-104 | 1,0 m |
| 051725 / AK-1394-184 | 1,8 m |
| 051756 / AK-1394-304 | 3,0 m |
| 051787 / AK-1394-504 | 5,0 m |



Power

Audio

Video



FireWire IEEE 1394A connection cable

1394A 4-pin plug <=> 1394A 4-pin plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL20276 and IEEE 1394A compatible
- The maximum data transfer rate is 400 Mbps
- Color: black


| | |
|-----------------------|-------|
| 078098 / AK-1394-1044 | 1,0 m |
| 051732 / AK-1394-1844 | 1,8 m |
| 051763 / AK-1394-3044 | 3,0 m |
| 051794 / AK-1394-5044 | 5,0 m |



Telephone

TV/SAT

Raw Cables

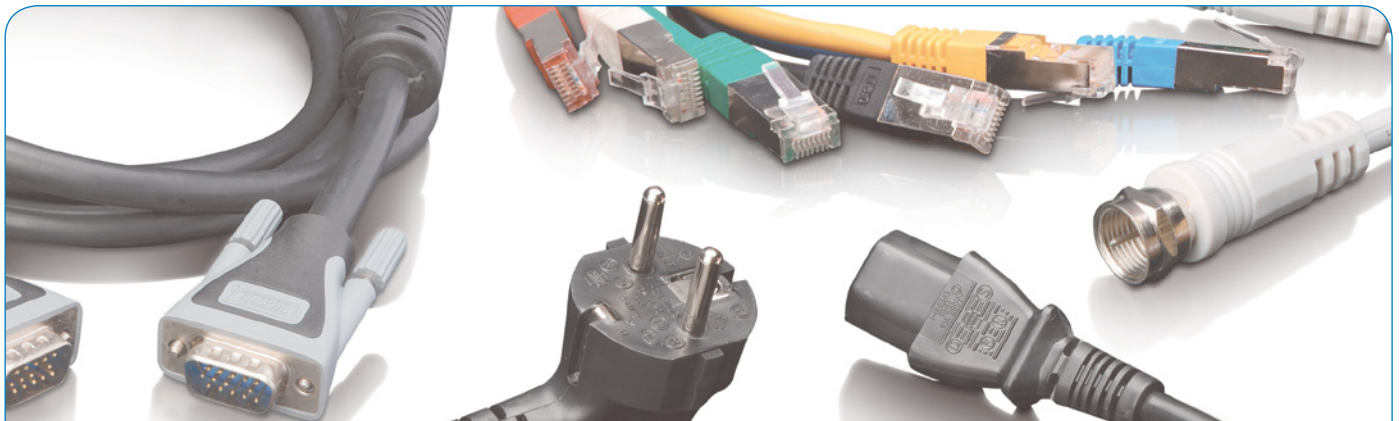

ASSMANN - The World of Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices

FireWire 800 IEEE 1394B connection cable

1394B 9-pin plug <=> 1394B 9-pin plug

- Molded housing
- 6-wire cable, double shielded, AWG22/25
- UL20276 and IEEE 1394B compatible
- The maximum data transfer rate is 800 Mbps
- Color: black

| | |
|----------------------|-------|
| 142164 / AK-1394B-10 | 1,0 m |
| 142171 / AK-1394B-18 | 1,8 m |
| 142188 / AK-1394B-30 | 3,0 m |
| 142195 / AK-1394B-50 | 5,0 m |




FireWire 800 IEEE 1394B connection cable

1394B 9-pin plug <=> 1394B 4-pin plug

- Molded housing
- 4-wire cable, double shielded, AWG26/30
- UL20276 and IEEE 1394B compatible
- The maximum data transfer rate is 800 Mbps
- Color: black

| | |
|-----------------------|-------|
| 142249 / AK-1394B-104 | 1,0 m |
| 142256 / AK-1394B-184 | 1,8 m |
| 142263 / AK-1394B-304 | 3,0 m |
| 142270 / AK-1394B-504 | 5,0 m |

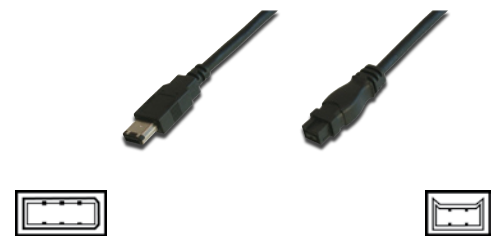

Firewire 800 IEEE 1394B connection cable

1394B 9-pin plug <=> 1394B 6-pin plug

- Molded housing
- 6-wire cable, double shielded, AWG26/30
- UL20276 and IEEE 1394B compatible
- The maximum data transfer rate is 800 Mbps
- Color: black

| | |
|-----------------------|-------|
| 142201 / AK-1394B-106 | 1,0 m |
| 142218 / AK-1394B-186 | 1,8 m |
| 142225 / AK-1394B-306 | 3,0 m |
| 142232 / AK-1394B-506 | 5,0 m |



DIGITUS® Blister FireWire IEEE 1394A connection cable, premium



1394A 6-pin plug <=> 1394A 6-pin plug

- Molded housing
- 6-wire cable, double shielded, AWG22/28
- UL20276 and IEEE 1394A compatible
- The maximum data transfer rate is 400 Mbps
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,0m | 236887 / DB-230526 | 230526 / DK-115001 |
| 1,8m | 236894 / DB-230533 | 230533 / DK-115002 |
| 3,0m | 236900 / DB-230540 | 230540 / DK-115003 |
| 5,0m | 236917 / DB-230557 | 230557 / DK-115004 |



DIGITUS® Blister FireWire IEEE 1394A connection cable, premium



1394A 4-pin plug <=> 1394A 6-pin plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL20276 and IEEE 1394A compatible
- The maximum data transfer rate is 400 Mbps
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,0m | 236924 / DB-230564 | 230564 / DK-115005 |
| 1,8m | 236931 / DB-230571 | 230571 / DK-115006 |
| 3,0m | 236948 / DB-230588 | 230588 / DK-115007 |
| 5,0m | 236955 / DB-230595 | 230595 / DK-115008 |



DIGITUS® Blister FireWire IEEE 1394A connection cable, premium



1394A 4-pin plug <=> 1394A 4-pin plug

- Molded housing
- 4-wire cable, double shielded, AWG28
- UL20276 and IEEE 1394A compatible
- The maximum data transfer rate is 400 Mbps
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,0m | 236962 / DB-230601 | 230601 / DK-115009 |
| 1,8m | 236979 / DB-230618 | 230618 / DK-115010 |
| 3,0m | 236986 / DB-230625 | 230625 / DK-115011 |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices



SATA connection cable

- Compatible with Serial ATA standard
- Suitable for data transfer up to 300 MB/s
- 7-wire cable, UL21149
- 4 x Data wires, 3 x earthing wires

152712 / AK-SATA-030 0,30 m

121121 / AK-SATA-050 0,50 m

121695 / AK-SATA-075 0,75 m

121138 / AK-SATA-100 1,00 m




SATA connection cable with left angled connector

- Compatible with Serial ATA standard
- Suitable for data transfer up to 300 MB/s
- 7-wire cable, UL21149
- 4 x Data wires, 3 x earthing wires
- Male connector 90° angled

154242 / AK-SATA-030DL 0,30 m

153191 / AK-SATA-050DL 0,50 m

153214 / AK-SATA-075DL 0,75 m



SATA connection cable with metal latch

- Compatible with Serial ATA standard
- Suitable for data transfer up to 300 MB/s
- 7-wire cable, UL21149
- 4 x Data wires, 3 x earthing wires
- Provides a safe connection between Harddisk and Mainboard

183020 / AK-SATA-030-L 0,30 m

183037 / AK-SATA-050-L 0,50 m

183044 / AK-SATA-075-L 0,75 m

187592 / AK-SATA-100-L 1,0 m

SATA connection cables with power connector

- Compatible with Serial ATA standard
- Suitable for data transfer rates up to 300 MB/s
- 7-wire cable, UL21149
- 4 x data wires, 3 x earthing wires
- 4-wire cable, 4 power supply / jack (12V, GND, 5V, GND)
- 22-pin SATA plug - 7-pin SATA plug a. 4-pin power supply plug

| | |
|-------------------------|--------|
| 154266 / AK-SATA-SP-050 | 0,50 m |
| 154273 / AK-SATA-SP-075 | 0,75 m |
| 154280 / AK-SATA-SP-100 | 1,00 m |




SATA Slim Line connection cables with power connector

This cable serves the connection of a SATA hard disk with a Motherboard (e.g., Intel of Atom-Board) and the power supply.

- Compatible with Serial ATA standard
- Suitable for data transfer rates up to 300 MB/s
- 7-wire cable, UL2725
- 4 x data wires, 3 x earthing wires
- 2-wire cable, UL1007, power supply and ground
- 13-pin SATA Slim Line plug - 7-pin SATA plug + 4-pin power supply plug

| | |
|--------------------|--------|
| 257295 / AK-125001 | 0,50 m |
|--------------------|--------|

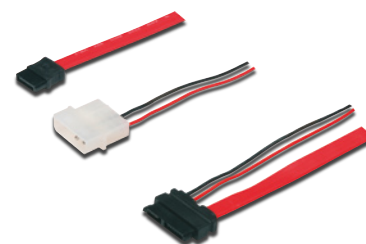

DIGITUS® Blister SATA power supply cable

- 15-pin SATA jack for power supply
- 4-pin ATX jack for power supply
- In blisterpackage



| | |
|--------------------|--------|
| 131939 / DB-129653 | 0,15 m |
|--------------------|--------|

SATA power supply cable

- 15-pin SATA jack for power supply
- 4-pin ATX jack for power supply




| | |
|-------------------------|--------|
| 129653 / AK-SATA-PC 015 | 0,15 m |
|-------------------------|--------|

Slot bracket with SATA connector

- Compliant with Serial ATA Standard
- Support for data transfer rate up to 300 MB/s
- 7-wired cabel, UL21149
- 4 x Data, 3 x Ground
- Cable length 0,50m

| |
|-----------------------------------|
| 180197 / AK-SATA-SB1 1 SATA Port |
| 180203 / AK-SATA-SB2 2 SATA Ports |



External eSATA connection cable

The cable provides a safe connection between PC and HDD-enclosure.

eSATA plug <=> eSATA plug

- Compatible with Serial ATA standard
- Molded housing
- 7-wire cable, double shielded, AWG26
- 4x Data wires, 3x earthing wires
- UL2725
- Suitable for data transfer up to 300 MB/s
- Color: black

| | |
|-----------------------|--------|
| 193821 / AK-ESATA-075 | 0,75 m |
| 193838 / AK-ESATA-100 | 1,00 m |
| 193845 / AK-ESATA-150 | 1,50 m |



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices

External eSATA adapter cable



The cable provides a safe connection between PC and HDD-enclosure.

eSATA plug (I-type) <=> SATA plug (L-type)

- Compatible with Serial ATA standard
- Molded housing
- 7-wire cable, double shielded, AWG26
- 4x Data wires, 3x earthing wires
- UL2725
- Suitable for data transfer up to 300 MB/s
- Color: black

193852 / AK-ESATA-SATA100 1,0 m

193869 / AK-ESATA-SATA150 1,5 m



DIGITUS® Blister external eSATA connection cable, premium



eSATA plug <=> eSATA plug

- Compatible with Serial ATA standard
- Molded housing
- 7-wire cable, double shielded, AWG26
- 4x Data wires, 3x earthing wires
- UL2725
- Suitable for data transfer up to 300 MB/s
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|-------|--------------------|--------------------|
| 0,75m | 237044 / DB-230632 | 230632 / DK-126001 |
| 1,00m | 237051 / DB-230649 | 230649 / DK-126002 |
| 1,50m | 237068 / DB-230656 | 230656 / DK-126003 |



DIGITUS® Blister external eSATA adapter cable, premium



eSATA plug <=> SATA plug

- Compatible with Serial ATA standard
- Molded housing
- 7-wire cable, double shielded, AWG26
- 4x Data wires, 3x earthing wires
- UL2725
- Suitable for data transfer up to 300 MB/s
- Plug color: black/grey
- Cable color: black
- In blisterpackage

| | DIGITUS® Blister | DIGITUS® Polybag |
|------|--------------------|--------------------|
| 1,0m | 237075 / DB-230663 | 230663 / DK-126004 |
| 2,0m | 241713 / DB-230670 | 230670 / DK-126005 |



DIGITUS® Blister slot bracket with eSATA connector



- Compliant with Serial ATA Standard
- Support for data transfer rate up to 300 MB/s
- 7-wired cabel, UL21149
- 4 x Data, 3 x Ground
- Cable length 0,50m
- In blisterpackage

197218 / DB-193807 1 eSATA Port

197225 / DB-193814 2 eSATA Ports



Slot bracket with eSATA connector

- Compliant with Serial ATA Standard
- Support for data transfer rate up to 300 MB/s
- 7-wired cabel, UL21149
- 4 x Data, 3 x Ground
- Cable length 0,50m

193807 / AK-ESATA-SB1 Slotblech 1 SATA Port

193814 / AK-ESATA-SB2 Slotblech 2 SATA Ports

SAS - SATA connection cable



This cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) controller.

SAS 32-pin plug (SFF-8484) - 4x SATA 7-pin plug

- Molded housing
- SATA plugs with metal latch
- Color: red



258476 / DK-127005 0,50m

SAS - SATA connection cable

This cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) controller.

SAS 32-pin plug (SFF-8484) - 4x SATA 7-pin plug

- Molded housing
- SATA plugs with metal latch
- Color: red



205142 / AK-SAS-01 0,50 m

SAS - SATA connection cable



This internal cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) controller.

SAS 32-pin plug (SFF-8484) - 4x SATA 7-pin plug + 6-pin LED jack

- Molded housing
- SATA plugs with metal latch
- LED power connection cable for drive cage LEDs (2 x 3-pin female header)
- Color: red



258520 / DK-127007 1,0 m

258483 / DK-127006 0,50m

SAS - SATA connection cable

This internal cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) controller.

SAS 32-pin plug (SFF-8484) - 4x SATA 7-pin plug + 6-pin LED jack

- Molded housing
- SATA plugs with metal latch
- LED power connection cable for drive cage LEDs (2 x 3-pin female header)
- Color: red



205159 / AK-SAS-02 1,0 m

SAS connection cable



This internal cable connects SAS (Serial Attached SCSI) devices to a SAS controller.

SAS 29-pin plug (SFF-8482) - SAS 29-pin plug (SFF-8482)

- Molded housing
- Color: red



258438 / DK-127001 0,50m

SAS - SATA connection cable



SAS 29-pin plug (SFF-8484) - 2x SATA 7-pin plug + 5,25" power plug

- Molded housing
- Color: red



258445 / DK-127002 0,50m

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Test devices



SAS connection cable

This internal cable connects SAS (Serial Attached SCSI) devices.

SAS 32-pin plug (SFF-8484) - SAS 32-pin plug (SFF-8484)

- Molded housing
- Color: red



258452 / DK-127003 0,50m

Computer



SAS connection cable

This internal cable connects four SAS (Serial Attached SCSI) devices to a SAS controller.

SAS 32-pin plug (SFF-8484) - 4x SAS 29-pin plug + 5,25" power plug

- Molded housing
- Color: red



258469 / DK-127004 0,50m

Power

Audio



SAS connection cable

This internal cable connects SAS (Serial Attached SCSI) devices.

Mini SAS 36-pin plug (SFF-8087) - Mini SAS 36-pin plug (SFF-8087)

- Molded housing
- SFF-8087 plugs with metal latch
- Color: red with meshwork tupe



258551 / DK-127008 0,50m

Video

Telephone



SAS connection cable

This internal cable connects (Serial Attached SCSI) devices.

Mini SAS 36-pin plug (SFF-8087) - SAS 32-pin plug (SFF-8484)

- Molded housing
- SFF-8087 plug with metal latch
- Color: red with meshwork tupe



258575 / DK-127009 0,50m

TV/SAT

Raw Cables



SAS - SATA connection cable

This internal cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) device.

Mini SAS 36-pin plug (SFF-8087) - 4x SATA 7-pin plug


- Molded housing
- SFF-8087 plug with metal latch
- Color: red



258582 / DK-127010 0,50m

Connectors + Adapters

Wall Plates

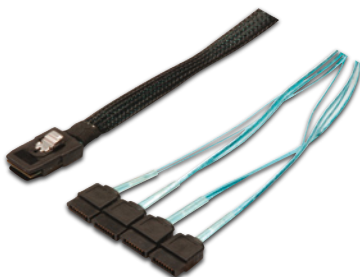

SAS - SATA connection cable

This internal cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) device.

Mini SAS 36-pin plug (SFF-8087) - 4x SATA 7-pin plug

- Molded housing
- All plugs with metal latch
- Color: transparent/blue with meshwork tupe



258599 / DK-127011 0,50m

Accessories + Testdevices

SAS connection cable

This internal cable connects SAS (Serial Attached SCSI) devices.

Mini SAS 36-pin plug (SFF-8087) - SAS 29-pin plug (SFF-8482) + 4x 5,25" power plug

- Moulded housing
- SFF-8087 plug with metal latch
- Color: black



258605 / DK-127012 0,50m in DIGITUS® Professional Polybag

SAS connection cable

This external Infiniband cable connects SAS (Serial Attached SCSI) devices.

SAS Infiniband plug (SFF-8470) - SAS Infiniband plug (SFF-8470)

- Metal housing
- Color: black



258612 / DK-127013 1,0 m

SAS connection cable

This external cable connects SAS (Serial Attached SCSI) devices.

Mini SAS 26-pin plug (SFF-8088) - Mini SAS 26-pin plug (SFF-8088)

- Metal housing
- Color: black




258629 / DK-127014 1,0 m

SAS connection cable

This external cable connects SAS (Serial Attached SCSI) devices.

SAS Infiniband plug (SFF-8470) - Mini SAS 26-pin plug (SFF-8088)

- Metal housing
- Color: black



258636 / DK-127015 1,0 m

SAS connection cable

This external cable connects SAS (Serial Attached SCSI) devices.

Mini SAS 26-pin plug (SFF-8088) - Mini SAS 36-pin plug (SFF-8087)

- SFF-8088 plug metal housing
- SFF-8087 plug molded housing
- Color: transparent/blue



258643 / DK-127016 1,0 m

SAS - eSATA connection cable

This external cable connects four Serial ATA devices to a SAS (Serial Attached SCSI) device.

Mini SAS 26-pin plug (SFF-8088) - 4x eSATA 7-pin plug

- eSATA plugs with molded housing
- SFF-8088 plug with metal housing
- Color: transparent/blue



258650 / DK-127017 1,0 m




USB mainboard adapter on slot bracket

AK 674 = 2 x USB-A female <=> 2 x 5-pin socket conn., 2.54 mm
 AK 674-2/4 = 2 x USB-A female <=> 2 x 4-pin socket conn., 2.54 mm
 AK 674-8 = 2 x USB-A female <=> 1 x 8-pin socket conn., 2.54 mm
 AK 674-2/10 = 4 x USB-A female <=> 2 x 10-pin socket conn., (2 x 5-pin each) 2.54 mm

- 4/5-wire cable, double shielded, AWG28
- USB 2.0 compatible

| | |
|----------------------|--------|
| 064527 / AK 674 0.3M | 0,25 m |
| 086345 / AK 674-2/4 | 0,25 m |
| 050865 / AK 674-8 | 0,25 m |
| 124252 / AK 674-2/10 | 0,25 m |



Computer



DIGITUS® Blister Slot bracket with SATA connector

- Compliant with Serial ATA Standard
- Support for data transfer rate up to 300 MB/s
- 7-wired cabel, UL21149
- 4 x Data, 3 x Ground
- Cable length 0,50m
- In blisterpackage



| | |
|--------------------|--------------|
| 206651 / DB-180197 | 1 SATA Port |
| 206682 / DB-180203 | 2 SATA Ports |

Power

Audio



Slot bracket with SATA connector

- Compliant with Serial ATA Standard
- Support for data transfer rate up to 300 MB/s
- 7-wired cabel, UL21149
- 4 x Data, 3 x Ground
- Cable length 0,50m

| | |
|----------------------|--------------|
| 180197 / AK-SATA-SB1 | 1 SATA Port |
| 180203 / AK-SATA-SB2 | 2 SATA Ports |

Video

Telephone



DIGITUS® Blister Slot bracket with eSATA connector

- Compliant with Serial ATA Standard
- Support for data transfer rate up to 300 MB/s
- 7-wired cabel, UL21149
- 4 x Data, 3 x Ground
- Cable length 0,50m
- In blisterpackage



| | |
|--------------------|---------------|
| 197218 / DB-193807 | 1 eSATA Port |
| 197225 / DB-193814 | 2 eSATA Ports |

TV/SAT

Raw Cables




Slot bracket with eSATA connector

- Compliant with Serial ATA Standard
- Support for data transfer rate up to 300 MB/s
- 7-wired cabel, UL21149
- 4 x Data, 3 x Ground
- Cable length 0,50m

| | |
|-----------------------|--------------|
| 193807 / AK-ESATA-SB1 | 1 SATA Port |
| 193814 / AK-ESATA-SB2 | 2 SATA Ports |

Connectors + Adapters

Wall Plates



Parallel connection cable, internal / external on slot bracket

AK 331: D-Sub25-pin jack <=> socket connector 26-pin AWG28, UL2651
 AK 575:D-Sub 9-pin jack <=> socket connector 10-pin AWG28, UL2651

| | |
|-----------------------|--------|
| 063186 / AK 331 | 0,25 m |
| 076100 / AK 575 0,25M | 0,25 m |

Accessories + Testdevices

ATA Hard Drive connection cable, round cable design

- 80-wire cable in plastic sheath, AWG 30
- Jacket and hoods in grey, material PVC
- 40-pin IDC in various colors (blue = controller, black = master, grey = slave)



092919 / AK-ATA-100/ROUND-LC 0,60 m

ATA 133 Hard Drive connection cable, round cable design

- 80-wire cable, twisted pair, AWG 30 (TPE), UL 20297
- Booths in black, sheath transparent, material PVC, foil and braid shielding
- 40-pin IDC in various colors, (blue = controller, black = master, grey = slave)
- Seperate Earthwire with terminal
- IDC connector with pulling support



106234 / AK-ATA133-1ROUND 0,45 m

106241 / AK-ATA133-2ROUND 0,60 m

106258 / AK-ATA133-3ROUND 0,90 m

DIGITUS® Hard Drive connector cable for 2 x IDE / AT bus hard drives

- 3 x 40-pin, socket connector
- 40-wire ribbon cable, AWG28,
- 2.54 mm pitch, UL2651
- In blisterpackage




074298 / DB-064084 0,50 m

074182 / DB-063193 0,70 m

Hard drive connector cable for 2 x IDE / AT bus hard drives

- 3 x 40-pin, socket connector
- 40-wire ribbon cable, AWG28,
- 2.54 mm pitch, UL2651

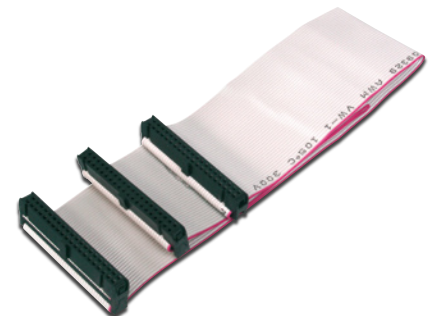

064084 / AK 5430 0,50 m

063193 / AK 336 0,70 m

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates


Accessories + Testdevices



DIGITUS® Blister Ultra ATA Hard Drive connection cable 100 Mbps

- For Ultra DMA, Ultra DMA 2 and Ultra ATA hard drives up to 100 Mbps
- 80-wire ribbon cable, AWG30, 0.635 mm pitch, UL2678, three differently colored 40-pin socket connectors (blue= controller, black= master, grey= slave)
- In blisterpackage


| | |
|--------------------|--------|
| 082248 / DB-079163 | 0,46 m |
| 082255 / DB-079156 | 0,60 m |

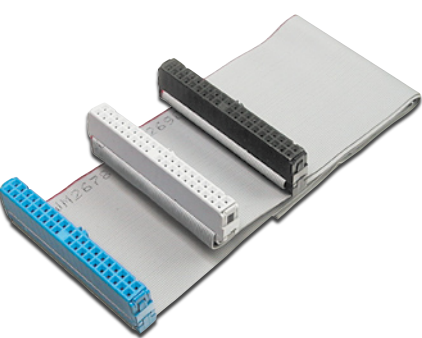

Ultra ATA Hard Drive connection cable 100 Mbps

- For Ultra DMA, Ultra DMA 2 and Ultra ATA hard drives up to 100 Mbps.
- 80-wire ribbon cable, AWG30, 0.635 mm pitch, UL2678
- Three differently colored 40-pin socket connectors (blue= controller, black= master, grey= slave).

| | |
|-----------------------|--------|
| 079163 / AK-ATA-100 | 0,46 m |
| 079156 / AK-ATA-100/1 | 0,60 m |

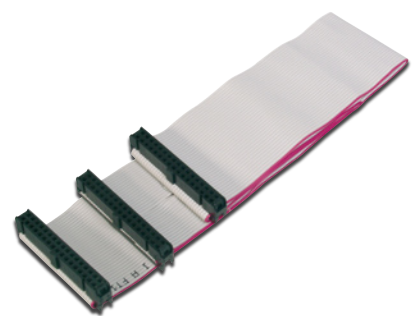

3.5" Floppy connection cable for 2 x 3.5" FDD

- 3 x 34-pin, socket connector (3.5")
- 34-wire ribbon cable, AWG28,
- 2.54 mm pitch, UL2651

| | |
|------------------------|--------|
| 078043 / AK 3620-050 | 0,50 m |
| 063438 / AK 3620 0,75M | 0,75 m |



Ribbon cable AWG28, 1.27 mm pitch

- Color grey with red marked ID line
- 30.5 meter roll
- AK AWG68 = 0,638 mm pitch

| | |
|-------------------|----------|
| 051220 / AK AWG20 | 20-adrig |
| 051251 / AK AWG26 | 26-adrig |
| 051268 / AK AWG34 | 34-adrig |
| 051275 / AK AWG40 | 40-adrig |
| 051299 / AK AWG50 | 50-adrig |

SCSI 2 <=> SCSI 2 cables, UL 2990

- D-Sub 50-pin, HP, plug <=> D-Sub 50-pin, HP, plug
- clip clip
 - UL 2990, twisted pair, double shielding, 50-wire,
 - Molded housing



| | |
|-----------------|-------|
| 064237 / AK 578 | 0,9 m |
| 064244 / AK 579 | 3,0 m |



SCSI 2 <=> SCSI 2 cable, UL 2919

- D-Sub 50-pin, HP, plug <=> D-Sub 50-pin, HP, plug
- clip clip
 - UL 2919, twisted pair, triple shielding, 50-wire, molded housing.



| | |
|---------------------|-------|
| 064268 / AK 579/F-2 | 2,0 m |
|---------------------|-------|



SCSI 3 <=> SCSI 3 cables, UL 2919

- D-Sub 68-pin, HP, plug <=> D-Sub 68-pin, HP, plug
- screw screw
 - UL 2919, twisted pair, triple shielding, 68-wire,
 - Molded hoods



| | |
|----------------------|--------|
| 064336 / AK 5800/F-1 | 0,90 m |
| 064343 / AK 5800/F-2 | 2,00 m |



SCSI 1 <-> SCSI 2 cable, UL 2990

- CENTRONIC 50-pin, SP, plug <=> D-Sub 50-pin, HP, plug
- clamp clip
 - UL 2990, twisted pair, double shielding, 50-wire,
 - Molded housing



| | |
|--------------------|-------|
| 064107 / AK 545 2M | 2,0 m |
|--------------------|-------|



Very High Density SCSI cable, UL 20276

- D-Sub 68-pin, HP, plug <=> CENTRONIC 68-pin, VHD, plug
- screw pitch 0.88 mm, screw
 - UL 20276, twisted pair, double shielding, 68-wire,
 - Molded housing



| | |
|-----------------------|-------|
| 082095 / AK 660 0.90M | 0,9 m |
|-----------------------|-------|



SCSI 1 <=> SCSI 2 cables, UL 2990

- D-Sub 25, SP, plug <=> D-Sub 50, HP, plug
- screw clip
 - UL 2990, twisted pair, double shielding, 25-wire,
 - Molded hoods, for ZIP drives



| | |
|----------------------|-------|
| 063766 / AK 438-1NEW | 0,9 m |
|----------------------|-------|



Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates


Accessories + Test devices

Fiber Optic Duplex Patchcables

ST / ST Fiber-optic patch cable, duplex



- ST / ST Connectors
- Halogen free cable I-VH 2G-XXX (Multimode), I-VH 2E-XXX (Singlemode)
- OM3 up to 10Gbit Ethernet, OM1 & 2 1Gbit Ethernet
- Connector with ceramic ferrule
- Two color Boot (Multimode cable)
- Single packed, with test report

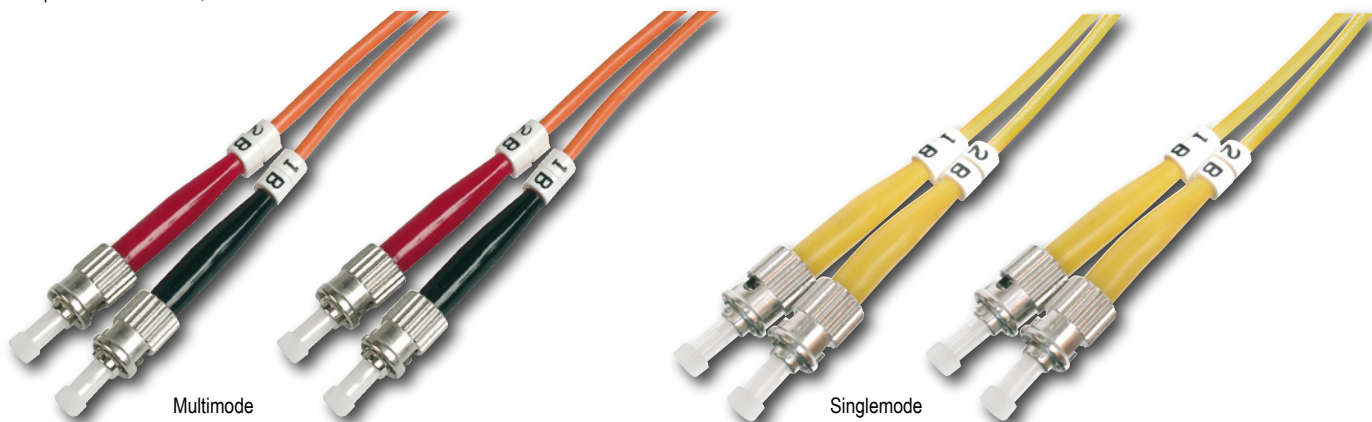

Multimode

Singlemode


Please choose your requested product by the corresponding article number or the EAN code.

| | Multimode OM2 - 50/125 μ | Multimode OM1 - 62,5/125 μ | Multimode OM3 - 50/125 μ | Singlemode - 9/125 μ |
|--------|------------------------------|--------------------------------|------------------------------|----------------------------|
| 1,0 m | 247999 / DK-2511-01 | 1,0 m 248194 / DK-2611-01 | 1,0 m 248279 / DK-2511-01/3 | 1,0 m 248330 / DK-2911-01 |
| 2,0 m | 248033 / DK-2511-02 | 2,0 m 248217 / DK-2611-02 | 2,0 m 248286 / DK-2511-02/3 | 2,0 m 248347 / DK-2911-02 |
| 3,0 m | 248064 / DK-2511-03 | 3,0 m 248224 / DK-2611-03 | 3,0 m 248293 / DK-2511-03/3 | 3,0 m 248354 / DK-2911-03 |
| 5,0 m | 248118 / DK-2511-05 | 5,0 m 248231 / DK-2611-05 | 5,0 m 248309 / DK-2511-05/3 | 5,0 m 248361 / DK-2911-05 |
| 7,0 m | 248101 / DK-2511-07 | 7,0 m 248255 / DK-2611-07 | 7,0 m 248316 / DK-2511-07/3 | 7,0 m 248378 / DK-2911-07 |
| 10,0 m | 248095 / DK-2511-10 | 10,0 m 248262 / DK-2611-10 | 10,0 m 248323 / DK-2511-10/3 | 10,0 m 248385 / DK-2911-10 |

SC / SC Fiber-optic patch cable, duplex



- SC / SC Connector
- Halogen free cable I-VH 2G-XXX (Multimode), I-VH 2E-XXX (Singlemode)
- OM3 up to 10Gbit Ethernet, OM1 & 2 1Gbit Ethernet
- Connector with ceramic ferrule
- Two color Boot (Multimode)
- Single packed, with test report

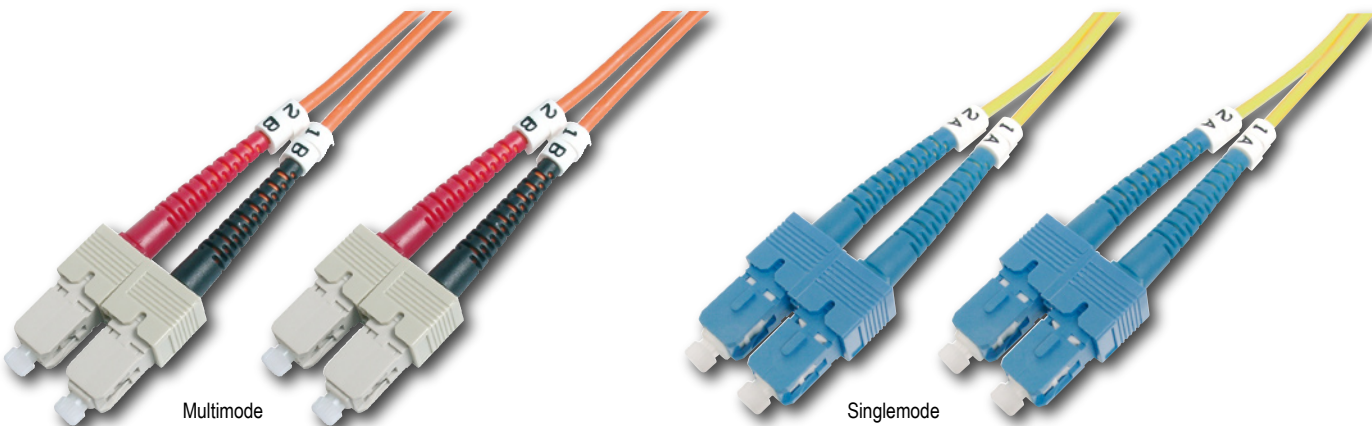

Multimode

Singlemode

Please choose your requested product by the corresponding article number or the EAN code.


| | Multimode OM2 - 50/125 μ | Multimode OM1 - 62,5/125 μ | Multimode OM3 - 50/125 μ | Singlemode - 9/125 μ |
|--------|------------------------------|--------------------------------|------------------------------|----------------------------|
| 1,0 m | 248392 / DK-2522-01 | 1,0 m 248460 / DK-2622-01 | 1,0 m 248538 / DK-2522-01/3 | 1,0 m 248736 / DK-2922-01 |
| 2,0 m | 248408 / DK-2522-02 | 2,0 m 248477 / DK-2622-02 | 2,0 m 248545 / DK-2522-02/3 | 2,0 m 248743 / DK-2922-02 |
| 3,0 m | 248415 / DK-2522-03 | 3,0 m 248491 / DK-2622-03 | 3,0 m 248552 / DK-2522-03/3 | 3,0 m 248750 / DK-2922-03 |
| 5,0 m | 248422 / DK-2522-05 | 5,0 m 248507 / DK-2622-05 | 5,0 m 248569 / DK-2522-05/3 | 5,0 m 248767 / DK-2922-05 |
| 7,0 m | 248446 / DK-2522-07 | 7,0 m 248514 / DK-2622-07 | 7,0 m 248576 / DK-2522-07/3 | 7,0 m 248774 / DK-2922-07 |
| 10,0 m | 248453 / DK-2522-10 | 10,0 m 248521 / DK-2622-10 | 10,0 m 248729 / DK-2522-10/3 | 10,0 m 248781 / DK-2922-10 |

LC / LC

Fiber-optic patch cable, duplex



- LC / LC Connector
- Halogen free cable I-VH 2G-XXX (Multimode), I-VH 2E-XXX (Singlemode)
- OM3 up to 10Gbit Ethernet, OM1 & 2 1Gbit Ethernet
- Connector with ceramic ferrule
- Single packed, with test report

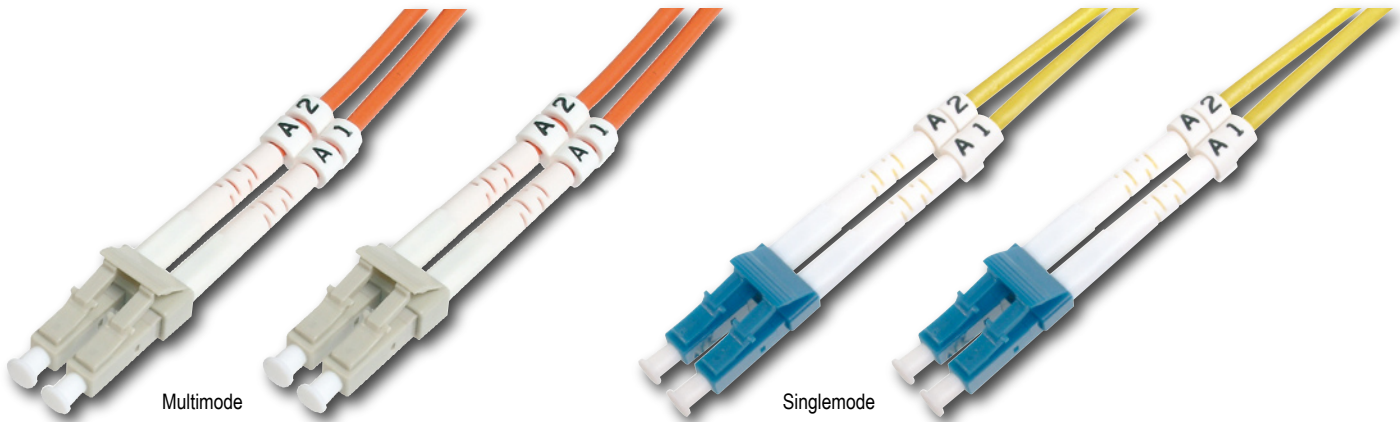

Multimode

Singlemode

Please choose your requested product by the corresponding article number or the EAN code.


| | Multimode OM2 - 50/125 μ | Multimode OM1 - 62,5/125 μ | Multimode OM3 - 50/125 μ | Singlemode - 9/125 μ |
|--------|------------------------------|--------------------------------|------------------------------|----------------------------|
| 1,0 m | 249030 / DK-2533-01 | 1,0 m 248798 / DK-2633-01 | 1,0 m 248859 / DK-2533-01/3 | 1,0 m 248910 / DK-2933-01 |
| 2,0 m | 249054 / DK-2533-02 | 2,0 m 248804 / DK-2633-02 | 2,0 m 248866 / DK-2533-02/3 | 2,0 m 248927 / DK-2933-02 |
| 3,0 m | 249047 / DK-2533-03 | 3,0 m 248811 / DK-2633-03 | 3,0 m 248873 / DK-2533-03/3 | 3,0 m 248934 / DK-2933-03 |
| 5,0 m | 249061 / DK-2533-05 | 5,0 m 248828 / DK-2633-05 | 5,0 m 248880 / DK-2533-05/3 | 5,0 m 248941 / DK-2933-05 |
| 7,0 m | 249078 / DK-2533-07 | 7,0 m 248835 / DK-2633-07 | 7,0 m 248897 / DK-2533-07/3 | 7,0 m 248958 / DK-2933-07 |
| 10,0 m | 249085 / DK-2533-10 | 10,0 m 248842 / DK-2633-10 | 10,0 m 248903 / DK-2533-10/3 | 10,0 m 248965 / DK-2933-10 |

ST / SC

Fiber-optic patch cable, duplex



- ST / SC Connector
- Halogen free cable I-VH 2G-XXX (Multimode), I-VH 2E-XXX (Singlemode)
- OM3 up to 10Gbit Ethernet, OM1 & 2 1Gbit Ethernet
- Connector with ceramic ferrule
- Two color Boot
- Single packed, with test report

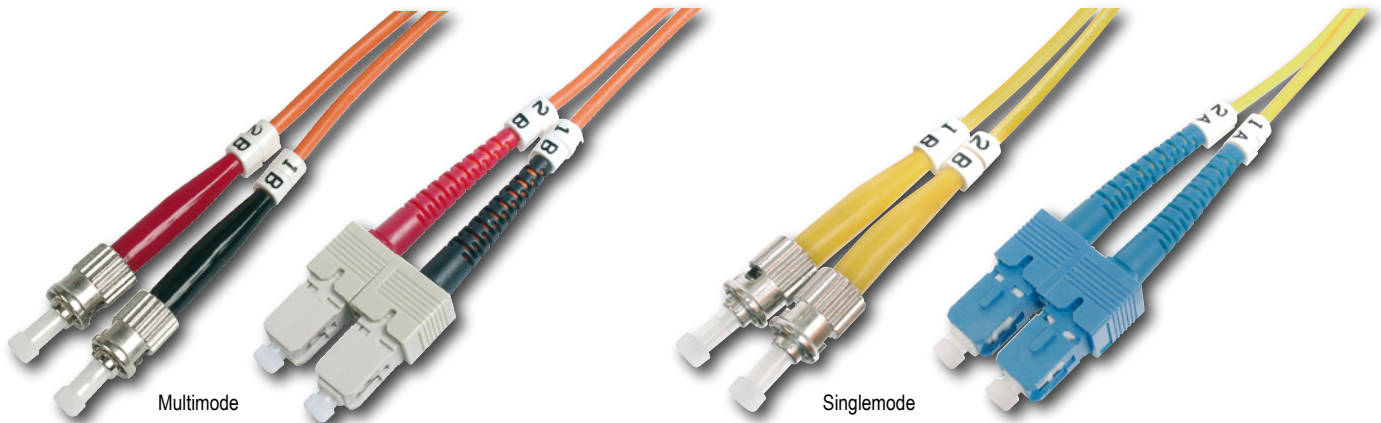

Multimode

Singlemode

Please choose your requested product by the corresponding article number or the EAN code.

| | Multimode OM2 - 50/125 μ | Multimode OM1 - 62,5/125 μ | Multimode OM3 - 50/125 μ | Singlemode - 9/125 μ |
|--------|------------------------------|--------------------------------|------------------------------|----------------------------|
| 1,0 m | 248606 / DK-2512-01 | 1,0 m 248668 / DK-2612-01 | 1,0 m 248972 / DK-2512-01/3 | 1,0 m 249092 / DK-2912-01 |
| 2,0 m | 248613 / DK-2512-02 | 2,0 m 248675 / DK-2612-02 | 2,0 m 248989 / DK-2512-02/3 | 2,0 m 249108 / DK-2912-02 |
| 3,0 m | 248620 / DK-2512-03 | 3,0 m 248682 / DK-2612-03 | 3,0 m 248996 / DK-2512-03/3 | 3,0 m 249115 / DK-2912-03 |
| 5,0 m | 248637 / DK-2512-05 | 5,0 m 248699 / DK-2612-05 | 5,0 m 249009 / DK-2512-05/3 | 5,0 m 249122 / DK-2912-05 |
| 7,0 m | 248644 / DK-2512-07 | 7,0 m 248705 / DK-2612-07 | 7,0 m 249016 / DK-2512-07/3 | 7,0 m 249139 / DK-2912-07 |
| 10,0 m | 248651 / DK-2512-10 | 10,0 m 248712 / DK-2612-10 | 10,0 m 249023 / DK-2512-10/3 | 10,0 m 249146 / DK-2912-10 |


Fiber Optic Duplex Patchcables

LC / ST

Fiber-optic patch cable, duplex



- LC / ST connector
- Halogen free cable I-VH 2G-XXX (Multimode), I-VH 2E-XXX (Singlemode)
- OM3 up to 10Gbit Ethernet, OM1 & 2 1Gbit Ethernet
- Connector with ceramic ferrule
- Two color Boot
- Single packed, with test report

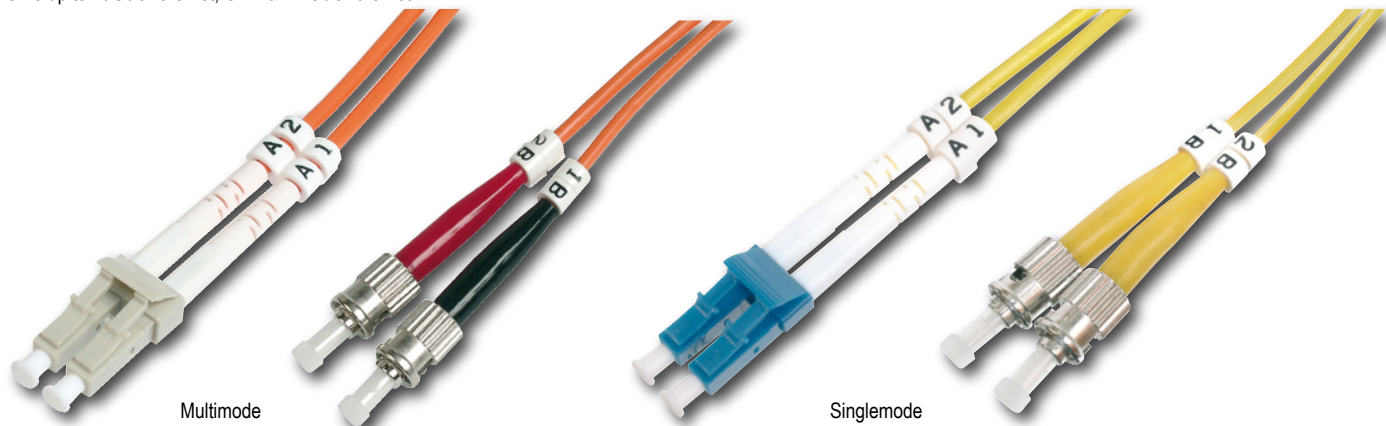

Multimode

Singlemode

Please choose your requested product by the corresponding article number or the EAN code.


| | Multimode OM2 - 50/125 μ | Multimode OM1 - 62,5/125 μ | Multimode OM3 - 50/125 μ | Singlemode - 9/125 μ |
|--------|--------------------------|----------------------------|------------------------------|----------------------------|
| 1,0 m | 249153 / DK-2531-01 | 1,0 m 249214 / DK-2631-01 | 1,0 m 249276 / DK-2531-01/3 | 1,0 m 249337 / DK-2931-01 |
| 2,0 m | 249160 / DK-2531-02 | 2,0 m 249221 / DK-2631-02 | 2,0 m 249283 / DK-2531-02/3 | 2,0 m 249344 / DK-2931-02 |
| 3,0 m | 249177 / DK-2531-03 | 3,0 m 249238 / DK-2631-03 | 3,0 m 249290 / DK-2531-03/3 | 3,0 m 249351 / DK-2931-03 |
| 5,0 m | 249184 / DK-2531-05 | 5,0 m 249245 / DK-2631-05 | 5,0 m 249306 / DK-2531-05/3 | 5,0 m 249368 / DK-2931-05 |
| 7,0 m | 249191 / DK-2531-07 | 7,0 m 249252 / DK-2631-07 | 7,0 m 249313 / DK-2531-07/3 | 7,0 m 249375 / DK-2931-07 |
| 10,0 m | 249207 / DK-2531-10 | 10,0 m 249269 / DK-2631-10 | 10,0 m 249320 / DK-2531-10/3 | 10,0 m 249382 / DK-2931-10 |

LC / SC

Fiber-optic patch cable, duplex



- LC / SC Connector
- Halogen free cable I-VH 2G-XXX (Multimode), I-VH 2E-XXX (Singlemode)
- OM3 up to 10Gbit Ethernet, OM1 & 2 1Gbit Ethernet
- Connector with ceramic ferrule
- Two color Boot (Multimode cable)
- Single packed, with test report

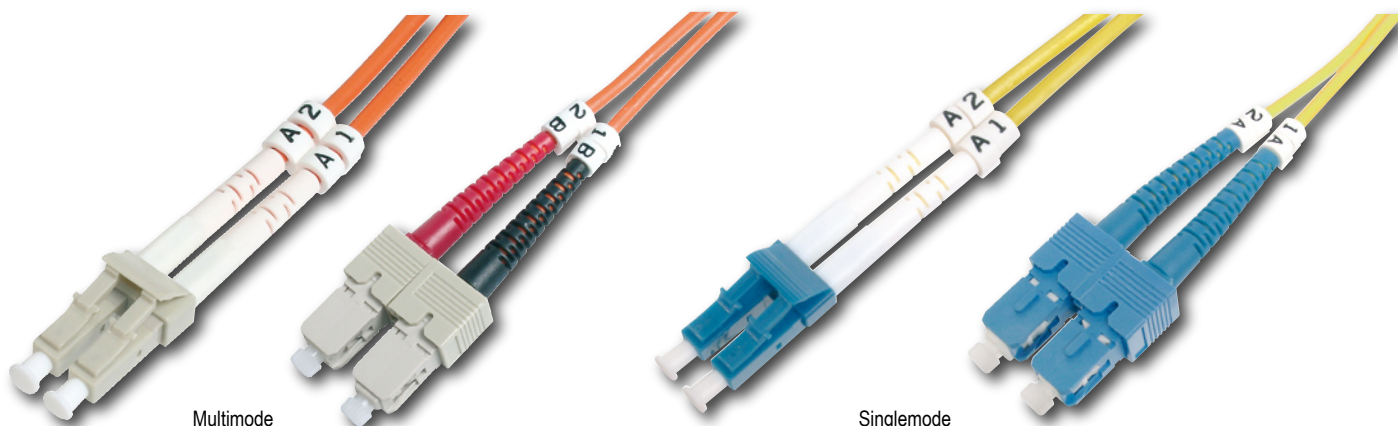

Multimode


Singlemode

Please choose your requested product by the corresponding article number or the EAN code.

| | Multimode OM2 50/125 μ | Multimode OM1 - 62,5/125 μ | Multimode OM3 - 50/125 μ | Singlemode - 9/125 μ |
|--------|------------------------|----------------------------|------------------------------|----------------------------|
| 1,0 m | 249399 / DK-2532-01 | 1,0 m 249467 / DK-2632-01 | 1,0 m 249566 / DK-2532-01/3 | 1,0 m 249634 / DK-2932-01 |
| 2,0 m | 249405 / DK-2532-02 | 2,0 m 249474 / DK-2632-02 | 2,0 m 249580 / DK-2532-02/3 | 2,0 m 249641 / DK-2932-02 |
| 3,0 m | 249412 / DK-2532-03 | 3,0 m 249481 / DK-2632-03 | 3,0 m 249597 / DK-2532-03/3 | 3,0 m 249658 / DK-2932-03 |
| 5,0 m | 249436 / DK-2532-05 | 5,0 m 249498 / DK-2632-05 | 5,0 m 249603 / DK-2532-05/3 | 5,0 m 249665 / DK-2932-05 |
| 7,0 m | 249443 / DK-2532-07 | 7,0 m 249511 / DK-2632-07 | 7,0 m 249610 / DK-2532-07/3 | 7,0 m 249672 / DK-2932-07 |
| 10,0 m | 249450 / DK-2532-10 | 10,0 m 249528 / DK-2632-10 | 10,0 m 249627 / DK-2532-10/3 | 10,0 m 249689 / DK-2932-10 |

Simplex, colored pigtails , OM 2 50/125 μ

- Simplex OM 2 50/125 μ 2m
- Semi tight buffer
- Colored buffer, according to IEC 302 in: white, violet, turquoise, black, red, pink, orange, grey, green, yellow, brown, blue
- Set of 12 pcs
- Incl. test report

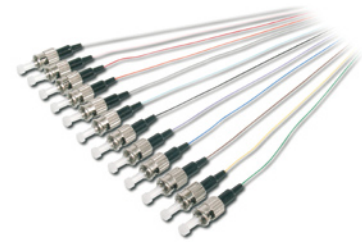

| | |
|-----------------------------|-------------------------------------|
| 148203 / AL-5FPST-02I-SET/2 | ST simplex pigtail, OM/125 μ 2m |
| 148210 / AL-5FPSC-02I-SET/2 | SC 2m |

ST fiber pigtail, Simplex

- Simplex, 2m.
- Tight buffer
- Individually packed with test report



| | |
|-------------------------|---|
| 133629 / AL-5FPST-02I | Faser Pigtail, Multimode OM 2 50/125 μ , 2m |
| 133681 / AL-5FPST-02/3I | Faser Pigtail, Multimode OM 3 50 / 125 μ 2m |
| 148494 / AL-9FPST-02I | Faser Pigtail, Singlemode 09/125 μ , 2m |

ST Fiber pigtail, multimode, Simplex

- Simplex, 2m
- Tight buffer
- Individually packed with test report



| | |
|-------------------------|--|
| 133643 / AL-5FPSC-02I | Faser Pigtail, Multimode OM 2, 50/125 μ , 2m |
| 133704 / AL-5FPSC-02/3I | Faser Pigtail, Multimode, 50 / 125 μ 2m, OM3 |
| 148500 / AL-9FPSC-02I | Faser Pigtail, Singlemode, 09/125 μ , 2m |

LC fiber pigtail, multimode, Simplex

- Simplex, 2m.
- Tight Buffer
- Individually packed with test report



| | |
|-------------------------|--|
| 133667 / AL-5FPLC-02I | Faser Pigtail, Multimode, OM 2 50/125 μ , 2m |
| 133728 / AL-5FPLC-02/3I | Faser Pigtail, Multimode, Om 3 50/125 μ , 2m |
| 148517 / AL-9FPLC-02I | Faser Pigtail, Singlemode, 09/125 μ m, 2m |

CABLES

Computer

Power

Audio

Video

Telephone

TV/SAT

Raw Cables

Connectors + Adapters

Wall Plates

Accessories + Testdevices

Wireless LAN coaxial cable CFD200 - low loss



- SMA reversed jack <=> SMA reversed plug
- Signal loss 0,3 db / m
- Gold plated contacts
- CFD200 coaxial cable

| | |
|-------------------------------|--|
| 200581 / AK ANT WLAN 1M C200 | Wireless LAN Antennenkabel 1m, low loss |
| 200628 / AK ANT WLAN 2M C200 | Wireless LAN Antennenkabel 2m, low loss |
| 200598 / AK ANT WLAN 3M C200 | Wireless LAN Antennenkabel 3m, low loss |
| 200604 / AK ANT WLAN 5M C200 | Wireless LAN Antennenkabel 5m, low loss |
| 200611 / AK ANT WLAN 10M C200 | Wireless LAN Antennenkabel 10m, low loss |

Antenna adapter TNC to SMA



- Antenna adapter to connect SMA antenna with devices based on TNC connector
- TNC plug reverse to SMA female reverse
- Length 5cm
- To connect some types of Linksys router with standard antenna

| | |
|--------------------------|-----------------------------|
| 233480 / AK ANT WLAN ADA | Antennenadapter TNC auf SMA |
|--------------------------|-----------------------------|