

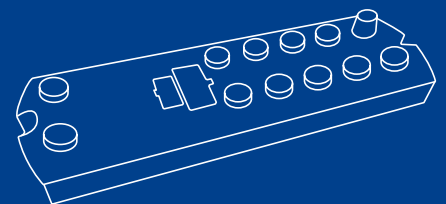

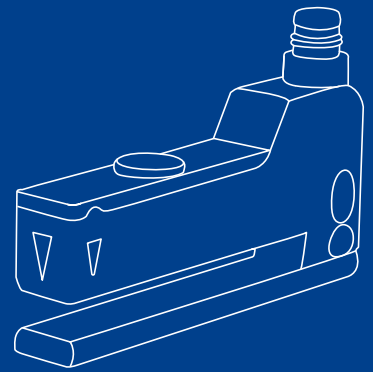


# CATALOG

## Photoelectric Sensors

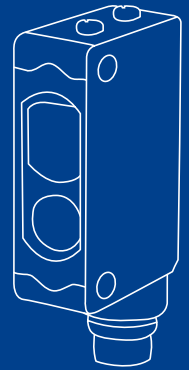

# DATALOGIC AT A GLANCE

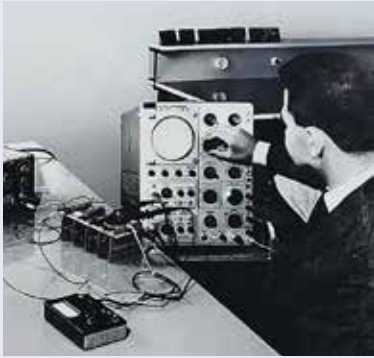

Datalogic began its entrepreneurial adventure in 1972, when **Dr. Romano Volta** started developing and producing optical-electronic control appliances for the packaging, textile and ceramics sectors. Romano Volta sensed the revolutionary scope of the bar code and started developing a manual reader able to read it, combining electronics, mechanics, optics and information technology. In 1974 Datalogic brought this technology into the Retail world, in a supermarket in Troy, Ohio and then applied it to the whole industrial world, giving life to the only true Bar Code Company at a global level.

Today, Datalogic is a global leader in the automatic data capture and process automation markets, specialized in the design and production of bar code readers, mobile computers, sensors for detection, measurement and safety, RFID, vision and laser marking systems. Throughout the entire value chain, Datalogic solutions increase the efficiency and quality for processes in the Retail, Manufacturing, Transportation & Logistics and Healthcare industries.

**45+**  
**years**  
of experience

**500 engineers**  
in 14 R&D centers in:  
Italy, USA, Vietnam, China,  
and Germany


**1,200**  
**patents**  
filed and more than  
350 in approval

**3,000+**  
**Employees**

in 27 countries:  
21% Americas,  
56% EMEA, 23% APAC

**A constant**  
**growth**

(total revenues  
mln Euros)



**10%**  
**Revenues**

invested in  
R&D

**10 Manufacturing and Repair facilities**

in US, Brazil, Hungary, Slovakia, Italy, China, Vietnam and Australia



# WHY DATALOGIC



- ⊕ **Unique Player** in both automatic data capture and industrial automation
- ⊕ Recognized worldwide **leader**
- ⊕ **Global player** expanding in different verticals
- ⊕ Leading **innovator**
- ⊕ Reliable products for **all needs**
- ⊕ Wide range of **customizable service solutions** worldwide



# PHOTOELECTRIC SENSORS


Tubular, Miniature and Fiber Optic sensors for object detection in reduced space



Fork sensors for label detection



Contrast and Luminescence sensors for registration marks detection

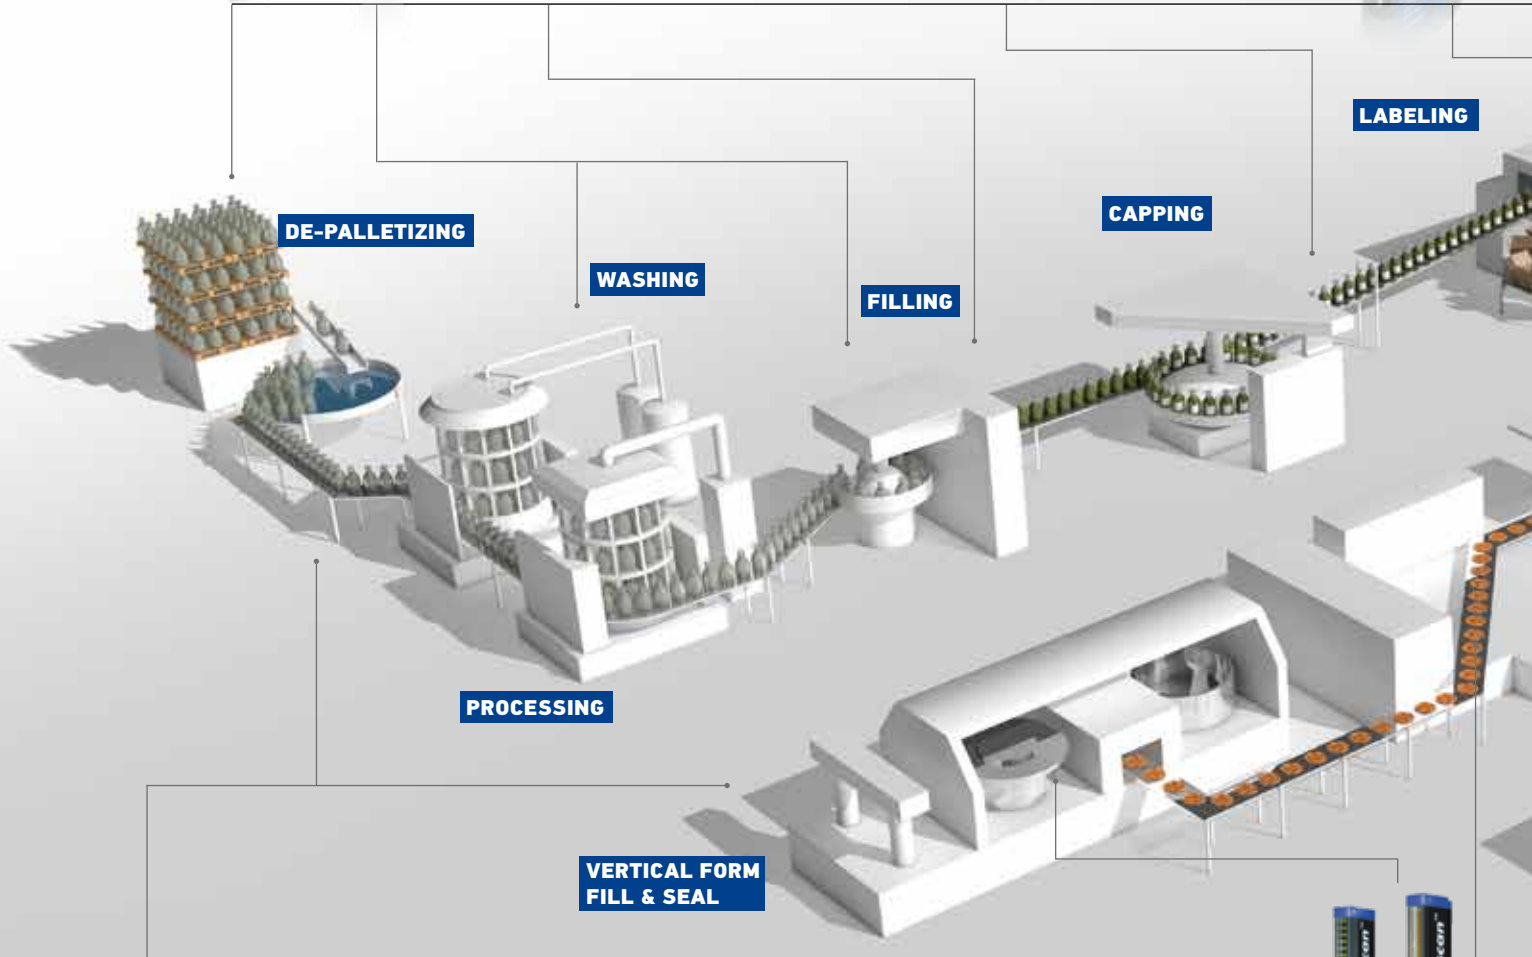

Extended range of universal compact sensors for object detection

Dimensional sensors for height/width measurement and object positioning



## Applications

- De-Palletizing
- Washing
- Filling
- Capping
- Labeling
- Case Packing
- Stretch-wrapping
- Palletizing
- Storage & Retrieval
- Cartoning
- Wrapping
- Vertical Form Fill & Seal
- Processing

**Datalogic** has more than 40 years of experience in the sensors and safety sector, developing their first product, a **Photoelectric Sensor**, in 1972. Today, Datalogic is one of the largest manufacturers of sensor and safety products worldwide.

**Datalogic** is the market leader in Italy for photoelectric sensors and safety light curtains, ranking among the **top-10 manufacturers** in Europe by market share.

Datalogic's **Sensors and Safety** portfolio solves customer applications in **Factory Automation**, specializing in Processing and Packaging machinery, and Automated Material Handling Systems related to manufacturing industries such as Automotive, Electronics, Pharmaceutical, Food & Beverage, Paper and Printing, Wood-working, Ceramics, Glass, and Textiles.

Area sensors for the detection of objects with different shape and dimensions



Maxi and Compact sensors for object detection



**STRETCH-WRAPPING**

**PALLETIZING**

**CASE PACKING**

**STORAGE & RETRIEVAL**

**WRAPPING**

**CARTONING**



TOF distance sensors for measurement and object positioning

## PHOTOELECTRIC SENSORS PRODUCTS RANGE

### SENSORS PRODUCT RANGE

Photoelectric

UNIVERSAL FUNCTION

M18 TUBULAR

FIBER OPTIC

MINI SIZE

MIDI SIZE

MAXI SIZE

APPLICATION SPECIFIC FUNCTION

FORK

CONTRAST / COLOR

LUMINESCENCE

AREA

DIMENSIONAL

DISTANCE

other sensors

Inductive  
Ultrasonic  
Capacitive  
Temperature



# INDEX

Photoelectric sensors	8
Selection chart	14
Reference guide	20
Tubular sensors	22
Miniature sensors	46
Compact sensors	74
Maxi sensors	106
Fiber optic sensors	118
Fork sensors	138
Contrast sensors	154
Luminescence sensors	166
Color & contrast sensors	170
Area sensors	176
Dimension light grids	180
Distance sensors	188
Accessories	204





# PHOTOELECTRIC SENSORS






# PHOTOELECTRIC SENSORS

## THROUGH BEAM




The light emitter and receiver are contained in two different housings and installed facing each other. The light beam released by the emitter directly hits the receiver; every object interrupting the beam is therefore detected. This system is used to obtain significant signal differences (when the light directly hits the receiver and when the object interrupts the beam) with the highest Excess Gain and the largest operating distance (up to 60 m). Moreover, these sensors can operate in the harshest working conditions, such as dirty or dusty environments. The through beam optic function typically operates in the dark mode: the output is activated when the object interrupts the light beam between emitter and receiver.

## RETROREFLECTIVE




Both emitter and receiver are located inside the same housing for retro-reflective photoelectric sensors. Utilizing a prismatic reflector, the emitted light beam is reflected onto the receiver, detecting the object when it interrupts the light beam.

## POLARIZED RETROREFLECTIVE



In polarized retroreflective sensors, the emitted light is polarized on a vertical plane through a polarization filter. The prismatic reflector rotates the light plane by 90°. A polarization filter placed on the receiver selects only the horizontal plane reflected by the prismatic reflector, ignoring the light reflected by other light sources. This technique guarantees a reliable signal reception, reaching significant distances-

## RETROREFLECTIVE FOR TRANSPARENT





For the detection of transparent objects, such as PET bottles or Mylar sheets, a low-hysteresis polarized retroreflective model (which detects small signal differences) can be used.

These sensors elaborate the slight signal differences received when the light beam passes through a transparent object, avoiding false detections due to the nature of this kind of targets.

This technique mostly suits applications for the detection of objects positioned at considerable distances, where a prismatic reflector can be installed.


Typically, the operating distance proportionally increases with the reflector's dimensions.

## DIFFUSE PROXIMITY




In photoelectric sensors with this optic function, both emitter and receiver are placed inside the same housing. These sensors work with weaker signals because the emitted light beam is reflected to the receiver by the object. As a consequence, the excess gain and the operating distance are reduced. However objects are detected without a prismatic reflector, making installations quick and easy.

## FIXED FOCUS PROXIMITY



Fixed focus proximity sensors have a simple fixed background suppression distance, beyond which no objects are detected. The fixed triangulation of the optics greatly reduces the detection distance of reflective objects. The visible red emission simplifies the sensor's installation.



## BACKGROUND SUPPRESSION



Background suppression sensors detect objects while avoiding reflections from the background. When the sensor is used for the first time, the proper background suppression distance has to be set through a distance adjustment trimmer. Once the background has been acquired, the objects can be detected regardless of their color. Background suppression sensors are not very reliable with highly clear, transparent or shiny objects.

## BACKGROUND SUPPRESSION

### *FOR CLEAR DETECTION*



Background suppression technology often has difficulty reliably detecting transparent, clear, or shiny objects. These objects generate false detections due to their highly reflective surfaces. Datalogic's patented background suppression technology guarantees reliable and repeatable detection, ignoring the false detections. Models are available with LED emission, ideal for reflections caused by moving surfaces such as conveyor belts, or with LASER emission for the detection of small objects on fixed or highly reflective backgrounds. Since background suppression sensors do not require a prismatic reflector, these sensors can substitute for a polarized retroreflective sensor for transparent objects for shorter distances.

# PHOTOELECTRIC SENSORS

## CONTRAST



Contrast sensors distinguish the received light beams on the basis of their degrees of intensity, which depend on the color or material of the detected surfaces. A typical application of these sensors is the detection of colored registration marks used in packaging machines to synchronize the folding, cutting and welding phases. In presence of colored surfaces, the contrast is highlighted using a LED with colored light emission, typically a selectable red, green or blue LED. The white light emission allows to detect very slight contrasts in similar materials and colors.


## LUMINESCENCE



Luminescence sensors emit invisible ultraviolet light, which is reflected at a higher wavelength (minor energy) on the fluorescent and phosphorescent surface, shifting into the visible light spectrum.

The ultraviolet emission is modulated and the visible light reception is synchronized. The maximum immunity against external interferences, like reflections caused by very shiny surfaces, is obtained and fluorescent targets, invisible to the human eye, can be detected. Luminescence sensors are used in several industrial fields to detect items containing phosphorous such as labels on glass or mirrors, fluorescent marks marked on tiles, fluorescent glues on paper, cutting and sewing guides, as well as fluorescent paints or lubricants.

## FORK




A fork sensor, is based on a particular model of the through beam sensor, where emitter and receiver are placed opposite to each other on the internal sides of an “U-shaped” housing. Any target passing through the internal slot interrupts the beam and is detected. The most typical fork sensor applications are hole/teeth detection on wheels, label detection on thin supports, and control of edge and continuity of sheets of labels or tapes. The emission is generally infrared or red light in order to detect colored registration marks on translucent films.

## COLOR




The color of an object is identified according to the different reflection coefficients obtained with the red (R), green (G) and blue (B) light emissions. For instance, yellow is characterized by R=50% G=50% B=0% reflections, orange by R=75% G=25% B=0%, pink by R=50% G=0% B=0%, the combinations are infinite. Color sensors cover a wide variety of applications, ranging from quality and process controls to automatic material handling for the identification, orientation, and selection of objects according to their color.

## DISTANCE



Datalogic distance sensors are based on Time of Flight (T.O.F.): the distance is calculated on the basis of the time between the moment the LASER pulse is generated and the moment the emitted light is reflected off the object, back to the sensor. These sensors are generally used to measure an object's distance within a selected range, while the output is linearly scaled to the analog signal (4...20mA). This technology provides high precision and fast measurements in many applications, such as automatic warehousing (to drive industrial vehicles and avoid collisions), packaging and material handling.

## AREA/DIMENSION LIGHT GRIDS







































Area and Dimension light grids utilize several light beams for area or dimensional measurements of objects. An object's area and size are measured using parallel cross-beams, which identify obscured beams, providing accurate information to a host GUI or PC. Models of light grids vary by length to match each application requirements.

# SELECTION CHART



# SELECTION CHART

## UNIVERSAL PHOTOELECTRIC SENSORS

	TUBULAR		MINIATURE			
	S15	S5N	SMall	S3Z	S45	S100
MAX OPERATING DISTANCE						
<b>Through beam</b> 	0...20 m	0...30 m  0...60 m	0...2 m	0...15 m  0...30 m 	0...15 m  0...20 m 	0...12 m
<b>Retroreflective</b> 	0,1...5 m	0,1...5 m	0,05...1,5 m			0,01...8 m
<b>Polarized retroreflective</b> 	0,1...4 m	0,1...4,5 m  0,1...16 m 	0,1...1 m	0,05...4 m  0,3...10 m 	0,1...7 m  0...2 m (coaxial)  0,1...15 m 	0,01...3 m 0,01...5,5 m
<b>Retroreflective for transparent</b> 	0,1...0,8 m	0,1...1,7 m		0...2 m	0...2 m	
<b>Diffuse proximity</b> 	1...100 mm 1...350 mm 1...1000 mm	0...100 mm 0...400 mm 0...700 mm 0...350 mm 		5...150 mm 0...700 mm	0...800 mm  1...250 mm 	2...300 mm 2...500 mm
<b>Fixed focus</b> 	0...50 mm	100 mm	3...15 mm 3...20 mm 3...30 mm 3...50 mm			70 mm
<b>Background suppression</b> 	40...120 mm	0...150 mm 0...100 mm		0...300 mm  0...300 mm 	1...200 mm  3...400 mm  4...120 mm 	0...100 mm
<b>Fiber optic</b> 		0...100 mm (through beam) 0...30 mm (diffuse proximity)				
<b>Contrast</b> 		10 ±2 mm			10 ±2 mm	
<b>Luminescence</b> 		0...20 mm				
<b>Page</b>	22	30	46	50	56	64

(\*) The maximum operating distance is determined by the optic fiber and accessory lens used and the response speed selected in the specific model

The table shows the maximum operating distance reached by different sensors models. Some measures indicate only the highest performances obtained by the corresponding sensor. Other operating distance values might be available for the same series and some optic functions might be carried out through LED or LASER emission, reaching different distances. For more specific information refer to the dedicated product page in this guide or download datasheets and manuals from our website ([www.datalogic.com](http://www.datalogic.com))



COMPACT				MAXI		FIBER OPTIC	
S8	S6	S60	S62	S300 PA	S300 PR	S7	S70
							
0...25 m	20 m	0...20 m 0...60 m 	0...25 m	0...50 m	0...60 m	0...300 mm (*)	0...1740 mm (*)
	0,1...6 m		0,1...13 m	0,1...15 m			
0...5 m 0...10 m 	0,1...5 m	0,1...8 m 0...4 m (coaxial) 0,1...20 m 	0,1...8 m 0,3...20 m 	0,1...10 m	0,1...22 m		
0...0,8 m 0...2 m		0...2 m (coaxial)					
0...500 mm	10...900 mm 10...2000 mm	0...100 cm 0...200 cm (long range) 0...60 cm 	0...900 mm 0...2000 mm 0...900 mm 	50...2000 m	0...5000 mm	0...100 mm (*)	0...550 mm (*)
50...300 mm 20...200 mm 	10...100 mm 30...250 mm 100...500 mm	7...20 cm 5...10 cm 	30...300 mm 60...600 mm 60...1200 mm 200...2000 mm 30...1500 mm  50...350 mm	0,2...2 m	400...2500 mm		
9 ±2 mm		19 mm +/-2 mm (white)					
10...20 mm		0...40 mm					
74	82	88	98	106	112	118	122

# APPLICATION PHOTOELECTRIC SENSORS

		FORK				CONT RAST	
MAX OPERATING DISTANCE		SR21	SR23	SRF	SRX3	TLμ	TL46
<b>Slot (width)</b>		2 mm	5 mm	30, 50, 80, 120 mm	4 mm		
<b>Contrast</b>						6...60 mm (*)	9 ±3 mm (*)
<b>Luminescence</b>							
<b>Color &amp; Contrast</b>							
<b>Area</b>							
<b>Dimensional</b>							
<b>Distance</b>							
<b>Page</b>		138	142	146	150	154	160



(\*) The maximum operating distance is determined by the lens used in the specific model

The table shows the maximum operating distance reached by different sensors models. Some measures indicate only the highest performances obtained by the corresponding sensor. Other operating distance values might be available for the same series and some optic functions might be carried out through LED or LASER emission, reaching different distances. For more specific information refer to the dedicated product page in this guide or download datasheets and manuals from our website ([www.datalogic.com](http://www.datalogic.com))

LUMINESCENCE								COLOR & CONTRAST		AREA		DIMENSION LIGHT GRIDS		DISTANCE	
LD46		S65		AS1		DS1		DS2		S65-M		S67		S85	
															
12...20 mm		10...50 mm (*)		5...45 mm		0,3...3 m		0,15...4 m		0,3...10 m		0,3...5m (white 90%)		50...300 mm (Y03) 100...600 mm (Y13)	
166		170		176		180		184		188		192		198	

ACCESSORIES					
	FIBER OPTIC	IO-LINK CONNECTIVITY	CONNECTORS		REFLECTORS
	OF/OFA 	MASTER IO-LINK 	CS 	CAB 	R 
Page	204	210	218	220	222

# REFERENCE GUIDE

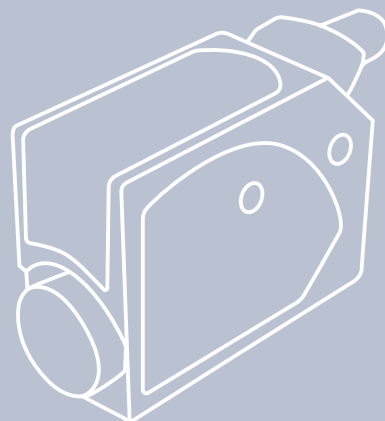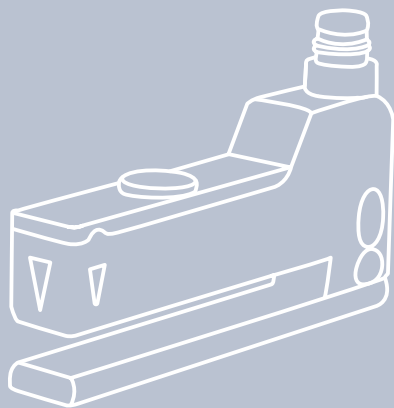



# S15



## PLASTIC AND STAINLESS STEEL TUBULAR M18 PHOTOELECTRIC SENSORS EVERY ENVIRONMENT

- Short case models for cost and space savings
- Plastic and stainless steel case with IP69K protection
- All optic functions at optimal operating distances
- Models with fixed settings or adjustment trimmer
- Cable, M12 connector and pig-tail models



CE cUL US LISTED IP69K



### APPLICATIONS

- Processing and Packaging machinery
- Assembling and Conveyor lines

(\*) Stainless steel models.  
ATEX II 3DG

### S15

<b>Through beam</b>		0...20 m
<b>Retroreflective (on R2 reflector)</b>		0,1...5 m
<b>Polarized retroreflective</b>		0,1...4 m
<b>Retroreflective for transparent (on R2 reflector)</b>		0,1...0,8 m
<b>Diffuse proximity</b>		short distance 0...100 mm
		medium distance 0...350 mm
		long distance 1 m
<b>Fixed focus</b>		0...50 mm
<b>Background suppression</b>		40...120 mm
<b>Power supply</b>	Vdc	10...30 V
	Vac	
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	
<b>Connection</b>	cable	•
	connector	•
	pig-tail	•
<b>Approximate dimensions (mm)</b>		M18x44/48
<b>Housing material</b>		ABS, INOX AISI 316L
<b>Mechanical protection</b>		IP65 - IP67 - IP69K


# TECHNICAL DATA

<b>Power supply</b>	12 ... 30 Vdc (limit values)
<b>Ripple</b>	2 Vpp max.
<b>Consumption</b>	25 mA max.
<b>Light emission</b>	red LED 660 nm (mod. S15...B/D/T/M) IR LED 880 nm (mod. S15...A/C/G)
<b>Setting</b>	mono-turn trimmer (mod. S15...A01/B01/Cx1/T01/F01) and 4 turns (mod. S15...M01)
<b>Operating mode</b>	white wire or pin 2 not connected: LIGHT mode (mod. S15...C/D/M)/DARK mode (mod. S15...A/B/T/F) white wire or pin 2 connected to: 0 V DARK mode, +Vcc LIGHT mode
<b>Indicators</b>	yellow OUTPUT LED green STABILITY LED, POWER LED (mod. S15...G)
<b>Output</b>	PNP or NPN
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	2 V max.
<b>Response time</b>	1 ms (mod. S15...A/B/C/T/M) 2 ms (mod. S15...F) 500 µs (mod. S15...D)
<b>Switching frequency</b>	500 Hz (mod. S15...A/B/C/T/M) 250 Hz (mod. S15...F) 1 kHz (mod. S15...D)
<b>Connection</b>	M12 4-pole connector, 2 m cable Ø 4 mm, 150 mm length Ø 4 mm cable with M12 4-pole connector (pig-tail vers.)
<b>Dielectric strength</b>	500 Vac 1 min., between electronics and housing
<b>Insulation resistance</b>	>20 MΩ 500 Vdc, between electronics and housing
<b>Mechanical protection</b>	IP65, IP67, IP69K
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0.5 mm amplitude, 10 ... 55 Hz frequency, for each axis (EN60068-2-6)
<b>Housing material</b>	ABS TERLURAN, INOX AISI 316L (mod. S15-PA) - (mod. S15-NA)
<b>Lens material</b>	plastic PMMA
<b>Operating temperature</b>	-25 ... 55°C
<b>Storage temperature</b>	-25 ... 70°C
<b>Weight</b>	40 g max. conn. vers., 55 g max. cable vers., 35 g max. pig-tail vers.

## CONNECTIONS


### CABLE AND PIG-TAIL

Through beam emitter

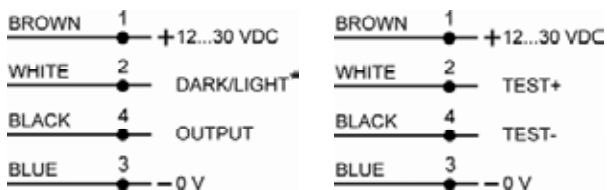

### M12 CONNECTOR

Through beam emitter









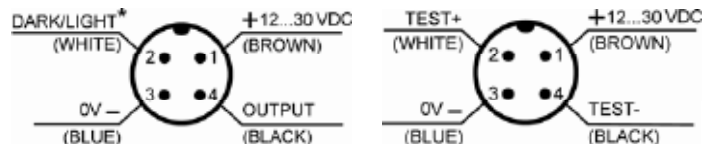








# DETECTION DIAGRAMS

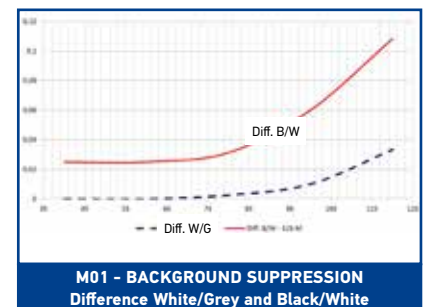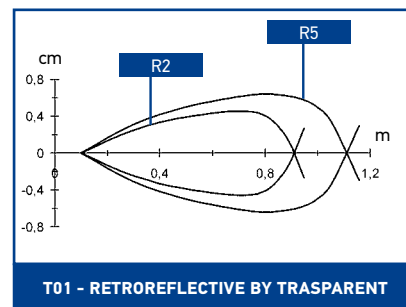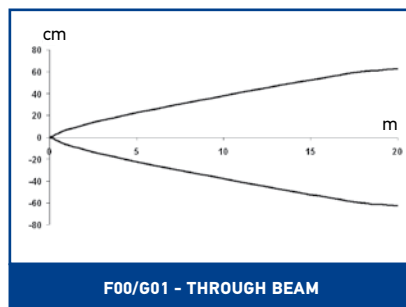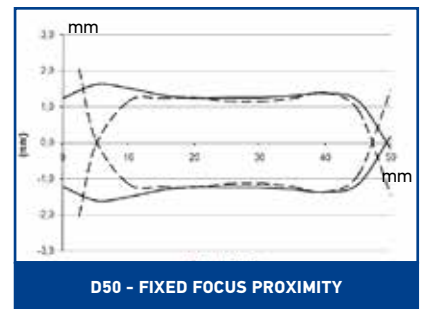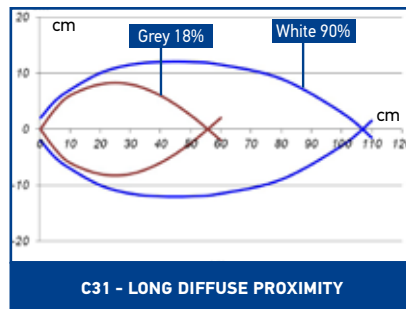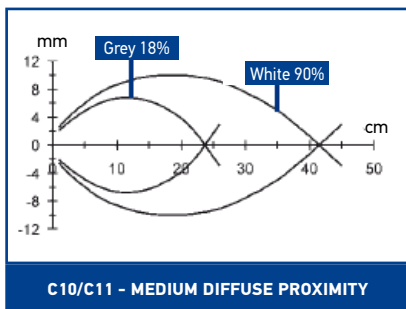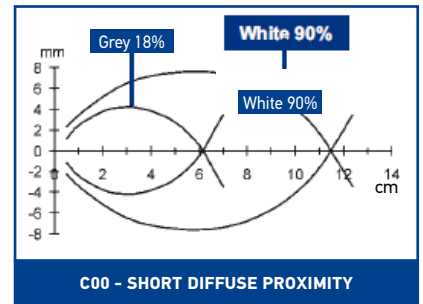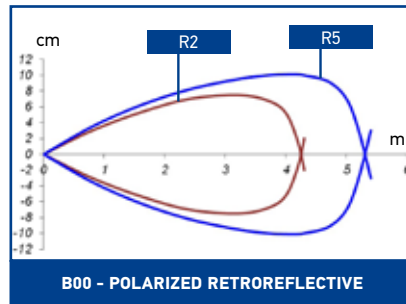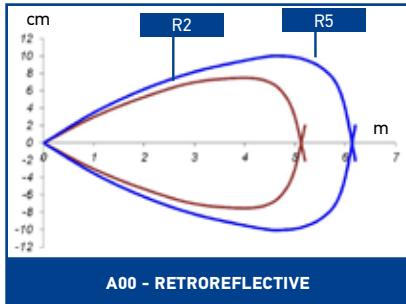


# MODEL SELECTION AND ORDER INFORMATION


OPTIC FUNCTION	HOUSING	CONNECTION	OUTPUT	MODEL	ORDER No.	
Retroreflective	Plastic	2 m cable	NPN	S15-PA-2-A00-NK	952301051	
			PNP	S15-PA-2-A00-PK	952301001	
		M12 connector	NPN	S15-PA-5-A01-NK	952301300	
	PNP		S15-PA-5-A01-PK	952301220		
	Stainless Steel	pig-tail	NPN	S15-PA-3-A00-NK	952301161	
			PNP	S15-PA-3-A00-PK	952301111	
M12 connector		NPN	S15-NA-5-A01-NK	952301450		
Polarized Retroreflective	Plastic	2 m cable	NPN	S15-PA-2-B00-NK	952301061	
			PNP	S15-PA-2-B00-PK	952301011	
		M12 connector	NPN	S15-PA-5-B01-NK	952301310	
	PNP		S15-PA-5-B01-PK	952301230		
	Stainless Steel	pig-tail	NPN	S15-PA-3-B00-NK	952301171	
			PNP	S15-PA-3-B00-PK	952301121	
M12 connector		NPN	S15-NA-5-B01-NK	952301460		
Diffuse proximity (short distance)	Plastic	2 m cable	NPN	S15-PA-2-C00-NK	952301071	
			PNP	S15-PA-2-C00-PK	952301021	
		pig-tail	NPN	S15-PA-3-C00-NK	952301181	
	PNP		S15-PA-3-C00-PK	952301131		
	Diffuse proximity (medium distance)	Plastic	2 m cable	NPN	S15-PA-2-C10-NK	952301081
				PNP	S15-PA-2-C10-PK	952301031
M12 connector			NPN	S15-PA-5-C11-NK	952301330	
		PNP	S15-PA-5-C11-PK	952301250		
Stainless Steel		pig-tail	NPN	S15-PA-3-C10-NK	952301191	
			PNP	S15-PA-3-C10-PK	952301141	
	M12 connector	NPN	S15-NA-5-C11-NK	952301480		
Diffuse proximity (long distance)	Plastic	M12 connector	PNP	S15-NA-5-C11-PK	952301400	
			NPN	S15-PA-5-C31-NK	952301340	
		Stainless Steel	M12 connector	PNP	S15-PA-5-C31-PK	952301260
	NPN			S15-NA-5-C31-NK	952301490	
	PNP		S15-NA-5-C31-PK	952301410		
	Fixed focus	Plastic	2 m cable	NPN	S15-PA-2-D50-NK	952301530
PNP				S15-PA-2-D50-PK	952301520	
pig-tail			NPN	S15-PA-3-D50-NK	952301550	
		PNP	S15-PA-3-D50-PK	952301540		
Through beam receiver		Plastic	2 m cable	NPN	S15-PA-2-F00-NK	952301091
				PNP	S15-PA-2-F00-PK	952301041
	M12 connector		NPN	S15-PA-5-F01-NK	952301360	
		PNP	S15-PA-5-F01-PK	952301280		
	Stainless Steel	pig-tail	NPN	S15-PA-3-F00-NK	952301201	
			PNP	S15-PA-3-F00-PK	952301151	
M12 connector		NPN	S15-NA-5-F01-NK	952301510		
Through beam emitter	Plastic	2 m cable	-	S15-PA-2-G00-XG	952301101	
			M12 connector	-	S15-PA-5-G01-XG	952301290
		pig-tail	-	S15-PA-3-G00-XG	952301211	
	Stainless Steel		M12 connector	-	S15-NA-5-G01-XG	952301440
	Background suppression	Plastic	M12 connector	NPN	S15-PA-5-M01-NK	952301350
				PNP	S15-PA-5-M01-PK	952301270
Stainless Steel		NPN		S15-NA-5-M01-NK	952301500	
		PNP		S15-NA-5-M01-PK	952301420	
Transparent	Plastic	M12 connector	NPN	S15-PA-5-T01-NK	952301320	
			PNP	S15-PA-5-T01-PK	952301240	
	Stainless Steel		NPN	S15-NA-5-T01-NK	952301470	
			PNP	S15-NA-5-T01-PK	952301390	

# ACCESSORIES


ST-5010




ST-5011




ST-5012




ST-5017

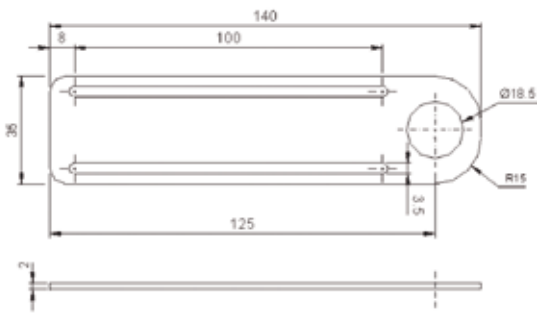


SWING-18

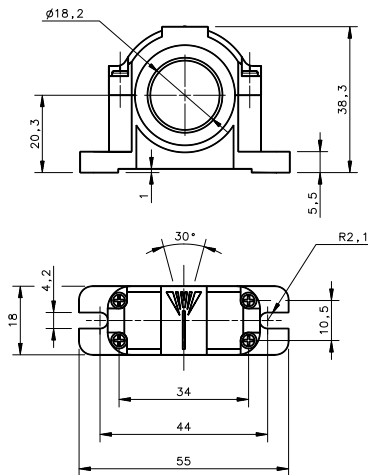

PLASTIC NUT



SP-40

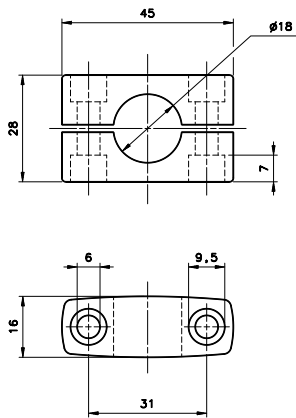

mm


MODEL	DESCRIPTION	ORDER No.
ST-5010	M18/14 mounting bracket	95ACC5230
ST-5011	M18 mounting bracket short	95ACC5240
ST-5012	M18 mounting bracket long	95ACC5250
ST-5017	M18 mounting bracket	95ACC5270
ST1218	M12/M18 mounting brackets	95ACC3340
ST1830	M18/M30 mounting brackets	95ACC3350
SP-40	mounting bracket tubular	95ACC1370
SWING-18	Adjustable support for M18 tubular sensors	895000006
PLASTIC NUT	flared mounting nut	95ACC2630

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
		5 m	CS-A1-02-G-05	95A251270
		7 m	CS-A1-02-G-07	95A251280
		10 m	CS-A1-02-G-10	95A251390
	4-pole, P.U.R.	2 m	CS-A1-02-R-02	95A251540
		5 m	CS-A1-02-R-05	95A251560
Radial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A2-02-G-03	95A251360
		5 m	CS-A2-02-G-05	95A251240
		7 m	CS-A2-02-G-07	95A251245
		10 m	CS-A2-02-G-10	95A251260
	4-pole, P.U.R.	2 m	CS-A2-02-R-02	95A251550
		5 m	CS-A2-02-R-05	95A251570
Axial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A1-22-B-03	95ACC1480
		5 m	CV-A1-22-B-05	95ACC1490
		10 m	CV-A1-22-B-10	95ACC1500
		15 m	CV-A1-22-B-15	95ACC2070
		25 m	CV-A1-22-B-25	95ACC2090
Radial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A2-22-B-03	95ACC1540
		5 m	CV-A2-22-B-05	95ACC1550
		10 m	CV-A2-22-B-10	95ACC1560
Axial M12 Connector	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
		10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
Radial M12 Connector	4-pole, black	Connector- not cabled	CS-A1-02-B-NC	G5085002
		Connector- not cabled	CS-A2-02-B-NC	G5085003


Rev. 01, 07/2016

# S5N



## EXTENDED RANGE OF STANDARD “ONE FOR ALL” PHOTOELECTRIC TUBULAR M18 SENSORS

- All optic functions
- Improved EMI immunity
- Improved ambient light immunity
- Improved laser safety level
- M18 flat plastic with universal mounting
- Available in M18 metal housing
- Axial or radial optics, cable or connector
- Standard 4-wire NO-NC NPN or PNP output

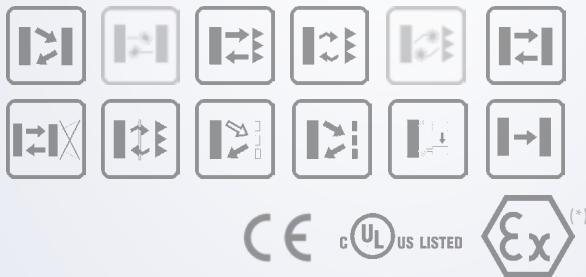

### APPLICATIONS

- Processing and Packaging machinery
- Conveyor lines, material handling
- Ceramics intralogistics
- Automated warehousing

S5N		
<b>Through beam</b>		0...20 m
		0...60 m (class 1 LASER)
<b>Retroreflective (on R2 reflector)</b>		0,1...4 m
<b>Polarized retroreflective</b>		0,1...4 m
		0,1...16 m (class 1 LASER)
<b>Retroreflective for transparent (on R2 reflector)</b>		0,1...1,3 m
<b>Diffuse proximity</b>		short distance 0...100 mm
		medium distance 0...400 mm
		long distance 0...700 mm
		long distance LASER 0...350 mm
<b>Fixed focus</b>		100 mm
<b>Background suppression</b>		50...150 mm
<b>Through beam with fiber optic</b>		0...100 mm
<b>Diffuse proximity with fiber optic</b>		0...30 mm
<b>Contrast sensor</b>		10 ±2 mm
<b>Luminescence sensor</b>		0...20 mm
		10...30 V
	<b>Power supply</b>	Vdc
	Vac	
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	IO-Link v 1.1
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>		M18x 55/68
<b>Housing material</b>		PBT, nickel plated brass
<b>Mechanical protection</b>		IP67


# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc (limit values)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	35 mA max. (mod. S5N...A00/B01/C01/C10/C21/D00/E01/T01)
	30 mA max. (mod. S5N...F01/M03)
	25 mA max. (mod. S5N...W03/U03)
<b>Light emission</b>	red LED 630 nm (mod. S5N...D00/E01, S5N-PA/MA...M03)
	red LED 660 nm (mod. S5N...B01/T01)
	red LED 670 nm (mod. S5N-PS/MS...M03)
	IR LED 880 nm (mod. S5N...A00/C01/C10/C20/C21/G00)
	white LED 400-700 nm (mod. S5N...W03)
	UV LED 370 nm (mod. S5N...U03)
	red Laser 650 nm (mod. S5N...G00/F01/B01/C01)
<b>Setting</b>	sensitivity trimmer (mod. B01/C01/C21/E01/F01/T01)
	teach-in push-button (mod. M03/W03/U03)
<b>Operating mode</b>	LIGHT mode on N.O. output / DARK mode on N.C. output (mod.S5N...C01/C10/C21/D00/M03/U03)
	DARK mode on N.O. output / LIGHT mode on N.C. output (mod.S5N...A00/B01/E01/F01/T01/W03)
<b>Indicators</b>	yellow OUTPUT LED (S5N, excl. mod. G00)
	green STABILITY LED (mod. S5N...B01/C01/C21/E01/F01), POWER LED (mod. S5N...G00)
	green/red READY/ERROR LED (mod. S5N...M03/W03/U03)
<b>Output</b>	PNP or NPN; NO; NC (mod. S5N) IO-Link v 1.1 (mod.S5N...OZ)
<b>IO-Link interface</b>	(mod.S5N...OZ) v 1.1, com 2, 38,4 kBaud, 32 bit process data, 5 ms cycle time LED emission model, 8 ms cycle time LASER emission model
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	2 V max.
<b>Response time</b>	0,5 ms (mod. S5N...A00/B01/T01/C10/C21/C01/D00/E01/U03)
	2 ms (mod. S5N...F01/G00)
	1 ms (mod. S5N...M03)
	100 µs (mod. S5N...W03)
	333 µs (Laser mod. S5N)
<b>Switching frequency</b>	1 kHz (mod. S5N...A00/B01/T01/C10/C21/C01/D00/E01/U03)
	250 Hz (mod. S5N...F01/G00)
	500 Hz (mod. S5N...M03)
	5 kHz (mod. S5N...W03)
	1,5 kHz (Laser mod. S5N)
<b>Connection</b>	2 m cable Ø- 4 mm, M12 4-pole connector
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	Plastic version PBT
	Metal version nickel plated brass
<b>Lens material</b>	PMMA
<b>Operating temperature</b>	-25 ... 55 °C
	(Laser mod.) -10 ... 50 °C
<b>Storage temperature</b>	-25 ... 70 °C
<b>Weight</b>	Plastic version 75 g max. cable vers. (90 g max. mod. M03), 25 g max. conn. vers. (40 g max. mod. M03)
	Metal version 110 g max. cable vers. (125 g max. mod. M03), 60 g max. conn. vers. (75 g max. mod. M03)


# DIMENSION

## PLASTIC


### AXIAL VERSION

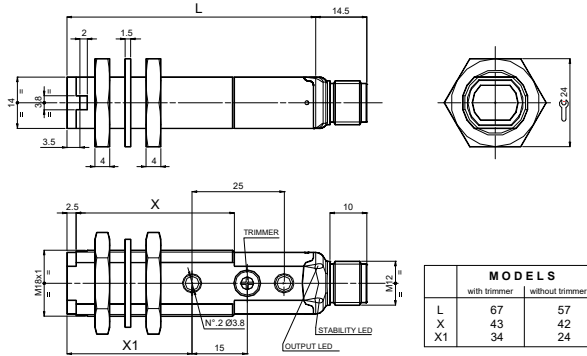

### RADIAL VERSION

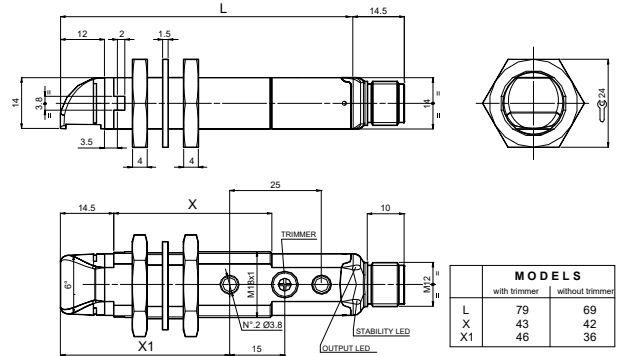


### FIBRE OPTIC VERSION

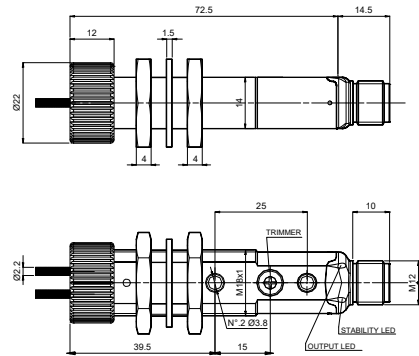


## METAL


### AXIAL VERSION

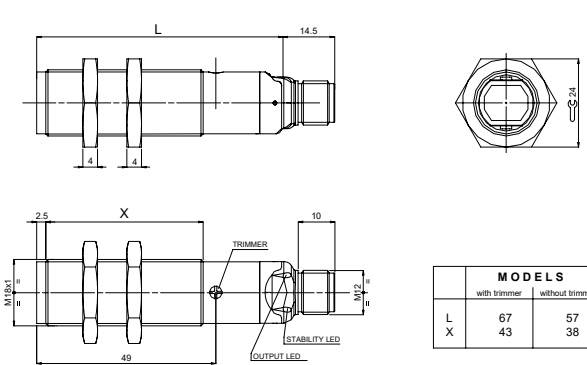

### RADIAL VERSION

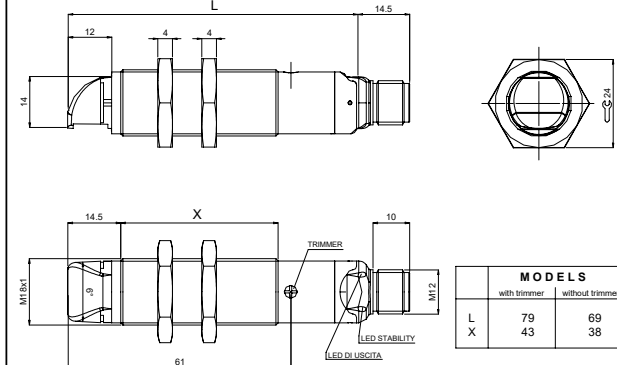

### FIBRE OPTIC VERSION

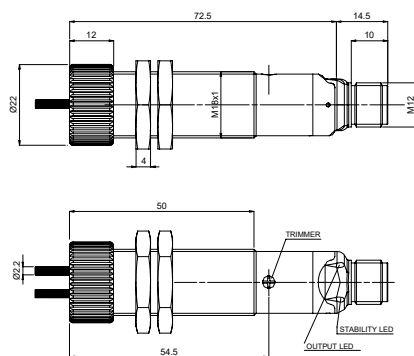





# CONNECTIONS

## CABLE

Through beam emitter

BROWN 1 + 10 ... 30 Vdc

WHITE 2 N.C. OUTPUT

BLACK 4 N.O. OUTPUT

BLUE 3 - 0 V



BROWN 1 + 10 ... 30 Vdc

WHITE 2 TEST +

BLACK 4 TEST / NOT USED (Laser version)

BLUE 3 - 0 V

## M12 CONNECTOR

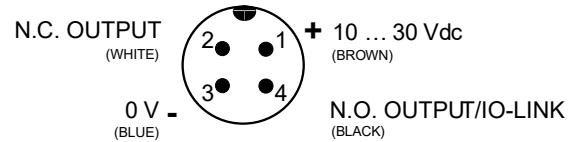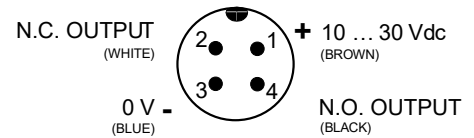

# INDICATORS AND SETTINGS


## S5N-XX...A00/B01/C01/C21/E01/F01/T01



- A** OUTPUT status LED Yellow  
STABILITY LED Green (Only Receiver)  
POWER ON LED Green (Only Emitter)
- B** Adjustment trimmer (receiver)

Single-turn trimmer for sensitivity adjustment. Rotate in a clockwise direction to increase the operating distance.


## S5N-XX-M03/W03/U03

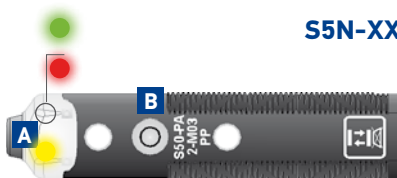

- A** OUTPUT status LED Yellow  
READY LED Green
- B** Teach-in push-button

Teach-in button for setting. EASYtouch™ provides two setting modes: standard or fine, both obtained by pressing the push-button only once. Please refer to instructions manual for operating details.


## S5N-XX-C10






- A00/C10/C20/F00
- A** OUTPUT status LED Yellow  
Stability LED green
- G00  
OUTPUT status LED yellow (Only Emitter G00)

# S5N DETECTION DIAGRAMS



## G/F INFRARED EMISSION

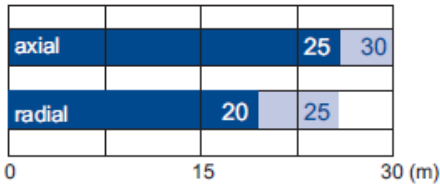


Recommended operating distance  
Maximum operating distance

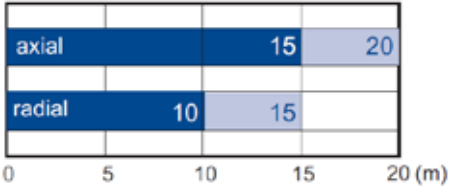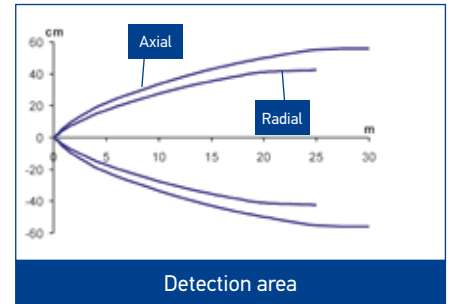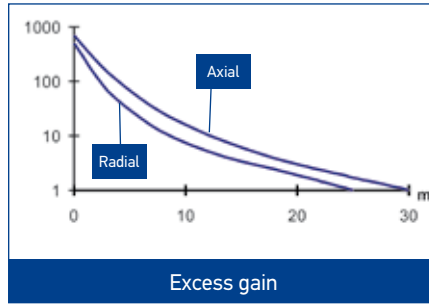






Recommended operating distance  
Maximum operating distance

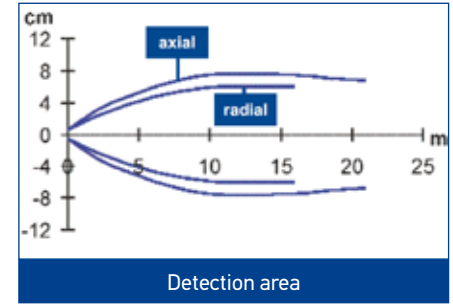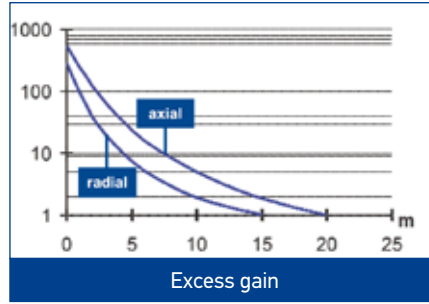





## G/F LASER RED EMISSION

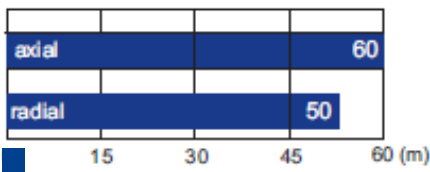

Operating distance

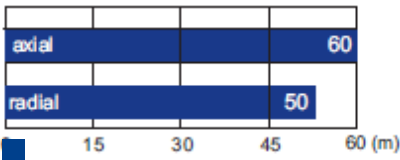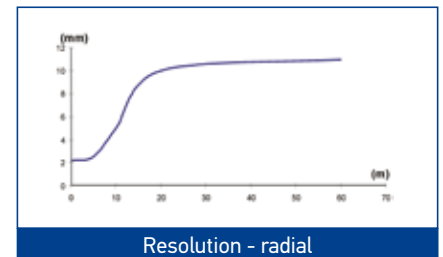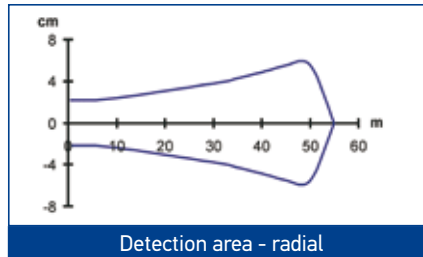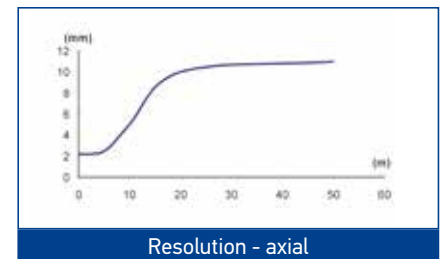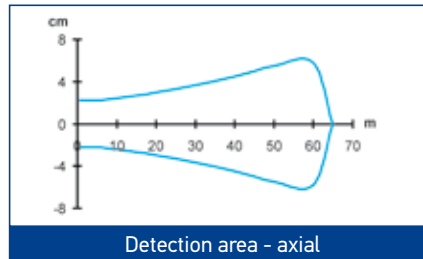



Operating distance

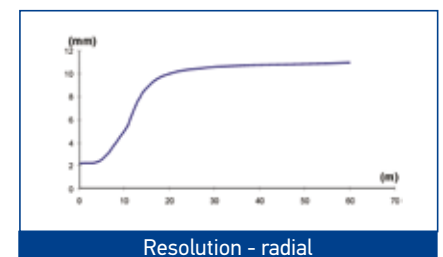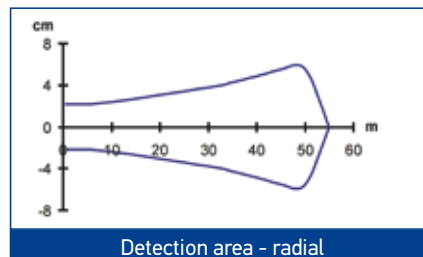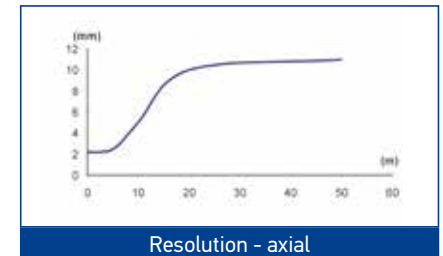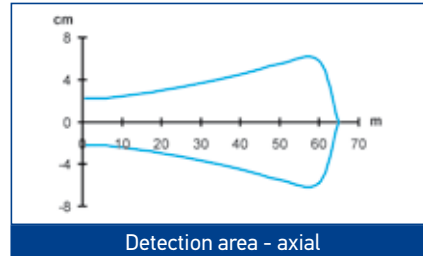


## A INFRARED EMISSION



Operating distance

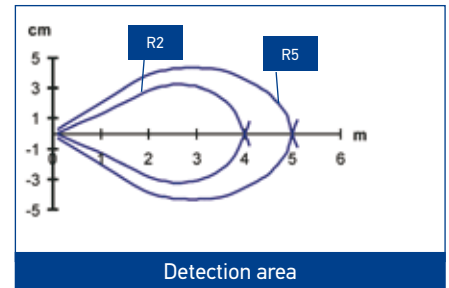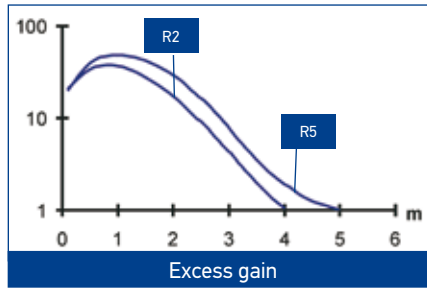





## B RED EMISSION

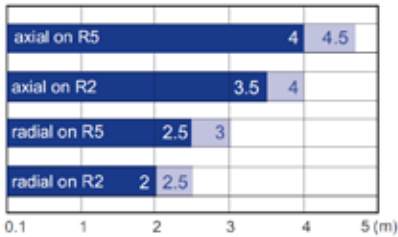


Recommended operating distance

Maximum operating distance

High efficiency reflectors can be used to obtain larger operating distances. Refer to **Reflectors** (A.01).

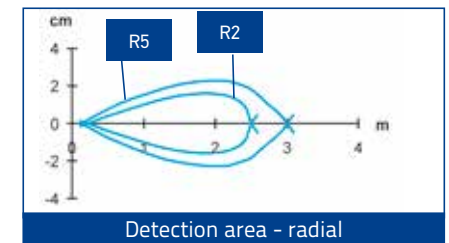
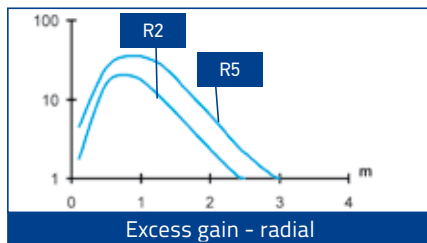
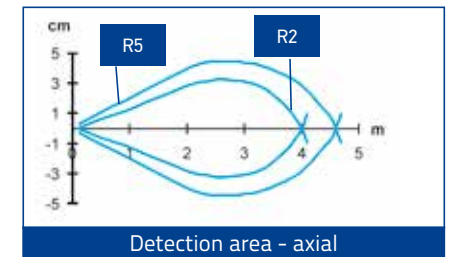
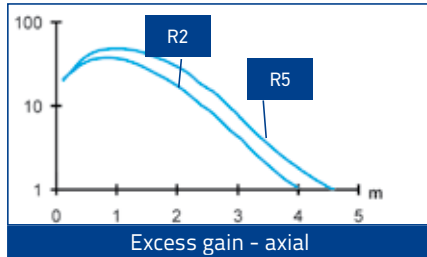


## B LASER RED EMISSION




Operating distance

High efficiency reflectors can be used to obtain larger operating distances. Refer to **Reflectors** (A.01).

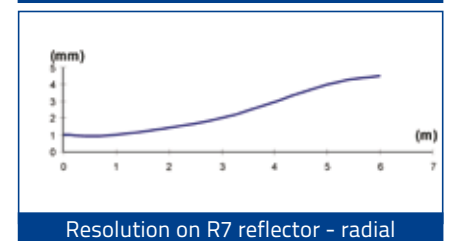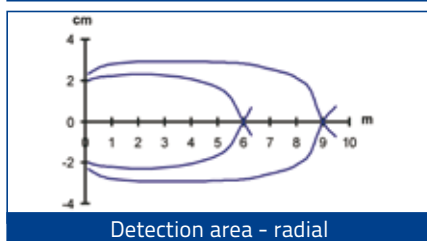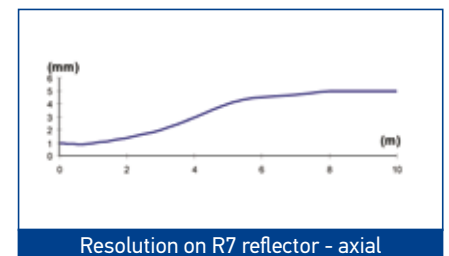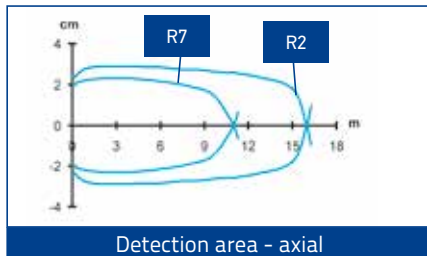



## T RED EMISSION




Recommended operating distance

Maximum operating distance





High efficiency reflectors can be used to obtain larger operating distances. Refer to **Reflectors**.

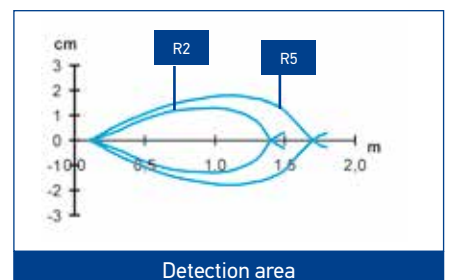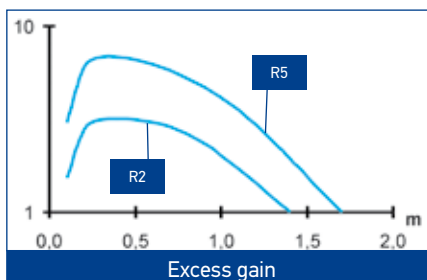


### C SHORT INFRARED EMISSION

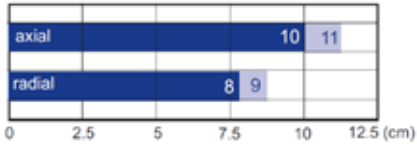



■ Recommended operating distance  
 ■ Maximum operating distance

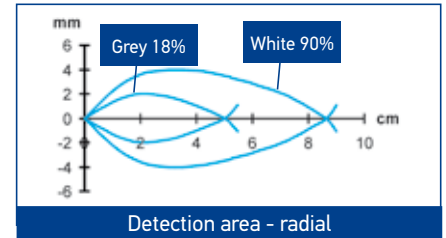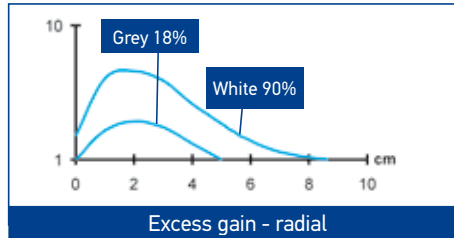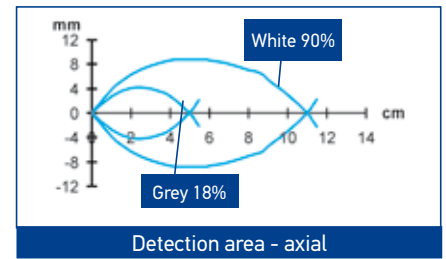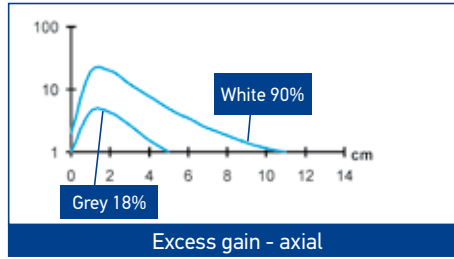


### C MID INFRARED EMISSION







■ Recommended operating distance  
 ■ Maximum operating distance

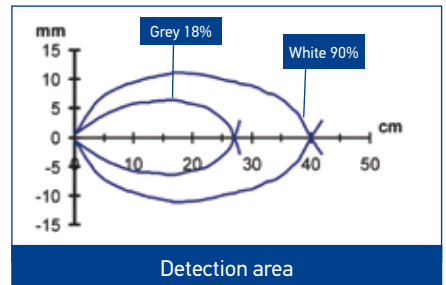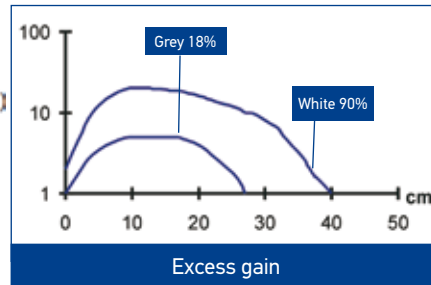


### C LONG INFRARED EMISSION

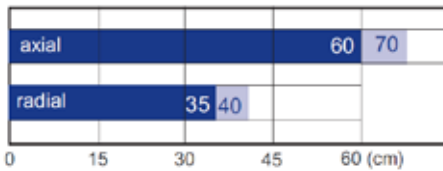





■ Recommended operating distance  
 ■ Maximum operating distance

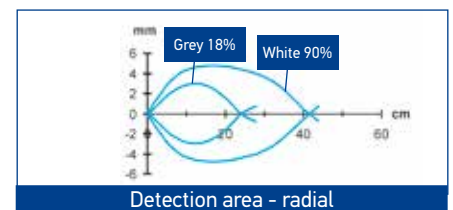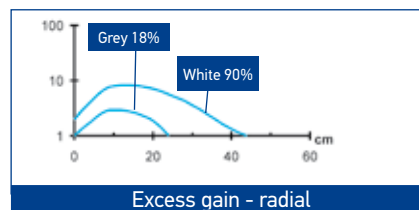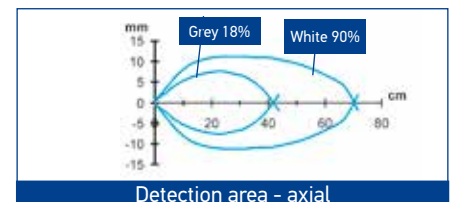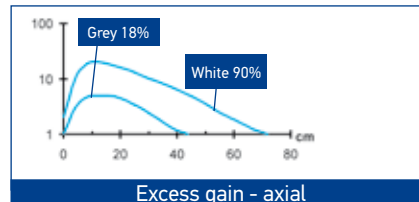


### D RED EMISSION

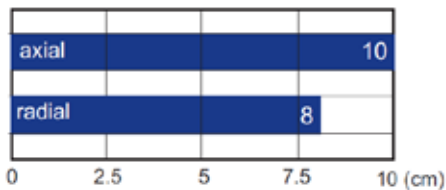





■ Operating distance

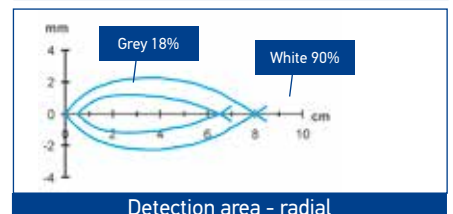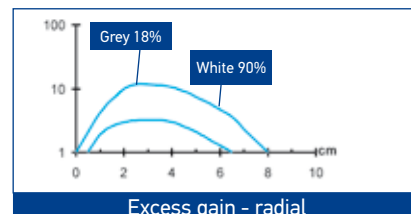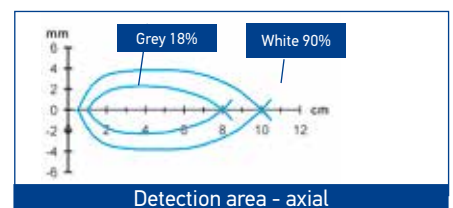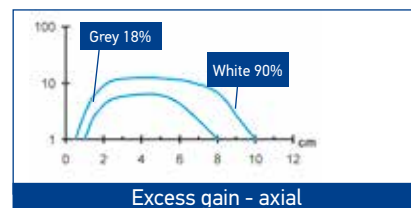


### C LONG INFRARED EMISSION

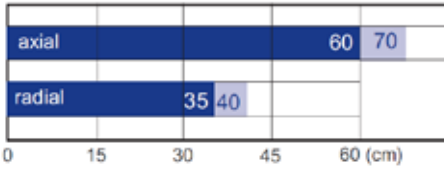





Recommended operating distance  
 Maximum operating distance

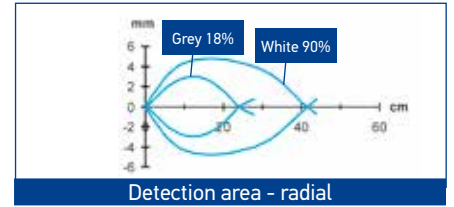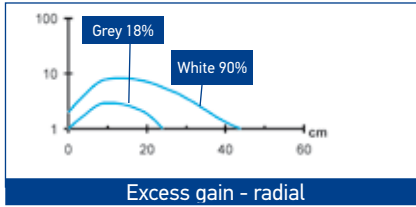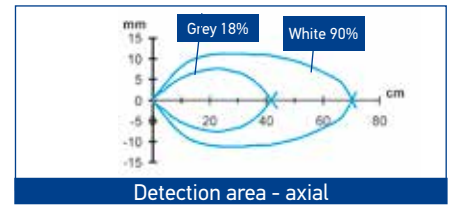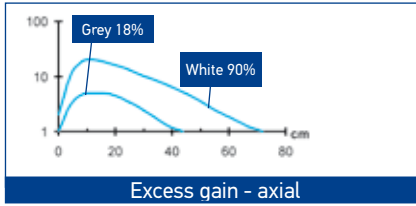


### D RED EMISSION

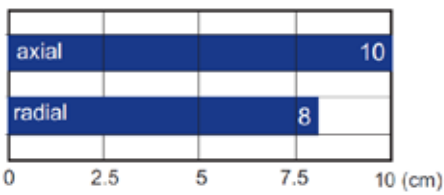





Operating distance

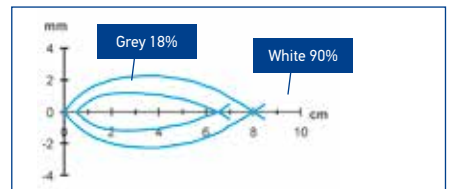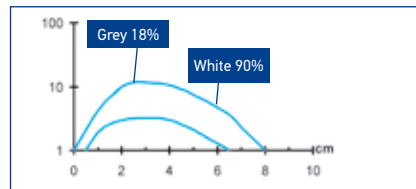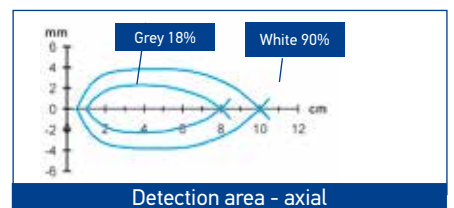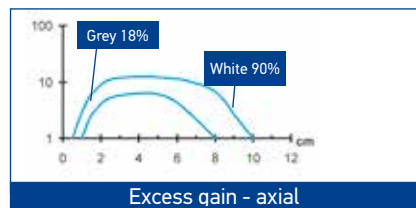


### C LASER RED EMISSION

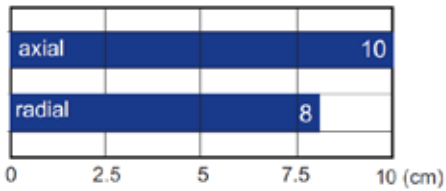



Operating distance

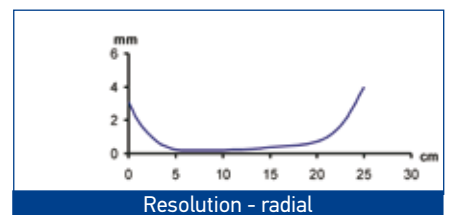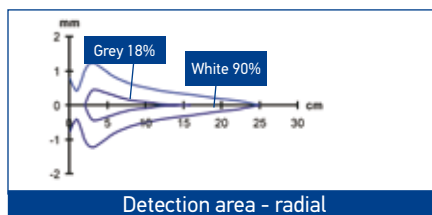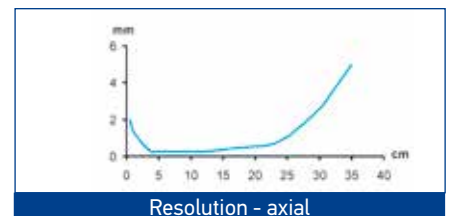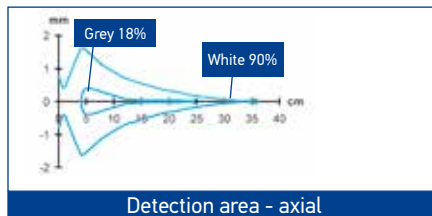


### M AXIAL RED EMISSION

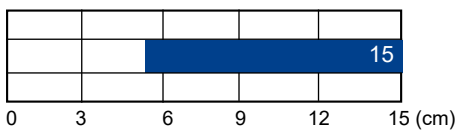



Operating distance

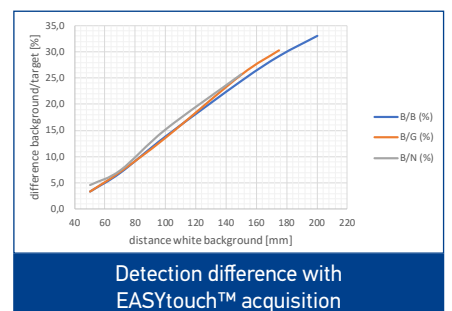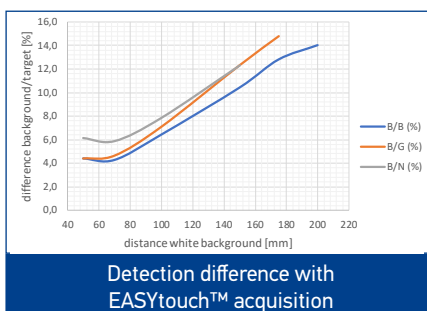


## M RADIAL RED EMISSION



Operating distance

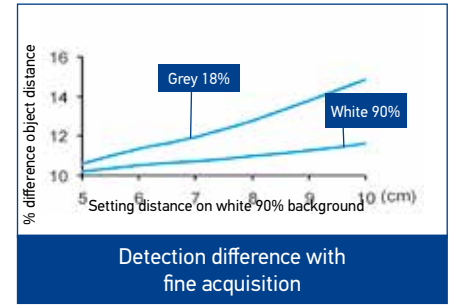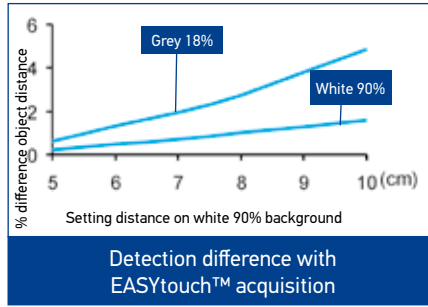





## E RED EMISSION

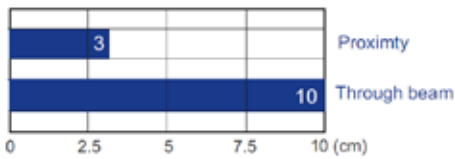

Operating distance with standard fibers


Standard Fiber-optics:  
OF-42-ST-20 proximity  
OF-43-ST-20 through beam

High efficiency fiber-optics or accessory lenses can be used to obtain larger operating distances.

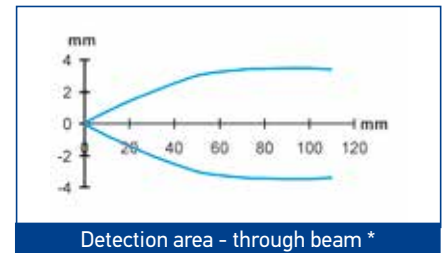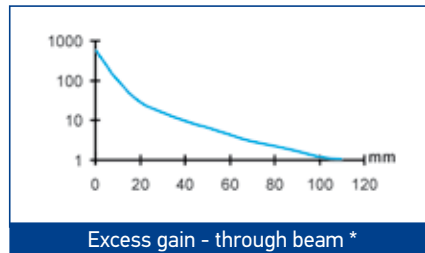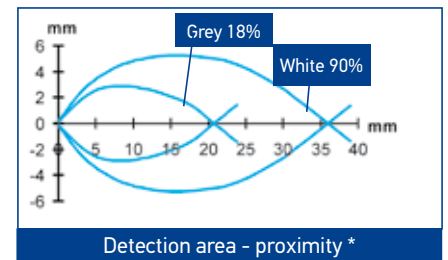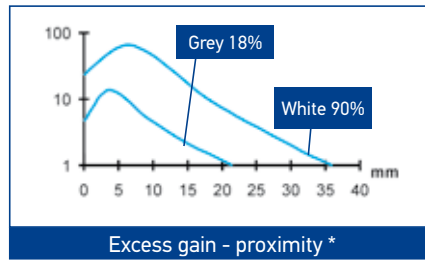


\* standard Fiber-optics

## W WHITE EMISSION




Operating distance

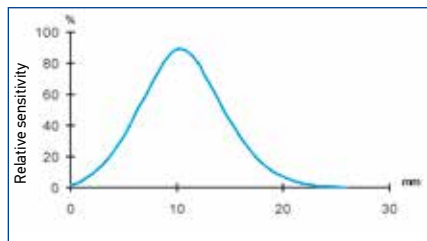


Operating distance

## U UV EMISSION



Operating distance

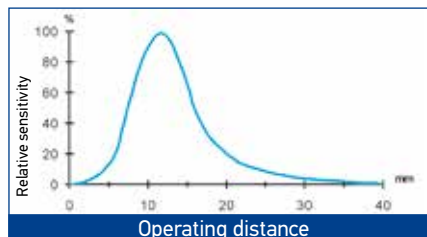

Operating distance

# MODEL SELECTION AND ORDER INFORMATION

S5N PLASTIC MODELS					
OPTIC FUNCTION	EMISSION	CONNECTION	OUTPUT	MODEL	ORDER No.
Retroreflective	LED, Axial optic	2m Cable	NPN	S5N-PA-2-A00-NN	952002091
			PNP	S5N-PA-2-A00-PP	952002081
		M12 Connector	NPN	S5N-PA-5-A00-NN	952002111
			PNP	S5N-PA-5-A00-PP	952002101
Polarized retroreflective	LED, Axial optic	2m Cable	NPN	S5N-PA-2-B01-NN	952001611
			PNP	S5N-PA-2-B01-PP	952001011
		M12 Connector	NPN	S5N-PA-5-B01-NN	952001501
			PNP	S5N-PA-5-B01-PP	952001021
			IO-Link	S5N-PA-5-B01-OZ	952002200
	LED, Radial optic	2m Cable	NPN	S5N-PR-2-B01-NN	952001781
			PNP	S5N-PR-2-B01-PP	952001031
		M12 Connector	NPN	S5N-PR-5-B01-NN	952001721
			PNP	S5N-PR-5-B01-PP	952001041
	LASER, Axial optic	2m Cable	NPN	S5N-PL-2-B01-NN	952001871
			PNP	S5N-PL-2-B01-PP	952001361
			IO-Link	S5N-PL-2-B01-OZ	
		M12 Connector	NPN	S5N-PL-5-B01-NN	952001841
			PNP	S5N-PL-5-B01-PP	952001371
			IO-Link	S5N-PL-5-B01-OZ	952002250
	LASER, Radial optic	2m Cable	NPN	S5N-PH-2-B01-NN	952001951
			PNP	S5N-PH-2-B01-PP	952001941
		M12 Connector	NPN	S5N-PH-5-B01-NN	952001971
			PNP	S5N-PH-5-B01-PP	952001961
Long Diffuse proximity	LED, Axial optic	2m Cable	NPN	S5N-PA-2-C01-NN	952001621
			PNP	S5N-PA-2-C01-PP	952001051
		M12 Connector	NPN	S5N-PA-5-C01-NN	952001511
			PNP	S5N-PA-5-C01-PP	952001061
	IO-Link		S5N-PA-5-C01-OZ	952002210	
	LED, Radial optic	2m Cable	NPN	S5N-PR-2-C01-NN	952001791
			PNP	S5N-PR-2-C01-PP	952001071
		M12 Connector	NPN	S5N-PR-5-C01-NN	952001731
			PNP	S5N-PR-5-C01-PP	952001081
	LASER, Axial optic	2m Cable	NPN	S5N-PL-2-C01-NN	952001881
			PNP	S5N-PL-2-C01-PP	952001381
			IO-Link	S5N-PL-2-C01-OZ	
		M12 Connector	NPN	S5N-PL-5-C01-NN	952001851
			PNP	S5N-PL-5-C01-PP	952001391
			IO-Link	S5N-PL-5-C01-OZ	952002260
	LASER, Radial optic	2m Cable	NPN	S5N-PH-2-C01-NN	952001991
			PNP	S5N-PH-2-C01-PP	952001981
		M12 Connector	NPN	S5N-PH-5-C01-NN	952002011
			PNP	S5N-PH-5-C01-PP	952002001
	Short Diffuse proximity	LED, Axial optic	2m Cable	NPN	S5N-PA-2-C10-NN
PNP				S5N-PA-2-C10-PP	952001241
M12 Connector			NPN	S5N-PA-5-C10-NN	952001521
			PNP	S5N-PA-5-C10-PP	952001251
LED, Radial optic		2m Cable	NPN	S5N-PR-2-C10-NN	952001801
			PNP	S5N-PR-2-C10-PP	952001491
		M12 Connector	NPN	S5N-PR-5-C10-NN	952001741
			PNP	S5N-PR-5-C10-PP	952001481
Medium Diffuse proximity	LED, Axial optic	2m Cable	NPN	S5N-PA-2-C21-NN	952002171
			PNP	S5N-PA-2-C21-PP	952002161
		M12 Connector	NPN	S5N-PA-5-C21-NN	952002191
			PNP	S5N-PA-5-C21-PP	952002181



Fixed focus	LED, Axial optic	2m Cable	NPN	S5N-PA-2-D00-NN	952001641	
			PNP	S5N-PA-2-D00-PP	952001091	
	M12 Connector		NPN	S5N-PA-5-D00-NN	952001531	
			PNP	S5N-PA-5-D00-PP	952001101	
	LED, Radial optic	2m Cable	NPN	S5N-PR-2-D00-NN	952001811	
			PNP	S5N-PR-2-D00-PP	952001111	
	M12 Connector	NPN	S5N-PR-5-D00-NN	952001751		
		PNP	S5N-PR-5-D00-PP	952001121		
Fiber optic	LED, Axial optic	2m Cable	NPN	S5N-PA-2-E01-NN	952001651	
			PNP	S5N-PA-2-E01-PP	952001131	
	M12 Connector		NPN	S5N-PA-5-E01-NN	952001541	
		PNP	S5N-PA-5-E01-PP	952001141		
Through beam receiver	LED, Axial optic	2m Cable	NPN	S5N-PA-2-F01-NN	952001661	
			PNP	S5N-PA-2-F01-PP	952001151	
	M12 Connector		NPN	S5N-PA-5-F01-NN	952001551	
			PNP	S5N-PA-5-F01-PP	952001161	
	LED, Radial optic	2m Cable	NPN	S5N-PR-2-F01-NN	952001821	
			PNP	S5N-PR-2-F01-PP	952001171	
	M12 Connector		NPN	S5N-PR-5-F01-NN	952001761	
			PNP	S5N-PR-5-F01-PP	952001181	
	LASER, Axial optic	2m Cable	NPN	S5N-PL-2-F01-NN	952001891	
			PNP	S5N-PL-2-F01-PP	952001401	
	M12 Connector		NPN	S5N-PL-5-F01-NN	952001861	
			PNP	S5N-PL-5-F01-PP	952001411	
	LASER, Radial optic	2m Cable	NPN	S5N-PH-2-F01-NN	952002031	
			PNP	S5N-PH-2-F01-PP	952002021	
	M12 Connector		NPN	S5N-PH-5-F01-NN	952002051	
			PNP	S5N-PH-5-F01-PP	952002041	
	Through beam emitter	LED, Axial optic	2m Cable	-	S5N-PA-2-G00-XG	952001191
			M12 Connector	-	S5N-PA-5-G00-XG	952001201
LED, Radial optic		2m Cable	-	S5N-PR-2-G00-XG	952001211	
		M12 Connector	-	S5N-PR-5-G00-XG	952001221	
LASER, Axial optic		2m Cable	-	S5N-PL-2-G00-XG	952001421	
		M12 Connector	-	S5N-PL-5-G00-XG	952001431	
LASER, Radial optic		2m Cable	-	S5N-PH-2-G00-XG	952002061	
		M12 Connector	-	S5N-PH-5-G00-XG	952002071	
Background suppression		LED, Axial optic	2m Cable	NPN	S5N-PA-2-M03-NN	952001671
				PNP	S5N-PA-2-M03-PP	952001231
	M12 Connector			NPN	S5N-PA-5-M03-NN	952001561
				PNP	S5N-PA-5-M03-PP	952001001
	LED, Radial optic	2m Cable		IO-Link	S5N-PA-5-M03-OZ	952002230
				NPN	S5N-PS-2-M03-NN	952001901
		M12 Connector		PNP	S5N-PS-2-M03-PP	952001911
				NPN	S5N-PS-5-M03-NN	952001921
		PNP	S5N-PS-5-M03-PP	952001931		
Retroreflective for transparent	LED, Axial optic	2m Cable	NPN	S5N-PA-2-T01-NN	952001691	
			PNP	S5N-PA-2-T01-PP	952001261	
		M12 Connector		NPN	S5N-PA-5-T01-NN	952001581
				PNP	S5N-PA-5-T01-PP	952001271
	LED, Radial optic	2m Cable		IO-Link	S5N-PA-5-T01-OZ	952002220
				NPN	S5N-PR-2-T01-NN	952001831
		M12 Connector		PNP	S5N-PR-2-T01-PP	952001281
				NPN	S5N-PR-5-T01-NN	952001771
		PNP	S5N-PR-5-T01-PP	952001291		
Luminescence	LED, Axial optic	2m Cable	NPN	S5N-PA-2-U03-NN	952001701	
			PNP	S5N-PA-2-U03-PP	952001301	
	M12 Connector		NPN	S5N-PA-5-U03-NN	952001591	
			PNP	S5N-PA-5-U03-PP	952001311	
Contrast	LED, Axial optic	2m Cable	NPN	S5N-PA-2-W03-NN	952001711	
			PNP	S5N-PA-2-W03-PP	952001321	
	M12 Connector		NPN	S5N-PA-5-W03-NN	952001601	
			PNP	S5N-PA-5-W03-PP	952001331	
		IO-Link	S5N-PA-5-W03-OZ	952002240		


S5N METAL MODELS

OPTIC FUNCTION	EMISSION	CONNECTION	OUTPUT	MODEL	ORDER No.
Retroreflective	LED, Axial optic	2m Cable	NPN	S5N-MA-2-A00-NN	952022091
			PNP	S5N-MA-2-A00-PP	952022081
		M12 Connector	NPN	S5N-MA-5-A00-NN	952022111
			PNP	S5N-MA-5-A00-PP	952022101
Polarized retroreflective	LED, Axial optic	2m Cable	NPN	S5N-MA-2-B01-NN	952021501
			PNP	S5N-MA-2-B01-PP	952021001
		M12 Connector	NPN	S5N-MA-5-B01-NN	952021661
			PNP	S5N-MA-5-B01-PP	952021201
			IO-Link	S5N-MA-5-B01-OZ	952022160
	LED, Radial optic	2m Cable	NPN	S5N-MR-2-B01-NN	952021601
			PNP	S5N-MR-2-B01-PP	952021141
		M12 Connector	NPN	S5N-MR-5-B01-NN	952021761
			PNP	S5N-MR-5-B01-PP	952021341
	LASER, Axial optic	2m Cable	NPN	S5N-ML-2-B01-NN	952021821
			PNP	S5N-ML-2-B01-PP	952021401
		M12 Connector	NPN	S5N-ML-5-B01-NN	952021851
			PNP	S5N-ML-5-B01-PP	952021441
			IO-Link	S5N-ML-5-B01-OZ	952022180
	LASER, Radial optic	2m Cable	NPN	S5N-MH-2-B01-NN	952021951
			PNP	S5N-MH-2-B01-PP	952021941
		M12 Connector	NPN	S5N-MH-5-B01-NN	952021971
			PNP	S5N-MH-5-B01-PP	952021961
Long Diffuse proximity	LED, Axial optic	2m Cable	NPN	S5N-MA-2-C01-NN	952021511
			PNP	S5N-MA-2-C01-PP	952021011
		M12 Connector	NPN	S5N-MA-5-C01-NN	952021671
			PNP	S5N-MA-5-C01-PP	952021211
			IO-Link	S5N-MA-5-C01-OZ	952022200
	LED, Radial optic	2m Cable	NPN	S5N-MR-2-C01-NN	952021611
			PNP	S5N-MR-2-C01-PP	952021151
		M12 Connector	NPN	S5N-MR-5-C01-NN	952021771
			PNP	S5N-MR-5-C01-PP	952021351
	LASER, Axial optic	2m Cable	NPN	S5N-ML-2-C01-NN	952021831
			PNP	S5N-ML-2-C01-PP	952021411
		M12 Connector	NPN	S5N-ML-5-C01-NN	952021861
			PNP	S5N-ML-5-C01-PP	952021451
			IO-Link	S5N-ML-5-C01-OZ	952022190
	LASER, Radial optic	2m Cable	NPN	S5N-MH-2-C01-NN	952021991
			PNP	S5N-MH-2-C01-PP	952021981
		M12 Connector	NPN	S5N-MH-5-C01-NN	952022011
			PNP	S5N-MH-5-C01-PP	952022001
Short Diffuse proximity	LED, Axial optic	2m Cable	NPN	S5N-MA-2-C10-NN	952021521
			PNP	S5N-MA-2-C10-PP	952021021
		M12 Connector	NPN	S5N-MA-5-C10-NN	952021681
			PNP	S5N-MA-5-C10-PP	952021221
	LED, Radial optic	2m Cable	NPN	S5N-MR-2-C10-NN	952021621
			PNP	S5N-MR-2-C10-PP	952021491
		M12 Connector	NPN	S5N-MR-5-C10-NN	952021781
			PNP	S5N-MR-5-C10-PP	952021481
Medium Diffuse proximity	LED, Axial optic	2m Cable	NPN	S5N-MA-2-C21-NN	952022131
			PNP	S5N-MA-2-C21-PP	952022121
		M12 Connector	NPN	S5N-MA-5-C21-NN	952022151
			PNP	S5N-MA-5-C21-PP	952022141


Fixed focus	LED, Axial optic	2m Cable	NPN	S5N-MA-2-D00-NN	952021531	
			PNP	S5N-MA-2-D00-PP	952021031	
		M12 Connector	NPN	S5N-MA-5-D00-NN	952021691	
	PNP		S5N-MA-5-D00-PP	952021231		
	LED, Radial optic	2m Cable	NPN	S5N-MR-2-D00-NN	952021631	
			PNP	S5N-MR-2-D00-PP	952021161	
M12 Connector		NPN	S5N-MR-5-D00-NN	952021791		
	PNP	S5N-MR-5-D00-PP	952021361			
Fiber optic	LED, Axial optic	2m Cable	NPN	S5N-MA-2-E01-NN	952021881	
			PNP	S5N-MA-2-E01-PP	952021041	
		M12 Connector	NPN	S5N-MA-5-E01-NN	952021891	
			PNP	S5N-MA-5-E01-PP	952021241	
Through beam receiver	LED, Axial optic	2m Cable	NPN	S5N-MA-2-F01-NN	952021541	
			PNP	S5N-MA-2-F01-PP	952021051	
		M12 Connector	NPN	S5N-MA-5-F01-NN	952021701	
			PNP	S5N-MA-5-F01-PP	952021251	
	LED, Radial optic	2m Cable	NPN	S5N-MR-2-F01-NN	952021641	
			PNP	S5N-MR-2-F01-PP	952021171	
		M12 Connector	NPN	S5N-MR-5-F01-NN	952021801	
			PNP	S5N-MR-5-F01-PP	952021371	
	LASER, Axial optic	2m Cable	NPN	S5N-ML-2-F01-NN	952021841	
			PNP	S5N-ML-2-F01-PP	952021421	
		M12 Connector	NPN	S5N-ML-5-F01-NN	952021871	
			PNP	S5N-ML-5-F01-PP	952021461	
	LASER, Radial optic	2m Cable	NPN	S5N-MH-2-F01-NN	952022031	
			PNP	S5N-MH-2-F01-PP	952022021	
		M12 Connector	NPN	S5N-MH-5-F01-NN	952022051	
			PNP	S5N-MH-5-F01-PP	952022041	
	Through beam emitter	LED, Axial optic	2m Cable	-	S5N-MA-2-G00-XG	952021061
			M12 Connector	-	S5N-MA-5-G00-XG	952021261
LED, Radial optic		2m Cable	-	S5N-MR-2-G00-XG	952021181	
		M12 Connector	-	S5N-MR-5-G00-XG	952021381	
LASER, Axial optic		2m Cable	-	S5N-ML-2-G00-XG	952021431	
		M12 Connector	-	S5N-ML-5-G00-XG	952021471	
LASER, Radial optic		2m Cable	-	S5N-MH-2-G00-XG	952022061	
		M12 Connector	-	S5N-MH-5-G00-XG	952022071	
Background suppression	LED, Axial optic	2m Cable	NPN	S5N-MA-2-M03-NN	952021551	
			PNP	S5N-MA-2-M03-PP	952021071	
		M12 Connector	PNP	S5N-MA-5-M03-PP	952021271	
			IO-Link	S5N-MA-5-M03-OZ	952022170	
	LED, Radial optic	2m Cable	PNP	S5N-MS-2-M03-PP	952021911	
		M12 Connector	PNP	S5N-MS-5-M03-PP	952021931	
Retroreflective for transparent	LED, Axial optic	2m Cable	NPN	S5N-MA-2-T01-NN	952021571	
			PNP	S5N-MA-2-T01-PP	952021091	
		M12 Connector	NPN	S5N-MA-5-T01-NN	952021731	
			PNP	S5N-MA-5-T01-PP	952021291	
	LED, Radial optic	2m Cable	NPN	S5N-MR-2-T01-NN	952021651	
			PNP	S5N-MR-2-T01-PP	952021191	
		M12 Connector	NPN	S5N-MR-5-T01-NN	952021811	
			PNP	S5N-MR-5-T01-PP	952021391	
Luminescence	LED, Axial optic	M12 Connector	PNP	S5N-MA-5-U03-PP	952021301	
Contrast	LED, Axial optic	2m Cable	PNP	S5N-MA-2-W03-PP	952021111	
		M12 Connector	NPN	S5N-MA-5-W03-NN	952021751	
			PNP	S5N-MA-5-W03-PP	952021311	

# ACCESSORIES


ST-5010




ST-5011




ST-5012




ST-5017

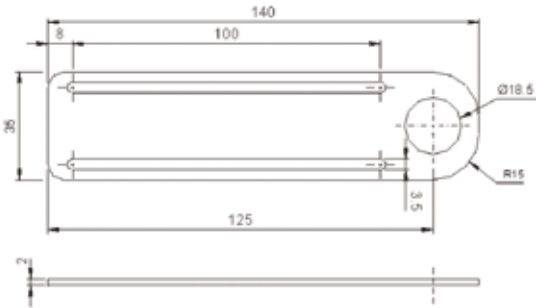


SWING-18

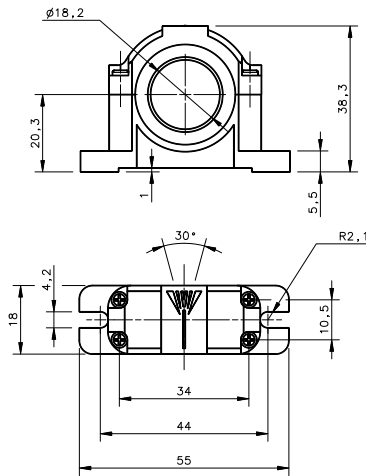


PLASTIC NUT




SP-40

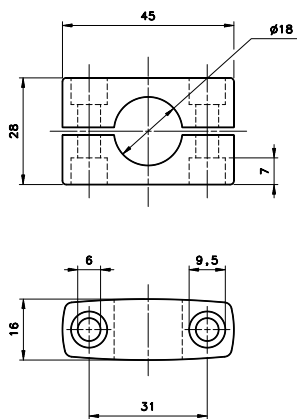

JOINT 18

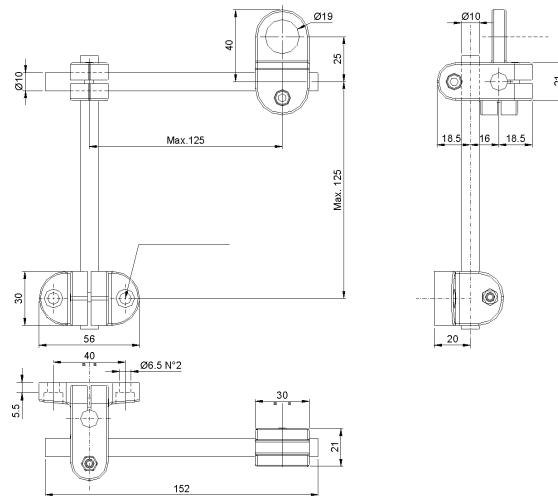

MICRO 18

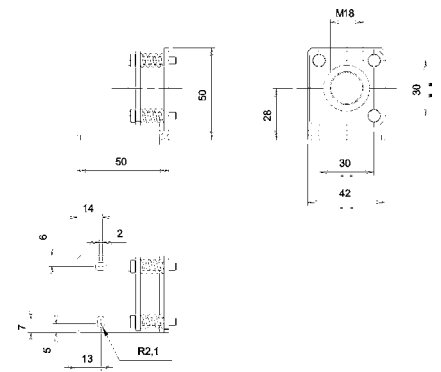

mm

MODEL	DESCRIPTION	ORDER No.
ST-5010	M18/14 mounting bracket	95ACC5230
ST-5011	M18 mounting bracket short	95ACC5240
ST-5012	M18 mounting bracket long	95ACC5250
ST-5017	M18 mounting bracket	95ACC5270
S50 EASY -IN	M18/14 EASY in™ adjustable mounting support	95ACC 5300
JOINT -18	M18 jointed support	95ACC 5220
MICRO -18	support with micrometric regulation for tubular M18 sensors	95ACC 1380
ST1218	M12/M18 mounting brackets	95ACC3340
ST1830	M18/M30 mounting brackets	95ACC3350
SP-40	mounting bracket tubular	95ACC1370
SWING-18	adjustable support for M18 tubular sensors	895000006
PLASTIC NUT	flared mounting nut	95ACC2630
MEK -PROOF	front protection (only for metal models)	G5000001

## IO-LINK CONNECTIVITY

MODEL	DESCRIPTION	ORDER No.
CBX-8IOL-EIP	CBX-8IOL-EIP 8P IOL M12 EIP MASTER	95ACC8180
CBX-8IOL-PNIO	CBX-8IOL-PNIO 8P IOL M12 PROFINET MASTER	95ACC8190

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
		5 m	CS-A1-02-G-05	95A251270
		7 m	CS-A1-02-G-07	95A251280
		10 m	CS-A1-02-G-10	95A251390
	4-pole, P.U.R.	2 m	CS-A1-02-R-02	95A251540
5 m		CS-A1-02-R-05	95A251560	
Radial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A2-02-G-03	95A251360
		5 m	CS-A2-02-G-05	95A251240
		7 m	CS-A2-02-G-07	95A251245
		10 m	CS-A2-02-G-10	95A251260
	4-pole, P.U.R.	2 m	CS-A2-02-R-02	95A251550
		5 m	CS-A2-02-R-05	95A251570
Radial M12 Connector with LED (for PNP N.O. sensors)	4-pole, grey, P.V.C.	3 m	CS-A2-12-G-03	95A251400
		5 m	CS-A2-12-G-05	95A251350
		10 m	CS-A2-12-G-10	95A251370
Axial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A1-22-B-03	95ACC1480
		5 m	CV-A1-22-B-05	95ACC1490
		10 m	CV-A1-22-B-10	95ACC1500
		15 m	CV-A1-22-B-15	95ACC2070
		25 m	CV-A1-22-B-25	95ACC2090
Radial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A2-22-B-03	95ACC1540
		5 m	CV-A2-22-B-05	95ACC1550
		10 m	CV-A2-22-B-10	95ACC1560
Axial M12 Connector	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
		10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
	4-pole, black	Connector- not cabled	CS-A1-02-B-NC	G5085002
Radial M12 Connector	4-pole, black	Connector- not cabled	CS-A2-02-B-NC	G5085003
Axial M12 Connector	5-pole, L coded power cable	3 m	CS-M1-02-B-03	95ACC0007
Axial M12 F/M8 M Connector	4-pole, double headed	3 m	CS-H1-02-B-03	95ACC0008
Axial M12 F/M12 M Connector	4-pole, double headed	3 m	CS-I1-02-B-03	95ACC0009

Rev. 01, 04/2019

# SM-ALL



## COMPLETE LINE OF AMPLIFIED SUBMINIATURE PHOTOELECTRIC SENSORS

- 15mm, 20mm, 30mm and 50mm fixed focus proximity
- 1,5m retroreflective and 1m polarized retroreflective
- 2m through beam models
- Amplified NPN or PNP output with NO-NC output

### APPLICATIONS

- Processing and Packaging machinery
- Automotive
- Beverage & Bottling
- Vending machines




SM-ALL	
<b>Through beam</b>	0...2 m
<b>Retroreflective (on R2 reflector)</b>	0,05...1,5 m
<b>Polarized retroreflective</b>	0,1...1 m
<b>Fixed focus</b>	3...15 mm
	3...20 mm
	3...30 mm
	3...50 mm
<b>Power supply</b>	Vdc
	Vac
	Vac/dc
<b>Output</b>	PNP
	NPN
	NPN/PNP
	relay
	other
<b>Connection</b>	cable
	connector
	pig-tail
<b>Approximate dimensions (mm)</b>	8x23x12
<b>Housing material</b>	Polycarbonate
<b>Mechanical protection</b>	IP67

# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc (limit values)
<b>Ripple</b>	10% max.
<b>Consumption (output current excluded)</b>	20 mA max.
<b>Light emission</b>	red LED 640 nm
<b>Operating mode</b>	LIGHT mode on N.O. output/DARK mode on N.C. output
<b>Indicators</b>	yellow OUTPUT LED excl. mod. G00 green POWER LED
<b>Output</b>	PNP or NPN; NO; NC
<b>Output current</b>	50 mA max.
<b>Saturation voltage</b>	1,25 V max. (NPN), 1,45 V max. (PNP)
<b>Response time</b>	700 $\mu$ s 1,3 ms (mod. SM...F00/G00)
<b>Switching frequency</b>	700 Hz 385 Hz (mod. SM...F00/G00)
<b>Connection</b>	2 m cable -2,5 mm
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 M $\Omega$ , 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	Polycarbonate
<b>Lens material</b>	PMMA, glass (mod. B00)
<b>Operating temperature</b>	-20 ... 55 °C
<b>Storage temperature</b>	-30 ... 75 °C
<b>Weight</b>	22 g



# DIMENSIONS

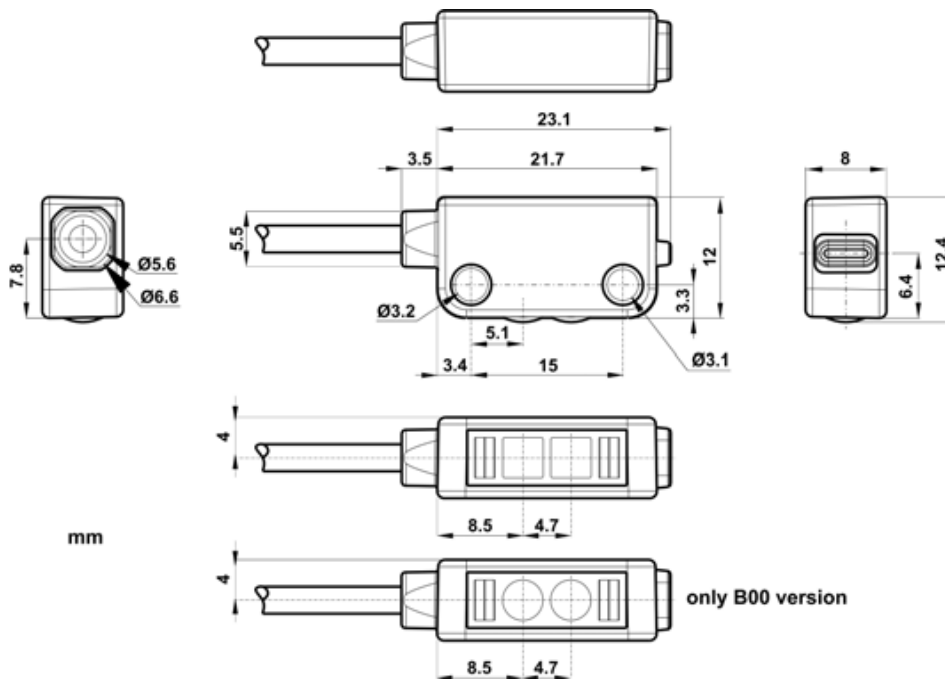













# CONNECTIONS

# INDICATORS AND SETTINGS

## CABLE

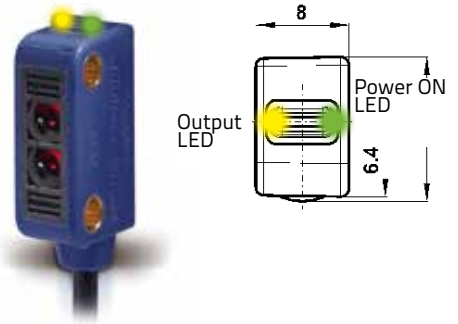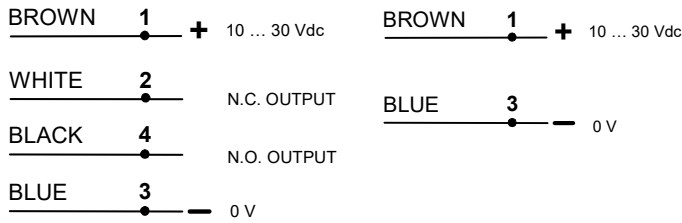

# DETECTIONS DIAGRAMS

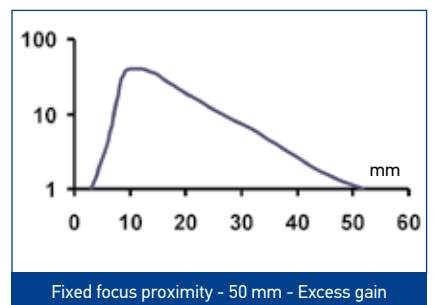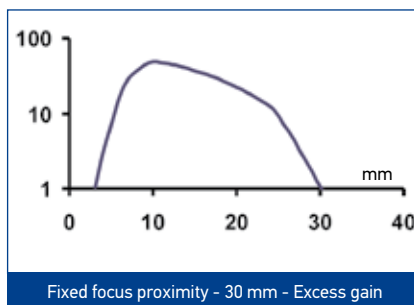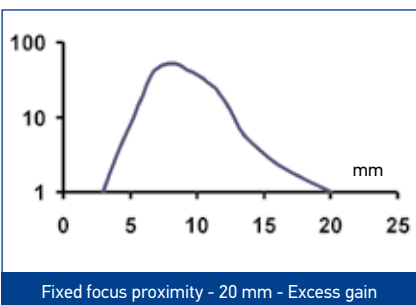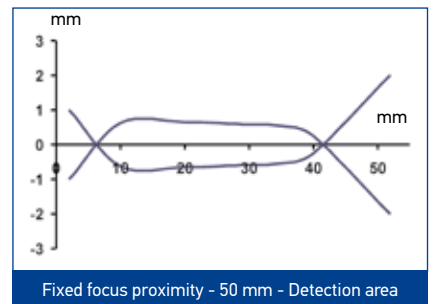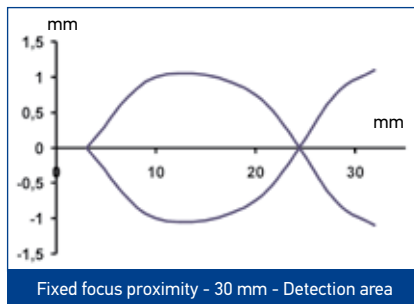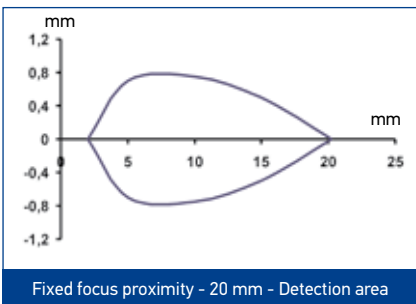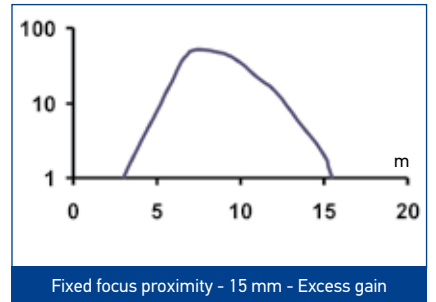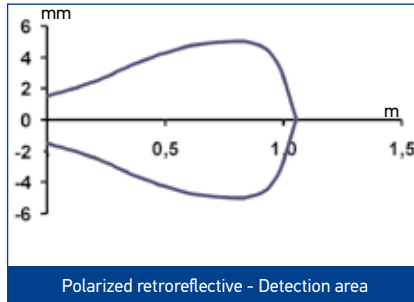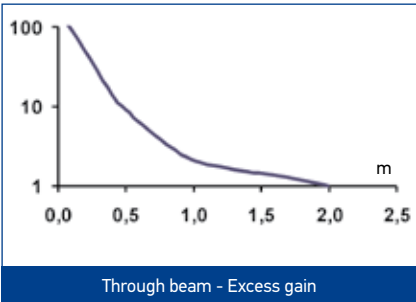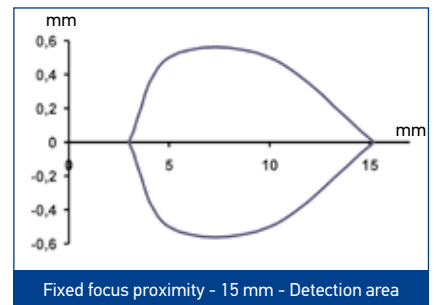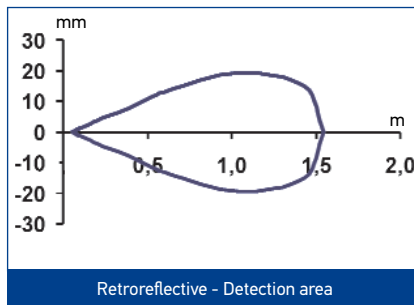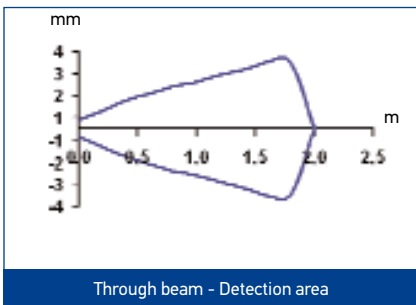




# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	OPERATING DISTANCE	CONNECTION	OUTPUT	MODEL	ORDER No.	
Retroreflective	0,05...1,5 m	2m Cable	PNP	SM-PR-2-A00-PP	95B000060	
			NPN	SM-PR-2-A00-NN	95B000070	
Polarized retroreflective	0,1...1 m	2m Cable	PNP	SM-PR-2-B00-PP	95B000080	
			NPN	SM-PR-2-B00-NN	95B000090	
Fixed focus (short distance)	15 mm	2m Cable	PNP	SM-PR-2-D00-PP	95B000020	
			NPN	SM-PR-2-D00-NN	95B000030	
Fixed focus (normal distance)	20 mm		PNP	SM-PR-2-D10-PP	95B000140	
			NPN	SM-PR-2-D10-NN	95B000150	
Fixed focus (medium distance)	30 mm		PNP	SM-PR-2-D20-PP	95B000040	
			NPN	SM-PR-2-D20-NN	95B000050	
Fixed focus (long distance)	50 mm		PNP	SM-PR-2-D30-PP	95B000000	
			NPN	SM-PR-2-D30-NN	95B000010	
Through beam receiver	0...2 m		2m Cable	PNP	SM-PR-2-F00-PP	95B000120
				NPN	SM-PR-2-F00-NN	95B000130
		-		SM-PR-2-G00-XG	95B000160	

## ACCESSORIES

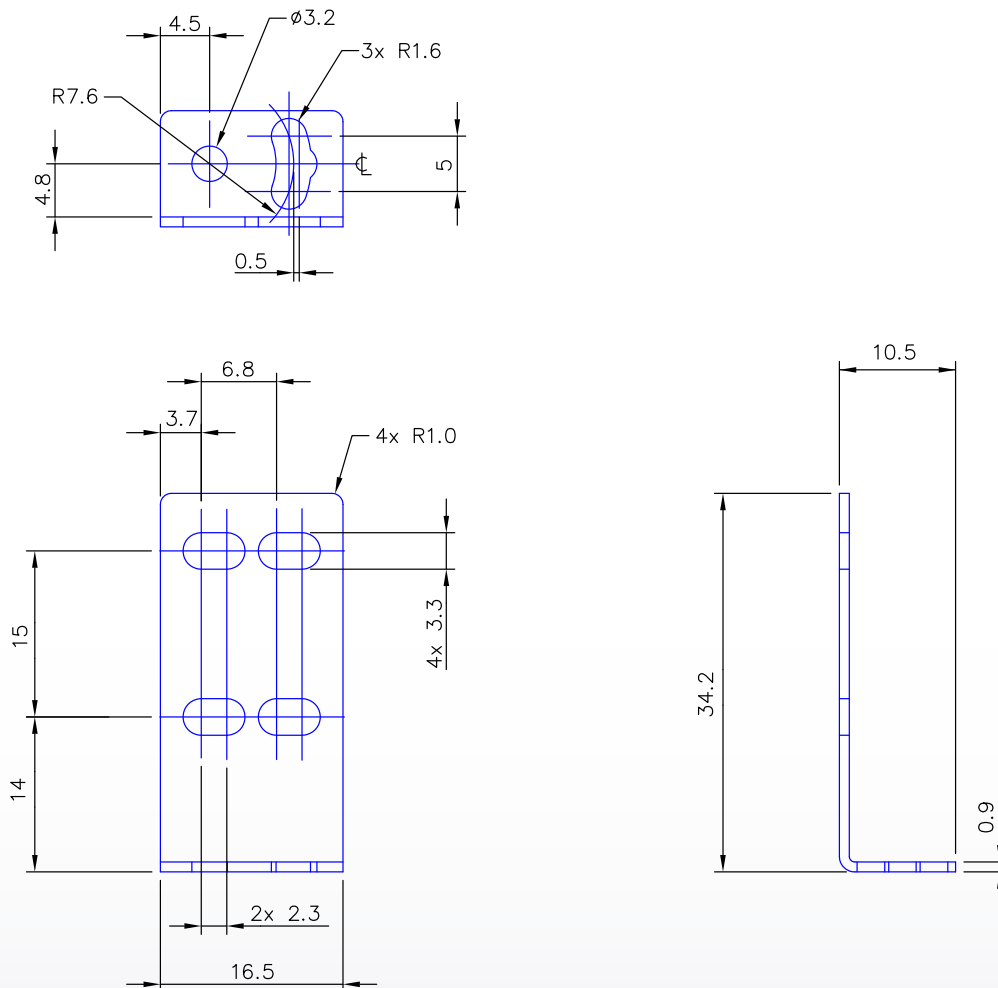

MODEL	DESCRIPTION	ORDER NO.
ST-5049	right angle bracket	95ACC6650

# S3Z


## ADVANCED LINE OF MINIATURE GLOBAL STYLE OF PHOTOELECTRIC SENSORS



- 50-250 mm background suppression
- 0.7 m proximity, 150 mm with narrow beam
- 4 m polarized retroreflective
- 15 m through beam
- Light and dark trimmer models
- Standard 3-wire output configuration

### APPLICATIONS

- Processing and Packaging machinery
- Electronics assembling
- Transportation lines, material handling
- Automatic warehouses
- Cosmetics and Pharmaceutical industry
- Small part detection with maximum accuracy

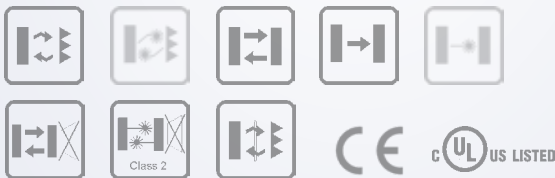


S3Z		
<b>Through beam</b>	0...15 m 0...30 m (class 1 LASER)	
<b>Polarized retroreflective</b>	0.05...4 m 0,3...10 m (class 1 LASER)	
<b>Retroreflective for transparent (on R2 reflector)</b>	0...2 m	
<b>Diffuse proximity</b>	0...700 mm	
<b>Background suppression</b>	50...150 mm (narrow beam) 50...250 mm 40...300 mm (class 1 LASER)	
<b>Power supply</b>	Vdc	10...30 V
	Vac	
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	11x31x19	
<b>Housing material</b>	PC/PBT	
<b>Mechanical protection</b>	IP67	

# TECHNICAL DATA


<b>Consumption (output current excluded)</b>	30 mA max. (LED mod.) 35 mA max. (Laser mod.)
<b>Light emission</b>	red LED 650 nm (mod. S3Z...T51) red LED 665 nm (mod. S3Z...B01/C01) red LED 670 nm (mod. S3Z...M01) IR LED 850 nm (mod. S3Z...C11) IR LED 870 nm (mod. S3Z...F01/G00) red Laser 650 nm (mod. S3Z...B01/F01/G00/M01)
<b>Setting</b>	sensitivity trimmer, 6 turns screw (mod. S3Z...M01), LIGHT/DARK trimmer model available (mod.S3Z...-PP, -NN)
<b>Operating mode</b>	LIGHT/DARK trimmer (Laser mod. S3Z...-PP, -NN), LIGHT (mod. S3Z...-PL, -NL), DARK (mod. S3Z...-PD, -ND)
<b>Indicators</b>	yellow OUTPUT LED, green STABILITY LED (mod. S3Z...B01/C01/C11/F01), POWER ON LED (mod. S3Z...G00)
<b>Output</b>	PNP or NPN (short circuit protection)
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	2 V max. (LED mod.) 1,5 V max. (Laser mod.)
<b>Response time</b>	1 ms max. (LED mod.) 250 µs max. (Laser mod.)
<b>Switching frequency</b>	500 Hz max. (LED mod.) 2 kHz max. (Laser mod.)
<b>Connection</b>	2 m cable Ø 3,5 mm, M8 4-pole connector
<b>Dielectric strength</b>	500 Vac 1 min., between electronics and housing
<b>Insulating resistance</b>	>20 MΩ 500 Vdc, between electronics and housing
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibration</b>	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	body PBT, indicators cover PC
<b>Lens material</b>	PMMA, PC (mod. S3Z...B01)
<b>Operating temperature</b>	-25 ... 55 °C (LED mod.), -10 ... 55 °C (Laser mod.)
<b>Storage temperature</b>	-40 ... 70 °C (LED mod.), -25 ... 70 °C (Laser mod.)
<b>Weight</b>	50 g max. cable vers. , 10 g max. conn. vers.

# DIMENSIONS

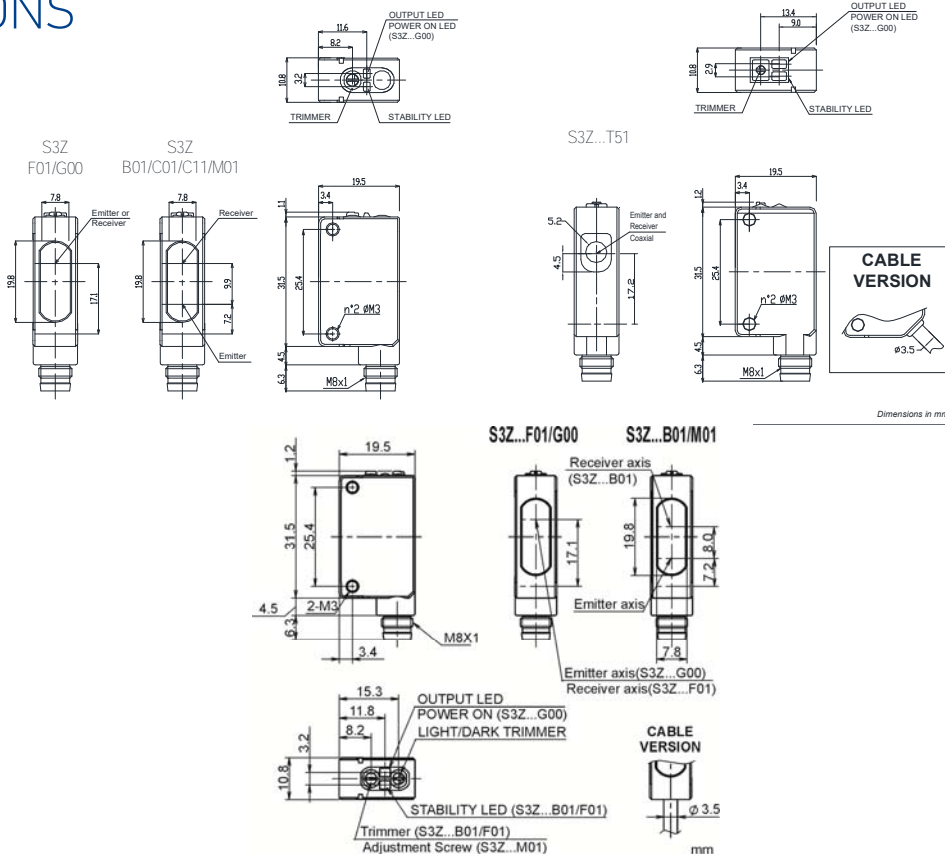


# CONNECTIONS

## CABLE

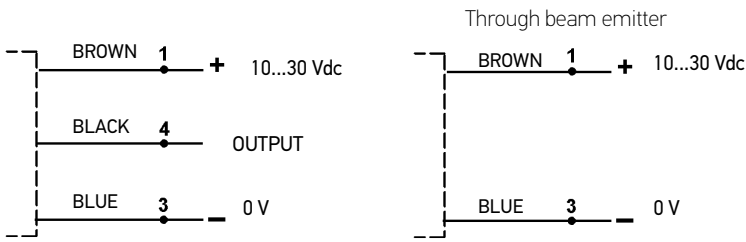


## M8 CONNECTOR

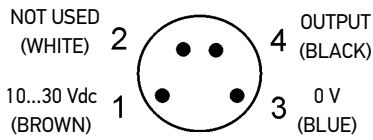


# INDICATORS AND SETTINGS


## S3Z...F01/G00/B01/C01/M01



## S3Z...T51




## S3Z...F01/G00/B01/M01/S3Z...-PP, -NN

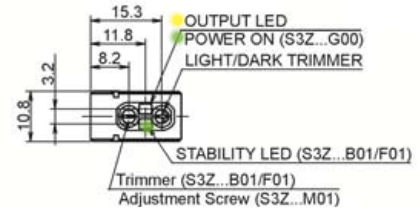


# DIAGRAM LED MODELS


## BACKGROUND SUPPRESSION - DISTANCE DIFFERENCE VS REFLECTANCE TARGET

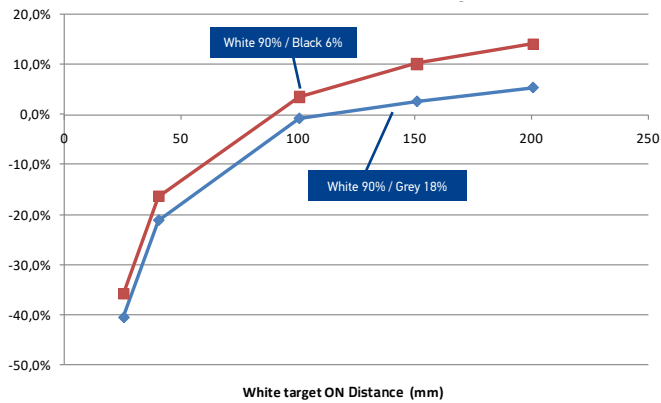


## THROUGH BEAM - DETECTION AREA

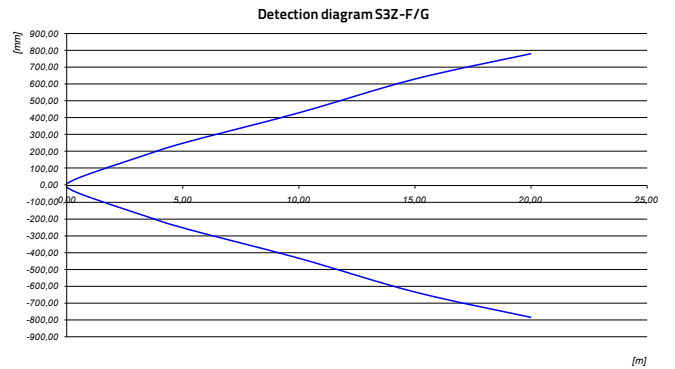


## POLARIZED RETROREFLECTIVE - DETECTION AREA

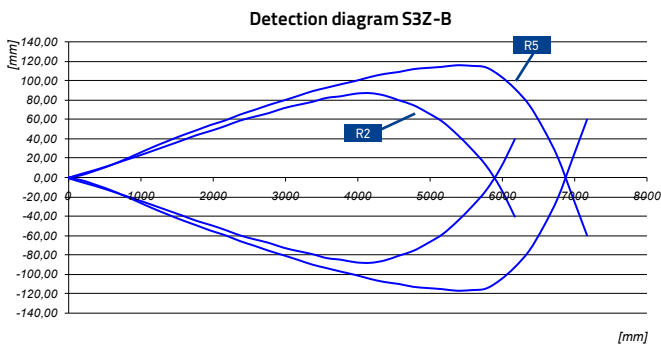


## DIFFUSE PROXIMITY - DETECTION AREA

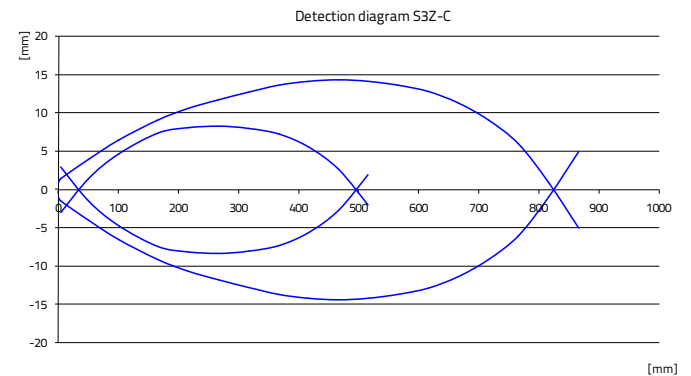

**NARROW BEAM PROXIMITY - DETECTION AREA**

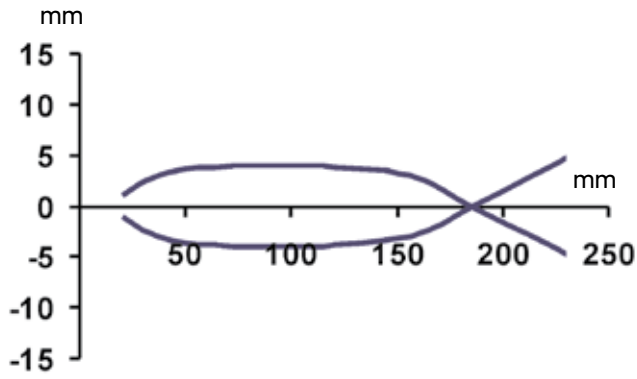


**POLARIZED RETROREFLECTIVE FOR TRANSPARENT - DETECTION AREA**

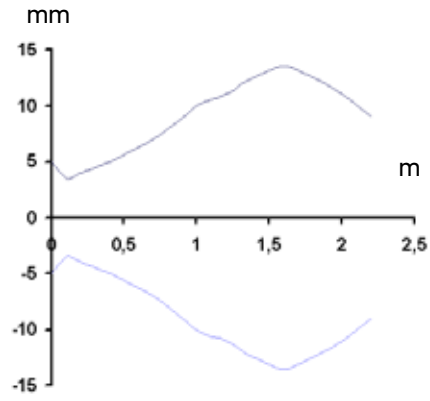


**DIAGRAMS LASER MODELS**


**BACKGROUND SUPPRESSION - DETECTION AREA**

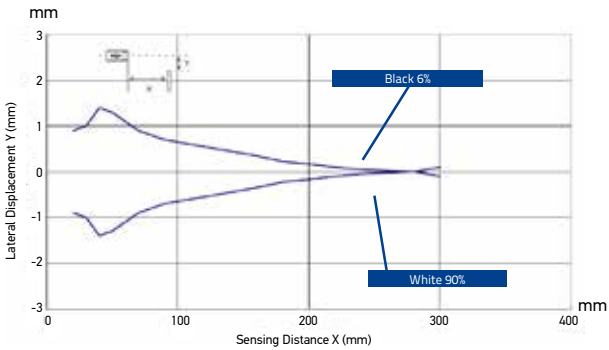


**BACKGROUND SUPPRESSION - SPOT DIMENSION**

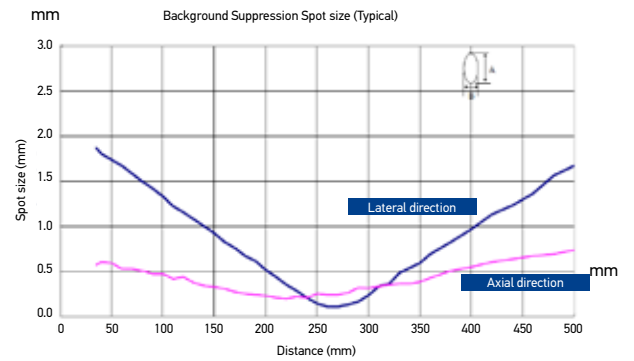


**POLARIZED RETROREFLECTIVE - DETECTION AREA**

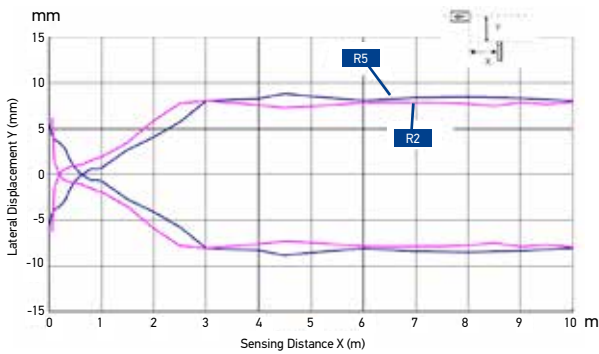


**POLARIZED RETROREFLECTIVE - EXCESS GAIN**

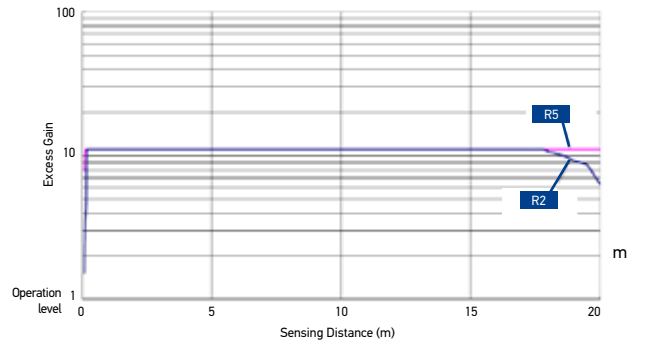

**THROUGH BEAM - DETECTION AREA**

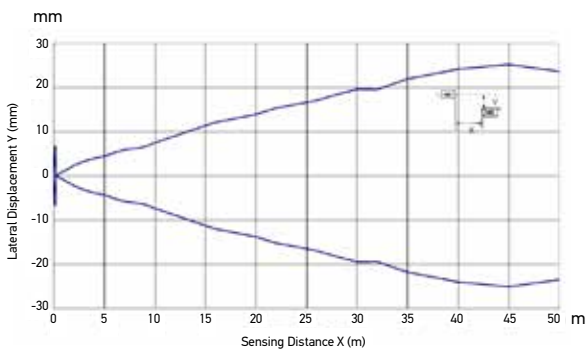


**THROUGH BEAM - EXCESS GAIN**

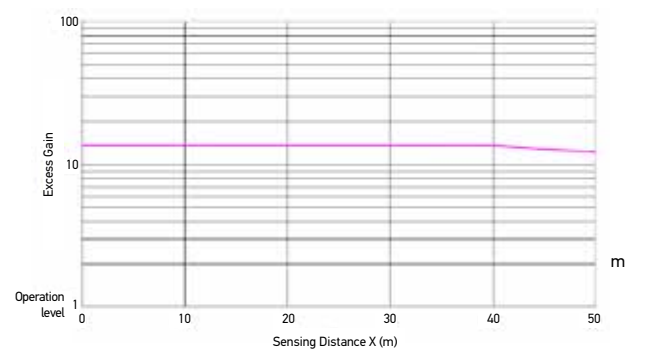

# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	EMISSION	CONNECTION	OUTPUT	MODEL	ORDER No.		
Narrow beam diffuse proximity	LED	2 m Cable	PNP - LIGHT	S3Z-PR-2-C01-PL	95B010040		
		M8 Connector	PNP - LIGHT	S3Z-PR-5-C01-PL	95B010050		
		2 m Cable	PNP - DARK	S3Z-PR-2-C01-PD	95B010060		
		M8 Connector	PNP - DARK	S3Z-PR-5-C01-PD	95B010070		
		2 m Cable	NPN - LIGHT	S3Z-PR-2-C01-NL	95B010200		
		M8 Connector	NPN - LIGHT	S3Z-PR-5-C01-NL	95B010210		
		2 m Cable	NPN - DARK	S3Z-PR-2-C01-ND	95B010220		
		M8 Connector	NPN - DARK	S3Z-PR-5-C01-ND	95B010230		
		2 m Cable	PNP - LIGHT/DARK	S3Z-PR-2-C01-PP	95B010670		
		M8 Connector	PNP - LIGHT/DARK	S3Z-PR-5-C01-PP	95B010690		
		2 m Cable	NPN - LIGHT/DARK	S3Z-PR-2-C01-NN	95B010660		
		M8 Connector	NPN - LIGHT/DARK	S3Z-PR-5-C01-NN	95B010680		
Long diffuse proximity	LED	2 m Cable	PNP - LIGHT	S3Z-PR-2-C11-PL	95B010001		
		M8 Connector	PNP - LIGHT	S3Z-PR-5-C11-PL	95B010011		
		2 m Cable	PNP - DARK	S3Z-PR-2-C11-PD	95B010021		
		M8 Connector	PNP - DARK	S3Z-PR-5-C11-PD	95B010031		
		2 m Cable	NPN - LIGHT	S3Z-PR-2-C11-NL	95B010161		
		M8 Connector	NPN - LIGHT	S3Z-PR-5-C11-NL	95B010171		
		2 m Cable	NPN - DARK	S3Z-PR-2-C11-ND	95B010181		
		M8 Connector	NPN - DARK	S3Z-PR-5-C11-ND	95B010191		
		2 m Cable	PNP - LIGHT/DARK	S3Z-PR-2-C11-PP	95B010630		
		M8 Connector	PNP - LIGHT/DARK	S3Z-PR-5-C11-PP	95B010650		
		2 m Cable	NPN - LIGHT/DARK	S3Z-PR-2-C11-NN	95B010620		
		M8 Connector	NPN - LIGHT/DARK	S3Z-PR-5-C11-NN	95B010640		
Polarized retroreflective	LED	2 m Cable	PNP - LIGHT	S3Z-PR-2-B01-PL	95B010081		
		M8 Connector	PNP - LIGHT	S3Z-PR-5-B01-PL	95B010091		
		2 m Cable	PNP - DARK	S3Z-PR-2-B01-PD	95B010101		
		M8 Connector	PNP - DARK	S3Z-PR-5-B01-PD	95B010111		
		2 m Cable	NPN - LIGHT	S3Z-PR-2-B01-NL	95B010241		
		M8 Connector	NPN - LIGHT	S3Z-PR-5-B01-NL	95B010251		
		2 m Cable	NPN - DARK	S3Z-PR-2-B01-ND	95B010261		
		M8 Connector	NPN - DARK	S3Z-PR-5-B01-ND	95B010271		
		2 m Cable	PNP - LIGHT/DARK	S3Z-PR-2-B01-PP	95B010590		
	M8 Connector	PNP - LIGHT/DARK	S3Z-PR-5-B01-PP	95B010610			
	2 m Cable	NPN - LIGHT/DARK	S3Z-PR-2-B01-NN	95B010580			
	M8 Connector	NPN - LIGHT/DARK	S3Z-PR-5-B01-NN	95B010600			
	LASER	2 m Cable	PNP - LIGHT/DARK	S3Z-PH-2-B01-P	95B010440		
		M8 Connector	PNP - LIGHT/DARK	S3Z-PH-5-B01-P	95B010460		
		2 m Cable	NPN - LIGHT/DARK	S3Z-PH-2-B01-N	95B010450		
		M8 Connector	NPN - LIGHT/DARK	S3Z-PH-5-B01-N	95B010470		
		Through beam	LED	2 m Cable	PNP - LIGHT	S3Z-PR-2-FG01-PL	95B010121
				M8 Connector	PNP - LIGHT	S3Z-PR-5-FG01-PL	95B010131
2 m Cable				PNP - DARK	S3Z-PR-2-FG01-PD	95B010141	
M8 Connector				PNP - DARK	S3Z-PR-5-FG01-PD	95B010151	
2 m Cable				NPN - LIGHT	S3Z-PR-2-FG01-NL	95B010281	
M8 Connector	NPN - LIGHT			S3Z-PR-5-FG01-NL	95B010291		
2 m Cable	NPN - DARK			S3Z-PR-2-FG01-ND	95B010301		
M8 Connector	NPN - DARK			S3Z-PR-5-FG01-ND	95B010311		
2 m Cable	PNP - LIGHT/DARK			S3Z-PR-2-FG01-PP	95B010710		
M8 Connector	PNP - LIGHT/DARK			S3Z-PR-5-FG01-PP	95B010730		
2 m Cable	NPN - LIGHT/DARK			S3Z-PR-2-FG01-NN	95B010700		
M8 Connector	NPN - LIGHT/DARK			S3Z-PR-5-FG01-NN	95B010720		
LASER	2 m Cable	PNP - LIGHT/DARK	S3Z-PH-2-FG01-P	95B010520			
	M8 Connector	PNP - LIGHT/DARK	S3Z-PH-5-FG01-P	95B010540			
	2 m Cable	NPN - LIGHT/DARK	S3Z-PH-2-FG01-N	95B010530			
	M8 Connector	NPN - LIGHT/DARK	S3Z-PH-5-FG01-N	95B010550			
	Background suPpression	LED	2 m Cable	PNP - LIGHT	S3Z-PR-2-M01-PL	95B010331	
			M8 Connector	PNP - LIGHT	S3Z-PR-5-M01-PL	95B010351	
2 m Cable			NPN - LIGHT	S3Z-PR-2-M01-NL	95B010321		
M8 Connector			NPN - LIGHT	S3Z-PR-5-M01-NL	95B010341		
2 m Cable			PNP - LIGHT/DARK	S3Z-PR-2-M01-PP	95B010750		
M8 Connector			PNP - LIGHT/DARK	S3Z-PR-5-M01-PP	95B010770		
LASER		2 m Cable	NPN - LIGHT/DARK	S3Z-PR-2-M01-NN	95B010740		
		M8 Connector	NPN - LIGHT/DARK	S3Z-PR-5-M01-NN	95B010760		
		2 m Cable	PNP - LIGHT/DARK	S3Z-PH-2-M01-P	95B010480		
		M8 Connector	PNP - LIGHT/DARK	S3Z-PH-5-M01-P	95B010500		
		2 m Cable	NPN - LIGHT/DARK	S3Z-PH-2-M01-N	95B010490		
		M8 Connector	NPN - LIGHT/DARK	S3Z-PH-5-M01-N	95B010510		
Polarized retroreflective for transparent	LED	2 m Cable	NPN - DARK	S3Z-PR-2-T51-ND	95B010390		
		2 m Cable	PNP - DARK	S3Z-PR-2-T51-PD	95B010380		
		M8 Connector	NPN - DARK	S3Z-PR-5-T51-ND	95B010370		
		M8 Connector	PNP - DARK	S3Z-PR-5-T51-PD	95B010360		

# ACCESSORIES

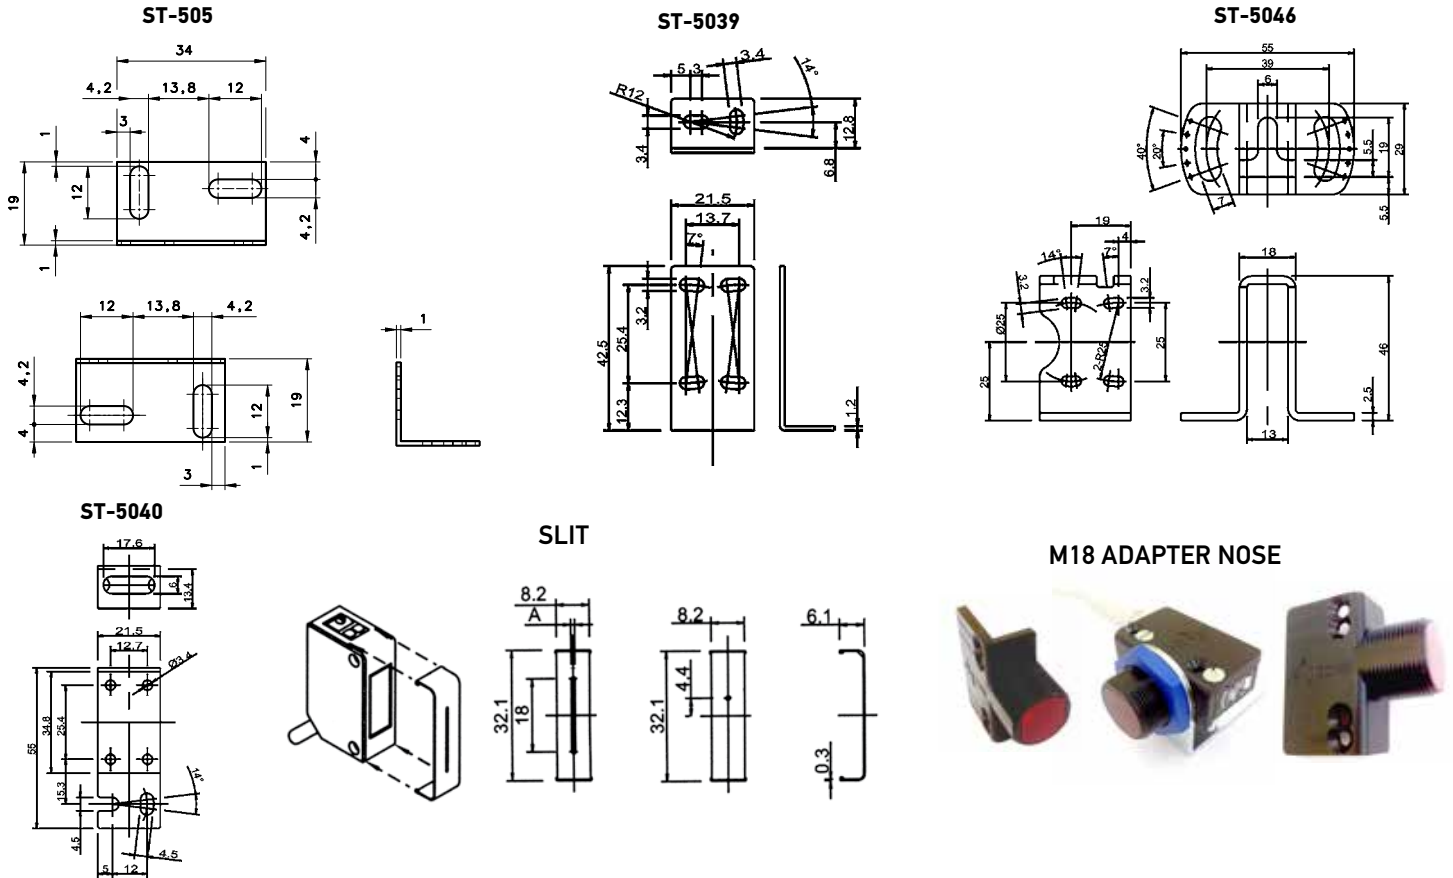

## MODEL SELECTION AND ORDER INFORMATION

MODEL	DESCRIPTION	ORDER NO.
ST-505	lateral mounting	95ACC2800
ST-5039	L-shaped fixing bracket	95ACC2270
ST-5040	protection bracket with vertical fixing (only for cable versions)	95ACC2280
ST-5046	protection bracket with horizontal fixing	95ACC2370
S3Z-SLIT1	Ø 0,5 mm slit for through beam	95ACC2470
S3Z-SLIT2	Ø 1 mm slit for through beam	95ACC2480
S3Z-SLIT3	Ø 2 mm slit for through beam	95ACC2490
S3Z-SLIT4	0,5x18 mm slit for through beam	95ACC2500
S3Z-SLIT5	1x18 mm slit for through beam	95ACC2510
S3Z-SLIT6	2x18 mm slit for through beam	95ACC2520
ST-S3Z-M18	S3Z FIX BRK M18 THREADED NOSE	95ACC7850

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 Connector	4-pole, grey, PVC.	3 m	CS-B1-02-G-03	95A251420
		5 m	CS-B1-02-G-05	95A251430
		7 m	CS-B1-02-G-07	95A251440
		10 m	CS-B1-02-G-10	95A251480
	4-pole, P.U.R.	2 m	CS-B1-02-R-02	95A251620
		5 m	CS-B1-02-R-05	95A251640
Radial M8 Connector	4-pole, grey, PVC.	3 m	CS-B2-02-G-03	95A251450
		5 m	CS-B2-02-G-05	95A251460
		7 m	CS-B2-02-G-07	95A251470
		10 m	CS-B2-02-G-10	95A251530
	4-pole, P.U.R.	2 m	CS-B2-02-R-02	95A251630
		5 m	CS-B2-02-R-05	95A251650

Rev. 03, 03/2019

# S45

## HIGH PERFORMANCE EUROPEAN STYLE MINIATURE SENSOR ALL-IN-ONE FAMILY



- Red LED and Laser emissions
- Precise risk free laser class 1 emission
- Diffused LED proximity 800mm
- Background Suppression 400mm
- Retroreflective Class 1 Laser 15m/Red LED 7m
- Through beam Class 1 Laser 20m/Red LED 15m
- IP69K housing
- 2m Cable or metal M8 4 pole version
- PNP or NPN output with remote teach in input
- High speed RGB and white emission contrast sensor
- High precision distance sensor up to 200 mm



### APPLICATIONS

- Processing and Packaging machinery
- Cosmetic and Pharmaceutical industry
- Electronics assembling
- Conveyor lines, material handling
- Automotive industry
- Print and paper industry
- Small part detection with maximum accuracy


S45		
<b>Through beam</b>	20m. (Laser Class1) 15m. (Red Led)	
<b>Polarized Retroreflective</b>	15m. (Laser Class1) 7m. (Red Led)	
<b>Autocollimated Retroreflective for Transparent objects</b>	2m. (Red Led)	
<b>Autocollimated Retroreflective</b>	2m. (Red Led)	
<b>Diffused proximity</b>	250mm. (Laser Class1) 800mm. (Red Led)	
<b>Background suppressor</b>	120mm. (Laser Class 1) 200mm. (Red Led) 400mm. (Red Led)	
<b>Distance sensor</b>	80mm. (Red Led) 200mm. (Red Led)	
<b>Contrast Sensor</b>	12mm. (White) 12mm. (RGB)	
<b>Power Supply</b>	Vdc	10...30Vdc (13...30Vdc Y models)
	Vac	
	Vac/Vdc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	Push Pull (Wxx, Yxx), Analog 0...10 V (Yxx)
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	34mm. x 20mm. X 12mm.	
<b>Housing material</b>	ABS(Housing), PMMA (Optics)	
<b>Mechanical protection</b>	IP67 & IP69K	




# TECHNICAL DATA

<b>Power supply</b>	10...30Vdc (13...30Vdc Y models)
<b>Ripple</b>	10% max.
<b>Consumption (Load current excluded)</b>	≤ 30 mA
<b>Light emission</b>	Red LED 632 nm, Red Laser 650 nm
<b>Setting</b>	Push Button TEACH-IN
<b>Indicators</b>	LED Green Operating Volatage LED Yellow Ouput Status
<b>Output</b>	NPN, PNP, Push Pull
<b>Output current</b>	100 mA
<b>Saturation voltage</b>	2 V max
<b>Response time</b>	500 μs 333 μs (C03 Laser) 250 μs (F/G Laser) 50 μs (W03, W33) 20 μs (W13, W43)
<b>Switching frequency</b>	≤ 1000Hz ≤ 1500Hz (C03 Laser) ≤ 2000 Hz (F/G Laser) ≤ 10 kHz (W03, W33) ≤ 25 kHz (W13, W43)
<b>Connection</b>	Plastic M8 4-pole connector, Metal M8 4-pole connector 2 m cable
<b>Dielectric strength</b>	500 Vac, 1min between electronic and housing
<b>Insulating resistance</b>	>20M OHM, 500 Vdc between electronic and housing
<b>Electrical protection</b>	class 2
<b>Mechanical protection</b>	IP67 & IP69K
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5mm amplitude, 10...55Hz frequency , for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	ABS
<b>Lens material</b>	PMMA
<b>Operating temperature</b>	-20...+60 °C
<b>Storage temperature</b>	-20...+80 °C
<b>Weight</b>	10g. with connector, 40g. with cable


# DIMENSIONS

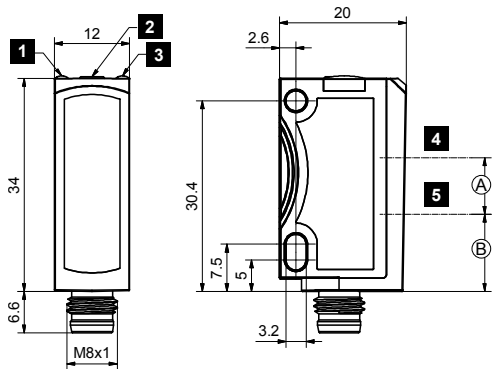

	S45-PR-2(5)-M03	S45-PR-2(5)-M13	S45-PR-2(5)-C03	S45-PH-5-M03	S45-PH-5-C03	S45-PR-G00	S45-PH-G00	S45-PR(PH)-F03
<b>A</b>	9	11.75	10.8	8.8	8.8	11.5	13.5	
<b>B</b>	12.3	11	11.5	12.5	13.5			22.3

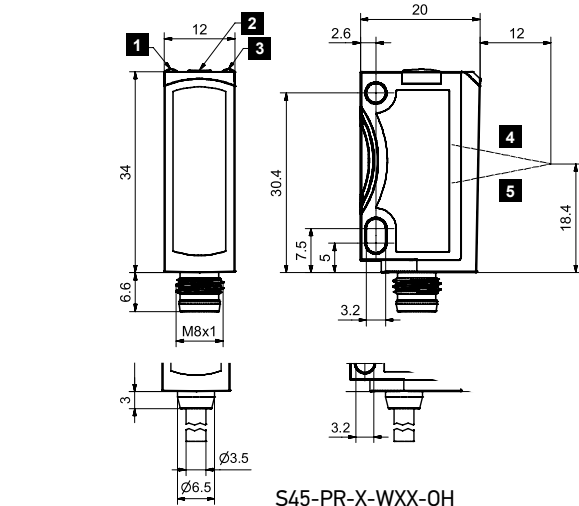

S45-PR-X-WXX-OH

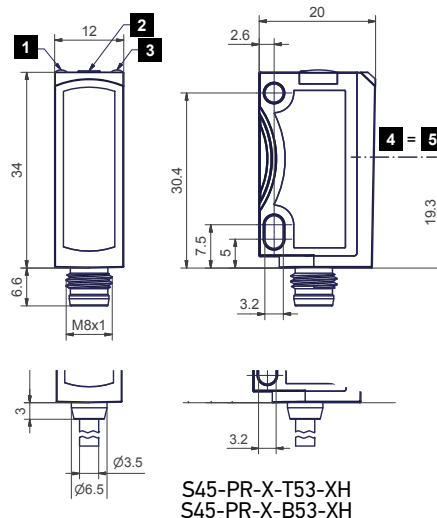


S45-PR-X-T53-XH  
S45-PR-X-B53-XH

<b>1</b>	Yellow LED 1)
<b>2</b>	Button
<b>3</b>	Green LED 2)
<b>4</b>	Receiver axis
<b>5</b>	Emitter axis


- 1) switching output indicator
- 2) operating voltage indicator

# CONNECTIONS

## CABLE

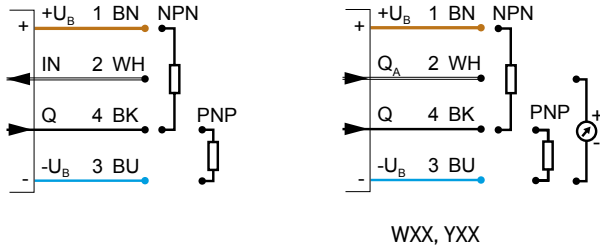


## M8 CONNECTOR

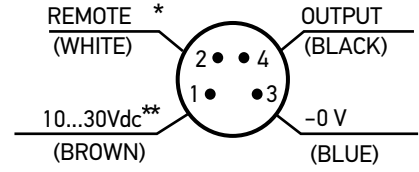

\* Analog out YXX

\*\* 13...30Vdc Y models



# INDICATORS AND SETTINGS

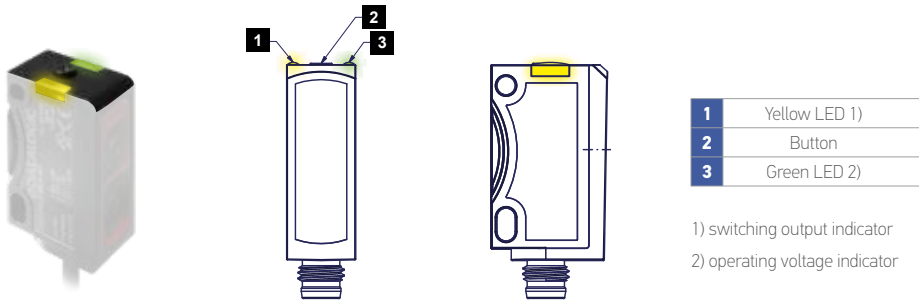



# DETECTION DIAGRAMS

## BACKGROUND SUPPRESSOR

### DETECTION SPOT SIZE

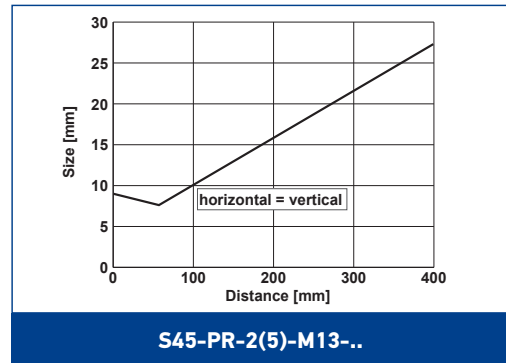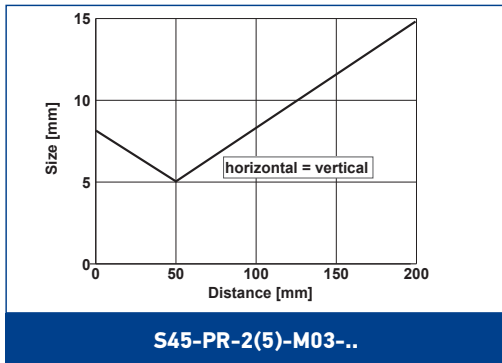


### B/W SHIFT

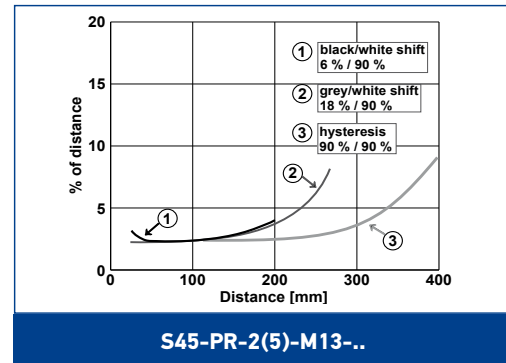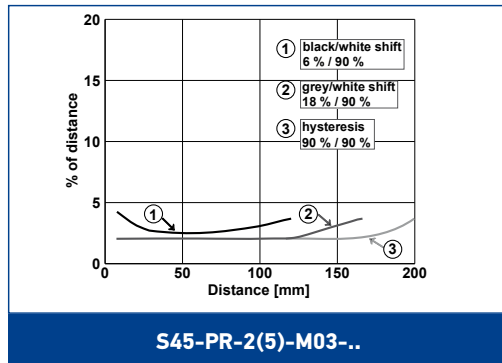


## ENERGETIC DIFFUSED

DETECTION SPOT SIZE

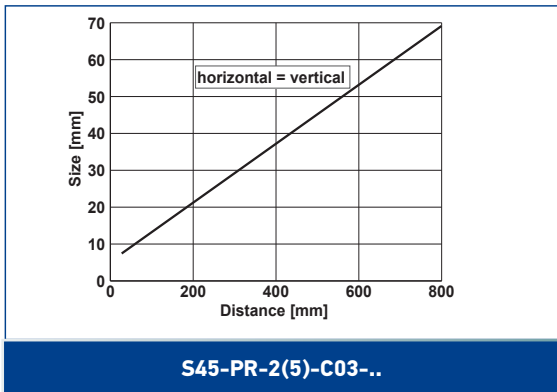


EXCESS GAIN

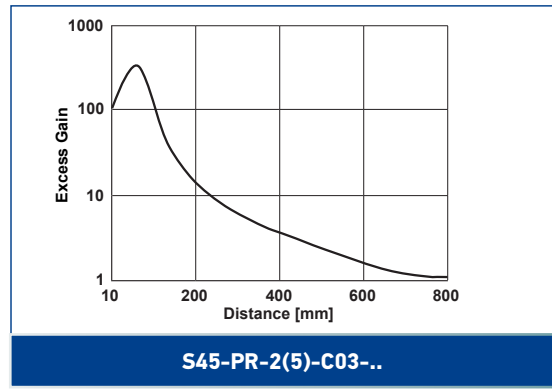


## RETROREFLECTIVE POLARIZED

DETECTION SPOT SIZE

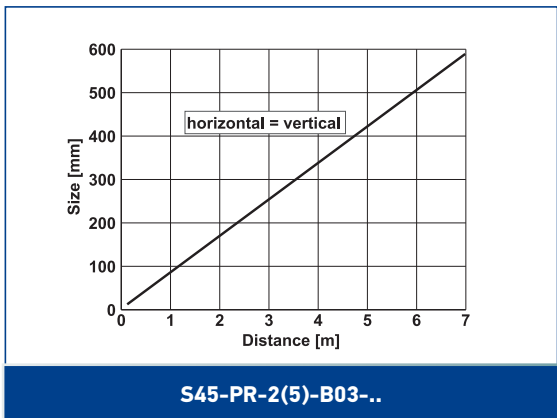


EXCESS GAIN

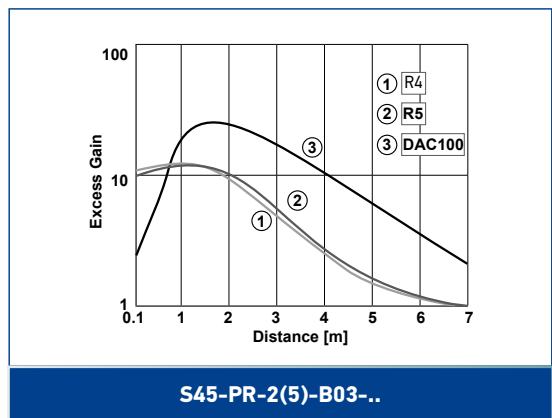


## COAXIAL RETROREFLECTIVE POLARIZED

DETECTION SPOT SIZE

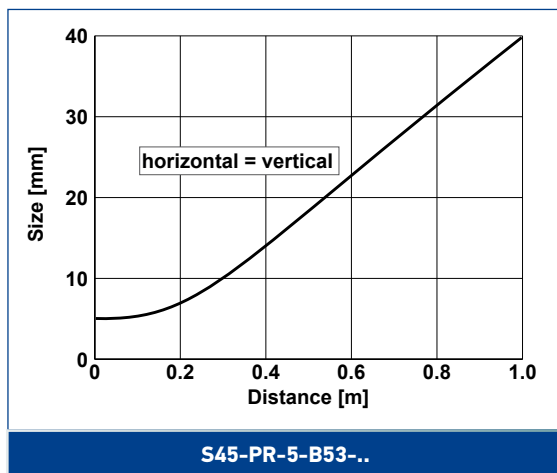


## RETROREFLECTIVE FOR TRANSPARENT

DETECTION SPOT SIZE

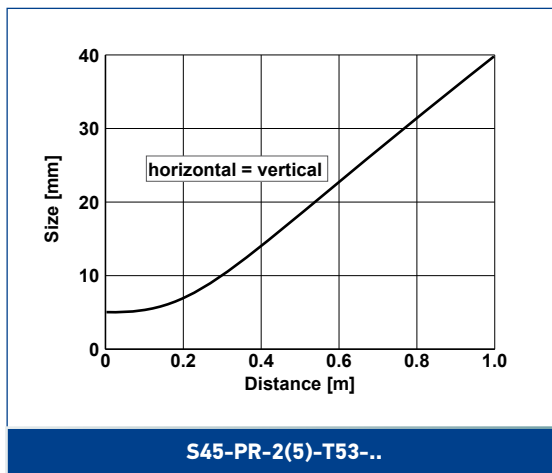


## THROUGH BEAM

DETECTION SPOT SIZE

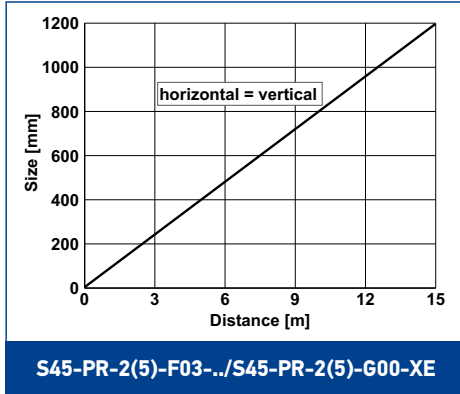


EXCESS GAIN

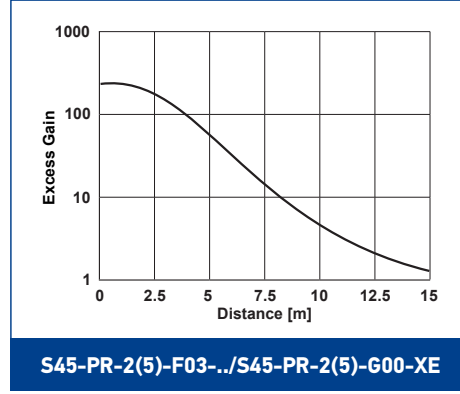


## LASER BACKGROUND SUPPRESSOR

DETECTION SPOT SIZE

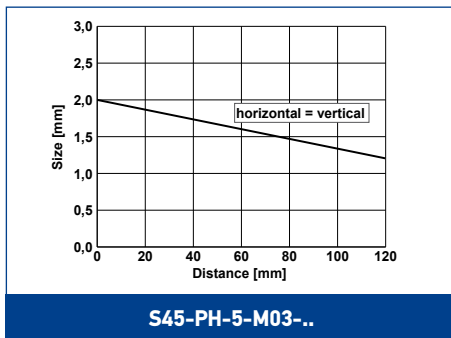


B/W SHIFT

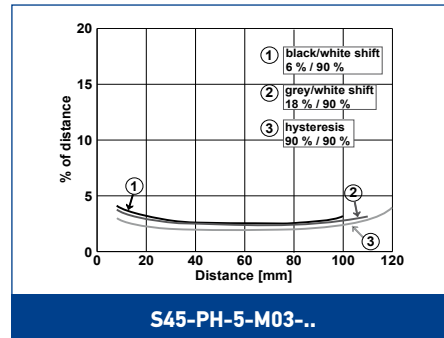


## LASER ENERGETIC DIFFUSED

DETECTION SPOT SIZE

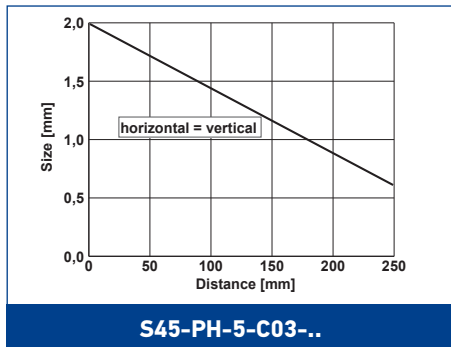


EXCESS GAIN

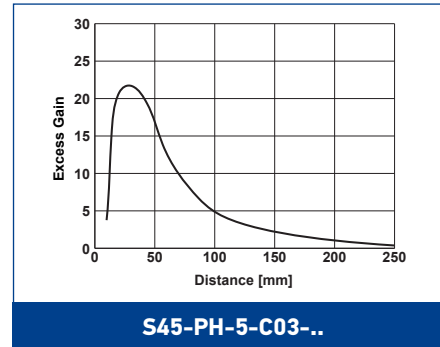


## LASER RETROREFLECTIVE POLARIZED

DETECTION SPOT SIZE

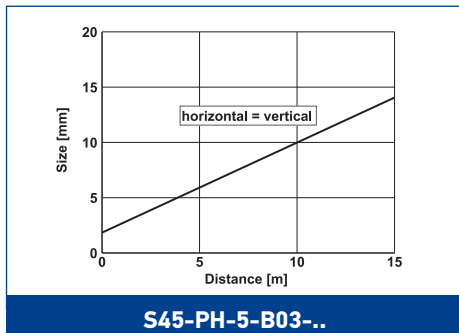


EXCESS GAIN

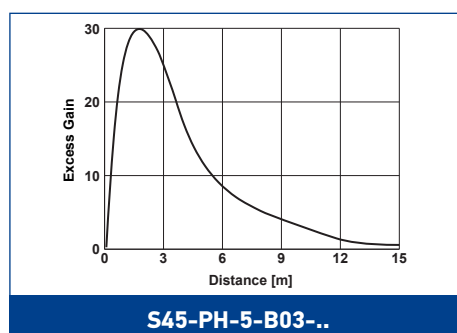


## LASER THROUGH BEAM

### DETECTION SPOT SIZE


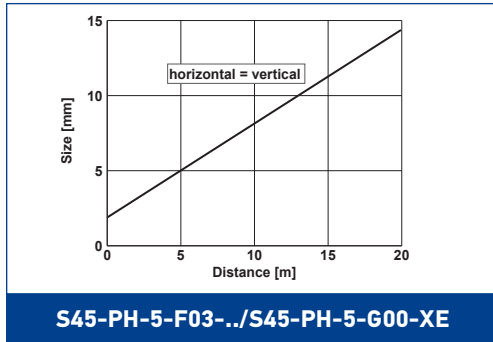


### EXCESS GAIN

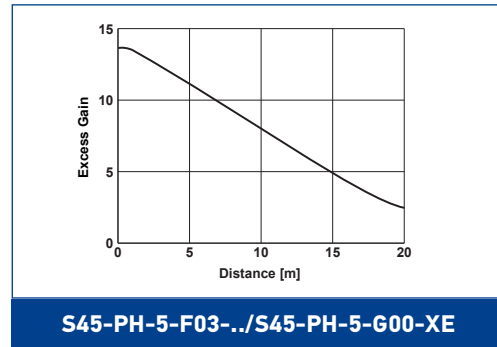


## CONTRAST SENSOR

### READING DIAGRAM

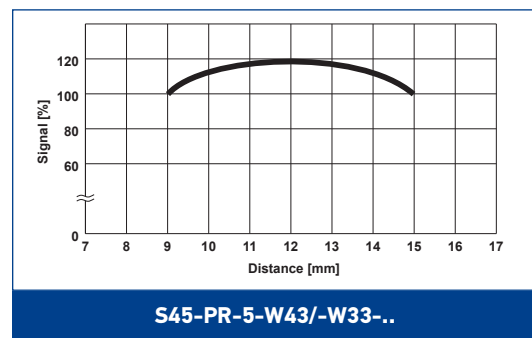
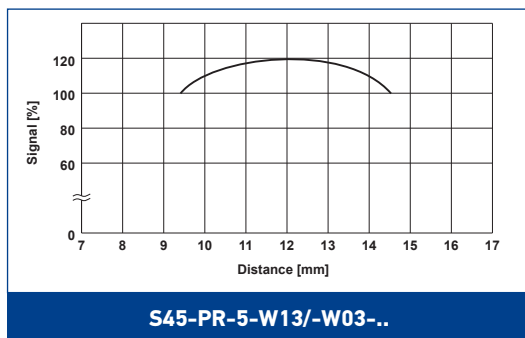


## DISTANCE SENSOR

### DETECTION SPOT SIZE

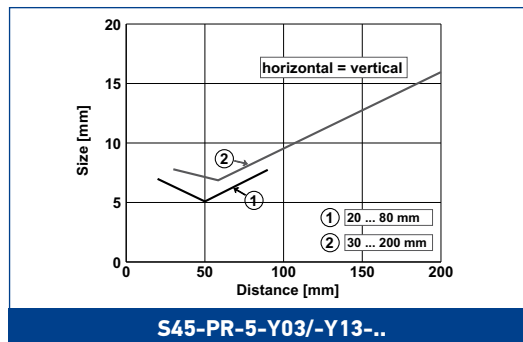


## SCANNING PROPERTIES

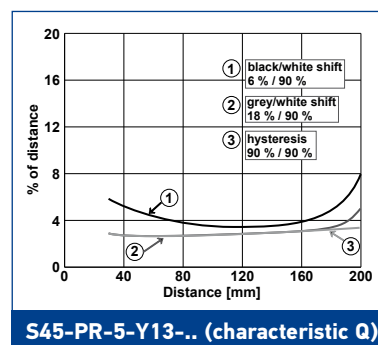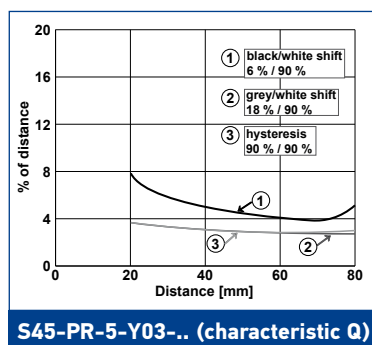


# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	EMISSION	CONNECTION	OUTPUT	MODEL	ORDER NO.
Diffused proximity	LED	2m Cable	PNP	S45-PR-2-C03-PH	950411220
			NPN	S45-PR-2-C03-NH	950411210
		M8	PNP	S45-PR-5-C03-PH	950411240
			NPN	S45-PR-5-C03-NH	950411230
	LASER	M8	PNP	S45-PH-5-C03-PH	950411260
			NPN	S45-PH-5-C03-NH	950411250
Polarized Retroreflective	LED	2m Cable	PNP	S45-PR-2-B03-PH	950411100
			NPN	S45-PR-2-B03-NH	950411090
		M8	PNP	S45-PR-5-B03-PH	950411120
			NPN	S45-PR-5-B03-NH	950411110
	LASER	M8	PNP	S45-PH-5-B03-PH	950411140
			NPN	S45-PH-5-B03-NH	950411130
Polarized retroreflective autocollimated for transparent	LED	2m Cable	PNP	S45-PR-2-T53-PH	950411160
			NPN	S45-PR-2-T53-NH	950411150
		M8	PNP	S45-PR-5-T53-PH	950411180
			NPN	S45-PR-5-T53-NH	950411170
Polarized retroreflective autocollimated	LED	M8	PNP	S45-PR-5-B53-PH	950411200
			NPN	S45-PR-5-B53-NH	950411190
Through beam	LED	2m Cable	-	S45-PR-2-G00-XE	950411000
			PNP	S45-PR-2-F03-PH	950411020
			NPN	S45-PR-2-F03-NH	950411010
		M8	-	S45-PR-5-G00-XE	950411030
			PNP	S45-PR-5-F03-PH	950411050
			NPN	S45-PR-5-F03-NH	950411040
	LASER	M8	-	S45-PH-5-G00-XE	950411060
			PNP	S45-PH-5-F03-PH	950411080
			NPN	S45-PH-5-F03-NH	950411070
			PNP	S45-PR-2-M03-PH	950411280
Background suppressor 200mm	LED	2m Cable	NPN	S45-PR-2-M03-NH	950411270
			M8	PNP	S45-PR-5-M03-PH
Background suppressor 400mm	LED	2m Cable		NPN	S45-PR-5-M03-NH
			M8	PNP	S45-PR-2-M13-PH
NPN	S45-PR-2-M13-NH	950411310			
PNP	S45-PR-5-M13-PH	950411340			
Background suppressor laser	LASER	M8	NPN	S45-PR-5-M13-NH	950411330
			PNP	S45-PH-5-M03-PH	950411360
Distance sensor	LED	M8	NPN	S45-PH-5-M03-NH	950411350
			PNP	S45-PR-5-Y03-PV	950411380
Distance sensor	LED	M8	NPN	S45-PR-5-Y03-NV	950411370
			PNP	S45-PR-5-Y13-PV	950411400
Contrast Sensor 10kHz	LED	M8	NPN	S45-PR-5-Y13-NV	950411390
			PUSH-PULL	S45-PR-5-W03-OH	950411420
Contrast Sensor 25kHz	LED	M8	PUSH-PULL	S45-PR-5-W13-OH	950411410
			PUSH-PULL	S45-PR-5-W33-OH	950411440
			PUSH-PULL	S45-PR-5-W43-OH	950411430


# ACCESSORIES

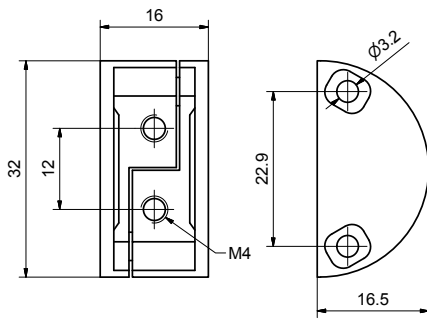



ST-S45-DVT



ST-S45-DVT

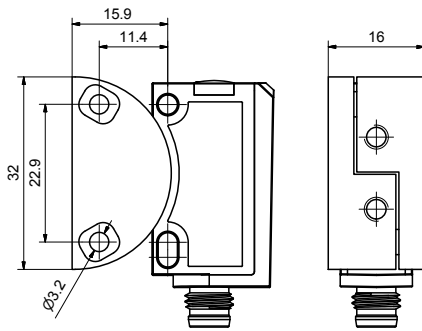

ST-S45-DVT

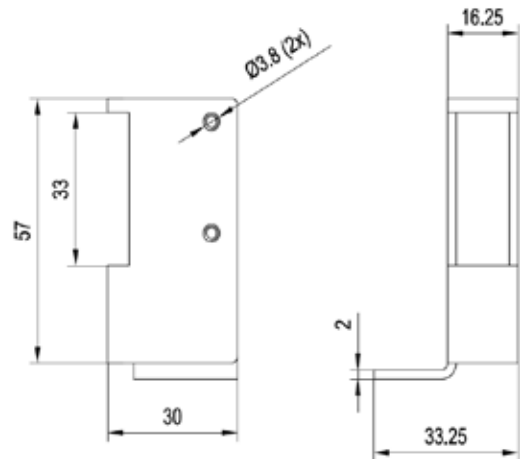

ST-MINI-PRO

MODEL	DESCRIPTION	ORDER NO.
ST-S45-DVT	S45 DOVE TAIL BRACKET	95ACC7970
ST-MINI-PRO	MINI PROTECTIVE BRACKET	95ACC7980

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B1-02-G-03	95A251420
		5 m	CS-B1-02-G-05	95A251430
		7 m	CS-B1-02-G-07	95A251440
		10 m	CS-B1-02-G-10	95A251480
	4-pole, P.U.R.	2 m	CS-B1-02-R-02	95A251620
		5 m	CS-B1-02-R-05	95A251640
Radial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B2-02-G-03	95A251450
		5 m	CS-B2-02-G-05	95A251460
		7 m	CS-B2-02-G-07	95A251470
		10 m	CS-B2-02-G-10	95A251530
	4-pole, P.U.R.	2 m	CS-B2-02-R-02	95A251630
		5 m	CS-B2-02-R-05	95A251650

# S100



## THE UNIVERSAL MINIATURE PHOTOELECTRIC SENSOR

- Two threaded front mounting holes
- Two slotted rear mounting holes
- Anti-tampering sensor (no adjustment)
- Standard optic functions
- Transparent object detection
- M8 connector and cable models
- PNP or NPN models with Light/Dark selection by wire
- Plastic housing, IP67 mechanical protection

### APPLICATIONS

- Processing and packaging machines
- Conveyors
- Automatic warehousing
- Intralogistic lines
- Bottling
- Cosmetic and Pharma machinery




S100		
<b>Through beam</b>		12 m
<b>Retroreflective</b>		7 m
<b>Polarized Retroreflective (long range)</b>		5,5 m
<b>Polarized Retroreflective (short range)</b>		3 m
<b>Transparent Retroreflective (short range)</b>		500 mm
<b>Transparent Retroreflective (long range)</b>		2 m
<b>Diffused proximity (short range)</b>		300 mm
<b>Diffused proximity (long range)</b>		500 mm
<b>Fixed focus</b>		70 mm
<b>Background Suppression (short range)</b>		100 mm
<b>Background Suppression (long range)</b>		200 mm
<b>Power supply</b>	Vdc	10...30 Vdc
<b>Output</b>	PNP	•
	NPN	•
<b>Connection</b>	cable	2 m cable, 4 wires
	connector	M8 conn., 4-pole
<b>Approximate dimensions (mm)</b>		32x20x12
<b>Housing material</b>		Plastic
<b>Mechanical protection</b>		IP67




# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc
<b>Ripple</b>	10% max.
<b>Consumption (output current excluded)</b>	20 mA max.
<b>Light emission</b>	red LED 632 nm (mod. S100...B/C/D/M01) IR LED 860 nm (mod. S100...A/G/Txx/M10)
<b>Setting</b>	remote teach-in (mod. S100...Mxx/Txx)
<b>Operating mode</b>	LIGHT/DARK selectable by wire (mod. S100...A/B/C/D/F)
<b>Indicators</b>	yellow OUTPUT LED (excl. mod. G) green POWER LED (mod. S100...G)
<b>Output</b>	PNP or NPN
<b>Output current</b>	100 mA
<b>Saturation voltage</b>	2 V max.
<b>Response time</b>	2 ms (mod. S100...FG) 1 ms (mod. S100...A/Bxx/C/D/Mxx/Txx) 250 Hz (mod. S100...FG)
<b>Switching frequency</b>	500 Hz (mod. S100...A/Bxx/C/D/Mxx/Txx)
<b>Connection</b>	2 m cable 3,5 mm, M8 4-pole connector
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	ABS body, PMMA indicators cover
<b>Lens material</b>	PC lens, PMMA window
<b>Operating temperature</b>	-25... 55 °C
<b>Storage temperature</b>	-40 ... 70 °C
<b>Weight</b>	50 g max. cable vers., 10 g max. connector vers.

# DIMENSIONS

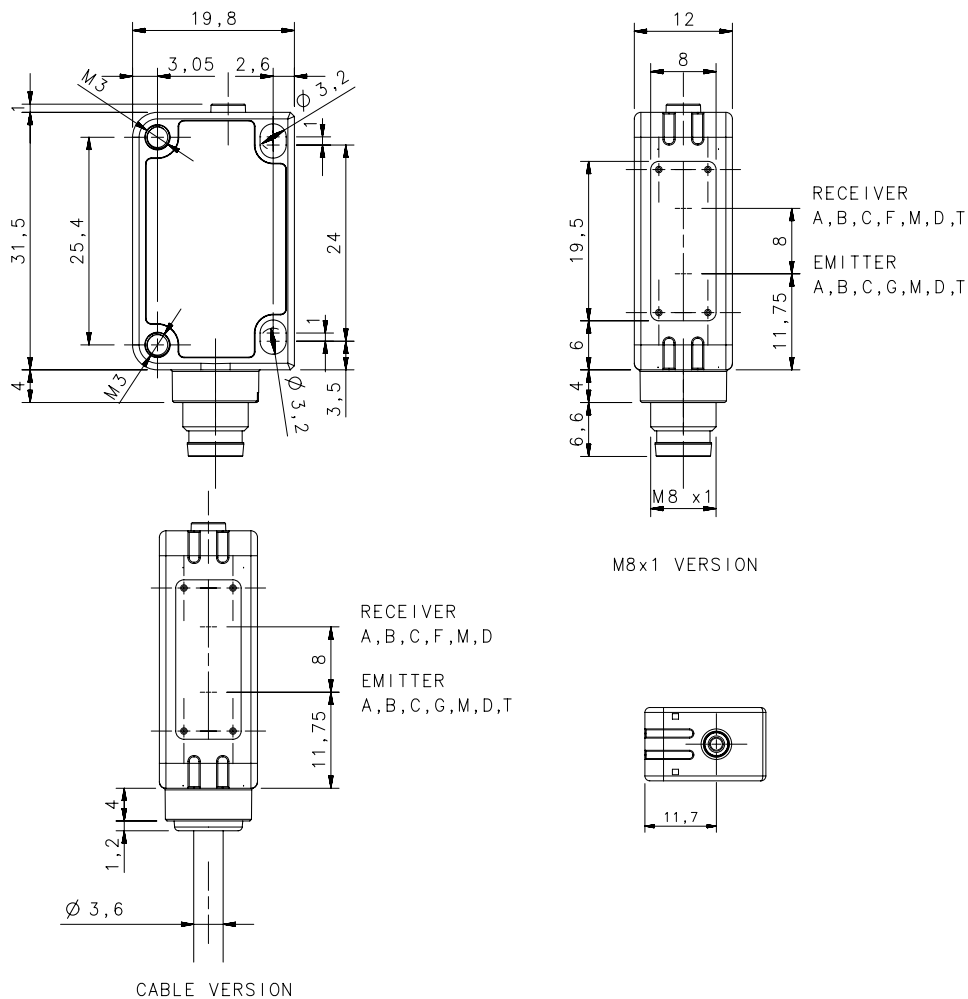


# CONNECTIONS

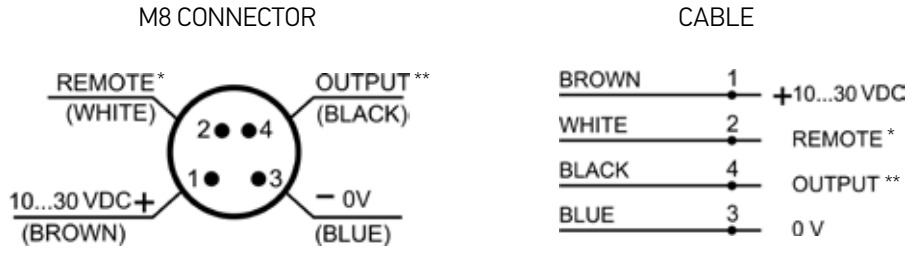


\*REMOTE: Light/Dark selection (S100-...-A-B-C-D-F), External Teach-in (S100-...-Mxx/Txx)  
 \*\*OUTPUT: PNP or NPN depends on the model

# INDICATORS AND SETTINGS

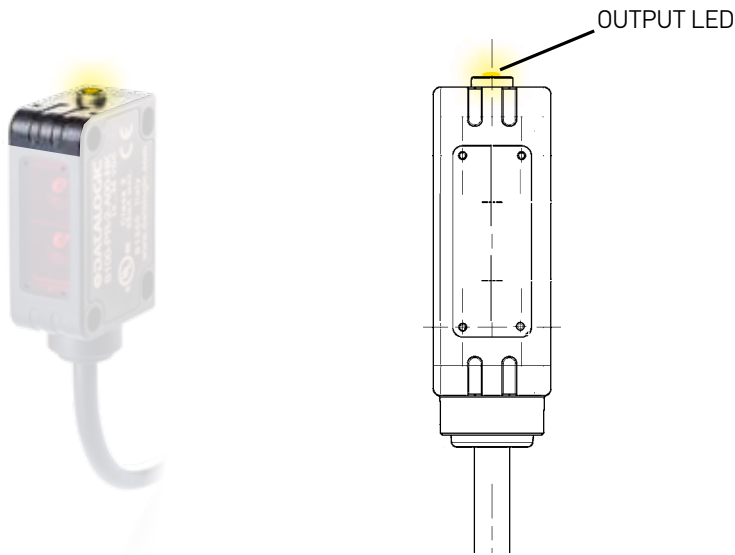

# DETECTION DIAGRAMS

## THROUGH BEAM


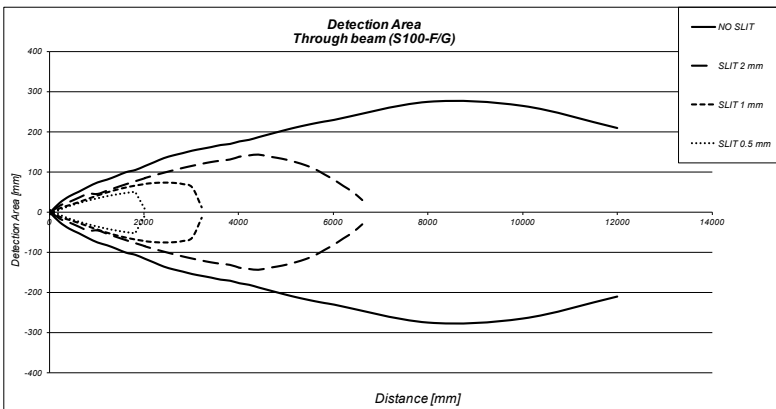


	max. operating distance
NO SLIT	12 m
2 mm SLIT	6,7 m
1 mm SLIT	3,2 m
0,5 mm SLIT	2 m



## DIFFUSE PROXIMITY

	SHORT RANGE (S100-...-C0)	LONG RANGE (S100-...-C1)
Recommended operating distance (on White 90% target)	10...240 mm	2...400 mm
Maximum operating distance (White 90% target)	1...300 mm	0...500 mm
Maximum operating distance (Grey 18% target)	20...150 mm	10...280 mm
Maximum operating distance (Black 6% target)	30...80 mm	20...160 mm
Difference White-Grey	50%	50%
Difference White-Black	75%	75%
Hysteresis	20%	20%

### DIFFUSE (SHORT RANGE: S100-C00)

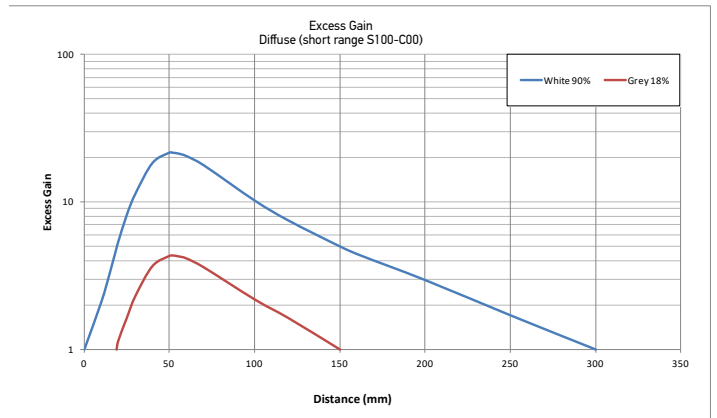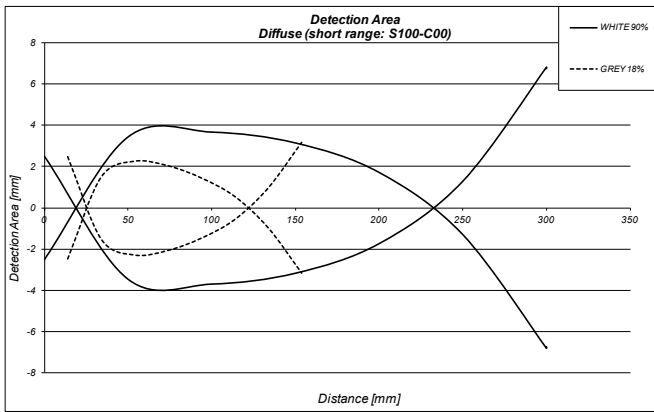

### DIFFUSE (LONG RANGE: S100-C10)

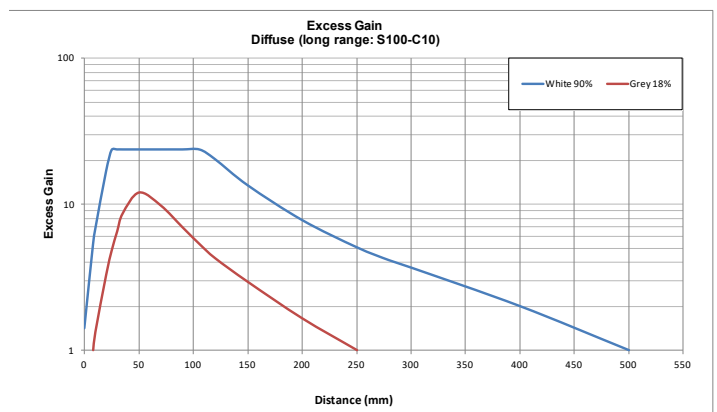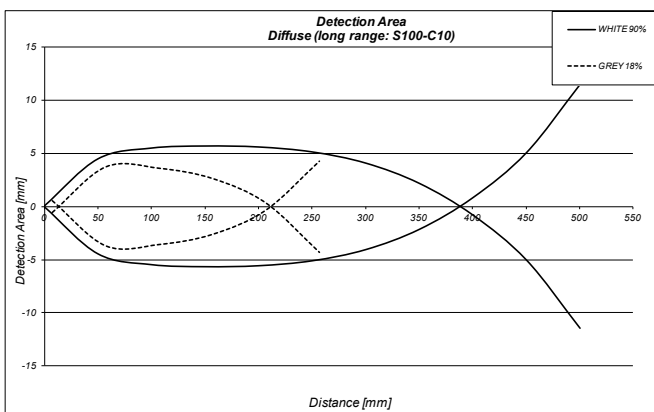



## POLARIZED RETROREFLECTIVE

REFLECTOR	TYPE	SHORT RANGE (S100-...-B00)	LONG RANGE (S100-...-B10)
R1	circular (23 mm)	0,2..0,8 m	0,02..2 m
R2	circular (48 mm)	0,03..2 m	0,01..4,5 m
R3	rectangular (18x54 mm)	0,03..1,5 m	0,01..3 m
R4	rectangular (47x47 mm)	0,03..2,5 m	0,01..4,5 m
R5	circular (75 mm)	0,01..3 m	0,01..5,5 m
R6	rectangular (36x55 mm)	0,03..1,8 m	0,01..4 m
RT3970	self-adhesive tape (60x40 mm)	0,2..0,8 m	0,05..1,8 m





	max. operating distance			
	SHORT RANGE (S100-...-B00)		LONG RANGE (S100-...-B10)	
	with R5 reflector	with R2 reflector	with R5 reflector	with R2 reflector
<b>NO SLIT</b>	0,02 ... 3 m	0,02 ... 2 m	0,1...5,5 m	0,01...4,5 m
<b>2 mm SLIT</b>	0,05 ... 1,5 m	0,05 ... 0,8 m	0,2...4 m	0,03...3 m
<b>1 mm SLIT</b>	-	-	0,3...2,5 m	0,05...1,5 m
<b>0,5 mm SLIT</b>	-	-	0,5...1,2 m	0,07...0,7 m

### POLARIZED RETROREFLECTIVE (SHORT RANGE: S100-B00)

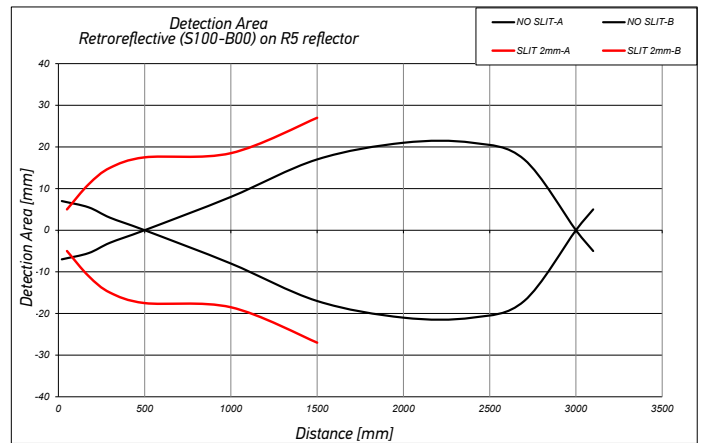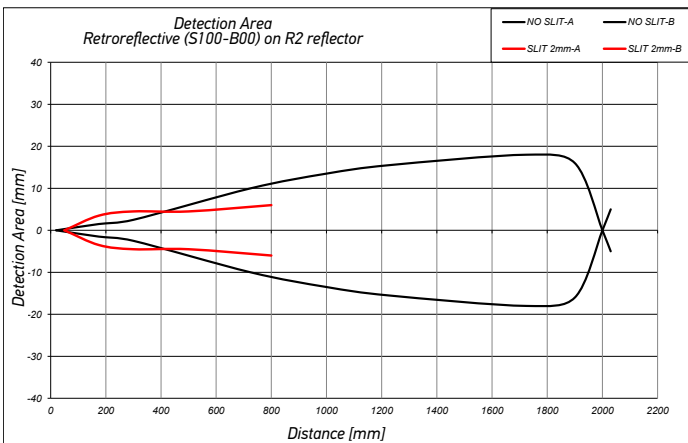

### POLARIZED RETROREFLECTIVE (LONG RANGE: S100-B10)

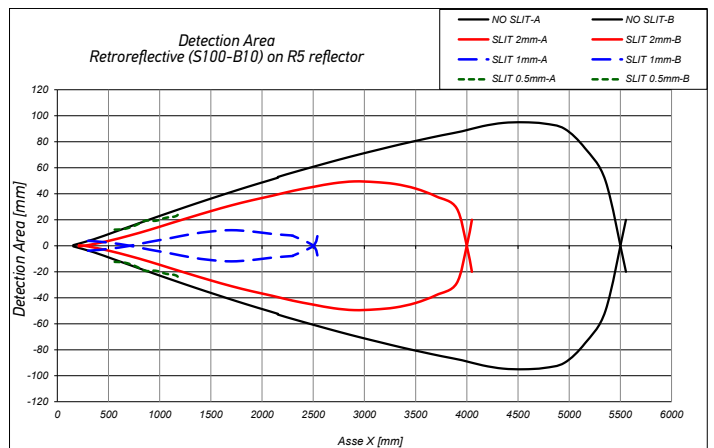
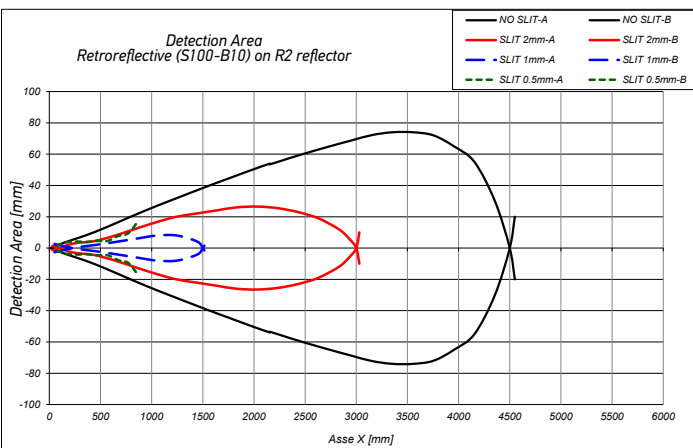


## RETROREFLECTIVE (INFRARED)


REFLECTOR	TYPE	(S100-...-A00)
R1	circular (23 mm)	0.03.3 m
R2	circular (48 mm)	0.01.6 m
R3	rectangular (18x54 mm)	0.01.3.5 m
R4	rectangular (47x47 mm)	0.01.5 m
R5	circular (75 mm)	0.01.7 m
R6	rectangular (36x55 mm)	0.01.6 m
RT3970	self-adhesive tape (60x40 mm)	0.05.2 m



	max. operating distance	
	with R5 reflector	with R2 reflector
NO SLIT	7 m	6 m
2 mm SLIT	4,7 m	3,4 m
1 mm SLIT	2,7 m	2,3 m
0,5 mm SLIT	1,5 m	1 m

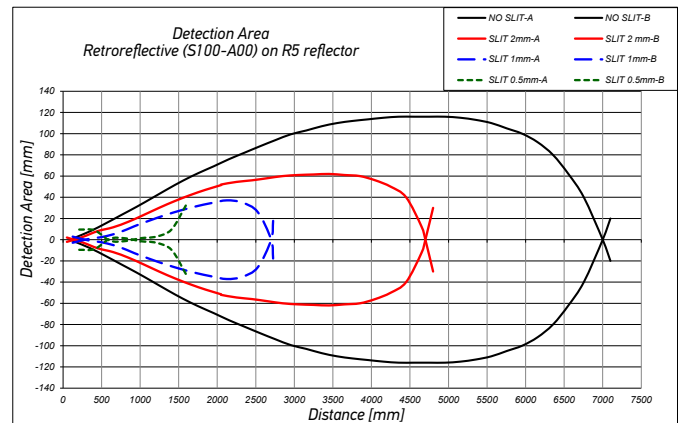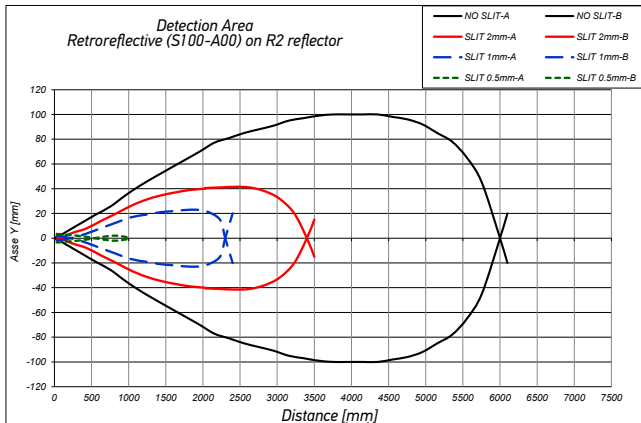

## FIXED FOCUS

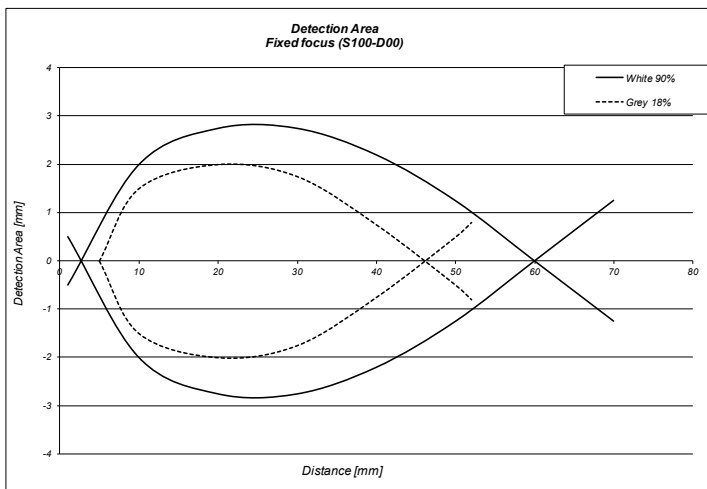

Focus point	70 mm
Maximum operating distance (White 90%)	70 mm
Maximum operating distance (Grey 18%)	55 mm
Difference White/Black	25%



## RETROREFLECTIVE FOR TRANSPARENT (INFRARED)

REFLECTOR	TYPE	SHORT RANGE (S100-...-T00)	LONG RANGE (S100-...-T10)
R1	circular (23 mm)	0.1...0.3 m	0.4...1 m
R2	circular (48 mm)	0.1...0.5 m	0.8...2 m
R3	rectangular (18x54 mm)	0.1...0.3 m	0.4...1 m
R4	rectangular (47x47 mm)	0.1...0.5 m	0.8...2 m
R5	circular (75 mm)	0.1...0.8 m	0.8...2.5 m
R6	rectangular (36x55 mm)	0.1...0.5 m	0.8...2m
RT3970	self-adhesive tape (60x40 mm)	0.15...0.3 m	0.1...0.8 m





	max. operating distance			
	SHORT RANGE (S100-...-T00)		LONG RANGE (S100-...-T10)	
	with R5 reflector	with R2 reflector	with R5 reflector	with R2 reflector
<b>NO SLIT</b>	0.1...0.8 m	0.1...0.5 m	0.8...2.5 m	0.8...2 m
<b>2 mm SLIT</b>	0.1...0.5 m	0.1...0.3 m	0.5...1.8 m	0.5...1.6 m
<b>1 mm SLIT</b>	-	-	-	-
<b>0,5 mm SLIT</b>	-	-	-	-

### TRANSPARENT RETROREFLECTIVE (SHORT RANGE: S100-T00)

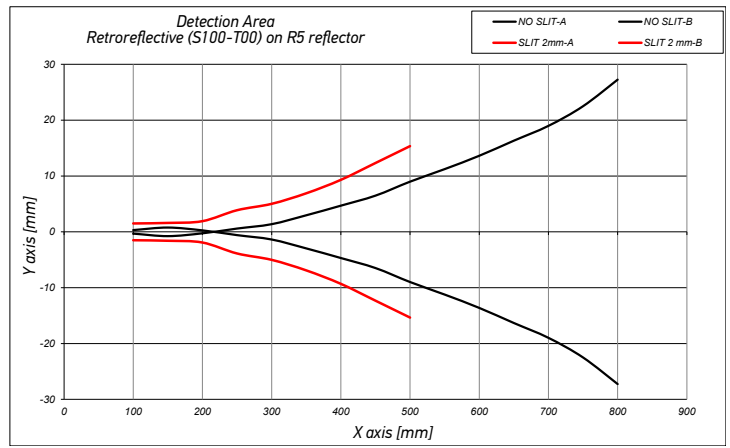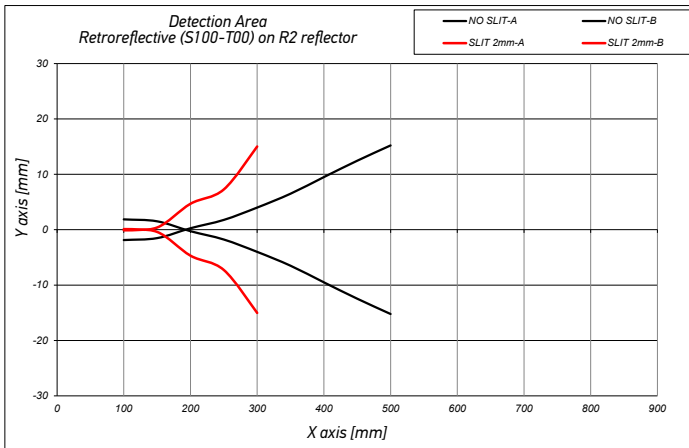



### TRANSPARENT RETROREFLECTIVE (LONG RANGE: S100-T10)

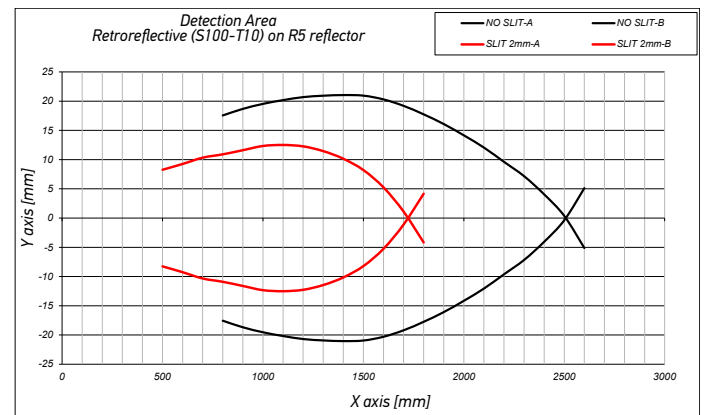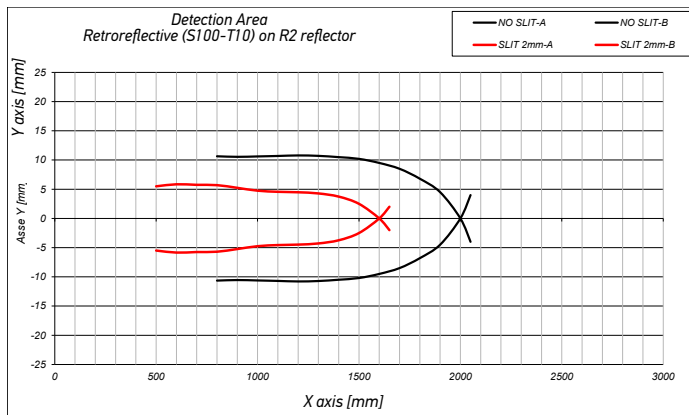



## BACKGROUND SUPPRESSION

Operating distances (background suppression)	30...100 mm	30...200 mm
	S100...M00	S100...M10
Maximum operating distance (White 90%)	0...150 mm	10...250 mm
Maximum operating distance (Grey 18%)	10...110 mm	10...135 mm
Maximum operating distance (Black 6%)	10...80 mm	10...110 mm
Difference White 90%/White 90%	< 5%	< 10%
Difference White 90%/Grey 18%	< 15%	< 32%
Difference White 90%/Black 6%	< 25%	< 45%

### BACKGROUND SUPPRESSION (SHORT RANGE: S100-M00)

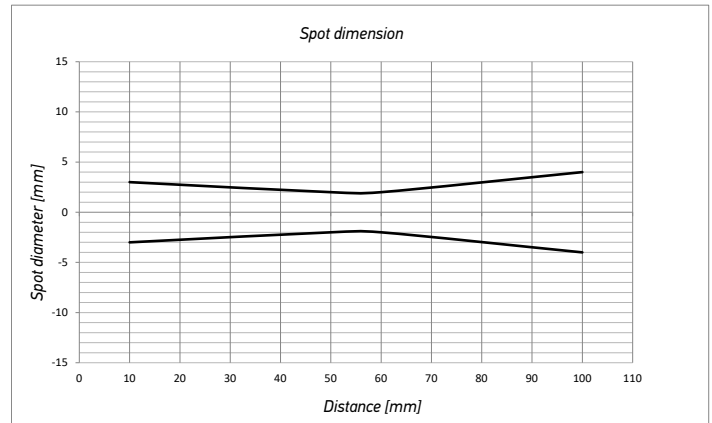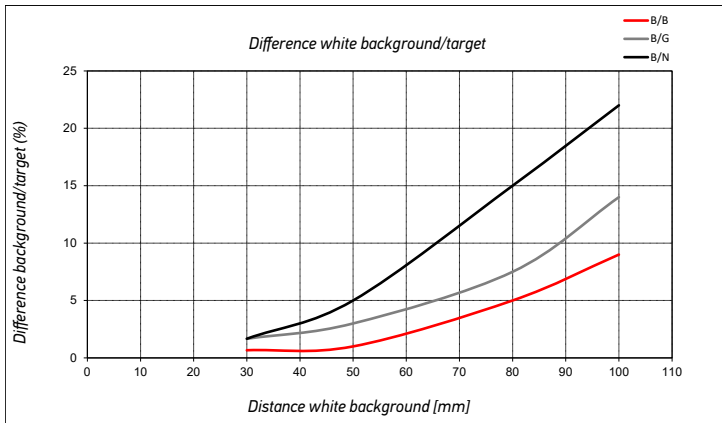

### BACKGROUND SUPPRESSION (LONG RANGE: S100-M10)

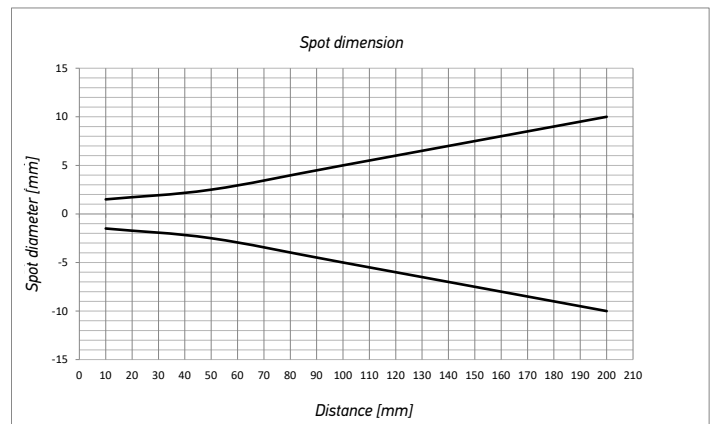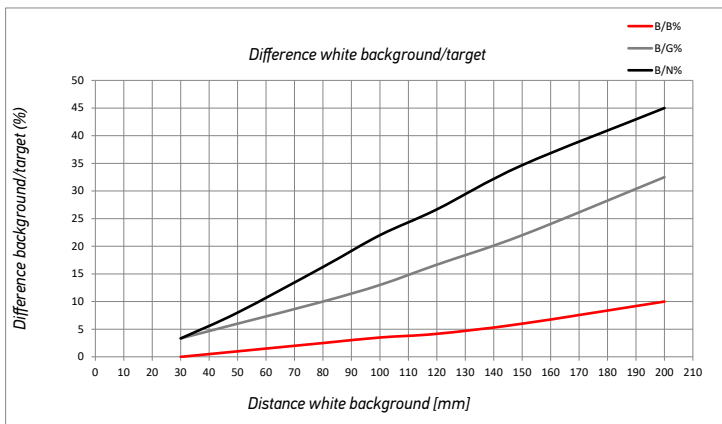


# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	EMISSION	OPERATING DISTANCE	CONNECTION	OUTPUT	MODEL	ORDER No.
Through beam	IR	12 m	2 m cable	NPN	S100-PR-2-FG00-NK	950811100
				PNP	S100-PR-2-FG00-PK	950811110
			M8 connector	NPN	S100-PR-5-FG00-NK	950811240
				PNP	S100-PR-5-FG00-PK	950811250
Retroreflective	IR	7 m	2 m cable	NPN	S100-PR-2-A00-NK	950811000
				PNP	S100-PR-2-A00-PK	950811010
			M8 connector	NPN	S100-PR-5-A00-NK	950811140
				PNP	S100-PR-5-A00-PK	950811150
Polarized Retroreflective (short)	RED	2 m	2 m cable	NPN	S100-PR-2-B00-NK	950811020
				PNP	S100-PR-2-B00-PK	950811030
			M8 connector	NPN	S100-PR-5-B00-NK	950811160
				PNP	S100-PR-5-B00-PK	950811170
Polarized Retroreflective (long)	RED	5 m	2 m cable	NPN	S100-PR-2-B10-NK	950811280
				PNP	S100-PR-2-B10-PK	950811290
			M8 connector	NPN	S100-PR-5-B10-NK	950811300
				PNP	S100-PR-5-B10-PK	950811310
Transparent Retroreflective (short)	IR	500 mm	2 m cable	NPN	S100-PR-2-T00-NH	950811330
			2 m cable	PNP	S100-PR-2-T00-PH	950811320
			M8 connector	NPN	S100-PR-5-T00-NH	950811350
			M8 connector	PNP	S100-PR-5-T00-PH	950811340
Transparent Retroreflective (long)	IR	2 m	2 m cable	NPN	S100-PR-2-T10-NH	950811370
			2 m cable	PNP	S100-PR-2-T10-PH	950811360
			M8 connector	NPN	S100-PR-5-T10-NH	950811390
			M8 connector	PNP	S100-PR-5-T10-PH	950811380
Diffuse proximity (short)	RED	300 mm	2 m cable	NPN	S100-PR-2-C00-NK	950811040
				PNP	S100-PR-2-C00-PK	950811050
			M8 connector	NPN	S100-PR-5-C00-NK	950811180
				PNP	S100-PR-5-C00-PK	950811190
Diffuse proximity (long)	RED	500 mm	2 m cable	NPN	S100-PR-2-C10-NK	950811060
				PNP	S100-PR-2-C10-PK	950811070
			M8 connector	NPN	S100-PR-5-C10-NK	950811200
				PNP	S100-PR-5-C10-PK	950811210
Fixed focus	RED	70 mm	2 m cable	NPN	S100-PR-2-D00-NK	950811080
				PNP	S100-PR-2-D00-PK	950811090
			M8 connector	NPN	S100-PR-5-D00-NK	950811220
				PNP	S100-PR-5-D00-PK	950811230
Background suppression (short range)	RED	30...100 mm	2 m cable	NPN	S100-PR-2-M00-NH	950811120
				PNP	S100-PR-2-M00-PH	950811130
			M8 connector	NPN	S100-PR-5-M00-NH	950811260
				PNP	S100-PR-5-M00-PH	950811270
Background suppression (long range)	IR	30...200 mm	2 m cable	NPN	S100-PR-2-M10-NH	950811420
				PNP	S100-PR-2-M10-PH	950811430
			M8 connector	NPN	S100-PR-5-M10-NH	950811400
				PNP	S100-PR-5-M10-PH	950811410



# ACCESSORIES



**ST-5039**

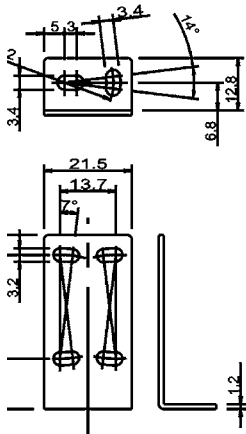


M18 ADAPTER NOSE



**ST-505**

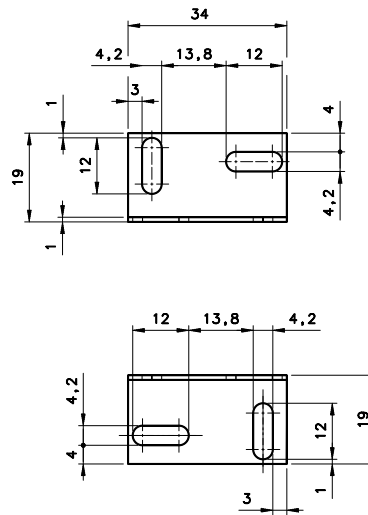

SLIT



TYPE	MODEL	DESCRIPTION	Order No.
Mounting bracket	ST-505	lateral mounting	95ACC2800
	ST-5039	L-shaped bracket	95ACC2270
Slit	S100-SLIT-05	0,5x19 mm SLIT	95ACC3450
	S100-SLIT-1	1x19 mm SLIT	95ACC3460
	S100-SLIT-2	2x19 mm SLIT	95ACC3470
M18 adapter	ST-S3Z-M18	M18 THREADED ADAPTER NOSE	95ACC7850

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B1-02-G-03	95A251420
		5 m	CS-B1-02-G-05	95A251430
		7 m	CS-B1-02-G-07	95A251440
		10 m	CS-B1-02-G-10	95A251480
	4-pole, P.U.R.	2 m	CS-B1-02-R-02	95A251620
		5 m	CS-B1-02-R-05	95A251640
Radial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B2-02-G-03	95A251450
		5 m	CS-B2-02-G-05	95A251460
		7 m	CS-B2-02-G-07	95A251470
		10 m	CS-B2-02-G-10	95A251530
	4-pole, P.U.R.	2 m	CS-B2-02-R-02	95A251630
		5 m	CS-B2-02-R-05	95A251650

Rev. 02, 01/2017

## S8



### COMPACT SIZE AND HIGH PERFORMANCE FOR THE MOST CHALLENGING DETECTION APPLICATIONS

- Compact dimensions (14x42x25 mm)
- Background suppression for transparent and shiny objects
- Contrast sensors up to 10 kHz switching frequency
- Extremely focused spot, under 1 mm (LASER model)
- Very high resolution LASER models
- INOX AISI 316L model



#### APPLICATIONS

- Processing and Packaging machinery
- Beverage/Food/ Cosmetics/Pharmaceutical industries
- Electronics assembling



(\*) Stainless steel models.  
ATEXII 3DG


S8	
<b>Through beam</b>	0...25 m
<b>Polarized retroreflective</b>	0,1...5 m
<b>Retroreflective for transparent (coaxial)</b>	0...10 m (class 2 LASER)
<b>Diffuse proximity</b>	0...0,8 m (T51), 0...2 m (T53, T50)
<b>Background suppression</b>	0...500 mm
<b>Background suppression for clear detection</b>	50...300 mm
<b>Contrast sensor</b>	20...200 mm (class 2 LASER)
<b>Luminescence sensor</b>	100...300 mm (LED)
<b>Power supply</b>	50...150 mm (class 2 LASER)
	Vdc
	Vac
	Vac/dc
<b>Output</b>	PNP
	NPN
	NPN/PNP
	relay
	other
<b>Connection</b>	cable
	connector
	pig-tail
<b>Approximate dimensions (mm)</b>	14x42x25
<b>Housing material</b>	ABS, Stainless Steel AISI 316L
<b>Mechanical protection</b>	IP69K (Stainless Steel vers.), IP67

# TECHNICAL DATA


<b>Power supply</b>	12 ... 30 Vdc (short-circuit protection)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	30 mA; 35 mA (mod. S8...M01); 20 mA (mod. S8...F), 15 mA (mod. S8...G) max.
<b>Light emission</b>	red LED 660 nm (mod. S8...B/C/M/G/T)
	RGB LEDs: blue 465 nm, green 520 nm, red 630nm with automatic selection (mod. S8...W)
	UV LED 375 nm (mod. S8...U)
<b>Setting</b>	red Laser 645..665 nm (mod. S8...B/M)
	8-turn distance adjustment trimmer (mod. S8...M53/M)
	LIGHT / DARK mono-turn trimmer (mod. S8...B/C/F/T51)
	teach-in push button (mod. S8...M53/W03/W13/T53/U)
<b>Operating mode</b>	remote input (mod. S8...W/U/T50/T53)
	mono-turn trimmer (mod. S8...B/C/F/M/T/U/W13)
	automatic (mod. S8...W/T50)
<b>Indicators</b>	remote input (mod. S8...M53)
	yellow OUTPUT LED (excl. mod. S8...G), OUTPUT/ALARM LED (mod. S8...M53/M/C)
<b>Output</b>	green POWER LED
<b>Output current</b>	PNP or NPN N.O.
<b>Saturation voltage</b>	100 mA (overload protection)
<b>Response time</b>	2 V max.
	1 ms (mod. S8...M53/M)
	500 µs (mod. S8...B/F/C)
	250 µs (mod. S8...T)
	100 µs (Laser vers. mod. S8...M)
	50 µs (mod. S8...W00/W03 e Laser mod. S8...B)
	20 µs (mod. S8...W13)
	250 µs...1 ms (mod. S8...U)
<b>Switching frequency</b>	500 Hz (mod. S8...M53/M)
	1 kHz (mod. S8...B/F/C)
	2 kHz (mod. S8...T)
	5 kHz (Laser vers. mod. S8...M)
	10 kHz (mod. S8...W00/W03 e Laser mod. S8...B)
	25 kHz (mod. S8...W13)
	500 Hz...2 kHz (mod. S8...U)
<b>Connection</b>	M8 4-pole connector, 150 mm length Ø 4 mm cable with M12 4-pole connector (pig-tail vers.)
<b>Dielectric strength</b>	1500 VAC 1 min between electronic parts and housing
<b>Insulating resistance</b>	>20 MΩ 500 VDC between electronic parts and housing
<b>Mechanical protection</b>	IP67, IP69K (mod. S8-M)
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shocks per every axis (EN60068-2-27)
<b>Housing material</b>	ABS, Stainless Steel AISI346L
<b>Lens material</b>	window in PMMA; lens in PC
<b>Operating temperature</b>	-10 ... 55 °C
<b>Storage temperature</b>	-20 ... 70 °C
<b>Weight</b>	12 g max. conn. vers., 50 g pig-tail vers., 70 g max. (mod. S8-M)

## CONNECTIONS

M12 PIGTAIL

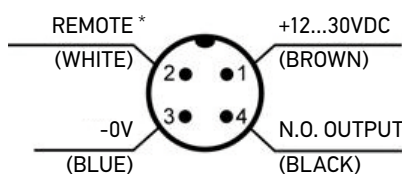


M8 CONNECTOR

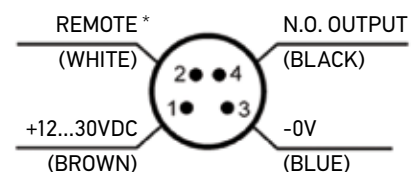


\* REMOTE INPUT (mod. S8..W, U, T50, T53), LIGHT / DARK INPUT (mod. S8..M53), DELAY (mod. S8..M Laser), TEST INPUT (mod. S8..G), ALARM OUTPUT (mod. S8..B, T51), NOT USED (mod. S8..C, M, F)

# DIMENSIONS









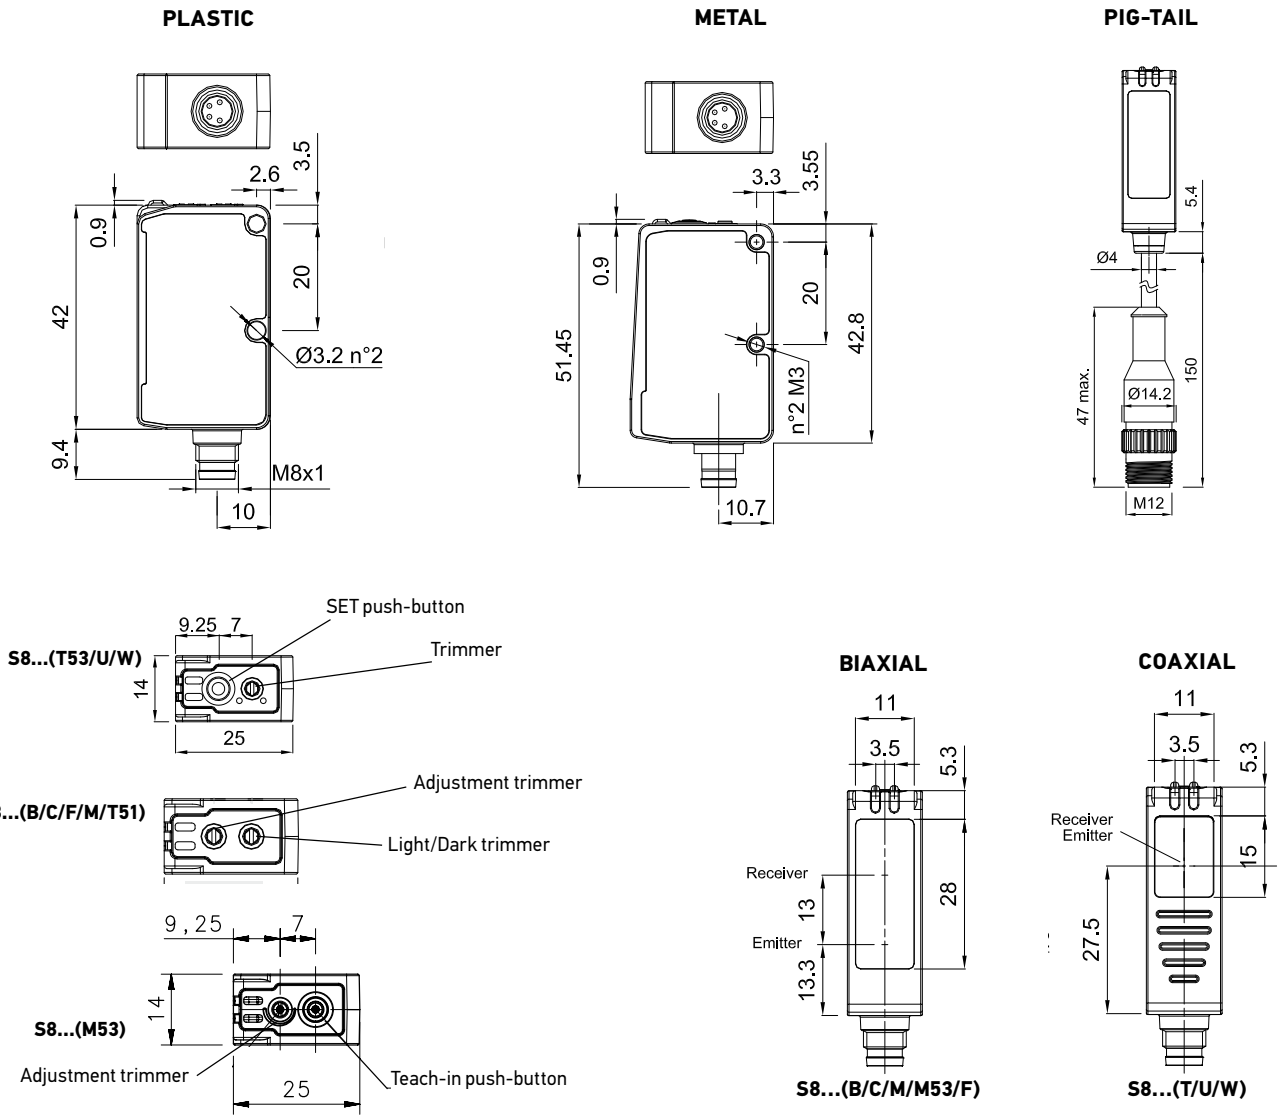


# INDICATOR AND SETTING

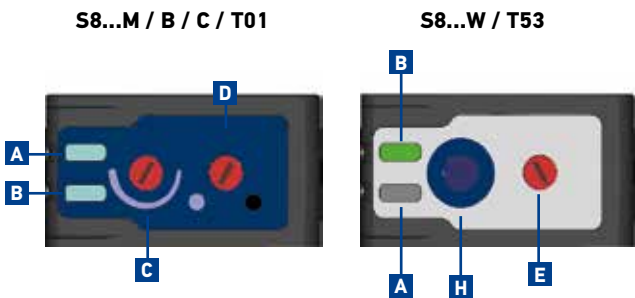

- A** Output status LED
- B** Ready LED or Power ON LED
- C** Sensitivity adjustment trimmer
- D** Dark/light trimmer
- E** Delay trimmer
- F** M8 connector
- G** M12 pig-tail connector
- H** SET push-button

# READING DIAGRAMS

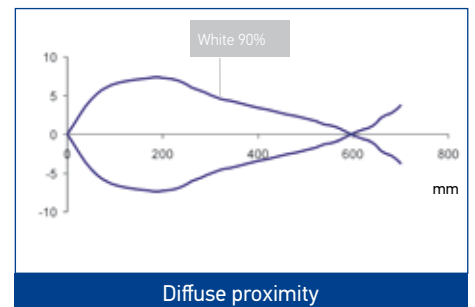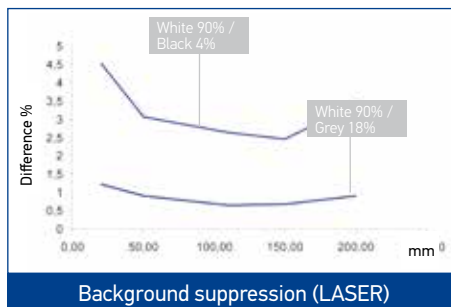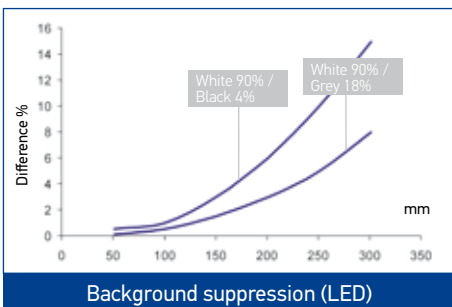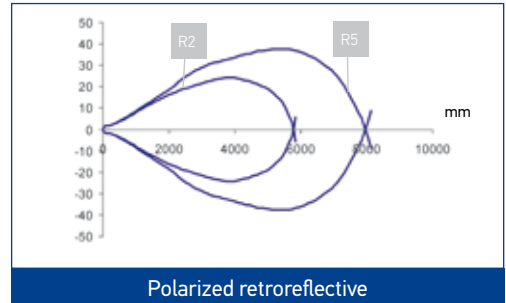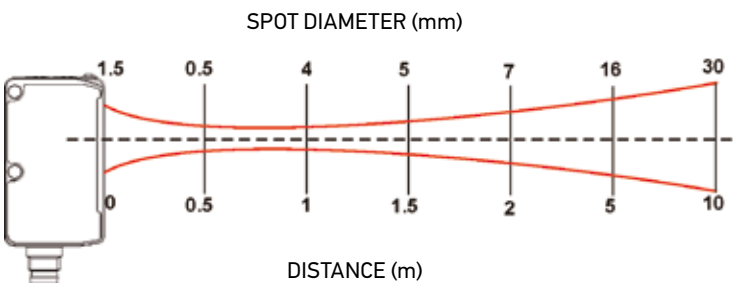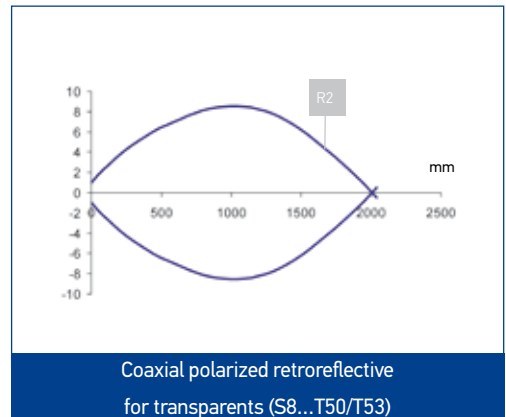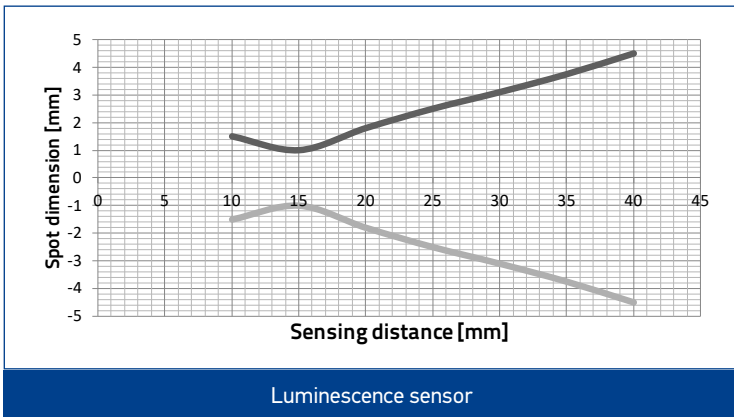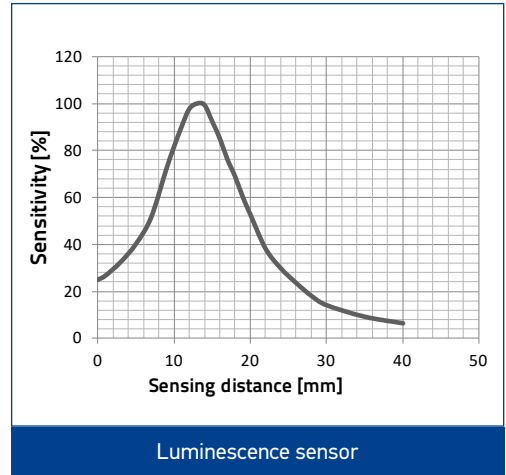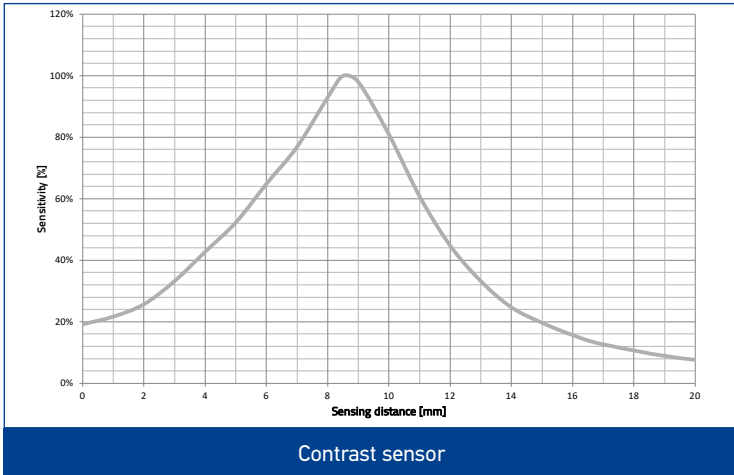

# MODEL SELECTION AND ORDER INFORMATION

CLEAR DETECTION					
HOUSING	LIGHT EMISSION	CONNECTION	OUTPUT	MODEL	ORDER NO.
METAL Stainless Steel (INOX AISI346L)	LASER	M8 connector	PNP	S8-MH-5-M53-PP	950801451
	LED			S8-MR-5-M53-PP	950801600
PLASTIC ABS	LASER			S8-PH-5-M53-PP	950801381
	LED			S8-PR-5-M53-PP	950801590

RETROREFLECTIVE FOR TRASPARENT					
HOUSING	LIGHT EMISSION	CONNECTION	OUTPUT	MODEL	ORDER NO.
METAL Stainless Steel (INOX AISI346L)	LED	M8 connector	NPN	S8-MR-5-T50-NH	950801330
			PNP	S8-MR-5-T50-PH	950801320
		M8 connector with auto-adjustment function	NPN	S8-MR-5-T53-NN	950801310
			PNP	S8-MR-5-T53-PP	950801300
PLASTIC ABS		pig-tail	NPN	S8-PR-3-T51-NN	950801130
			PNP	S8-PR-3-T51-PP	950801120
		M8 connector	NPN	S8-PR-5-T51-NN	950801050
			PNP	S8-PR-5-T51-PP	950801040
	M8 connector with auto-adjustment function	NPN	S8-PR-5-T53-NN	950801290	
		PNP	S8-PR-5-T53-PP	950801280	

POLARIZED RETROREFLECTIVE					
HOUSING	LIGHT EMISSION	CONNECTION	OUTPUT	MODEL	ORDER NO.
METAL Stainless Steel (INOX AISI346L)	LASER	M8 connector	NPN	S8-MH-5-B51-NN	950801490
			PNP	S8-MH-5-B51-PP	950801480
	LED		NPN	S8-MR-5-B01-NN	950801420
			PNP	S8-MR-5-B01-PP	950801410
PLASTIC ABS	LASER	pig-tail	NPN	S8-PH-3-B51-NN	950801090
			PNP	S8-PH-3-B51-PP	950801080
		M8 connector	NPN	S8-PH-5-B51-NN	950801010
			PNP	S8-PH-5-B51-PP	950801000
	LED	pig-tail	NPN	S8-PR-3-B01-NN	950801190
			PNP	S8-PR-3-B01-PP	950801180
		M8 connector	NPN	S8-PR-5-B01-NN	950801170
			PNP	S8-PR-5-B01-PP	950801160

BACKGROUND SUPPRESSION					
HOUSING	LIGHT EMISSION	CONNECTION	OUTPUT	MODEL	ORDER NO.
METAL Stainless Steel (INOX AISI346L)	LASER	M8 connector	NPN	S8-MH-5-M01-NN	950801470
			PNP	S8-MH-5-M01-PP	950801460
	LED		NPN	S8-MR-5-M01-NN	950801400
			PNP	S8-MR-5-M01-PP	950801390
PLASTIC ABS	LASER	pig-tail	NPN	S8-PH-3-M01-NN	950801110
			PNP	S8-PH-3-M01-PP	950801100
		M8 connector	NPN	S8-PH-5-M01-NN	950801030
			PNP	S8-PH-5-M01-PP	950801020
	LED	pig-tail	NPN	S8-PR-3-M01-NN	950801230
			PNP	S8-PR-3-M01-PP	950801220
		M8 connector	NPN	S8-PR-5-M01-NN	950801210
			PNP	S8-PR-5-M01-PP	950801200

THROUGH BEAM					
HOUSING	LIGHT EMISSION	CONNECTION	OUTPUT	MODEL	ORDER NO.
METAL Stainless Steel (INOX AISI346L)	LED	M8 connector	NPN	S8-MR-5-F01-NN	950801570
			PNP	S8-MR-5-F01-PP	950801580
			emitter	S8-MR-5-G00-XG	950801580
PLASTIC ABS		pig-tail	NPN	S8-PR-3-F01-NN	950801530
			PNP	S8-PR-3-F01-PP	950801520
			emitter	S8-PR-3-G00-XG	950801550
M8 connector		NPN	S8-PR-5-F01-NN	950801510	
		PNP	S8-PR-5-F01-PP	950801500	
		emitter	S8-PR-5-G00-XG	950801540	


DIFFUSE					
HOUSING	LIGHT EMISSION	CONNECTION	OUTPUT	MODEL	ORDER NO.
METAL Stainless Steel (INOX AISI346L)	LED	M8 connector	NPN	S8-MR-5-C01-NN	950801440
			PNP	S8-MR-5-C01-PP	950801430
PLASTIC ABS		pig-tail	NPN	S8-PR-3-C01-NN	950801270
			PNP	S8-PR-3-C01-PP	950801250
M8 connector		NPN	S8-PR-5-C01-NN	950801260	
		PNP	S8-PR-5-C01-PP	950801240	

CONTRAST					
SWITCHING FREQUENCY	HOUSING	CONNECTION	OUTPUT	MODEL	ORDER NO.
10 kHz	METAL Stainless Steel	M8 connector without trimmer	PNP	S8-MR-5-W00-PH	950801360
			NPN	S8-MR-5-W00-NH	950801370
		M8 connector	PNP	S8-MR-5-W03-PP	950801340
			NPN	S8-MR-5-W03-NN	950801350
	PLASTIC ABS	M12 pig-tail (150 mm)	PNP	S8-PR-3-W03-PP	950801140
			NPN	S8-PR-3-W03-NN	950801150
		M8 connector	PNP	S8-PR-5-W03-PP	950801060
			NPN	S8-PR-5-W03-NN	950801070
25 kHz	METAL Stainless Steel	M8 connector	PNP	S8-MR-5-W13-PP	950801670
			NPN	S8-MR-5-W13-NN	950801680
			PNP	S8-PR-5-W13-PP	950801650
			NPN	S8-PR-5-W13-NN	950801660
	PLASTIC ABS	M12 pig-tail (150 mm)	PNP	S8-PR-3-W13-PP	950801690
			NPN	S8-PR-3-W13-NN	950801700


LUMINESCENCE					
HOUSING	SETTINGS	CONNECTION	OUTPUT	MODEL	ORDER NO.
METAL Stainless Steel	Teach-in push-button; L/D trimmer selector; Remote input	M8 connector	PNP	S8-MR-5-U03-PP	950801630
			NPN	S8-MR-5-U03-NN	950801640
PNP			S8-PR-5-U03-PP	950801610	
NPN			S8-PR-5-U03-NN	950801620	
PLASTIC ABS		pig-tail	PNP	S8-PR-3-U03-PP	950801710
			NPN	S8-PR-3-U03-NN	950801720

# ACCESSORIES



ST-S8-S3Z

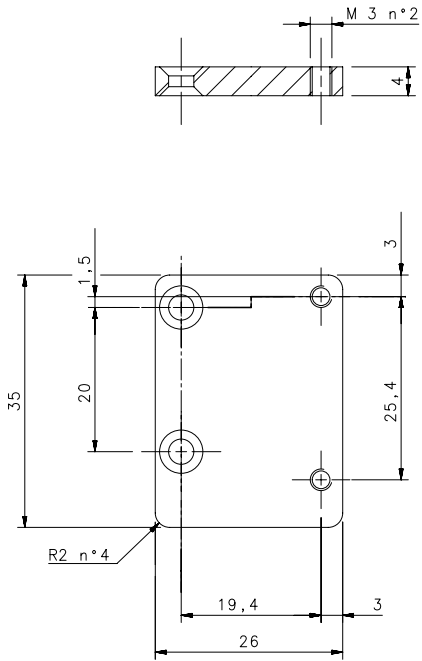

ST-S8-TL-LD46

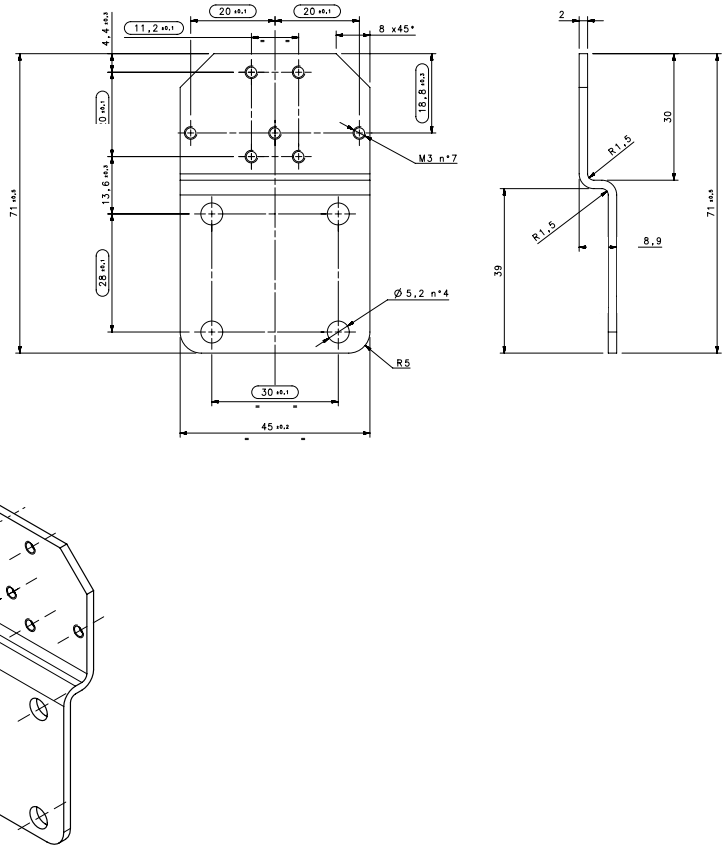


ST-S8-FRM

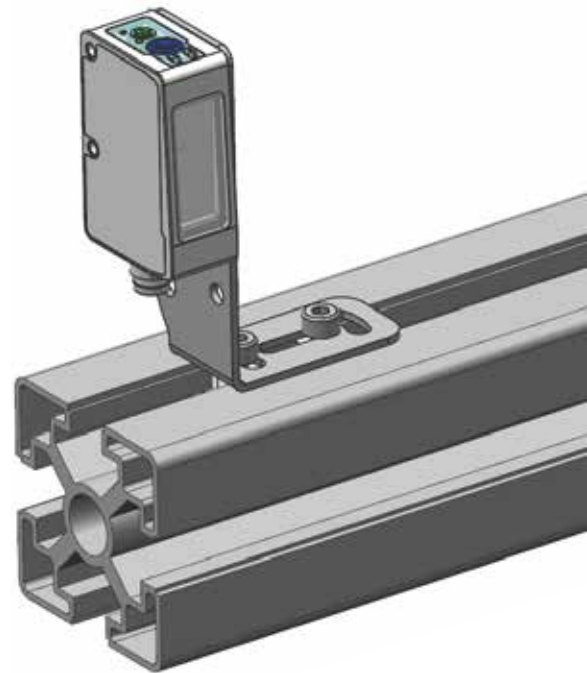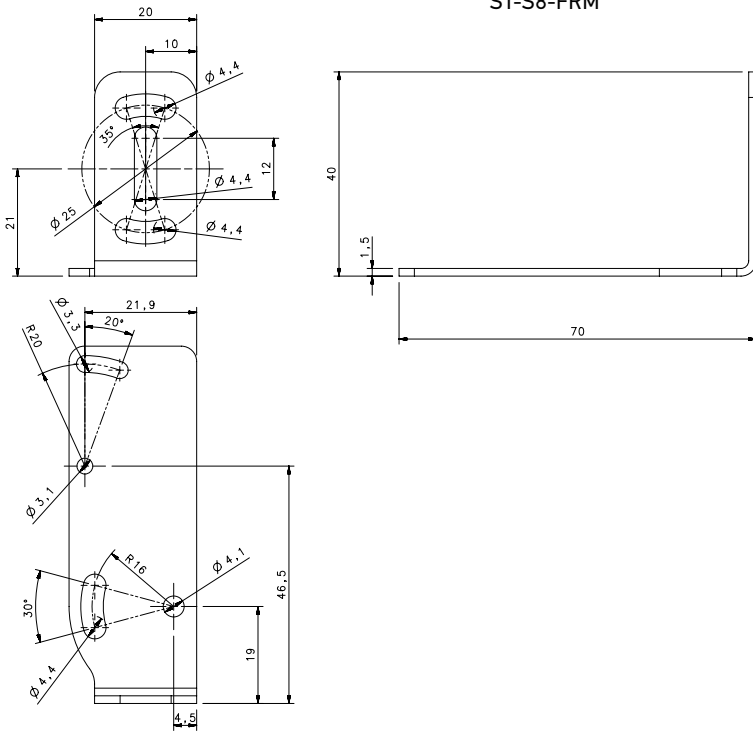



ST-5072

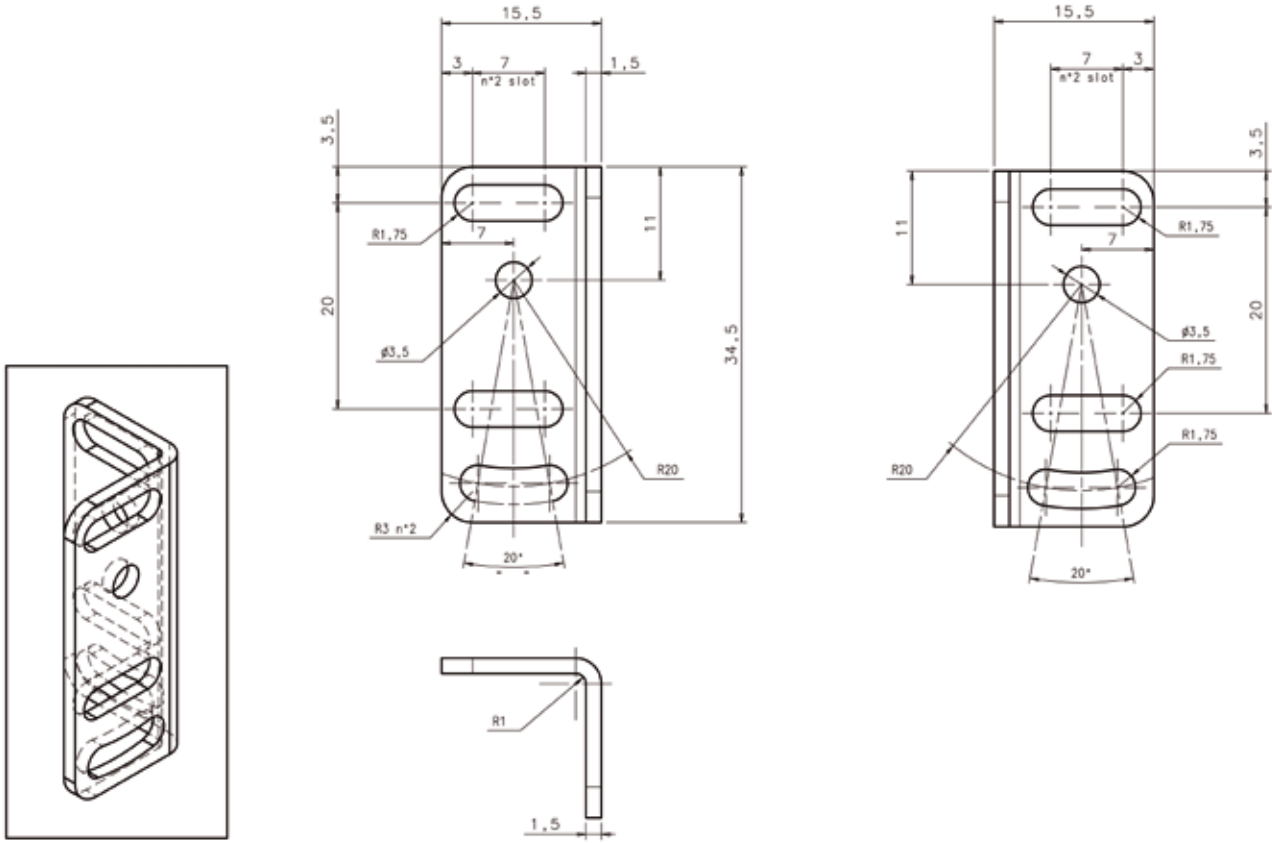

MODEL	FUNCTION	ORDER No.
ST-S8-FRM	mounting bracket for standard frame	95ACC7860
ST-5072	mounting bracket	95ACC1470
R4K	IP69K plastic reflector 51 x 61 mm	95A151220
ST-S8-TL-LD46	TL-LD46 adapting bracket	95ACC3430
ST-S8-S3Z	S8-miniature sensors adapting bracket	95ACC3440

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B1-02-G-03	95A251420
		5 m	CS-B1-02-G-05	95A251430
		7 m	CS-B1-02-G-07	95A251440
		10 m	CS-B1-02-G-10	95A251480
	4-pole, P.U.R.	2 m	CS-B1-02-R-02	95A251620
		5 m	CS-B1-02-R-05	95A251640
Radial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B2-02-G-03	95A251450
		5 m	CS-B2-02-G-05	95A251460
		7 m	CS-B2-02-G-07	95A251470
		10 m	CS-B2-02-G-10	95A251530
	4-pole, P.U.R.	2 m	CS-B2-02-R-02	95A251630
		5 m	CS-B2-02-R-05	95A251650

Rev. 02, 03/2019

# S6



## MULTIVOLTAGE 50X50 MM COMPACT SENSORS SERIES

- 50x50 mm compact dimensions
- Free voltage Vac/Vdc models with relay output
- 10-30 Vdc model with transistor output
- Standard cable or M12 4-pole connection

### APPLICATIONS

- Automatic machines
- Packaging lines
- Transportation lines
- Automatic warehouses




S6		
<b>Through beam</b>	0...20 m	
<b>Retroreflective (on R2 reflector)</b>	0,1...6 m	
<b>Polarized retroreflective (on R2 reflector)</b>	0,1...5 m	
<b>Diffuse proximity</b>	10...900 mm	
	10...2000 mm	
	30...100 mm	
<b>Background suppression</b>	30...250 mm	
	100...500 mm	
	10...30 V	
<b>Power supply</b>	Vdc	
	Vac	
	Vac/dc	15...264 Vac/Vdc
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	•
	relay	•
	other	•
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	18x50x50	
<b>Housing material</b>	ABS	
<b>Mechanical protection</b>	IP65	

# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc limit values (mod. S6/S6T/S6R-5) 15 ... 264 Vac/Vdc (48 ... 60 Hz) limit values (mod. S6-1)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	30 mA max. (mod. S6/S6T/S6R-5) 40 mA max. (mod. S6-1)
<b>Light emission</b>	IR LED 880 nm red LED 660 nm (mod. S6/S6R/S6T...B/M10)
<b>Setting</b>	sensitivity trimmer (excl. mod. S6...G, S6R-5-M) adjustment screw (mod. S6/S6T/S6R-5-M)
<b>Operating mode</b>	LIGHT/DARK selection by cable or connector (mod. S6/S6T/S6R-5) LIGHT/DARK selection by N.O./N.C. output (mod. S6R-5-M) LIGHT/DARK selection by trimmer (mod. S6-1)
<b>Indicators</b>	red OUTPUT LED (excl. mod. S6...G), POWER LED (mod. S6...G) green STABILITY LED (mod. S6-5-M25)
<b>Output</b>	NPN/PNP (mod. S6) PNP (mod. S6T) NPN or PNP; NC; NO (mod. S6R) Relay 1 NO and NC contact 250 Vac, 30 Vdc min. applicable load 5 Vdc, 10 mA (mod. S6-1)
<b>Output current</b>	100 mA max., 3 A max. (mod. S6-1)
<b>Saturation voltage</b>	1,5 V max. (NPN/PNP output)
<b>Response time</b>	1 ms max. 2 ms max. (mod. S6/S6R/S6T...F/G) 30 ms max. (mod. S6-1)
<b>Switching frequency</b>	500 Hz 250 Hz max. (mod. S6/S6R/S6T...F/G) 16 Hz (mod. S6-1)
<b>Connection</b>	2 m cable – 6 mm (mod. S6-1), 2 m cable – 5 mm (mod. S6-5), M12 4-pole connector (mod. S6T-S6R)
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2, class 1 (mod. S6-1)
<b>Mechanical protection</b>	IP65
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	ABS UL 94V-0
<b>Lens material</b>	PMMA plastic
<b>Operating temperature</b>	-25 ... 55 °C
<b>Storage temperature</b>	-25 ... 70 °C
<b>Weight</b>	160 g max. cable vers., 40 g max. conn. vers.


# DIMENSIONS

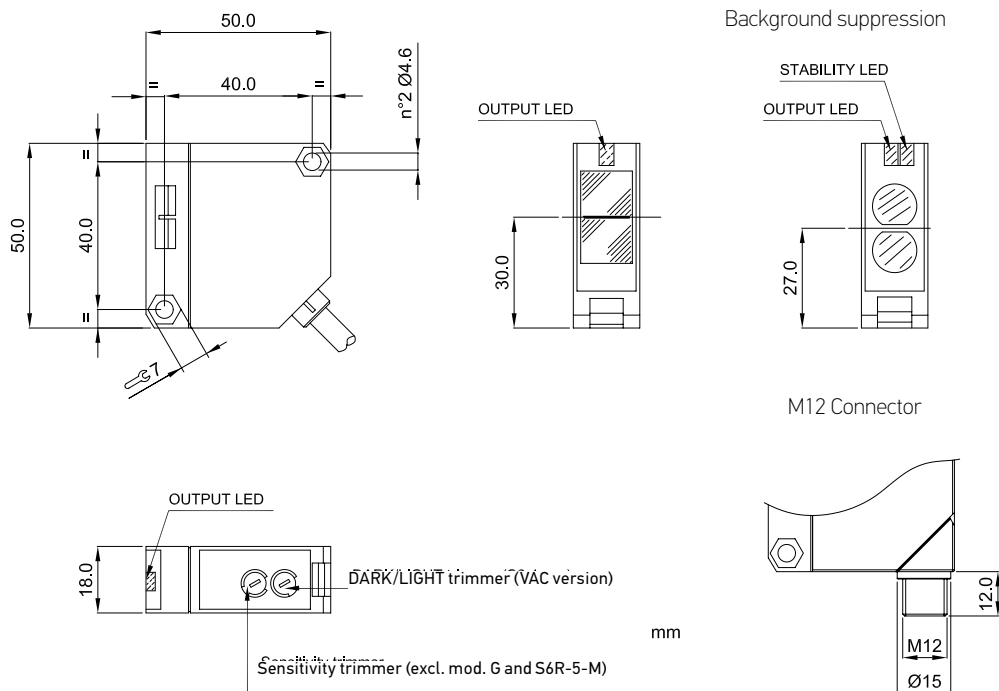


# CONNECTIONS

## VDC MODELS


NPN/PNP version




Through beam receiver - NPN/PNP version




Through beam emitter - NPN/PNP version




NPN or PNP and NC/NO version



PNP version





Through beam emitter - PNP version






## VAC MODELS

Through beam emitter











# INDICATORS AND SETTINGS

Background suppression

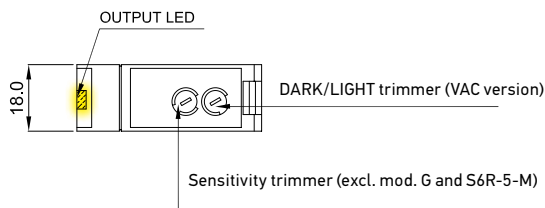

# DETECTION DIAGRAMS

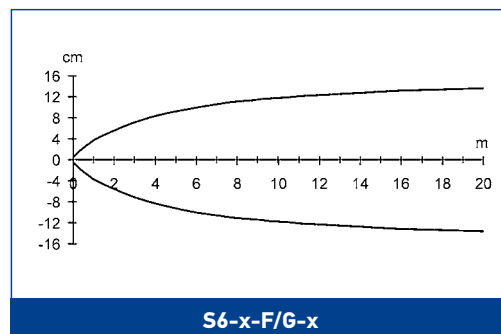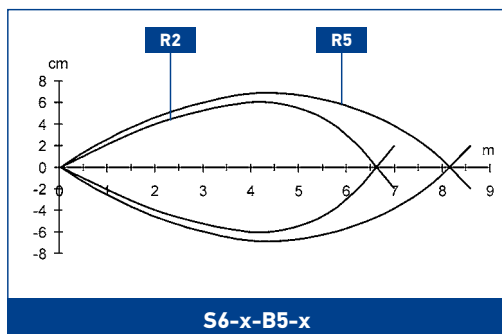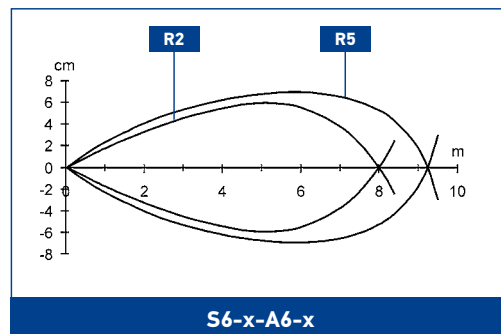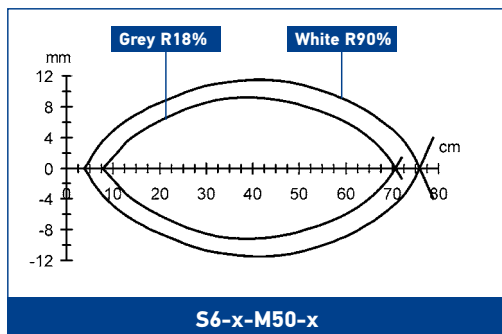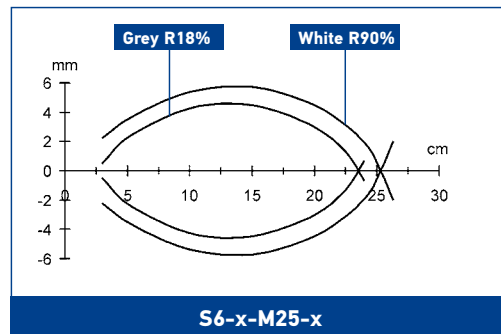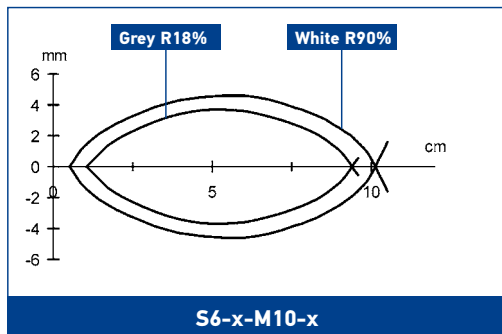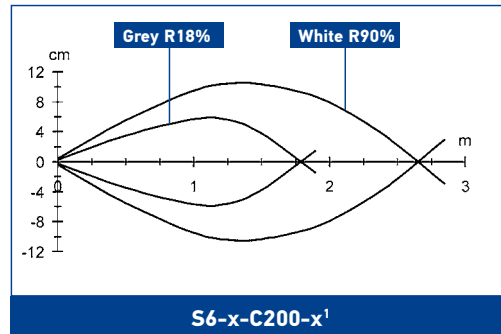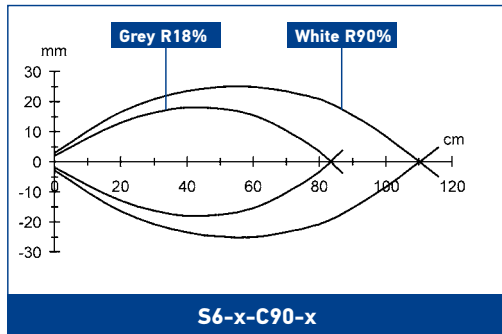


The detection diagrams indicate the typical operating distance with excess gain 1.


# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	OPERATING	POWER SUPPLY	OUTPUT	MODEL	ORDER No.
Short diffuse proximity	10...900 mm	15...264 V A.C.	relay SPDT 250V/3A	S6-1-C90	S937530090
		10...30 V D.C.	NPN/PNP	S6-5-C90	S937530000
			PNP N.O./N.C.	S6R-5-C90-P	950201190
Long diffuse proximity	10...2000 mm	15...264 V A.C.	relay SPDT 250V/3A	S6-1-C200	950151140
		10...30 V D.C.	NPN/PNP	S6-5-C200	950201150
			PNP N.O./N.C.	S6R-5-C200-P	950201200
Retroreflective	0,1...6 m (on R2 reflector)	15...264 V A.C.	relay SPDT 250V/3A	S6-1-A6	S937330090
		10...30 V D.C.	NPN/PNP	S6-5-A6	S937330000
			PNP N.O./N.C.	S6R-5-A6-P	961031000
Polarized retroreflective	0,1...5 m (on R2 reflector)	15...264 V A.C.	relay SPDT 250V/3A	S6-1-B5	S937420090
		10...30 V D.C.	NPN/PNP	S6-5-B5	S937420000
			PNP N.O./N.C.	S6R-5-B5-P	950201180
Background suppression	30...100 mm	10...30 V D.C.	PNP	S6T-5-B5-P	961031010
	30...250 mm		PNP N.O./N.C.	S6R-5-M10-P	950201230
			NPN/PNP	S6-5-M25	S937830000
	100...500 mm		PNP N.O./N.C.	S6R-5-M25-P	950201220
			PNP	S6T-5-M25-P	961041000
Through beam (Receiver)	0...20 m	15...264 V A.C.	relay SPDT 250V/3A	S6-1-F20	S937200090
		10...30 V D.C.	NPN/PNP	S6-5-F20	S937200010
			PNP N.O./N.C.	S6R-5-F20-P	950201160
			PNP	S6T-5-F20-P	961211010
Through beam (Emitter)	-	15...264 V A.C.	-	S6-1-G20	S937130090
		10...30 V D.C.	-	S6-5-G20	S937130000
			-	S6T-5-G20	961211000


## ACCESSORIES

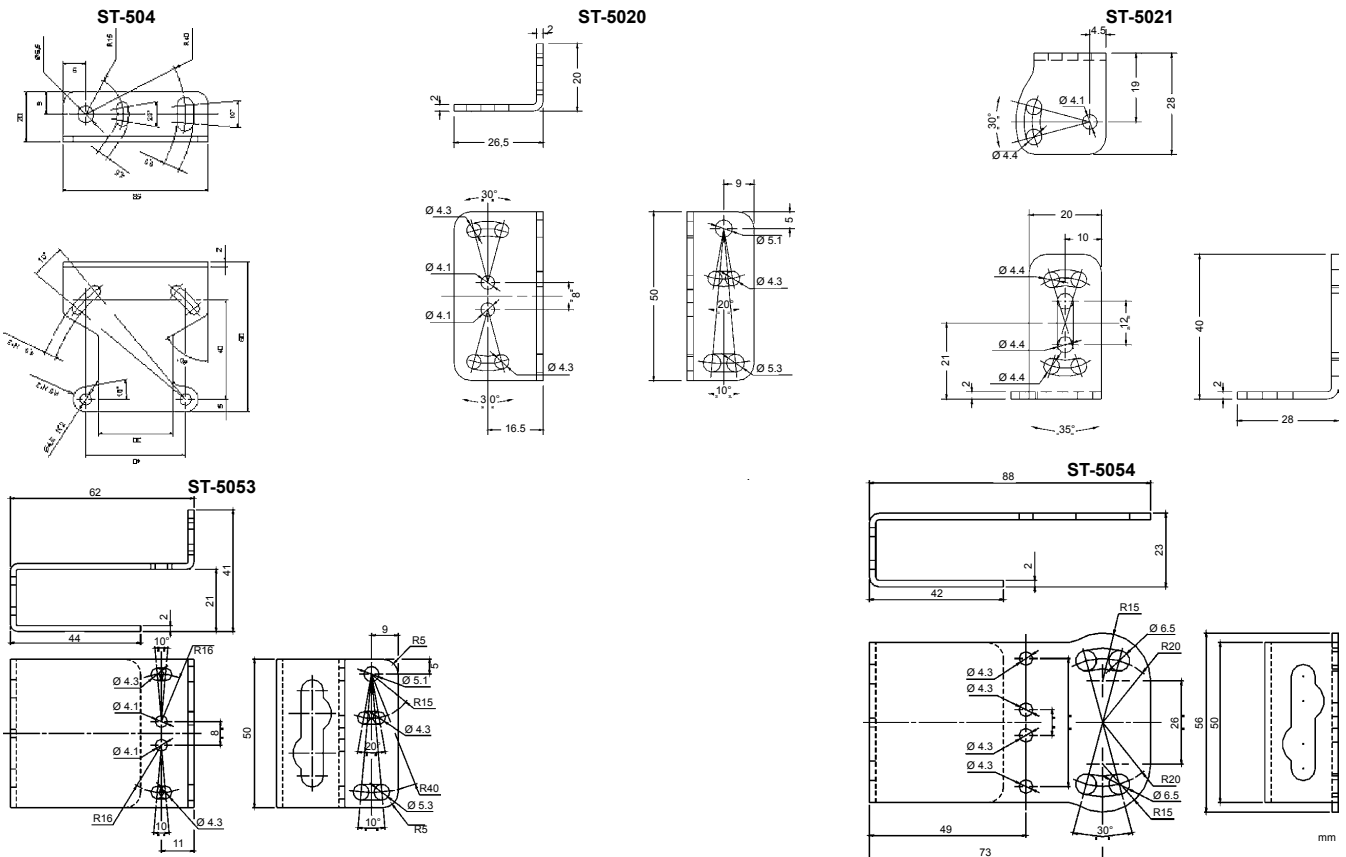

ST-5018

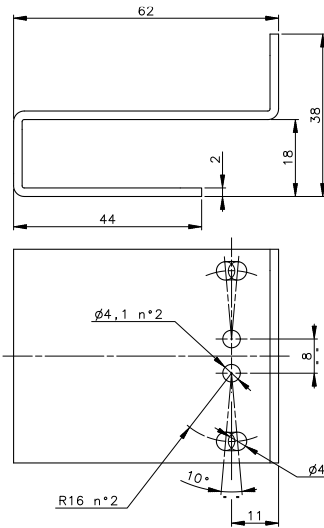

ST-5019

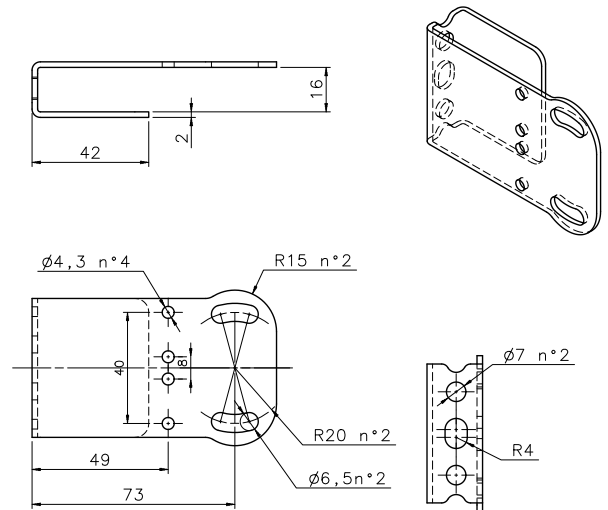

MODEL	DESCRIPTION	ORDER No.
ST-5018	protective bracket	95ACC5310
ST-5019	protective bracket	95ACC5320
ST-5020	mounting bracket	95ACC5330
ST-5021	mounting bracket	95ACC5340
ST-504	mounting bracket	95ACC2820
ST-5053	protective bracket	95ACC2410
ST-5054	protective bracket	95ACC2420
JOINT-S62	protective bracket with jointed support	95ACC2430

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
		5 m	CS-A1-02-G-05	95A251270
		7 m	CS-A1-02-G-07	95A251280
		10 m	CS-A1-02-G-10	95A251390
		2 m	CS-A1-02-R-02	95A251540
Radial M12 Connector	4-pole, grey, P.V.C.	5 m	CS-A1-02-R-05	95A251560
		3 m	CS-A2-02-G-03	95A251360
		5 m	CS-A2-02-G-05	95A251240
		7 m	CS-A2-02-G-07	95A251245
		10 m	CS-A2-02-G-10	95A251260
Radial M12 Connector with LED (for PNP N.O. sensors)	4-pole, grey, P.V.C.	2 m	CS-A2-02-R-02	95A251550
		5 m	CS-A2-02-R-05	95A251570
		3 m	CS-A2-12-G-03	95A251400
		5 m	CS-A2-12-G-05	95A251350
		10 m	CS-A2-12-G-10	95A251370
Axial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A1-22-B-03	95ACC1480
		5 m	CV-A1-22-B-05	95ACC1490
		10 m	CV-A1-22-B-10	95ACC1500
		15 m	CV-A1-22-B-15	95ACC2070
		25 m	CV-A1-22-B-25	95ACC2090
Radial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A2-22-B-03	95ACC1540
		5 m	CV-A2-22-B-05	95ACC1550
		10 m	CV-A2-22-B-10	95ACC1560
Axial M12 Connector	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
		10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
Radial M12 Connector	4-pole, black	Connector- not cabled	CS-A1-02-B-NC	G5085002
		Connector- not cabled	CS-A2-02-B-NC	G5085003

Rev. 01, 07/2016

# S60


## EXTENDED RANGE OF STANDARD “ONE FOR ALL” PHOTOELECTRIC COMPACT SENSORS



- Complete range of optic functions, basic, advanced and laser class 1
- Models with coaxial optics for polarized retroreflective, contrast and luminescence sensors
- Trimmer or EASY touch™ setting with
- Remote, Keylock and Delay functions
- Standard cable or M12 connection with standard NPN or PNP configuration

### APPLICATIONS

- Automatic machines
- Packaging lines
- Transportation lines
- Automatic warehouses
- Pharma and bottling

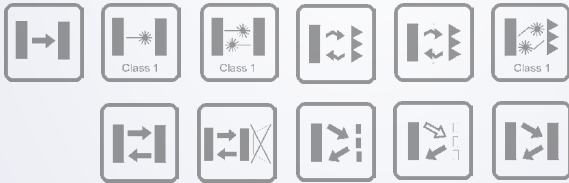



S60	
<b>Through beam</b>	0...20 m 0...60 m (class 1 LASER)
<b>Polarized retroreflective (on R5 reflector)</b>	0.1...8 m 0.1...20 m (class 1 LASER)
<b>Polarized retroreflective coaxial (on R5 reflector)</b>	0...4 m
<b>Polarized retroreflective coaxial transparent (on R5 reflector)</b>	0...2 m
<b>Diffuse proximity</b>	0...100 cm 0...200 cm (long range) 0...60 cm (class 1 LASER)
<b>Background suppression</b>	7...20 cm 5...10 cm (class 1 LASER)
<b>Contrast Sensor</b>	19 mm ±2 m (white emission)
<b>Luminescence Sensor</b>	0...40 mm
<b>Power supply</b>	Vdc 10...30 V 18...30 V
	Vac
	Vac/dc
<b>Output</b>	PNP •
	NPN •
	NPN/PNP
	relay
	other
<b>Connection</b>	cable •
	connector •
	pig-tail
<b>Approximate dimensions (mm)</b>	50x50x15 mm
<b>Housing material</b>	ABS
<b>Mechanical protection</b>	IP67




# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc
<b>Ripple</b>	≤ 2 Vpp max.
<b>Consumption (output current excluded)</b>	≤ 40 mA max.
<b>Light emission</b>	red LED 660 nm (mod. S60...B01/B51/T51/C01) IR LED 880 nm (mod. S60...C11/G00) white LED 400-700 nm (mod. S60...W08) UV LED 370 nm (mod. S60...U08) red Laser 650 nm (mod. S60...G00/B01/C01/M08)
<b>Setting</b>	sensitivity trimmer (mod. B01/B51/C01/C11/F01/T51)
<b>Operating mode</b>	LIGHT mode on N.O. output / DARK mode on N.C. output (mod.S60...C01/C11/M08/U08) DARK mode on N.O. output / LIGHT mode on N.C. output (mod.S60...B01/B51/F01/T51) LIGHT mode on N.O. output / remote input (mod.M08/W08/U08)
<b>Indicators</b>	yellow OUTPUT LED (S60 all models excluded G00) green STABILITY LED (mod. S60...F01/B01/B51/T51/C01/C11) POWER LED (mod. S60 LASER...F01/B01/C01) green/red READY/ERROR LED (mod. S60...M08/W08/U08)
<b>Output</b>	PNP or NPN; NO; NC (mod. S60)
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	2 V max.
<b>Response time</b>	0,5 ms (mod. S60...A00/B01/T01/C10/C21/C01/D00/E01/U08) 2 ms (mod. S60...F01/G00) 1 ms (mod. S50...M08, A00/B01/C01/C10/G00) 4 ms (mod. S60) 100 μs (mod. S60...W08) 333 μs (Laser mod. S60)
<b>Switching frequency</b>	1 kHz (mod. S60...A00/B01/T01/C10/C21/C01/D00/E01/U08) 250 Hz (mod. S50...F01/G00) 500 Hz (mod. S60...M08, A00/B01/C01/C10/G00) 5 kHz (mod. S60...W08) 1,5 kHz (Laser mod. S60)
<b>Connection</b>	2 m Ø 4 mm cable / M12 4-pole connector
<b>Dielectric strength</b>	500 VAC, 1 min between electronic parts and housing
<b>Insulating resistance</b>	>20 MΩ, 500 VDC between electronic parts and housing
<b>Electrical protection</b>	Class 2
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	ABS
<b>Lens material</b>	window in PMMA, lenses in glass and polycarbonate
<b>Operating temperature</b>	-10 ... 50 °C (Laser Models) -25 ... 55 °C (LED Models)
<b>Storage temperature</b>	-25 ... 70 °C
<b>Weight</b>	90 g. max. cable vers. / 40 g. max. connector vers.

# DIMENSIONS

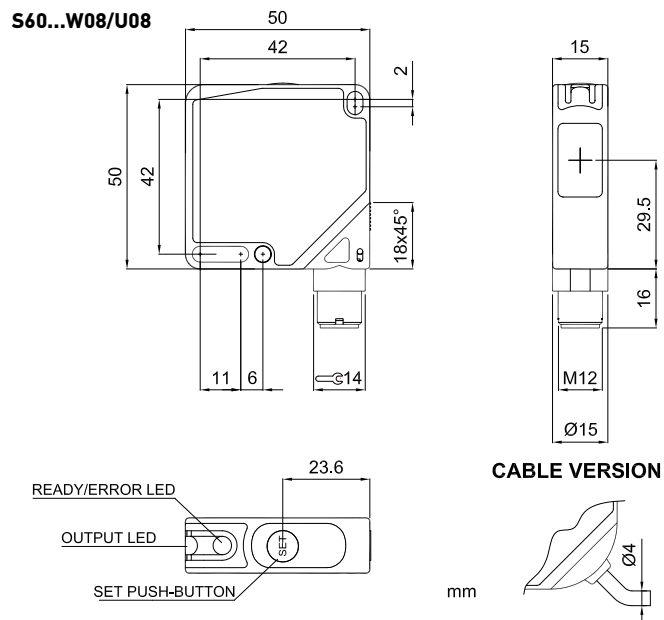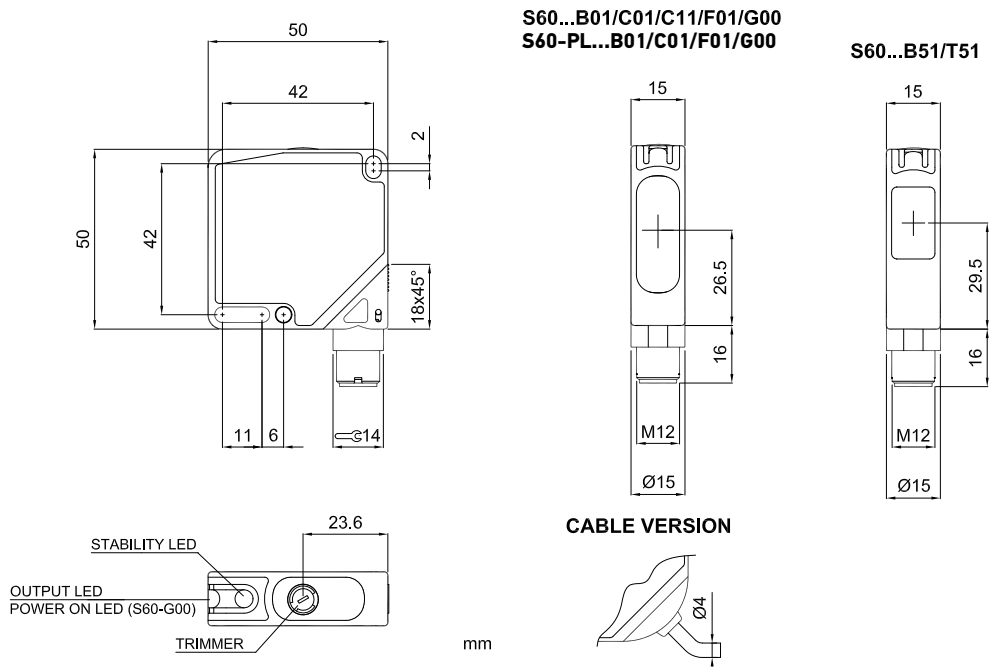



**S60...M08**  
**S60-PL...M08**

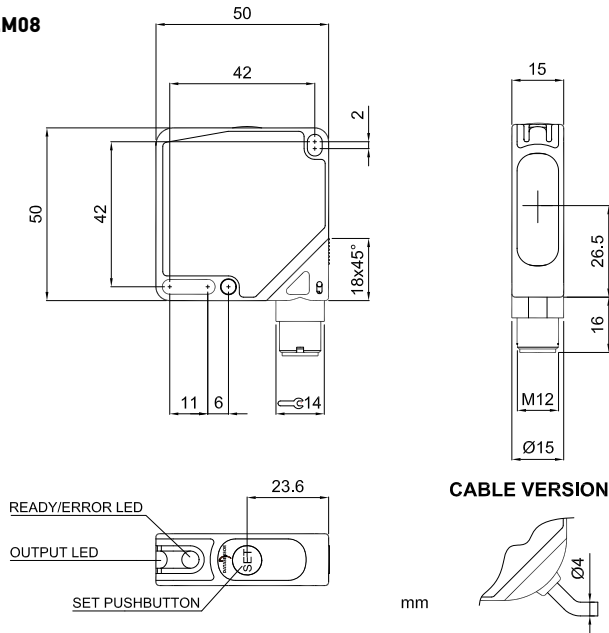


## CONNECTIONS





S60-PA-2





S60-PA-5



S60...G00  
S60-PL...G00

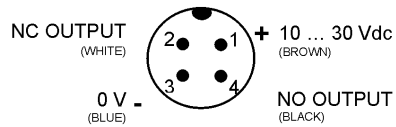



S60...B01,B51,C01,C11,T51,F01  
S60-PL...B01,C01,F01

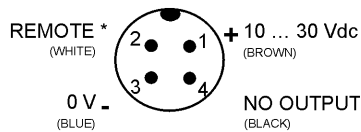

S60...W08,U08,M08  
S60-PL...M08

# INDICATORS AND SETTINGS

## INFRARED EMISSION G00 - LASER RED EMISSION G00/F01

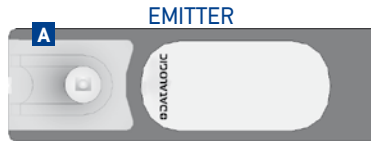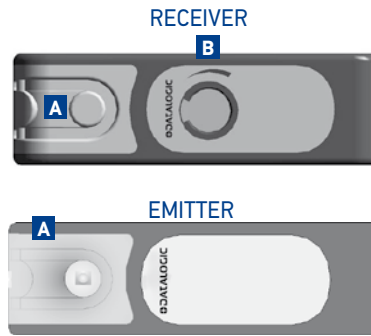

- A** Output status and stability LEDs (receiver); power on LED (emitter)
- B** Adjustment trimmer (receiver)
- C** M12 connector output
- D** Cable output

Single-turn trimmer for sensitivity adjustment. Rotate clockwise direction to increase the operating distance. Decrease sensitivity to increase resolution. Only for Receiver model

## B01/B51/T51/C01/C11



- A** Output status yellow LED and green Stability LED
- B** Adjustment trimmer
- C** M12 connector output
- D** Cable output

Single-turn trimmer for sensitivity adjustment. Rotate clockwise to increase the operating distance.

## RED LASER MODEL B01/C01



- A** Output status yellow LED and green Power LED
- B** Teach-in push-button
- C** M12 connector output
- D** Cable output

Single-turn trimmer for sensitivity adjustment. Rotate clockwise to increase the operating distance.

## W08/U08/M08/M08 LASER




- A** Output status and READY/ ERROR LEDs
- B** Teach-in push-button
- C** M12 connector output orientable in two positions
- D** Cable output



Teach-in button for setting. EASYtouch™ provides two setting modes: standard or fine. Please refer to instructions manual for operating details.

# DETECTION DIAGRAMS


## S60...F01,G00

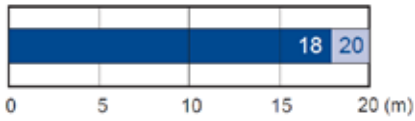



- Recommended operating distance
- Maximum operating distance

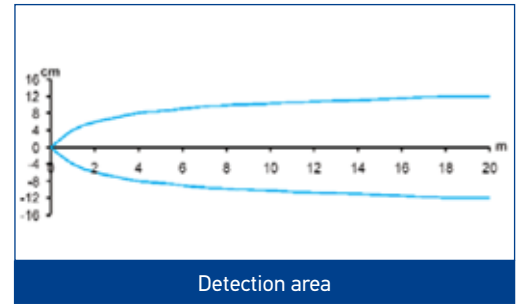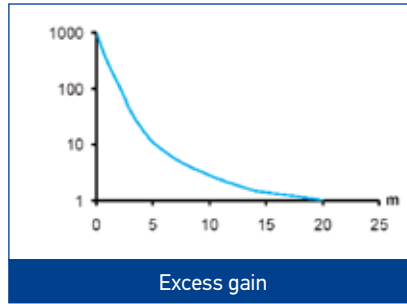


## S60-PL...F01,G00



- Operating distance

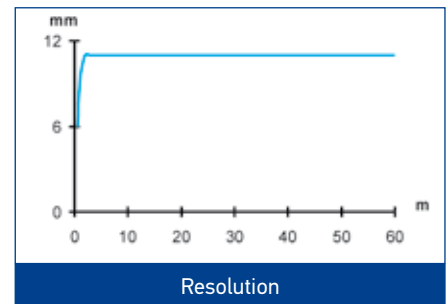
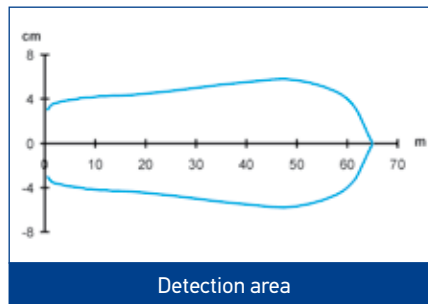


## S60...B01

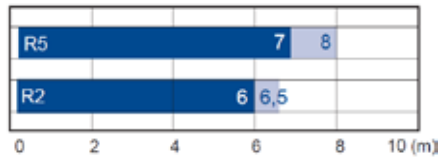


- Recommended operating distance
- Maximum operating distance

High efficiency reflectors can be used to obtain larger operating distances.  
Refer to **Reflectors (A.01)** of the **General Catalogue**.

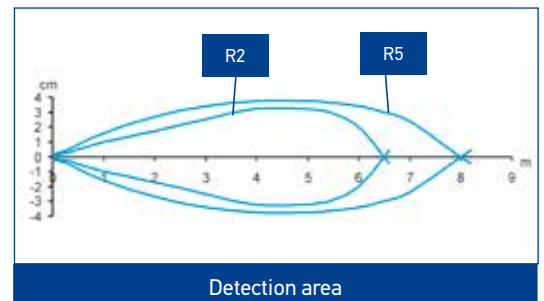
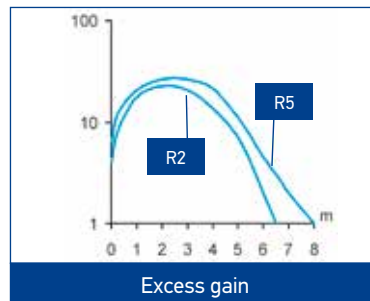


## S60-PL...B01

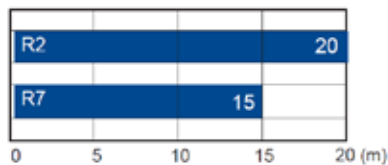


- Operating distance

High efficiency reflectors can be used to obtain larger operating distances.  
Refer to **Reflectors (A.01)** of the **General Catalogue**.

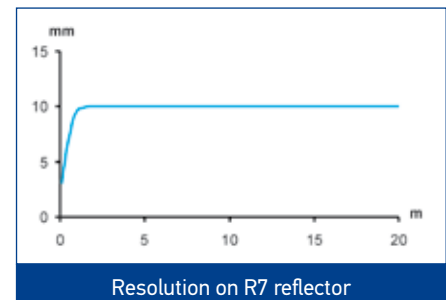
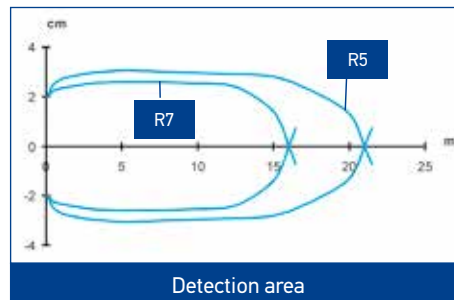


### S60...B51

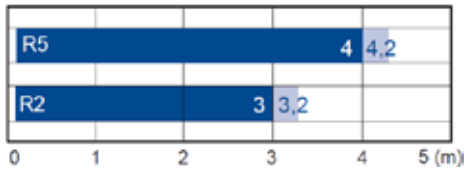

■ Recommended operating distance  
 ■ Maximum operating distance



High efficiency reflectors can be used to obtain larger operating distances. Refer to **Reflectors**.

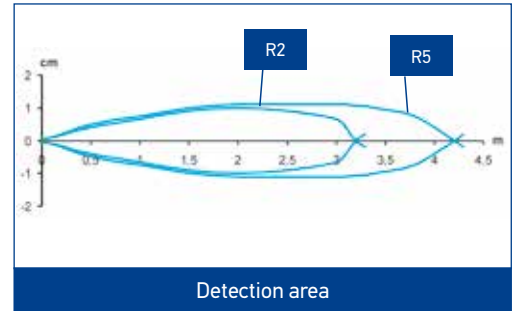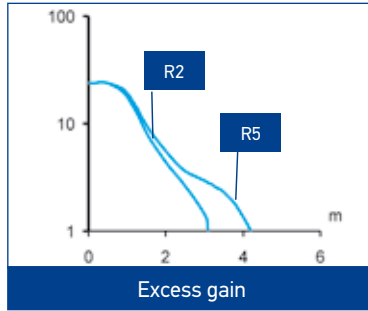


### S60...T51





■ Recommended operating distance  
 ■ Maximum operating distance

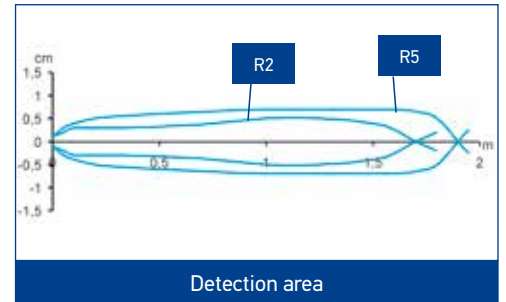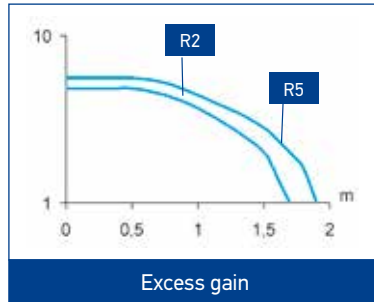


### S60...C01

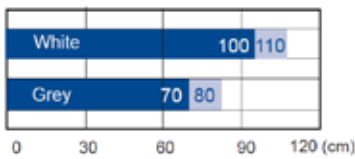



■ Recommended operating distance  
 ■ Maximum operating distance

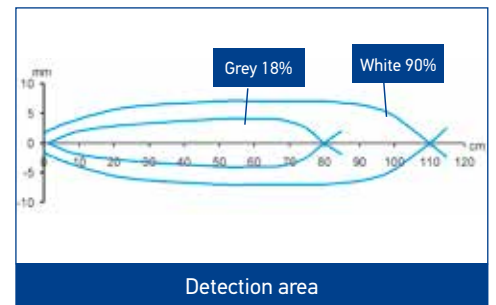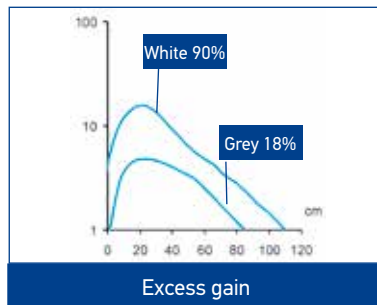


### S60...C11

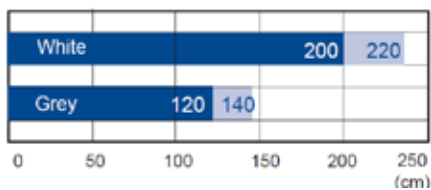



■ Recommended operating distance  
 ■ Maximum operating distance

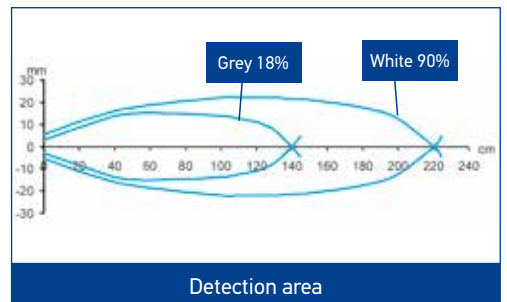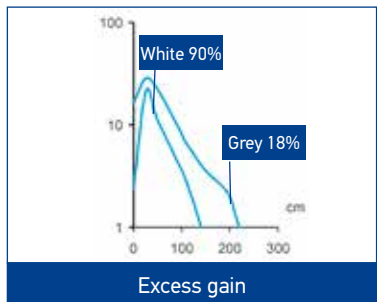


### S60-PL...C01



■ Operating distance

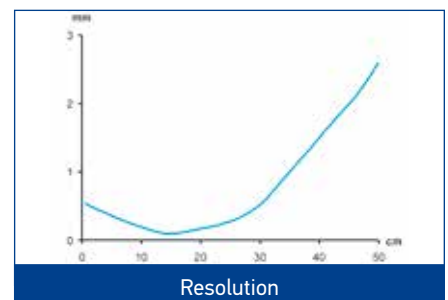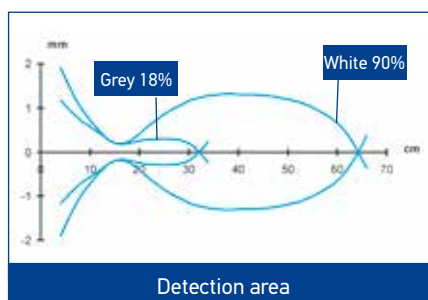


S60...M08




■ Operating distance


ST-5018

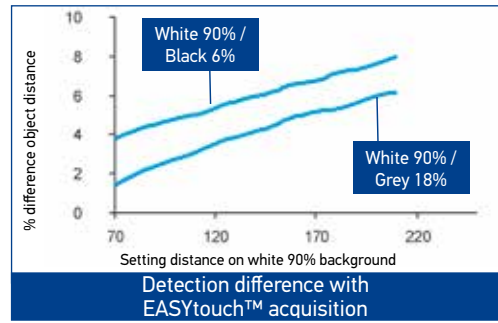

S60-PL...M08

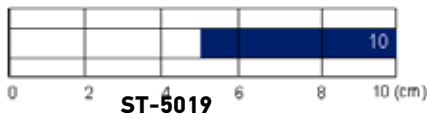


■ Operating distance

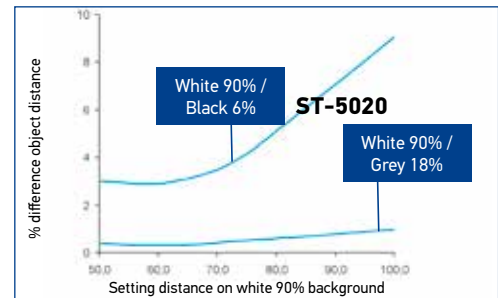


Detection difference with EASYtouch™ acquisition

S60...W08

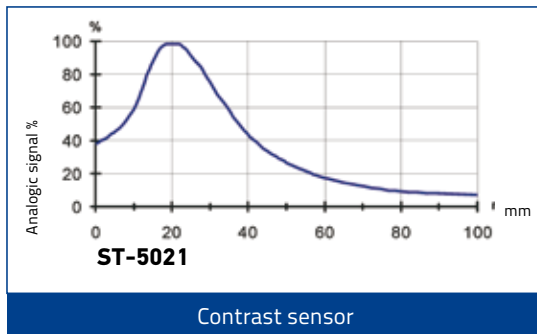


Contrast sensor

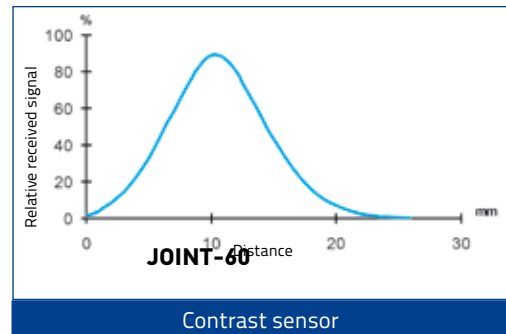


Contrast sensor

S60...U08

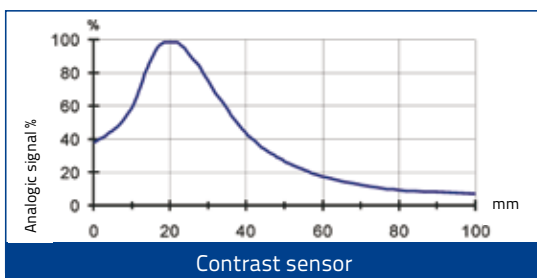

Contrast sensor

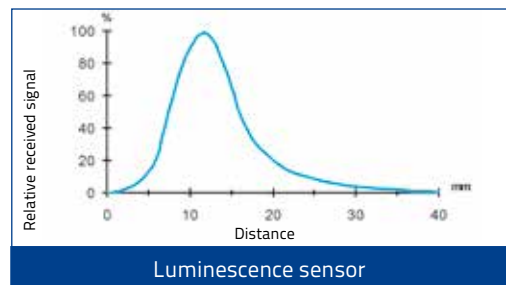

Luminescence sensor

# MODEL SELECTION AND ORDER INFORMATION

MODEL	FUNCTION	N° ORDER
S60-PA-2-B01-NN	polarized retroreflective	956201460
S60-PA-2-B01-PP	polarized retroreflective	956201300
S60-PA-2-C01-NN	diffuse proximity	956201470
S60-PA-2-C01-PP	diffuse proximity	956201310
S60-PA-2-C11-NN	long diffuse proximity	956201480
S60-PA-2-C11-PP	long diffuse proximity	956201320
S60-PA-2-F01-NN	receiver	956201490
S60-PA-2-F01-PP	receiver	956201330
S60-PA-2-G00-XG	emitter	956201340
S60-PA-2-T51-NN	retroreflective for transparents	956201530
S60-PA-2-T51-PP	retroreflective for transparents	956201380
S60-PA-2-U08-NH	luminescence sensor	956201540
S60-PA-2-U08-PH	luminescence sensor	956201390
S60-PA-2-W08-NH	contrast sensor	956201550
S60-PA-2-W08-PH	contrast sensor	956201400
S60-PA-5-B01-NN	polarized retroreflective	956201180
S60-PA-5-B01-PP	polarized retroreflective	956201040
S60-PA-5-B51-NN	coaxial polarized retroreflective	956201630
S60-PA-5-B51-PP	coaxial polarized retroreflective	956201620
S60-PA-5-C01-NN	diffuse proximity	956201190
S60-PA-5-C01-PP	diffuse proximity	956201050
S60-PA-5-C11-NN	long diffuse proximity	956201200
S60-PA-5-C11-PP	long diffuse proximity	956201110
S60-PA-5-F01-NN	receiver	956201210
S50-PA-5-F01-PP	receiver	956201060
S60-PA-5-G00-XG	emitter	956201070
S60-PA-5-M08-NH	background suppression	956201220
S60-PA-5-M08-PH	background suppression	956201080

MODEL	FUNCTION	N° ORDER
S60-PA-5-T51-NN	retroreflective for transparents	956201250
S60-PA-5-T51-PP	retroreflective for transparents	956201100
S60-PA-5-U08-NH	luminescence sensor	956201010
S60-PA-5-U08-PH	luminescence sensor	956201000
S60-PA-5-W08-NH	contrast sensor	956201030
S60-PA-5-W08-PH	contrast sensor	956201020
S60-PL-2-B01-NN	laser polarized retroreflective	956201560
S60-PL-2-B01-PP	laser polarized retroreflective	956201410
S60-PL-2-C01-NN	laser diffuse proximity	956201640
S60-PL-2-C01-PP	laser diffuse proximity	956201650
S60-PL-2-F01-NN	laser receiver	956201570
S60-PL-2-F01-PP	laser receiver	956201420
S60-PL-2-G00-XG	laser emitter	956201430
S60-PL-2-M08-NH	laser background suppression	956201580
S60-PL-2-M08-PH	laser background suppression	956201440
S60-PL-5-B01-NN	laser polarized retroreflective	956201260
S60-PL-5-B01-PP	laser polarized retroreflective	956201120
S60-PL-5-C01-NN	laser diffuse proximity	956201660
S60-PL-5-C01-PP	laser diffuse proximity	956201670
S60-PL-5-F01-NN	laser receiver	956201270
S50-PL-5-F01-PP	laser receiver	956201140
S60-PL-5-G00-XG	laser emitter	956201150
S60-PL-5-M08-NH	laser background suppression	956201280
S60-PL-5-M08-PH	laser background suppression	956201160

## ACCESSORIES

The series is compatible with the following Datalogic Automation accessories

- CS connectors
- R reflectors

New accessories dedicated to the S60 series have been developed to cover all the fixing requirements and improve functioning.


## ACCESSORY SELECTION AND ORDER INFORMATION

MODEL	DESCRIPTION	ORDER N°
ST-5018	protection bracket	95ACC5310
ST-5019	protection bracket	95ACC5320
ST-5020	fixing bracket	95ACC5330
ST-5021	fixing bracket	95ACC5340
JOINT-60	protection bracket with jointed support	95ACC5350
ST-504	S6/S60 fixing bracket	95ACC2820




# ACCESSORIES DIMENSIONS


**ST-504**

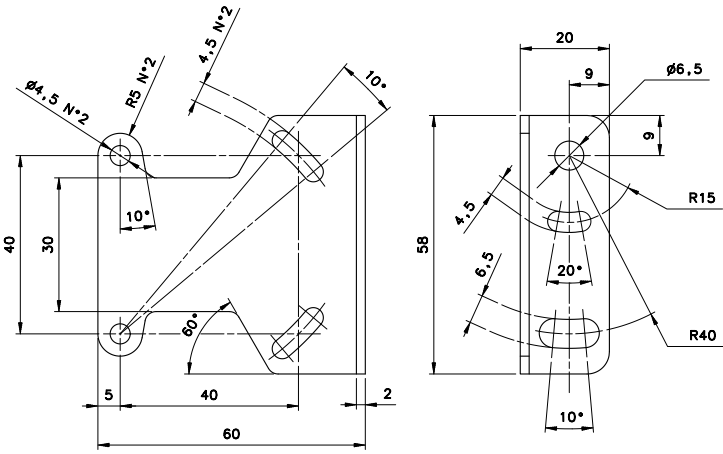


**ST-5018**

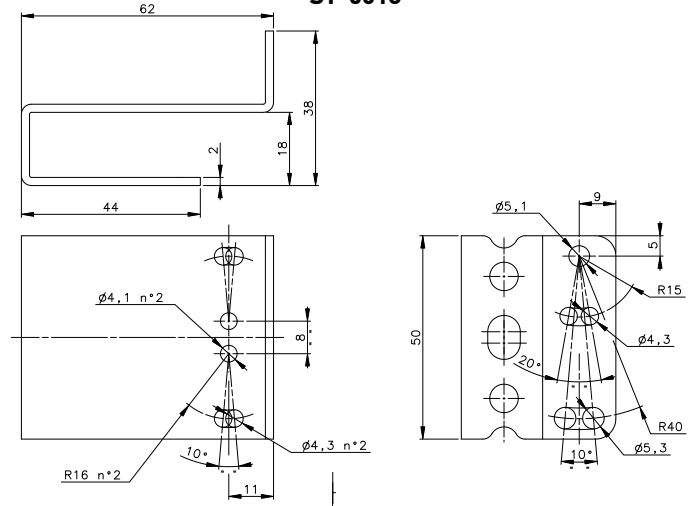


**ST-5019**

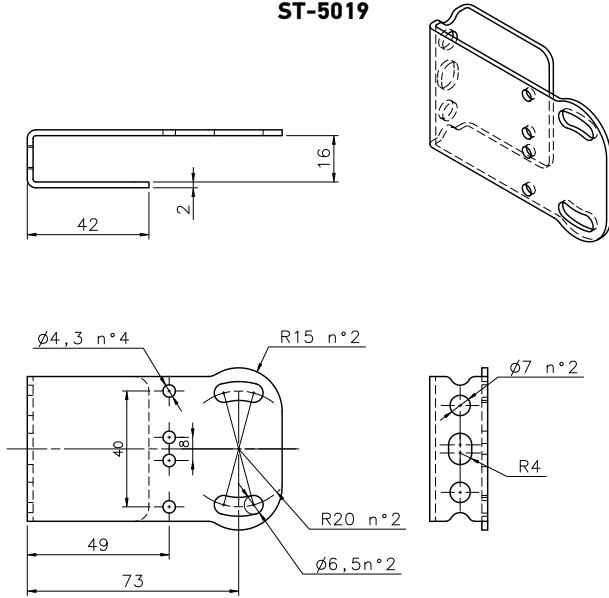


**ST-5020**

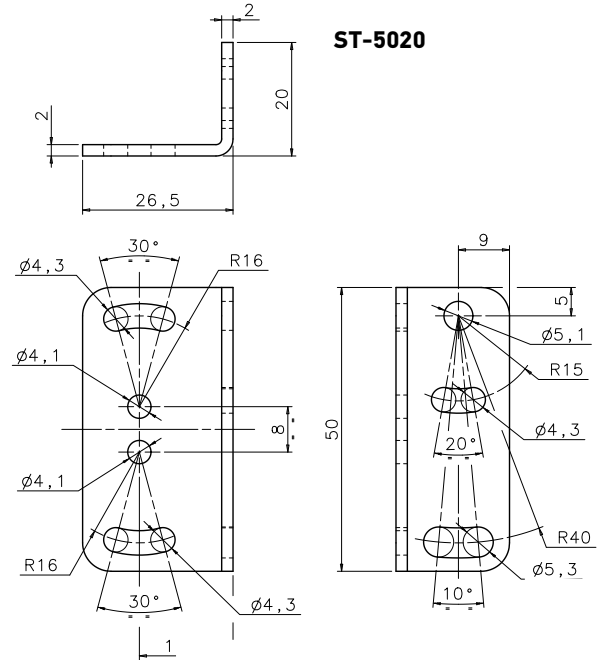

**ST-5021**

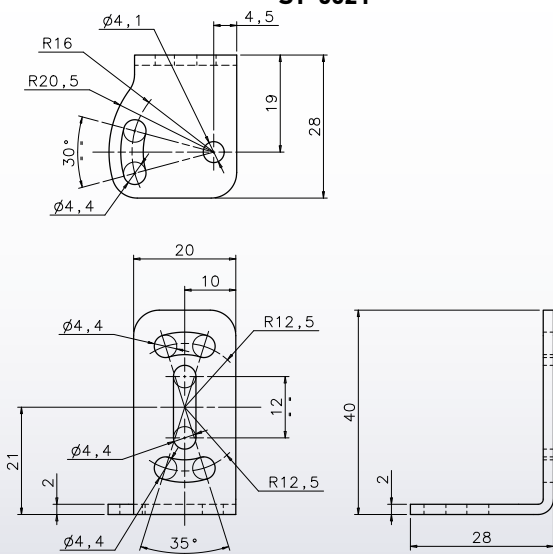

**JOINT-60**

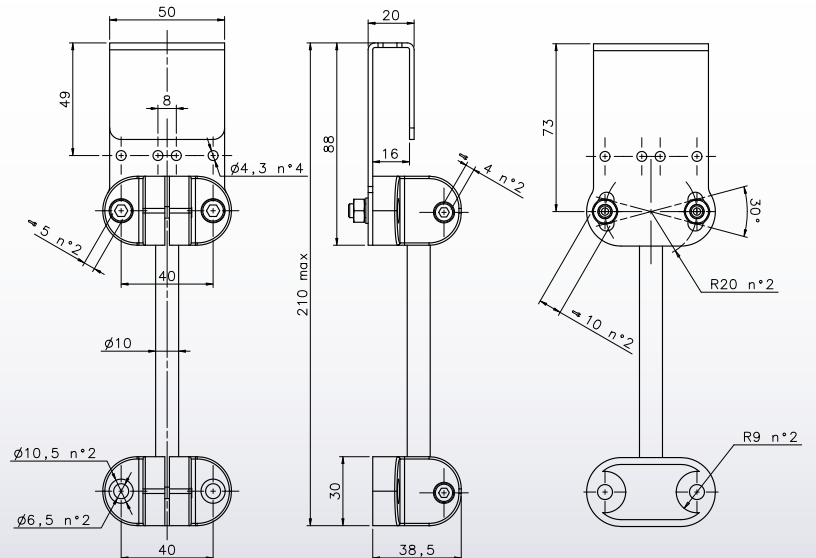

Rev. 01,07/2016

# S62



## THE MOST COMPLETE UNIVERSAL SENSOR IN A COMPACT 50X50 MM HOUSING

- Sensors with red, infrared LED or LASER emission
- Background suppression from 3 cm to 2 m
- Polarized retroreflective up to 20 m
- Multivoltage 24-240Vac/24-60Vdc with Relay output
- NPN/PNP output NO-NC configuration

### APPLICATIONS

- Processing and Packaging machinery
- Conveyor lines, material handling






S62		
<b>Through beam</b>	0...25 m	
<b>Retroreflective (on R2 reflector)</b>	0,1...13 m	
<b>Polarized retroreflective</b>	0,1...8 m	
	0,3...20 m (class 2 LASER)	
<b>Diffuse proximity</b>	short 0...900 mm, long 0...2000 mm	
	0...900 mm (class 2 LASER)	
<b>Background suppression</b>	short 30...300 mm	
	medium 60...600 mm	
	long 60...1200 mm	
	very long 200...2000 mm	
	short LASER 30...150 mm (class 2 LASER)	
	long LASER 50...350 mm (class 2 LASER)	
<b>Power supply</b>	Vdc	10...30 V
	Vac	
	Vac/dc	24/240 Vac/24...60 Vdc
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	•
	relay	•
	other	•
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	18x50x50	
<b>Housing material</b>	ABS	
<b>Mechanical protection</b>	IP67	

# TECHNICAL DATA


<b>Power supply</b>	10 ... 30 Vdc (mod. S62...2/5) 24...240 Vac/ 24...60 Vdc (mod. S62...1)
<b>Ripple</b>	2 Vpp max. (mod. S62...2/5), 10% max. (mod. S62...1)
<b>Consumption (output current excluded)</b>	30 mA max. (mod. S62...2/5) 3 VA max. (mod. S62...1)
<b>Light emission</b>	red LED 640 nm (mod. S62-PA...A/B/C/G/M01/M05/M11/M15) IR LED 880 nm (mod. S62-PA...M21/M25/M31/M35) red Laser 645...665 nm (mod. S62-PL)
<b>Setting</b>	sensitivity adjustment trimmer
<b>Operating mode</b>	mono-turn LIGHT/DARK trimmer (mod. S62...RX/PN)
<b>Indicators</b>	yellow OUTPUT LED green STABILITY LED, POWER LED (S62...G)
<b>Output</b>	PNP or NPN N.O./N.C. (mod. S62...PP/NN); NPN/PNP (mod. S62...PN); electromechanical SPDT 250 Vac/30 Vdc (mod. S62...RX)
<b>Output current</b>	100 mA max. (mod. S62...2/5), 2 A max. (mod. S62...1)
<b>Saturation voltage</b>	2 V max. (mod. S62...2/5)
<b>Response time</b>	25 ms (mod. S62...1) 1,5 ms (mod. S62...M3x) 1 ms (mod. S62...2/5-F/G/M2x) 500 µs (mod. S62-PA...2/5-A/B/C/M0x/M1x) 200 µs (mod. S62-PL...B/C/M11) 140 µs (mod. S62-PL...M01)
<b>Switching frequency</b>	20 Hz (mod. S62...1) 330 Hz (mod. S62...M3x) 500 Hz (mod. S62...2/5-F/G/M2x) 1 kHz (mod. S62-PA...2/5-A/B/C/M0x/M1x) 2,5 kHz (mod. S62-PL...B/C/M11) 3,5 kHz (mod. S62-PL...M01)
<b>Connection</b>	M12 4-pole connector, 2 m Ø 4 mm cable vers., 2 m Ø 5 mm cable vers.
<b>Dielectric strength</b>	500 Vac 1 min., between electronics and housing
<b>Insulation resistance</b>	>20 MΩ 500 Vdc, between electronics and housing
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	According to EN 60947-5-2
<b>Vibrations</b>	0.5 mm amplitude, 10 ... 55 Hz frequency, for each axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	ABS
<b>Lens material</b>	PMMA window, polycarbonate lens
<b>Operating temperature</b>	-10 ... 55 °C
<b>Storage temperature</b>	-20 ... 70 °C
<b>Weight</b>	40 g max. conn. vers., 90 max. cable vers.

# DIMENSIONS



Background suppression

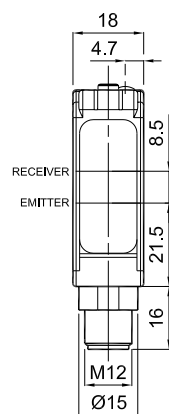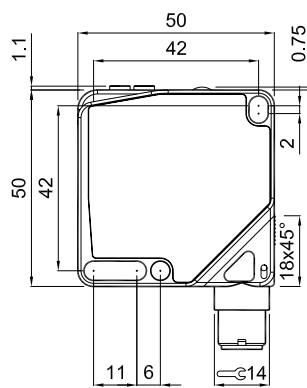


Cable version



Laser version

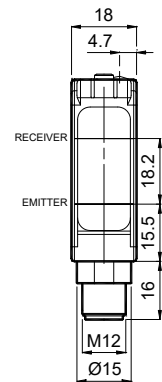


Led version

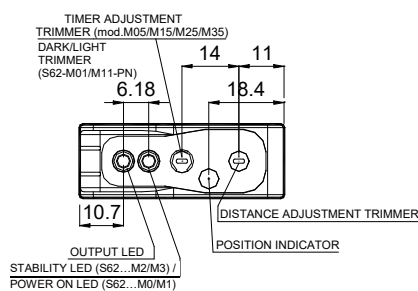


# CONNECTIONS


## VDC MODELS

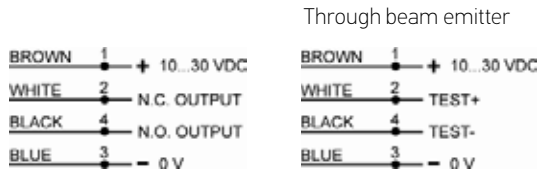


NPN/PNP version




## M12 CONNECTOR

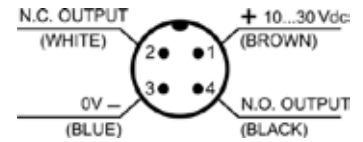




## VAC MODELS



Through beam emitter










# INDICATORS AND SETTINGS



- A** Output status LED
- B** Stability LED or Power ON LED (laser vers.)
- C** Timer adjustment trimmer

- D** Distance adjustment trimmer
- E** Geared numeric scale
- F** M12 connector output
- G** Cable output





# DETECTION DIAGRAMS OF MODELS WITH LED EMISSION

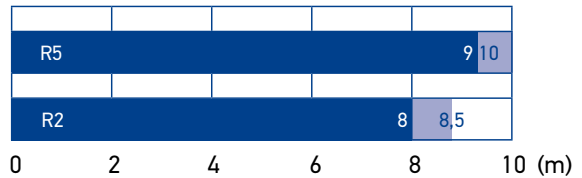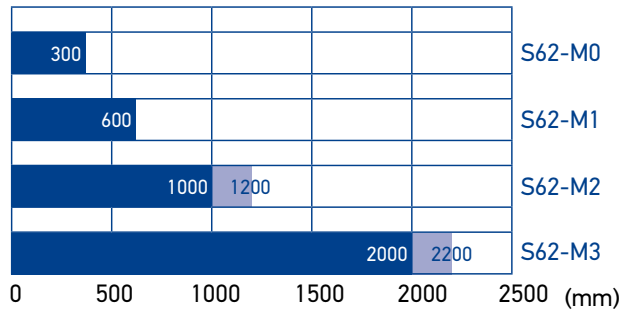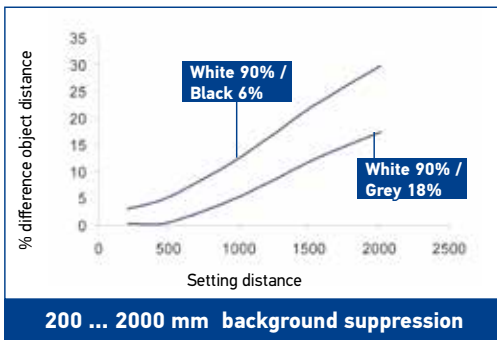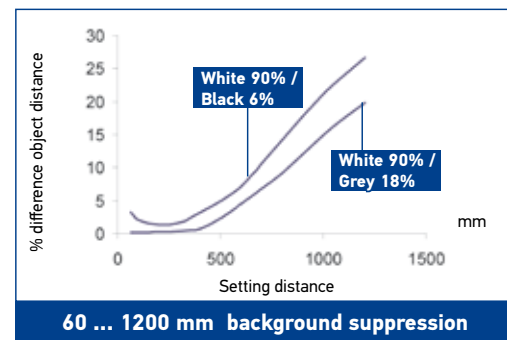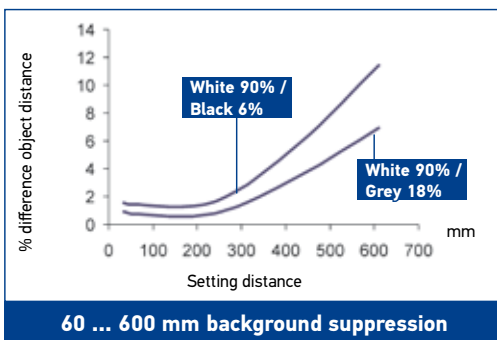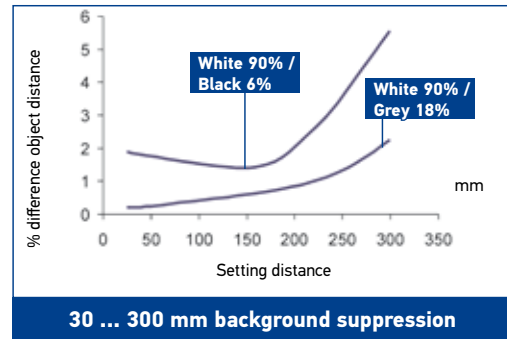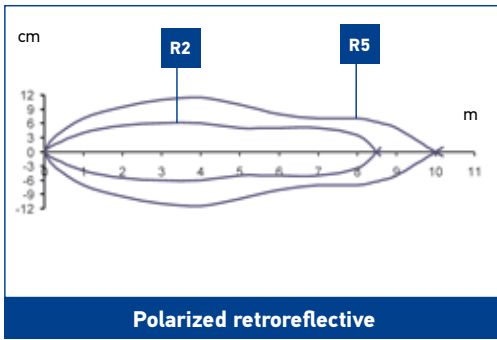

Recommended operating distance



Maximum operating distance

# DETECTION DIAGRAMS OF MODELS WITH LASER EMISSION

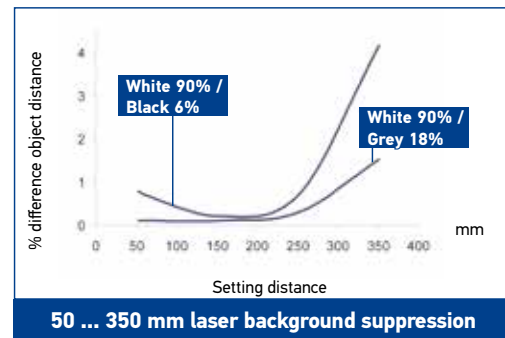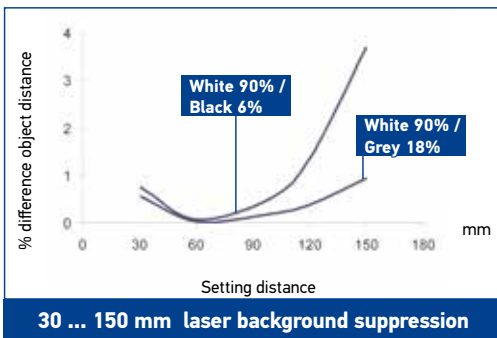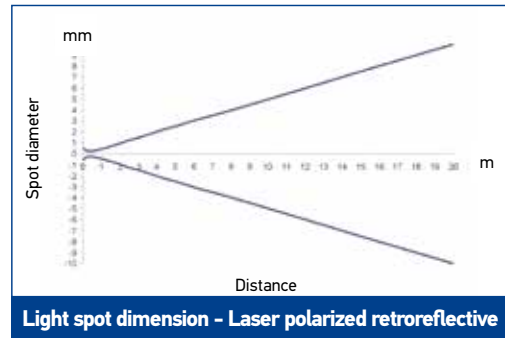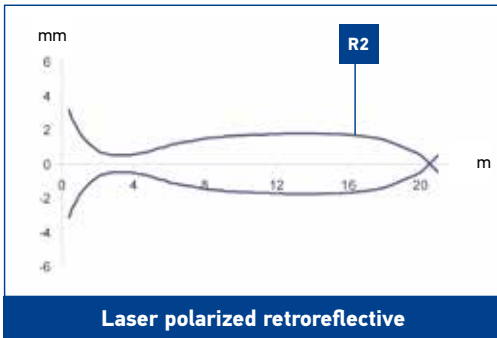

Reflector operating distances (m)				
R1	R2	R6	R7 / R20	R8
0.3 ... 16	0.3 ... 20	0.4 ... 22	0.3 ... 22	0.2 ... 2

The use of the RT3970 reflecting tape is suggested.




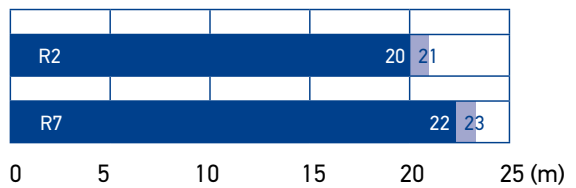
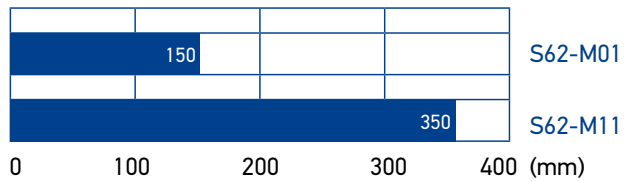


- Recommended operating distance
- Maximum operating distance


# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	EMISSION	CONNECTION	SETTING	OUTPUT	MODEL	ORDER No.		
Retroreflective	LED (red 640nm)	2m Cable	sensitivity trimmer (mono turn)	PNP/NPN	S62-PA-2-A01-PN	956211240		
		M12 Connector		PNP/NPN	S62-PA-5-A01-PN	956211310		
		Vac relay	mono-turn light/dark trimmer	Relay	S62-PA-1-A01-RX	956211180		
Polarized retroreflective	LED (red 640nm)	2m Cable	sensitivity trimmer (mono-turn)	PNP/NPN	S62-PA-2-B01-PN	956211250		
		M12 Connector		PNP	S62-PA-2-B01-PP	956211010		
				NPN	S62-PA-5-B01-NN	956211020		
				PNP/NPN	S62-PA-5-B01-PN	956211320		
	Vac relay	mono-turn light/dark trimmer	PNP	S62-PA-5-B01-PP	956211000			
	LASER	M12 Connector	mono-turn light/dark trimmer	Relay	S62-PA-1-B01-RX	956211190		
				NPN	S62-PL-5-B01-NN	956211100		
			PNP	S62-PL-5-B01-PP	956211110			
Short diffused proximity	LED (red 640nm)	2m Cable	sensitivity trimmer (mono-turn)	NPN	S62-PA-2-C01-NN	956211420		
				PNP/NPN	S62-PA-2-C01-PN	956211260		
		M12 Connector		PNP	S62-PA-2-C01-PP	956211380		
				NPN	S62-PA-5-C01-NN	956211500		
				PNP/NPN	S62-PA-5-C01-PN	956211330		
	Vac relay	mono-turn light/dark trimmer	PNP	S62-PA-5-C01-PP	956211460			
	LASER	M12 Connector	mono-turn light/dark trimmer	Relay	S62-PA-1-C01-RX	956211200		
				NPN	S62-PL-2-C01-NN	956211440		
				PNP	S62-PL-2-C01-PP	956211400		
				NPN	S62-PL-5-C01-NN	956211520		
PNP				S62-PL-5-C01-PP	956211480			
Long diffused proximity	LED (red 640nm)	2m Cable	sensitivity trimmer (mono turn)	NPN	S62-PA-2-C11-NN	956211430		
				PNP/NPN	S62-PA-2-C11-PN	956211270		
		M12 Connector		PNP	S62-PA-2-C11-PP	956211390		
				NPN	S62-PA-5-C11-NN	956211510		
				PNP/NPN	S62-PA-5-C11-PN	956211340		
	Vac relay	mono-turn light/dark trimmer	PNP	S62-PA-5-C11-PP	956211470			
	-	-	-	-	Relay	S62-PA-1-C11-RX	956211210	
					NPN	S62-PA-2-F01-NN	956211450	
					PNP/NPN	S62-PA-2-F01-PN	956211290	
					PNP	S62-PA-2-F01-PP	956211410	
NPN					S62-PA-5-F01-NN	956211530		
Through beam receiver	-	2m Cable	sensitivity trimmer (mono turn)	PNP/NPN	S62-PA-5-F01-PN	956211360		
				PNP	S62-PA-5-F01-PP	956211490		
		M12 Connector		Relay	S62-PA-1-F01-RX	956211220		
				NPN	S62-PA-2-G00-NN	956211300		
				PNP/NPN	S62-PA-5-G00-XG	956211370		
	Vac relay	mono-turn light/dark trimmer	PNP	S62-PA-1-G00-XX	956211230			
	Through beam emitter	LED (red 640nm)	2m Cable	sensitivity trimmer (mono turn)	PNP/NPN	S62-PA-2-M01-PN	956211280	
			M12 Connector		PNP	S62-PA-2-M01-PP	956201841	
			Vac relay		NPN	S62-PA-5-M01-NN	956201811	
		LED (red 640nm)	M12 Connector	6 turns distance adjustment trimmer	PNP/NPN	S62-PA-5-M01-PN	956211350	
PNP					S62-PA-5-M01-PP	956201831		
NPN					S62-PA-5-M05-NN	956201801		
PNP					S62-PA-5-M05-PP	956201821		
LASER			M12 Connector	4 turns distance adjustment trimmer	NPN	S62-PL-5-M01-NN	956211120	
					PNP	S62-PL-5-M01-PP	956211130	
					NPN	S62-PA-2-M11-NN	956201891	
Background suppression (short distance)	LED (red 640nm)	2m Cable	6 turns distance adjustment trimmer	NPN	S62-PA-5-M11-NN	956201861		
				PNP	S62-PA-5-M11-PP	956201881		
		M12 Connector		NPN	S62-PA-5-M15-NN	956201851		
				PNP	S62-PA-5-M15-PP	956201871		
				NPN	S62-PL-5-M11-NN	956211140		
	LASER	M12 Connector	6 turns distance adjustment trimmer	PNP	S62-PL-5-M11-PP	956211150		
				PNP	S62-PA-2-M21-PP	956201940		
				NPN	S62-PA-5-M21-NN	956201910		
				PNP	S62-PA-5-M21-PP	956201900		
				NPN	S62-PA-5-M25-NN	956201930		
Background suppression (medium distance)	LED (red 640nm)	2m Cable	6 turns distance adjustment trimmer	PNP	S62-PA-5-M25-PP	956201920		
				M12 Connector	PNP	S62-PA-2-M31-PP	956211050	
		NPN			S62-PA-5-M31-NN	956211060		
		PNP			S62-PA-5-M31-PP	956211070		
		LASER		M12 Connector	6 turns distance adjustment trimmer	NPN	S62-PA-5-M35-NN	956211080
	PNP		S62-PA-5-M35-PP			956211090		
	2m Cable		timer adjustment trimmer			NPN	S62-PA-2-M21-NN	956201910
						PNP	S62-PA-5-M21-PP	956201900
	LED (infrared 880nm)		M12 Connector			timer adjustment trimmer	NPN	S62-PA-5-M25-NN
		PNP		S62-PA-5-M25-PP	956201920			
2m Cable		6 turns distance adjustment trimmer		PNP	S62-PA-2-M31-PP		956211050	
				NPN	S62-PA-5-M31-NN		956211060	
Background suppression (long distance)	M12 Connector	timer adjustment trimmer	PNP	S62-PA-5-M31-PP	956211070			
			NPN	S62-PA-5-M35-NN	956211080			
			PNP	S62-PA-5-M35-PP	956211090			
			NPN	S62-PA-5-M35-NN	956211080			



# ACCESSORIES

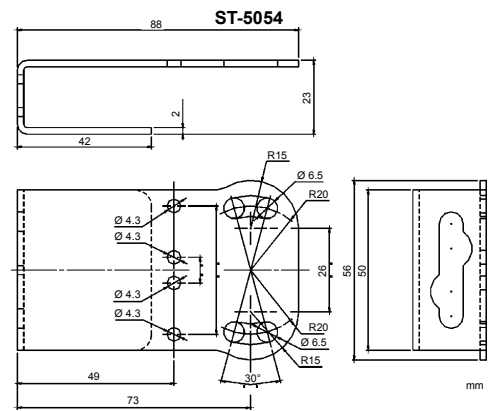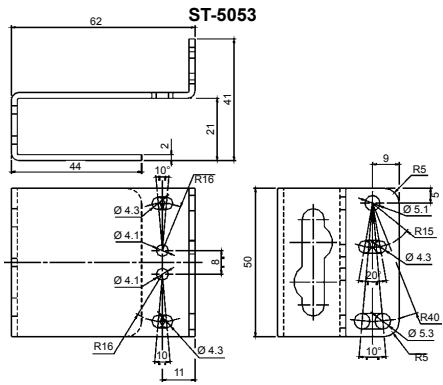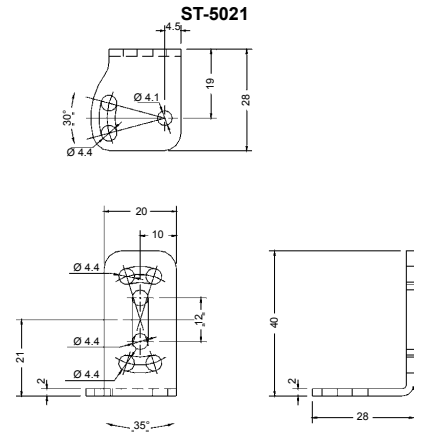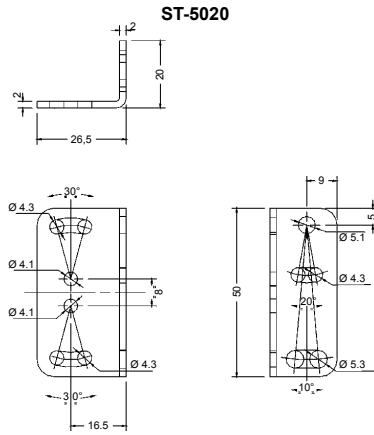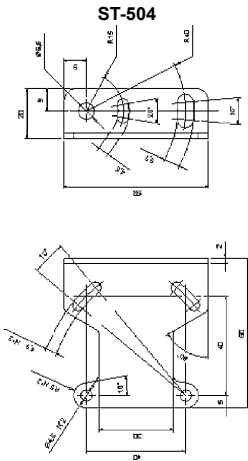

ST-5018

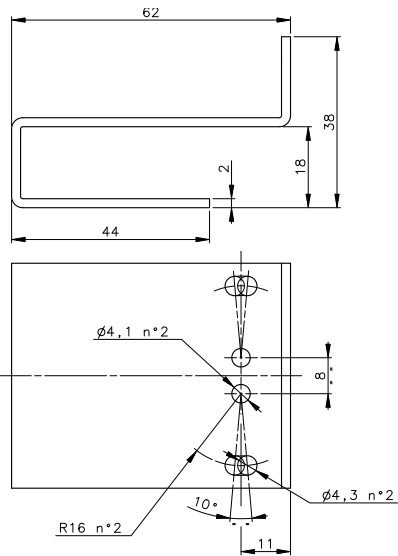

ST-5019

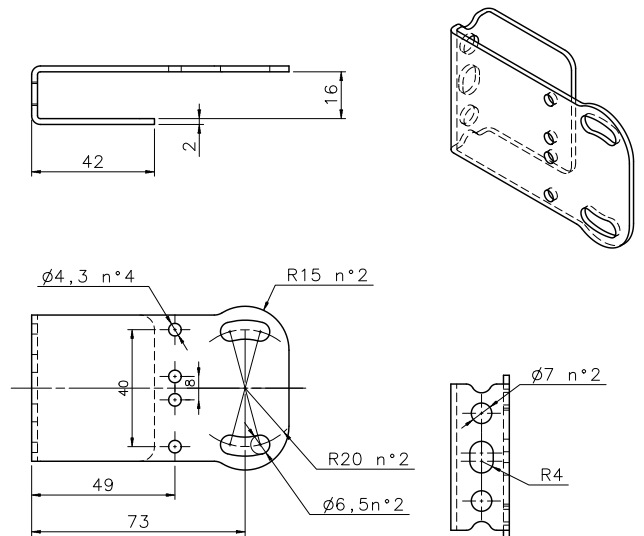



MODEL	DESCRIPTION	ORDER No.
ST-5018	protective bracket	95ACC5310
ST-5019	protective bracket	95ACC5320
ST-5020	mounting bracket	95ACC5330
ST-5021	mounting bracket	95ACC5340
ST-504	mounting bracket	95ACC2820
ST-5053	protective bracket	95ACC2410
ST-5054	protective bracket	95ACC2420
JOINT-S62	protective bracket with jointed support	95ACC2430

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
		5 m	CS-A1-02-G-05	95A251270
		7 m	CS-A1-02-G-07	95A251280
		10 m	CS-A1-02-G-10	95A251390
	4-pole, P.U.R.	2 m	CS-A1-02-R-02	95A251540
		5 m	CS-A1-02-R-05	95A251560
Radial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A2-02-G-03	95A251360
		5 m	CS-A2-02-G-05	95A251240
		7 m	CS-A2-02-G-07	95A251245
		10 m	CS-A2-02-G-10	95A251260
	4-pole, P.U.R.	2 m	CS-A2-02-R-02	95A251550
		5 m	CS-A2-02-R-05	95A251570
Radial M12 Connector with LED (for PNP N.O. sensors)	4-pole, grey, P.V.C.	3 m	CS-A2-12-G-03	95A251400
		5 m	CS-A2-12-G-05	95A251350
		10 m	CS-A2-12-G-10	95A251370
Axial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A1-22-B-03	95ACC1480
		5 m	CV-A1-22-B-05	95ACC1490
		10 m	CV-A1-22-B-10	95ACC1500
		15 m	CV-A1-22-B-15	95ACC2070
		25 m	CV-A1-22-B-25	95ACC2090
Radial M12 Connector		3 m	CV-A2-22-B-03	95ACC1540
		5 m	CV-A2-22-B-05	95ACC1550
		10 m	CV-A2-22-B-10	95ACC1560
Axial M12 Connector	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
		10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
Radial M12 Connector	4-pole, black	Connector- not cabled	CS-A1-02-B-NC	G5085002
		Connector- not cabled	CS-A2-02-B-NC	G5085003

Rev. 01, 07/2016

# S300 PA



## Advanced MAXI photoelectric multivoltage sensors

- Industrial plastic housing with IP67 mechanical protection
- Timing function from 0.6-16 s ON delay, OFF delay and ONE SHOT
- Terminal block for both Vdc and Vac/ Vdc free voltage
- Distance trimmer for mechanical background suppression models



### APPLICATIONS

- Packaging end of line, palletizers
- Outdoor or indoor gates control
- Manufacturing plants


(\*)DC models:  
ATEXII 3DG

S300 PA		
<b>Through beam</b>	0...50 m	
<b>Retroreflective (on R2 reflector)</b>	0,1...15 m	
<b>Polarized retroreflective</b>	0,1...10 m	
<b>Diffuse proximity</b>	0,05...2 m	
<b>Background suppression</b>	0,2...2 m	
<b>Power supply</b>	Vdc	12...30 V
	Vac	
	Vac/dc	24...240 Vac/24...60 Vdc
<b>Output</b>	PNP	
	NPN	
	NPN/PNP	•
	relay	•
	other	
<b>Connection</b>	cable	
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	25x100x70	
<b>Housing material</b>	PBT	
<b>Mechanical protection</b>	IP67	

# TECHNICAL DATA

<b>Power supply</b>	12 ... 30 Vdc (mod. S300...2) 24...240 Vac/24...60 Vdc (mod. S300...1)
<b>Ripple</b>	10% max.
<b>Consumption (output current excluded)</b>	35 mA max. (mod. S300...2) 3 VA max. (mod. S300...1)
<b>Light emission</b>	red LED 660 nm (mod. S300...B) IR LED 940 nm (mod. S300...C) IR LED 880 nm (mod. S300...A/G/M)
<b>Setting</b>	sensitivity trimmer (mod. S300...A/B/C/F), DARK/LIGHT dip-switch (mod. S300...A/B/C/F/M) 7-turns distance adjustment trimmer (mod. S300...M) dip-switch mode ON delay/OFF delay/ON-OFF delay/single pulse (ONE-SHOT) (mod. S300...x06) timing trimmer (mod. S300...x06)
<b>Indicators</b>	yellow OUTPUT LED (excl. mod. S300...G) green STABILITY LED, POWER LED (mod. S300...G)
<b>Output</b>	PNP or NPN open collector (mod. S300...2); electromechanical SPDT 250 Vac/30 Vdc (mod. S300...1)
<b>Output current</b>	100 mA (mod. S300...2) 3 A max. (mod. S300...1)
<b>Saturation voltage</b>	2,4 V max.
<b>Response time</b>	1 ms (mod. S300..2-A/B/C/M) 2 ms (mod. S300...2-F/G) 25 ms (mod. S300...1)
<b>Switching frequency</b>	500 Hz (mod. S300..2-A/B/C/M) 250 Hz (mod. S300...2-F/G) 20 Hz max. (mod. S300...1)
<b>Connection</b>	terminal block
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2 (mod. S300...2)
<b>Mechanical protection</b>	IP67 (IEC/EN60529)
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	PBT 30% glass fiber-reinforced
<b>Lens material</b>	frontal window and lens in PC
<b>Operating temperature</b>	-25 ... 55 °C
<b>Storage temperature</b>	-25 ... 70 °C
<b>Weight</b>	120 g (mod. S300...2), 130 g (mod. S300...1)


# DIMENSIONS

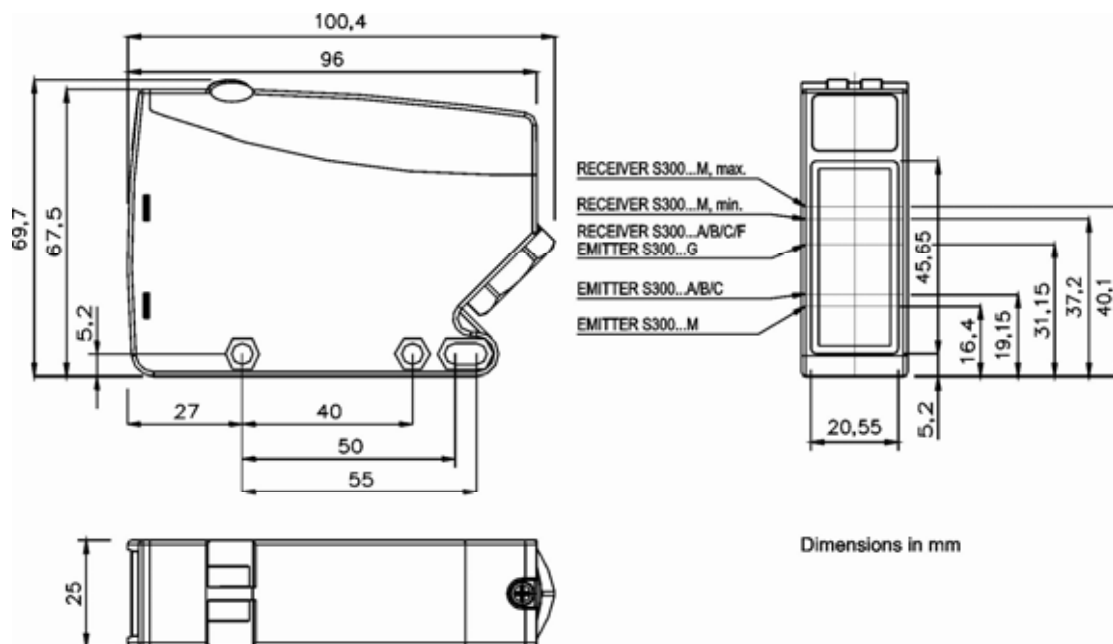

# CONNECTIONS


## VAC MODELS

Through beam emitter

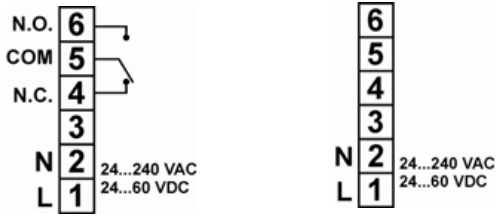


## VDC MODELS

Through beam emitter

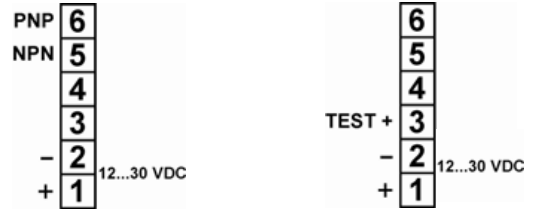

# INDICATORS AND SETTINGS






## INDICATORS AND SETTINGS

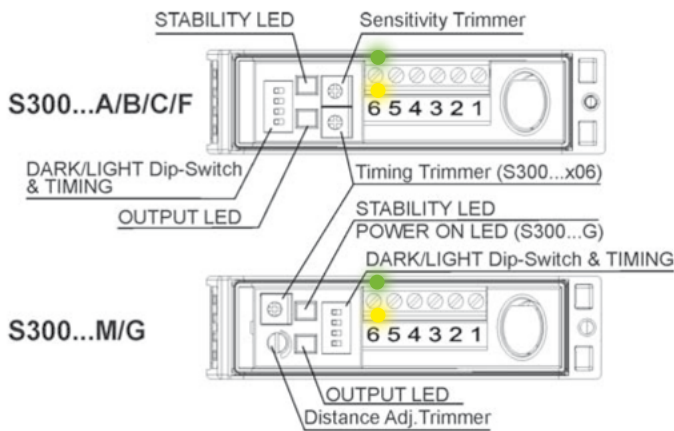

## SETTINGS

The **M** model presents a **multiturn adjustment screw** for the adjustment of the background suppression distance using a mechanical variation of the optic triangulation angle. The **other models have a mono-turn electronic trimmer** that adjusts the sensitivity and the sensor operating distance. The operating distance can be increased by rotating the screws clockwise. Trimmers can be used to adjust the output activation and deactivation delay time whilst functioning mode selection is performed through DIP SWITCHES.

# DETECTION DIAGRAMS

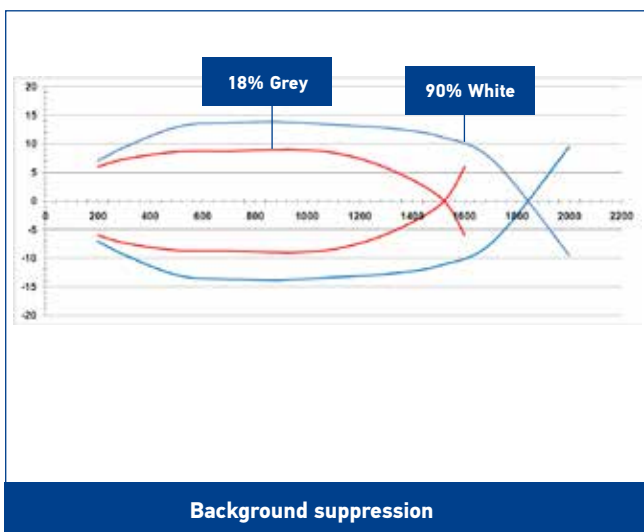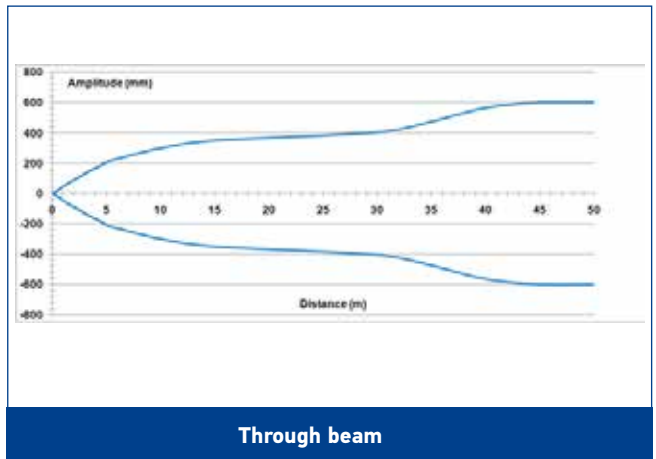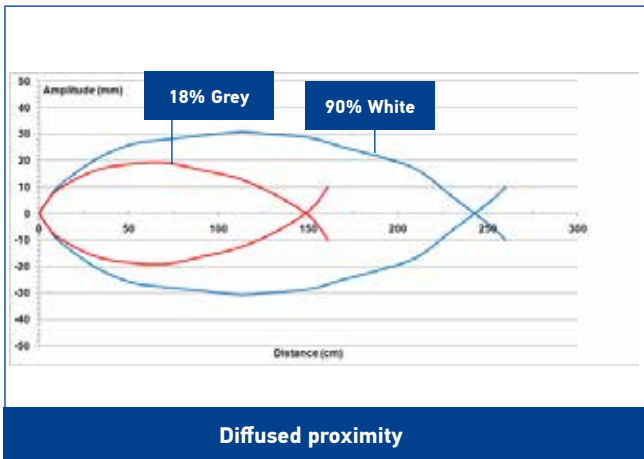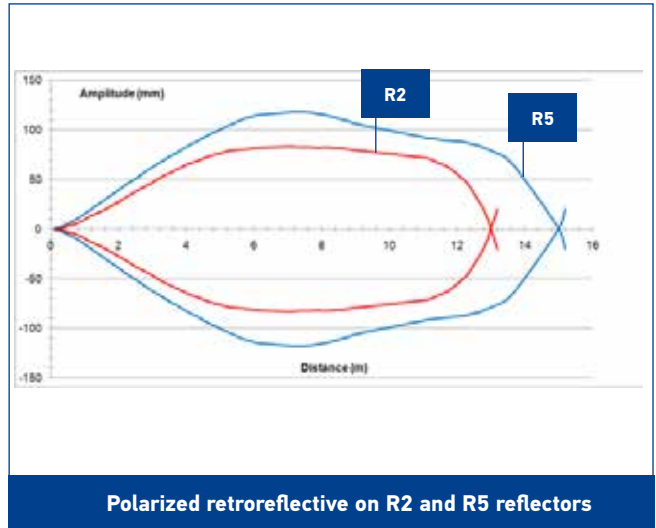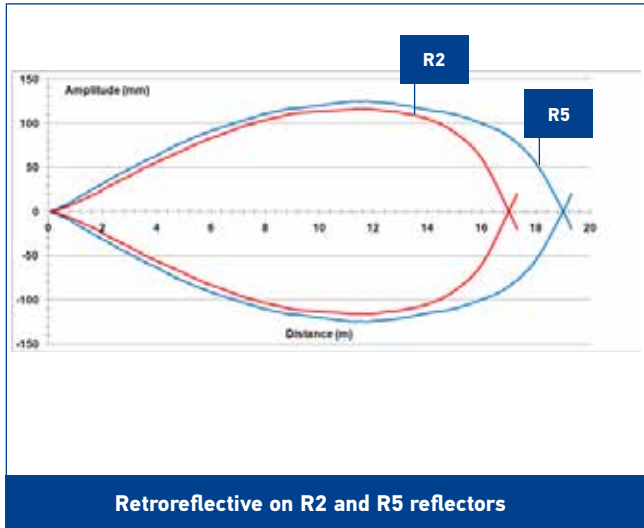


# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	POWER SUPPLY	OUTPUT	SETTING	MODEL	ORDER No.
Retroreflective (IR LED 880 nm)	12...30 Vdc	NPN/PNP	Sensitivity trimmer and D/L dip-switch	S300-PA-2-A01-OC	951451500
			Timing and sensitivity trimmers, D/L dip-switch	S300-PA-2-A06-OC	951451510
	24...240 Vac/24...60 Vdc	Relay	Sensitivity trimmer and D/L dip-switch	S300-PA-1-A01-RX	951451480
			Timing and sensitivity trimmers, D/L dip-switch	S300-PA-1-A06-RX	951451490
Polarized retroreflective (red LED 660 nm)	12...30 Vdc	NPN/PNP	Sensitivity trimmer and D/L dip-switch	S300-PA-2-B01-OC	951451540
			Timing and sensitivity trimmers, D/L dip-switch	S300-PA-2-B06-OC	951451550
	24...240 Vac/24...60 Vdc	Relay	Sensitivity trimmer and D/L dip-switch	S300-PA-1-B01-RX	951451520
			Timing and sensitivity trimmers, D/L dip-switch	S300-PA-1-B06-RX	951451530
Diffused proximity (IR LED 940 nm)	12...30 Vdc	NPN/PNP	Sensitivity trimmer D/L dip-switch	S300-PA-2-C01-OC	951451420
			Timing and sensitivity trimmers, D/L dip-switch	S300-PA-2-C06-OC	951451430
	24...240 Vac/24...60 Vdc	Relay	Sensitivity trimmer and D/L dip-switch	S300-PA-1-C01-RX	951451400
			Timing and sensitivity trimmers, D/L dip-switch	S300-PA-1-C06-RX	951451410
Through beam receiver	12...30 Vdc	NPN/PNP	Sensitivity trimmer and D/L dip-switch	S300-PA-2-F01-OC	951451600
			Timing and sensitivity trimmers, D/L dip-switch	S300-PA-2-F06-OC	951451610
	24...240 Vac/24...60 Vdc	Relay	Sensitivity trimmer and D/L dip-switch	S300-PA-1-F01-RX	951451580
			Timing and sensitivity trimmers, D/L dip-switch	S300-PA-1-F06-RX	951451590
Through beam emitter (IR LED 880 nm)	12...30 Vdc	-	-	S300-PA-2-G00-EX	951451570
	24...240 Vac/24...60 Vdc		-	S300-PA-1-G00-EX	951451560
Background suppression (IR LED 880 nm)	12...30 Vdc	NPN/PNP	7-turns distance adjustment trimmer and /L dip-switch	S300-PA-2-M01-OC	951451460
			Timing and 7-turns distance adj. trimmers, D/L dip-switch	S300-PA-2-M06-OC	951451470
	24...240 Vac/24...60 Vdc	Relay	7-turns distance adjustment trimmer and D/L dip-switch	S300-PA-1-M01-RX	951451440
			Timing and 7-turns distance adj. trimmers, D/L dip-switch	S300-PA-1-M06-RX	951451450

# ACCESSORIES

ST-511

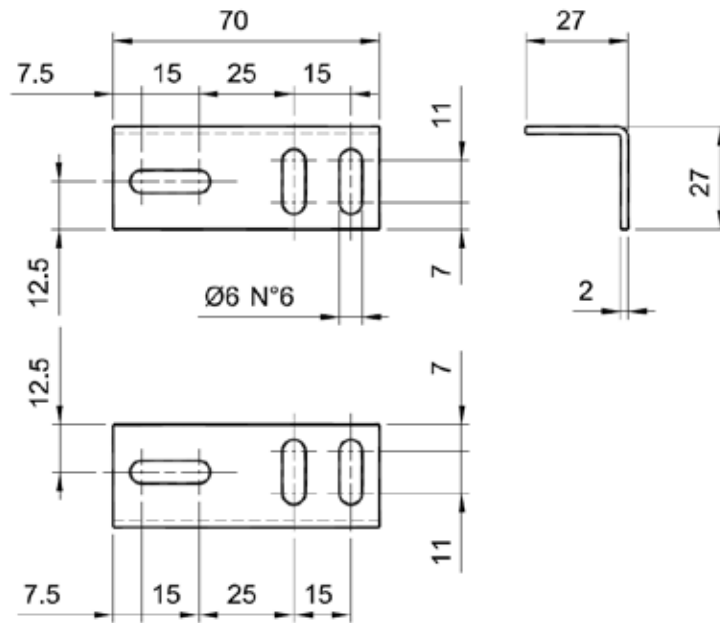

MODEL	DESCRIPTION	ORDER No.
ST-511	mounting bracket	95ACC2810

# S300 PR



Heavy duty sensor for outdoor applications and harsh environments

- Industrial plastic housing with IP67 mechanical protection
- Defogging system function
- Double independent timing functions with double time scale from 0-2s or 0-10s, One-Delay, Off Delay, ONE SHOT

### APPLICATIONS

- Packaging end of line, palletizers
- Outdoor or indoor gates control
- Automotive plants
- Automated warehousing



(\*)DC models:  
ATEX II 3DG


S300 PA		
<b>Through beam</b>	0...60 m	
<b>Polarized retroreflective</b>	0,1...22 m	
<b>Diffuse proximity</b>	0,05...5 m	
<b>Background suppression</b>	0,4...2,5 m	
<b>Power supply</b>	Vdc	10...30 V
	Vac	
	Vac/dc	24...240 Vac/24...60 Vdc
<b>Output</b>	PNP	
	NPN	
	NPN/PNP	•
	relay	•
	other	
<b>Connection</b>	cable	
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	25x100x70	
<b>Housing material</b>	PBT	
<b>Mechanical protection</b>	IP67	





# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc (mod. S300...2/5) 24...240 Vac/24...60 Vdc (mod. S300...1)
<b>Ripple</b>	10% max.
<b>Consumption (output current excluded)</b>	30 mA max. (mod. S300...2/5-B/C) 35 mA max. (mod. S300...2/5-M) 25 mA max. (mod. S300...2/5-F) 20 mA max. (mod. S300...2/5-G) 3 VA max. (mod. S300...1)
<b>Light emission</b>	red LED 660 nm (mod. S300...B) IR LED 880 nm (mod. S300...C/G/M)
<b>Setting</b>	sensitivity trimmer, DARK/LIGHT trimmer (mod. S300...F/C/B) 15 turns adjustment screw/DARK/LIGHT trimmer (mod. S300...M) emission power regulation trimmer (mod. S300...G) versions with timing functions: time base selection and one shot trimmer/ON DELAY trimmer/OFF DELAY trimmer (mod. S300...x06)
<b>Indicators</b>	yellow OUTPUT LED (excl. mod. S300...G) green STABILITY LED, POWER LED (mod. S300...G)
<b>Output</b>	PNP or NPN open collector (mod. S300...2/5); Electromechanical SPDT 250 Vac/30 Vdc (mod. S300...1)
<b>Output current</b>	100 mA (mod. S300...2/5) 3 A max. (mod. S300...1)
<b>Saturation voltage</b>	2,4 V max.
<b>Response time</b>	1 ms (mod. S300...2/5-B/C/F/G) 2 ms (mod. S300...2/5-M) 20 ms (mod. S300...1)
<b>Switching frequency</b>	500 Hz (mod. S300...2/5-B/C/F/G) 250 Hz (mod. S300...2/5-M) 25 Hz (mod. S300...1)
<b>Connection</b>	terminal block, M12 4-pole connector (only DC mod.)
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2 (mod. S300...2/5)
<b>Mechanical protection</b>	IP67 (IEC/EN60529)/cable gland EN50262
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	PBT 30% glass fiber-reinforced
<b>Lens material</b>	frontal window and lens in PC
<b>Operating temperature</b>	-40 ... 55 °C
<b>Storage temperature</b>	-40 ... 70 °C
<b>Weight</b>	140 g (mod. S300...2/5), 150 g (mod. S300...1)

# DIMENSIONS

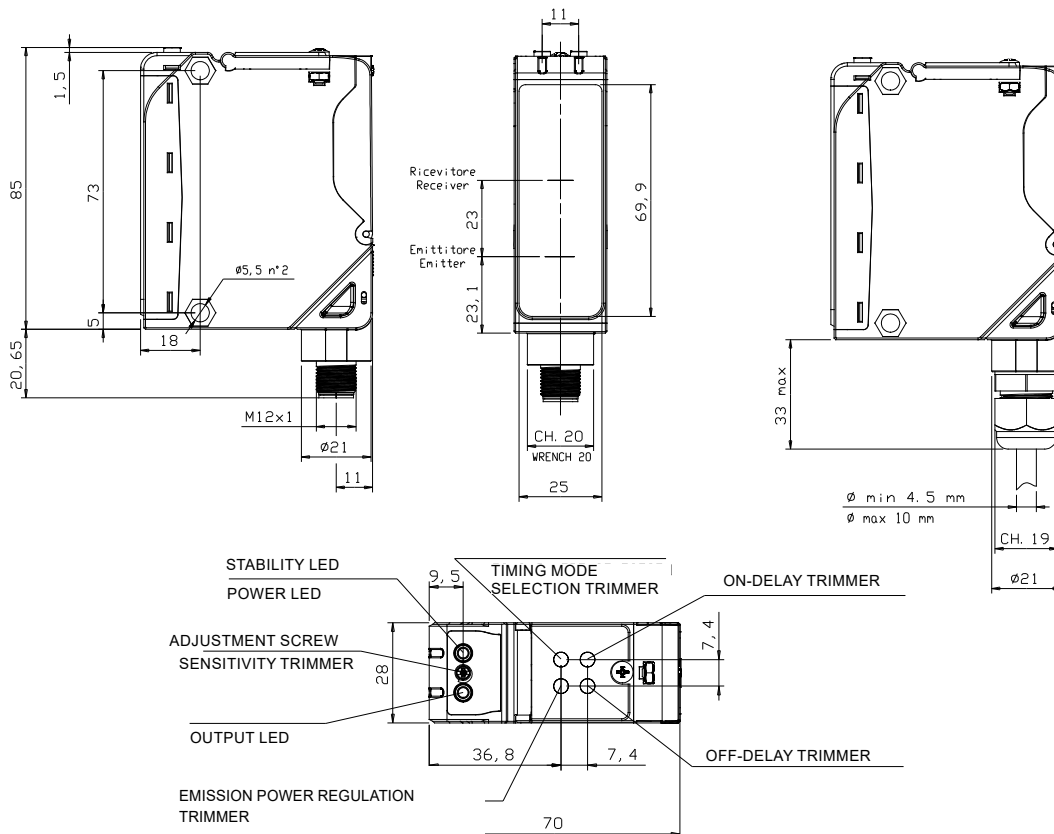


# INDICATORS AND SETTINGS

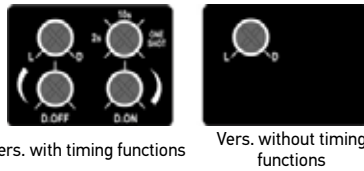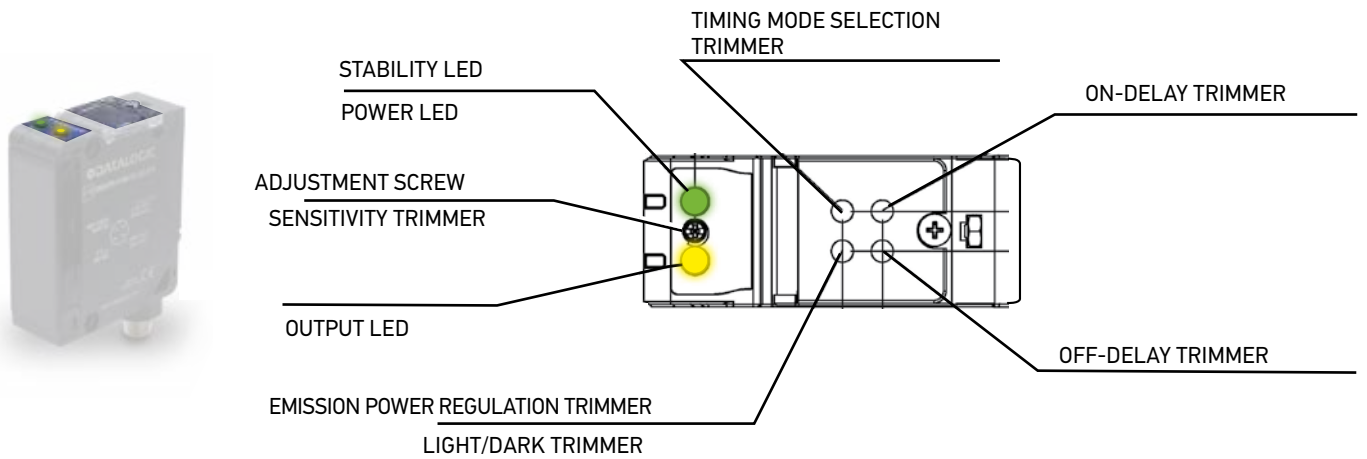


# CONNECTIONS


## MODELS



## DC MODELS




## M12 CONNECTOR (only DC models)

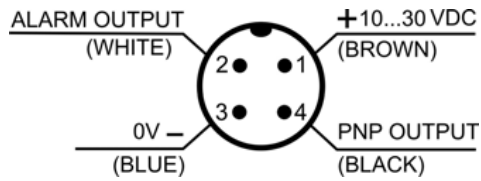


Through beam emitter


## AC MODELS







## DC MODELS



## M12 CONNECTOR (only DC models)

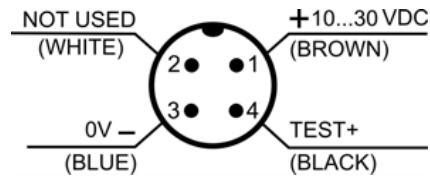


# DETECTION DIAGRAMS

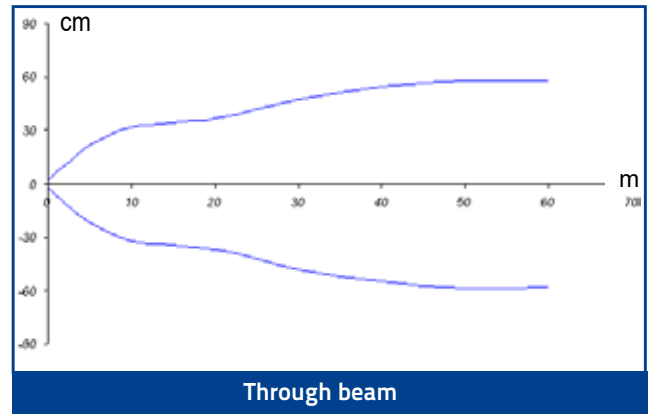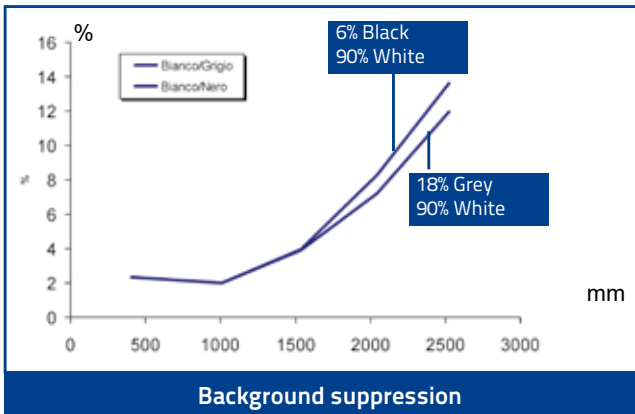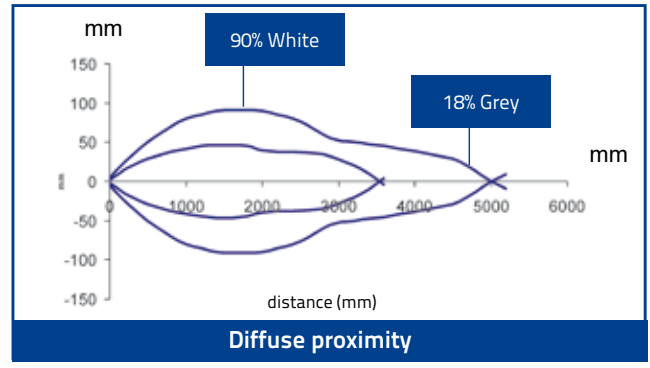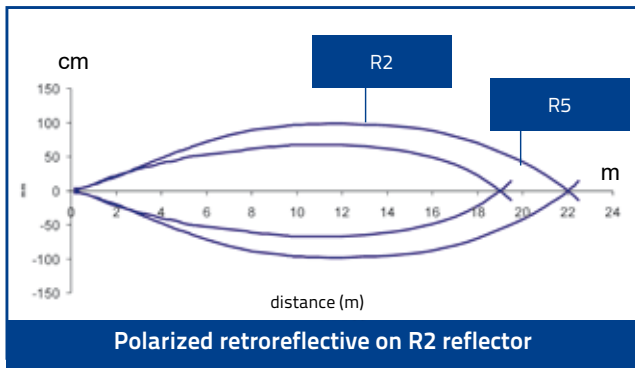

# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	OUTPUT	CONNECTION	SETTING	MODEL	ORDER No.	
Polarized retroreflective	NPN/PNP	Vdc - Terminal block	Sensitivity and D/L trimmers	S300-PR-2-B01-OC	951451000	
			Timing, sensitivity and D/L trimmers	S300-PR-2-B06-OC	951451010	
		Vdc - M12 Connector	Sensitivity and D/L trimmers	S300-PR-5-B01-OC	951451020	
	Relay	Vac - Terminal block	Timing, sensitivity and D/L trimmers	S300-PR-5-B06-OC	951451030	
			Sensitivity and D/L trimmers	S300-PR-1-B01-RX	951451040	
		Vac - Terminal block	Timing, sensitivity and D/L trimmers	S300-PR-1-B06-RX	951451050	
Diffused proximity	NPN/PNP	Vdc - Terminal block	Timing, sensitivity and D/L trimmers; defogging function	S300-PR-1-B06-RX-M	951451060	
			Sensitivity and D/L trimmers	S300-PR-2-C01-OC	951451070	
		Vdc - M12 Connector	Timing, sensitivity and D/L trimmers	S300-PR-2-C06-OC	951451080	
	Relay	Vac - Terminal block	Sensitivity and D/L trimmers	S300-PR-5-C01-OC	951451090	
			Timing, sensitivity and D/L trimmers	S300-PR-5-C06-OC	951451100	
		Vac - Terminal block	Sensitivity and D/L trimmers	S300-PR-1-C01-RX	951451110	
	Through beam receiver	NPN/PNP	Vdc - Terminal block	Timing, sensitivity and D/L trimmers	S300-PR-1-C06-RX	951451120
				Timing, sensitivity and D/L trimmers; defogging function	S300-PR-1-C06-RX-M	951451130
			Vdc - M12 Connector	Sensitivity and D/L trimmers	S300-PR-2-F01-OC	951451210
Relay		Vac - Terminal block	Timing, sensitivity and D/L trimmers	S300-PR-2-F06-OC	951451220	
			Timing, sensitivity and D/L trimmers	S300-PR-5-F01-OC	951451230	
		Vac - Terminal block	Timing, sensitivity and D/L trimmers	S300-PR-5-F06-OC	951451240	
Through beam emitter	-	Vdc - Terminal block	Sensitivity and D/L trimmers	S300-PR-1-F01-RX	951451250	
			Timing, sensitivity and D/L trimmers	S300-PR-1-F06-RX	951451260	
		Vdc - M12 Connector	Timing, sensitivity and D/L trimmers; defogging function	S300-PR-1-F06-RX-M	951451270	
	-	Vdc - Terminal block	Emission power regulation trimmer	Sensitivity and D/L trimmers	S300-PR-2-G00-EX	951451280
				Timing, sensitivity and D/L trimmers	S300-PR-5-G00-EX	951451290
		Vac - Terminal block	Defogging function	S300-PR-1-G00-EX	951451300	
Background suppression	NPN/PNP	Vdc - Terminal block	Sensitivity and D/L trimmers	S300-PR-1-G00-EX-M	951451310	
			Timing, sensitivity and D/L trimmers	S300-PR-2-M01-OC	951451140	
		Vdc - M12 Connector	Sensitivity and D/L trimmers	S300-PR-2-M06-OC	951451150	
	Relay	Vac - Terminal block	Timing, sensitivity and D/L trimmers	S300-PR-5-M01-OC	951451160	
			Timing, sensitivity and D/L trimmers	S300-PR-5-M06-OC	951451170	
		Vac - Terminal block	Sensitivity and D/L trimmers	S300-PR-1-M01-RX	951451180	
			Timing, sensitivity and D/L trimmers	S300-PR-1-M06-RX	951451190	
			Timing, sensitivity and D/L trimmers; defogging function	S300-PR-1-M06-RX-M	951451200	

# ACCESSORIES

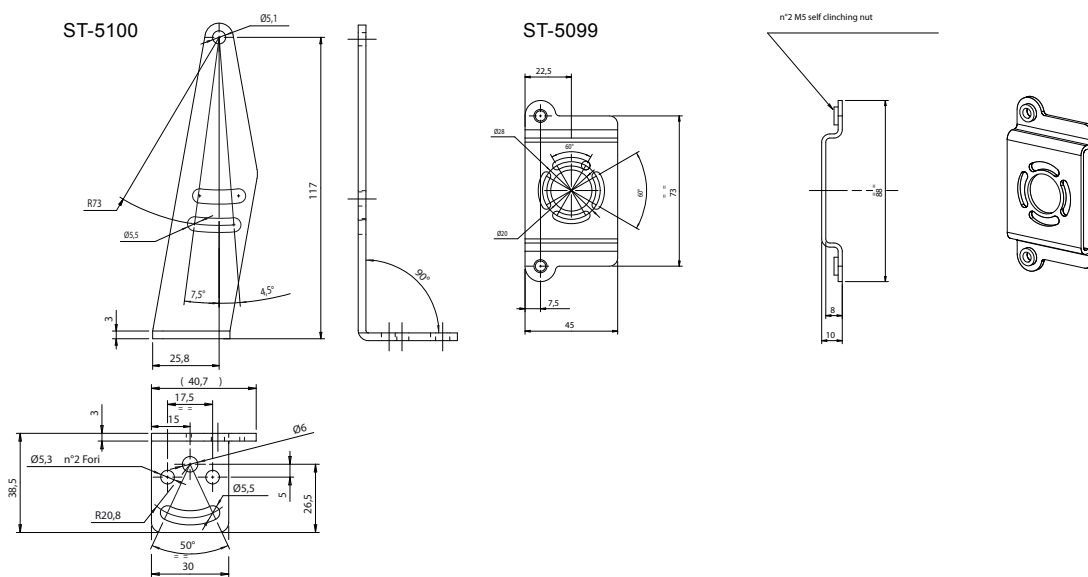

MODEL	DESCRIPTION	ORDER No.
ST-5099	mounting BRACKET	95ACC2830
ST-5100	mounting BRACKET	95ACC2840

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
		5 m	CS-A1-02-G-05	95A251270
		7 m	CS-A1-02-G-07	95A251280
		10 m	CS-A1-02-G-10	95A251390
	4-pole, P.U.R.	2 m	CS-A1-02-R-02	95A251540
		5 m	CS-A1-02-R-05	95A251560
Radial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A2-02-G-03	95A251360
		5 m	CS-A2-02-G-05	95A251240
		7 m	CS-A2-02-G-07	95A251245
	4-pole, P.U.R.	10 m	CS-A2-02-G-10	95A251260
		2 m	CS-A2-02-R-02	95A251550
		5 m	CS-A2-02-R-05	95A251570
Axial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A1-22-B-03	95ACC1480
		5 m	CV-A1-22-B-05	95ACC1490
		10 m	CV-A1-22-B-10	95ACC1500
		15 m	CV-A1-22-B-15	95ACC2070
		25 m	CV-A1-22-B-25	95ACC2090
Radial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A2-22-B-03	95ACC1540
		5 m	CV-A2-22-B-05	95ACC1550
		10 m	CV-A2-22-B-10	95ACC1560
Axial M12 Connector	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
		10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
Radial M12 Connector	4-pole, black	Connector- not cabled	CS-A1-02-B-NC	G5085002
		Connector- not cabled	CS-A2-02-B-NC	G5085003





Fiber optic amplifiers in a DIN rail compatible format for small object detection in limited spaces

- High-resolution models with integrated display
- 12 bit resolution and 50  $\mu$ s response time
- Trimmer or teach-in models
- Wide range of accessory fiber optics
- 4 wire NO/NC output or Remote teach input

### APPLICATIONS

- Processing and Packaging machinery
- Electronics assembling
- Pharmaceutical industry




S7		
<b>Through beam with fiber optic</b>	0...300 mm	
	0...150 mm	
	0...75 mm	
<b>Diffuse proximity with fiber optic</b>	0...100 mm	
	0...50 mm	
	0...25 mm	
<b>Power supply</b>	Vdc	12...24 V
	Vac	
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	10x65x40	
<b>Housing material</b>	ABS	
<b>Mechanical protection</b>	IP65, IP60 (trimmer vers.)	


# TECHNICAL DATA

<b>Power supply</b>	12 ... 24 Vdc ± 10% (reverse polarity protection)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	50 mA max. (mod. S7-1/2/4/5) 40 mA (mod. S7-3/6) 30 mA max. (mod. S7-7/8)
<b>Light emission</b>	red 670 nm (mod. S7-2/3/5/6/7/8) white 400-700 nm (mod. S7-1/4)
<b>Setting</b>	SET pushbutton, + pushbutton, - pushbutton (mod. S7-1/2/4/5) 1 SET pushbutton (mod. S7-3/6) 12 multiturn trimmer (mod. S7-7/8)
<b>Indicators</b>	yellow OUTPUT LED green STABILITY LED, DELAY LED and SPEED LED (mod. S7-1/2/4/5) green/red READY/ERROR LED (mod. S7-3/6/7/8)
<b>Output</b>	PNP or NPN
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	1,2 V max. (mod. S7-3/6/7/8) 2 V max. (mod. S7-1/2/4/5)
<b>Response time</b>	500 µs max. (at low speed for mod. S7-1/2/7/8) 100 µs max. (at fast speed for mod. S7-2/5) 50 µs max. (at fast speed for mod. S7-1/4)
<b>Switching frequency</b>	1 kHz (at low speed for mod. S7-1/2/7/8) 5 kHz (at fast speed for mod. S7-2/5) 10 kHz (at fast speed for mod. S7-1/4)
<b>Connection</b>	2 m Ø 4 mm cable (S7-1/2/3/7), M8 4-pole connector (S7-4/5/6/8)
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2
<b>Mechanical protection</b>	IP65 IP60 (mod. S7-7/8)
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	ABS
<b>Operating temperature</b>	-10 ... 55 °C
<b>Storage temperature</b>	-25 ... 70 °C
<b>Weight</b>	115 g max. cable vers., 30 g max. conn. vers.

# DIMENSIONS

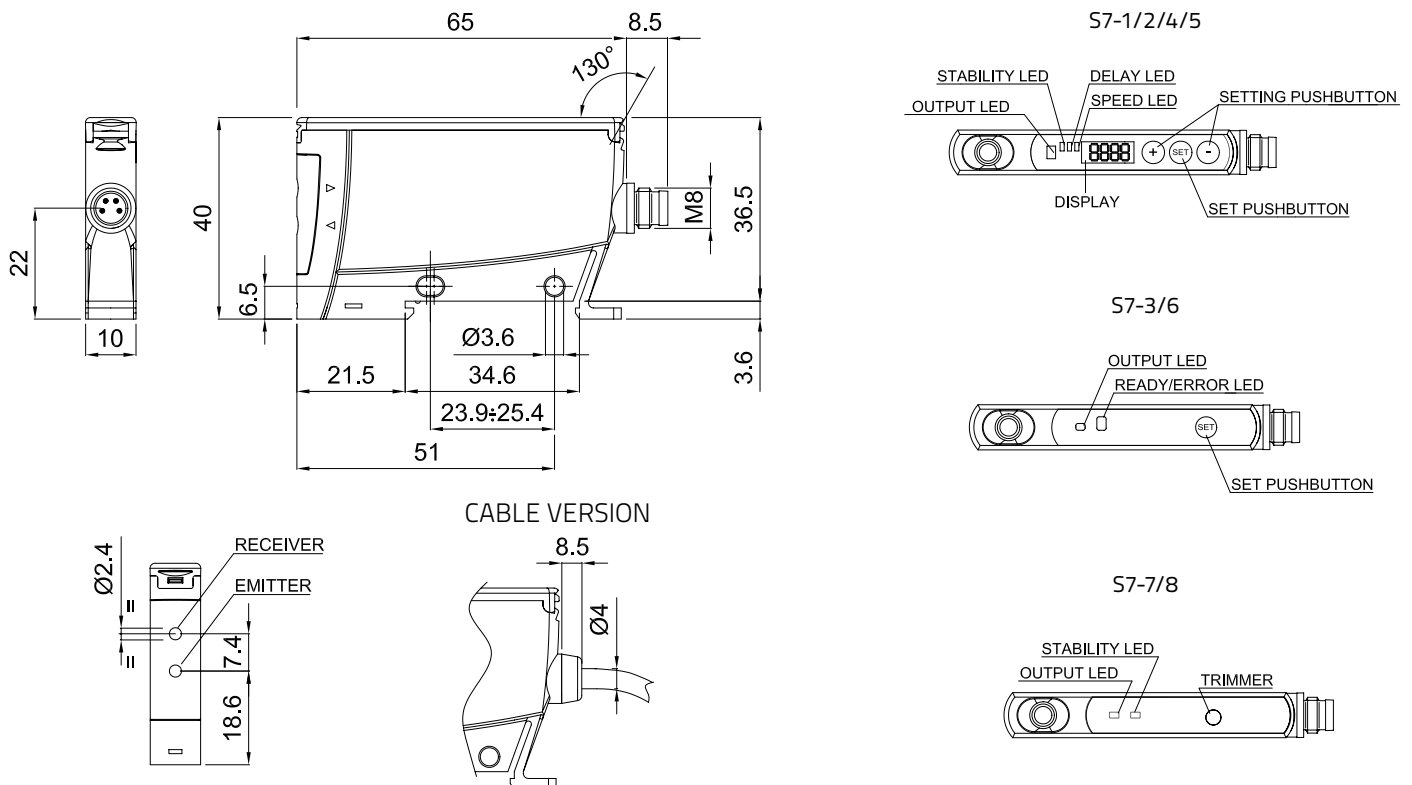


# CONNECTIONS

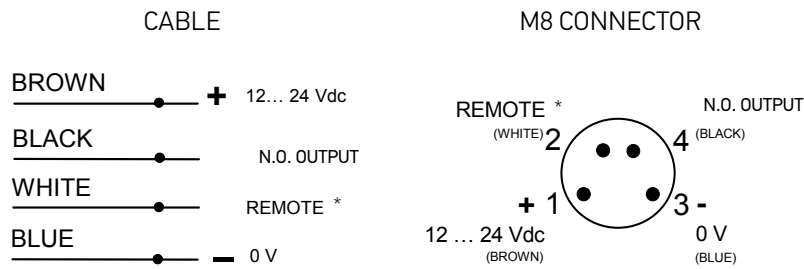

\* N.C. OUTPUT on S7-7/8 models






# INDICATOR AND SETTINGS

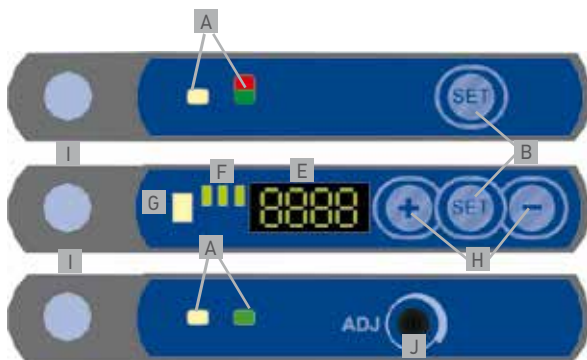

- A OUTPUT status and READY/ERROR LEDs
- B Teach-in push-button
- C M8 connector output
- D Cable output
- E 4 digit display
- F STATUS signalling LEDs
- G OUTPUT status LED
- H '+' e '-' buttons
- I Fiber lock/unlock button
- J Multiturn trimmer

Teach-in button for setting.  
EASytouch™ provides two setting modes: standard or fine.  
Please refer to instructions manual for operating details

# DETECTION DIAGRAMS

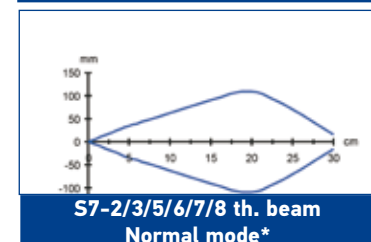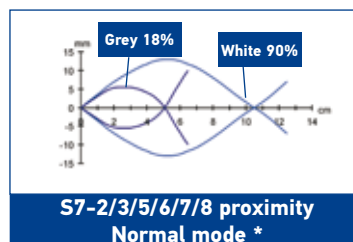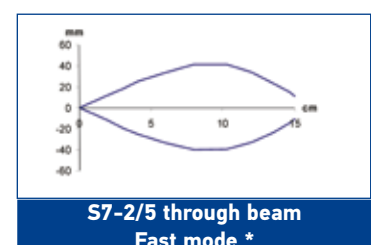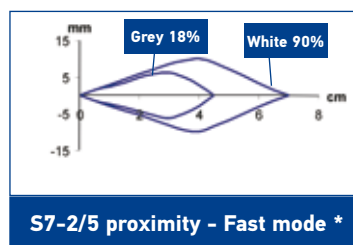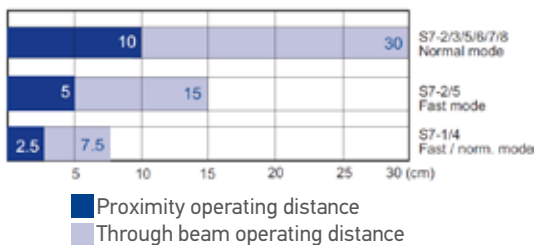

High efficiency Fiber-optics or accessory lenses can be used to obtain larger operating distances.

**Note:** the detection diagrams of the S7-1/4 models in normal and fast mode, corresponds to the values of the S7-2/5 models in fast mode, but with half the operating distance




# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	SETTING	CONNECTION	OUTPUT	MODEL	ORDER No.	
OPTIC FIBER (white LED)	display, push-button	2m Cable	PNP	S7-1-E-P	950551090	
			NPN	S7-1-E-N	950551080	
		M8 Connector	PNP	S7-4-E-P	950551110	
			NPN	S7-4-E-N	950551100	
OPTIC FIBER (red LED)	display, push-button	2m Cable	PNP	S7-2-E-P	950551010	
			NPN	S7-2-E-N	950551000	
			push-buttons	PNP	S7-3-E-P	950551050
				NPN	S7-3-E-N	950551040
	display, push-buttons	M8 Connector	PNP	S7-5-E-P	950551030	
			NPN	S7-5-E-N	950551020	
	push-buttons	M8 Connector	PNP	S7-6-E-P	950551070	
			NPN	S7-6-E-N	950551060	
	trimmer	2m Cable	PNP	S7-7-E-P	950551120	
			NPN	S7-7-E-N	950551130	
		M8 Connector	PNP	S7-8-E-P	950551140	
			NPN	S7-8-E-N	950551150	


Datalogic Automation offers a wide range of fiber optic cables available in two different lines: OF series for standard applications and OFA series for specialistic applications, such as 90° optics as well as fixed focus optics. These accessories allow to carry out the diffuse proximity and through beam detection of small object in difficult point of the machine. Refer to the next page for the complete list.

## ACCESSORIES

**ST-505**

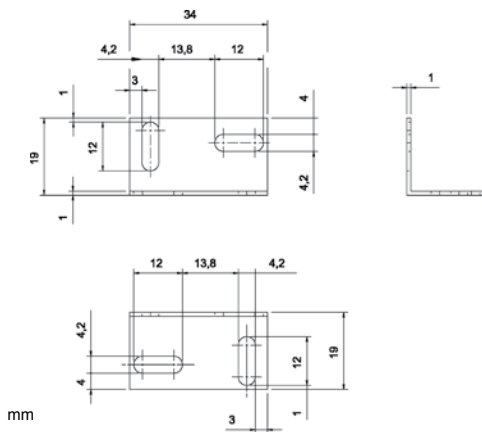

**CRD-5000**

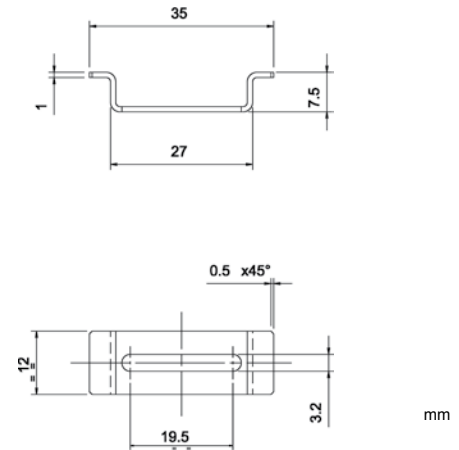

MODEL	DESCRIPTION	ORDER No.
ST -505	L-shaped mounting bracket	95ACC 2800
CRD -5000	DIN rail mounting bracket	95ACC 2790

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B1-02-G-03	95A251420
		5 m	CS-B1-02-G-05	95A251430
		7 m	CS-B1-02-G-07	95A251440
		10 m	CS-B1-02-G-10	95A251480
	4-pole, P.U.R.	2 m	CS-B1-02-R-02	95A251620
Radial M8 Connector	4-pole, grey, P.V.C.	5 m	CS-B1-02-R-05	95A251640
		3 m	CS-B2-02-G-03	95A251450
		5 m	CS-B2-02-G-05	95A251460
		7 m	CS-B2-02-G-07	95A251470
	4-pole, P.U.R.	10 m	CS-B2-02-G-10	95A251530
		2 m	CS-B2-02-R-02	95A251630
		5 m	CS-B2-02-R-05	95A251650

# S70



## ADVANCED FIBER OPTIC AMPLIFIERS FOR HIGH SPEED AND LOW CONTRAST APPLICATIONS

- DIN rail mountable models with dual digital displays
- High speed models: 200  $\mu$ s...5 ms
- Super high speed models: 10  $\mu$ s...1ms
- Analog output models
- Teach-in setting via +/SET/- push-button/switch, remote input or IO-Link
- Standard 2 m cable or M8 4-pole connection

### APPLICATIONS

- Processing and Packaging machinery
- Electronics assembling
- Pharmaceutical industry
- Cosmetic and bottling industries




### S70

<b>Response time</b>		Super high speed: 10 $\mu$ s (S70...E2) High speed: 200 $\mu$ s (S70...E1), 15 $\mu$ s (S70...E2), 250 $\mu$ s (S70...E3) Fast: 50 $\mu$ s (S70...E2), 500 $\mu$ s (S70...E3) Standard: 500 $\mu$ s (S70...E1), 250 $\mu$ s (S70...E2), 1 ms (S70...E3) Medium range: 500 $\mu$ s (S70...E2) Long range: 2 ms (S70...E1), 1 ms (S70...E2), 4 ms (S70...E3) Extra long range: 5 ms (S70...E1), 12 ms (S70...E3)
<b>Repeatability</b>		Super high speed: 5 $\mu$ s (S70...E2) High speed: 66 $\mu$ s (S70...E1), 5 $\mu$ s (S70...E2), 100 $\mu$ s (S70...E3) Fast: 12 $\mu$ s (S70...E2), 150 $\mu$ s (S70...E3) Standard: 100 $\mu$ s (S70...E1), 50 $\mu$ s (S70...E2), 180 $\mu$ s (S70...E3) Medium range: 80 $\mu$ s (S70...E2) Long range: 100 $\mu$ s (S70...E1), 165 $\mu$ s (S70...E2), 180 $\mu$ s (S70...E3) Extra long range: 100 $\mu$ s (S70...E1), 180 $\mu$ s (S70...E3)
<b>Power supply</b>	Vdc	10...30 V (current output models and digital output models)
	Vac	12...30 (voltage output models)
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	Analog out 4...20mA; Analog out 0...10V; Analog out 0...5V
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>		10x79x31.5
<b>Housing material</b>		ABS and polycarbonate
<b>Mechanical protection</b>		IP50, NEMA 1



# TECHNICAL DATA

<b>Power supply</b>	10...30 V (current output models and digital output models) 12...30 (voltage output models)
<b>Ripple</b>	10% max.
<b>Consumption (output current excluded)</b>	40 mA max. (standard display mode), 30 mA max. (ECO display mode)
<b>Light emission</b>	red 660 nm (mod. S70...E1, S70...E3) red 635 nm (mod. S70...E2)
<b>Setting</b>	+ / SET / - push-button, LIGHT / DARK switch, RUN / PRG / ADJ mode switch
<b>Indicators</b>	yellow OUTPUT LED red SIGNAL LEVEL 4-digit display green THRESHOLD 4-digit display
<b>Output</b>	PNP or NPN
<b>Output current</b>	PNP and push-pull (IO-Link mod. S70...PZ) 100 mA max.
<b>Saturation voltage</b>	1,5 V max. (mod. S70...N) 2 V max. (mod. S70...P/PZ)
<b>Response time</b>	Super high speed: 10 µs (S70...E2) High speed: 200 µs (S70...E1), 15 µs (S70...E2), 250 µs (S70...E3) Fast: 50 µs (S70...E2), 500 µs (S70...E3) Standard: 500 µs (S70...E1), 250 µs (S70...E2), 1 ms (S70...E3) Medium range: 500 µs (S70...E2) Long range: 2 ms (S70...E1), 1 ms (S70...E2), 4 ms (S70...E3) Extra long range: 5 ms (S70...E1), 12 ms (S70...E3)
<b>Switching frequency</b>	S70...E1: 2,5 kHz (High Speed), 1 kHz (Standard), 250 Hz (Long Range), 100 Hz (Extra Long Range) S70...E2: 50 kHz (Super High Speed), 33 kHz (High Speed), 10 kHz (Fast), 2 kHz (Standard), 1 kHz (Medium Range), 500 Hz (Long Range) S70...E3: 1 kHz (High Speed), 500 Hz (Fast), 250 Hz (Standard), 62,5 Hz (Long Range), 20 Hz (Extra Long Range)
<b>IO-Link interface</b>	baud rate: 38400 bps (COM2) process data width: 16 bits IODD files: provide all programming options of top panel interface, plus additional functionality
<b>Connection</b>	2 m cable, M8 4-pole connector
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2
<b>Mechanical protection</b>	IP50, NEMA 1
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	ABS and polycarbonate
<b>Operating temperature</b>	-10 ... 55 °C
<b>Storage temperature</b>	-25 ... 85 °C
<b>Weight</b>	69 g max. cable vers., 21 g max. conn. vers.

# DIMENSIONS

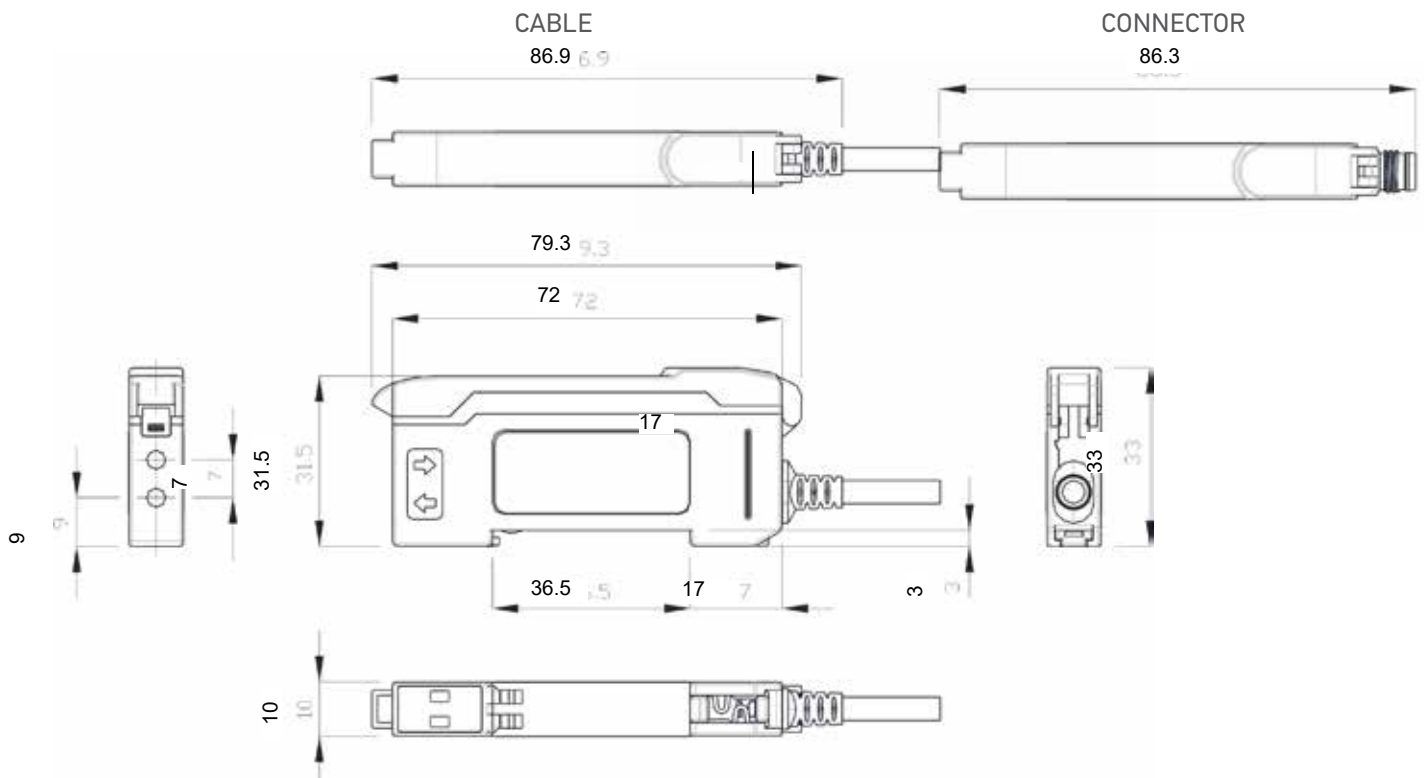


# CONNECTIONS

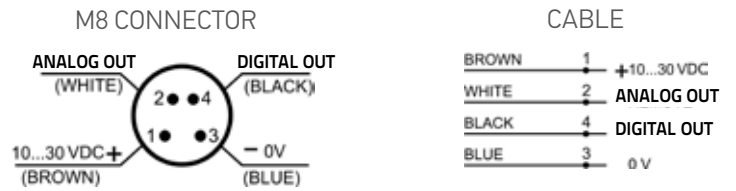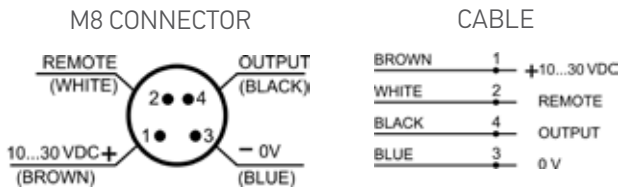

# INDICATOR AND SETTINGS

The **RUN/PRG/ADJ Mode Switch** puts the sensor in RUN, PRG (Program), or ADJ (Adjust) mode. RUN mode allows the sensor to operate normally and prevents unintentional programming changes via the **+ /SET/ - button**. PRG mode allows the sensor to be programmed through the display driven programming menu. ADJ mode allows the user to perform TEACH and SET methods and Manual Adjust.

The **LO/DO Switch** is used to select Light Operate or Dark Operate mode.

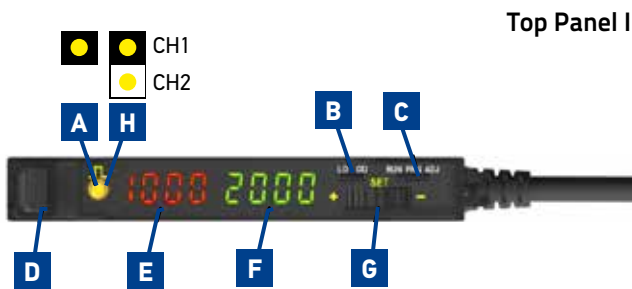

**Top Panel Interface**


- A** Output LED
- B** LO/DO Switch
- C** RUN/PRG/ADJ
- D** Lever Action Fiber Clamp
- E** Red Signal Level
- F** Green Threshold
- G** +/SET/- Rocker Button
- H** CH1 Analog out, CH2 Discrete out (only S70...E3)

As an alternative the sensor can be programmed remotely and the remote input may be used to perform TEACH and SET methods (not available on IO-Link models).


# DETECTION DIAGRAMS

	<b>S70-E1</b>			
	<b>HIGH SPEED</b>	<b>STANDARD</b>	<b>LONG RANGE</b>	<b>EXTRA LONG RANGE</b>
Response Time	200 $\mu$ s	500 $\mu$ s	2 ms	5 ms
Repeatability	66 $\mu$ s	100 $\mu$ s	100 $\mu$ s	100 $\mu$ s

## EXCESS GAIN


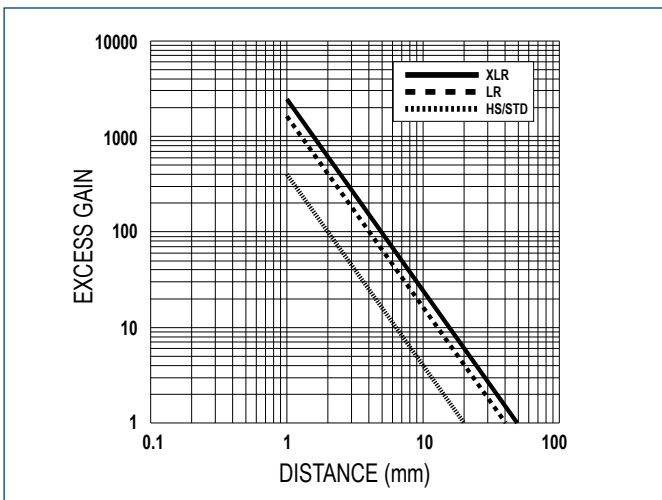


**Through beam with 0.2 mm internal fiber optic diameter**


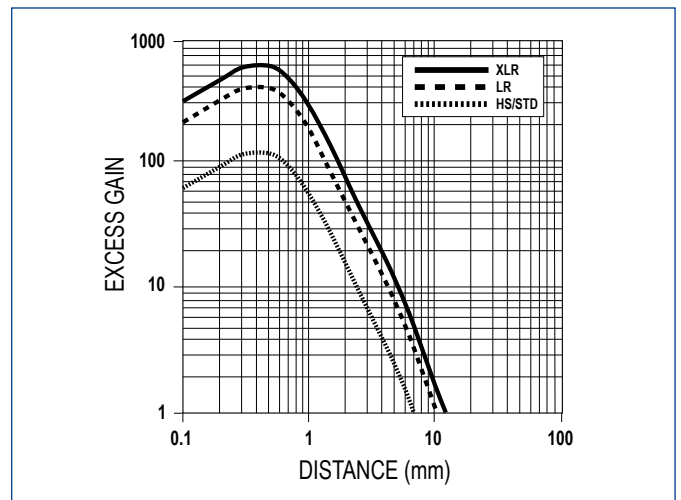


**Diffuse proximity with 0.2 mm internal fiber optic diameter**



### EXCESS GAIN

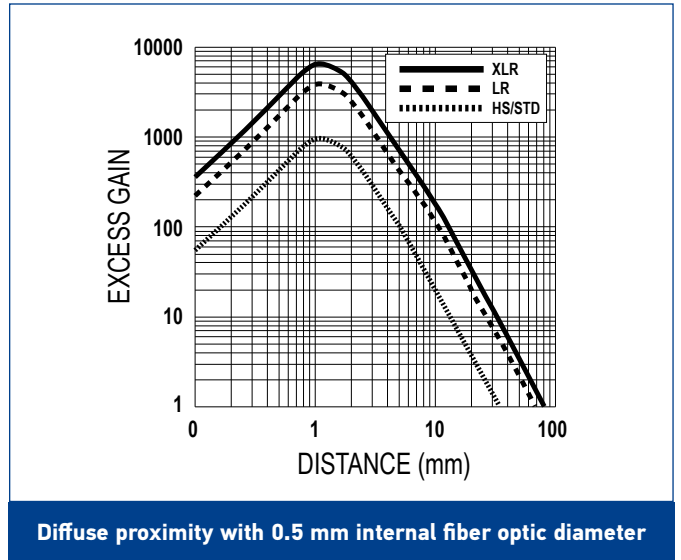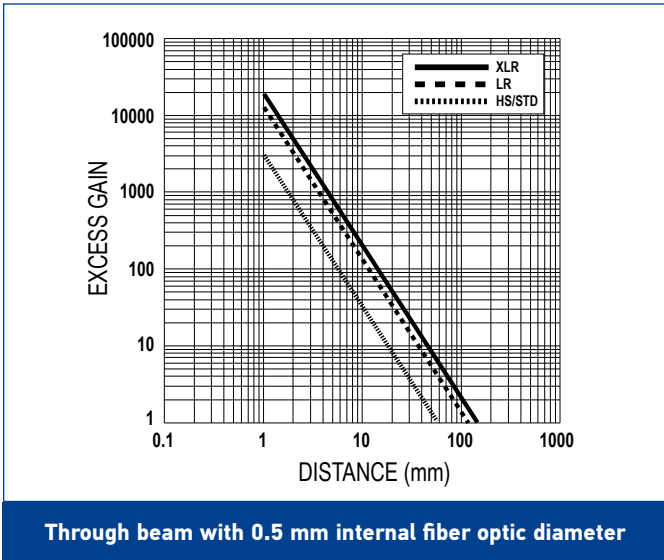

### EXCESS GAIN

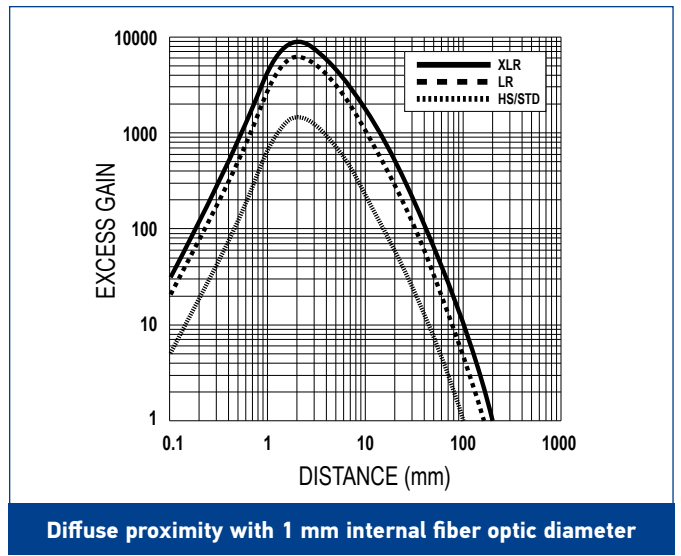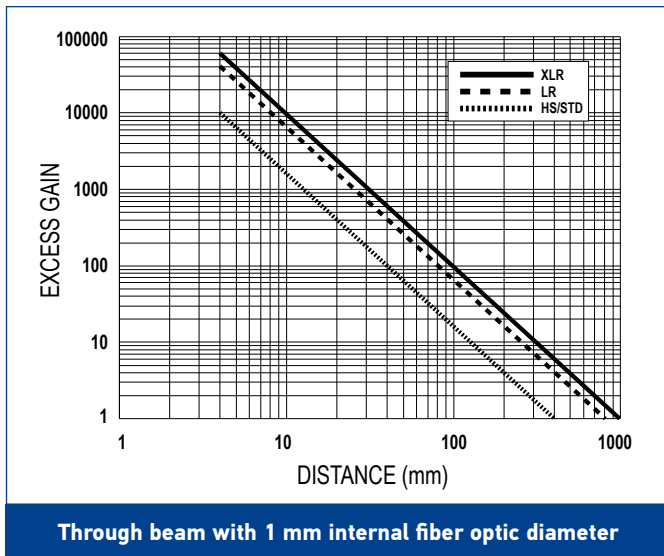



### EXCESS GAIN

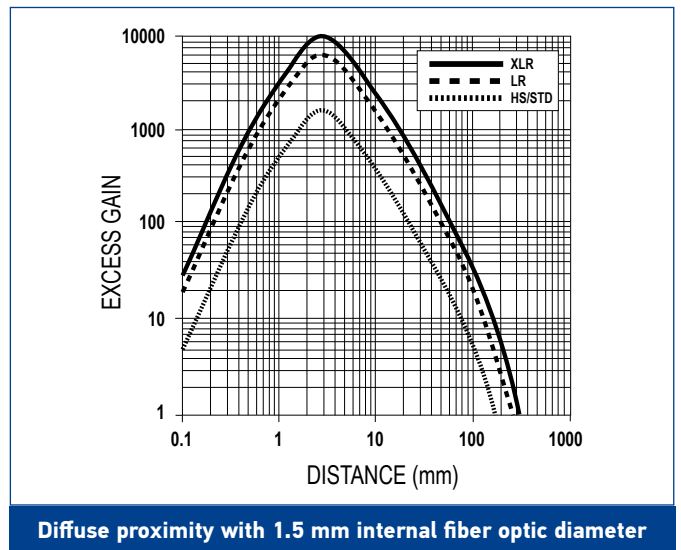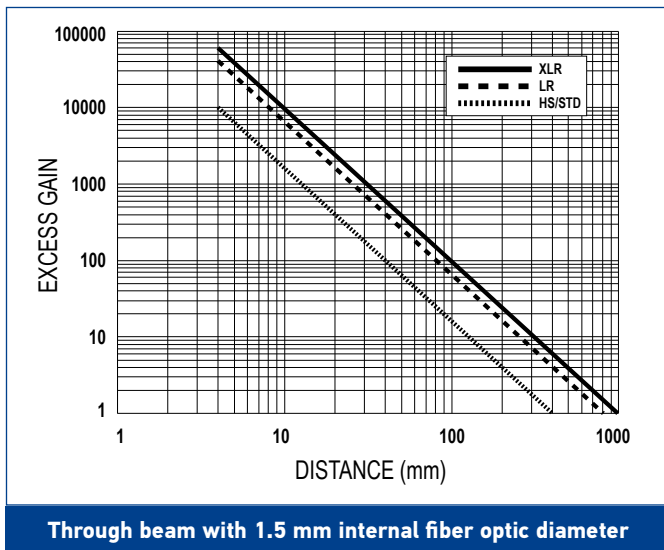



## S70-E1

	HIGH SPEED	STANDARD	LONG RANGE	EXTRA LONG RANGE
Response Time	200 $\mu$ s	500 $\mu$ s	2 ms	5 ms
Repeatability	66 $\mu$ s	100 $\mu$ s	100 $\mu$ s	100 $\mu$ s

### DETECTION AREA

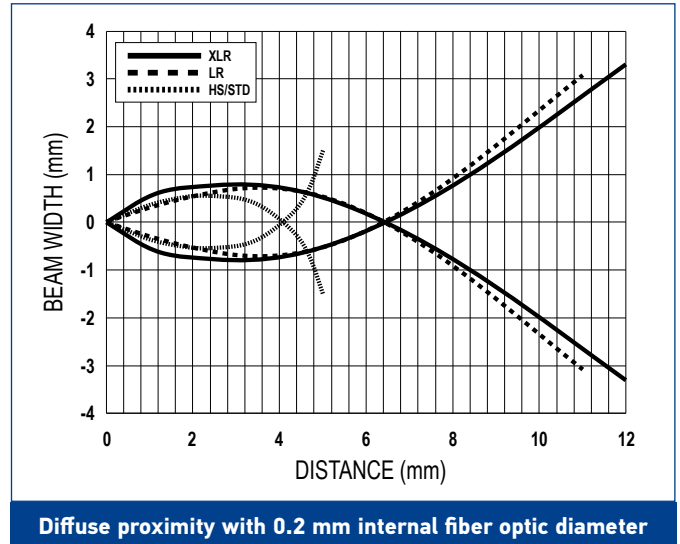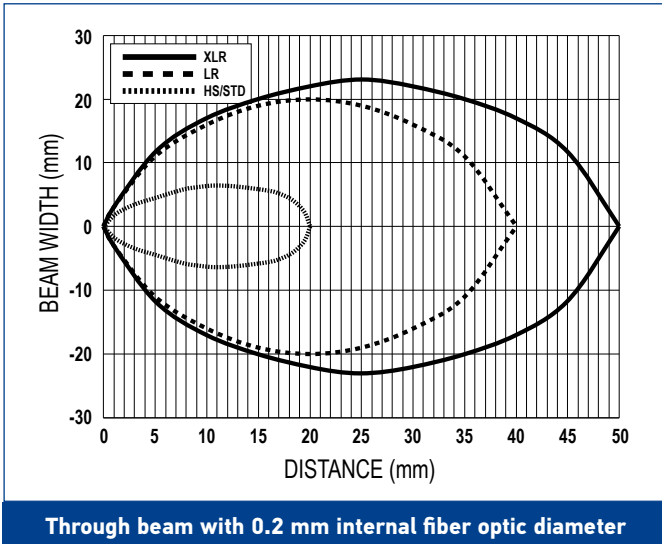



### DETECTION AREA

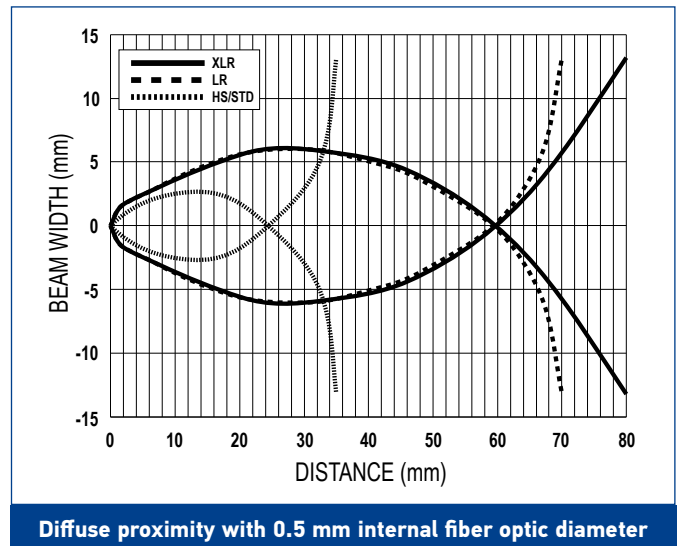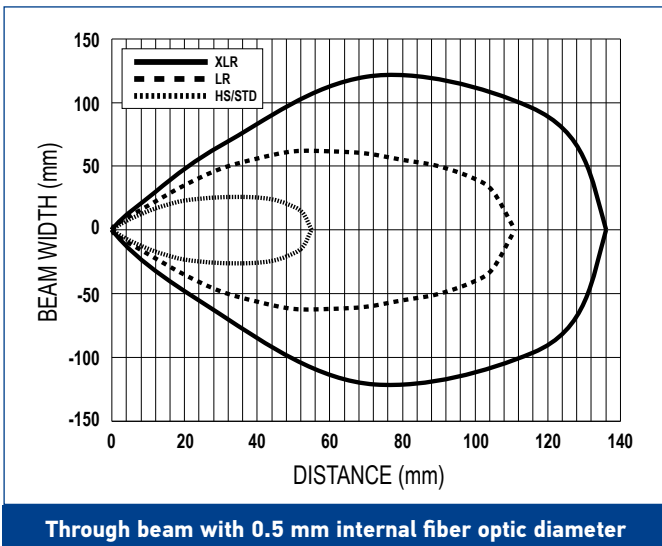



## S70-E1

	HIGH SPEED	STANDARD	LONG RANGE	EXTRA LONG RANGE
Response Time	200 $\mu$ s	500 $\mu$ s	2 ms	5 ms
Repeatability	66 $\mu$ s	100 $\mu$ s	100 $\mu$ s	100 $\mu$ s

### DETECTION AREA

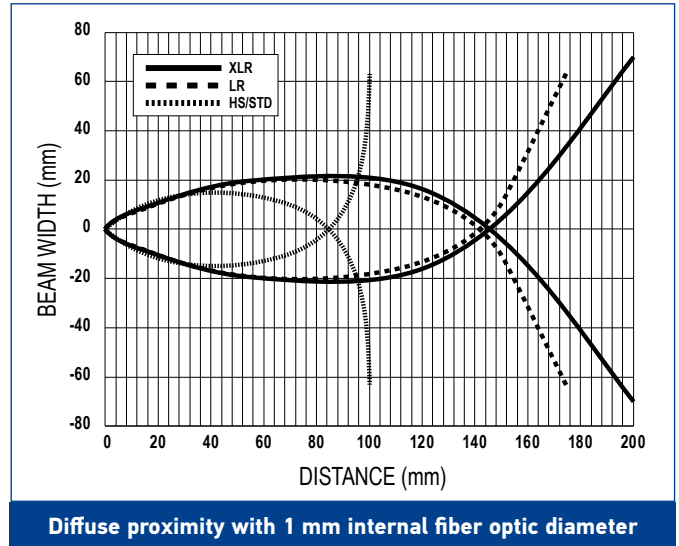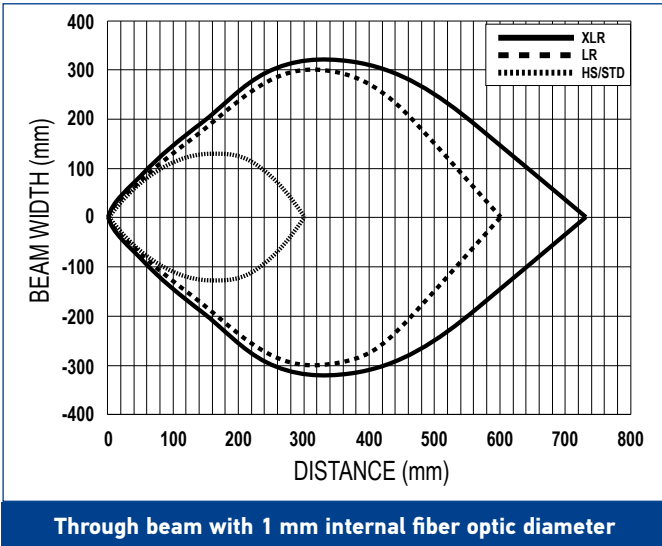


### DETECTION AREA

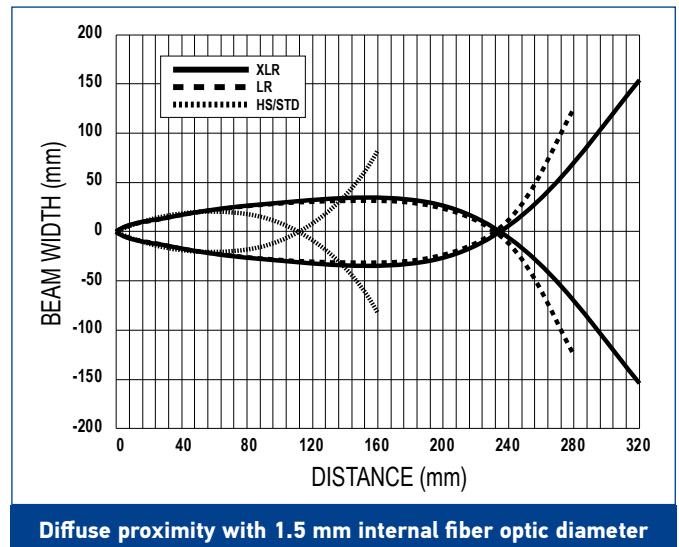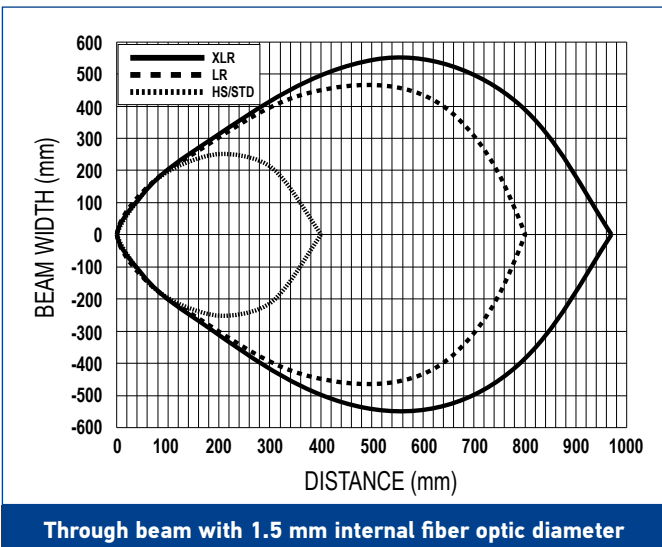


**S70-E2**

	<b>SUPER HIGH SPEED</b>	<b>HIGH SPEED</b>	<b>FAST</b>	<b>STANDARD</b>	<b>MEDIUM RANGE</b>	<b>LONG RANGE</b>
Response Time	10 $\mu$ s	15 $\mu$ s	50 $\mu$ s	250 $\mu$ s	500 $\mu$ s	1 ms
Repeatability	5 $\mu$ s	5 $\mu$ s	12 $\mu$ s	50 $\mu$ s	80 $\mu$ s	165 $\mu$ s

**EXCESS GAIN**

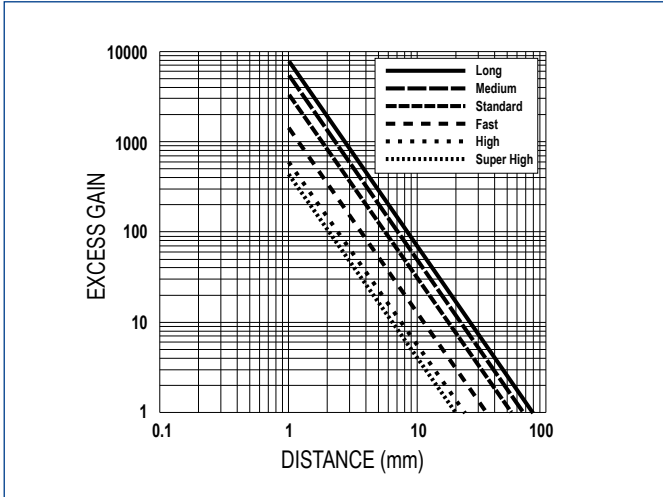


**Through beam with 0.2 mm internal fiber optic diameter**

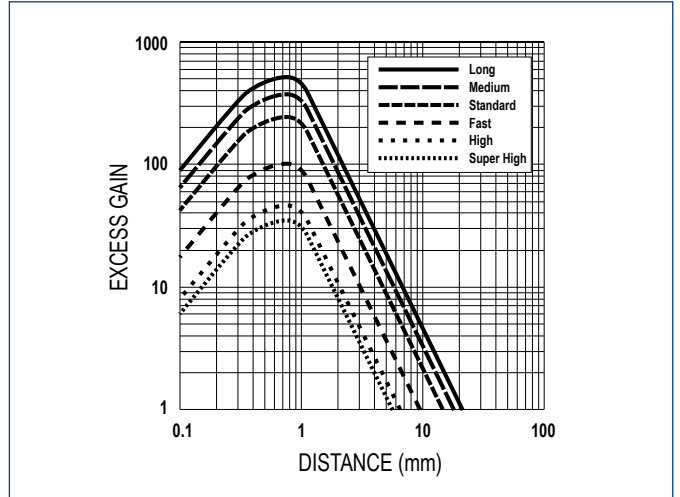


**Diffuse proximity with 0.2 mm internal fiber optic diameter**

**EXCESS GAIN**

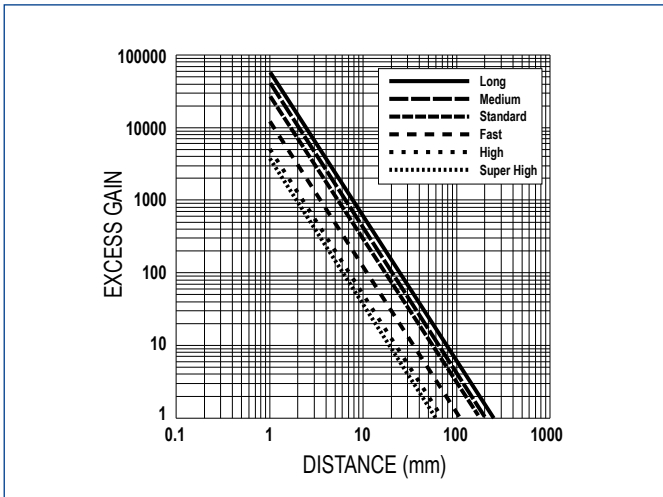

**Through beam with 0.5 mm internal fiber optic diameter**

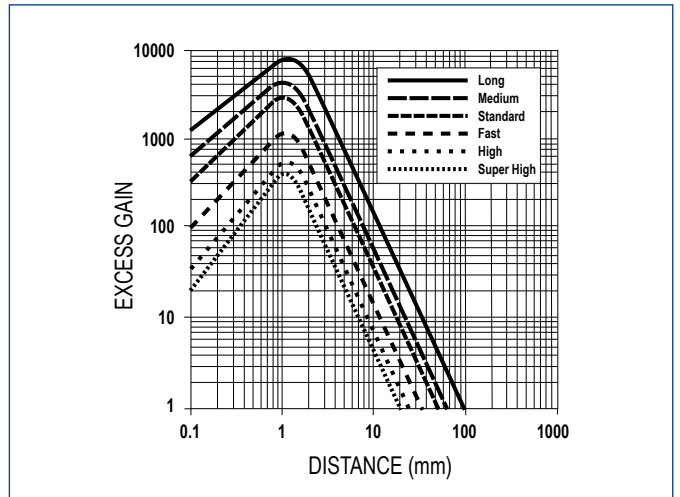



**Diffuse proximity with 0.5 mm internal fiber optic diameter**





**S70-E2**

	<b>SUPER HIGH SPEED</b>	<b>HIGH SPEED</b>	<b>FAST</b>	<b>STANDARD</b>	<b>MEDIUM RANGE</b>	<b>LONG RANGE</b>
Response Time	10 $\mu$ s	15 $\mu$ s	50 $\mu$ s	250 $\mu$ s	500 $\mu$ s	1 ms
Repeatability	5 $\mu$ s	5 $\mu$ s	12 $\mu$ s	50 $\mu$ s	80 $\mu$ s	165 $\mu$ s

**EXCESS GAIN**

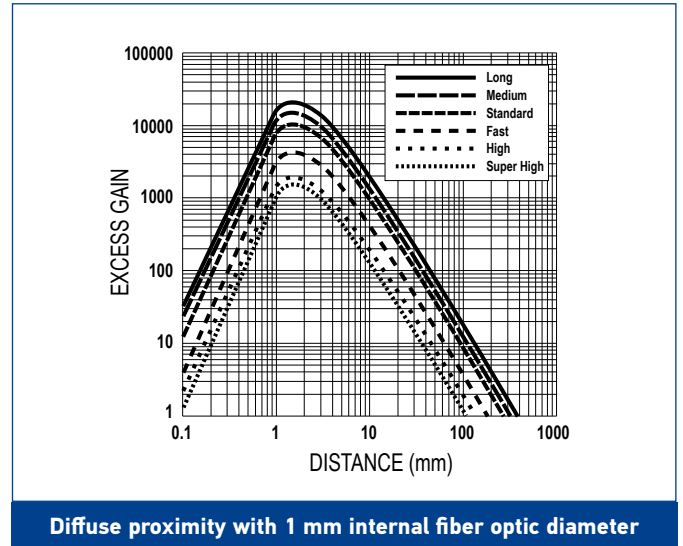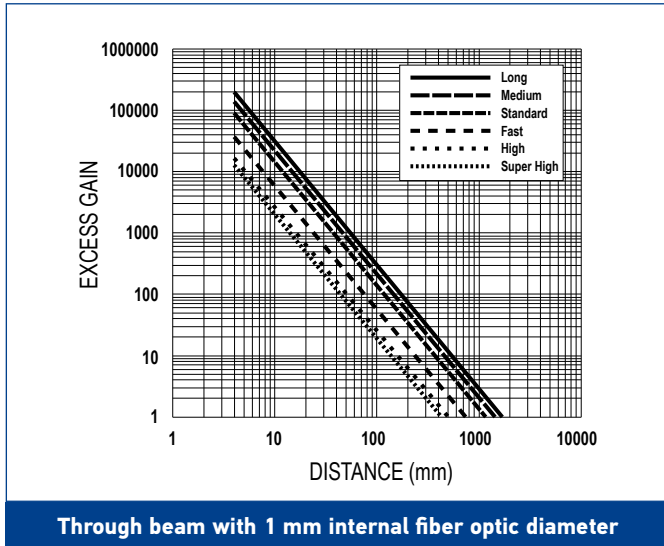


**EXCESS GAIN**

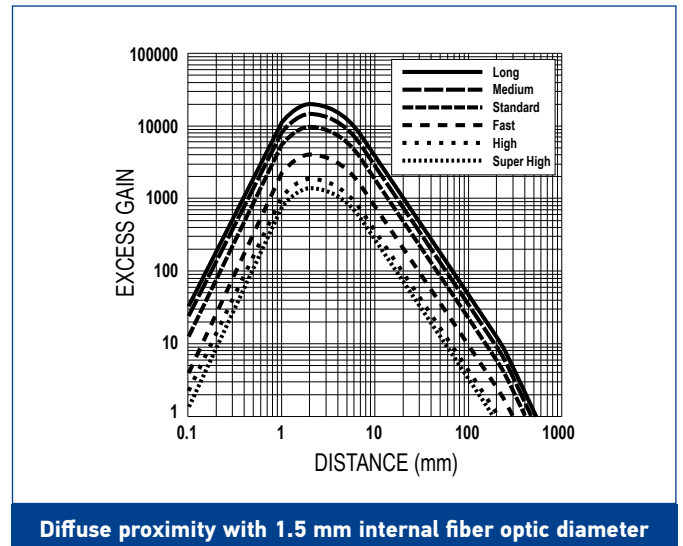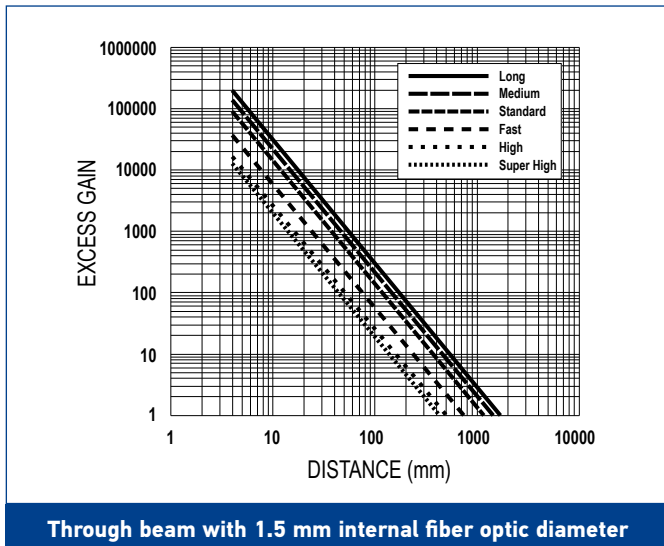


**S70-E2**

	<b>SUPER HIGH SPEED</b>	<b>HIGH SPEED</b>	<b>FAST</b>	<b>STANDARD</b>	<b>MEDIUM RANGE</b>	<b>LONG RANGE</b>
Response Time	10 $\mu$ s	15 $\mu$ s	50 $\mu$ s	250 $\mu$ s	500 $\mu$ s	1 ms
Repeatability	5 $\mu$ s	5 $\mu$ s	12 $\mu$ s	50 $\mu$ s	80 $\mu$ s	165 $\mu$ s

**DETECTION AREA**

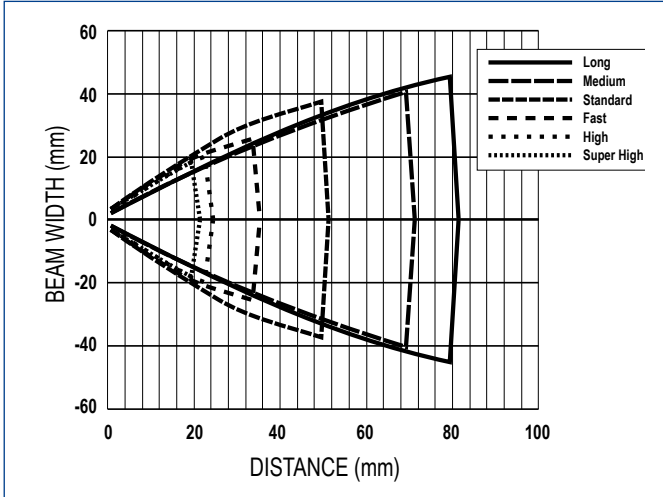


**Through beam with 0.2 mm internal fiber optic diameter**

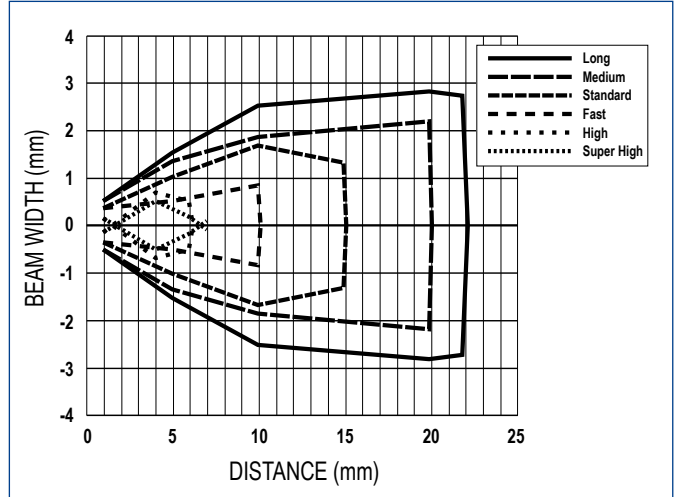


**Diffuse proximity with 0.2 mm internal fiber optic diameter**

**DETECTION AREA**

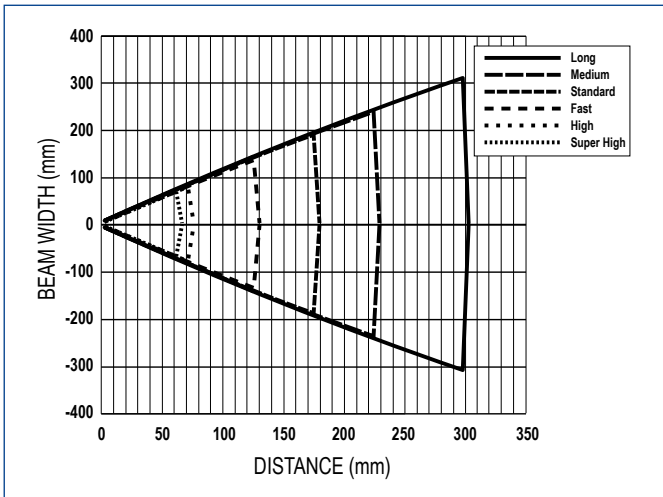

**Through beam with 0.5 mm internal fiber optic diameter**

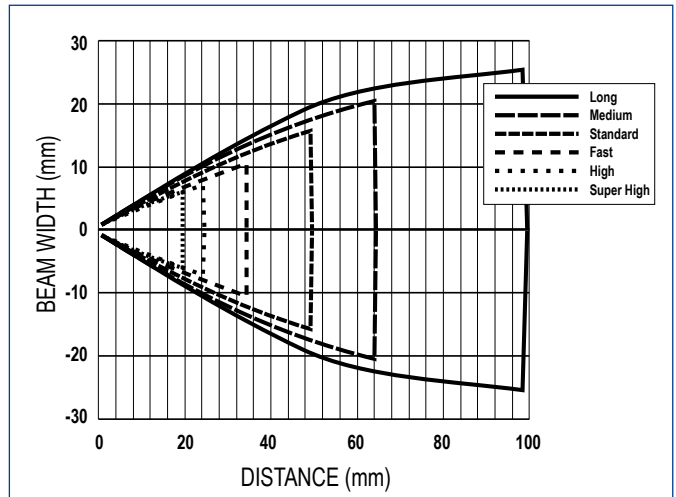


**Diffuse proximity with 0.5 mm internal fiber optic diameter**


### S70-E2

	SUPER HIGH SPEED	HIGH SPEED	FAST	STANDARD	MEDIUM RANGE	LONG RANGE
Response Time	10 $\mu$ s	15 $\mu$ s	50 $\mu$ s	250 $\mu$ s	500 $\mu$ s	1 ms
Repeatability	5 $\mu$ s	5 $\mu$ s	12 $\mu$ s	50 $\mu$ s	80 $\mu$ s	165 $\mu$ s

### DETECTION AREA

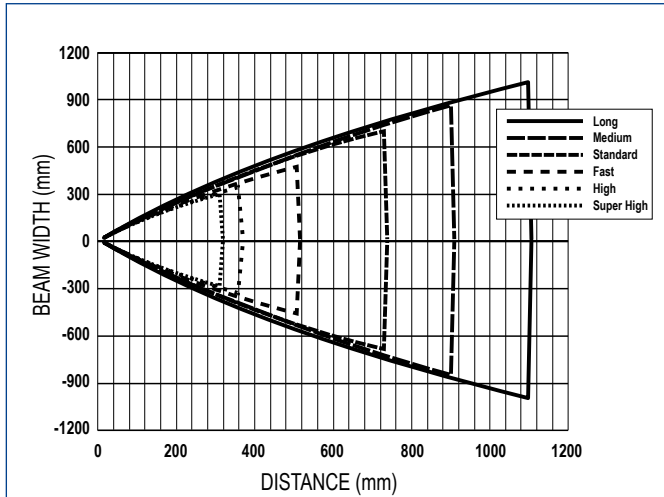


Through beam with 1 mm internal fiber optic diameter

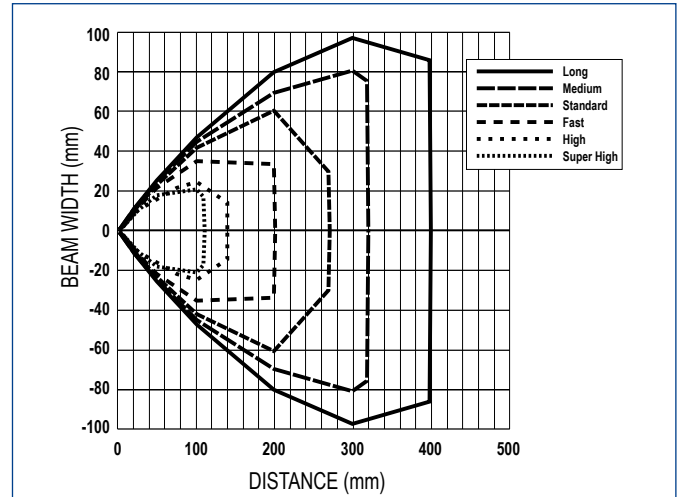


Diffuse proximity with 1 mm internal fiber optic diameter

### DETECTION AREA

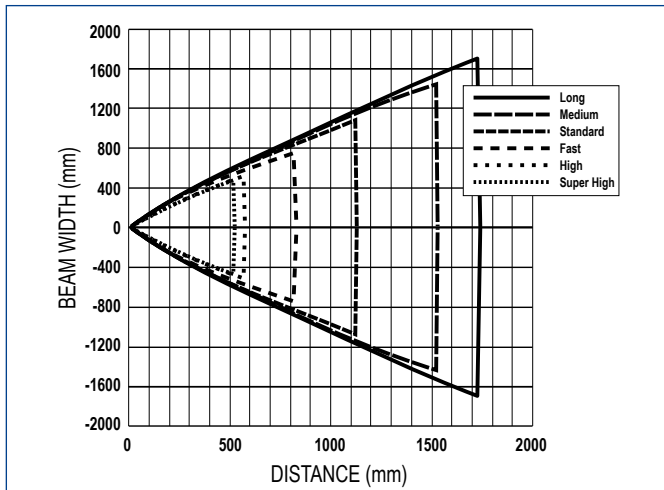

Through beam with 1.5 mm internal fiber optic diameter

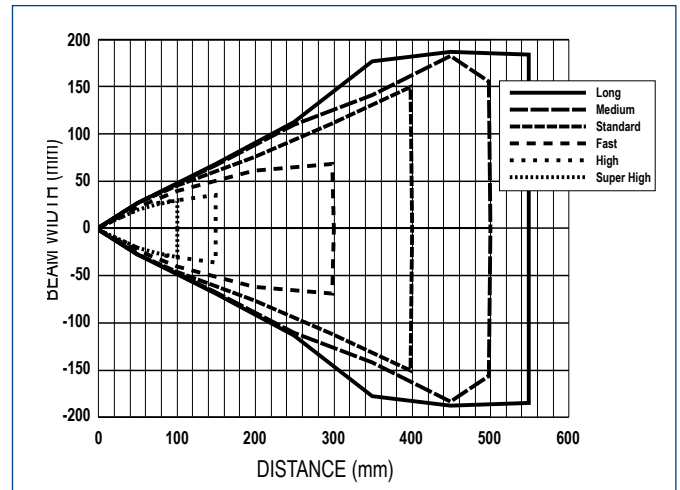


Diffuse proximity with 1.5 mm internal fiber optic diameter


## S70-E3

	SUPER HIGH SPEED	HIGH SPEED	FAST	STANDARD	LONG RANGE	EXTRA LONG RANGE
Response Time	-	250 $\mu$ s	500 $\mu$ s	1 ms	4 ms	12 ms
Repeatability	-	100 $\mu$ s	150 $\mu$ s	180 $\mu$ s	180 $\mu$ s	180 $\mu$ s

### EXCESS GAIN

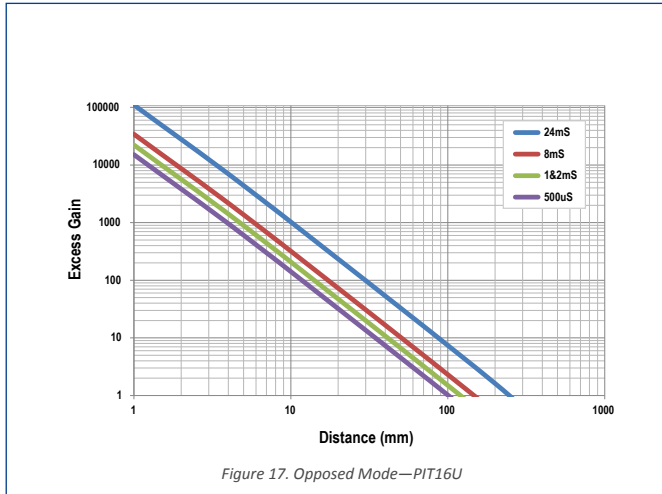


Through beam with 0.2 mm internal fiber optic diameter

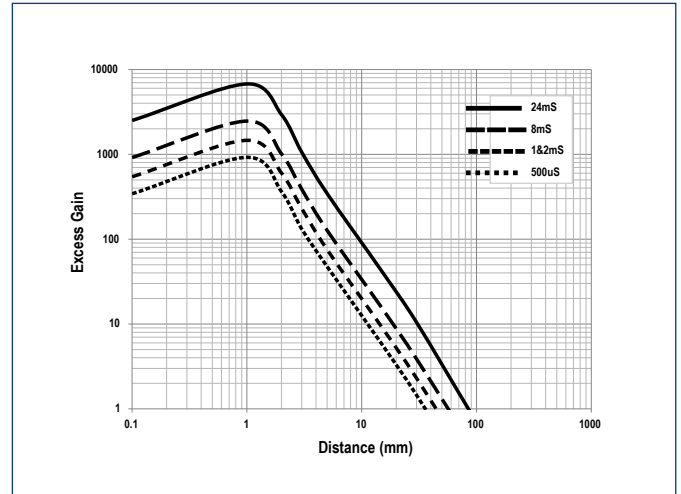


Diffuse proximity with 0.2 mm internal fiber optic diameter

### EXCESS GAIN

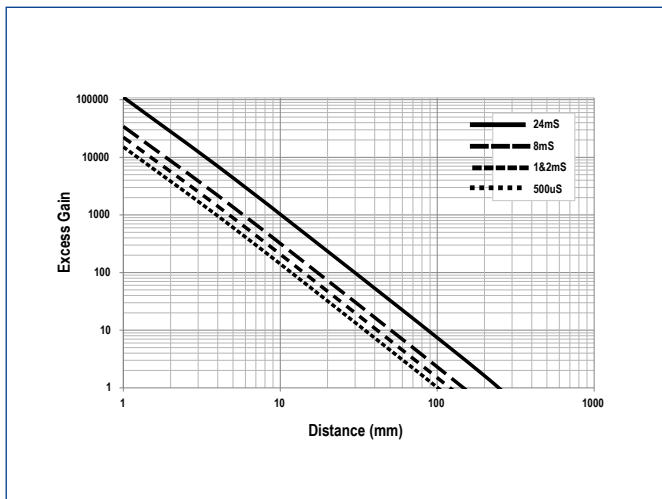

Through beam with 0.5 mm internal fiber optic diameter


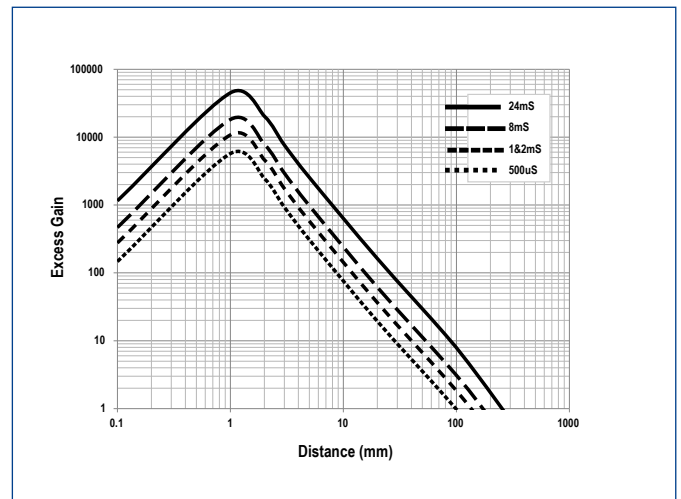


Diffuse proximity with 0.5 mm internal fiber optic diameter



## S70-E3

	SUPER HIGH SPEED	HIGH SPEED	FAST	STANDARD	LONG RANGE	EXTRA LONG RANGE
Response Time	-	250 $\mu$ s	500 $\mu$ s	1 ms	4 ms	12 ms
Repeatability	-	100 $\mu$ s	150 $\mu$ s	180 $\mu$ s	180 $\mu$ s	180 $\mu$ s

### EXCESS GAIN

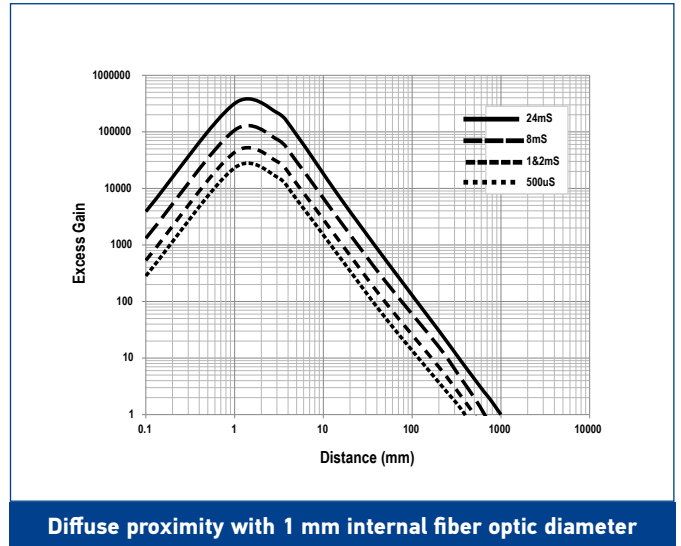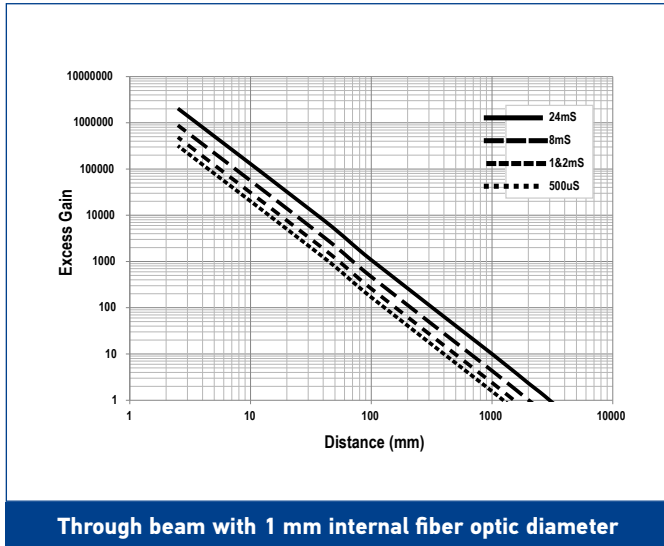


### EXCESS GAIN

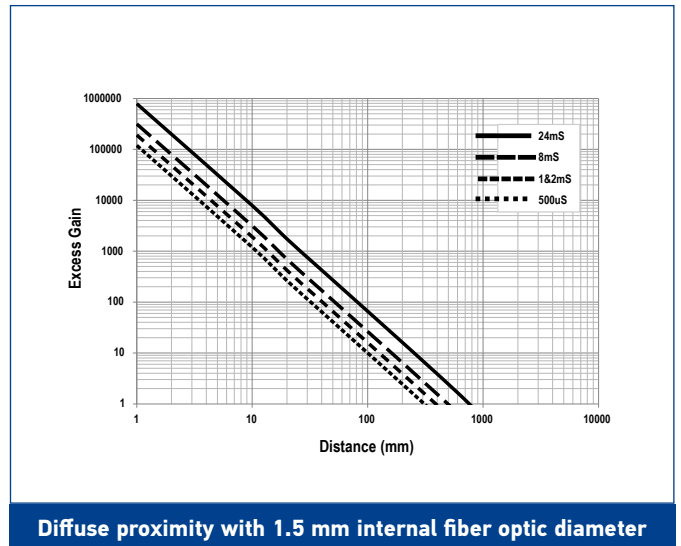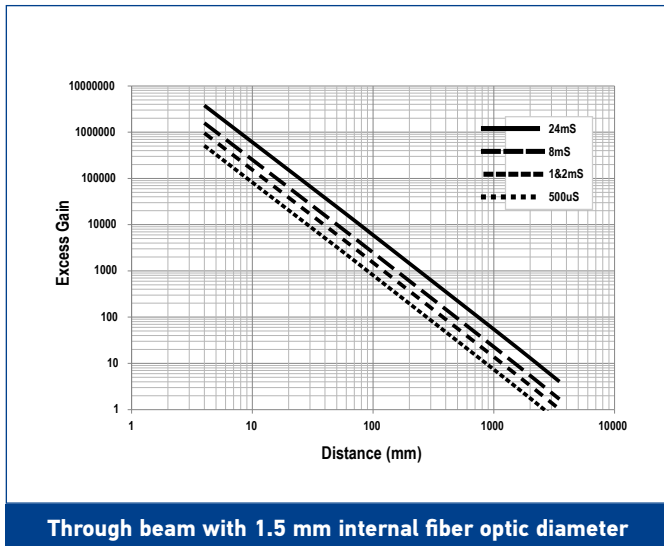


## S70-E3

	SUPER HIGH SPEED	HIGH SPEED	FAST	STANDARD	LONG RANGE	EXTRA LONG RANGE
Response Time	-	250 $\mu$ s	500 $\mu$ s	1 ms	4 ms	12 ms
Repeatability	-	100 $\mu$ s	150 $\mu$ s	180 $\mu$ s	180 $\mu$ s	180 $\mu$ s

### DETECTION AREA

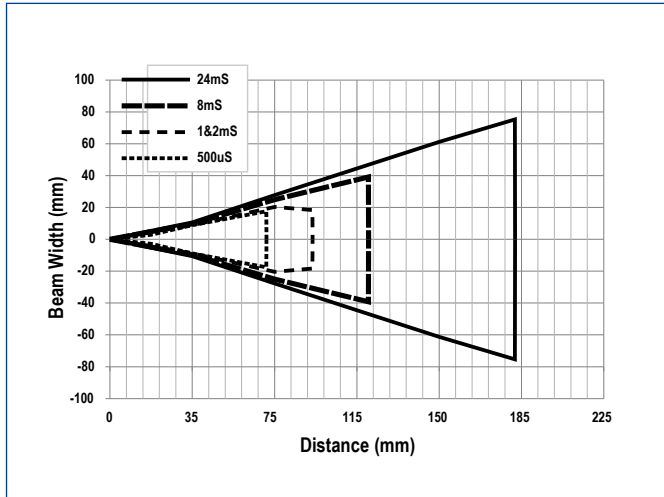


Through beam with 0.2 mm internal fiber optic diameter

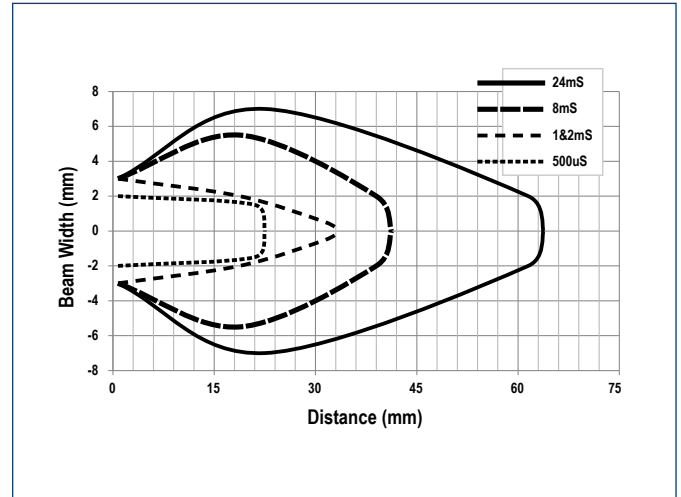


Diffuse proximity with 0.2 mm internal fiber optic diameter

### DETECTION AREA

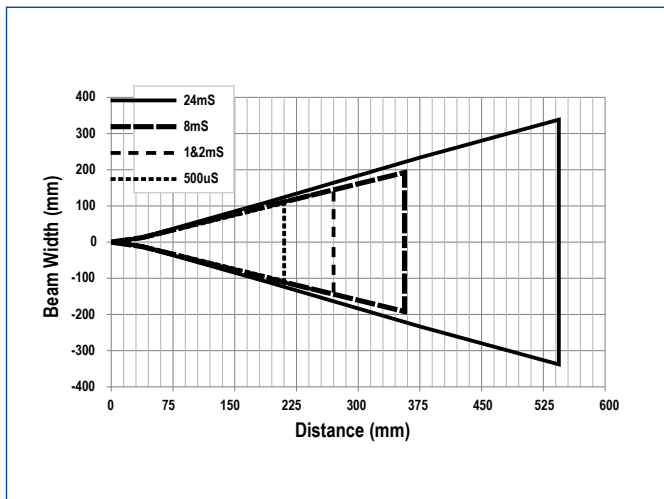

Through beam with 0.5 mm internal fiber optic diameter

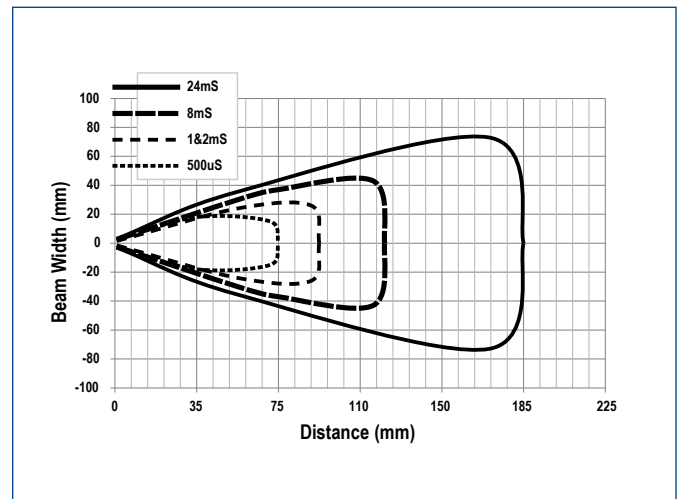


Diffuse proximity with 0.5 mm internal fiber optic diameter


## S70-E3

	SUPER HIGH SPEED	HIGH SPEED	FAST	STANDARD	LONG RANGE	EXTRA LONG RANGE
Response Time	-	250 $\mu$ s	500 $\mu$ s	1 ms	4 ms	12 ms
Repeatability	-	100 $\mu$ s	150 $\mu$ s	180 $\mu$ s	180 $\mu$ s	180 $\mu$ s

### DETECTION AREA

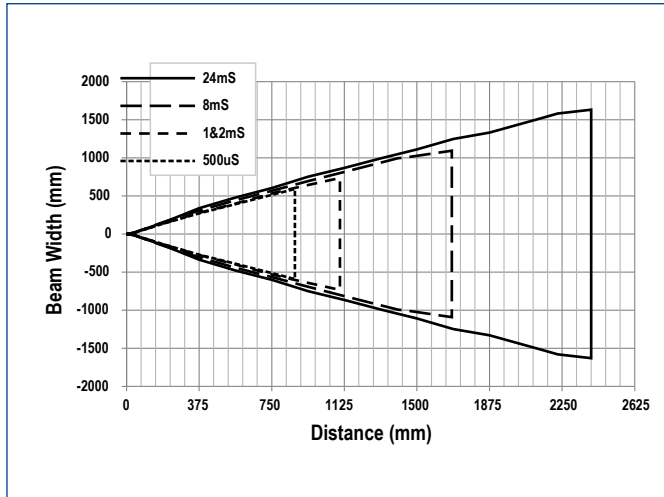


Through beam with 1 mm internal fiber optic diameter

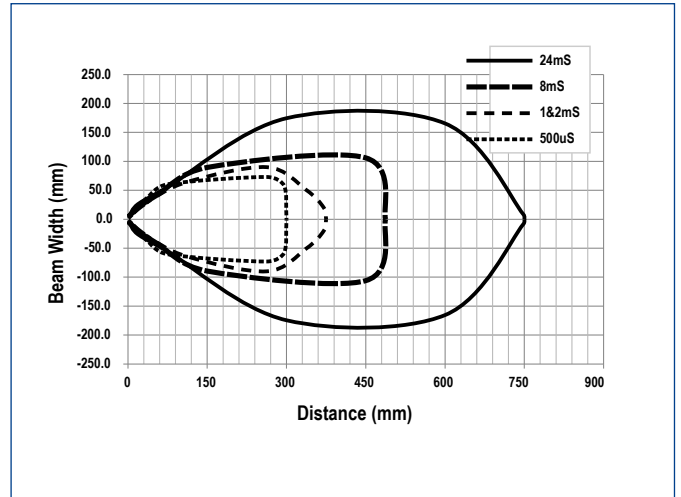


Diffuse proximity with 1 mm internal fiber optic diameter

### DETECTION AREA

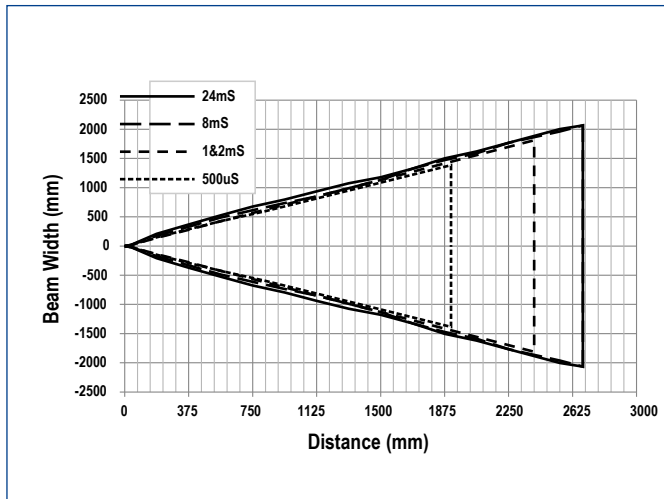


Through beam with 1.5 mm internal fiber optic diameter

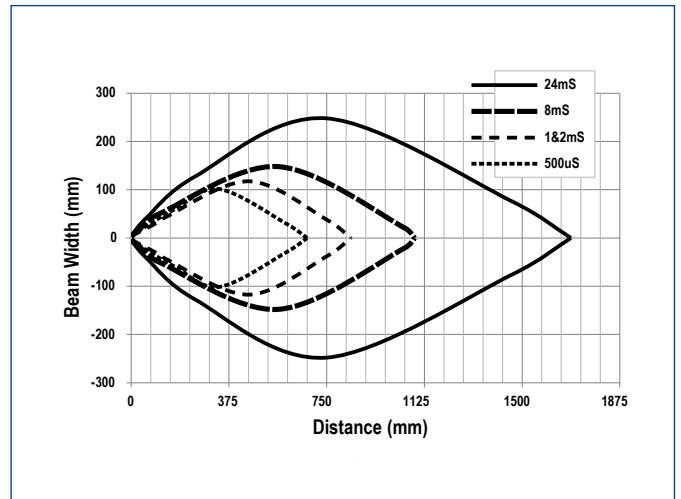

Diffuse proximity with 1.5 mm internal fiber optic diameter

# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	RESPONSE TIME	CONNECTION	OUTPUT	MODEL	ORDER No.
Fiber Optic Amplifier	200 $\mu$ s ... 5 ms	2 m Cable	NPN	S70-2-E1-N	950561000
			PNP	S70-2-E1-P	950561010
		M8 Connector	NPN	S70-5-E1-N	950561060
			PNP	S70-5-E1-P	950561020
			PNP, push-pull IO-Link	S70-5-E1-PZ	950561030
			NPN	S70-5-E2-N	950561040
	10 $\mu$ s ... 1 ms	M8 Connector	PNP	S70-5-E2-P	950561050
			4...20mA, NPN	S70-5-E3-NI	950561100
	250 $\mu$ s...12ms	M8 Connector	0...10V, NPN	S70-5-E3-NV	950561080
			4...20mA, PNP	S70-5-E3-PI	950561090
			0...10V, PNP	S70-5-E3-PV	950561070

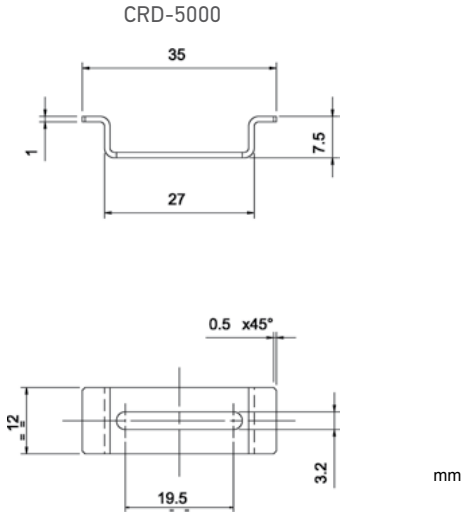

MODEL	DESCRIPTION	ORDER No.
CRD-5000	DIN rail mounting bracket	95ACC2790



# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B1-02-G-03	95A251420
		5 m	CS-B1-02-G-05	95A251430
		7 m	CS-B1-02-G-07	95A251440
		10 m	CS-B1-02-G-10	95A251480
Radial M8 Connector	4-pole, P.U.R.	2 m	CS-B1-02-R-02	95A251620
		5 m	CS-B1-02-R-05	95A251640
	4-pole, grey, P.V.C.	3 m	CS-B2-02-G-03	95A251450
		5 m	CS-B2-02-G-05	95A251460
		7 m	CS-B2-02-G-07	95A251470
		10 m	CS-B2-02-G-10	95A251530
	4-pole, P.U.R.	2 m	CS-B2-02-R-02	95A251630
		5 m	CS-B2-02-R-05	95A251650
Axial M12 Connector	5-pole, L coded power cable	3 m	CS-M1-02-B-03	95ACC0007
Axial M12 F/M8 M Connector	4-pole, double headed	3 m	CS-H1-02-B-03	95ACC0008
Axial M12 F/M12 M Connector	4-pole, double headed	3 m	CS-I1-02-B-03	95ACC0009

Rev. 03, 04/2019

# SR21



## 2MM HIGH-RESOLUTION FORK SENSORS FOR LABELING AND PACKAGING

- 25 kHz high switching frequency
- IR or red/green light models
- Detection of labels (SR21-IR) or print register mark on transparent films (SR21-RG)
- 4 wire NPN and PNP output

### APPLICATIONS

- Packaging and labeling machinery
- Print and apply systems




SR21		
<b>Slot width</b>	2 mm	
<b>Slot depth</b>	50 mm	
<b>Switching frequency</b>	25 kHz	
<b>Light emission</b>	IR LED	
	red/green LED	
<b>Setting</b>	push button	
<b>Power supply</b>	Vdc	
	Vac	
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	
<b>Connection</b>	cable	
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	20x90x26	
<b>Housing material</b>	Zama	
<b>Mechanical protection</b>	IP65	



# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc (limit values)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	55 mA max.
<b>Light emission</b>	red LED 633 nm/green LED 570 nm IR LED 880 nm
<b>Setting</b>	AUTO-SET push-button
<b>Operating mode</b>	LIGHT/DARK configurable
<b>Indicators</b>	yellow OUTPUT LED green/red READY/ERROR LED
<b>Output</b>	PNP and NPN
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	2 V max.
<b>Response time</b>	20 µs max.
<b>Switching frequency</b>	25 kHz max.
<b>Connection</b>	M8 4-pole connector
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 1
<b>Mechanical protection</b>	IP65
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Slot width</b>	2 mm
<b>Resolution</b>	0,5 mm
<b>Housing material</b>	ZAMA
<b>Lens material</b>	glass
<b>Operating temperature</b>	-20 ... 60 °C
<b>Storage temperature</b>	-20 ... 70 °C
<b>Weight</b>	115 g

# DIMENSIONS

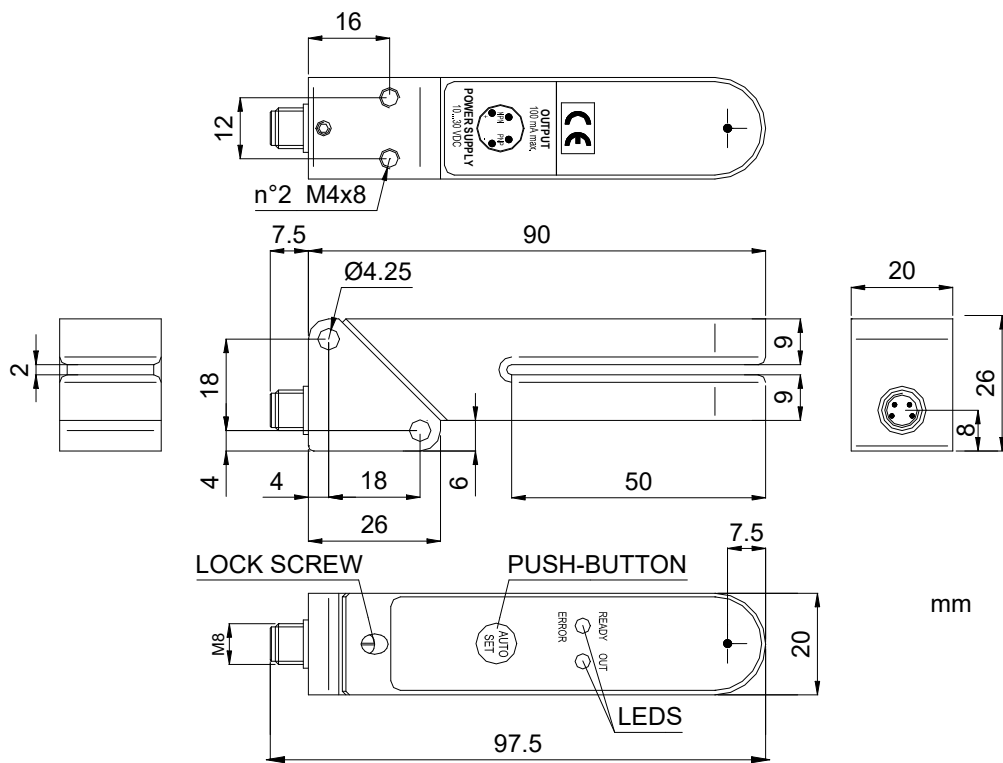


# INDICATORS AND SETTINGS

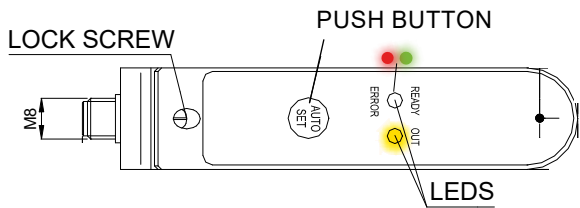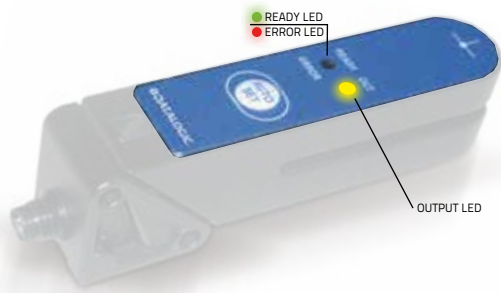

# CONNECTIONS

M8 CONNECTOR

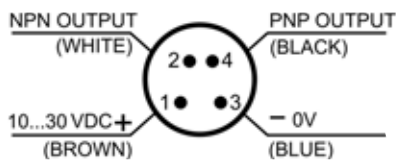

# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	EMISSION	CONNECTION	OUTPUT	MODEL	ORDER No.
Fork sensor	Infrared LED	M8 Connector	PNP/NPN	SR21-IR	953151070
	Red/Green LED			SR21-RG	953151080

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B1-02-G-03	95A251420
		5 m	CS-B1-02-G-05	95A251430
		7 m	CS-B1-02-G-07	95A251440
		10 m	CS-B1-02-G-10	95A251480
	4-pole, P.U.R.	2 m	CS-B1-02-R-02	95A251620
		5 m	CS-B1-02-R-05	95A251640
Radial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B2-02-G-03	95A251450
		5 m	CS-B2-02-G-05	95A251460
		7 m	CS-B2-02-G-07	95A251470
		10 m	CS-B2-02-G-10	95A251530
	4-pole, P.U.R.	2 m	CS-B2-02-R-02	95A251630
		5 m	CS-B2-02-R-05	95A251650



Rev. 03, 04/2019

# SR23



## HIGH EFFICIENCY FORK SENSOR FOR BOOKLET AND MULTILAYER LABELS DETECTION

- Multilayer labels detection
- Up to 0,5 mm of minimum size labels/gap
- 5 mm slot width
- 50 mm slot depth
- Dynamic or static setting through single push-button
- 12 kHz switching frequency
- Compact and robust housing, IP65
- M8 connector or 2 m cable models
- PNP or NPN models



### APPLICATIONS

- Processing and Packaging machinery
- Automatic labelers


### SR23

<b>Slot width</b>		5 mm
<b>Slot depth</b>		50 mm
<b>Switching frequency</b>		12 kHz
<b>Light emission</b>		IR LED
<b>Setting</b>		push button
<b>Power supply</b>	Vdc	10...30 Vdc
	Vac	
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>		30x63x10
<b>Housing material</b>		Alluminum (Zama), Plastic (PBT)
<b>Mechanical protection</b>		IP65


# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc (reverse polarity protection)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	30 mA max.
<b>Light emission</b>	IR LED 850 nm
<b>Setting</b>	SET push-button
<b>Indicators</b>	yellow OUTPUT LED green READY LED
<b>Output</b>	PNP or NPN
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	2 V max.
<b>Slot width</b>	5 mm
<b>Slot depth</b>	50 mm
<b>Minimum label width</b>	0,5...2 mm
<b>Minimum space between labels</b>	0,5...2 mm
<b>Speed of the conveyor during setting procedure</b>	20 m/min (30 cm/s) max.
<b>Response time</b>	40 µs max.
<b>Switching frequency</b>	12 kHz max.
<b>Connection</b>	M8 4-pole connector, 2 m cable
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	> 20 MΩ, 500 Vdc between electronics and housing
<b>Mechanical protection</b>	IP65
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	Aluminum (Zama)
<b>Cover material</b>	PBT
<b>Lens material</b>	PC
<b>Operating temperature</b>	-20 ... 55°C
<b>Storage temperature</b>	-20 ... 70°C
<b>Weight</b>	85 g cable vers., 46 g M8 conn. vers.


# DIMENSIONS

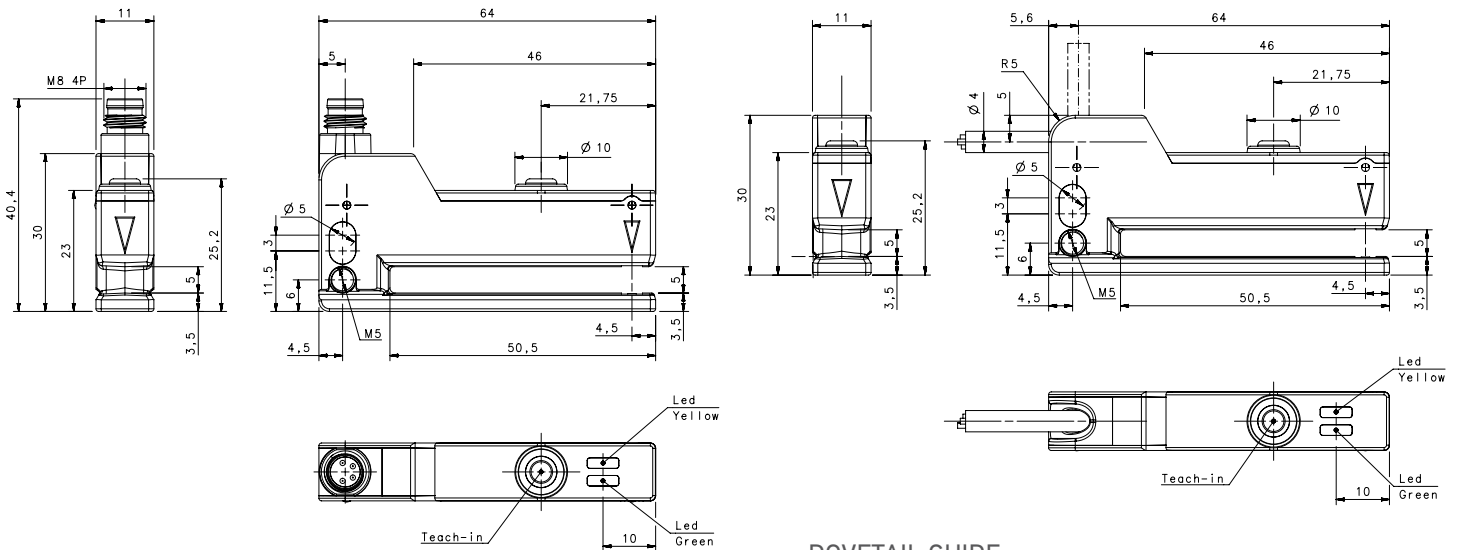

## DOVETAIL GUIDE MOUNTING




# INDICATORS AND SETTINGS

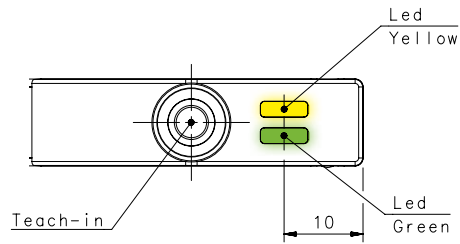


# CONNECTIONS

M8 CONNECTOR



CABLE




# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	CONNECTION	OUTPUT	MODEL	ORDER No.
Fork Sensor	2m Cable	PNP	SR23-2-IR-PH	953161000
		NPN	SR23-2-IR-NH	953161020
	M8 Connector	PNP	SR23-5-IR-PH	953161010
		NPN	SR23-5-IR-NH	953161030

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B1-02-G-03	95A251420
		5 m	CS-B1-02-G-05	95A251430
		7 m	CS-B1-02-G-07	95A251440
		10 m	CS-B1-02-G-10	95A251480
	4-pole, P.U.R.	2 m	CS-B1-02-R-02	95A251620
		5 m	CS-B1-02-R-05	95A251640
Radial M8 Connector	4-pole, grey, P.V.C.	3 m	CS-B2-02-G-03	95A251450
		5 m	CS-B2-02-G-05	95A251460
		7 m	CS-B2-02-G-07	95A251470
		10 m	CS-B2-02-G-10	95A251530
	4-pole, P.U.R.	2 m	CS-B2-02-R-02	95A251630
		5 m	CS-B2-02-R-05	95A251650



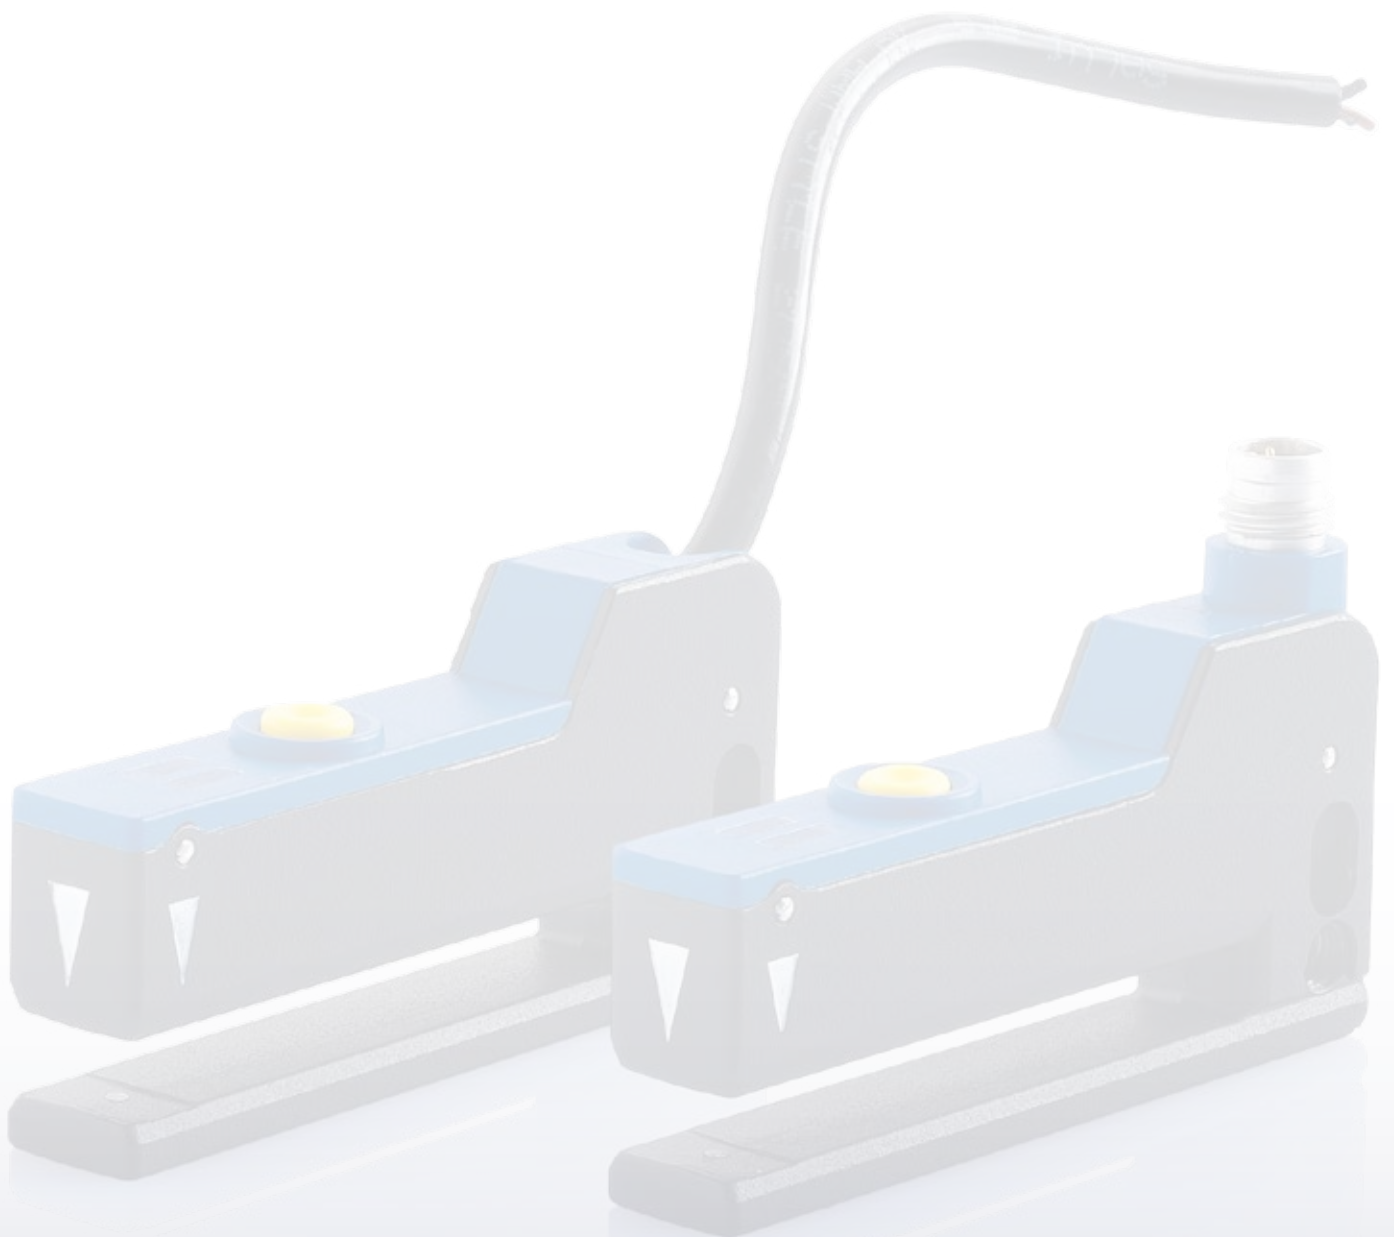

Rev. 03, 04/2019

## ULTIMATE PRECISION USING LED OR LASER EMISSIONS FOR HIGH RESOLUTION



- Visible red emission models
- High resolution LASER models
- Sensitivity adjustment trimmer and dark/light selectors
- Industrial metal housing with glass lenses

### APPLICATIONS

- Packaging and labeling machinery
- Automotive
- Packaging lines




SRF-30/50/80/120	
<b>Slot width</b>	30 mm (SRF-30)
	50 mm (SRF-50)
	80 mm (SRF-80)
	120 mm (SRF-120)
<b>Slot depth</b>	34 mm (SRF-30)
	54 mm (SRF-50/80/120)
<b>Switching frequency</b>	1,5 kHz
	5 kHz (class 2 LASER)
<b>Light emission</b>	red LED
	red LASER (class 2)
<b>Setting</b>	trimmer
<b>Power supply</b>	Vdc
	Vac
	Vac/dc
<b>Output</b>	PNP
	NPN
	NPN/PNP
	relay
	other
<b>Connection</b>	cable
	connector
	pig-tail
<b>Approximate dimensions (mm)</b>	10x50x59 (SRF-30)
	10x70x79 (SRF-50)
	10x100x79 (SRF-80)
	10x140x84 (SRF-120)
<b>Housing material</b>	Aluminium
<b>Mechanical protection</b>	IP67

# TECHNICAL DATA


<b>Power supply</b>	10 ... 30 Vdc (reverse polarity protection)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	35 mA max. 20 mA max. (Laser mod.)
<b>Light emission</b>	red LED 640 nm red Laser 650 nm
<b>Setting</b>	sensitivity trimmer and N.O./N.C. trimmer
<b>Operating mode</b>	LIGHT/DARK configurable
<b>Indicators</b>	yellow LED
<b>Output</b>	PNP or NPN; NO; NC
<b>Output current</b>	200 mA max.
<b>Saturation voltage</b>	3 V max. PNP, 2,5 V max. NPN
<b>Response time</b>	333 $\mu$ s 100 $\mu$ s (Laser mod.)
<b>Switching frequency</b>	1,5 kHz 5 kHz (Laser mod.)
<b>Connection</b>	M8 3-pole connector
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 M $\Omega$ , 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 1
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	5 kLux
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Slot width</b>	30, 50, 80, 120 mm
<b>Resolution</b>	0,3 mm (mod. SRF...30), 0,5 mm (mod. SRF...50/80), 0,8 mm (mod. SRF...120) 0,05 mm (Laser mod. SRF...30), 0,08 mm (Laser mod. SRF...50), 0,1 mm (Laser mod. SRF...80), 0,15 mm (Laser mod. SRF...120)
<b>Housing material</b>	GDZn
<b>Lens material</b>	glass
<b>Operating temperature</b>	-10 ... 60 °C
<b>Storage temperature</b>	-20 ... 70 °C
<b>Weight</b>	36 g (mod. SRF...30), 54 g (mod. SRF...50), 77 g (mod. SRF...80), 118 g (mod. SRF...120) 66 g (Laser mod. SRF...30), 110 g (Laser mod. SRF...50), 135 g (Laser mod. SRF...80), 210 g (Laser mod. SRF...120)

# DIMENSIONS

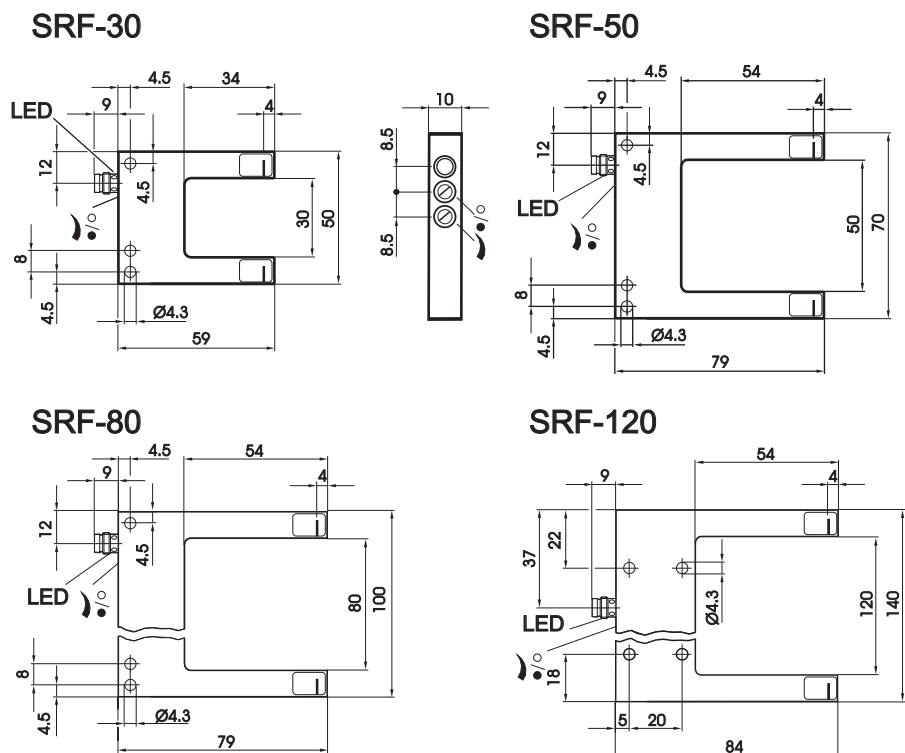


# INDICATORS AND SETTINGS

ALL MODELS



# CONNECTIONS

M8 CONNECTOR

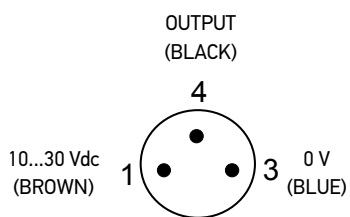

# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	EMISSION	CONNECTION	OUTPUT	MODEL	ORDER No.
Fork sensor (30 mm)	Red LED	M8 Connector	PNP	SRF-30-5-P	95B020050
	LASER		NPN	SRF-30-5-N	95B020090
Fork sensor (50 mm)	Red LED	M8 Connector	PNP	SRF-L-30-5-P	95B020130
	LASER		PNP	SRF-50-5-P	95B020060
			NPN	SRF-50-5-N	95B020100
Fork sensor (80 mm)	Red LED	M8 Connector	PNP	SRF-L-50-5-P	95B020140
	LASER		PNP	SRF-80-5-P	95B020070
			NPN	SRF-80-5-N	95B020110
Fork sensor (120 mm)	Red LED	M8 Connector	PNP	SRF-L-80-5-P	95B020150
	LASER		PNP	SRF-120-5-P	95B020080
			NPN	SRF-120-5-N	95B020120
			PNP	SRF-L-120-5-P	95B020160

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M8 connector	3-pole, Grey, P.V.C.	3 m	CS -B1-01-G-03	95A251490
		5 m	CS -B1-01-G-05	95A251510
Radial M8 connector		3 m	CS -B2-01-G-03	95A251500
		5 m	CS -B2-01-G-05	95A251520

Rev. 03, 04/2019

# SRX3



## HIGH PERFORMANCE ULTRASONIC FORK SENSORS FOR TRANSPARENT LABEL DETECTION

- Dynamic or static teach models
- Slot size 3mm
- High resolution up to 2 mm label gap
- M8 connector with PNP or NPN output
- M12 connector with PNP/NPN output and external teach-in
- Rugged and sturdy aluminium housing



### APPLICATIONS

- Detection of transparent, opaque, or metallic ink labels
- Double sheet detection
- Adhesive surface detection

SRX3		
<b>Slot width</b>		3 mm
<b>Slot depth</b>		68 mm
<b>Switching frequency</b>		500 hz
<b>Emission type</b>		Ultrasonic 300 Khz
<b>Setting</b>		300 mm
<b>Power supply</b>	Vdc	12...30 Vdc ●
<b>Output</b>	PNP	●
	NPN	●
<b>Connection</b>	Connector	M12 5-pin
	Connector	M8 4-pin
<b>Approximate dimensions (mm)</b>		90 x 55 x 22
<b>Housing material</b>		Aluminium
<b>Mechanical protection</b>		IP54

# TECHNICAL DATA

## SPECIFICATION

<b>Minimum pulse time</b>	1ms
<b>Detectable size</b>	> 2mm
<b>Max. tape speed</b>	60m/min
<b>Tape size</b>	> 16mm
<b>Ultrasonic frequency</b>	300 KHz


## ELECTRICAL DATA

<b>Power supply</b>	12...30 Vdc
<b>Current consumption</b>	< 55mA
<b>Ripple</b>	10%
<b>Output current</b>	250 mA max.
<b>Output saturation voltage</b>	< 1,5V @ 100mA
<b>Rising time</b>	0,8 us max
<b>Falling time</b>	1,6 us max
<b>Power On delay</b>	325 ms
<b>Response time</b>	1ms
<b>Switching frequency</b>	500 hz
<b>Output</b>	PNP / NPN



## MECHANICAL DATA

<b>Connection</b>	M12 5 pin
<b>Operating temperature</b>	0 °C ... +50 °C
<b>Storage temperature</b>	-25 °C ... +75 °C
<b>Humidity</b>	35...85% rH non condensing
<b>Vibration</b>	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	Aluminium
<b>Protection class</b>	IP54
<b>Weight</b>	300g

# DIMENSIONS

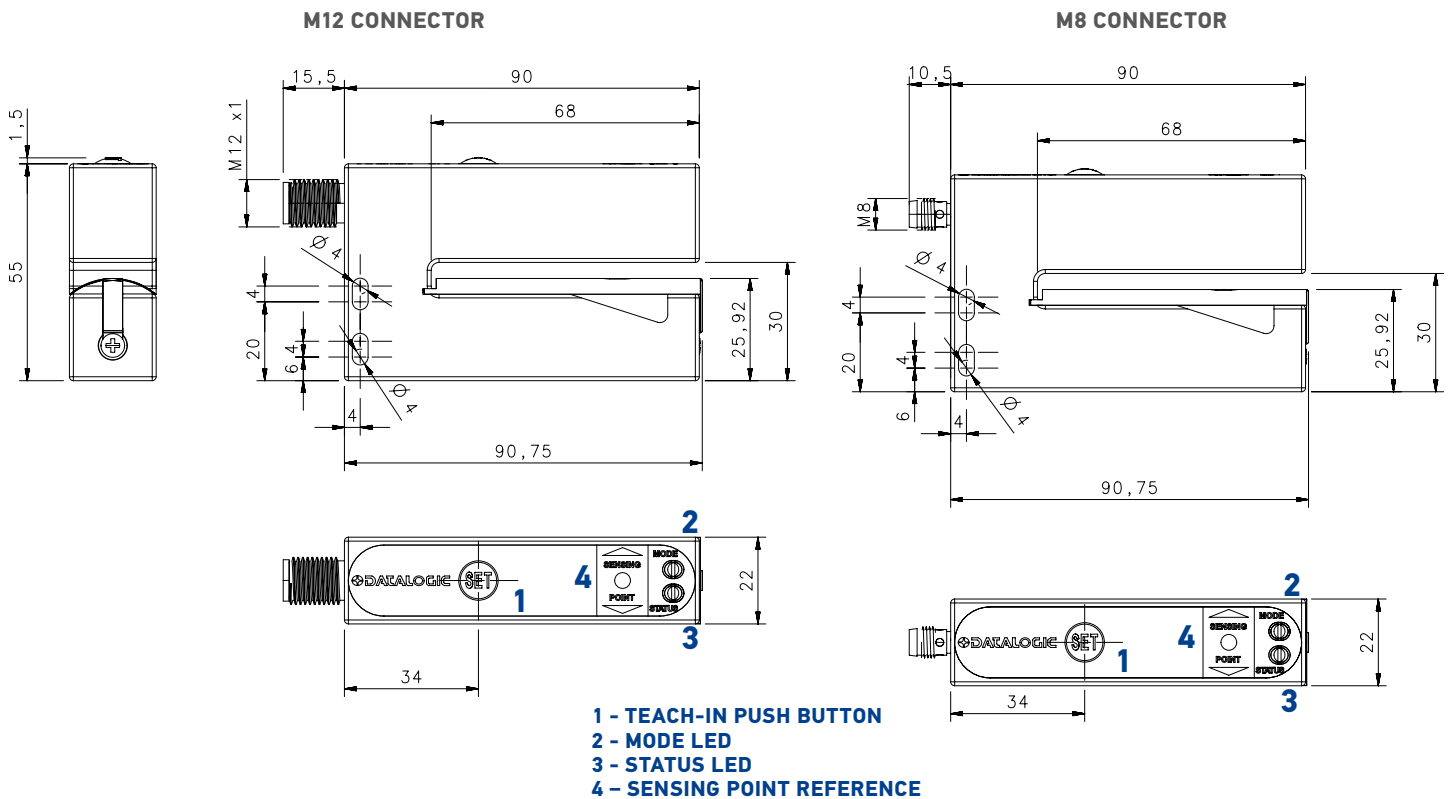


# INDICATORS AND SETTINGS

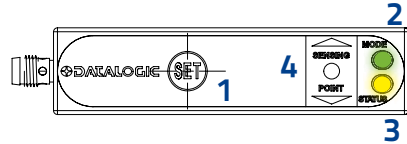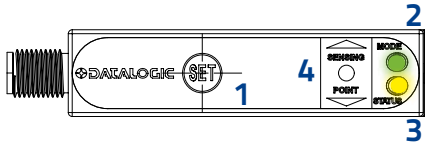

- 1 - TEACH-IN PUSH BUTTON
- 2 - MODE LED
- 3 - STATUS LED (OUTPUT LED)
- 4 - SENSING POINT REFERENCE


# CONNECTIONS

## M12 CONNECTOR – 5 PIN

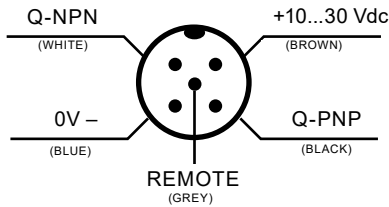


- BROWN 1 +10...30 Vdc
- WHITE 2 Q-NPN
- BLACK 4 Q-PNP
- BLUE 3 - 0 V
- GREY 5 TEACH-IN

## M8 CONNECTOR – 8 PIN



- BROWN 1 +10...30 Vdc
- WHITE 2 REMOTE
- BLACK 4 Q-PNP
- BLUE 3 - 0 V



- BROWN 1 +10...30 Vdc
- WHITE 2 Q-NPN
- BLACK 4 Q-PNP
- BLUE 3 - 0 V

# MODEL SELECTION AND ORDER INFORMATION

ADJUSTMENT	OUTPUT	CONNECTION	MODEL	ORDER No.
Dynamic Teach-in	PNP/NPN +EXT	M12 5 pin	SRX3-5-US-M12-PNH	953171000
Static Teach-in	PNP/NPN +EXT	M12 5 pin	SRX3-5-US-3-M12-PNH	953171010
Dynamic Teach-in	PNP+EXT	M8 4 pin	SRX3-6-US-M8-PH	953171020
Static Teach-in	PNP+EXT	M8 4 pin	SRX3-6-US-3-M8-PH	953171030
Dynamic Teach-in	PNP/NPN	M8 4 pin	SRX3-6-US-M8-PN	953171040
Static Teach-in	PNP/NPN	M8 4 pin	SRX3-6-US-3-M8-PN	953171050



# CABLES

TYPE	No. Of POLES	SHEAT	LENGTH	DESCRIPTION	ORDER No.
Female M12 Connector (Axial)	5-poles	Grey, P.V.C.	3 m	CS-A1-03-G-03	95ACC2110
			5 m	CS-A1-03-G-05	95ACC2120
			10 m	CS-A1-03-G-10	95ACC2140
		Black, P.V.C. UL	3	CS-A1-03-U-03	95ASE1170
			5	CS-A1-03-U-05	95ASE1180
			10	CS-A1-03-U-10	95ASE1190
M8 Connector (Axial)	4-poles	Grey, P.V.C.	3 m	CS-B-1-02-G-03	95A251420
			5 m	CS-B-1-02-G-05	95A251430
			7 m	CS-B-1-02-G-07	95A251440
			10 m	CS-B-1-02-G-10	95A251480
		P.U.R.	2 m	CS-B-1-02-R-02	95A251500
			5 m	CS-B-1-02-R-05	95A251520
M8 Connector (radial 90°)	4-poles	Grey, P.V.C.	3 m	CS-B2-02-G-03	95A251450
			5 m	CS-B2-02-G-05	95A251480
			7 m	CS-B2-02-G-07	95A251470
		P.U.R.	5 m	CS-B2-02-R-05	95ACC2110

Rev. 03, 04/2019

# TL $\mu$



## ALL REGISTRATION MARK DETECTION APPLICATIONS

- Teach-in, Remote settings
- Red/green or white LED emission
- Various interchangeable lenses and fiber-optic models
- Metal housing with orientable optics and connector

### APPLICATIONS

- Packaging and labeling machinery
- Beverage/Food/Cosmetic/Pharmaceutical industries
- Printing machinery




TL $\mu$		
<b>Contrast sensor</b>	6...12 mm (9 mm lens)	
	14...22 mm (18 mm lens)	
	22...34 mm (28 mm lens)	
	40...60 mm (50 mm lens)	
<b>Contrast sensor with fiber optic</b>	0...3 mm (proximity)	
	0...10 mm (through beam)	
<b>Switching frequency</b>	10 kHz	
	20 kHz	
<b>Light emission</b>	red/green LED	
	white LED	
<b>Setting</b>	push buttons	
	remote	
	10...30 V	
<b>Power supply</b>	Vdc	
	Vac	
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	0...5 V Analog Output
<b>Connection</b>	cable	•
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	31x81x58	
<b>Housing material</b>	Zama	
<b>Mechanical protection</b>	IP67	


# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc (limit values; reverse polarity protection)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	80 mA max.
<b>Light emission</b>	green LED 526 nm/red LED 630 nm (mod. TLμ-0/1xx) white LED 400-700 nm (mod. TLμ-4/5xx)
<b>Setting</b>	teach-in push-buttons/remote by 2 wires, 4 settings storage cable version
<b>Operating mode</b>	Light/Dark automatic setting with teach-in procedure
<b>Indicators</b>	red OUTPUT LED green READY LED
<b>Output</b>	PNP or NPN; analog output
<b>Output current</b>	200 mA max.
<b>Saturation voltage</b>	1 V max. NPN vers., 2 V max. PNP vers.
<b>Response time</b>	50 μs max. (mod. TLμ-4xx) 25 μs max. (mod. TLμ-5xx)
<b>Switching frequency</b>	10 kHz max. (mod. TLμ-4xx) 20 kHz max. (mod. TLμ-5xx)
<b>Connection</b>	3 m shielded cable Ø 6.1 mm, M12 4-pole connector
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 1
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Minimum spot dimension</b>	1,5 x 5 mm (TLμ-x1x), 2 x 7 mm (TLμ-x6x), Ø 3 mm (TLμ-4xx/5xx)
<b>Depth of field</b>	± 3 mm (TLμ-x1x/4xx/5xx) / ± 4 mm (TLμ-x6x)
<b>Housing material</b>	ZAMA
<b>Lens material</b>	glass
<b>Operating temperature</b>	-10 ... 55 °C
<b>Storage temperature</b>	-20 ... 70 °C
<b>Weight</b>	450 g max. cable vers., 310 g max. connector vers.

# DIMENSIONS

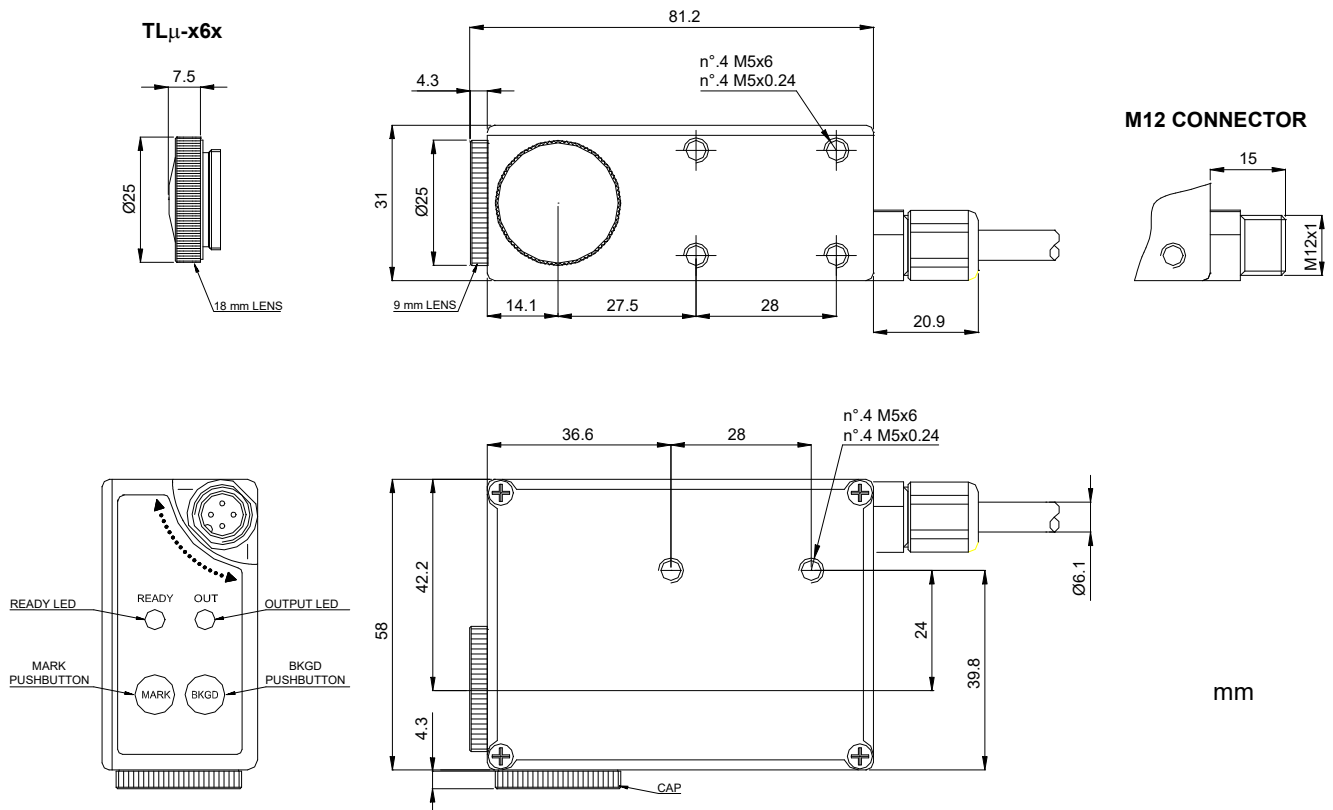


# INDICATORS AND SETTINGS

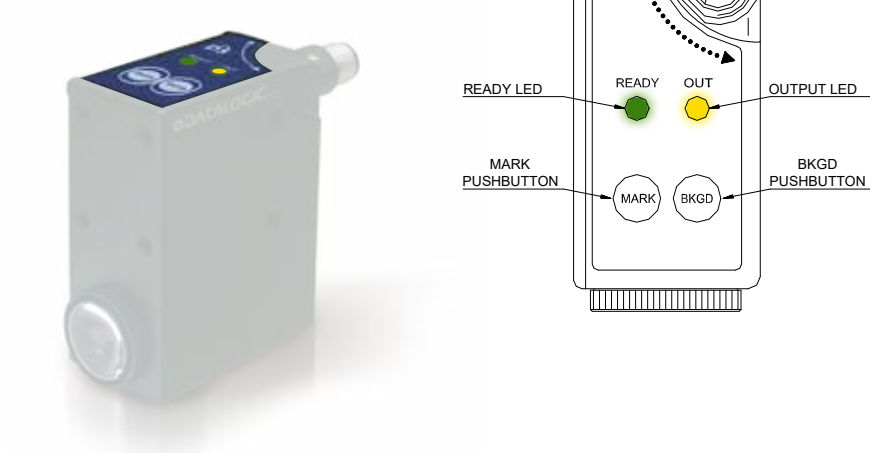

# CONNECTIONS


## CABLE

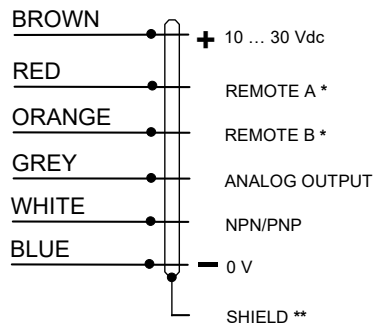








\* = Connect the unused REMOTE wires to 0 V.

\*\* = The cable shield is insulated from the sensor housing; it is recommended to connect the shield to 0 V.

## M12 CONNECTOR

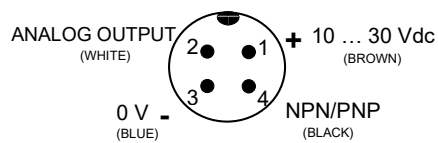

# DETECTION DIAGRAMS

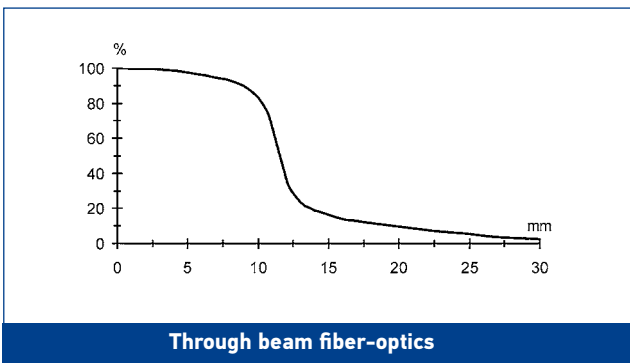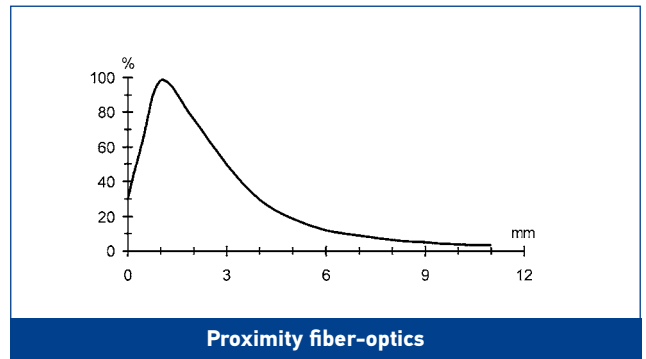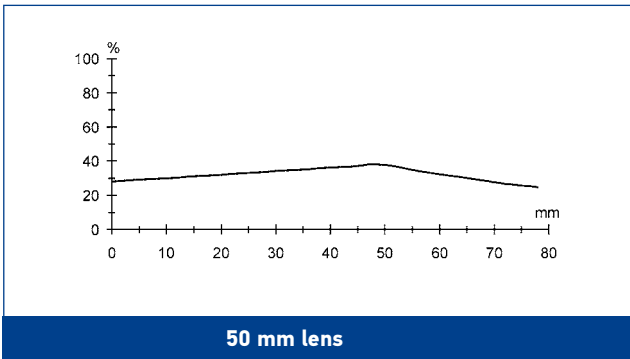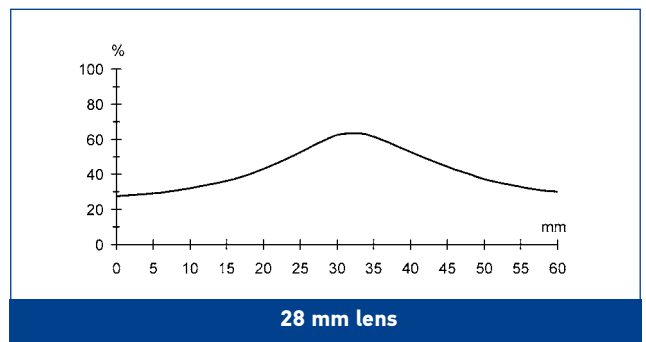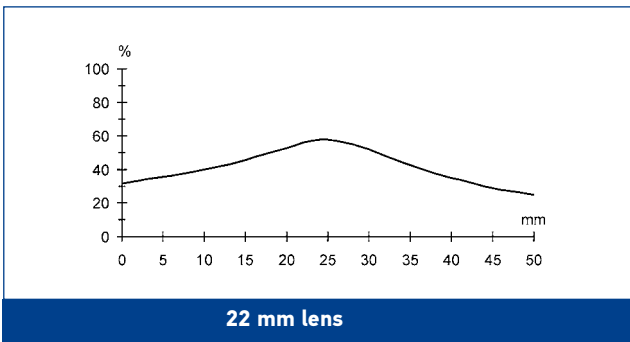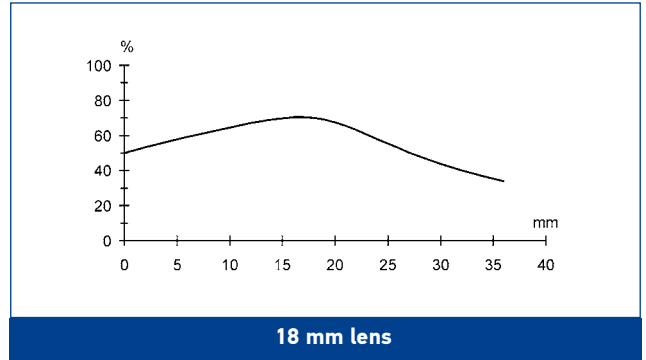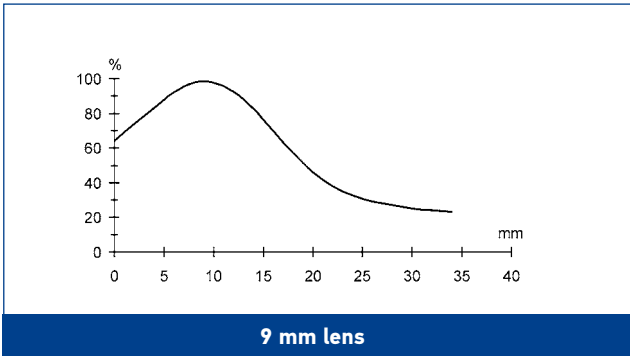


The detection diagrams indicate the typical operating distance.

# MODEL SELECTION AND ORDER INFORMATION


OPTIC FUNCTION	EMISSION	OPTICS	CONNECTION	OUTPUT	MODEL	ORDER No.
Contrast sensor	Red/Green (Vertical spot)	9 mm	3m Cable	NPN	TL $\mu$ -011	964401000
				PNP	TL $\mu$ -111	964401080
			M12 Connector	NPN	TL $\mu$ -015	964401020
				PNP	TL $\mu$ -115	964401100
			3m Cable	NPN	TL $\mu$ -011L	964401010
				PNP	TL $\mu$ -111L	964401090
	M12 Connector	NPN	TL $\mu$ -015L	964401030		
		PNP	TL $\mu$ -115L	964401110		
	Red/Green (Horizontal spot)	18 mm	M12 Connector	NPN	TL $\mu$ -065	964401060
				PNP	TL $\mu$ -165	964401140
	White (Circular spot)	9 mm	M12 Connector	NPN	TL $\mu$ -415C	954151330
				PNP	TL $\mu$ -515C	954151360
3m Cable			NPN	TL $\mu$ -411C	954151410	
			PNP	TL $\mu$ -511C	954151420	
M12 Connector			PNP	TL $\mu$ -545	954151380	
			NPN	TL $\mu$ -445	954151350	
Fiber optic contrast sensor	White	Fiber optics	M12 Connector			

## ACCESSORIES


HI-RES LENS




18 mm LENS

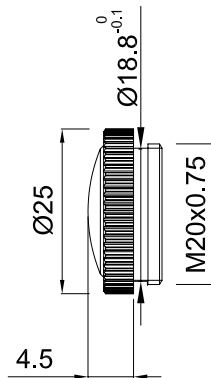


22 mm LENS



28 mm LENS

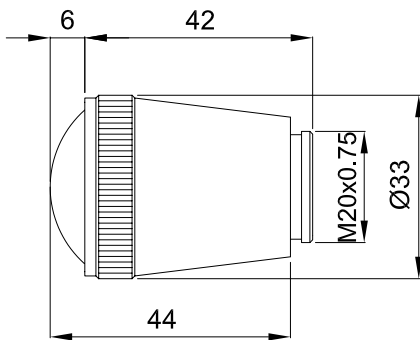

40 mm LENS

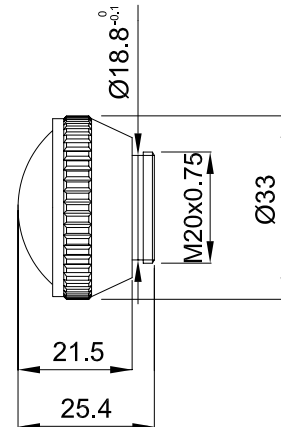

MODEL	DESCRIPTION	ORDER No.
Lens Hi-Res	additional focussing glass lens with 9 mm focus (*)	95ACC1050
Lens No.18	glass lens with 18 mm focus	95ACC2680
Lens No.22	glass lens with 22 mm focus	95ACC1100
Lens No.28	glass lens with 28 mm focus	890000194
Lens No.40	glass lens with 40 mm focus	95ACC2740
Lens No.50	glass lens with 50 mm focus	S73030511
OF -30-5	plastic fiber-optic L 50 cm - point-shaped spot proximity	96B001070
OF -31-10	glass fiber-optic L 100 cm - point-shaped spot proximity	96B201000
OF -32-10	glass fiber-optic L 100 cm - rectangular spot proximity	96B211000
OF -33-10	glass fiber-optic L 100 cm - through beam	96B221000
OF -34-10	glass fiber-optic L 100 cm - horizontal spot 90° proximity	96B231000
OF -35-10	glass fiber-optic L 100 cm - vertical spot 90° proximity	96B24100

\* focussing lens to screw between the sensor and the normal 9 mm lens

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
		5 m	CS-A1-02-G-05	95A251270
		7 m	CS-A1-02-G-07	95A251280
		10 m	CS-A1-02-G-10	95A251390
	4-pole, P.U.R.	2 m	CS-A1-02-R-02	95A251540
		5 m	CS-A1-02-R-05	95A251560
Radial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A2-02-G-03	95A251360
		5 m	CS-A2-02-G-05	95A251240
		7 m	CS-A2-02-G-07	95A251245
		10 m	CS-A2-02-G-10	95A251260
	4-pole, P.U.R.	2 m	CS-A2-02-R-02	95A251550
		5 m	CS-A2-02-R-05	95A251570
Axial M12 Connector	4-pole, shielded, black, P.V.C.	3 m	CV-A1-22-B-03	95ACC1480
		5 m	CV-A1-22-B-05	95ACC1490
		10 m	CV-A1-22-B-10	95ACC1500
		15 m	CV-A1-22-B-15	95ACC2070
25 m		CV-A1-22-B-25	95ACC2090	
Radial M12 Connector		3 m	CV-A2-22-B-03	95ACC1540
		5 m	CV-A2-22-B-05	95ACC1550
		10 m	CV-A2-22-B-10	95ACC1560
Axial M12 Connector	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
		10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
Radial M12 Connector	4-pole, black	Connector- not cabled	CS-A1-02-B-NC	G5085002
		Connector- not cabled	CS-A2-02-B-NC	G5085003

Rev. 03, 04/2019

# TL46



## HIGH PERFORMANCE CONTRAST SENSOR FOR COLORED REGISTRATION MARK DETECTION

- Fastest and accurate low jitter model (TL46-WJ)
- Color mode enhanced model (TL46-WE)
- Wide-spectrum RGB or white LED emission
- 5 different models: basic, standard, enhanced, low jitter, color mode
- Automatic, manual and dynamic settings
- 10, 15, 20, 30 or 50 kHz switching frequencies
- Very low jitter down to 7µs (TL46-WJ...)
- NPN/PNP and analog outputs
- Standard mounting, M12 connector rotatable to 5 positions

### APPLICATIONS

- Packaging and labeling machinery
- Beverage/Food/Cosmetic/Pharmaceutical industries
- Printing machinery
- Flexographic printing machinery




TL46		9 ±3 mm
<b>Contrast sensor</b>		18 mm (Lens No.18 glass)
		22 mm (Lens No.22 glass)
		28 mm (Lens No.28 glass)
		40 mm (Lens No.40 glass)
<b>Switching frequency</b>		10 kHz (mod. TL46-WE color mode)
		15 kHz (mod. TL46-W)
		20 kHz (mod. TL46-A/WL)
		30 kHz (mod. TL46-WLF/WE contrast mode)
		50 kHz (mod. TL46-WJ)
<b>Jitter</b>		< 7µs (mod. TL46-WJ)
		16µs (mod. TL46-WLF/WE contrast mode)
		>25µs (mod. TL46-W/WL)
<b>Light emission</b>		RGB LED
		white LED
		Red LED
<b>Setting</b>		push buttons
		trimmer
<b>Power supply</b>	Vdc	10...30 V
	Vac	
	Vac/dc	
<b>Output</b>	NPN	•
	NPN	•
	NPN/PNP	•
	relay	
	other	0...5 V Analog Output
	cable	
<b>Connection</b>	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>		31x81x58
<b>Housing material</b>		Aluminium
<b>Mechanical protection</b>		IP67




# TECHNICAL DATA

<b>Power supply</b>	10 ... 30 Vdc (limit values)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	40 mA max. at 24 Vdc (mod. TL46-A) 50 mA max. at 24 Vdc (mod. TL46-W/WJ) 85 mA max. at 24 Vdc 24 Vdc with bargraph ON in threshold adjustment mode, 55 mA max at 24 Vdc with bargraph OFF in normal functioning mode (mod. TL46-WL) 35 mA max. at 24 Vdc (mod. TL46-WLF/WE)
<b>Light emission</b>	white LED 400-700 nm (mod. TL46-A-4xx) red LED 630 nm (mod. TL46-A-6xx) blu LED 465nm/green LED 520 nm/red LED 630 nm (mod. TL46-W/WL/WLF/WE/WJ)
<b>Detection Distance</b>	9 ±3 mm 18 mm (Lens No.18 glass) 22 mm (Lens No.22 glass) 28 mm (Lens No.28 glass) 40 mm (Lens No.40 glass)
<b>Minimum spot dimension</b>	1,5 x 5 mm 0,8x4mm (TL46-WJ)
<b>Depth of field</b>	± 3 mm
<b>Response time</b>	100 µs (mod. TL46-WE color mode) 33 µs (mod. TL46-W) 25 µs (mod. TL46-A/WL) 16 µs (mod. TL46-WLF/WE contrast mode) 10 µs (mod. TL46-WJ)
<b>Switching frequency</b>	10 kHz (mod. TL46-WE color mode) 15 kHz (mod. TL46-W) 20 kHz (mod. TL46-A/WL) 30 kHz (mod. TL46-WLF/WE contrast mode) 50 kHz (mod. TL46-WJ)
<b>Jitter</b>	< 7µs (TL46-WJ) 16µs (TL46-WLF/WE contrast mode) >25µs (TL46-W/WL)
<b>Setting</b>	SET push-buttons (mod. TL46-W/WL/WLF/WE) sensitivity trimmer (mod. TL46-A)
<b>Operating mode</b>	DARK/LIGHT selection by switch (mod. TL46-A) automatic DARK/LIGHT selection (mod. TL46-W/WL/WJ) automatic DARK/LIGHT selection in the target/background detection, selectable via wire in the dynamic detection (mod. TL46-WLF/WE)
<b>Indicators</b>	yellow OUTPUT LED green READY LED, orange DELAY LED and KEYLOCK (Mod TL46-W/WJ) green READY LED, 4-digit display/DELAY LED/KEYLOCK LED (mod. TL46-WLF/WE) orange ARROWS (mod. TL46-A), DELAY LED and KEYLOCK LED 5-segment bargraph (mod. TL46-WL)
<b>Dark/light selection</b>	Switch Automatic Automatic/manual; remote/dynamic
<b>Delay</b>	0...20ms selectable via delay input 0...100ms programmed
<b>Auxiliary function</b>	Keylock (not available on TL46-WE) Fine Hysteresis regulation (TL46-WL/WLF/WE)
<b>Output</b>	PNP (mod. TL46-WJ); PNP or NPN; PNP/NPN (mod. TL46-W/WL/WLF/WE by part number); analog output (mod. TL46-A/W/WL)
<b>Output current</b>	100mA
<b>Saturaton Voltage</b>	=<2V
<b>Analogue Out</b>	0,5...5,5V ±10%; 2V on white target 90% 1...3V ±10%(white 90%) ; 5,5V max
<b>Analogue out impedance</b>	2,2 kΩ (short circuit protection)
<b>Connection</b>	M12 5-pole connector
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2, double insulation
<b>Protection device</b>	Reverse polarity protection, overload and short circuit protection
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	aluminium
<b>Lens material</b>	mirror (mod. TL46-A), glass (mod. TL46-W/WL/WLF/WJ/WE)
<b>Operating temperature</b>	-10 ... 55 °C
<b>Storage temperature</b>	'-20 ... 70 °C
<b>Weight</b>	170 g max.


# DIMENSIONS

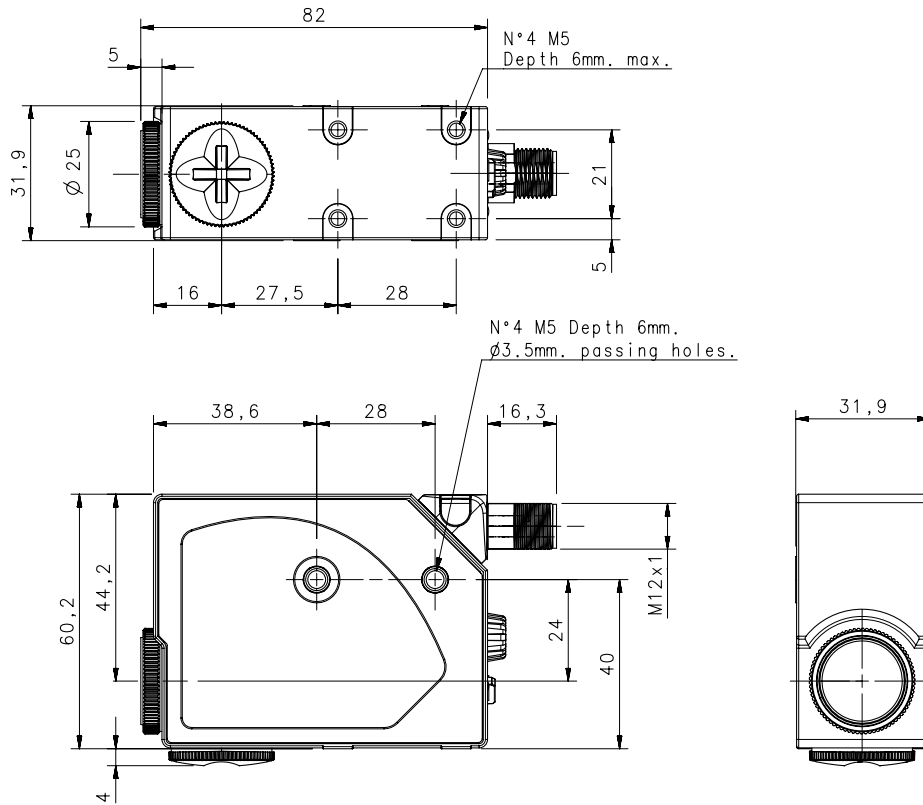


TL46-A

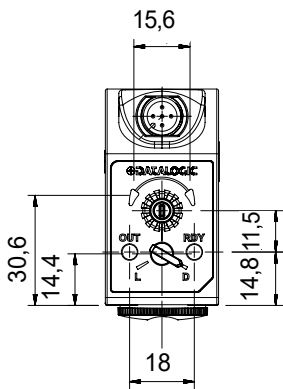


TL46-W/TL46-WJ

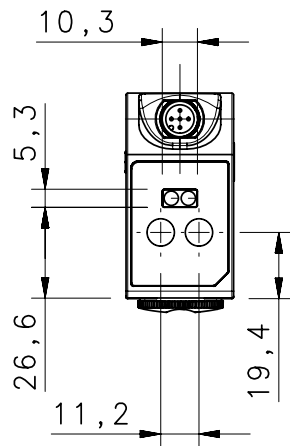

TL46-WL

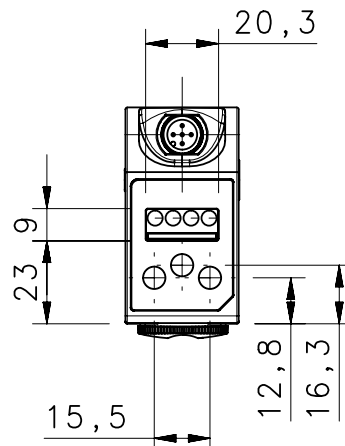


TL46-WLF/WE

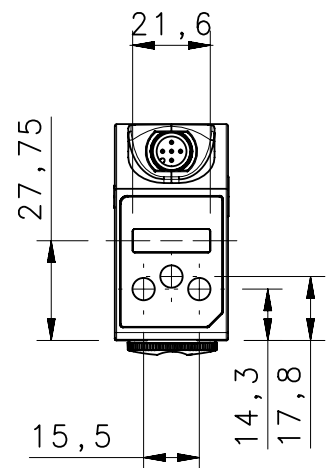

# INDICATORS AND SETTINGS




**TL46-A  
TRIMMER**



**TL46-W  
BASE**

**TL46-WJ  
LOW JITTER**



**TL46-WL  
STANDARD**






**TL46-WLF  
ENHANCED**






**TL46-WE  
COLOR  
ENHANCED**

- A** yellow OUTPUT LED
- B** green READY LED
- C** orange DELAY LED
- E** orange KEYLOCK LED
- D** Bargraph
- F** +/- push-buttons
- G** SET push-button
- H** Display
- I** MARK push-button
- L** BKGD push-button
- M** Light/Dark Switch
- N** Orange Indicators Arrows
- O** Sensitivity Adjustment Knob

# CONNECTIONS

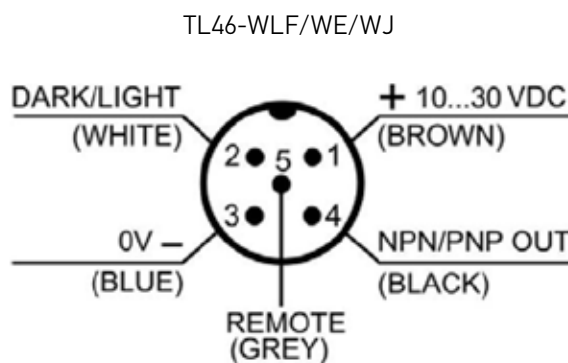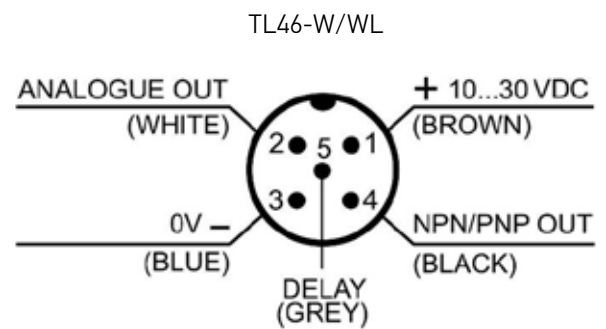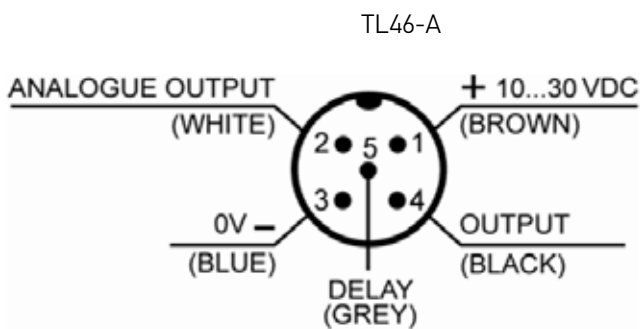

# READING DIAGRAMS

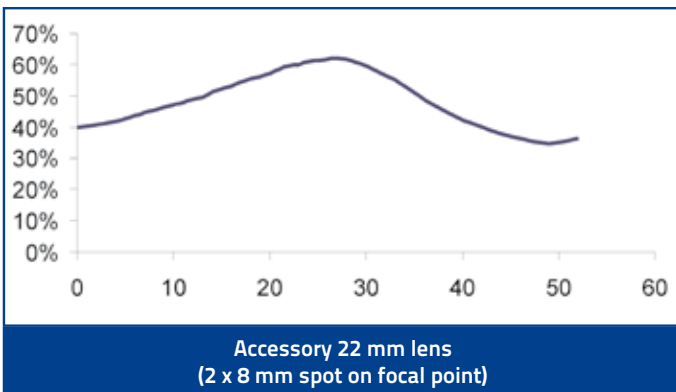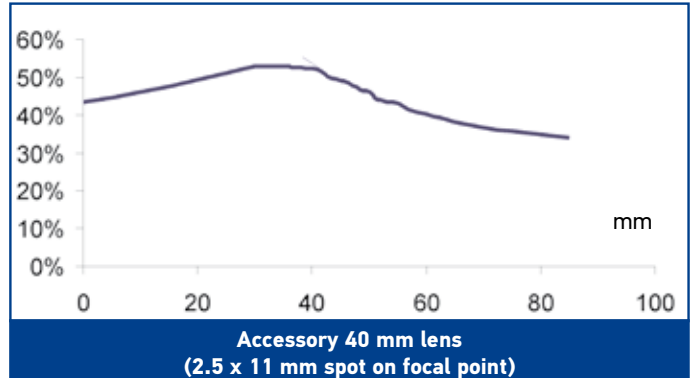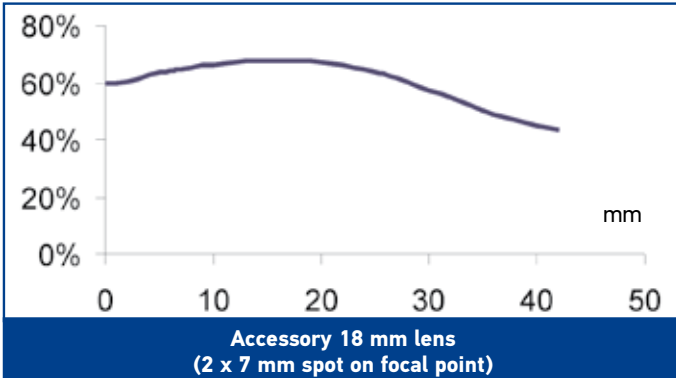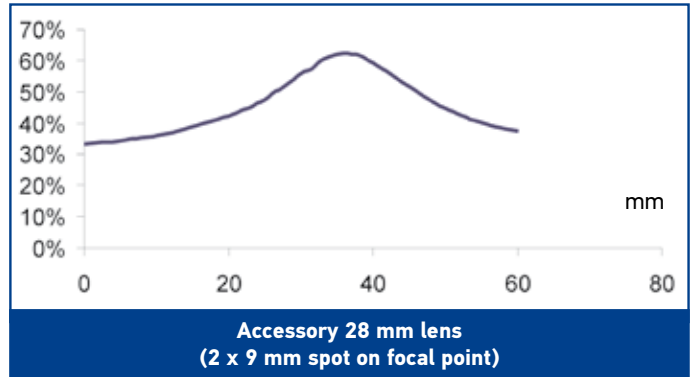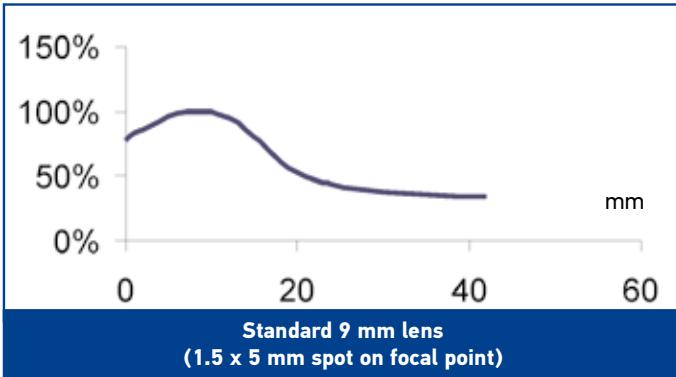

VERTICAL SPOT

HORIZONTAL SPOT




Horizontal spot is present in the TL46 models with final '-L' suffix

# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	SETTING & INDICATORS	OUTPUT	EMISSION	MODEL	ORDER No.
Contrast sensor	Trimmer 2 LEDs	PNP	WHITE vertical spot	TL46-A-415	954601070
		NPN	WHITE vertical spot	TL46-A-425	954601080
		PNP	RED vertical spot	TL46-A-615	954601090
		NPN	RED vertical spot	TL46-A-625	954601100
	Push-buttons 2 LEDs	PNP/NPN	R.G.B. vertical spot	TL46-W-815	954601000
			R.G.B. horizontal spot	TL46-W-815L	954601010
	Push buttons 4 LEDs bargraph	PNP/NPN	R.G.B. vertical spot	TL46-WL-815	954601020
			R.G.B. horizontal spot	TL46-WL-815L	954601030
			R.G.B. vertical spot	TL46-WLF-815	954601040
			R.G.B. horizontal spot	TL46-WLF-815L	954601050
Contrast low jitter sensor	Push buttons 4 LEDs display	PNP	R.G.B. vertical spot	TL46-WJ-815	954601110
		NPN	R.G.B. horizontal spot	TL46-WJ-815L	954601120
Color contrast sensor		PNP	R.G.B. vertical spot	TL46-WE-815	954601130
		NPN	R.G.B. vertical spot	TL46-WE-825	954601140

# ACCESSORIES

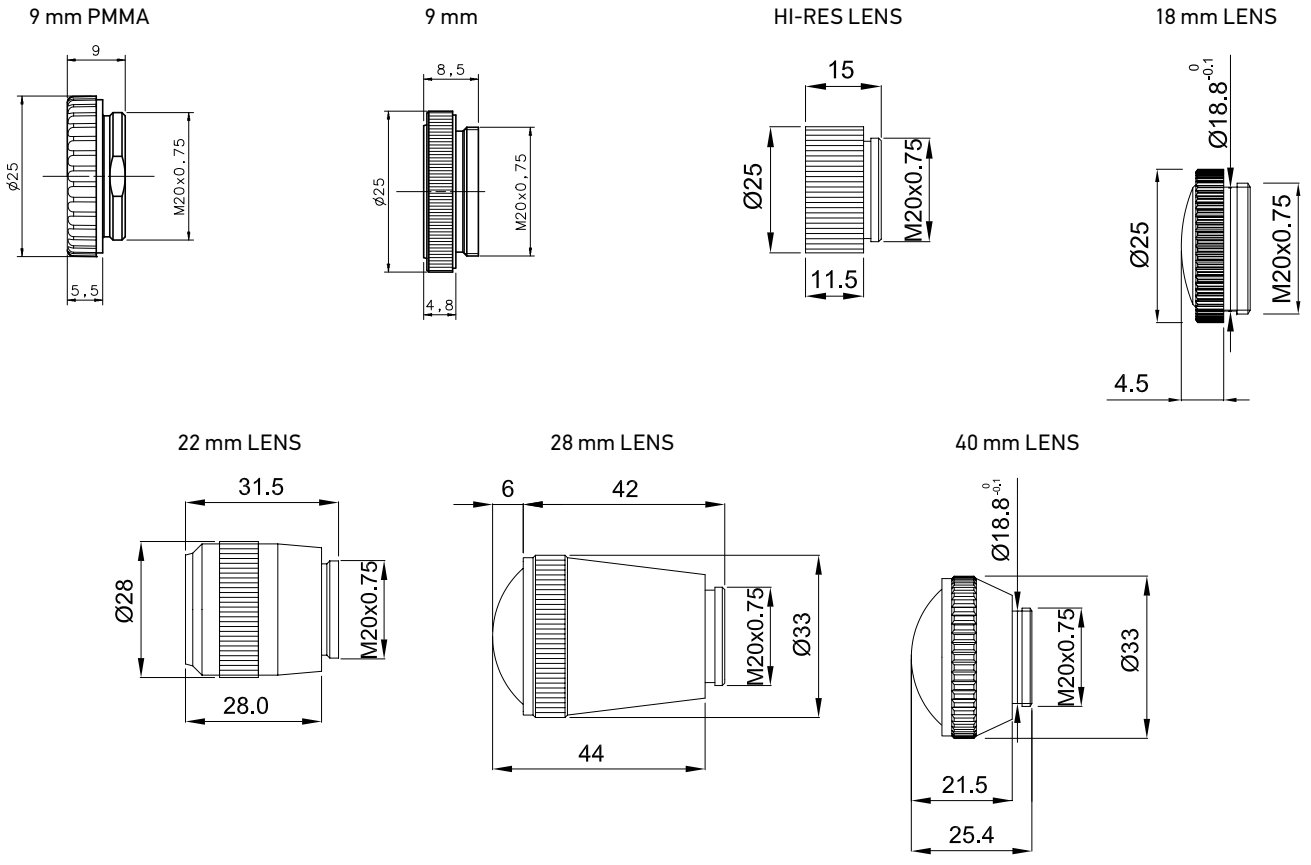

MODEL	DESCRIPTION	ORDER No.
Lens No.9	glass lens with 9 mm focus	95ACC2670
Lens No.9 PMMA	plastic lens with 9 mm focus	95ACC2540
Lens Hi-Res	additional focussing glass lens with 9 mm focus (*)	95ACC1050
Lens No.18	glass lens with 18 mm focus	95ACC2680
Lens No.22	glass lens with 22 mm focus	95ACC1100
Lens No.28	glass lens with 28 mm focus	890000194
Lens No.40	glass lens with 40 mm focus	95ACC2740

\* focussing lens to screw between the sensor and the normal 9 mm lens

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	5-pole, grey, PVC.	3 m	CS-A1-03-G-03	95ACC2110
		5 m	CS-A1-03-G-05	95ACC2120
		10 m	CS-A1-03-G-10	95ACC2140
	5-pole, U.L., black, PVC	3 m	CS-A1-03-U-03	95ASE1170
		5 m	CS-A1-03-U-05	95ASE1180
		10 m	CS-A1-03-U-10	95ASE1190
		15 m	CS-A1-03-U-15	95ASE1200
		25 m	CS-A1-03-U-25	95ASE1210
		50 m	CS-A1-03-U-50	95A252700

## LD46



### LUMINESCENCE SENSOR LINE IN STANDARD METAL HOUSING

- UV high power LED emission
- High sensitivity on fluorescent marks
- 10 - 50 mm detection distance
- 2 kHz switching frequency
- NPN/PNP and 0-5 V analog outputs

#### APPLICATIONS

- Packaging and labeling machinery
- Food, Cosmetic and Pharmaceutical
- Ceramic tiles selection and sorting




—  
(\*) ATEX II 3DG

LD46	
<b>Luminescence sensor</b>	10...20 mm (LD46-UL-715) 20...40 mm (LD46-UL-755) 30...50 mm (LD46-UL-735)
<b>Spot dimension</b>	2x8 mm at 10 mm 3x11 mm at 24 mm 4x15 mm at 50 mm
<b>Switching frequency</b>	2 kHz
<b>Response Time</b>	250 µs
<b>Light emission</b>	UV-HP LED
<b>Setting</b>	push buttons
<b>Power supply</b>	Vdc Vac Vac/dc 15...30 V
<b>Output</b>	PNP NPN NPN/PNP relay other 0...5 V Analog output
<b>Connection</b>	cable connector pig-tail
<b>Approximate dimensions (mm)</b>	31x81x58
<b>Housing material</b>	aluminium
<b>Mechanical protection</b>	IP67


# TECHNICAL DATA

<b>Power supply</b>	15 ... 30 Vdc (limit values)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	50 mA max. at 24 Vdc
<b>Light emission</b>	UV LED 375 nm
<b>Setting</b>	SET push-buttons
<b>Indicators</b>	yellow OUTPUT LED green READY LED orange DELAY LED and KEYLOCK LED 5-segment bargraph
<b>Output</b>	PNP/NPN; analog output
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	2 V max.
<b>Response time</b>	250 µs
<b>Switching frequency</b>	2 kHz
<b>Connection</b>	M12 5-pole connector
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2, double insulation
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Minimum spot dimension</b>	2 x 8 mm at 10 mm (mod. LD46-UL-715) 3x11 mm at 24 mm (mod. LD46-UL-755) 4x15 mm at 50 mm (mod. LD46-UL-735)
<b>Housing material</b>	aluminium
<b>Lens material</b>	glass
<b>Operating temperature</b>	-10 ... 55 °C
<b>Storage temperature</b>	-20 ... 70 °C
<b>Weight</b>	180 g max.

# DIMENSIONS

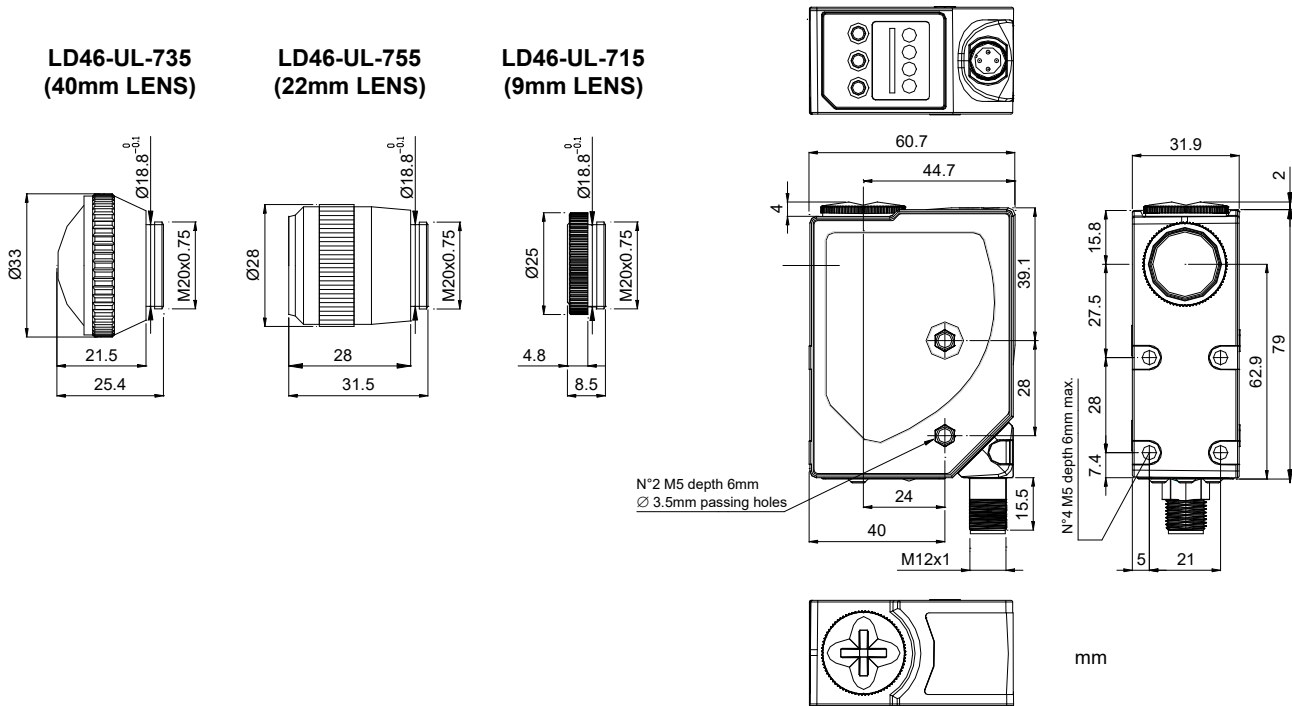


# INDICATORS AND SETTINGS

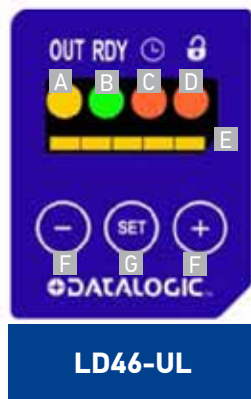


- A** yellow OUTPUT LED
- B** green READY LED
- C** orange DELAY LED
- D** orange KEYLOCK LED
- E** Bargraph
- F** +/- push-buttons
- G** SET push-button

# CONNECTIONS


## M12 CONNECTOR




# DETECTION DIAGRAMS

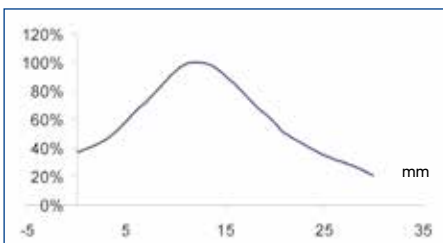

**Standard 9 mm lens**  
(2 x 8 mm spot at 10 mm)

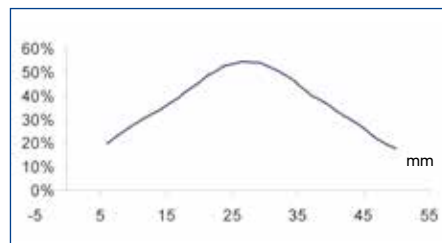

**Standard 22 mm lens**  
(3 x 11 mm spot at 24 mm)

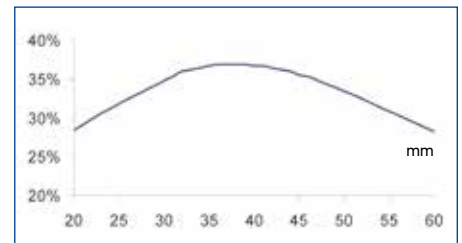

**Standard 40 mm lens**  
(4 x 15 mm spot at 50 mm)




# MODEL SELECTION AND ORDER INFORMATION


OPTIC FUNCTION	EMISSION	CONNECTION	OUTPUT	MODEL	ORDER No.
Luminescence sensor	10-20 mm Vertical spot	M12 Connector	NPN/PNP	LD46-UL-715	955201000
	20-40 mm Vertical spot			LD46-UL-755	955201010
	30-50 mm Vertical spot			LD46-UL-735	955201020

## ACCESSORIES


40 mm LENS  
(LD46-UL-735)



22 mm LENS  
(LD46-UL-755)



9 mm LENS  
(LD46-UL-715)



MODEL	DESCRIPTION	ORDER No.
Lens No.9	glass lens with 9 mm focus	95ACC2670
Lens No.22	glass lens with 22 mm focus	95ACC1100
Lens No.40	glass lens with 40 mm focus	95ACC2740

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	5-pole, grey, P.V.C.	3 m	CS-A1-03-G-03	95ACC2110
		5 m	CS-A1-03-G-05	95ACC2120
		10 m	CS-A1-03-G-10	95ACC2140
	5-pole, U.L., black, P.V.C	3 m	CS-A1-03-U-03	95ASE1170
		5 m	CS-A1-03-U-05	95ASE1180
		10 m	CS-A1-03-U-10	95ASE1190
		15 m	CS-A1-03-U-15	95ASE1200
		25 m	CS-A1-03-U-25	95ASE1210
		50 m	CS-A1-03-U-50	95A252700

Rev. 03, 04/2019

# S65



## ADVANCED COLOR AND CONTRAST SENSORS IN COMPACT CASE

### Color S65-V:

- 3 independent NPN or PNP outputs and RS 485 serial interface
- 3 channel color sensor with 10 tolerance levels
- Wide spectrum white light LED emission and RGB photo-receiver
- 2 push button setting with 4 digit display indicator

### Contrast S65-W:

- High 12 bit resolution and 30 kHz switching frequency
- PNP or NPN output and RS 485 serial interface

### APPLICATIONS

- Packaging lines
- Contrast reading
- Automatic machine




S65		
<b>Contrast sensor</b>	12...20 mm (S65-W)	
<b>Color sensor</b>	5...45 mm (S65-V)	
<b>Switching frequency</b>	30 kHz (S65-W)	
	500 Hz (S65-V19 vers.)	
	1,5 kHz (S65-V09 vers.)	
<b>Light emission</b>	white LED	
<b>Serial interface</b>	RS485	
<b>Setting</b>	push-buttons	
<b>Power supply</b>	Vdc	10...30 V
	Vac	
	Vac/dc	
<b>Output</b>	PNP	•
	NPN	•
	NPN/PNP	
	relay	
	other	0...5 V Analog output (S65-W)
<b>Connection</b>	cable	
	connector	•
	pig-tail	
<b>Approximate dimensions (mm)</b>	50x50x25	
<b>Housing material</b>	ABS	
<b>Mechanical protection</b>	IP67	

# TECHNICAL DATA


<b>Power supply</b>	10 ... 30 Vdc (limit values)
<b>Ripple</b>	2 Vpp max.
<b>Consumption (output current excluded)</b>	50 mA max. at 24 Vdc (mod. S65-W) 60 mA max. at 24 Vdc (mod. S65-V)
<b>Light emission</b>	white LED 400-700 nm
<b>Setting</b>	SET push-buttons SEL push-buttons (mod. S65-V)
<b>Indicators</b>	yellow OUTPUT LED green 4-digit display, 3 OUTPUT STATUS LEDs (S65-V), STABILITY and 2 OUTPUT DELAY LEDs (mod. S65-W)
<b>Output</b>	1 PNP or NPN; analog output (mod. S65-W) 3 PNP or NPN; RS485 serial interface (mod. S65-V)
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	2 V max.
<b>Response time</b>	5 ms (norm) and 1 ms (fast) (mod. S65-V19) 335 $\mu$ s (mod. S65-V09) 16 $\mu$ s (mod. S65-W)
<b>Switching frequency</b>	100 Hz (norm) and 500 Hz (fast) (mod. S65-V19) 1,5 kHz (mod. S65-V09) 30 kHz (mod. S65-W)
<b>Connection</b>	M12 5-pole connector (mod. S65-W standard vers.), M12 8-pole connector (mod. S65-W vers. with RS485 serial interface) M12 8-pole connector (mod. S65-V)
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 M $\Omega$ , 500 Vdc between electronics and housing
<b>Electrical protection</b>	class 2
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Minimum spot dimension</b>	3x1 mm at 19 mm (mod. S65-W) $\varnothing$ 4 mm (mod. S65-V)
<b>Depth of field</b>	$\pm$ 2 mm (mod. S65-W)
<b>Housing material</b>	ABS
<b>Lens material</b>	window and lenses in glass
<b>Operating temperature</b>	-10 ... 55 $^{\circ}$ C
<b>Storage temperature</b>	-20 ... 70 $^{\circ}$ C
<b>Weight</b>	100 g max.

# DIMENSIONS

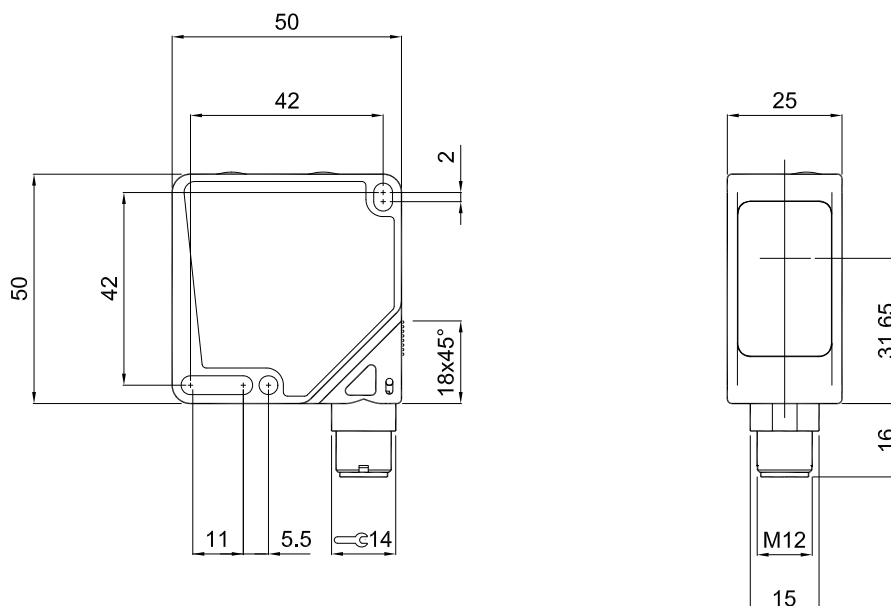


# S65-W

## INDICATORS AND SETTINGS S65-W

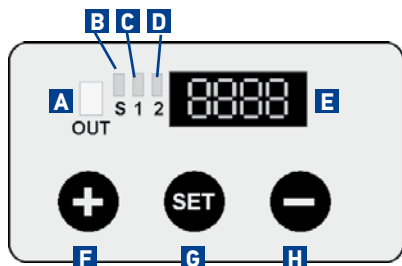


- A Output status LED
- B Stability LED
- C Delay ON LED
- D Delay OFF LED
- E 4-digit display
- F +/- push-buttons
- G SET push-button
- H M12 connector output, orientable on two positions

## DETECTION DIAGRAMS S65-W

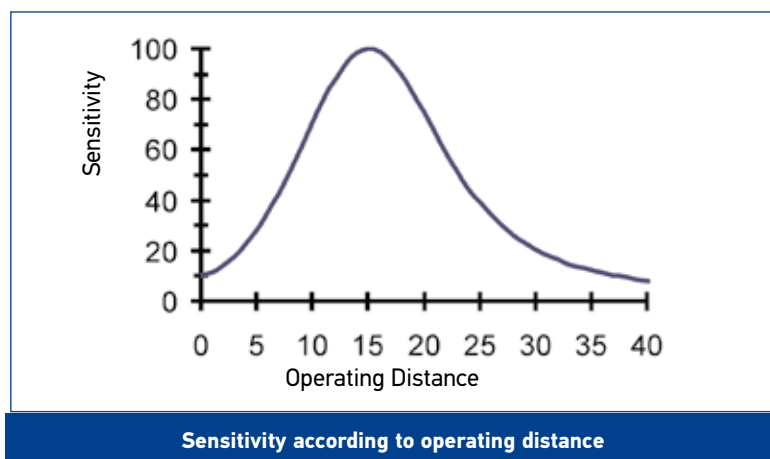



# S65-V

## INDICATORS AND SETTINGS S65-W

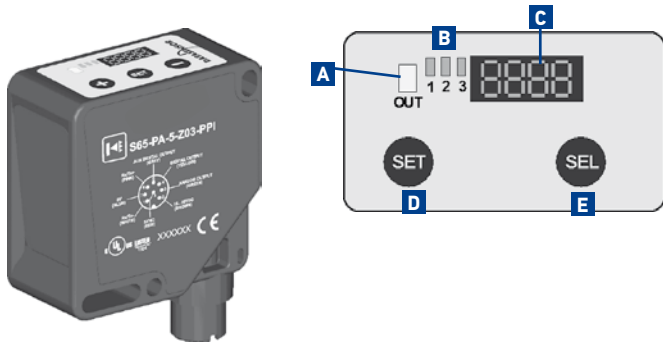



- A** Output 'OR' function LED
- B** Output status LEDs
- C** 4 digit display
- D** SET push-button
- E** SEL push-button
- F** +/- selection push-buttons
- G** M12 connector output, orientable on two positions

## DETECTION DIAGRAMS S65-W

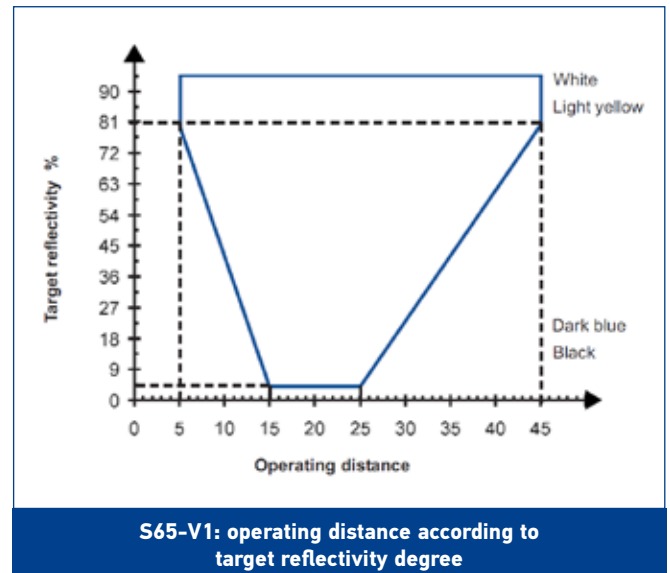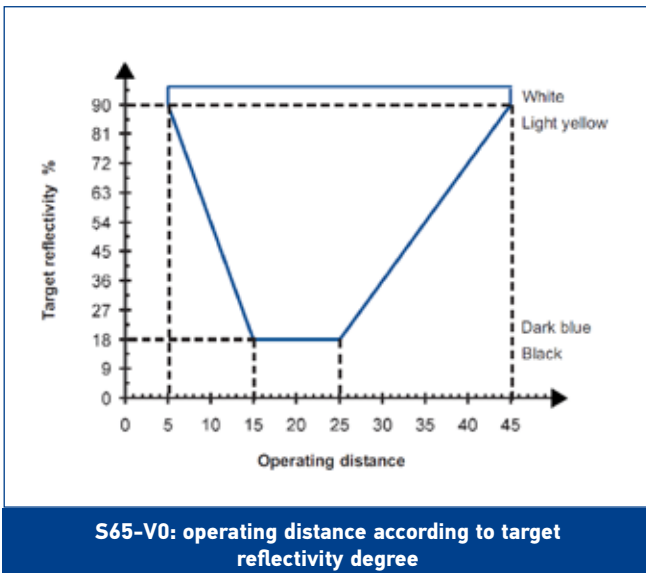

Color sensor S65-V

Contrast sensor S65-W


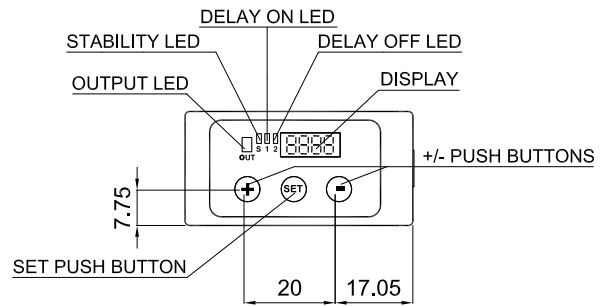
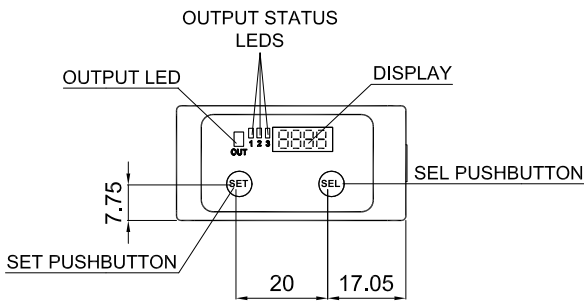


mm

## CONNECTIONS

M12 CONNECTOR - COLOR SENSOR S65-V

M12 CONNECTOR - CONTRAST SENSOR S65-W

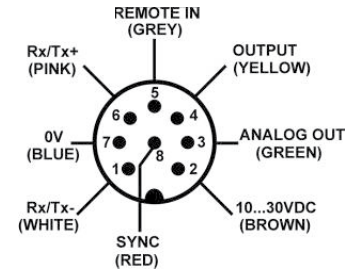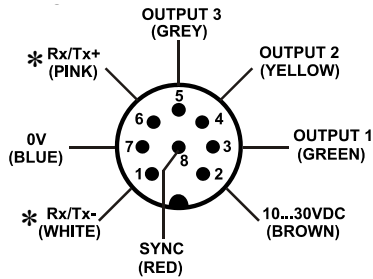


\* Available only for version with RS485 serial connection (S65-PA-5-V09-xxxZ).

## MODEL SELECTION AND ORDER INFORMATION


OPTIC FUNCTION	HOUSING	CONNECTION	OUTPUT	MODEL	ORDER No.
Color sensor	335 $\mu$ s	M12 8-pole Connector	PNP, RS485	S65-PA-5-V09-PPPZ	956251000
			NPN, RS485	S65-PA-5-V09-NNNZ	956251010
			PNP	S65-PA-5-V09-PPP	956251020
			NPN	S65-PA-5-V09-NNN	956251030
	5 ms (norm) or 1 ms (fast)		PNP, RS485	S65-PA-5-V19-PPPZ	956251080
			NPN, RS485	S65-PA-5-V19-NNNZ	956251090
			PNP	S65-PA-5-V19-PPP	956251100
			NPN	S65-PA-5-V19-NNN	956251110
Contrast sensor	16 $\mu$ s	M12 5-pole Connector	NPN	S65-PA-5-W09-NH	954201000
		M12 8-pole Connector	NPN, RS485	S65-PA-5-W09-NHZ	954201010
		M12 5-pole Connector	PNP	S65-PA-5-W09-PH	954201020
		M12 8-pole Connector	PNP, RS485	S65-PA-5-W09-PHZ	954201030

# ACCESSORIES

ST-5020

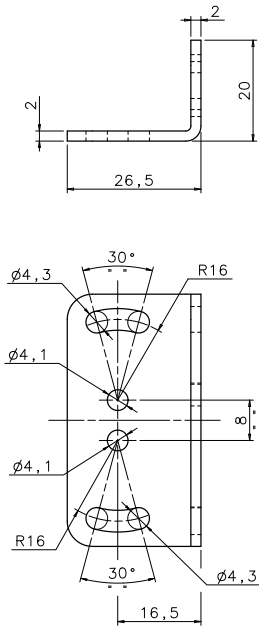

ST-5021

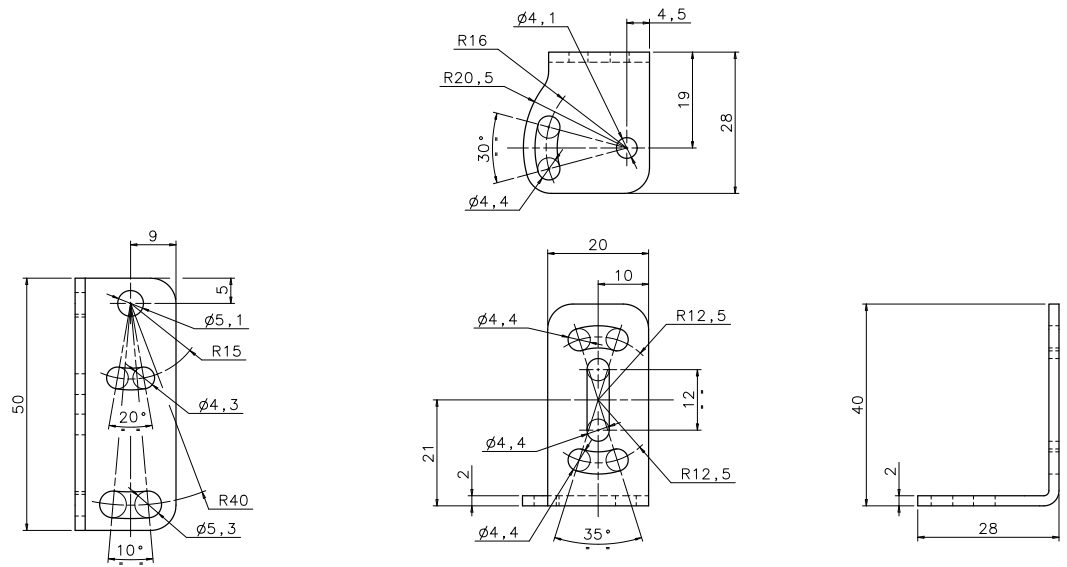

MODEL	DESCRIPTION	ORDER No.
ST-5020	mounting bracket 50 x 27 x 20 mm	95ACC5330
ST-5021	mounting bracket 20 x 40 x 28 mm	95ACC5340

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.	
Axial M12 connector	5-pole, grey, P.V.C.	3 m	CS-A1-03-G-03	95ACC2110	
		5 m	CS-A1-03-G-05	95ACC2120	
		10 m	CS-A1-03-G-10	95ACC2140	
	5-pole, U.L., black, P.V.C	3 m	CS-A1-03-U-03	95ASE1170	
		5 m	CS-A1-03-U-05	95ASE1180	
		10 m	CS-A1-03-U-10	95ASE1190	
		15 m	CS-A1-03-U-15	95ASE1200	
		25 m	CS-A1-03-U-25	95ASE1210	
		50 m	CS-A1-03-U-50	95A252700	
		8-pole, black, P.V.C.	3 m	CS-A1-06-B-03	95ACC2260
5 m	CS-A1-06-B-05		95ACC2270		
10 m	CS-A1-06-B-10		95ACC2280		
Radial M12 Connector	8-pole, shielded, black, P.V.C.	3 m	CV-A2-26-B-03	95ACC1600	
		5 m	CV-A2-26-B-05	95ACC1610	
		10 m	CV-A2-26-B-10	95ACC1620	
Axial M12 Connector	8-pole, shielded, black, P.V.C.	3 m	CV-A1-26-B-03	95ACC1510	
		5 m	CV-A1-26-B-05	95ACC1520	
		10 m	CV-A1-26-B-10	95ACC1530	
		15 m	CV-A1-26-B-15	95ACC2080	
		25 m	CV-A1-26-B-25	95ACC2100	
		8-pole, U.L., black, P.V.C.	3 m	CS-A1-06-U-03	95ASE1220
			5 m	CS-A1-06-U-05	95ASE1230
	10 m		CS-A1-06-U-10	95ASE1240	
	15 m		CS-A1-06-U-15	95ASE1250	
	25 m		CS-A1-06-U-25	95ASE1260	
	50 m		CS-A1-06-U-50	95A252710	
	8-pole, black	Connector-not cabled	CS-A1-06-B-NC	95ACC2550	

# AS1



## AREASCAN™ HIGH-RESOLUTION DETECTION PHOTOELECTRIC LIGHT GRIDS

- Crossed beam area sensors
- 100mm controlled height
- Adjustment trimmer
- Optical or wire synchronism
- Scan Mode input

### APPLICATIONS

- Processing lines
- Food, Cosmetic and Pharmaceutical
- Electronics and mechanical assembling
- Conveyor lines and sorting systems




AS1	
<b>Area sensing</b>	100 mm
<b>Operating Distance</b>	0,3...2,1 m (AS1-LD) 0,8...3 m (AS1-HD)
<b>Resolution</b>	Flat: 0,2x75mm Cylindrical: Ø 6mm (AS1-HR) Flat: 0,2x200mm Cylindrical: Ø18mm (AS1-SR)
<b>Response Time</b>	1,75 ms (AS1-SR) 2,75...8 ms (AS1-HR)
<b>Light emission</b>	IR LED
<b>Power supply</b>	Vdc 24 V Vac Vac/dc
<b>Output</b>	PNP • NPN NPN/PNP relay other
<b>Connection</b>	cable connector • pig-tail
<b>Approximate dimensions (mm)</b>	22x43x150
<b>Housing material</b>	aluminium
<b>Mechanical protection</b>	IP65



# TECHNICAL DATA


<b>Power supply</b>	24 Vdc $\pm$ 15%
<b>Consumption on emitter unit (TX)</b>	150 mA max.
<b>Consumption on receiver unit (RX)</b>	40 mA max. load excluded
<b>Light emission</b>	IR LED 880 nm
<b>Setting</b>	adjustment trimmer (mod. AS1...P)
<b>Indicators</b>	yellow OUTPUT LED green POWER ON LED
<b>Output</b>	PNP
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	1,5 V max.
<b>Response time</b>	2,75 - 8 ms (mod. AS1-HR) 1,75 ms (mod. AS1-SR)
<b>Connection</b>	M12 4-pole connector (TX), M12 5-pole connector (RX)
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 M $\Omega$ , 500 Vdc between electronics and housing
<b>Mechanical protection</b>	IP65 (EN 60529)
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	black electro-painted aluminium
<b>Lens material</b>	PMMA
<b>Operating temperature</b>	0 ... 50 °C
<b>Storage temperature</b>	-25 ... 70 °C
<b>Weight</b>	300 g

# DIMENSIONS

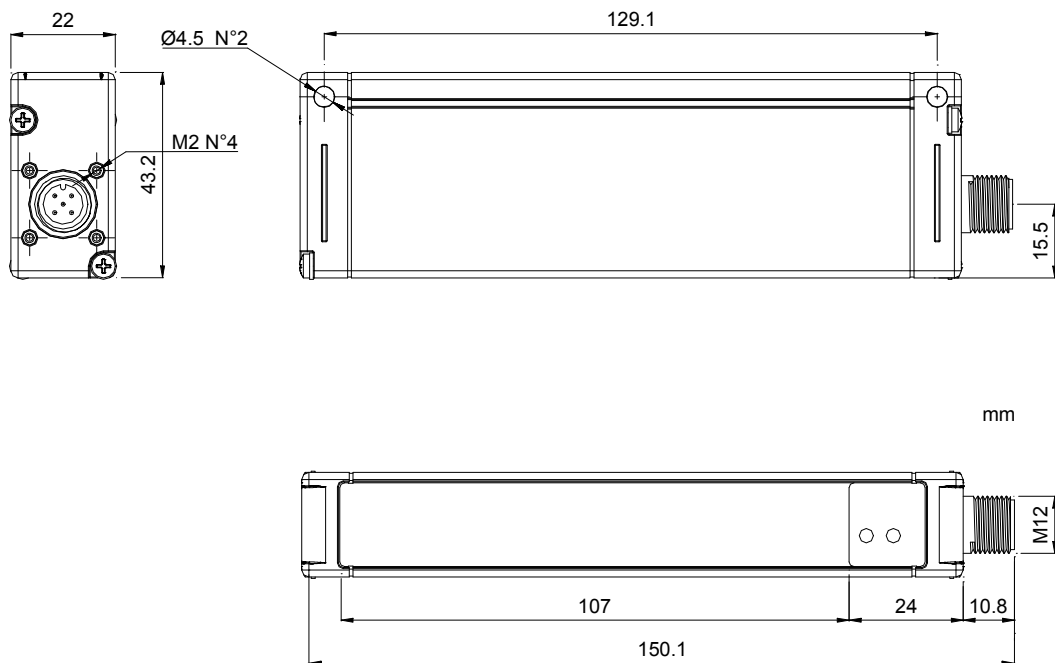


# INDICATORS AND SETTINGS

Two different models are available: high resolution (AS1-HR) or standard resolution (AS1-SR). In the first case the light array has 16 beams, while in the second case the beams are reduced to 6. In the AS1-HR model, the selection inputs of the SCAN MODE, can configure 4 different crossed-beam scanning modes. These different modes allow to vary the detection performances, in particular the resolution can be increased to 0.2mm thickness, or the response time up to less than 3ms.

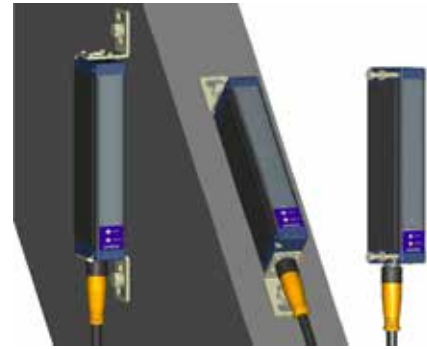

## INDICATORS AND SETTINGS (TRIMMER VERSION)




Emitter is equipped with a manual regulation which lets the user change the emission power by means of a screwdriver.

The emission power reduction can be particularly useful to lower passive reflections when maximum operating distance it is not required.

## CONNECTIONS

### M12 CONNECTOR

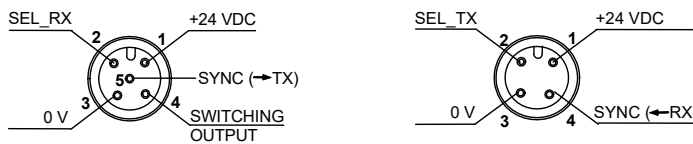


		AS1-HR	AS1-SR			AS1-HR	AS1-SR
<b>RECEIVER (RX):</b> M12 5-pole connector	1 – brown:	+24 VDC	+24 VDC	<b>EMITTER (TX):</b> M12 4-pole connector	1 – brown:	+24 VDC	+24 VDC
	2 – white:	SEL_RX	Not used		2 – white:	SEL_TX	Not used
	3 – blue:	0 V	0 V		3 – blue:	0 V	0 V
	4 – black:	Switching output	Switching output		4 – black:	SYNC **	SYNC *
	5 – grey:	SYNC*	SYNC*				


\* not used in trimmer version  
\*\* SEL\_TX2 in trimmer version

## HIGH RESOLUTION SCANNING MODE


PROG. N°	SEL_RX	SEL_TX	RESOLUTION	RESPONSE TIME (msec )
1	0 Vdc or FLOAT	0 Vdc or FLOAT	LOW	2.75
2	0 Vdc or FLOAT	24 Vdc	M/L	3
3	24 Vdc	0Vdc or FLOAT	M/H	7.75
4	24 Vdc	24 Vdc	HIGH	8

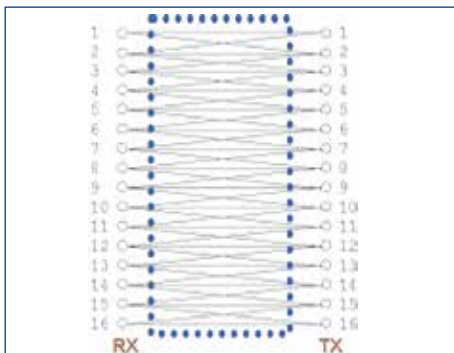

**Scan mode 1:**  
high speed / low resolution  
Minimum object detection  
Flat = 0.4 (thickness) x 100 (width) mm  
Cylindrical objects = Ø 6 mm

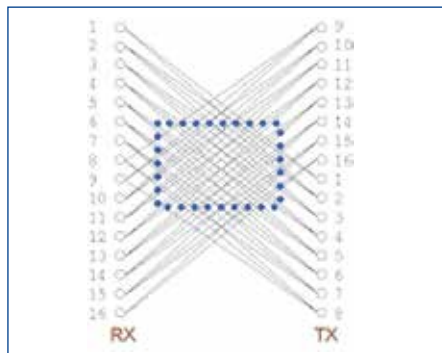


**Scan mode 2:**  
high speed / mid resol. central area  
Minimum object detection  
Flat = 0.4 (thickness) x 90 (width) mm  
Cylindrical objects = Ø 6 mm

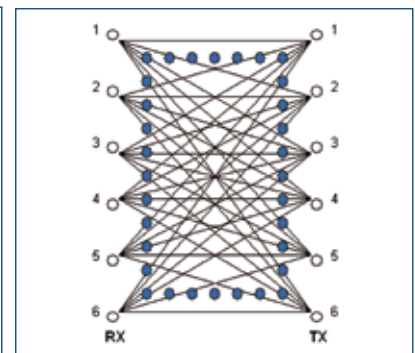

**Scan mode 3-4:**  
low speed / high resolution  
Minimum object detection  
Flat = 0.2 (thickness) x 75 (width) mm  
Cylindrical objects = Ø 6 mm

# STANDARD RESOLUTION SCANNING MODE

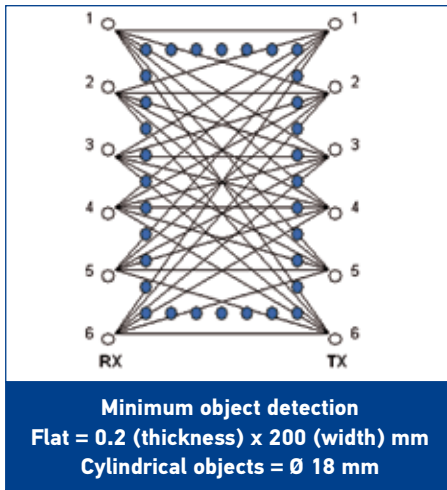

Note: the scan mode is fixed in the standard resolution version.

## MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	OPERATING DISTANCE	RESOLUTION	SETTING	MODEL	ORDER No.
Area sensor	2 m	High	n/a	AS1-LD-HR-010-J	958101000
			Adjustment Trimmer	AS1-LD-HR-010-P	958101040
		Standard	n/a	AS1-LD-SR-010-J	958101010
			Adjustment Trimmer	AS1-LD-SR-010-P	958101050
	3 m	High	n/a	AS1-HD-HR-010-J	958101020
		Standard		AS1-HD-SR-010-J	958101030

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
		5 m	CS-A1-02-G-05	95A251270
		10 m	CS-A1-02-G-10	95A251390
	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
		10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
		5-pole, grey, P.V.C.	3 m	CS-A1-03-G-03
	5 m		CS-A1-03-G-05	95ACC2120
	10 m		CS-A1-03-G-10	95ACC2140
	5-pole, U.L., black, P.V.C.	3 m	CS-A1-03-U-03	95ASE1170
		5 m	CS-A1-03-U-05	95ASE1180
		10 m	CS-A1-03-U-10	95ASE1190
		15 m	CS-A1-03-U-15	95ASE1200
		25 m	CS-A1-03-U-25	95ASE1210
		50 m	CS-A1-03-U-50	95A252700

Rev. 03, 04/2019

# DS1



## AREASCAN™ DETECTION AND MEASUREMENT LIGHT GRIDS WITH ANALOG OUTPUT

- 4 mm resolution and 1 ms response time
- 100 to 300 mm controlled height
- Operating distance up to 4 m
- PNP digital and 0-10 V analog outputs
- Adjustment trimmer

### APPLICATIONS

- Processing and Packaging machinery
- Food, Cosmetic, Pharmaceutical
- Electronics and mechanical assembling
- Conveyor lines and sorting systems




DS1		
<b>Light array (controlled height)</b>	100...300 mm	
<b>Resolution</b>	4...7 mm	
<b>Number of beams</b>	16...48	
<b>Light emission</b>	IR LED	
<b>Response time</b>	1...2,75 ms	
<b>Setting</b>	Trimmer	
<b>Operating distance</b>	0,15...0,8 m (SD)	
	0,15...2,1 m (LD)	
	0,2...4 m (HD)	
<b>Power supply</b>	Vdc	
	Vac	
	Vac/dc	
<b>Output</b>	PNP	
	NPN	
	NPN/PNP	
	relay	
	other	0...10 V Analog output
	cable	
<b>Connection</b>	connector	
	pig-tail	
<b>Approximate dimensions (mm)</b>	22x43x(150/350)	
<b>Housing material</b>	aluminium	
<b>Mechanical protection</b>	IP65	

# TECHNICAL DATA

<b>Power supply</b>	24 Vdc ± 15%
<b>Consumption on emitter unit (TX)</b>	150 mA max.
<b>Consumption on receiver unit (RX)</b>	50 mA max. load excluded
<b>Light emission</b>	IR LED 880 nm
<b>Setting</b>	adjustment trimmer (mod. DS1...PV)
<b>Indicators</b>	yellow OUTPUT LED green POWER ON LED
<b>Output</b>	PNP; analog output
<b>Output current</b>	100 mA max.
<b>Saturation voltage</b>	1,5 V max.
<b>Response time</b>	1 - 2,75 ms
<b>Connection</b>	M12 4-pole connector (TX), M12 5-pole connector (RX)
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Mechanical protection</b>	IP65 (EN 60529)
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	black electro-painted aluminium
<b>Lens material</b>	PMMA
<b>Operating temperature</b>	0 ... 50 °C
<b>Storage temperature</b>	-25 ... 70 °C
<b>Weight</b>	300 g (mod. DS1...010) 400 g (mod. DS1...015) 600 g (mod. DS1...030)

# DIMENSIONS

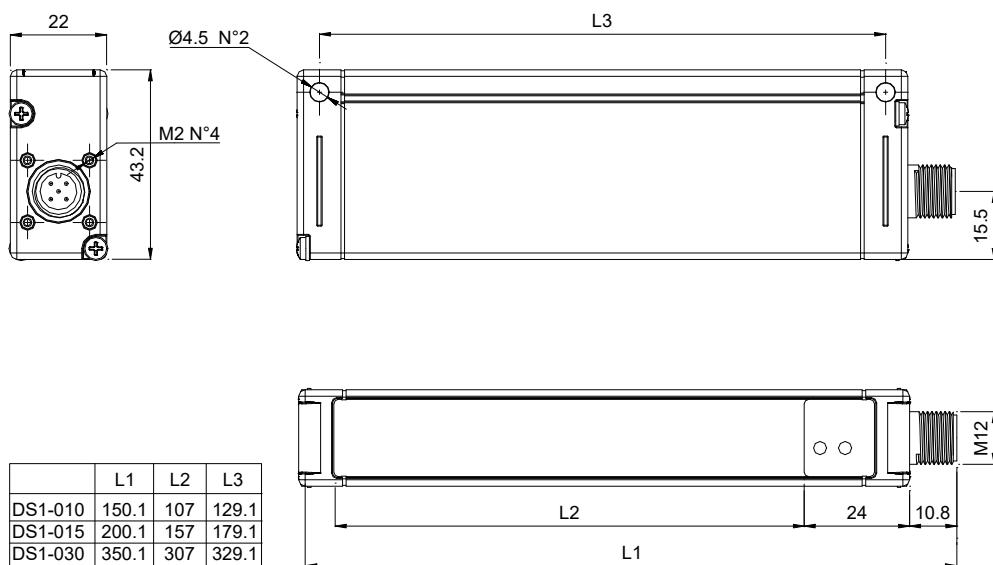


# INDICATORS AND SETTINGS (TRIMMER VERSION)




## CONNECTIONS

### M12 CONNECTOR

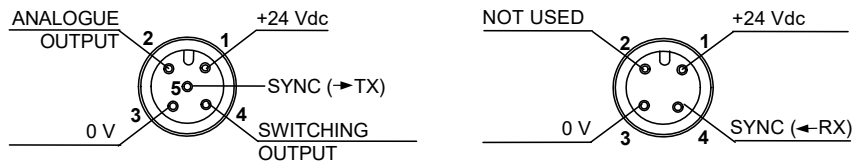

<b>RECEIVER (RX):</b> M12 5-pole connector	1 – brown:	+24 Vdc	<b>EMITTER (TX):</b> M12 4-pole connector	1 – brown:	+24 Vdc
	2 – white:	Analogue output		2 – white:	Not used
	3 – blue:	0 V		3 – blue:	0 V
	4 – black:	Switching output		4 – black:	SYNC
	5 – grey:	SYNC			

## DETECTION DIAGRAMS

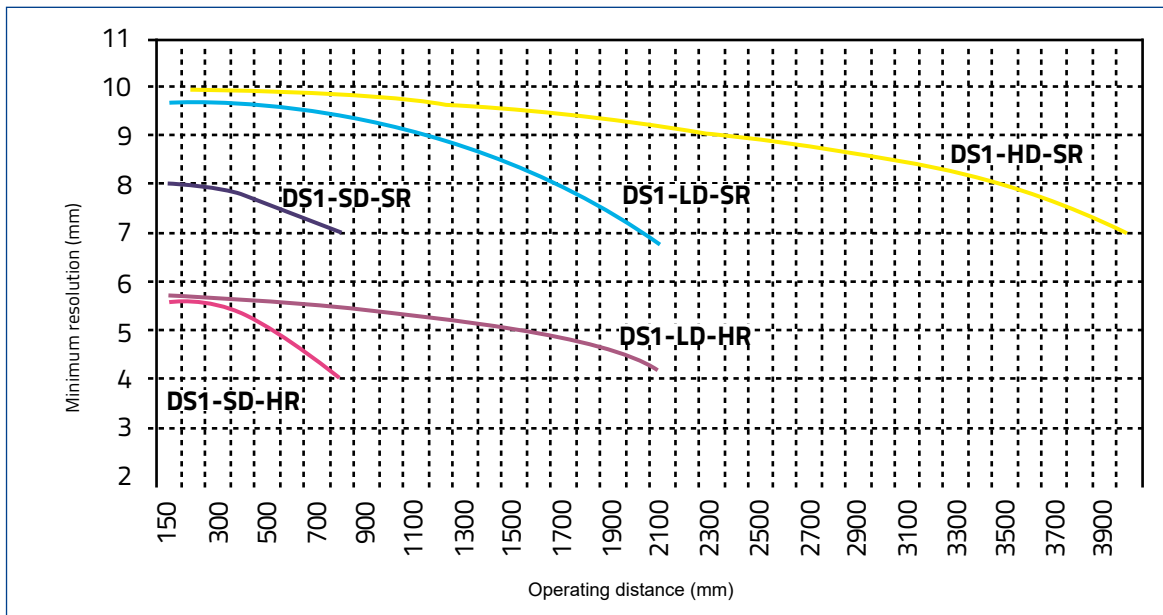

Variation of the minimum resolution according to the operating distance between the emitting and receiving units.


# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	OPERATING DISTANCE	SETTING	CONTROLLED HEIGHT & RESOLUTION	MODEL	ORDER NO
Measurement light curtain	0,8 m	n/a	100 mm (res.: 7 mm)	DS1-SD-SR-010-JV	957701170
			100 mm (res.: 4 mm)	DS1-SD-HR-010-JV	957701200
			150 mm (res.: 7 mm)	DS1-SD-SR-015-JV	957701180
			150 mm (res.: 4 mm)	DS1-SD-HR-015-JV	957701210
	300 mm (res.: 7 mm)		DS1-SD-SR-030-JV	957701190	
	2 m		100 mm (res.: 7 mm)	DS1-LD-SR-010-JV	957701130
			100 mm (res.: 4 mm)	DS1-LD-HR-010-JV	957701120
			150 mm (res.: 7 mm)	DS1-LD-SR-015-JV	957701150
		150 mm (res.: 4 mm)	DS1-LD-HR-015-JV	957701140	
	Adjustment trimmer	300 mm (res.: 7 mm)	DS1-LD-SR-030-JV	957701160	
		100 mm (res.: 7 mm)	DS1-LD-SR-010-PV	957701250	
		150 mm (res.: 7 mm)	DS1-LD-SR-015-PV	957701260	
	4 m	n/a	300 mm (res.: 7 mm)	DS1-LD-SR-030-PV	957701270
			100 mm (res.: 7 mm)	DS1-HD-SR-010-JV	957701220
			150 mm (res.: 7 mm)	DS1-HD-SR-015-JV	957701230
300 mm (res.: 7 mm)			DS1-HD-SR-030-JV	957701240	

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
		5 m	CS-A1-02-G-05	95A251270
		10 m	CS-A1-02-G-10	95A251390
	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
		10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
	5-pole, grey, P.V.C.	3 m	CS-A1-03-G-03	95ACC2110
		5 m	CS-A1-03-G-05	95ACC2120
		10 m	CS-A1-03-G-10	95ACC2140
	5-pole, U.L., black, P.V.C	3 m	CS-A1-03-U-03	95ASE1170
		5 m	CS-A1-03-U-05	95ASE1180
		10 m	CS-A1-03-U-10	95ASE1190
		15 m	CS-A1-03-U-15	95ASE1200
		25 m	CS-A1-03-U-25	95ASE1210
		50 m	CS-A1-03-U-50	95A252700

# DS2

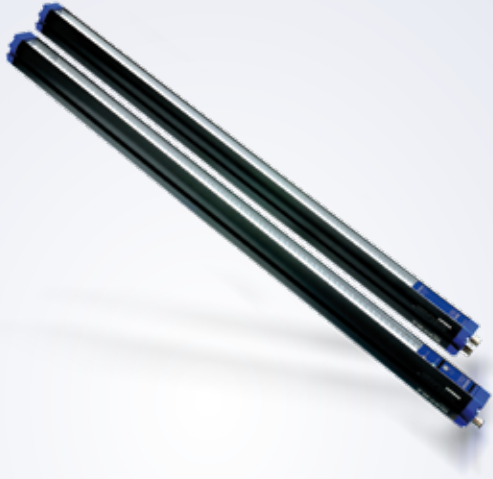

## AREASCAN™ DETECTION AND MEASUREMENT LIGHT GRIDS WITH SERIAL OR ETHERNET INTERFACE

- 6 or 25 mm resolution
- Relative measurement precision  $\pm 6$  mm or  $\pm 22.5$  mm
- 150 - 1650 mm controlled heights
- Operating distance up to 10 m
- PNP and 0-10 V Analog output and RS485 or Ethernet interface

### APPLICATIONS

- Processing and Packaging machinery
- Food, Cosmetic, Pharmaceutical
- Electronics and mechanical assembling
- Conveyor lines and sorting systems




DS2		
<b>Light array (controlled height)</b>	150...1650 mm	
<b>Resolution</b>	6...25 mm	
<b>Number of beams</b>	21...231 (res= 6mm)	
	6...66 (res= 25mm)	
<b>Light emission</b>	IR LED	
<b>Response time</b>	5...90 ms	
<b>Interface</b>	serial RS485 or Ethernet	
<b>Setting</b>	Dip-switches	
	Graphic interface	
<b>Operating distance</b>	0,3...5 m (res= 6mm)	
	0,3...10 m (res=25mm)	
<b>Power supply</b>	Vdc	
	Vac	
	Vac/dc	
<b>Output</b>	PNP	
	NPN	
	NPN/PNP	
	relay	
	other	0...10 V Analog output
	cable	
<b>Connection</b>	connector	
	pig-tail	
<b>Approximate dimensions (mm)</b>	35x40x(256...1726)	
<b>Housing material</b>	aluminium	
<b>Mechanical protection</b>	IP65	



# TECHNICAL DATA

<b>Power supply</b>	24 Vdc ± 20%
<b>Consumption on emitter unit (TX)</b>	250 mA max. load excluded
<b>Light emission</b>	IR LED 880 nm
<b>Output</b>	PNP; analog output
<b>Output current</b>	100 mA
<b>Saturation voltage</b>	1,5 V max.
<b>Connection</b>	M12 4-pole connector (TX), M12 8-pole and M12 4-pole type "D" connector (RX)
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Electrical protection</b>	class I
<b>Mechanical protection</b>	IP65 (EN 60529)
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	painted aluminium (Pulverit 5121/0085 Black)
<b>Lens material</b>	PMMA
<b>Operating temperature</b>	0 ... 50 °C
<b>Storage temperature</b>	-25...70°C
<b>Weight</b>	1,9 - 4,6 kg

## DIMENSIONS

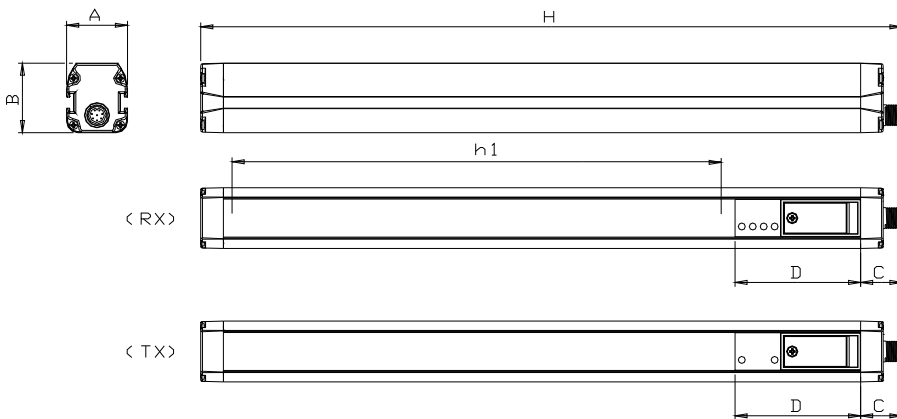


MODEL	A x B (mm)	H (mm)	C (mm)	D (mm)
DS2-05-07-015-XX	35 x 40	256	23.8	72.5
DS2-05-07-030-XX	35 x 40	403	23.8	72.5
DS2-05-07-045-XX	35 x 40	550	23.8	72.5
DS2-05-07-060-XX	35 x 40	697	23.8	72.5
DS2-05-07-075-XX	35 x 40	844	23.8	72.5
DS2-05-07-090-XX	35 x 40	991	23.8	72.5
DS2-05-07-105-XX	35 x 40	1138	23.8	72.5
DS2-05-07-120-XX	35 x 40	1285	23.8	72.5
DS2-05-07-135-XX	35 x 40	1432	23.8	72.5
DS2-05-07-150-XX	35 x 40	1579	23.8	72.5
DS2-05-07-165-XX	35 x 40	1726	23.8	72.5
DS2-05-07-045-XX	35 x 40	562	23.8	72.5
DS2-05-07-060-XX	35 x 40	713	23.8	72.5
DS2-05-07-075-XX	35 x 40	864	23.8	72.5
DS2-05-07-090-XX	35 x 40	1015	23.8	72.5


XX: JV for serial models or JE for ETHERNET models

## CONNECTIONS

### M12 CONNECTOR - SERIAL VERSION

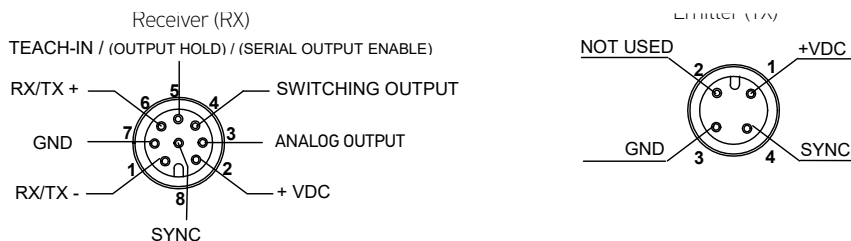



### M12 CONNECTOR - ETHERNET VERSION

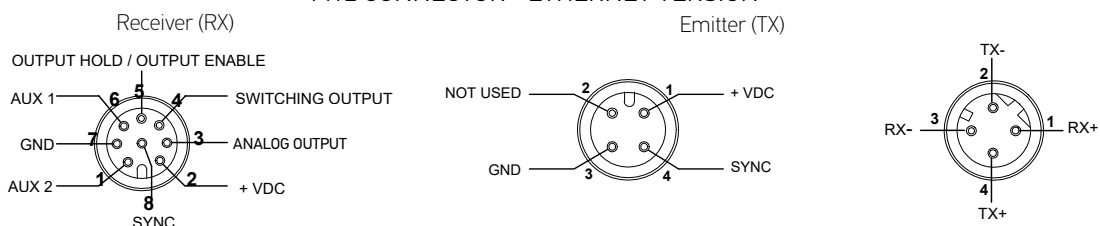

# INDICATORS AND SETTINGS



## DETECTION MODE EXAMPLES



And more applications:

- Object height measurement (vertical mounting);
- Object width measurement (horizontal mounting);
- Object distance measurement (horizontal mounting);
- Object volume measurement (vertical and horizontal combination);
- Single or multiple object presence and/or position detection in a given area;
- Missing label detection on multiple lanes;
- Vertical warehouse drawers positioning;
- Box or other objects profiling on conveyors;
- Web edges or center guiding;
- Cartoners, stackers and palletizers.

## RESPONSE TIME - SERIAL AND ETHERNET VERSION

MODEL RS485	Tmin (msec)							Tmax (msec)
	CONFIGURATION							
	Top beam				Complete beams status			
	Binary	Binary	ASCII	ASCII	Binary	Binary	ASCII	ASCII
	57600 baud	9600 baud	57600 baud	9600 baud	57600 baud	9600 baud	57600 baud	9600 baud
DS2-05-07-015-JV	5.5	12.5	5.05	13	5.5	15	6.5	10
DS2-05-07-030-JV	7	14	7	14.5	7	18	8.5	21
DS2-05-07-045-JV	8.5	15.5	8.5	16	8.5	21	10	24
DS2-05-07-060-JV	10	17	10	18	10	26	12	38
DS2-05-07-075-JV	11.5	18.5	11.5	19	11.5	31	15	44
DS2-05-07-090-JV	13	20	13	20	13	36	17	54
DS2-05-07-105-JV	14.5	21.5	14.5	22	14.5	40	19	62
DS2-05-07-120-JV	17	24	17	24	17	44	21	70
DS2-05-07-135-JV	18.5	25	19	26	19	48	23	80
DS2-05-07-150-JV	20	26.5	21	28	21	53	25	84
DS2-05-07-165-JV	22	28	23	30	23	56	28	91
DS2-05-07-045-JV	5	11	5	11	5	13	6	18
DS2-05-07-060-JV	5.5	12	5.5	12.5	5.5	14.5	6.5	19.5
DS2-05-07-075-JV	6	13	6	13.5	6	16	7	21
DS2-05-07-090-JV	6.5	13.5	6.5	14.5	6.5	17.5	7.5	22.5

MODEL ETHERNET	Tmin (msec)				Tmax (msec)
	CONFIGURATION				
	Top beam		Complete beams status		
	Binary	ASCII	Binary	ASCII	
DS2-05-07-060-JE	10	10	10	12	
DS2-05-07-075-JE	11.5	11.5	11.5	15	
DS2-05-07-090-JE	13	13	13	17	
DS2-05-07-120-JE	17	17	17	21	
DS2-05-07-150-JE	20	21	21	25	
DS2-05-07-165-JE	22	23	23	28	

# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	CONTROLLED AREA (mm)	OPTICS INTERAXIS (mm)	OUTPUT	MODEL	ORDER No.		
Measurement light curtain	147	6.75	Voltage Analog and RS485	DS2-05-07-015-JV	957501040		
	294			DS2-05-07-030-JV	957501050		
	441			DS2-05-07-045-JV	957501060		
	588			DS2-05-07-060-JV	957501000		
	735			DS2-05-07-075-JV	957501070		
	882			DS2-05-07-090-JV	957501010		
	1029			DS2-05-07-105-JV	957501080		
	1176			DS2-05-07-120-JV	957501020		
	1323			DS2-05-07-135-JV	957501090		
	1470			DS2-05-07-150-JV	957501100		
	1617			DS2-05-07-165-JV	957501030		
	453			25	Voltage Analog and RS485	DS2-05-25-045-JV	957501110
	604					DS2-05-25-060-JV	957501140
	755					DS2-05-25-075-JV	957501120
	912	DS2-05-25-090-JV	957501130				
	588	6.75	Voltage Analog and Ethernet	DS2-05-07-060-JE	957501150		
	735			DS2-05-07-075-JE	957501160		
	882			DS2-05-07-090-JE	957501170		
	1176			DS2-05-07-120-JE	957501180		
	1470			DS2-05-07-150-JE	957501190		
	1617			DS2-05-07-165-JE	957501200		

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.	
Axial M12 Connector	4-pole, grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380	
		5 m	CS-A1-02-G-05	95A251270	
		10 m	CS-A1-02-G-10	95A251390	
	4-pole, P.U.R.	2 m	CS-A1-02-R-02	95A251540	
		5 m	CS-A1-02-R-05	95A251560	
	8-pole, black, P.V.C.	3 m	CS-A1-06-B-03	95ACC2230	
		5 m	CS-A1-06-B-05	95ACC2240	
		10 m	CS-A1-06-B-10	95ACC2250	
	4-pole, shielded, grey, P.V.C.	3 m	CV-A1-22-B-03	95ACC1480	
		5 m	CV-A1-22-B-05	95ACC1490	
		10 m	CV-A1-22-B-10	95ACC1500	
	8-pole, shielded, black, P.V.C.	3 m	CV-A1-26-B-03	95ACC1510	
		5 m	CV-A1-26-B-05	95ACC1520	
		10 m	CV-A1-26-B-10	95ACC1530	
		15 m	CV-A1-26-B-15	95ACC2080	
		25 m	CV-A1-26-B-25	95ACC2100	
	4-pole, U.L., black, P.V.C.	3 m	CS-A1-02-U-03	95ASE1120	
		5 m	CS-A1-02-U-05	95ASE1130	
		10 m	CS-A1-02-U-10	95ASE1140	
		15 m	CS-A1-02-U-15	95ASE1150	
		25 m	CS-A1-02-U-25	95ASE1160	
	8-pole, U.L., black, P.V.C.	3 m	CS-A1-06-U-03	95ASE1220	
		5 m	CS-A1-06-U-05	95ASE1230	
		10 m	CS-A1-06-U-10	95ASE1240	
		15 m	CS-A1-06-U-15	95ASE1250	
		25 m	CS-A1-06-U-25	95ASE1260	
			50 m	CS-A1-06-U-50	95A252710
		4-pole, black	Connector-not cabled	CS-A1-02-B-NC	G5085002
		8-pole, black	Connector-not cabled	CS-A1-06-B-NC	95ACC2550
Ethernet cable M12/RJ45	4-pole	3m straight D coded	DATAVS-CV-RJ45D-03	95A901350	

# S65-M



## TIME OF FLIGHT LONG RANGE BACKGROUND SUPPRESSOR

- Long Range background suppression detection up to 5m
- Cost effective solution for precise and reliable detection
- Risk-free Infrared LED emission and embedded green LED pointer
- Two independent fully programmable outputs
- NPN/PNP or IO-Link connection models
- Rugged plastic housing in compact 50x50x24 mm format

### APPLICATIONS

- Presence of all medium and large sized objects on conveyors
- Critical object detection in front of problematic background
- Positioning tasks in palletizing
- Position limiter for deck and robot in automotive manufacturing
- Collision prevention limit switch for AGV applications
- Checking filling level for liquid and objects




S65-M		
<b>Operating Distance</b>	0.3..5 m (90% white) / 0.3..4 m (18% grey) / 0.3..2.5 m (6 % black)	
<b>Hysteresis</b>	20mm / 50mm / 80mm	
<b>Difference White 90%/Grey 18% and White 90%/Black 6%</b>	see chart (value Typ, 1σ, T=25°C, ambient light <1Klux)	
<b>Repeatability error</b>	20mm for distance > 750mm / 40mm for distance <= 750mm (1σ, T=25°C)	
<b>Response time</b>	8.5 msec max.T=25°C	
<b>Operating Frequency</b>	<65Hz	
<b>Setting</b>	Teach-in buttons SET1, SET2	
<b>Teach-in Input</b>	Active High ( +24V ) 1 sec < t < 3 sec teach Q1 / > 3 sec teach Q2	
<b>Supply voltage</b>	Vdc	24 VDC ± 20%
	Vac	
	Vac/dc	
<b>Switching output</b>	PNP	
	NPN	
	NPN/PNP	Can be set up (PNP NPN / Light Dark) 100mA max.
	relay	
<b>Connections</b>	other	IO-Link V1.1
	cable	
	connector	M12 - 5 poles
	pig-tail	
<b>Exposed material</b>	Body ABS / Display POLYESTER	
<b>Front side material</b>	PMMA	
<b>Dimensions</b>	50 x 50 x 25 mm	
<b>Mechanical protection</b>	IP67	
<b>Weight</b>	50 g.max.	
<b>UL (requirements)</b>	Class 2 power supply according to UL 508	

# TECHNICAL DATA

<b>Supply voltage</b>	24 VDC ± 20%
<b>Consumption</b>	< 2.2 W (excluding any loads)
<b>Operating Distance</b>	0.3..5 m (90% white) / 0.3..4 m (18% grey) / 0.3..2.5 m (6 % black)
<b>Hysteresis</b>	20mm / 50mm / 80mm
<b>Response time</b>	8.5 msec max.
<b>Difference White 90%/Grey 18% and White 90%/Black 6%</b>	see chart (value Typ, 1σ, T=25°C, ambient light <1Klux)
<b>Repeatability error</b>	20mm for distance > 750mm / 40mm for distance ≤ 750mm (1σ, T=25°C)
<b>Thermal compensation error</b>	1.5 mm / °C (T ≠ 25°C)
<b>Switching output</b>	Can be set up (PNP NPN / Light Dark) 100mA max.
<b>Teach-in Input</b>	Active High (+24V) 1 sec < t < 3 sec teach Q1 / > 3 sec teach Q2
<b>Warming-up time</b>	20 min typ
<b>Warnings</b>	Q1 (YELLOW) / Q2 (YELLOW) / ON PWR (GREEN) - PNP / NPN (GREEN)
<b>Operating temperature</b>	-15°... +55 °C (with device ON)
<b>Storage temperature</b>	-25 ... +70 °C
<b>Electrical strength</b>	500 VAC, 1 min between electronics and case
<b>Insulation resistance</b>	> 20 MΩ, 500 VDC between electronics and case
<b>Reading spot size</b>	typ 200x200 mm @ 4m
<b>Pointer spot size (green)</b>	typ 250x250 mm @ 4m
<b>Max. deviation of pointer/reading spot axes origin</b>	+/- 40 mm
<b>Emission and Wavelength</b>	LED / 850 nm
<b>Ambient light rejection</b>	according to EN 60947-5-2,
<b>Vibrations</b>	width 0.5 mm, frequency 10 ... 55Hz, per axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shocks for each axis (EN60068-2-27)
<b>Humidity</b>	< 90% no condensation
<b>Exposed material</b>	Body ABS / Display POLYESTER
<b>Front side material</b>	PMMA
<b>Mechanical protection</b>	IP67
<b>Connections</b>	M12 - 5 poles
<b>(Overall) Dimensions</b>	50 x 50 x 25 mm
<b>Weight</b>	50 g.max.
<b>I/O LINK Connection</b>	NO (See parameter table on <a href="http://www.datalogic.com">www.datalogic.com</a> )
<b>UL (requirements)</b>	Class 2 power supply according to UL 508


# DIMENSIONS

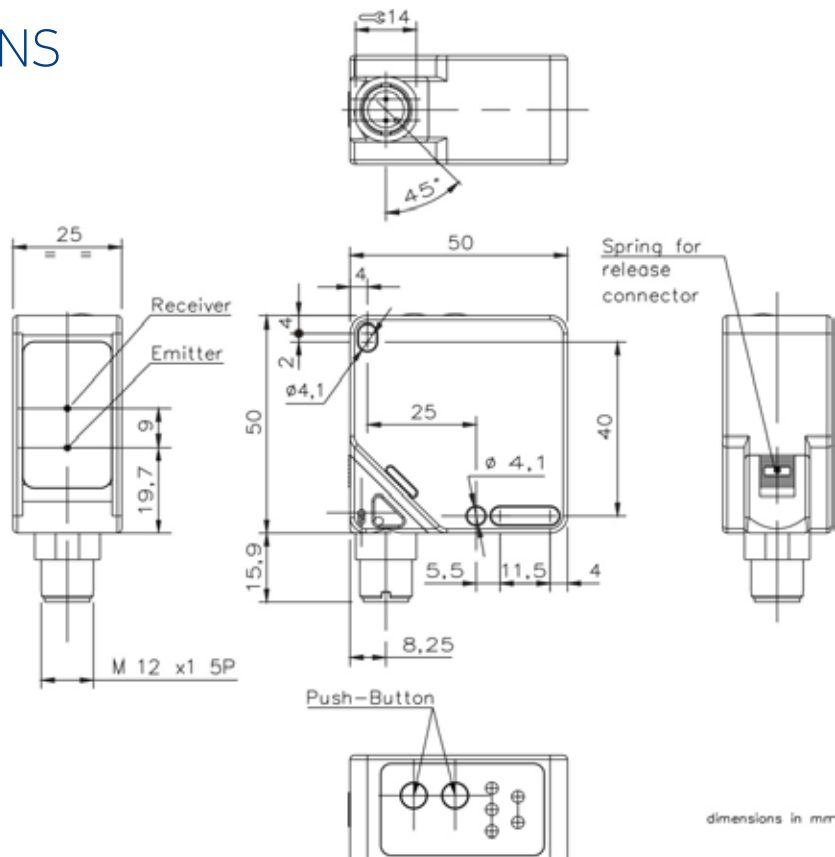

# CONNECTIONS


## M12 CONNECTOR

S65-PA-5-M13-OO



- 1 (BROWN) : +24 V ±20%
- 2 (WHITE) : Q2 100mA max.
- 3 (BLUE) : 0 V
- 4 (BLACK) : Q1 100mA max.
- 5 (GREY) : REMOTE TEACH-IN

S65-PA-5-M13-OOZ



- 1 (BROWN) : +24 V ±20%
- 2 (WHITE) : Q2 100mA max.
- 3 (BLUE) : 0 V
- 4 (BLACK) : C/Q1 (I/O LINK)
- 5 (GREY) : REMOTE TEACH-IN

NOTE: Wire colour refers to European standard.

# INDICATORS AND SETTINGS



### OUTPUT LED (yellow)

Yellow LEDs, numbered as 1 and 2, indicate activation of Q1 and Q2 outputs.

LEDs blink at the same time if measurement is out of range or not available due to the presence of environmental contamination.

### POWER LED (green)

Green PWR LED on indicates that the device is switched on and operating.

### ACTIVE SETUP LED (green)

Green PNP/NPN LEDs on indicate that the device is in the selected setup.

### SET1 Push Button


Teach-in push button for Q1 and setting parameter menu

### SET2 Push Button


Teach-in push button for Q2 and setting parameter menu

# DETECTION DIAGRAMS

Typical spot size - squared section

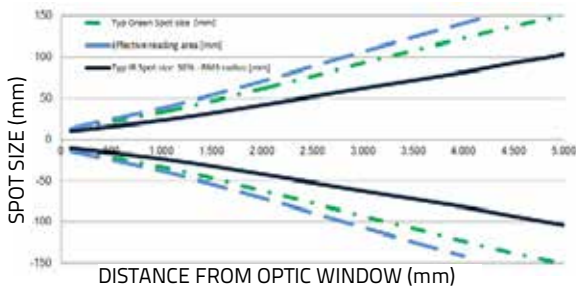

Reading area dimension

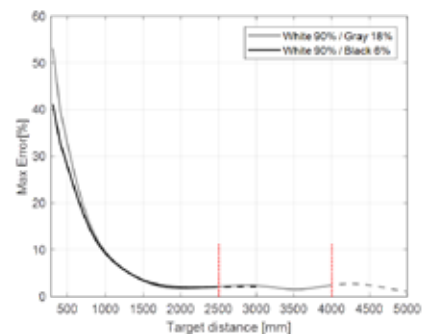


Difference white/grey - white/black

# MODEL SELECTION AND ORDER INFORMATION


OPTIC FUNCTION	CONNECTION	OUTPUT	MODEL	ORDER No.
Background Suppression long range IR	M12 5 poles	NPN/PNP	S65-PA-5-M13-00	956251160
	M12 5 poles	IO-LINK	S65-PA-5-M13-00Z	956251170

## ACCESSORIES

ST-5020

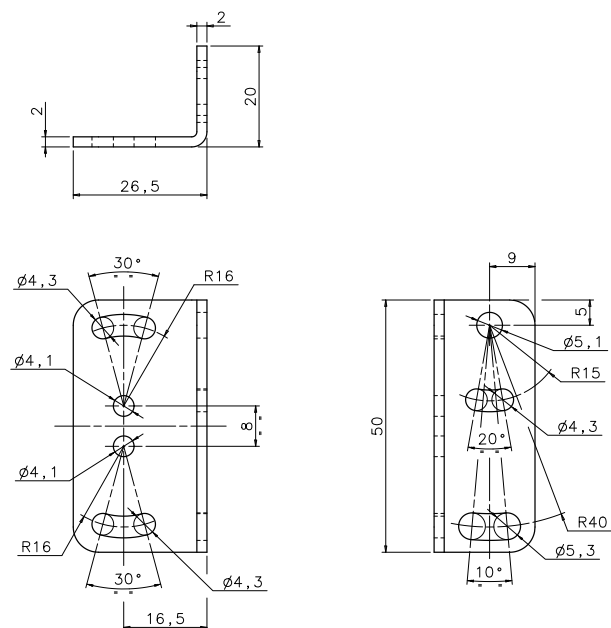

ST-5021

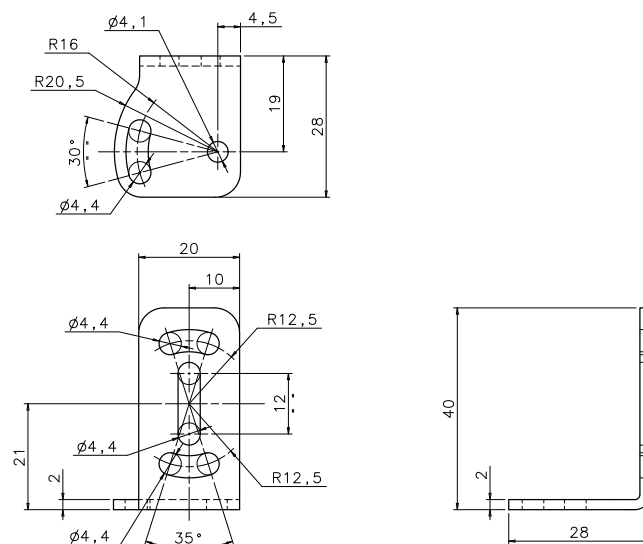

MODEL	DESCRIPTION	ORDER No.
ST-5020	mounting bracket 50 x 27 x 20 mm	95ACC5330
ST-5021	mounting bracket 20 x 40 x 28 mm	95ACC5340

## CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 Connector	M12 5-pole conn. with 3 m unshielded cable	3 m	CS-A1-03-G-03	95ACC2110
	M12 5-pole conn. with 5 m unshielded cable	5 m	CS-A1-03-G-05	95ACC2120
	M12 5-pole conn. with 10 m unshielded cable	10 m	CS-A1-03-G-10	95ACC2140
Axial M12 F/M8 M Connector	5-pole, L coded power cable	3 m	CS-M1-02-B-03	95ACC0007
	4-pole, double headed	3 m	CS-H1-02-B-03	95ACC0008
	4-pole, double headed	3 m	CS-I1-02-B-03	95ACC0009

# S67



## ACCURATE AND PRECISE LASER DISTANCE SENSOR WITH SUBMILLIMETRIC RESOLUTION

- Sturdy metal Die-cast zinc IP67 housing.
- Resolution of 10um@50mm. distance on white 90% remission.
- Response time less than 0,9ms (short range models)
- Linearity error of +/-0,03mm@50mm range.
- Analog Voltage models with 0V-10V protected output.
- Analog Current models with 4-20mA protected output.
- Soiling indicator and Alarm Output.
- Robust light interference suppression.



### APPLICATIONS

- Automotive Industries
- Textile and Paper Industries
- Wood Industries
- General Packaging Industries
- Metal tooling
- Assembly lines
- Mechanical engineering and Special machinery

### S67


<b>Distance sensor (90% White target)</b>		50...300 mm (Y03)
		100...600 mm (Y13)
<b>Linearity error:</b>		±0.03...±1.0 mm (Y03)
		±0.05...±2.0 mm (Y13)
<b>Resolution:</b>		0.01...0.33 mm (Y03)
		0.015...0.67 mm (Y13)
<b>Laser class emission:</b>		RED Laser Diode CLASS 2 According to IEC 60825-1 (2014)
<b>Response time:</b>		< 900 µs long range
<b>Setting</b>		Red LED Alarm/Soiled lens indicator
		Green LED Power indicator
		Push Button Teach in
<b>Power supply:</b>	Vdc	12 -28 VDC +/- 10%
	PNP	-
	NPN	-
	Push pull	-
	other	Analog output: 4...20 mA (-I) 0...10 V (-V)
<b>Connection</b>	connector	Rotatable M12 5poles
<b>Approximate dimensions (mm)</b>		Rectangular 20,6mm x 65mm x 50mm
<b>Housing material</b>		die-cast zinc
<b>Mechanical protection</b>		IP67



# TECHNICAL DATA

<b>Power supply</b>	12 –28 VDC +/- 10%
<b>Consumption (output current excluded)</b>	100 mA
<b>Light emission</b>	650 nm Pulsed RED Laser Diode CLASS 2 According to IEC 60825-1 (2014) Complies with 21 CFR 1040.10 and 1040.11
<b>Laser Spot</b>	2 mm Point
<b>Setting</b>	Push Button Teach in
<b>Operating Distance (90% White target)</b>	50...300 mm (Y03) 100...600 mm (Y13)
<b>Linearity error (90% White target)</b>	±0.03...±1.0 mm (Y03) ±0.05...±2.0 mm (Y13)
<b>Resolution (90% White target)</b>	0.01...0.33 mm (Y03) 0.015...0.67 mm (Y13)
<b>Teach-in Range min.</b>	>5mm (Y03) >10mm (Y13)
<b>Indicators</b>	Red LED Alarm/Soiled lens indicator Green LED Power indicator Push Button Teach in
<b>Analog output</b>	Analog Current Output : load resistance (analog I) < (+Vs - 6 V) / 0,02 (-I) Analog Voltage Output : load resistance > 100 kOhm (-V)
<b>Response time</b>	< 900 µs long range
<b>Connection</b>	Rotatable M12 5poles
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 MΩ, 500 Vdc between electronics and housing
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	< 8k Lux (Y03) < 10k Lux (Y13)
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	die-cast zinc
<b>Lens material</b>	Glass
<b>Typ. Temperature Drift</b>	± 0.03% of Full Scale Measuring Range / °C
<b>Operating temperature</b>	0...50°C
<b>Storage temperature</b>	-25 ... 70 °C
<b>Tightening torque</b>	1.0 Nm
<b>Weight</b>	180g. max.

# DIMENSIONS

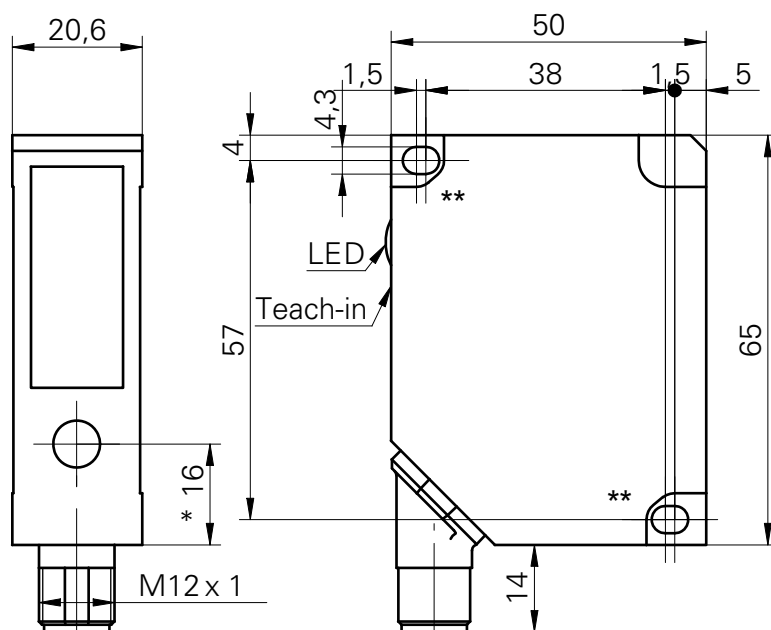


\* emitter axis

\*\*Apply tighten torque...<1.0 Nm

# CONNECTIONS


## S67-MH-5-Y03-I / S67-MH-5-Y13-I

1. (BROWN): +12...28 VDC
2. (WHITE): ANALOGUE OUTPUT- I(4...20mA)
3. (BLUE): 0V
4. (BLACK): NOT USED
5. (GREY): TEACH IN




## S67-MH-5-Y03-V / S67-MH-5-Y13-V

1. (BROWN): +12...28 VDC
2. (WHITE): ANALOGUE OUTPUT- V(0...10V)
3. (BLUE): 0V
4. (BLACK): NOT USED
5. (GREY): TEACH IN



Note: If external Teach-In option is not used, the Teach-In wire must be attached to GND.  
 Note: Shielded cable is suggested for critical cabling.  
 Note: Color of wires are referred to European standard.

# INDICATORS AND SETTINGS



**LEDS**

RED LED may indicate ALARM or dirty lens surface.  
 GREEN LED is the POWER indicator.

**TEACH IN BUTTON**

The yellow button allows the user to teach a new range by optimizing the resolution. It can be used to reset the factory settings.

The S67Y distance sensor is factory set to the maximum measuring range. In order to optimize the resolution and linearity, its Teach-In feature is designed to select a smaller range within the nominal range. If a new range is chosen the Output current, voltage and alarm output will adapt to it.

The sensor must be taught with two specific positions:

- First Teach-In: aligns the position with 0 V (or 4 mA)
- Second Teach-In: aligns the position with 10 V (or 20 mA)







Note: The two positions are always at the border of the new range (within the measuring range).

The red LED gives feedback during a Teach-In session. The red LED located on the back of the sensor, indicates "Run" mode if it detects an object in the measuring range. The S67Y can be set in two different ways: one with Teach-In button and the other one through the external teach input.

The device can be taught more than 10.000 times in its lifetime. The S67Y may be always reset to factory setup.

TEACHING NEW MEASURE	RESET
<p>Seven steps to teaching a new measuring range:</p> <ol style="list-style-type: none"> <li>1. Press (and hold) the button. The red LED will turn on, if the sensor can be taught.</li> <li>2. Hold down the button for 5 more sec. The LED will start to blink.</li> <li>3. Release the button.</li> <li>4. Place a target at the first new position of the measuring range. This is the position that will later produce 0 V (or 4 mA).</li> <li>5. Briefly press the button again. The LED will stop blinking and will stay on for about 3 sec to indicate that the first position has been stored. Then the LED will blink again.</li> <li>6. Now place the target at the second position (the other end of the new range), which will produce 10 V (or 20 mA).</li> <li>7. Briefly press the button again. The LED will stop blinking and will stay on for about 3 sec to indicate that the second position has been stored. The LED will then turn off and blink once more. Now the sensor is ready to measure.</li> </ol> <p>The new, smaller operating range is now set. The red LED now indicates whether an object is within the new range (LED OFF) or not (LED ON). If one of the new borders of the range was outside the standard range or the two positions were too close to each other, then the new settings are not valid. The sensor will respond with an extended blinking at the end of the teach procedure. The previous settings are still valid and the new settings are lost</p>	<ol style="list-style-type: none"> <li>1. Push the button. The red LED will turn on, if the sensor can be taught.</li> <li>2. Hold down the button further 5 sec. The LED will start to blink. Do not release the button now. Wait another 10 sec until the LED is ON without blinking. Factory settings have been restored to the sensor.</li> <li>3. Release the button.</li> </ol> <p>Note: If there are missed measurements (up to 30 cycles) these will be suppressed. During this time the analog output stays on hold.                      Note: For objects with a reflectivity &lt; 7 % (S67-MR-5-Y13...), the response/release time is increased automatically up to max. 2.8 ms.</p>

# DETECTION DIAGRAMS

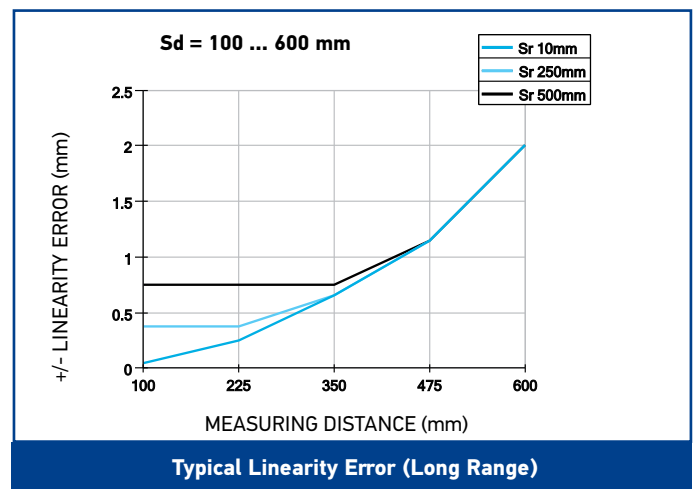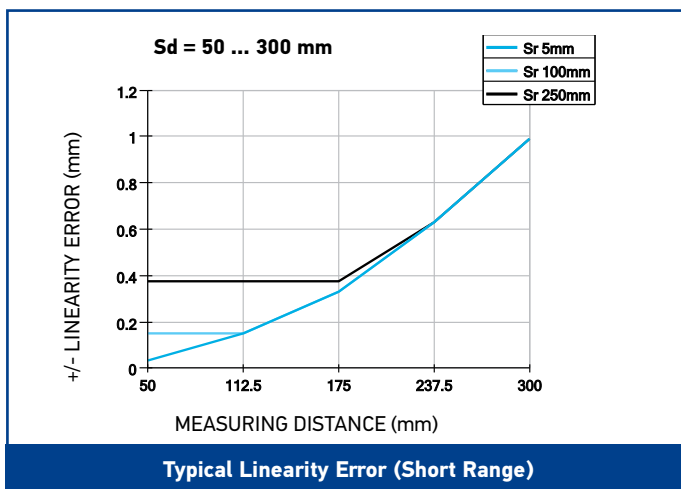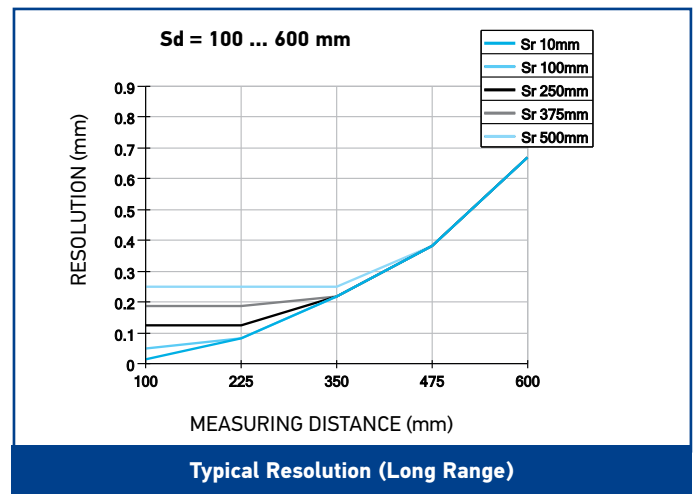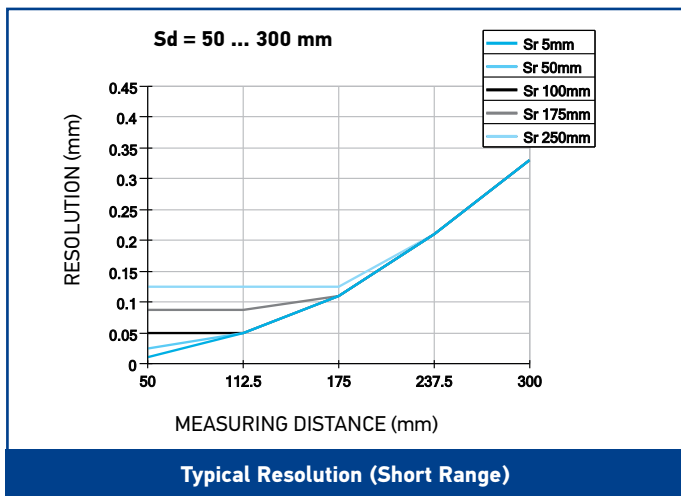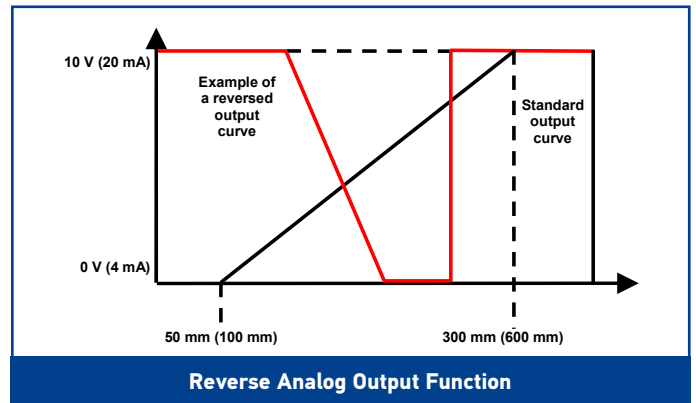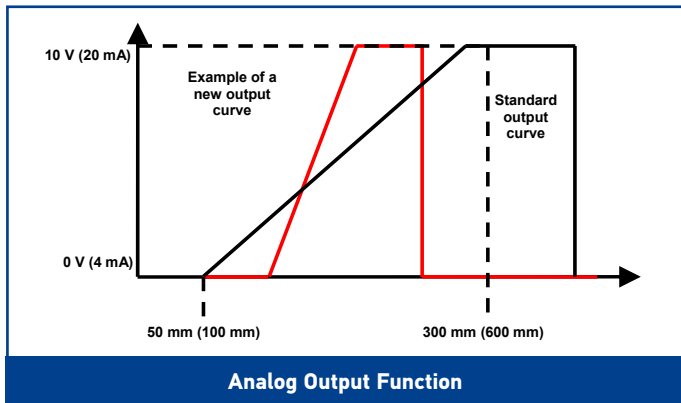


# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	OPERATING DISTANCE	CONNECTION	OUTPUT & INPUT	MODELS	ORDER No.
Long range Laser Distance Sensor	100...600 mm	M12 5-poles connector	Analog output: 0...10 V (-V)	S67-MH-5-Y13-V	956271030
			Analog output: 4...20 mA (-I)	S67-MH-5-Y13-I	956271010
Short range Laser Distance Sensor	50...300 mm	M12 5-poles connector	Analog output: 0...10 V (-V)	S67-MH-5-Y03-V	956271020
			Analog output: 4...20 mA (-I)	S67-MH-5-Y03-I	956271000

## ACCESSORIES

S67Y mounting kit

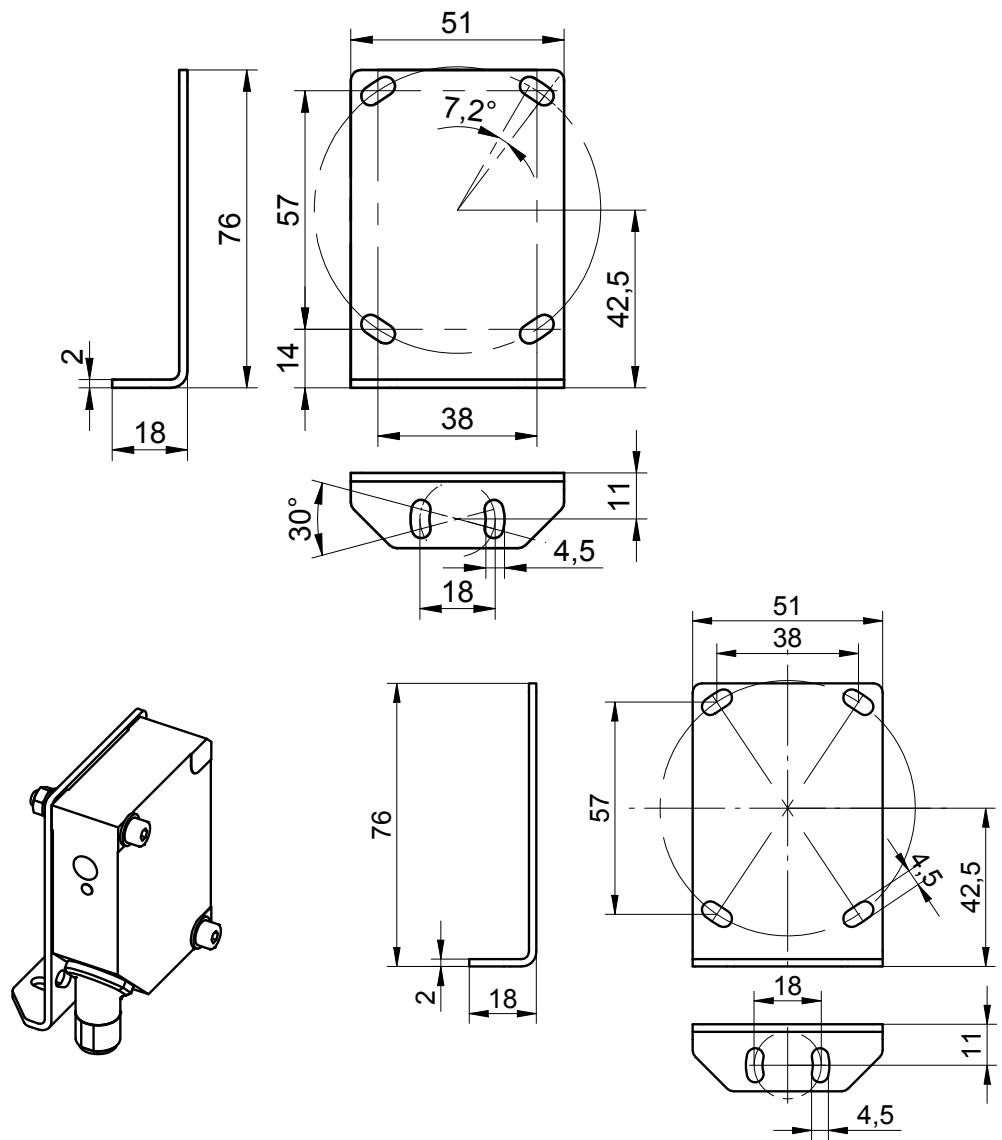

MODEL	DESCRIPTION	ORDER No.
ST-S67Y	S67Y mounting kit	95ACC8160

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
Axial M12 connector	5-pole, grey, PVC.	3 m	CS-A1-03-G-03	95ACC2110
		5 m	CS-A1-03-G-05	95ACC2120
		10 m	CS-A1-03-G-10	95ACC2140
	5-pole, U.L., black, PVC	3 m	CS-A1-03-U-03	95ASE1170
		5 m	CS-A1-03-U-05	95ASE1180
		10 m	CS-A1-03-U-10	95ASE1190

# S85



## LASER DISTANCE SENSOR FOR PRECISE MEASUREMENT UP TO 20 M WITH A MILLIMETER OF RESOLUTION AND REPEATABILITY THROUGH THE TIME OF FLIGHT TECHNOLOGY

- Time of Flight technology
- Class 2 visible red LASER for an easy alignment with the target
- Measuring range up to 10m or 20m in the advanced model
- 1 mm resolution, 7 mm accuracy, 1 mm repeatability
- 4-20 mA or 0-10 V scalable analog output and 2 digital outputs
- RS485 serial interface in the advanced model
- Standard M12 connector
- IP67 Industrial metal housing



### APPLICATIONS

- Automated warehousing
- Processing and Packaging machinery
- Industrial vehicles
- Automotive


### S85

<b>Distance sensor (90% White target)</b>		0,2...20 m (S85...Y13)
		0,2...10 m (S85...Y03)
<b>Repeatability</b>		1...2 mm
<b>Accuracy</b>		7...10 mm
<b>Resolution</b>		1 mm
<b>Light emission</b>		red LASER (class 2)
<b>Response time</b>		30 ms (S85...Y03)
		15...30 ms (S85...Y13)
<b>Serial interface</b>		RS485 (S85...Y13)
<b>Setting</b>		Display (S85...Y13)
		push-buttons (S85...Y03)
<b>Power supply</b>	Vdc	24 Vdc +/- 20%
<b>Output</b>	PNP	•
	NPN	•
	Push pull	•
	other	Analog output: 4...20 mA or 0...10 V
<b>Connection</b>	connector	•
<b>Approximate dimensions (mm)</b>		60x72x37
<b>Housing material</b>		Zamak
<b>Mechanical protection</b>		IP67

# TECHNICAL DATA

<b>Power supply</b>	24 Vdc $\pm$ 20%
<b>Consumption (output current excluded)</b>	2,8 W max. (mod. S85...Y03) 3 W max. (mod. S85...Y13)
<b>Light emission</b>	red Laser 658 nm
<b>Setting</b>	push-buttons (mod. S85...Y03) push-buttons and display (mod. S85...Y13)
<b>Operating distance</b>	90% white target 0,2...10 m (mod. S85...Y03), 0,2...20 m (mod. S85...Y13) 18% grey target 0,2...5 m (mod. S85...Y03), 0,2...8 m (mod. S85...Y13) 6% black target 0,2...3 m (mod. S85...Y03), 0,2...5 m (mod. S85...Y13)
<b>Indicators</b>	yellow Q1 LED, Q2 LED green/red POWER/OUT OF RANGE LED 5-digit multi display (mod. S85...Y13)
<b>Output</b>	push pull/Q (mod. S85...Y03) PNP, NPN, push pull, Q, Qneg (mod. S85...Y13)
<b>Analog output</b>	0-10 V (mod. S85...Y03-OOV) 4-20 mA (mod. S85...Y03-OOI) 0-10 V//4-20 mA (mod. S85...Y13-OOIVY)
<b>Response time</b>	slow 45 ms (mod. S85...Y13) medium 30 ms fast 15 ms (mod. S85...13)
<b>Connection</b>	M12 5-pole connector (mod. S85...Y03), M12 8-pole connector (mod. S85...Y13)
<b>Dielectric strength</b>	500 Vac, 1 min between electronics and housing
<b>Insulating resistance</b>	>20 M $\Omega$ , 500 Vdc between electronics and housing
<b>Mechanical protection</b>	IP67
<b>Ambient light rejection</b>	according to EN 60947-5-2, >40 Klux DC ambient light
<b>Vibrations</b>	0,5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)
<b>Shock resistance</b>	11 ms (30 G) 6 shock for every axis (EN60068-2-27)
<b>Housing material</b>	ZINC ALLOY ZAMA 13 EN-1774/PC LEXAN 121R display
<b>Lens material</b>	PMMA
<b>Operating temperature</b>	-15 ... 50 °C
<b>Storage temperature</b>	-25 ... 70 °C
<b>Weight</b>	250 g max.


# DIMENSIONS

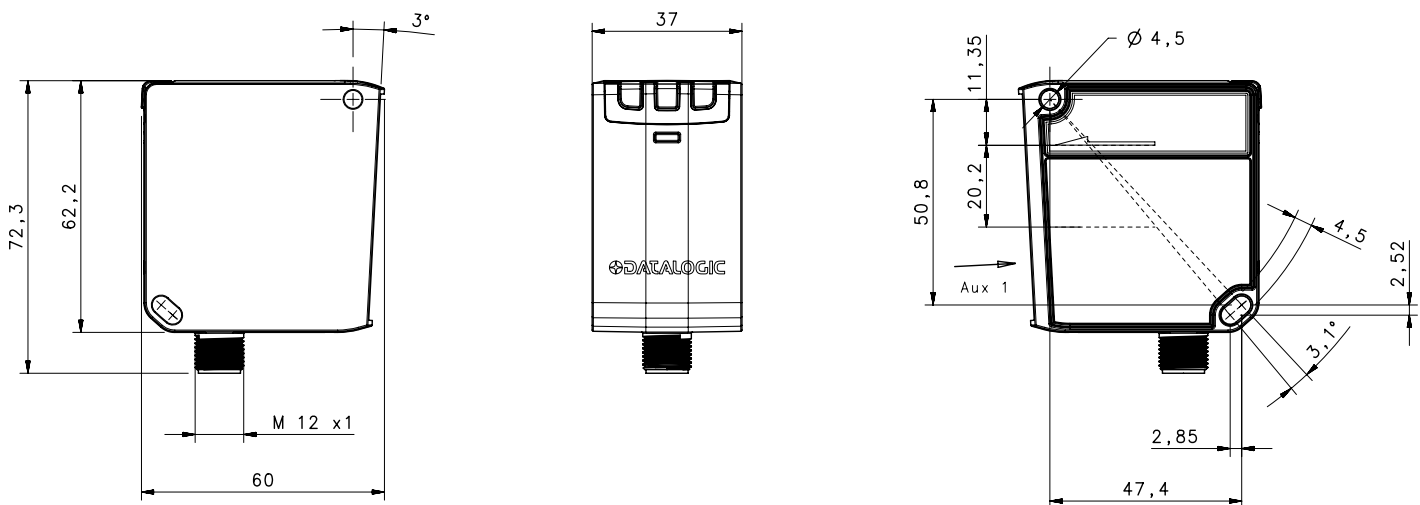

# CONNECTIONS


## M12 CONNECTOR - STANDARD

S85-Y03-00V  
Voltage version



- 1 (BROWN): +24 V ± 20 %
- 2 (WHITE): Q2 100mA max.
- 3 (BLUE): 0 V
- 4 (BLACK): Q1 100mA max.
- 5 (GREY): ANALOG. OUT 0-10V


S85-Y03-00I  
Current version



- 1 (BROWN): +24 V ± 20 %
- 2 (WHITE): Q2 100mA max.
- 3 (BLUE): 0 V
- 4 (BLACK): Q1 100mA max.
- 5 (GREY): ANALOG. OUT 4-20mA


## M12 CONNECTOR - ADVANCED

S85-Y13-00IVY  
Analog version



- 1 (WHITE): RS485 -
- 2 (BROWN): +24 V ± 20 %
- 3 (GREEN): ANALOGUE OUT
- 4 (YELLOW): Q1 100mA max.
- 5 (GREY): Q2 100mA max.
- 6 (PINK): RS485 +
- 7 (BLUE): 0 V
- 8 (RED): MULTIFUNC.INPUT

S85-Y13-00Y



- 1 (WHITE): RS485 -
- 2 (BROWN): +24 V ± 20 %
- 3 (GREEN): RESERVED
- 4 (YELLOW): Q1 100mA max.
- 5 (GREY): Q2 100mA max.
- 6 (PINK): RS485 +
- 7 (BLUE): 0 V
- 8 (RED): MULTIFUNC.INPUT

# INDICATORS AND SETTINGS

Without the procedure setting the sensor is configured to measure distances on a white target from a minimum value of 200 mm and a maximum of 20000 mm, with both switching point placed at 500 mm.

The parameters can be changed by the menu on the display pointing the LASER on the target in the different interested points.

### INDICATORS

- LED 1 | Q1 (yellow)
- LED 2 | Q2 (yellow)
- LED 3 | POWER ON (green),  
OUT OF RANGE (red)



- DISPLAY | Run/W.UP → Run mode or Warm-up mode
- Q+Q → Digital Output setting → PNP/NPN/Push-Pull
- I/V → Analog Output Setting → Ampere/Volt
- Lock Symbol → Keylock or unlock
- 5-digit display → Value corresponds to Distance in mm


MENU	FUNCTIONS
OUT 1	Switching point 1: Light/Dark; Switching point value; PNP, NPN, Push-pull; Alarm
OUT 2	Switching point 2: Light/Dark; Switching point value; PNP, NPN, Push-pull; Alarm
HYSTERESIS	Hysteresis level: 5...1000 mm
ANALOG OUT	Voltage (0...10 V); Current (4...20 mA)
MULTIFUNCTION IN	LASER OFF; Teach IN (Thresholds); RS485 Send Data
AVERAGE	Response time: SLOW; MEDIUM; FAST
RS485	Node N°; Enable; Termination; Output mode; Delay (0...254 ms)
SCALABLE OUT	Analog output range: Reset, MIN and MAX distance
FACTORY RESET	Factory default values
INFO	Software version



# DETECTION DIAGRAMS


## CURRENT ANALOG OUTPUT

MEASUREMENT RANGE (4...20 mA)  
OUT OF RANGE (3,95...4 mA; 20...20,5 mA)

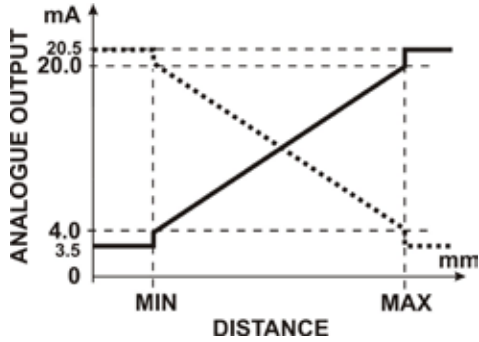


## VOLTAGE ANALOG OUTPUT

MEASUREMENT RANGE (0...10 V)

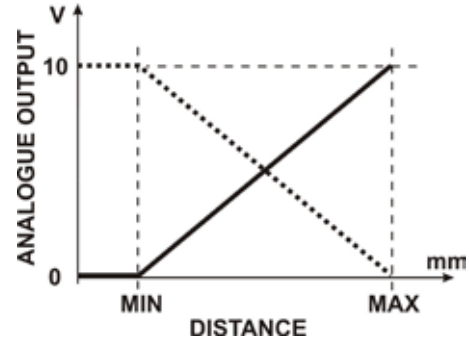


## S85-...-Y13 ADVANCED REPEATABILITY (SLOW MODE)

[WHITE 90%; GREY 18%; BLACK 6%]

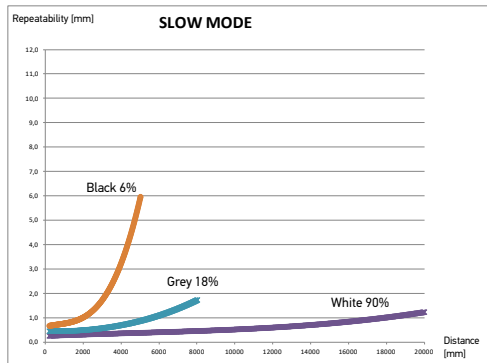


## S85-...-Y13 ADVANCED REPEATABILITY (MEDIUM MODE)

[WHITE 90%; GREY 18%; BLACK 6%]

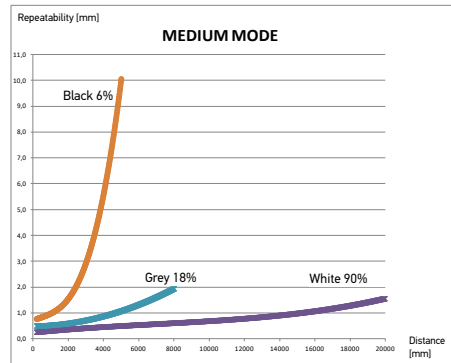

## S85-...-Y13 ADVANCED REPEATABILITY (FAST MODE)

[WHITE 90%; GREY 18%; BLACK 6%]

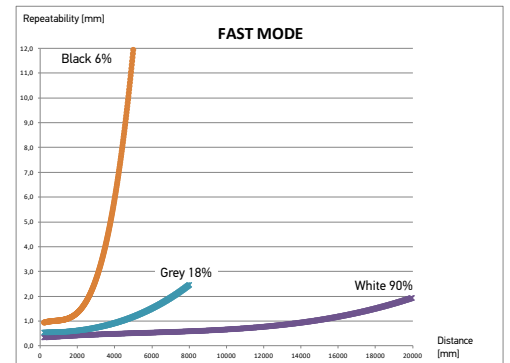


## S85-...-Y13 ADVANCED

### REPEATABILITY/RESPONSE TIME

(90% WHITE TARGET @ 20 m)

Mode	Response time	Repeatability
Slow	45 ms	< 1,5 mm
Medium	30 ms	1,5 mm
Fast	15 ms	< 2 mm

## HYSTERESIS

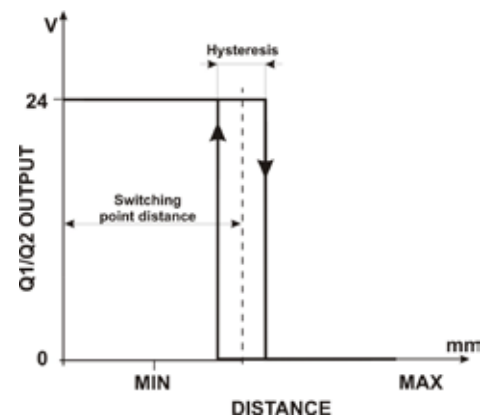


# MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	OPERATING DISTANCE	CONNECTION	OUTPUT & INPUT	MODELS	ORDER No.
Distance sensor (Standard)	10 m	M12 5-pole connector	2 Digital outputs; Analog output: Voltage (0...10 V)	S85-MH-5-Y03-00V	951511010
			2 Digital outputs; Analog output: Current (4... 20mA)	S85-MH-5-Y03-00I	951511030
Distance sensor (Advanced)	20 m	M12 8-pole connector	2 Digital outputs; Analog output: Current (4... 20mA) or Voltage (0...10 V); RS485; Multifunction input	S85-MH-5-Y13-00IVY	951511020
			2 Digital outputs; RS485; Multifunction input	S85-MH-5-Y13-00Y	951511040

## ACCESSORIES

ST-S85-STD

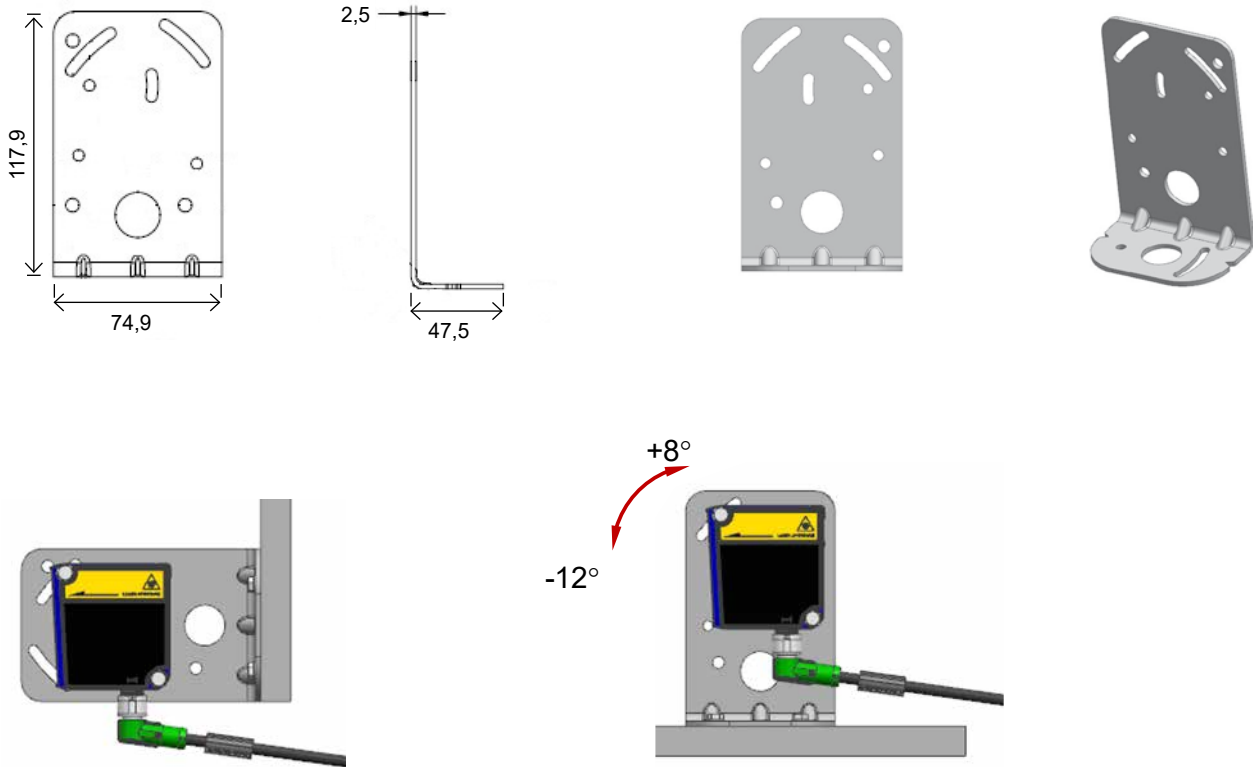

MODEL	DESCRIPTION	ORDER No.
ST-S85-STD	mounting bracket	95ACC7840

# CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.	
Axial M12 connector	5-pole, grey, P.V.C.	3 m	CS-A1-03-G-03	95ACC2110	
		5 m	CS-A1-03-G-05	95ACC2120	
		10 m	CS-A1-03-G-10	95ACC2140	
	5-pole, U.L., black, P.V.C	3 m	CS-A1-03-U-03	95ASE1170	
		5 m	CS-A1-03-U-05	95ASE1180	
		10 m	CS-A1-03-U-10	95ASE1190	
		15 m	CS-A1-03-U-15	95ASE1200	
		25 m	CS-A1-03-U-25	95ASE1210	
Axial M12 Connector	8-pole, black, P.V.C.	50 m	CS-A1-03-U-50	95A252700	
		3 m	CS-A1-06-B-03	95ACC2230	
		5 m	CS-A1-06-B-05	95ACC2240	
		10 m	CS-A1-06-B-10	95ACC2250	
Radial M12 Connector	8-pole, shielded, black, P.V.C.	3 m	CV-A2-26-B-03	95ACC1600	
		5 m	CV-A2-26-B-05	95ACC1610	
		10 m	CV-A2-26-B-10	95ACC1620	
Axial M12 Connector	8-pole, shielded, black, P.V.C.	3 m	CV-A1-26-B-03	95ACC1510	
		5 m	CV-A1-26-B-05	95ACC1520	
		10 m	CV-A1-26-B-10	95ACC1530	
		15 m	CV-A1-26-B-15	95ACC2080	
		25 m	CV-A1-26-B-25	95ACC2100	
		8-pole, U.L., black, P.V.C.	3 m	CS-A1-06-U-03	95ASE1220
			5 m	CS-A1-06-U-05	95ASE1230
	10 m		CS-A1-06-U-10	95ASE1240	
	8-pole, black	15 m	CS-A1-06-U-15	95ASE1250	
		25 m	CS-A1-06-U-25	95ASE1260	
50 m		CS-A1-06-U-50	95A252710		
Connector-not cabled		CS-A1-06-B-NC	95ACC2550		

# OF/OFA SERIES



## COMPLETE RANGE OF OPTIC FIBERS: UNIVERSAL OR ADVANCED MODELS

- Flexible models
- High temperature models (up to 125 °C)
- Fiber array with parallel beams for proximity or through beam detection
- Fixed focus proximity with axial, radial or lateral optics
- Proximity with 90° optics self-contained
- Focusing, collimating and deviating lenses

### APPLICATIONS

- Processing and Packaging machinery
- Electronics assembling
- Pharmaceutical industry
- Cosmetic and bottling industries

OF/OFA	
<b>Through beam</b>	Mechanical characteristics, length, diameter of the optic fiber, as well as the switching frequencies, light emitted and resolution of the optic fiber amplifier, affect the operating distances. Refer to the manuals to find the proper operating distance.
<b>Diffuse proximity</b>	
<b>Fixed focus</b>	
<b>OF diameter</b>	M3, M4, M6
<b>OFA number of emitted beams</b>	1, 16, 32
<b>Cable lengths</b>	1, 2 m
<b>Operating temperature</b>	-40...+60 °C (OF)
	-40...125 °C (OF-...-HT)
	-30...+70 °C (OFA)
<b>Core material</b>	PMMA plastic
<b>Sheath material</b>	PE plastic
<b>Terminal material</b>	Nickel-plated brass (OF), Stainless steel, Aluminium, ABS (OFA)
<b>Mechanical protection</b>	IP67

OF SERIES					
OPTIC FUNCTION	FIBER TYPE	LENGTH	TERMINAL	MODEL	ORDER No.
Through beam	standard	1 m	M4x0.7 mm	OF-19-ST-10	S76021901
	standard	2 m	M4x0.7 mm *	OF-23-ST-20	S76022300
	thin (Ø 1 mm)	1 m	M2x0.4 mm	OF-25-TN-10	S76022500
	standard	2 m	M4x0.7 mm	OF-43-ST-20	95A201350
	high-temperature	2 m	M4x0.7 mm	OF-43-HT-20	95A201280
	ultra-flexible	2 m	M4x0.7 mm	OF-43-UF-20	95A201290
Proximity	high-efficiency	2 m	M4x0.7 mm	OF-43-HP-20	95A201300
	standard	1 m	M6x1 mm	OF-18-ST-10	S76021801
	standard	2 m	M6x1 mm *	OF-22-ST-20	S76022200
	standard	2 m	M4x0.7 mm	OF-24-ST-20	S76022400
	thin (Ø 1 mm)	1 m	M3x0.5 mm	OF-26-TN-10	S76022600
	thin (Ø 1 mm)	1 m	M3x0.5 mm *	OF-28-TN-10	S76022800
	standard	2 m	ø 3x15 mm	OF-38-ST-20	95A201070
	standard	2 m	M6x0.75 mm	OF-42-ST-20	95A201340
	high-temperature	2 m	M6x0.75 mm	OF-42-HT-20	95A201250
	ultra-flexible	2 m	M6x0.75 mm	OF-42-UF-20	95A201260
Coaxial proximity	high-efficiency	2 m	M6x0.75 mm	OF-42-HP-20	95A201270
	standard	2 m	M6x1 mm	OF-36-ST-20	95A201000
	extra-flexible	2 m	M6x1 mm	OF-36-XF-20	95A201330
	standard	2 m	M4x0.7 mm	OF-44-ST-20	95A201310
	extra-flexible	2 m	M4x0.7 mm	OF-44-XF-20	95A201320

\* a bendable stainless steel extension 90mm long protrudes from the threaded optic head



OFA SERIES					
OPTIC FUNCTION	FIBER TYPE	LENGTH	TERMINAL	MODEL	ORDER No.
Through beam	axial, 16 beam array	2 m	15x15 mm	OFA-1-AE-20	95A201170
	radial, 16 beam array	2 m	15x15 mm	OFA-1-AS-20	95A201180
Proximity	axial, 32 beam array	2 m	20x20 mm	OFA-2-AE-20	95A201150
	radial, 32 beam array	2 m	20x20 mm	OFA-2-AS-20	95A201160
	radial	2 m	5x65 mm	OFA-6-RA-20	95A201140
Fixed focus proximity	axial	2 m	15x20 mm	OFA-4-FE-20	95A201200
	lateral	2 m	15x20 mm	OFA-4-FF-20	95A201210
	radial	2 m	15x20 mm	OFA-4-FS-20	95A201190

















OF ACCESSORIES			
DESCRIPTION	SUITABLE FiberS	MODEL	CODE N°
2 pcs 90° deviating lenses	OF-43-XX	AF-1	95ACC2690
2 pcs long distance collimating lenses (x 4)	OF-43-XX	AF-2	95ACC2700
1 pc focusing lens with 4 mm resolution	OF-44-XX	AF-3	95ACC2710
1 pc focusing lens with 0.4 mm resolution	OF-44-XX	AF-4	95ACC2720
2 pcs adapters Ø 2.2 mm for thin Fibers	OF-XX-TN	AF-5	95ACC2730
1 pc metal sheath for m6 x 0.75 Fibers	OF-42-XX	AF-7	95ACC2750
1 pc metal sheath for m4 x 07 Fibers	OF-43-XX (*)	AF-9	95ACC2770
Fiber-cutting tool with Ø 2.2 mm and Ø 1.1 mm holes	ALL	AF-11	95ACC2780

\* 2 sheaths have to be ordered for both the emitter-receiver sections

# DIMENSIONS









# OF SERIES

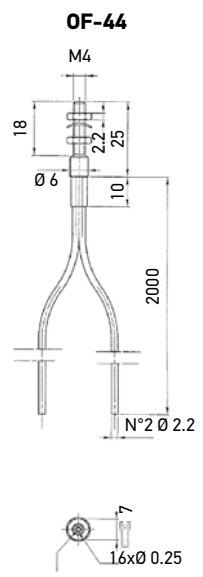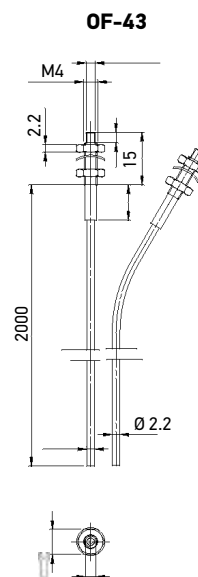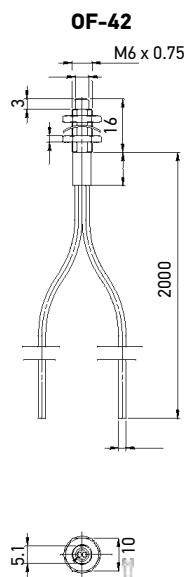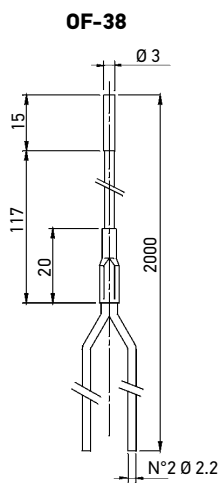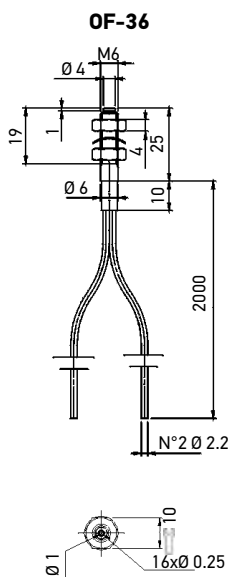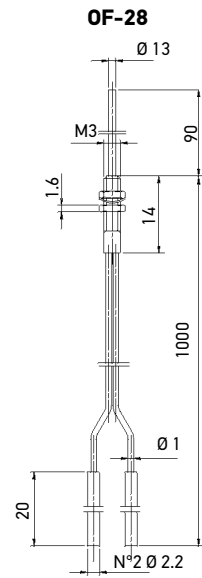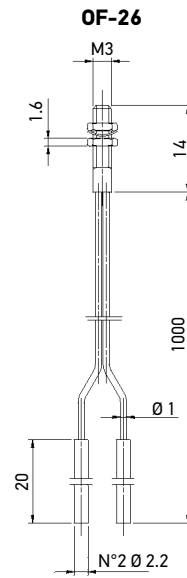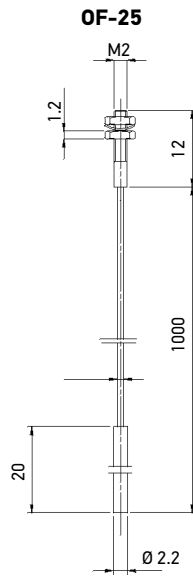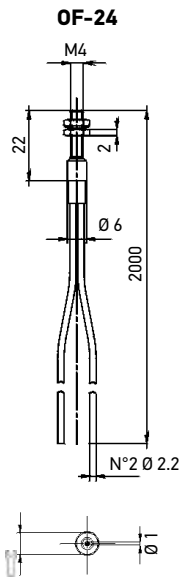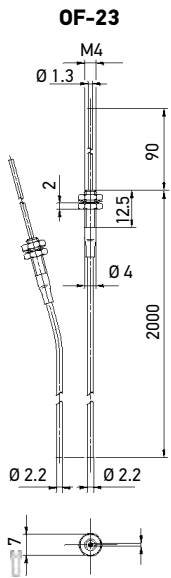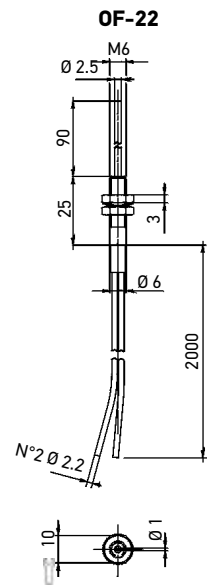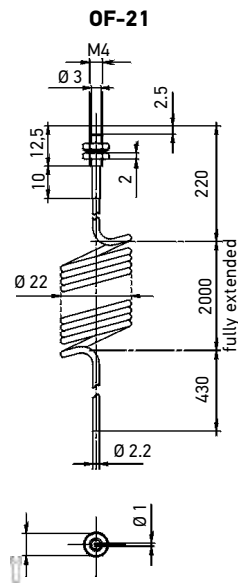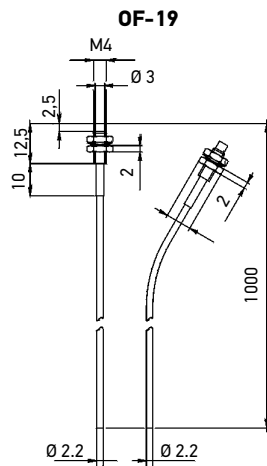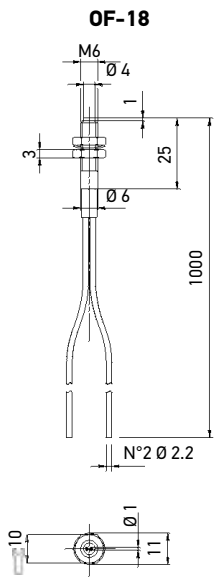

mm







# DIMENSIONS

# OF SERIES

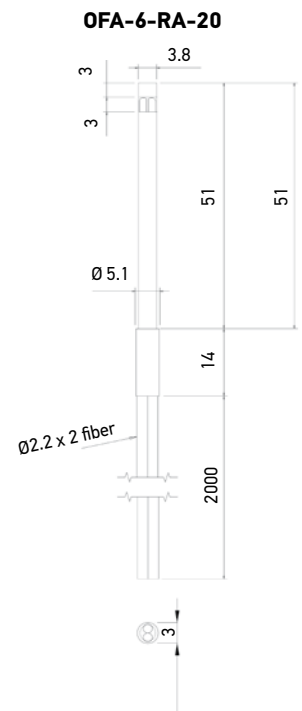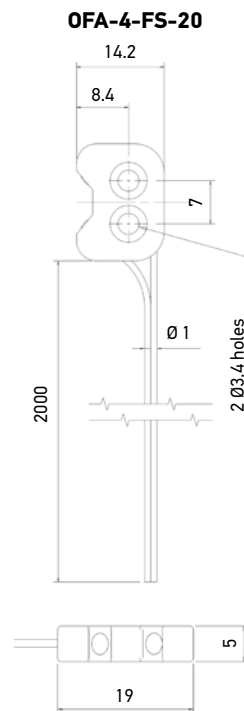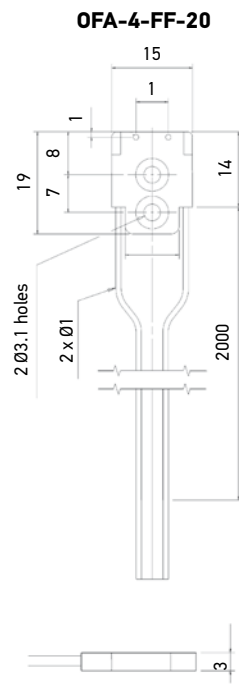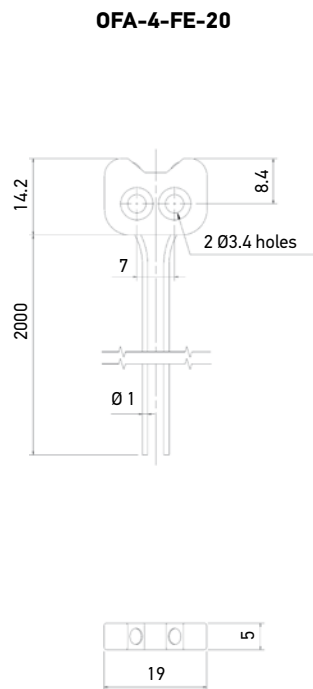
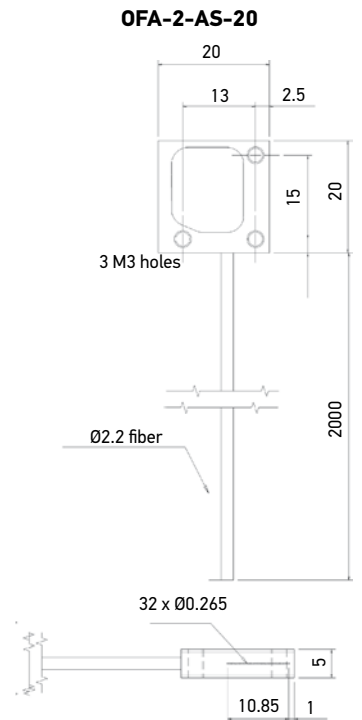
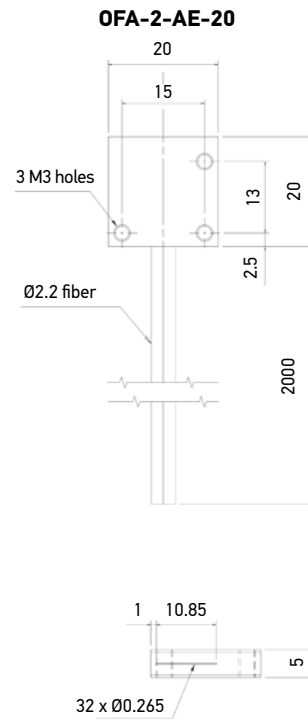
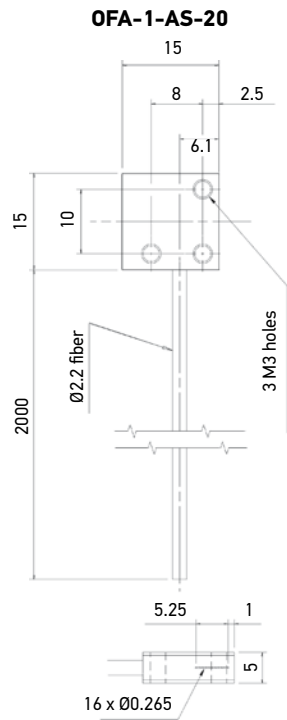
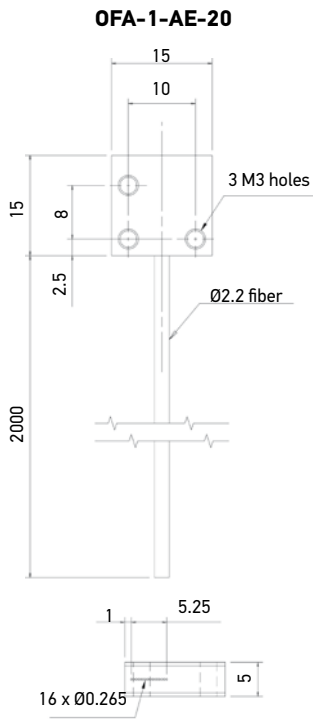


mm

# DETECTION DIAGRAMS

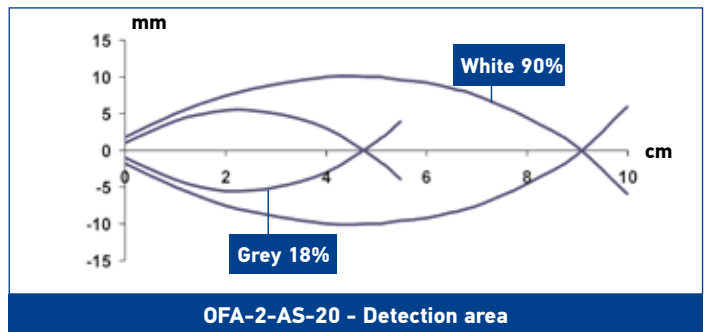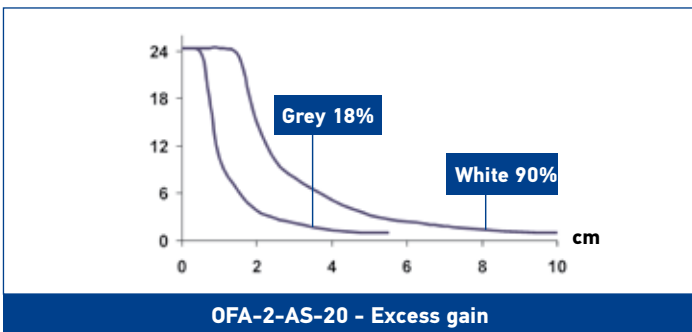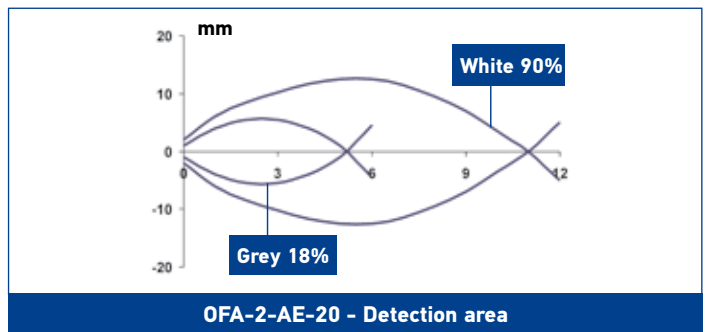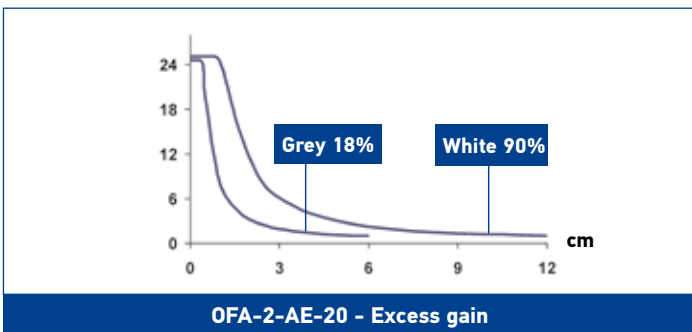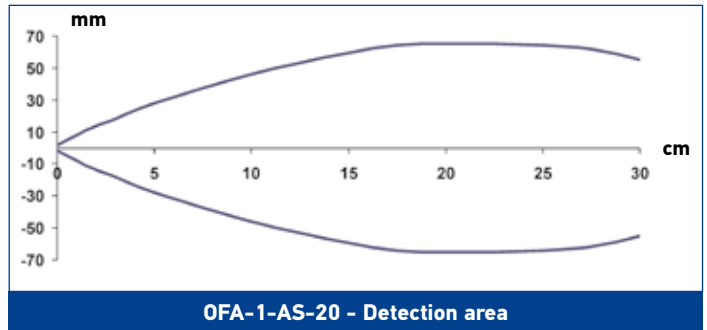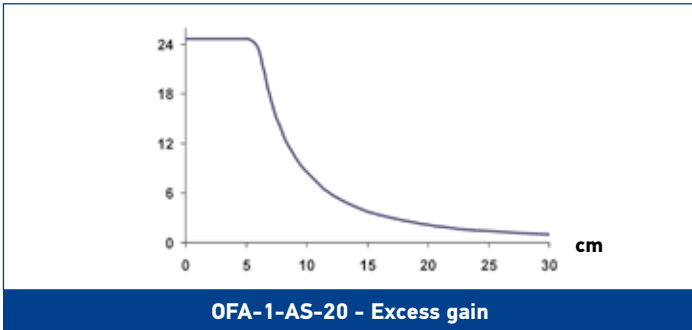



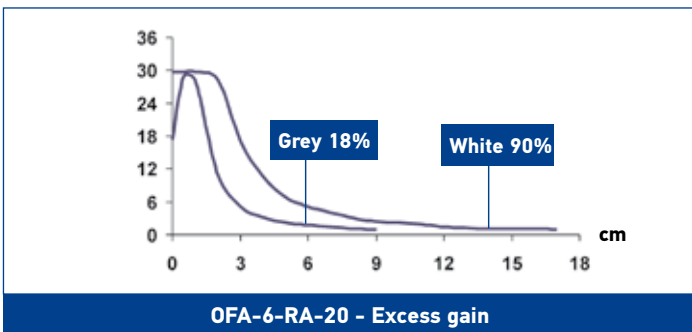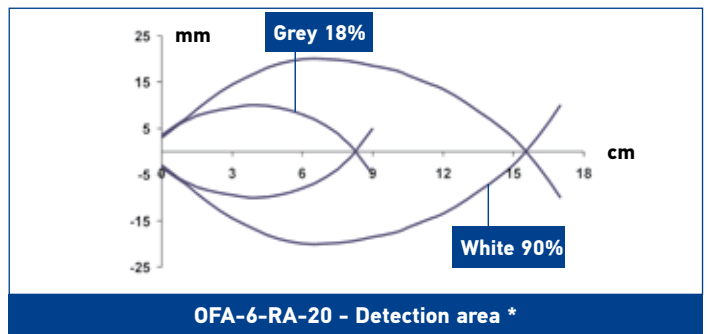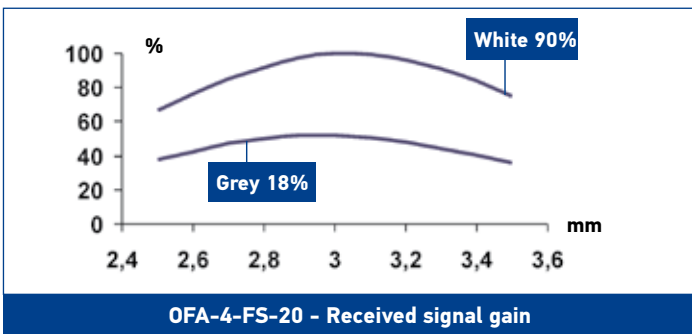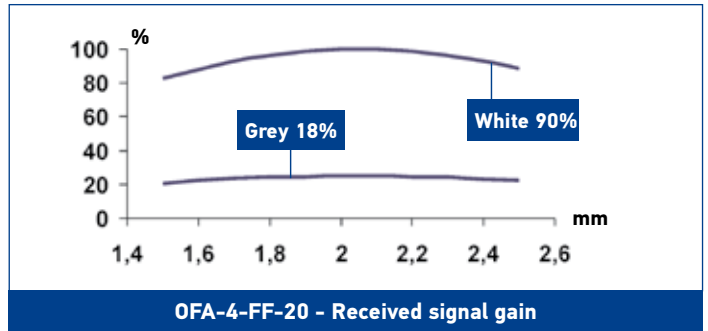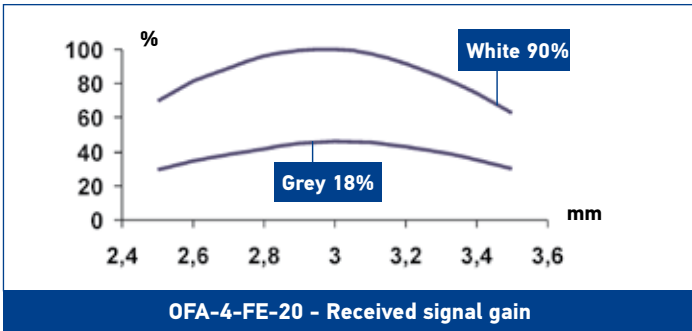

# IO-Link Master



## CBX-8IOL-XXXX


- Eight M12 IO-Link ports to PROFINET or Ethernet IP, which allows up to eight sensor or actuator connections on a single master
- L-Coded power connectors
- Rugged IP67 housing design for harsh environments
- Dual Ethernet ports
- Additional digital input on every port
- Power port sharing capability
- PLC access to IO-Link ISDU blocks without complex programming
- Supports the IOL\_CALL function
- OPC-UA based technology
- Web server

### APPLICATIONS

- Processing and Packaging machinery
- Conveyor lines, material handling
- Ceramics intralogistics
- Automated warehousing
- Industry 4.0 based applications



### GENERAL VIEW

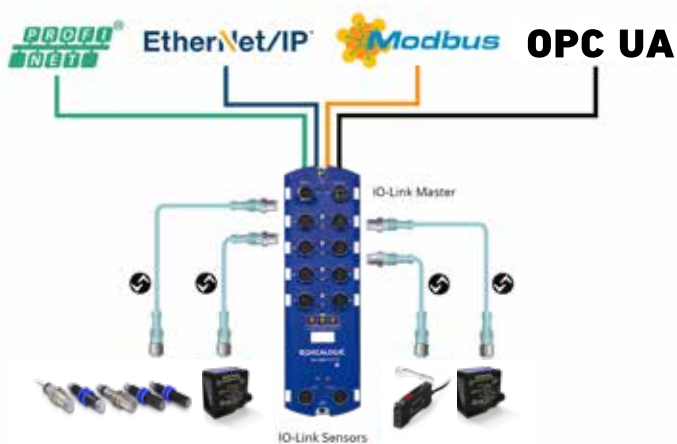

#### CBX-8IOL Master

The IO-Link Master is a very versatile industrial standard device. It provides the best solution about IO-Link gateway systems the embedded OPC-UA based technology. This new device series combines all the IO-Link standard technology benefits with OPC-UA and Field busses like Ethernet-IP, Profinet and Modbus all together in one family with two different devices to select the appropriate bus technology. The IO-Link Master is able to run simultaneously different technologies allowing the use of OPC-UA without the need of a PLC included in the system saving hardware and software cost. The IO-link data can be sent by an IO-Link sensor directly up to any SCADA or HMI software system. The unique and integrated WEB server Technology allows to get connected with your sensor bank just with a ethernet based device and using any commercial internet browser, setting and reading sensor parameters in the most efficient and easy way.


# TECHNICAL DATA

SPECIFICATION	PROFINET	EIP
<b>Hardware</b>		
<b>Network Interface</b>	10/100BASE-TX	
<b>Enclosure</b>	Molded Polyamide 66 (potted)	
<b>Ingress Protection Rating</b>	IP67	
<b>Installation and Grounding Method</b>	Machine or panel mount Two-hole M4 or #8	
<b>Network Protocols</b>	PROFINET IO, Modbus/TCP (slave)	EtherNet/IP™, Modbus/TCP (slave)
<b>Channels</b>	8 x IO-Link / Digital I/O (configurable)	
	8 x Digital Input DI	
	2 x Ethernet	
<b>LED Indicators</b>	Power, Module Status, Network Status, IO-Link, DI and Ethernet Port Status	
<b>Dimensions</b>	212 x 65 x 30 mm (8.35 x 2.56 x 1.18)	
<b>Product Weight</b>	454g (1.0 lb)	
<b>Electrical Specifications</b>		
<b>Power Connectors</b>	1 x Power Input	
	1 x Power Output	
<b>Connector type</b>	M12, L-coded, 4 + FE	
<b>Power Connector Pin-Out</b>	Pin 1 – US+ (Master electronics & sensor supply)	
	Pin 2 – UA- (Actuator supply)	
	Pin 3 – US- (Master electronics & sensor supply)	
	Pin 4 – UA- (Actuator supply)	
	Pin 5 – FE	
<b>DC Input Voltage Range</b>	20 VDC – 30 VDC	
<b>Power Supply In</b>		
<b>Module electronics and sensor (Us)</b>	16A (max.)	
<b>Actuator supply (UA)</b>	16A (max.)	
<b>Power Consumption (module electronics)</b>	120mA @ 24VDC	
<b>Power Supply Out</b>		
<b>US</b>	16A (max.) *	
<b>UA</b>	16A (max.) **	
<b>* US output available is determined by subtracting the following from the available input current:</b>	Module electronics Total C/Q current for all IO-Link ports Total sensor supply current	
<b>** UA output available is the same as the available</b>	UA input current	
<b>Environmental Specifications</b>		
<b>Operating Temperature</b>	-25°C to +60°C	
<b>Storage Temperature</b>	-40°C to +70°C	
<b>Operating Humidity (Non-Condensing)</b>	10% to 95%	
<b>Storage Humidity (Non-Condensing)</b>	10% to 95%	
<b>Ingress Protection</b>	IP67 (EN / IEC 60529)	
<b>Shock / Vibrations</b>	EN60068-2-6	
	EN60068-2-27	
<b>Environmental / Mechanical Approvals</b>	IEC 61131-2	
<b>Ethernet Interface Ports</b>		
<b>Number of Ports</b>	2	
<b>Connector Type</b>	M12 D-coded, 4-pin	
<b>Ethernet Specification</b>	10/100BASE-TX	
<b>Standards</b>	IEEE 802.3: 10BASE-T	
	IEEE 802.3u: 100BASE-TX	
<b>Auto-MD/MDI-X</b>	Yes	
<b>Auto-Negotiation</b>	Yes	
<b>Link Distance</b>	100 m	
<b>Cable Types</b>	---	Unshielded or Shielded twisted pair (Cat 5 or higher)
<b>IPv4 Addressing</b>	---	Yes
<b>IO-Link Ports Specifications</b>		
<b>IO-Link Version</b>	Supports V1.0 and V1.1	
<b>Connectors</b>	8 (PORT 1 – 8)	
<b>Connector type</b>	M12, A-coded Female, 5-position	
<b>Channels</b>	8 x IO-Link / Digital I/O (configurable)	
	8 x DI	
<b>Port Pinout</b>	Pin 1 = L+	
	Pin 2 = DI	
	Pin 3 = L-	
	Pin 4 = C/Q	
	Pin 5 = no connect	

SPECIFICATION	PROFINET	EIP
<b>IO-Link Ports Specifications</b>		
<b>Configurations per Port</b>		
<b>Pin 4 (configurable):</b>	DI (SIO mode)	
<b>Pin 3</b>	DO (SIO mode)	
	DI	
<b>Output Current L+/L- (sensor)</b>	1.6 A (Port 1)	
	1.0 A (Port 3)	
	500 mA (Port 2, 4 – 8; each)	
<b>Output Current C/Q</b>	200 mA	
<b>Output Current per Master (C/Q &amp; L+/L-)</b>	6.7 A (max.)	
	4.8K (COM1)	
<b>IO-Link Mode Transfer Rates</b>	38.4K (COM2)	
	230.4K (COM3)	
<b>Baud Rate Recognition</b>	Automatic	
<b>Cable Length</b>	20 m (max.)	
<b>Protection</b>	Overload and short circuit protection (Self recovers)	
<b>Cable Length (Maximum)</b>	20 m	
<b>IO-Link Ports – Digital Input SIO Mode (Port Pin 4)</b>		
<b>Input Characteristics</b>	IEC 61131-2 Type 1 and Type 3 Compliant	
<b>Input Threshold</b>	High: 10.5 – 13.0V	
	Low: 8.0 – 11.5V	
<b>Typical Input Current</b>	3 mA	
<b>Cable length (max.)</b>	30 m	
<b>IO-Link Ports – Digital Output SIO Mode (Port Pin 4)</b>		
<b>Typical Output Voltage</b>	24 VDC	
<b>Output Current (max.)</b>	200 mA	
<b>Output Current per Master</b>	1.6 A (max.)	
<b>Lamp Load (max.)</b>	4W	
<b>Protection</b>	Overload and short circuit protection	
<b>Output Function</b>	PNP/NPN (Push-Pull)	
<b>Cable length (maximum)</b>	30 m	
<b>IO-Link Ports – Digital Input (Port Pin 3; dedicated)</b>		
<b>Input Characteristics</b>	IEC 61131-2 Type 1 and Type 3 Compliant	
<b>Typical Input Current</b>	3 mA	
<b>Input Threshold</b>	High: 6.8 – 8.0V	
	Low: 5.2 – 6.4V	
<b>Reverse Polarity Protected</b>	Yes (-40V to +40V)	
<b>Cable length (maximum)</b>	30 m	
<b>PROFINET IO Specifications</b>		
<b>Web Page Configuration</b>	PROFINET IO Device Name	---
	IOL_CALL Function Block Timeout (1-20)	---
<b>Diagnostics</b>	Yes	---
<b>GSD Files</b>	Yes	---
<b>Diagnostics</b>	Yes	---
<b>EtherNet/IP Interface Specifications</b>		
<b>Supported PLCs</b>		
<b>Including but not limited to:</b>	Control Logix	---
	Compact Logix	---
	RSLogix	---
	SLC 500	---
	PLC5	---
	MicroLogix	---
<b>Other Class 1 or Class 3 EtherNet/IP PLCs may be supported</b>		
<b>ISDU Read &amp; Writes</b>	---	Up to 40 individual commands in one EtherNet/IP message
<b>ISDU Commands</b>	---	Selectable byte swapping (none, 16-bit, or 32-bit)
	---	Selectable payload sizes (4 to 232 bytes)
	---	ISDU block index
	---	ISDU sub-index
	---	Length of read or write
	---	Data payload
<b>Web Page Configuration</b>	Port configuration for ISDU Data, Process Data, Transfer Mode, Read/Write, Write PDI to Tag/File, Read PDO from Tag/File.	
	---	EtherNet/IP configuration
	---	Time to Live (TTL) Network Value
	---	Multicast IP Address Allocation Control
	---	User-Defined Number of Multicast IP Addresses
	---	User-Defined Multicast Starting IP Address
<b>Diagnostics</b>	---	Session Encapsulation Timeout
<b>Electronic Data Sheet (EDS)</b>	---	Yes
<b>Sample PLC Programs</b>	---	Yes

SPECIFICATION	PROFINET	EIP
	<b>Modbus TCP</b>	
<b>Supported Controllers (Modbus TCP Masters)</b>	PLC HMI SCADA OPC Server	
<b>Supported Clients</b>	Any Modbus TCP Client Applications on phones/tables	
<b>Web Page Configuration</b>	Port configuration for ISDU Response Timeout, Process Data, and Transfer Mode.	
<b>Diagnostics</b>	Yes	
	<b>IO-Link Master Features</b>	
<b>Configuration</b>	Embedded web interface, IO-Link, EtherNet/IP, and Modbus TCP	
<b>Data Storage</b>	Automatic or Manual - Upload and/or Download	
<b>Device Validation</b>	Yes	
<b>Data Validation</b>	Yes	
<b>Diagnostics</b>	IO-Link, EtherNet/IP, and Modbus TCP	
	<b>Provides the following capabilities:</b>	
<b>Powerful Web Interface</b>	Password protected with Admin, Operator, and User accounts ISDU batch handling Load IODD files to configure the IO-Link device IODD Handler parses xml files making them readable and configurable Log files	
<b>Remote Parameterization</b>	Yes	
	<b>Export Information</b>	
<b>Packaged Shipping Weight</b>	1.2 lb, 544.3 g	
<b>Package Dimensions (L x W x H)</b>	10.5 x 4.5 x 1.5 ; 267 x 114 x 38mm	
<b>UPC Code</b>	7-56727-99609-5	
<b>Country of Origin</b>	USA	
<b>ECCN</b>	5A992	
<b>Schedule B Number</b>	8517.62.0050	
	<b>Regulatory Approvals</b>	
<b>Immunity</b>	European Standard EN 61000-6-2 International Standard IEC 61000-6-2	
<b>EN/IEC 61131-2 and EN/IEC 61131-9</b>	IEC 1000-4-2/EN 61000-4-2: Electrostatic Discharge (ESD) IEC 1000-4-3/EN 61000-4-3: Radiated, Radio-Frequency (RF) IEC 1000-4-4/EN 61000-4-4: Fast Transient/Burst IEC 1000-4-5/EN 61000-4-5: Surge IEC 1000-4-6/EN 61000-4-6: Conducted disturbance IEC 1000-4-8/EN 61000-4-8: Magnetic field IEC 1000-4-11/EN 61000-4-11: Dips and Voltage Variations	
<b>Emission</b>	European Standard EN 61000-6-4 International Standard IEC 61000-6-4 AS/NZS CISPR-11 Class A limit	
<b>FCC Part15 Subpart B</b>	Canadian EMC requirements ICES-001 CSA C22.2 No. 61010-1-12 / CSA C22.2 No. 61010-1-201	
<b>Safety</b>	UL 61010-1 / UL 61010-1-201 UL File # E360395	
<b>Vibration</b>	EN 60068-2-6/ IEC 60068-2-6	
<b>Mechanical Shock</b>	EN 60068-2-27/ IEC 60068-2-27	
<b>Environmental / Mechanical Test Approvals</b>	IEC 61131-2	
<b>Other</b>	The components of this product comply with the requirements of the EMC/EMI Directive 2014/30/EU, Directive 2011/65/EU on the Restriction of the use of certain Hazardous Substances (RoHS2).	
<b>Regulatory Approval Symbols</b>		

# DIMENSION

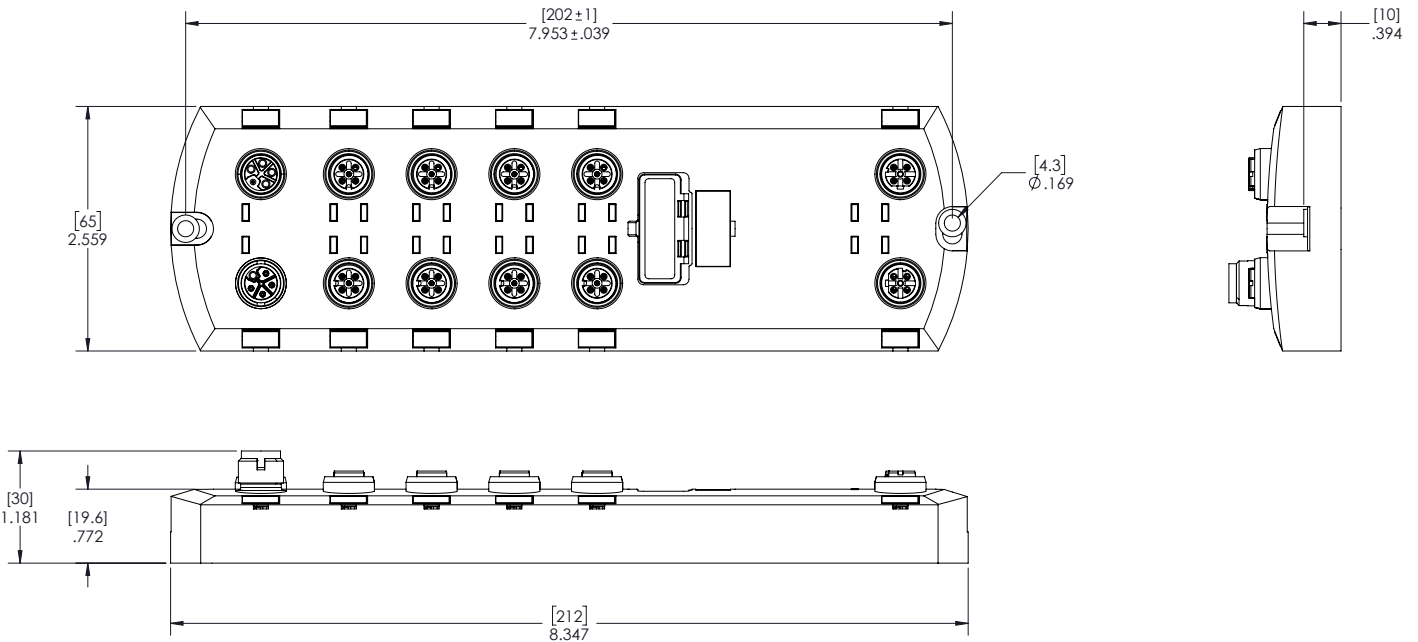


# CONNECTIONS

## CONNECTING THE POWER

The CBX-IOL-8-PNIO provides M12 (5-poles) L-coded input and output power connectors. Use a 24VDC power supply capable of the total output current required.

*Note: Power connectors must have an approved cable or protective cover attached to the port for IP67 compliance.*


PIN	POWER INPUT (MALE)	POWER OUTPUT OR ACTUATOR POWER (FEMALE)	DESCRIPTION
1	US+	US+ or +V	IO-Link Master's system electronics and IO-Link devices
2	UA-	UA- or 0V	Actuator supply
3	US-	US- or 0V	IO-Link Master's system electronics and IO-Link devices
4	UA+	UA+ or +V	Actuator supply
5		FE	

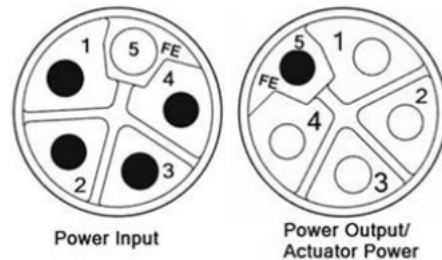

## CONNECTING THE NETWORK

The IOLM provides two Fast Ethernet (10/100BASE-TX) M12, 4-pin female D-coded connectors.

PIN	SIGNAL
1	Tx+
2	Rx+
3	Tx-
4	Tx-



You can use this procedure to connect the IOLM to the network.

1. Securely connect one end of a shielded twisted-pair (Cat 5 or higher) M12 Ethernet cable to either Ethernet port.
2. Connect the other end of the cable to the network.
3. Optionally, use the other Ethernet port to daisy-chain to another Ethernet device.
4. If you did not connect both Ethernet ports, make sure that the unused port is covered with a connector cap to keep dust and liquids from getting in the connector.

*Note: Ethernet ports must have an approved cable or protective cover attached to the connector to guarantee IP67 integrity.*

# INDICATORS AND SETTINGS


## SETTINGS



Follow these steps to change the default rotary switch settings:

1. Gently open the window using a small flathead screwdriver.
2. Gently swing open the switch window from the top to the bottom, allowing it to pivot on the hinge on the bottom of the window.
3. Turn each dial to the appropriate position using a small flathead screwdriver.  
The default setting is 000 as shown above. The arrow points to the switch location. 0 is located at the 9:00 position. Turn the dial clockwise to the appropriate setting.
4. Close the window and make sure that it snaps shut tightly.  
Failure to close the configuration window properly may compromise IP67 integrity.

## INDICATORS

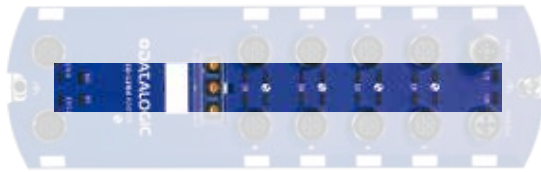


### CBX-IOL-8-xxx LEDs

The CBX-IOL-8-EIP (8-port IP67 model with an L-coded power connector) provides these LEDs.

### LED Activity During Power On Sequence - CBX-IOL-8-xxx LEDs

1. The **US** LED lights.
2. The **ETH1/ETH2** LED lights on the connected port.
3. The **MOD** and **NET** LEDs are lit.
4. The IO-Link LEDs flash (if no IO-Link device attached) or are lit if an IO-Link device is attached.  
The **MOD** LED is solid green, the IO-Link Master is ready for operation.


CBX-IOL-8-EIP LEDs	
US	<p>The <b>US</b> LED provides the following information:</p> <ul style="list-style-type: none"> <li>Green solid = The IO-Link Master is powered</li> <li>Red solid = Power input voltage below 18VDC</li> </ul>
UA	<p>The <b>UA</b> LED provides the following information:</p> <ul style="list-style-type: none"> <li>Green solid = The IO-Link Master is powered</li> <li>Red solid = Power input voltage below 18VDC</li> </ul>
MOD (Module Status)	<p>The <b>MOD</b> LED provides the following information:</p> <ul style="list-style-type: none"> <li>Off = No module status</li> <li>Green and red flashing = Self-test</li> <li>Green flashing = Standby – not configured</li> <li>Green solid = Operational</li> <li>Red flashing = Minor recoverable fault - check the <b>EtherNet/IP Diagnostics</b> page to locate the issue</li> <li>Red solid = Major unrecoverable fault</li> </ul>
NET (Network)	<p>The <b>NET</b> LED provides the following information:</p> <ul style="list-style-type: none"> <li>Off = No IP address</li> <li>Green and red flashing = Self-test</li> <li>Green flashing = An IP address is configured, but no CIP connections are established, and an Exclusive Owner connection has not timed out</li> <li>Green solid = Active EtherNet/IP or Modbus connection and no EtherNet/IP connection time-outs</li> <li>Red flashing = One or more EtherNet/IP connection time-outs</li> <li>Red solid = Duplicate IP address on network</li> </ul>
 1-8	<p>This LED provides the following information about the IO-Link port</p> <ul style="list-style-type: none"> <li>Off = SIO mode - signal is low or disabled</li> <li>Yellow = SIO mode - signal is high</li> <li>Red flashing = Hardware fault - make sure that configured IO-Link settings on the port do not conflict with the device that is attached:                             <ul style="list-style-type: none"> <li>- <b>Automatic Upload</b> and <b>Download</b> is enabled and it is not the same device</li> <li>- <b>Device Validation Mode</b> is enabled and it is not the correct device</li> <li>- <b>Data Validation Mode</b> is enabled but there is an error</li> </ul> </li> <li>Red solid = PDI of the attached IO-Link device is invalid</li> <li>Green solid = An IO-Link device is connected and communicating</li> <li>Green flashing = Searching for IO-Link devices</li> </ul>
Port 1-4 DI	<p>The <b>DI</b> LED indicates digital input on DI (Pin 2)</p> <ul style="list-style-type: none"> <li>Off = DI signal is low or disconnected</li> <li>Yellow = DI signal is high</li> </ul>
ETH1/ETH2	<p>The <b>ETH1/ETH2</b> LEDs provide the following information:</p> <ul style="list-style-type: none"> <li>Green solid = Link</li> <li>Green flashing = Activity</li> </ul>

# IO-LINK SETTING AND CONNECTIONS

The CBX-IOL-8-EIP provides eight IO-Link ports with M12, 5-pin female/A coded connectors. Each port has robust over-current protection and short circuit protection on its L+/L- power output and C/Q IO-Link signal. The pin-out for each IO-Link port is per the IO-Link standard and is provided in the following table:

This table provides signal information for the IO-Link connectors.

PIN	SIGNAL	DESCRIPTION
1	L+	IO-Link device power supply (+24V)
2	DI	Digital input
3	L-	IO-Link device power supply (0V)
4	C/Q	Communication signal, which supports SDCI (IO- Link) or SIO (standard input/output) digital I/O
5	FE	Functional Earth (electronics wiring)



The standard SDCI (IO-Link) transmission rates are supported:

- COM1 at 4.8Kbps
- COM2 at 38.4Kbps
- COM3 at 230.4Kbps

There are active over-current limiter electronics for each port in the CBX-IOL-8-EIP that detects the overload/short-circuit condition within a few milliseconds and shuts off the output power to protect the port and the devices connected to it. The port's power output self-recovers and restores to normal immediately after the overload or short-circuit condition is removed.

When a port is affected by overload/short-circuit condition, it does not affect the operation of the other ports. All other ports will continue to operate normally without any glitch or interruption. The current output capacity, cutoff current, and power sharing/budgeting for L+/L- and C/Q signal for the ports on the CBX-IOL-8-EIP are as follows.

## WEB SERVER GUI

IO-Link Port Config	PORT 1	PORT 2	PORT 3	PORT 4	PORT 5	PORT 6	PORT 7	PORT 8
Port Name	IO-Link Port 1	IO-Link Port 2	IO-Link Port 3	IO-Link Port 4	IO-Link Port 5	IO-Link Port 6	IO-Link Port 7	IO-Link Port 8
Port Mode	IOLink	IOLink	IOLink	IOLink	IOLink	IOLink	IOLink	IOLink
PDG Link Enable	True	True	True	True	True	True	True	True
Direct SDCI	False	False	False	False	False	False	False	False
Direct Auxiliary Input	False	False	False	False	False	False	False	False
Default Digital Output	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Maximum Cable Time (t <sub>max</sub> - t <sub>min</sub> )	4 ms	4 ms	4 ms	4 ms	4 ms	4 ms	4 ms	4 ms
Auxiliary Input Settling Time (t <sub>max</sub> - t <sub>min</sub> )	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms
Auxiliary Input Hold Time (t <sub>max</sub> - t <sub>min</sub> )	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms
SDCI Input Settling Time (t <sub>max</sub> - t <sub>min</sub> )	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms
SDCI Input Hold Time (t <sub>max</sub> - t <sub>min</sub> )	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms	0 ms

1 • Home

2 • IO-Link Settings


ID NUMBER	DEVICE	LOAD FILENAME	DEVICE IMAGE	GENERATOR IMAGE	SIZE
412	A	data\loglc-514-401-2030126-3000L_1.xml	data\loglc-etc-etc.png	data\loglc-1log.png	476
412	T	data\loglc-514-401-192-2010010-3000L_1.xml	data\loglc-etc-etc.png	data\loglc-1log.png	534
412	2	data\loglc-514-401-2030126-3000L_1.xml	data\loglc-etc-etc.png	data\loglc-1log.png	494
412	3	data\loglc-514-401-2030126-3000L_1.xml	data\loglc-etc-etc.png	data\loglc-1log.png	476
412	5	data\loglc-514-401-2030126-3000L_1.xml	data\loglc-etc-etc.png	data\loglc-1log.png	796
412	4	data\loglc-514-401-2030126-3000L_1.xml	data\loglc-etc-etc.png	data\loglc-1log.png	796

3 • IO-Link Device Description Files






4 • IO-Link Device - Port 1

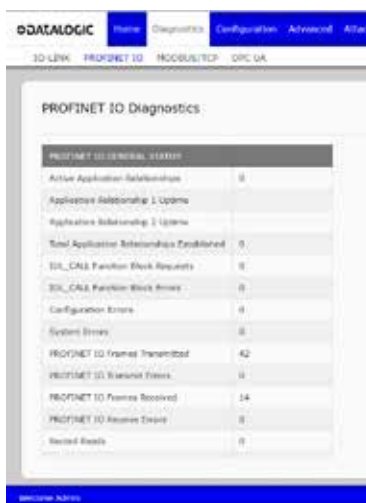

5 • PROFINET IO Diagnostics

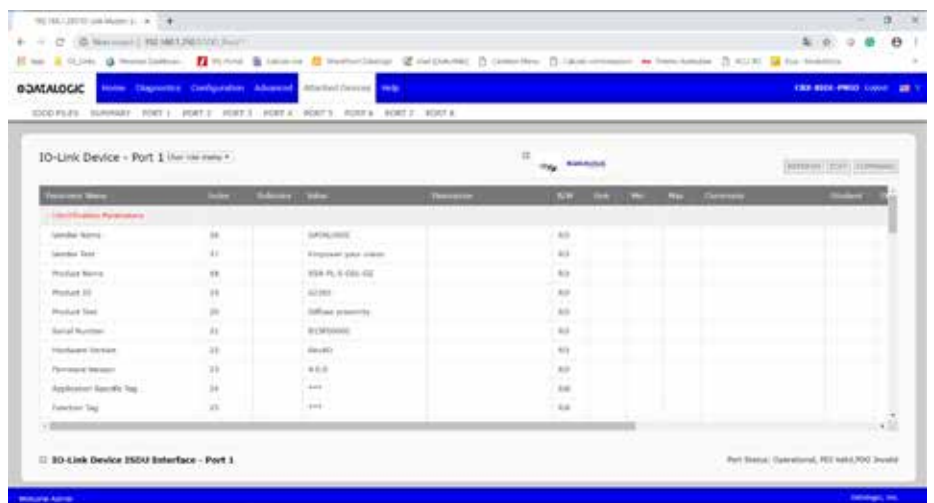

## MODEL SELECTION AND ORDER INFORMATION

MODEL	DESCRIPTION	ORDER No.
CBX-8IOL-EIP	CBX-8IOL-EIP 8P IOL M12 EIP MASTER	95ACC8180
CBX-8IOL-PNIO	CBX-8IOL-PNIO 8P IOL M12 PROFINET MASTER	95ACC8190

## CABLES

TYPE	DESCRIPTION	STYLES	LENGTH	MODEL	ORDER No.
M12 L-coded Axial	5-poles	PVC Grey	3m	CS-M1-02-B-03	95ACC0007
M12 Male/M8 Female double headed axial	4-poles	PVC Black	3m	CS-H1-02-B-03	95ACC0008
M12 Male/M12 Female double headed axial	4-poles	PVC Black	3m	CS-I1-02-B-03	95ACC0009

# CS SERIES - CABLES & CONNECTORS




THE RIGHT CONNECTION FOR YOUR PHOTOELECTRIC SENSORS FOR INDUSTRIAL ENVIRONMENT 24VDC OR 10-30VDC POWER SUPPLY

- M8 and M12, axial or radial female connectors
- Standard length cables: 2, 3, 5, 7, 10, 15, 25 or 50m
- 3, 4, 5, 8 or 12 poles
- Shielded or unshielded models
- P.U.R. coated models for use in harsh environments
- P.V.C. coated models for standard use
- Standard M12 4 pole non-cabled connectors
- The cable jacket maybe marked 300V only as insulation voltage between wires, the operational voltage is 24Vdc or 10-30Vdc, less than 80 V required by CCC-China

CS	
<b>Connectors</b>	M8 axial or radial(90°) 3 poles M12 axial or radial(90°) 3 poles M8 axial or radial(90°) 4 poles M12 axial or radial(90°) 4 poles M12 axial 5 poles M12 axial 8 poles
<b>Cable lengths</b>	3, 5, 7, 10, 15, 25 m
<b>Conductor diameter</b>	42 x 0.10 mm - 0.35 mm≈ (m12 3-pole) 32 x 0.10 mm - 0.25 mm≈ (m12 4-pole) 32 x 0.10 mm - 0.25 mm≈ (m8 4-pole)
<b>Conductor material</b>	annealed non-tinned electrolytic copper
<b>Flammability class</b>	CEI 20-22, IEC 332/3
<b>Housing material</b>	flame-retardant and non-propagate P.U.R., P.V.C.
<b>Mechanical protection</b>	IP67, with locked ring

CONNECTOR & DIRECTION	POLES	STYLE	CABLE LENGTH	MODEL	ORDER No.	
M12 Connector (Axial)	3-pole	Grey, P.V.C.	3 m	CS-A1-01-G-03	95A251290	
			5 m	CS-A1-01-G-05	95A251300	
			7 m	CS-A1-01-G-07	95A251320	
			10 m	CS-A1-01-G-10	95A251340	
	4-pole	Grey, P.V.C.	Grey, P.V.C.	3 m	CS-A1-02-G-03	95A251380
				5 m	CS-A1-02-G-05	95A251270
				7 m	CS-A1-02-G-07	95A251280
			P.U.R.	10 m	CS-A1-02-G-10	95A251390
				2 m	CS-A1-02-R-02	95A251540
				5 m	CS-A1-02-R-05	95A251560
	5-pole	Grey, P.V.C.	Grey, P.V.C.	3 m	CS-A1-03-G-03	95ACC2110
				5 m	CS-A1-03-G-05	95ACC2120
				10 m	CS-A1-03-G-10	95ACC2140
			Black, P.V.C.	3 m	CS-A1-06-B-03	95ACC2230
				5 m	CS-A1-06-B-05	95ACC2240
				10 m	CS-A1-06-B-10	95ACC2250
M12 Connector (Radial 90°)	3-pole	Grey, P.V.C.	3 m	CS-A2-01-G-03	95A251200	
			5 m	CS-A2-01-G-05	95A251210	
			7 m	CS-A2-01-G-07	95A251220	
			10 m	CS-A2-01-G-10	95A251230	
		OIL resistant (CEI 2034-01)	3 m	CS-A2-01-O-03	95A251660	
			5 m	CS-A2-01-O-05	95A251670	
			10 m	CS-A2-01-O-10	95A251680	
			3 m	CS-A2-02-G-03	95A251360	
	4-pole	Grey, P.V.C.	5 m	CS-A2-02-G-05	95A251240	
			7 m	CS-A2-02-G-07	95A251245	
			10 m	CS-A2-02-G-10	95A251260	
			P.U.R.	2 m	CS-A2-02-R-02	95A251550
		OIL resistant (CEI 2034-01)	5 m	CS-A2-02-R-05	95A251570	
			5 m	CS-A2-02-O-05	95A251690	
			10 m	CS-A2-02-O-10	95A251700	

M12 Connector with LED (for PNP N.O. sensors) (Radial 90°)	3-pole	Grey, P.V.C.	5 m	CS-A2-11-G-05	95A251310	
			10 m	CS-A2-11-G-10	95A251330	
	4-pole	Grey, P.V.C.	3 m	CS-A2-12-G-03	95A251400	
			5 m	CS-A2-12-G-05	95A251350	
M8 Connector (Axial)	3-pole	Grey, P.V.C.	10 m	CS-A2-12-G-10	95A251370	
			3 m	CS-B1-01-G-03	95A251490	
		P.U.R.	5 m	CS-B1-01-G-05	95A251510	
			2 m	CS-B1-01-R-02	95A251580	
	4-pole	Grey, P.V.C.	5 m	CS-B1-01-R-05	95A251600	
			3 m	CS-B1-02-G-03	95A251420	
			5 m	CS-B1-02-G-05	95A251430	
			7 m	CS-B1-02-G-07	95A251440	
		P.U.R.	10 m	CS-B1-02-G-10	95A251480	
			2 m	CS-B1-02-R-02	95A251620	
			5 m	CS-B1-02-R-05	95A251640	
			5 m	CS-B1-02-O-05	95A251730	
M8 Connector (Radial 90°)	3-pole	Grey, P.V.C.	10 m	CS-B1-02-O-10	95A251100	
			3 m	CS-B2-01-G-03	95A251500	
		P.U.R.	5 m	CS-B2-01-G-05	95A251520	
			2 m	CS-B2-01-R-02	95A251590	
	4 pole	Grey, PVC	5 m	CS-B2-01-R-05	95A251610	
			3 m	CS-B2-02-G-03	95A251450	
			5 m	CS-B2-02-G-05	95A251460	
		P.U.R.	7 m	CS-B2-02-G-07	95A251470	
			10 m	CS-B2-02-G-10	95A251530	
			2 m	CS-B2-02-R-02	95A251630	
Shielded M12 Connector (Axial)	3-pole	Grey, P.V.C.	5 m	CS-B2-02-R-05	95A251650	
			5 m	CS-B2-02-O-05	95A251720	
		P.U.R.	10 m	CS-B2-02-O-10	95A251110	
			10 m	CS-B2-02-G-03	95A251450	
	4-pole	Black, P.V.C.	5 m	CS-B2-02-G-05	95A251460	
			7 m	CS-B2-02-G-07	95A251470	
		P.U.R.	10 m	CS-B2-02-G-10	95A251530	
			2 m	CS-B2-02-R-02	95A251630	
Shielded M12 Connector (Radial 90°)	3-pole	Grey, P.V.C.	5 m	CS-B2-02-R-05	95A251650	
			5 m	CS-B2-02-O-05	95A251720	
		P.U.R.	10 m	CS-B2-02-O-10	95A251110	
			10 m	CS-B2-02-G-03	95A251450	
	4-pole	Black, P.V.C.	5 m	CS-B2-02-G-05	95A251460	
			7 m	CS-B2-02-G-07	95A251470	
			10 m	CS-B2-02-G-10	95A251530	
		P.U.R.	2 m	CS-B2-02-R-02	95A251630	
			5 m	CS-B2-02-R-05	95A251650	
			5 m	CS-B2-02-O-05	95A251720	
M12 Connector (Axial)	3-pole	Grey, P.V.C.	10 m	CS-B2-02-O-10	95A251110	
			10 m	CV-A1-21-G-10	95ACC2060	
		Black, P.V.C.	3 m	CV-A1-22-B-03	95ACC1480	
			5 m	CV-A1-22-B-05	95ACC1490	
	4-pole	Black, P.V.C.	10 m	CV-A1-22-B-10	95ACC1500	
			15 m	CV-A1-22-B-15	95ACC2070	
		P.U.R.	25 m	CV-A1-22-B-25	95ACC2090	
			3 m	CV-A1-26-B-03	95ACC1510	
	8-pole	Black, P.V.C.	5 m	CV-A1-26-B-05	95ACC1520	
			10 m	CV-A1-26-B-10	95ACC1530	
		P.U.R.	15 m	CV-A1-26-B-15	95ACC2080	
			25 m	CV-A1-26-B-25	95ACC2100	
M12 Connector (Axial)	4-pole	Black, P.V.C.	3 m	CV-A2-22-B-03	95ACC1540	
			5 m	CV-A2-22-B-05	95ACC1550	
		Black, P.V.C.	10 m	CV-A2-22-B-10	95ACC1560	
			3 m	CV-A2-26-B-03	95ACC1600	
	8-pole	Black, P.V.C.	5 m	CV-A2-26-B-05	95ACC1610	
			10 m	CV-A2-26-B-10	95ACC1620	
		P.U.R.	3 m	CS-A1-02-U-03	95ASE1120	
			5 m	CS-A1-02-U-05	95ASE1130	
		5-pole	U.L., Black, P.V.C.	10 m	CS-A1-02-U-10	95ASE1140
				15 m	CS-A1-02-U-15	95ASE1150
P.U.R.	25 m		CS-A1-02-U-25	95ASE1160		
	3 m		CS-A1-03-U-03	95ASE1170		
8-pole	U.L., Black, P.V.C.	5 m	CS-A1-03-U-05	95ASE1180		
		10 m	CS-A1-03-U-10	95ASE1190		
	P.U.R.	15 m	CS-A1-03-U-15	95ASE1200		
		25 m	CS-A1-03-U-25	95ASE1210		
	50 m	U.L., Black, P.V.C.	50 m	CS-A1-03-U-50	95A252700	
			3 m	CS-A1-06-U-03	95ASE1220	
		P.U.R.	5 m	CS-A1-06-U-05	95ASE1230	
			10 m	CS-A1-06-U-10	95ASE1240	
M12 Connector (Axial)	4-pole	Black	15 m	CS-A1-06-U-15	95ASE1250	
			25 m	CS-A1-06-U-25	95ASE1260	
	8-pole	Black	50 m	CS-A1-06-U-50	95A252710	
			Connector- not cabled	CS-A1-02-B-NC	G5085002	
M12 Connector (Radial 90°)	4-pole	Black	Connector- not cabled	CS-A1-06-B-NC	95ACC2550	
			15 m	CS-A2-02-B-NC	G5085003	
	12-pole	Black	50 m	CS-A1-10-U-15	95A252750	
			10 m	CS-A1-10-U-50	95A252770	
M12 Connector (Axial)	12-pole	SG Extended blank rx	0,2 m	CS-A1-10-U-10	95A252740	
M12 Connector (Radial 90°)	12-pole	Black	3 m	CS-G1-70-B-002	95A252830	
M12 Connector (Axial)	5-pole	SG extended tx	0,2 m	CS-A1-10-U-03	95A252720	
SG Extended Cascade	---	SG extended cascade	0,05 m	CS-G1-50-B-002	95A252820	
M12-SG Extended Muting RX	---	SG extended muting rx	0,2 m	CS-F1-80-B-0005	95A252860	
M12-Slim Cascade	---	Slim cascade	0,1 m	CS-R1-75-B-002	95A252810	
M12 Connector (Axial)	8-pole	Shielded cable	3 m	CS-H1-03-B-001	95A252950	
	4-pole		5 m	CV-A1-36-B-03	95A255430	
Axial M12 Connector	5-pole, L coded power cable	Black 	3 m	CS-A1-03-G-03	95A252800	
Axial M12 F/M8 M Connector	4-pole, double headed		3 m	CS-M1-02-B-03	95ACC0007	
Axial M12 F/M12 M Connector	4-pole, double headed		3 m	CS-H1-02-B-03	95ACC0008	
			3 m	CS-I1-02-B-03	95ACC0009	

# CAB SERIES – CABLES & CONNECTORS




## THE RIGHT CONNECTION FOR YOUR IDENTIFICATION PRODUCTS FOR INDUSTRIAL ENVIRONMENT (24VDC)

- The cable jacket maybe marked 300V only as insulation voltage between wires, the operational voltage is 24Vdc, less than 80 V required by CCC-China

DATALOGIC CODE	DESCRIPTION
93A050059	CAB-DS03-S M12-IP67 TO CBX 3M
93A050099	CAB-1011 - M120 M12 MAIN TO CBX 1M
93A051359	CAB-MS03 M16-IP67 CABLE TO CBX 3M
93A051348	CAB-ETH-M05 M12-IP67 ETHERNET CAB. (5M)
606-0677-03	Cable, Gig-E, CAT6, 3 Meter
93A051360	CAB-MS05 M16-IP67 CABLE TO CBX 5M
93A05134	CAB-ETH-M03 M12-IP67 ETHERNET CAB. (3M)
95A906069	CAB-SCS03 Cable, A30/T4x to CBX, 3M
93A051353	CAB-S05 STD CABLE TO CBX 5M
93A050060	CAB-DS05-S M12-IP67 TO CBX 5M
93ACC0081	PWR Cable, AS-I type, 2 Wires, 10 mt
93A050035	CAB-GE03 M12-IP67 TO RJ45 3M
CAB-465	CAB-465 USB TYPE A POT LW 12' 90A051997
93A050036	CAB-GE05 M12-IP67 TO RJ45 5M
93A050048	CBL-1480-0.3 M12/5P MALE/FEM. 0.3M IDNET
93A050073	CAB-AV7-101 M16-IP67 CABLE TO CBX 5M
93A050027	CAB-L003 IP67 LT-020 CABLE TO QL (0,3M)
93A050033	CAB-LP-03 LIGHTING POWER 3M
93A050037	CAB-LP-05 LIGHTING POWER 5M
93A051357	CAB-F05 6K/8K FBUS CABLE TO CBX 5M
93A051364	CAB-9E05 RJ45-IP67 CABLE ETHERNET 5M
93A051346	CAB-ETH-M01 M12-IP67 ETHERNET CAB. (1M)
93A050051	CBL-1480-05 M12/5P MALE/FEMALE 5M IDNET
90A052292	CABLE,USB,TYPEA,EXT PWR,15'
90A051700	CAB-388 RS232/BEETLE 9P M-CONN COIL
93A050058	CAB-DS01-S M12-IP67 TO CBX 1M
93A201203	FOCUS CONTROL 5MT CABLE (M12-FREE WIRES)
93A050084	CAB-MLP-05 MULTI LIGHTING POWER 5M
90A052121	CABLE,RS,ICL PC,15'
93ACC0105	CAB-DS003-S M12-IP67 TO QL 0.3M
606-0677-05	Cable, Gig-E, CAT6, 5 Meter
93A050080	CAB-SE05 M12M TO M12F 5M
93A050100	CAB-1021 - M120 M12 MAIN TO USB 1M
93A051388	CAB-TC1200 TO CBX 10-30 VDC PWR SUPPLY
90A051340	CAB-363 RS232 COILED 25PIN FEM. DCE
93A050067	ETH CABLE M12-M12 5M (STRAIGHT-STRAIGHT)
95A903018	86984-Pwr and I/O cable, 6pin/9Pin ,2M
8-0938-02	CABLE,ROHS,USB,SURE POS,POT,4.6M
606-0674-03	Camera to Term Block Pwr/I/O cable,6 pin
93A050044	CAB-LD-102 LT DRIVER NO PWR 0.2M
93A050072	CAB-AV7-100 M16-IP67 CABLE TO CBX 3M
606-0675-1.5	M-Series I/O Cable, DB37 M/M, 1.5 Meter
95A901340	DataVS-CV-RJ45C-03 ethernet cable 3m cro
93A051295	CAB-PWO 03 CABLE PWO TO PWO, 3M
90A052065	CABLE,USB,TYPE A,ENHANCED,STRT,POT,2M
606-0675-.75	M-Series I/O Cable, DB37 M/M, .75 Meter
95A903001	86967-I/O Cable, DB37 M/M, .75 Meter
93A051356	CAB-F02 6K/8K FBUS CABLE TO CBX 2M
93ACC0068	PWR Cable (AS-I to M12 straight)-2mt
93A051337	CAB-SC6013 25p SC6K TO PWO, PWR/NET, 3m
CAB-512	CBL ASY, RS,25P,M,CBX800 POT,COIL,12'
95A906070	CAB-SCS05 Cable, A30/T4x to CBX, 5M
95A903010	86976-Pwr and I/O cbl,6pin, pigtail,2M
93A051338	CAB-SC6003 25P SC6K TO PWO, I/O, 3M
CAB-459	CAB-459 RS232 PWR 9P Female Coiled 3.6m
93A051230	CAB-6102 CABLE M.SLAVE FAM 6K 2M
93A050105	CAB-1005 - M120 M12 MAIN EXTENS 5M
94A051970	CABLE, USB HANDYLINK, CLIENT

8-0863-04	CBL ASY,ROHS,USB,TYPE A,TEC,E/P,1M
93A050032	CAB-LD-002 LT DRIVER +PWR 0.2M
606-0674-02	Camera to Term Block Pwr/IO cable,6 pin
93A051352	CAB-S02 STD CABLE TO CBX 2M
606-0686-15	Cable, Ethernet,SVS Camera, 15 Meter
93A051225	CAB-6115 M/S (NO POWER) FAM 6K 5M
93ACC1855	BA600 M12 5P F. PANEL CONN. (ID-NET OUT)
93A050104	CAB-1002 - M120 M12 MAIN EXTENS 2M
93A051294	CAB-SC6103 9p CAB SC6000 TO PWR, 3m
606-0677-M1-02	Cable, Gig-E, CAT6, Horizontal Mold, 2 M
95A903002 86968-I/O	Cable, DB37 M/M, 1.5 Meter
606-0673-10	Camera to Term Block Pwr/IO cable,12 pin
606-0685-10	Cable, Power and I/O for SVS Cam
93A050050	CBL-1480-02 M12/5P MALE/FEMALE 2M IDNET
606-0675-4.5	M-Series I/O Cable, DB37 M/M, 4.5 Meter
93A051371	CAB-9S05 M16-IP67 CABLE TO CBX 5M
6003-0940	CBL,AC CORD,IEC/EUR,ROHS
93A050115	CAB-MC06 M300 M12 8P PWR + CAN
93A050066	ETH CABLE M12-M12 3M (STRAIGHT-STRAIGHT)
606-0677-HF-03	Cable, Gig-E, Hi-Flex CAT-5e, 3 Meter
606-0677-02	Cable, Gig-E, CAT6, 2 Meter
93A050079	CAB-SE03 M12M TO M12F 3M
95A903012	86978-Pwr and I/O cbl,6pin, pigtail,5M
93A051289	CAB-6505 FAM 6K-8K CABLE 5m
632289-001	CABLE,CAB-521 ENHANCED USB,BLACK,STRT,2M
CAB-524	CABLE,CAB-524,USB,TYPE A,POT,COIL,2.4M
93A050103	CAB-1001 - M120 M12 MAIN EXTENS 1M
1000065716	CORDSET,ENET,8P,(M) M12-(F) RJ45,0.2M
606-0677-M1-03	Cable, Gig-E, CAT6, Horizontal Mold, 3 M
95A903003	86969-I/O Cable, DB37 M/M, 3 Meter
606-0677-10	Cable, Gig-E, CAT6, 10 Meter
95A903009	86975-Pwr and I/O cbl,12pin,pigtail,10M
90A051740	CAB-391 IBM/PS2 COILED MINIDIN EXT.PW
93A051000	CAB-8005 CABLE SCANNER CONTROLLER 5m
93A051389	CAB-GE10 M12-IP67 TO RJ45 10M
606-0671-02	Power Supply/IO cable, 12pin, pigtail,2M
0112247002	CBL ASY,SYNC NTRWK ADPTR,2FT,AV60
606-0673-05	Camera to Term Block Pwr/IO cable,12 pin
90A051950	CAB-428 RS485 INTERFACE SPLITTER
95A906071	CAB-SCS10 Cable, A30/T4x to CBX, 10M
93ACC1752	CAB-6310 POWER CABLE FAM 6K 10M
CAB-463	CAB-463 KBW PS2 POT LAPTOP 12' 90A051995
93A201206	AV7000 CONTROLLER KEY
8-0730-04	CABLE,ROHS,RS,ICL PC,15'
CAB-501	CAB-501 RS 9D F PWR STR 10.5' 90A052036
606-0673-02	Camera to Term Block Pwr/IO cable, 12 pin
RCR-P090	CABLE RETAINER & SPACER (5PCS)
606-0675-3	M-Series I/O Cable, DB37 M/M, 3 Meter
CAB-462	CAB-462 KBW PS2 POT-E/P 12' 90A051994
95A906516	Cable USB3.0, Micro B screw lock/A, 5m
93A051358	CAB-MS01 M16-IP67 CABLE TO CBX 1M
CAB-437	CAB-437 KBW PS/2 POT COIL,10' 90A051968
606-0677-HF-02	Cable, Gig-E, Hi-Flex CAT-5e, 2 Meter
95A903011	86977-Pwr and I/O cbl,6pin, pigtail,3M
90A052060	CBL ASY,RS/BEETLE,9P,COIL,6M
90A052058	CBL ASY,RS/BEETLE,9P-M,COILED,12'
93A051240	CAB-6105 CABLE M.SLAVE FAM 6K 5M
10-4229	PART,CABLE,ANALOG,HORIZONTAL MGL85, 85XT
93A050047	CBL-1496 TERM. RESIST. M12/5P/FEM. IDNET
93A050057	CBL-1534-0.2 ADAPT. CABLE ETH M12-T0-RJ4
90A051350	CAB-364 RS232 COILED 25PIN MALE DTE
890002947	MEMOR X3 CABLE KIT
95A901700	DataVS-CV-VSM-02 connection cable 2mt
93A050053	CBL-1494-05 M12/5P/FEMALE-LEADS 5M IDNET
94A051020	CAB-427 RS232 NULL MODEM CABLE
671376-001	CABLE,USB,SERIES A,POT,2M
93A050124	CAB-ETH-X-M03 M12-IP67 GETH-X CAB 5M
93A051363	CAB-9C05 M12-IP67 CABLE CHAIN 5M
93A050123	CAB-ETH-X-M03 M12-IP67 GETH-X CAB 3M
93A051387	CAB-MS003 M16 IP-67 CABLE TO QL 0,35M
93A050070	ETH CABLE M12-M12 5M (STRAIGHT-90°)
93A050088	ETH CABLE M12-RJ45 5mt LENGTH (90°-RJ45)
606-0672-05	Power Supply/IO cable,6pin,pigtail,5M
93A050071	Connection Cable SC5000 to CBX510
93A050049	CBL-1480-01 M12/5P MALE/FEMALE 1M IDNET
94ACC0157	RS232 CABLE, SCREEN BLANKING
6003-0925	POWER CORD,IEC C13,AUSTRALIA,RoHS
CAB-509	CBL ASY, RS,25P,M,CBX800 E/P,COIL,12'
94ACC0165	DC PWR CABLE 2.9m
93ACC1854	BA500 M12 4P F. PANEL CONN. (TRIGGER)
93ACC1853	BA400 M12 3P M. PANEL CONN. (EXT.POWER)
93ACC1877	BA300 M12 3P F. PANEL CONN. (SERVICE)
93A050108	CAB-1051 - M120 M12 MAIN USB AND I/O 1M

# R-SERIES REFLECTORS

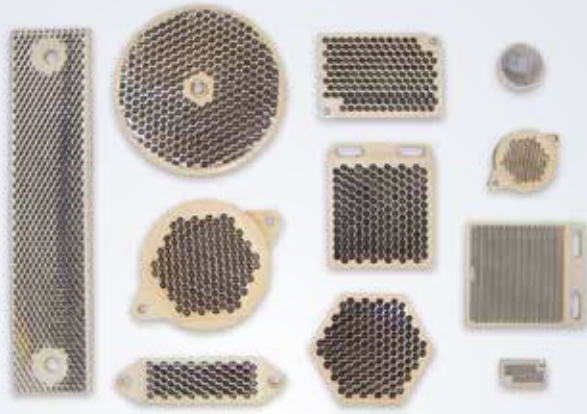

## EXCELLENT PERFORMANCE WITH INFRARED, RED LIGHT AND POLARIZED EMISSION

- Prismatic reflectors for retroreflective sensors
- High efficiency models for long operating distances
- Microprism reflectors for sensors with LASER emission
- Self-adhesive reflectors and reflector tape



### APPLICATIONS

- Automated warehousing
- Processing and Packaging machinery
- Industrial vehicles
- Automotive


### REFLECTORS

<b>Prismatic reflector material</b>	Reflector in PMMA plastic
<b>Support material</b>	Support in ABS
<b>Mechanical protection</b>	IP67, IP69K (R4K)
<b>Operating temperature</b>	-30 ... +70°C


MODELS	DESCRIPTION	ORDER No.
R1	Ø 23 mm with Ø 31 mm support	S940700023
R2	Ø 48 mm with Ø 63 mm support	S940700048
R3	18 x 54 mm with 22 x 82 mm support	S940700972
R4	47x 47 mm with 51.5 x 61 mm support	95A151340
R4K	51X61 mm IP69K protection	95A151220
R5	Ø 75 mm with Ø 82 mm support	S940700075
R6	36 x 55 mm with 40.5 x 60 mm support	95A151350
R7	47x47 mm microprism reflector with 51 x 61 mm support	95A151360
R8	9.7 x 19 mm microprism reflector with 13.8 x 23 mm support	95A151370
R9	Ø 23 mm with Ø 25 mm self-adhesive support	95A151080
R10	36 x 176 mm with 41 x 181 mm support	S19120000
R11	146 x 15 mm with 150 x 18 mm support	95A155050
R14	Ø 24 mm with Ø 25 mm support	95A151310
R16	9.7 x 19 mm reflector with 14 x 23 mm support	95A151330
R20	Ø 48 mm microprism reflector with Ø 63 mm support	95A151090
R35	Ø 33 mm with Ø 35 mm support	95A151530
S12	Ø 48 mm with ch.52 mm hexagon support	S940710048
R100	19 x 35 mm reflector with 24 x 48 mm support	9CACC7990
RT3870	200 x 300 mm self-adhesive reflective tape	S940000600
RT3970	200 x 300 mm self-adhesive reflective tape for polarized light	S940000900
RT3970	60 x 40 mm self-adhesive reflective tape for polarized light	S940000604

# DIMENSIONS


**R1**

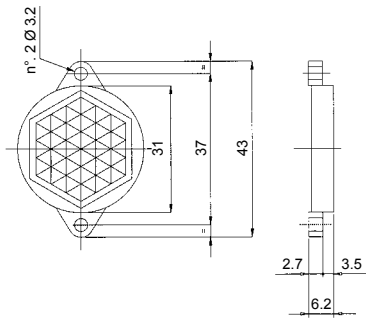


**R2 / R20**

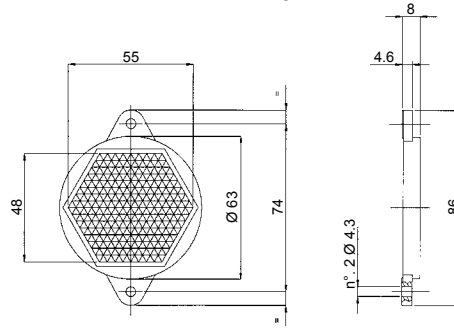


**R3**




**R4**




**R5**

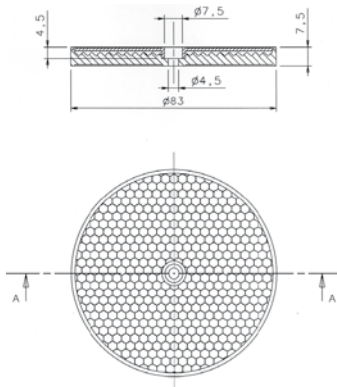


**R6**

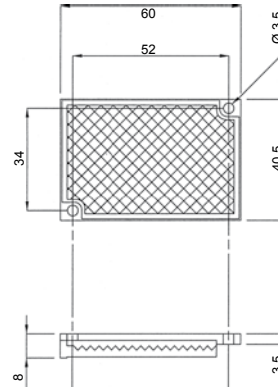


**R7**

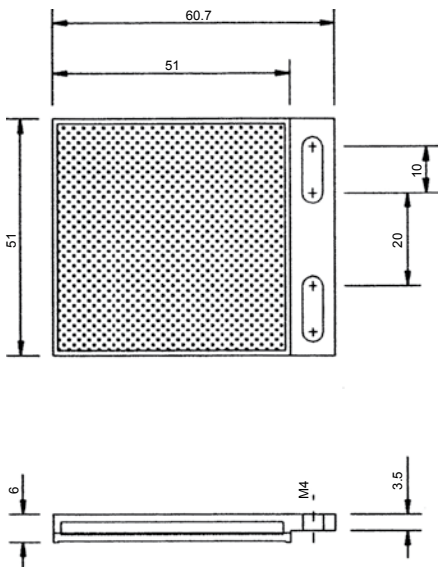








**R8**

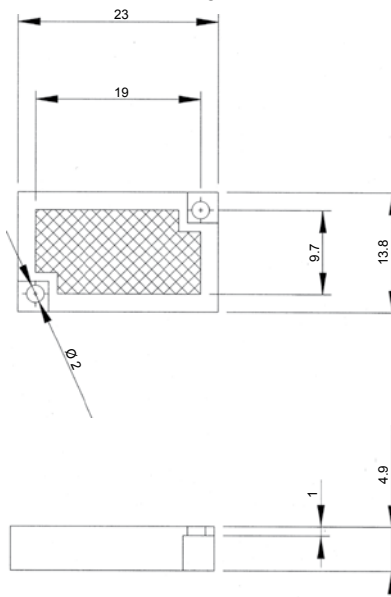


**R9**

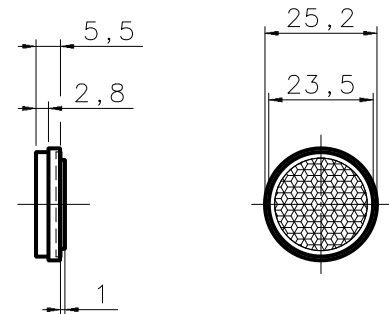

mm

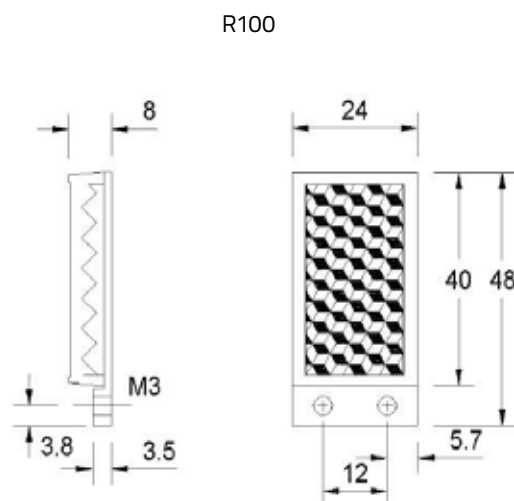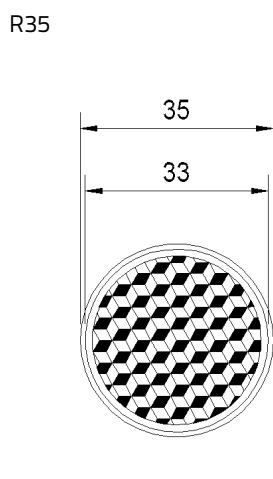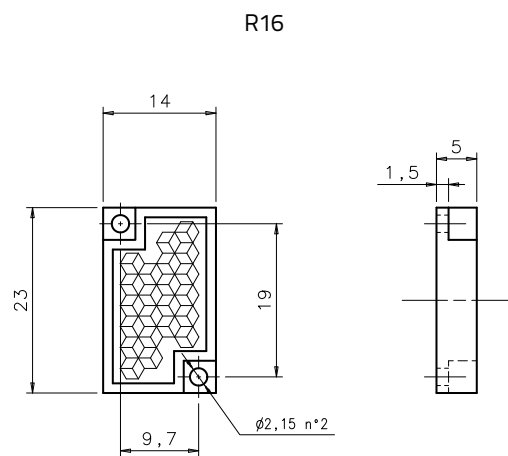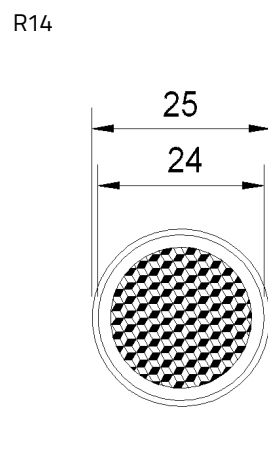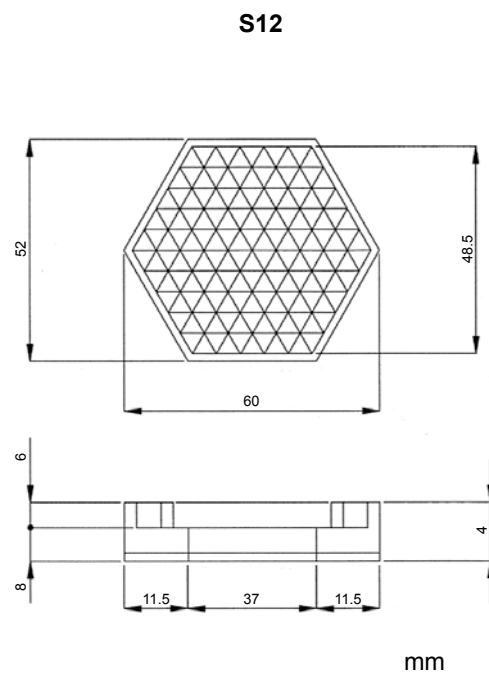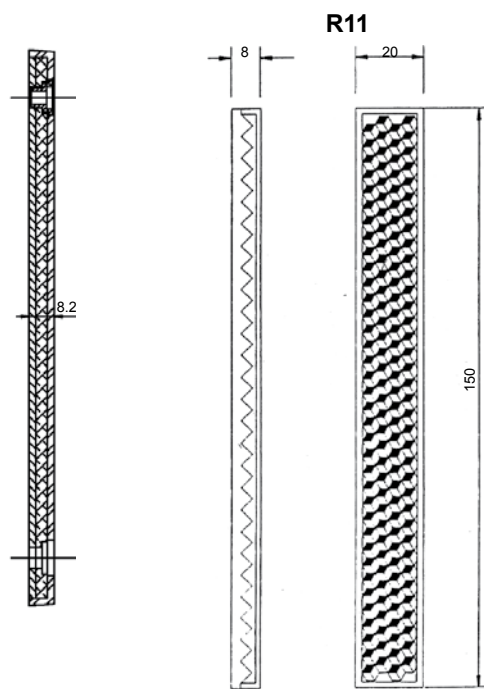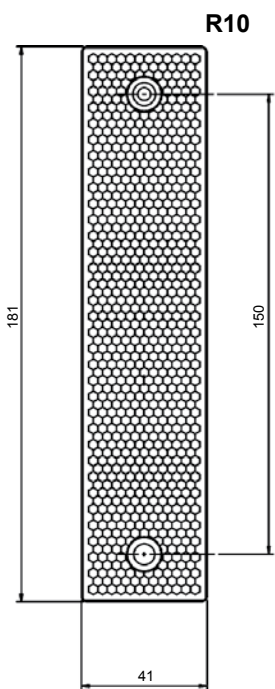



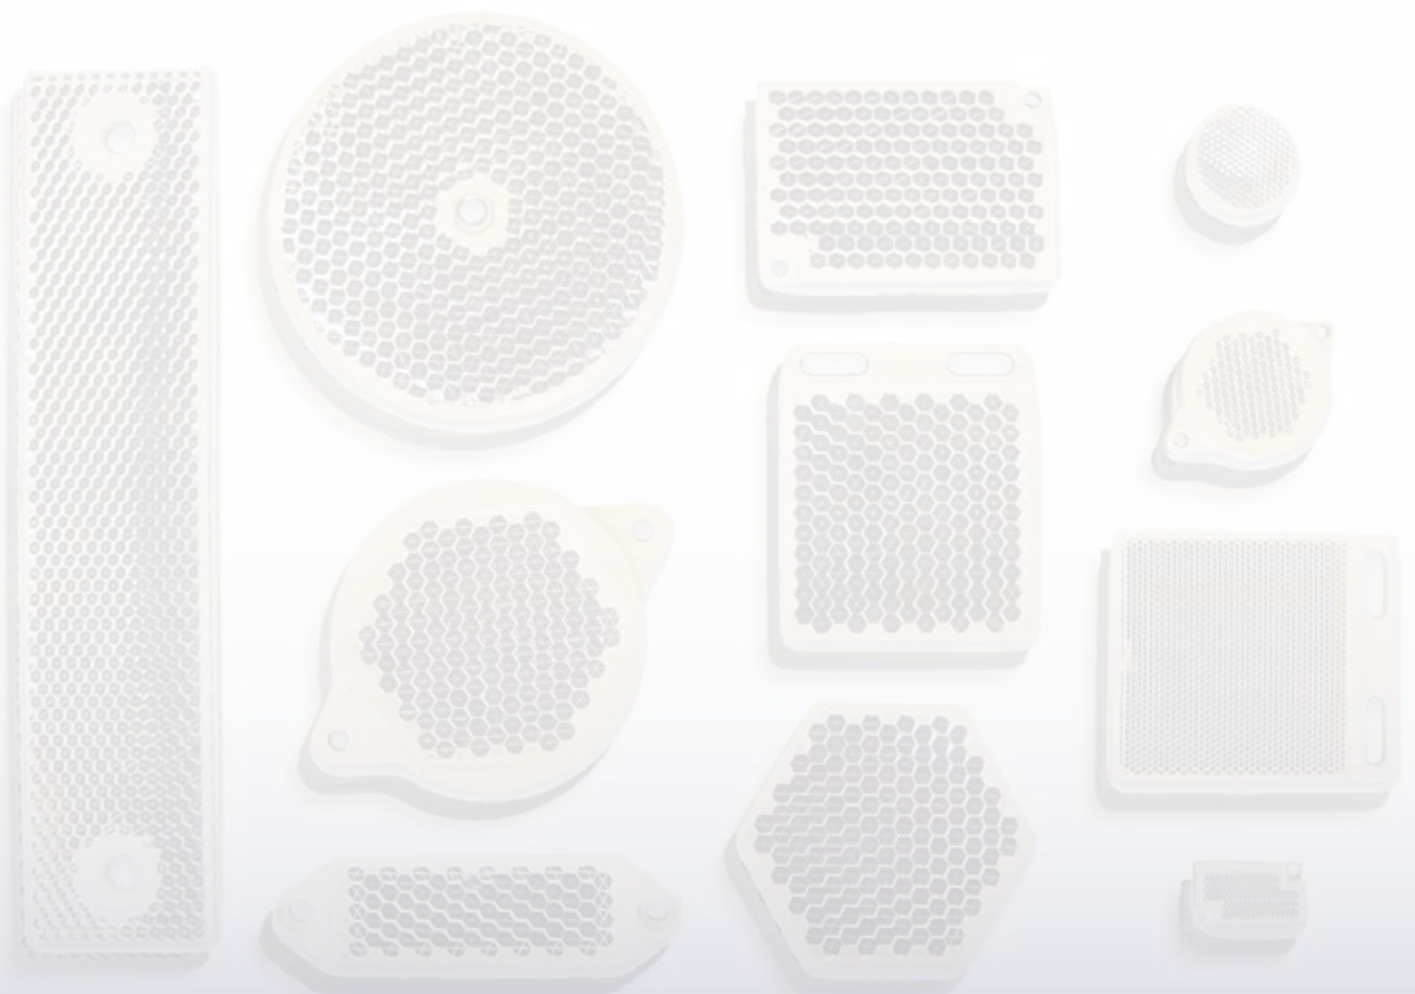







Rev. 09, 08/2019



9C514100E

Product and Company names and logos referenced may be either trademarks or registered trademarks of their respective companies. We reserve the right to make modifications and improvements.

[www.datalogic.com](http://www.datalogic.com)