

Delivering user convenience at every step



At Bosch Power Tools, we understand the challenges that our users face every day. Our legacy has been founded on innovation which supports real users, up against real challenges in the workplace. Users who work hard, despite a harsh working environment and are continuously driven by the need to work more efficiently and productively. This is the reason why our products are designed to deliver user convenience at every step. From ease of repair to long life, reliability, sturdiness and much more, every Bosch power tool offers value and convenience to its users.



We deliver unmatched endurance coupled with reliability and world-class performance. All Bosch products are powered by innovation and technology engineered to outlast customer expectations.

For over a century, Bosch has been dedicated to creating advanced, efficient solutions for professionals at work. However, we have noted that some of our users were not completely satisfied with the performances of their tools that match their specific needs. This probed us to listen to the users directly resulting in our urge to develop a product portfolio that can really fulfill their demands and more.

Continual innovation, intensive research and development have helped Bosch create this new Heavy Duty product range, designed to make your every heavy duty task easier by providing the optimum solution.



All Heavy Duty products are designed to handle extremely demanding jobs by giving users more of everything!

POWER

Each product is built with enough power to drill, hammer and cut through the toughest problems with extreme ease.

PERFORMANCE

Increased power naturally leads to higher performance that results in the most efficient solution possible.

ROBUSTNESS

The same tool can solve every need you might have for many years to come because each one is built to last guaranteed!

Every tool in the Bosch Heavy Duty Range comes with a one-year warranty.

In this handbook, we will proudly introduce our Heavy Duty tools along with the facilitating technologies, detailed product features and user benefits. Some examples of industry specific applications in different user environments are included to help you select the right solution for your task at hand. You are sure to find the tool you need in our comprehensive product range.

Bosch Heavy Duty
Designed to outlast all your demands.



Designed for exceptional portability

Bosch brings to you an exclusive range of Power Tools and that are ideal for modular furniture applications in homes and offices. These proficient tools are ergonomically designed to accomplish tasks in hard to reach corners effortlessly, with the promise of an excellent work experience.

Screwdriver

Bosch GO Solo Professional



Technical Specifications		
HSN code	84672900	
Part no.	0 601 9H2 0F0	
Battery voltage	3.6 V	
Battery capacity	1.5 Ah	
Torque, max. (hard/soft)	5 / 2.5 Nm	
Torque adjustment range,	4 Nm	
min. /max.		
No-load speed	360 rpm	
Charging time	90 mins	
Weight incl. battery	0.28 kg	

Scope of supply: Small plastic box; 1 PH2 screw bit; USB cable

MRP: ₹ 3,070



Screwdriver

Bosch GO Kit Professional



Technical Specific	cations
HSN code	84672100
Part no.	0 601 9H2 0F1
Battery voltage	3.6 V
Battery capacity	1.5 Ah
Torque, max. (hard/soft)	5 / 2.5 Nm
Torque adjustment range, min. /max.	4 Nm
No-load speed	360 rpm
Charging time	90 mins
Weight incl. battery	0.28 kg
Scope of supply:	

Small plastic box; MRP: ₹ 3,680 33 bit accessory kit; USB cable;



Screwdriver


IXO 3 Professional



Technical Specifications		
HSN code	84672900	
Part no.	0 601 960 2K0	
Battery voltage	3.6 V	
Chuck capacity	5 mm	
Max. torque (soft/hard)	3 / 4 Nm	
No-load speed	180 rpm	
Weight incl. battery	0.3 kg	

Scope of supply: 1 Charger; Hex drill bit; Screw driver bit set; Universal holder

MRP: ₹ 4,200



USB charger



Screwdriver

GSR ProDrive Professional





Technical Specifications		
HSN code	84672100	
Part no.	0 601 9A2 0K1	
Battery voltage	3.6 V	
Battery capacity	1.3 Ah	
No-load speed	0 - 250 rpm	
Torque, max. (hard/soft)	7 / 3 Nm	
Max. screw diameter	5 mm	
Charging time, approx.	60 min	
Vibration emission value ah	2.5 m/s ²	

Scope of supply:

1 Charger; Hex drill bit; Holster;

Screw driver bit set; Soft bag; Universal holder; 1

x 1.3 Ah Li-Ion battery



Drill Driver

GSR 120 Li Professional



Technical Specifications		
HSN code	84672100	
Part no.	0 601 9F7 0K4	
Battery voltage	12 V	
Battery capacity	1.5 Ah	
No-load speed (1st/2nd)	0 - 380 / 0 - 1300 rpm	
Torque (Hard/Soft)	30 / 13 Nm	
Max. screw diameter	7 mm	
Max. drilling (wood/steel)	20 / 8 mm	
Chuck size	10 mm	

Scope of supply:

2 x 12V 1.5 Ah Li-ion Batteries;

1 Charger; Carry case

MRP: ₹ 8,900

MRP: ₹ 21,100

MRP: ₹ 5,510



Drill Driver

GSR 12V-15 FC Professional



Technical Specific	cations
HSN code	84672100
Part no.	0 601 9F6 0K0
Battery voltage	12 V
Battery capacity	2 Ah
No-load speed (1st/2nd)	0 - 400 / 0 - 1300 rpm
Torque (Hard/Soft)	30 / 15 Nm
Max. screw diameter	7 mm
Max. drilling (wood/steel)	19 / 10 mm
Chuck size	10 mm

Scope of supply:

Drill chuck adapter GFA 12-B;

Off-set angle adapter GFA 12-E; Angle adapter GFA 12-W;

Hex adapter; 1 Charger;

2 x 2 Ah Li-ion Battery; Carry case



Drill Driver

GSR 12 V-EC Professional





Technical Specifications		
HSN code	84672100	
Part no.	0 601 9D4 0K2	
Battery voltage	12 V	
Battery capacity	2 Ah	
No-load speed (1st/2nd)	0 - 400 / 0 - 1300 rpm	
Torque (Hard/Soft)	20 / 18 Nm	
Max. screw diameter	7 mm	
Max. drilling (wood/steel)	25 / 10 mm	
Chuck size	10 mm	

Scope of supply: Carry case; 2 x 2.0 Ah batteries;

MRP: ₹ 15,200 Quick charger



ess

Drill Driver

Technical Specifications HSN code 84672100 0 601 9F8 0K0 Part no. Battery voltage 14.4 V Battery capacity No-load speed (1st/2nd) 1.5 Ah 0 - 450 / 0 - 1700 rpm Torque (Hard/Soft) 50 / 18 Nm Max. screw diameter 8 mm Max. drilling (wood/steel) 32 / 10 mm Chuck size 13 mm



2 x 1.5 Ah Li-ion batteries; MRP: ₹ 13,180 1 charger; Carry case



GSR 140 Li Professional

Drill Driver

GSR 14.4-2 V Li Plus Professional



Technical Specifications		
HSN code	84672100	
Part no.	0 601 9E6 020	
Battery voltage	14.4 V	
Battery capacity	2 Ah	
No-load speed (1st/2nd)	0 - 500 / 0 - 1900 rpm	
Torque (Hard/Soft)	59 / 21 Nm	
Max. screw diameter	7 mm	
Max. drilling (wood/steel)	35 / 13 mm	
Chuck size	13 mm	

Scope of supply: 1 charger; Carry case; 2 x 2.0 Ah Li-lon batteries

MRP: ₹ 26,220



Drill Driver

GSR 180 Li Professional



Technical Specifications		
HSN code	84672100	
Part no.	0 601 9F8 1K0	
Battery voltage	18 V	
Battery capacity	1.5 Ah	
No-load speed (1st/2nd)	0 - 450 / 0 - 1700 rpm	
Torque (Hard/Soft)	54 / 21 Nm	
Max. screw diameter	10 mm	
Max. drilling (wood/steel)	35 / 10 mm	
Chuck size	13 mm	

Scope of supply: 2 x 1.5 Ah Li-ion batteries; 1 charger; Carry case

MRP: ₹ 14,800



Drill Driver

GSR 18 V-EC Professional



HEAVY DUTY	1 year varranty	Li-lon	EC

Technical Specifications		
HSN code	84672100	
Part no.	0 601 9E8 1K0	
Torque, max. (hard/soft)	60 / 31 Nm	
No-load speed (1st gear/2nd gear	ır) 0 – 600 / 0 – 1900 rpm	
Drill spindle thread	1/2"	
Battery voltage	18 V	
Charging time, approx.	45 mins	
Torque settings	20+1	
Length x Height	173 x 248 mm	
Bit holder	Three-jaw chuck	

Scope of supply: Carry case; 1 charger; 2 x 2.0 Ah Li-lon batteries

MRP: ₹ 27,020



GSB 120 Kit Professional

Impact Drill





Technical Specifications HSN code 84672100 0 601 9F30 K4 Part no. Battery voltage 12 V Battery capacity No-load speed (1st/2nd) 1.5 Ah 0 - 400 / 0 - 1300 rpm Torque (Hard/Soft) 28 / 11 Nm Impact Rate 0 - 18,750 bpm Max. drilling (wood/steel/masonry)19 / 6 / 8 mm

1.1 kg

Scope of supply: Carry case; 1 Charger; 1 x 1.5 Ah Li-Ion battery; 100 pcs accessory set

Weight with Battery

MRP: ₹ 8,160



Impact Drill





Technical Specifications

HSN code	84672100
Part no.	0 601 9F8 2K0
Battery voltage	14.4 V
Battery capacity	1.5 Ah
No-load speed (1st/2nd)	0 - 450 / 0 - 1700 rpm
Torque (Hard/Soft)	50 / 18 Nm
Max. screw diameter	8 mm
Max. drilling (wood/steel/mason	nry)32 / 10 / 8 mm
Chuck size	13 mm

Scope of supply:

2 x 1.5 Ah Li-ion batteries; 1 charger; Carry case

MRP: ₹ 14,200



Impact Drill





Technical Specifications

HSN code	84672100
Part no.	0 601 9F8 3K0
Battery voltage	18 V
Battery capacity	1.5 Ah
No-load speed (1st/2nd)	0 - 450 / 0 - 1700 rpm
Torque (Hard/Soft)	54 / 21 Nm
Max. screw diameter	10 mm
Max. drilling (wood/steel/masonry	y)35 / 10 / 8 mm
Chuck size	13 mm

Scope of supply:

2 x 1.5 Ah Li-ion batteries; 1 charger; Carry case

MRP: ₹ 15,510



GDR 120 Li Professional

GSB 180-Li Professional

Impact Driver





Technical Specifications

roommoun opposi	
HSN code	84672100
Part no.	0 601 9F0 0K1
Battery voltage	12 V
Battery capacity	1.5 Ah
No-load speed (1st/2nd)	0 - 1300 / 0 - 2600 rpm
Torque (Hard)	100 Nm
Max. screw diameter	8 mm
Rated impact rate	0 - 1900/0 - 3200 bpm
Bit holder	1/4" hexagon socket

Scope of supply:


2 x 1.5Ah Battery; 1 charger;

Carry case

MRP: ₹ 12,360



Impact Driver





MRP: ₹ 20,680 Carry case; 2 x 2Ah battery;

1.6 kgs.

170 Nm

1 charger

Bit holder




GDR 12 V-EC Professional

Impact Driver

HEAVY

DUTY




Weight incl. battery

Torque, max. (hard

screwdriving applications) Rated impact rate 0 - 3200 bpm

Battery voltage 18 V



MRP: ₹ 39,830

GDR 18 V-EC Professional





HEAVY

DUTY



Impact Wrench

GDS 12 V-EC Professional



Technical Specific	cations
HSN code	84672100
Part no.	0 601 9E0 1F5
Battery voltage	12 V
Battery capacity	2 Ah
No-load speed (1 st /2 nd)	0 - 2600 rpm
Torque (Hard)	115 Nm
Standard bolting capacity	M6 - M14
Rated impact rate	0 - 3100 bpm
Bit holder	3/8" external square

Scope of supply:

Carry case; 2 x 2Ah battery; MRP: ₹ 25,330

1 charger



GDS 250 Li Professional

Impact Driver

Technical Specification



reclinical Specifications		
HSN code	84672900	
Part no.	0 601 9G6 1K0	
Battery voltage	18 V	
Max torque	250 Nm	
No-load speed	0 - 2,400 min-1	
Impact rate	0 - 3,300 bpm	
Tool holder	1/2" Square	
Screw size	M10~ M18	

Scope of supply: 2 x 3 Ah Li-ion batteries; 1 charger; Carry case

MRP: ₹ 24,700







Impact Driver



Technical Specifications

HSN code	84672100
Part no.	0 601 9A1 SF2
Battery voltage	18 V
No-load speed	0 - 2800 rpm
Torque (Hard)	180 Nm
Max. screw diameter	8 mm
Rated impact rate	0 - 3200 bpm
Bit holder	1/2" external square
Screw diameter	M 6 – M 16

Scope of supply:

2 x 2.6 Ah Li-ion Battery;

MRP: ₹ 35,450 1 charger; Carry Case



GDS 18 V-Li Professional

Impact Wrench





Technical Specifications	
HSN code	84672100
Part no.	0 601 9D8 1F0
No-load speed	0 - 2.400 rpm
Length	163 mm
Height	245 mm
Weight incl. battery	1.85 kgs.
Torque, max. (hard screwdriving applications)	250 Nm
Rated impact rate	0 - 3400 bpm
Battery voltage	18 V
Toolholder	1/2" external square
Screw dia.	M 10 - M 18

Scope of supply: 2 x 4 Ah Li-ion batteries; 1 charger; Carry case

MRP: ₹ 42,460



Impact Wrench

GDS 18 V-LI HT Professional





Technical Specifications		
HSN code	84672100	
Part no.	0 601 9A1 3F2	
Torque max.	650 Nm	
No-load speed	0 - 1900 rpm	
Rated impact rate	0 - 2100 bpm	
Screw diameter	M 12 - M 20	
Tool holder	1/2" external square	
Weight	3 kgs.	

Scope of supply: 2 x 4 Ah Li-ion batteries; 1 charger; Carry case

MRP: ₹ 68,830



Impact Wrench

GDX 14.4 V-EC Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 9B9 0F0
Battery voltage	14.4 V
Torque max.	180 Nm
No-load speed	0 - 2.800 rpm
Rated impact rate	0 - 3200 bpm
Length	166,0 mm
Height	242,0 mm
Bit holder	1/4" Hex socket +
	1/2" External square

Scope of supply: 2 x 4 Ah Li-ion batteries; 1 charger; Carry case

MRP: ₹ 35,830





Technical Specifications	
HSN code	84672900
Part no.	0 601 9B9 1F0
Battery voltage	18 V
Torque max.	180 Nm
No-load speed	0 - 2.800 rpm
Rated impact rate	0 - 3200 bpm
Bit holder	1/4" Internal Hex socke 1/2" External square
	1/2 External square

GBH 180 Li Professional

Scope of supply: 2 x 4 Ah Li-ion batteries; 1 charger; Carry case

MRP: ₹ 37,840

Rotary Hammer 1-2 Kg





DUTY

Technical Specifications

HSN code	84672900
Part no.	0 611 911 0F2
Battery Voltage	4.0 Ah
No-load speed	0 - 1,800 rpm
Rated impact rate	0 - 4,550 bpm
Impact force	1.7 J
Drilling capacity	20 mm
LED light	Yes
Mode	3
Weight	2.6 kgs.

Scope of supply: 2 x 3.0 Ah Li-Ion batteries; 1 charger

MRP: ₹ 29,300


GBH 36-V Li Plus Professional



Drill Driver

Technical Specifications HSN code 84672100 Pa<u>rt no.</u> 0 611 906 003 Max. impact energy 3,2 J Impact rate at rated speed 0 - 4.200 bpm Rated speed 0 - 940 rpm Battery voltage 36 V 4 Ah Battery capacity 4.5 kgs. 383/108/246mm Weight incl. battery Length/Width/Height Drilling dia. in concrete with 4 - 28 mm hammer drill bits Max. drilling dia. in 13/30 mm

Scope of supply: Carry case; Depth stop; Auxiliary handle; Charger; 2 x 4.0 Ah Li-lon batteries



Vacuum Cleaner





HEAVY DUTY	1 year	II-lon
w	arranty	

reclinical opecifications	
HSN code	85081100
Part no.	0 601 9C6 200
Battery Voltage	18 V
Container volume	0.7
Length	142 mm
Width	184 mm
Height	121 mm

55 cm²

1.3 kgs.

Scope of supply: 1 x 3.0 Ah battery; Charger; 4 accessories

Filter surface area

Weight excl. battery

MRP: ₹ 15,700

GAS 18V-1 Professional



Built for Champs -

Bosch Battery Technology







Technical Specifications	
HSN code	85076000
Part no.	1 600 A00 1BN
Battery voltage	10.8 V
Battery capacity	1.5 Ah
Length	51 mm
Width	48 mm
Height	85 mm
Weight	200 g



MRP: ₹ 1,960

Battery Pack and Charger

GBA 10.8 V 2.0 Ah O-B Professional



Technical Specifications	
HSN code	85076000
Part no.	1 600 A00 1BT
Battery voltage	12 V
Battery capacity	2 Ah
Weight	175 g
Variable (LxWxH)	51X48X85 mm



MRP: ₹ 2,510

Battery

GBA 14.4 V 4.0 Ah M-C Professional



Technical Specifications	
HSN code	85076000
Part no.	1 600 A00 162
Battery voltage	14.4 V
Battery capacity	4 Ah
Length	98 mm
Width	74 mm
Height	56 mm
Weight	500 g



MRP: ₹ 6,450

Battery

Freedom 2.0Ah 18V Professional



Technical Specifications		
HSN code	85076000	
Part no.	1 600 A00 1CG	
Battery voltage	18 V	
Battery capacity	2 Ah	
Length	113 mm	
Width	75 mm	
Height	40 mm	
Weight	300 g	



MRP: ₹ 4,830



Technical Specifications	
HSN code	85076000
Part no.	1 600 A00 163
Battery voltage	18 V
Battery capacity	4 Ah
Length	115 mm
Width	74 mm
Height	56 mm
Weight	600 g



MRP: ₹ 7,600

Charger

(Freedom) AL 1130 Professional



Technical Specifications	
HSN code	85044030
Part no.	1 600 A00 1D1
Battery voltage	10.8V - 12V quick charge
Charge current A	3 A
Charging time min	30 Min
Weight, approx.	0.400 kg
	-



MRP: ₹ 2,140

Charger

GAL 1860 CV Professional



Technical Specifications	
HSN code	85044030
Part no.	1 600 A00 1DH
Charge current A	6
Charging time min	45 Min
Input voltage(s) V	230
Country version	EU
Model	Li-lon quick charger
Charge monitoring	Constant-Current,
	Constant-Voltage
	charging control
Weight, approx.	0.765 kg



MRP: ₹ 3,840







Technical Specifications

HSN code	84672100
Part no.	0 611 338 5F0
Input Power	1025 W
Impact Rate at Rated Speed	2750 bpm
Impact Energy	6.8 J
Toolholder	17 Hex mm
Side Handle	Straight Handle
Weight	5.5 kgs.

Scope of supply: Auxillary handle

MRP: ₹ 19,930



Demolition Hammer < 12 Kg



reclinical opecifications	
HSN code	84672100
Part no.	0 611 337 0K0
Rated power input	1100 W
Impact energy	7,5 J
Rated speed	2850 rpm
Weight without cable	5.6 kgs.

*with vario lock feature for chisel adjustment





Scope of supply: Pointed chisel; Carry case; Cleaning cloth; Grease tube;


MRP: ₹ 35,080 Straight handle



GSH 5 Professional

Demolition Hammer < 12 Kg





Scope of supply:

Auxiliary handle; Carry case; Grease tube; RTec pointed chisel

MRP: ₹ 44,990

GSH 11 E Professional







Demolition Hammer > 12 Kg







Technical Specifications	
HSN code	84672100
Part no.	0 611 335 1F0
Power input	1750 W
Impact rate	1300 bpm
Impact energy	45 J
Weight	16.5 kgs.

Scope of supply: Carrying handle; Trolley; Grease tube; Machine cloth; Pointed chisel

MRP: ₹ 1,09,110

GSH 16-30 Professional



Demolition Hammer > 12 Kg

GSH 27 VC Professional



Technical Specifications	
HSN code	84672100
Part no.	0 611 30A 000
Rated power input	2000 W
Impact energy	69 J
Impact rate at rated speed	1000 bpm
Weight	29.5 Kgs.

Scope of supply: Paper box; Plastic Bags


MRP: ₹ 2,21,640



Demolition Hammer < 12 Kg

GSH 11 VC Professional









Scope of supply: Auxiliary handle; Carrying case; Grease tube; Machine cloth; Pointed chisel

MRP: ₹ 69,520





Rotary Hammer 1-2 Kg



Technical Specifications

	HSN code	84672100
_	Part no.	0 611 258 3F2
	Rated power input	550
	Impact energy	2,2 J
	Impact rate at rated speed	0 - 3960
	Rated speed	0 - 1550
	Drilling dia. in concrete	4 - 20
	Optimum range in concrete	4 - 12
	Max. drilling dia. in steel	13 mm
	Max. drilling dia. in wood	30 mm
	Weight	2.3 kgs.

Scope of supply:

MRP: ₹ 7,760 Auxillary Handle; Depth Gauge; Carry case



Rotary Hammer 1-2 Kg



Technical Specifications

HSN code	84672100
Part no.	0 611 250 655
Drilling dia. in concrete	4 - 22 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	620 W
No-load speed	0 - 1000 rpm
Single impact energy	0 - 2.2 J
Weight	2.3 Kgs.

Scope of supply:

Auxillary Handle; Depth Gauge; MRP: ₹ 11,340

Carry case



GBH 2-22 RE Professional

GBH 2-22 E Professional

Rotary Hammer 1-2 Kg



Technical Specifications

HSN code	84672100
Part no.	0 611 250 755
Drilling dia. in concrete	4 - 22 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	620 W
No-load speed	0 - 1000 rpm
Single impact energy	2.2 J
Weight	2.3 Kgs.

Scope of supply: Auxillary Handle; Depth Gauge; Carry case

MRP: ₹ 11,960

Rotary Hammer 1-2 kg



Technical Specifications

HSN code	84672100
Part no.	0 611 251 655
Drilling dia. in concrete	4 - 26 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	800 W
No-load speed	0 - 900 rpm
Single impact energy	0 - 3 J
Weight	2.7 Kgs.

Scope of supply: Auxillary Handle; Depth Gauge; Carry case

MRP: ₹ 15,240

GBH 2-26 E Professional



Rotary Hammer 1-2 Kg

GBH 2-26 RE Professional



Technical Specifications HSN code 84672100 Part no. 0 611 251 755 Drilling dia. in concrete 4 - 26 mm Drilling dia. in steel 13 mm Drilling dia. in wood 30 mm Core bits masonry 68 mm Power input 800 W No-load speed 0 - 900 rpm Single impact energy 0 - 3 J Weight 2.7 Kgs.

Scope of supply: MRP: ₹ 15,730 Auxillary Handle; Depth Gauge; Carry case



Rotary Hammer 1-2 Kg

GBH 2-26 DRE Professional



rechnical Specific	cations
HSN code	84672100
Part no.	0 611 253 755
Drilling dia. in concrete	4 - 26 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	800 W
No-load speed	0 - 900 rpm
Single impact energy	0 - 3 J
Weight	2.7 Kgs.

Scope of supply: MRP: ₹ 17,080 Auxillary Handle; Depth Gauge; Carry case



Rotary Hammer 1-2 Kg

GBH 2-28 DV Professional



Technical Specifications	
HSN code	84672100
Part no.	0 611 267 1F0
Drilling dia. in concrete	4 - 28 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core dia. masonry	68 mm
Rated power input	850 W
Rated speed	0 - 1300 rpm
Impact rate at rated speed	0 - 5100 bpm
Impact energy	0 - 3.2 J
Weight	2.9 Kgs.

Scope of supply: MRP: ₹ 19,210 Auxillary Handle; Depth Gauge; Carry case



Rotary Hammer 3 Kg

GBH 3-28 DRE Professional



Technical Specifications	
HSN code	84672100
Part no.	0 611 23A 0K0
Drilling dia. in concrete	4 - 28 mm
Drilling dia. in steel	13 mm
Core bits masonry	82 mm
Power input	800 W
No-load speed	0 - 900 rpm
Single impact energy	0 - 3.5 J
Weight	3.5 Kgs.

Scope of supply: MRP: ₹ 28,420 Auxiliary Handle; Carry case; Depth stop





Rotary Hammer 4 Kg





Technical Specifications

HSN code	84672100
Part no.	0 611 332 1F0
Drilling dia. in concrete	6 - 32 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	32 mm
Power input	900 W
No-load speed	0 - 760 rpm
Single impact energy	0 - 5 J
Weight	47 Køs

Scope of supply:

Auxiliary Handle; Carry case; Depth stop;

SDS-plus quick-change chuck

MRP: ₹ 40,610



Rotary Hammer 5 Kg and more











Technical Specifications


HSN code	84672100
Part no.	0 611 269 0K0
Drilling dia. in concrete	40 - 90 mm
Rated power input	1,100 W
Impact energy	8.5 J
Impact rate at rated speed	1500 - 2900 bpm
Rated speed	170 - 340 rpm
No-load speed	0 - 760 rpm
Weight	6.8 Kgs.

Scope of supply:

Carrying cases; Cleaning cloth;

MRP: ₹ 45,950 Grease tube; Auxiliary handle

GBH 5-40 D Professional



Rotary Hammer 5 Kg and more

GBH 5-40 DCE Professional








Technical Specifications	
HSN code	84672100
Part no.	0 611 264 000
Rated power input	1150 W
Impact energy	2-11 J
Impact rate at rated speed	1500 - 3050bpm
Rated speed	170 - 340 rpm
Weight without cable	6.8 kgs.
Drilling dia. in concrete, hammer drill bits	12 - 40 mm
Drilling dia. in concrete, breakthrough drill bits	45 - 55 mm
Drilling dia. in concrete with core cutters	40 - 90 mm

MRP: 61,210 Scope of supply:

Auxiliary handle; Carrying case; Grease tube; Machine cloth



Rotary Hammer 5 Kg and more

Technical Specifications



reclinical Specifications	
HSN code	84672100
Part no.	0 611 265 0K0
Rated power input	1500 W
Impact energy	12 - 5 J
Impact rate at rated speed	1380 - 2720 bpm
Rated speed	0 - 305 rpm
Weight without cable	8.9 kgs.
Drilling dia. concrete, hammer drill bits	12 - 45 mm
Optimum range of applications	

in concrete with hammer drill bits Drilling dia. in concrete with 80 mm breakthrough drill bits

Scope of supply:

MRP: ₹ 85,360





GBH 8-45 DV Professional

Rotary Hammer 5 Kg and more

GBH 12-52 DV Professional






reconfical Specifications	
HSN code	84672100
Part no.	0 611 2660 000
Input Power	1700 W
Max. impact energy	19 J
Impact rate at rated speed	1750 - 2150 bpm
Rated speed	0 - 220 rpm
Weight	11.9 kgs.
Length	600 mm
Width	120 mm
Height	312 mm
Drilling dia. in concrete	12 - 52 mm
with hammer drill bits	

Scope of supply: MRP: ₹ 1,03,690
Carrying case, Grease tube;
Machine cloth; Auxiliary handle



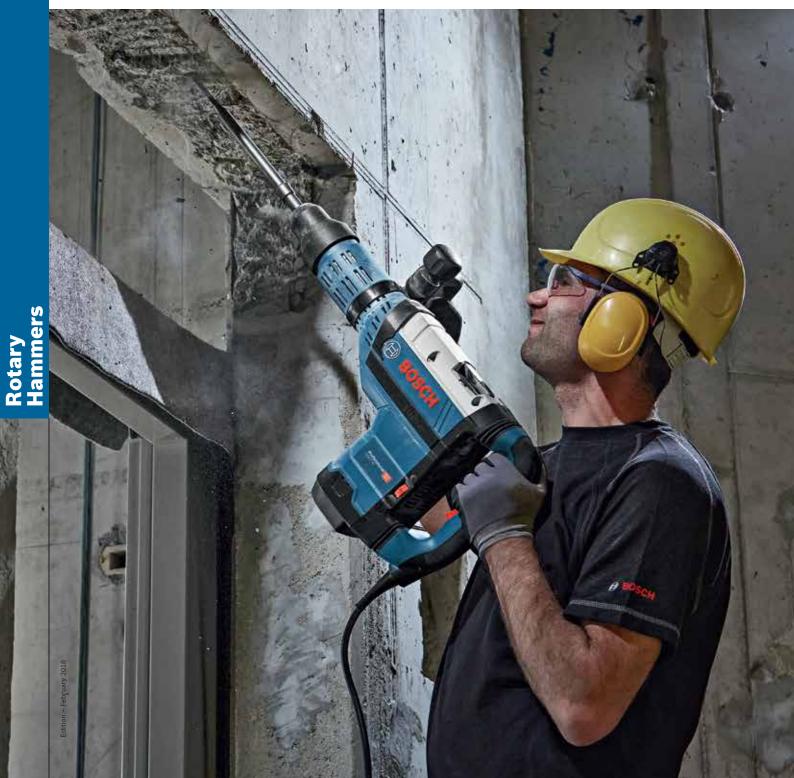

Diamond Technology

Diamond Drill



Technical Specifications

HSN code	84672100
Part no.	0 601 189 800
Rated power input	2000 W
Weight without cable	5.2 kgs.
Drilling range	180 mm
Length	481 mm
Width	108 mm
Height	294 mm
Suitability	Wet drilling in concrete
Concrete, possible range	180 mm
Masonry, possible range	180 mm
Vibration emission value ab	1 0 m/s2

Vibration emission value ah 4.8 m/s²

Scope of supply: Adapter dust extraction; Ball valve; Carry case

MRP: ₹ 1,52,690



GDB 180 WE Professional

Diamond Drill



Technical Specifications

HSN code	84672100
Part no.	0 601 190 100
Drilling diameter	180 mm
Working length, Z-axis	455 mm
Column length	767 mm
Drill stroke	514 mm
Weight	9.5 kgs.

MRP: ₹ 1,13,520



GCR 180 Professional

Diamond Drill







Technical Specifications

HSN code	84672100
Part no.	0 601 189 900
Rated power input	3200 W
Weight without cable	11.9 kgs.
Drilling range	350 mm
Length	534 mm
Width	142 mm
Height	167 mm
Suitability	Wet drilling in concrete
Concrete, possible range	350 mm

Scope of supply: Water coupling MRP: ₹ 2,30,610



GCR 350 Professional

Diamond Drill






reclinical Specifications		ations
	HSN code	84672100
	Part no.	0 601 190 200
	Drilling diameter	350 mm
	Working length, Z-axis	550 mm
	Column length	955 mm
	Drill stroke	580 mm
	Weight	12.6 kgs.

Scope of supply: Adapter for GDB 350 WE diamond drill

MRP: ₹ 1,55,010



Marble Cutter

GDC 120 Professional



Technical Specifications	
84672900	
0 601 393 0F1	
1200 W	
12000 rpm	
4 inch	
2.5 kgs.	
34 mm	
1.5 m	



MRP: ₹ 4,370

Marble Cutter

GDC 121 Professional



Technical Specifications		
HSN code	84672900	
Part no.	0 601 393 1F1	
Rated power input	1200 W	
No-load speed	12000 rpm	
Tool blade	5 inch	
Net weight	2.5 kgs.	
Cutting depth (at 90°)	34 mm	
Cord length	1.5 m	




MRP: ₹ 4,800





Technical Specifications	
HSN code	84672900
Part no.	0 601 3A2 0F0
Power	950 W
Variable Speed	600 - 2,100 rpm
Adaptor Size	M14 / M16
Stick Pad Diameter	ø165 mm
Max. Accessory Diameter	180 mm
Cable Length	4 m
Features	Soft Start, Constant/
	Variable Speed
Weight	2.3 kg

Scope of supply: MRP: ₹ 8,900 Sponge pad; Stick pad; M14 & M16 adaptor; Wrench;



Metal Surface Polisher



HEAVY		
DUTY	1 year arranty	ELECTRONIC

Technical Specifications

HSN code	84672900
Part no.	0 601 389 0F0
No-load speed	750 - 3000 rpm
Grinding spindle thread	M 14
Rubber sanding plate	180 mm
Power input	1250 W
Weight	2.5 kgs.

*Package doesn't contain polishing pad

Scope of supply:

Aux handle; Aux plate

M14/M16 adaptor; Auxiliary handle;

Spacer disc; Auxiliary D-handle; MRP: ₹ 13,590

Wrench

GPO 12 CE Professional



Recipsaw





Technical Specifications

HSN code	84672200
Part no.	0 601 64C 8K0
Power input	1100 W
No-load stroke rate:	0 - 2700 spm
Saw, stroke length:	28 mm
Cutting depth in wood:	230 mm
Cutting depth in metal	20 mm
profiles and metal pipes:	

Scope of supply: Blade for metal; Blade for wood;

HSN code

Part no. Power input

Weight

MRP: ₹ 16,050 Carry cases

> 84672200 0 601 64E 200

1300 W

4.1 kgs. 28 mm

230 mm

21.0 m/s² 1.5 m/s²

MRP: ₹ 18,760

20 mm

0 - 2,900 spm

Technical Specifications

GSA 1100 E Professional




Recipsaw

GSA 1300 PCE Professional





HEAVY DUTY 1 year warranty



Stroke rate at no load

Cutting depth in metal

profiles and metal pipes Vibration emission value ah

Saw, stroke length Cutting depth in wood

Carry case; Wood saw blade S 2345 X; Metal saw blade S 123 XF





Technical Specifications		
HSN code	84678920	
Part no.	0 601 283 1F1	
Input Power	2200 W	
Voltage	220/230 V	
Vibration per minute	20000 vpm	
Diameter of vibrator head	35 mm	
Hose Length	3.5 m	
Weight	4 kgs.	
Relation Power/weight	550	

*Tool comes with 1 No. 3.5m x 35mm nose with needle

Scope of supply: Needle 3.5 m with 35 mm diameter

MRP: ₹ 96,850



Nibbler

GNA 2.0 Professional





Technical Specifications

HSN code	84672900
Part no.	0 601 530 103
Max. cutting depth in stee	el 2 mm
Max. cutting depth in	2.5 mm
aluminium	
Cutting width	6 mm
Power input	500 W
No-load stroke rate	2400 spm
Weight	2.0 Kgs.

Scope of supply:

Allen key WAF 2.5; Die plate; MRP: ₹ 68,380

Punch



Nibbler

GNA 3.5 Professional



Technical Specifications		
HSN code	84672900	
Part no.	0 601 533 103	
Max. cutting depth in steel	3.5 mm	
Max. cutting depth in	4 mm	
aluminium		
Cutting width	6 mm	
Power input	620 W	
No-load stroke rate	1000 spm	
Weight	3.5 kgs.	

Scope of supply: Allen key WAF 4; Auxiliary handle; Die plate; Punch; Supporting arm

MRP: ₹ 1,32,380



Shear/Cutter

GSC 2.8 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 506 103
Max. cutting depth in steel	2.8 mm
Max. cutting depth	3.5 mm
in aluminium	
Power input	500 W
No-load stroke rate	2400 spm
Weight	2.7 Kgs.

Scope of supply: Allen key WAF 2.5; Allen key WAF 5; Blade; Alignment gauge


MRP: ₹ 61,820



Oscillating Tool

Technical Specifications







Scope of supply: MRP: ₹ 19,870
Carrying case; 1 set sanding sheet, Grit 2x80,
Grit 2x120, Grit 1x240; Starlock BIM segment
saw blade ACZ 85 EB, Wood & Metal;
Starlock BIM plunge cut saw blade AIZ 32
APB, Wood & Metal, Curved-Tec;
Starlock sanding plate AVZ 93 G Professional



GOP 30-28 Professional

Wall Chaser

GNF 35 CA Professional





Technical Specifications HSN code 84672100 0 601 621 703 Part no. Adjustable groove depth 0 - 35 mm Groove width 3 - 39 mm 150 mm Disc diameter Power input 1400 W No-load speed 9300 rpm Weight 4.1 kgs.

Scope of supply: MRP: ₹ 60,780

Break-out tool; Two-hole spanner, Carrying cases; Round nut; Backing flange; 3 spacers 4 mm;

4 spacers 6 mm





Rotary Drill



Technical Specifications

84672100
0 601 472 0F0
15 mm
6.5 mm
350 W
4000 rpm
1.1 Kgs.

Scope of supply:
Keyed chuck MRP: ₹ 4,010



GBM 6 Professional

Rotary Drill



GBM 10 RE Professional



MRP: ₹ 4,910



Rotary Drill



Technical Specifications

84672100
0 601 477 5F0
600 W
0 - 2600 rpm
1.5 - 13 mm
13 mm
13 mm
30 mm
½"- 20UNF
1.7 Kgs.

Scope of supply: MRP: ₹ 5,150
Keyed chuck 13 mm

GBM 13 RE Professional



Rotary Drill



Technical Specifications

HSN code	84672100
Part no.	0 601 169 055
Power input	550 W
No-load speed	0 - 1000/1900 rpm
Chuck capacity	1 - 13 mm
Drilling dia. in steel	13/8 mm
Drilling dia. in aluminium	20/12 mm
Drilling dia. in wood	32/20 mm
Drill spindle connecting	½" - 20 UNF
thread	
Weight	1.9 Kgs.

Scope of supply:

Auxiliary handle; Depth stop; Keyed chuck MRP: ₹ 10,070



GBM 13-2 Professional

GBM 1600 RE Professional



Rotary Drill

Technical Specifications HSN code 84672100 0 601 1B0 0K0 Part no. Power input 850 W 0 - 630 rpm No-load speed Rated torque 11 Nm D-Handle position 360° multiple Lock-on Button Yes Stirrer capacity 160 mm Wood Drilling 40 mm Metal Drilling 16 mm Weight 3 kg



Rotary Drill

HEAVY DUTY

GBM 23-2 Professional

MRP: ₹ 12,270

MRP: ₹ 65,940

Technical Specifications		
HSN code	84672100	
Part no.	0 601 121 103	
Power input	1050 W	
Drilling dia. in steel	23 / 13 mm	
Drilling dia. in aluminium	28 / 18 mm	
Drilling dia. in wood	50 / 35 mm	
Drill spindle connecting	MK 2 - DIN 228	
thread		
Weight	3.7 kgs.	

Scope of supply: Auxiliary handle

Scope of supply: Auxiliary handle

GBM 32-4 Professional



Technical Specifications	
HSN code	84672100
Part no.	0 601 130 203
Power input	1500 W
No-load speed	210 / 330 /
	470 / 740 rpm
Drilling dia. in steel	32 mm
Drilling dia. in aluminium	50 mm
Drilling dia. in wood	70 mm
Drill spindle connecting	MK 3 - DIN 228
thread	
Weight	7.3 kgs.
Scope of supply:	MRP: ₹ 81,760

Scope of supply: Carry case; Drift; Auxiliary handle



Rotary Drill / Stand



Technical Specifications		
HSN code	84679900	
Part no.	0 601 193 003	
Power input	95 W	
Magnet retention force	25 kN	
Clamping flange diameter	65 mm	
Working length, Z-axis	223 mm	
Twist drill bit diameter	32 mm	
Weight	26.0 kgs.	

Scope of supply: Carry case

MRP: ₹ 1,86,480

GMB 32 Professional



24





Technical Specifications	
HSN code	84672100
Part no.	0 601 216 1FK
Input Power	500 W
Impact Rate	0-41600 bpm
No-load speed	0-2600 rpm
Max. Drill Capacity: Concrete	10 mm
Max. Drill Capacity: Steel	8 mm
Max. Drill Capacity: Wood	20 mm
Weight	1.5 kg

MRP: ₹ 3,020



Impact Drill < 500W



Technical Specifications HSN code 84672100 Part no. 0 601 216 1FD

Part no.	0 601 216 1FD
Input Power	500 W
Impact Rate	0 - 47.000 bpm
No-load speed	0 - 3150 rpm
Max. Drill Capacity: Concrete	13 mm
Max. Drill Capacity: Steel	10 mm
Max. Drill Capacity: Wood	25 mm
Weight	1.5 kgs.

MRP: ₹ 3,330



GSB 501 Professional

Impact Drill 1G > 500W



Technical Specifications

HSN code	84672100
Part no.	0 601 217 1F3
Power input	650 W
No-load speed	0 - 3150 rpm
Impact rate at	0 - 47000 bpm
Drilling dia. in masonry wall	13 mm
Drilling dia. in steel	10 mm
Drilling dia. in wood	20 mm
Weight	1.6 kgs.

Scope of supply:

Auxillary Handle; Depth Gauge; Keyed chuck 13 mm

MRP: ₹ 5,440

MRP: ₹ 8,280

GSB 13 RE Professional



Impact Drill 1G > 500W



Technical Specifications

reclinical opecinications	
HSN code	84672100
Part no.	0 601 228 1K0
Power input	701 W
No-load speed	0 - 3000 rpm
Impact rate at no-load	0 - 48000 bpm
speed	
Drilling dia. in masonry wall	
Drilling dia. in steel	12 mm
Drilling dia. in wood	30 mm
Chuck capacity	1.5 - 13 mm
Weight	1.9 kgs.

Scope of supply: Auxiliary handle; Chuck key; Depth gauge

GSB 16 RE Professional



GSB 20-2 RE Professional



Impact Drill 2G Clam

Technical Specifications 84672100 HSN code 0 601 1A2 1F1 Part no. Power input 800 W No-load speed(1st/2nd Gear) 1100/3000 rpm Impact Rate 48,000 bpm Max. Drilling dia.(1st/2nd gear) Brickwork 20/16 mm 20/16 mm Concrete Steel 13/6 mm Wood 40/25 mm 2.6 kgs. Weight

Scope of supply: MRP: ₹ 13,290
Auxiliary handle; Chuck key;

Depth gauge



Impact Drill 2G St





Technical Specifications		
HSN code	84672100	
Part no.	0 601 19C 600	
Power input	1,100 W	
No-load speed	0 - 900 / 3000 rpm	
Rated speed	0 - 580 / 1900 rpm	
Rated torque	9,6 / 3,2 Nm	
Concrete	22 / 13 mm	
Wood	40 / 25 mm	
Steel	16 / 8 mm	
Weight	2.85 kgs.	
	HSN code Part no. Power input No-load speed Rated speed Rated torque Concrete Wood Steel	

Scope of supply:

Carry case; Depth stop; MRP: ₹ 20,010

Keyed chuck 13 mm; Auxiliary handle



Impact Drill < 500W

GSB 10 RE Kit Professional





Technical Specifications		
HSN code	84672100	
Part no.	0 601 216 1F4	
Power input	500 W	
No-load speed	0 - 2600 rpm	
Impact rate at no-load	0 - 41600 bpm	
speed		
Drilling dia. in masonry wall	10 mm	
Drilling dia. in steel	8 mm	
Drilling dia. in wood	20 mm	
Chuck capacity	1 - 10 mm	
Weight	1.5 kgs.	
Coope of cupply		

Scope of supply:
Keyed chuck 10 mm;
100 pcs accessory set

MRP: ₹ 5,690



Impact Drill 1G > 500W

GSB 13 RE Kit Professional



Technical Specifications		
HSN code	84672100	
Part no.	0 601 217 1F6	
Drilling dia. in masonry	13 mm	
Drilling dia. in wood	25 mm	
Drilling dia. in steel	10 mm	
Power input	600 W	
Impact rate	48000 bpm	
No-load speed	0 - 2800 rpm	
Weight	1.6 kgs.	

Scope of supply: Auxillary Handle; Depth Gauge; Keyed chuck 13 mm; 100 pcs accessory set

MRP: ₹ 7,010





Technical	Specifications

HSN code	84672100
Part no.	0 601 1A1 5F3
Input power	550 W
Rated power input	0 - 2,800 rpm
Impact rate	0 - 41,800 bpm
D :::: 1 10	

Drilling capacity in concrete 13 mm

Drilling capacity steel/wood 10/25 mm



Scope of supply:

5 x masonry drill bits; 5 x wood drill bits; 8 x hex keys; 10 x CRV bits 50 mm; 18 x sockets; 7 x wrenches; Magnetic bit holder; Cutter; Hammer; Cross screwdriver; Flat screwdriver; Pliers; Long nose pliers; Adapter; Socket wrench; Screw set; Wall plug set

MRP: ₹ 6,990



Impact Drill 1G > 500W

GSB 550 (Freedom Kit) Professional




Technical Specifications HSN code 84672100 0 601 1A1 5F1 Part no. Input power 550 W 0 - 2,800 rpm Rated power input 0 - 41,800 bpm Impact rate Drilling capacity in concrete 13 mm Drilling capacity steel/wood 10/25 mm

Scope of supply: 4 x masonry drill bits; 4 x wood drill bits;

2 x PH2 screw bits; Screw set; Wall plug set

MRP: ₹ 5,300







GCO 200 Professional



BT Chop-/Multicut Saw

Technical Specifications HSN code 84672200 0 601 B37 0F0 Part no. Input Power 2000 W Cutting Capacity Rectangle 100 x 196 mm **Cutting Capacity Square** 119 x 119 mm Cutting Capacity L-Protile 130 x 130 mm No-load Speed 3800 rpm 355 mm Disc dia. Weight

Scope of supply: MRP: ₹ 13,410 Cutting disc; Allen key



BT Chop-/Multicut Saw



Technical Specifications HSN code 84672200 Part no. 0 601 B37 1F0 Input Power 2400 W Cutting Capacity Rectangle 100 x 196 mm **Cutting Capacity Square** 119 x 119 mm Cutting Capacity L-Protile 130 x 130 mm No-load Speed 3,800 rpm 355 mm Disc dia. Weight 17.5 kgs.

Scope of supply: Cutting disc MRP: ₹ 16,800

GCO 14-24 Professional



BT Chop-/Multicut Saw



Tec	hnical	Specif	fications

HSN code	84672200
Part no.	0 601 B37 2F0
Rated power input	2,400 W
No-load speed	3,800 rpm
Saw blade diameter	355 mm
Saw blade bore	25.4 mm
Depth x length x height	9 x 29 x 48 cm
Cutting capacity at rectangle	0° 100 x 196 mm
Cutting capacity at square	0° 119 x 119 mm
Cutting capacity at L-profile	e 0° 130 x 130 mm
Weight	18.1 kg

Scope of supply: **Cutting disc**

GCO 14-24 J Professional





MRP: ₹ 18,450

Mini Grinder 4" **GWS 600** Professional



Technical Specifications HSN code 84672900 0 601 375 05F Part no. Input Power 670 W No-load Speed 11000 rpm Grinding Spindle Thread 10 M Disc dia. 100 mm Wire Cup Brush, dia. 70 mm Weight 1.8 kgs

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner;

MRP: ₹ 2,920 Clamping Flange



Mini Grinder 4"

GWS 6-100 S Professional



Technical Specifications		
HSN code	84672900	
Part no.	0 601 3750B7	
Rated power input	710 W	
No-Load speed	11,000 rpm	
Disc diameter	100 mm	
Grinding spindle	M10	
Weight	1.6 kgs	

Scope of supply: Clamping flange; Round nut; Spanner wrench; Auxiliary handle;

Grinding guard MRP: ₹ 3,830



Mini Grinder 4"

GWS 750-100 Professional



Technical Specifications		
HSN code	84672900	
Part no.	0 601 394 0F0	
Power input	750 W	
Disc dia.	100/115/125 mm	
Grip Size	59/54.5 mm	
Perimeter	187 mm	

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

MRP: ₹ 3,950



Mini Grinder 4"

HEAVY

GWS 900-100 Professional



Technical Specifications		
HSN code	84672900	
Part no.	0 601 396 0F0	
Rated power input	900 W	
Disc dia.	100 mm	
Grip size	59/54.5 mm	
Perimeter	187 mm	
Weight	1.8 kgs.	



Scope of supply: Wrench; Protective guard; Auxiliary handle

MRP: ₹ 4,760



Mini Grinder 5"





Technical Specifications		
HSN code	84672900	
Part no.	0 601 375 15A	
Rated power input	670 W	
No-load speed	11000 rpm	
Power output	400 W	
Grinding spindle thread	M14	
Disc dia.	125 mm	
Rubber sanding plate,	125 mm	
diameter		
Wire cup brush, dia.	70 mm	
Length/Height	263/104 mm	

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

Weight without cable

MRP: ₹ 4,550

1.9 kgs.



GWS 6-125 Professional

Mini Grinder 5"

GWS 900-125 Professional















Technical Specifications	
HSN code	84672900
Part no.	0 601 396 0F2
Rated input power	900 W
No load speed	11000 - 11000 rpm
Power output	450 W
Polished mandrel thread	M14
Disc diameter	125 mm
Length	280 mm
Width	73 mm
Height	100 mm
Weight	1.9 kg
Switch	2 way
e of supply:	MRP: ₹ 5,70

Scope of supply: Wrench; Protective guard; Auxillary handle



Mini Grinder 5"

GWS 14-125 CI Professional



Technical Specifications			
HSN code	84672900		
Part no.	0 601 824 2F1		
Power input	1,400 W		
No-load Speed	11000 rpm		
Power output	860 W		
Grinding spindle thread	M14		
Disc dia.	125 mm		
Rubber sanding plate, dia.	125 mm		
Wire cup brush, dia.	70 mm		
Weight without cable	2.2 kgs.		

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

MRP: ₹ 8,680



Mini Grinder 5"

GWS 18-125 L Professional







Technical Specifications			
HSN code	84672900		
Part no.	0 601 7A3 0F0		
Power input	1800 W		
No-load Speed	12000 rpm		
Grinding spindle thread	M14		
Disc dia.	125 mm		
Rubber sanding plate, dia.	125 mm		
Wire cup brush, dia.	70 mm		
Weight without cable	2.5 kgs.		

Scope of supply: Wrench; Protective guard; Auxillary handle

MRP: ₹ 14,790



Concrete Grinder



	A		-	
1		1	No. of Lot	

HEAVY		
W	1 year arranty	CONSTANT SPEED

Technical Specifications

HSN code	84672900
Part no.	0 601 776 001
Rated power input	1500 W
No-load speed	9300 rpm
Grinding spindle thread	M14
Main handle	Bow
Grinding head, diameter	125 mm
Weight	2.6 kgs.

*Tool comes with 1 No. Bosch Concrete grinding wheel

MRP: ₹ 58,340 Scope of supply:

Clamp key; Diamond grinding head; Carry Case; 3 x replacement brush rings



GBR 15 CAG Professional

Large Angle Grinder



HEAVY

Technical Specif	ications
HSN code	84672900
Part no.	0 601 849 1F1
Power input	2000 W
No-load speed	6500 rpm
Grinding spindle thread	M 14
Disc dia.	230 mm
Weight without cable	5.3 kgs.

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

MRP: ₹ 8,750



GWS 2000 Professional

Large Angle Grinder



	9	,	
HEAVY			

Technical Specifications

HSN code	84672900
Part no.	0 601 881 AK0
Rated power input	2200 W
No-load speed	8500 rpm
Grinding spindle thread	M14
Main handle	Shaft
Disc dia.	180 mm
Weight without cable	5 kgs.

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

MRP: ₹ 12,060



GWS 22-180 Professional

Large Angle Grinder



HEAVY DUTY 1 year warranty	
-------------------------------------	--

Technical Specifications

HSN code	84672900
Part no.	0 601 853 455
Power input	2400 W
No-load speed	8500 rpm
Grinding spindle thread	M14
Disc dia.	180 mm
Weight without cable	4.9 kgs.

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

MRP: ₹ 18,030




GWS 24-180 Professional

GWS 24-180 LVI Professional



Large Angle Grinder









Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

MRP: ₹ 31,270

Large Angle Grinder

GWS 26-180 H Professional



Technical Specifications		
HSN code	84672900	
Part no.	0 601 855 100	
Rated power input	2600 W	
No-load speed	8500 rpm	
Grinding spindle thread	M14	
Disc dia.	180 mm	








Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

MRP: ₹ 24,560

Large Angle Grinder

GWS 20-230 Professional







Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner;

MRP: ₹ 13,740 Clamping Flange



Large Angle Grinder

GWS 22-230 Professional





Technical Specifications		
HSN code	84672900	
Part no.	0 601 882 AF0	
Power input	2200 W	
No-load speed	6500 rpm	
Grinding spindle thread	M 14	
Main handle	Shaft	
Disc dia.	230 mm	
Weight without cable	5.3 kgs.	

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

MRP: ₹ 16,320



Large Angle Grinder



84672900
0 601 854 455
2,400 W
6500 rpm
M 14
Shaft
230 mm
6 kgs.

Technical Specifications

Scope of supply:
Auxillary Handle; Guard;
Round nut; Pin Spanner;

Clamping Flange MRP: ₹ 19,270



Large Angle Grinder

GWS 26-230 H Professional




reclinical Specifications		
HSN code	84672900	
Part no.	0 601 856 100	
Power input	2600 W	
No-load speed	6500 rpm	
Grinding spindle thread	M 14	
Main handle	Bow (rotatable)	
Disc dia.	230 mm	
Weight without cable	5.2 kgs.	

Scope of supply: Auxillary Handle; Guard; Round nut; Pin Spanner; Clamping Flange

amping Flange MRP: ₹ 26,200









Heat Gun

Technical Specifications

HSN code	84672900
Part no.	0 601 94D 0F0
Power input	1800 W
Max Temperature	60 / 350 / 550° C
Air Flow Rate	350 / 350 / 550 lpm
Over-heat protection	Yes
Weight	0.75 kg

Scope of supply: Reducing nozzle

MRP: ₹ 2,900



GHG 180 Professional

Heat Gun

GHG 630 DCE Professional



Technical Specifications			
HSN code	84672900		
Part no.	0 601 94C 704		
Power input	2000 W		
Weight without cable	0.9 kgs.		
Working temperature	50 - 630 °C		
Airflow	150 - 500 I/min		

MRP: ₹ 9,250



Heat Gun

GHG 600 CE Professional



Technical Specifications HSN code 84672900 0 601 942 103 Part no. Power input 2000 W Weight without cable 0.6 kgs. Length 340 mm 105 mm Height Working temperature 100-600°C

MRP: ₹ 10,120



Blower

GBL 620 Professional



Technical Specifications			
HSN code	84145920		
Part no.	0 601 980 5F0		
Power input	620 W		
No-load speed	16000 rpm		
Weight without cable	1.7 kgs.		
Volumetric flow rate	3.5 m³/min		
Standard Accessories	1 Nozzle		

MRP: ₹ 3,240









Blower GBL 800 E Combo Kit



Technical Specifications		
HSN code	84672900	
Part no.	0 601 980 4F3	
Power input	820 W	
No-load speed	0 - 16000 rpm	
Weight without cable	1.8 kgs.	
Volumetric flow rate	4.5 m³/min	
Standard Accessories	4 nozzle + 1 dust bag	

50mm nozzle; Extension nozzle; MRP: ₹ 6,040

Straight Grinder



Technical Specifications HSN code 84672900 0 601 224 0F0 Part no. Power input 300 W No-load speed 0 - 28000 rpm Collet chuck dia. max 8 mm 41 mm Spindle collar dia. Weight without cable 1.5 kgs.

Scope of supply: Collet chuck; Lock nut; Spanner

MRP: ₹ 8,110



GGS 3000 L Professional

Straight Grinder



Technical Specifications			
HSN code	84672900		
Part no.	0 601 224 1F0		
Power input	500 W		
No-load speed	33000 rpm		
Collet chuck dia. max.	8 mm		
Spindle collar dia.	41 mm		
Weight without cable	1 Δ kgs		

Scope of supply: MRP: ₹ 9,720 Collet chuck;

2 x single head open end wrench

GGS 5000 L Professional



Straight Grinder



4				
	Charles	-		

IEAVY		ELECTRONIC	CONSTANT
DUTY w	1 year arranty	KICK BACK STOP	\mathfrak{M}

Technical Specifications

HSN code	84672900
Part no.	0 601 221 100
Power input	650 W
No-load speed	10000 - 28000 rpm
Toolholder	Up to 8 mm
Weight without cable	1.6 kgs.

Scope of supply: Clamping unit; 13 mm spanner; 19 mm spanner

MRP: ₹ 22,810



GGS 28 LCE Professional

Impact Wrench



Technical Specifications		
HSN code	84672100	
Part no.	0 601 444 000	
Power input	500 W	
Torque, max. (hard/Soft	250/160 Nm	
Screw)		
Rated speed	500 - 1300 rpm	
Weight without cable	3.2 kgs.	
Length	320 mm	
Height	190 mm	
Screw dia.	M 6 - M 18	

MRP: ₹ 49,060



GDS 18 E Professional

Impact Wrench





Technical Specifications

84672100
0 601 435 103
920 W
1.000/500 Nm
860 rpm
7.3 kgs.
431 mm
436 mm

Scope of supply: MRP: ₹ 1,14,650 Auxiliary handle; Hanging loop

GDS 30 Professional



Bench Grinder



HEAVY	
	1 year arranty

Technical Specifications

•	
HSN code	84672900
Part no.	0 601 27A 3F0
Input Power	350 W
No load speed (50/60Hz)	3000 / 3600 rpm
Disc diameter	150 mm
Weight	10 kg
Grinding disc width	20 mm
Grinding disc bore	20 mm

MRP: ₹ 10,690 Scope of supply: Grinding wheel, Normal grit, Grit 24; Grinding wheel, Normal grit, Grit 60

GBG 35-15 Professional

Bench Grinder




Technical Specifications

HSN code	84672900
Part no.	0 601 27A 4F0
Input Power	600 W
No load speed (50/60Hz)	3000 / 3600 rpm
Disc diameter	200 mm
Weight	17 kg
Grinding disc width	25 mm
Grinding disc bore	32 mm

MRP: ₹ 16,220 Scope of supply: Grinding wheel, Normal grit, Grit 24; Grinding wheel, Normal grit, Grit 60

GBG 60-20 Professional



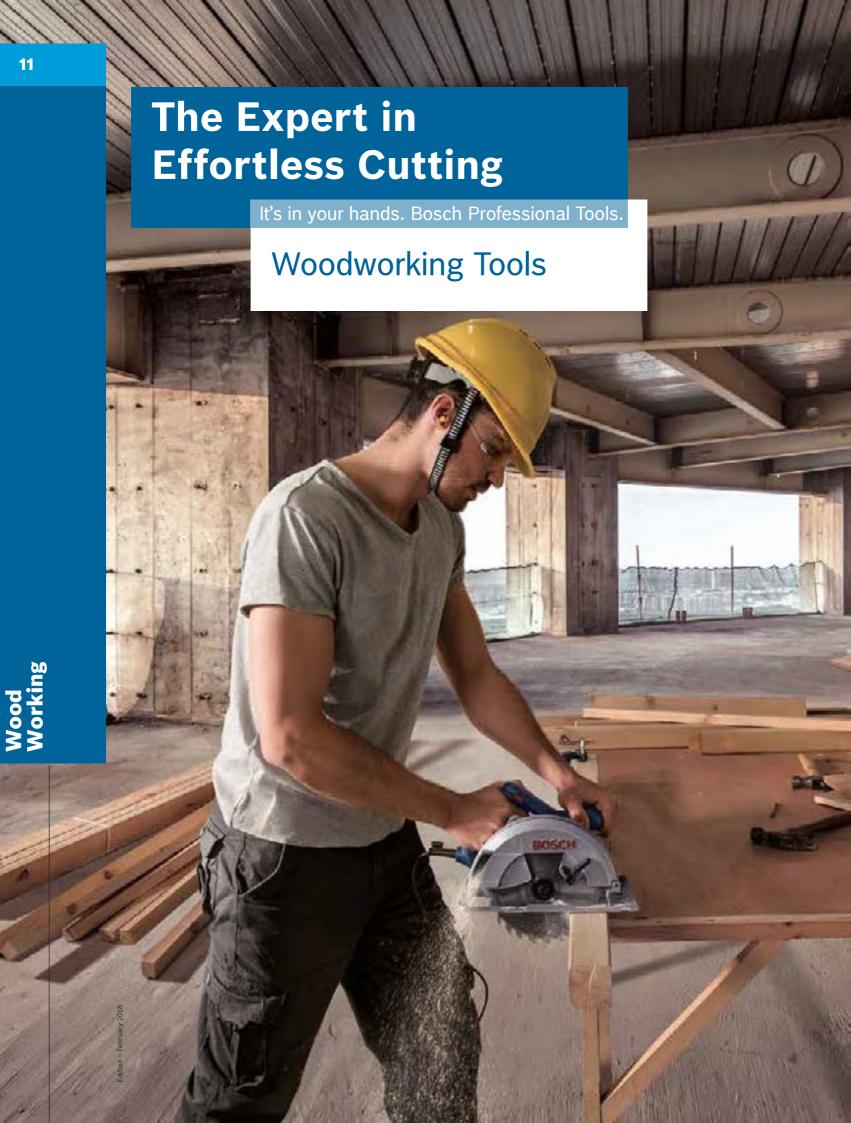

Chainsaw





Technical Specifications HSN code 84678100 0 601 597 603 Part no. Power input 2100 W Weight without cable 4.6 kgs. 350 mm Chain bar, length Chain pitch 3/8 12 m/s Chain speed Cable length 2.5 m Chain gauge 1.3 mm Length 780 mm Width 255 mm 200 mm Height Vibration emission value ah 4.8 m/s²

GKE 35 BCE Professional

Uncertainty K 1.5 m/s² Scope of supply: MRP: ₹ 43,660 Double Guard chain bar 35 cm; Chain 35 cm

Chainsaw



Technical Specifications

HSN code	84678100
Part no.	0 601 597 703
Power input	2100 W
Weight without cable	4.8 kgs.
Chain bar, length	400 mm
Chain pitch	3/8 "
Chain speed	12 m/s
Cable length	2.5 m
Chain gauge	1.3 mm
Length/Width/Height	820/255/200 mm
Vibration emission value ah	4.8 m/s ²
Uncertainty K	1.5 m/s ²

MRP: ₹ 54,600 Scope of supply: Double Guard chain bar 40 cm; Chain 40 cm

GKE 40 BCE Professional



Circular Saw



Technical Specifications

HSN code	84672200
Part no.	0 601 676 0F0
Power input	1100 W
No-load speed	5200 rpm
Saw blade bore	19 mm
Saw blade dia.	184 mm
Cutting depth (90°)	65 mm
Cutting depth (45°)	47 mm
Weight without cable	3.6 kgs.

Scope of supply:

Allen key; Saw blade; Wrench MRP: ₹ 10,250

GKS 7000 Professional



Circular Saw



Technical Specifications

HSN code	84672200
Part no.	0 601 623 0F1
Power input	1400 W
No-load speed	5500 rpm
Saw blade bore	20 mm
Saw blade dia.	184 mm
Cutting depth (90°)	67 mm
Cutting depth (45°)	48 mm
Weight without cable	4.1 kgs.

Scope of supply:

Allen key WAF 5; Parallel guide; MRP: ₹ 11,620 Saw blade

GKS 190 Professional





Technical Specifications HSN code 84672200 0 601 5A2 0F0 Part no. Power input 2050 W 0 - 5300 rpm No-load speed Saw blade bore 25 mm 235 mm Saw blade dia. Cutting depth (90°) 85 mm Cutting depth (45°) 65 mm Weight without cable 7.6 kgs.

Scope of supply:
Allen key; Wrench;
Saw blades

MRP: ₹ 14,680



Jigsaw

OSCA LECTRONIC

GST 700 Professional

Technical Specifications	
HSN code	84672200
Part no	0 601 2A7 0F0
Power input	500 W
Stroke rate	1,450-3,200 spm
Cutting depth in wood	70 mm
Stroke length	20 mm
Weight	2.1 kgs.
-	

Scope of supply: Wood blade T111C; 1 hex key; Dust Cover

MRP: ₹ 7,720



Jigsaw



Technical Specifications

HSN code	84672200
Part no.	0 601 587 65B
Power input	580 W
No-load stroke rate	500 - 3100 spm
Weight without cable	2.4 kgs.
Cutting depth in wood	85 mm
Cutting depth in aluminium	20 mm
Cutting depth in non-alloyed	d 10 mm
steel	

Scope of supply:

1 anti-splinter guard;

3 x saw blades; Carry case MRP: ₹ 16,970

GST 85 PBE Professional



Jigsaw



Technical Specifications

HSN code	84672200
Part no	0 601 516 0F1
Power input	670 W
Stroke length	24 mm
Cutting depth in wood	80 mm
Cutting depth in alumium	25 mm
Cutting depth in non-alloy	15 mm
steel	
Weight	2.7 kgs.

Scope of supply: Blade metal T121 AF; Blade of T345 XF; Splinter guard

MRP: ₹ 16,350



GST 25 M Professional

Jigsaw



Technical Specifications

HSN code	84672200
Part no.	0 601 513 0F0
Power input	780 W
No-load stroke rate	500 - 3100 spm
Weight without cable	2.7 kgs.
Cable length	4 m
Stroke height	26 mm
Cutting depth in wood	150 mm
Cutting depth in aluminium	20 mm
Cutting depth in non-alloyed	10 mm
-41	

MRP: ₹ 20,680 Scope of supply:

Dust extraction set; Anti-splinter guard; Carry case; Glide shoe; 3 x saw blades



GST 150 BCE Professional

Orbital Sander




Technical Specifications

HSN code	84672900
Part no.	0 601 298 0F0
Power input	190 W
No-load speed	12000 rpm
Weight	1.5 kgs.

Scope of supply: Carton box; 3 Sanding sheets

MRP: ₹ 6,550



Random Orbit Sander





Technical Specifications

HSN code	84672900
Part no.	0 601 387 5F2
Sanding pad dia.	125 mm
No-load speed	7,500 - 12,000 rpm
Orbital stroke rate	15,000 - 24,000 rpm
Eccentricity	1.25 mm
Power input	250 W
Weight	1.3 kgs.
Oscillating circuit dia.	2.5 mm
Vibration emission value ah	5.0 m/s ²
Uncertainty K	1.5 m/s ²

Scope of supply: MRP: ₹ 7,110 Dust box; Sanding disc

GEX 125-1 AE Professional



Random Orbit Sander







Technical Specifications		cations
	HSN code	84672900
	Part no.	0 601 372
	Sanding plate diameter	150 mm
	No-load speed	4500 - 12000 rpm
	Orbital stroke rate	9000 - 24000 opm
	Eccentricity	2 mm
	Power input	340 W
	Weight without cable	2.1 kgs.
	Oscillating circuit diameter	4 mm
	Vibration emission value ah	4 m/s ²
	Uncertainty K	1.5 m/s ²

Scope of supply: MRP: ₹ 15,990 Dust extraction adapter; Adapter;

Sanding paper G80



GHO 6500 Professional



Planer



Technical Specifications

HSN code	84672900
Part no.	0 601 596 0F0
Power input	650 W
No-load speed	16500 rpm
Planing width	82 mm
Max. cutting depth	2.6 mm
Weight	2.8 kgs.

Scope of supply: Allen key; Parallel guide; Sharpening device for HSS blade; Setting gauge for HSS blade MRP: ₹ 8,270



Planer

GHO 10-82 Professional







Technical Specifications 84672900 HSN code Part no. 0 601 594 060 Power input 710 W Adjustable chip thickness 0 - 1,0 mm Weight without cable 2.5 kgs.

Adjustable rebating depth 0 - 9 mm 16,500 rpm No-load speed Length 284 mm Height 173 mm

Scope of supply: MRP: ₹ 9,300 Guide bracket; Single-ended open-jaw spanner; Stop bracket



Planer

GHO 26-82 Professional







Technical Specifications

HSN code	84672900
Part no.	0 601 594 160
Power input	710 W
Adjustable chip thickness	0 - 2,6 mm
Weight without cable	2.6 kgs.
Adjustable rebating depth	0 - 9 mm
No-load speed	16,500 rpm
Length/Width/Height	284/163/173 mm
Planing width	82 mm
Vibration emission value ah	7.8 m/s ²
Uncertainty K	1.5 m/s ²

MRP: ₹ 13,910 Scope of supply: Dustbag; Parallel guide; Auxillary blade



Router

GMR 1 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 60A 0K0
Power input	550 W
No-load speed	33000 rpm
Weight without cable	1.5 kgs.
Toolholder	6 mm

Scope of supply: Guide bracket; Laminate trim guide; Straight edge guide; Template guide; Wrench

MRP: ₹ 10,020



Router



Technical Specifications

HSN code	84672900
Part no.	0 603 26C 800
Power input	1400 W
Power output	650 W
Toolholder (supplied)	6 mm
No-load speed	11,000 - 28,000 rpm
Maximum router cage stroke	55 mm
Weight	3.5 kgs.

Scope of supply: Dust extraction adapter; Open ended spanner;

Template guide; Plastic case; Straight bit; Parallel guide; MRP: ₹ 12,870

Centring pin; 3 collets



POF 1400 ACE Professional

Miter Saw



Technical Specifications

HSN code	84672200
Part no.	0 601 B29 0K0
Power input	1700 W
Weight	14.1 kgs.
Cutting capacity, 0°:	89 mm
Cutting capacity, 45° incline:	67 mm
No-load speed:	4800 rpm
Saw blade diameter:	255 mm
Saw blade bore:	25.4 mm

Scope of supply: Allen key; Saw blade; Wrench; Carton box

MRP: ₹ 27,020



GCM 10 MX Professional

Miter Saw



HEAVY

Technical Specifications

HSN code	84672200
Part no.	0 601 B21 1K0
Power input	1800 W
Cutting Capacity 0°	91x187 mm
Cutting Capacity 45° mitre	91x132 mm
Cutting Capacity 45° incline	38x141 mm
Mitre setting	52° L/52° R
Incline setting	47° L/2° R
No-load speed	4300 min ⁻¹
Weight	20.7 kgs.
Saw blade diameter	305 mm
Blade body thickness	1.7 - 2.62 mm
Mounting hole dia.	25.4 mm
Scope of supply:	MRP: ₹ 52.140

MRP: ₹ 52,140 Saw blade; Clamp; Dust bag

GCM 12 MX Professional



Miter Saw









reclinical Specifications		ations
	HSN code	84672200
	Part no.	0 601 B23 6K0
	Power input	1800 W
	Cutting capacity, 0°	103 x 341 mm
	Cutting capacity, 45° mitre	104 x 240 mm
	Cutting capacity, 45° incline	e51 x 341 mm
	Mitre setting	52 ° L / 60 ° R
	Incline setting	47 ° L / 47 ° R
	No-load speed	3,800 rpm
	Saw blade dia.	305 mm
	Saw blade bore	30 mm
	Weight without cable	32.1 kgs.

Scope of supply: MRP: ₹ 98,730

Dust bag; Insert plate; Saw blade 305 mm 80 T; Collet; Wrench

GCM 12 GDL Professional



*With sliding feature

GTS 10 J Professional



Table Saw



Technical Specifications HSN code 84672200 0 601 B30 5K0 Part no. Table size 642 x 572 mm 3650 rpm No-load speed Saw blade diameter 254 mm

25 mm

Max. cutting capacity on the right 460 mm

Max. cutting capacity on the left 210 mm

Scope of supply: Wood saw blade;

Saw blade bore

Incline setting

MRP: ₹ 72,400 Push stick




Screwdriver

GSR 6-25 TE Professional







Scope of supply: Carry case; Depth stop; Magnetic universal holder; Screwdriver bit; Belt clip



Vacuum Cleaner

GAS 15 Professional



rechnical Specifications	
HSN code	85081100
Part no.	0 601 9E5 0K0
Power input	1100 W
Container (gross/net)	15/8 L
Max. Airflow	33 l/s
Max. Vacuum Pressure	22 kPa
Weight	6 kgs.

* Tool Socket for connecting Power Tools.

Scope of supply: Crevice nozzle; Carton box; 3m anti-static hose; Elbow; Tubes (2pcs); Plastic Bags;

Floor nozzle set

MRP: ₹ 16,520



Vacuum Cleaner

GAS 35 L SFC Professional



Technical Specifications	
HSN code	85081100
Part no.	0 601 9C3 060
Max. power input (Turbine)	1380 W
Weight	11.6 kgs.
Container volume, gross	35 I
Container volume, net	23
Container volume, net, water	19.2 l
Length	515 mm
Width	450 mm
Height	575 mm
Filter surface area	6,150 cm ²
Max. volume flow rate (Turbine)	74 l/sec
Max. vacuum pressure (Turbine)	254 mbar



MRP: ₹ 66,870 Brown box; Hose with BIA nozzle 3 m, 35 mm diameter; Elbow; Crevice nozzle; Floor nozzle set; Disposal bag; Tool Sleeve; SFC+ module



Technical Specifications

HSN code	85081100
Part no.	0 601 9C3 360
Max. power input (Turbine)	1380 W
Weight	16.2 kgs.
Container volume, gross	55 l
Container volume, net	43
Container volume, net, water	40 I
Length/Width/Height	570/450/865 mm
Filter surface area	6.150 cm ²
Max. volume flow rate (Turbine)	74 I/sec
Max. vacuum pressure (turbine)	254 mbar



*Tool Socket for connecting Power Tools. MRP: ₹ 98,300

Scope of supply: 5 m anti-static hose; Elbow; Crevice nozzle; Floor nozzle set; Disposal bag; Tool Sleeve



Wood Working

High-pressure Washer

GHP 5-13 C Professional



	Technical Specific	ations
	HSN code	84248990
	Part no.	0 600 910 0F0
	Maximum pressure	140 bar
	Working pressure	130 bar
	Maximum flow rate	520 l/h
	Auto-stop	Yes
j	Pump system	Crankshaft
	Working position	Horizontal
	Motor type	Induction
	Absorbed power	2300 Watts
	Voltage / Frequency	220-240v and 50hz
	Hose length	8 m
	Electric cable	5 m
	Pressure adjustment (flow)	Yes
	Weight	16.5 kgs.

MRP: ₹ 54,980

High-pressure Washer

Scope of supply:

Variably adjustable fan spray lance

GHP 5-65 Professional



Technical Specifi	cations
Part no.	0 600 910 5F0
Maximum Pressure	160 bar
Maximum Flow rate	520 l/h
Motor power	2.400 W
Hose length	8 m
Auto Stop	Yes
Weight	23.5 kgs.
Integrated detergent	Yes
Suction System	
Handle	Metal Telescopic
	Handle
Pump system	Wobble Plate

Scope of supply: MRP: ₹ 63,470
Bosch gun; Roto nozzle; Hose coupling;
Adjustable 3-in-1 lance (stainless steel); Water filter



High-pressure Washer

GHP 5-75 X Professional



Technical Specifications		
Part no.	0 600 910 8F0	
Maximum pressure	185 bar	
Maximum flow rate	570 l/h	
Motor power	2.600 W	
Hose length	10 m	
Auto-stop	Yes	
Weight	28.2 kgs.	
Integrated detergent	Yes	
Suction System		
Handle	Metal Telescopic	
	Handle with Hose Reel	
Pump system	Wobble Plate	

MRP: ₹ 95,120



High-pressure Washer

GHP 8-15 XD Professional



Technical Specifications		
Part no.	0 600 910 3F0	
Maximum flow rate	800 l/h	
Maximum pressure	160 bar	
Working pressure	150 bar	
Auto-stop	Yes	
Pump system	Wobble plate	
Working position	Horizontal	
Weight	40.6 kgs.	

MRP: ₹ 107,320



Symbols and their meaning.



Guide rail For precise cuts.



'Plus-clean" system Electromagnetic filter cleaning for clean filter surfaces and lasting suction power.



Removable cable



Handle



Carrying case





Slim Grip



Spindle lock Faster, easier disc//tool changing.



High Torque



Adjustable cutter clearance

Screw to adjust the cutter clearance according to sheet thickness.



Intelligent system for transport and storage.



2 in 1 dual tool holder

Easily switch between screwdriving and bolting applications



Bosch SDS System

Fast, tool-free changing of application tools.



Bosch SDS-pro System For fast, tool-free

changing of grinding discs



SDS-plus toolholder

Optimum power transfer. For Rotary Hammers in the 2 – 4kg class.



SDS-max toolholder

Optimum power transfer. For Rotary Hammers and Demolition Hammers from the 5kg class onwards.



Electronic

Speed preselection for adjusting to suit any application.



Constant Electronic

Power booster for heavy loads. Constant speed, even under load.



Torque Control

Torque preselection for uniform screwdriving of a large number of screws.



Anti-Rotation Interruption of power transfer.



Overload clutch



Forward/reverse rotation

For inserting and removing screws.



Lithium-ion technology No self-discharge. No memory effect.

Anti-rotation protective

Stands firm, even if the disc breaks.



Brake system

The brake reduces the run-out time of the disc by up to 80%.



Kick-Back Stop

More protection: the tool shuts down when STOP jammed.



Restart protection

Prevents the tool from automatically starting up after a power cut.



Dust extraction

Directly into the integral dust bag on the machine and/or using an allpurpose dust extractor.



Direct cooling

For high overload capability and a long service life.



Starting current limitation

For a safe start.



Saw blade pendulum action

Adjustable 3-stage or 4-stage saw blade pendulum action.



For a perfect finish on stainless steel



A perfect fit for paper with a velcro-type fastening and for rolls of paper.



Fine depth adjustment Scale accurate to 1/10 mm for precise routing work.



Turbo Blower Blower for optimum view of the cutting line.



Double Insulation



1 Speed





Light Weight



Auto-Lock

For fastest possible tool changes with



Turbo Power

More power for faster working.



Extremely sharp blades and an exact



Laser class 3R

Laser class for various measuring



Laser class 2 Laser class for measuring tools.



Bosch Wood Protection System For preventing damage



Bosch Full Force Technology For eliminating wasted power and



Vibration Control

space.

Patented vibration damping system.

Part Number	Category	Model Number	HSN Code	MRP ₹
		Cordless		
06019H20F0	Screwdriver	Bosch GO Solo	84672900	3,070
06019H20F1	Screwdriver	Bosch GO Kit	84672100	3,680
06019602K0	Screwdriver	IXO 3	84672900	4,200
06019A20K1	Screwdriver	GSR ProDrive	84672100	5,510
06019F70K4	Drill Driver	GSR 120 Li	84672100	8,900
06019F60K0	Drill Driver	GSR 12V-15 FC	84672100	21,100
06019D40K2	Drill Driver	GSR 12 V-EC	84672100	15,200
06019F80K0	Drill Drivers	GSR 140 Li	84672100	13,180
06019E6020	Drill Drivers	GSR 14.4-2-LI Plus	84672100	26,220
06019F81K0	Drill Drivers	GSR 180-Li	84672100	14,800
06019E81K0	Drill Drivers	GSR 18 V-EC	84672100	27,020
06019F30K4	Impact Drills	GSB 120 Kit	84672100	8,160
06019F82K0	Impact Drills	GSB 140-Li	84672100	14,200
06019F83K0	Impact Drills	GSB 180-Li	84672100	15,510
06019F00K1	Impact Driver	GDR 120-LI	84672100	12,360
06019E00F6	Impact Driver	GDR 12 V-EC	84672100	20,680
06019B93F0	Impact Driver	GDR 18 V-EC	84672100	39,830
06019E01F5	Impact Wrench	GDS 12 V-EC	84672100	25,330
06019G61K0	Impact Driver	GDS 250-Li	84672900	24,700
06019A1SF2	Impact Driver	GDS 18 V-Li	84672100	35,450
06019D81F0	Impact Wrench	GDS 18 V-EC 250	84672100	42,460
06019A13F2	Impact Wrench	GDS 18 V-Li HT	84672100	68,830
06019B90F0	Impact Wrench	GDX 14.4 V-EC	84672900	35,830
06019B91F0	Impact Wrench	GDX 18 V-EC	84672900	37,840
06119110F2	Rotary Hammers 1-2 Kg	GBH 180-Li	84672900	29,300
0611906003	Drill Drivers	GBH 36 V-Li Plus	84672100	74,120
06019C62K1	Vacuum Cleaners	GAS 18V-1	85081100	15,700

Battery Battery				
1600A001BN	Battery-Packs	Freedom 1,5Ah 10,8V	85076000	1,960
1600A001BT	Battery-Packs	GBA 12V 2.0Ah	85076000	2,510
1600A00162	Battery-Packs	GBA 14.4 V 4.0 Ah M-C	85076000	6,450
1600A001CG	Battery-Packs	Freedom 2.0Ah 18V	85076000	4,830
1600A00163	Battery-Packs	GBA 18 V 4.0 Ah M-C	85076000	7,600
1600A001D1	Battery-Packs	(Freedom) AL 1130	85076000	2,140
1600A001DH	Battery-Packs	GAL 1860 CV	85076000	3,840

Dellik	olition Hammers		
Demolition Hammers < 12 Kg	GSH 500	84672100	19,930
Demolition Hammers < 12 Kg	GSH 5	84672100	35,080
Demolition Hammers < 12 Kg	GSH 11 E	84672100	44,990
Demolition Hammers > 12 Kg	GSH 16-30	84672100	1,09,110
Demolition Hammers > 12 Kg	GSH 27 VC	84672100	2,21,640
Demolition Hammers < 12 Kg	GSH 11 VC	84672100	69,520
	Demolition Hammers < 12 Kg Demolition Hammers < 12 Kg Demolition Hammers > 12 Kg Demolition Hammers > 12 Kg	Demolition Hammers < 12 Kg GSH 5 Demolition Hammers < 12 Kg GSH 11 E Demolition Hammers > 12 Kg GSH 16-30 Demolition Hammers > 12 Kg GSH 27 VC	Demolition Hammers < 12 Kg GSH 5 84672100 Demolition Hammers < 12 Kg

	Rot	ary Hammers		
06112583F2	Rotary Hammers 1 - 2 Kg	GBH 200	84672100	7,760
0611250655	Rotary Hammers 1 - 2 Kg	GBH 2-22 E	84672100	11,340
0611250755	Rotary Hammers 1 - 2 Kg	GBH 2-22 RE	84672100	11,960
0611251655	Rotary Hammers 1 - 2 Kg	GBH 2-26 E	84672100	15,240
0611251755	Rotary Hammers 1 - 2 Kg	GBH 2-26 RE	84672100	15,730
0611253755	Rotary Hammers 1 - 2 Kg	GBH 2-26 DRE	84672100	17,080
06112671F0	Rotary Hammers 1 - 2 Kg	GBH 2-28 DV	84672100	19,210
061123A0K0	Rotary Hammers 3 Kg	GBH 3-28 DRE	84672100	28,420
06113321F0	Rotary Hammers 4 Kg	GBH 4-32 DFR	84672100	40,610
06112690K0	Rotary Hammer 5 Kg and more	GBH 5-40 D	84672100	45,950
0611264000	Rotary Hammer 5 Kg and more	GBH 5-40 DCE	84672100	61,210
06112650K0	Rotary Hammer 5 Kg and more	GBH 8-45 DV	84672100	85,360
0611266000	Rotary Hammer 5 Kg and more	GBH 12-52 DV	84672100	1,03,690

Part Number	Category	Model Number	HSN Code	MRP ₹
		Diamond Technology		
0601189800	Diamond Drills	GDB 180 WE	84672100	1,52,690
0601190100	Diamond Drills	GCR 180	84672100	1,13,520
0601189900	Diamond Drills	GDB 350 WE	84672100	2,30,610
0601190200	Diamond Drills	GCR 350	84679900	1,55,010
06013930F1	Marble Cutter	GDC 120	84672900	4,370
06013931F1	Marble Cutter	GDC 121	84672900	4,800

	S	peciality Tools		
06013A20F0	Metal Surface Polisher	GPO 950	84672900	8,900
06013890F0	Metal Surface Polisher	GPO 12 CE	84672900	13,590
060164C8K0	Recipsaw	GSA 1100 E	84672200	16,050
060164E200	Recipsaw	GSA 1300 PCE	84672200	18,760
06012831F1	Stirrers	GVC 22 EX	84678920	96,850
0601530103	Nibblers	GNA 2.0	84672900	68,380
0601533103	Nibblers	GNA 3.5	84672900	1,32,380
0601506103	Shears/Cutters	GSC 2.8	84672900	61,820
06012370F0	Oscillating Tools	GOP 30-28	84672900	19,870
0601621703	Wall Chaser	GNF 35 CA	84672900	60,780

		Drills		
06014720F0	Rotary Drills	GBM 6	84672100	4,010
06014735F0	Rotary Drills	GBM 10 RE	84672100	4,910
06014775F0	Rotary Drills	GBM 13 RE	84672100	5,150
0601169055	Rotary Drills	GBM 13-2	84672100	10,070
06011B00K0	Rotary Drills	GBM 1600 RE	84672100	12,270
0601121103	Rotary Drills	GBM 23-2	84672100	65,940
0601130203	Rotary Drills	GBM 32-4	84672100	81,760
0601193003	Rotary Drills	GMB 32	84679900	1,86,480
06012161FK	Impact Drills < 500W	GSB 450	84672100	3,020
06012161FD	Impact Drills < 500W	GSB 501	84672100	3,330
06012171F3	Impact Drill 1G > 500W	GSB 13 RE	84672100	5,440
06012281K0	Impact Drill 1G > 500W	GSB 16 RE	84672100	8,280
06011A21F1	Impact Drill 2G Clam	GSB 20-2 RE	84672100	13,290
060119C600	Impact Drills 2G St	GSB 21-2 RE	84672100	20,010
06012161F4	Impact Drills < 500W	GSB 10 RE Kit	84672100	5,690
06012171F6	Impact Drill 1G > 500W	GSB 13 RE Kit	84672100	7,010
06011A15F3	Impact Drill 1G > 500W	GSB 550 (XL Kit)	84672100	6,990
06011A15F1	Impact Drill 1G > 500W	GSB 550 (Freedom Kit)	84672100	5,300

Chopsaws					
0601B370F0	BT Chop-/Multicut Saw	GCO 200	84672200	13,410	
0601B371F0	BT Chop-/Multicut Saw	GCO 14-24	84672200	16,800	
0601B372F0	BT Chop-/Multicut Saw	GCO 14-24 J	84672200	18,450	

Grinders Gri				
060137505F	Mini Grinder 4"	GWS 600	84672900	2,920
06013750B7	Mini Grinder 4"	GWS 6-100 S	84672900	3,830
06013940F0	Mini Grinder 4"	GWS 750-100	84672900	3,950
06013960F0	Mini Grinder 4"	GWS 900-100	84672900	4,760
060137515A	Mini Grinder 5"	GWS 6-125	84672900	4,550
06013960F2	Mini Grinder 5"	GWS 900-125	84672900	5,700
06018242F1	Mini Grinder 5"	GWS 14-125 CI	84672900	8,680
06017A30F0	Mini Grinder 5"	GWS 18-125 L	84672900	14,790
0601776001	Concrete Grinder	GBR 15 CAG	84672900	58,340

Part Number	Category	Model Number	HSN Code	MRP ₹		
Grinders Gri						
06018491F1	Large Angle Grinder	GWS 2000	84672900	8,750		
0601881AK0	Large Angle Grinder	GWS 22-180	84672900	12,060		
0601853455	Large Angle Grinder	GWS 24-180	84672900	18,030		
0601892F00	Large Angle Grinder	GWS 24-180 LVI	84672900	31,270		
0601855100	Large Angle Grinder	GWS 26-180 H	84672900	24,560		
0601850155	Large Angle Grinder	GWS 20-230	84672900	13,740		
0601882AF0	Large Angle Grinder	GWS 22-230	84672900	16,320		
0601854455	Large Angle Grinder	GWS 24-230	84672900	19,270		
0601856100	Large Angle Grinder	GWS 26-230 H	84672900	26,200		

Metalworking Metalworking					
060194D0F0	Heat Gun	GHG 180	84672900	2,900	
060194C704	Heat Gun	GHG 630 DCE	84672900	9,250	
0601942103	Heat Gun	GHG 600 CE	84672900	10,120	
06019805F0	Heat Gun	GBL 620	84145920	3,240	
06019804F3	Heat Gun	GBL 800 E	85081100	6,040	
06012240F0	Straight Grinder	GGS 3000 L	84672900	8,110	
06012241F0	Straight Grinder	GGS 5000 L	84672900	9,720	
0601221100	Straight Grinder	GGS 28 LCE	84672900	22,810	
0601444000	Impact Wrench	GDS 18 E	84672100	49,060	
0601435103	Impact Wrench	GDS 30	84672100	114,650	
060127A3F0	Bench Grinder	GBG 35-15	84672900	10,690	
060127A4F0	Bench Grinder	GBG 60-20	84672900	16,220	

Woodworking					
0601597603	Chainsaw	GKE 35 BCE	84678100	43,660	
0601597703	Chainsaw	GKE 40 BCE	84678100	54,600	
06016760F0	Circular Saw	GKS 7000	84672200	10,250	
06016230F1	Circular Saw	GKS 190	84672200	11,620	
06015A20F0	Circular Saw	GKS 235 Turbo	84672200	14,680	
06012A70F0	Jigsaw	GST 700	84672200	7,720	
060158765B	Jigsaw	GST 85 PBE	84672200	16,970	
06015160F1	Jigsaw	GST 25 M	84672200	16,350	
06015130F0	Jigsaw	GST 150 BCE	84672200	20,680	
06012980F0	Orbital Sander	GSS 2300	84672900	6,550	
06013875F2	Random Orbit Sander	GEX 125-1 AE	84672900	7,110	
0601372768	Random Orbit Sander	GEX 150 AC	84672900	15,990	
06015960F0	Planer	GHO 6500	84672900	8,270	
0601594060	Planer	GHO 10-82	84672900	9,300	
0601594160	Planer	GHO 26-82	84672900	13,910	
060160A0K0	Router	GMR 1	84672900	10,020	
060326C800	Router	POF 1400 ACE	84672900	12,870	
0601B290K0	Miter Saw	GCM 10 MX	84672200	27,020	
0601B211K0	Miter Saw	GCM 12 MX	84672200	52,140	
0601B236K0	Miter Saw	GCM 12 GDL	84672200	98,730	
0601B305K0	Table Saw	GTS 10 J	84672200	72,400	
0601445000	Screwdriver	GSR 6-25 TE	84672100	18,600	
06019E50K0	Vacuum Cleaner	GAS 15	85081100	16,520	
06019C3060	Vacuum Cleaner	GAS 35 L SFC	85081100	66,870	
06019C3360	Vacuum Cleaner	GAS 55 M AFC	85081100	98,300	

High-Pressure Cleaners					
06009100F0	High-pressure Washer	GHP 5-13 C	84248990	54,980	
06009105F0	High-pressure Washer	GHP 5-65	84248990	63,470	
06009105F0	High-pressure Washer	GHP 5-65	84248990	63,470	
06009107F0	High-pressure Washer	GHP 5-75	84248990	89,250	

WARRANTY TERMS AND CONDITIONS

Power Tools from Bosch are guaranteed against all material and manufacturing defects for a period of 6 months from the date of purchase*.

In the event of failure of the tools due to material and manufacturing defects, we undertake to repair the tools free of charge, provided we are satisfied that,

- The power tool has not been tampered with.
- Failure has occurred due to manufacturing / material defect.
- The power tool has been purchased from an accredited dealer.
- The claim has been referred to one of the Bosch Authorized Service Centres along with the power tool, guarantee card and original tool purchase receipt or invoice.

This warranty does not cover

- ▶ All normal wear and tear parts like carbon brush, bearings, o-rings etc.
- ▶ Installation to wrong voltage, over load and wrong application.
- Use other than in accordance to handling instructions.

 Unauthorized repair carried out. Damage due to any unit caused by accident, misuse, wilful damage, and normal wear, claims arising from loss, fire or other calamities caused by nature or in any way being tampered with. *Check with Local Bosch representative for Hot Air Gun Warranty. **HEAVY** 1 year 1 year from the date of purchase*

Bosch Limited, Power Tool Division PA-AT Complex, Hosur Road, Adugodi Bangalore - 560030



