













OPTOELECTRONIC INSTRUMENTS AND SYSTEMS FOR
GEOMETRIC QUANTITIES MEASUREMENT

PRODUCT CATALOG

2021

	DISPLACEMENT AND POSITION MEASUREMENT		GAP MEASUREMENT
	THICKNESS AND WIDTH MEASUREMENT		PROFILE MEASUREMENT
	OUTER DIAMETER AND PROFILE MEASUREMENT		LEVEL MEASUREMENT
	INNER DIAMETER AND PROFILE MEASUREMENT		2D MEASUREMENT
	VIBRATION AND RUN-OUT MEASUREMENT		3D MEASUREMENT
	STRAIGHTNESS AND FLATNESS MEASUREMENT		MACHINE VISION SYSTEMS



The parent company, Scientific and Production Company «RIFTEK» was founded in 1993. The enterprise specializes in development and fabrication of optoelectronic instruments for measuring of geometrical quantities.

The group also includes:

Enterprise «RIFTEK TECHNO» — manufacturing of mechanical parts and components for the parent company, contract manufacturing;

Enterprise «RIFTEK-SMT» — automated assembling of printed circuit boards (PCB), contract manufacturing;

Enterprise «RIFTEK-Systems» — assembly unit in Russia.

The basic product line includes:

- laser triangulation position sensors;
- 2D and 3D laser scanners;
- absolute linear encoders;
- optical micrometers;
- hardware and software system for welding robots;
- specialized systems for measuring dimensions, displacements and distances, thickness, diameter, etc.;
- measurement instruments for railway transport;
- video processing FPGA IP-cores and hardware;
- machine vision systems.

RIFTEK products are delivered in more than 70 countries. Company representative offices operate in 45 countries.

RIFTEK company is certified according to ISO 9001:2015 in the field of management of quality of design and manufacture of optoelectronic instrumentation.

We offer integrated solution to control and automation problems — from sensing devices to multifunctional measuring and control systems.



GIUA-0038-QC

ISO 9001:2015

LASER TRIANGULATION SENSORS, RF60x SERIES


PURPOSE

Contactless dimensions, surface profile, deformation, vibration measurement, sorting, sensing presence or absence, positional checking, bulk materials and liquids level measurement.

OPERATION

Sensor operation is based on the principle of optical triangulation.

Radiation of a semiconductor laser is focused by an objective on an object. The radiation scattered at the object is collected on the CMOS array by the input lens. Object motion causes a corresponding motion of the image. Built-in signal processor calculates the distance to the object according to the light spot image position on the CMOS array.

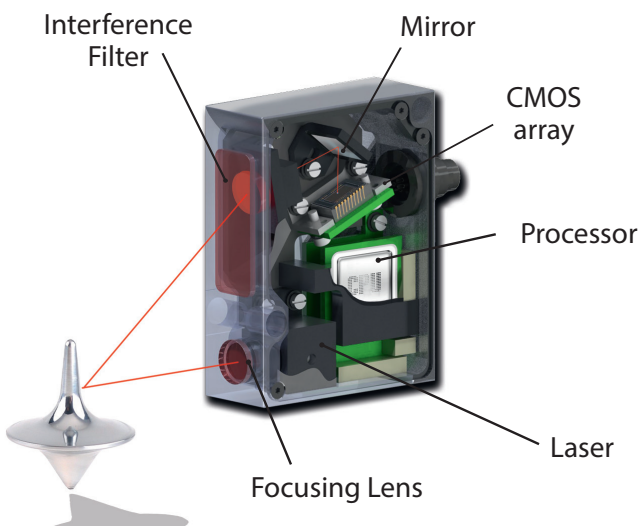


MAIN FEATURES

- Measuring ranges from 2 to 2500 mm
- $\pm 1 \mu\text{m}$ accuracy
- Sampling rate up to 70 kHz
- RS232/RS485/Ethernet/CAN/ CANopen +4...20 mA/0...10V/ModbusRTU
- Binocular sensors for laser scanning
- Binary and ASCII data formats
- Sensors with BLUE lasers to control high temperature, mirrored and semitransparent objects
- Sensors with IR lasers
- Mutual synchronization of the sensors (master-slave) for multi-axis measurement tasks
- Service Software for parameter setting and results visualization
- Free SDK and examples for Windows, Linux, .NET, MATLAB, LabVIEW

MODELS

- RF603 — universal sensors
- RF603HS — high speed sensors
- RF600 / RF600HS — sensors with increased base distance and large measurement range. High speed sensors
- RF605 — compact sensors
- RF602 — super compact sensors
- RF607 — high-precision high-speed sensors
- RF609 / RF609Rt / RF609Wi-Fi — laser probes for inner surface control

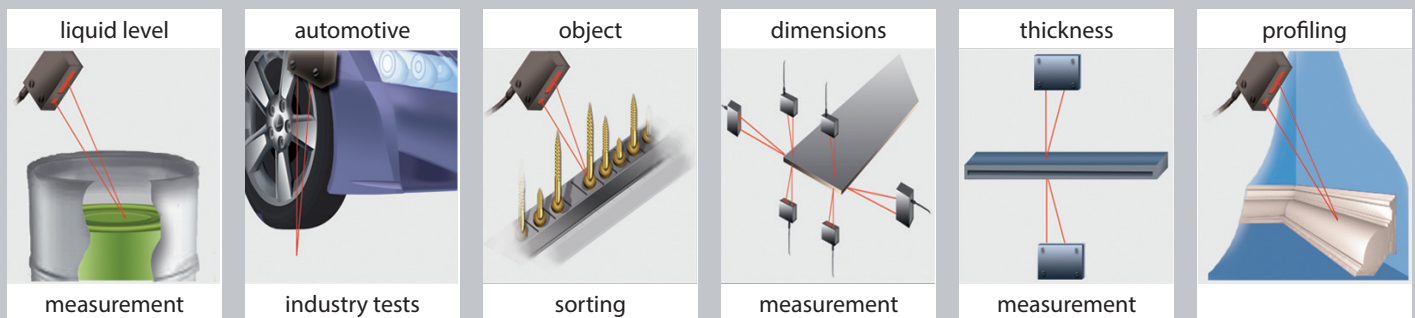

PARAMETER		VALUE
Output interface	digital	RS232 (max. 460.8 kbit/s) or RS485 (max. 921.6 kbit/s) or RS232 and CAN V2.0B (max 1Mbit/s) or Ethernet and (RS32 or RS485)
	analog	4...20 mA ($\leq 500 \Omega$ load) or 0...10 V
Synchronization input		2.4 – 5 V (CMOS, TTL)
Logic output		programmed functions, NPN: 100 mA max; 40 V max for output
Power supply, V		9 ...36
Power consumption, W		1.5..2
Environment resistance	Enclosure rating	IP67 (for the sensors with cable connector only)
	Vibration	20g/10...1000Hz, 6 hours, for each of XYZ axes
	Shock	30 g / 6 ms
	Operation temperature, °C	-10...+60, (-30...+60 for the sensors with built-in heater), (-30...+120 for the sensors with built-in heater and air cooling housing)
	Permissible ambient light, lx	>30000
	Relative humidity	5-95% (no condensation)
Storage temperature, °C		-20...+70
Housing material		aluminum

LASER TRIANGULATION SENSORS, RF60x SERIES

UNIVERSAL LASER SENSORS


RF603 Series

- Varied diode powers
- Binocular sensors
- Available with Red, Blue or IR laser diodes
- Accuracy $\pm 0.05\%$ working range




OPTIONS

- Protective housing with air and water cooling
- Custom versions with non-standard base, range or housing shape
- Special version for use in high vibration conditions
- Special flexible cable for robotic applications
- Variants with round and elliptical spot

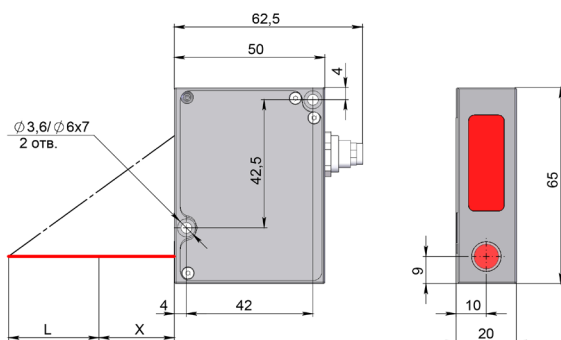

SOFTWARE

- Setting sensor parameters
- Receiving, storage, visualization
- Speed and acceleration calculation

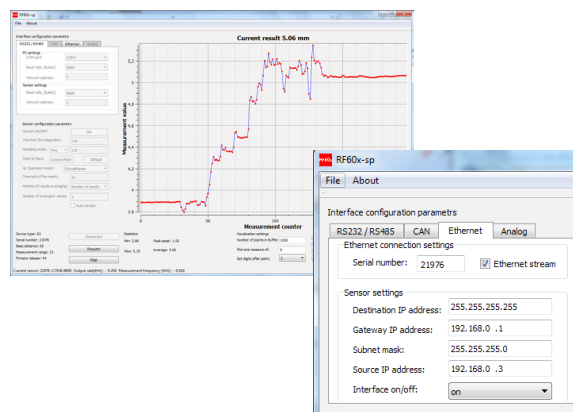


RF603-	R-X/4	X/2	X/5	X/10	X/15	X/25	X/30	X/50	X/100	X/250	X/500	X/750	X/1000	X/1250	
Base distance X, mm	39	15	15	15, 25 60	15, 30 65	25, 45 80	35, 55 95	45, 65 105	60, 90 140	80	125	145	245	260	
Measurement range, mm	4	2	5	10	15	25	30	50	100	250	500	750	1000	1250	
Linearity, %	± 0.05 of the range												± 0.1		
Resolution, %	0.01 of the range (for the digital output only)												0.02		
Temperature drift	0.02% of the range/°C														
Max. measurement frequency, Hz	9400														
Light source	red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405/450 nm wavelength (BLUE version)														
Light source	model	RF603													
	output power	≤ 0.2	≤ 3 mW												
	laser safety Class	1	3R (IEC60825-1)												
	model	RF603L													
	output power	≤ 0.95 mW													
	laser safety Class	2 (IEC60825-1)													
Light source	model											RF603P			
	output power											≤ 20 mW			
	laser safety Class											3B (IEC60825-1)			
Weight (without cable)	100														

Note 1: RF603-R-39/4 sensor is designed to use with mirror surfaces and glass.

HIGH SPEED SENSORS

RF603HS Series

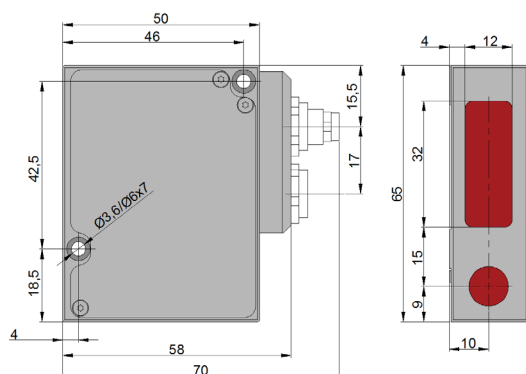

- Universal high-speed compact laser sensors
- Sampling rate up to 70 kHz
- Available with Red and Blue laser diodes
- Ideal for registration of high speed events and vibration measurement


LASER TRIANGULATION SENSORS, RF60x SERIES

RF603HS-	X/2	X/5	X/10	X/15	X/25	X/30	X/50	X/100	X/250	X/500	X/750	
Base distance X, mm	15	15	15, 25 60	15, 30 65	25, 45 80	35, 55 95	45, 65 105	60, 90 140	80	125	145	
Measurement range, mm	2	5	10	15	25	30	50	100	250	500	750	
Max. measurement frequency, kHz	70											
Linearity, %	±0.1 (70 kHz) of the range											
Resolution, %	0.01 (70 kHz) of the range											
Temperature drift	0.02% of the range/°C											
Light source	red semiconductor laser (660 nm wavelength) or blue semiconductor laser (405/450 nm wavelength)											
Output power	≤4.8 mW					≤20 mW			≤80 mW			
Laser safety Class	3R (IEC/EN 60825-1:2014)								3B (IEC/EN 60825-1:2014)			
Weight (without cable)	110											

LARGE-BASE AND LONG RANGE SENSORS

RF600 Series


- High-precision measurement of the position of remote objects
- High-speed (70 kHz) sensors

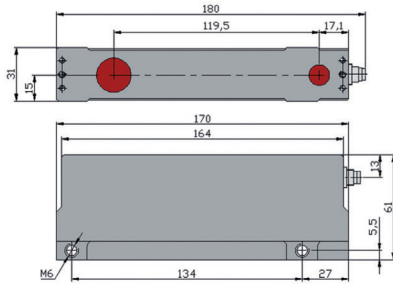

RF600-	X/10	X/30	X/40	X/100	X/250	X/500	X/600	X/1000	X/1000	X/1500	X/2000	X/2500	X/20	X/50	
Base distance X, mm	230	300	330	500	230	300, 1000	230	1300	380	390	410	420	540	535	
Measurement range, mm	10	30	40	100	250	500	600	1000	1000	1500	2000	2500	20	50	
Max. measurement frequency	9.4 kHz, 70 kHz														
Linearity, % of the range	±0.1											±0.2		±0.05	
Resolution, % of the range	0.01 of the range (digital output only)											0.03		0.01	
Temperature drift	0.02% of the range/°C														
Light source	red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405/450 nm wavelength (BLUE version)														
Output power	≤4.8 mW										80 mW				
Laser safety Class	3R (IEC60825-1)										3B (IEC60825-1)				
Weight (without cable)						500					2000				

COMPACT LASER SENSORS

RF605 Series





RF605-	25/50	45/100	65/250	105/500
Base distance X, mm	25	45	65	105
Measurement range, mm	50	100	250	500
Max. measurement frequency	2000 Hz			
Linearity, % of the range	±0.1			
Resolution, % of the range	0.01 (digital output only)			
Temperature drift	0.02% of the range/°C			
Light source	red semiconductor laser, 660 nm wavelength			
Output power	≤0.95 mW			
Laser safety Class	2 (IEC60825-1)			
Weight (without cable)	60			

LASER TRIANGULATION SENSORS, RF60x SERIES

SUPER COMPACT LASER SENSORS

RF602 Series

- Unique combination of dimensions, performance and operating ranges

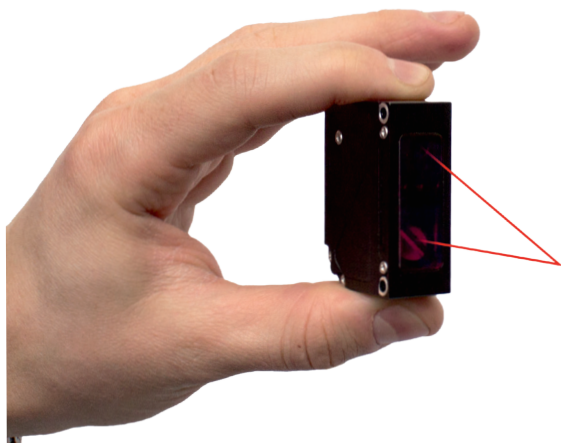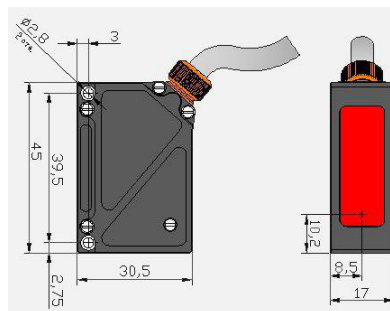




RF602-	20/10	20/25	30/50	50/100	65/250	105/500
Base distance X, mm	20	20	30	50	65	105
Measurement range, mm	10	25	50	100	250	500
Max. measurement frequency	9400 Hz					
Linearity, % of the range	±0.05					
Resolution, % of the range	0.01 (digital output only)					
Temperature drift	0.02% of the range/°C					
Light source	red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405/450 nm wavelength (BLUE version)					
Output power, mW	≤0.95 mW					
Laser safety Class	2 (IEC60825-1)					
Weight (without cable), gram	40					

SPECIALIZED LASER SENSORS FOR PAVEMENT PROFILE AND TEXTURE MEASUREMENT

RF60i Series

- Accuracy ± 0.03% of working range
- Sampling rate up to 70 kHz

MODEL	SPECIFIC FEATURES	ASSIGNMENT	
RF603P-125/500 RF603P-245/1000	<ul style="list-style-type: none"> ■ high resistance to solar radiation ■ stable operation on wet surfaces 	Pavement profile measurement	
RF607-195/500	<ul style="list-style-type: none"> ■ 70 kHz operating frequency ■ round laser spot, diameter <1 mm 		
RF607-210/230 RF607-230/250	<ul style="list-style-type: none"> ■ 70 kHz operating frequency ■ round laser spot, diameter <0.8 mm ■ accuracy ±0.03% of the range 	Pavement roughness (texture) measurement	
RF603Txt-30/30	<ul style="list-style-type: none"> ■ reduced triangulation angle ■ round laser spot, diameter <60 μm ■ simultaneously obtaining profile and image of the surface 		




ABSOLUTE LINEAR ENCODERS, RF25x SERIES

ABSOLUTE LINEAR POSITION SENSORS (ABSOLUTE LINEAR ENCODERS)


RF25X Series

Absolute linear encoders are designed for measuring and checking displacements, dimensions, run-outs, surface profiles and deformations of engineered objects.



- Innovative technology of absolute measurement
- Measuring ranges from 3 to 55 mm
- 0.1 μm resolution
- Emulation of incremental encoder signals

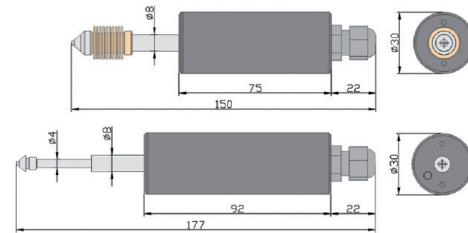

RF251

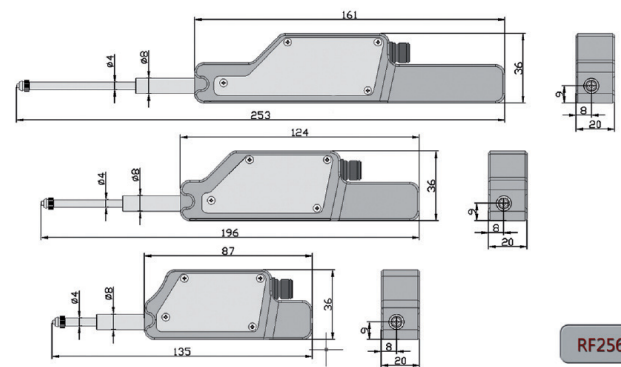

RF256

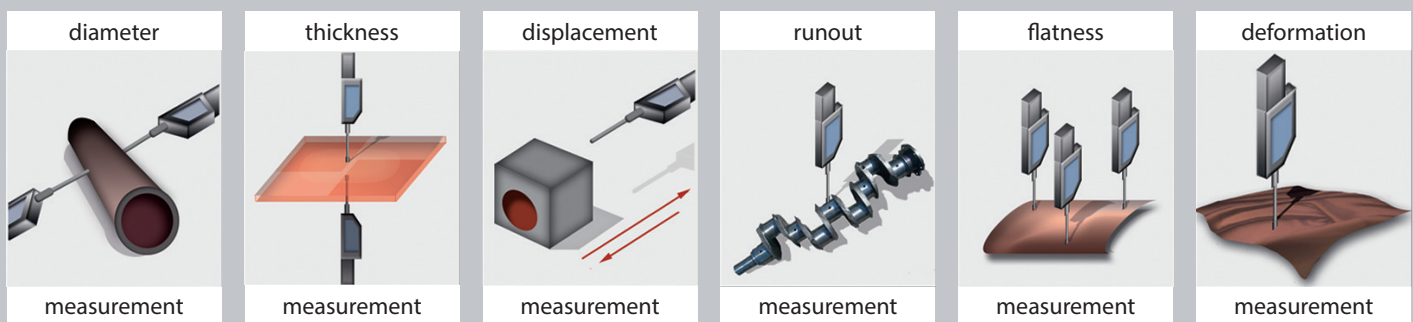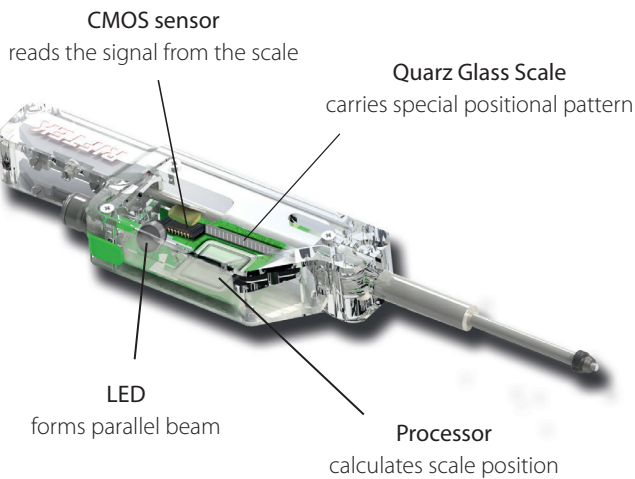

RF25X-	RF251-3	RF251-25	RF256-15	RF256-35	RF256-55
Measurement range, mm	3	25	15	35	55
Accuracy (at T=20 °C), μm		±2			±3
Resolution, μm			0.1 or 0.5 or 1 or 5 or 10		
Output interface	digital	RS422	(RS485 and SSI or RS232) and (EncD5 or EncD10 – emulation of quadrature signals of incremental transducers)		
	analog	no	0...20 mA (<500 Ohm load) or 0...10 V		
Synchronization input		no	opto-isolated		
Logical outputs	no		two outputs, NPN: 100 mA max; 40 V max		
Indication		no	two-color LED (red/green)		
Power supply, V			12 (without analogue output) 15 (with analogue output)		
Power consumption, W			0.75		
Enclosure rating	IP57		IP50		
Operating temperature, °C	-40...+50		-10...+50		
Weight (without cable), gram	70	110	110	150	180

OPTICAL MICROMETERS, RF65x SERIES

OPTICAL MICROMETERS

RF65X Series

PURPOSE

Contactless diameter, gaps and technological object position measurement.

WORKING PRINCIPLE

The micrometer operation is based on the so-called 'shadow' principle. The micrometer consists of two blocks – transmitter and receiver. Radiation of a semiconductor LED is collimated by a lens. With an object placed in the collimated beam region, shadow image formed is scanned with a photo-detector array. A processor calculates the position (size) of the object from the position of shadow border (borders).

MODELS

RF651 — universal micrometers

RF656 — high-precision micrometers with telecentric optics




RF656XY and RF656.3 — two and three axis micrometers

RF656.2D — 2D optical micrometers

RF659 — edge sensors


MAIN FEATURES

- Measurement range from 5 to 100 mm
- Up to $\pm 0.3 \mu\text{m}$ accuracy
- Up to 10 000 Hz sampling rate
- RS232/RS485/Ethernet +4...20 mA/0...10V
- Micrometers with telecentric lens
- Mutual synchronization of the sensors (master-slave) for multi-axis measurement tasks
- Service Software for micrometers parameterization
- Free SDK and examples for Windows, Linux, .NET, MATLAB, LabVIEW
- Dual, three and multi axis Micrometers
- Air-knife window protection

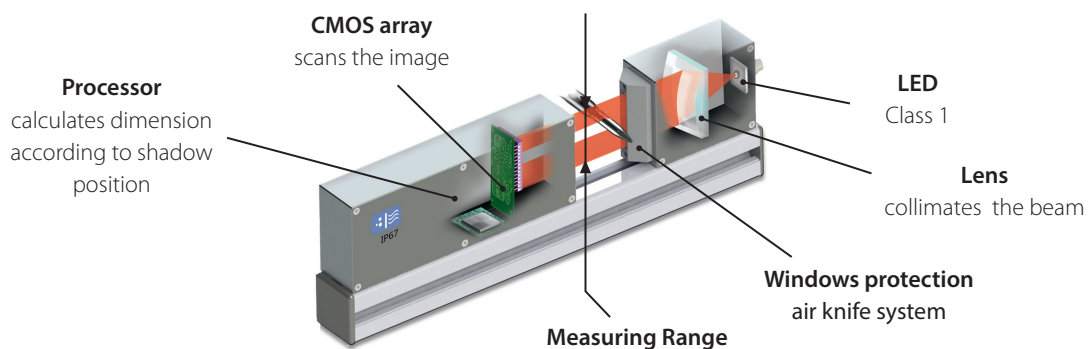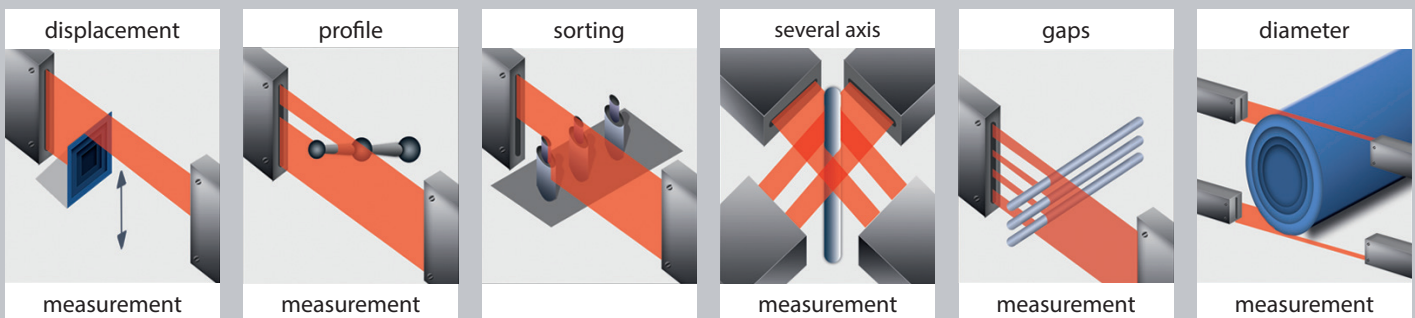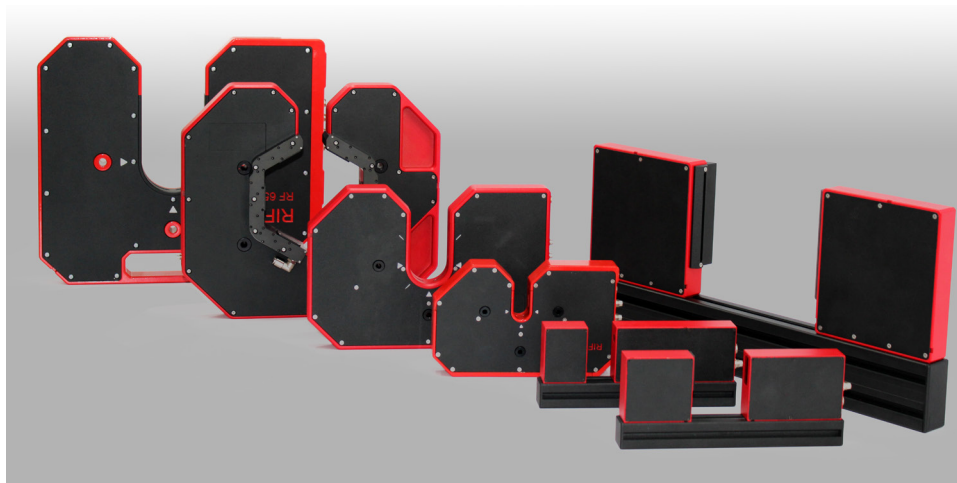


OPTICAL MICROMETERS, RF65x SERIES

	A, mm	B, mm	C, mm	D, mm	E, mm	H, mm	H1, mm	K, mm	N, mm
RF651-25	51	139	62	25	13	28	42.5	30	30
RF651-50	91	120	134	50	20	31	45.5	40	80
RF651-75	128	132	132	75	15	31	45.5	40	80
RF651-100	165	165	150	98	20	31	45.5	40	80

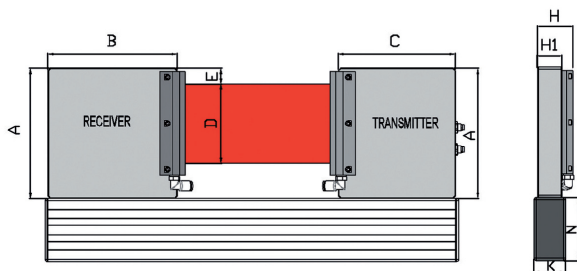

	A, mm	B, mm	C, mm	D, mm	E, mm	K, mm	R, mm	M, mm	N, mm
RF656-5	66	50	158	5	14	28	2	30	30
RF656-10	50	70	126	10	11.5	56	6	30	30
RF656-25	72	74	106	25	7	63	10	30	30
RF656-50	105	134	110	50	20	150	25	30	60
RF656-75	135	148	125	75	17	200	40	40	80
RF656-100	175	170	160	100	20	300	50	40	80

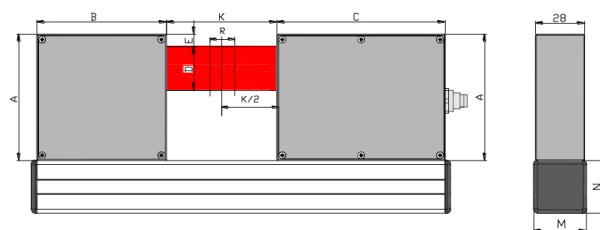


RF65X-	RF651-25	RF651-50	RF651-75	RF651-100	RF656-5	RF656-10	RF656-25	RF656-50	RF656-75	RF656-100
Measurement range, mm	25	50	75	100	±1x5	±3x10	±5x25	±7x50	±9x75	±10x100
Minimum size of the object, mm	0.5	1	1.5	2	0.05 (0.1)	0.1 (0.2)	0.25 (0.5)	0.5 (1)	0.75 (1.5)	1 (2)
Accuracy ¹ , μm	±5	±10	±15	±20	±0.3	±0.5	±1	±2	±3	±5
Measurement frequency, Hz	500	500	500	500	500	2000	2000	2000	2000	2000
Light source	LED									
Laser safety class	1 (IEC60825-1)									
Output interface	digital RS232 (max. 921.6 kbit/s) or RS485 (max. 921.6 kbit/s) or Ethernet & (RS32 or RS485) analog									
Synchronization input	2.4 – 5 V (CMOS, TTL)									
Logic output	three outputs, NPN: 100 mA max; 40 V max									
Power supply, V	24 (9 ...36)									
Power consumption, W	1.5..2									
Housing material	aluminum									
Weight (without cable), gram	600	2000	2600	4000	700	700	700	1600	3200	4500

¹ typical data obtained when a knife edge was used to interrupt the beam and distance between transmitter and receiver is equal of two measurement range


RF656 TWO AND THREE AXIS MICROMETERS. TWIN MICROMETERS

The parameters for each axis of the micrometer match to the parameters of the corresponding single-axis micrometer, see Table above.


RF656XY-5

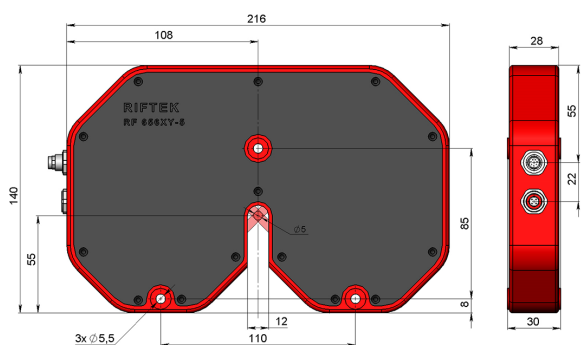


RF656XY-10

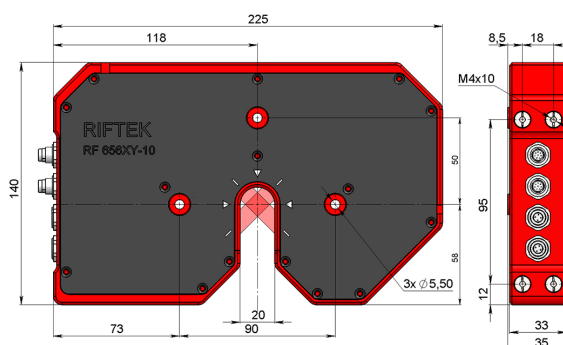

RF656XY-25

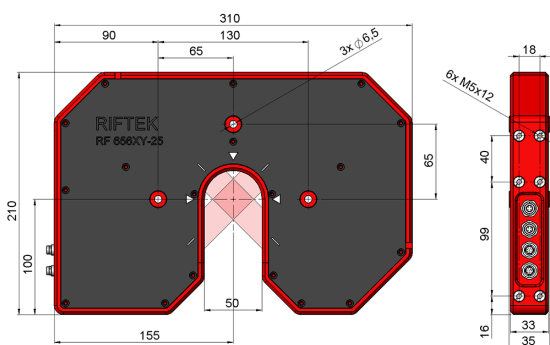


RF656XY-50

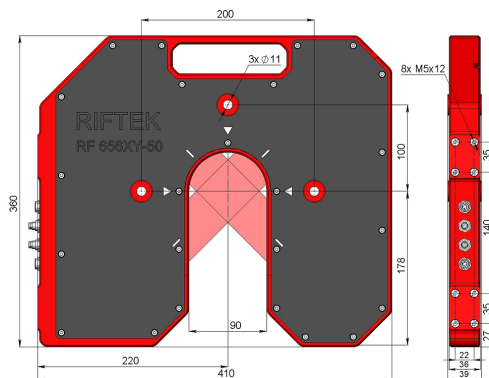


OPTICAL MICROMETERS, RF65x SERIES

RF656 TWO AND THREE AXIS MICROMETERS. TWIN MICROMETERS


RF656XY-75

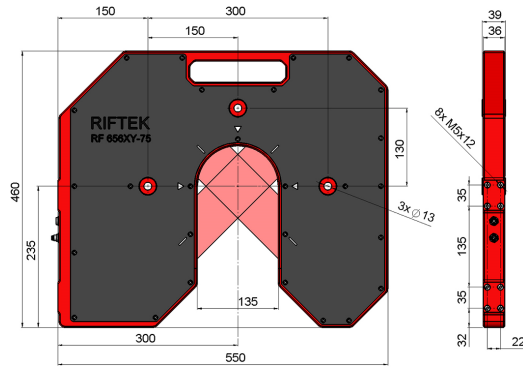


RF656XY-100

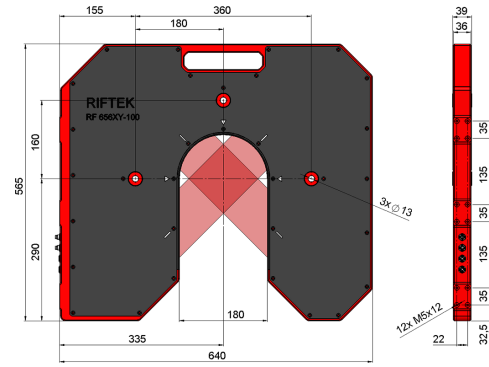



RF656.3-25

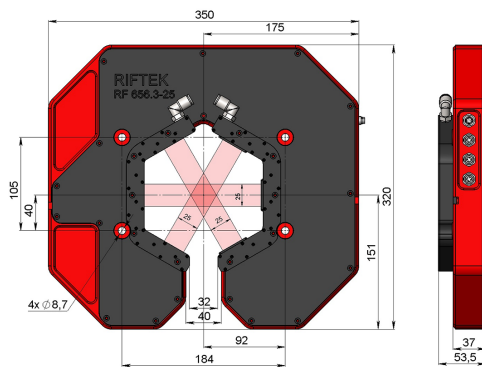

RF656TWIN-75

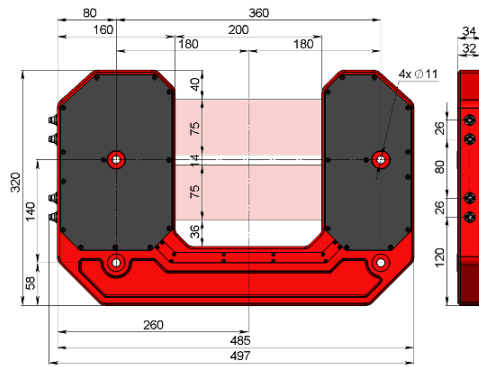


SOFTWARE

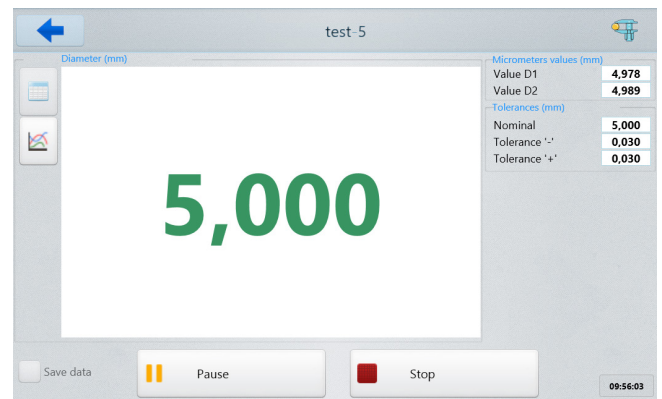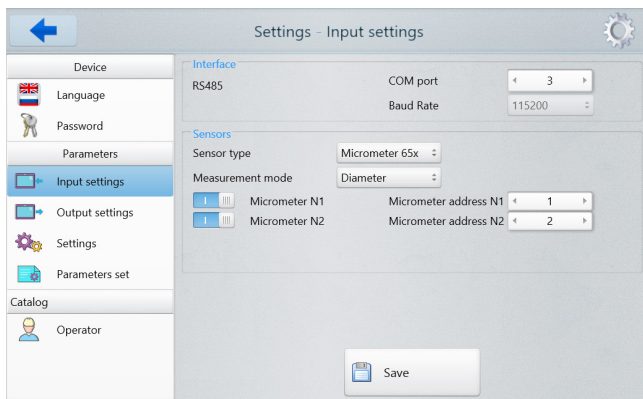

EDGE AND DIAMETER SENSORS

RF659 Series

The sensors are intended for non-contact measuring and monitoring the position of the edge (edges) of various objects, such as tapes, plates, substrates, etc.

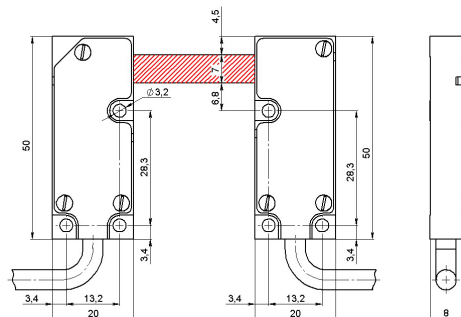

Parameter	Value
Distance between transmitter and receiver	30 mm
Measurement range	7 mm
Accuracy	±20 µm

2D OPTICAL MICROMETERS, RF656.2D SERIES

PURPOSE


Micrometers are designed for non-contact two-dimensional measurements of linear dimensions, diameters, angles, thread pitch, shape of parts, etc.

WORKING PRINCIPLE


The micrometer operation is based on the so-called shadow principle. The micrometer consists of two parts - an emitter and a receiver. The light from the LED is collimated by the lens. When placing an object in the area of the collimated beam, the resulting shadow image of the object is scanned by a 2D CMOS sensor. Based on the location of the shadow border, the computer calculates the dimensions of the object.

MAIN FEATURES


- Simultaneous measurement of multiple geometric parameters
- Measurement accuracy: $\pm 1.5 \mu\text{m}$
- Measurement speed: 130 images/s

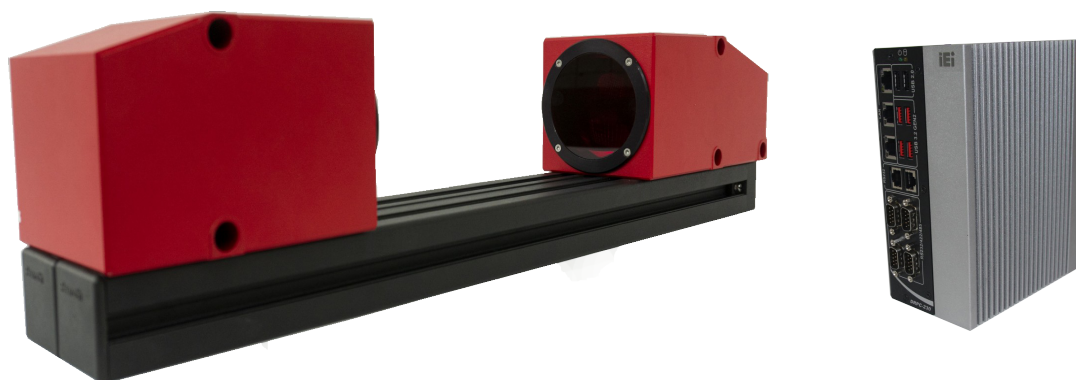


PФ656.2D	-8x10	-25x30	-30x40	-40x50
Measurement range, mm	8x10	25x30	30x40	40x50
Measurement accuracy, μm	± 1.5	± 2.5	± 3	± 4.5
Smallest detectable object, mm	0.07	0.2	0.25	0.35
Measurement frequency, Hz	130 (50 with triggering)			
Dimension B, see drawings below	20...100	20...259	20...250	20...500
Controller	SmartUnit-M			
Weight, not less, kg	1.1	2.3	2.8	5.6

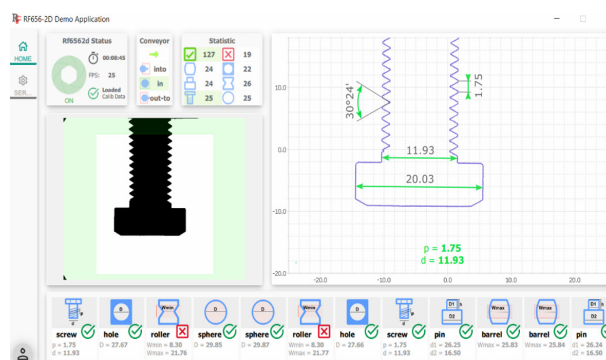


RF656.2D-8x10

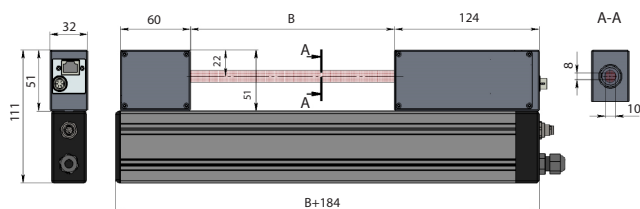


RF656.2D-25x30

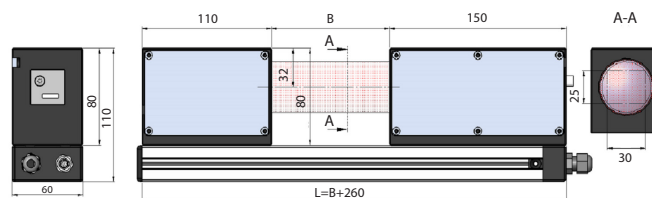

RF656.2D-30x40

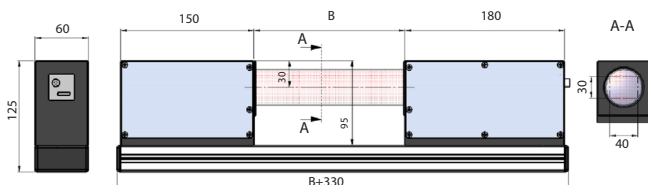

RF656.2D-40x50

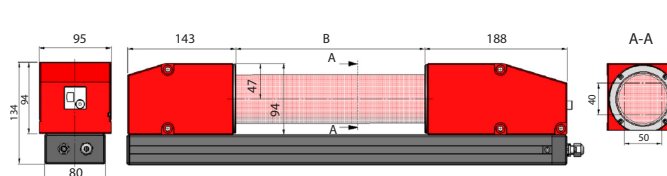

LASER SCANNERS, RF62x SERIES

PURPOSE

Non-contact measuring and checking of surface profile, dimensions, deformations, flatness, gaps, volume, 3D models construction.

WORKING PRINCIPLE

Scanner operation is based on the principle of optical triangulation.

Radiation of a semiconductor laser is formed by a lens in a line and projected to an object. Radiation scattered from the object is collected by the lens and directed to a two-dimensional CMOS image sensor. The image of object outline thus formed is analyzed by a signal processor, which calculates the distance to the object (Z-coordinate) for each point of the set along the laser line on the object (X-coordinate). Scanners are characterized by base distance (beginning of the range), SMR, for Z-coordinate, measuring range (MR) for Z-coordinate, measuring range for X-coordinate at the beginning of Z (Xsmr) and measuring range for X-coordinate at the end of Z (Xemr).

MAIN FEATURES

- Measuring ranges from 10 to 1100 mm
- 0.05% linearity
- Sampling rate up to 6800 profiles/s
- Scanners with RED, BLUE and IR lasers
- Laser Safety Class 2M
- Binocular scanners
- Trigger and encoder synchronization, mutual synchronization
- WEB-interface
- Free SDK and examples for Windows, Linux, .NET, MATLAB, LabVIEW
- Specialized scanners for hole control

MODELS

RF627 — universal scanners



RF627Weld — scanners for welding robots

RF627Smart — scanners with built-in measurement functions

RF627Weld-Smart — scanners with built-in tracking functions

RF627AVIKScan — weld inspections scanners

RF629 — ultra-fast scanners, up to 50000 profiles/s (from September 2021)

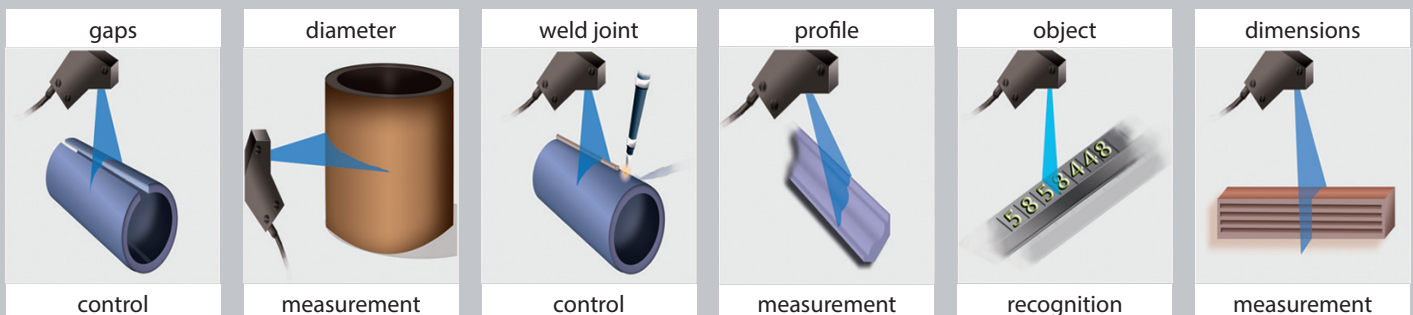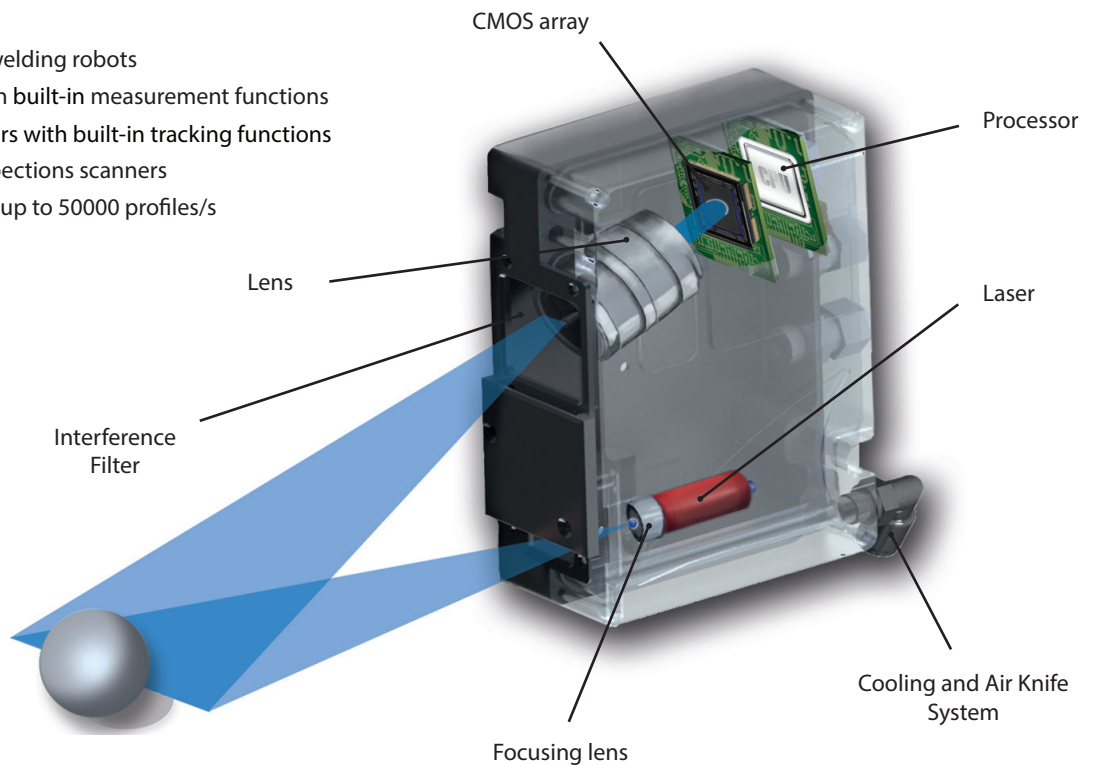


LASER SCANNERS, RF62x SERIES

LASER SCANNERS


RF627 Series

OPTIONS

- Cooling plate with air-knife and air/water cooling
- Customized versions with non-standard base, range and housing shape
- Special version for use in vacuum conditions
- Special flexible cable for robotic applications

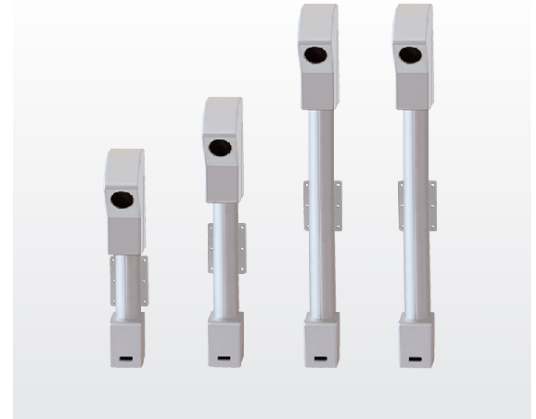

RF627-	MR, mm	SMR, mm	EMR, mm	Xsmr, mm	Xemr, mm	Size, mm	Weight, g		
25/10-8/11	10	25	35	8	11	Fig. 1	0.37		
65/25-20/22	25	65	90	20	22	Fig. 2	0.6		
75/50-30/41	50	75	125	30	41				
70/100-48/82	100	70	170	48	82				
70/150-58/122	150	70	220	58	122				
95/150-53/106	150	95	245	53	106				
82/200-60/150	200	82	282	60	150	Fig. 3			
90/250-65/180	250	90	340	65	180				
180/250-170/278	250	180	430	170	278			L=326	2
190/300-160/300	300	190	490	160	300			L=283	1.9
220/300-203/330	300	220	520	203	330			L=374	2.1
260/400-210/400	400	260	660	210	400			L=350	2.2
325/500-268/500	500	325	825	268	500			L=415	2.3
400/600-320/600	600	400	1000	320	600			L=490	2.4
475/700-374/700	700	475	1175	374	700			L=558	2.5
545/800-425/800	800	545	1345	425	800			L=627	2.6
615/900-480/900	900	615	1515	480	900	L=696	2.7		
690/1000-535/1000	1000	690	1690	535	1000	L=765	2.8		
620/1165-430/1010	1165	620	1785	430	1010	L=554	2.5		

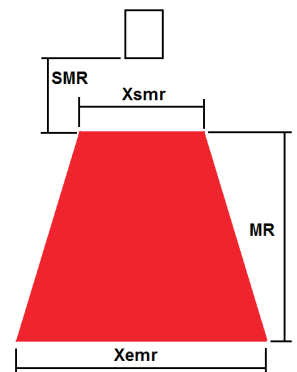

Overall specifications

Sampling rate, Hz	Full range: 485 or 938 (DS mode), ROI: 5096 or 6800 (DS mode)
Linearity Z, %FS	0.05 or 0.1 for DS mode
Linearity X, %FS	0.1
Resolution Z, %FS	0.01% or 0.02% (DS mode)
Resolution X	648 or 1296 (programmable value)
Environment resistance:	
Enclosure rating	IP67
Vibration	20g/10...1000Hz, 6 hours, for each of XYZ axes
Shock	30 g/6 ms
Ambient temperature, °C	0...+40, (-20...+40 for the sensors with built-in heater), (-30...+120 for the sensors with built-in heater and water/air cooling housing)
Relative humidity	5-95% (no condensation)
Storage temperature, °C	-20...+70
Housing/windows material	aluminum/glass

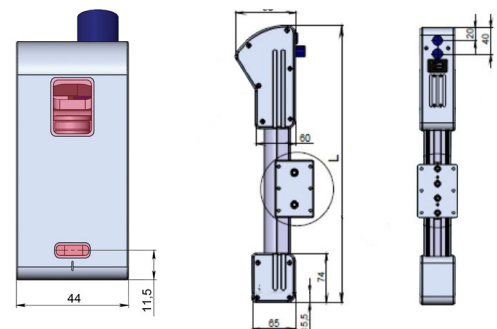
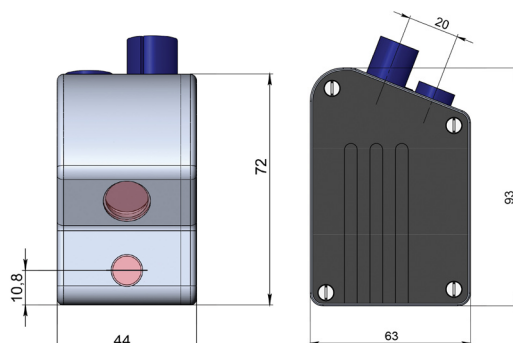



Figure 1

Figure 2


Figure 3

LASER SCANNERS, RF62x SERIES


SOFTWARE

WEB-INTERFACE
for scanner parameterization,
image and profile visualization

- Setting sensor parameters
- Data receiving, storage, visualization

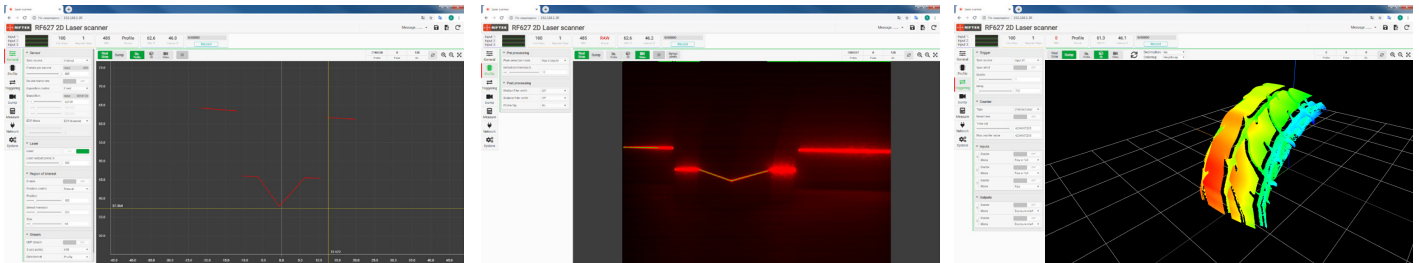

RF627SMART

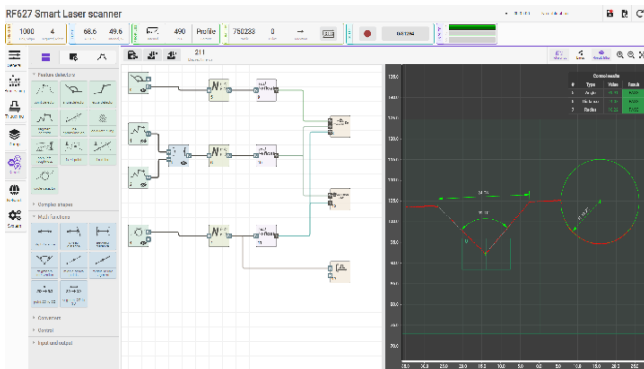

RF627Smart scanner makes it possible to measure geometric parameters of the object profile in real time directly in the scanner without connecting to a computer. Analysis, calculations, measurements, tolerance control are carried out according to the algorithm created by the user. To build an algorithm, a simple and intuitive tool is provided - a computation graph. The graph is formed from a library of ready-made blocks. Various combinations of blocks and connections between them allow the user to create an almost unlimited number of measuring functions, as well as to process profiles of any complexity. Measurement results can be transmitted via various protocols (Ethernet/IP, Modbus TCP, UDP), as well as to the logic outputs of the scanner in order to control the actuators and notify about product suitability.

3D OPTICAL SCANNER



■ RF635 - 3D scanners on the base of structured light

PURPOSE

3D models creation and measurement

WORKING PRINCIPLES

The scanner contains a projector that sequentially projects onto the object a series of stripes of different periods. Images of the stripes are captured by two cameras, located at an angle to each other, and analyzed by the built-in processor, which generates a 3D model of the object.

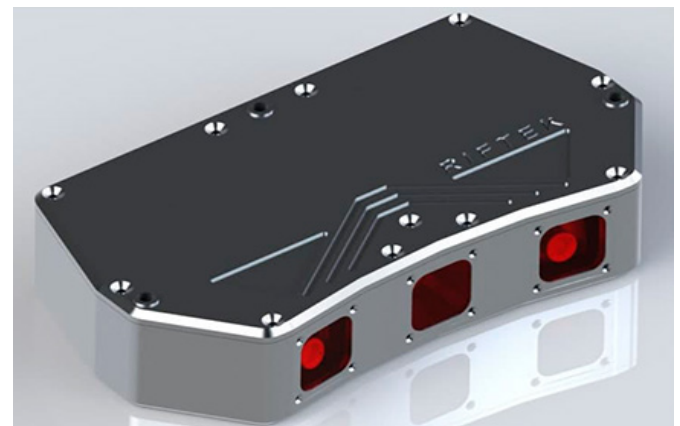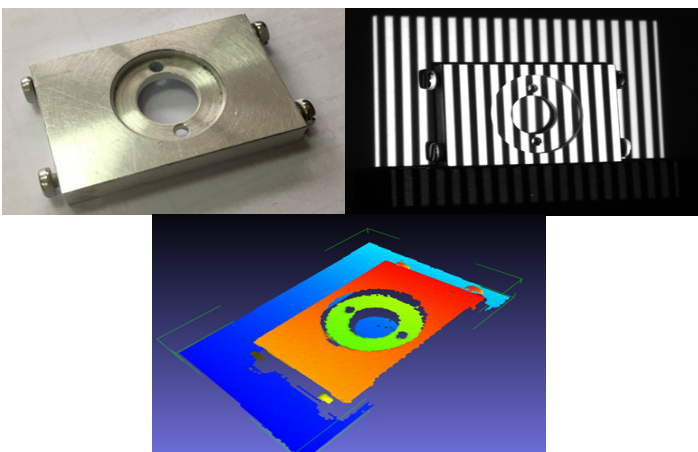

Parameter	Value
Scan rate, Hz	4
Clearance distance, mm	250
Measurement Range, mm	120
FOV, mm	160 x 100 – 260 x 150
Accuracy (depth), mm	±0.05
Resolution XY, mm	0.08
Inputs	Differential Encoder, Trigger
Outputs	2x Digital Output, RS485 Serial (115 kbaud), 1x Analog Output (4 - 20 mA)
Interface	Gigabit Ethernet
Weight, kg	1.8

LASER SCANNERS RF627WELD, RF627WELD-SMART

MAIN FEATURES


- Laser scanners and software for welding robots
- Recognition, tracking and measuring in real time
- Various protocols for communication with robots

Laser Scanners RF627Weld Series. Working ranges


Range	SMR, mm	MR, mm	Xsmr, mm	Xemr, mm	Laser
65/25-21/25	65	25	21	25	Class 2M
70/130-35/86	70	130	35	86	
90/250-65/180	90	250	65	180	

For the rest parameters see "Overall specifications" in the previous page.


RF627Weld-65/25-21/25 and RF627Weld-90/250-65/180

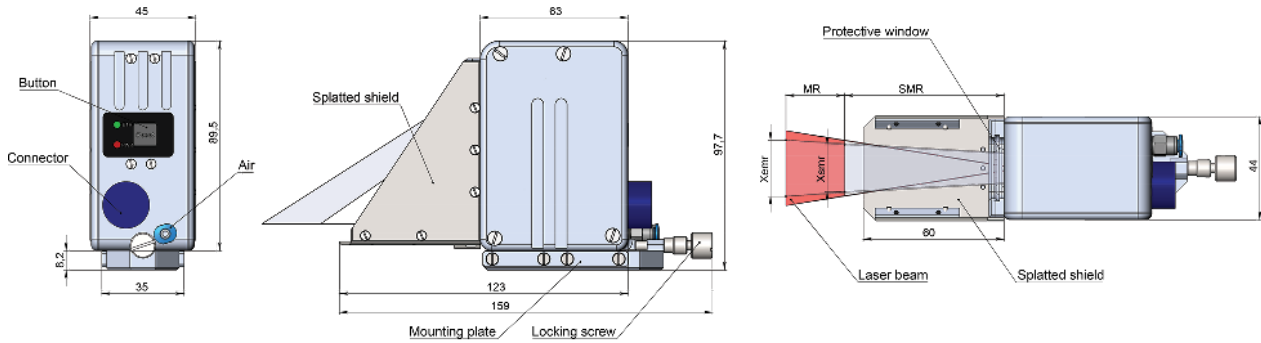

RF627Weld-70/130-35/86

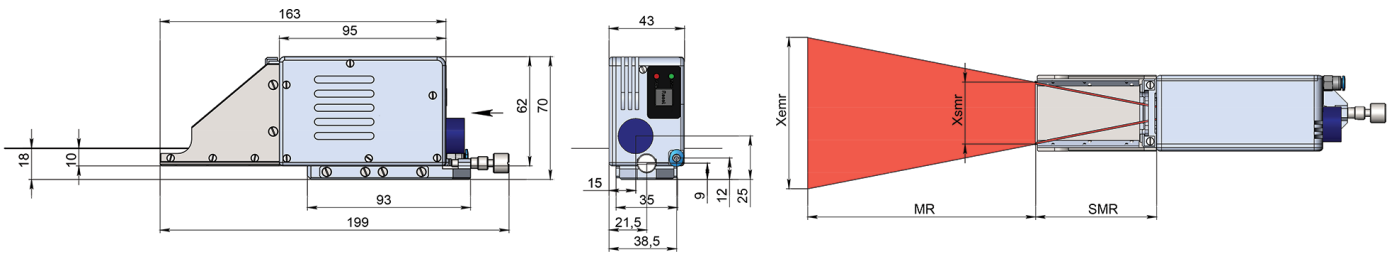

STEP 1

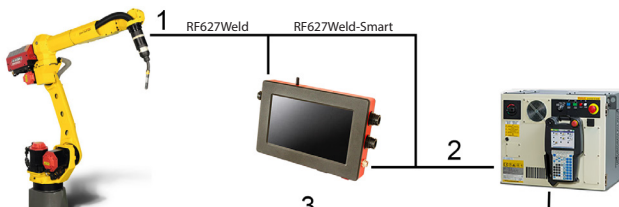


Connect equipment in accordance with functional diagram:

1. Connection between the RF627Weld scanner and the RIFTEK RF017 controller or between the RF627Weld-Smart scanner and the robot controller
2. Connection between the RIFTEK RF017 controller and the robot controller (for RF627Weld) or between the scanner and the robot controller (for RF627Weld-Smart)
3. Connection between the robot and the robot controller

STEP 2

Select Template

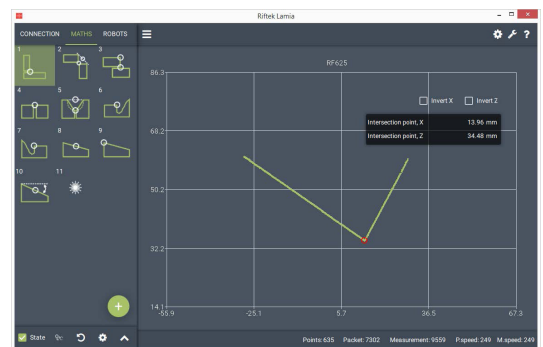

STEP 3

Robot Exchange Protocols

Riftek P1	R691 USI	Riftek P2
Sensor s/n: 206162	Sensor s/n: 206162	Sensor s/n: 206162
Sensor target port: 6003	Sensor target port: 6003	Sensor target port: 6003
Protocol: Riftek P1	Protocol: R691 USI	Protocol: Riftek P2
Server address: 127.0.0.1	Server port: 5020	Server port: 502
Server port: 502	Timeout, s: 60	Timeout, s: 60
LOCK SENSOR	<input type="checkbox"/> Debug log	<input type="checkbox"/> Debug log
<input type="checkbox"/> State	LOCK SENSOR	CALIBRATION
	<input type="checkbox"/> State	LOCK SENSOR
		<input type="checkbox"/> State



HOW IT WORKS


STEP 4

START WORKING

LASER SCANNERS

SPECIALIZED SCANNING SYSTEMS FOR WELDS, WELDED JOINTS AND EDGE PREPARATION

RF627AVIKScan

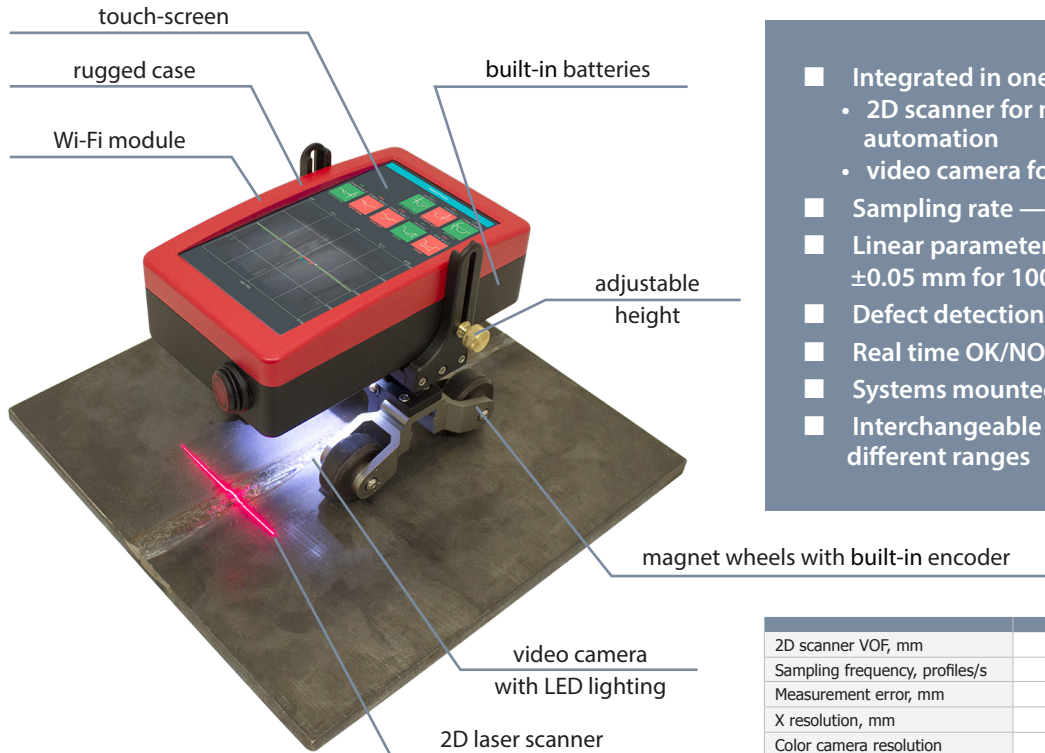

- Integrated in one system:
 - 2D scanner for measurement control automation
 - video camera for visual control automation
- Sampling rate — more than 2000 profiles/s
- Linear parameters measurement error — ± 0.05 mm for 100 mm range
- Defect detection (porosity, cracks)
- Real time OK/NOK analysis
- Systems mounted on the robot
- Interchangeable measuring heads with different ranges


2D scanner VOF, mm	Z - 120, X - 30...110
Sampling frequency, profiles/s	>2000
Measurement error, mm	± 0.05
X resolution, mm	0.025...0.08
Color camera resolution	1296 x 976
Camera speed, frames/s	120
Laser	red (660 nm) or blue (405 nm), Class 2
Working temperature, °C	-40...50
Measured parameters	width, height, angles, mismatch, undercut and so on

EDGE PREPARATION CONTROL




MEASUREMENT OF OFFSET, JOINT ANGLE, GAP WIDTH AND ETC.

WELD CONTROL

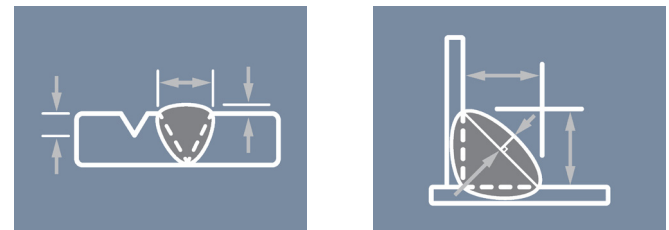


MEASUREMENT OF WELD HEIGHT AND WIDTH, CUTTING DEPTH, CAMBER AND ETC.

DESIGN

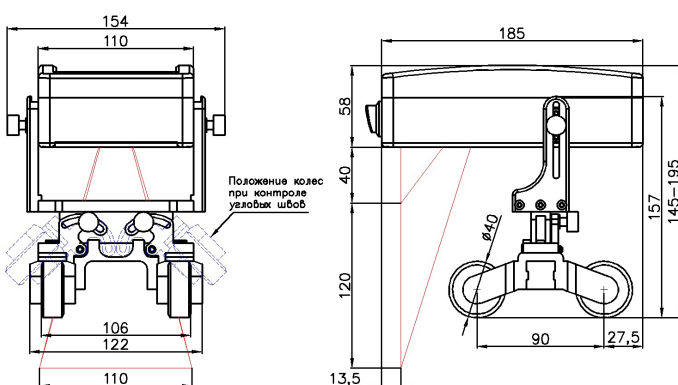

3D VISUALIZATION SOFTWARE

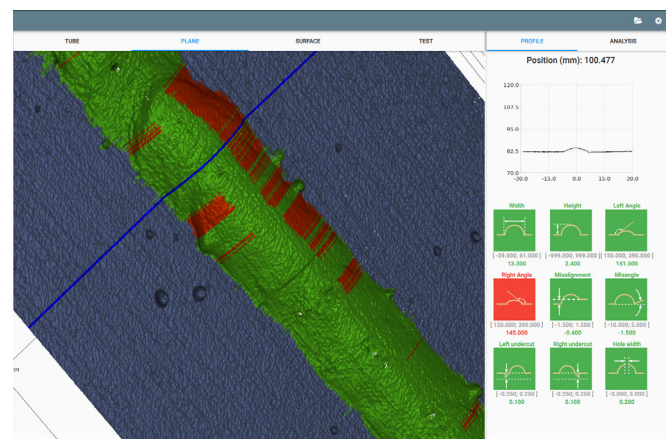


3D LASER MEASUREMENTS

3D LASER SCANNING KIT

SHTRIKH-2 SERIES

3D Laser Scanning Kit is designed for mounting on any type of CNC machine and intended for non-contact scanning of products and obtaining 3D computer-simulated models.

In the scanning mode, the machine CNC system moves the sensor line-by-line over the item prototype. Thus, XYZ coordinate array for the surface is formed, i.e. a digital prototype model is created which is saved as a point cloud file as well as in a common STL format suitable for subsequent use in CNC.

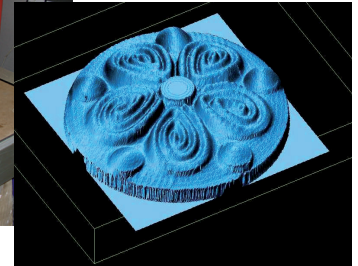

Parameter	Value
Materials to be scanned	any material
Size of scanning area	arbitrary
Average scanning speed, points/s	up to 100 000

3D LASER MEASUREMENT MACHINE

RF1010SS

3D measuring machine is designed for non-contact measurement of geometrical parameters of objects, specifically sunflower seeds. Laser scanner RF625 Series, that is installed in the machine, scans the objects and identifies its geometry. As result of scanning we get the parameters of every sunflower seed and their total quantity.




Parameter	Value
Nominal sampling rate, profiles/sec	250
Scanning speed, mm/s	100
Accuracy, μm	± 150

3D LASER MEASUREMENT MACHINE

RF1010SL

3D Measurement Machine was specially developed to measure suspension arm's parameters for automotive industry. Laser scanner RF625 Series, which is installed in the machine, scans the suspension arm, measures and controls its geometrical parameters.



Parameter	Value
Nominal sampling rate, profiles/sec	250
Scanning speed, mm/s	50
Accuracy, % of the range	± 0.1

3D LASER MEASUREMENT MACHINE



RF1240TB Series

Developed together with MARVIE LLC



3D Measurement Machine is specially designed for control of geometric parameters of large diameter pipes. The machine consists of 24 wide-range high speed synchronized laser scanners type RF625-650 located on the outer circumference of the pipe, which makes it possible to inspect full profile of the pipe in the course of manufacture.

Parameter	Value
Pipes diameter range, mm	500...1450
Accuracy, mm	± 0.1

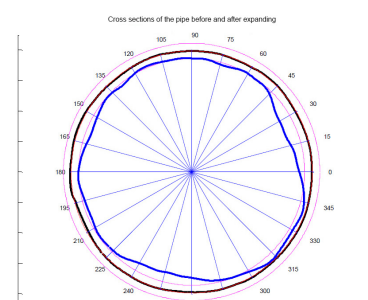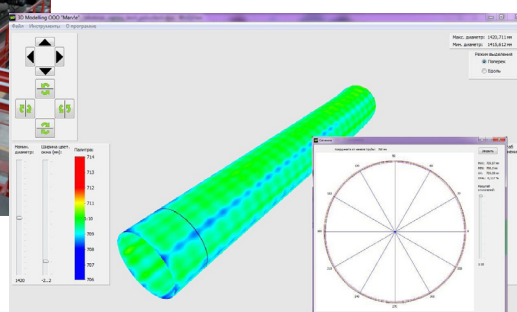

INNER DIAMETER MEASUREMENT SYSTEMS

Systems are intended for contactless measuring of inner diameter and profiles of gun barrels, cylindrical and taper pipes, progressive cavity stators, turbodrills and so on.

TWO WORKING PRINCIPLES

- Multisensor measurement by stationary laser sensors - **RF040 Series**
- Inner surface laser scanning by rotating sensors - **RF096 Series**

SYSTEMS PARAMETERS

- Measured ID – from 6 mm
- Up to several μm accuracy
- Up to 32000 measured points on the surface in 2 seconds
- Calculation of ovality and roundness
- Surface defects detection and measurement
- 3D model of inner surface design

SYSTEM STRUCTURE

- Laser measurement module with
 - stationary sensors
 - rotating sensors
- Translation module intended for transportation of measurement module inside the pipe:
 - self propelled
 - any kind of pulling machine
- Software for PC
- Calibration rings

SYSTEM CAN CONTAIN


Centering frame to hold measurement module near pipe axis

OPTIONS

- Pipe straightness measurement module
- Video inspection module
- Wireless connection (Wi-Fi) module

MULTISENSOR MEASUREMENT HEAD

RF040 Series



The Multisensor Measurement Module contains up to 6 laser triangulation sensors located circumferentially in one housing at known fixed angles.

The measurement module is inserted into the pipe and moved by translation module to the definite position.

Calibrated laser sensors measure distances to the inner surface .

Software calculates diameter of the pipe.

LASER MEASURING HEAD FOR INNER DIAMETER CONTROL



Parameter	Value
6 laser triangulation sensors	
Diameter range, mm	65...115 or by request
Accuracy, % of range	± 0.1

LASER MEASURING HEAD FOR NUCLEAR STATION PIPE DIAMETER CONTROL



Parameter	Value
Diameter of the module, mm	70
Diameter range, mm	95...195 mm (main range) 160...300 mm (extended range)
Accuracy, mm	0.05 mm (main range) 0.2 mm (extended range)

LASER MEASUREMENT MODULE FOR CONTROL OF LARGE DIAMETER FIBERGLASS PIPES



Parameter	Value
6 laser triangulation sensors	
Diameter range, mm	500-1250
Accuracy, mm	± 0.2

MULTISENSOR INNER DIAMETER MEASUREMENT SYSTEMS WITH WI-FI MODULE





Parameter	Value
ID measurement range, mm	100...150
Accuracy, mm	± 0.05
Measurement speed, ID /s	500
Light source	Red laser, 660 nm
Laser output power, mW	<1
Laser safety Class	2 (IEC60825-1)
Interface	Wi-Fi, USB
Time of continuous work, hour	4

INNER DIAMETER MEASUREMENT SYSTEMS

ROTATING MEASUREMENT HEAD

RF096 Series

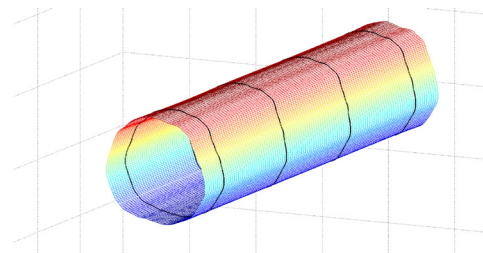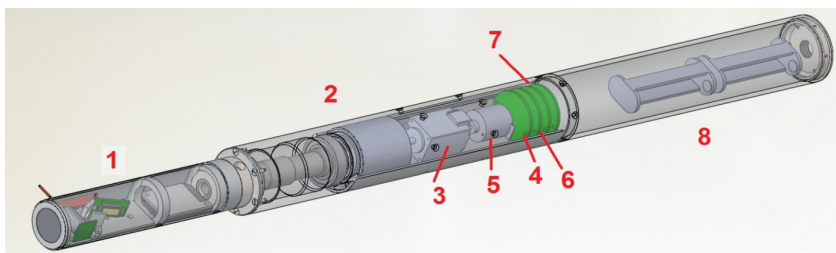

MULTISENSOR MEASUREMENT MODULE CONTAINS

laser triangulation sensor 1 (one or several with different measurement range and stand-off distance), mounted on rotating platform 2, which contains motor 3 with electronic driver 4, and rotary encoder 5 coupled to the motor 3. The system also includes a tilt sensor 6, intended for control of inclination of rotating platform during measurement.

OPTIONS

built-in Wi-Fi module 7 is used for communication between the system and PC; the system can be powered from internal batteries 8.
2D laser scanner can be installed instead of points sensor.

The measurement module is inserted into the pipe and moved by pulling machine to the definite position.

Rotating laser sensor scans inner surface of the pipe and the module transmits polar coordinates of the surface (distance from rotation axis, measured by triangulation sensor and a corresponding angle, measured by encoder).

Software uses the set of transmitted coordinates

- to calculate:
 - ID of measured pipe
 - ovality and roundness
- to find:
 - surface defects
- to design
 - Full profile in definite section
 - 3D model of the pipe inner surface

WHEEL CENTER BORE INNER DIAMETER MEASURING GAUGE




MODEL RF096-50/70-200-C1b

Non-contact scanning and inner surface geometry measurement of wheel center bore.

Parameter	Value
Rotating measurement head with 2 sensors	
ID range, mm	50...70
ID measurement accuracy, μm	± 5
Depth of measurement, mm	200
Autocalibration	

MOBILE LASER SCANNING SYSTEM FOR PIPE DIAMETER CONTROL

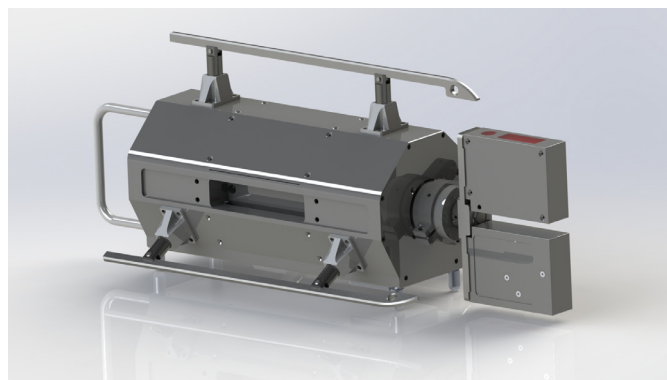

- Rotating measurement head with 2 sensors
- Linear scanning along the tube

Parameter	Value
ID range, mm	146...176
ID measurement accuracy, μm	± 10
Depth of measurement, mm	programmable, up to 70
Battery power supply	
Built-in Wi-Fi module	

LASER SCANNING SYSTEMS FOR PIPE DIAMETER CONTROL




Parameter	Value
ID range, mm	45...55 or by request
ID measurement accuracy, μm	± 2

INNER DIAMETER MEASUREMENT SYSTEMS

LEAF SPRING HOLE INNER DIAMETER MEASUREMENT MACHINE

RF096-30/75-120

The machine is designed for contactless scanning and geometrical parameters measurement of the leaf springs holes.

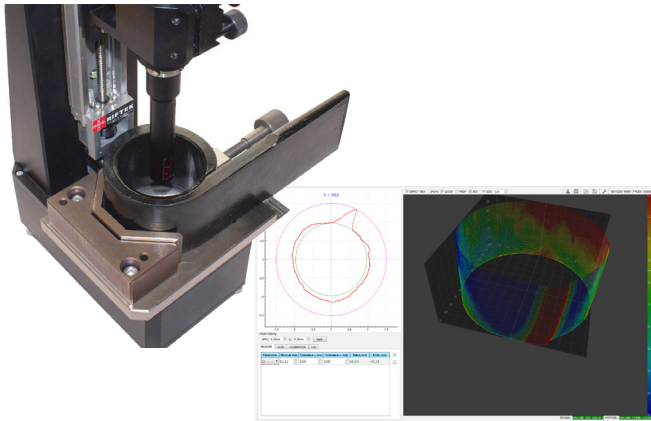


Parameter	Value
Measured diameters, mm	30-75
ID measurement accuracy, mm	±0.04
Depth of measured hole, mm	120
Measured parameters	diameter, roundness, conicity, cylindricity

LASER DEBRIS INSPECTION SYSTEM

RF096-Insp

The system is intended for non-contact detection of the debris inside the circular grooves of different technological items, for example brake calipers and so on.

The system can be used also for groove seal profiling (seal deformation inspection).

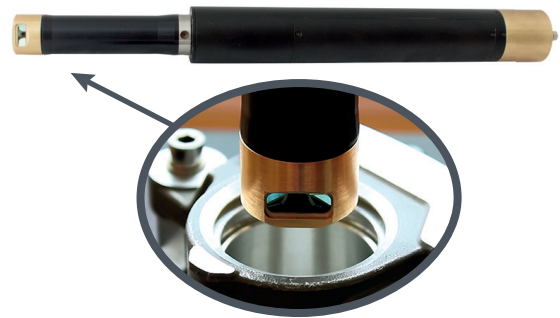


Parameter	Value
Inspected grooves diameter range, mm	35-53
Minimal size of detected debris, mm	0.1x0.1x0.1
Laser sensor linearity, µm	±10
Depth of measured hole, mm	120
Inspection time, s	1.2

PIPES ID MEASUREMENT MACHINE

RF096-9/16-800

The machine is designed for contactless scanning and geometrical parameters measurement of small diameter pipes.

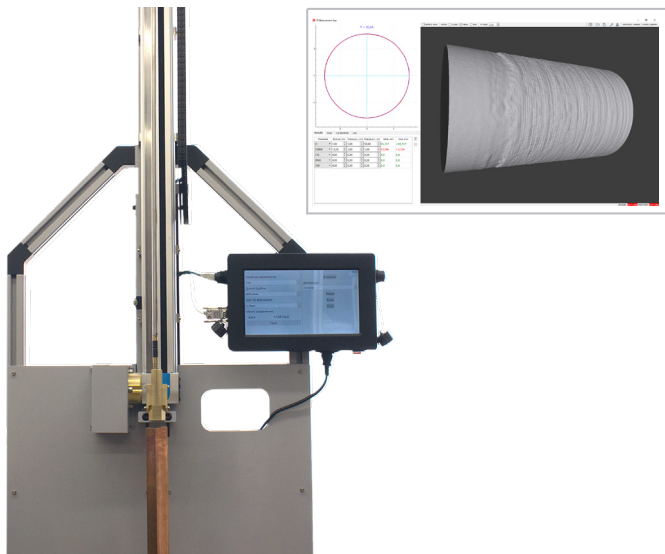

Parameter	Value
ID measurement range, mm	
Accuracy, mm	±5
Pipe length, mm	Up to 800

PIPES ID MEASUREMENT MACHINE

RF096-35/50-100

The machine is designed for in-line contactless scanning and geometrical parameters measurement of small diameter pipes.



Parameter	Value
ID measurement range, mm	
Accuracy, mm	±5
Pipe length, mm	Up to 100

INNER DIAMETER MEASUREMENT SYSTEMS


PIPE INNER DIAMETER MEASUREMENT MACHINE

MODEL RF096-32/42-100

The machine is designed for contactless scanning and geometrical parameters measurement of inner diameter of pipes, bushes, holes, tubes, and so on.

Application of the machine - large-scale production.

Parameter	Value
Measured diameters, mm	32..42
ID measurement accuracy, μm	± 5
Depth of measured hole, mm	≤ 80
Measurement cycle (5 sections), s	13

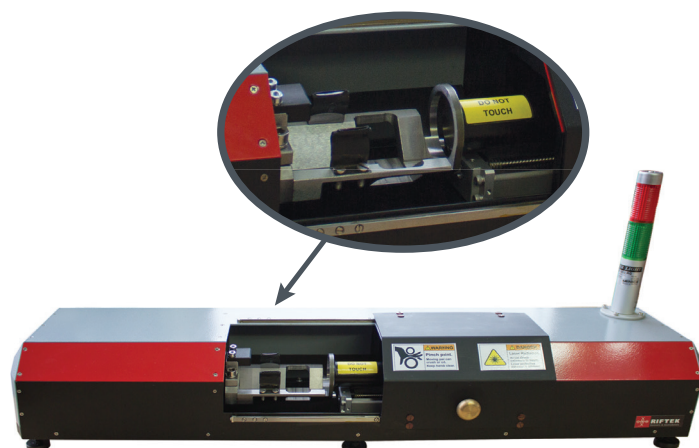

LASER SCANNING SYSTEM FOR METALLURGICAL NOZZLE INNER DIAMETER CONTROL

MODEL RF096_Insp2D-50/140-1000-A


- 2D rotating laser scanner
- synchronous linear translation
- air cooling system
- generating of 3D model of inner surface
- surface defects detection

Parameter	Value
Measured diameters, mm	50...140
ID measurement accuracy, μm	± 50
Minimum size of defects controlled, mm	0.1



INNER DIAMETER MEASURING GAUGE

RF096-100/250-87-HH Series

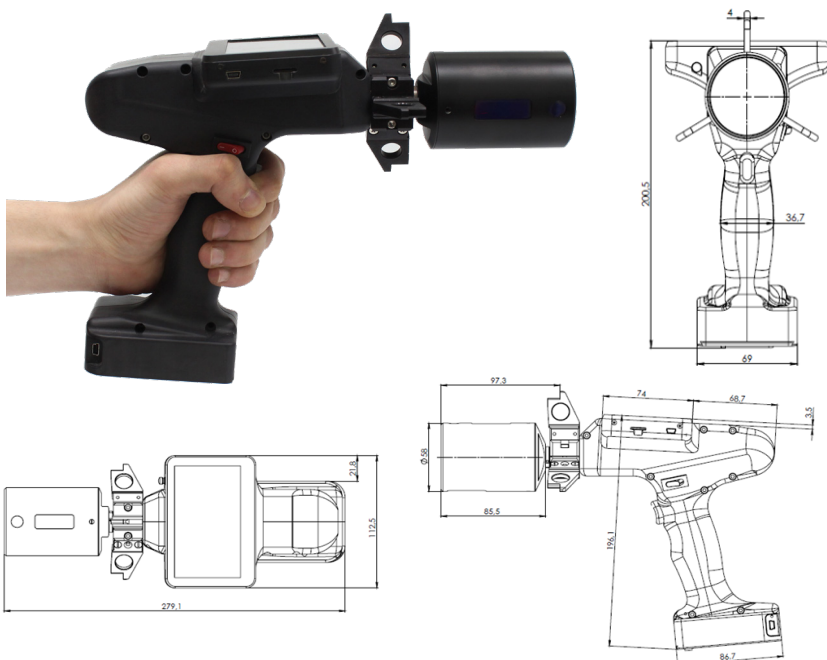

Parameter	Value
ID range, mm	100...250
Accuracy, mm	± 0.03
Number of laser sensors	2
Depth of measurement	on request
Measurement time, s	1
Resolution for cross-section, points	3200
Laser safety Class	2
Display	LED 4.3"
Power supply	Li-ion battery, 5400 mAh
Number of measurements before recharging the battery, not less	3000

The Specification can be changed on request

The device is designed for ID measurement of pipes, channels and so on

Measured parameters:

- inner diameter;
- ovality;
- roundness.

SPECIAL MEASUREMENT SYSTEMS

LAMINATED TUBES GEOMETRY MEASUREMENT SYSTEM


The system is designed for contactless scanning and geometrical parameters (outer and inner diameter, foil thickness, weld width, tube length) measurement of laminated tubes, made of PBL and ABL foil.



Parameter	Value
Measured diameters, mm	13...50
Diameter measurement accuracy, μm	± 10
Foil thickness range, mm	0.05...0.5
Foil and weld thickness measurement accuracy, μm	± 5
Tube length measurement accuracy, mm	± 0.1
Interface to PC	Ethernet
Power supply	220

ONLINE SYSTEMS FOR CONTROL AND REGULATION OF DIAMETER


The systems are designed for non-contact measurement, control and regulation of diameter of technological objects (wire, fiber, hoses, tubes, rods, sausage casings) during their production.

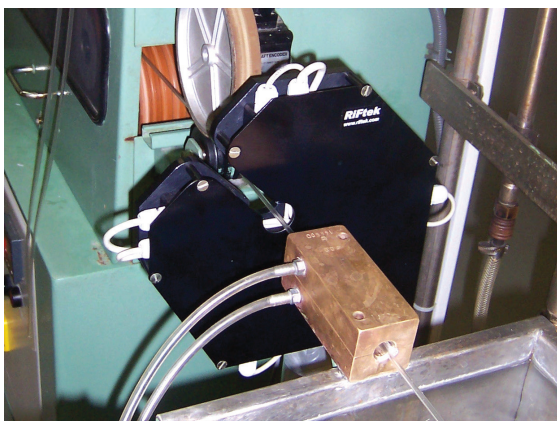


Parameter	Value
Measured diameters, mm	0.3...100
Accuracy, μm	from ± 1
Number of controlled sections	up to 6

LASER SYSTEMS FOR SHEET MATERIALS THICKNESS CONTROL

The systems are intended for in-process contactless measurements of thickness of various sheet materials (plastic, metal, rubber).

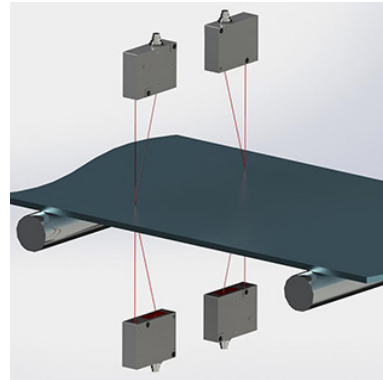

■ RF580 - Thickness Measurement System

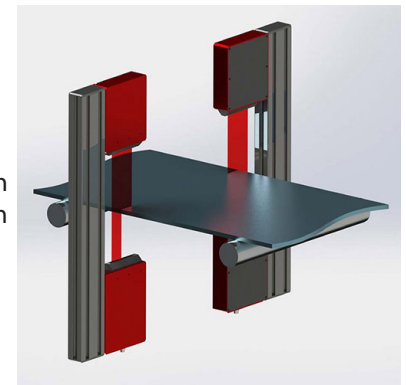


■ RF590 - Width Measurement System

ADVANTAGES

- Manufacturing process optimization
- Continuous quality monitoring

AUTOMATED SYSTEMS FOR MOTOR SHAFTS MEASUREMENT

The systems are designed for the measurement and control of motor shafts.

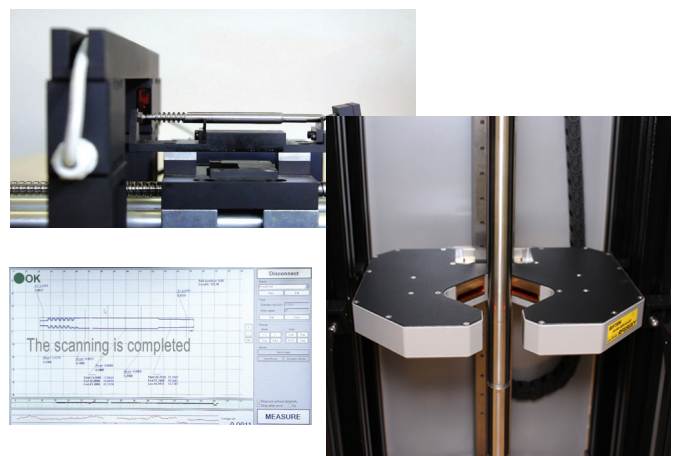

Parameter	Value
Measured diameters, mm	0.1...100 (or on request)
Measurement error, μm	± 2
Length	on request



SPEED AND DISTANCE SENSORS

SPEED AND DISTANCE SENSORS

ISD-3 & ISD-5 Series

The sensors are intended for automotive and industrial application for precise contactless measurement of speed and length of nearly any moving object.

Designed for use in automobile and railway transport, metallurgy, cable, chemical, pulp and paper, textile and wood industries, in automated control systems, cutting and accounting systems.

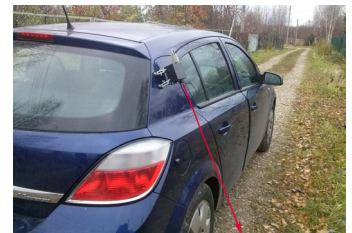

ISD-3 Parameter	Value	Comments
Speed range, Km/h	0.4 – 200	At TTLout 400 Hz per m/s. Others on request
Speed accuracy	±0.2 % RMS	Determined on test bench (treadmill) at 18.38 km/h
Absolute distance accuracy*	±0.2 % RMS	After calibration at S >100 m
Measuring frequency, Hz	22	
Nominal distance to the road and tolerance (range of working distance), mm	280 ± 140 (140 – 420)	Up to 800 mm on request
System power supply (tolerance)	12 V nominal (11 – 14.5V)	
System power consumption, Wt	Sensor head: 10 Wt Processor unit: 5 Wt	
Sensor head operation temperature range, °C	-20...+50	
Weight of the sensor + mounting bracket, g	280 + 120	Without cable
Weight of the processor unit, g	400	
Sensor dimensions, mm	Ø55 x 205 + illuminator	
Processor unit dimensions, mm	120x100x35	
Sensor cable length, m	2.5	Up to 10 m on request
System power cable length, m	2	Up to 10 m on request
Environmental sensor head protection	IP67	
Magnetic fixing tool	4 magnets x 16 Kg strength	
Output signal	TTL (SMOS) 0 – 5 V meander type, 400 Hz per m/s (=400 pulses/m)	Others on request

ISD-5 Parameter	ISD-5 Standard	ISD-5 Mini	Comments
Speed range, m/s	0.02 - 20	0.005 - 5	Typical values. The less nominal working distance the less min and max speed range
Speed accuracy*, % RMS	±0.07 ±0.02	±0.15 ±0.05	No signal averaging With averaging 0.2 - 0.3 s, at V > 1 m/s
Length accuracy*, % RMS	<±0.05	<±0.1	While pre-calibration for path lengths > 2 m
Measuring frequency, Hz	16 - 54		
Nominal distance to the object (tolerance), cm	10, 20, 30, 50, 75, 100	10, 15, 20	Could be noted at ordering
Distance tolerance	±20-25% of nominal		Depends on the surface (on the edge of the range signal decreased)
Emitter type, mW	Visible or IR c.v. laser, 5 – 120	Visible c.v. laser, <5	class 3B – 3R
Power supply, V	12 (8 - 14)		Internal linear voltage regulators +5V in sensor and controller unit
Power consumption, Wt: Sensor	0.5 - 2	0.5	
Controller unit	1		
Temperature working range, °C	+15...+50		-10...+50 – with active thermostabilization option): -50...+80°C with protect air cooling housing (option)
Sensor weight, g	320	70	
Sensor size, mm	85x79x46	58x43x30	Without connector, blend and fixing holes
Cable length from sensor to controller unit, V	1.8 or 3		Standard cable RS-232 or VGA with DB9 connectors are used. To extend a length it is possible to connect cables sequential
Sensor environmental protection	IP67		
Controller unit:			
Dimensions, mm	120x100x35		
Weight, g	350		
Analog out:	Length, 2000 pulses/m (=speed 2000 Hz/(m/s), meander 0 – 3 V, TTL compatible, up to 200 KHz		Typical values, user adjustable (see software description below)
Frequency out:	Ethernet (UDP protocol)		Others on request
Digital out:			
Physical data latency at measurement freq, ms	9		Stable, =½ of measuring time, without averaging
54 Hz	31		
16 Hz			
Base Software	<ul style="list-style-type: none"> - Program to read data via Ethernet, visualization and saving data, - Program for sensor diagnostics, - Read data example (LabView 8.2.1 and higher), - Dynamic library (DLL) to read data via Ethernet, - Sensor parameters configuration via any Internet browser 		Custom software by request are possible

MEASUREMENT INSTRUMENTS FOR RAILWAY TRANSPORT

RAILWAY WHEEL PROFILE GAUGE

IKP Series



The laser profilometer is designed for measuring

- flange thickness, slope and height, rim/tire thickness,
- full profile scanning and analyze of wheel rolling surface,
- maintaining of electronic wear data base,
- control of tolerances and sorting in the course of checkup, examination, repair and formation of railway wheel sets.

The device is supplied with database and software package for wheel sets wear data storage and processing.


Measurements are made directly on rolling stock without wheel set roll-out.

Parameter	Value
Measurement range flange height, mm	20...45
-"- flange thickness, mm	20...50
-"- flange slope, mm	1...15
-"- rim thickness, mm	36...100 (30...90)
-"- diameter (calculation method), mm	400...1400
Measurement error flange height, mm	± 0.03
-"- flange thickness, mm	± 0.03
-"- flange slope, mm	± 0.1
-"- rim thickness, mm	± 0.1
-"- diameter, mm	± 0.1
Discreteness of indication all parameters, mm	0.01
Profile measurement range, mm	145
Discreteness of the profile formation, not worse than, mm	0.025 (5800 points for profile)
Measurement time, s	adaptive, depending on surface quality, 4 average
Power supply (laser scanning module)	3,7V, Li-ion rechargeable battery 5400mAh for standard IKP and 2400mAh for Short and SShort
The number of measurements that can be taken before battery recharge is not less than	5000 for standard IKP and 2200 for Short and Super-short
Laser module battery life time	5 million measurement cycles
Power supply (PDA)	3,7V
PDA memory capacity	Li-polymer battery 3300mAh
Interface between laser scanning module and PDA	100 000 measurements
Working temperature range, °C	Bluetooth
Enclosure rating	-20...+50
	IP42 or IP64

PDA is intended for control of the laser scanning module, data reception from the scanning module, indication of measurement result, parameter input and data storage.



Operator mounts the laser scanning module onto the wheel to be measured. Having received a command from PDA or PC, the laser module performs non-contact scanning of the wheel surface.




IKP-5 SOFTWARE

MAIN FEATURES

- User-Friendly Interface;
- Flexible setting of measured Parameters of the Wheel Flange;
- The list of Calculated Parameters:
 - Flange Height, Thickness and Slope,
 - Wear parameters (Vertical, Horizontal and Angular Wear, Hollow, Difference of Diameters, Even/Uneven Wear),
 - Angular Profile Parameters,
 - Rim Width and Thickness,
 - Wheel Diameter,
 - Wheel Defects (Slides and Cavities),
 - Special Flange Parameters of the Tram Wheel and etc.;
- Setting of displayed Identification Parameters of the Wheelset. I.e., you can select only required parameters (number, series, operator, mileage, and etc.) for displaying on the screen;
- Simple Calibration Procedure: it performs automatically by clicking one button;
- The possibility to compare several Saved Profiles;

- The possibility to align Measured Profile manually (by buttons) relative to the reference with saving;
- Possibility to save several Bluetooth-devices in the PDA memory and then to select the required one from the list. I.e. You save addresses of several IKP and after that you need only to select the required one from the list without a necessity of searching procedure (the same is for IMR and IDK);
- Possibility to connect PDA to PC as an External Storage Device (alternative of ActiveSync).

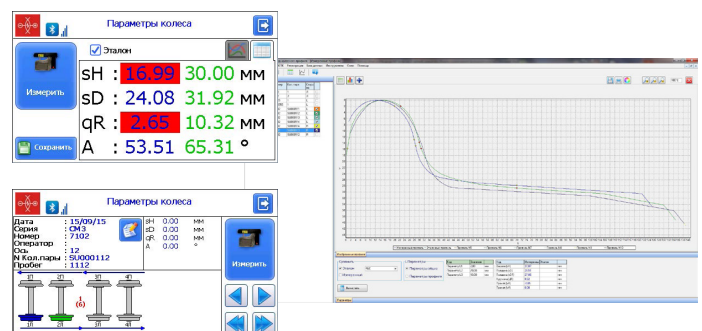

MEASUREMENT INSTRUMENTS FOR RAILWAY TRANSPORT

WHEEL DIAMETER MEASUREMENT GAUGE

IDK Series

Electronic gauge is designed for measuring wheel rolling circle diameter. Measurements are made directly on rolling stock without wheel set roll-out. The measurement of the diameter is performed according to the "three points" technique, without the complete wheel coverage.

The gauge contains numeric display to show the value of the wheel diameter. IDK-BT gauge contains Bluetooth interface for transfer results into wheel-set wear database management system.

Parameter	Value
Measurement range, mm	400...1400 or on request
Measurement error, mm	±0.2
Indication discreteness	0.1mm, 0.01mm * or 0.01 inch **
Position of measurement, S, mm	On request
Distance between axes of ball bearings (base), mm and diameters measurement range, mm	122±0.5 (400...750 mm) or 200±0.5 (400...950 mm) or 250±0.5 (600...1400 mm) or 300±0.5 (720...1400 mm)
Display	build-in, LED
Operating temperature, °C	-15...+55
Power supply	rechargeable battery 2 x AAA 1.2V
Weigh, kg	0.5
The number of measurements that can be taken before battery recharge is not less than	1000



SPECIAL MODELS OF IKP-5 AND IDK FOR TRAMWAY WHEELS

Special models of IKP-5 and IDK are designed especially for measurement of wheels with restricted space for device placement (tramway wheels):

- Laser Wheel Profile Gauge model **IKP-5-short** (Fig. A) with a shortened handle,
- Laser Wheel Profile Gauge model **IKP-5-Super short** (Fig. B) version for Ansaldo Breda low floor trams,
- Wheel Diameter Measurement Gauge model **IDK-compact** (Fig. C) with the measurement base (distance between ball supports) of the gauge 122 mm and diameter measurement range - 400...750 mm.



Fig. A


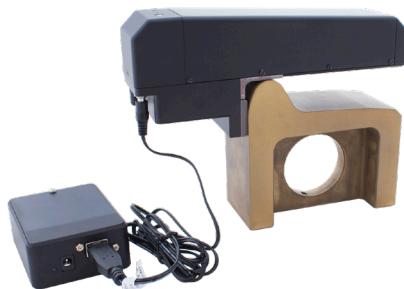


Fig. B



Fig. C

LASER PROFILOMETER FOR RAILROAD RAILS AND SWITCHERS

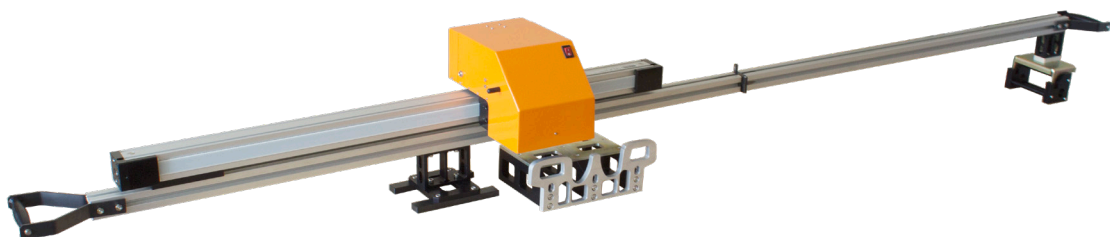

The device consists of frame for device placement on the rails and laser measurement head placed with possibility of linear translation. The measurements are carried out automatically. The measurement result is rails transfer profile.

Parameter	Value
Measurement range, mm	600
Measurement error, mm	±0.1



MEASUREMENT INSTRUMENTS FOR RAILWAY TRANSPORT

BACK-TO-BACK DISTANCE MEASURING GAUGES

IMR and IMR-L Series


Electronic gauge is designed for measuring back-to-back distance of railway, metro and tram wheels in the course of checkup, examination, repair and formation of wheel sets. The method of measurement is based on direct measurement the distance by contactless laser sensor. Measurements are made directly on rolling stock without wheel set roll-out.

IMR SERIES



Parameter	Value
Measurement range, mm	$L \pm 25$ (L – nominal distance)
Measurement error, mm	± 0.1
Indication discreteness	0.1mm, or 0.01 inch **
Display	build-in, LED
Operating temperature, °C	-15...+50
Weigh, kg	1
Dimensions, mm	D+137x30x124
Power supply	rechargeable batteries 2xAAA, 1.2V

IMR-L SERIES

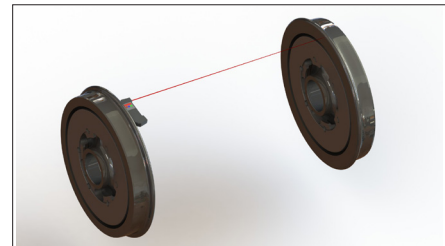

Parameter	Value
Measurement range, mm	1360...1440 or on request (nominal distance ± 15 mm)
Measurement error, mm	± 0.3
Indication discreteness	0.1mm, 0.01mm * or 0.01 inch
Display	build-in, LED
Operating temperature, °C	-15...+50
Weigh, kg	0.85
Dimensions, mm	234.2x87.7x32
Power supply	rechargeable batteries 4 x AA 1.2V
Connection to PC	Bluetooth

DISK BRAKES PROFILE GAUGE

IKD Series

Profilometer uses non-contact method of registration with a laser sensor and a scanning device.

MAIN FUNCTIONALITY

- obtaining data on the parameters of railway wheel disk brakes working surface;
- full profile scanning and analysis of the working surface of disk brakes;
- visualization of combined graphic images of the actual and new profiles of the wheel brake disks;
- support of the electronic database of profiles.

Profilometer for measuring parameters of the disc brakes installed on the wheel.



Profilometer with a bracket for measuring parameters of the disk brakes installed on the wheelset axle.



Parameter	Value
Measurement range, mm	30
Profile measurement range, mm	150
Measurement error	± 0.03
Discreteness of indication, mm	0.01
Discreteness of the profile formation, not worse than, mm	0.1
Power supply, laser module	3.7 Li-ion rechargeable battery 6800 mAh
Power supply, PDA	3.7 Li-polymer battery 3300 mAh
The number of measurements that can be taken before battery recharge is not less than	1000
PDA memory capacity	100 000 measurements
Interface between laser scanning module and PDA	Bluetooth
Working temperature range, °C	-15...+35
Enclosure rating	IP42

MEASUREMENT INSTRUMENTS FOR RAILWAY TRANSPORT

RAIL PROFILE MEASUREMENT GAUGE


PRP Series

Portable laser rail profilometer (PRP) is designed for non-contact registration of cross-section of the railhead acting face.

The profilometer uses non-contact method of registration with a laser sensor and a scanning device.

MAIN FUNCTIONALITY

- obtaining the information on the cross-section profile of the working railhead surface;
- full profile scanning and analyze of the railhead acting face;
- visualization of the combined graphical images of actual and new crosssection.

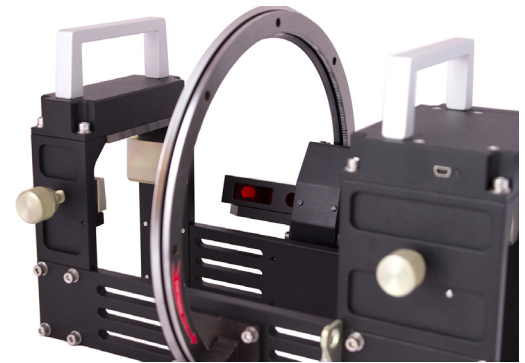

Parameter	Value
Railhead vertical wear, mm	-15.0 ... +20.0
Lateral railhead wear, mm	-15.0...+20.0
Redused railhead wear, mm	Up to 20.0
Scanning angle inside the rail track, degrees	108
Scanning angle outside the rail track, degrees	108
Measurement error, not more than, mm	±0.03
Scanning time, sec	10-12
Digital readout device (PDA) dimensions, mm	112.5x95.5x22.7
Laser module dimensions, mm	293x230x230
Power supply, laser module	3.7V, Li-ion battery, 6800mAh
Power supply, PDA	3.7V, Li-polymer battery, 3300mAh
The number of measurements that can be taken before battery recharge is not less than	500
PDA memory capacity, no less	100 000 measurements
Interface to PC	Bluetooth

AUTOMATIC REAL-TIME SYSTEM FOR MEASUREMENT OF WHEELSETS GEOMETRICAL PARAMETERS

3DWheel Series



The system is intended for contactless automatic real-time measurement of geometrical parameters of railway vehicles (locomotives, railcars, subway, trams) and uses combination of 2D laser scanners mounted wayside in the track area and calibrated into one common coordinate system.

Measurement cycle starts when an inductive sensor detects a wheel.

While the wheel passes through the system of synchronized 2D laser scanners its profile is taken at many sections.

All measurement readings for all the wheels are sent through Ethernet to control computer for profiles reconstruction and dimensions calculations.

Finally, all the data are collected in the host depot computer in wheel sets wear database.

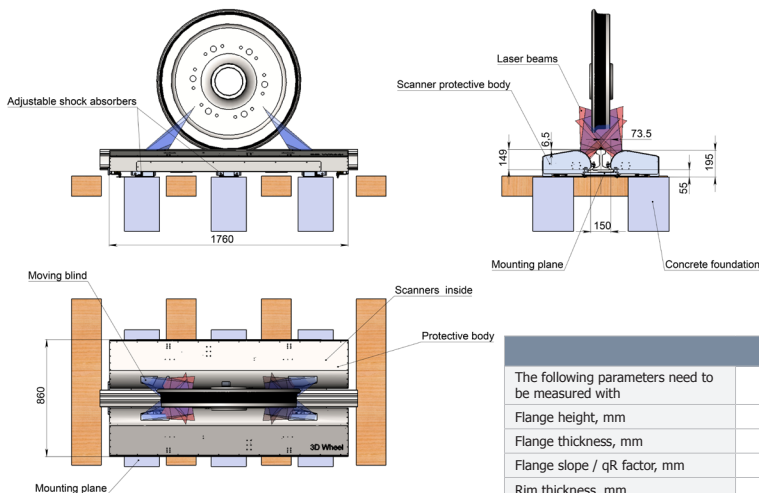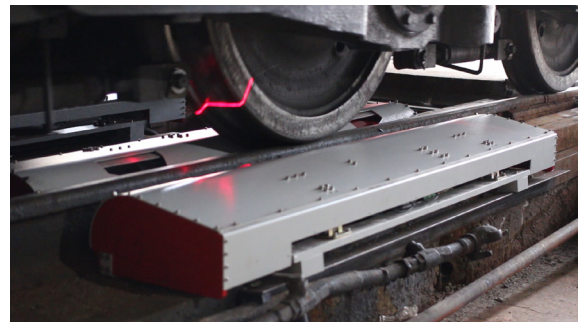

The following parameters need to be measured with	Measurement error		
	Maximum error. Train speed is up to 10 km/h	Maximum error. Train speed is up to 60 km/h	Maximum error. Train speed is up to 120 km/h
Flange height, mm	± 0.2	± 0.4	± 0.6
Flange thickness, mm	± 0.2	± 0.4	± 0.6
Flange slope / qR factor, mm	± 0.2	± 0.4	± 0.6
Rim thickness, mm	± 0.5	± 0.5	± 1.0
Wheel width / Rim width, mm	± 0.3	± 0.5	± 1.0
Wheel diameter, mm	± 0.5	± 0.5	± 1.0
Back to Back distance, mm	± 0.3	± 0.5	± 1.0

AUSTRALIA

Applied Measurement Australia Pty Ltd

RAILWAY INSTRUMENTS ONLY

Thornton Plaza, Unit 5,
27 Thornton Crescent, Mitcham
VIC 3132, Australia
Tel: +61 39874 5777
Fax: +61 39874 5888
sales@appliedmeasurement.com.au
www.appliedmeasurement.com.au

BOSNIA AND HERZEGOVINA

RMT Ltd.

Zahradni 224, 739 21 Paskov
Tel: +420 55864 0211
Fax: +420 55864 0218
rmt@rmt.cz
www.rmt.cz

CHINA

Beijing Gemston Mechanical & Electrical Equipment Co.,Ltd

RAILWAY INSTRUMENTS ONLY

Room 613, Anfu Mansion, Fengtai
District, Beijing, China
Tel: +86 10 6765 0516
Fax: +86 10 6765 6966
Mobile: +86 137 1755 1423
dh0526@163.com
www.baof.cn

CROATIA

RMT Ltd.

Zahradni 224
739 21 Paskov, Czech Republic
Tel: +420 55864 0211
Fax: +420 55864 0218
rmt@rmt.cz
www.rmt.cz

FINLAND

Teräspyörä-Steelwheel OY

RAILWAY INSTRUMENTS ONLY

Juvan teollisuuskatu 28
FI-02920 Espoo, Finland
Tel: +358 400 422 900
Fax: +358 9 2511 5510
steelwheel@steelwheel.fi
www.teraspyora.fi

GERMANY

Hylewicz CNC-Technik

SHTRIKH-2 ONLY

Siemensstrasse 13-15,
47608 Geldern, Germany
Tel: +49 2831 91021-20
Fax: +49 2831 91021-99
info@cnc-step.de
www.cnc-step.de

BELARUS

RIFTEK LLC

22, Logoiski trakt, 220090, Minsk,
Republic of Belarus
Tel/Fax: +375 17 357 36 57
Mobile: +375 29 655 72 55
info@riftek.com
www.riftek.com

BULGARIA

RMT Ltd.

Zahradni 224, 739 21 Paskov
Tel: +420 55864 0211
Fax: +420 55864 0218
rmt@rmt.cz
www.rmt.cz

CHINA

Xi'an Win-Success Automation Technology Co.,Ltd.

Room 3-1-1039, Iduhui Building,
No.11 Tangyan South Road, High-
Tech Zone, Xi'an, Shaanxi PRC,
China
Tel: +86 29 8110 6280
Fax: +86 29 8110 6285
Mob: +86 133 1927 1405
www.maxsensor.com
info@maxsensor.com

CZECH REPUBLIC

RMT Ltd.

Zahradni 224
739 21 Paskov, Czech Republic
Tel: +420 55864 0211
Fax: +420 55864 0218
rmt@rmt.cz
www.rmt.cz

FRANCE

BLET Measurement Group S.A.S.

1 avenue du Président Georges
Pompidou, 92500 Rueil Malmaison,
France
Tel: +33(0)1 8088 5785
Fax: +33(0)1 8088 5793
technique@blet-mesure.fr
www.blet-mesure.fr

GERMANY

ALTHEN GmbH Meß- und Sensortechnik

Dieselstrasse 2
65779 Kelkheim, Germany
Tel: +49 (0)6195 7 00 60
info@althen.de
www.althen.de

BELGIUM

Althen Sensors & Controls BV

Vlietweg 17a
2266KA Leidschendam
The Netherlands
Tel: +0031 70 392 44 21
Fax: +0031 70 364 42 49
sales@althen.nl / info@althen.nl
www.althensensors.com
www.althencontrols.com

CHILE

Verne SpA

Apoquindo 2818, oficina 31,
Las Condes, Santiago, Chile
Tel: +56 2 228858633
info@verne.cl
jsaavedra@verne.cl
www.verne.cl

CHINA

Micron-Metrology co., Ltd.

No.2, Kecheng Rd., Industrial Park
District, Suzhou, Jiangsu Province.,
China
Tel: +0512 6558 9760
Mob: +86 189 1806 9807
sales@micron-metrology.cn
www.micron-metrology.cn

DENMARK

BLConsult

Ryssbält 294,
95 291 Kalix, Sweden
Mobile: +46 70663 1925
info@blconsult.se
www.blconsult.se

GERMANY

Disynet GmbH

Breyeller Str. 2
41379, Brueggen, Germany
Tel: +49 (2157) 8799 -0
Fax: +49 (2157) 8799 -22
disynet@sensoren.de
www.sensoren.de

HUNGARY

RMT Ltd.

Zahradni 224, 739 21 Paskov
Tel: +420 55864 0211
Fax: +420 55864 0218
rmt@rmt.cz
www.rmt.cz

BRASIL

CAPi Controle e Automação Ltda

Rua Itororó, 121, CEP 13466-240
Americana-SP, Brazil
Tel: +55 19 36047068
Tel: +55 19 34681791
capi@capicontrol.com.br
www.capicontrol.com.br

CANADA

Invisual E. Inc.

59 Brawley Ave,
Etobicoke, On. Canada M8Z 4Z5
Tel: +1 888 530 0712
Fax: +1 416 530 4787
info@invisuale.ca
pierre.h@invisuale.ca
www.invisuale.com

CHINA

Zhenshangyou Technologies Co.,Ltd.

Rm 2205-2210, Zhongyou Hotel
1110 Nanshan Road, Nanshan
District 518054 Shenzhen, China
Tel: +86 755 26528100/8011/8012
Fax: +86 755 26528210/26435640
info@51sensors.com
www.51sensors.com

ESTONIA

RD Resolve OU

Punane 14a-304,
Tallinn 13619, Estonia
Tel.: +372 62 06506
rdresolv@gmail.com

GERMANY

Finger GmbH & Co. KG

OPTICAL MICROMETERS ONLY

Sapelloh 172,
31606 Warmsen, Germany
Tel: +49 5767 96020
Fax: +49 5767 93004
finger@finger-kg.de
www.finger-kg.de

INDIA

Influx Big Data Solutions

Bangalore
No:2, Krishvi, Ground Floor, Old
Airport Road,
Domlur, Bangalore - 560071. India
Tel: +91 73 3774 8490
Tel: +91 94 4849 2380
milan@influxtechnology.com
support_india@influxtechnology.com
www.influxtechnology.com

INDIA

Paragon Instrumentation Engineers Pvt. Ltd.

RAILWAY INSTRUMENTS ONLY
200, Station Road,
Roorkee, 247 667, India
Tel: +91 1332 27 2394
tanuj@paragoninstruments.com
www.paragoninstruments.com

ITALY

FAE s.r.l.

Via Tertulliano, 41
20137 Milano, Italy
Tel: +39 02 5518 7133
Fax: +39 02 5518 7399
fae@fae.it
www.fae.it

MALAYSIA

OptoCom InstruVentures

H-49-2, Jalan 5, Cosmoplex
Industrial Park, Bandar Baru Salak
Tinggi, Sepang, Malaysia
Tel: +603 8706 6806
Fax: +603 8706 6809
optocom@tm.net.my
www.optocom.com.my

NORWAY

BLConsult

Ryssbält 294, 95 291 KALIX, Sweden
Contactperson: Berndt Lundström
Tel.: +46 70 663 1925
info@blconsult.se
www.blconsult.se

RUSSIA

Sensorika-M LLC

Dmitrovskoe highway 64-4
127474, Moscow, Russia
Tel: +7 499 487 0363
Tel: +7 499 753 3990
Fax: +7 499 487 7460
info@sensorika.com
www.sensorika.com

SERBIA

RMT Ltd.

Zahradni 224
739 21 Paskov, Czech Republic
Tel: +420 55864 0211
Fax: +420 55864 0218
rmt@rmt.cz
www.rmt.cz

INDONESIA

PT. DHAYA BASWARA SANIYASA

Botanic Junction Blok H-9 NO. 7
Mega Kebon Jeruk, Joglo
Jakarta, 11640, Indonesia
Tel: +62 21 2932 5859
management@ptdbs.co.id

JAPAN

Tokyo Instruments, Inc.

6-18-14 Nishikasai, Edogawa-ku,
Tokyo, 134-0088 Japan
Tel: +81 3 3686 4711
Fax: +81 3 3686 0831
f_kuribayashi@tokyoinst.co.jp
www.tokyoinst.co.jp

MONTENEGRO

RMT Ltd.

Zahradni 224, 739 21 Paskov
Tel: +420 5586 40211
Fax: +420 5586 40218
rmt@rmt.cz
www.rmt.cz

PERU

Verne Perú S.A.C

Las Codornices 104,
Surquillo, Lima, Peru
Tel/fax: +51 99243 6734
info@verne.com.pe
www.verne.cl

RUSSIA

Intellect-Optic

Mira 32 -120,
Yekaterinburg, Russia
Tel: +7 (343) 222 7565
Fax: +7 (343) 222 7370
mail@d-test.net
www.ru.d-test.ru

SLOVAKIA

RMT Ltd.

Zahradni 224
739 21 Paskov, Czech Republic
Tel: +420 55864 0211
Fax: +420 55864 0218
rmt@rmt.cz
www.rmt.cz

IRAN

Novin Industrial Development Grp.

Tel: +98 21 4402 2093-6
Fax: +98 21 4385 8794
Mobile: +98 912320 7518
info@novinid.com
www.novinid.com

LATVIA

SIA "SOLARTEX"

RAILWAY INSTRUMENTS ONLY
Terbatas street, 5, Riga, Latvia
Tel: +371 2657 8640
solartex@inbox.lv

NETHERLANDS

Althen Sensors & Controls BV

Vlietweg 17a
2266KA Leidschendam
The Netherlands
Tel: +0031-(0)70 392 4421
Fax: +0031-(0)70 364 4249
sales@althen.nl / info@althen.nl
www.althensensors.com
www.althencontrols.com

POLAND

MTL ASCO Sp. z o.o.

RAILWAY INSTRUMENTS ONLY
ul. Wielowiejska 53,
44-120 PYSKOWICE, Poland
Tel: +48 32 230 4570
Fax: +48 32 332 7014
biuro@ascorail.pl
www.ascorail.pl

RUSSIA

Group company
SpecAvtoEngineering SPEKTR KSK
Electrozavodskaya St, 27
107023, Moscow, Russia
Tel: +7 485 225 7557
Tel/Fax: +7 495 782 1421
mail@sai-holding.ru
www.sai-holding.ru
www.spektrsk.ru

SLOVENIA

RMT Ltd.

Zahradni 224
739 21 Paskov, Czech Republic
Tel: +420 55864 0211
Fax: +420 55864 0218
rmt@rmt.cz
www.rmt.cz

ISRAEL

Nisso Dekalo Import Export LTD

1 David Hamelech Street
Herzlia 46661 Israel
Tel: +972 9957 7888
Fax: +972 9956 8860
eli@fly-supply.net
www.fly-supply.net
www.aircraft-partsupply.com

LUXEMBOURG

Althen Sensors & Controls BV

Vlietweg 17a
2266KA Leidschendam
The Netherlands
Tel: +0031-(0)70 392 4421
Fax: +0031-(0)70 364 4249
sales@althen.nl / info@althen.nl
www.althensensors.com
www.althencontrols.com

NORWAY

Salitec AS

PB 468,
N-1327 Lysaker
Tel.: +47 2389 1015
Fax: +47 9210 1005
mail@salitec.no
www.salitec.no

PORTUGAL

Campal Inovacoes Ferroviarias Lda.

Lagoas Park, Edificio 7, 1° Piso Sul
2740-244 Porto Salvo, Oeiras,
Portugal
Tel: +351 21 584 4348
campal@campal.pt
www.campal.pt

RUSSIA

LLC "ALIANCE"

Plekhanova St, 4A
111123, Moscow, Russia
Tel/Fax: +7 495 741 5915
info@stankialiance.ru
www.stankialiance.ru

SOUTH KOREA

PROSEN. CO., LTD

M-1001, Songdo techno park IT
center, 32, Songdogwahak-ro,
Yeonsu-gu, Incheon, 21984,
Republic of Korea
Tel: +82 32 811 3457
Fax: +82 32 232 7458
trade@prosen.co.kr
www.prosen.co.kr

SOUTH KOREA

BS Holdings

B-201,Wonpogongwon 1ro,
59 Danwon-gu, Ansan-si,
Gyeonggi-do, 15455,
Republic of Korea
Tel: +82 31 411 5011
Fax: +82 31 411 5015
bsh5011@hanmail.net
www.lasersolution.co.kr

SWEDEN, FINLAND

Kvalitest Industrial AB

EXCEPT FOR RAILWAY INSTRUMENTS

Ekbacksvägen 28,
16869 Bromma, Sweden
Tel: ++46 (0)76 525 5000
sales@kvalitest.com
www.kvalitest.com
www.kvalitest.se

TURKEY

MAK Elektronik Malzeme

Analiz ve Kalite Kontrol Cihazlari Dis Tic. Ltd. Sti.

Cenap Sahabettin Sokak, No:39,
34718 Kosuyolu – Kadikoy /
Istanbul - Turkey
Tel: +90 216 402 1034
Fax: +90 216 402 1035
ulastac@metalografi.net
www.makelektronik.com.tr

USA, CANADA, MEXICO

Acuity Products of Schmitt Industries, Inc.

2765 NW Nicolai Street
Portland, OR, 97210, USA
Tel: +1 503 227 7908
Fax: +1 503 223 1258
sales@acuitylaser.com
www.acuitylaser.com

SPAIN

IBERFLUID Instruments S.A.

C/ Botanica, 122,
08908 L'Hospitalet de Llobregat,
Barcelona, Spain
Tel: +34 93 447 1065
Fax: +34 93 334 0524
myct@iberfluid.com
www.iberfluid.com

TAIWAN

Advantech Solution Co.,Ltd.

Nano-Trend Technology Co., Ltd.
No.365-6, Zhongshan Rd.,
Sanxia Dist., New Taipei City 23741,
Taiwan (R.O.C.)
Tel: +886 2 8671 9560
Fax: +886 2 8671 0084
nt@nano-trend.com
www.nano-trend.com

UKRAINE

KODA

Frunze st, 22
61002, Harkov, Ukraine
Tel/Fax: +38 057714 2654
mail@koda.com.ua
www.koda.com.ua

SWITZERLAND

ID&T GmbH

Gewerbestrasse 12/a,
8132 Egg (Zurich), Switzerland
Tel: +41 44 994 9232
Fax: +41 44 994 9234
info@idtlaser.com
www.idtlaser.com

THAILAND

Advantech Solution Co.,Ltd.

20/170 Motorway Rd.,
Kwang Pravet, Khet Pravet,
Bangkok, Thailand 10250
Tel: +662 184 8705
Fax: +662 184 8708
sales@advantechsolution.com
bundit.s@advantechsolution.com
www.advantechsolution.com

UNITED KINGDOM, IRELAND

Ixthus Instrumentation Ltd.

The Stables, Williams' Barns
Tiffeld road, Towcester,
Northants,UK
Tel: + 01327 35 3437
Fax: + 01327 35 3564
www.ixthus.co.uk
info@ixthus.co.uk

SWEDEN

BLConsult

Ryssbält 294,
95 291 Kalix, Sweden
Mobile: +46 70 663 1925
info@blconsult.se
www.blconsult.se

TURKEY

TEKMA Mühendislik A.Ş.

Cevizli Mh. M. Kemal Cd.,
Hukukçular Towers,
A-Blok, No: 66-A/39
Kartal – Istanbul
Tel: +90 216 970 1318
Tel: +90 850 840 2334
info@tekma.eu
www.tekma.eu

USA, CANADA, MEXICO

International Electronic Machines Corporation

RAILWAY INSTRUMENTS ONLY

850 River Street
Troy, NY 12180, USA
Tel: +1 518 268 1636
Fax: +1 518 268 1639
railway_marketing@iem.net
www.iem.net



RIFTEK LLC

22-311, Logoisky tract,
220090, Minsk, Republic of Belarus

Tel/Fax: +375 17 357-36-57

Email: info@riftek.com

Site: www.riftek.com