


The end of the boring door™
SUPADOORS[®]
Environmentally Kind Stile + Rail MDF Doors

Style: #425

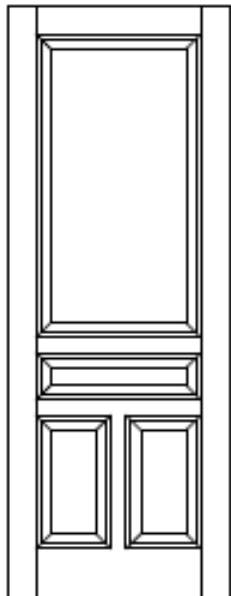

Style # 425

| | |
|------------------------------|---|
| Base Material: | Solid, Double-Refined MDF |
| Construction: | Stile and Rail |
| Manufacturing: | Universal City, TX, USA (San Antonio, TX area) |
| Height: | Up to 9'0" tall (Warranty up to 8'0" tall) |
| Width: | 1'0" to 5'0" (Warranty up to 36" wide) |
| Thickness: | 1-3/8" or 1-3/4" or 2-1/4" |
| Use: | Swinging Pocket Barn Slider Pivot Bypass Bifold Dbl Act |
| Customizable: | YES (Sizing Layout Sticking Panel Profiles) |
| Edge: | Interlocking "Keyed" hardwood edges (full length) |
| Stile/Rail Dimension: | Customizable to accommodate any project requirements |
| Sticking profiles: | 8 standard plus custom options |
| Panel profiles: | Raised panels – 7/8" to 1-1/4" (plus custom) Flat Panel – 1/4" to 7/8" (plus custom) |
| Raised Molding: | Optional |
| Standard Finish: | Two (2) Coats Water-based low VOC Primer |
| Veneer Options: | Yes |
| Door Weight: | Typically varies from 4.0 – 6.0 lbs/sq ft. (non-rated) |
| Acoustic ratings: | Standard 1-3/4" door – STC 32 Fire rated doors STC 34 – STC 45 |
| Hardware Options: | All machining available |
| Recycled Content: | Minimum 86% Post-Industrial recycled material |
| Jambs: | Optional Factory prehung or KD units - pine or poplar |
| Glazing Options: | Panels can be replaced with glass (40+ options) |
| Louver Options: | True (Vented) or False (Non-Vented) |
| LEED Credit Option: | YES (Recycled content, plus optional NAUF) |
| FSC® Certification: | FSC®-C002211 – Mix (upon request) |
| Fire Ratings: | 20 45 60 90 Minute Stile & Rail (Positive Pressure) |
| Warranty: | Limited Lifetime |