


Anna

VARIO FLEX

Recessed LED Panel

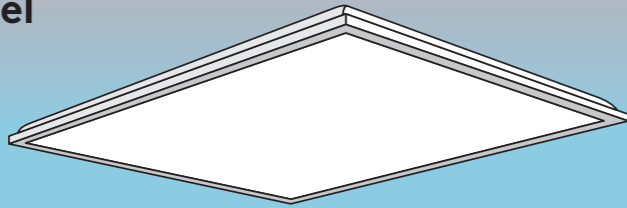


Ideal for Schools/universities
and office/meeting rooms

Providing high quality light with low glare and high efficiency.



- **VARIO Feature (Colour Temperature Switch):** The ability to choose your colour temperature on site with the flick of a switch
- **FLEX Feature (Lumen Output Switch):** The flexibility to decide on your lumen package on site with the flick of a switch
- **JUST – adapt on-site to an emergency version** using the Just Emergency PLUG&PLAY kit
- **Integrated self-test emergency indicator** with the JUST E3 self-test kit
- **Energy efficient** with 125 lm/W
- **Gentle, soft and glare free lighting** with UGR < 19
- **Direct replacement** for 4x14 W T5 or 4x18 W T8 fluorescent panels
- **Easy, quick and tool-free installation** thanks to an integrated connector with a 4-pole push terminal (for up to 2.5 mm wires) enabling loop-in loop-out wiring
- **The detachable connector** enables first fix wiring and high voltage circuit testing while the luminaire is detached

Dimensions (mm)	L	W	H1	H2
ANNA Q596	596	596	35	60
ANNA Q622	622	622	35	60
ANNA 1200 x 300	1196	296	35	60



Specification

Electrical class	II
Ambient operating temperature	-20 to +40 °C
Driver	ENEC certified
DALI	DALI-2 and SwitchDim – suitable for emergency escape lighting systems acc. to EN 50172

Installation / Mounting

Mounting	Safety wire included in Q596 and 12x3 versions
Installation	Lay-in installation in T-bar ceiling grids – suitable for surface and plaster board installation (accessories available separately)

Material / Finish

Frame	Aluminium
Diffuser	TpB rated, PET, opal
Light guide panel	PS
Backplate	Steel sheet

Light source information

VARIO (Colour temperature switch)	3000 K, 3500 K, 4000 K
FLEX (Lumen switch)	3000 lm (24 W), 3750 lm (30 W), 4000 lm (33 W), 4400 lm (36 W)
Efficiency	up to 125 lm/W
Lifetime	50 000 hours (@L80, Ta 25 °C)
MacAdam (Initial)	4

Controllability (DALI-2)

Dimming level	1-100 %
---------------	---------

VARIO and FLEX feature

There is no need to worry about lumen packages or colour temperatures anymore – it's always the same product and the adaption to your application can be done directly on site:



Colour temperature switch



Lumen output switch

Ordering guide

Description	SAP Code
ANNA VARIOFLEX 2 Q596 4400 830/35/40	96700001
ANNA VARIOFLEX 2 Q622 4400 830/35/40	96700002
ANNA VARIOFLEX 2 12X3 4400 830/35/40	96700003
DALI	
ANNA VARIOFLEX 2 Q596 4400 830/35/40 DALI	96700004
ANNA VARIOFLEX 2 Q622 4400 830/35/40 DALI	96700005
ANNA VARIOFLEX 2 12X3 4400 830/35/40 DALI	96700006
Accessories	
TECO ANNA V RECESSED SPRINGS	96700007
TECO ANNA V CONNECTOR DRIVER	59013250
TECO SURFACE MOUNT BOX Q596	96635585
TECO SURFACE MOUNT BOX Q622	96635586
TECO SURFACE MOUNT BOX 12X3	96635572
JUST E3 PLUG&PLAY KIT SELF TEST LiFePO4	96634428
JUST E3 PLUG&PLAY KIT MANUAL TEST LiFePO4	96635766

830 – 3000K / 835 – 3500K / 840 – 4000 K