


Overview


HP Compaq 8200 Elite Ultra Slim Desktop Business PC

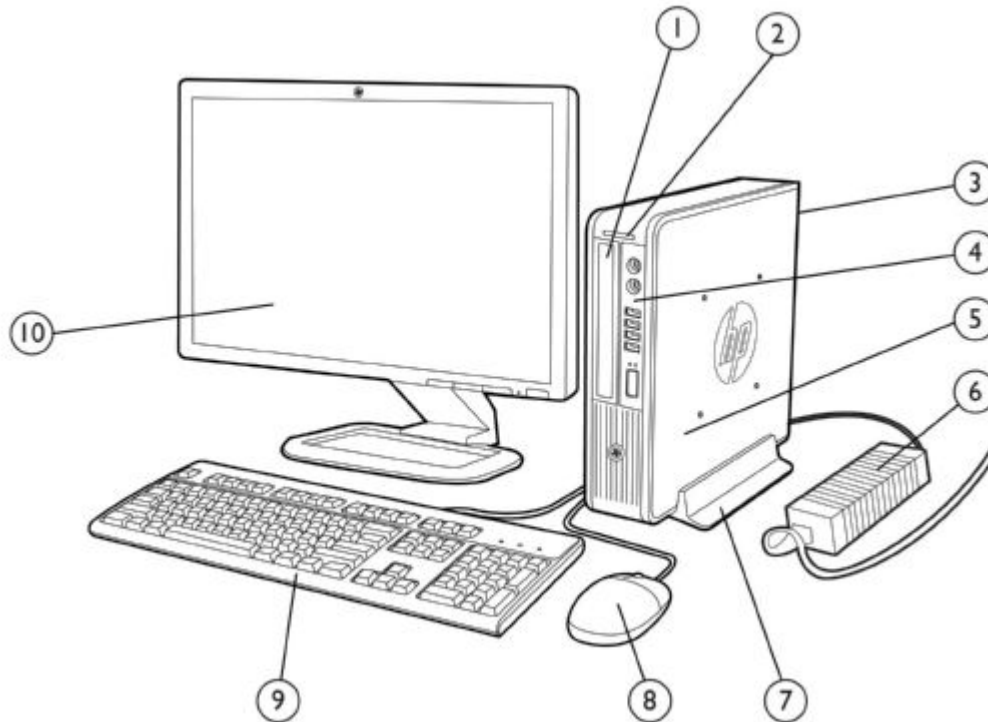

- 1 Optical Disc Drive
- 2 Secure Digital (SD) Card Reader (optional)
- 3 Rear I/O includes (6) USB 2.0 ports, DisplayPort v1.1a and VGA video interfaces, PS/2 mouse and keyboard ports, RJ-45 network interface, 3.5mm audio in/out jacks
- 4 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 5 2.5" internal hard disk drive bay
- 6 135W 87% efficient external Power Adapter or 180W 87% efficient external Power Adapter (when configured with discrete graphics)
- 7 HP USDT Tower Stand (optional)
- 8 HP Mouse
- 9 HP Keyboard
- 10 HP Monitor (sold separately)

Overview


HP Compaq 8200 Elite Small Form Factor Business PC

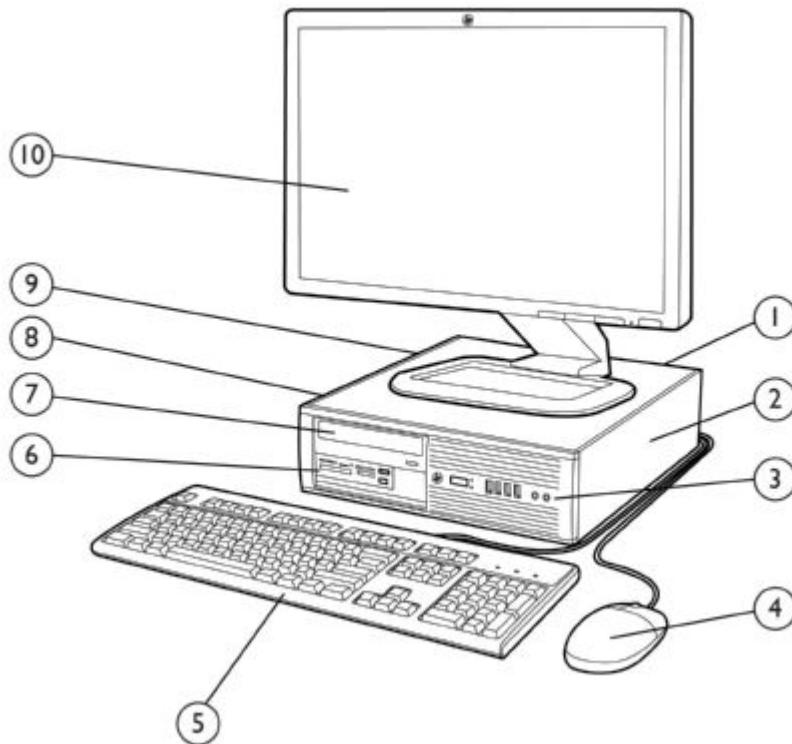

- 1 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 2 Low profile expansion slots include (1) PCI, (1) PCI Express x1 and (2) PCI Express x16 graphics
- 3 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 4 HP Mouse
- 5 HP Keyboard
- 6 3.5" external drive bay supporting a media card reader or a secondary hard disk drive
- 7 5.25" external drive bay supporting an optical disk drive
- 8 3.5" internal drive bay supporting primary hard disk drive
- 9 240W standard or 90% high efficiency Power Supply
- 10 HP Monitor (sold separately)

Overview


HP Compaq 8200 Elite Microtower Business PC

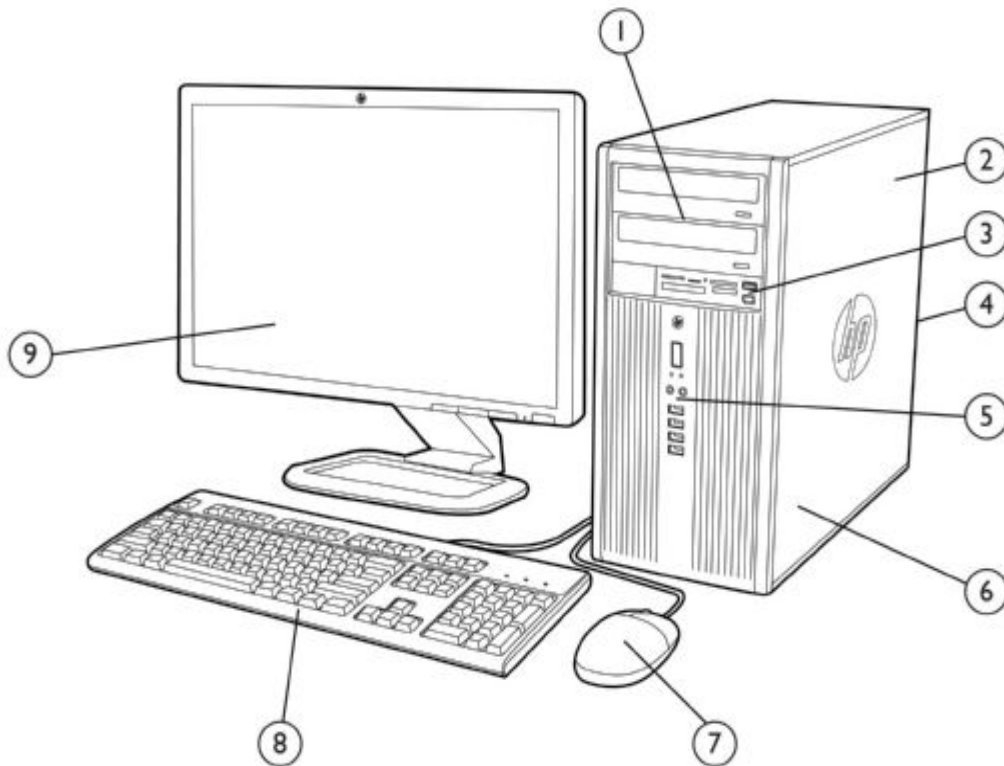

- 1 (2) 5.25" external drive bays supporting optical disk drives or removable hard disk drives; (2) 3.5" internal drive bays supporting hard disk drives capable of RAID configurations
- 2 320W standard or 90% high efficiency Power Supply
- 3 3.5" external drive bay supporting the HP Media Card Reader
- 4 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 5 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 6 Full height expansion slots include (1) PCI, (1) PCI Express x1 and (2) PCI Express x16 graphics
- 7 HP Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

Overview

HP Compaq 8200 Elite Convertible Minitower Business PC

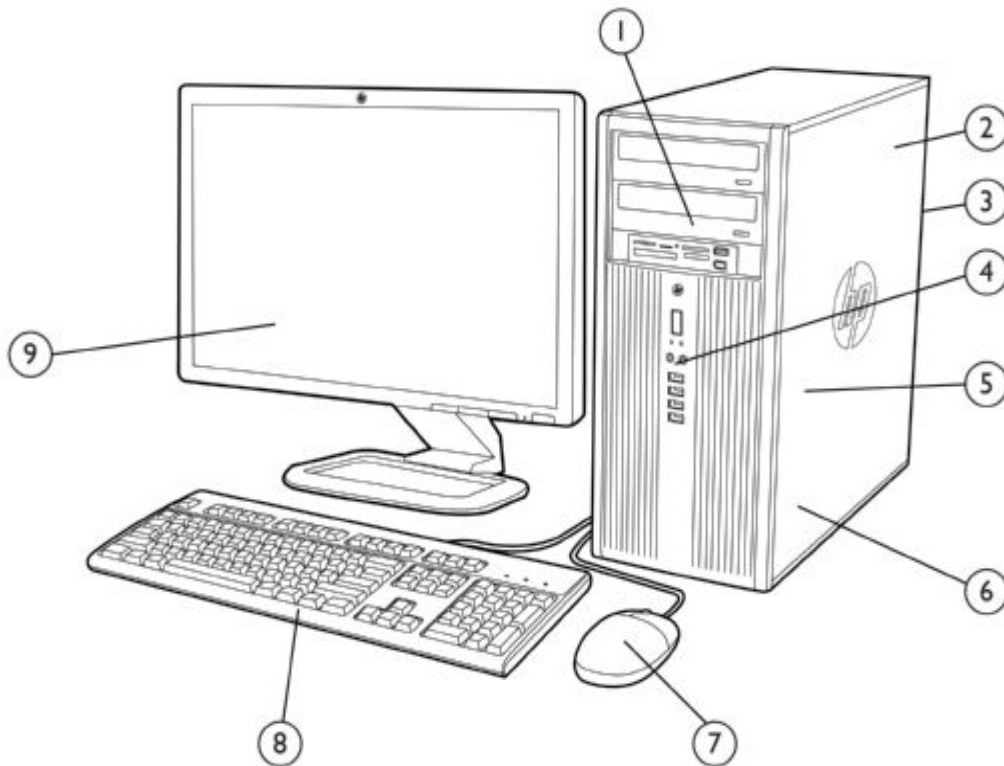

- 1 (3) 5.25" external drive bays supporting optical disk drives, removable hard disk drives, or the HP Media Card Reader
- 2 320W standard or 90% high efficiency Power Supply
- 3 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 4 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 5 (3) 3.5" internal drive bays supporting multiple hard disk drives capable of RAID configurations
- 6 Full height expansion slots include (3) full-length PCI, (1) PCI Express x1, and (2) full-length PCI Express x16 graphics
- 7 HP Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

Overview

At A Glance

- Choice of four professional chassis form factors: USDT, SFF, MT, CMT
- PC chassis and all internal components and modules are 100% free of brominated flame retardants (BFRs) and Polyvinyl Chloride (PVC).
- UEFI BIOS developed and engineered by HP for better security, manageability and software image stability
- Intel Q67 Express chipset supporting Intel 2nd generation Core processors, featuring Intel HD Graphics and vPro Technology (available with select processors)
- Intel 82579LM GbE integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Integrated dual independent monitor support via VGA and digital DisplayPort v1.1a video interfaces
- Discrete graphics options available for all platforms including the Ultra Slim Desktop (USDT)
- SRS Premium Sound audio management software
- Standard efficiency or 90% high efficiency energy saving power supplies available on the SFF, MT and CMT models
- 87% efficient energy saving external power adapter standard with USDT models
- ENERGY STAR qualified
- SFF, MT and CMT models can be configured with multiple hard disk drives in a RAID array
- Guaranteed lengthy purchase lifecycles and image stability
- Software image fully compatible across all models and form factors
- Created using industry leading Design for Environment standards
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Tool-less serviceability features for easier upgrades and repairs

Standard Features and Configurable Components (availability may vary by country)

Operating Systems

Preinstalled	Genuine Windows 7 Home Basic Edition (32-bit) Genuine Windows 7 Home Premium Edition (32-bit or 64-bit) Genuine Windows 7 Professional Edition (32-bit or 64-bit) Genuine Windows 7 Ultimate Edition (32-bit or 64-bit) FreeLnx
Supported	Genuine Windows XP Professional Edition Genuine Windows Vista Home Basic ¹ Genuine Windows Vista Business ¹ Genuine Windows Vista Enterprise Edition ¹ Genuine Windows 7 Enterprise Edition
Certified	Novell SUSE Linux Enterprise Desktop 11† Red Hat Enterprise Linux 64††

¹ Certain Windows Vista product features require advanced or additional hardware. Refer to the following web sites for details:

www.microsoft.com/windowsvista/getready/hardwarereqs.aspx

www.microsoft.com/windowsvista/getready/capable.aspx

Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer.

To download the tool, visit: www.windowsvista.com/upgradeadvisor

† The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP 22-in-1 Media Card Reader
- HP ProtectTools
- HP Blu-ray Writer playback of commercial movies
- DisplayPort video interface
- HP 2nd serial port adapter
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR

†† The following features are not supported by Red Hat Enterprise Linux 64:

- TPM v1.2 embedded Security Chip
- Intel Gigabit CT Desktop NIC
- HP Wireless 802.11b/g/n NIC
- HP 22-in-1 Media Card Reader
- HP Blu-ray Writer
- HP FireWire / IEEE 1394 PCI Card
- HP 2nd serial port Adapter
- HP USB Smart Card (CCID) Keyboard
- AMD Radeon HD 6350 Graphics
- NVIDIA Quadro NVS 295 Graphics
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR

Standard Features and Configurable Components (availability may vary by country)

Value Added Software (included with all models; not included when configured with FreeDOS)

HP ProtectTools Security Suite
HP Software Management Agent
CompuTrace for Desktops agent

HP Vision Diagnostics
PDF Complete Special Edition
Microsoft Office Starter Edition 2010

Value Added Software (included with select models; not included when configured with FreeDOS)

HP Power Assistant v2.0
Computer Setup Utility
Roxio Creator Business
Norton Internet Security 2011 ¹
Norton Internet Security 2012 ¹
HP Connect
HP MyRoom

HP Virtual Rooms
Corel WinDVD
Mozilla Firefox for Solutions 2011
HP Direct Connect
Box.net Online Storage – 5GB
Box.net Online Storage – Unlimited
Microsoft Windows Virtual PC – XP Mode

¹ Includes a 60 day subscription for virus definition and minor program revision updates. Internet access required to receive updates.

HP Client Management Solutions (available for free download from the Internet)

<http://www.hp.com/go/easydeploy>

HP Client Automation Starter¹
HP SoftPaq Download Manager

HP Client Catalog for Microsoft SMS
HP Systems Software Manager

¹ Available from your HP Sales Representative or HP Channel Partner

HP Business PC Services and Features

HP Stable Platform Program
Intel Stable Image Platform Program (SIPP)
Business-to-Business Portals
HP Global Series Services

Factory Express Deployment and Lifecycle Services
Intel Core vPro Processors
Trusted Platform Module (TPM) v1.2¹

¹ TPM module disabled where use is restricted by law.

Service and Support

On-site warranty and service¹: This limited warranty and service offering delivers parts, labor and on-site repair for terms up to 5 years. Response time is next business day² and includes free telephone support³ 24 x 7. Global coverage² ensures any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labor.

¹ Terms and conditions may vary by country. Certain restrictions and exclusions apply

² On-site services may be provided pursuant to a service contract between HP and an authorized HP third party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country

³ Technical telephone support applies only to HP configured, HP and HP qualified third party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Chipset

Intel Q67 Express



Standard Features and Configurable Components (availability may vary by country)

Processor	USDT	SFF/MT/CMT
Intel® Pentium® Processors		
<u>Intel Pentium G620 Processor</u> 2.60 GHz, 3M cache, 2 cores/2 threads Intel HD Graphics	X	X
<u>Intel Pentium G630 Processor</u> 2.70 GHz, 3M cache, 2 cores/2 threads Intel HD Graphics	X	X
<u>Intel Pentium G840 Processor</u> 2.80 GHz, 3M cache, 2 cores/2 threads Intel HD Graphics	X	X
<u>Intel Pentium G850 Processor</u> 2.90 GHz, 3M cache, 2 cores/2 threads Intel HD Graphics	X	X
<u>Intel Pentium G860 Processor</u> 3.00 GHz, 3M cache, 2 cores/2 threads Intel HD Graphics	X	X
Intel® 2nd Generation Core™ i3 Processors		
<u>Intel Core i3-2100 Processor</u> 3.10 GHz, 3M cache, 2 cores/4 threads Intel HD Graphics 2000	X	X
<u>Intel Core i3-2105 Processor</u> 3.10 GHz, 3M cache, 2 cores/4 threads Intel HD Graphics 3000	X	X
<u>Intel Core i3-2120 Processor</u> 3.30 GHz, 3M cache, 2 cores/4 threads Intel HD Graphics 2000	X	X
<u>Intel Core i3-2130 Processor</u> 3.40 GHz, 3M cache, 2 cores/4 threads Intel HD Graphics 2000	X	X
Intel® 2nd Generation Core™ i5 Processors		
<u>Intel Core i5-2400 Processor</u> 3.10 GHz, 6M cache, 4 cores/4 threads Intel HD Graphics 2000 Intel Stable Image Platform Program (SIPP) Supports Intel vPro Technology		X
<u>Intel Core i5-2400S Processor</u> 2.50 GHz, 6M cache, 4 cores/4 threads Intel HD Graphics 2000 Intel Stable Image Platform Program (SIPP) Supports Intel vPro Technology	X	
<u>Intel Core i5-2500 Processor</u> 3.30 GHz, 6M cache, 4 cores/4 threads Intel HD Graphics 2000 Intel Stable Image Platform Program (SIPP) Supports Intel vPro Technology		X
<u>Intel Core i5-2500S Processor</u> 2.70 GHz, 6M cache, 4 cores/4 threads Intel HD Graphics 2000 Intel Stable Image Platform Program (SIPP) Supports Intel vPro Technology	X	
Intel® 2nd Generation Core™ i7 Processors		

Standard Features and Configurable Components (availability may vary by country)

<u>Intel Core i7-2600 Processor</u> 3.40 GHz, 8M cache, 4 cores/8 threads Intel HD Graphics 2000 Intel Stable Image Platform Program (SIPP) Supports Intel vPro Technology	X
<u>Intel Core i7-2600S Processor</u> 2.80 GHz, 8M cache, 4 cores/8 threads Intel HD Graphics 2000 Intel Stable Image Platform Program (SIPP) Supports Intel vPro Technology	X

Intel 2nd Generation Core vPro Processors

All HP Compaq 8200 Elite Series models featuring this technology include processors that are part of the Intel 2011 Stable Image Platform Program (SIPP) designed to ensure the stability promise inherent in the value proposition of the HP Compaq 8200 Elite Series Business PC, thus making these models the most stable, secure, and manageable platforms available to enterprises today.

Intel Advanced Management Technology (AMT) v7.0 – An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 7.0 includes the following advanced management functions:

- Power Management (on, off, reset)
- Hardware Inventory (includes BIOS and firmware revisions)
- Hardware Alerting
- Agent Presence
- System Defense Filters
- SOL/IDER
- Cisco NAC/SDN Support
- ME Wake-on-LAN
- DASH 1.1 compliance
- IPv6 Support
- Fast Call for Help – a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance – pre-schedule when the PC connects to the IT or service provider console for maintenance. Remote PCs can get required patches, be inventoried, etc by connecting to their IT console or Service Provider when it's convenient
- Remote Alerts – automatically alert IT or service provider if issues arise
- Access Monitor – Provides oversight into Intel® AMT actions to support security requirements
- PC Alarm Clock
- Microsoft NAP Support
- Host Base set-up and configuration
- Management Engine (ME) firmware roll back
- Wireless AMT functionality on Desktop (WoDT)
- Enhanced KVM resolution

Redundant Array of Independent Drives (RAID)

Flexible implementation:

- DriveLock is supported while in RAID mode. Users can manage the DriveLock password from within F10 Setup. Locked drives will be displayed as such in the RAID option ROM interface.
- Hard drive information can be viewed within F10 Setup while in RAID mode. Previously, the hard drives will not appear in Drive Configuration when switching to RAID mode.
- DPS Self Test can be executed on physical hard drives while in RAID mode.
- The RAID Setup Utility (accessed through CTRL-I) can be protected by the F10 Setup password.

Standard Features and Configurable Components (availability may vary by country)

NOTE:

RAID 1 is the only RAID configuration offered via factory configurations. The pre-configured systems:

- Are only available on the SFF, MT and CMT form factors. The USDT does not support RAID as it does not allow for more than one hard disk drive.
- Are complete RAID systems and have both drives installed. If the CMT is configured with three hard disk drives, the third drive is would be unpartitioned and not part of the RAID array
- Have the necessary Option ROM configuration.
- Are pre-loaded and pre-installed with all required Intel software.
- Include a preinstalled operating system that is mirrored mode out of the box.

Please refer to the HP White Paper titled “Advanced Host Controller Interface (AHCI) and Redundant Array of Independent Disks (RAID) on HP Compaq 8200 Elite Series PCs” at: <http://www.hp.com> for more information and instructions.

System Memory Support

The HP Compaq 8200 Elite Series supports the 2nd generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the processor includes an integrated memory controller (IMC). The IMC supports DDR3 protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC unbuffered DDR3 memory with a maximum of two UDIMMs or SODIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- DDR3 memory data transfer rates of 1066 MT/s (PC3-8500) and 1333 MT/s (PC3-10600)
- 64-bit wide channels
- DDR3 I/O voltage of 1.5V
- Maximum memory bandwidth of 10.6 GB/s in single-channel mode or 21 GB/s in dual-channel mode assuming DDR 1333 MT/s (PC3-10600)
- 1GB, 2GB, and 4GB DDR3 DRAM technologies are supported. Using 4 GB device technologies, the largest memory capacity possible is 32 GB, assuming dual channel mode with four x 8 GB dual ranked unbuffered DIMM memory configuration.

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

Memory Configurations: Ultra Slim Desktop

Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

NOTE:

For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system

Total Memory	Socket	
	Channel A (black)	Channel B (black)
2 GB (dual channel)	1 GB	1 GB
4 GB (dual channel)	2 GB	2 GB
8 GB (dual channel)	4 GB	4 GB

Standard Features and Configurable Components (availability may vary by country)

Memory Configurations:

Small Form Factor
Microtower
Convertible Minitower


Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

NOTE:


For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Total Memory	Socket			
	Channel A		Channel B	
	1 (black)	2 (white)	3 (white)	4 (white)
2 GB	2 GB	unpopulated	unpopulated	unpopulated
4 GB (dual channel)	2 GB	unpopulated	2 GB	unpopulated
8 GB (dual channel)	2 GB	2 GB	2 GB	2 GB
16 GB (dual channel)	4 GB	4 GB	4 GB	4 GB


USDT




SFF



MT



CMT



Storage Drive Support

	USDT			SFF			MT			CMT		
	SDR	ODD	HDD	MCR	ODD	HDD	MCR	ODD	HDD	MCR	ODD	HDD
Quantity Supported	1	1	1	1	1	2	1	2	2	1	2	3
Position	1	2	3	1	2	1,3	3	1,2	4,5	3	1,2	4,5,6

Data Storage Drives

160-GB Hard Disk Drives

- HP 160GB 7.2K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive
- HP 160GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive
Includes 3.5" adapter

USDT **SFF/MT/CMT**

X
X

250-GB Hard Disk Drives

- HP 250-GB 7.2K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive
- HP 250-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

X
X

Standard Features and Configurable Components (availability may vary by country)

300-GB Hard Disk Drive

HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter			X
---	--	--	---

320-GB Hard Disk Drive

HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive		X	
HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Self-Encrypting Drive Includes 3.5" adapter when installed in SFF, MT or CMT		X	X

500-GB Hard Disk Drives

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X
--	--	--	---

750-GB Hard Disk Drives

HP 750-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X
--	--	--	---

1-TB Hard Disk Drives

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive			X
--	--	--	---

Solid State Drives

HP 80-GB SATA 3.0Gb/s Solid State Drive Includes 3.5" adapter when installed in SFF, MT or CMT		X	X
HP 120-GB SATA 3.0Gb/s Solid State Drive Includes 3.5" adapter when installed in SFF, MT or CMT		X	X
HP 128-GB SATA 3.0Gb/s Solid State Drive Includes 3.5" adapter when installed in SFF, MT or CMT		X	X
HP 160-GB SATA 3.0Gb/s Solid State Drive Includes 3.5" adapter when installed in SFF, MT or CMT		X	X

Optical Disc Drives

HP DVD-ROM Drive ¹			X
HP Slim DVD-ROM Drive ¹		X	
HP SuperMulti DVD Writer Drive ^{1,2,3}			X
HP Slim SuperMulti DVD Writer Drive ^{1,2,3}		X	
HP Blu-ray Writer Drive			X
HP Slim Blu-ray Writer Drive		X	

¹ For playing DVDs, Corel WinDVD 8

² For writing CDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

³ For writing CDs and DVDs, video editing and authoring DVDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

Media Card Readers

HP 22-n-1 Media Card Reader			X
HP Secure Digital (SD) HC Media Reader		X	

Standard Features and Configurable Components (availability may vary by country)

Security Solutions and Capabilities

	USDT	SFF/MT/CMT
Trusted Platform Module (TPM) 1.2 ¹	X	X
Stringent security (via BIOS) ²	X	X
SATA port disablement (via BIOS)	X	X
Drive lock	X	X
RAID configurations		X
HP ProtectTools Security Software Suite	X	X
Intel Identify Protection Technology (IPT): Models configured with Intel 2 nd generation Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP ProtectTools module		
Serial, parallel, USB enable/disable (via BIOS)	X	X
Optional USB Port Disable at factory (user configurable via BIOS)	X	X
Removable media write/boot control	X	X
Power-On password (via BIOS)	X	X
Setup password (via BIOS)	X	X
HP Solenoid Hood Lock / Sensor		X
HP Hood Sensor	X	
Support for chassis padlocks and cable lock devices	X	X

¹ TPM module disabled where use is restricted by law.

² This setting is defaulted to disable, but when enabled, the PW jumper will not clear the BIOS pre-boot authentication passwords.

Network Interface Connections

	USDT	SFF/MT/CMT
Intel 82579LM integrated GbE Network Connection	X	X
Intel Gigabit CT Desktop NIC (PCIe x1)		X
HP 802.11 b/g/n Wireless NIC (PCIe x1)		X
Intel Centrino Advanced-N 6205 Wireless NIC (mini PCI Express)	X	

NOTE: Either the integrated network connection or the Intel Centrino wireless NIC is required to support Intel vPro Technology features.

Standard Features and Configurable Components (availability may vary by country)

Graphics

	USDT	SFF/MT/CMT
Intel HD Graphics 2000/3000 (integrated)	X	X
ATI Radeon HD 5450 Graphics (MXM)	X	
AMD FirePro 2270 Graphics (PCIe x16)		X
AMD Radeon HD 6350 Graphics (PCIe x16)		X
AMD Radeon HD 6450 Graphics (PCIe x16)		X
AMD Radeon HD 6570 Graphics (PCIe x16) Only available as a single graphics card configuration		MT/CMT only
Nvidia NVS 295 Graphics (PCIe x16)		X
Nvidia NVS 300 Graphics (PCIe x16)		X
Nvidia GeForce 405 Graphics (PCIe x16) Available in China only		X
<hr/>		
HP DisplayPort Cable	X	X
HP DisplayPort to DVI-D Adapter	X	X
HP DisplayPort to HDMI Adapter	X	X
HP DisplayPort to VGA Adapter	X	X

Multi-Media

	USDT	SFF/MT/CMT
High Definition Audio with Realtek ALC261 codec (all ports are stereo)	X	X
Microphone/Headphone* and dedicated headphone front ports (3.5mm)	X	X
Line-out and Line-In rear Ports* (3.5mm)	X	X
Multi-streaming capable*	X	X
Internal Speaker (standard)	X	X
HP Thin USB Powered Speakers	X	X
HP TV Tuner (mini PCIe card)	X	
HP USB HD 720P Business Webcam	X	X
HP Business Headset	X	X
SRS Premium Sound	X	X

*The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-in port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

Standard Features and Configurable Components (availability may vary by country)

Input/Output Devices	USDT	SFF/MT/CMT
HP PS/2 Standard Keyboard	X	X
HP USB Standard Keyboard	X	X
HP USB Keyboard with USB ports	X	X
HP USB Smart Card (CCID) Keyboard	X	X
HP USB Mini Keyboard	X	X
HP USB and PS/2 Washable Keyboard	X	X
<hr/>		
HP PS/2 Optical Mouse	X	X
HP USB Optical Mouse	X	X
HP USB Laser Mouse	X	X
HP USB and PS/2 Washable Mouse	X	X

Miscellaneous Devices and Configurations	USDT	SFF/MT/CMT
HP FireWire IEEE 1394 PCIe x1 Card		X
HP SuperSpeed USB 3.0 PCIe x1 Card		X
HP Serial Port Adapter (RS-232 compatible); provides 2nd Serial Port		X
HP Parallel Port Adapter		X
HP eSATA Port Adapter		X
HP USDT Tower Stand	X	
HP SFF Tower Stand		SFF only
Configure CMT in desktop orientation		CMT only
HP USDT Rear Port/Cable Control Cover	X	

After-Market Options (availability may vary by region)

Communication Devices

	USDT	SFF/MT/CMT	Part Number
Intel Gigabit CT Desktop NIC (PCIe x1)		X	FH969AA
Broadcom NetXtreme GbE Ethernet Plus NIC (PCIe x1)		X	FS215AA
HP Wireless 802.11 b/g/n NIC (PCIe x1)		X	FH971AA

NOTE: The use of any of these optional NIC Cards (wired or wireless) will disable the Intel vPro Technology features.

Graphics Solutions

	USDT	SFF/MT/CMT	Part Number
AMD FirePro 2270 Graphics (PCIe x16)		X	QK551AA
AMD Radeon HD 6350 Graphics (PCIe x16)		X	QK638AA
AMD Radeon HD 6450 Graphics (PCIe x16)		X	QM229AA
AMD Radeon HD 6570 Graphics (PCIe x16)		CMT/MT only	QP027AA
Nvidia NVS 295 Graphics (PCIe x16)		X	FY943AA
Nvidia NVS 300 Graphics (PCIe x16)		X	BV456AA
Nvidia GeForce 405 Graphics (PCIe x16) (Available in China only)		X	QM194AA

HP DisplayPort Cable Kit	X	X	VN567AA
HP DisplayPort To Dual Link DVI-D Adapter	X	X	NR078AA
HP DisplayPort To DVI-D Adapter	X	X	FH973AA
HP DisplayPort to HDMI Adapter	X	X	BP937AA
HP DisplayPort to VGA Adapter	X	X	AS615AA
HP DMS-59 to Dual DVI Cable		X	DL139A
HP DMS-59 to Dual DisplayPort Adapter		X	XP688AA

Data Storage Drives and Accessories

	USDT	SFF/MT/CMT	Part Number
HP 160GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter		X	FX618AA
HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter		X	FX619AA
HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		X	QK554AA
HP 750-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		X	QR469AA
HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		X	QK555AA

HP 80-GB SATA 3.0Gb/s Solid State Drive	X	X	BM848AA
HP 120-GB SATA 3.0Gb/s Solid State Drive	X	X	TBD
HP 120-GB SATA 3.0Gb/s Solid State Drive	X	X	TBD
HP 160-GB SATA 3.0Gb/s Solid State Drive	X	X	BW321AA

HP eSATA Adapter		X	FH966AA
HP Removable SATA Hard Drive Enclosure (frame & carrier)		X	RY102AA
HP Removable SATA Hard Drive Enclosure (carrier only)		X	RY103AA

After-Market Options (availability may vary by region)

Input Devices

	USDT	SFF/MT/CMT	Part Number
HP PS/2 Standard Keyboard	X	X	DT527A
HP USB Standard Keyboard	X	X	DT528A
HP USB Keyboard with USB ports	X	X	BT330AA
HP USB Mini Keyboard	X	X	AS601AA
HP USB Gray Keyboard	X	X	DT529A
HP USB Smart Card (CCID) Keyboard	X	X	BV813AA
HP USB Keyboard and Mouse Kit	X	X	RC465AA
<hr/>			
HP USB Washable Keyboard	X	X	VF097AA
HP USB and PS/2 Washable Mouse	X	X	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	X	X	BU207AA
<hr/>			
HP PS/2 Optical Mouse	X	X	EY703AA
HP USB Optical Mouse	X	X	DC172AT
HP USB Laser Mouse	X	X	GW405AT
HP USB Travel Mouse	X	X	RH304AA
<hr/>			
HP 2.4GHz Wireless Keyboard and Mouse	X	X	NB896AA

System Memory

	USDT	SFF/MT/CMT	Part Number
HP 1 GB DIMM		X	AT023AA
HP 2 GB DIMM		X	AT024AA
HP 4 GB DIMM		X	VH638AA
HP 1 GB SO-DIMM	X		VH639AA
HP 2 GB SO-DIMM	X		VH640AT
HP 4 GB SO-DIMM	X		VH641AT

Multimedia Devices

	USDT	SFF/MT/CMT	Part Number
HP Thin USB Powered Speakers	X	X	KK912AA
HP DVD-ROM Drive		X	AR629AA
HP SuperMulti DVD Writer Drive		X	AR630AA
HP Blu-ray Writer Drive		X	AR482AA
HP Slim DVD-ROM Drive	X		VP033AA
HP Slim SuperMulti DVD Writer Drive	X		VP034AA
HP USB HD 720P Business Webcam	X	X	QP896AA
HP Business Headset	X	X	QK550AA

Removable Media Storage

	USDT	SFF/MT/CMT	Part Number
HP USB External Diskette Drive	X	X	DC141B
HP 22-n-1 Media Card Reader		X	AR941AA

After-Market Options (availability may vary by region)

Security Devices

	USDT	SFF/MT/CMT	Part Number
HP/Kensington MicroSaver Cable Lock	X	X	PC766A
HP Business PC Security Lock	X	X	PV606AA
HP USDT Rear Port Controller Cover	X		VN571AA
HP SFF Solenoid Lock and Hood Sensor		SFF only	BP428AA
HP CMT Solenoid Lock and Hood Sensor		MT/CMT only	DE618A
HP SFF Wall Mount/Security Sleeve		SFF only	VN570AA
HP Keyed Lock Cable	X	X	BV411AA

HP Client Automation Software

	USDT	SFF/MT/CMT	Part Number
HP Client Automation – Standard Edition (single seat)	X	X	T3488AA
HP Client Automation – Standard Edition (10 seats)	X	X	TA599AA
HP Client Automation – Standard Edition (100 seats)	X	X	TA600AA
HP Client Automation – Standard Edition (500 seats)	X	X	TA601AA
HP Client Automation – Standard Edition (1,000 seats)	X	X	T3489AA

Stands and Accessories

	USDT	SFF/MT/CMT	Part Number
HP Integrated Work Center Stand (USDT)	X		GN783AA
HP Integrated Work Center Stand (SFF)		SFF only	TBA
HP USDT Tower Stand	X		VN568AA
HP SFF Tower Stand		SFF only	VN569AA
HP Mobile Meeting Room	X		QS946AA#ABA
HP Executive Meeting Room	X		QS947AA#ABA
HP Serial Port Adapter (RS-232 compatible)		X	PA716A
HP 5.25" Blank Bezel Kit (50 pack)		X	DC177B
HP FireWire IEEE 1394 Card		X	PA997A
HP SuperSpeed USB 3.0 Card		X	BM867AA

Technical Specifications

Weights & Dimensions

(configured with 1 HDD & 1 ODD)

	USDT	SFF	MT	CMT
Chassis (H x W x D)	2.6 x 9.9 x 10 in 66 x 252 x 254 mm	4.0 x 13.3 x 14.9 in 100 x 338 x 379 mm	14.9 x 7.0 x 17.0 in 377 x 177 x 431 mm	17.6 x 7.00 x 18.0 in 448 x 178 x 445 mm
System Volume	257.5 cu in 4.2 L	782.77 cu in 12.8 L	782.77 cu in 12.8 L	2160 cu in 35.4 L
Tower Stand (H x W x D)	1.1 x 4.9 x 6.7 in 27 x 125 x 170 mm	1.1 x 7.0 x 7.9 in 29 x 178 x 200 mm	N/A	N/A
Packaging (H x W x D)	8.6 x 15.7 x 19.7 in 218 x 398 x 500 mm	9.0 x 19.7 x 23.4 in 229 x 500 x 594 mm	19.7 x 12.2 x 23.6 in 500 x 310 x 600 mm	22.6 x 12.7 x 24.4 in 575 x 323 x 620 mm
System Weight*	6.8 lb 3.1 kg	16.7 lb 7.6 kg	20.5 lb 9.3 kg	24.5 lb 11.2 kg
Shipping Weight*	14.4 lb 6.5 kg	17.9 lb 8.1 kg	28.8 lb 13.1 kg	34.0 lb 15.4 kg
Max Supported Weight (desktop orientation)	77.0 lb 35.0 kg	77.0 lb 35.0 kg	N/A	77.0 lb 35.0 kg

I/O Ports

USDT

SFF/MT/CMT

USB 2.0	Front – four (4) ports Rear – six (6) ports		
Serial	N/A		one RS-232 compatible port standard second port available optionally
Parallel	N/A		one port available as an option
eSATA	N/A		one port available as an option
PS/2	color coded support for keyboard (purple) and mouse (green)		
Video	VGA and DisplayPort v1.1a provide integrated dual independent monitor support		
DVI output	available via optional DisplayPort to DVI Adapter		
Audio	Front – microphone & headphone Rear – line input (supports microphone or line input), line out All ports are 3.5mm in diameter		
	NOTE: See Audio/Visual section for information on re-taskable audio ports.		
NIC	Industry standard RJ-45 port accesses the integrated network interface controller		

Slots

USDT

SFF

MT

CMT

Mini PCI Express	1 each	N/A	N/A	N/A
MXM	1 each	N/A	N/A	N/A
Conventional PCI Revision 2.3 5-volt	N/A	1 each 2.5" low profile 6.6" length 25W max. power	1 each 4.2" full height 6.6" length 25W max. power	3 each 4.2" full height 6.6" length 25W max. power
PCI Express 2.0	N/A	1 each x1 slot 2.5" low profile 6.6" length 25W max. power	1 each x1 slot 4.2" full height 6.6" length 25W max. power	1 each x1 slot 4.2" full height 6.6" length 25W max. power



Technical Specifications

	N/A		1 each x16 slot 4.2" full height 6.6" length 75W max. power (for single graphics card) 35W max. power (for dual graphics cards)	1 each x16 slot 4.2" full height 6.6" length 75W max. power (for single graphics card) 35W max. power (for dual graphics cards)
		1 each x16 slot 2.5" low profile 6.6" length 25W max. power		
	N/A	1 each x16 slot (wired as a x4) 2.5" low profile 6.6" length 25W max. power	1 each x16 slot (wired as a x4) 4.2" full height 6.6" length 35W max. power	1 each x16 slot (wired as a x4) 4.2" full height 6.6" length 35W max. power

Bays

	USDT	SFF	MT	CMT
3.5" external	N/A	1 bay available for Media Card Reader unless used for a secondary hard drive		N/A
5.25" external	N/A	1 each 8.19" depth	2 each 8.19" depth	2 each 8.19" depth
Slim	1 each	N/A	N/A	1 each 5.7" depth
Secure Digital (SD) Reader	1 each	N/A	N/A	N/A
Internal HDD Bays	1 each 2.5" drives	1 each 3.5" drives	2 each 3.5" drives	3 each 3.5" drives

Controller

	USDT	SFF	MT	CMT
Hard Drive Controller	These systems provide up to four serial ATA (SATA) interfaces that support transfer rates up to 6.0 Gb/s (for ports 0 and 1, 3 Gb/s on all others) and RAID data protection functionality. These systems can also support an external SATA (eSATA) device through an optional bracket/cable assembly (does not apply to USDT).			
SATA Interfaces	2 ea. SATA 3.0	2 ea. SATA 3.0 1 ea. SATA 2.0 1 ea. eSATA		2 ea. SATA 3.0 2 ea. SATA 2.0 1 ea. eSATA
Host SATA Controller	Advanced Host Controller Interface (AHCI) Revision 1.2. The specification includes a description of the hardware/software interface between system software and the host controller hardware.			

Technical Specifications

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure the unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F(-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply

	USDT	SFF	MT/CMT
Standard Efficiency	N/A	240W active PFC	320W active PFC
High Efficiency*	Integrated graphics: 135W active PFC 87% efficient Discrete graphics: 180W active PFC 87% efficient	240W active PFC 87/90/87% efficient at 20/50/100% load	320W active PFC 87/90/87% efficient at 20/50/100% load
Operating Voltage Range	90 - 264 VAC	90 - 264 VAC	90 - 264 VAC
Rated Voltage Range	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
Rated Line Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Operating Line Frequency Range	47 - 63 Hz	47 - 63 Hz	47 - 63 Hz
Rated Input Current	N/A	4A	5.5A
Rated Input Current with Energy Efficient* Power Supply	135W: 2.4A 180W: 2.9A	4A	5.5A
Current Leakage (NFPA 99)	< 250 µA	< 275 µA	< 450 µA
Power Supply Fan	N/A	92mm variable speed	92mm variable speed
Power cord length	N/A	6.0 ft. (1.83 m)	6.0 ft. (1.83 m)
External Power Adapter			
Dimensions	6.7 x 2.6 x 1.5 in	N/A	N/A
Total Cord Length	12 ft 8 in	N/A	N/A

*High efficiency power supply is a requirement for ENERGY STAR qualification in conjunction with a select range of processors and modules

Technical Specifications

ROM BIOS Information

Key features of the HP BIOS include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Compaq 8200 Elite Series PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Select models feature either Intel Standard Manageability or Intel Core vPro Processor Technology.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Support UEFI specification 2.1
- Computrace agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS Features

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Elite models use ACPI to provide power conservation features.
- S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W is (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

Other Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- System Management BIOS v2.6
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Technical Specifications

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 -- memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, bootblock recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy Identification

Additional Features

Description

Computrace	Computrace agent support standard
Towerable Orientation	Product can be oriented as either a desktop or a tower DPS Access through F10 Setup during Boot
Drive Protection System	A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
SMART I - Drive Failure Prediction	Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count
SMART II - Off-Line Data Collection	
SMART III - Off-Line Read Scanning with Defect Reallocation	By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure IOEDC: I/O Error Detection Circuitry

Technical Specifications

SMART IV - End-to-End CRC for hard drives

Detects errors in Read/Write buffers on HDD cache RAM
Interface in F10 setup provides confirmation of SMART IV support.

Technical Specifications - Audio

High Definition Audio

Type	Integrated
HD Stereo Codec	Realtek 2-channel ALC261 codec
Audio I/O Ports	Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal. All ports are 3.5mm
Internal Speaker Amplifier	1.5W amplifier for the internal speaker only. External speakers must be powered externally Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
Multi-streaming Capable	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
Sampling	8 kHz - 192 kHz
Wavetable Syntheses	Yes – Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out	Stereo (Left & Right channels)
Internal Speaker	Yes
External Speaker Jack	Yes

HP Thin USB Powered Speakers

On/Off/Volume Controls	Right side of right speaker
Power LED	Front of right speaker (green)
Frequency Response	FO to 20kHz
Watts	2/3 watt (normal/maximum)
Dimensions/Speaker (H x W x D)	5.72 x 3.74 x 0.96 in 14.52 x 9.50 x 2.45 cm
Net Weight	0.68 lbs 0.31kg
Color	Black
Environmental (all conditions non- condensing)	Operating Temperature: 14° to 104° F (-10° to 40° C) Relative Humidity: 40% to 90%
Speaker Cable Length	Input Cord: 5.91 ft (1800 mm) L-channel Cord: 3.28 ft (1000 mm) USB Cord: 5.91 ft (1800 mm)

Technical Specifications - Audio

SRS Premium Sound Technology

SRS Premium Sound™ is a state-of-the-art solution suite which optimizes the audio experience for all business applications including VoIP, computer based training, business presentations and digital content creation for any speaker configuration (notebook / desktop speakers or headphones). SRS Premium Sound delivers natural and immersive surround sound complete with deep, enveloping bass and crystal clear dialog which allows users to clearly hear audio and voice in communications or presentations and ensures that digital content can be experienced with uncompromised quality.

SRS Premium Sound Features

- Premium audio experience for all applications including VoIP, Video Conferencing, Webcasts, Multimedia Presentations and Digital Content Creation
- Natural and Immersive sound from two speakers or headphones
- Custom-tuned solutions to provide superior natural sound from desktop speakers and headphones
- Crystal clear dialog
- Deep, rich bass
- Intuitive user interface with presets for ease of use

SRS Premium Sound Benefits

- Turn your desktop into a multimedia powerhouse!
 - Bring your business communication to life with natural sounding voice and clear dialog
 - Increase productivity by making computer based training, webcasts and VoIP available anytime and anywhere with crystal clear audio
 - Make presentations shine with rich, expansive sound without the need for external speakers
 - Take digital content creation to a new level with deep bass, enhanced fidelity and immersive surround sound which ensures that your content is heard with uncompromised quality and detail
-

Technical Specifications - Communications

Intel 82579LM GbE Network Connection (integrated)

Connector	RJ-45
System Interface	Integrated on PCA
Controller	Intel 82579LM GbE platform LAN connect networking controller
Memory	24 KB FIFO packet buffer memory
Data rates supported	10/100/1000 Mbps 802.1P 802.1Q 802.2 802.3 802.3ab 802.3az 802.3u
IEEE Compliance	
Bus architecture	PCI Express and SMBus
Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
Power requirement	Requires 3.3V and 1.05V or just 3.3V with integrated regulators Power consumption 0.697 Watts
Boot ROM support	Yes
Network transfer mode	Full-duplex Half-duplex (not supported for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating Temperature: 0° to 85° C Operating Humidity: 60% RH
Management	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic.
Alerting	ASF 2.0 support; AMT 7.0 support

Intel Gigabit CT Desktop Network Interface Controller

Connector	RJ-45
System Interface	PCI Express x1
Controller	Intel WG82574L Gigabit Ethernet Controller
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
Data rates supported	10/100/1000 Mbps
Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
Bus architecture	PCI-E 1.0a
Data path width	X1, 250 MB/s, Bi-directional interface
Data transfer mode	Bus-master DMA
Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
Boot ROM support	Yes

Technical Specifications - Communications

	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
Network Transfer Rate	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
Environmental	Operating Temperature: 32° to 131°F (0° to 55° C)
	Operating Humidity: 85% at 131° F (55° C)
Dimensions	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)
Management	WOL, PXE, DMI, WFM 2.0

HP 802.11 b/g/n Wireless Network Connection

Dimensions (L x H)	2.8 x 2.2 in (7.0 x 5.7 cm)
Weight	0.08 lbs (40 g)
Controller	Ralink RT2790
System interface	PCI Express x1
Network standard	802.11 b/g/n
Frequency band	2.400 - 2.497 GHz
Operating temperature	14° to 149°F, operating (-10° to 65°C, operating)
Storage temperature	-40° to 176°F, non-operating (-40° to 80°C, non-operating)
Humidity	10-90% operating 5-95% non-operating
Operating voltage	3.3V +/- 9% 12V +/- 8%

	Platform/WLAN Mode	Power Consumption
	Maximum Power Consumption:	10 Watts
	Transmit Only	4 Watts maximum averaged power over 1 second
	Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer
Power Consumption	Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second
	Idle, with IEEE PSP mode enabled	1.0 Watts maximum averaged over 1 second
	Transmit Disabled (turned off in software)	50 mW maximum, averaged over 1 second
	Platform in S3 or S4 (power removed from Low Profile PCI Express Card)	5 mW maximum, averaged over 1 second
	802.11b mode	+19 dBm +/- 1.0 dB maximum
Output Power (approximate)	802.11g mode	+17 dBm +/- 1.0 dB maximum
	EWC mode	+17 dBm +/- 1.0 dB maximum (total power in all transmit chains)

Technical Specifications - Communications

Security	IEEE and WiFi compliant 64 / 128 bit WEP encryption AES: CCM 802.1x authentication WPA: 802.1x. WPA-PSK and TKIP WPA2 certification IEEE 802.11i Cisco Certified Extensions, all versions through V5
Antenna	HP part number 497317-003
Certifications	Wi-Fi certified
Certifications for use by country	United States, Canada, Peru, Taiwan

Intel Centrino Advance-N 6205 Wireless Network Interface Connection (USDT only)

Wireless LAN Standards	IEEE 802.11a/b/g/n IEEE 802.11 e, 802.11i, 802.11d, 802.11d, 802.11h
Interoperability	Wi-Fi certified (802.11 a/b/g/n WMM, WPA, WPA2 and WPS) Tested with wireless access points from several major manufacturers OS compatible with Microsoft Windows, Win7, Vista, and XP Cisco Compatible Extensions Program compliant (802.11a/b/g only) with Microsoft Window XP, Windows Vista and Windows 7
Frequency Band	2.4 GHz and 5 GHz
Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128bits), TKIP, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP, MSCHAP, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM, EAP-AKA PAP, CHAP, TLS, GTC Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) Intel® My Wifi Technology (iPAN)
Roaming	Provide seamless roaming between like access points (same frequency band)
Output Power (for CCK)	15 dBm
Output Power (for OFDM; power varies by data rate)	15 dBm

Technical Specifications - Communications

Power Consumption	Transmit: 2.3 Watts (average, with one spatial streams) Receive: 1.9 Watts (average with two receive chains) Idle mode: 30mW – 40mW (average) Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Antenna Connections	3 U.FL type connectors, 50 ohm nominal impedance
Range	802.11 a - Typical (@6 Mbps) 600 feet - Outdoor Open Area 150 feet - Indoor, Office environment 802.11 b - Typical (@1 Mbps) 1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment 802.11 g - Typical (@1 Mbps) 1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
Form Factor	MiniPCI-Express
Weight	0.013 lb (4.0 g)
Dimensions	1.1 x 1.2 in (26.8 x 30.0 mm)
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%
Temperature	Operating: 32° to 176° F (0° to 80° C) Non-operating: -40° to 176° F (-40° to 80° C)
Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 90% (non-condensing)
Configuration Utility	Microsoft Windows XP Microsoft Windows Vista and Win 7 <ul style="list-style-type: none">• Microsoft Windows XP Wireless Network Connection Manager• Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support)• Microsoft Windows Vista Wireless Network Connection Manager• Intel IHV extensions for Win7 and Vista available to support Cisco Compatible Extensions

Technical Specifications - Graphics

Intel HD Graphics 2000/3000

3D/2D Controller	Microsoft DirectX 10.1 based with support for Pixel Shader 4.1
VGA Controller	Integrated
DisplayPort	v1.1a; integrated, multimode capable; supports HDCP and audio over DisplayPort
Bus Type	PCI Express™ x16
RAMDAC	Integrated, 350 MHz

Memory Intel graphics do not have dedicated memory but utilizes some of the computer's system memory. The amount of memory used for graphics depends on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content.

Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

Microsoft Windows XP	Microsoft Windows Vista	Microsoft Windows 7
----------------------	-------------------------	---------------------

Maximum Graphics Memory	Up to 1GB	Up to 1.7GB	Up to 1.7GB
--------------------------------	-----------	-------------	-------------

Note: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.

HW Video Decode Hardware Accelerated decode for MPEG2 encrypted video; support for PAVP

Maximum Color Depth 32 bits/pixel

Integrated dual independent monitor support facilitated via one VGA port and one DisplayPort v1.1a integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces. Support for DVI, HDMI, dual link DVI or second VGA monitor provided by optional HP DisplayPort adapters. (see complete listing of available optional adapters elsewhere in this QuickSpec).

Multi-display Support

Small Form Factor and Tower systems can support greater than two monitors with the addition of an optional PCI Express discrete graphics card. Both the integrated graphics and PCIe discrete graphics can be utilized simultaneously. The Ultra-slim Desktop only supports MXM graphics cards which do not provide additional video output ports, therefore will not provide this functionality.

Graphics/Video API Support DirectX 10.1 support in hardware
OpenGL 3.0 support in hardware

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz)	
	Analog	Digital
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R



Technical Specifications - Graphics

1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

* Only supported when using a DisplayPort connection

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

AMD FirePro 2270 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	AMD FirePro 2270 GPU Single DMS-59 connector
Output Connector	Supports dual analog displays with included DMS-59 to dual VGA Y cable. Supports dual digital displays with optional DMS-59 to dual DVI cable. Supports dual DisplayPort displays with optional DMS59 to dual DisplayPort cable.
Core Clock	600MHz
Memory Clock	600MHz
Memory Frame Buffer	512MB, DDR3, 64-bit wide
Supported Graphics APIs	DirectX 11 support in hardware OpenGL 4.0 support in hardware

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

Technical Specifications - Graphics

AMD Radeon HD 5450 Graphics Card

Form Factor	MXM 3.0 A
Engine Clock	650 MHz
Memory Type	DDR3
Memory Data Rate	800 MHz
Memory Size (width)	512 MB (64 bit)
3D API support	DX11, SM 5
LVDS support	Yes
DisplayPort	1.1a
HDCP support	yes
HDMI support	1.3 compatible
BD support	<ul style="list-style-type: none"> • Full rate playback @ max. resolution of display • Full sub-video support w/o frame drops • Full BDJ or iHD support w/o frame drops
Total Power Consumption	25W

AMD Radeon HD 6350 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	AMD HD 6350 GPU
Output Connector	Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA cable. Supports dual DVI displays with optional DMS-59 to dual DVI cable.
Core Clock	650MHz
Memory Clock	800MHz
Memory Frame Buffer	512MB, DDR3, 64-bit wide
Supported Graphics APIs	HDCP supported on DVI output using optional DMS-59 to dual DVI cable. DirectX 11 support in hardware. OpenGL 4.0 support in hardware.

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.



Technical Specifications - Graphics

AMD Radeon HD 6450 Graphics Card

Form Factor	PCI Express x16 (Generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	AMD HD 6450 GPU One (1) DisplayPort 1.1 One (1) Dual Link DVI-I
Output Connector	Includes a DVI to VGA adapter. Other optional adapter kits are available to support DVI-D, and HDMI monitor inputs (see a complete listing of available optional adapters elsewhere in this QuickSpec). Supports audio with video through the DisplayPort 1.1 connector. DisplayPort v1.2 support will be provided in a future driver update.
Core Clock	625MHz
Memory Clock	800MHz
Memory Frame Buffer	512MB, DDR3, 64-bit wide
Display Maximum Resolution	Digital: 2560 x 1600 Analog: 2048 x 1536 (see chart below for more resolutions)
Supported Graphics APIs	HDCP supported on DisplayPort 1.1 and DVI output. DirectX 11 support in hardware.

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60*
2048 x 1536	75	60*
2560 x 1600	N/A	60*

* Only supported when using a dual link DVI or DisplayPort monitor connection

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

Technical Specifications - Graphics

AMD Radeon HD 6570 Graphics Card

Form Factor	<p>PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Includes full height bracket when configured in CMT or MT chassis.</p>
Graphics Controller	<p>AMD HD 6570 GPU Two (2) DisplayPort 1.1 One (1) Dual Link DVI-I Includes a DVI-I to VGA adapter. Other optional adapter kits are available to support DVI-D and HDMI monitor inputs (see complete listing of available optional adapters elsewhere in this QuickSpec).</p>
Output Connector	<p>Supports audio with video through the DisplayPort 1.1 connector. Audio is also supported with an optional DisplayPort to HDMI Adapter. DisplayPort 1.2 support will be provided in a future driver update.</p>
Core Clock	650MHz
Memory Clock	900MHz
Memory Frame Buffer	1GB of DDR3, 128-bit wide
Supported Graphics APIs	<p>HDCP supported on DisplayPort and DVI output. DirectX 11 support in hardware. OpenGL 4.0 support in hardware</p>

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60
2048 x 1536	75	60
2560 x 1600	N/A	60

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

Technical Specifications - Graphics

NVIDIA NVS 295 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	NVIDIA NVS 295 Graphics Board
Output Connectors	Two (2) DisplayPort Includes two (2) DisplayPort to VGA Adapters
Memory Frame Buffer	256 MB DDR3 SDRAM
Display Output	Drives DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking Drives DVI enabled digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable)
Supported Graphics APIs	OpenGL 3.0 in hardware DirectX 10.0 in hardware

NVIDIA NVS 300 Graphics Card

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	Nvidia GT218 GPU
Memory Frame Buffer	512MB DDR3, 64-bit wide
Output Connectors	Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA Y cable. Supports dual DVI displays with an optional DMS59 to dual DVI cable.
Core Clock	520MHz
Memory Clock	790MHz
Supported Graphics APIs	OpenGL 3.3 support in hardware DirectX 10.0 support in hardware

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A

NOTE: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

Technical Specifications - Graphics

NVIDIA GeForce 405 Graphics Card

Form Factor	PCI Express x16 (Generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	NVIDIA GeForce 405
Output Connectors	One (1) VGA analog One (1) DVI-I digital
Memory Frame Buffer	512MB DDR3, 64-bit wide
Maximum Resolution	Analog: 1920 x 1440 x 32bpp @ 75Hz Digital: 1600 x 1200 x 32bpp @ 60Hz

Technical Specifications – Hard Disk Data Storage

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP Compaq 8200 Elite Series supports the latest SATA 6.0Gb/s specification.

HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be complete before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

NOTE: GB = 1 billion bytes. Actual available capacity is less.

Technical Specifications – Hard Disk Data Storage

HP 160-GB 7.2K SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	160,041,885,696 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	312,581,808
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 160-GB 10K SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	160,041,885,696 bytes
Rotational Speed	10,000 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	312,581,808
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms
Height (nominal)	0.6 in (1.53 cm)
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 250-GB 7.2K SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	250,059,350,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	8 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

Technical Specifications – Hard Disk Data Storage

HP 250-GB 7.2K SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	250,059,350,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	8 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 1.0 ms Average: 8.5 ms Full-Stroke: 18 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 300-GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	300,069,052,416 bytes
Rotational Speed	10,000 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	586,072,368
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 0.7 ms Average: 4.4 ms Full-Stroke: 9.5 ms
Height (nominal)	0.6 in (1.53 cm)
Width (nominal)	Media diameter: 2.5 in (6.36 cm) Physical size: 2.75 in (6.99 cm)
Operating Temperature	41° to 131° F (5° to 55° C)

HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	320,072,933,376 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

Technical Specifications – Hard Disk Data Storage

HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Self-Encrypting Hard Disk Drive

Capacity	320,072,933,376 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	500,107,862,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	976,773,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 750-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	750,107,862,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	976,773,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

Technical Specifications – Hard Disk Data Storage

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	1,000,204,886,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	32 MB
Logical Blocks	1,953,525,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

Technical Specifications - Input/Output Devices

HP USB Standard Keyboard

	Keys	104, 105, 106, 107, 109 layout (depending upon country)
Physical characteristics	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg)
	Operating voltage	+ 5VDC \pm 5%
Electrical	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Mechanical	Switch type
Key-leveling mechanisms		For all double-wide and greater-length keys
Cable length		6 ft (1.8 m)
Microsoft PC 99 - 2001		Mechanically compliant
Acoustics		43-dBA maximum sound pressure level
Operating temperature		50° to 122° F (10° to 50° C)
Non-operating temperature		-22° to 140° F (-30° to 60° C)
Operating humidity		10% to 90% (non-condensing at ambient)
Non-operating humidity		20% to 80% (non-condensing at ambient)
Environmental		Operating shock
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS
Kit contents	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

Technical Specifications - Input/Output Devices

HP PS/2 Standard Keyboard

	Keys	104, 105, 106, 107, 109 layout (depending upon country)
Physical Characteristics	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC \pm 5%
Electrical	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	PS/2 6-pin mini din connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
Mechanical	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft 1.8 m
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
Environmental	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP USB Smart Card (CCID) Keyboard

Introduction:



Technical Specifications - Input/Output Devices

Boost your security, simplify access procedures and reduce the costs associated with managing networks by preventing unauthorized access to your computers and networks using smartcard technology with the HP Smart Card (CCID) Keyboard.

The USB Smart Card (CCID) Keyboard is a full-sized keyboard that takes advantage of digital signatures and certificates to secure the environment for transactions performed on both public and private networks. The USB Smart Card (CCID) Keyboard works with all smart cards that comply with ISO standard 7816.

Smart cards are easy-to-use credit card-sized devices which require multiple forms of information to be validated before you gain access to your accounts or resources. Used worldwide, smart cards strengthen access to a network or other resource using dual-factor authentication. Implementing a two-factor authentication (or multi-factor authentication) process reduces the risk of unauthorized access by verifying and validating your identity in one of the following ways:

- Something you know - a combination of username and password or PIN
- Something you have - a smart card or security token.

Something you have (smart card) plus something you know (PIN), improves user-access security within corporate network environments. Smart cards are used in government agencies, healthcare companies and the finance industry.

HP ProtectTools Smart Card Manager provides authentication software for the smart card. The Smart Card Reader module works with the HP ProtectTools Security Manager and enables the user to setup, use, and manage the smart card. This allows strengthened security with HP patented technology.

- Protects against unauthorized access with smart card technology
- Delivers even greater security when combined with a HP ProtectTools smart card and the HP ProtectTools Security Software
- Combination of username and password or pin with a smart card or security token
- Secures online transactions using digital signatures and certificates
- Conforms to industry standards for ease of setup and use
- Delivers long product life and quiet operation with high-impact materials and lubricate keys
- Spill drain feature

Key Benefits:

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)	
	Form factor	USB basic smart card keyboard	
	Colors	Carbonite/Silver	
	Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in 46.3 x 16.1 x 3.3 cm	
	Weight	2 lb (0.9 kg) minimum	
	Operating voltage	+ 5VDC ± 5%	
	Power consumption	100-mA maximum (with four LEDs ON)	
	Electrical	System interface	USB Type A plug connector
		ESD	CE level 4, 15-kV air discharge
		EMI - RFI	Conforms to FCC rules for a Class B computing device
Microsoft PC 99 - 2001		Functionally compliant	
Languages		30+ available	
Keycaps		Standard design	
Switch actuation		55 g nominal peak force with tactile feedback	
Switch life		20 million keystrokes (using Hasco modified tester)	
Mechanical		Switch type	Contamination-resistant membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)	

Technical Specifications - Input/Output Devices

	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Support	All ISO 7816 smart cards
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	Chipset	SCM STCIII
	Standard APIs supported	PC/SC, EMV2000, CT-API
	Power	USB Port Short circuit detection (protects smart card and reader) Power supply compliant with ISO7816 and EMV (5V, 60 mA) Supports 3-V and 5-V cards
	Power consumption	100-mA maximum draw
	Communication	From card 9600 bps to 330,000 bps From computer 12 Mbps (USB transfer speed)
	Landing mechanism	Contact device Friction contact Card insertions rating Up to 100,000 insertion cycles
	Interface modes	CCID protocol
	Reader performance interface	USB connection
	Electro-magnetic standards	Europe 2004/108/EC USA USAFCC part 15
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF	
Ergonomic Compliance	ISO 9241-4, TUVGS	
Kit Contents	Keyboard, I/O Security and Documentation CD, warranty card	

Technical Specifications - Input/Output Devices

HP USB & PS2 Washable Keyboard

	Keys	104, 105, 106, 107, 109 layout (depending upon country)
Physical Characteristics	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
Electrical	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
Mechanical	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft 2.2 m
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-4° to 149° F (-20° to 65° C)
Environmental	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1 IP66/NEMA4X
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS

HP PS/2 Optical Mouse

Technical Specifications - Input/Output Devices

Dimensions (H x L x W)	1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)
Weight	4.44 oz (126 g)
	Operating temperature -32° to 104°F (0° to 40° C)
	Non-operating temperature -4° to 140°F (-20° to 60° C)
	Operating humidity 10% to 90% (non condensing at ambient)
	Non-operating humidity 10% to 90% (non condensing at ambient)
Environmental	Operating shock 40 g, 6 surfaces
	Non-operating shock 80 g, 6 surfaces
	Operating vibration 2 g peak acceleration
	Non-operating vibration 4 g peak acceleration
	Drop 80 cm height onto asphalt tile over concrete or equivalent, (out of box) 5-drop in 5 direction except the cable face
	Operating voltage 5 VDC ± 10%
	Power consumption 100mA
Electrical	System consumption PS/2 mini-din connector
	ESD CE level 4, 15 kV air discharge
	EMI-RFI Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001 Functionally compliant
	Resolution 400 ± 20% DPI
	Tracking speed 10 in/s (25.4 cm/s) maximum
	Acceleration 100 in/s/s (2.54 m/s/s)
	Switch actuation 61 g nominal peak force
Mechanical	Switch life 3,000,000 operations (using Hasco modified tester)
	Switch type Low force micro-switches
	Tracking mechanism life 155 mi (250 km) at average speed of 10 in/s
	Cable length 6 ft (1.8 m)
	Microsoft PC99 - 2001 Mechanically compliant
	Width 8 mm
	Diameter 1.01 in (25.6 mm)
Scroll wheel	Maximum rotation speed 48 rats/sec
	Switch type Light force micro-switch
	Switch life 1 million operations
	Mechanical life Minimum 200,000 revolutions
Regulatory Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC

Technical Specifications - Input/Output Devices

HP USB Optical Mouse

Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
Weight	0.27 lb (0.12 kg)
Cable length	72.8 in (185 cm)
System requirements	Microsoft Windows 95, 98, 2000, Me, XP and Vista Available USB port

HP USB Laser Mouse

Scroll Wheel	24
Maximum Rotation Speed	48 rats/sec
Switch Type	Wheel
Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times
Environmental	Operating Temperature 32° to 104° F (0° to 40° C) Non-operating Temperature -4° to 140° F (-20° to 60° C) Operating Humidity 10% to 90% (non-condensing at ambient) Non-operating Humidity 20% to 80% (non-condensing at ambient) Operating Shock 40 g, six surfaces Non-operating Shock 80 g, six surfaces Operating Vibration 2-g peak acceleration Non-operating Vibration 4-g peak acceleration
Electrical	Operating Voltage + 5VDC ± 5% Power Consumption MTBF > 150,000 hrs ESD IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV EMI-RFI FCC Class B PC98 PC 99 Compliant
Mechanical	Resolution 800dpi Tracking Speed 25 cm/sec Acceleration 0.5mm Switch Actuation 0.6N (60gf)

Technical Specifications - Input/Output Devices

Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times
Cable Length	1850mm
PC98-99	PC99 compliant

Regulatory Approvals UL60950-1, UL 94, UL 746 (A-E), UL 796
TUV/GS: EN 60950-1, EN 60825-1
FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL

HP 80-GB Solid State Drive

Unformatted Capacity	80-GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	Sustained Sequential Read: Up to 250 MB/s Sustained Sequential Write: Up to 70 MB/s Random Read: Up to 35K IOPs Random Write: Up to 6.6K IOPs
Latency	Read: 65-ms Write: 85-ms
Power	DC power requirement: 5 VDC 5%-100 mV ripple p-p Total power consumption: 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years Operating Temperature: 32° to 158° F (0° to 70° C)
Environmental (all conditions, non-condensing)	Relative Humidity: 5% to 95% Maximum Wet Bulb Temperature (operating): 84° F (29° C) Shock: 1,500 G/0.5-ms

NOTE:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

Technical Specifications - Input/Output Devices

HP 120-GB Solid State Drive

Unformatted Capacity	120 GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	Sustained Sequential Read: Up to 250 MB/s
	Sustained Sequential Write: Up to 70 MB/s
	Random Read: Up to 35K IOPs
	Random Write: Up to 6.6K IOPs
Latency	Read: 65-ms
	Write: 85-ms
Power	DC power requirement: 5 VDC 5%-100 mV ripple p-p
	Total power consumption: 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years
	Operating Temperature: 32° to 158° F (0° to 70° C)
Environmental (all conditions, non-condensing)	Relative Humidity: 5% to 95%
	Maximum Wet Bulb Temperature (operating): 84° F (29° C)
	Shock: 1,500 G/0.5-ms

NOTE:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

HP 160-GB Solid State Drive

Unformatted Capacity	160-GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	Sustained Sequential Read: Up to 250 MB/s
	Sustained Sequential Write: Up to 70 MB/s
	Random Read: Up to 35K IOPs
	Random Write: Up to 6.6K IOPs
Latency	Read: 65-ms
	Write: 85-ms
Power	DC power requirement: 5 VDC 5%-100 mV ripple p-p
	Total power consumption: 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years
	Operating Temperature: 32° to 158° F (0° to 70° C)
Environmental (all conditions, non-condensing)	Relative Humidity: 5% to 95%
	Maximum Wet Bulb Temperature (operating): 84° F (29° C)
	Shock: 1,500 G/0.5-ms

NOTE:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.



Technical Specifications - Removable Storage

HP Blu-ray Writer Drive

AMO Part Number AR482AA

Height 5.25-inch, half-height, tray-load

Orientation Either horizontal or vertical

Interface type SATA

Disc capacity 50 GB DL or 25 GB standard

Dimensions 5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 19.0 cm)
(W x H x D)

Weight 2.0 lb (907 g)
(max)

DVD-ROM 8.5GB DL or 4.7GB standard

Blu-ray 50GB DL or 25GB standard

Full Stroke DVD < 250 ms (seek)

Full Stroke CD < 210 ms (seek)

Blu-ray < 275 ms (seek)

(Time to drive ready from tray loading)

BD-ROM (SL/DL) 25S / 28S

BD-R (SL/DL) 25S / 28S

BD-RE (SL/DL) 25S / 28S

DVD-ROM (SL/DL) 18S / 18S

Startup Time DVD-R (SL/DL) 25S / 25S

DVD-RW 25S

DVD+R (SL/DL) 25S / 25S

DVD+RW DVD+RW 25S

DVD-RAM 45S

CD-ROM 15S

CD-ROM Read CD-ROM up to 40X

CD-R up to 40X

CD-RW up to 40X

DVD-ROM Read DVD-RAM up to 5X

DVD+RW up to 10X

DVD-RW up to 10X

DVD+R DL up to 8X

DVD-R DL up to 8X

DVD-ROM up to 16X

DVD-ROM DL up to 8X

Maximum Data Transfer Rates



Technical Specifications - Removable Storage

		DVD+R up to 12X
		DVD-R up to 12X
	Blu-ray	BD-ROM up to 6X
		BD-ROM DL up to 4.8X
		BD-R up to 6X
		BD-R DL up to 4.8X
		BD-R up to 6X
		BD-RE SL/DL up to 4.8X
Power	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	DC Current	5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum
	Temperature (operating)	41° to 122° F (5° to 50° C)
Environmental (all conditions non-condensing)	Relative Humidity (operating)	10% to 90%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)

HP SuperMulti DVD Writer Drive

AMO Part Number	AR630AT	
Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	Serial ATA	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
Weight (max)	2.6 lb (1.2 kg)	
	CD Media Read Access	Random < 120 ms typical Full Stroke < 200 ms typical
	DVD Media Read Access	Random < 130 ms typical Full Stroke < 240 ms typical
		CD-ROM, CD-R Read Up to 6000 KB/s (40X) CD-RW Read Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback Up to 2400 KB/s (16X)
	CD Media Read Transfer	Digital Audio Extraction (CD-ROM, CD-R) Up to 6000 KB/s (40X) Digital Audio Extraction (CD-RW) Up to 4800 KB/s (32X) Video CD Playback Up to 2400 KB/s (16X) DVD-ROM SL Read Up to 21600 KB/s (16X) DVD-ROM DL Read Up to 10800 KB/s (8X) DVD Video Playback Up to 10800 KB/s (8X)



Technical Specifications - Removable Storage

Performance		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)	
		DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
			DVD-R	Up to 21600 KB/s (16X)
			DVD+R	Up to 21600 KB/s (16X)
			DVD-RW	Up to 10800 KB/s (8X)
			DVD-R DL	Up to 10800 KB/s (8X)
			DVD+RW	Up to 10800 KB/s (8X)
			CD-R Write	Up to 6000 KB/s (40X)
			CD-RW	600 KB/s (4X)
		CD Media Write Transfer	CD-RW (High speed)	1500 KB/s (10X)
			CD-RW (Ultra speed)	Up to 3600 KB/s (24X)
			CD-RW (Ultra speed+)	Up to 4800 KB/s (32X)
			DVD+R	Up to 21600 KB/s (16X)
			DVD+R DL (v1.2)	Up to 16200 KB/s (12X)
			DVD+R DL (v1.1)	Up to 10800 KB/s (8X)
			DVD+RW (Volume 2 v1.0)	Up to 10800 KB/s (8X)
			DVD+RW (Volume 1 v1.3)	Up to 5400 KB/s (4X)
			DVD-R (v2.1 rev. 6.0)	Up to 16200 KB/s (12X)
		DVD Media Write Transfer	DVD-R (v2.1 rev. 4.0)	Up to 21600 KB/s (16X)
		DVD-R DL (v3.0 rev. 5.0)	Up to 10800 KB/s (8X)	
		DVD-R DL (v3.0 rev. 3.0)	Up to 10800 KB/s (8X)	
		DVD-RW (v1.2 rev. 3.0)	8100 KB/s (6X)	
		DVD-RW (v1.2 rev. 2.0)	Up to 5400 KB/s (4X)	
		DVD-RAM (v2.2 rev. 5.0)	Up to 16200 KB/s (12X)	
		DVD-RAM (v2.2 rev. 2.0)	Up to 6750 KB/s (5X)	
		Media	Read	
			Write	
		CD-ROM	Yes	No
		CD-R	Yes	No
		CD-RW	Yes	No
		DVD-ROM	Yes	No
		DVD-ROM DL	Yes	No
	Media Compatibility	DVD-RAM	Yes	No
		DVD+R	Yes	No
		DVD+R DL	Yes	No
		DVD+RW	Yes	No
		DVD-R	Yes	No
		DVD-RW	Yes	No
		DVD-R DL	Yes	No
		Source	SATA DC power receptacle	
		DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p
			12 VDC ± 5%	200 mV ripple p-p
			5 VDC	<1000 mA (typical)
	Power Supply			1600 mA (max.)
		DC Current	12 VDC	1200 mA (typical)
				2000 mA (max.)

Technical Specifications - Removable Storage

		Total Drive Power (Standby Mode)	< 2.5W
Rear Panel	SATA Power Connector, 15-pin SATA Data Connector, 7-pin Markings to identify each connector		
	Temperature (operating)	41° to 122° F (5° to 50° C)	
Environmental conditions (all conditions non-condensing)	Temperature (storage)	-22° F to 140° F (-30° C to 60° C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)	

HP DVD-ROM Drive

AMO Part Number	AR629AA		
Height	5.25-inch, half-height, tray-load		
Orientation	Either horizontal or vertical		
Interface type	Serial ATA		
Dimensions (W x H x D)	5.8 x 1.7 x 6.9 in (14.8 x 4.2 x 17.5 cm)		
Weight (max)	2.1 lb (950 kg)		
	CD Media Read Access	Random Full Stroke	< 120 ms typical < 200 ms typical
	DVD Media Read Access	Random Full Stroke	< 130 ms typical < 240 ms typical
		CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
		CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
	CD Media Read Transfer	Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
Performance		Video CD Playback	Up to 2400 KB/s (16X)
		DVD-ROM SL Read	Up to 21600 KB/s (16X)
		DVD-ROM DL Read	Up to 10800 KB/s (8X)
		DVD Video Playback	Up to 10800 KB/s (8X)
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)
	DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
		DVD-R	Up to 21600 KB/s (16X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD-RW	Up to 10800 KB/s (8X)
		DVD-R DL	Up to 10800 KB/s (8X)
		DVD+RW	Up to 10800 KB/s (8X)
		Media	Read
			Write

Technical Specifications - Removable Storage

	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
Media Compatibility	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p
		12 VDC ± 5%	200 mV ripple p-p
Power Supply		5 VDC	1000 mA (typical) 1600 mA (max.)
	DC Current	12 VDC	1200 mA (typical) 2000 mA (max.)
		Total Drive Power (Standby Mode)	< 2.5W
Rear Panel	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
	Markings to identify each connector		
	Temperature (operating)	41° to 122° F (5° to 50° C)	
Environmental conditions (all conditions non-condensing)	Temperature (storage)	-22° F to 140° F (-30° C to 60° C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)	

HP Slim SuperMulti DVD Writer Drive

AMO Part Number	VP034AA		
Height	12.7mm height		
Orientation	Either horizontal or vertical		
Interface type	SATA/ATAPI		
Disc recording capacity	Up to 8.5 GB DL or 4.7 GB standard		
Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)		
Weight (max)	0.42 lb (190 g)		
	DVD-RAM	Up to 5X	
	DVD-R DL	Up to 4X	

Technical Specifications - Removable Storage

	DVD+R	Up to 8X
	DVD+RW	Up to 4X
Write speeds	DVD+R DL	Up to 4X
	DVD-R	Up to 8X
	DVD-RW	Up to 6X
	CD-R	Up to 24X
	CD-RW	Up to 16X
	DVD-RAM	Up to 5X
	DVD-RW, DVD+RW	Up to 8X
	DVD-R DL, DVD+R DL	Up to 6X
Read speeds	DVD+R, DVD-R	Up to 8X
	DVD-ROM DL, DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
Access time (typical reads, including settling)	Stop Time	< 4 seconds
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode : (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s - default)
	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
Power	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum) 12 VDC (< 600 mA typical, 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
	Line-Out	0.7 VRMS
Audio output	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
	Temperature	41° to 122° F (5° to 50° C)
Environmental conditions (operating - non-condensing)	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

Technical Specifications - Removable Storage

HP Slim DVD-ROM Drive

AMO Part Number	VP033AA	
Height	12.7mm	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)	
Weight (max)	0.42 lb (190 g)	
Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 4X
	DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
Access time (typical reads, including settling)	Random DVD	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Random CD	DVD: < 250 ms (seek), CD: < 210 ms (seek)
Power	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode : (16.7 MB/s)
	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
	Total Drive Power (standby mode)	< 2.5 Watt
Audio output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	5% to 85%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)

HP 22-n-1 Media Card Reader

USB 2.0 High-speed interface

USB Interface

NOTE:

Requires the USB cable to be connected to the internal USB 2.0 port or a USB 2.0 PCI card.

Supports hardware ECC (Error Correction Code) function

Supports hardware CRC (Cyclic Redundancy Check) function

Supports MS 4-bit parallel transfer mode



Technical Specifications - Removable Storage

	Supports MS-PRO 4-bit parallel transfer mode
Advance protocol support	Supports MS PRO-HG Duo 4-bit parallel transfer mode
	Supports SD 4-bit parallel transfer mode
	Supports high-speed 50Mhz SD 4-bit card (version 2.0)
	Supports high-speed 52Mhz MMC 8-bit card (version 4.2)
	Supports CF v4.0 with PIO mode 6 and Ultra DMA mode
	CompactFlash Type I
	CompactFlash Type II
	Microdrive
	MultiMediaCard (MMC)
	Reduced Size MultiMediaCard (RS MMC)
	MultiMediaCard 4.2 (MMC Plus, including MMC Plus HC)
	Reduced Size MultiMediaCard 4.2 (MMC Mobile, including MMC Mobile HC)
	Secure Digital Card (SD)
	Secure Digital High Capacity (SDHC)
	miniSD
Supported media type	miniSD High Capacity
	Micro SD (T-Flash)
	Micro SD HC
	Memory Stick
	Memory Stick Select
	Memory Stick Duo (MS Duo)
	Memory Stick PRO (MS PRO)
	Memory Stick PRO Duo (MS PRO Duo)
	Memory Stick PRO-HG Duo
	MagicGate Memory Stick (MG)
	MagicGate Memory Stick Duo
	xD-Picture Card
Supported media type with card adapter	Memory Stick Micro (M2)
	MMC Micro

Technical Specifications - Environmental Data

Eco-Label Certifications & declarations

This product series has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR ®
- IT ECO declaration
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country

Ultra Slim Desktop

Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	18.95 W	20.01 W	18.66 W
Sleep (Energy Star low power mode)	2.09 W	2.182 W	2.099 W
Off	1.128 W	1.228 W	1.127 W

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family . HP computer marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations then energy efficiency data listed is for a typically configured model.

Heat Dissipation (typically configured)*	115 VAC	230 VAC	100 VAC
Normal Operation	65 BTU/hr	68 BTU/hr	64 BTU/hr
Sleep	7 BTU/hr	7 BTU/hr	7 BTU/hr
Off	4 BTU/hr	4 BTU/hr	4 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.74	27.5
Fixed Disk (random writes)	4.53	32.8

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery Size

CR2032 (coin cell)

Battery Type

Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Silver where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

Technical Specifications - Environmental Data

- Plastics parts weighing over 25 grams used in the product are marked per ISO 11466 and ISO1043.
- This product contains 0.04% post consumer recycled plastic (by wt.)
- This product is 93.7% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated 1966 g
- Internal:
 - Polyethylene low density Foam 154 g
- The corrugated packaging material contains at least 38.38% recycled content.
- The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.

Small Form Factor

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	31.07 W	31.42 W	31.31 W
Sleep (Energy Star low power mode)	2.14 W	2.37 W	2.11 W
Off	0.88 W	1.06 W	0.86 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	106.25 BTU/hr	107.4 BTU/hr	107.08 BTU/hr
Sleep	7.3 BTU/hr	8.10 BTU/hr	7.2 BTU/hr
Off	3 BTU/hr	3.6 BTU/hr	2.9 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.74	27.5
Fixed Disk (random writes)	4.53	32.8

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery Size

CR2032 (coin cell)

Battery Type

Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11466

Technical Specifications - Environmental Data

and ISO1043.

- This product contains 0.04% post consumer recycled plastic (by wt.)
- This product is 93.7% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated 1966 g
- Internal:
 - Polyethylene low density Foam 154 g
- The corrugated packaging material contains at least 38.38% recycled content.
- The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.

Microtower

Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	33.6464 W	34.7426 W	33.7985 W
Sleep (Energy Star low power mode)	2.3283 W	2.5323 W	2.3149 W
Off	0.8531 W	1.0106 W	0.8386 W

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computer marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations then energy efficiency data listed is for a typically configured model.

Heat Dissipation (typically configured)*	115 VAC	230 VAC	100 VAC
Normal Operation	115 BTU/hr	119 BTU/hr	116 BTU/hr
Sleep	8 BTU/hr	9 BTU/hr	8 BTU/hr
Off	3 BTU/hr	3 BTU/hr	3 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.9	28
Fixed Disk (random writes)	3.9	29

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight:

Battery Size

CR2032 (coin cell)

Battery type

Li-Ion

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe



Technical Specifications - Environmental Data

Drinking Water and Toxic Enforcement Act of 1986).

- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold when HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11466 and ISO1043.
- This product contains 0.13% post consumer recycled plastic (by wt.)
- This product is 92.4% recyclable when properly disposed of at end of life.

Packaging Materials

- External
 - Corrugated Carton - 1950 g
- Internal
 - Polyethylene low density foam - 205 g
- The corrugated packaging material contains at least 31.38% recycled content.
- The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.

Convertible Minitower

Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	31.4797 W	31.2721 W	31.5603 W
Sleep (Energy Star low power mode)	2.1754 W	2.3982 W	2.1609 W
Off	0.9116 W	1.1064 W	0.8938 W

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations then energy efficiency data listed is for a typically configured model.

Heat Dissipation (typically configured)*	115 VAC	230 VAC	100 VAC
Normal Operation	108 BTU/hr	107 BTU/hr	108 BTU/hr
Sleep	7 BTU/hr	8 BTU/hr	7 BTU/hr
Off	3 BTU/hr	4 BTU/hr	3 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Technical Specifications - Environmental Data

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.8	21
Fixed Disk (random writes)	3.8	21

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight:

Battery Size

CR2032 (coin cell)

Battery type

Li-Ion

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold when HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0.05% post consumer recycled plastic (by wt.)
- This product is 95.1% recyclable when properly disposed of at end of life.

Packaging Materials

- External
 - Corrugated: 1900g
- Internal
 - Polyethylene low density foam: 230g
- The corrugated carton packaging material contains at least 53.5% recycled content.
- The Polyethylene low density foam packaging material is made from 60.42% recycled content.

All Models

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in

Technical Specifications - Environmental Data

- plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:
Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Technical Specifications - Environmental Data

Copyright © 2011 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Core 2 Quad, Core 2 Duo, Pentium and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.