

LUMILUX[®] T5 HO

High Lumen Output



LUMILUX[®] T5 HO



QTi DALI/DIM / QTi GII / QTP5




Benefits

- Impressive luminous flux
- High efficiency
- Very good luminous flux maintenance throughout the life of the lamp
- Natural color indication

Product Features

- High lumen package
- Long average life time: up to 24,000 h (with QUICKTRONIC®)
- Good color Rendering Group 1B (Ra 80-89)
- Dimmable with appropriate ECG
Light colors: SKYWHITE (880), Cool Daylight (865), Cool White (840), White (835), Warm White (830), INTERNA (827)

Dimensions

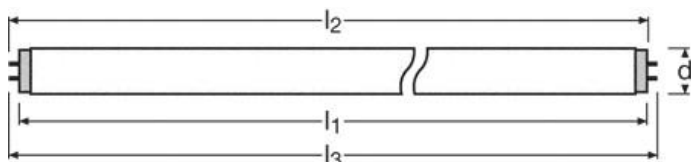

Description	Base	Length (l1) [mm]	Length (l2) min [mm]	Length (l2) max [mm]	Length (l3) [mm]	Tube Diameter (d) max [mm]
LUMILUX® T5 HO 24 W	G5	549	553.7	556.1	563.2	17
LUMILUX® T5 HO 39 W	G5	849	853.7	856.1	863.2	17
LUMILUX® T5 HO 49 W	G5	1449	1453.7	1456.1	1463.2	17
LUMILUX® T5 HO 54 W	G5	1149	1153.7	1156.1	1163.2	17
LUMILUX® T5 HO 80 W	G5	1449	1453.7	1456.1	1463.2	17

Electrical Data¹

LUMILUX® T5 HO	Lamp Voltage in HF ² mode rated [V]	Lamp Current in HF mode rated [mA]	Pre-heat current rated [mA]
24 W	77	295	440
39 W	118	325	440
49 W	195	255	330
54 W	120	455	720
80 W	152	530	765

¹ According to IEC 60081 (measurement with reference control gear)

² High Frequency

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

Photometrical Data³


LUMILUX® T5 HO	Light Color LUMILUX®	Color Rend- ering Index (CRI), Ra	Target Color Coor- dinate X	Target Color Coor- dinate Y	Color Temp- erature [K]	Nominal Luminous Flux [lm]	Max. Luminous Flux [lm]
24 W	827 INTERNA	80 ... 89	0.463	0.420	2700	1750	2000
24 W	830 Warm White	80 ... 89	0.440	0.403	3000	1750	2000
24 W	835 White	80 ... 89	0.409	0.394	3500	1750	2000
24 W	840 Cool White	80 ... 89	0.380	0.380	4000	1750	2000
24 W	865 Cool Daylight	80 ... 89	0.313	0.337	6500	1600	1900
24 W	880 SKYWHITE	80 ... 89	0.463	0.420	8000	1550	1750
39 W	827 INTERNA	80 ... 89	0.463	0.420	2700	3100	3500
39 W	830 Warm White	80 ... 89	0.440	0.403	3000	3100	3500
39 W	840 Cool White	80 ... 89	0.380	0.380	4000	3100	3500
39 W	865 Cool Daylight	80 ... 89	0.313	0.337	6500	2850	3325
39 W	880 SKYWHITE	80 ... 89	0.294	0.309	8000	2750	3150
49 W	827 INTERNA	80 ... 89	0.463	0.420	2700	4310	4900
49 W	830 Warm White	80 ... 89	0.440	0.403	3000	4300	4900
49 W	840 Cool White	80 ... 89	0.380	0.380	4000	4300	4900
49 W	865 Cool Daylight	80 ... 89	0.313	0.337	6500	4100	4600
49 W	880 SKYWHITE	80 ... 89	0.294	0.309	8000	4050	4610
54 W	827 INTERNA	80 ... 89	0.463	0.420	2700	4450	5000
54 W	830 Warm White	80 ... 89	0.440	0.403	3000	4450	5000
54 W	835 White	80 ... 89	0.409	0.394	3500	4450	5000
54 W	840 Cool White	80 ... 89	0.380	0.380	4000	4450	5000
54 W	865 Cool Daylight	80 ... 89	0.313	0.337	6500	4100	4750
54 W	880 SKYWHITE	80 ... 89	0.294	0.309	8000	4000	4500
80 W	827 INTERNA	80 ... 89	0.463	0.420	2700	6150	7000
80 W	830 Warm White	80 ... 89	0.440	0.403	3000	6150	7000
80 W	835 White	80 ... 89	0.409	0.394	3500	6150	7000
80 W	840 Cool White	80 ... 89	0.380	0.380	4000	6150	7000
80 W	865 Cool Daylight	80 ... 89	0.313	0.337	6500	5700	6650
80 W	880 SKYWHITE	80 ... 89	0.294	0.309	8000	5550	6400

³ Measurement in accordance with EN 60081, annex C and the relevant annex on rated colour characteristics in IEC 60081.

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

Relative Luminous Flux / Ambient Temperature

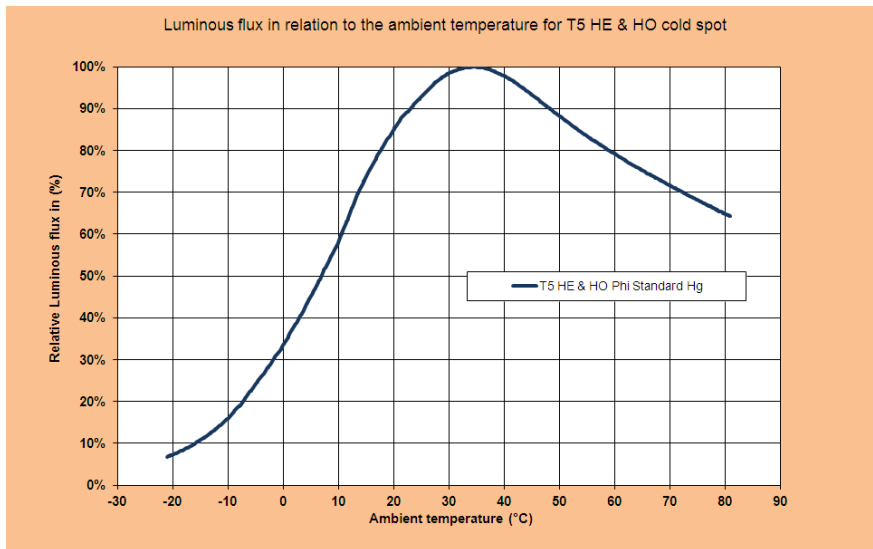

For more detailed information please refer to our technical guide for Fluorescent Lamps. Free download at www.osram.com

Lifetime⁴

	ECG ⁵ (IEC 60929) preheat IEC 60081 switching cycle ⁶
B50⁷	24,000 h
Service life time⁸	19,000 h
LLMF⁹ 20.000 h	0.89
LLMF 16.000 h	0.90
LLMF 12.000 h	0.90
LLMF 8.000 h	0.90
LLMF 6.000 h	0.91
LLMF 4.000 h	0.92
LLMF 2.000 h	0.95
LSF¹⁰ 20.000 h	0.85
LSF 16.000 h	0.97
LSF 12.000 h	0.99
LSF 8.000 h	0.99
LSF 6.000 h	0.99
LSF 4.000 h	0.99
LSF 2.000 h	0.99

⁴ Measurement in accordance with EN 60081, annex C.

⁵ Electronic Control Gear

⁶ Switching cycle 165 min. on, 15 min. off (according to IEC 60081)

⁷ Average rated lamp life (B50) is the average value of the life time for an entity of lamps operated under standardized conditions until 50% failure. In other words, this is the operation time at which, for a standardized 3-hour switching cycle (165 minutes on / 15 minutes off (according to IEC)), 50% of a sample population of lamps have failed.

⁸ Service life time is the mathematical life time (maintenance multiplied with the % of failed lamps e.g. B10) for lamps in an installation after which the installation luminous flux (100 h value) decreased with 20 % (decrease in luminous flux and failed lamps) for indoor lighting.

⁹ Lamp Lumen Maintenance Factor (lamp luminous flux in %): Ratio of the luminous flux of a specific quantity of lamps at a defined number of hours of operation to their luminous flux at 100 h

¹⁰ Lamp Survival Factor (lamp survival in %): Ratio of the number of electrically intact lamps to the total number of lamps

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

Energy labelling¹¹

Description	Energy efficiency class	Weighted energy consumption E _c [kWh/1000h]
LUMILUX® T5 HO 24W/827	A+	25
LUMILUX® T5 HO 24W/830	A+	25
LUMILUX® T5 HO 24W/835	A+	25
LUMILUX® T5 HO 24W/840	A+	25
LUMILUX® T5 HO 24W/865	A	25
LUMILUX® T5 HO 24W/880	A	25
LUMILUX® T5 HO 39W/827	A+	42
LUMILUX® T5 HO 39W/830	A+	42
LUMILUX® T5 HO 39W/840	A+	42
LUMILUX® T5 HO 39W/865	A	42
LUMILUX® T5 HO 49W/830	A+	55
LUMILUX® T5 HO 49W/840	A+	55
LUMILUX® T5 HO 49W/865	A+	55
LUMILUX® T5 HO 49W/880	A+	55
LUMILUX® T5 HO 54W/827	A+	60
LUMILUX® T5 HO 54W/830	A+	60
LUMILUX® T5 HO 54W/835	A+	60
LUMILUX® T5 HO 54W/840	A+	60
LUMILUX® T5 HO 54W/865	A	60
LUMILUX® T5 HO 54W/880	A	60
LUMILUX® T5 HO 80W/827	A	88
LUMILUX® T5 HO 80W/830	A	88
LUMILUX® T5 HO 80W/840	A	88
LUMILUX® T5 HO 80W/865	A	88
LUMILUX® T5 HO 80W/880	A	88

¹¹ According to Regulation (EU) No 874/2012 of July 12, 2012
Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.
LP LPD EM

Logistic Data

Description	EAN 10	EAN 40	Packaging Unit
LUMILUX® T5 HO 24W/827	4050300646077	4050300646084	20
LUMILUX® T5 HO 24W/830	4050300453491	4050300453507	40
LUMILUX® T5 HO 24W/835	4050300776439	4050300776446	20
LUMILUX® T5 HO 24W/840	4050300453477	4050300453484	40
LUMILUX® T5 HO 24W/865	4050300453453	4050300453460	40
LUMILUX® T5 HO 24W/880	4008321081469	4008321081476	20
LUMILUX® T5 HO 39W/827	4050300646138	4050300646145	40
LUMILUX® T5 HO 39W/830	4050300453552	4050300453569	40
LUMILUX® T5 HO 39W/840	4050300453538	4050300453545	20
LUMILUX® T5 HO 39W/865	4050300453514	4050300453521	40
LUMILUX® T5 HO 49W/830	4050300657158	4050300657165	40
LUMILUX® T5 HO 49W/840	4050300657134	4050300657141	40
LUMILUX® T5 HO 49W/865	4008321110732	4008321110749	40
LUMILUX® T5 HO 49W/880	4008321907486	4008321110725	40
LUMILUX® T5 HO 54W/827	4050300646176	4050300646183	40
LUMILUX® T5 HO 54W/830	4050300453415	4050300453422	40
LUMILUX® T5 HO 54W/835	4050300776477	4050300776484	20
LUMILUX® T5 HO 54W/840	4050300453392	4050300453408	40
LUMILUX® T5 HO 54W/865	4050300453378	4050300453385	40
LUMILUX® T5 HO 54W/880	4008321070425	4008321070432	20
LUMILUX® T5 HO 80W/827	4050300646213	4050300646220	40
LUMILUX® T5 HO 80W/830	4050300515137	4050300515144	40
LUMILUX® T5 HO 80W/840	4050300515151	4050300515168	40
LUMILUX® T5 HO 80W/865	4050300515113	4050300515120	40
LUMILUX® T5 HO 80W/880	4008321070449	4008321070456	20

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

Lamp/ECG System Combination

Lamp	ECG	EAN 10 ECG	Luminous Flux @25°C [lm]	System Power [W]	IN [A]	Power Factor ECG	System Luminous Efficacy [lm/W]	Length [mm]	Width [mm]	Height [mm]	Distance between holes [mm]	T _a [°C]
LUMILUX® T5 HO 24 W	QTi DALI 1x14/24/220-240 DIM	4050300870380	1750	25.3	0.11	0.98	69	360	30	21	350	+10...+50
	QTi DALI 2x14/24/220-240 DIM	4050300870861	3500	49.3	0.22	0.98	71	423	30	21	415	+10...+50
	QTi DALI 3x14/24/220-240 DIM	4008321069955	5250	73.4	0.32	0.99	72	360	40	21	350	+10...+50
	QTi DALI 4x14/24/220-240 DIM	4008321070036	7000	97.6	0.43	0.99	72	360	40	21	350	+10...+50
	QTi 1x14/24/220-240 DIM	4050300870922	1750	26	0.11	0.98	67	360	30	21	350	+10...+50
	QTi 2x14/24/220-240 DIM	4050300870946	3500	50	0.22	0.96	70	423	30	21	415	+10...+50
	QTi 3x14/24/220-240 DIM	4008321069719	5250	74	0.32	0.99	73	360	40	21	350	+10...+50
	QTi 4x14/24/220-240 DIM	4008321069993	7000	98	0.43	0.99	71	360	40	21	350	+10...+50
	QTi 1x14/24/21/39 GII	4008321383334	1750	26	0.12	0.96	67	360	30	21	350	-20...+50
	QTi 2x14/24/21/39 GII	4008321383396	3500	50	0.23	0.96	70	360	30	21	350	-20...+50
	QTP5 1x24-39	4008321329110	1750	26	0.12	0.95	67	280	30	21	270	-20...+50
	QTP5 2x24-39	4008321329417	3500	49	0.23	0.95	71	360	30	21	350	-20...+50
	QTP-M 1x26-42	4008321329134	1750	25	0.12	0.95	70	103	67	31	110	-20...+50
	QTP-M 2x26-32	4008321329158	3500	49	0.23	0.97	71	123	79	33	129.5	-20...+50
	QT-M 2x26-42/220-240 S	4008321110022	3500	54	0.23	0.97	65	123	79	33	129.5	-20...+50
	QT-ECO 1x18-24/220-240 L	4050300660417	1600	20	0.15	0.60c	80	150	22	22	140	-15...+50
	QT-ECO 1x18-24/220-240 S	4050300638560	1600	20	0.15	0.60c	80	80	40	22	72-75	-15...+50
LUMILUX® T5 HO 39 W	QTi DALI 1x21/39/220-240 DIM	4050300870366	3100	41.8	0.18	0.98	74	360	30	21	350	+10...+50
	QTi DALI 2x21/39/220-240 DIM	4050300870489	6200	82	0.36	0.98	76	423	30	21	415	+10...+50
	QTi 1x21/39/220-240 DIM	4050300870564	3100	41.8	0.18	0.98	74	360	30	21	350	+10...+50
	QTi 2x21/39/220-240 DIM	4050300870694	6200	82	0.36	0.96	76	423	30	21	415	+10...+50
	QTi 1x14/24/21/39 GII	4008321383334	3100	41	0.18	0.98	76	360	30	21	350	-20...+50
	QTi 2x14/24/21/39 GII	4008321383396	6200	81	0.36	0.98	77	360	30	21	350	-20...+50
	QTP5 1x24-39	4008321329110	3100	41	0.18	0.98	76	280	30	21	270	-20...+50
	QTP5 2x24-39	4008321329417	6200	82	0.36	0.98	77	360	30	21	350	-20...+50

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

LP LPD EM

	QTP-M 1x26-42	4008321329134	3100	41	0.18	0.97	76	103	67	31	110	-20...+50
Lamp	ECG	EAN 10 ECG	Luminous Flux @25°C [lm]	System Power [W]	IN [A]	Power Factor ECG	System Luminous Efficacy [lm/W]	Length [mm]	Width [mm]	Height [mm]	Distance between holes [mm]	T _a [°C]
LUMILUX® T5 HO 49 W	QTi DALI 1x35/49/80/220-240 DIM	4050300870342	4300	53.4	0.24	0.98	81	360	30	21	350	+10...+50
	QTi DALI 2x35/49/80/220-240 DIM	4050300870441	8600	101	0.46	0.99	85	423	30	21	415	+10...+50
	QTi DALI 2x35/49/220-240 DIM	4050300870465	8600	103.6	0.45	0.99	83	423	30	21	415	+10...+50
	QTi 1x35/49/80/220-240 DIM	4050300870540	4300	53.4	0.24	0.98	81	360	30	21	350	+10...+50
	QTi 2x35/49/80/220-240 DIM	4050300870984	8600	103	0.46	0.97	81	423	30	21	415	+10...+50
	QTi 2x35/49/220-240 DIM	4050300870670	8600	103.6	0.45	0.97	83	423	30	21	415	+10...+50
	QTi 1x28/54/35/49 GII	4008321383358	4300	53	0.24	0.97	81	360	30	21	350	-20...+50
	QTi 2x28/54/35/49 GII	4008321383419	8600	105	0.46	0.98	82	360	30	21	350	-20...+50
	QTi 1x35/49/80 GII	4008321383372	4300	53	0.24	0.97	81	360	30	21	350	-20...+50
	QTi 2x35/49/80/220-240	4008321174291	8600	104	0.46	0.97	83	425	30	21	415	-20...+50
	QTP5 1x49	4008321329370	4300	53	0.24	0.95	81	280	30	21	270	-20...+50
	QTP5 2x49	4008321329431	8600	106	0.49	0.99	81	360	30	21	350	-20...+50
LUMILUX® T5 HO 54 W	QTi DALI 1x28/54/220-240 DIM	4050300870809	4450	58.8	0.26	0.99	76	360	30	21	350	+10...+50
	QTi DALI 2x28/54/220-240 DIM	4050300870502	8900	115	0.51	0.99	77	423	30	21	415	+10...+50
	QTi 1x28/54/220-240 DIM	4050300870588	4450	58.8	0.26	0.99	76	360	30	21	350	+10...+50
	QTi 2x28/54/220-240 DIM	4050300870717	8900	115	0.51	0.98	77	423	30	21	415	+10...+50
	QTi 1x28/54/35/49 GII	4008321383358	4450	58	0.26	0.97	77	360	30	21	350	-20...+50
	QTi 2x28/54/35/49 GII	4008321383419	8900	115	0.51	0.98	77	360	30	21	350	-20...+50
	QTP5 1x54	4008321329394	4450	59	0.26	0.98	75	280	30	21	270	-20...+50
	QTP5 2x54	4008321329097	8900	115	0.50	0.99	77	360	30	21	350	-20...+50

Edition 08.2013. Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.
LP LPD EM

Lamp	ECG	EAN 10 ECG	Luminous Flux @25°C [lm]	System Power [W]	IN [A]	Power Factor ECG	System Luminous Efficacy [lm/W]	Length [mm]	Width [mm]	Height [mm]	Distance between holes [mm]	T _a [°C]
LUMILUX® T5 HO 80 W	QTi DALI 1x35/49/80/220-240 DIM	4050300870342	6150	88.1	0.39	0.99	70	360	30	21	350	+10...+50
	QTi DALI 2x35/49/80/220-240 DIM	4050300870441	12300	165	0.74	0.99	75	423	30	21	415	+10...+50
	QTi 1x35/49/80/220-240 DIM	4050300870540	6150	88.1	0.39	0.99	70	360	30	21	350	+10...+50
	QTi 2x35/49/80/220-240 DIM	4050300870984	12300	165	0.74	0.99	75	423	30	21	415	+10...+50
	QTi 1x35/49/80 GII	4008321383372	6150	85	0.38	0.98	72	360	30	21	350	-20...+50
	QTi 2x35/49/80/220-240	4008321174291	12300	165	0.74	0.99	75	423	30	21	415	-20...+50
	QTP5 1x80	4008321329059	6150	86	0.38	0.98	72	360	30	21	350	-20...+50
	QT-FQ 2x80	4050300825564	12600	175	0.76	0.98	72	423	30	21	415	-20...+50

For more information on ECG refer to <http://www.osram.com/ecg>

For more information on System Guarantee refer to <http://www.osram.com/guarantee>

In case of lamp breakage: www.osram.com/brokenlamp

For more information technical Information see Technical guide. Free download at www.osram.com