

For indoor and outdoor use.

2-way Tapper 694–2700 7.0 /1.0dB
2-way Tapper 694–2700 10.5/0.5dB
2-way Tapper 694–2700 15.3/0.3dB


Type No.	86010150	86010151	86010152
Frequency range	694 – 2700 MHz		
Tap Loss			
Input ↔ P ₁	–1.0 dB	–0.5 dB	–0.3 dB
Input ↔ P ₂	–7.0 dB	–10.5 dB	–15.3 dB
For connecting ... antennas	2		
Insertion loss	< 0.05 dB		
Impedance	50 Ω		
VSWR	694 – 2700 MHz: < 1.5		
Intermodulation IM3	< –150 dBc (2 x 43 dBm carrier)		
Max. power per input	500 W (at 50 °C ambient temperature)		
Connector	7-16 female		
Weight	Approx. 1.3 kg		
Packing size	310 x 93 x 112 mm		
Max. size	244 / 90 / 55 mm		

Material: Housing: Aluminum.
Inner conductor: Brass.

DC capability: DC transmission only between input and port P₁.
P₂ is coupled capacitively.

Mounting: Bracked for wall mounting included in the scope of supply.
For pipe mast mounting use clamps listed below (order separately).

Environmental conditions: IP 65

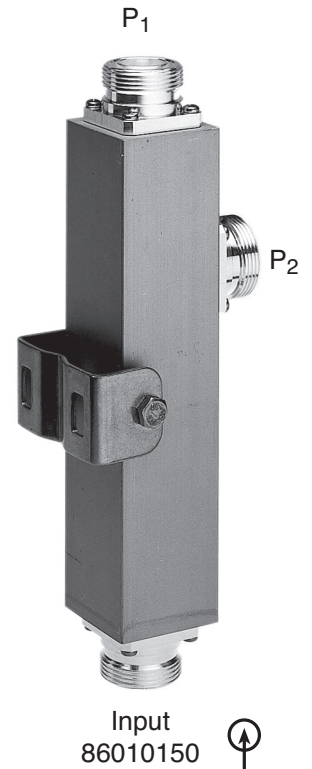

Clamps (order separately)

Type No.	Description	Remarks
734360	1 tension band	Mast: 34 – 60 mm diameter
734361	1 tension band	Mast: 60 – 80 mm diameter
734362	1 tension band	Mast: 80 – 100 mm diameter
734363	1 tension band	Mast: 100 – 120 mm diameter
734364	1 tension band	Mast: 120 – 140 mm diameter
734365	1 tension band	Mast: 45 – 125 mm diameter



734364

936.4158 Subject to alteration.