

PHILIPS

LED lighting



**REAL
PROs**
**REAL
QUALITY**

Professional LED lighting catalog

Discover our wide portfolio of innovative and efficient LED lamps and luminaires for both indoor and outdoor application areas.

New generation of MasterConnect LEDlamps, CoreLine recessed and CoreLine surface-mounted luminaires



January
2021

Why choose Philips for lighting solutions

An **LED light** for every need,
from the **world leader** in lighting

Best products:

Our LED lighting provides you with:

Unbeatable quality

Industry-leading quality and reliability ensure our lights keep their output and light quality over the full warranted lifetime.

Easy-to-install

The efficient design of the CoreLine fixtures enables replacement of existing lights, with no need for expensive re-wiring or new ceiling configurations. Our LED lamps are compatible with most dimmers and transformers for easy installation, retaining their full specifications and lifetimes for lowest Total Cost of Ownership.

Leading the way

With Philips lighting you get much more than high quality and easy-to-install lighting solutions – you get LED lighting that's setting the reference in the industry. It has never been easier to bring the power of connected lighting to small- and medium-sized enterprises thanks to our Interact Ready range that works seamlessly with the intuitive Interact Pro software.

For the full dimmer and transformer compatibility list, visit:
www.lighting.philips.com/main/products/ledlamps



Best partner:

Close cooperation before, during and after projects is important to us:

“They really managed to satisfy our needs well. They really have cared a lot and showed a lot of commitment...”

Technical consulting and intense customer support:

“Quick and competent responses to questions”

Close cooperation with local wholesalers was a key element of assuring on-time product availability:

“Philips is flexible to offer different delivery options”

Best portfolio:

We offer the right lighting for every application.

Our Philips CoreLine range consists of a full range of luminaire types that offer innovative, high quality and easy-to-install lighting for every project where light really matters. Philips Ledinaire is our essential range of trusted luminaires for everyday lighting jobs that need good performance. And that for a price that's on your side! Our LED tubes offer best in class lighting and ultimate compatibility. And we offer a full range of LED lamps, in any form and shape, that allow you to create the perfect ambience while saving energy.

For our warranty document, visit:
www.lighting.philips.com/main/support/support/warranty.html

Two new regulations for more sustainability

What you need to know about the EU's **Ecodesign Regulation (SLR)** and **Energy Labelling Regulation (ELR)**

As of September 2021, the EU will implement two updated regulations, both with the goal of further expanding the lighting industry's lead in sustainability by delivering significant energy savings for lighting products and systems.

The Ecodesign Regulation – improving product performance


- Optimizing the design of light sources and separate control gear for more sustainability and efficiency
- Products that fail to meet requirements will be phased out (e.g. T8 fluorescent lamps in 2023)
- Lighting installations will have to be renovated with new energy-efficient light sources

For more transparency,
efficiency, sustainability –
and a greener future.

The Energy Labelling Regulation – empowerment through information

- Introduces a new consumer-friendly energy label to empower end users to choose energy efficient products
- New scale reflects how efficient a product is – the definition of A to G will change based on the new efficacy requirements

Current label		EU proposal new label	
Class	Lm/W	Class	Lm/W
A++	120	A	210
A+	65	B	185
A	50	C	160
B	15	D	135
C	12	E	110
D	9	F	85
E	0	G	0

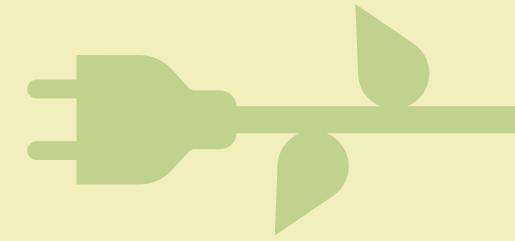

**Brighter lives,
better world**

Philips is **100% carbon neutral**
since September 2020.

We recycle **up to 90%** of our
manufacturing waste.

We use **100% renewable
electricity.**

Our paper packaging for LED
lamps and luminaires is saving
**over 500,000 kilos of plastic
waste** per year.

**Thank you for choosing
Philips and joining us on
our mission!**

Select the right LED luminaire or lamp

A partner that understands the challenges you face, saves you time.

Which is why we offer a comprehensive portfolio of LED luminaires and lamps.

The right product, for every job. For more information and online tools, check:

lighting.philips.com/main/support/purchase/installer

		CorePro	MASTER Value	MASTER	MasterConnect <small>interact ready.</small>
Solution		Simple replacement of fluorescent tubes for average use	Strong performance in demanding applications with intense usage	Best in class performance for very demanding applications	For smart lighting applications with personal/automated light control
Performance					
Price					
Products		167 types	60 types	132 types	2 types
Life span		30,000	50,000	50,000 - 70,000	50,000 + insight into remaining life span
Warranty		3 years	5 years	5 years	5 years

		Ledinaire	CoreLine	CoreLine Interact Ready <small>interact ready.</small>
Solution		Essential range of trusted products	Suitable for every project where light really matters	For smart lighting applications with personal/automated light control
Performance				
Price				
Products		13 types	17 types	6 types
Life span		50,000 L65/L70	50,000 L70/L80	50,000 + insight into remaining life span
Warranty		3 years	5 years	5 years

Contents

10

Interact Ready

- 10 CoreLine Waterproof
- 11 CoreLine Panel Office compliant
- 11 CoreLine Panel Non-office compliant
- 12 CoreLine Panel
- 12 CoreLine Recessed Office compliant
- 13 CoreLine Recessed Non-office compliant
- 13 CoreLine Surface-mounted Office compliant
- 14 CoreLine Surface-mounted Non-office compliant
- 14 CoreLine Downlight
- 15 CoreLine Batten
- 15 CoreLine SlimDownlight
- 17 MasterConnect LEDtube EM/Mains T8
- 17 MasterConnect LEDspot GU10
- 18 Indoor Accessories

20

CoreLine LED luminaires

- 20 CoreLine Panel Office compliant
- 21 CoreLine Panel Non-office compliant
- 21 CoreLine Panel
- 22 CoreLine Recessed Office compliant
- 23 CoreLine Recessed Non-office compliant
- 24 CoreLine Recessed
- 25 CoreLine Surface-mounted Office compliant
- 26 CoreLine Surface-mounted Non-office compliant
- 27 CoreLine Surface-mounted
- 27 Coreline 2.0
- 28 CoreLine Wall-mounted
- 30 CoreLine Waterproof
- 32 CoreLine Downlight
- 33 CoreLine SlimDownlight
- 34 CoreLine Recessed Spot
- 35 CoreLine Projector
- 36 Coreline Bollard
- 38 Coreline Highbay Gen4
- 39 CoreLine Trunking Gen2
- 40 CoreLine Trunking
- 42 Coreline tempo X-Large
- 42 Coreline tempo large
- 43 Coreline tempo medium
- 43 Coreline tempo small
- 44 CoreLine Malaga LED
- 45 CoreLine Batten

47

Ledinaire LED luminaires

- 47 Ledinaire Panel Office compliant
- 47 Ledinaire Panel Non-office compliant
- 48 Ledinaire Recessed Non-office compliant
- 48 Ledinaire Surface-mounted Office compliant
- 48 Ledinaire Surface-mounted Non-office compliant
- 49 Ledinaire Wall-mounted WL060V
- 49 Ledinaire Square Wall-mounted
- 50 Downlight DN060B
- 50 Ledinaire Slim Downlight DN065B G2 & DN065C
- 51 Ledinaire Downlight DN029B
- 51 Ledinaire floodlight
- 52 Ledinaire Batten
- 53 Ledinaire High-bay
- 54 Ledinaire Waterproof
- 54 Ledinaire Waterproof Tube Housing
- 55 Other LEDtube

Contents

57

LED lamps

- 57 MASTER LEDspot ExpertColor MV
- 57 SceneSwitch LEDspot
- 58 MASTER LEDspot ExpertColor LV
- 59 MASTER VALUE LEDspot LV
- 60 MASTER VALUE LEDspot MV
- 61 MASTER LEDspot PAR
- 62 MASTER LEDspot LV AR111
- 63 CorePro LEDspot Reflectors
- 63 CorePro LEDspot LV
- 64 CorePro LEDspot MV
- 65 CorePro LEDcapsule LV
- 65 CorePro LEDcapsule MV
- 66 CorePro LEDlinear MV
- 66 SceneSwitch LEDbulbs
- 67 SceneSwitch LED candles and lusters

69

LED bulbs

- 69 Decorative LEDbulbs
- 71 Accessory
- 71 MASTER LEDbulbs
- 72 SceneSwitch LEDbulbs
- 72 Classic filament LEDbulbs
- 76 Classic frosted LED Lamps
- 76 CorePro LEDbulbs
- 78 Classic filament LED candles and lusters
- 79 CorePro LED candles and lusters
- 79 Premium LED bulbs - Dimmable and features

80

LED candles & lusters

- 80 Decorative LED candles and lusters
- 80 Classic filament LED candles and lusters
- 83 Classic frosted LED candles and lusters
- 84 MASTER LED candles and lusters
- 85 CorePro LED candles and lusters
- 85 Candle LED
- 86 Standard LED candles & lusters

88

LED tubes

- 88 MASTER LEDtube EM/Mains T8
- 89 Master Value LEDtube T8
- 90 CorePro LEDtube EM/Mains T8
- 91 MASTER LEDtube InstantFit HF T8
- 92 Master Value LEDtube Universal T8
- 92 CorePro LED tube Universal T8
- 93 MASTER LEDtube InstantFit HF T5
- 94 MASTER LEDtube Mains T5
- 94 CorePro LED PLS
- 95 CorePro LED PLL
- 95 CorePro LEDtube circular
- 96 Other LEDtube

97

LED PL-lamps

- 97 CorePro LED PLC 2P
- 97 CorePro LED PLC 4P
- 98 CorePro LED PLC

101

TrueForce LED


- 101 Trueforce CorePro LED HPL
- 101 TrueForce LED Public (Road – SON)
- 102 TrueForce LED Public (Road/Area – SOX)
- 102 TrueForce LED Public (Urban/Road – HPL/SON)
- 103 TrueForce LED Industrial and Retail (Highbay – MH)
- 103 TrueForce Core LED Industrial and Retail (Highbay – HPI/SON/HPL)

The future is connected

The future starts now, are you ready for it?
Combine Philips Interact Ready lamps and luminaires with Interact Pro software,
to create smart lighting systems for your customers.

Philips Interact Ready lighting works with the Interact Pro dashboard and app.

Get connected in **5 simple steps**

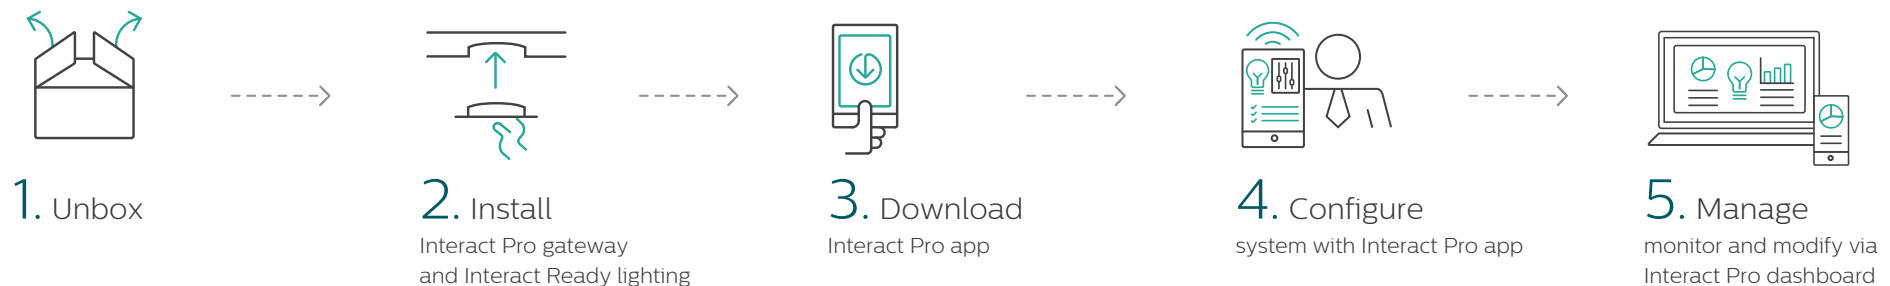

The Interact Pro dashboard and app work with a range of Philips luminaires and lamps and a set of wireless switches and sensors that are Interact Ready.

You can customize the software's settings for specific workspaces. Whether you're connecting 20 light points or 200, Interact Pro helps everyone to work smarter.

Overview of most popular **Interact Ready** lamps and luminaires

Philips Interact Ready lighting

interact
ready.



CoreLine
waterproof Interact Ready



MasterConnect LEDtube T8
Ultra Output



CoreLine slim downlight
Interact Ready



CoreLine panel
Interact Ready



CoreLine batten
Interact Ready


works
with

Interact Pro software


interact Pro



Interact Pro gateway



Interact Pro app

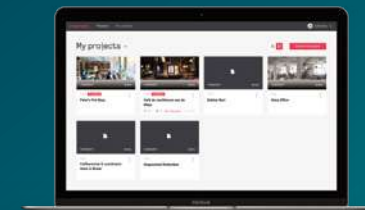


Interact Pro
dashboard

Interact Ready

Now that more and more products are being connected to the internet, they are becoming smarter. This provides more flexibility, saves extra costs and offers more comfort. This means there is an opportunity for the installation sector to be part of the smart lighting on the internet, to offer a better experience for the end user. So far, small and medium-sized enterprises (SMEs) have remained excluded from these developments, but that is now a thing of the past. The luminaires and lamps from the list below are the first Interact Ready LED products and work seamlessly with the intuitive Interact Pro app and dashboard.

CoreLine Waterproof

www.philips.com/interact-ready




Product Type	LED	Lumen Output	Efficiency	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	K	Number			
WT120C G2 LED40S/840 IA1 L1200	30	4000	133	4000	22	IP65	910505100052	39713500
WT120C G2 LED40S/840 IA1 TW3 L1200	30	4000	133	4000	22	IP65	910505101032	97180900
WT120C G2 LED40S/840 IA1 ELB3 L1200	33	4000	116	4000	22	IP65	910505100056	39980100
WT120C G2 LED60S/840 IA1 L1500	45.5	6000	132	4000	22	IP65	910505100071	39714200
WT120C G2 LED60S/840 IA1 TW3 L1500	45.5	6000	132	4000	22	IP65	910505101033	97181600
WT120C G2 LED60S/840 IA1 ELB3 L1500	50	6000	120	4000	22	IP65	910505100075	39981800

Interact Ready

CoreLine Panel Office compliant


www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
RC132V G4 LED34S/830 W60L60 OC IA1	29	3400	117		●	3000	24	IP20/44	910505100531	96709300
RC132V G4 LED36S/840 W30L120 OC IA1	29	3600	123		●	4000	24	IP20/44	910505100535	96713000
RC132V G4 LED36S/840 W60L60 OC IA1	29	3600	123		●	4000	24	IP20/44	910505100530	96708600
RC133V G4 LED36S/840 W62L62 OC IA1	29	3600	123		●	4000	24	IP20/44	910505100540	96718500
RC132V G4 LED36S/840 W60L60 OC IA1 ELB3	33	3600	123		●	4000	24	IP20/44	910505100529	96707900
RC132V LED36S/840 W30L120 IA1 OC	34	3600	100	120	●	4000	24	IP20/44	912401483130	38523100
RC132V LED36S/840 W60L60 IA1 OC	34	3600	100	120	●	4000	24	IP20/44	912401483127	38520000
RC132V G4 LED43S/840 W60L60 OC IA1	34.5	4300	125		●	4000	24	IP20/44	910505100542	96720800
RC133V G4 LED43S/840 W62L62 OC IA1	34.5	4300	125		●	4000	24	IP20/44	910505100543	96721500
RC132V LED36S/840 W30L120 ELB3 IA1 OC	36	3600	100	120	●	4000	24	IP20/44	910500465363	40136800
RC132V LED36S/840 W60L60 ELB3 IA1 OC	40	3600	100	120	●	4000	24	IP20/44	910500465362	40135100

CoreLine Panel Non-office compliant

www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
① RC132V G4 LED36S/840 W30L120 NOC IA1	29	3600	123		●	4000	24	IP20/44	910505100534	96712300
② RC132V G4 LED36S/840 W60L60 NOC IA1	29	3600	123		●	4000	24	IP20/44	910505100527	96705500
② RC133V G4 LED34S/830 W62L62 NOC IA1	29	3400	117		●	3000	24	IP20/44	910505100539	96717800
② RC133V G4 LED36S/840 W62L62 NOC IA1	29	3600	123		●	4000	24	IP20/44	910505100538	96716100
① RC132V LED36S/840 W30L120 IA1 NOC	34	3600	100	120	●	4000	24	IP20/44	912401483126	38519400
② RC132V LED36S/840 W60L60 IA1 NOC	34	3600	100	120	●	4000	24	IP20/44	912401483123	38516300
① RC132V LED36S/840 W30L120 ELB3 IA1 NOC	36	3600	100	120	●	4000	24	IP20/44	910500465361	40134400
② RC132V LED36S/840 W60L60 ELB3 IA1 NOC	36	3600	100	120	●	4000	24	IP20/44	910500465360	40133700

Interact Ready

CoreLine Panel

www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
RC132V G4 LED34S/830 W60L60 NOC IA1	29	3400	117	●	3000	24	IP20/44	910505100528	96706200

CoreLine Recessed Office compliant

www.philips.com/interact-ready




Product Type	LED	Lumen Output	Efficiency	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	K	Number			
RC134B LED37S/830 W30L120 IA1 OC	35.4	3700	104.5	3000	24	IP20/44	910925865177	99656000
RC134B LED37S/830 W60L60 IA1 OC	35.4	3700	104.5	3000	24	IP20/44	910925865172	99651500
RC134B LED37S/840 W60L60 IA1 OC	35.4	3700	104.5	4000	24	IP20/44	910925865169	99648500

Interact Ready

CoreLine Recessed Non-office compliant


www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	K	Number			
① RC134B LED37S/830 W30L120 IA1 NOC	35.4	3700	104.5	3000	24	IP20/44	910925865178	99657700
② RC134B LED37S/830 W60L60 IA1 NOC	35.4	3700	104.5	3000	24	IP20/44	910925865171	99650800
① RC134B LED37S/840 W30L120 IA1 NOC	35.4	3700	104.5	4000	24	IP20/44	910925865174	99653900
② RC134B LED37S/840 W60L60 IA1 NOC	35.4	3700	104.5	4000	24	IP20/44	910925865170	99649200

CoreLine Surface-mounted Office compliant

www.philips.com/interact-ready




Product Type	LED	Lumen Output	Efficiency	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	K	Number			
SM134V LED37S/830 W20L120 IA1 OC	35.4	3700	104.5	3000	24	IP20	910925865187	99666900
SM134V LED37S/830 W60L60 IA1 OC	35.4	3700	104.5	3000	24	IP20	910925865190	99669000
SM134V LED37S/840 W20L120 IA1 OC	35.4	3700	104.5	4000	24	IP20	910925865184	99663800
SM134V LED37S/840 W60L60 IA1 OC	35.4	3700	104.5	4000	24	IP20	910925865188	99667600

Interact Ready

CoreLine Surface-mounted Non-office compliant


www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	K	Number			
① SM134V LED37S/830 W20L120 IA1 NOC	35.4	3700	104.5	3000	24	IP20	910925865185	99664500
② SM134V LED37S/830 W60L60 IA1 NOC	35.4	3700	104.5	3000	24	IP20	910925865189	99668300
① SM134V LED37S/840 W20L120 IA1 NOC	35.4	3700	104.5	4000	24	IP20	910925865183	99662100
② SM134V LED37S/840 W60L60 IA1 NOC	35.4	3700	104.5	4000	24	IP20	910925865186	99665200

CoreLine Downlight

www.philips.com/interact-ready




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
DN140B LED20S/830 C IA1	22	2200	100	120	●	3000	24	IP20	911401634405	32614600
DN140B LED20S/840 C IA1	22	2200	100	120	●	4000	24	IP20	911401634505	32615300
DN140B LED20S/840 WR IA1	22	2200	100	120	●	4000	24	IP20	911401634305	32613900
DN140B LED20S/830 C ELB3 IA1	25	2200	88	120	●	3000	24	IP20	911401640405	32841600
DN140B LED20S/830 WR ELB3 IA1	25	2200	88	120	●	3000	24	IP20	911401640205	32839300
DN140B LED20S/840 C ELB3 IA1	25	2200	88	120	●	4000	24	IP20	911401640505	32842300
DN140B LED20S/840 WR ELB3 IA1	25	2200	88	120	●	4000	24	IP20	911401640305	32840900

Interact Ready

CoreLine Batten


www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
BN126C LED41S/840 IA1 TW1 L1200	31	4100	132		●	4000	20	IP20(front)	911401804381	36548099
BN124C LED41S/840 IA1 TW1 L1200	36	4100	114	120	●	4000	22	IP20	911401800280	33733399
BN126C LED52S/840 IA1 TW1 L1500	39	5200	133		●	4000	20	IP20(front)	911401804581	36550399
BN124C LED53S/840 IA1 TW1 L1500	44	5300	120	120	●	4000	22	IP20	911401800380	33734099
BN126C LED64S/840 IA1 TW1 L1200	47	6400	136		●	4000	20	IP20(front)	911401804481	36549799

CoreLine SlimDownlight

www.philips.com/interact-ready



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
DN145B LED20S/830 IA1 WH	22.5	2100	93	●	3000	24	IP20/44	910500465898	96098899
DN145B LED20S/840 IA1 WH	22.5	2100	93	●	4000	24	IP20/44	910500465899	96099599
DN135B LED20S/830 IA1 WH	27	2000	70	●	3000	24	IP44	912401483215	38922299
DN135B LED20S/840 IA1 WH	27	2000	70	●	4000	24	IP44	912401483216	38924699

Philips MasterConnect

Take a first and easy step into connected lighting

Find out **more** about **MasterConnect LEDlamps** on philips.com/masterconnect

MasterConnect LEDspot

- Perfect fit design to retrofit halogen lamps
- 90% energy savings compared with halogen lamps
- Color spectrum that replicates halogen, CRI 90
- Lifetime of up to 25,000 hrs
- Perfect for hospitality, restaurant and retail



MasterConnect LEDtube

- Retrofit to T8 lamps on EM ballast or mains
- Safe and hassle-free installation
- 55% energy savings compared with fluorescent lamps
- Extra-long lifetime of 60,000 hrs
- Perfect for office, school, retail, healthcare, parking and warehouse



Add switches for wireless lighting

- Wireless dimming and scenes
- No control wires for cost effective installation



Add sensors for automated lighting

- Automated lighting through occupancy detection
- Daylight harvesting



Add a gateway for connected lighting

- Preventive maintenance of light
- Remote and personal control of lighting
- Management dashboard



Interact Ready

MasterConnect LEDtube EM/Mains T8

www.philips.com/interact-ready



	Product Type	LED	Lumen Output	Efficacy	Beam Angle	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
		W	lm	lm/W	°		K	Hrs.					
NEW	MasterConnect LEDtube IA 600mm HO 7W840 T8	7	1050	150.00	160	83	4000		28	600	A++	929002295302	71748300
NEW	MasterConnect LEDtube IA 600mm HO 7W865 T8	7	1050	150.00	160	83	6500		28	600	A++	929002295402	71750600
NEW	MasterConnect LEDtube IA 1200mm UO 16W840 T8	16	2500	156.00	160	83	4000		28	1200	A++	929002210402	66970600
NEW	MasterConnect LEDtube IA 1200mm UO 16W865 T8	16	2500	156.00	160	83	6500		28	1200	A++	929002210502	66972000
	MASTERConnect LEDtube IA 1200mm UO 16.5W830 T8	16.5	2300	139.39	160	83	3000	50.000	25.7	1200	A++	929001813702	77342000
	MASTERConnect LEDtube IA 1200mm UO 16.5W840 T8	16.5	2500	151.52	160	83	4000	50.000	25.7	1200	A++	929001813802	77344400
	MASTERConnect LEDtube IA 1200mm UO 16.5W865 T8	16.5	2500	151.52	160	83	6500	50.000	25.7	1200	A++	929001813902	77346800
NEW	MasterConnect LEDtube IA 1500mm UO 25W840 T8	25	3700	148.00	160	83	4000		28	1500	A++	929002210802	66976800
NEW	MasterConnect LEDtube IA 1500mm UO 25W865 T8	25	3700	148.00	160	83	6500		28	1500	A++	929002210902	66978200
	MASTERConnect LEDtube IA 1500mm UO 25.5W830 T8	25.5	3400	133.33	160	83	3000	50.000	25.7	1500	A++	929001814002	77348200
	MASTERConnect LEDtube IA 1500mm UO 25.5W840 T8	25.5	3700	145.10	160	83	4000	50.000	25.7	1500	A++	929001814102	77350500
	MASTERConnect LEDtube IA 1500mm UO 25.5W865 T8	25.5	3700	145.10	160	83	6500	50.000	25.7	1500	A++	929001814202	77352900

MasterConnect LEDspot GU10

www.philips.com/interact-ready



	Product Type	LED	Lumen Output	Efficiency	Luminous Intensity	Beam Angle	CRI	Color Temp.	Lamp diameter	Total length	EEL	12NC	EOC code
		W	lm	lm/W	cd	°		K					
NEW	MC LEDspot IA 4.7-50W GU10 927 36D	4.7	400	73.00	500	36	90	2700	50	100	A+	929002253702	69392300
NEW	MC LEDspot IA 4.7-50W GU10 930 36D	4.7	400	73.00	500	36	90	3000	50	100	A+	929002253802	69394700
NEW	MC LEDspot IA 4.7-50W GU10 940 36D	4.7	400	73.00	500	36	90	4000	50	100	A+	929002253902	69396100

Interact Ready

Indoor Accessories

www.philips.com/interact-ready



Product Type	LED	12NC	EOC code
	W		
OCC SENSOR IA CM IP42 WH	1	929001819002	77752700
OCC-DL SENSOR IA CM IP42 WH	1	929001819102	77754100



Philips CoreLine

The reference for innovative good quality, easy-to-use lighting solutions for every project where light really matters

Find the **right** solution in our range using the **Selector tool**
productfinder.lighting.philips.com

Find out **more** about **all 16** different CoreLine luminaires on philips.com/coreline

New!



 Innovative  Easy to install  High Quality

CoreLine waterproof



interact ready.

- New, robust design with improved mechanical and electrical design for a faster and more flexible installation
- Wide-beam light distribution for more effective lighting
- Energy savings (up to 140lm/W) and longer lifetime (50k hrs L75) to reduce operating costs

CoreLine recessed and CoreLine surface-mounted

- Easy to install thanks to new quick connector – simply detach, wire and re-connect with the luminaire
- Innovative MultiLumen feature: 3 different lumen outputs in one luminaire
- Various accessories and looping enable flexible installation
- Energy savings of up to 45% compared to functional TL-D luminaires
- Comfortable, flicker-free light with reduced glare
- Dust-proof optical compartments
- Long lifetime of 50,000 hrs (L80), efficacy up to 140lm/W
- On/off (PSU) and DALI dimming (PSD) available



Contents

Interact Ready

CoreLine

Ledinaire

LED lamps

LED bulbs

LED candles & lusters

LED tubes

LED PL-lamps

TrueForce




CoreLine LED luminaires

Philips CoreLine offers a full range of LED lighting solutions that keeps installation time to a minimum, while saving a maximum of energy. Whether old or new, optimal lighting can transform a building into something truly special and turn it into a place where people enjoy working and living. Give your customers that “wow” moment with Philips CoreLine: the complete range of high quality LED lighting that's setting the reference in the market. Because when light really matters, you don't want to take a chance.

CoreLine Panel Office compliant

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
RC132V G4 LED34S/830 PSD W30L120 OC	29	3400	117		●	3000	30	IP20/44	911401879680	36052200
RC132V G4 LED34S/830 PSD W60L60 OC	29	3400	117		●	3000	30	IP20/44	911401879080	36046100
RC132V G4 LED34S/830 PSU W60L60 OC	29	3400	117		✕	3000	40	IP20/44	911401878680	36042300
RC132V G4 LED36/840 PSU W60L60 OC TP(a)	29	3600	123		✕	4000	30	IP20/44	911401879780	36053900
RC132V G4 LED36/840 PSU W60L60 OC TP(a)E	29	3600	123		✕	4000	65	IP20/44	910505100544	96722200
RC132V G4 LED36S/840 PSD W30L120 OC	29	3600	123		●	4000	30	IP20/44	911401879580	36051500
RC132V G4 LED36S/840 PSD W60L60 OC	29	3600	123		●	4000	30	IP20/44	911401878980	36045400
RC132V G4 LED36S/840 PSU W30L120 OC	29	3600	123		✕	4000	40	IP20/44	911401878880	36044700
RC132V G4 LED36S/840 PSU W60L60 OC	29	3600	123		✕	4000	40	IP20/44	911401878580	36041600
RC133V G4 LED34S/830 PSD W62L62 OC	29	3400	117		●	3000	30	IP20/44	911401879380	36049200
RC133V G4 LED36S/840 PSD W62L62 OC	29	3600	123		●	4000	30	IP20/44	911401879280	36048500
RC133V G4 LED36S/840 PSU W62L62 OC	29	3600	123		✕	4000	40	IP20/44	911401878780	36043000
RC132V G4LED34_43S/830_840 PSU W60L60 OC	30	4300	125		✕	3000-4000	18	IP20/44	911401879880	36054600
RC132V G4LED34_43S/830_840 PSUW30L120 OC	30	4300	125		✕	3000-4000	18	IP20/44	911401880080	36056000
RC133V G4LED34_43S/830_840 PSU W62L62 OC	30	4300	125		✕	3000-4000	18	IP20/44	911401879980	36055300
RC132V G4 LED36S/840 PSD W30L120 OC ELB3	33	3600	123		●	4000	24	IP20/44	910505100537	96715400
RC132V G4 LED36S/840 PSD W60L60 OC ELB3	33	3600	123		●	4000	24	IP20/44	910505100532	96710900
RC132V G4 LED36S/840 PSU W30L120 OC ELB3	33	3600	123		✕	4000	65	IP20/44	910505100536	96714700
RC132V G4 LED36S/840 PSU W60L60 OC ELB3	33	3600	123		✕	4000	65	IP20/44	910505100533	96711600
RC132V LED36S/840 PSU W30L120 OC	33	3600	110	120	✕	4000	24	IP20/44	910503910314	38102800
RC132V LED36S/840 PSU W60L60 OC	33	3600	110	120	✕	4000	24	IP20/44	910503910310	38098400
RC132V G4 LED43S/840 PSD W60L60 OC	34.5	4300	125		●	4000	30	IP20/44	911401879180	36047800
RC133V G4 LED43S/840 PSD W62L62 OC	34.5	4300	125		●	4000	30	IP20/44	911401879480	36050800
RC132V LED36S/840 PSD W30L120 OC	35	3600	105	120	●	4000	24	IP20/44	912401483169	38612200
RC132V LED36S/840 PSD W60L60 OC	35	3600	105	120	●	4000	24	IP20/44	912401483165	38608500
RC132V G4 LED43S/840 PSD W60L60 OC ELB3	37	4300	125		●	4000	24	IP20/44	910505100541	96719200

CoreLine LED luminaires

CoreLine Panel Non-office compliant


www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
RC132V G4 LED34S/830 PSU W60L60 NOC	29	3400	117		✗	3000	40	IP20/44	911401878080	36036200
RC132V G4 LED36S/840 PSU W30L120 NOC	29	3600	123		✗	4000	40	IP20/44	911401878480	36040900
RC132V G4 LED36S/840 PSU W60L60 NOC	29	3600	123		✗	4000	40	IP20/44	911401877980	36035500
RC133V G4 LED34S/830 PSU W62L62 NOC	29	3400	117		✗	3000	40	IP20/44	911401878380	36039300
RC133V G4 LED36S/840 PSU W62L62 NOC	29	3600	123		✗	4000	40	IP20/44	911401878280	36038600
RC132V LED36S/840 PSU W30L120 NOC	33	3600	105	120	✗	4000	24	IP20/44	910503910309	38097700
RC132V LED36S/840 PSU W60L60 NOC	33	3600	110	120	✗	4000	24	IP20/44	910503910307	38095300
RC132V G4 LED43S/840 PSU W60L60 NOC	34.5	4300	125		✗	4000	40	IP20/44	911401878180	36037900

CoreLine Panel

www.philips.com/coreline





Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
RC132V G4 LED36_43S/830840PSUW30L120OCW3	30	4300	125	✗	3000-4000	18	IP20/44	910505100560	96738300
RC132V G4 LED36_43S/830_840PSUW60L60OCW3	30	4300	125	✗	3000-4000	18	IP20/44	910505100564	96742000

CoreLine LED luminaires

CoreLine Recessed Office compliant

www.philips.com/coreline




	Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
		W	lm	lm/W		K	Number			
NEW	RC136B 28S_34S_40S/830 PSD W30L120 OC	22/26/31	2800/3400/4000		●	3000	30	IP20/44	911401880881	51222100
NEW	RC136B 28S_34S_40S/830 PSD W60L60 OC	22/26/31	2800/3400/4000		●	3000	30	IP20/44	911401880681	51220700
NEW	RC136B 28S_34S_40S/830 PSD W60L60 OC W5	22/26/31	2800/3400/4000		●	3000	30	IP20/44	911401881481	51228300
NEW	RC136B 31S_37S_43S/840 PSD W30L120 OC	22/26/31	3100/3700/4300		●	4000	30	IP20/44	911401880981	51223800
NEW	RC136B 31S_37S_43S/840 PSD W60L60 OC	22/26/31	3100/3700/4300		●	4000	30	IP20/44	911401880781	51221400
NEW	RC136B 31S_37S_43S/840 PSD W60L60 OC W5	22/26/31	3100/3700/4300		●	4000	30	IP20/44	911401881581	51229000
NEW	RC136B 31S_37S_43S/840 PSU W60L60 OC	22/26/31	3100/3700/4300		⊗	4000	35	IP20/44	911401880481	51218400
NEW	RC136B 31S_37S_43S/840 PSU W60L60 OC W3	22/26/31	3100/3700/4300		⊗	4000	35	IP20/44	911401881281	51226900
	RC134B LED27S/840 PSD W30L120 OC	22	2700	123	●	4000	38	IP44	910925864770	34812000
	RC134B LED27S/840 PSD W60L60 OC	22	2700	123	●	4000	38	IP44	910925864768	34810600
	RC134B LED27S/830 PSD W30L120 OC	23	2700	117	●	3000	38	IP44	910925864774	34816800
	RC134B LED27S/830 PSD W60L60 OC	23	2700	117	●	3000	38	IP44	910925864772	34814400
	RC134B LED27S/840 PSD W30L120 ELB3 OC	25.5	2700	106	●	4000	38	IP44	910925864795	34837300
	RC134B LED27S/840 PSD W60L60 ELB3 OC	25.5	2700	106	●	4000	38	IP44	910925864780	34822900
	RC134B LED37S/840 PSU W30L120 OC	30.5	3700	121	⊗	4000	24	IP44	910925864788	34830400
	RC134B LED37S/840 PSU W60L60 OC	30.5	3700	121	⊗	4000	24	IP44	910925864787	34829800
	RC134B LED37S/830 PSD W30L120 OC	31.5	3700	117	●	3000	24	IP44	910925864773	34815100
	RC134B LED37S/830 PSD W60L60 OC	31.5	3700	117	●	3000	24	IP44	910925864771	34813700
	RC134B LED37S/840 PSD W30L120 OC	31.5	3700	117	●	4000	24	IP44	910925864769	34811300
	RC134B LED37S/840 PSD W60L60 OC	31.5	3700	117	●	4000	24	IP44	910925864762	34804500
	RC134B LED37S/830 PSU W30L120 OC	34.5	3700	107	⊗	3000	24	IP44	910925864790	34832800
	RC134B LED37S/830 PSU W60L60 OC	34.5	3700	107	⊗	3000	24	IP44	910925864789	34831100
	RC134B LED37S/830 PSD W30L120 ELB3 OC	35	3700	106	●	3000	24	IP44	910925864802	34843400
	RC134B LED37S/840 PSD W30L120 ELB3 OC	35	3700	106	●	4000	24	IP44	910925864796	34838000

CoreLine LED luminaires

CoreLine Recessed Non-office compliant

www.philips.com/coreline




	Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
		W	lm	lm/W		K	Number			
NEW	RC136B 28S_34S_40S/830 PSU W60L60 NOC	22/26/31	2800/3400/4000		⊗	3000	35	IP20/44	911401880281	51216000
NEW	RC136B 28S_34S_40S/830 PSU W60L60 NOC W3	22/26/31	2800/3400/4000		⊗	3000	35	IP20/44	911401881081	51224500
NEW	RC136B 31S_37S_43S/840 PSD W60L60 NOC	22/26/31	3100/3700/4300		●	4000	30	IP20/44	911401880581	51219100
NEW	RC136B 31S_37S_43S/840 PSD W60L60 NOC W5	22/26/31	3100/3700/4300		●	4000	30	IP20/44	911401881381	51227600
NEW	RC136B 31S_37S_43S/840 PSU W60L60 NOC	22/26/31	3100/3700/4300		⊗	4000	35	IP20/44	911401880381	51217700
NEW	RC136B 31S_37S_43S/840 PSU W60L60 NOC W3	22/26/31	3100/3700/4300		⊗	4000	35	IP20/44	911401881181	51225200
	RC134B LED27S/840 PSD W30L120 NOC	26.5	2700	102	●	4000	38	IP44	910925864784	34826700
	RC134B LED27S/840 PSD W60L60 NOC	26.5	2700	102	●	4000	38	IP44	910925864783	34825000
	RC134B LED27S/840 PSU W30L120 NOC	27	2700	100	⊗	4000	24	IP44	910925864782	34824300
	RC134B LED27S/840 PSU W60L60 NOC	27	2700	100	⊗	4000	24	IP44	910925864781	34823600
	RC134B LED27S/830 PSU W30L120 NOC	28.5	2700	95	⊗	3000	33	IP44	910925864755	34797000
	RC134B LED27S/830 PSU W60L60 NOC	28.5	2700	95	⊗	3000	33	IP44	910925864753	34795600
	RC134B LED27S/830 PSD W30L120 NOC	30.5	2700	89	●	3000	38	IP44	910925864761	34803800
	RC134B LED27S/830 PSD W60L60 NOC	30.5	2700	89	●	3000	38	IP44	910925864759	34801400
	RC134B LED27S/840 PSD W30L120 ELB3 NOC	30.5	2700	89	●	4000	38	IP44	910925864793	34835900
	RC134B LED27S/840 PSD W60L60 ELB3 NOC	30.5	2700	89	●	4000	38	IP44	910925864786	34828100
	RC134B LED27S/840 PSU W30L120 ELB3 NOC	30.5	2700	89	⊗	4000	24	IP44	910925864791	34833500
	RC134B LED27S/840 PSU W60L60 ELB3 NOC	30.5	2700	89	⊗	4000	24	IP44	910925864785	34827400
	RC134B LED27S/830 PSU W30L120 ELB3 NOC	32	2700	84	⊗	3000	33	IP44	910925864797	34839700
	RC134B LED27S/830 PSD W30L120 ELB3 NOC	34	2700	79	●	3000	38	IP44	910925864799	34841000
	RC134B LED37S/830 PSU W30L120 NOC	34	3700	109	⊗	3000	24	IP44	910925864754	34796300
	RC134B LED37S/830 PSU W60L60 NOC	34	3700	109	⊗	3000	24	IP44	910925864752	34794900
	RC134B LED37S/840 PSU W30L120 NOC	34	3700	109	⊗	4000	24	IP44	910925864776	34818200
	RC134B LED37S/840 PSU W60L60 NOC	34	3700	109	⊗	4000	24	IP44	910925864775	34817500
	RC134B LED37S/830 PSD W30L120 NOC	35.5	3700	104	●	3000	24	IP44	910925864760	34802100
	RC134B LED37S/830 PSD W60L60 NOC	35.5	3700	104	●	3000	24	IP44	910925864758	34800700
	RC134B LED37S/840 PSD W30L120 ELB3 NOC	35.5	3700	104	●	4000	24	IP44	910925864794	34836600
	RC134B LED37S/840 PSD W30L120 NOC	35.5	3700	104	●	4000	24	IP44	910925864757	34799400
	RC134B LED37S/840 PSD W60L60 NOC	35.5	3700	104	●	4000	24	IP44	910925864756	34798700
	RC134B LED37S/830 PSU W30L120 ELB3 NOC	38	3700	97	⊗	3000	24	IP44	910925864798	34840300
	RC134B LED37S/830 PSD W30L120 ELB3 NOC	39	3700	95	●	3000	24	IP44	910925864801	34842700
	RC134B LED37S/840 PSD W60L60 ELB3 NOC	39	3700	95	●	4000	24	IP44	910925864778	34820500

CoreLine LED luminaires

CoreLine Recessed

www.philips.com/coreline





	Product Type	LED		Lumen Output	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
		W	lm							
NEW	RC136B 28S_34S_40S/830 PSD W30L120OCELB3	25/29/34	2800/3400/4000		●	3000	30	IP20/44	910505101244	97551700
NEW	RC136B 31S_37S_43S/840 PSD W30L120OCELB3	25/29/34	3100/3700/4300		●	4000	30	IP20/44	910505101245	97552400
NEW	RC136B 31S_37S_43S/840 PSD W60L60 OCELB3	25/29/34	3100/3700/4300		●	4000	30	IP20/44	910505101241	97548700
NEW	RC136B 31S_37S_43S/840 PSD W60L60NOCELB3	25/29/34	3100/3700/4300		●	4000	30	IP20/44	910505101243	97550000
NEW	RC136B 31S_37S_43S/840 PSU W60L60NOCELB3	25/29/34	3100/3700/4300		✕	4000	35	IP20/44	910505101242	97549400

CoreLine LED luminaires

CoreLine Surface-mounted Office compliant

www.philips.com/coreline





	Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./ MCB (16a type B)	IP rating	12NC	EOC code
		W	lm	lm/W		K	Number			
NEW	SM136V 28S_34S_40S/830 PSD W20L120 OC	22/26/31	2800/3400/4000		●	3000	30	IP20/44	911401882081	51234400
NEW	SM136V 28S_34S_40S/830 PSD W20L120 OC W5	22/26/31	2800/3400/4000		●	3000	30	IP20/44	910505101253	97560900
NEW	SM136V 28S_34S_40S/830 PSD W20L150 OC	22/26/31	2800/3400/4000		●	3000	30	IP20/44	911401882581	51239900
NEW	SM136V 31S_37S_43S/840 PSD W20L120 OC	22/26/31	3100/3700/4300		●	4000	30	IP20/44	911401882181	51235100
NEW	SM136V 31S_37S_43S/840 PSD W20L120 OC W5	22/26/31	3100/3700/4300		●	4000	30	IP20/44	910505101250	97557900
NEW	SM136V 31S_37S_43S/840 PSD W20L150 OC	22/26/31	3100/3700/4300		●	4000	30	IP20/44	911401882681	51240500
NEW	SM136V 31S_37S_43S/840 PSU W20L120 OC	22/26/31	3100/3700/4300		⊗	4000	35	IP20/44	911401881881	51232000
NEW	SM136V 31S_37S_43S/840 PSU W20L120 OC W3	22/26/31	3100/3700/4300		⊗	4000	35	IP20/44	910505101254	97561600
NEW	SM136V 31S_37S_43S/840 PSU W20L150 OC	22/26/31	3100/3700/4300		⊗	4000	35	IP20/44	911401882481	51238200
	SM134V LED27S/840 PSD W20L120 OC	22	2700	123	●	4000	38	IP20	910925864823	34864900
	SM134V LED27S/840 PSD W60L60 OC	22	2700	123	●	4000	38	IP20	910925864821	34862500
	SM134V LED27S/830 PSD W20L120 OC	23	2700	117	●	3000	38	IP20	910925864827	34868700
	SM134V LED27S/830 PSD W60L60 OC	23	2700	117	●	3000	38	IP20	910925864825	34866300
	SM134V LED27S/840 PSD W20L120 ELB3 OC	25.5	2700	106	●	4000	38	IP20	910925864848	34889200
	SM134V LED27S/840 PSD W60L60 ELB3 OC	25.5	2700	106	●	4000	38	IP20	910925864833	34874800
	SM134V LED37S/840 PSU W20L120 OC	30.5	3700	121	⊗	4000	24	IP20	910925864841	34882300
	SM134V LED37S/840 PSU W60L60 OC	30.5	3700	121	⊗	4000	24	IP20	910925864840	34881600
	SM134V LED37S/830 PSD W20L120 OC	31.5	3700	117	●	3000	24	IP20	910925864826	34867000
	SM134V LED37S/830 PSD W60L60 OC	31.5	3700	117	●	3000	24	IP20	910925864824	34865600
	SM134V LED37S/840 PSD W20L120 OC	31.5	3700	117	●	4000	24	IP20	910925864822	34863200
	SM134V LED37S/840 PSD W60L60 OC	31.5	3700	117	●	4000	24	IP20	910925864820	34861800
	SM134V LED37S/830 PSU W20L120 OC	34.5	3700	107	⊗	3000	24	IP20	910925864843	34884700
	SM134V LED37S/830 PSU W60L60 OC	34.5	3700	107	⊗	3000	24	IP20	910925864842	34883000
	SM134V LED37S/840 PSD W20L120 ELB3 OC	35	3700	106	●	4000	24	IP20	910925864849	34890800
	SM134V LED37S/840 PSD W60L60 ELB3 OC	35	3700	106	●	4000	24	IP20	910925864832	34873100

CoreLine LED luminaires

CoreLine Surface-mounted Non-office compliant

www.philips.com/coreline




	Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
		W	lm	lm/W		K	Number			
NEW	SM136V 28S_34S_40S/830 PSU W20L120 NOC	22/26/31	2800/3400/4000		✗	3000	35	IP20/44	911401881681	51230600
NEW	SM136V 28S_34S_40S/830 PSU W20L150 NOC	22/26/31	2800/3400/4000		✗	3000	35	IP20/44	911401882281	51236800
NEW	SM136V 31S_37S_43S/840 PSD W20L120 NOC	22/26/31	3100/3700/4300		●	4000	30	IP20/44	911401881981	51233700
NEW	SM136V 31S_37S_43S/840 PSU W20L120 NOC	22/26/31	3100/3700/4300		✗	4000	35	IP20/44	911401881781	51231300
NEW	SM136V 31S_37S_43S/840 PSU W20L150 NOC	22/26/31	3100/3700/4300		✗	4000	35	IP20/44	911401882381	51237500
	SM134V LED27S/840 PSD W20L120 NOC	26.5	2700	102	●	4000	38	IP20	910925864837	34878600
	SM134V LED27S/840 PSD W60L60 NOC	26.5	2700	102	●	4000	38	IP20	910925864836	34877900
	SM134V LED27S/840 PSU W20L120 NOC	27	2700	100	✗	4000	24	IP20	910925864835	34876200
	SM134V LED27S/840 PSU W60L60 NOC	27	2700	100	✗	4000	24	IP20	910925864834	34875500
	SM134V LED27S/830 PSU W20L120 NOC	28.5	2700	95	✗	3000	33	IP20	910925864813	34854000
	SM134V LED27S/830 PSU W60L60 NOC	28.5	2700	95	✗	3000	33	IP20	910925864811	34852600
	SM134V LED27S/830 PSD W20L120 NOC	30.5	2700	89	●	3000	38	IP20	910925864819	34860100
	SM134V LED27S/830 PSD W60L60 NOC	30.5	2700	89	●	3000	38	IP20	910925864817	34858800
	SM134V LED27S/840 PSD W20L120 ELB3 NOC	30.5	2700	89	●	4000	38	IP20	910925864846	34887800
	SM134V LED27S/840 PSD W60L60 ELB3 NOC	30.5	2700	89	●	4000	38	IP20	910925864839	34880900
	SM134V LED27S/840 PSU W20L120 ELB3 NOC	30.5	2700	89	✗	4000	24	IP20	910925864844	34885400
	SM134V LED27S/840 PSU W60L60 ELB3 NOC	30.5	2700	89	✗	4000	24	IP20	910925864838	34879300
	SM134V LED27S/830 PSU W20L120 ELB3 NOC	32	2700	84	✗	3000	33	IP20	910925864850	34891500
	SM134V LED27S/830 PSD W20L120 ELB3 NOC	34	2700	79	●	3000	38	IP20	910925864852	34893900
	SM134V LED37S/830 PSU W20L120 NOC	34	3700	109	✗	3000	24	IP20	910925864812	34853300
	SM134V LED37S/830 PSU W60L60 NOC	34	3700	109	✗	3000	24	IP20	910925864810	34851900
	SM134V LED37S/840 PSU W20L120 NOC	34	3700	109	✗	4000	24	IP20	910925864829	34870000
	SM134V LED37S/840 PSU W60L60 NOC	34	3700	109	✗	4000	24	IP20	910925864828	34869400
	SM134V LED37S/830 PSD W20L120 NOC	35.5	3700	104	●	3000	24	IP20	910925864818	34859500
	SM134V LED37S/830 PSD W60L60 NOC	35.5	3700	104	●	3000	24	IP20	910925864816	34857100
	SM134V LED37S/840 PSD W20L120 ELB3 NOC	35.5	3700	104	●	4000	24	IP20	910925864847	34888500
	SM134V LED37S/840 PSD W20L120 NOC	35.5	3700	104	●	4000	24	IP20	910925864815	34856400
	SM134V LED37S/840 PSD W60L60 NOC	35.5	3700	104	●	4000	24	IP20	910925864814	34855700
	SM134V LED37S/830 PSU W20L120 ELB3 NOC	38	3700	97	✗	3000	24	IP20	910925864851	34892200
	SM134V LED37S/840 PSU W20L120 ELB3 NOC	38	3700	97	✗	4000	24	IP20	910925864845	34886100
	SM134V LED37S/840 PSU W60L60 ELB3 NOC	38	3700	97	✗	4000	24	IP20	910925864830	34871700
	SM134V LED37S/830 PSD W20L120 ELB3 NOC	39	3700	95	●	3000	24	IP20	910925864853	34894600
	SM134V LED37S/840 PSD W60L60 ELB3 NOC	39	3700	95	●	4000	24	IP20	910925864831	34872400

CoreLine LED luminaires

CoreLine Surface-mounted


www.philips.com/coreline



	Product Type	LED	Lumen Output	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
		W	lm		K	Number			
NEW	RC136B 31S_37S_43S/840 PSDW60L60OCELB3W5	25/29/34	3100/3700/4300	●	4000	30	IP20/44	910505101256	97563000
NEW	RC136B 31S_37S_43S/840 PSUW60L60OCELB3W3	25/29/34	3100/3700/4300	⊗	4000	35	IP20/44	910505101257	97564700
NEW	SM136V 28S_34S_40S/830 PSU W20L120 NOCW3	22/26/31	2800/3400/4000	⊗	3000	35	IP20/44	910505101252	97559300
NEW	SM136V 31S_37S_43S/840 PSD W20L120 NOCW5	22/26/31	3100/3700/4300	●	4000	30	IP20/44	910505101255	97562300
NEW	SM136V 31S_37S_43S/840 PSD W20L120OCELB3	25/29/34	3100/3700/4300	●	4000	30	IP20/44	910505101247	97554800
NEW	SM136V 31S_37S_43S/840 PSD W20L150OCELB3	25/29/34	3100/3700/4300	●	4000	30	IP20/44	910505101248	97555500
NEW	SM136V 31S_37S_43S/840 PSU W20L120 NOCW3	22/26/31	3100/3700/4300	⊗	4000	35	IP20/44	910505101251	97558600
NEW	SM136V 31S_37S_43S/840 PSUW20L120NOCELB3	25/29/34	3100/3700/4300	⊗	4000	35	IP20/44	910505101246	97553100
NEW	SM136V 31S_37S_43S/840 PSUW20L150NOCELB3	25/29/34	3100/3700/4300	⊗	4000	35	IP20/44	910505101249	97556200
NEW	SM136V 31S_37S_43S/840PSDW20L120OCELB3W5	25/29/34	3100/3700/4300	●	4000	30	IP20/44	910505101258	97565400
NEW	SM136V 31S_37S_43S/840PSUW20L120OCELB3W3	25/29/34	3100/3700/4300	⊗	4000	35	IP20/44	910505101259	97566100

Coreline 2.0

www.philips.com/coreline




	Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
		W	lm	lm/W		K	Number			
	SM100C LED25S/840 PSU W20L120	27.1	2700	101	⊗	4000	24	IP20	911401825899	01825899
	SM100C LED25S/840 PSU W60L60	27.1	2700	101	⊗	4000	24	IP20	911401825999	01825999

CoreLine LED luminaires

CoreLine Wall-mounted

www.philips.com/coreline





Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	Motion/Daylight sensor	12NC	EOC code
	W	lm	lm/W	°		K	Number				
1 WL130V LED12S/830 PSU WH	12	1200	100	120	✗	3000	32	IP65		912401483182	38778599
1 WL130V LED12S/840 PSU WH	12	1200	100	120	✗	4000	32	IP65		912401483183	38779299
2 WL131V LED12S/830 PSED EL3 WH	12	1200	100	120	●	3000	20	IP65	no	910500465390	40268600
2 WL131V LED12S/830 PSR EL3 MDU WH	12	1200	100	120	●	3000	18	IP65	yes	910500465405	40282200
2 WL131V LED12S/830 PSU WH	12	1200	100	120	✗	3000	32	IP65		911401807080	34000599
2 WL131V LED12S/840 PSED EL3 WH	12	1200	100	120	●	4000	20	IP65	no	910500465391	40269300
2 WL131V LED12S/840 PSR EL3 MDU WH	12	1200	100	120	●	4000	18	IP65	yes	910500465406	40283900
2 WL131V LED12S/840 PSU WH	12	1200	100	120	✗	4000	32	IP65		911401807180	34001299
2 WL131V LED12S/830 PSED WH	13	1200	90	120	●	3000	20	IP65		912401483196	38792199
2 WL131V LED12S/840 PSED WH	13	1200	90	120	●	4000	20	IP65		912401483197	38793899
2 WL131V LED12S/830 PSR MDU WH	15	1200	80	120	●	3000	18	IP65	yes	912401483190	38786099
2 WL131V LED12S/830 PSU EL3 WH	15	1200	80	120	✗	3000	32	IP65	no	910500465894	96094000
2 WL131V LED12S/840 PSR MDU WH	15	1200	80	120	●	4000	18	IP65	yes	912401483191	38787799
2 WL131V LED12S/840 PSU EL3 WH	15	1200	80	120	✗	4000	32	IP65	no	910500465895	96095700
1 WL130V LED20S/830 PSU WH	22	2000	90	120	✗	3000	32	IP65		912401483184	38780899
1 WL130V LED20S/840 PSU WH	22	2000	90	120	✗	4000	32	IP65		912401483185	38781599
2 WL131V LED20S/830 PSED EL3 WH	22	2000	91	120	●	3000	20	IP65	no	910500465392	40270900
2 WL131V LED20S/830 PSR EL3 MDU WH	22	2000	91	120	●	3000	18	IP65	yes	910500465407	40284600
2 WL131V LED20S/830 PSU WH	22	2000	90	120	✗	3000	32	IP65		911401807280	34002999
2 WL131V LED20S/840 PSED EL3 WH	22	2000	91	120	●	4000	20	IP65	no	910500465393	40271600
2 WL131V LED20S/840 PSR EL3 MDU WH	22	2000	91	120	●	4000	18	IP65	yes	910500465408	40285300
2 WL131V LED20S/840 PSU WH	22	2000	90	120	✗	4000	32	IP65		911401807380	34003699
1 WL130V LED20S/830 PSU MDU WH	23	2000	80	120	✗	3000	32	IP65	yes	912401483186	38782299
1 WL130V LED20S/840 PSU MDU WH	23	2000	80	120	✗	4000	32	IP65	yes	912401483187	38783999
2 WL131V LED20S/830 PSED WH	23	2000	90	120	●	3000	20	IP65		912401483198	38794599
2 WL131V LED20S/840 PSED WH	23	2000	90	120	●	4000	20	IP65		912401483199	38795299
2 WL131V LED20S/830 PSR MDU WH	25	2000	80	120	●	3000	18	IP65	yes	912401483192	38788499
2 WL131V LED20S/830 PSU EL3 WH	25	2000	80	120	✗	3000	32	IP65	no	910500465896	96096400
2 WL131V LED20S/840 PSR MDU WH	25	2000	80	120	●	4000	18	IP65	yes	912401483193	38789199
2 WL131V LED20S/840 PSU EL3 WH	25	2000	80	120	✗	4000	32	IP65	no	910500465897	96097100
2 WL131V LED34S/830 PSED EL3 WH	36	3400	94	120	●	3000	20	IP65	no	910500465396	40274700

CoreLine LED luminaires

CoreLine Wall-mounted - Continued

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	Motion/Daylight sensor	12NC	EOC code
	W	lm	lm/W	°		K	Number				
WL131V LED34S/830 PSED WH	36	3400	94	120	●	3000	20	IP65	no	910500465394	40272300
WL131V LED34S/830 PSR EL3 MDU WH	36	3400	94	120	●	3000	18	IP65	yes	910500465409	40286000
WL131V LED34S/830 PSU WH	36	3400	95	120	⊗	3000	32	IP65		912401483188	38784699
WL131V LED34S/840 PSED EL3 WH	36	3400	94	120	●	4000	20	IP65	no	910500465397	40275400
WL131V LED34S/840 PSED WH	36	3400	94	120	●	4000	20	IP65	no	910500465395	40273000
WL131V LED34S/840 PSR EL3 MDU WH	36	3400	94	120	●	4000	18	IP65	yes	910500465410	40287700
WL131V LED34S/840 PSU WH	36	3400	95	120	⊗	4000	32	IP65		912401483189	38785399
WL131V LED34S/830 PSR MDU WH	38	3400	90	120	●	3000	18	IP65	yes	912401483194	38790799
WL131V LED34S/840 PSR MDU WH	38	3400	90	120	●	4000	18	IP65	yes	912401483195	38791499

CoreLine LED luminaires

CoreLine Waterproof

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	Motion/Daylight sensor	12NC	EOC code
	W	lm	lm/W		K	Number				
1 WT120C G2 LED18S/840 PSU PCO L600	15	1800	120	✗	4000	80	IP65		911401836980	34976399
2 WT120C G2 LED19S/840 PSU L600	15	1900	127	✗	4000	80	IP65		911401823480	84045900
2 WT120C G2 LED19S/840 PSD L600	16	1900	119	●	4000	30	IP65		910505100038	88306800
2 WT120C G2 LED19S/840 PSU MDU L600	16	1900	119	✗	4000	80	IP65		910505100036	96244900
1 WT120C G2 LED25S/840 PSU PCO L1200	20.5	2500	125	✗	4000	80	IP65		911401837080	34977099
2 WT120C G2 LED27S/840 PSU L1200	20.5	2700	135	✗	4000	80	IP65		911401823580	84046600
2 WT120C G2 LED27S/840 PSU TW3 L1200	21	2700	129	✗	4000	80	IP65		910505100039	91685800
2 WT120C G2 LED27S/840 PSU MDU L1200	21.5	2700	126	✗	4000	80	IP65		910505100040	96248700
2 WT120C G2 LED27S/840 PSU MDU TW3 L1200	21.5	2700	125	✗	4000	80	IP65		910505100041	96249400
2 WT120C G2 LED27S/840 PSD L1200	22	2700	123	●	4000	30	IP65		910505100044	88307500
1 WT120C G2 LED31S/840 PSU PCO L1500	24.3	3100	129	✗	4000	60	IP65		911401837180	34978799
2 WT120C G2 LED34S/840 PSU L1500	24.3	3400	142	✗	4000	60	IP65		911401823680	84047300
2 WT120C G2 LED34S/865 PSU L1500	24.5	3400	139	✗	6500	60	IP65		911401824481	36934199
2 WT120C G2 LED34S/840 PSU TW3 L1500	25	3400	136	✗	4000	60	IP65		910505100058	91686500
2 WT120C G2 LED27S/840 PSU ELB3 L1200	25.5	2700	104	✗	4000	80	IP65		910505100042	85418000
2 WT120C G2 LED34S/840 PSU MDU L1500	25.5	3400	133	✗	4000	60	IP65		910505100059	96267800
2 WT120C G2 LED34S/840 PSU MDU TW3 L1500	25.5	3400	133	✗	4000	60	IP65		910505100060	96268500
2 WT120C G2 LED34S/840 PSD L1500	26	3400	133	●	4000	30	IP65		910505100061	88308200
2 WT120C G2 LED27S/840 PSD ELB3 L1200	27	2700	100	●	4000	30	IP65		910505100045	88311200
2 WT120C G2 LED37S/830 PSU L1200	28.5	3700	130	✗	3000	60	IP65		911401824681	36936599
2 WT120C G2 LED40S/865 PSU L1200	28.5	4000	140	✗	6500	60	IP65		911401824381	36933499
1 WT120C G2 LED37S/840 PSU PCO L1200	28.6	3700	132	✗	4000	60	IP65		911401837280	34979499
2 WT120C G2 LED40S/840 PSU L1200	28.6	4000	143	✗	4000	60	IP65		911401823780	84048000
2 WT120C G2 LED40S/840 PSU TW1 WEC L1200	29	4000	133	✗	4000	60	IP65		910505100051	16317400
2 WT120C G2 LED40S/840 PSU WEC L1200	29	4000	133	✗	4000	60	IP65		910505100050	16316700
2 WT120C G2 LED34S/840 PSU ELB3 L1500	29.5	3400	113	✗	4000	60	IP65		910505100062	85420300
2 WT120C G2 LED40S/840 PSD L1200	30	4000	133	●	4000	30	IP65		910505100053	88309900
2 WT120C G2 LED40S/840 PSU MDU L1200	30	4000	133	✗	4000	60	IP65		910505100048	96256200
2 WT120C G2 LED40S/840 PSU MDU TW3 L1200	30	4000	133	✗	4000	60	IP65		910505100049	96257900
2 WT120C G2 LED40S/840 PSU TW3 L1200	30	4000	133	✗	4000	60	IP65		910505100047	91687200
2 WT120C G2 LED34S/840 PSD ELB3 L1500	30.5	3400	111	●	4000	30	IP65		910505100064	88313600
2 WT120C G2 LED34S/840 PSU MDU ELB3 L1500	31	3400	110	✗	4000	60	IP65	yes	910505100063	96271500
2 WT120C G2 LED40S/840 PSU ELB3 L1200	34	4000	114	✗	4000	60	IP65		910505100054	85419700
2 WT120C G2 LED40S/840 PSD ELB3 L1200	35	4000	114	●	4000	30	IP65		910505100057	88312900
2 WT120C G2 LED40S/840 PSU MDU ELB3 L1200	35	4000	114	✗	4000	60	IP65	yes	910505100055	96263000

CoreLine LED luminaires

CoreLine Waterproof - Continued

www.philips.com/coreline




Product Type	LED		Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	Motion/Daylight sensor	12NC	EOC code
	W	Lumen Output								
	lm	lm/W		K	Number					
① WT120C G2 LED57S/840 PSU PCO L1500	42.9	5700	136	⊗	4000	45	IP65		911401837380	34980099
② WT120C G2 LED60S/840 PSU L1500	42.9	6000	143	⊗	4000	45	IP65		911401823880	84049700
② WT120C G2 LED55S/830 PSU L1500	43	5500	128	⊗	3000	45	IP65		911401824781	36937299
② WT120C G2 LED60S/865 PSU L1500	43	6000	140	⊗	6500	45	IP65		911401824581	36935899
② WT120C G2 LED60S/840 PSU TW1 WEC L1500	44	6000	133	⊗	4000	45	IP65		910505100070	16319800
② WT120C G2 LED60S/840 PSU TW3 L1500	44	6000	133	⊗	4000	45	IP65		910505100066	91688900
② WT120C G2 LED60S/840 PSU WEC L1500	44	6000	133	⊗	4000	45	IP65		910505100069	16318100
② WT120C G2 LED60S/840 PSD L1500	45	6000	133	●	4000	29	IP65		910505100072	88310500
② WT120C G2 LED60S/840 PSU MDU L1500	45	6000	133	⊗	4000	45	IP65		910505100067	96275300
② WT120C G2 LED60S/840 PSU MDU TW3 L1500	45	6000	133	⊗	4000	45	IP65		910505100068	96276000
② WT120C G2 LED60S/840 PSD ELB3 L1500	49	6000	118	●	4000	29	IP65		910505100076	88314300
② WT120C G2 LED60S/840 PSU ELB3 L1500	49	6000	120	⊗	4000	45	IP65		910505100073	85421000
② WT120C G2 LED60S/840 PSU MDU ELB3 L1500	50	6000	120	⊗	4000	45	IP65	yes	910505100074	96282100
① WT120C G2 LED75S/840 PSU PCO L1500	57.1	7500	132	⊗	4000	30	IP65		911401837480	34981799
② WT120C G2 LED80S/840 PSU L1500	57.1	8000	140	⊗	4000	30	IP65		911401823980	40928900
② WT120C G2 LED80S/840 PSU TW3 L1500	60	8000	131	⊗	4000	30	IP65		910505100077	40930200
② WT120C G2 LED80S/840 PSD L1500	61	8000	131	●	4000	29	IP65		910505100079	40929600
② WT120C G2 LED80S/840 PSU MDU L1500	61	8000	131	⊗	4000	30	IP65		910505100078	96286900
② WT120C G2 LED80S/840 PSU L1500 ELB3	63	8000	121	⊗	4000	30	IP65		910505100080	40931900

CoreLine LED luminaires

CoreLine Downlight

www.philips.com/coreline





Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
DN140B LED10S/830 PSU C IP54 PI6	9.5	1100	116	120	✗	3000	48	IP20/54	911401633405	32604700
DN140B LED10S/830 PSU C PI6	9.5	1100	116	120	✗	3000	48	IP20	911401631805	32588000
DN140B LED10S/830 PSU WR PI6	9.5	1100	116	120	✗	3000	48	IP20	911401631005	32580400
DN140B LED10S/840 PSU C IP54 PI6	9.5	1100	116	120	✗	4000	48	IP20/54	911401633505	32605400
DN140B LED10S/840 PSU C PI6	9.5	1100	116	120	✗	4000	48	IP20	911401631905	32589700
DN140B LED10S/840 PSU WR IP54 PI6	9.5	1100	116	120	✗	4000	48	IP20/54	911401632705	32597200
DN140B LED10S/840 PSU WR PI6	9.5	1100	116	120	✗	4000	48	IP20	911401631105	32581100
DN140B LED10S/830 PSD-E C	11.5	1100	96	120	●	3000	24	IP20	911401632005	32590300
DN140B LED10S/830 PSD-E C IP54	11.5	1100	96	120	●	3000	24	IP20/54	911401633605	32606100
DN140B LED10S/830 PSD-E WR IP54	11.5	1100	96	120	●	3000	24	IP20/54	911401632805	32598900
DN140B LED10S/840 PSD-E C	11.5	1100	96	120	●	4000	24	IP20	911401632105	32591000
DN140B LED10S/840 PSD-E C IP54	11.5	1100	96	120	●	4000	24	IP20/54	911401633705	32607800
DN140B LED10S/840 PSD-E WR IP54	11.5	1100	96	120	●	4000	24	IP20/54	911401632905	32599600
DN140B LED10S/830 PSD-E C ELB3	14.5	1100	76	120	●	3000	24	IP20	911401639805	32835500
DN140B LED10S/830 PSD-E WR ELB3	14.5	1100	76	120	●	3000	24	IP20	911401639405	32831700
DN140B LED10S/840 PSD-E C ELB3	14.5	1100	76	120	●	4000	24	IP20	911401639905	32836200
DN140B LED10S/840 PSD-E WR ELB3	14.5	1100	76	120	●	4000	24	IP20	911401639505	32832400
DN140B LED20S/830 PSU C IP54 PI6	19	2200	116	120	✗	3000	48	IP20/54	911401633805	32608500
DN140B LED20S/830 PSU C PI6	19	2200	116	120	✗	3000	48	IP20	911401632205	32592700
DN140B LED20S/840 PSU C IP54 PI6	19	2200	116	120	✗	4000	48	IP20/54	911401633905	32609200
DN140B LED20S/840 PSU C PI6	19	2200	116	120	✗	4000	48	IP20	911401632305	32593400
DN140B LED20S/840 PSU WR IP54 PI6	19	2200	116	120	✗	4000	48	IP20/54	911401633105	32601600
DN140B LED20S/840 PSU WR PI6	19	2200	116	120	✗	4000	48	IP20	911401631505	32585900
DN140B LED20S/830 PSD-E C	20.5	2200	107	120	●	3000	24	IP20	911401632405	32594100
DN140B LED20S/830 PSD-E C IP54	20.5	2200	107	120	●	3000	24	IP20/54	911401634005	32610800
DN140B LED20S/830 PSD-E WR IP54	20.5	2200	107	120	●	3000	24	IP20/54	911401633205	32602300
DN140B LED20S/840 PSD-E C	20.5	2200	107	120	●	4000	24	IP20	911401632505	32595800
DN140B LED20S/840 PSD-E C IP54	20.5	2200	107	120	●	4000	24	IP20/54	911401634105	32611500
DN140B LED20S/840 PSD-E WR IP54	20.5	2200	107	120	●	4000	24	IP20/54	911401633305	32603000
DN140B LED20S/830 PSD-E C ELB3	23.5	2200	94	120	●	3000	24	IP20	911401640005	32837900
DN140B LED20S/830 PSD-E WR ELB3	23.5	2200	94	120	●	3000	24	IP20	911401639605	32833100
DN140B LED20S/840 PSD-E C ELB3	23.5	2200	94	120	●	4000	24	IP20	911401640105	32838600
DN140B LED20S/840 PSD-E WR ELB3	23.5	2200	94	120	●	4000	24	IP20	911401639705	32834800

CoreLine LED luminaires

CoreLine SlimDownlight

www.philips.com/coreline





Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
① DN145B LED6S/830 PSU II WH	6.5	650	100	✗	3000	27	IP20/44	911401805780	33945099
① DN145B LED6S/840 PSU II WH	6.5	650	100	✗	4000	27	IP20/44	911401805880	33946799
② DN145B LED10S/830 PSU II WH	11	1100	100	✗	3000	38	IP20/44	911401805980	33947499
② DN145B LED10S/840 PSU II WH	11	1100	100	✗	4000	38	IP20/44	911401806080	33948199
③ DN145C LED10S/830 PSU II WH	11	1100	100	✗	3000	38	IP44	911401806380	33951199
③ DN145C LED10S/840 PSU II WH	11	1100	100	✗	4000	38	IP44	911401806480	33952899
② DN145B LED10S/830 PSD-E II WH	13	1100	85	●	3000	24	IP20/44	910500465901	96100899
② DN145B LED10S/840 PSD-E II WH	13	1100	85	●	4000	24	IP20/44	910500465902	96101599
④ DN145B LED20S/830 PSU II WH	21	2100	100	✗	3000	13	IP20/44	911401806180	33949899
④ DN145B LED20S/840 PSU II WH	21	2100	100	✗	4000	13	IP20/44	911401806280	33950499
⑤ DN145C LED20S/830 PSU II WH	21	2100	100	✗	3000	13	IP44	911401806580	33953599
⑤ DN145C LED20S/840 PSU II WH	21	2100	100	✗	4000	13	IP44	911401806680	33954299
④ DN145B LED20S/830 PSD-E II WH	22.5	2100	93	●	3000	24	IP20/44	910500465903	96102299
④ DN145B LED20S/840 PSD-E II WH	22.5	2100	93	●	4000	24	IP20/44	910500465904	96103999
⑥ DN135B LED20S/830 PSD-E II WH	28	2000	71	●	3000	24	IP44	910500465817	96492499
⑥ DN135B LED20S/840 PSD-E II WH	28	2000	71	●	4000	24	IP44	910500465818	96493199

CoreLine LED luminaires

CoreLine Recessed Spot

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
RS140B LED6-32-/827 PSR PI6 WH	8	650	82	32	●	2700	40	IP65	912401483031	38277399
RS140B LED6-32-/830 PSR PI6 WH	8	650	82	32	●	3000	40	IP65	912401483032	38278099
RS140B LED6-32-/840 PSR PI6 WH	8	650	82	32	●	4000	40	IP65	912401483033	38279799
RS141B LED6-32-/827 PSR PI6 ALU	8	650	82	32	●	2700	40	IP44	912401483048	38290299
RS141B LED6-32-/827 PSR PI6 WH	8	650	82	32	●	2700	40	IP44	912401483034	38280399
RS141B LED6-32-/830 PSR PI6 ALU	8	650	82	32	●	3000	40	IP44	912401483049	38291999
RS141B LED6-32-/830 PSR PI6 WH	8	650	82	32	●	3000	40	IP44	912401483035	38281099
RS141B LED6-32-/840 PSR PI6 ALU	8	650	82	32	●	4000	40	IP44	912401483050	38292699
RS141B LED6-32-/840 PSR PI6 WH	8	650	82	32	●	4000	40	IP44	912401483036	38282799
RS142B LED6-32-/827 PSR PI6 WH FR	8	650	82	32	●	2700	40	IP44	912401483119	38417399
RS142B LED6-32-/830 PSR PI6 WH FR	8	650	82	32	●	3000	40	IP44	912401483120	38418099
RS140B LED9-32-/840 PSR PI6 ALU	11	900	82	32	●	4000	40	IP65	912401483052	38294099
RS140B LED9-32-/840 PSR PI6 WH	11	900	82	32	●	4000	40	IP65	912401483040	38286599
RS140B LED12-36-/830 PSR PI6 ALU	15	1200	82	36	●	3000	40	IP65	912401483053	38423499
RS140B LED12-36-/830 PSR PI6 WH	15	1200	82	36	●	3000	40	IP65	912401483043	38421099
RS140B LED12-36-/840 PSR PI6 ALU	15	1200	82	36	●	4000	40	IP65	912401483054	38424199
RS140B LED12-36-/840 PSR PI6 WH	15	1200	82	36	●	4000	40	IP65	912401483044	38422799
RS141B LED12-36-/830 PSR PI6 WH	15	1200	82	36	●	3000	40	IP44	912401483041	38419799
RS141B LED12-36-/840 PSR PI6 WH	15	1200	82	36	●	4000	40	IP44	912401483042	38420399

CoreLine LED luminaires

CoreLine Recessed Spot - Accessory

www.philips.com/coreline



1

2

3

 6/12/18 PACK

Product Type	IP rating	12NC	EOC code
1 RS143Z CFRM GRID 1x1 WH	IP20	912401483212	38832499
2 RS143Z CFRM GRID 1x2 WH	IP20	912401483213	38833199
3 RS143Z CFRM GRID 1x3 WH	IP20	912401483214	38834899





CoreLine Projector

www.philips.com/coreline



1

2



 = Dimmable
 = Non-Dimmable
 L70 at 50.000
 6 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
1 ST150T LED22S-23-/830 PSU BK	24	2200	90	24	✗	3000	40	IP20	912401483217	79067799
2 ST150T LED22S-23-/830 PSU WH	24	2200	90	24	✗	3000	40	IP20	912401483219	79069199
1 ST150T LED22S-23-/840 PSU BK	24	2200	90	24	✗	4000	40	IP20	912401483218	79068499
2 ST150T LED22S-23-/840 PSU WH	24	2200	90	24	✗	4000	40	IP20	912401483220	79070799
1 ST150T LED22S-36-/830 PSU BK	24	2200	90	36	✗	3000	40	IP20	912401483221	79071499
2 ST150T LED22S-36-/830 PSU WH	24	2200	90	36	✗	3000	40	IP20	912401483223	79073899
1 ST150T LED22S-36-/840 PSU BK	24	2200	90	36	✗	4000	40	IP20	912401483222	79072199
2 ST150T LED22S-36-/840 PSU WH	24	2200	90	36	✗	4000	40	IP20	912401483224	79074599

CoreLine LED luminaires

Coreline Bollard

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
BCP155 LED100/NW PSU 220-240V S 7043	12	1000	85	✘	4000	1	IP65	912401483112	38378700
BCP155 LED100/WW PSU 220-240V S 7043	12	1000	85	✘	3000	1	IP65	912401483111	38377000
BCP155 LED100/NW PSU 220-240V A 7043	13	1000	80	✘	4000	1	IP65	912401483110	38376300
BCP155 LED100/WW PSU 220-240V A 7043	13	1000	80	✘	3000	1	IP65	912401483109	38375600

Coreline Bollard - Accessory

www.philips.com/coreline



Product Type	12NC	EOC code
ZCP150 ANB L500	912401483113	38379400

Philips **CoreLine** highbay

Superior light quality that's easy to handle

- High-quality visibility and application uniformity with low glare.
- Robust and reliable solutions for long service life.
- Highly efficient solutions with an attractive total cost of ownership.
- Dedicated lens optics (NB/WB) to meet all application requirements
- Innovative product design with the option of seamlessly integrating sensors into the product.
- High efficiency of up to 145 lm/W
- Long service life of 70,000 at L70
- Low glare rating and color rendering of >80
- Suitable for replacement of 250W / 400W conventional highbays

Application:

- Warehouses
- Logistical centers
- General manufacturing areas
- Exhibition halls
- High ceiling lounges



CoreLine highbay luminaires are designed for optimized installation – saving you time and money by **getting the job done twice as fast.**



- ✓ Straightforward electrical connection – no need to open the luminaire
- ✓ Single point mounting system



CoreLine LED luminaires

Coreline Highbay Gen4

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
BY120P G4 LED100S/840 PSU NB	69	10.000	145	55	✘	4000	8	IP65	911401569851	33571100
BY120P G4 LED100S/840 PSU WB	69	10.000	145	90 x 90	✘	4000	8	IP65	911401569951	33570400
BY120P G4 LED100S/865 PSU NB	69	10.000	145	55	✘	6500	8	IP65	911401575251	33567400
BY120P G4 LED100S/865 PSU WB	69	10.000	145	90 x 90	✘	6500	8	IP65	911401575351	33566700
BY120P G4 LED100S/840 PSD NB	73	10.000	137	55	●	4000	13	IP65	911401574451	33702900
BY120P G4 LED100S/840 PSD WB	73	10.000	137	90 x 90	●	4000	13	IP65	911401574551	33703600
BY120P G4 LED100S/865 PSD NB	73	10.000	137	55	●	6500	13	IP65	911401575651	33704300
BY120P G4 LED100S/865 PSD WB	73	10.000	137	90 x 90	●	6500	13	IP65	911401575751	33705000
BY121P G4 LED200S/840 PSU NB	138	20.000	145	55	✘	4000	8	IP65	911401570051	33569800
BY121P G4 LED200S/840 PSU WB	138	20.000	145	90 x 90	✘	4000	8	IP65	911401570151	33568100
BY121P G4 LED200S/865 PSU NB	138	20.000	145	55	✘	6500	8	IP65	911401575451	33565000
BY121P G4 LED200S/865 PSU WB	138	20.000	145	90 x 90	✘	6500	8	IP65	911401575551	33564300
BY121P G4 LED200S/840 PSD NB	146	20.000	137	55	●	4000	13	IP65	911401574651	33698500
BY121P G4 LED200S/840 PSD WB	146	20.000	137	90 x 90	●	4000	13	IP65	911401574751	33699200
BY121P G4 LED200S/865 PSD NB	146	20.000	137	55	●	6500	13	IP65	911401575851	33700500
BY121P G4 LED200S/865 PSD WB	146	20.000	137	90 x 90	●	6500	13	IP65	911401575951	33701200
BY122P G4 LED250S/840 PSU NB	172	25.000	145	55	✘	4000	8	IP65	911401578351	33664000
BY122P G4 LED250S/840 PSU WB	172	25.000	145	90 x 90	✘	4000	8	IP65	911401578451	33665700
BY122P G4 LED250S/865 PSU NB	172	25.000	145	55	✘	6500	8	IP65	911401578551	33666400
BY122P G4 LED250S/865 PSU WB	172	25.000	145	90 x 90	●	6500	8	IP65	911401578651	33667100
BY122P G4 LED250S/840 PSD NB	183	25.000	137	55	●	4000	8	IP65	911401582051	33879800
BY122P G4 LED250S/840 PSD WB	183	25.000	137	90 x 90	●	4000	8	IP65	911401582151	33880400
BY122P G4 LED250S/865 PSD NB	183	25.000	137	55	●	6500	8	IP65	911401582251	33881100
BY122P G4 LED250S/865 PSD WB	183	25.000	137	90 x 90	●	6500	8	IP65	911401582351	33882800



CoreLine LED luminaires

CoreLine Trunking Gen2

www.philips.com/coreline



	Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
		W	lm	lm/W	°		K	Number			
NEW	LL217X 45S/840 1x PSU WB 5x1.5	28	4500	161	120	✗	4000	24	IP20	910925868234	61794000
NEW	LL212X 53S/840 1x PSD WB 7x1.5 HE	33	5300	161	120	●	4000	21	IP20	910925867522	10779300
NEW	LL212X 53S/840 1x PSD WB 7x1.5	34	5300	156	120	●	4000	21	IP20	910925867515	10772400
NEW	LL217X 80S/840 1x PSD WB 7x1.5 HE	48.5	8000	165	120	●	4000	21	IP20	910925867560	10817200
NEW	LL217X 80S/840 1x PSD WB 7x2.5 HE	48.5	8000	165	120	●	4000	21	IP20	910925867531	10788500
NEW	LL217X 80S/840 1x PSU WB 5x2.5 HE	49	8000	163	120	✗	4000	24	IP20	910925867533	10790800
NEW	LL217X 80S/840 1x PSD O 7x2.5	50	7400	144	120	●	4000	21	IP20	910925867535	10792200
NEW	LL217X 80S/840 1x PSU WB 5x1.5	51	8000	157	120	✗	4000	24	IP20	910925867537	10794600
NEW	LL234X 90S/840 2x PSD WB 7x1.5	55	9000	164	120	●	4000	11	IP20	910925867561	10818900
NEW	LL234X 90S/840 2x PSU WB 5x1.5	56	9000	161	120	✗	4000	12	IP20	910925868232	61792600
NEW	LL217X 120S/840 1x PSD WB 7x1.5 HE	79	12.000	152	120	●	4000	18	IP20	910925867526	10783000
NEW	LL217X 120S/840 1x PSU BV WB HE	80	12.000	150	120	✗	4000	23	IP20	910925867525	10782300
NEW	LL217X 120S/840 1x PSU WB 5x1.5 HE	80	12.000	150	120	✗	4000	23	IP20	910925867529	10786100
NEW	LL234X 160S/840 2x PSD WB 7x1.5 HE	97	16.000	165	120	●	4000	10	IP20	910925867540	10797700
NEW	LL234X 160S/840 2x PSD O 7x2.5	100	15.000	144	120	●	4000	10	IP20	910925867552	10809700
NEW	LL234X 160S/840 2x PSD WB 7x1.5	100	16.000	160	120	●	4000	10	IP20	910925867553	10810300
NEW	LL234X 240S/840 2x PSD WB 7x1.5 HE	158	24.000	152	120	●	4000	9	IP20	910925867545	10802800
NEW	LL234X 240S/840 2x PSU WB 5x1.5 HE	160	24.000	150	120	✗	4000	11	IP20	910925867548	10805900

CoreLine Trunking Gen2 - Accessory

www.philips.com/coreline




	Product Type	IP rating	12NC	EOC code
NEW	LL212X 7x1.5 BC	IP20	910925867583	10840000
NEW	LL217X 7x1.5 BC	IP20	910925867589	10846200
NEW	LL234X 7x1.5 BC	IP20	910925867595	10852300

CoreLine LED luminaires

CoreLine Trunking

www.philips.com/coreline




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B) Number	IP rating	12NC	EOC code
	W	lm	lm/W	°		K				
1 LL120X LED150S/840 1x PSD O 7 WH	108	15.000	139	120	●	4000	12	IP20	910925863969	38090100
2 LL120X LED150S/840 2x PSD O 7 VLC WH	108	15.000	139	120	●	4000	24	IP20	910925863968	38089500
2 LL120X LED150S/840 2x PSU O 5 WH	108	15.000	139	120	⊗	4000	24	IP20	910925863979	38100700
1 LL120X LED150S/865 2x PSU O 5 WH	108	15.000	139	120	⊗	6500	24	IP20	910925864022	38142700
3 LL120X LED152S/830 2x PSD DA20 7 VLC WH	108	15.200	141	120	●	3000	24	IP20	910925864031	38151900
3 LL120X LED152S/830 2x PSD WB 7 VLC WH	108	15.200	141	120	●	3000	24	IP20	910925863994	38115100
3 LL120X LED152S/830 2x PSU A 5 WH	108	15.200	141	120	⊗	3000	24	IP20	910925864020	38140300
3 LL120X LED152S/830 2x PSU DA20 5 WH	108	15.200	141	120	⊗	3000	24	IP20	910925863988	38109000
3 LL120X LED152S/830 2x PSU MB 5 WH	108	15.200	141	120	⊗	3000	24	IP20	910925863995	38116800
3 LL120X LED152S/830 2x PSU VWB 5 WH	108	15.200	141	120	⊗	3000	24	IP20	910925863985	38106900
3 LL120X LED152S/830 2x PSU WB 5 WH	108	15.200	141	120	⊗	3000	24	IP20	910925863983	38104500
3 LL120X LED160S/840 1x PSD MB 7 WH	108	16.000	148	120	●	4000	12	IP20	910925863987	38108300
3 LL120X LED160S/840 1x PSD NB 7 WH	108	16.000	148	120	●	4000	12	IP20	910925863986	38107600
3 LL120X LED160S/840 1x PSD WB 7 WH	108	16.000	148	120	●	4000	12	IP20	910925863974	38095600
3 LL120X LED160S/840 1x PSD WB 7X2.5 WH	108	16.000	148	120	●	4000	12	IP20	910925863976	38097000
3 LL120X LED160S/840 2x PSD A 7 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925864018	38138000
3 LL120X LED160S/840 2x PSD A 7X2.5 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925863998	38119900
3 LL120X LED160S/840 2x PSD DA20 7 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925864016	38136600
3 LL120X LED160S/840 2x PSD MB 7 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925863977	38098700
3 LL120X LED160S/840 2x PSD MB 9 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925864014	38134200
3 LL120X LED160S/840 2x PSD NB 7 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925863992	38113700
3 LL120X LED160S/840 2x PSD NB 9 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925863989	38110600
3 LL120X LED160S/840 2x PSD VWB 7 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925863984	38105200
3 LL120X LED160S/840 2x PSD VWB 7X2.5 VLC	108	16.000	148	120	●	4000	24	IP20	910925864064	38184700
3 LL120X LED160S/840 2x PSD WB 7 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925863966	38087100
3 LL120X LED160S/840 2x PSD WB 7X2.5 VLC W	108	16.000	148	120	●	4000	24	IP20	910925863965	38086400
3 LL120X LED160S/840 2x PSD WB 9 VLC WH	108	16.000	148	120	●	4000	24	IP20	910925863978	38099400
3 LL120X LED160S/840 2x PSU A 5 WH	108	16.000	148	120	⊗	4000	24	IP20	910925864009	38129800
3 LL120X LED160S/840 2x PSU DA20 5 WH	108	16.000	148	120	⊗	4000	24	IP20	910925863972	38093200
3 LL120X LED160S/840 2x PSU MB 5 WH	108	16.000	148	120	⊗	4000	24	IP20	910925863970	38091800
3 LL120X LED160S/840 2x PSU MB 7 WH	108	16.000	148	120	⊗	4000	24	IP20	910925864041	38161800
3 LL120X LED160S/840 2x PSU NB 5 WH	108	16.000	148	120	⊗	4000	24	IP20	910925863975	38096300
3 LL120X LED160S/840 2x PSU NB 7 WH	108	16.000	148	120	⊗	4000	24	IP20	910925864048	38168700
3 LL120X LED160S/840 2x PSU VWB 5 WH	108	16.000	148	120	⊗	4000	24	IP20	910925863996	38117500
3 LL120X LED160S/840 2x PSU VWB 5X2.5 WH	108	16.000	148	120	⊗	4000	24	IP20	910925864059	38179300

CoreLine LED luminaires

CoreLine Trunking - Continued

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
① LL120X LED160S/840 2x PSU VWB 7 WH	108	16.000	148	120	✘	4000	24	IP20	910925864055	38175500
① LL120X LED160S/840 2x PSU WB 5 WH	108	16.000	148	120	✘	4000	24	IP20	910925863967	38088800
① LL120X LED160S/840 2x PSU WB 7 WH	108	16.000	148	120	✘	4000	24	IP20	910925863991	38112000
② LL120X LED150S/840 1x PSD PCO 7 WH	126	15.000	120	120	●	4000	12	IP20	910925864540	98765000
② LL120X LED150S/840 2x PSD PCO 7 VLC WH	126	15.000	120	120	●	4000	24	IP20	910925864541	98766700
② LL120X LED150S/840 2x PSU PCO 5 WH	126	15.000	120	120	✘	4000	24	IP20	910925864543	98887900

CoreLine Trunking - Accessory

www.philips.com/coreline




Product Type	IP rating	12NC	EOC code
LL120X 5X2.5 WH BC	IP20	910925863234	34646400
LL120X 7X2.5 WH BC	IP20	910925863236	34648800

CoreLine LED luminaires

Coreline tempo X-Large


www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
BVP140 LED360-4S 30K6/740 PSD OFA52 D9	225	30.600	136	●	4000	4	IP66	912300024344	87288500
BVP140 LED360-4S 30K6/740 PSU OFA52	225	30.600	136	⊗	4000	4	IP66	912300024336	87280900
BVP140 LED360-4S 31K3/740 PSD S D9	225	31.320	139	●	4000	4	IP66	912300024348	87292200
BVP140 LED360-4S 31K3/740 PSU S	225	31.320	139	⊗	4000	4	IP66	912300024340	87284700
BVP140 LED420-4S 35K3/740 PSD OFA52 D9	250	35.280	141	●	4000	4	IP66	912300024343	87287800
BVP140 LED420-4S 35K3/740 PSU OFA52	250	35.280	141	⊗	4000	4	IP66	912300024335	87279300
BVP140 LED420-4S 36K1/740 PSD S D9	250	36.120	144	●	4000	4	IP66	912300024347	87291500
BVP140 LED420-4S 36K1/740 PSU S	250	36.120	144	⊗	4000	4	IP66	912300024339	87283000
BVP140 LED480-4S 40K3/740 PSD OFA52 D9	295	40.320	137	●	4000	4	IP66	912300024342	87286100
BVP140 LED480-4S 40K3/740 PSU OFA52	295	40.320	137	⊗	4000	4	IP66	912300024334	87278600
BVP140 LED480-4S 41K3/740 PSD S D9	295	41.280	140	●	4000	4	IP66	912300024346	87290800
BVP140 LED480-4S 41K3/740 PSU S	295	41.280	140	⊗	4000	4	IP66	912300024338	87282300

Coreline tempo large

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
BVP130 LED160-4S/740 OFA52	126	16.000	130	⊗	4000	8	IP66	912300023662	09641000
BVP130 LED160-4S/740 S	126	16.000	130	⊗	4000	8	IP66	912300023665	09644100
BVP130 LED210-4S/740 OFA52	164	21.000	130	⊗	4000	7	IP66	912300023661	09640300
BVP130 LED210-4S/740 S	164	21.000	130	⊗	4000	7	IP66	912300023664	09643400
BVP130 LED260-4S/740 OFA52	220	26.000	120	⊗	4000	8	IP66	912300023660	09639700
BVP130 LED260-4S/740 S	220	26.000	120	⊗	4000	8	IP66	912300023663	09642700

CoreLine LED luminaires

Coreline tempo medium

www.philips.com/coreline



○ = Dimmable
 ⊗ = Non-Dimmable

1 PACK

Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
BVP125 LED80-4S/740 OFA52	66	8000	124	⊗	4000	8	IP66	912300024002	45588000
BVP125 LED80-4S/740 S	66	8000	124	⊗	4000	8	IP66	912300024004	45590300
BVP125 LED120-4S/740 OFA52	98	12.000	126	⊗	4000	8	IP66	912300024001	45587300
BVP125 LED120-4S/740 S	98	12.000	126	⊗	4000	8	IP66	912300024003	45589700

Coreline tempo small

www.philips.com/coreline



○ = Dimmable
 ⊗ = Non-Dimmable



1 PACK

Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
BVP110 LED42/NW A	38	4200	111	⊗	4000	95	IP65	911401555231	30635300
BVP110 LED42/NW S	38	4200	111	⊗	4000	95	IP65	911401555331	30636000

CoreLine LED luminaires

CoreLine Malaga LED

www.philips.com/coreline



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
BRP101 LED37/740 DM FU	29.6	3054	103	✗	4000	11	IP65	910925865553	44820200
BRP101 LED37/740 I DM	29.6	3054	103	✗	4000	11	IP65	910925865338	99815100
BRP101 LED37/740 II DM	29.6	3054	103	✗	4000	11	IP65	910925865339	99816800
BRP101 LED37/740 II DM MSP	29.6	3054	103	✗	4000	11	IP65	910925867783	12566700
BRP101 LED37/740 II DW SDM10	29.6	3054	103	✗	4000	11	IP65	910925865552	44819600
BRP102 LED55/740 DW PZM-35	39	4600	118	✗	4000	11	IP65	910925865554	44821900
BRP102 LED55/740 I DM	39	4600	118	✗	4000	11	IP65	910925865340	99817500
BRP102 LED55/740 II DM	39	4600	118	✗	4000	11	IP65	910925865341	99818200
BRP102 LED75/740 I DM	56.5	6133	109	✗	4000	11	IP65	910925865342	99819900
BRP102 LED75/740 II DM	56.5	6133	109	✗	4000	11	IP65	910925865343	99820500
BRP102 LED75/740 II DM SDM10	56.5	6133	109	✗	4000	11	IP65	910925865555	44822600
BRP102 LED110/740 I DM	83	9006	111	✗	4000	11	IP65	910925865344	99821200
BRP102 LED110/740 II DM	83	9006	111	✗	4000	11	IP65	910925865345	99822900
BRP102 LED110/740 II DW FU	83	9006	111	✗	4000	11	IP65	910925865556	44823300

CoreLine Malaga LED - Accessory

www.philips.com/coreline



Product Type	12NC	EOC code
ZRP220 AD60/60 A5	910925227912	62134100

CoreLine LED luminaires

CoreLine Batten

www.philips.com/coreline



= Dimmable
 = Non-Dimmable
 L70 at 50,000
 6/8 PACK

Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
BN126C LED20S/830 PSU TW1 L600	17	2000	118	✘	3000	50	IP20(front)	911401897080	36345599
BN126C LED22S/840 PSU TW1 L600	17	2200	129	✘	4000	50	IP20(front)	911401896980	36344899
BN126C LED23S/830 PSU TW1 L1200	18	2300	128	✘	3000	48	IP20(front)	911401897280	36347999
BN126C LED25S/840 PSU TW1 L1200	18	2500	139	✘	4000	48	IP20(front)	911401897180	36346299
BN126C LED32S/830 PSU TW1 L1500	25.5	3200	125	✘	3000	47	IP20(front)	911401897880	36353099
BN126C LED35S/840 PSU TW1 L1500	25.5	3500	137	✘	4000	47	IP20(front)	911401897780	36352399
BN126C LED38S/830 PSU TW1 L1200	31	3800	123	✘	3000	40	IP20(front)	911401897480	36349399
BN126C LED41S/840 PSU TW1 L1200	31	4100	132	✘	4000	40	IP20(front)	911401897380	36348699
BN126C LED41S/840 PSD TW1 L1200	33	4100	124	●	4000	13	IP20(front)	911401804681	36551099
BN126C LED48S/830 PSU TW1 L1500	40	4800	120	✘	3000	38	IP20(front)	911401898080	36355499
BN126C LED52S/840 PSU TW1 L1500	40	5200	130	✘	4000	38	IP20(front)	911401897980	36354799
BN126C LED52S/840 PSD TW1 L1500	41	5200	127	●	4000	13	IP20(front)	911401804781	36552799
BN126C LED60S/830 PSU TW1 L1200	49	6000	122	✘	3000	35	IP20(front)	911401897680	36351699
BN126C LED60S/830 PSU TW1 L1800	49	6000	122	✘	3000	35	IP20(front)	911401898480	36359299
BN126C LED64S/840 PSU TW1 L1200	49	6400	131	✘	4000	35	IP20(front)	911401897580	36350999
BN126C LED64S/840 PSU TW1 L1800	49	6400	131	✘	4000	35	IP20(front)	911401898380	36358599
BN126C LED74S/830 PSU TW1 L1500	59	7400	125	✘	3000	28	IP20(front)	911401898280	36357899
BN126C LED80S/840 PSU TW1 L1500	59	8000	136	✘	4000	28	IP20(front)	911401898180	36356199
BN124C LED60S/830 PSU TW1 L1500	60	6000	100	✘	3000	24	IP20	910503910282	38002199
BN126C LED100S/840 PSU TW1 L1800	75	10.000	133	✘	4000	20	IP20(front)	911401898580	36360899
BN126C LED94S/830 PSU TW1 L1800	75	9400	125	✘	3000	20	IP20(front)	911401898680	36361599

Philips Ledinaire

The essential range of trusted products for everyday lighting jobs that need good performance

Find the **right** solution in our range using the **Selector tool**
productfinder.lighting.philips.com

Find out **more** about **all 12** different Ledinaire luminaires on philips.com/ledinaire



Trusted



Reliable



Great value

Ledinaire panel



- Energy-saving comfortable light
- Modern, unobtrusive design
- Hassle-free installation
- Accessories for plaster, surface mounted and suspension available

Ledinaire batten



- LED tube versions for easy replacement of light sources
- Mounting accessories included
- Trusted performance, low early failures

Ledinaire waterproof




- Easy to use: light levels tuned to conventional
- Reliable driver, less early failures
- High efficacy up to 120 lm/W

Ledinaire LED luminaires

Easily make the switch to LED lighting without high investments. The Philips Ledinaire portfolio consists of 9 popular LED luminaires. Choose affordable, reliable and energy-efficient lighting from the leading name in LED.

Ledinaire Panel Office compliant


www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
RC065B LED34S/840 PSU W60L60 OC	34	3400	100		✗	4000	35	IP20	911401884580	38647499
RC065B LED34S/865 PSU W60L60 OC	34	3400	100		✗	6500	35	IP20	911401884680	36204599
RC066B LED34S/840 PSU W62L62 OC	34	3400	100		✗	4000	35	IP20	911401884780	36558999
RC065B LED34S/840 PSU W60L60 OC 1PK	38	3400	90	120	✗	4000	40	IP20	912401483244	79153700

Ledinaire Panel Non-office compliant

www.lighting.philips.com/main/products/ledinaire




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
RC065B LED34S/840 PSU W60L60 NOC	34	3400	100		✗	4000	35	IP20	911401885080	79180399
RC065B LED34S/840 PSU W60L60 NOC UKI	34	3400	100		✗	4000	35	IP20	911401899680	36446999
RC065B LED34S/865 PSU W60L60 NOC	34	3400	100		✗	6500	35	IP20	911401885180	36206999
RC065B LED34S/840 PSU W60L60 NOC 1PK	38	3400	90	120	✗	4000	40	IP20	912401483243	79152000

Ledinaire LED luminaires

Ledinaire Recessed Non-office compliant


www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
RC060B LED34S/840 PSU W60L60 NOC	34	3400	100	110	✘	4000	24	IP20	911401850780	06958500
RC060B LED40S/840 PSU W60L60 NOC	40	4000	100	110	✘	4000	24	IP20	911401842380	35040000

Ledinaire Surface-mounted Office compliant


www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
SM060C LED34S/840 PSU W20L120 OC	34	3400	100	80	✘	4000	24	IP20	911401842280	35039400

Ledinaire Surface-mounted Non-office compliant

www.lighting.philips.com/main/products/ledinaire




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
SM060C LED34S/840 PSU W20L120 NOC	34	3400	100	110	✘	4000	24	IP20	911401850680	06962200
SM060C LED40S/840 PSU W20L120 NOC	40	4000	100	110	✘	4000	24	IP20	911401842480	35041700

Ledinaire LED luminaires

Ledinaire Wall-mounted WL060V


www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	Motion/Daylight sensor	12NC	EOC code
	W	lm	lm/W	°		K	Number				
WL060V LED11S/830 PSU II WH	12	1100	90	120	✗	3000	50	IP44		911401802080	33909299
WL060V LED11S/840 PSU II WH	12	1100	90	120	✗	4000	50	IP44		911401802180	33910899
WL060V LED17S/830 PSU II WH	18.5	1700	90	120	✗	3000	50	IP44		911401802280	33911599
WL060V LED17S/840 PSU II WH	18.5	1700	90	120	✗	4000	50	IP44		911401802380	33912299
WL060V LED17S/830 PSU MDU II WH	19.5	1700	90	120	✗	3000	50	IP44	yes	911401802480	33913999
WL060V LED17S/840 PSU MDU II WH	19.5	1700	90	120	✗	4000	50	IP44	yes	911401802580	33914699

Ledinaire Square Wall-mounted

www.lighting.philips.com/main/products/ledinaire




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	Motion/Daylight sensor	12NC	EOC code
	W	lm	lm/W	°		K	Number				
WL055V LED6S/830 PSR MDU WH	6	600	100	110	●	3000	2	IP65	yes	911401862580	35409599
WL055V LED6S/830 PSU WH	6	600	100	110	✗	3000	2	IP65		911401834880	34941199
WL055V LED6S/840 PSR MDU WH	6	600	100	110	●	4000	2	IP65	yes	911401850580	35064699
WL055V LED6S/840 PSU WH	6	600	100	110	✗	4000	2	IP65		911401834980	34942899
WL055V LED6S/830 PSU EL3 WH	8	600	75	110	✗	3000	2	IP65		910505100602	96774199
WL055V LED6S/840 PSU EL3 WH	8	630	79	110	✗	4000	2	IP65		910505100601	96773499

Ledinaire LED luminaires

Downlight DN060B


www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	12NC	EOC code
	W	lm	lm/W		K			
DN060B LED8S/830 PSU WH	9	800	89	✗	3000	IP20	911401532031	30662999
DN060B LED8S/840 PSU WH	9	800	89	✗	4000	IP20	911401532231	30664399
DN060B LED18S/830 PSU WH	18	1800	100	✗	3000	IP20	911401531931	30661299
DN060B LED18S/840 PSU WH	18	1800	100	✗	4000	IP20	911401532131	30663699

Ledinaire Slim Downlight DN065B G2 & DN065C

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Lamp diameter	Total length	IP rating	12NC	EOC code
	W	lm	lm/W		K					
DN065B G2 LED10/830 11W 220V D150 RD EU	11	950	86.00	✗	3000	175	45	IP20	929002220432	67939200
DN065B G2 LED10/830 11W 220V L150 SQ EU	11	900	86.00	✗	3000	175	39	IP20	929002220832	67947700
DN065B G2 LED10/840 11W 220V D150 RD EU	11	1000	90.00	✗	4000	175	45	IP20	929002220532	67941500
DN065B G2 LED10/840 11W 220V L150 SQ EU	11	900	90.00	✗	4000	175	39	IP20	929002220932	67949100
DN065C LED10/830 11W 220V D175 RD EU	11	950	86.00	✗	3000			IP20(front)	929002034102	72007000
DN065C LED10/840 11W 220V D175 RD EU	11	1000	90.00	✗	4000			IP20(front)	929002034202	72009400
DN065B G2 LED19/830 22W 220V D200 RD EU	22	1900	86.00	✗	3000	225	45	IP20	929002220632	67943900
DN065B G2 LED20/840 22W 220V D200 RD EU	22	2000	90.00	✗	4000	225	45	IP20	929002220732	67945300
DN065C LED20/830 23W 220V D225 RD EU	23	1900	82.00	✗	3000			IP20(front)	929002035002	72011700
DN065C LED20/840 23W 220V D225 RD EU	23	2000	86.00	✗	4000			IP20(front)	929002035102	72013100

Ledinaire LED luminaires

Ledinaire Downlight DN029B

www.lighting.philips.com/main/products/ledinaire



= Dimmable
 = Non-Dimmable
 8/12/24 PACK

Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	IP rating	12NC	EOC code
	W	lm	lm/W		K			
DN029B LED8/CCT 8W 220-240V D90 EU	8.5	800	100.00		3000	IP20/44	929002066119	66018500
DN029B LED12/CCT 14W 220-240V D150 EU	14	1200	85.00		3000	IP20/44	929002066219	66020800
DN029B LED20/CCT 24W 220-240V D200 EU	24	2000	83.00		3000	IP20/44	929002066319	66022200

Ledinaire floodlight

www.lighting.philips.com/main/products/ledinaire



= Dimmable
 = Non-Dimmable
 L70 at 50.000
 2/4/6/18 PACK

Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	Motion/Daylight sensor	12NC	EOC code
	W	lm	lm/W		K	Number				
1 BVP154 LED10/830 PSU 10W VWB CE	10	1000	100		3000	220	IP65		911401730422	32970399
2 BVP154 LED10/830 PSU 10W VWB MDU CE	10	1000	100		3000	220	IP65	yes	911401730432	33131799
1 BVP154 LED10/840 PSU 10W VWB CE	10	1050	105		4000	220	IP65		911401730432	32971099
2 BVP154 LED10/840 PSU 10W VWB MDU CE	10	1050	105		4000	220	IP65	yes	911401733342	33132499
3 BVP154 LED20/830 PSU 20W VWB CE	20	2000	100		3000	110	IP65		911401730442	32972799
2 BVP154 LED20/830 PSU 20W VWB MDU CE	20	2000	100		3000	110	IP65	yes	911401733352	33133199
3 BVP154 LED21/840 PSU 20W VWB CE	20	2100	105		4000	110	IP65		911401730452	32973499
2 BVP154 LED21/840 PSU 20W VWB MDU CE	20	2100	105		4000	110	IP65	yes	911401733362	33134899
4 BVP154 LED50/830 PSU 50W VWB CE	50	5000	100		3000	47	IP65		911401730462	32974199
5 BVP154 LED50/830 PSU 50W VWB MDU CE	50	5000	100		3000	47	IP65	yes	911401733372	33135599
4 BVP154 LED52/840 PSU 50W VWB CE	50	5250	105		4000	47	IP65		911401730472	32975899
5 BVP154 LED52/840 PSU 50W VWB MDU CE	50	5250	105		4000	47	IP65	yes	911401733382	33136299
6 BVP155 LED100/840 PSU 100W AWB CE	100	10.000	100		4000	22	IP65		911401733302	33128799
7 BVP155 LED105/840 PSU 100W VWB CE	100	10.500	105		4000	22	IP65		911401733272	33125699
8 BVP155 LED150/840 PSU 150W AWB CE	150	15.000	100		4000	15	IP65		911401733312	33129499

Ledinaire LED luminaires

Ledinaire floodlight - Continued

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
1 BVP155 LED157/840 PSU 150W VWB CE	150	15.750	105	☒	4000	15	IP65	911401733282	33126399
2 BVP155 LED200/840 PSU 200W AWB CE	200	20.000	100	☒	4000	11	IP65	911401733322	33130099
3 BVP155 LED210/840 PSU 200W VWB CE	200	21.000	105	☒	4000	11	IP65	911401733292	33127099

Ledinaire Batten

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W		K	Number			
BN013C LED5S/830 L300	5	475	100	☒	3000	10	IP20	911401835880	34953499
BN013C LED5S/840 L300	5	500	100	☒	4000	10	IP20	911401835780	34952799
BN013C LED10S/830 L600	10	940	100	☒	3000	10	IP20	911401836080	34955899
BN013C LED10S/840 L600	10	1000	100	☒	4000	10	IP20	911401835980	34954199
BN013C LED14S/830 L900	15	1410	100	☒	3000	10	IP20	911401836280	34957299
BN013C LED15S/840 L900	15	1500	100	☒	4000	10	IP20	911401836180	34956599
BN060C 1xTLED16/840 L1200	18	1600	89	☒	4000	180	IP20	910503910118	07007999
BN013C LED19S/830 L1200	20	1880	100	☒	3000	10	IP20	911401836480	34959699
BN013C LED20S/840 L1200	20	2000	100	☒	4000	10	IP20	911401836380	34958999
BN013C LED24S/830 L1500	24	2350	100	☒	3000	10	IP20	911401836680	34961999
BN013C LED25S/840 L1500	24	2500	100	☒	4000	10	IP20	911401836580	34960299
BN060C 2xTLED16/840 L1200	36	3200	89	☒	4000	180	IP20	910503910119	07009399

Ledinaire LED luminaires

Ledinaire Batten - Accessory

www.lighting.philips.com/main/products/ledinaire






24 PACK



Product Type	IP rating	12NC	EOC code
BN060Z C600 (10 PCS)	IP20	910503910213	07029199



Ledinaire High-bay

www.lighting.philips.com/main/products/ledinaire



 = Dimmable
 = Non-Dimmable

 L65 at 50.000
 4 PACK

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K	Number			
BY020P LED100S/840 PSU WB GR	97	10.000	103	100		4000	24	IP65	911401599651	33996299
BY021P LED200S/840 PSU WB GR	190	20.000	105	100		4000	12	IP65	911401599751	33998699

Ledinaire High-bay - Accessory

www.lighting.philips.com/main/products/ledinaire





4/6 PACK

Product Type	12NC	EOC code
BY020Z AC	911401597351	33992499
BY021Z AC	911401597451	33994899

Ledinaire LED luminaires

Ledinaire Waterproof

www.lighting.philips.com/main/products/ledinaire



Product Type	LED		Efficiency	Beam Angle	Dimmable	Color Temp.	Prod./MCB (16a type B)	IP rating	12NC	EOC code
	W	lm	lm/W	°		K				
WT060C LED18S/840 PSU L600	15	1800	120	120	✗	4000	55	IP66	911401876480	36007299
WT060C LED25S/840 PSU L1200	20	2500	120	120	✗	4000	50	IP66	911401892780	36291599
WT060C LED25S/840 PSU TW1 L1200	20	2500	120	120	✗	4000	10	IP66	911401892880	36292299
WT060C LED34S/840 PSU L1500	28	3400	120	120	✗	4000	45	IP66	911401892980	36293999
WT060C LED34S/840 PSU TW1 L1500	28	3400	120	120	✗	4000	10	IP66	911401893080	36294699
WT060C LED36S/840 PSU L1200	30	3600	120	120	✗	4000	45	IP66	911401876680	36009699
WT060C LED36S/840 PSU TW1 L1200	30	3600	120	120	✗	4000	10	IP66	911401876780	36010299
WT060C LED36S/865 PSU L1200	30	3600	120	120	✗	6500	45	IP66	911401877280	36015799
WT060C LED56S/840 PSU L1500	46	5600	120	120	✗	4000	40	IP66	911401876880	36011999
WT060C LED56S/840 PSU TW1 L1500	46	5600	120	120	✗	4000	10	IP66	911401876980	36012699
WT060C LED56S/865 PSU L1500	46	5600	120	120	✗	6500	40	IP66	911401877480	36017199
WT060C LED 80S/840 PSU L1800	65	8000	120	120	✗	4000	20	IP66	911401893180	36295399

Ledinaire Waterproof Tube Housing

www.lighting.philips.com/main/products/ledinaire



Product Type	IP rating	12NC	EOC code
WT050C 1xTLED L1200	IP65	911401807381	36602999
WT050C 1xTLED L1500	IP65	911401807581	36604399
WT050C 2xTLED L1200	IP65	911401807481	36603699
WT050C 2xTLED L1500	IP65	911401807681	36605099

Ledinaire LED luminaires

Other LEDtube

www.lighting.philips.com/main/products/ledinaire



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dimmable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
LED 6.5W 310mm S19 WW ND 1CT/4	6.5	480	73.85	175	✘	83	2700	15.000	38	310	A+	929001126730	41985400

Create the perfect ambience for every space

MASTER LEDspot ExpertColor features a light spectrum similar to halogens, for a true color experience.

MASTER LEDspot ExpertColor


Expert
Color



Customized light spectrum
similar to halogen




Deep and smooth
dimming, below 5%

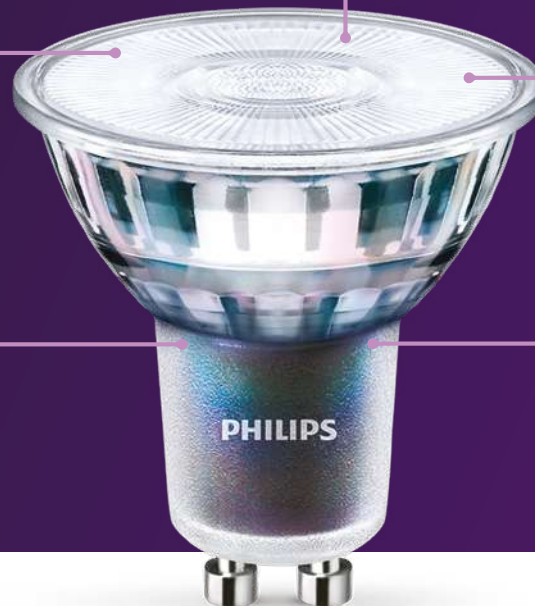

CRI
97

Best-in-class color
realization, CRI97



Energy savings
up to 85%*



40,000 hours
lifetime

* Compared to halogen lamps

Click here and have a look
at the **new MasterConnect
LEDspot** for an easy step into
connected lighting.

Contents

Interact
Ready

CoreLine

Ledinaire

LED lamps

LED bulbs

LED candles
& lusters

LED tubes

LED
PL-lamps

TrueForce



LED lamps

LED lamps save you up to 69% energy and offer the same light quality as conventional lamps. Philips MASTER LED lamps provide you with constant colors, high performance and maximum dimming compatibility. CorePro lamps are good for energy savings of up to 69% and have a lifespan of 30,000 hours. The complete range of Philips LED lamps is designed as a 1-on-1 replacement for currently installed conventional lighting.

MASTER LEDspot ExpertColor MV

www.philips.com/ledlamps



Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
MASTER LED ExpertColor 3.9-35W GU10 927 25D	35	3.9	265	67.95	700	25	●	97	2700	40.000	50	54	A+	929001346402	70749400
MASTER LED ExpertColor 3.9-35W GU10 927 36D	35	3.9	265	67.95	540	36	●	97	2700	40.000	50	54	A+	929001346702	70755500
MASTER LED ExpertColor 3.9-35W GU10 930 25D	35	3.9	280	71.00	750	25	●	97	3000	40.000	50	54	A+	929001346502	70751700
MASTER LED ExpertColor 3.9-35W GU10 930 36D	35	3.9	280	71.00	560	36	●	97	3000	40.000	50	54	A+	929001346802	70757900
MASTER LED ExpertColor 3.9-35W GU10 940 25D	35	3.9	300	76.00	800	25	●	97	4000	40.000	50	54	A+	929001346602	70753100
MASTER LED ExpertColor 3.9-35W GU10 940 36D	35	3.9	300	76.00	600	36	●	97	4000	40.000	50	54	A+	929001346902	70759300
MASTER LED ExpertColor 5.5-50W GU10 927 25D	50	5.5	355	64.55	1000	25	●	97	2700	40.000	50	54	A+	929001347002	70761600
MASTER LED ExpertColor 5.5-50W GU10 927 36D	50	5.5	355	64.55	800	36	●	97	2700	40.000	50	54	A+	929001347302	70767800
MASTER LED ExpertColor 5.5-50W GU10 930 25D	50	5.5	375	68.00	1000	25	●	97	3000	40.000	50	54	A+	929001347102	70763000
MASTER LED ExpertColor 5.5-50W GU10 930 36D	50	5.5	375	68.00	800	36	●	97	3000	40.000	50	54	A+	929001347402	70769200
MASTER LED ExpertColor 5.5-50W GU10 940 25D	50	5.5	400	72.00	1050	25	●	97	4000	40.000	50	54	A+	929001347202	70765400
MASTER LED ExpertColor 5.5-50W GU10 940 36D	50	5.5	400	72.00	800	36	●	97	4000	40.000	50	54	A+	929001347502	70771500

SceneSwitch LEDspot

www.philips.com/ledlamps




Product Type	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	W	lm	lm/W	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	lm	lm/W	°			K						
LED SceneSwitch 50W GU10 WW 36D ND SRT4	1.5	345	69.00	36	⊗	80	-	15.000	50	54	A+	929001346058	71093701
LED SceneSwitch 50W GU10 WW 36D RF ND 1BC/6	1.5	345	69.00	36	⊗	80	-	15.000	50	54	A+	929001346001	71093700

LED lamps

MASTER LEDspot ExpertColor LV

www.philips.com/ledlamps



Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
1 MASTER LED ExpertColor 6.5-35W MR16 930 36D	35	6.5	440	67.69	1400	36	●	97	3000	40.000	51	46	A+	929001342402	73885600
2 MASTER LED ExpertColor 6.5-35W MR16 927 10D	35	6.5	410	63.00	4600	10	●	97	2700	40.000	51	46	A	929001341702	73871900
1 MASTER LED ExpertColor 6.5-35W MR16 927 24D	35	6.5	420	64.62	2200	24	●	97	2700	40.000	51	46	A	929001342002	73877100
1 MASTER LED ExpertColor 6.5-35W MR16 927 36D	35	6.5	420	64.62	1300	36	●	97	2700	40.000	51	46	A	929001342302	73883200
1 MASTER LED ExpertColor 6.5-35W MR16 927 60D	35	6.5	400	61.54	410	60	●	97	2700	40.000	50.5	46	A	929001341402	75751200
2 MASTER LED ExpertColor 6.5-35W MR16 930 10D	35	6.5	430	66.15	5000	10	●	97	3000	40.000	51	46	A	929001341802	73873300
1 MASTER LED ExpertColor 6.5-35W MR16 930 24D	35	6.5	440	67.69	2350	24	●	97	3000	40.000	51	46	A+	929001342102	73879500
1 MASTER LED ExpertColor 6.5-35W MR16 930 60D	35	6.5	440	67.69	440	60	●	97	3000	40.000	50.5	46	A+	929001341502	75753600
2 MASTER LED ExpertColor 6.5-35W MR16 940 10D	35	6.5	440	67.69	5000	10	●	97	4000	40.000	51	46	A+	929001341902	73875700
1 MASTER LED ExpertColor 6.5-35W MR16 940 24D	35	6.5	460	70.77	2350	24	●	97	4000	40.000	51	46	A+	929001342202	73881800
1 MASTER LED ExpertColor 6.5-35W MR16 940 36D	35	6.5	460	70.77	1400	36	●	97	4000	40.000	51	46	A+	929001342502	73887000
1 MASTER LED ExpertColor 6.5-35W MR16 940 60D	35	6.5	440	67.69	440	60	●	97	4000	40.000	50.5	46	A+	929001341602	75755000
3 MASTER MR16 ExpertColor7.2-50W 927 10D EZ10	50	7.2	450	62.50	4500	10	●	97	2700	40.000	51	59		929001302318	69220200
4 MASTER MR16 ExpertColor7.2-50W 927 24D EZ10	50	7.2	450	62.50	2200	24	●	97	2700	40.000	51	59		929001302618	69230100
4 MASTER MR16 ExpertColor7.2-50W 927 36D EZ10	50	7.2	450	62.50	1350	36	●	97	2700	40.000	51	59		929001302918	69236300
3 MASTER MR16 ExpertColor7.2-50W 930 10D EZ10	50	7.2	480	66.67	5000	10	●	97	3000	40.000	51	59		929001302418	69224000
4 MASTER MR16 ExpertColor7.2-50W 930 24D EZ10	50	7.2	480	66.67	2400	24	●	97	3000	40.000	51	59		929001302718	69232500
4 MASTER MR16 ExpertColor7.2-50W 930 36D EZ10	50	7.2	480	66.67	1450	36	●	97	3000	40.000	51	59		929001303018	69238700
3 MASTER MR16 ExpertColor7.2-50W 940 10D EZ10	50	7.2	480	66.67	5000	10	●	97	4000	40.000	51	59		929001302518	69228800
4 MASTER MR16 ExpertColor7.2-50W 940 24D EZ10	50	7.2	480	66.67	2400	24	●	97	4000	40.000	51	59		929001302818	69234900
4 MASTER MR16 ExpertColor7.2-50W 940 36D EZ10	50	7.2	480	66.67	1450	36	●	97	4000	40.000	51	59		929001303118	69240000
2 MASTER LED ExpertColor 7.5-43W MR16 927 36D	43	7.5	485	64.67	1400	36	●	92	2700	40.000	50.5	46	A	929001386302	73544200
2 MASTER LED ExpertColor 7.5-43W MR16 930 24D	43	7.5	500	66.67	2600	24	●	92	3000	40.000	50.5	46	A	929001386102	73540400
2 MASTER LED ExpertColor 7.5-43W MR16 930 36D	43	7.5	500	66.67	1550	36	●	92	3000	40.000	50.5	46	A	929001386402	73546600
2 MASTER LED ExpertColor 7.5-43W MR16 940 24D	43	7.5	520	69.33	2800	24	●	92	4000	40.000	50.5	46	A	929001386202	73542800
2 MASTER LED ExpertColor 7.5-43W MR16 940 36D	43	7.5	520	69.33	1650	36	●	92	4000	40.000	50.5	46	A	929001386502	73548000
2 MASTER LED ExpertColor 7.5-43W MR16 927 24D	43	7.5	485	64.67	2400	24	●	92	2700	40.000	50.5	46	A	929001386002	73538100

LED lamps

MASTER VALUE LEDspot LV

www.philips.com/ledlamps




Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional		Output		Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
1 MAS LEDspotLV 3.5-20W 827 MR11 24D	20	3.5	210	60.00	1000	24	✗	80	2700	40.000	35	40	A+	929001123802	41019600
2 MAS LEDspotLV DimTone 5-35W MR16 36D	35	5	345	69.00	600	36	●	80	2700	25.000	50.5	44.5	A+	929001904702	81538000
3 MAS LED spot VLE D 5.5-35W MR16 827 36D	35	5.5	450	81.82	1000	36	●	80	2700	25.000	50.5	45	A+	929001325902	70823100
3 MAS LED spot VLE D 5.5-35W MR16 827 60D	35	5.5	450	81.82	500	60	●	80	2700	25.000	50.5	45	A+	929001326202	70829300
3 MAS LED spot VLE D 5.5-35W MR16 830 36D	35	5.5	460	83.64	1000	36	●	80	3000	25.000	50.5	45	A+	929001326002	70825500
3 MAS LED spot VLE D 5.5-35W MR16 830 60D	35	5.5	460	83.64	500	60	●	80	3000	25.000	50.5	45	A+	929001326302	70831600
3 MAS LED spot VLE D 5.5-35W MR16 840 36D	35	5.5	490	89.09	1100	36	●	80	4000	25.000	50.5	45	A+	929001326102	70827900
3 MAS LED spot VLE D 5.5-35W MR16 840 60D	35	5.5	490	89.09	550	60	●	80	4000	25.000	50.5	45	A+	929001326402	70833000
4 MAS LEDspotLV DimTone 6.5-35W MR16 24D	35	6.5	410	63.08	1800	24	●	80	2700	25.000	51	50	A	929001127802	44213500
4 MAS LEDspotLV DimTone 6.5-35W MR16 36D	35	6.5	410	63.08	900	36	●	80	2700	25.000	51	50	A	929001127902	44215900
2 MAS LED SPOT VLE D 7-50W MR16 827 36D	50	7	621	88.00	1500	36	●	80	2700	25.000	50.5	45	A+	929001903402	81554000
2 MAS LED SPOT VLE D 7-50W MR16 830 36D	50	7	630	90.00	1500	36	●	80	3000	25.000	50.5	45	A+	929001903502	81556400
2 MAS LED SPOT VLE D 7-50W MR16 840 36D	50	7	660	94.00	1650	36	●	80	4000	25.000	50.5	45	A+	929001903602	81558800
5 MAS LEDspotLV DimTone 7-50W MR16 36D	50	7	621	88.00	1000	36	●	80	2700	25.000	50.5	45.5	A+	929002058902	65820500

LED lamps

MASTER VALUE LEDspot MV

www.philips.com/ledlamps




Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
1 MASTER LED spot VLE D 3.7-35W GU10 927 36D	35	3.7	260	78.38	500	36	●	90	2700	25.000	50	54	A+	929001348202	70773900
1 MASTER LED spot VLE D 3.7-35W GU10 927 60D	35	3.7	260	78.38	330	60	●	90	2700	25.000	50	54	A+	929001348502	70779100
1 MASTER LED spot VLE D 3.7-35W GU10 930 36D	35	3.7	270	81.08	500	36	●	90	3000	25.000	50	54	A+	929001348302	70775300
1 MASTER LED spot VLE D 3.7-35W GU10 930 60D	35	3.7	270	81.08	340	60	●	90	3000	25.000	50	54	A+	929001348602	70781400
1 MASTER LED spot VLE D 3.7-35W GU10 940 36D	35	3.7	285	85.14	500	36	●	90	4000	25.000	50	54	A++	929001348402	70777700
1 MASTER LED spot VLE D 3.7-35W GU10 940 60D	35	3.7	285	85.14	350	60	●	90	4000	25.000	50	54	A++	929001348702	70783800
1 MASTER LED spot VLE DT 3.7-35W GU10 927 36D	35	3.7	260	78.38	500	36	●	90	2700	25.000	50	54	A+	929001350002	70809500
1 MASTER LED spot VLE D 4.9-50W GU10 927 36D	50	4.9	355	80.61	650	36	●	90	2700	25.000	50	54	A+	929001348802	70785200
1 MASTER LED spot VLE D 4.9-50W GU10 927 60D	50	4.9	355	80.61	400	60	●	90	2700	25.000	50	54	A+	929001349102	70791300
1 MASTER LED spot VLE D 4.9-50W GU10 930 36D	50	4.9	365	82.65	650	36	●	90	3000	25.000	50	54	A+	929001348902	70787600
1 MASTER LED spot VLE D 4.9-50W GU10 930 60D	50	4.9	365	82.65	400	60	●	90	3000	25.000	50	54	A+	929001349202	70793700
1 MASTER LED spot VLE D 4.9-50W GU10 940 36D	50	4.9	380	85.71	700	36	●	90	4000	25.000	50	54	A+	929001349002	70789000
1 MASTER LED spot VLE D 4.9-50W GU10 940 60D	50	4.9	380	85.71	400	60	●	90	4000	25.000	50	54	A+	929001349302	70795100
1 MASTER LED spot VLE DT 4.9-50W GU10 927 36D	50	4.9	355	80.61	650	36	●	90	2700	25.000	50	54	A+	929001350302	70811800
2 MASTER LEDspot VLE D 5-50W GU10 827 36D 5CT	50	5	345	69.00	650	36	●	80	2700	25.000	50	54	A+	929001994752	73950800
3 MASTER LEDspot VLE D 5-50W GU10 830 36D 5CT	50	5	345	69.00	650	36	●	80	3000	25.000	50	54	A+	929002348452	74716900
4 MASTER LED spot VLE D 6.2-80W GU10 927 36D	80	6.2	575	92.00	850	36	●	90	2700	25.000	50	54	A++	929002059502	67541700
4 MASTER LED spot VLE D 6.2-80W GU10 930 36D	80	6.2	575	92.00	850	36	●	90	3000	25.000	50	54	A++	929002068402	70525100
4 MASTER LED spot VLE D 6.2-80W GU10 940 36D	80	6.2	575	92.00	850	36	●	90	4000	25.000	50	54	A++	929002066002	70523700
4 MASTER LED spot VLE D 6.2-80W GU10 965 36D	80	6.2	575	92.00	850	36	●	90	6500	25.000	50	54	A++	929002209902	70607400
4 MASTER LED spot VLE D 650lm GU10 930 120D		6.2	650	104.00	200	120	●	90	3000	25.000	50	54	A+	929002210002	70609800
4 MASTER LED spot VLE D 680lm GU10 940 120D		6.2	680	109.00	200	120	●	90	4000	25.000	50	54	A+	929002210102	70611100
4 MASTER LED spot VLE D 680lm GU10 965 120D		6.2	680	109.00	200	120	●	90	6500	25.000	50	54	A+	929002210202	70613500
5 MASTER LED spot VLE D 650lm GU10 830 120D		7	650	92.86		120	●	80	3000	25.000	50	54	A+	929001349702	72431600
5 MASTER LED spot VLE D 680lm GU10 840 120D		7	680	97.14		120	●	80	4000	25.000	50	54	A+	929001349802	72433000
5 MASTER LED spot VLE D 680lm GU10 865 120D		7	680	97.14		120	●	80	6500	25.000	50	54	A+	929001349902	72435400
1 MASTER LED spot VLE D 7-80W GU10 830 36D	80	7	590	84.29	1200	36	●	80	3000	25.000	50	54	A+	929001349402	70797500
1 MASTER LED spot VLE D 7-80W GU10 840 36D	80	7	610	87.14	1200	36	●	80	4000	25.000	50	54	A+	929001349502	70799900
1 MASTER LED spot VLE D 7-80W GU10 865 36D	80	7	610	87.14	1200	36	●	80	6500	25.000	50	54	A+	929001349602	70801900

LED lamps

MASTER LEDspot PAR

www.philips.com/ledlamps




Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
1 MAS LEDspot CLA D 6-50W 827 PAR20 25D	50	6	500	86.67	1500	25	●	80	2700	25.000	64	85	A+	929001317402	71356300
1 MAS LEDspot CLA D 6-50W 827 PAR20 40D	50	6	500	86.67	800	40	●	80	2700	25.000	64	85	A+	929001317702	71370900
1 MAS LEDspot CLA D 6-50W 830 PAR20 25D	50	6	515	89.17	1500	25	●	80	3000	25.000	64	85	A+	929001317502	71366200
1 MAS LEDspot CLA D 6-50W 830 PAR20 40D	50	6	515	89.17	800	40	●	80	3000	25.000	64	85	A+	929001317802	71372300
1 MAS LEDspot CLA D 6-50W 840 PAR20 25D	50	6	540	92.50	1500	25	●	80	4000	25.000	64	85	A+	929001317602	71368600
1 MAS LEDspot CLA D 6-50W 840 PAR20 40D	50	6	540	92.50	800	40	●	80	4000	25.000	64	85	A+	929001317902	71374700
2 MAS LEDspot CLA ND 9-60W 827 PAR38 25D	60	9	750	88.89	1800	25	⊗	80	2700	15.000	122	134	A+	929001322702	71456000
3 MAS LEDspot CLA D 9.5-75W 827 PAR30S 25D	75	9.5	740	83.16	3500	25	●	80	2700	25.000	95	86	A+	929001322902	71380800
3 MAS LEDspot CLA D 9.5-75W 830 PAR30S 25D	75	9.5	760	85.26	3500	25	●	80	3000	25.000	95	86	A+	929001342902	71390700
3 MAS LEDspot CLA D 9.5-75W 840 PAR30S 25D	75	9.5	820	92.63	3500	25	●	80	4000	25.000	95	86	A+	929001323002	71384600
2 MAS LEDspot CLA D 13-100W 827 PAR38 25D	100	13	875	76.92	4000	25	●	80	2700	25.000	122	134	A+	929001322502	71376100

LED lamps

MASTER LEDspot LV AR111

www.philips.com/ledlamps




Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional		Output		Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
1 MAS LEDspotLV D 11-50W 927 AR111 24D	50	11	560	50.91	2900	24	●	90	2700	40.000			A	929001169802	51488700
1 MAS LEDspotLV D 11-50W 927 AR111 40D	50	11	550	50.00	1100	40	●	90	2700	40.000			A	929001170002	51492400
2 MAS LEDspotLV D 11-50W 927 AR111 8D	50	11	560	50.91	7800	8	●	90	2700	40.000	111	62	A	929001243902	57833900
1 MAS LEDspotLV D 11-50W 930 AR111 24D	50	11	580	52.73	3000	24	●	90	3000	40.000			A	929001169902	51490000
1 MAS LEDspotLV D 11-50W 930 AR111 40D	50	11	570	51.82	1150	40	●	90	3000	40.000			A	929001170102	51494800
2 MAS LEDspotLV D 11-50W 930 AR111 8D	50	11	580	52.73	8000	8	●	90	3000	40.000	111	62	A	929001244002	57835300
1 MAS LEDspotLV D 15-75W 927 AR111 24D	75	15	800	53.33	3900	24	●	90	2700	40.000			A	929001170202	51496200
1 MAS LEDspotLV D 15-75W 927 AR111 40D	75	15	800	53.33	1400	40	●	90	2700	40.000			A	929001170402	51500600
1 MAS LEDspotLV D 15-75W 930 AR111 24D	75	15	810	54.00	4000	24	●	90	3000	40.000			A	929001170302	51498600
1 MAS LEDspotLV D 15-75W 930 AR111 40D	75	15	810	54.00	1450	40	●	90	3000	40.000			A	929001170502	51502000
1 MAS LEDspotLV D 15-75W 940 AR111 24D	75	15	830	55.33	4100	24	●	90	4000	40.000	111	62	A	929001329702	71834600
1 MAS LEDspotLV D 15-75W 940 AR111 40D	75	15	830	55.33	1500	40	●	90	4000	40.000	111	62	A	929001330002	71836000
1 MAS LEDspotLV D 20-100W 827 AR111 24D	100	20	1180	59.00	5800	24	●	80	2700	25.000			A	929001170802	51504400
1 MAS LEDspotLV D 20-100W 827 AR111 40D	100	20	1160	58.00	2300	40	●	80	2700	25.000	111	62	A	929001171102	70745600
1 MAS LEDspotLV D 20-100W 830 AR111 24D	100	20	1200	60.00	6000	24	●	80	3000	25.000	111	62	A	929001170902	70743200
1 MAS LEDspotLV D 20-100W 830 AR111 40D	100	20	1180	59.00	2350	40	●	80	3000	25.000	111	62	A	929001171202	70747000
1 MAS LEDspotLV D 20-100W 840 AR111 24D	100	20	1250	62.50	6100	24	●	80	4000	25.000	111	62	A	929001171002	72532000
1 MAS LEDspotLV D 20-100W 840 AR111 40D	100	20	1250	62.50	2400	40	●	80	4000	25.000	111	62	A	929001171302	72534400



LED lamps

CorePro LEDspot Reflectors

www.philips.com/ledlamps



Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
1 CorePro LEDspot ND1.4-25W R50 E14 827 36D	25	1.4	105	75.00		36	✗	80	2700	15.000	50	84	A++	929001891002	81173300
2 CorePro LEDspot ND1.8-30W R39 E14 827 36D	30	1.8	150	83.00	250	36	✗	80	2700	15.000	39	65	A++	929001890902	81171900
1 CorePro LEDspot ND2.8-40W R50 E14 827 36D	40	2.8	210	75.00		36	✗	80	2700	15.000	50	84	A++	929001891102	81175700
3 CorePro LEDspot ND 3-40W R63 E27 827 36D	40	3	210	70.00		36	✗	80	2700	15.000	63	102	A+	929001891302	81179500
4 CorePro LEDspot ND 4-60W R80 E27 827 36D	60	4	345	86.00		36	✗	80	2700	15.000	80	112	A+	929001891502	81183200
1 CorePro LEDspot D 4.3-60W R50 E14 827 36D	60	4.3	320	74.00		36	●	80	2700	15.000	50	84	A+	929001891202	81177100
3 CorePro LEDspot D 4.5-60W R63 E27 827 36D	60	4.5	345	76.00		36	●	80	2700	15.000	63	102	A+	929001891402	81181800
4 CorePro LEDspot ND 8-100W R80 E27 827 36D	100	8	670	83.00		36	✗	80	2700	15.000	80	112	A+	929001891602	81185600

CorePro LEDspot LV

www.philips.com/ledlamps




Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
1 CorePro LED spot 2.3-20W 827 MR11 36D	20	2.3	184	80.00	400	36	✗	80	2700	25.000	35.5	39.5	A++	929002066402	65948600
2 CorePro LED spot 2.6-20W 827 MR11 36D	20	2.6	190	63.33	400	36	✗	80	2700	15.000	35	37.5	A+	929001339202	70868200
3 CorePro LED spot ND 3-20W MR16 827 36D	20	3	230	76.00	600	36	✗	80	2700	15.000	51	46	A++	929001344002	71061600
4 CorePro LED spot ND 5-35W MR16 827 36D	35	5	345	69.00	650	36	✗	80	2700	15.000	51	46	A+	929001344302	71063000
4 CorePro LED spot ND 5-35W MR16 840 36D	35	5	390	78.00	650	36	✗	80	4000	15.000	51	46	A+	929001344502	71065400
5 CorePro LED spot ND 7-50W MR16 827 36D	50	7	621	88.00	1400	36	✗	80	2700	15.000	50.5	45	A+	929001904802	81471000
5 CorePro LED spot ND 7-50W MR16 830 36D	50	7	621	88.00	1400	36	✗	80	3000	15.000	50.5	45	A+	929001904902	81477200
5 CorePro LED spot ND 7-50W MR16 840 36D	50	7	660	94.00	1500	36	✗	80	4000	15.000	50.5	45	A+	929001905002	81479600

LED lamps

CorePro LEDspot MV

www.philips.com/ledlamps




Product Type	Tradi	LED	Lumen	Efficacy	Luminous	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Intensity	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	cd	°			K						
1 Corepro LEDspot 2.7-25W GU10 827 36D	25	2.7	215	79.00	470	36	✗	80	2700	15.000	50	53	A++	929001217532	75209800
2 Corepro LEDspot 2.7-25W GU10 830 36D	25	2.7	225	83.00	490	36	✗	80	3000	15.000	50	54	A++	929001217602	72829100
2 Corepro LEDspot 2.7-25W GU10 840 36D	25	2.7	230	85.00	500	36	✗	80	4000	15.000	50	54	A++	929001217702	72831400
1 Corepro LEDspot 3.5-35W GU10 827 36D	35	3.5	255	72.00	545	36	✗	80	2700	15.000	50	54	A+	929001217862	75253100
2 Corepro LEDspot 3.5-35W GU10 830 36D	35	3.5	265	75.00	565	36	✗	80	3000	15.000	50	54	A++	929001217902	72833800
2 Corepro LEDspot 3.5-35W GU10 840 36D	35	3.5	275	78.00	590	36	✗	80	4000	15.000	50	54	A++	929001218002	72835200
3 CorePro LEDspot 4-35W GU10 827 36D DIM	35	4	250	62.00	500	36	●	80	2700	15.000	50	53	A+	929001218632	72133900
4 CorePro LEDspot 4-35W GU10 830 36D DIM	35	4	260	65.00	540	36	●	80	3000	15.000	50	54	A+	929001363902	72135300
4 CorePro LEDspot 4-35W GU10 840 36D DIM	35	4	270	67.00	540	36	●	80	4000	15.000	50	54	A+	929001364002	73022500
1 Corepro LEDspot 4.6-50W GU10 827 36D	50	4.6	355	77.00	700	36	✗	80	2700	15.000	50	54	A+	929001215232	75251700
2 Corepro LEDspot 4.6-50W GU10 830 36D	50	4.6	370	80.00	740	36	✗	80	3000	15.000	50	54	A+	929001218102	72837600
2 Corepro LEDspot 4.6-50W GU10 840 36D	50	4.6	390	84.00	770	36	✗	80	4000	15.000	50	54	A++	929001218202	72839000
2 Corepro LEDspot 4.6-50W GU10 865 36D	50	4.6	390	84.00	770	36	✗	80	6500	15.000	50	54	A++	929001218302	72841300
3 CorePro LEDspot 5-50W GU10 827 36D DIM	50	5	350	70.00	650	36	●	80	2700	15.000	50	53	A+	929001218832	72137700
4 CorePro LEDspot 5-50W GU10 830 36D DIM	50	5	365	73.00	710	36	●	80	3000	15.000	50	54	A+	929001364202	72139100
4 CorePro LEDspot 5-50W GU10 840 36D DIM	50	5	380	76.00	710	36	●	80	4000	15.000	50	54	A+	929001364302	73024900
4 CorePro LEDspot 5-65W GU10 830 36D ND	65	5	460	92.00	800	36	✗	80	3000	15.000	50	54	A++	929001381202	74385000
4 CorePro LEDspot 5-65W GU10 840 36D ND	65	5	485	97.00	800	36	✗	80	4000	15.000	50	54	A++	929001381302	74387400

LED lamps

CorePro LEDcapsule LV

www.philips.com/ledlamps



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 CorePro LEDcapsuleLV 0.9-10W G4 827	10	0.9	110	122.00	⊗	80	2700	15.000	14.5	38	A++	929001843902	79312100
2 CorePro LEDcapsuleLV 1.7-20W G4 827	20	1.7	205	120.00	⊗	80	2700	15.000	14.5	38	A++	929001844102	79310700
2 CorePro LEDcapsuleLV 1.7-20W GY6.35 827	20	1.7	210	123.00	⊗	80	2700	15.000	15	39	A++	929001844302	79767900
3 CorePro LEDcapsuleLV 2-20W G4 827 D	20	2	200	100.00	●	80	2700	15.000	17	48	A++	929001235302	57865000
4 CorePro LEDcapsuleLV 2.5-28W G4 827	28	2.5	300	120.00	⊗	80	2700	15.000	15	46.5	A++	929001896702	82694200

CorePro LEDcapsule MV

www.philips.com/ledlamps



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 CorePro LEDcapsule ND 1.9-25W G9 827	25	1.9	204	107.37	⊗	80	2700	15.000	16.5	48	A++	929001323802	71392100
1 CorePro LEDcapsule ND 1.9-25W G9 830	25	1.9	210	110.53	⊗	80	3000	15.000	16.5	48	A++	929001364702	72423100
2 CorePro LEDcapsule 2-25W ND G9 827 G	25	2	200	100.00	⊗	80	2700	10.000	13.5	50	A++	929002326202	73500500
2 CorePro LEDcapsule 2-25W ND G9 830 G	25	2	220	110.00	⊗	80	3000	10.000	13.5	50	A++	929002326302	73502900
3 CorePro LEDcapsuleMV 2.3-25W G9 827 D	25	2.3	215	93.48	●	80	2700	15.000	23	51	A++	929001232002	57869800
4 CorePro LEDcapsule ND 3.2-40W G9 827	40	3.2	400	125.00	⊗	80	2700	15.000	17	51.5	A++	929001902902	81526700
5 CorePro LEDcapsule 3.5-40W ND G9 827 G	40	3.5	380	108.00	⊗	80	2700	10.000	14.5	60	A++	929002326502	73506700
5 CorePro LEDcapsule 3.5-40W ND G9 830 G	40	3.5	400	114.00	⊗	80	3000	10.000	14.5	60	A++	929002326602	73508100
6 CorePro LEDcapsule ND 4.8-60W G9 827	60	4.8	570	118.00	⊗	80	2700	15.000	19	60	A++	929002055102	65780200

LED lamps

CorePro LEDlinear MV

www.philips.com/ledlamps



Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	°			K						
1 CorePro LED linear R7S 78mm 4-40W 830 G	40	4	475	118.00		✗	80	3000	10.000	14.5	78	A++	929002327002	73512800
2 CorePro LED linear R7S 118mm 6.5-60W 830	60	6.5	806	124	300	✗	80	3000	20.000	22.5	118	A++	929001186102	52253000
3 CorePro LEDlinear ND 7.5-60W R7S 78mm830	60	7.5	950	126.67		✗	80	3000	15.000	29	78	A++	929001339002	71394500
3 CorePro LEDlinear ND 7.5-60W R7S 78mm840	60	7.5	1000	133.33		✗	80	4000	15.000	29	78	A++	929001339102	71396900
4 CorePro LED linear R7S 118mm 8.1-60W 830 G	60	8.1	900	111.00		✗	80	3000	10.000	13.5	118	A+	929002327202	73516600
4 CorePro LED linear R7S 118mm 8.1-60W 840 G	60	8.1	970	119.00		✗	80	4000	10.000	13.5	118	A++	929002327302	73518000
5 CorePro LED linear D 14-120W R7S 118 830	120	14	2000	142.86		●	80	3000	15.000	29	118	A++	929001353602	71400300
5 CorePro LED linear D 14-120W R7S 118 840	120	14	2000	142.86		●	80	4000	15.000	29	118	A++	929001353702	71406500
6 CorePro LED linear R7S 118mm 14-100W 830 D	100	14	1600	114.29		●	80	3000	15.000	29	118	A+	929001243702	57879700
7 CorePro LED linear R7S 118mm 14-100W 840 D	100	14	1800	128.57		●	80	4000	15.000	29	118	A++	929001243802	57881000
8 CoreProLED linearD 17.5-150W R7S 118 830	150	17.5	2460	140.00		●	80	3000	15.000	42	118	A++	929002016602	64673800
8 CoreProLED linearD 17.5-150W R7S 118 840	150	17.5	2460	140.00		●	80	4000	15.000	42	118	A++	929002016702	64675200

SceneSwitch LEDbulbs

www.philips.com/ledlamps



Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	°			K						
1 LED Scene Switch 60W A60 E27 WW-CW FR ND SRT4	60	8	806	100.00		✗	80	-	15.000	61	111	A+	929001905901	59837502
2 LED Scene Switch 100W A67 E27 WW FR ND 1SRT4	100	14	1521/600/150	108	150	✗	80	-	15.000	71.1	139.1	A+	929001336658	70679401

LED lamps

SceneSwitch LED candles and lusters

www.philips.com/ledlamps



○ = Dimmable
 ⊗ = Non-Dimmable

4 PACK
 E14

Product Type	Traditional	LED	Lumen Output	Efficacy	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W			K	Hrs.					
LED SceneSwitch 40W B38 E14 WW CL ND 1SRT4	40	5.5	470/190/50	85	⊗	80	-	15.000	38	113	A+	929001260858	59847402

Designed to be seen

Today our work spaces need to fulfil multiple functions. We produce, meet, present, sell and require our lighting to be adaptable to meet every need and mood. There is a growing demand for lighting to be decorative and stylish; it needs to be designed to be seen. The Philips Deco collections are highly stylish giant filament LED bulbs, designed to make a statement and accentuate your customer's office or shop interior, or to complement the style in a hotel, bar or restaurant. Complement multiple design preferences with Philips unique filament designs.



Deco LED Vintage Giant

Accentuates a traditional warm & cozy vintage atmosphere.



Deco LED Modern Giant


Modern, a bright and sleek, fresh, forward design.

Easy to upgrade, simple to install

Both collections get the most out of classic designs, so you're able to select the perfect shape, from a choice of 'Globe', 'Teardrop' or 'Tubular' shaped bulbs. Dimmable and non-dimmable.

LED bulbs


Decorative LEDbulbs



Product Type	Tradi- tional	LED	Lumen Output	Efficacy	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W			K	Hrs.					
1 CLA LEDBulb SP ND 5-25W E27 GOLD G93 CL	25	5	250	50.00	✗	80	2000	15.000	95	142	A	929001392102	74415400
2 CLA LEDBulb SP ND 5-25W E27 GOLD ST64 CL	25	5	250	50.00	✗	80	2000	15.000	64	143	A	929001392002	74413000
3 LED classic-giant 25W E27 A160 GOLD ND	25	5	300	60.00	✗	80	2000	15.000	160	293	A	929001817101	76806800
4 LED classic-giant 25W E27 G200 GOLD ND	25	5	300	60.00	✗	80	2000	15.000	200	286	A	929001817201	76808200
5 LED giant 25W E27 A160 4000K smoky D	25	6.5	270	41.00	●	80	4000	15.000	160	293	A	929001903201	81510600
6 LED giant 25W E27 G200 4000K smoky D	25	6.5	270	41.00	●	80	4000	15.000	200	286	A	929001903101	81506900
7 LED giant 25W E27 T65 4000K smoky D	25	6.5	270	41.00	●	80	4000	15.000	65	273	A	929001903301	81512000
6 LED giant E27 G200 modern D + black CORD	25	6.5	270	41.00	●	80	4000	15.000	200	286	A	929001903199	62948900
8 LEDClassic 30W Mushroom E27 2000K GOLD D	30	5	350	70.00	●	80	2000	15.000	202	188	A+	929001935601	59351300


LED bulbs

Decorative LEDbulbs - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional		Output		mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 LED classic-giant 40W E27 A160 GOLD DIM	40	6.5	470	72.00	●	80	2000	15.000	160	293	A+	929001873501	80349300
2 LED classic-giant 40W E27 G200 GOLD DIM	40	6.5	470	72.00	●	80	2000	15.000	200	286	A+	929001873401	80347900
3 LED classic-giant 40W E27 T65 GOLD DIM	40	6.5	470	72.00	●	80	2000	15.000	65	273	A+	929001873601	80351600
4 LED giant E27 G200 VIN D + rosegold CORD	40	6.5	470	72.00	●	80	2000	15.000	200	286	A+	929001873499	62950200
4 LEDClassic 40W Diamond E27 2700K CL D	40	5	500	100.00	●	80	2700	15.000	112	142	A+	929001935701	59353700
5 CLA LEDBulb D 7.5-48W A60 B22 820 GOLD	48	7.5	610	81.33	●	80	2000	15.000	60	102	A+	929001333002	70958000
6 LED classic CM 48W A60 E27 WW CL D SRT4	48	7.5	610	81.33	●	80	2700	15.000	60	104	A+	929001333501	70926900
7 CLA LEDBulb D 8-50W A60 E27 822 GOLD	50	8	630	78.00	●	80	2200	15.000	60	104	A+	929001921602	84154900
8 CLA LEDBulb D 8-50W G120 E27 822 GOLD	50	8	630	78.00	●	80	2200	15.000	120	168	A+	929001896102	81437600

Decorative LEDbulbs - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional		Output		mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 CLA LEDBulb D 8-50W ST64 E27 822 GOLD	50	8	630	78.00	●	80	2200	15.000	64	140	A+	929001895902	81435200
2 LED classic 50W A60 B22 FL GOLD D SRT4	50	8	630	78.00	●	80	2200	15.000	60	102	A+	929001921701	70916001
3 LEDClassic 50W G120 E27 2700K CM D	50	8	700	87.00	●	80	2700	15.000	120	168	A+	929001935401	59341400


LED bulbs

Accessory



Product Type	LED	Efficacy	12NC	EOC code
	W	lm/W		
1 CORD/classic/E27/gold 1CT EU RF	40	0.00	929001978001	16777900
2 CORD/modern/E27/black 1CT EU RF	40	0.00	929001977901	16776200
3 CORD/VIN/E27/rose gold 1CT EU	40	0.00	929001977801	62405700

MASTER LEDbulbs



Product Type	Tradi tional	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W	°			K	Hrs.					
1 MASTER LED bulb DT 5.5-40WE27 927-922 A60FR	40	5.5	470	85.00	200	●	90	-	25.000	60	110	A+	929001351302	70709800
2 MASTER LEDbulb DT 6-40W B22 A60 CL	40	6	470	78.00		●	80	-	25.000			A+	929001150602	48130100
3 MASTER LEDbulb DT 6-40W E27 A60 CL	40	6	470	78.00		●	80	-	25.000	60	110	A+	929001150802	48128800
4 MASTER LED bulb DT 9-60W E27 927-922 A60 FR	60	9	806	89.00	200	●	90	-	25.000	60	110	A+	929001351402	70711100
5 MASTER LEDbulb DT 8.5-60W B22 A60 CL	60	8.5	806	94		●	80	-	25.000	60	110	A+	929001150732	48134900
6 MASTER LEDbulb DT 8.5-60W E27 A60 CL	60	8.5	806	94		●	80	-	25.000	60	110	A+	929001150932	48132500
7 MASTER LED bulb DT 12-75WE27 927-922 A67 FR	75	12	1055	87.00	200	●	90	-	25.000	77	142	A+	929001868602	82618800
8 MASTER LEDbulb DT 11-75W A67 B22 827 FR	75	11	1055	96		●	80	-	25.000	70.6	135.9	A+	929001200402	55553800
8 MASTER LEDbulb DT 15-100W A67 B22 827 FR	100	15	1521	101		●	80	-	25.000	70.6	135.9	A+	929001200302	55557600
7 MASTERLEDbulb DT 14-100WE27 927-922 A67FR	100	14	1521	108.00	200	●	90	-	25.000	77	142	A+	929002218602	69564400


LED bulbs

SceneSwitch LEDbulbs



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 LEDClassic SSW 60W A60 B22 WW CL ND 1SRT		1.6	150/320/806	107.47	⊗	80	-	15.000	60	110	A+	929001383901	74311900
2 LEDClassic SSW 60W A60 E27 WW CL ND 1SRT		7.5	806-320-150	107.00	⊗	80	-	15.000	60	104	A+	929001888601	74309602
3 LED Scene Switch 60W A60 E27 WW FR ND 1SRT4	60	8	806-320-80	100.00	⊗	80	-	15.000	61	111	A+	929001236558	58884002


Classic filament LEDbulbs



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 LED CLA giant 25W E27 G200 pink DIM	25	4.5	270	60.00	●	80	1800	15.000	200	283	A+	929002453901	26957600
2 LED classic 25W G120 E27 gradient D 1PF	25	4.5	250	55.00	●	80	1800	15.000	125	178	A	929002454101	26961300
3 LED classic 25W G93 E27 GOLD SP D SRT4	25	5.5	250	45.00	●	80	2000	15.000	95	140	A	929002224001	67607000
4 LED classic 25W G93 E27 pink D 1PF/4	25	4.5	250	55.00	●	80	1800	15.000	95	140	A	929002453801	26955200
5 LED classic 25W ST64 E27 gradient D SRT	25	4.5	250	55.00	●	80	1800	15.000	64	140	A	929002454001	26959000
6 LED classic 25W ST64 E27 pink D SRT4	25	4.5	250	55.00	●	80	1800	15.000	64	140	A	929002453701	26953800
7 LED CLA giant 28W E27 G200 gradient D	28	4.5	300	66.00	●	80	1800	15.000	200	283	A+	929002454201	26963700
8 CLA LED bulb ND 4-40W B22 827 A60 CL	40	4	470	118.00	⊗	80	2700	15.000	60	102	A++	929001237502	76868600

LED bulbs


Classic filament LEDbulbs - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	lm		°			K							
1 CLA LEDBulb D 5-40W A60 B22 827 CL	40	5.5	470	85.00		●	80	2700	15.000	60	102	A+	929001331102	70942900
2 CLA LEDBulb D 5.5-40W A60 E27 827 CL	40	5.5	470	85.00		●	80	2700	15.000	60	104	A+	929001331002	70940500
3 CLA LEDBulb DT 5-40W B22 CRI90 A60 FR	40	5	470	94.00	270	●	90	2700-2200	15.000	60	104	A+	929002392602	77124900
4 CLA LEDBulb DT 5-40W E27 CRI90 A60 FR	40	5	470	94.00	270	●	90	2700-2200	15.000	60	106	A+	929002392202	78009800
5 CLA LEDBulb DT6.7-40W E27 CRI90 A60 CL	40	6.7	470	70.00		●	90	-	15.000	60	106	A+	929002019602	64616500
6 CLA LEDBulb ND 4-40W A60 E27 827 CL	40	4.3	470	109.00		⊗	80	2700	15.000	60	104	A++	929001890012	63086700
7 CLA LEDBulb ND 4-40W ST64 E27 827 CL	40	4	470	118.00		⊗	80	2700	15.000	64	140	A++	929001237302	57403400
6 CLA LEDBulb ND 4.3-40W E27 827 A60 CL	40	4.3	470	109.00		⊗	80	2700	15.000	60	104	A++	929001890002	80867200
4 CLA LEDBulb ND 4.5-40W E27 830 A60 FR	40	4.5	470	104.00		⊗	80	3000	15.000	60	106	A++	929002424902	25004800
8 CLA LEDBulb D 8-60W A60 B22 827 CL	60	8	806	100.00		●	80	2700	15.000	60	102	A+	929001331302	70946700

LED bulbs


Classic filament LEDbulbs - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Angle									
	W	W	lm	lm/W	°			K	Hrs.	diameter	length			code
1 CLA LEDBulb D 8-60W A60 E27 827 CL	60	8	806	100.00		●	80	2700	15.000	60	104	A+	929001331202	70944300
2 CLA LEDBulb D 8-60W G93 E27 827 CL	60	8	806	100.00		●	80	2700	15.000	95	137	A+	929001895702	81431400
3 CLA LEDBulb D 8-60W ST64 B22 827 CL	60	8	806	100.00		●	80	2700	15.000	64	138	A+	929001895602	81429100
4 CLA LEDBulb D 8-60W ST64 E27 827 CL	60	8	806	100.00		●	80	2700	15.000	64	140	A+	929001895502	81427700
5 CLA LEDBulb DT 7-60W B22 CRI90 A60 FR	60	7	806	115.00	270	●	90	2700-2200	15.000	60	104	A++	929002392702	77126300
6 CLA LEDBulb DT 7-60W E27 CRI90 A60 FR	60	7	806	115.00	270	●	90	2700-2200	15.000	60	106	A++	929002392302	78013500
7 CLA LEDBulb DT9-60W E27 CRI90 ST64 CL	60	9	806	89.00		●	90	-	15.000	64	143	A+	929002019202	64652300
8 CLA LEDBulb ND 7-60W B22 WW A60 CL	60	7	806	115.00		⊗	80	2700	15.000	60	104	A++	929001387402	74277800
3 CLA LEDBulb ND 7-60W B22 WW ST64 CL	60	7	806	115.00		⊗	80	2700	15.000	64	138	A++	929001387702	74279200
6 CLA LEDBulb ND 7-60W E27 830 A60 FR	60	7	806	115.00		⊗	80	3000	15.000	60	106	A++	929002425002	25006200
1 CLA LEDBulb ND 7-60W E27 WW A60 CL	60	7	806	115.00		⊗	80	2700	15.000	60	104	A++	929001387302	74273000
2 CLA LEDBulb ND 7-60W E27 WW G93 CL	60	7	806	115.00		⊗	80	2700	15.000	95	140	A++	929001387902	74271600
4 CLA LEDBulb ND 7-60W E27 WW ST64 CL	60	7	806	115.00		⊗	80	2700	15.000	64	140	A++	929001387602	74275400
5 CLA LEDBulb DT10.5-75W B22 CRI90 A60 FR	75	10.5	1055	100.00	270	●	90	2700-2200	15.000	60	104	A+	929002392802	77108900
6 CLA LEDBulb DT10.5-75W E27 CRI90 A60 FR	75	10.5	1055	100.00	270	●	90	2700-2200	15.000	60	106	A+	929002392402	77106500


LED bulbs

Classic filament LEDbulbs - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	lm	lm/W	°			K							
1 CLA LEDBulb ND 8-75W E27 827 A60 CL	75	8	1055	131.00		X	80	2700	15.000	60	104	A++	929001888902	80951800
1 CLA LEDBulb ND 8.5-75W A60 E27 827 CL	75	8.5	1055	124.00		X	80	2700	15.000	60	104	A++	929002025402	64908100
2 CLA LEDBulb ND 8.5-75W E27 830 A60 FR	75	8.5	1055	124.00		X	80	3000	15.000	60	104	A++	929002425102	25008600
2 CLA LEDBulb DT12-100W E27 CRI90 A60 FR	100	12	1521	126.00	270	●	90	2700-2200	15.000	60	106	A++	929002392502	77102700
3 CLA LEDBulb ND 10.5-100W A60 E27 827 CL	100	10.5	1521	144.00		X	80	2700	15.000	60	104	A++	929002026102	64910400
2 CLA LEDBulb ND 10.5-100W E27 830 A60 FR	100	10.5	1521	144.00		X	80	3000	15.000	60	104	A++	929002425202	25010900
4 CLA LEDBulb ND 11-100W E27 827 A67 CL	100	11	1521	138.00		X	80	2700	15.000	70	124	A++	929001889202	80959400
5 LED classic 120W A67 E27 CDL FR ND 1SRT4	120	13	2000	153.00		X	80	6500	15.000	70	121	A++	929002372001	76455500
6 LED classic 120W A67 E27 CW CL ND 1SRT4	120	13	2000	153.00		X	80	4000	15.000	70	121	A++	929002371601	76437100
5 LED classic 120W A67 E27 CW FR NDRF1SRT4	120	13	2000	153.00		X	80	4000	15.000	70	121	A++	929002371901	76453100
6 LED classic 120W A67 E27 WW CL ND SRT4	120	13	2000	153.00		X	80	2700	15.000	70	121	A++	929002371501	76435700
5 LED classic 120W A67 E27 WW FR NDRFSRT4	120	13	2000	153.00		X	80	2700	15.000	70	121	A++	929002371801	76451700
7 CLA LEDBulb ND 17-150W A67 E27 827 CL	150	17	2452	144.00		X	80	2700	15.000	70	128	A++	929002055002	65784000
5 LED classic 150W A67 E27 CDL FR ND 1SRT4	150	17.5	2452	140.00		X	80	6500	15.000	70	121	A++	929002372801	76461600
8 LED classic 150W A67 E27 CW CL ND 1SRT4	150	17	2452	144.00		X	80	4000	15.000	70	121	A++	929002372401	76439500
5 LED classic 150W A67 E27 CW FR ND 1SRT4	150	17.5	2452	140.00		X	80	4000	15.000	70	121	A++	929002372701	76459300
5 LED classic 150W A67 E27 WW FR NDRFSRT4	150	17.5	2452	140.00		X	80	2700	15.000	70	121	A++	929002372601	76457900

Classic filament LEDbulbs - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	lm	lm/W			K							
LED classic 200W A95 E27 CDL FR ND 1PF/4	200	23	3452	150.00	X	80	6500	15.000	95	165	A++	929002373101	76467800
LED classic 200W A95 E27 CW FR ND 1PF/4	200	23	3452	150.00	X	80	4000	15.000	95	165	A++	929002373001	76465400
LED classic 200W A95 E27 WW FR ND 1PF	200	23	3452	150.00	X	80	2700	15.000	95	165	A++	929002372901	76463000

LED bulbs

Classic frosted LED Lamps



Product Type	LED	Lumen Output	Efficacy	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W			K	Hrs.					
LED classic 40W A60 E27 WW FR ND 1CT/10	4.5	470	104.00	✗	80	2700	15.000	60	110	A++	929001242982	41965601


CorePro LEDbulbs



Product Type	Tradi tional	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W	°			K	Hrs.					
1 CorePro LEDbulb D 5-40W A60 B22 927	40	5	470	94.00	150	●	90	2700	15.000	60	110	A+	929002069002	66070300
2 CorePro LEDbulb D 5-40W A60 E27 927	40	5	470	94.00	150	●	90	2700	15.000	60	110	A+	929002068902	66062800
3 CorePro LEDbulb D 5.5-40W A60 E27 827	40	5.5	470	85.45	150	●	80	2700	15.000	60	110	A+	929001352402	76266000
3 CorePro LEDbulb ND 5-40W A60 E27 830	40	5	470	94.00	200	✗	80	3000	15.000	60	110	A+	929001304532	57993000
3 CorePro LEDbulb ND 5-40W A60 E27 840	40	5	470	94.00	200	✗	80	4000	15.000	60	110	A+	929001234602	57779000
4 CorePro LEDbulb ND 5.5-40W A60 B22 827	40	5.5	470	85.00	200	✗	80	2700	15.000	60	110	A+	929001233802	57765300
3 CorePro LEDbulb ND 5.5-40W A60 E27 827	40	5.5	470	85.00	200	✗	80	2700	15.000	60	110	A+	929001234202	57757800
5 CorePro LEDbulb D 8.5-60W A60 B22 927	60	8.5	806	94.00	150	●	90	2700	15.000	60	110	A+	929002069202	66072700
6 CorePro LEDbulb D 8.5-60W A60 E27 827	60	8.5	806	94.00	200	●	80	-	15.000	60	110	A+	929001352502	76270700
7 CorePro LEDbulb D 8.5-60W A60 E27 927	60	8.5	806	94.00	150	●	90	2700	15.000	60	110	A+	929002069102	66064200
3 CorePro LEDbulb ND 7.5-60W A60 E27 830	60	7.5	806	107.00	200	✗	80	3000	15.000	60	110	A+	929001304732	57771400
3 CorePro LEDbulb ND 7.5-60W A60 E27 840	60	7.5	806	107.00	200	✗	80	4000	15.000	60	110	A+	929001234702	57777600
4 CorePro LEDbulb ND 8-60W A60 B22 827	60	8	806	100.00	200	✗	80	2700	15.000	60	110	A+	929001233902	57763900
3 CorePro LEDbulb ND 8-60W A60 E27 827	60	8	806	100.00	200	✗	80	2700	15.000	60	110	A+	929001234302	57755400
8 LED Globe 60W G93 E27 WW FR ND 1CT/4	60	9.5	806	84.00		✗	80	2700	15.000	95	128	A+	929001229201	58063900

LED bulbs


CorePro LEDbulbs - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	°			K						
1 CorePro LEDbulb D 10.5-75W A60 B22 927	75	10.5	1055	100.00	150	●	90	2700	15.000	60	110	A+	929002069402	66074100
2 CorePro LEDbulb D 10.5-75W A60 E27 927	75	10.5	1055	100.00	150	●	90	2700	15.000	60	110	A+	929002069302	66066600
3 CorePro LEDbulb D 11-75W A60 E27 827	75	11	1055	95.00	200	●	80	-	15.000	60	110	A+	929001352702	76274500
4 CorePro LEDbulb ND 10-75W A60 E27 840	75	10	1055	105.00	200	⊗	80	4000	15.000	60	110	A+	929001234802	51032200
5 CorePro LEDbulb ND 10-75W A60 E27 865	75	10	1055	105.00	200	⊗	80	6500	15.000	60	110	A+	929001163832	49758600
5 CorePro LEDbulb ND 10.5-75W A60 E27 830	75	10.5	1055	100.00	200	⊗	80	3000	15.000	60	110	A+	929001162332	49752400
6 CorePro LEDbulb ND 11-75W A60 B22 827	75	11	1055	95.00	200	⊗	80	2700	15.000	60	110	A+	929001234002	57761500
4 CorePro LEDbulb ND 11-75W A60 E27 827	75	11	1055	95.00	200	⊗	80	2700	15.000	60	110	A+	929001234402	49076100
1 CorePro LEDbulb D 13-100W A60 B22 927	100	13	1521	117.00	150	●	90	2700	15.000	60	110	A+	929002069602	66076500
2 CorePro LEDbulb D 13-100W A60 E27 927	100	13	1521	117.00	150	●	90	2700	15.000	60	110	A+	929002069502	66068000
7 CorePro LEDbulb D 13.5-100W A60 E27 827	100	13.5	1521	112.00	200	●	80	-	15.000	60	110	A+	929001867802	81667700
4 CorePro LEDbulb ND 12.5-100W A60 E27 840	100	12.5	1521	121.00	200	⊗	80	4000	15.000	60	110	A+	929001312402	51030800
6 CorePro LEDbulb ND 13-100W A60 B22 827	100	13	1521	117.00	200	⊗	80	2700	15.000	60	110	A+	929001234102	51002500
4 CorePro LEDbulb ND 13-100W A60 E27 827	100	13	1521	117.00	200	⊗	80	2700	15.000	60	110	A+	929001234502	49074700
4 CorePro LEDbulb ND 13-100W A60 E27 830	100	13	1521	117.00	200	⊗	80	3000	15.000	60	110	A+	929001235002	57767700
8 LED Globe 100W G93 E27 WW FR ND 1CT/4	100	15	1521	101.00	200	⊗	80	2700	15.000	95	128	A+	929001229401	58061500


LED bulbs

CorePro LEDbulbs - Continued



Product Type	Tradi tional	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W	°			K	Hrs.					
① CorePro LEDbulb ND 15.5-120WA67E27 840FR	120	15.5	2000	129.00	150	⊗	80	4000	15,000	68	132	A++	929002047902	66218900
① CorePro LEDbulb ND 17-120WA67E27 827FR	120	17	2000	117.00	150	⊗	80	2700	15,000	68	132	A+	929002047802	66216500
② LED Globe 120W G120 E27 WW 230V ND 1CT/4	120	18	2000	111.00	200	⊗	80	2700	15,000	120	168	A+	929001229801	56759300
③ CorePro LEDbulb ND 17.5-150WA67E27 840FR	150	17.5	2500	142.00	150	⊗	80	4000	15,000	77	142	A++	929002048202	66222600
③ CorePro LEDbulb ND 19-150WA67E27 827FR	150	19	2500	131.00	150	⊗	80	2700	15,000	77	142	A++	929002048102	66220200


Classic filament LED candles and lusters



Product Type	Tradi tional	LED	Lumen Output	Efficacy	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W			K	Hrs.					
LED classic 50W G120 E27 2200K GOLD 1PF	50	8	630	78.00	●	80	2200	15,000	120	168	A+	929001896101	57543701

LED bulbs

CorePro LED candles and lusters



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 Corepro Lustre ND 4-25W E14 827 P45 CL	25	4	250	62.50	✗	80	2700	15.000	45	88	A+	929001142302	50759900
2 CorePro lustre ND 4-25W E14 827 P45 FR	25	4	250	62.50	✗	80	2700	15.000	45	88	A+	929001157502	78703700
3 Corepro Lustre ND 4-25W E27 827 P45 CL	25	4	250	62.50	✗	80	2700	15.000	45	87	A+	929001142402	50767400
4 CorePro lustre ND 4-25W E27 827 P45 FR	25	4	250	62.50	✗	80	2700	15.000	45	87	A+	929001157602	78705100
1 Corepro lustre ND 5.5-40W E14 827 P45 CL	40	5.5	470	90.91	✗	80	2700	15.000	45	88	A+	929001142602	45483100
2 CorePro lustre ND 5.5-40W E14 827 P45 FR	40	5.5	470	85.45	✗	80	2700	15.000	45	88	A+	929001157802	47489100
1 Corepro lustre ND 5.5-40W E14 840 P45 CL	40	5.5	520	94.55	✗	80	4000	15.000	45	88	A+	929001206102	54344300
5 CorePro lustre ND 5.5-40W E14 865 P45 FR	40	5.5	520	94.55	✗	80	6500	15.000	45	88	A+	929001394602	74683700
3 Corepro Lustre ND 5.5-40W E27 827 P45 CL	40	5.5	470	90.91	✗	80	2700	15.000	45	87	A+	929001175302	50763600
4 Corepro Lustre ND 5.5-40W E27 827 P45 FR	40	5.5	470	90.91	✗	80	2700	15.000	45	87	A+	929001175402	50765000
6 CorePro lustre ND 7-60W E14 827 P48 FR	60	7	806	115.00	✗	80	2700	15.000	48	95	A++	929001325202	70301400
6 CorePro lustre ND 7-60W E14 840 P48 FR	60	7	830	118.00	✗	80	4000	15.000	48	95	A++	929001325502	70307600
5 CorePro lustre ND 7-60W E14 865 P48 FR	60	7	830	118.57	✗	80	6500	15.000	48	95	A++	929001394802	74687500
7 CorePro lustre ND 7-60W E27 827 P48 FR	60	7	806	115.00	✗	80	2700	15.000	48	93	A++	929001325302	70303800
7 CorePro lustre ND 7-60W E27 840 P48 FR	60	7	830	118.00	✗	80	4000	15.000	48	93	A++	929001325602	70309000


Premium LED bulbs - Dimmable and features



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
LED 60W A60 E27 WW CL WGD SRT4	60	8.5	806	94.00	●	80	-	15.000	60	110	A+	929001150958	57217701

LED candles & lusters

Decorative LED candles and lusters



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
1 Classic LEDCandle D 5-32W B35 E14 822 GOLD	32	5	350	70.00	●	80	2200	15.000	35	103	A+	929001896302	81439000
2 Classic LEDCandle D 5-32W BA35 E14 822 GOLD	32	5	350	70.00	●	80	2200	15.000	35	129	A+	929001896502	81443700
3 Classic LEDLuster D 5-32W P45 E14 822 GOLD	32	5	350	70.00	●	80	2200	15.000	45	85	A+	929001896602	81567000
4 Classic LEDLuster D 5-32W P45 E27 822 GOLD	32	5	350	70.00	●	80	2200	15.000	45	80	A+	929001896402	81441300

Classic filament LED candles and lusters



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
1 Classic LEDCandle ND 2-25W B35 B15 827 CL	25	2	250	125.00	⊗	80	2700	15.000	35	97	A++	929001815502	76688000
2 Classic LEDCandle ND 2-25W B35 B22 827 CL	25	2	250	125.00	⊗	80	2700	15.000	35	93	A++	929001815602	76690300
3 Classic LEDCandle ND 2-25W B35 E14 827 CL	25	2	250	125.00	⊗	80	2700	15.000	35	97	A++	929001238302	57407200
4 Classic LEDCandle ND 2-25W BA35 E14 827 CL	25	2	250	125.00	⊗	80	2700	15.000	35	123	A++	929001238402	57409600
5 Classic LEDCandle ND 2-25W ST35 E14 827 CL	25	2	250	125.00	⊗	80	2700	15.000	35	97	A++	929001238502	57411900
6 Classic LEDLuster ND 2-25W P45 B22 827 CL	25	2	250	125.00	⊗	80	2700	15.000	45	78	A++	929001815902	76696500
7 Classic LEDLuster ND 2-25W P45 E14 827 CL	25	2	250	125.00	⊗	80	2700	15.000	45	80	A++	929001238602	57413300
8 Classic LEDLuster ND 2-25W P45 E27 827 CL	25	2	250	125.00	⊗	80	2700	15.000	45	78	A++	929001238702	57415700
3 LED classic 25W B35 E14 WW CL ND 1CT/6	25	2	250	125.00	⊗	80	2700	15.000	35	97	A++	929001238391	71005700

LED candles & lusters

Classic filament LED candles and lusters - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 Classic LEDCandle D 2.7-25W B35 E14 827 CL	25	2.7	250	92.59	●	80	2700	15.000	35	103	A++	929001332002	70980100
2 Classic LEDLuster D 2.7-25W P45 E14 827 CL	25	2.7	250	92.59	●	80	2700	15.000	45	85	A++	929001332302	70986300
3 Classic LEDLuster D 2.7-25W P45 E27 827 CL	25	2.7	250	92.59	●	80	2700	15.000	45	80	A++	929001332402	70988700
4 Classic LEDCandle DT3.5-25W E14 CRI90 B35 CL	25	3.5	250	71.00	●	90	-	15.000	35	104	A+	929002017902	64622600
5 Classic LEDLuster DT3.5-25W E14 CRI90 P45 CL	25	3.5	250	71.00	●	90	-	15.000	45	93	A+	929002018502	64638700
6 Classic LEDLuster DT3.5-25W E27 CRI90 P45 CL	25	3.5	250	71.00	●	90	-	15.000	45	80	A+	929002018402	64636300
7 LED classic 15W P45 E27 GOLD SP D SRT4		3.5	136	38.00	●	80	2000	15.000	45	80	A	929002224201	67611700
8 Classic LEDCandle ND 4.3-40W B15 827 B35 CL	40	4.3	470	109.00	⊗	80	2700	15.000	35	97	A++	929001889802	80855900

Classic filament LED candles and lusters - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 Classic LEDCandle ND 4.3-40W B22 827 B35 CL	40	4.3	470	109.00	⊗	80	2700	15.000	35	93	A++	929001889902	80857300
2 Classic LEDCandle ND 4.3-40W E14 827 B35 CL	40	4.3	470	109.00	⊗	80	2700	15.000	35	97	A++	929001889702	80853500
3 Classic LEDLuster ND 4.3-40W E14 827 P45 CL	40	4.3	470	109.00	⊗	80	2700	15.000	45	82	A++	929001890402	80971600
4 Classic LEDLuster ND 4.3-40W E27 827 P45 CL	40	4.3	470	109.00	⊗	80	2700	15.000	45	82	A++	929001890502	80973000
5 Classic LEDCandle D 5-40W B35 B22 827 CL	40	5	470	94.00	●	80	2700	15.000	35	97	A+	929001332202	70984900
6 Classic LEDCandle D 5-40W B35 E14 827 CL	40	5	470	94.00	●	80	2700	15.000	35	103	A+	929001332102	70982500
7 Classic LEDCandle D 5-40W BA35 E14 827 CL	40	5	470	94.00	●	80	2700	15.000	35	129	A+	929001332802	70996200
8 Classic LEDLuster D 5-40W P45 B22 827 CL	40	5	470	94.00	●	80	2700	15.000	45	78	A+	929001332702	70994800

LED candles & lusters

Classic filament LED candles and lusters - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 Classic LEDLuster D 5-40W P45 E14 827 CL	40	5	470	94.00	●	80	2700	15.000	45	85	A+	929001332502	70990000
2 Classic LEDLuster D 5-40W P45 E27 827 CL	40	5	470	94.00	●	80	2700	15.000	45	80	A+	929001332602	70992400
3 Classic LEDCandle DT6-40W E14 CRI90 B35 CL	40	6	470	78.00	●	90	-	15.000	35	104	A+	929002018002	64628800
4 Classic LEDCandle DT6-40W E14 CRI90 BA35 CL	40	6	470	78.00	●	90	-	15.000	35	131	A+	929002018302	64634900
5 Classic LEDLuster DT6-40W E27 CRI90 P45 CL	40	6	470	78.00	●	90	-	15.000	45	80	A+	929002018602	64642400
6 Classic LEDCandle ND 6.5-60W B35 E14 827 CL	60	6.5	806	124.00	⊗	80	2700	15.000	35	97	A++	929002028002	64912800
7 Classic LEDCandle ND 6.5-60W B35 E14 827 FR	60	6.5	806	124.00	⊗	80	2700	15.000	35	97	A++	929002028202	64922700
8 Classic LEDLuster ND 6.5-60W P45 E14 827 CL	60	6.5	806	124.00	⊗	80	2700	15.000	45	80	A++	929002028502	64916600


Classic filament LED candles and lusters - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 Classic LEDLuster ND 6.5-60W P45 E14 827 FR	60	6.5	806	124.00	⊗	80	2700	15.000	45	80	A++	929002028702	64928900
2 Classic LEDLuster ND 6.5-60W P45 E27 827 CL	60	6.5	806	124.00	⊗	80	2700	15.000	45	78	A++	929002029002	64920300
3 Classic LEDLuster ND 6.5-60W P45 E27 827 FR	60	6.5	806	124.00	⊗	80	2700	15.000	45	78	A++	929002029202	64934000

LED candles & lusters


Classic frosted LED candles and lusters



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W		K							
1 Classic LEDCandle ND 2.2-25W B35 E14 FR	25	2.2	250	113.00	✗	80	2700	15.000	35	97	A++	929001345202	70637400
2 Classic LEDCandle ND 2.2-25W BA35 E14 FR	25	2.2	250	113.00	✗	80	2700	15.000	35	123	A++	929001345802	70649700
3 Classic LEDLuster ND 2.2-25W P45 E14 FR	25	2.2	250	113.00	✗	80	2700	15.000	45	80	A++	929001345402	70641100
4 Classic LEDLuster ND 2.2-25W P45 E27 FR	25	2.2	250	113.00	✗	80	2700	15.000	45	78	A++	929001345602	70645900
1 Classic LEDCandle ND 4.3-40W E14 827 B35 FR	40	4.3	470	109.00	✗	80	2700	15.000	35	97	A++	929001345302	70639800
3 Classic LEDLuster ND 4.3-40W E14 827 P45 FR	40	4.3	470	109.00	✗	80	2700	15.000	45	80	A++	929001345502	70643500
4 Classic LEDLuster ND 4.3-40W E27 827 P45 FR	40	4.3	470	109.00	✗	80	2700	15.000	45	78	A++	929001345702	70647300


LED candles & lusters

MASTER LED candles and lusters



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 MASTER LEDcandle DT 4-25W B22 B38 CL	25	4	250	62.00	●	80	-	15,000	38	111	A+	929001140202	70065500
2 MASTER LEDcandle DT 4-25W E14 B38 CL	25	4	250	65	●	80	-	25,000	38	113	A+	929001139802	45368100
3 MASTER LEDcandle DT 4-25W E14 BA38 CL	25	4	250	65	●	80	-	25,000	38	129	A+	929001139902	45376600
4 MASTER LEDlustre DT 4-25W E14 P48 CL	25	4	250	65	●	80	-	25,000	48	95	A+	929001140002	45378000
5 MASTER LEDlustre DT 4-25W E27 P48 CL	25	4	250	65	●	80	-	25,000	48	93	A+	929001140102	45380300
6 MASTER LEDcandle DT 6-40W B15 B38 CL	40	6	470	78.00	●	80	-	25,000	38	113	A+	929001140302	55601600
1 MASTER LEDcandle DT 6-40W B22 B38 CL	40	6	470	75	●	80	-	25,000	38	111	A+	929001140802	45362900
2 MASTER LEDcandle DT 6-40W E14 B38 CL	40	6	470	75	●	80	-	25,000	38	113	A+	929001140402	45350600
3 MASTER LEDcandle DT 6-40W E14 BA38 CL	40	6	470	75	●	80	-	25,000	38	129	A+	929001140502	45354400
7 MASTER LEDcandle DT 6-40W E27 B38 CL	40	6	470	75	●	80	-	25,000	38	112	A+	929001157902	47479200
8 MASTER LEDlustre DT 6-40W B22 P48 CL	40	6	470	75	●	80	-	25,000	48	92	A+	929001157302	47477800
4 MASTER LEDlustre DT 6-40W E14 P48 CL	40	6	470	75	●	80	-	25,000	48	95	A+	929001140602	45358200
5 MASTER LEDlustre DT 6-40W E27 P48 CL	40	6	470	75	●	80	-	25,000	48	93	A+	929001140702	45360500
2 MASTER LEDcandle DT 8-60W B40 E14 827 CL	60	8	806	100.00	●	80	-	25,000	40	127	A+	929001211702	55599600


MASTER LED candles and lusters - Continued



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
MASTER LEDlustre DT 8-60W P50 E14 827 CL	60	8	806	100.00	●	80	-	25,000	50	111	A+	929001211902	58067700


LED candles & lusters

CorePro LED candles and lusters



Product Type	Tradi	LED	Lumen	Efficacy	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W			K						
1 Corepro Candle ND 4-25W E14 827 B35 CL	25	4	250	62.50	⊗	80	2700	15.000	35	106	A+	929001142202	50757500
2 CorePro LEDcandle ND 4-25W E14 827 B35 FR	25	4	250	62.50	⊗	80	2700	15.000	35	106	A+	929001157402	78701300
1 Corepro candle ND 5.5-40W E14 827 B35 CL	40	5.5	470	85.45	⊗	80	2700	15.000	35	106	A+	929001142502	45479400
3 CorePro LEDcandle ND 5.5-40W E14 865 B35 FR	40	5.5	520	94.55	⊗	80	6500	15.000	35	106	A+	929001394502	74681300
4 CorePro LEDcandle ND 7-60W E14 827 B38 FR	60	7	806	115.00	⊗	80	2700	15.000	38	114	A++	929001325102	70299400
4 CorePro LEDcandle ND 7-60W E14 840 B38 FR	60	7	830	118.00	⊗	80	4000	15.000	38	114	A++	929001325402	70305200
4 CorePro LEDcandle ND 7-60W E14 865 B38 FR	60	7	830	118.57	⊗	80	6500	15.000	38	114	A++	929001394702	74685100

Candle LED



Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
	tional	W	Output	lm/W	Angle	mable		Temp.	Hrs.	diameter	length			code
	W	W	lm	lm/W	°			K						
LED 25W T25 E14 WW FR ND SRT4	25	3.2	250	78.13	160	⊗	80	2700	15.000	25	71	A+	929001325801	70313700

LED candles & lusters

Standard LED candles & lusters



● = Dimmable
 ⊗ = Non-Dimmable

10 PACK
 E14

Product Type	Traditional	LED	Lumen Output	Efficacy	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W			K	Hrs.					
LED candle/luster CorePro candle ND 5.5-40W E14 827 B35 FR	40	5.5	470	85.45	⊗	80	2700	15.000	35	106	A+	929001157702	76238600

Philips LEDtube

The right LEDtube every time

Industry leading LED range of fluorescent tube replacements

For general applications, Universal is the tube of choice.

For more demanding applications: use our Selector tool.

- Best in class lumen performance
- Best compatibility
- Easy installation



Find the **right** solution in our range using the **Selector tool: productfinder.lighting.philips.com**

MASTER Value LEDtube Universal T8

NEW

- Universal compatibility – compatible with all kinds of driver technologies (EM ballast, HF ballasts and direct mains)
- Glass platform – uniform light (large beam angle 240D – suitable for many applications)
- Ultra high lumen package – up to 3700 lumen
- InstantFit technology – for largest HF ballast compatibility, safety and ease and speed of installation

CorePro LEDtube T8 Universal

- Works on every driver technology (EM/HF/Mains)
- Up to 2700 lumen output
- 1 year typical payback time for 24/7 operation*
- Up to 3x longer lifetime*

MASTER LEDtube T5

- 50,000 hours lifetime
- Up to 155 lumen/Watt
- Up to 5600 lumen output

MASTER LEDtube T8 sensor

- Integrated motion sensor
- Automatic dimming based on movement
- No extra sensors or wiring needed
- Up to 70% energy saving*

CorePro LED PL-C, PL-L, PL-S & LED Circular

- Simple retrofit for fluorescent PL-C and PL-L lamps
- 30,000 hours life time
- Up to 60% energy saving*

*Compared to fluorescent lamps

Click here and check out the **new MasterConnect LEDtube** for an easy step into connected lighting.

Contents

Interact Ready

CoreLine

Ledinaire

LED lamps

LED bulbs

LED candles & lusters

LED tubes

LED PL-lamps


TrueForce



LED tubes

MASTER LEDtube EM/Mains T8

www.philips.com/ledtube





Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
1 MASTER LEDtube 600mm HO 8W830 T8	8	1000	125.00	160	✗	83	3000	60.000	25.78	600	A++	929001307002	69747400
1 MASTER LEDtube 600mm HO 8W840 T8	8	1050	131.00	160	✗	83	4000	60.000	25.78	600	A++	929001307102	69749800
1 MASTER LEDtube 600mm HO 8W865 T8	8	1050	131.00	160	✗	83	6500	60.000	25.78	600	A++	929001307202	69751100
2 MASTER LEDtube 900mm 8.5W833 T8 FOOD	8.5	750	88.00	160	✗	83	3300	50.000	25.7	900	A+	929001812102	76391900
1 MASTER LEDtube 1200mm 12W833 T8 FOOD	12	1000	83.00	160	✗	83	3300	50.000	25.7	1200	A+	929001812202	76393300
1 MASTER LEDtube 900mm HO 12W 840 T8	12	1575	131.00	160	✗	83	4000	50.000	25.78	900	A++	929001298402	68708600
1 MASTER LEDtube 900mm HO 12W 865 T8	12	1575	131.00	160	✗	83	6500	50.000	25.78	900	A++	929001298502	68710900
3 MASTER LEDtube 1200mm HO 12.5W 830 T8	12.5	2000	160.00	160	✗	83	3000	60.000	25.8	1200	A++	929001922602	59235600
3 MASTER LEDtube 1200mm HO 12.5W 840 T8	12.5	2100	168.00	160	✗	83	4000	60.000	25.8	1200	A++	929001922702	59237000
3 MASTER LEDtube 1200mm HO 12.5W 865 T8	12.5	2100	168.00	160	✗	83	6500	60.000	25.8	1200	A++	929001922802	59239400
4 MASTER LEDtube 1200mm UE 14.5W 840 T8	14.5	2500	172.00	160	✗	83	4000	70.000	25.8	1200	A++	929001376802	73150500
4 MASTER LEDtube 1200mm UE 14.5W 865 T8	14.5	2500	172.00	160	✗	83	6500	70.000	25.8	1200	A++	929001376902	73152900
5 MASTER LEDtube 1200mm UO 15.5W 830 T8	15.5	2300	148.00	160	✗	83	3000	60.000	25.8	1200	A++	929002020502	64721600
5 MASTER LEDtube 1200mm UO 15.5W 840 T8	15.5	2500	161.00	160	✗	83	4000	60.000	25.8	1200	A++	929002020602	64723000
5 MASTER LEDtube 1200mm UO 15.5W 865 T8	15.5	2500	161.00	160	✗	83	6500	60.000	25.8	1200	A++	929002020702	64725400
6 MASTER LEDtube 1050mm 16W 830 T8	16	2300	143.00	160	✗	80	3000	50.000	25.8	1050	A++	929001375602	72855000
3 MASTER LEDtube 1050mm 16W 840 T8	16	2500	156.00	160	✗	83	4000	50.000	25.8	1100	A++	929001961102	61602100
5 MASTER LEDtube 1200mm UO 16W 830 T8	16	2300	143.00	160	✗	83	3000	50.000	25.78	1200	A++	929001297802	68736900
5 MASTER LEDtube 1200mm UO 16W 840 T8	16	2500	156.00	160	✗	83	4000	50.000	25.78	1200	A++	929001297902	68738300
5 MASTER LEDtube 1200mm UO 16W 865 T8	16	2500	156.00	160	✗	83	6500	50.000	25.78	1200	A++	929001298002	68740600
7 MASTER LEDtube Sensor 1200mm HO 16.5W840 T8	16.5	2100	127.00	240	●	83	4000	50.000	25.8	1200	A++	929001878502	80602900
7 MASTER LEDtube Sensor 1200mm HO 16.5W865 T8	16.5	2100	127.00	240	●	83	6500	50.000	25.8	1200	A++	929001878602	80604300
3 MASTER LEDtube 1500mm HO 18.2W 830 T8	18.2	2900	159.00	160	✗	83	3000	60.000	25.8	1500	A++	929001922902	59241700
3 MASTER LEDtube 1500mm HO 18.2W 840 T8	18.2	3100	170.00	160	✗	83	4000	60.000	25.8	1500	A++	929001923002	59243100
3 MASTER LEDtube 1500mm HO 18.2W 865 T8	18.2	3100	170.00	160	✗	83	6500	60.000	25.8	1500	A++	929001923102	59245500
2 MASTER LEDtube 1500mm 20W833 T8 FOOD	20	1680	84.00	160	✗	83	3300	50.000	25.7	1500	A+	929001812302	76395700
4 MASTER LEDtube 1500mm UE 21.5W 840 T8	21.5	3700	172.00	160	✗	83	4000	70.000	25.8	1500	A++	929001377002	73154300
4 MASTER LEDtube 1500mm UE 21.5W 865 T8	21.5	3700	172.00	160	✗	83	6500	70.000	25.8	1500	A++	929001377102	73156700
5 MASTER LEDtube 1500mm UO 23W 830 T8	23	3400	147.00	160	✗	83	3000	60.000	25.8	1500	A++	929002020802	64727800
5 MASTER LEDtube 1500mm UO 23W 840 T8	23	3700	160.00	160	✗	83	4000	60.000	25.8	1500	A++	929002020902	64729200
5 MASTER LEDtube 1500mm UO 23W 865 T8	23	3700	160.00	160	✗	83	6500	60.000	25.8	1500	A++	929002021002	64731500
5 MASTER LEDtube 1500mm UO 24W 830 T8	24	3400	141.00	160	✗	83	3000	50.000	25.78	1500	A++	929001298102	68742000
5 MASTER LEDtube 1500mm UO 24W 840 T8	24	3700	154.00	160	✗	83	4000	50.000	25.78	1500	A++	929001298202	68744400
5 MASTER LEDtube 1500mm UO 24W 865 T8	24	3700	154.00	160	✗	83	6500	50.000	25.78	1500	A++	929001298302	68746800
7 MASTER LEDtube Sensor 1500mm HO 24W840 T8	24	3100	129.00	240	●	83	4000	50.000	25.8	1500	A++	929001878702	80606700

LED tubes

MASTER LEDtube EM/Mains T8 - Continued

www.philips.com/ledtube

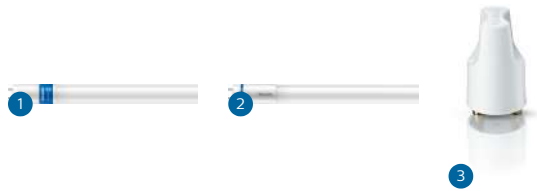

Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
1 MASTER LEDtube Sensor 1500mm HO 24W865 T8	24	3100	129.00	240	●	83	6500	50.000	25.8	1500	A++	929001878802	80608100
2 MASTER LEDtube 1800mm 25W 840 T8 ROT	25	3700	148.00	160	⊗	83	4000	50.000	25.68	1800	A++	929001161102	48037300
3 MASTER LEDtube Starter EMP									3			929000299902	72928000
3 MASTER LEDtube Starter EMP GenII OP									3			929001801432	81965400

Master Value LEDtube T8

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
1 MASTER LEDtube VLE 600mm HO 8W 830 T8	8	1000	125.00	240	⊗	83	3000	50.000	25.8	600	A++	929002021102	64679000
1 MASTER LEDtube VLE 600mm HO 8W 840 T8	8	1050	131.00	240	⊗	83	4000	50.000	25.8	600	A++	929002021202	64681300
1 MASTER LEDtube VLE 600mm HO 8W 865 T8	8	1050	131.00	240	⊗	83	6500	50.000	25.8	600	A++	929002021302	64683700
2 MASTER LEDtube VLE 1200mm HO 14W 830 T8	14	2000	142.00	240	⊗	83	3000	50.000	25.8	1200	A++	929002021402	64685100
2 MASTER LEDtube VLE 1200mm HO 14W 840 T8	14	2100	150.00	240	⊗	83	4000	50.000	25.8	1200	A++	929002021502	64687500
2 MASTER LEDtube VLE 1200mm HO 14W 865 T8	14	2100	150.00	240	⊗	83	6500	50.000	25.8	1200	A++	929002021602	64689900
2 MASTER LEDtube VLE 1200mm UO 16W 830 T8	16	2300	143.00	240	⊗	83	3000	50.000	25.8	1200	A++	929002022002	64697400
2 MASTER LEDtube VLE 1200mm UO 16W 840 T8	16	2500	156.00	240	⊗	83	4000	50.000	25.8	1200	A++	929002022102	64699800
2 MASTER LEDtube VLE 1200mm UO 16W 865 T8	16	2500	156.00	240	⊗	83	6500	50.000	25.8	1200	A++	929002022202	64701800
3 MASTER LEDtube VLE 1500mm HO 20.5W 830 T8	20.5	2900	141.00	240	⊗	83	3000	50.000	25.8	1500	A++	929002021702	64691200
3 MASTER LEDtube VLE 1500mm HO 20.5W 840 T8	20.5	3100	151.00	240	⊗	83	4000	50.000	25.8	1500	A++	929002021802	64693600
3 MASTER LEDtube VLE 1500mm HO 20.5W 865 T8	20.5	3100	151.00	240	⊗	83	6500	50.000	25.8	1500	A++	929002021902	64695000
3 MASTER LEDtube VLE 1500mm UO 24W 830 T8	24	3400	141.00	240	⊗	83	3000	50.000	25.8	1500	A++	929002022302	64703200
3 MASTER LEDtube VLE 1500mm UO 24W 840 T8	24	3700	154.00	240	⊗	83	4000	50.000	25.8	1500	A++	929002022402	64705600
3 MASTER LEDtube VLE 1500mm UO 24W 865 T8	24	3700	154.00	240	⊗	83	6500	50.000	25.8	1500	A++	929002022502	64707000

LED tubes

CorePro LEDtube EM/Mains T8

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
CorePro LEDtube 600mm 8W840	8	800	100.00	240	✘	80	4000	30.000	25.7	600	A+	929001338602	71103300
CorePro LEDtube 600mm 8W865	8	800	100.00	240	✘	80	6500	30.000	25.7	600	A+	929001338702	71105700
CorePro LEDtube 1200mm 14.5W840	14.5	1600	110.00	240	✘	80	4000	30.000	25.7	1200	A+	929001338802	71107100
CorePro LEDtube 1200mm 14.5W865	14.5	1600	110.00	240	✘	80	6500	30.000	25.7	1200	A+	929001338902	71109500
CorePro LEDtube 1200mm HO 18W 840 T8	18	2000	111.00	240	✘	80	4000	30.000	25.7	1200	A+	929001874902	80613500
CorePro LEDtube 1200mm HO 18W 865 T8	18	2000	111.00	240	✘	80	6500	30.000	25.7	1200	A+	929001874802	80611100
CorePro LEDtube 1500mm 20W 840	20	2200	110.00	240	✘	80	4000	30.000	25.7	1500	A+	929001337902	71091300
CorePro LEDtube 1500mm 20W 865	20	2200	110.00	240	✘	80	6500	30.000	25.7	1500	A+	929001338002	71095100
CorePro LEDtube 1500mm HO 24W 840 T8	24	2700	112.00	240	✘	80	4000	30.000	25.7	1500	A+	929001875102	80617300
CorePro LEDtube 1500mm HO 24W 865 T8	24	2700	112.00	240	✘	80	6500	30.000	25.7	1500	A+	929001875002	80615900

LED tubes

MASTER LEDtube InstantFit HF T8

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
1 MASTER LEDtube HF 600mm HO 8W830 T8	8	1000	125.00	160	✗	83	3000	60.000	25.6	600	A+	929001393102	74353900
1 MASTER LEDtube HF 600mm HO 8W840 T8	8	1050	131.00	160	✗	83	4000	60.000	25.6	600	A+	929001393202	74355300
1 MASTER LEDtube HF 600mm HO 8W865 T8	8	1050	131.00	160	✗	83	6500	60.000	25.6	600	A+	929001393302	74367600
2 MASTER LEDtube HF 1200mm HO 14W830 T8	14	2000	142.00	160	✗	83	3000	60.000	25.6	1200	A+	929001284302	68752900
2 MASTER LEDtube HF 1200mm HO 14W840 T8	14	2100	150.00	160	✗	83	4000	60.000	25.6	1200	A++	929001284102	68748200
2 MASTER LEDtube HF 1200mm HO 14W865 T8	14	2100	150.00	160	✗	83	6500	60.000	25.6	1200	A++	929001284202	68750500
2 MASTER LEDtube HF 1200mm UO 16W830 T8	16	2350	146.00	160	✗	83	3000	60.000	25.6	1200	A+	929001300202	68800700
2 MASTER LEDtube HF 1200mm UO 16W840 T8	16	2500	156.00	160	✗	83	4000	60.000	25.6	1200	A++	929001300002	68796300
2 MASTER LEDtube HF 1200mm UO 16W865 T8	16	2500	156.00	160	✗	83	6500	60.000	25.6	1200	A++	929001300102	68798700
3 MASTER LEDtube HF 1200mm 16.5W833 T8 FOOD	16.5	960	58.18	160	✗	83	3300	50.000	25.7	1200	B	929001226302	56616900
4 MASTER LEDtube HF 1050mm UO 17W840 T8	17	2600	152.00	160	✗	82	4000	50.000	27.9	1100	A++	929001834302	81028600
2 MASTER LEDtube HF 1500mm HO 20W830 T8	20	2900	145.00	160	✗	83	3000	60.000	25.6	1500	A+	929001284602	68758100
2 MASTER LEDtube HF 1500mm HO 20W840 T8	20	3100	155.00	160	✗	83	4000	60.000	25.6	1500	A++	929001284402	68754300
2 MASTER LEDtube HF 1500mm HO 20W865 T8	20	3100	155.00	160	✗	83	6500	60.000	25.6	1500	A++	929001284502	68756700
2 MASTER LEDtube HF 1500mm UO 24W830 T8	24	3500	145.00	160	✗	83	3000	60.000	25.6	1500	A++	929001300502	68806900
2 MASTER LEDtube HF 1500mm UO 24W840 T8	24	3700	154.00	160	✗	83	4000	60.000	25.6	1500	A++	929001300302	68802100
2 MASTER LEDtube HF 1500mm UO 24W865 T8	24	3700	154.00	160	✗	83	6500	60.000	25.6	1500	A++	929001300402	68804500

LED tubes

Master Value LEDtube Universal T8

www.philips.com/ledtube



	Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
		W	lm	lm/W	°			K	Hrs.					
NEW	1 MAS LEDtube VLE UN 1200mm UO 16W830 T8	16	2300	143.00	240	⊗	83	3000	50.000	25.7	1200	A++	929002333002	73917100
NEW	1 MAS LEDtube VLE UN 1200mm UO 16W840 T8	16	2500	156.00	240	⊗	83	4000	50.000	25.7	1200	A++	929002333102	73919500
NEW	1 MAS LEDtube VLE UN 1200mm UO 16W865 T8	16	2500	156.00	240	⊗	83	6500	50.000	25.7	1200	A++	929002333202	73921800
	2 Master LEDtube Universal 1200mm UO 16W830 T8	16	2300	143.00	160	⊗	83	3000	60.000	25.7	1200	A++	929001336102	72853600
	2 Master LEDtube Universal 1200mm UO 16W840 T8	16	2500	156.00	160	⊗	83	4000	60.000	25.7	1200	A++	929001336102	70537700
	2 Master LEDtube Universal 1200mm UO 16W865 T8	16	2500	156.00	160	⊗	83	6500	60.000	25.7	1200	A++	929001336202	70539100
NEW	1 MAS LEDtube VLE UN 1500mm UO 24W830 T8	24	3400	141.00	240	⊗	83	3000	50.000	25.7	1500	A++	929002333302	73923200
NEW	1 MAS LEDtube VLE UN 1500mm UO 24W840 T8	24	3700	154.00	240	⊗	83	4000	50.000	25.7	1500	A++	929002333402	73925600
NEW	1 MAS LEDtube VLE UN 1500mm UO 24W865 T8	24	3700	154.00	240	⊗	83	6500	50.000	25.7	1500	A++	929002333502	73927000
	2 Master LEDtube Universal 1500mm UO 24W830 T8	24	3400	141.00	160	⊗	83	3000	60.000	25.7	1500	A++	929001336302	72851200
	2 Master LEDtube Universal 1500mm UO 24W840 T8	24	3700	154.00	160	⊗	83	4000	60.000	25.7	1500	A++	929001336402	70533900
	2 Master LEDtube Universal 1500mm UO 24W865 T8	24	3700	154.00	160	⊗	83	6500	60.000	25.7	1500	A++	929001336502	70535300

CorePro LED tube Universal T8

www.philips.com/ledtube



	Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
		W	lm	lm/W	°			K	Hrs.					
NEW	CorePro LEDtube UN 600mm HO 8W830 T8	8	850	106.00	240	⊗	83	3000	30.000	25.7	600	A+	929002419802	78277100
NEW	CorePro LEDtube UN 600mm HO 8W840 T8	8	900	112.00	240	⊗	83	4000	30.000	25.7	600	A+	929002419902	78279500
NEW	CorePro LEDtube UN 600mm HO 8W865 T8	8	900	112.00	240	⊗	83	6500	30.000	25.7	600	A+	929002420002	78281800
	CorePro LEDtube UN 1200mm HO 18W830 T8	18	1850	102.00	240	⊗	80	3000	30.000	27.9	1200	A+	929001869202	80166600
	CorePro LEDtube UN 1200mm HO 18W840 T8	18	2000	111.00	240	⊗	80	4000	30.000	27.9	1200	A+	929001869302	80168000
	CorePro LEDtube UN 1200mm HO 18W865 T8	18	2000	111.00	240	⊗	80	6500	30.000	27.9	1200	A+	929001869402	80170300
	CorePro LEDtube UN 1500mm HO 23W830 T8	23	2500	108.00	240	⊗	80	3000	30.000	27.9	1500	A+	929001869502	80172700
	CorePro LEDtube UN 1500mm HO 23W840 T8	23	2700	117.00	240	⊗	80	4000	30.000	27.9	1500	A+	929001869602	80174100
	CorePro LEDtube UN 1500mm HO 23W865 T8	23	2700	117.00	240	⊗	80	6500	30.000	27.9	1500	A+	929001869702	80176500

LED tubes

MASTER LEDtube InstantFit HF T5

www.philips.com/ledtube



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
1 Master LEDtube HF 600mm HE 8W 830 T5	8	1000	125.00	200	✗	83	3000	50.000	15.5	600	A+	929001390702	74323200
1 Master LEDtube HF 600mm HE 8W 840 T5	8	1050	131.00	200	✗	83	4000	50.000	15.5	600	A+	929001390802	74325600
1 Master LEDtube HF 600mm HE 8W 865 T5	8	1050	131.00	200	✗	83	6500	50.000	15.5	600	A+	929001390902	74327000
1 Master LEDtube HF 1200mm HE 16.5W 830 T5	16.5	2300	139.00	200	✗	83	3000	50.000	15.5	1200	A+	929001391002	74329400
1 Master LEDtube HF 1200mm HE 16.5W 840 T5	16.5	2500	151.00	200	✗	83	4000	50.000	15.5	1200	A++	929001391102	74331700
1 Master LEDtube HF 1200mm HE 16.5W 865 T5	16.5	2500	151.00	200	✗	83	6500	50.000	15.5	1200	A++	929001391202	74333100
1 Master LEDtube HF 1500mm HE 20W 830 T5	20	2800	140.00	200	✗	83	3000	50.000	15.5	1500	A+	929001391302	74335500
1 Master LEDtube HF 1500mm HE 20W 840 T5	20	3000	150.00	200	✗	83	4000	50.000	15.5	1500	A++	929001391402	74337900
1 Master LEDtube HF 1500mm HE 20W 865 T5	20	3000	150.00	200	✗	83	6500	50.000	15.5	1500	A++	929001391502	74339300
NEW 2 Master LEDtube HF 1200mm HO 26W 830 T5 OE	26	3700	142.00	200	●	80	3000	60.000	15.5	1200	A+	929002352002	74951400
NEW 2 Master LEDtube HF 1200mm HO 26W 840 T5 OE	26	3900	150.00	200	●	80	4000	60.000	15.5	1200	A++	929002352102	74953800
NEW 2 Master LEDtube HF 1200mm HO 26W 865 T5 OE	26	3900	150.00	200	●	80	6500	60.000	15.5	1200	A++	929002352202	74955200
NEW 2 Master LEDtube HF 1500mm HO 26W 830 T5 OE	26	3700	142.00	200	●	80	3000	60.000	15.5	1500	A+	929002352302	74957600
NEW 2 Master LEDtube HF 1500mm HO 26W 840 T5 OE	26	3900	150.00	200	●	80	4000	60.000	15.5	1500	A++	929002352402	74959000
NEW 2 Master LEDtube HF 1500mm HO 26W 865 T5 OE	26	3900	150.00	200	●	80	6500	60.000	15.5	1500	A++	929002352502	74961300
3 Master LEDtube HF 1500mm UO 36W 830 T5	36	5200	144.00	160	✗	83	3000	50.000	15.2	1500	A++	929001346102	70599500
3 Master LEDtube HF 1500mm UO 36W 840 T5	36	5600	155.00	160	✗	83	4000	50.000	15.2	1500	A++	929001346202	70603900
3 Master LEDtube HF 1500mm UO 36W 865 T5	36	5600	155.00	160	✗	83	6500	50.000	15.2	1500	A++	929001346302	70605300

OE: Office Enabled LED tube light with the following benefits:

- True Retrofit due to High Compatibility
- Dimmable (1-10V and Dali Ballast)
- Compatible with Multi- Watt ballasts
- Supports UGR 19 applications due to Glass Design with wider beam angle


[Please visit the website for the compatibility list of dimmable and non-dimmable ballasts.](#)



LED tubes

MASTER LEDtube Mains T5


www.philips.com/ledtube



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
NEW MAS LEDtube 600mm HE 8W 830 T5	8	1000	125.00	200	✗	80	3000	50.000	15.8	600	A++	929002420608	78343300
NEW MAS LEDtube 600mm HE 8W 840 T5	8	1050	131.00	200	✗	80	4000	50.000	15.8	600	A++	929002420708	78345700
NEW MAS LEDtube 600mm HE 8W 865 T5	8	1050	131.00	200	✗	80	6500	50.000	15.8	600	A++	929002420808	78347100
NEW MAS LEDtube 1200mm HE 16.5W 830 T5	16.5	2300	139.00	200	✗	80	3000	50.000	15.8	1200	A++	929002420908	78349500
NEW MAS LEDtube 1200mm HE 16.5W 840 T5	16.5	2500	151.00	200	✗	80	4000	50.000	15.8	1200	A++	929002421008	78351800
NEW MAS LEDtube 1200mm HE 16.5W 865 T5	16.5	2500	151.00	200	✗	80	6500	50.000	15.8	1200	A++	929002421108	78353200
NEW MAS LEDtube 1500mm HE 20W 830 T5	20	2800	140.00	200	✗	80	3000	50.000	15.8	1500	A++	929002421208	78355600
NEW MAS LEDtube 1500mm HE 20W 840 T5	20	3000	150.00	200	✗	80	4000	50.000	15.8	1500	A++	929002421308	78357000
NEW MAS LEDtube 1500mm HE 20W 865 T5	20	3000	150.00	200	✗	80	6500	50.000	15.8	1500	A++	929002421408	78359400
MASTER LEDtube 1200mm HO 26W 830 T5	26	3600	138.00	200	✗	80	3000	50.000	15	1200	A++	929001908502	81921000
MASTER LEDtube 1200mm HO 26W 840 T5	26	3900	150.00	200	✗	80	4000	50.000	15	1200	A++	929001908602	81923400
MASTER LEDtube 1200mm HO 26W 865 T5	26	3900	150.00	200	✗	80	6500	50.000	15	1200	A++	929001908702	81925800
MASTER LEDtube 1500mm HO 26W 830 T5	26	3600	138.00	200	✗	80	3000	50.000	15	1500	A++	929001908802	81929600
MASTER LEDtube 1500mm HO 26W 840 T5	26	3900	150.00	200	✗	80	4000	50.000	15	1500	A++	929001908902	81931900
MASTER LEDtube 1500mm HO 26W 865 T5	26	3900	150.00	200	✗	80	6500	50.000	15	1500	A++	929001909002	81933300

CorePro LED PLS

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
CorePro LED PLS 5W 830 2P G23	5	520	104.00	120	✗	82	3000	30.000	15.8	170	A+	929001926302	59666800
CorePro LED PLS 5W 840 2P G23	5	550	110.00	120	✗	82	4000	30.000	15.8	170	A+	929001926402	59668200

LED tubes

CorePro LED PLL


www.philips.com/ledtube



Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
① CorePro LED PLL HF 16.5W 830 4P 2G11	16.5	2000	121.00	160	✘	83	3000	30.000	43.6	400	A+	929001381502	73966200
① CorePro LED PLL HF 16.5W 840 4P 2G11	16.5	2100	127.00	160	✘	83	4000	30.000	43.6	400	A+	929001381602	73974700
① CorePro LED PLL HF 16.5W 865 4P 2G11	16.5	2100	127.00	160	✘	83	6500	30.000	43.6	400	A+	929001381702	73976100
② CorePro LED PLL HF 24W 830 4P 2G11	24	3200	133.00	160	✘	83	3000	30.000	17	540	A+	929001920402	82839700
② CorePro LED PLL HF 24W 840 4P 2G11	24	3400	141.00	160	✘	83	4000	30.000	17	540	A+	929001920502	82841000
② CorePro LED PLL HF 24W 865 4P 2G11	24	3400	141.00	160	✘	83	6500	30.000	17	540	A+	929001920602	82843400

CorePro LEDtube circular

www.philips.com/ledtube




Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.				
CorePro LED Circular 20W 840 G10q	20	2100	105.00	120	✘	80	4000	30.000	298	A+	929002068002	66042000
CorePro LED Circular 20W 865 G10q	20	2100	105.00	120	✘	80	6500	30.000	298	A+	929002068102	66044400

LED tubes

Other LEDtube

www.philips.com/ledtube




	Product Type	LED	Lumen Output	Efficiency	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
		W	lm	lm/W	°			K	Hrs.					
NEW	① LED 2.2W 300mm S14D WW ND 1CT/4	2.2	250	113.00	140	⊗	80	2700	30.000	30	300	A++	929002444001	26362800
	② LED 2.2W 300mm S14S WW ND 1CT/4	2.2	250	113.00	140	⊗	80	2700	30.000	30	300	A++	929002444201	26356700
	③ LED 3W 300mm S14D WW ND 1CT/4	3	250	83.33	140	⊗	83	2700	15.000	30	300	A+	929001249301	58605100
NEW	④ LED 3.5W 500mm S14D WW ND 1CT/4	3.5	375	107.00	140	⊗	80	2700	30.000	30	500	A++	929002444101	26364200
NEW	⑤ LED 4.5W 310mm S19 WW ND 1CT/4	4.5	480	106.00	175	⊗	80	2700	30.000	38	300	A++	929002443801	26360400
	⑥ LED 4.5W 500mm S14D WW ND 1CT/4	4.5	375	83.33	140	⊗	83	2700	15.000	30	500	A+	929001249401	58607500

LED PL-lamps

CorePro LED PLC 2P

www.philips.com/ledlamps



Product Type	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
1 CorePro LED PLC 6.5W 830 2P G24d-2	6.5	650	92.31	120	✗	83	3000	30.000	24.3	100	A+	929001201402	54127200
1 CorePro LED PLC 6.5W 840 2P G24d-2	6.5	700	92.31	120	✗	83	4000	30.000	24.3	100	A+	929001201502	54129600
2 CorePro LED PLC 8.5W 830 2P G24d-3	8.5	950	105.88	120	✗	83	3000	30.000	24.3	200	A+	929001201202	54123400
2 CorePro LED PLC 8.5W 840 2P G24d-3	8.5	1000	105.88	120	✗	83	4000	30.000	24.3	200	A+	929001201302	54125800

CorePro LED PLC 4P

www.philips.com/ledlamps




Product Type	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
1 CorePro LED PLC 6.5W 830 4P G24q-2	6.5	650	92.31	120	✗	83	3000	30.000	24.3	100	A+	929001201002	54119700
1 CorePro LED PLC 6.5W 840 4P G24q-2	6.5	700	92.31	120	✗	83	4000	30.000	24.3	100	A+	929001201102	54121000
2 CorePro LED PLC 9W 830 4P G24q-3	9	950	100.00	120	✗	83	3000	30.000	24.3	200	A+	929001200802	54115900
2 CorePro LED PLC 9W 840 4P G24q-3	9	1000	100.00	120	✗	83	4000	30.000	24.3	200	A+	929001200902	54117300

LED PL-lamps

CorePro LED PLC

www.philips.com/ledlamps



Product Type	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	lm	lm/W	°			K	Hrs.					
1 CorePro LED PLC 4.5W 830 2P G24d-1	4.5	475	105.00	120	✘	83	3000	30.000	24.3	100	A++	929001350702	70659600
2 CorePro LED PLC 4.5W 830 4P G24q-1	4.5	475	105.56	120	✘	83	3000	30.000	24.3	100	A+	929001351002	70663300
1 CorePro LED PLC 4.5W 840 2P G24d-1	4.5	500	111.00	120	✘	83	4000	30.000	24.3	100	A++	929001350802	70661900
2 CorePro LED PLC 4.5W 840 4P G24q-1	4.5	500	111.11	120	✘	83	4000	30.000	24.3	100	A+	929001351102	70665700

Philips TrueForce LED lamps

Save energy and provide the perfect light for every space



Up to 50% energy savings*

6 kV surge protection

High efficiency (>170 lm/W)

Plug & play: EM system compatible

Industry leading LED lamps for HID replacement:

- Powerful light output, optically efficient
- Instant upgrade – no need to replace or modify fixture
- 50,000 hours life time, 5 years warranty

TrueForce LED Road

More features at a glance



Using existing optics of conventional luminaire



Pleasant white light with CRI 70



Optically efficient, emits light towards direction of use

TrueForce LED highbay universal

- A real retrofit alternative: replacement for 250 and 400 W SON/HPI/HPL in conventional high-bay applications
- Two different beam angle options: wide angle (120°) and narrow angle (60°) for high installation heights
- No rewiring necessary: even with ignitors, meanwhile, it's also possible to use mains voltage directly.
- Excellent color rendering with Ra 80 and a color temperature of 4,000 kelvin
- Available in 13,000 and 20,000 lumen type
- 50,000-hour service life and 5-year warranty
- Dimensions: 285 X 250 mm, weight: 1.05Kg, additional steel cable to securely attach the lamp to the fixture
- IP40 protection rating (dry, clean environment)
- Perfectly suited for industrial use, in warehouses and retail areas.



TrueForce LED Core HPL

- Similar look and feel as conventional HID SON/HPL lamps
- Perfect fit in HID luminaires on existing EM ballast or mains connection
- IP65 design suitable for indoor and outdoor applications




New!

TrueForce LED

Trueforce CorePro LED HPL


www.philips.com/trueforce-led-lamps



	Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
		W	W	lm	lm/W	°			K	Hrs.					
NEW	① TForce Core LED HPL 13W E27 830 FR	50	13	2000	153.00	300	✗	80	3000	25.000	75	180	A++	929002349702	75025100
NEW	① TForce Core LED HPL 13W E27 840 FR	50	13	2000	153.00	300	✗	80	4000	25.000	75	180	A++	929002349802	75027500
NEW	① TForce Core LED HPL 18W E27 830 FR	80	18	3000	166.00	300	✗	80	3000	25.000	75	180	A++	929002349902	75029900
NEW	① TForce Core LED HPL 18W E27 840 FR	80	18	3000	166.00	300	✗	80	4000	25.000	75	180	A++	929002350002	75031200
NEW	② TForce Core LED HPL 26W E27 830 FR	125	26	4000	153.00	300	✗	80	3000	25.000	90	245	A++	929002350102	75033600
NEW	② TForce Core LED HPL 26W E27 840 FR	125	26	4000	153.00	300	✗	80	4000	25.000	90	245	A++	929002350202	75035000

TrueForce LED Public (Road – SON)

www.philips.com/trueforce-led-lamps




	Product Type	Traditional	LED	Lumen Output	Efficacy	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
		W	W	lm	lm/W			K	Hrs.					
NEW	① TrueForce LED Road 112-68W E40 730		68	11.200	164.00	✗	70	3000	50.000	71	262	A++	929002007602	63908200
NEW	① TrueForce LED Road 120-68W E40 740		68	12.000	176.00	✗	70	4000	50.000	71	262	A++	929002007702	63910500
NEW	② TrueForce LED Road 40-25W E27 730	50	25	4000	160.00	✗	70	3000	50.000	61	200	A++	929001999402	63251900
NEW	② TrueForce LED Road 42-25W E27 740	50	25	4200	168.00	✗	70	4000	50.000	61	200	A++	929001999502	63253300
NEW	③ TrueForce LED Road 55-35W E27 730	70	35	5500	157.00	✗	70	3000	50.000	61	200	A++	929001898402	81115300
NEW	③ TrueForce LED Road 60-35W E27 740	70	35	6000	171.00	✗	70	4000	50.000	61	200	A++	929001898502	81117700
NEW	④ TrueForce LED Road 84-55W E40 730	100	55	8400	152.00	✗	70	3000	50.000	71	262	A++	929002007402	63904400
NEW	④ TrueForce LED Road 90-55W E40 740	100	55	9000	163.00	✗	70	4000	50.000	71	262	A++	929002007502	63906800

TrueForce LED

TrueForce LED Public (Road/Area – SOX)

www.philips.com/trueforce-led-lamps



Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W	°			K	Hrs.					
TrueForce LED SOX D 25-19W B22 740 FR	35	19	2500	131.00	230	●	70	4000	50.000	54	308	A+	929001828602	78201900
TrueForce LED SOX D 40-31W B22d 740 FR	36	31	4000	129.00	230	●	70	4000	50.000	54	422	A+	929001307902	69938600

TrueForce LED Public (Urban/Road – HPL/SON)

www.philips.com/trueforce-led-lamps




Product Type	Traditional	LED	Lumen Output	Efficacy	Beam Angle	Dim mable	CRI	Color Temp.	Lifetime	Lamp diameter	Total length	EEL	12NC	EOC code
	W	W	lm	lm/W	°			K	Hrs.					
NEW ① TrueForce LED HPL ND 28-21W E27 830	80	21	2850	135.00	360	✕	80	3000	50.000	75	178	A++	929002006102	63814600
NEW ① TrueForce LED HPL ND 30-21W E27 840	80	21	3000	142.00	360	✕	80	4000	50.000	75	178	A++	929002006202	63816000
NEW ① TrueForce LED HPL ND 38-28W E27 830	125	28	3800	135.00	360	✕	80	3000	50.000	75	178	A++	929002006302	63818400
NEW ① TrueForce LED HPL ND 40-28W E27 840	125	28	4000	142.00	360	✕	80	4000	50.000	75	178	A++	929002006402	63820700
NEW ② TrueForce LED HPL ND 57-42W E27 830	125	42	5700	135.00	360	✕	80	3000	50.000	84	178	A++	929002006502	63822100
NEW ② TrueForce LED HPL ND 60-42W E27 840	125	42	6000	142.00	360	✕	80	4000	50.000	84	178	A++	929002006602	63824500
NEW ③ TrueForce LED HPL ND 57-42W E40 830	200	42	5700	135.00	360	✕	80	3000	50.000	84	191	A++	929002006702	63826900
NEW ③ TrueForce LED HPL ND 60-42W E40 840	200	42	6000	142.00	360	✕	80	4000	50.000	84	191	A++	929002006802	63828300

TrueForce LED

TrueForce LED Industrial and Retail (Highbay – MH)


www.philips.com/trueforce-led-lamps



	Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
		tional		Output		Angle	mable		Temp.	Hrs.	diameter	length			code
		W	W	lm	lm/W	°			K						
NEW	TrueForce LED HPI UN 95W E40 840 NB	250	95	13.000	136.00	60	✗	80	4000	50.000	250	290	A+	929002350702	75367200
NEW	TrueForce LED HPI UN 95W E40 840 WB	250	95	13.000	136	120	✗	80	4000	50.000	250	290	A++	929002350802	75369600
NEW	TrueForce LED HPI UN 140W E40 840 NB	400	140	20.000	142.00	60	✗	80	4000	50.000	250	290	A+	929002350902	75371900
NEW	TrueForce LED HPI UN 140W E40 840 WB	400	140	20.000	142.00	120	✗	80	4000	50.000	250	290	A++	929002351002	75373300

TrueForce Core LED Industrial and Retail (Highbay – HPI/SON/HPL)

www.philips.com/trueforce-led-lamps



	Product Type	Tradi	LED	Lumen	Efficacy	Beam	Dim	CRI	Color	Lifetime	Lamp	Total	EEL	12NC	EOC
		tional		Output		Angle	mable		Temp.	Hrs.	diameter	length			code
		W	W	lm	lm/W	°			K						
1	TrueForce Core HB MV ND 20W E27 830 G3	40	20	2600	130.00	150	✗	80	3000	15.000	80	139	A++	929002405702	78101900
1	TrueForce Core HB MV ND 20W E27 840 G3	40	20	2700	135.00	150	✗	80	4000	15.000	80	139	A++	929002405802	78103300
2	TrueForce Core HB MV ND 30W E27 830 G3	55	30	3700	123.00	180	✗	80	3000	15.000	100	165	A+	929002406302	78095100
2	TrueForce Core HB MV ND 30W E27 840 G3	55	30	4000	133.00	180	✗	80	4000	15.000	100	165	A++	929002406402	78097500
3	TrueForce Core HB MV ND 35W E27 830 G3	70	35	4800	137.00	180	✗	80	3000	15.000	118	193	A++	929002406602	78105700
3	TrueForce Core HB MV ND 35W E27 840 G3	70	35	5000	142.00	180	✗	80	4000	15.000	118	193	A++	929002406702	78107100

All you need to know, right at your finger tips

We know that installation is about finding the right solutions.

Visit our webpage created especially for installers and find:

- All latest product information
- Selector tools to help you select the right product for your customers
- Installation videos
- Training

www.philips.com/installer



© 2021 Signify Holding. All rights reserved. Signify reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.