

MC-10A & MC-11 Rugged, low-cost "MINI-CAT" Label Rewinders

Meet the LABELMATE MINI-CATs, the world's most popular Label Rewinders. They can rewind label rolls up to 4½ -inches wide, up to 8.6-inches (220-mm) in diameter at speeds up to 15-inches/second (38-cm/sec.) The MINI-CATs can also be used as Label Unwinders.

The **MC-10A** has a 3" diameter Core Holder. You can also use the included "coreless rewind" feature to rewind directly on-shaft.

The **MC-11** includes a precision-crafted **Adjustable Core Holder** that adjusts in seconds to accept any core diameter from 1" to 4" (25- to 102-mm). The **MC-11** can also do coreless rewinding.

The MINI-CATs use LABELMATE's proprietary Constant Adjustable Torque™ ("CAT") technology to achieve reliable performance at an unprecedented low price. A special direct-drive motor offers bi-directional operation and trouble-free performance. Your MINI-CAT is backed by an unmatched **5-Year Parts and Labor Limited Warranty**! No speed adjustments are required. The MINI-CAT automatically adjusts to any printer speed up to 15-ips and even allows label back-feeding automatically if your printer requires it. The amount of rewind force is adjustable.

The MINI-CATs have an inner Label Flange to keep the edge of the label web aligned as the labels are being rewound. Also available is an optional Adjustable Paper Guide (**APG-MC**) that mounts directly to the **MC-10A** or **MC-11** base plate and guides the outer edge of the labels. For the **MC-10A**, an optional plastic Outer Flange is also available. See photos below right.

Rugged steel construction allows your MINI-CAT to simply be set in place near your label printer. Special anti-slip feet keep the unit from moving.

Join tens of thousands of others, and put a MINI-CAT to work for you today and enjoy the finest in low-cost label rewinding convenience and reliability.

MC-10A & MC-11 SPECIFICATIONS:

Label Width: Up to 4.5" (114-mm).

Label Roll Diameter: Up to 8.6" (220-mm).

Maximum Label Roll Weight: 8.5-lbs. (3.9-kg).

Core Diameter: **MC-10A** - 3" (76-mm) or coreless. **MC-11** - Any from 1" to 4" (25- to 102-mm) or coreless.

Speed: Up to 15-ips (38-cm/sec). Switch adjustable rewind force.

No speed adjustments are required.

Start/Stop: Convenient ON-OFF switch also controls **Direction**.


Power Requirements: 120v 60Hz. 20 va. UL / CSA Listed Power Supply. 230v 50Hz available at the same price. Specify.

Size: H-W-D 9 x 6 x 11" (229 x 152 x 279-mm). **Weight:** 13-lbs. (5.9-kg).

Optional: Adjustable Paper Guide (**APG-MC**) Arm. Fits both the MC-10A and the MC-11.



Optional: Plastic Outer Flange for the MC-10A only (**Flange, MC-10, Outer**)

Warranty: Now! 5-Year Parts and Labor Limited Warranty, by far the longest in the industry! (One-year Limited Warranty on the included Power Supply Module.)

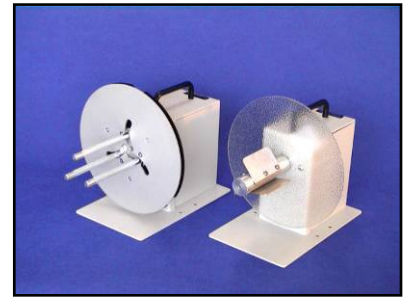


MC-11 (left): Rewind on any core from 1" to 4" diameter, or coreless.


MC-10A (right): You can use the included 3-inch core holder, or rewind "coreless" directly "on-shaft" without any label core as set up in the photo below. Also shown below is the Optional **APG-MC** Adjustable Paper Guide.



MC-11 with APG-MC



**MC-10A w/
optional Outer Flange**



**ON-OFF / DIRECTION
Switch**