


Overview



1. Power Button
 2. 2 External 5.25" Bays
 3. Front I/O: 3 USB 2.0, 1 IEEE 1394a, Headphone, Microphone
-

Overview

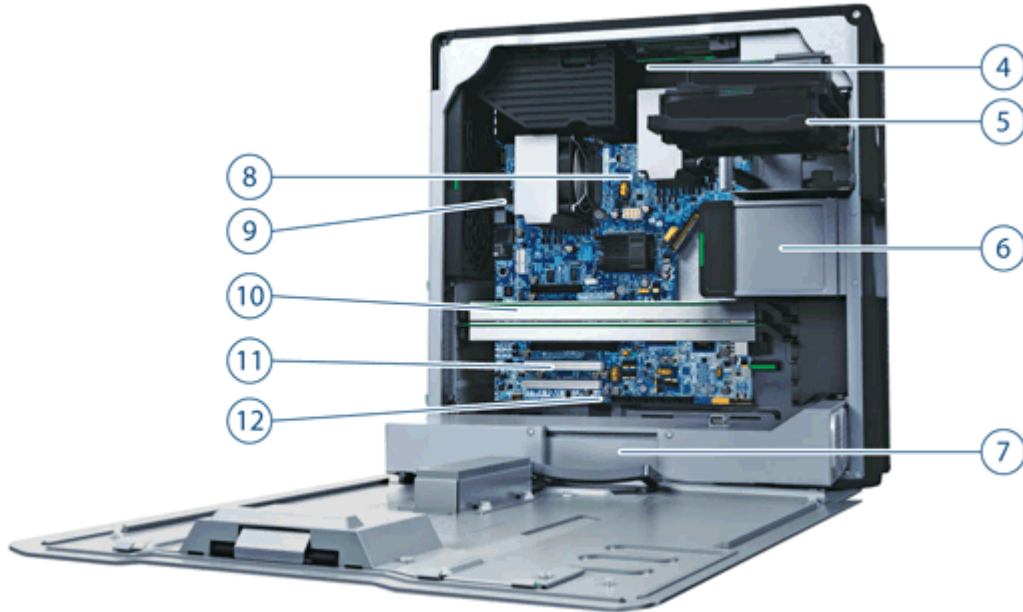

- | | |
|---|---|
| <ul style="list-style-type: none"> 4. 6 DIMM Slots for DDR3 ECC Memory 5. 2 Internal 3.5" Bays 6. 2 External 5.25" Bays 7. 650W, 85% efficient Power Supply | <ul style="list-style-type: none"> 8. 2 Quad Core Intel 5500 Series Processors 9. Rear I/O: 6 USB 2.0, PS/2 keyboard/mouse
1 RJ-45 to Integrated Gigabit LAN
1 Audio Line In, 1 Audio Line Out, 1 Microphone In 10. 2 PCIe x16 Gen2 Slots 11. 1 PCIe x4 electrical / x8 mechanical Gen2,
1 PCIe x4 electrical / x8 mechanical Gen1,
2 PCI Slots 12. 3 Internal USB 2.0 ports |
|---|---|

Form Factor	Minitower
Operating Systems	<p>Preinstalled:</p> <ul style="list-style-type: none"> ● Genuine Windows 7® Ultimate 64-bit* ● Genuine Windows 7® Professional 64-bit* ● Genuine Windows 7® Professional 32-bit* ● HP Linux Installer Kit for Linux [includes drivers for 32-bit & 64-bit OS versions of Red Hat Enterprise Linux(RHEL) 4 Workstation, Red Hat Enterprise Linux (RHEL) 5 Workstation, Red Hat Enterprise Linux (RHEL) 6 Workstation, 64-bit SUSE Linux Enterprise Desktop (SLED) 11] ● Red Hat Enterprise Linux Desktop (Preinstall NOT available; 1 year paper license only) <p>Supported:</p> <ul style="list-style-type: none"> ● Genuine Windows® 7 Enterprise 32/64 ● Genuine Windows® XP Professional 32/64 ● Genuine Windows® Vista Business 32/64 ● SUSE Linux Enterprise Desktop 11 <p>Certified:</p>

Overview

	<ul style="list-style-type: none"> • Solaris 10, 11 • Ubuntu 10.10, 11.04 <p>Notes: For detailed OS/hardware support information for Linux, see: http://www.hp.com/support/linux_hardware_matrix</p> <p>*Systems may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See http://www.microsoft.com/windows/windows-7/ for details.</p>
Available Processors	<p>Intel® Xeon® Processor X5675 6C 3.06 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo Intel® Xeon® Processor X5672 4C 3.20 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo Intel® Xeon® Processor X5660 6C 2.80 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo Intel® Xeon® Processor E5649 6C 2.53 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo Intel® Xeon® Processor X5647 4C 2.93 GHz, 130W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo Intel® Xeon® Processor E5645 6C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo Intel® Xeon® Processor E5640 4C 2.66 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo Intel® Xeon® Processor E5607 4C 2.26 GHz, 80W, 8M cache, 4.80GT/s QPI, DDR3 1066MHz Intel® Xeon® Processor E5606 4C 2.13 GHz, 80W, 8M cache, 4.80GT/s QPI, DDR3 1066MHz</p>
Available Processor Disclaimers	<p>When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: http://www.intel.com/products/processor_number/ for details.</p> <p>Quad-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.</p> <p>64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: http://www.intel.com/info/em64t for more information.</p>
Additional Details	<ul style="list-style-type: none"> • Intel® Nehalem Architecture • Up to 6.40GT/s QPI support • 3-channel 800/1066/1333 MHz DDR3 memory* subsystem • Up to 48 GB Memory capacity with 6 DIMM slots and 8 GB DIMMs • PCI Express I/O and PCIe x16 Gen2 graphics • Integrated Broadcom 5764 Gigabit LAN on Motherboard (LOM) • 6 channels of Serial ATA (SATA) 3.0 Gb/s natively supported internally • SATA RAID** 0, 1, 5, and 10 support standard on motherboard • SAS RAID 0, 1, and 10 supported using the LSI 3041E PCIe controller or the LSI 9212-4i 6Gb/s controller • SATA optical drives • High Definition integrated audio with internal speaker • 650W 85% efficient power supply • ENERGY STAR® qualification and energy-saving features available on selected configurations (Not supported by Linux)

Overview

	<ul style="list-style-type: none"> Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply. <p>*Each processor supports up to 3 channels of DDR3 memory. To realize full performance at least 1 DIMM must be inserted into each channel. To get full 6 channel support, 2 processors MUST be installed.</p> <p>**SATA hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit: http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.</p>
Form Factor	Rackable Minitower
Color	Black/Silver
I/O Slots (see system board section for more details)	<ul style="list-style-type: none"> 2 PCI Express Gen2 x16 slots (full-length, full-height) 1 PCI Express Gen2 x4/x8* slot – with x8 open-ended connectors (full-length, full-height) 1 PCI Express Gen1 x4/x8* slot – with x8 open-ended connectors (full-length, full-height) 2 PCI 32bit/33MHz slot, (full-length, full-height) <p>*These slots have 4 PCI Express lanes routed to them. They are sometimes called "x4 electrical, x8 mechanical" slots.</p> <p>The PCIe x8 open-ended connectors allow a PCIe x 16 card to be seated in the slot.</p>
Bays (see storage section for more details)	Total Bays = 4
Internal Bays	2 internal 3.5" bays (with acoustic dampening rail assemblies)
External Bays	2 external 5.25" bays (3rd & 4th HDDs occupy one external bay)
Front I/O	3 USB 2.0, 1 Headphone Out, 1 Microphone In. 1 IEEE 1394a integrated with systems manufactured beginning 3/22/10.
Rear I/O	6 USB 2.0 1 RJ-45 to integrated Gigabit LAN 2 legacy PS/2 1 Audio Line In, 1 Audio Line Out, 1 Microphone In; audio ports can be retasked to function as line in, line out, microphone, or headphone. Serial supported with optional rear bulkhead adapter.
Internal USB	3 USB 2.0 headers [3 USB 2.0 ports available by one 2x5 header and one 1x5 header: supports either up to two HP Internal USB Port Kits, AMO- EM165AA (one port on each Kit), or one Internal Port kit and one USB Media Card Reader.]
Chassis Dimensions (H x W x D)	44.51 x 16.53 x 44 cm (17.5 x 6.5 x 17.3 in)
System Weight	Exact weights depend upon configuration Minimum config - 15.0 kg (33.0 lb) Typical config - 16.9 kg (37.4 lb) Maximum config - 19.6 kg (43.3 lb) (Maximum shipping weight - 23.6 kg/52.0 lb)
Temperature	Operating: 5° to 35° C (40° to 95° F)
	Non-operating -40° to 60° C (-40° to 140° F)
Humidity	Operating: 8% to 85%
	Non-operating 8% to 90%

Overview

Maximum Altitude (non-pressurized)	Operating:	3,000 m; 10,000 feet
	Non-operating	9,100 m; 30,000 feet
Power Supply	650W 85% (80PLUS) Efficient wide-ranging, active Power Factor Correction, with tool-free & cable-free connection The Power Supply Efficiency Report for this product may be found at this link: http://www.80plus.org/manu/psu/psu_reports/S0-034_DELTA_DPS-25AB%20A_650W_Report_mod.pdf	
Interfaces Supported	6-channel SATA 3.0 Gb/s Interface (6 Serial-ATA connectors on the motherboard, 4 channels are eSATA configurable for use with eSATA CTO/AMO Kit) SAS interface supported with optional LSI 3041E 4-port SAS/SATA PCIe card. 1 Floppy interface (1 Floppy connector), USB 2.0. 1 IEEE 1394a interface with systems manufactured beginning 3/22/10.	
Hard Drive Controllers Supported	SATA and SAS controllers	
Backup Devices	For a complete listing of compatible DAT tape drives, LTO tape drives and RDX Removable Disk Backup System offerings, please visit: http://www.hp.com/go/connect	

Supported Components

Processors

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Four-Core and Six-Core Intel Xeon Processor 5600 Series with Intel® 64 Architecture				
Intel® Xeon® Processor X5675 6C 3.06 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	LB215AA	
Intel® Xeon® Processor X5672 4C 3.20 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	LB214AA	
Intel® Xeon® Processor X5660 6C 2.80 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	WG732AA	
Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	WG731AA	
Intel® Xeon® Processor E5649 6C 2.53 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	LB212AA	
Intel® Xeon® Processor X5647 4C 2.93 GHz, 130W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	Y	Y	LB213AA	
Intel® Xeon® Processor E5645 6C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo	Y	Y	LB211AA	
Intel® Xeon® Processor E5640 4C 2.66 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	Y	Y	WG730AA	
Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	Y	Y	WG728AA	
Intel® Xeon® Processor E5607 4C 2.26 GHz, 80W, 8M cache, 4.80 GT/s QPI, DDR3 1066MHz	Y	Y	LB210AA	
Intel® Xeon® Processor E5606 4C 2.13 GHz, 80W, 8M cache, 4.80 GT/s QPI, DDR3 1066MHz	Y	Y	LB209AA	

NOTE 1: When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: http://www.intel.com/products/processor_number/ for details.

Quad-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: <http://www.intel.com/info/em64t> for more information.

Intel's numbering is not a measurement of higher performance.

Support for Xeon 5600 Series processors requires the C2 revision of the Intel 5520 chipset. Two methods are available to determine if a specific Z600 system has the C2 revision of the chipset. 1. Use the BIOS setup menu to access the "Boot Block Date" from the "System Information Menu". All B3-based systems will have a "1/30/09" date and C2-based systems will have a "01/07/10" date. 2. HP Performance Advisor SW can be used to determine the PCA ID, which is reported by Performance Advisor under "System Configuration" and "Baseboard ID". All B3-based systems will have the ID "0AE8h" and all C2-based

Supported Components

systems will have the ID "0B54h".

Monitors / Displays

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP LP2065 20-inch LCD Monitor	Y	Y	EF227A4	
HP LP2475w 24-inch Widescreen LCD Monitor	Y	Y	KD911A4	
HP DreamColor LP2480zx Professional Display	Y	Y	GV546A4	
HP LP3065 30-inch Widescreen LCD Monitor	Y	Y	EZ320A4	
HP ZR22w 21.5-inch S-IPS LCD Monitor	Y	Y	VM626A4	
HP ZR24w 24-inch S-IPS LCD Monitor	Y	Y	VM633A4	
HP ZR30w 30-inch S-IPS LCD Monitor	Y	Y	VM617A4	

Supported by all Operating Systems available from HP

Screen size diagonally measured

SAS Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations				
300GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU967AA	
450GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU968AA	
600GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	VM647AA	
HP 300GB SAS 10K SFF HDD	Y	Y	A2Z20AA	
HP 450GB SAS 10K SFF HDD	Y	Y	B0A48AA	
HP 600GB SAS 10K SFF HDD	Y	Y	A2Z21AA	

Sub-Section Description/Notes

(SAS Controller, not integrated, is required)

SATA Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
SATA (Serial ATA) Hard Drives for HP Workstations				
250GB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	PY278AA	
500GB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	PV943A	
1TB SATA 7200 rpm 3.0Gb/s 3.5" HDD	Y	Y	GE262AA	
1.5TB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	VH997AA	
2.0TB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	WE464AA	
160GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	EW222AA	
300GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	FM802AA	
600GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	XP309AA	

Sub-Section Description/Notes

(2.5" SFF drives cannot be mixed with 3.5" drives)

SATA Solid State Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Solid State Drives for Workstations				
HP 128GB SATA SSD	Y	Y	A3D25AA	

Supported Components

HP 160GB SATA SSD	Y	Y	LZ704AA
HP 256GB SATA SSD	Y	Y	A3D26AA
HP 300GB SATA SSD	Y	Y	LZ069AA

For hard drives, 1 GB = 1 billion bytes; TB = 1 trillion bytes. Actual formatted capacity is less.

Up to 3 of the following 3.5" SATA and 3.5" 15K SAS drives, or up to 4 of the 2.5" small form factor (SFF) 10K SATA drives are allowed.

Hard Drive Controllers

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated SATA 3.0 Gb/s Controller				
Integrated SATA 3.0 Gb/s Controller	Y	N		
Factory integrated RAID on motherboard for SATA drives				
RAID 0 Configuration - Striped Array	Y	N		See note 1
RAID 1 Configuration - Mirrored Array	Y	N		See note 1
LSI 3041E 4-Port SAS 3.0 Gb/s RAID Card				
LSI 3041E 4-Port SAS 3.0 Gb/s RAID Card	Y	Y	EH417AA	
LSI 9212 4-Port SAS 6Gb/s RAID Card				
LSI 9212 4-Port SAS 6Gb/s RAID Card	Y	Y	XP310AA	
LSI MegaRAID® SAS 8888ELP Host Bus Adapter (HBA)				
LSI 8888ELP 8-port SAS HW RAID Card	N	Y	GE258AA	
LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit				
LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card	N	Y	WE465AA	
Optional: LSI iBBU08 Battery Backup Unit for LSI 9260-8i	N	Y	LA783AA	

All RAID arrays must be less than 2 TB in size

NOTE 1: Requires 2 identical hard drives (speeds, capacity, interface). RAID 1 does not support a 3rd HDD. No Linux support for SATA RAID.

NOTE: Specific user-configured hardware SAS RAID configurations are supported on this system with Linux. Please visit: http://www.hp.com/support/linux_hardware_matrix for details.

LSI RAID Definitions:

SATA hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit: <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

IS: Striping of 2 or more HDDs into a single logical volume

IM: Mirroring of 2 HDDs into a single logical volume

IME: Mirroring of 3 or more HDDs into a single logical volume

NOTE: Specific user-configured hardware SAS RAID configurations are supported on this Linux system. Please visit: http://www.hp.com/support/linux_hardware_matrix for details

Supported Components

Graphics

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported Multi Mixed
Professional 2D					
NVIDIA Quadro NVS 295 256MB PCIe Graphics Card	Y	Y	FY943AA	2nd card must be NVS 450 or NVS 295	2 X
NVIDIA Quadro NVS 450 512 MB PCIe Graphics Card	Y	Y	FH519AA	2nd card must be NVS 450 or NVS 295	2 X
NVIDIA NVS300 512MB PCIe Graphics Card	Y	Y	XP612AA	2nd card must be NVS 450 or NVS 300	2 X
AMD FirePro 2270 512MB Graphics Card	Y	Y	LA524AA	2nd card must be FirePro 2270	2
NVIDIA Quadro NVS 290 256 MB PCIe Graphics Card with 'DMS-59 to Dual DVI cable' included - for Workstations	N	Y	GN502AA	1 or 2 of these cards are supported - 2nd card must be NVS 290	2
Entry 3D					
NVIDIA Quadro 400 512MB Graphics Card	Y	Y	LD542AA		2
NVIDIA Quadro 600 1GB Graphics Card	Y	Y	WS093AA		2
AMD FirePro V3900 1GB Graphics Card	Y	Y	A6R69AA		2
AMD FirePro V4900 1GB Graphics Card	Y	Y	A3J92AA		2
Mid-range 3D					
NVIDIA Quadro 2000 1GB Graphics Card	Y	Y	WS094AA		2
NVIDIA Quadro 2000D (Spec DVI only card)	N	Y	A9C88AA		1
ATI FirePro V5800 1GB Graphics Card	Y	Y	WL050AA		2
AMD FirePro V5900 2GB Graphics	Y	Y	LS992AA		2
High End 3D					
NVIDIA Quadro 4000 2GB Graphics Card	Y	Y	WS095AA		1
NVIDIA Quadro 5000 2.5GB Graphics Card	Y	Y	WS096AA		1
AMD FirePro V7900 2GB Graphics	Y	Y	LS993AA		1

Memory

CTO

Option Kit Part Number

Support Notes

PC3-10600 DDR3-1333 ECC Unbuffered DIMMs CTO
 2GB (1x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 4GB (2x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 6GB (3x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 8GB (2x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

Supported Components

8GB (2x2GB + 1x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU	
12GB (3x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU	
4GB (2x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU	Both processor sockets must be populated.
8GB (4x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU	Both processor sockets must be populated.
8GB (2x4GB) DDR3-1333 ECC Unbuffered RAM 2-CPU	Both processor sockets must be populated.
12GB (6x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU	Both processor sockets must be populated.
16GB (4x4GB) DDR3-1333 ECC Unbuffered RAM 2-CPU	Both processor sockets must be populated.
16GB (4x2GB + 2x4GB) DDR3-1333 ECC Unbuffered RAM 2-CPU	Both processor sockets must be populated.
24GB (6x4GB) DDR3-1333 ECC Unbuffered RAM 2-CPU	Both processor sockets must be populated.
PC3-10600 DDR3-1333 ECC Registered DIMMs CTO	
8GB (2x4GB) DDR3-1333 ECC Registered RAM 1-CPU	
12GB (3x4GB) DDR3-1333 ECC Registered RAM 1-CPU	
16GB (2x8GB) DDR3-1333 ECC Registered RAM 1-CPU	
24GB (3x8GB) DDR3-1333 ECC Registered RAM 1-CPU	
8GB (2x4GB) DDR3-1333 ECC Registered RAM 2-CPU	Both processor sockets must be populated.
16GB (4x4GB) DDR3-1333 ECC Registered RAM 2-CPU	Both processor sockets must be populated.
24GB (6x4GB) DDR3-1333 ECC Registered RAM 2-CPU	Both processor sockets must be populated.
32GB (4x8GB) DDR3-1333 ECC Registered RAM 2-CPU	Both processor sockets must be populated.
48GB (6x8GB) DDR3-1333 ECC Registered RAM 2-CPU	Both processor sockets must be populated.

Sub-Section Description/Notes

Supported Components

The Z600 has a three-channel memory architecture. Three channels are associated with each processor. For optimal performance, populate a DIMM in each channel.

AMO

PC3-10600 DDR3-1333 ECC Unbuffered DIMMs AMO

2GB (1x2GB) DDR3-1333 ECC Unbuffered RAM	FX699AA
4GB (1x4GB) DDR3-1333 ECC Unbuffered RAM	NL797AA

PC3-10600 DDR3-1333 ECC Registered DIMMs AMO

8GB (1x8GB) DDR3-1333 ECC Registered RAM	FX622AA
4GB (1x4GB) DDR3-1333 ECC Registered RAM	FX621AA

Although all of these memory configurations incorporate 1333MHz memory modules, the speed at which they operate is dependent upon the processor.

Support for Registered DIMMs on the Z600 requires a systemboard with the C2 revision of the Intel 5520 chipset. Two methods are available to determine if a specific Z600 system has the C2 revision of the chipset. 1. Use the BIOS setup menu to access the "Boot Block Date" from the "System Information Menu". All B3-based systems will have a "1/30/09" date and C2-based systems will have a "01/07/10" date. 2. HP Performance Advisor SW can be used to determine the PCA ID, which is reported by Performance Advisor under "System Configuration" and "Baseboard ID". All B3-based systems will have the ID "0AE8h" and all C2-based systems will have the ID "0B54h".

Multimedia and Audio Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Intel/Realtek HD ALC262 Audio	Y	N		
HP Thin USB Powered Speakers	Y	Y	KK912AA	
Creative X-Fi Titanium PCIe Audio Card	Y	Y	NH222AA	See note 1

NOTE 1: The Creative Sound Blaster X-Fi Titanium audio card is supported on the HP Z Series Workstations with Microsoft Windows XP Pro 32-bit and 64-bit and Microsoft Vista 32-bit and 64-bit versions. Linux is not supported.

Supported Components

Optical and Removable Storage

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP 16X DVD-ROM SATA Drive (non-Lightscribe version)	Y	Y	AR629AA	See note 1
HP 16X DVD+/-RW SuperMulti SATA Drive (non-Lightscribe)	Y	Y	QS208AA	
HP Slot Load DVD+/-RW Drive	Y	N		
HP Blu-ray Writer	Y	Y	AR482AA	
HP 22-in-1 Media Card Reader Kit (Workstations)	Y	Y	NK361AA	
HP DX115 Removable Drive Enclosure				
HP DX115 Carrier with 160GB SATA HDD	N	Y	FZ577AA	
HP DX115 Removable HDD Frame/Carrier	N	Y	FZ576AA	
HP DX115 Removable HDD Carrier	N	Y	NB792AA	

Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

NOTE 1: Not supported as a 2nd Optical Drive.

Controller Cards

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP USB 3.0 2x2 Port SuperSpeed PCIe x1 Card	Y	Y	QT587AA	
HP SuperSpeed USB 3.0 PCIe x1 Card	Y	Y	BM867AA	
HP FireWire/IEEE 1394a PCI Card	Y	Y	PA997A	
HP IEEE 1394b FireWire PCIe Card	Y	Y	NK653AA	

Supported Components

Networking and Communications

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Broadcom 5764 PCIe LOM Controller	Y	N		
Broadcom NetXtreme Gigabit Ethernet Plus NIC (PCIe)	Y	Y	FS215AA	
HP NC360T PCI Express Dual Port Gigabit NIC	N	Y	KU004AA	
Intel Gigabit CT Desktop NIC	N	Y	FH969AA	

The Broadcom NetXtreme Plus card may be used, along with the integrated 5764 LOM, for teaming, redundancy, or additional network bandwidth.

"Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

Racking and Physical Security

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Security Cable with Kensington Lock	N	Y	PC766A	
HP (CMT) Solenoid Lock	N	Y	DE618A	
HP Solenoid Hood Lock & Hood Sensor	Y	N		
HP Z6/Z8 Adjustable Sliding Rail Rack Kit	N	Y	NN124AA	

Input Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP PS/2 Standard Keyboard	Y	Y	DT527A	
HP USB Standard Keyboard	Y	Y	DT528A	
HP PS/2 Optical Scroll Mouse	Y	Y	EY703AA	
HP USB 2-Button Optical Scroll Mouse	Y	Y	DC172B	
HP USB Laser Mouse	Y	Y	GW405AA	
HP USB Optical 3-Button Mouse	Y	Y	DY651A	
HP USB Smart Card Keyboard	Y	Y	ED707AA	
HP 2.4GHz Wireless Keyboard & Mouse	N	Y	NB896AA	
HP USB Optical 3-Button 2.9M OEM Mouse	N	Y	ET424AA	
HP SpaceExplorer 3D USB Controller	N	Y	RY429AA	
HP SpacePilot 3D USB Intelligent Controller	N	Y	EF390AA	

Supported Components

Other Hardware

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Workstation Mouse Pad	Y	N		Japan only.
HP Power Cord Kit	N	Y	DM293A	
HP eSATA PCI Cable Kit	N	Y	GM110AA	
HP Serial Port Adapter	N	Y	PA716A	Provides 1st Serial Port for the Z600.
HP Internal USB Port Kit	N	Y	EM165AA	
HP Workstation to LTO SAS Int. Cable	N	Y	EH925A	
HP Optical Bay HDD Mounting Bracket	Y	Y	NQ099AA	For 3.5" HDDs
HP ENERGY STAR 5.0 Enabled Configuration	Y	N		

Software

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Performance Advisor	Y	N		Supported on Windows 7 only. Available as a web download starting 1/7/2010. Included in Windows 7 preload starting 3/1/2010.
Roxio Easy Media Creator (DVD/Blu-ray Disc burner software)	Y	N		
Intervideo WinDVD (DVD player/burner software)	Y	N		
HP ProtectTools Security	Y	N		Must select as a Configure to Order Option. Delivered as a "Drop in the Box" CD
PDF Complete - Corporate Edition	Y	N		
HP Power Assistant	Y	N		
Buy Office	Y	N		
Parallels Workstation 4.0 Extreme	Y	N		Supported with dual NVIDIA Quadro 2000 graphics cards and a minimum of 8GB of

Supported Components

HP Remote Graphics Software (RGS) V5	Y	N	system memory. Will be preloaded starting 12/1/11. Supports both 32 and 64 bit versions of Windows 7 Professional and Enterprise, Windows XP Professional and Enterprise, Windows Vista Business, Ultimate and Enterprise, and RHEL V6
--------------------------------------	---	---	--

Operating Systems

Support Notes

Genuine Windows® 7 Ultimate 64-bit	See Note 1
Genuine Windows® 7 Professional 64-bit	See Note 1
Genuine Windows® 7 Professional 32-bit	See Note 1
HP Linux Installer Kit	See: http://www.hp.com/go/linux
SUSE Linux Enterprise Desktop 11	SUSE Linux Enterprise Desktop 11
Red Hat Enterprise Linux (RHEL) Workstation - Paper License (1yr)	This second OS must be ordered with The HPIKL as the first OS. It is a Drop In the Box (DIB) Red Hat registration card redeemed directly with Red Hat SW company (using the URL and Subscription / registration number), NOT through HP.

NOTE 1: Systems may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

System Technical Specifications

System Board																																																																												
System Board Form Factor	36 x 28 cm 14.2 x 11 inches																																																																											
Processor Socket	Dual LGA 1366																																																																											
CPU Bus Speed	QPI: Up to 6.4GT/second, depending on processor																																																																											
Chipset	Intel® 5520																																																																											
Super I/O Controller	SMSC SCH5327, Rev B																																																																											
Memory Expansion Slots	6 (3 per processor)																																																																											
Memory Type Supported	DDR3, UDIMM (Unbuffered), ECC: 1GB, 2GB, and 4GB DDR3, RDIMM (Registered), ECC: 4GB and 8GB																																																																											
Memory Modes	NUMA (Non-Uniform Memory Architecture), Memory Node Interleave																																																																											
Memory Speed Supported	800, 1066, & 1333MHz																																																																											
Maximum Memory	Supports up to 48GB																																																																											
	<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="3">Single Processor CPU0</th> </tr> <tr> <th>Capacity</th> <th>Type</th> <th>DIMM1</th> <th>DIMM2</th> <th>DIMM3</th> </tr> </thead> <tbody> <tr> <td>1GB</td> <td>UDIMM</td> <td>1GB</td> <td></td> <td></td> </tr> <tr> <td>2GB</td> <td>UDIMM</td> <td>1GB</td> <td>1GB</td> <td></td> </tr> <tr> <td>3GB</td> <td>UDIMM</td> <td>1GB</td> <td>1GB</td> <td>1GB</td> </tr> <tr> <td>4GB</td> <td>UDIMM</td> <td>2GB</td> <td>2GB</td> <td></td> </tr> <tr> <td>4GB</td> <td>RDIMM</td> <td>4GB</td> <td></td> <td></td> </tr> <tr> <td>6GB</td> <td>UDIMM</td> <td>2GB</td> <td>2GB</td> <td>2GB</td> </tr> <tr> <td>8GB</td> <td>UDIMM</td> <td>4GB</td> <td>4GB</td> <td></td> </tr> <tr> <td>8GB</td> <td>RDIMM</td> <td>4GB</td> <td>4GB</td> <td></td> </tr> <tr> <td>8GB</td> <td>RDIMM</td> <td>8GB</td> <td></td> <td></td> </tr> <tr> <td>12GB</td> <td>UDIMM</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> </tr> <tr> <td>12GB</td> <td>RDIMM</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> </tr> <tr> <td>16GB</td> <td>RDIMM</td> <td>8GB</td> <td>8GB</td> <td></td> </tr> <tr> <td>24GB</td> <td>RDIMM</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> </tr> </tbody> </table>			Single Processor CPU0			Capacity	Type	DIMM1	DIMM2	DIMM3	1GB	UDIMM	1GB			2GB	UDIMM	1GB	1GB		3GB	UDIMM	1GB	1GB	1GB	4GB	UDIMM	2GB	2GB		4GB	RDIMM	4GB			6GB	UDIMM	2GB	2GB	2GB	8GB	UDIMM	4GB	4GB		8GB	RDIMM	4GB	4GB		8GB	RDIMM	8GB			12GB	UDIMM	4GB	4GB	4GB	12GB	RDIMM	4GB	4GB	4GB	16GB	RDIMM	8GB	8GB		24GB	RDIMM	8GB	8GB	8GB
		Single Processor CPU0																																																																										
Capacity	Type	DIMM1	DIMM2	DIMM3																																																																								
1GB	UDIMM	1GB																																																																										
2GB	UDIMM	1GB	1GB																																																																									
3GB	UDIMM	1GB	1GB	1GB																																																																								
4GB	UDIMM	2GB	2GB																																																																									
4GB	RDIMM	4GB																																																																										
6GB	UDIMM	2GB	2GB	2GB																																																																								
8GB	UDIMM	4GB	4GB																																																																									
8GB	RDIMM	4GB	4GB																																																																									
8GB	RDIMM	8GB																																																																										
12GB	UDIMM	4GB	4GB	4GB																																																																								
12GB	RDIMM	4GB	4GB	4GB																																																																								
16GB	RDIMM	8GB	8GB																																																																									
24GB	RDIMM	8GB	8GB	8GB																																																																								

System Technical Specifications

		Dual Processor					
		CPU0			CPU1		
Capacity	Type	DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6
2GB	UDIMM	1GB			1GB		
4GB	UDIMM	1GB	1GB		1GB	1GB	
4GB	UDIMM	2GB			2GB		
6GB	UDIMM	1GB	1GB	1GB	1GB	1GB	1GB
8GB	UDIMM	2GB	2GB		2GB	2GB	
8GB	UDIMM	4GB			4GB		
8GB	RDIMM	4GB			4GB		
12GB	UDIMM	2GB	2GB	2GB	2GB	2GB	2GB
16GB	UDIMM	4GB	4GB		4GB	4GB	
16GB	RDIMM	4GB	4GB		4GB	4GB	
16GB	RDIMM	8GB			8GB		
24GB	UDIMM	4GB	4GB	4GB	4GB	4GB	4GB
24GB	RDIMM	4GB	4GB	4GB	4GB	4GB	4GB
32GB	RDIMM	8GB	8GB		8GB	8GB	
48GB	RDIMM	8GB	8GB	8GB	8GB	8GB	8GB

Memory Configuration
(Supported)

- Not all memory configurations possible are represented above.
- Only ECC DIMMs are supported.
- Do not install memory modules into memory slots if corresponding processor is not installed.
- Dual processor configurations with memory modules installed for only one processor is not supported.
- UDIMM (Unbuffered) and RDIMM (Registered) memory cannot be mixed. All memory installed in the system must be either UDIMM or RDIMM.

PCI Express Connectors

2 PCI Express x16 Gen2 graphics
 1 PCI Express Gen2 (x8 mechanically, x4 electrically)
 1 PCI Express Gen1 (x8 mechanically, x4 electrically)

PCI Connectors (5.0V)

2 full length 33 MHz 32-Bit

Supported Drive Interfaces

SATA	Integrated 6-channel SATA 3.0Gb/sec controller with RAID 0, 1, 5, 10 and NCQ. (Factory integrated RAID is Microsoft Windows only)
Serial Attached SCSI	Requires Optional PCIe card
Integrated RAID	Integrated SATA RAID <ul style="list-style-type: none"> • RAID 0, RAID 1*, RAID 5, RAID 10 • Supports one RAID array with 2-4 drives • RAID 0 configuration - striped array (supported and configure to order) • RAID 1 configuration - mirrored array (supported and configure to order) • RAID 5 parity striping (supported but not configure to order) • RAID 10 striped and mirrored array (supported but not

System Technical Specifications

		configure to order) *HW RAID functionality not supported by Linux. Use SW RAID functionality provided in the Red Hat Operating system instead.
	Integrated Graphics	No
	Network Controller	Controller Broadcom 5764 PCI-E LAN Controller Memory Integrated 48KB receive buffer and 8KB transmit buffer Data rates supported 10/100/1000 Mb/s Compliance IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control Bus architecture PCIe 1.0a Data path width X1 Data path speed 2.5Gbit per sec per direction transfer rate Data transfer mode Bus-master DMA Power requirement 1.0 watts @ +3.3V AUX supply Boot ROM support Yes Network transfer rate 10BASE-T (half-duplex) 10 Mb/s 10BASE-T (full-duplex) 20 Mb/s 100BASE-TX (half-duplex) 100 Mb/s 100BASE-TX (full-duplex) 200 Mb/s 1000BASE-T (full-duplex) 2000 Mb/s Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional 32 and 64 Management capabilities WOL, PXE 2.1 and ASF 2.0
	SATA Connectors	6 ports/connectors (Include 4 are eSATA configurable with optional eSATA After-Market Option cable kit)
	IEEE 1394a or 1394b	Integrated 1394a (beginning with systems manufactured 3/22/10) No integrated 1394b - optional PCIe card required. Cable from Front IO can be plugged into PCI Card. Not supported in Linux
IEEE 1394 Connector(s)	Front	1 IEEE 1394a (requires optional PCI card to function with systems manufactured before 3/22/10 only)
	Rear	No
	Internal	No
USB Connector(s)	Front	3 on header for front
	Rear	6
	Internal	3 [3 USB 2.0 ports available by one 2x5 header and one 1x5 header: supports either up to two HP Internal USB Port Kits, AMO- EM165AA (one port on each Kit), or one Internal Port Kit and one USB Media Card Reader.]
HD Integrated Audio	High Definition Integrated Realtek ALC262 Audio with Line in, Line Out, Microphone, Headphone Line-in, Line-out, Mic-in x2, and Headphone jacks	
Flash ROM	Yes	
CPU Fan Header	One for each CPU socket	

System Technical Specifications

Chassis Fan Header	2 Rear System Chassis Fan Header 1 Front Chassis Fan Header
Front PCI Fan Header	Yes
Front Control Panel/Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Integrated Trusted Platform Module	TPM 1.2, Infineon
Power Supply Headers	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Clear Password Jumper	Yes
Serial Port	Optional
Parallel Port	No
Keyboard/Mouse	PS/2
Power Supply	650 watt 85% efficient custom power supply (Wide Ranging, Active PFC)
Operating Voltage Range	90 – 269 VAC
Rated Voltage Range	100 - 240 VAC
Rated Line Frequency	50/60Hz
Operating Line Frequency Range	47-66Hz
Rated Input Current	10 A @ 100-240 VAC
Heat Dissipation	Typical = 434 btu/hr (109 kg-cal/hr) Maximum = 964 btu/hr (243 kg-cal/hr)
Power Supply Fan	92x25 mm variable speed
ENERGY STAR® qualified (Config Dependent)	Yes
80 PLUS Compliant	Yes. For the ECOs PSU Efficiency Report for the power supply, please go to this link: http://www.plugloadsolutions.com/psu_reports/SO-034_DELTA_DPS-725AB%20A_650W_Report_mod.pdf .
FEMP Standby Power Compliant	Yes
Power consumption in sleep mode (as defined by ENERGY STAR) – Suspend to RAM (S3)	<5W
Built-in Self Test (BIST) LED	Yes

System Technical Specifications

Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	Withstands power surges up to 2000V	
Hood Lock Header	Yes	
Hood Sensor Header	Yes Integrated in Front Control Panel Cable	
Multibay Header	No	
Integrated Gigabit Ethernet	Integrated Broadcom 5764 Gigabit Ethernet LOM	
Wake on LAN	Yes	
ASF 1.0/2.0 (Alert Standard Format)	Yes	
TPM	Integrated TPM 1.2; Infineon	
Password Clear Header	Yes	
CD-ROM; analog audio cable	No	
AUX; analog audio in	No	
Clear CMOS Button	Yes	
Chassis Speaker Header	Yes (Integrated in Front Control Panel Cable)	
ENERGY STAR® qualified (Config Dependent)	Yes	
Z600 Required Power Supply Info		
Power Supply	650 watt custom power supply – (Wide Ranging Active PFC)	
Operating Voltage Range	90 - 269 VAC	
Rated Voltage Range	100 – 240 VAC	118 VAC
Rated Line Frequency	50-60 Hz	400 Hz
Operating Line Frequency Range	47 – 66 Hz	393 – 407 Hz
Rated Input Current	10 A @ 110-127 VAC 6 A @ 200-240 VAC	10 A @118 VAC
Heat Dissipation (Configuration and software dependent)	Typical 1578 btu/hr (397.7 kg-cal/hr) Maximum 2705 btu/hr (681.8 kg-cal/hr)	
Power Supply Fan	2x60x25 mm variable speed (sleeve-bearing) fans	
Energy Star Compliant (config dependent)	YES	
80 PLUS® Compliant	Yes. For the ECOs PSU Efficiency Report for the power supply, please go to this link: http://www.pluginloadsolutions.com/psu_reports/SO-034_DELTA_DPS-725AB%20A_650W_Report_mod.pdf .	
FEMP Standby Power Compliant@115V (Wake-on LAN disabled)(<2W in S5-Power Off)	YES	
EuP Compliant@230V (<1 W in S5-Power Off)	YES	

System Technical Specifications

Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC) measured at 115V.	<9W
Built-in Self Test LED	YES
Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	YES

System Configuration

Example Configuration #1

Processor Info	1x Intel Xeon E5506
Memory Info	1x1 GB DDR3 1333 (UDIMM)
Graphics Info	NVS290
Disks/Optical/Floppy	1x160GB SATA / 0 Optical / 0 Floppy
PSU	650W 80PLUS® BRONZE

Energy Consumption

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	62.2 W		61.8 W		63.1 W	
Windows Busy Typ(S0)	117.9 W		114.9 W		118.2 W	
Windows Busy Max (S0)	156.9 W		155.1 W		157.5 W	
Sleep (S3)	3.71 W	3.47 W	4.05 W	3.84 W	3.69 W	3.44 W
Off (S5)	1.14 W	1.32 W	1.45 W	1.32 W	1.12 W	0.99 W
Zero Power Mode (EuP)	0.24 W		0.52 W		0.29W	

Heat Dissipation**

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	212.4 btu/hr		210.8 btu/hr		215.2 btu/hr	
Windows Busy Typ(S0)	402.3 btu/hr		392.0 btu/hr		403.4 btu/hr	
Windows Busy Max (S0)	535.6 btu/hr		529.3 btu/hr		538.1 btu/hr	
Sleep (S3)	12.7 btu/hr	11.8 btu/hr	13.8 btu/hr	13.1 btu/hr	12.6 btu/hr	11.7 btu/hr
Off (S5)	3.9 btu/hr	4.5 btu/hr	4.9 btu/hr	4.5 btu/hr	3.8 btu/hr	3.4 btu/hr
Zero Power Mode (EuP)	0.8 btu/hr		1.77 btu/hr		0.7 btu/hr	

Example Configuration #2

Processor Info	2 x Intel Xeon E5506
Memory Info	2x1 GB DDR3 1333MHz (UDIMM)
Graphics Info	1xFX580
Disks/Optical/Floppy	1x250GB SATA / 0 Optical / 0 Floppy
PSU	650W 80PLUS® BRONZE

Energy Consumption

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	89.2 W		87.8 W		90.0 W	
Windows Busy Typ(S0)	294.1 W		287.8 W		294.9 W	
Windows Busy Max (S0)	313.5 W		307.3 W		317.0 W	
Sleep (S3)	5.08 W	4.84 W	5.43W	5.25 W	5.05 W	4.82 W
Off (S5)	1.14 W	1.01 W	1.45 W	1.32 W	1.12 W	0.99 W

System Technical Specifications

Heat Dissipation**

Zero Power Mode (EuP)	0.24 W		0.52 W		0.22 W	
	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	304.5 btu/hr		299.5 btu/hr		307 btu/hr	
Windows Busy Typ (S0)	1003.8 btu/hr		982.3 btu/hr		1006.5 btu/hr	
Windows Busy Max (S0)	1070 btu/hr		1048.8 btu/hr		1081.9 btu/hr	
Sleep (S3)	17.3 btu/hr	16.5 btu/hr	18.5 btu/hr	17.9 btu/hr	17.2 btu/hr	16.5 btu/hr
Off (S5)	3.9 btu/hr	3.5 btu/hr	5.0 btu/hr	4.5 btu/hr	3.8 btu/hr	3.38 btu/hr
Zero Power Mode (EuP)	0.8 btu/hr		1.8 btu/hr		0.8 btu/hr	

Example Configuration #3

Processor Info: 2x Intel Xeon X5570
 Memory Info: 6x2GB DDR3 1333MHz (UDIMM)
 Graphics Info: 1 x FX4800
 Disks/Optical/Floppy: 2x1000GB SATA / 1 Optical / 1 Floppy
 PSU: 1xBroadcom 5761 Gigabit PCIe NIC
 650W 80PLUS® BRONZE

Energy Consumption

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	123.3 W		119.9 W		123.6 W	
Windows Busy Typ (S0)	455.7 W		443.0 W		462.3 W	
Windows Busy Max (S0)	564.8 W		554.4 W		570.7 W	
Sleep (S3)	7.0 W	6.28 W	7.2 W	6.61 W	7.0 W	6.27 W
Off (S5)	1.6 W	0.90W	1.9 W	1.21W	1.6 W	0.88 W
Zero Power Mode (EuP)	0.24 W		0.51 W		0.22 W	

Heat Dissipation**

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	420.8 btu/hr		409.2 btu/hr		421.8 btu/hr	
Windows Busy Typ (S0)	1555.3 btu/hr		1512.0 btu/hr		1577.8 btu/hr	
Windows Busy Max (S0)	1927.7 btu/hr		1892.2 btu/hr		1947.8 btu/hr	
Sleep (S3)	23.9 btu/hr	21.4 btu/hr	24.6 btu/hr	22.6 btu/hr	23.9 btu/hr	21.4 btu/hr
Off (S5)	5.5 btu/hr	3.1 btu/hr	6.5 btu/hr	4.1 btu/hr	5.5 btu/hr	3.0 btu/hr
Zero Power Mode (EuP)	0.8 btu/hr		1.7 btu/hr		0.8 btu/hr	

System Technical Specifications

Example Configuration #4 (ENERGY STAR Qualified)

Processor Info	2x Intel Xeon X5570
Memory Info	6x2GB DDR3 1333MHz (UDIMM)
Graphics Info	1 x FX4800
Disks/Optical/Floppy I/O	2x1000GB SATA / 1 Optical / 1 Floppy
PSU	1xBroadcom 5761 Gigabit PCIe NIC 650W 80PLUS® BRONZE

Energy Consumption

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
<i>On-Idle (ENERGY STAR® Idle (S0))</i>	123.3 W		119.9 W		123.6 W	
<i>ENERGY STAR® P_{MAX}</i> <small>Windows running Linpack and Vmperf</small>	455.7 W		443.0 W		462.3 W	
<i>ENERGY STAR® "Sleep" (S3)</i>	7.0 W	-	7.2 W	-	7.0 W	-
<i>ENERGY STAR® "Standby" (Off) (S5)</i>	1.6 W	-	1.9 W	-	1.6 W	-

Heat Dissipation**

	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
<i>On-Idle (ENERGY STAR® Idle (S0))</i>	420.8 btu/hr		409.2 btu/hr		421.8 btu/hr	
<i>ENERGY STAR® P_{MAX}</i> <small>Windows running Linpack and Vmperf</small>	1555.3 btu/hr		1512.0 btu/hr		1577.8 btu/hr	
<i>ENERGY STAR® "Sleep" (S3)</i>	23.9 btu/hr	-	24.6 btu/hr	-	23.9 btu/hr	-
<i>ENERGY STAR® "Standby" (Off) (S5)</i>	5.5 btu/hr	-	6.5 btu/hr	-	5.5 btu/hr	-

NOTES:

* Energy Star low energy mode

** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions (Entry-level and High-end configurations)

Declared Noise Emissions (Entry-level and High-end configurations)		
System Configuration (Entry level)	Processor Info	Dual Intel® Xeon® X5570 2.93Ghz processors
	Memory Info	4 x 1GB 1333Mhz
	Graphics Info	NVIDIA Quadro NVS 295
	Disks/Optical/Floppy	250GB 7200 rpm SATA / 1 DVD-ROM/ 1 Floppy

System Technical Specifications

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	4.1	22
	Hard drive Operating (random reads)	4.1	23
	Floppy Drive Operating (continuous copy)		
	DVD-ROM Operating (sequential reads)	5.1	37

System Configuration (High-end)	Processor Info	Dual Intel® Xeon® X5570 2.93GHz processors
	Memory Info	6 x 2GB 1333 Mhz
	Graphics Info	NVIDIA FX4800
	Disks/Optical/Floppy	2x300GB 15k SAS / 1 DVD-ROM/ 1 Floppy

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	4.8	32
	Hard drive Operating (random reads)	4.9	33
	Floppy Drive Operating (continuous copy)		
	DVD-ROM Operating (sequential reads)	5.3	38

Environmental Requirements	Temperature	Operating: 5°C to 35°C (40°F to 95°F) Non-operating: -40°C to 60°C (-40°F to 140°F)
	Humidity	Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing
	Maximum Altitude	Operating: 3,048 m (10,000 ft) Non-operating: 9,100 m (30,000 ft)
	Dynamic (new)	Shock Operating: ½-sine: 40g, 2-3ms Non-operating: ½-sine: 160 cm/s, 2-3ms (~100g) square: 422 cm/s, 20g NOTE: Values represent individual shock events and do not indicate repetitive shock events. Vibration Operating random: 0.5g (rms), 5-300 Hz Non-operating random: 2.0g (rms), 10-500 Hz NOTE: Values do not indicate continuous vibration.

System Technical Specifications

	Cooling	Above 1524m (5,000 ft) altitude, maximum operating temperature is de-rated by 1°C (1.8°F) per 305m (1,000 ft) elevation increase
--	----------------	--

Physical Security and Serviceability

Access Panel	Tool-less Includes system board and memory information
Optical Drive	Tool-less, no carrier or rails required
Floppy Drive	Tool-less
Hard Drives	Tool-less
Expansion Cards	Tool-less
Processor Socket	Yes
Green User Touch Points	Yes, on tool-free internal chassis components
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Tool-less
Dual Color Power and HD LED on Front of Computer	Yes
Configuration Record SW	Yes
Over-Temp Warning on Screen	Yes
Restore CD/DVD Set	Restores the computer to its original factory shipping image - Can be obtained via HP Support
Dual Function Front Power Switch	Also acts as a reset switch when held for 4 seconds
Padlock Support	No
Cable Lock Support	Yes, Kensington Cable Lock (optional): Prevents entire system theft only. 3mm x 7mm slot at rear of system
Universal Chassis Clamp Lock Support	No
Solenoid Lock and Hood Sensor	Yes (optional)
Rear Port Control Cover	Yes, locks rear IO cables to prevent cable theft
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enables or disables serial, parallel, USB, 1394, audio, and network ports
Removable Media Write/Boot Control	User can prevent the workstation from writing to or booting from removable media
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration

System Technical Specifications

3.3V Aux Power LED on System PCA	No
NIC LEDs (integrated) (Green & Amber)	Yes
CPUs and Heatsinks	A torx driver (T15) is needed to remove the CPU heatsink(s) before the CPU can be removed. CPU removal is tool-less
Power Supply Diagnostic LED	Yes
Front Power Button	Yes
Rear Power Button	Yes
Front Power LED	Yes, blue (normal), red (fault)
Front Hard Drive Activity LED	Yes, green
Front ODD Activity LED	Yes
Internal Speaker	Yes
System/Emergency ROM Flash Recovery	Recovers corrupted system BIOS
Alert Standard Format (ASF) Specification	Industry-standard specification for network alerting in operating system-absent environments
Cooling Solutions	Air cooled forced convection
Power Supply Fans	2x -- 60mm x 25mm
CPU Heatsink Fan	80mm x 15mm
MXM Heatsink Fan	Rear: 2x -- 92mm x 25mm Front: 80mm x 25mm
Memory Heatsink Fan	80mm x 25mm
HP Advanced System Diagnostics Offline Edition	<p>HP Vision Diagnostics Offline Edition</p> <p>The diagnostics utility must be booted from USB or CD, and enables you to perform testing and to view critical computer hardware and software configuration information from various sources.</p> <p>This utility enables you to:</p> <ul style="list-style-type: none"> ● Run diagnostics ● View the hardware configuration of the system <p>Key features and benefits</p> <p>HP Vision Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest insight into potential system issues, is the configuration of the system. Vision Diagnostics helps provide higher system availability. Typical uses of Vision Diagnostics are:</p> <ul style="list-style-type: none"> ● Testing and diagnosing apparent hardware failures ● Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance

System Technical Specifications

	<ul style="list-style-type: none"> • Sending configuration information to another location for more in-depth analysis
Access Panel Key Lock	Yes, prevents removal of the access panel and all internal components including optical and floppy drives
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> • Allows the system to wake from a low power mode • Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system
Trusted Platform Module Chip with optional ProtectTools Software	Yes, Infineon SLB9635TT1.2
Integrated Chassis Handles	Yes
Power Supply	Tool-less, direct-connect (blind-mate)
PCI Card Retention	Yes, rear (all), middle (full-height cards), front (full-length with extender cards)
Flash ROM	SPI ROM
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder	Yes
DIMM Connectors	Yes
HP ProtectTools Security Manager	Yes - Not supported on Microsoft XP x64 or Linux

BIOS	
BIOS 32-bit Services	Standard BIOS 32-Bit Service Directory Proposal v0.4
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0
BBS	BIOS Boot Specification v1.01
WMI Support	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
BIOS Boot Spec 1.01+	Provides more control over how and from what devices the workstation will boot
BIOS Power On	Users can define a specific date and time for the system to power on
ROM Based Computer Setup Utility (F10)	Review and customize system configuration settings controlled by the BIOS
System/Emergency ROM Flash Recovery with Video	Recovers system BIOS in corrupted Flash ROM
Replicated Setup	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
SMBIOS	System Management BIOS 2.5, previously known as DMI BIOS, for system management information

System Technical Specifications

Boot Control	Disables the ability to boot from removable media on supported devices
Memory Change Alert	Alerts management console if memory is removed or changed
Thermal Alert	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> ● NORMAL - normal temperature ranges. ● ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown. ● SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs.
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
ACPI (Advanced Configuration and Power Management Interface)	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems.
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
Remote Wakeup/Remote Shutdown	System administrators can power on, restart, and power off a client computer from a remote location
ASF 2.0 Compliant	Allows workstation status to be monitored on a remote console
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time
Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system
ROM revision levels	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information.
System board revision level	Allows management SW to read revision level of the system board Revision level is digitally encoded into the HW and cannot be modified
Start-up Diagnostics (Power-on Self-Test)	Assesses system health at boot time with selectable levels of testing
Auto Setup when new hardware installed	System automatically detects the addition of new hardware
Keyboard-less Operation	The system can be booted without a keyboard
Localized ROM Setup	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings
Asset Tag	Allows the user or MIS to set a unique tag string in non-volatile memory
Per-slot Control	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually
Adaptive Cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics
Pre-boot Diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED
Industry Standard Specification Support	

System Technical Specifications

Industry Standard	Revision Supported by the BIOS
ACPI	Advanced Configuration and Power Management Interface, Version 2.0
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
CD Boot	"El Torito" Bootable CD-ROM Format Specification Version 1.0
EDD	<ul style="list-style-type: none"> Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	<ul style="list-style-type: none"> PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft 0.7
PCI Express	PCI Express Base Specification, Revision 2.0
PMM	POST Memory Manager Specification, Version 1.01
SATA	<ul style="list-style-type: none"> Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
TPM	Trusted Computing Group TPM Specification Version 1.2
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB	Universal Serial Bus Revision 1.1 Specification Universal Serial Bus Revision 2.0 Specification
SMBIOS	System Management BIOS Reference Specification, Version 2.6

Social and Environmental Responsibility

Eco-Label Certifications & Declarations	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> ENERGY STAR® (Configuration dependent, Microsoft Windows only) EPEAT Gold® for all ENERGY STAR® configurations. For more details and a list of countries in which this product is registered, please visit the following link: http://www.epeat.net/ProductDisplay.aspx?return=search&action=view&search=true&productid=2485&ProductType=5&epeatcountryid=1 US Federal Energy Management Program (FEMP) China Energy Conservation Program IT ECO declaration Japan PC Green label* <p>* This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'</p>
Batteries	<p>This product complies with ISO standards:</p> <ul style="list-style-type: none"> EU Directive 91/ 157/ EEC EU Directive 93/ 86/ EEC EU Directive 98/ 101/ EEC <p>Batteries used in the product do not contain:</p>

System Technical Specifications

	<ul style="list-style-type: none"> ● Mercury greater than 5ppm by weight ● Cadmium greater than 10ppm by weight ● Lead greater than 4,000ppm by weight <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p>
Restricted Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none"> ● Asbestos ● Batteries – Mercury ● Batteries – Cadmium ● Batteries – Lead (non-rechargeable) ● Batteries – Non-rechargeable Alkaline and Carbon-Zinc Batteries ● Batteries – Classification as "Not Restricted" for Transport ● Brominated Flame Retardants (PBBs, PBDEs, including DecaBDE) ● Brominated Flame Retardants (all BFRs in external case plastic parts) ● Cadmium and its compounds ● Certain Azo Colorants ● Chlorinated Hydrocarbons ● Chlorinated Paraffins ● Formaldehyde ● Formaldehyde – emissions ● Hexavalent Chromium and its compounds in metallic applications ● Hexavalent Chromium and its compounds in non-metallic applications ● Lead and its compounds ● Lead in paint ● Lead in Polyvinyl Chloride (PVC) coating of external cables, wires and cords ● Mercury and its compounds ● Nickel on external surfaces ● Ozone Depleting Substances (ODS) ● Polycyclic Aromatic Hydrocarbons (PAH) ● Perfluorooctane sulfonates (PFOS) in parts ● Perfluorooctane sulfonates (PFOS) in preparations ● Polychlorinated Biphenyls (PCBs) and Polychlorinated Terphenyls (PCTs) ● Polychlorinated Naphthalenes ● Polyvinyl Chloride (PVC) in external case plastic parts ● Radioactive Substances ● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
End-of-Life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>
Hewlett-Packard Corporate Environmental Information	<p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report: http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</p> <p>Eco-label certifications: http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</p>

System Technical Specifications

	ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html
Additional Information	<ul style="list-style-type: none"> This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. This product contains 0% recycled materials (by wt.) This product is >90% recycle-able when properly disposed of at end of life.
Packaging	<p>HP Workstation product packaging meets the following (refer to the HP General Specification for the Environment at: http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none"> Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment (see link above). Does not contain ozone-depleting substances (ODS). Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed. Maximize the use of post-consumer recycled content materials in packaging materials. All packaging material is recyclable. All packaging material is designed for ease of disassembly. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
Packaging Materials	
Internal	LDPE Foam: .740 kg
External	Cardboard carton and insert: 1.537 kg

Manageability	
Industry Standard Specifications	<p>This product meets the following industry standard specifications for manageability functionality:</p> <ul style="list-style-type: none"> ASF 2.0 (via integrated Broadcom LAN)
Remote Manageability Software Solutions	<p>The HP Z600 Workstation is supported on the following remote manageability software consoles:</p> <ul style="list-style-type: none"> LANDesk Management Suite (PSG recommended solution) Microsoft System Center Configuration Manager HP Client Automation Enterprise <p>For questions or support for manageability needs, please visit: http://www.hp.com/go/easydeploy</p>
System Software Manager	<p>For questions or support for SSM, please visit: http://www.hp.com/go/ssm</p>
Service, Support, and Warranty	<p>On-site Warranty and Service (Note 1): Three-years, limited warranty and service offering delivers on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 8am - 5pm. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.</p> <p>NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on</p>

System Technical Specifications

	<p>commercially reasonable best effort and may vary by country.</p> <p>NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries. HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: http://www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at: http://www.hp.com/hps/carepack. Service levels and response times for HP Care Packs may vary depending on your geographic location.</p>
Product Change Notification	<ul style="list-style-type: none"> • Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile • PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition • Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support

Global Series SKUs	
Title	Z600 /Zl2.40+/250K /8Wa /XA/kp (A9F62AW)
OS	Genuine Windows® 7 Professional 64-bit
Base Unit	WD059AV - HP Z600 RDIMM Workstation w/ 650W 85% PSU
Localization Unit	FY914AV (with all WS supported localizations)
Processor 1	Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo
Processor 2	Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo
Memory	8GB (4x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU
Hard Drive	250GB SATA 7200 rpm 3Gb/s 3.5" HDD
Optical Drive	HP 16X DVD-ROM SATA Drive (non Lightscribe)
Keyboard	HP USB Standard Keyboard
Mouse	HP USB 2-Button Optical Scroll Mouse

Title	Z600e/ZL2.66+/300L /6.0W /295+A/kp (XN057AW)
OS	Genuine Windows® 7 Professional 64-bit
Base Unit	WD059AV - HP Z600 RDIMM Workstation w/ 650W 85% PSU
Localization Unit	FY914AV (with all WS supported localizations)
Processor 1	Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo
Processor 2	Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo
Memory	6GB (6x1GB) DDR3-1333 ECC Unbuffered RAM 2-CPU
Hard Drive	300GB SATA 10K rpm SFF HDD
Graphics	NVIDIA Quadro NVS 295 256MB PCIe Graphics Card
Keyboard	HP USB Standard Keyboard
Mouse	HP USB 2-Button Optical Scroll Mouse

System Technical Specifications

Copyright/Disclaimers	<ul style="list-style-type: none">• The above SKU, XN057AW, also includes a 2nd NVS 295 Graphics Card and is Energy Star 5.0 qualified. <p>© 2011 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and QuickPath are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.</p>
------------------------------	--

Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section. HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers—no special programs, no additional cost—no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

Processors	Product #	Offering
	WG712AV	Intel Xeon E5620 2.40 12MB/1066 4C CPU-1
	WG720AV	Intel Xeon E5620 2.40 12MB/1066 4C CPU-2
	WG715AV	Intel Xeon X5650 2.66 12MB/1333 6C CPU-1
	WG723AV	Intel Xeon X5650 2.66 12MB/1333 6C CPU-2

Hard Drives	Product #	Offering
	FX560AV	HP 250GB SATA 7200 1st HDD
	FX570AV	HP 250GB SATA 7200 2nd HDD
	FX562AV	HP 500GB SATA 7200 1st HDD
	FX572AV	HP 500GB SATA 7200 2nd HDD

Graphics	Product #	Offering
	FY915AV	NVIDIA Quadro NVS 295 256MB Graphics Card
	FY924AV	NVIDIA Quadro NVS 295 256MB Graphics (2nd)
	WS077AV	NVIDIA Quadro 2000 1GB Graphics Card
	WS078AV	NVIDIA Quadro 2000 1GB Graphics Card (2nd)

Memory	Product #	Offering
	NL786AV	6GB (3x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
	NL787AV	12GB (3x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
	NL794AV	12GB (6x2GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

Optical and Removable Storage	Product #	Offering
	FX600AV	HP 16X DVD+-RW SuperMulti SATA 1st Drive
	FX602AV	HP 16X DVD+-RW SuperMulti SATA 2nd Drive

Input Devices	Product #	Offering
	FX596AV	HP USB Optical Scroll Mouse
	FY931AV	HP USB Standard Keyboard

Stable & Consistent Offerings

Operating Systems**Product #****Offering**

VM436AV

Genuine Windows® 7 Professional 64-bit

Technical Specifications - Processors

Processors	Intel® Xeon® Processor X5675 6C 3.06 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	LB215AA
	Intel® Xeon® Processor X5672 4C 3.20 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	LB214AA
	Intel® Xeon® Processor X5660 6C 2.80 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	WG732AA
	Intel® Xeon® Processor X5650 6C 2.66 GHz, 95W, 12M cache, 6.40GT/s QPI, DDR3 1333MHz, HT, Turbo	WG731AA
	Intel® Xeon® Processor E5649 6C 2.53 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo	LB212AA
	Intel® Xeon® Processor X5647 4C 2.93 GHz, 130W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	LB213AA
	Intel® Xeon® Processor E5645 6C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1333MHz, HT, Turbo	LB211AA
	Intel® Xeon® Processor E5640 4C 2.66 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	WG730AA
	Intel® Xeon® Processor E5620 4C 2.40 GHz, 80W, 12M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo	WG728AA
	Intel® Xeon® Processor E5607 4C 2.26 GHz, 80W, 8M cache, 4.80 GT/s QPI, DDR3 1066MHz	LB210AA
	Intel® Xeon® Processor E5606 4C 2.13 GHz, 80W, 8M cache, 4.80 GT/s QPI, DDR3 1066MHz	LB209AA

Introduction

Intel's latest-generation microarchitecture represents the next step in unprecedented processor performance and dynamic scalability. Designed from the ground up to take advantage of hafnium-based Intel® 32nm hi-k metal gate silicon technology, Intel® Microarchitecture (Westmere) unleashes parallel processing performance enabled by Intel® QuickPath technology providing an integrated memory controller and high-speed interconnect per independent processing core.

Performance and Features

Maximum multitasking performance Intel® Microarchitecture (Westmere) offers the latest in processor innovation, including:

Dynamic scalability, managed cores, threads, cache, interfaces, and power for energy-efficient performance on demand.

Design and performance scalability for servers, workstations, notebooks and desktops with support for 4-12 cores and up to 24+ threads with Intel® Hyper-Threading Technology (Intel® HT Technology), and scalable cache sizes, system interconnects, and integrated memory controllers.

Intel® Turbo Boost Technology delivers additional performance automatically when needed by taking advantage of the processor's power and thermal headroom. This enables increased performance of both multi-threaded and single-threaded workloads.

Intel Hyper-Threading Technology brings high-performance applications into mainstream computing with 1-24 threads optimized for a new generation multi-core processor architecture.

Technical Specifications - Processors

Scalable shared memory of Intel® QuickPath technology features memory distributed to each processor with integrated memory controllers and high-speed point-to-point interconnects to unleash the performance of future versions of next-generation Intel® multi-core processors.

Multi-level shared cache improves performance and efficiency by reducing latency to frequently used data.

Turbo Boost Technology

This technology, now built into Xeon 5600 processors, will increase the speed of your processor on demand (from OS) if the CPU is operating below power / thermal specifications:

Benefit of Turbo Boost (how much CPU speed up) depends on number of active cores.

Likelihood of Turbo Boost operation increases when fewer cores are active.

Likelihood of Turbo Boost operation increases when dynamic power mgt is enabled

Technical Specifications - Monitors / Displays

HP LP2065 20-inch LCD Monitor	QuickSpecs URL	http://h18000.www1.hp.com/products/quickspecs/12377_div/12377_div.html
	Part Number	Workstation Volume Channel EF227A4
		Workstation Value Channel EF227A5
HP LP2475w 24-inch Widescreen LCD Monitor	QuickSpecs URL	http://h18000.www1.hp.com/products/quickspecs/13134_div/13134_div.html
	Part Number	KD911A8
HP DreamColor LP2480zx Professional Display	QuickSpecs URL	http://h18000.www1.hp.com/products/quickspecs/13081_div/13081_div.html
	Part Number	GV546A8
HP LP3065 30-inch Widescreen LCD Monitor	QuickSpecs URL	http://h18000.www1.hp.com/products/quickspecs/12621_div/12621_div.html
	Part Number	Workstation Volume and Business Desktop Channel EZ320A4#XXX
		Workstation Value Channel EZ320A5#XXX
HP ZR22w 21.5-inch S-IPS LCD Monitor	QuickSpecs URL	http://h18000.www1.hp.com/products/quickspecs/13556_div/13556_div.html
	Part Number	VM626A4
HP ZR24w 24-inch S-IPS LCD Monitor	QuickSpecs URL	http://h18000.www1.hp.com/products/quickspecs/13557_div/13557_div.html
	Part Number	VM633A8
HP ZR30w 30-inch S-IPS LCD Monitor	QuickSpecs URL	http://h18000.www1.hp.com/products/quickspecs/13635_div/13635_div.html
	Part Number	VM617A8

Technical Specifications - Hard Drives

HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations	600GB SAS 15K rpm 6Gb/s 3.5" HDD	Capacity	600GB		
		Height	1 in; 2.54 cm		
		Width		Media Diameter	3.5 in; 8.9 cm
				Physical Size	4 in; 10.17 cm
		Interface	SAS		
		Synchronous Transfer Rate (Maximum)	6.0 Gb/s		
		Buffer	16 MB		
		Seek Time (typical reads, includes controller overhead, including settling)		Single Track	0.2 ms
				Average	3.4 ms
				Full Stroke	6.6 ms
		Rotational Speed	15,000 rpm		
		Logical Blocks	1,172,123,568 - 512 byte blocks		
		Operating Temperature	50° to 95° F (10° to 35° C)		

	450GB SAS 15K rpm 6Gb/s 3.5" HDD	Capacity	450GB		
		Height	1 in; 2.54 cm		
		Width		Media Diameter	3.5 in; 8.9 cm
				Physical Size	4 in; 10.17 cm
		Interface	SAS		
		Synchronous Transfer Rate (Maximum)	6Gb/s		
		Buffer	16MB		
		Seek Time (typical reads, includes controller overhead, including settling)		Single Track	0.2 ms
				Average	3.4 ms
				Full Stroke	6.6 ms
		Rotational Speed	15,000 rpm		
		Operating Temperature	50° to 95° F (10° to 35° C)		

	300GB SAS 15K rpm 6Gb/s 3.5" HDD	Capacity	300GB		
		Height	1 in; 2.54 cm		
		Width		Media Diameter	3.5 in; 8.9 cm
				Physical Size	4 in; 10.17 cm
		Interface	SAS		
		Synchronous Transfer Rate (Maximum)	6Gb/s		
		Buffer	16MB		

Technical Specifications - Hard Drives

	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.2 ms
		Average	3.4 ms
		Full Stroke	6.6 ms
	Rotational Speed		15,000 rpm
	Operating Temperature		50° to 95° F (10° to 35° C)
HP 300GB SAS 10K SFF HDD	Capacity		300GB
	Height		0.6 in; 1.53 cm
	Width	Media Diameter	2.5 in; 6.36 cm
		Physical Size	2.75 in; 6.99 cm
	Interface		SAS 6Gb/s
	Synchronous Transfer Rate (Maximum)		Up to 600MB/s
	Buffer		64MB
	Cache		multi-segmentable cache buffer
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.4 ms (max)
		Average	3.6 ms
		Full Stroke	7.3 ms
	Rotational Speed		10,000 rpm
	Logical Blocks		585,937,500
	Operating Temperature		41° to 131° F (5° to 55° C)
HP 450GB SAS 10K SFF HDD	Capacity		450GB
	Height		0.6 in; 1.53 cm
	Width	Media Diameter	2.5 in; 6.36 cm
		Physical Size	2.75 in; 6.99 cm
	Interface		SAS 6Gb/s
	Synchronous Transfer Rate (Maximum)		Up to 600MB/s
	Buffer		64MB
	Cache		multi-segmentable cache buffer
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.4ms (max)
		Average	3.6ms
		Full Stroke	7.3ms
	Rotational Speed		10,000 rpm
	Operating Temperature		41° to 131° F (5° to 55° C)
HP 600GB SAS 10K SFF	Capacity		600GB

Technical Specifications - Hard Drives

HDD

Height	0.6 in; 1.53 cm
Width	Media Diameter 2.5 in; 6.36 cm
	Physical Size 2.75 in; 6.99 cm
Interface	SAS 6Gb/s
Synchronous Transfer Rate (Maximum)	Up to 600MB/s
Buffer	64MB
Cache	multi-segmentable cache buffer
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.4 ms (max)
	Average 3.6 ms
	Full Stroke 7.3 ms
Rotational Speed	10,000 rpm
Logical Blocks	1,172,123,568
Operating Temperature	41° to 131° F (5° to 55° C)

SATA (Serial ATA) Hard Drives for HP Workstations

600GB SATA 10K rpm SFF in 3.5" Frame HDD

Capacity	600GB
Height	1 in; 2.54 cm
Width	Media Diameter 2.5 in; 6.36 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (3.0Gb/s)
Synchronous Transfer Rate (Maximum)	Up to 300MB/s
Buffer	32MB
Cache	Segmentable
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.4 ms (max)
	Average 3.6 ms
	Full Stroke 9.0 ms
Rotational Speed	10,000 rpm
Logical Blocks	1,172,123,568
Operating Temperature	41° to 131° F (5° to 55° C)

300GB SATA 10K rpm SFF in 3.5" Frame HDD

Capacity	300,069,052,416 bytes
Height	1 in; 2.54 cm
Width	Media Diameter 2.5 in; 6.36 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
Synchronous Transfer Rate (Maximum)	Up to 300 MB/s

Technical Specifications - Hard Drives

	Buffer	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)		Single Track 0.7 ms (maximum)
			Average 4.4 ms
			Full Stroke 9.5 ms
	Rotational Speed	10,000 rpm	
	Logical Blocks	586,072,368	
	Operating Temperature	41° to 131° F (5° to 55° C)	
160GB SATA 10K rpm SFF in 3.5" Frame HDD	Capacity	160,041,885,696 bytes	
	Height	1 in; 2.54 cm	
	Width		Media Diameter 2.5 in; 6.36 cm
			Physical Size 4 in; 10.17 cm
	Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	Up to 300 MB/s	
	Buffer	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)		Single Track 0.7 ms (maximum)
			Average 4.4 ms
			Full Stroke 9.5 ms
	Rotational Speed	10,000 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	41° to 131° F (5° to 55° C)	
2.0TB SATA 7200 rpm 3Gb/s 3.5" HDD	Capacity	2.0TB	
	Height	1 in; 2.54 cm	
	Width		Media Diameter 3.5 in; 8.9 cm
			Physical Size 4.0 in; 10.17 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing Enabled	
	Synchronous Transfer Rate (Maximum)	Up to 300MB/s	
	Buffer	64MB	
	Seek Time (typical reads, includes controller overhead, including settling)		Single Track 1.0 ms
			Average 10 ms
			Full Stroke Not Specified
	Rotational Speed	7,200 rpm	
	Logical Blocks	3,907,029,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Hard Drives

1.5TB SATA 7200 rpm 3Gb/s 3.5" HDD

Capacity	1.5TB
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4.0 in; 10.17 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
Synchronous Transfer Rate (Maximum)	Up to 300MB/s
Buffer	32MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms
	Average 11 ms
	Full Stroke 21 ms
Rotational Speed	7,200 rpm
Logical Blocks	2,930,277,168
Operating Temperature	41° to 131° F (5° to 55° C)

1TB SATA 7200 rpm 3.0Gb/s 3.5" HDD

Capacity	1,000,204,886,016 bytes
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
Synchronous Transfer Rate (Maximum)	Up to 300 MB/s
Buffer	32 MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms
	Average 11 ms
	Full Stroke 21 ms
Rotational Speed	7,200 rpm
Logical Blocks	1,953,525,168
Operating Temperature	41° to 131° F (5° to 55° C)

500GB SATA 7200 rpm 3Gb/s 3.5" HDD

Capacity	500,107,862,016 bytes
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled

Technical Specifications - Hard Drives

	Synchronous Transfer Rate (Maximum)	300 MB/s	
	Buffer	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
		Average	11 ms
		Full Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	
320GB SATA 7200 rpm 3Gb/s 3.5" HDD	Capacity	320,072,933,376 bytes	
	Height	1 in; 2.54 cm	
	Width	Media Diameter	3.5 in; 8.9 cm
		Physical Size	4.0 in; 10.17 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	300 MB/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
		Average	12 ms
		Full Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	41° to 131° F (5° to 55° C)	
250GB SATA 7200 rpm 3Gb/s 3.5" HDD	Capacity	250,059,350,016 bytes	
	Height	1 in; 2.54 cm	
	Width	Media Diameter	3.5 in; 8.9 cm
		Physical Size	4 in; 10.17 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	300 MB/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
		Average	11 ms
		Full Stroke	21 ms
	Rotational Speed	7,200 rpm	

Technical Specifications - Hard Drives

	Logical Blocks	488,397,168		
	Operating Temperature	41° to 131° F (5° to 55° C)		
160GB SATA 7200 rpm 3Gb/s 3.5" HDD	Capacity	160,041,885,696 bytes		
	Height	1 in; 2.54 cm		
	Width		Media Diameter 3.5 in; 8.9 cm	
			Physical Size 4 in; 10.2 cm	
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled		
	Synchronous Transfer Rate (Maximum)	300 MB/s		
	Buffer	8 MB		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms	
		Average	11 ms	
		Full Stroke	21 ms	
		Rotational Speed	7,200 rpm	
		Logical Blocks	312,581,808	
		Operating Temperature	41° to 131° F (5° to 55° C)	

HP Solid State Drives for Workstations

HP 160GB SATA SSD	Capacity	160GB	
	Width		Media Diameter NaN in; NaN cm
			Physical Size 2.5 in; 6.36 cm
	Interface	SATA	
	Synchronous Transfer Rate (Maximum)	3Gb/s	
	Operating Temperature	32° to 158° F (0° to 70° C)	
HP 300GB SATA SSD	Capacity	300GB	
	Width		Physical Size 2.5 in; 6.36 cm
	Interface	SATA	
	Synchronous Transfer Rate (Maximum)	3Gb/s	
	Operating Temperature	32° to 158° F (0° to 70° C)	

Technical Specifications - Hard Drive Controllers

LSI 3041E 4-Port SAS 3.0 Gb/s RAID Card	PCI Bus	PCI-Express x4 lanes	
	PCI Modes	Bus Master DMA	
	RAID Levels	RAID 0, 1, 1E and 10E	
	PCI Data Burst Transfer Rate	250 MB/s per lane half duplex 500 MB/s per lane full duplex 1,000 MB/s 4-lane half duplex	
	SAS Bandwidth	Half Duplex	Single lane – 300 MB/s Wide Port (2 lanes) – 600 MB/s Wide Port (4 lanes) – 1200 MB/s
		Full Duplex	Single SAS Lane – 600 MB/s Wide Port (2 lanes) – 1200 MB/s Wide Port (4 lanes) – 2400 MB/s
	PCI Card Type	3.3 volt add-in card	
	PCI Voltage	12 V ± 10%	
	PCI Power	7.5 Watts	
	Bracket	Full height and Low-profile	
	Certification Level	PCI-Express 1.0a	
	IO Bus	Four 3 Gb/s SAS/SATA ports	
	SAS Processor	LSISAS1064E	
	Internal Connectors	Four- SATA x1 connectors	
	External Connectors	None	
Maximum Number of SCSI Devices	122		
LED Indicators	On-board activity and fault LEDs		
Integrated Mirroring	Integrated Mirroring option available		

LSI 9212 4-Port SAS 6Gb/s RAID Card	PCI Bus	8-lane, 5GT/s PCI Express 2.0	
	PCI Modes	Bus Master DMA	
	RAID Levels	RAID 0, 1, 1E and 10	
	PCI Data Burst Transfer Rate	Half Duplex, x4 PCIe 2000 MB/s Full Duplex, x8 PCIe 4000 MB/s	
	SAS Bandwidth	Half Duplex	Single lane - 600 MB/s Wide Port (2 lanes) - 1200 MB/s Wide Port (4 lanes) - 2400 MB/s
		Full Duplex	Single SAS Lane - 1200 MB/s Wide Port (2 lanes) - 2400 MB/s Wide Port (4 lanes) - 4800 MB/s
	PCI Card Type	3.3V Add-in card	
	PCI Voltage	12 V ± 10%	
	PCI Power	<13.5 Watts	
	Bracket	Full height and Low-profile	

Technical Specifications - Hard Drive Controllers

Certification Level	PCI-Express 2.0
IO Bus	1x4 6Gb/s SAS ports
SAS Processor	LSISAS2004
Internal Connectors	Four x1 SATA
External Connectors	None
Maximum Number of SCSI Devices	256
LED Indicators	Internal Activity/Fault per x4 port - Heartbeat

LSI MegaRAID® SAS 8888ELP Host Bus Adapter (HBA)

PCI Bus	PCI-Express x8 lanes
PCI Modes	Bus Master DMA
RAID Levels	RAID 0, 1, and 5 RAID spans 10 and 50
PCI Data Burst Transfer Rate	Up to 3Gb/s per port
Full Duplex	Up to 1.5 GB/s
PCI Voltage	+3.3V Add-in Card
PCI Power	19.2 Watts Maximum
Certification Level	PCI-Express 1.0a
IO Bus	Eight 3Gb/s SAS/SATA ports
Internal Connectors	Two SAS SFF8087 x4
External Connectors	Two SAS SFF8088 x4
Maximum Number of SCSI Devices	32
LED Indicators	Connector LEDs indicate whether the internal or external connector is active for ports 0-3 and 4-7

Technical Specifications - Hard Drive Controllers

LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit	PCI Bus	PCI-Express (Gen2) V2.0 x8 lanes
	PCI Modes	Bus Master DMA
	RAID Levels	RAID 0, 1, 5, and 6
		RAID spans 10, 50 and 60
	PCI Data Burst Transfer Rate	Up to 4GB/s
	PCI Card Type	Low profile, single PCIe slot design with full height bracket.
		The optional iBBU08 Battery Backup unit mounts on the controller card and the assembly remains within a single PCIe slot width.
	PCI Voltage	+3.3V Add-in Card
	PCI Power	12.5 Watts
	Certification Level	PCI-Express 2.0
	IO Bus	Eight 3 Gb/s and 6Gb/s compatible SAS/SATA ports
	Internal Connectors	Two SAS SFF8087 x4
	External Connectors	None
	Maximum Number of SCSI Devices	32. NOTE: HP Workstations do not support this many internal drives.
LED Indicators	Connector LEDs indicate whether the internal connector is active for ports 0-3 and 4-7	

Technical Specifications - Graphics

NVIDIA Quadro NVS 295 256MB Graphics Card	Form Factor	2.731 inches (H) × 6.600 inches (L), Half-Height
	Graphics Controller	NVIDIA Quadro NVS 295 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	256 MB GDDR3 SDRAM unified graphics memory
	Connectors	2 DisplayPort Comes with 2 DisplayPort to DVI-D Adapters ('DisplayPort to VGA' and 'DisplayPort to DL DVI' adapters available as an accessory)
	Maximum Resolution	Two DisplayPort outputs drive two digital displays up to 2560 x 1600
	Display Output	NOTE: This card supports up to two displays <ul style="list-style-type: none">• Drives DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking• Drives DVI enabled digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable)
	Supported Graphics APIs	OpenGL 3.0 DirectX 10.0
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit) <i>* WS4 not supported on Z200 & Z200 SFF</i> Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation (64-bit and 32-bit) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
	Power Consumption	<24 Watts

Technical Specifications - Graphics

NVIDIA Quadro NVS 450 512 MB PCIe Graphics Card	Form Factor	ATX Full Height, 1/2 length Passive cooling
	Bus Type	PCI Express x16, Generation 2.0
	Memory	512 MB GDDR3 (256MB per GPU)
	Connectors	Four DisplayPort; Four DisplayPort to DVI-D adapters included. (‘DisplayPort to VGA’ and ‘DisplayPort to Dual Link DVI’ adapters available as an accessory)
	Maximum Resolution	DisplayPort connectors support ultra-high-resolution panels (up to 2560 x 1600)
		NOTE: This card supports up to four displays
	Supported Graphics APIs	OpenGL 3.0 DirectX 10.0
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Microsoft Windows Vista (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
		SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
	Power Consumption	<40 Watts

NVIDIA NVS 300 512MB Graphics Card	Form Factor	2.7 inches (H) x 5.7 inches (L), Half-Height
	Graphics Controller	NVIDIA NVS 300 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	512 MB GDDR3 SDRAM unified graphics memory
	Connectors	DMS-59 Includes DMS-59 to Dual DVI-I adapter DMS-59 to Dual DisplayPort adapter and DMS-59 to Dual VGA adapter available as an option DMS-59 to Dual DisplayPort adapter required for HP ZR30w Display
	Maximum Resolution	DVI: two digital displays up to 1920 x 1200 DisplayPort: two digital displays up to 2560 x 1600 VGA: two analog displays up to 1920 x 1080
	Image Quality Features	
	Display Output	This card support up to two displays: <ul style="list-style-type: none">• Drives DVI enabled digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking• Drives DisplayPort enabled digital displays at resolutions up to 2560 x

Technical Specifications - Graphics

1600 at 60 Hz with reduced blanking (through optional DMS-59 to DisplayPort adapter)

- Drives VGA enabled analog displays at resolutions up to 1920 x 1080 (through optional DMS-59 to VGA adapter)

Supported Graphics APIs

OpenGL 3.3
DirectX 10.1

Available Graphics Drivers

Genuine Windows 7 Professional (64-bit and 32-bit)
Genuine Windows Vista Business (64-bit and 32-bit)
Microsoft Windows XP Professional (64-bit and 32-bit)
Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation
Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from: <ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

Power Consumption

<18 Watts

AMD FirePro 2270 512MB Graphics Card**Form Factor**

Low Profile, Half Length, 2.3" x 6.6"

Graphics Controller

AMD FirePro™ 2270 Professional Graphics

Bus Type

PCI Express™ x16 Generation 2.0

Memory

512MB DDR3

Connectors

DMS-59 connector to support breakout cables for dual DisplayPort, DVI and VGA output.

DMS-59 to Dual DVI adapter included.

(Display Port and VGA adapters sold separately)

Maximum Resolution

Digital 2560x1600 (DisplayPort)

Analog 1920x1200 (DVI 60 Hz/ VGA 75Hz)

RAMDAC

400 MHz DAC, 10-bit per channel

Display Output

Card supports up to two displays

Supported Graphics APIs

DirectX 11 and OpenGL 4.0

Available Graphics Drivers

Genuine Windows 7 Professional (64-bit and 32-bit)

Genuine Windows Vista Business (64-bit and 32-bit)

Microsoft Windows XP Professional (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Power Consumption

17W Maximum

Technical Specifications - Graphics

NVIDIA Quadro NVS 290	Form Factor	Low Profile
256 MB PCIe Graphics Card	Bus Type	PCIe x16
	Memory	256 MB 400MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	DMS-59, includes DMS-59 to Dual DVI-I cable. DMS-59 to Dual VGA cable available as an option.
	Maximum Resolution	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	RAMDAC	Integrated dual 400MHz
	Image Quality Features	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	Supported Graphics APIs	OGL 2.1 & DX10 Support; Shader Model 4.0
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from: <ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

Technical Specifications - Graphics

NVIDIA Quadro 400 512MB Form Factor Graphics Card

Graphics Controller	Low Profile, 2.7 inches (H) x 5.6 inches (L) NVIDIA Quadro 400 Graphics Board
Bus Type	PCI Express x 16, Generation 2.0
Memory	512MB DDR3 SDRAM
Connectors	One (1) Dual-link DVI-I One (1) DisplayPort 1.1 Includes one DisplayPort to DVI-D adapter
Maximum Resolution	DisplayPort 1.1: 2560 x 1600 @ 60 Hz Dual Link DVI-I: 2560 x 1600 @ 60 Hz Analog: 2048 x 1536 @ 85 Hz
RAMDAC	Dual internal 400 MHz DACs
Display Output	This card supports up to two displays
Supported Graphics APIs	OpenGL 3.2 DirectX 10.1 Shader Model 4.1
Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
Power Consumption	HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Novell SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com < 35 Watts

NVIDIA Quadro 600 1GB Graphics Card

Form Factor	2.731" H x 6.6" L Single Slot Small Form Factor
Graphics Controller	NVIDIA Quadro 600 Graphics Card
Bus Type	PCI Express 2.0 x16
Memory	1 GB GDDR3 128-bit
Connectors	1 DVI-I output, 1 DisplayPort output One DP to DVI adapter included with card
Maximum Resolution	DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
Shading Architecture	Shader Model 5.0

Technical Specifications - Graphics

Supported Graphics APIs	OpenGL 4.1 DirectX 11
Available Graphics Drivers	CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
Power Consumption	40 Watts

AMD FirePro V3900 1GB Graphics Card

Form Factor	Full height, half length (full-height bracket included)
Graphics Controller	AMD FirePro™ V3900 professional graphics
Bus Type	PCI Express® x16, Generation 2.1
Memory	1GB DDR3 memory
Connectors	1 DL DVI, 1 DP output One DP to DVI adapter included
Maximum Resolution	2560x1600 per display (5120x1600 max. horizontal resolution)
Display Output	1 DisplayPort® 1.2 1 Dual-link DVI
Supported Graphics APIs	OpenCL™ 1.1, DirectX® 11 and OpenGL 4.2
Available Graphics Drivers	Genuine Windows® 7 Professional (64-bit and 32-bit) Genuine Windows Vista® Business (64-bit and 32-bit) Microsoft® Windows XP® Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
Power Consumption	<50W
Note	AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See www.amd.com/firepro for details.

Technical Specifications - Graphics

AMD FirePro V4900 1GB Graphics Card	Form Factor	Full height (4.37 in) , half length (6.61 in)
	Graphics Controller	AMD FirePro™ V4900 Professional Graphics
	Bus Type	PCI Express™ x16, Generation 2.1
	Memory	1GB GDDR5
	Connectors	2 DisplayPort, 1 dual link DVI Output, One DP to DVI adapter included
	Maximum Resolution	Up to three digital displays at resolutions up to 2560 x 1600 @ 60Hz or up to three analog displays, one at resolutions up to 2048 x 1536 @ 85Hz, plus two resolutions up to 1920 x 1200 @ 60Hz (165 MHz dot clock) Note: This card supports up to three displays with Windows 7, Vista or Linux, and up to two displays on XP
	RAMDAC	
	Image Quality Features	Up to 3 independent outputs with ATI Eyefinity technology support (More information at: www.amd.com/us/products/technologies/eyefinity/). Full 30-bit display pipeline. Advanced video capabilities, including high fidelity gamma, color correction and scaling. Dedicated hardware (UVD2) for H.264, VC-1, and MPEG2 decode NOTE: The use of more than two displays on Linux requires support for xrandr 1.2 or greater in the X server.
	Supported graphics APIs	DirectX 11 and OpenGL 4.1. OpenCL 1.2 DirectCompute 11
	Available graphics drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
Power Consumption	<75W	
Note	AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See www.amd.com/firepro for details.	

Technical Specifications - Graphics

NVIDIA Quadro 2000 1GB Graphics Card	Form Factor	4.376" H x 7" L Single Slot
	Graphics Controller	NVIDIA Quadro 2000 Graphics Card
	Bus Type	PCI Express 2.0 x16
	Memory	1 GB GDDR5 128-bit
	Connectors	1 DVI-I output, 2 DisplayPort outputs One DP to DVI adapter included with card
		DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories
	Maximum Resolution	Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	Image Quality Features	<ul style="list-style-type: none">• Up to 16K x16K texture and render processing• Transparent multisampling and super sampling• 16x angle independent anisotropic filtering• 128-bit floating point performance• 32-bit per-component floating point texture filtering and blending• Support for any combination of two connected displays• DisplayPort 1.1a, HDMI 1.3a, and HDCP support• NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support• Full OpenGL quad buffered stereo support• Underscan/overscan compensation and hardware scaling• NVIDIA® nView® multi-display technology
	Shading Architecture	Shader Model 5.0
	Supported Graphics APIs	OpenGL 4.1 DirectX 11
		CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
		SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
	Power Consumption	62 Watts

Technical Specifications - Graphics

NVIDIA Quadro 2000D (Spec DVI only card)	Form Factor	4.376" H x 7" L Single Slot
	Graphics Controller	NVIDIA Quadro 2000D Graphics Card
	Bus Type	PCI Express 2.0 x16
	Memory	1 GB GDDR5 128-bit
	Connectors	2 Dual Link DVI outputs
	Maximum Resolution	Dual-link DVI output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	Image Quality Features	<ul style="list-style-type: none">• Up to 16K x16K texture and render processing• Transparent multisampling and super sampling• 16x angle independent anisotropic filtering• 128-bit floating point performance• 32-bit per-component floating point texture filtering and blending• Support for any combination of two connected displays• Dual Link DVI, HDMI 1.3a, and HDCP support• NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support• Full OpenGL quad buffered stereo support• Underscan/overscan compensation and hardware scaling• NVIDIA® nView® multi-display technology
	Shading Architecture	Shader Model 5.0
	Supported Graphics APIs	OpenGL 4.0 DirectX 11
	Available Graphics Drivers	CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
Power Consumption	62 Watts	

ATI FirePro V5800 1GB Graphics Card	Form Factor	4.38 in (H) x 9.0 in (L)
	Graphics Controller	ATI FirePro V5800 Graphics Card
	Bus Type	PCI Express x 16, Generation 2.0
	Memory	1GB GDDR5 SDRAM

Technical Specifications - Graphics

Connectors	2 DP, 1 DL DVI
Maximum Resolution	One DP to DVI adapter included Up to three digital displays at resolutions up to 2560 x 1600 @ 60Hz or up to three analog displays, one resolution up to 2048 x 1536 @ 85Hz, plus two display resolutions up to 1920 x 1200 @ 60 Hz (165 MHz dot clock) NOTES: This card supports up to three displays with Vista, Win7, or Linux, up to two displays with XP The use of more than two displays on Linux requires support for xrandr 1.2 or greater in the X server
RAMDAC	400 MHz DAC, 10-bits per channel
Image Quality Features	<ul style="list-style-type: none">• 3 independent outputs with ATI Eyefinity1 technology support (More information at: www.amd.com/us/products/technologies/eyefinity/)• Full 30-bit display pipeline for more accurate color reproduction superior image quality2• Advanced video capabilities, including high fidelity gamma, color correction and scaling• Dedicated hardware (UVD2) for H.264, VC-1, and MPEG2 decode
Shading architecture	<ul style="list-style-type: none">• Support for Full Shader Model 5.0• Dynamic load balancing and resource allocation for vertex, geometry, and pixel shaders• Common instruction set and texture unit access supported for all types of shaders• Dedicated branch execution units and texture address processors• Anti-aliases Shaders and Textures as well as Polygon Edges
Supported graphics APIs	DirectX 11, OpenGL 3.2, OpenCL 1.0 and full implementation of DirectCompute 11 (OpenCL™ compliant driver and SDK release scheduled in 2010)
Available graphics drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit) * WS4 not supported on Z200 & Z200 SFF Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
Power Consumption	75 Watts

Technical Specifications - Graphics

AMD FirePro V5900 2GB Graphics Card	Form Factor	Full-height, full length, single slot
	Graphics Controller	AMD FirePro™ V5900 Professional Graphics
	Bus Type	PCI Express™ x16, Generation 2.1
	Memory	2GB GDDR5
	Connectors	2 x Display Port 1.2 1 x Dual-link DVI One DP to DVI adapter included with card
	Maximum Resolution	2560 x 1600
	Display Output	Up to 3 simultaneous displays (using AMD Eyefinity with Windows 7 or Linux)
	Shading Architecture	Shader Model 5.0
	Supported Graphics APIs	DirectX 11 and OpenGL 4.1
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
	Power Consumption	HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html < 75W
	Note	AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See www.amd.com/firepro for details.

NVIDIA Quadro 4000 2GB Graphics Card	Form Factor	4.376" H x 9.50" L Single Slot
	Graphics Controller	NVIDIA Quadro 4000 Graphics Card
	Bus Type	PCI Express 2.0 x16
	Memory	2 GB GDDR5 256-bit
	Connectors	1 DVI-I output, 2 DisplayPort outputs; One DP to DVI adapter included with card
	Maximum Resolution	DVI to VGA, DisplayPort to VGA and DisplayPort to DVI (single- link or dual-link) adapters available as accessories (Optional stereo bracket available from 3rd party)
	RAMDAC	Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	Image Quality Features	400 MHz integrated RAMDAC ● Up to 16K x16K texture and render processing

Technical Specifications - Graphics

- Transparent multisampling and super sampling
- 16x angle independent anisotropic filtering
- 128-bit floating point performance
- 32-bit per-component floating point texture filtering and blending
- Support for any combination of two connected displays
- DisplayPort 1.1a, HDMI 1.3a, and HDCP support
- NVIDIA 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support
- Full OpenGL quad buffered stereo support
- Underscan/overscan compensation and hardware scaling
- NVIDIA nView® multi-display technology

Shading Architecture	Shader Model 5.0
Supported Graphics APIs	OpenGL 4.0 DirectX 11 CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
	HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	Novell SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
Power Consumption	142 Watts

NVIDIA Quadro 5000 2.5GB Graphics Card

Form Factor	4.376" H x 9.75" L Dual Slot
Graphics Controller	NVIDIA Quadro 5000 Graphics Card
Bus Type	PCI Express 2.0 x16
Memory	2.5 GB GDDR5 320-bit
Connectors	DVI-I (1), DP (2), Stereo (1) One DP to DVI adapter included with card
	DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories
Maximum Resolution	Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
Image Quality Features	<ul style="list-style-type: none"> • Up to 16K x16K texture and render processing • Transparent multisampling and super sampling • 16x angle independent anisotropic filtering • 128-bit floating point performance

Technical Specifications - Graphics

- 32-bit per-component floating point texture filtering and blending
- Support for any combination of two connected displays
- DisplayPort 1.1a, HDMI 1.3a, and HDCP support
- NVIDIA 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support
- Full OpenGL quad buffered stereo support
- Underscan/overscan compensation and hardware scaling
- NVIDIA nView® multi-display technology

Shading Architecture Shader Model 5.0

Supported Graphics APIs OpenGL 4.0
DirectX 11
CUDA API support includes:
CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran

Available Graphics Drivers Genuine Windows 7 Professional (64-bit and 32-bit)
Genuine Windows Vista Business (64-bit and 32-bit)
Microsoft Windows XP Professional (64-bit and 32-bit)
Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)
Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from: <ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

Power Consumption 152 Watts

AMD FirePro V7900 2GB Graphics Card

Form Factor Full height, full length, single slot

Graphics Controller AMD FirePro™ V7900 Professional Graphics

Bus Type PCI Express™ x16, Generation 2.1

Memory 2GB GDDR5

Connectors 4 x DisplayPort 1.2
Two DP to DVI adapters included with card

Maximum Resolution 2560 x1600

Display Output Up to 4 simultaneous displays (using AMD Eyefinity with Windows 7 or Linux)

Shading Architecture Shader Model 5.0

Supported Graphics APIs DirectX 11 and OpenGL 4.1

Available Graphics Drivers Genuine Windows 7 Professional (64-bit and 32-bit)
Genuine Windows Vista Business (64-bit and 32-bit)
Microsoft Windows XP Professional (64-bit and 32-bit)
Red Hat Enterprise Linux(RHEL)
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Power Consumption < 150W

Technical Specifications - Graphics

Note

AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See www.amd.com/firepro for details.

Technical Specifications - Multimedia and Audio Devices

SoundBlaster (Creative Labs) X-Fi Titanium PCIe Audio Card	24-bit Analog-to-Digital conversion of analog inputs	96kHz sample rate
	24-bit Digital-to-Analog conversion of digital sources	96kHz to analog 7:1 speaker output
	24-bit Digital-to-Analog conversion of stereo digital sources	8, 11.025, 16, 22.05, 24, 32, 44.1, 48 and 96kHz
	16-bit to 24-bit recording sampling rates	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz, 24-bit/48kHz and 24-bit/96kHz with direct monitoring
	Enhanced SoundFont support	Up to 24-bit resolution
	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted)	109dB
	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter)	.004%
	Frequency Response (-3dB, 24-bit/96kHz input)	10Hz to 46kHz
	Frequency Response (-3dB, 24-bit/192kHz input)	10Hz to 46kHz
	Speaker and Headphone connections	Stereo to 7.1 (Line Out via three 3.5mm mini jacks)
	Flexijack	Line In/ Microphone In/Optical Out via shared 3.5mm mini jack
	Front Panel Header	Intel HD Audio Compatible (2x5 pin)
	Operating System	Windows 7 Professional 32-bit and 64-bit Microsoft Windows Vista Business 32-bit and 64-bit Microsoft® Windows® XP Professional SP2 Microsoft Windows XP Professional x64 Edition
Minimum System Requirements	System RAM 512MB Operating System Windows Vista 32-bit and 64-bit version or Windows XP 32-bit or 64-bit version	

Technical Specifications - Optical and Removable Storage

HP DVD-ROM Drive	Description	5.25-inch, half-height, tray-load	
	Mounting Orientation	Either horizontal or vertical	
	Interface Type	SATA/ATAPI	
	Dimensions (WxHxD)	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)	
	Disc Capacity	DVD-ROM Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB	
	Access Times	DVD-ROM Single Layer	< 140 ms (typical)
		CD-ROM Mode 1	< 125 ms (typical)
		Full Stroke DVD	< 250 ms (seek)
		Full Stroke CD	< 210 ms (seek)
	Power	Source	SATA DC power receptacle
		DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
		DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
		Relative Humidity	10% to 90%
Maximum Wet Bulb Temperature		86° F (30° C)	
Operating Systems Supported		Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, Removed reference to "Novell" because of acquisition and changed product reference to "SUSE Linux Enterprise Desktop 10 & 11", No driver is required for this device. Native support is provided by the operating system.	

HP DVD+/-RW Drive	Description	5.25-inch, half-height, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	SATA/ATAPI
	Dimensions (WxHxD)	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)
	Disc Formats	DVD-RAM
		DVD+R
DVD+RW		
DVD+R DL		
DVD-R DL		
	DVD-R	
	DVD-RW	

Technical Specifications - Optical and Removable Storage

	CD-R CD-RW		
Disc Capacity	DVD-ROM		8.5 GB DL or 4.7 GB standard
	Full Stroke DVD		< 250 ms (seek)
	Full Stroke CD		< 210 ms (seek)
Maximum Data Transfer Rates	CD ROM Read		CD-ROM, CD-R Up to 40X CD-RW Up to 32X
	DVD ROM Read	DVD-RAM	Up to 12X
		DVD+RW	Up to 8X
		DVD-RW	Up to 8X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 8X
		DVD+R	Up to 16X
		DVD-R	Up to 16X
Power	Source		SATA DC power receptacle
	DC Power Requirements		5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	DC Current		5 VDC - <1000 mA typical, <1600 mA maximum 12 VDC - <600 mA typical, <1400 mA maximum
Operating Environmental (all conditions non-condensing)	Temperature		41° to 122° F (5° to 50° C)
	Relative Humidity		10% to 90%
	Maximum Wet Bulb Temperature		86° F (30° C)
	Operating Systems Supported		Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation SUSE Linux Enterprise Desktop 10 & 11
	Kit Contents		No driver is required for this device. Native support is provided by the operating system. HP SATA SuperMulti DVD Writer Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide, and DVD+R media.

Technical Specifications - Optical and Removable Storage

HP Slot Load DVD+/-RW Drive	Description	Slim-Line, Slot-load	
	Mounting Orientation	Either horizontal or vertical	
	Interface Type	SATA	
	Dimensions (WxHxD)	12.7 x 1.2 x 12.9 cm (5 x 0.5 x 5 in)	
	Disc Formats	DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW	
	Disc Capacity	DVD-ROM	5/9/10/18 G DVD-Single / Dual (PTP, OTP) (Read Only)
			4.7G DVD±R/RW (Read & Write)
			DVD±R Dual (Read & Write)
			80mm DVD
		CD-ROM	DVD-RAM (Read & Write)
			650 MB CD-ROM (Read Only)
			80mm CD
			800/700/650/ CD-Recordable (Read & Write)
			700/650MB CD-Rewritable (Read & Write)
700/650MB High Speed CD-Rewritable (Read & Write)			
Maximum Data Transfer Rates	Full Stroke DVD	< 270 ms (seek)	
	Full Stroke CD	< 250 ms (seek)	
	CD ROM Read	CD-ROM, CD-R and CD-RW Up to 24X	
	DVD ROM Read	DVD-RAM Up to 5X DVD Single layer Up to 8X DVD Dual Layer up to 6X	
Power	Source	SATA DC power receptacle	
	DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p	
	DC Current	5 VDC 40 mA typical, 800 mA maximum	
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
	Relative Humidity	10% to 90%	
	Operating Systems Supported	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows XP Professional or Windows XP Home 32*.	
		Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation, SUSE Linux Enterprise Desktop 10 & 11, No driver is required for this device. Native support is provided by the operating system.	
	Kit Contents	Factory integrated only. Not available as a kit.	

HP Blu-Ray Writer	Description	5.25-inch, half-height, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	SATA
	Dimensions (WxHxD)	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)

Technical Specifications - Optical and Removable Storage

Disc Formats	BD-ROM BD-R BD-RE DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW		
Disc Capacity	DVD-ROM	8.5 GB DL or 4.7 GB standard	
	Blu-ray	50 GB DL or 25 GB standard	
	Full Stroke DVD	< 250 ms (seek)	
	Full Stroke CD	< 210 ms (seek)	
	Blu-ray	<275 ms (seek)	
	Startup Time (Time to drive ready from tray loading)	BD-ROM (SL/DL)	25S / 28S
		BD-R (SL/DL)	25S / 28S
		BD-RE (SL/DL)	25S / 28S
		DVD-ROM (SL/DL)	18S / 18S
		DVD-R (SL/DL)	25S / 25S
		DVD-RW	25S
		DVD+R (SL/DL)	25S / 25S
		DVD+RW	25S
		DVD-RAM	45S
		CD-ROM	45S
Maximum Data Transfer Rates	CD ROM Read	CD-ROM	Up to 40X
		CD-R	Up to 40X
		CD-RW	Up to 40X
	DVD ROM Read	DVD-RAM	Up to 5X
		DVD+RW	Up to 10X
		DVD-RW	Up to 10X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 8X
		DVD+R	Up to 12X
		DVD-R	Up to 12X
	Blu-Ray	BD-ROM	Up to 6X
		BD-ROM DL	Up to 4.8X
		BD-R	Up to 6X
		BD-R DL	Up to 4.8X

Technical Specifications - Optical and Removable Storage

		BD-R	Up to 6X
		BD-RE SL/DL	Up to 4.8X
Power	Source	SATA DC power receptacle	
	DC Power Requirements	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 10%-100 mV ripple p-p	
	DC Current	5 VDC -900 mA typical, 1200 mA maximum 12 VDC -1000 mA typical, 1600 mA maximum	
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
	Relative Humidity	15% to 80%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Operating Systems Supported	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, SUSE Linux Enterprise Desktop 10 & 11	
		* No driver is required for this device. Native support is provided by the operating system.	
		** RHEL WS4 not supported on Z200/Z200SFF	
	Kit Contents	HP Blue Laser RW Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide.	
Disclaimer	As Blu-Ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-Ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.		

Technical Specifications - Optical and Removable Storage

HP 22-in-1 Media Card Reader	Description	The Media Card Reader device uses the same physical form factor and mounting as a Floppy Disk Drive. The device connects to a 2x5 two-channel USB header on the motherboard of the system. There is no USB controller card provided. Please see the Disc Formats section below for a list of flash memory card formats that are supported.
	Mounting Orientation	The Media Card Reader can be mounted in a dedicated Floppy Drive bay (if the chassis provides one) or in an appropriate Optical Bay adapter. It will operate in any orientation.
	Interface Type	USB 2.0 (one channel dedicated to the separate USB port; one channel dedicated to the flash memory card slots)
	Dimensions (WxHxD)	124.5 x 101.6 x 25.4 mm (4.9 x 4.0 x 1.0 in)
	Disc Formats	<ul style="list-style-type: none"> Picture Micro SD Micro SDHC SD SDHC SDXC Mini SD Mini SDHC MultiMediaCard Reduced Size MultiMediaCard (RS MultiMediaCard) MultiMedia Card 4.2 (MultiMediaCard Plus, including MultiMediaCard Plus HC) Reduced Size MultiMedia Card 4.2 (MultiMediaCard Mobile, including MultiMediaCard Mobile HC) CompactFlash Card Type I CompactFlash Card Type II MicroDrive Memory Stick (MS) MagicGate Memory Stick (MG) MagicGate Memory Stick Duo Memory Stick Select Memory Stick Duo (MS Duo) Memory Stick PRO (MS PRO) Memory Stick PRO Duo (MS PRO Duo) Memory Stick PRO-HG Duo <p>Two additional formats are usable with adapters (not supplied):</p> <ul style="list-style-type: none"> MultiMediaCard Micro Memory Stick Micro (M2)

HP DX115 Removable Drive Enclosure	Interface Type	Compatible with SAS or SATA controllers
	Dimensions (WxHxL)	147.6 x 41.1 x 205 mm (5.81 x 1.62 x 8.08 in)
	Weight	<ul style="list-style-type: none"> Frame and Carrier: 1.73 kg (3.8 lbs) Carrier: 0.45 kg (1 lbs)

Technical Specifications - Controller Cards

HP USB 3.0 2x2 Port SuperSpeed PCIe x1 Card	Dimensions (HxD)	TBD
	Ports	2 External, 2 internal
	Operating Systems Supported	Microsoft Windows 7, Windows Vista*, Windows XP Professional (32-bit and 64-bit); Red Hat Enterprise Linux 6, SUSE Linux Enterprise Desktop 11 Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor . For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements .
	Kit Contents	I/O and Security Software and Documentation CD with software drivers and documentation, HP SuperSpeed USB 3.0 PCIe x1 card (with full-height expansion bracket attached), SATA to SATA split power extension cable, Low profile expansion bracket to replace the full-height expansion bracket required on some computer models and HP SuperSpeed USB 3.0 PCIe x1 Card Quick Setup.
	Regulatory Approvals and registrations	FCC 15B, CE EN55022+ EN55024, VCCI, CISPR 22 AS/NZS CISPR 22, LCIE CB service(ITE/AV) IEC 60950-1, Korea EMC, UL USB-IF
	Weight	0.21 lb (95.0 g)
Warranty	The HP USB 3.0 2x2 Port Super Speed PCIe x1 Card has either a one-year limited warranty or the remainder of the warranty of the HP product in which it is installed. Technical support is available seven days a week, 24 hours a day, by phone, as well as online support forums. Certain restrictions and exclusions apply.	

HP SuperSpeed USB 3.0 PCIe x1 Card	Dimensions (HxD)	Full-height: 4.13 x 2.32 in; Low profile: 2.68 x 2.32 in (Full-height: 104.89 x 59.04 mm; Low profile: 68.09 x 59.04 mm)
	Ports	2 External
	Operating Systems Supported	Microsoft Windows 7, Windows Vista*, Windows XP Professional (32-bit and 64-bit); Red Hat Enterprise Linux 6.0, SuSE Linux Enterprise Desktop 11 * Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor . For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements .
	Kit Contents	I/O and Security Software and Documentation CD with software drivers and documentation, HP SuperSpeed USB 3.0 PCIe x1 card (with full-height expansion bracket attached), SATA to SATA split power extension cable, Low profile expansion bracket to replace the full-height expansion bracket required on some computer models and HP SuperSpeed USB 3.0 PCIe x1 Card Quick Setup.
	Regulatory Approvals and registrations	FCC 15B, CE EN55022+ EN55024, VCCI, CISPR 22 AS/NZS CISPR 22, LCIE CB service (ITE/AV) IEC 60950-1, Korea EMC, UL USB-IF
	Weight	0.21 lb (95.0 g)

Technical Specifications - Controller Cards

Warranty	The HP Super Speed USB 3.0 PCIe x1 Card has either a one-year limited warranty or the remainder of the warranty of the HP product in which it is installed. Technical support is available seven days a week, 24 hours a day, by phone, as well as online support forums. Certain restrictions and exclusions apply.
-----------------	--

HP FireWire/IEEE 1394a PCI Card	Data Transfer Rate	Burst Data Rate up to 400 Mbps
	Device Interface Protocol	IEEE-1394a
	Devices Supported	IEEE-1394 compliant devices
	Bus Type	PCI card with brackets for low profile and full height PCI slots.
	Certification Level	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	Ports	Two IEEE 1394 6-Pin Connector (Rear)
	Internal Connectors	One 10-Pin (9 Contacts) Custom Connector
	System Requirements	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. No driver is required for this device. Native support is provided by the operating system. * Certain Windows Vista product features require advanced or additional hardware. See http://microsoft.com/windowsvista/getready/hardwarereqs.mspix and http://www.microsoft.com/windowsvista/getready/capable.mspix for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor . For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements .
		Pentium II 266 or above 128-MB RAM 1-GB Hard Drive CD-ROM drive Built-in sound system Available PCI slot
		Temperature - Operating 50° to 131° F (10° to 55° C) Temperature - Storage -22° to 140° F (-30° to 60° C) Relative Humidity - Operating 20% to 80%
	Operating Systems Supported Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32* * Certain Windows Vista product features require advanced or additional hardware. See http://microsoft.com/windowsvista/getready/hardwarereqs.mspix and http://www.microsoft.com/windowsvista/getready/capable.mspix for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit:	

Technical Specifications - Controller Cards

<http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

HP IEEE 1394b FireWire PCIe Card	Data Transfer Rate	Supports up to 800 Mbps
	Devices Supported	IEEE-1394 compliant devices
	Bus Type	PCIe card full height PCIe slots
	Ports	Two IEEE-1394b bilingual 9-Pin connectors (Rear)
	Internal Connectors	One 10-Pin Header connector
	System Requirements	Windows 7 Professional 32-bit and 64-bit, Microsoft® Windows® XP Professional, Windows XP Home, Windows Vista, SLED 11 and RHEL 6. Intel Pentium® G series or higher processor, 128-MB RAM, 1-GB Hard Drive, CD-ROM drive, built in sound system, Available PCIe slot.
	Temperature – Operating	50° to 131° F (10° to 55° C)
	Temperature – Storage	–22° to 140° F (–30° to 60° C)
	Relative Humidity – Operating	20% to 80%
	Compliances	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	Operating Systems Supported	Windows 7 Professional 32-bit and 64-bit, Windows Vista® Business 32-bit and 64-bit, Windows® XP Professional, XP Professional 64-bit. Not supported on Linux.

Technical Specifications - Networking and Communications

Integrated Broadcom 5764 PCIe LOM Controller	Connector	RJ45
	Data Rates Supported	10/100/1000BT
	Bus Architecture	PCIe X1
	Alerting	ASF 2.0

Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC	Connector	RJ-45
	Controller	Broadcom 5761 PCI-Express LAN Controller
	Memory	8 MB NVRAM serial Flash
	Data Rates Supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, and 802.3x
	Bus Architecture	PCI-Express
	Data Path Width	Single Channel PCI-Express
	Data Transfer Mode	Bus Master DMA
	Hardware Certifications	FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed (E212044), European Union Notice (CE 0682)
	Power Requirement	1.8W @ 3.3V
	Boot ROM Support	Yes
	Network Transfer Mode	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	131° F (55° C) with 5% to 95% non-condensing humidity
	Dimensions	7 cm x 10.5 cm (2.75 in x 4.13 in), low profile compatible
Operating System Driver Support	Windows 7 Professional 32-bit and 64-bit, Windows Vista 32-bit SP1, Windows Vista x64 SP1, Windows XP 32 bit professional, Windows XP x64 Red Hat Enterprise Linux (RHEL) 5, 6; Novell SLED 10 & 11	
Management Capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles	
Kit Contents	Broadcom NetXtreme Gigabit Ethernet Plus NIC, Broadcom NetXtreme Gigabit Ethernet Plus NIC USB Cable Assembly, CD, drivers, quick install guide, product warranty statement	

Technical Specifications - Networking and Communications

HP NC360T PCI Express Dual Port Gigabit NIC	Connector	Two RJ-45
	Controller	Intel 82571EB
	Memory	Integrated 96KB
	Data Rates Supported	10/100/1000 Mbps
	Compliance	802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q
	Bus Architecture	PCI-E 1.0a
	Data Path Width	Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots
	Data Transfer Mode	Bus-master DMA
	Hardware Certifications	FCC Class B, VCCI Class B, BSMI Class A, CISPR 22 Class B, EN 55022 Class B, EN55024-1, ICES-003 Class B, MIC Class B, ACA Class B, UL, Canada UL, EN60950
	Power Requirement	1280 mA @ 3.3V typical
	Boot ROM Support	Yes
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	0% to 95% non-condensing
	Dimensions	12.95 x 6.8 cm (5.1 x 2.7 in)
	Operating System Driver Support	Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP Professional x64 Edition. Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation Novell SLED 10 & SLED 11
	Management Capabilities	WOL , PXE 2.1
	Kit Contents	HP NC360T PCI Express Dual Port Gigabit NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

Technical Specifications - Networking and Communications

Intel Gigabit CT Desktop NIC	Connector	RJ-45
	Controller	Intel WG82574L Gigabit Ethernet Controller
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
	Data Rates Supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus Architecture	PCI-E 1.0a
	Data Path Width	X1, 250 MB/s, Bi-directional interface
	Data Transfer Mode	Bus-master DMA
	Hardware Certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power Requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	Boot ROM Support	Yes
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	85% at 131° F (55° C)
	Dimensions	12.1 x 5.7 x 2.0 cm (4.75 x 2.25 x 0.8 in)
	Operating System Driver Support	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP x64, Red Hat Enterprise Linux 4 (RHEL4.8 or newer)*, Red Hat Enterprise Linux 5 (RHEL5.3 or newer), Red Hat Enterprise Linux 6, SUSE Linux Enterprise Desktop (SLED) 11
	Management Capabilities	RHEL 4 and 5, SLED 10, are not supported on the Z220 CMT/SFF WOL , PXE, DMI, WFM 2.0
	Kit Contents	Intel Gigabit CT Desktop NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

© 2013 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and QuickPath are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.