

Cisco CRS-1 Series 20 port Gigabit Ethernet Flexible Interface Module


The Cisco® CRS-1 Carrier Routing System is the industry's first carrier router offering continuous system operation, unprecedented service flexibility, and system longevity. The Cisco CRS-1 is powered by Cisco IOS® XR Software—a unique self-healing, distributed operating system. As part of a video-enabled IP Next-Generation Network (NGN), the Cisco CRS-1 Series delivers continuous, always-on operation that easily scales to support the massive bandwidth requirements of visual networking experiences such as high-definition IPTV and Cisco TelePresence. These services demand a platform that delivers predictable forwarding performance and efficient, intelligent fabric-based multicast replication. The Cisco CRS-1 Series enables the Internet and NGNs to handle the approaching zettabyte era of carrier IP communications while protecting network investments for decades to come.

Product Overview

The Cisco CRS-1 Series 20-Port Gigabit Ethernet Flexible Interface Module (Figure 1) provides 20 ports of IEEE 802.3-compliant Gigabit Ethernet interfaces and two available Cisco I-Flex shared port adapter (SPA) slots. By providing service intelligence, modularity, and configuration flexibility with fully compatible SPAs, the Cisco I-Flex design offers carriers long-term savings and the ability to handle evolving service delivery requirements, such as SONET-to- Ethernet.

The SPAs can be a mix of Ethernet or Packet over SONET/SDH (POS), and are identical to the SPAs used in other Cisco platforms such as the Cisco XR 12000 Series and the Cisco CRS-1 Carrier Routing System. Gigabit Ethernet physical interface characteristics can be selected using different modular Small Form-Factor Pluggable (SFP) optics – short, long, extra long, and copper interfaces are supported. Extensive per-port and per-VLAN counters simplify network performance monitoring and troubleshooting.

Figure 1. Cisco CRS-1 Series 20-Port Gigabit Ethernet Flexible Interface Module

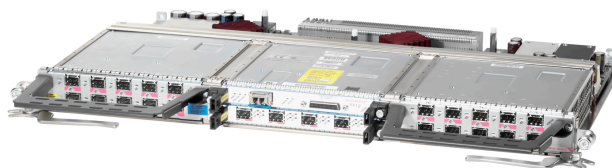

Features and Benefits

- 20 line-rate Gigabit Ethernet full duplex interfaces
- Two half-height SPA bays
- Per-port flexibility for distance – selected using the appropriate SFP optical or copper modules
- Compatible with all Cisco CRS-1 Series chassis
- Supports in-use insertion and removal without the need to power down the chassis
- Simple configuration, monitoring, and maintenance

Product Specifications

Table 1. Product Specifications

Feature	Description
Chassis Compatibility	Compatible with both 4-slot and 8-slot Cisco CRS-1 chassis Requires one of the following forwarding engines: FP40, MSC, or MSC-B.
Software Compatibility	Cisco IOS XR Software Release 3.8.1 or later
Interface Types	Integrated Gigabit Ethernet using SFPs for physical interfaces SFPs supported: <ul style="list-style-type: none"> • Short wavelength (SX) • Long reach/long haul (LX/LH) • Extended distance (ZX) • Copper (RJ-45) SFP-GE-T SPAs can be Packet over SONET/SDH (POS) or Ethernet. The following SPAs are supported: <ul style="list-style-type: none"> • SPA-5X1GE-V2 • SPA-8X1GE • SPA-8X1GE-V2 • SPA-10X1GE-V2 • SPA-1X10GE-L-V2 • SPA-1X10GE-WL-V2 • SPA-4XOC3-POS • SPA-8XOC12-POS • SPA-2XOC48POS/RPR • SPA-4XOC48POS/RPR • SPA-OC192POS-VSR • SPA-OC192POS-XFP
Port Density	20 ports of integrated Gigabit Ethernet per card, each using SFP physical interfaces Two normal-height SPAs or one double-height SPA

Feature	Description
Ethernet	Encapsulations: ARPA, IEEE 802.2/SAP, IEEE 802.3/SNAP IEEE 802.3x flow control Jumbo frames (9188 bytes) IEEE 802.1p tagging Source/destination MAC accounting and VLAN accounting <ul style="list-style-type: none"> • Autonegotiation • Full-duplex operation • 802.1Q VLAN termination • Per-port byte and packet counters for policy drops; oversubscription drops; cyclic redundancy check (CRC) error drops; packet sizes; and unicast, multicast, and broadcast packets • Per-VLAN byte and packet counters for policy drops; oversubscription drops; and unicast, multicast, and broadcast packets • Per-port byte counters for good bytes and dropped bytes
Ethernet LED Indicators	LED off: Port is not enabled by software LED: Port is enabled by software, but there is a problem with the Ethernet link LED green: Port is enabled by software, and there is a valid Ethernet link
Reliability and Availability	Online insertion and removal (OIR) without affecting system traffic Field-replaceable SFP optical modules
Network Management	Cisco IOS XR Software command-line interface (CLI) Simple Network Management Protocol (SNMP) Extensible Markup Language (XML) interface
Physical Dimensions	Occupies one PLIM slot Weight: 8.4 lb (3.8 kg) Height: 20.6 in. (52.2 cm) Depth: 11.2 in. (28.4 cm) Width: 1.8 in. (4.49 cm)
Power	150W
Environmental Conditions	Storage Temperature: –40 to 70°C (–40 to 158°F) Operating Temperature: Normal: 5 to 40°C (41 to 104°F) Short-term: –5 to 50°C (23 to 122°F) short-term Relative Humidity: Normal: 5% to 85% Short-term: 5% to 90% but not to exceed 0.024 kg water/kg of dry air Short-term refers to a period of not more than 96 consecutive hours and a total of not more than 15 days in 1 year. (This refers to a total of 360 hours in any given year, but no more than 15 occurrences during that 1-year period.)

Approvals and Compliance

Table 2. Compliance and Agency Approvals

Feature	Description
Safety Standards	UL/CSA/IEC/EN 60950-1 IEC/EN 60825 Laser Safety ACA TS001 AS/NZS 60950 FDA – Code of Federal Regulations Laser Safety
EMI	FCC Class A ICES 003 Class A AS/NZS 3548 Class A CISPR 22 (EN55022) Class A VCCI Class A BSMI Class A IEC/EN 61000-3-2: Power Line Harmonics IEC/EN 61000-3-3: Voltage Fluctuations and Flicker

Feature	Description
Immunity (Basic Standards)	IEC/EN-61000-4-2: Electrostatic Discharge Immunity (8 kV Contact, 15 kV Air) IEC/EN-61000-4-3: Radiated Immunity (10 V/m) IEC/EN-61000-4-4: Electrical Fast Transient Immunity (2 kV Power, 1 kV Signal) IEC/EN-61000-4-5: Surge AC Port (4 kV CM, 2 kV DM) IEC/EN-61000-4-5: Signal Ports (1 kV) IEC/EN-61000-4-5: Surge DC Port (1 kV) IEC/EN-61000-4-6: Immunity to Conducted Disturbances (10 Vrms) IEC/EN-61000-4-8: Power Frequency Magnetic Field Immunity (30 A/m) IEC/EN-61000-4-11: Voltage DIPS, Short Interruptions, and Voltage Variations
ETSI and EN	EN300 386: Telecommunications Network Equipment (EMC) EN55022: Information Technology Equipment (Emissions) EN55024: Information Technology Equipment (Immunity) EN50082-1/EN-61000-6-1: Generic Immunity Standard
Network Equipment Building Systems (NEBS)	This product is designed to meet the following requirements (qualification in progress): SR-3580: NEBS Criteria Levels (Level 3) GR-1089-CORE: NEBS EMC and Safety GR-63-CORE: NEBS Physical Protection

Additional Specifications

Table 3. Optical Specifications: Modular SFP Optics

Gigabit Ethernet SFP Optics	Maximum Distance
SX SFP optics	1804 ft (550m)
LX/LH SFP optics	6.2 mi (10 km)
ZX SFP optics	43.5 mi (70 km)
Copper (RJ-45) SFP optics	328 ft (100 m)

Ordering Information

To place an order, visit the [Cisco Ordering Home Page](#).

Table 4. Ordering Information

Product Part Number	Product Name
20-1GE-FLEX(=)	Cisco CRS-1 Series 20x1GE Flexible Interface Module
SFP-GE-S(=)	Cisco Extended Temperature SX SFP
SFP-GE-L(=)	Cisco Extended Temperature LX/LH SFP
SFP-GE-Z(=)	Cisco Extended Temperature ZX SFP
SFP-GE-T(=)	1000BASE-T SFP

Service and Support

Cisco offers numerous innovative services programs to accelerate customer success. These programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you to protect your network investment, optimize network operations, and prepare the network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, see [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

For More Information

For more information about the Cisco CRS-1 Series 20-Port Gigabit Ethernet Flexible Interface Module, contact your local account representative or visit: www.cisco.com/go/crs



Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Europe Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: +31 0 800 020 0791
Fax: +31 0 20 357 1100

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

©2007 Cisco Systems, Inc. All rights reserved. CCVP, the Cisco logo, and the Cisco Square Bridge logo are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networking Academy, Network Registrar, Packet, PIX, ProConnect, ScriptShare, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0705R)