

DATALOGIC™

QuickScan™ Mobile



Quick Reference Guide

Datalogic Scanning, Inc.

959 Terry Street

Eugene, Oregon 97402

USA

Telephone: (541) 683-5700

Fax: (541) 345-7140

An Unpublished Work - All rights reserved. No part of the contents of this documentation or the procedures described therein may be reproduced or transmitted in any form or by any means without prior written permission of Datalogic Scanning, Inc. or its subsidiaries or affiliates ("Datalogic" or "Datalogic Scanning"). Owners of Datalogic products are hereby granted a non-exclusive, revocable license to reproduce and transmit this documentation for the purchaser's own internal business purposes. Purchaser shall not remove or alter any proprietary notices, including copyright notices, contained in this documentation and shall ensure that all notices appear on any reproductions of the documentation.

Should future revisions of this manual be published, you can acquire printed versions by contacting your Datalogic representative. Electronic versions may either be downloadable from the Datalogic website (www.scanning.datalogic.com) or provided on appropriate media. If you visit our website and would like to make comments or suggestions about this or other Datalogic publications, please let us know via the "Contact Datalogic" page.

Disclaimer

Datalogic has taken reasonable measures to provide information in this manual that is complete and accurate, however, Datalogic reserves the right to change any specification at any time without prior notice.

Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U. All other brand and product names may be trademarks of their respective owners.

CONTENTS

Updates and Language Availability	iv
Using Quickscan™ Mobile Reader and Cradle.....	1
System Connections	5
QuickScan Mobile Cradle Configuration	8
QuickScan Mobile Reader Configuration	8
Interface Selection	9
USB Interface Configuration	10
USB Interface Selection.....	11
RS-232 Interface Selection	12
Wedge Interface Selection.....	13
USB / Wedge Keyboard Nationality.....	16
IBM46xx Interface Selection	17
Pen Interface Selection.....	18
Operating Test.....	19
Reader Default Configuration.....	20
Cradle Default Configuration.....	21
Technical Features	22
Warranty.....	24
Patents	24
Services and Support.....	24
Compliance.....	25
Reading Diagram.....	28
Numeric Table	29

UPDATES AND LANGUAGE AVAILABILITY

UK/US

The latest drivers and documentation updates for this product are available on Internet.

Log on to: www.scanning.datalogic.com

I

Su Internet sono disponibili le versioni aggiornate di driver e documentazione di questo prodotto. Questo manuale è disponibile anche nella versione italiana.

Collegarsi a: www.scanning.datalogic.com

F

Les versions mises à jour de drivers et documentation de ce produit sont disponibles sur Internet. Ce manuel est aussi disponible en version française.

Cliquez sur: www.scanning.datalogic.com

D

Im Internet finden Sie die aktuellsten Versionen der Treiber und Dokumentation von diesem Produkt. Die deutschsprachige Version dieses Handbuchs ist auch verfügbar.

Adresse : www.scanning.datalogic.com

E

En Internet están disponibles las versiones actualizadas de los drivers y documentación de este producto. También está disponible la versión en español de este manual.




Dirección Internet: www.scanning.datalogic.com


USING QUICKSCAN™ MOBILE READER AND CRADLE

The QuickScan Mobile reader and cradle build a Cordless Reading System for the collection, decoding and transmission of barcoded data.

Standard models can be connected to a Host PC through a USB, RS-232, Wedge or Pen emulation cable. All models are suited for single-cradle layouts.

The LEDs signal the QuickScan Mobile cradle status, as described in the following table:

	LED	BEEPER	STATUS
	Power on / Data	-	Yellow On = QuickScan® Mobile cradle is powered. Yellow Blinking = the cradle receives data and commands from the Host or the reader.
	Charging	-	Red On = the battery charge is in progress.
	Charge completed	-	Green On = the battery is completely charged.
	Alternating red/green	Repetitive beep	Charging out of temperature range, over-current or over-voltage conditions

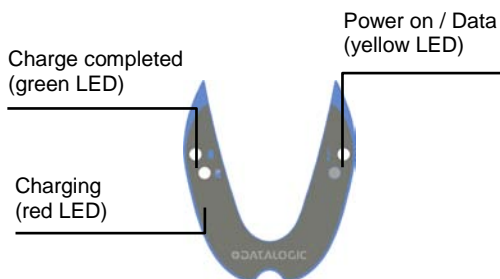

READING ANGLE

QuickScan™ Mobile readers automatically scan barcodes **at a distance**. Simply aim and pull the trigger. Code scanning is performed along the center of the light bar emitted from the reading window. This bar must cover the entire code.


Successful scanning is obtained by tilting the reader with respect to the barcode to avoid direct reflections, which could impair the reading performance. See the figures below.

Successful reading is obtained by an audible tone.

Good read LED



OK



Not Advised

HANDS-FREE USE

When using the QuickScan Mobile on the cradle, remember to lock the reader by pushing up the locking system as indicated in the following figure.



USING YOUR QUICKSCAN™ MOBILE READING SYSTEM

Follow the procedure below to start using your QuickScan Mobile reading system:

1. Connect a QuickScan Mobile cradle to the Host. For installation and connection information see page 5.
2. Insert the QuickScan Mobile reader into the cradle to start the battery charging.
A full charge of the Lithium battery takes 3.5 – 6 hours.



NOTE

*To achieve the best battery life, it is recommended to perform a full battery charge before using the reader **in hand-held mode**.*

In hands-free use, you can immediately start using the *reader*, since it is powered by the cradle.

3. Configure the QuickScan Mobile reader.
4. Configure the QuickScan Mobile cradle. See QuickScan Mobile cradle configuration on page 8.

CHANGING THE BATTERIES

To change the battery of your reader, you must:

1. Unscrew the battery cover screw (Figure 1)
2. Unplug the white connector and remove the old battery (Figure 2)
3. Insert the new battery and plug in the white connector



NOTE

When inserting the new battery into the handle pay attention to position the battery and the connector just as shown in Figure 3.



Figure 1



Figure 2



Figure 3

4. Insert the cover in the handle and screw it back into place.



Figure 4



WARNING

Do not incinerate, disassemble, short terminals or expose to high temperature. Risk of fire, explosion. Use specified charger only. Risk of explosion if the battery is replaced by an incorrect type. Dispose of the batteries as required by the relevant laws in force.

SYSTEM CONNECTIONS




CAUTION

Connections should always be made with power off!

You can connect the QuickScan™ Mobile cradle to the Host through the dedicated connector, using the cable corresponding to the desired interface type.

1. Connect the appropriate interface cable to the cradle by simply plugging it into the Host connector on the base of the cradle.



QuickScan Mobile Cradle - Bottom View

To disconnect the cable, insert a paper clip or other similar object into the hole corresponding to the connector on the base of the cradle. Push down on the clip while unplugging the cable. Refer to the following figure:



Disconnecting the Cable

RS-232




USB




IBM USB POS



WEDGE (ONLY FOR QUICKSCAN M2 TYPE:130)

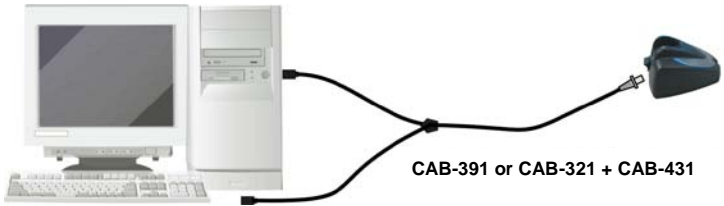

WEDGE (ONLY FOR QUICKSCAN M2 TYPE:130)

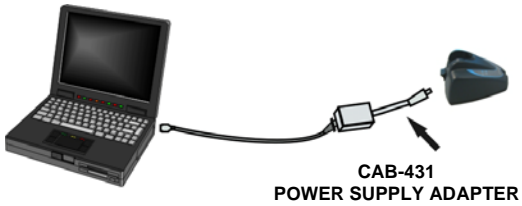

PEN



IBM PORT9B / IBM PORT 5B

(ONLY FOR QUICKSCAN M2 TYPE:110)



QUICKSCAN MOBILE CRADLE CONFIGURATION

The QuickScan Mobile cradle configuration can be performed in two ways: either by sending configuration strings from the Host via the RS-232 or USB-COM interface or by reading configuration barcodes with the reader.


Serial/USB-COM Configuration


By connecting the QuickScan Mobile cradle to a PC through an RS-232 or USB cable (only USB-COM interface) it is possible to send configuration strings from the PC to the reader. Using this method you can also send new configuration strings from the PC to the reader or upgrade application software onto the reader.


QUICKSCAN MOBILE READER CONFIGURATION

When the QuickScan Mobile cradle is connected and powered, configure the QuickScan® Mobile reader by reading the following codes in the given sequence and follow the instructions.

Note: for the numeric code selection of step 3, use the table at the end of this Quick Reference Guide.

1. Restore QuickScan Mobile default



2. Enter configuration


3. Set Radio Address


+

four digits for the QuickScan Mobile Address
(from 0000 to 1999).

All readers used in the same area must have different addresses.

4. Exit and Save configuration


5. Read the **Bind** code to pair the QuickScan™ Mobile reader to the cradle. The reader is dedicated to the cradle. Any previously **bound** reader will be excluded.



The green LED on the QuickScan Mobile reader will blink: the reader is ready to be positioned onto the cradle.

6. Firmly position the reader onto the cradle within 10 seconds, a beep will be emitted, signaling that the QuickScan Mobile cradle has been paired to the QuickScan Mobile reader.

YOUR READER IS NOW READY TO READ CODES.

7. Now you can configure the QuickScan Mobile cradle by reading configuration barcodes.

INTERFACE SELECTION

Follow the procedure to configure the interface required by your application.

Multi-standard interface models:

- USB Interface
- RS-232 Interface
- Wedge Interface
- Pen Interface

USB INTERFACE CONFIGURATION

The USB interface is compatible with:

- Windows 98 (and later)
- Mac SO 8.0 (and later)
- 4690 Operating System


START-UP

As with all USB devices, upon connection, the Host performs several checks by communicating with the cradle. Before the cradle is ready, the correct USB driver must be loaded.

For all systems, the correct USB driver for the default USB-KBD interface is included in the Host Operating System and will either be loaded automatically or will be suggested by the O.S. and should therefore be selected from the dialog box (the first time only).

You can now read codes with the associated QuickScan Mobile reader. At this point you can read the USB interface configuration code according to your application. Load drivers from the O.S. (if requested). When configuring the USB-COM interface, the relevant files and drivers must be installed from the USB Device Installation software which can be downloaded from the web site: <http://www.scanning.datalogic.com>.

The cradle is ready.

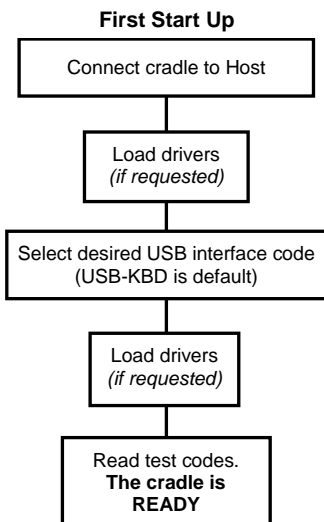

Successive start-ups will automatically recognize the previously loaded drivers.

USB INTERFACE SELECTION

USB-KBD (default)



USB-KBD-ALT-MODE



USB-KBD-APPLE



USB-COM*



USB-IBM-Table Top



USB-IBM-Hand Held



* When configuring USB-COM, the relevant files and drivers must be installed from the USB Device Installation software, which can be downloaded from the web site <http://www.scanning.datalogic.com>.

Select one keyboard nationality code from the table at page 16.

RS-232 INTERFACE SELECTION

Read the QuickScan™ Mobile cradle restore default code, and then read the interface selection code for your application:

RESTORE QUICKSCAN MOBILE CRADLE DEFAULT



RS-232 INTERFACE

Standard



POS TERMINALS

Nixdorf Mode A



Fujitsu



ICL Mode



WEDGE INTERFACE SELECTION

NOTE: only for Quickscan M2 Type:130

Read the QuickScan™ Mobile cradle restore default code, then read the interface selection code for your application:

RESTORE QUICKSCAN MOBILE CRADLE DEFAULT



WEDGE INTERFACE

IBM AT or PS/2 PCs



IBM XT



PC Notebook



IBM SURE1



IBM Terminal 3153



WEDGE INTERFACE (CONTINUED)

IBM Terminals 31xx, 32xx, 34xx, 37xx:

To select the interface for these IBM Terminals, read the correct KEY TRANSMISSION code. Select the KEYBOARD TYPE if necessary (default = advanced keyboard).

KEY TRANSMISSION MODE

make-only keyboard



make-break keyboard



KEYBOARD TYPE

advanced keyboard



typewriter keyboard



ALT MODE

The following interface selection allows barcodes sent to the PC to be interpreted correctly independently from the Keyboard Nationality used. **You do not need to make a Keyboard Nationality selection.**

(default = Num Lock Unchanged)

Make sure the Num Lock key on your keyboard is ON.

IBM AT - ALT mode



PC Notebook - ALT mode



WEDGE INTERFACE (CONTINUED)**WYSE TERMINALS**

ANSI Keyboard



PC Keyboard



ASCII Keyboard



VT220 style Keyboard

**DIGITAL TERMINALS**

VT2xx/VT3xx/VT4xx

**APPLE**

APPLE ADB Bus



USB / WEDGE KEYBOARD NATIONALITY

USB/Wedge interface users should select one of the following KEYBOARD NATIONALITY codes.

Belge



Deutsch



English (UK)



Español



Français



Italiano



Svenskt



USA



The following Keyboard Nationality selection is only valid for IBM AT compatible PCs:

Japanese



IBM46XX INTERFACE SELECTION

NOTE: only for Quickscan M2 Type:110

Read the QuickScan™ Mobile cradle restore default code, then read the interface selection code for your application:

RESTORE QUICKSCAN MOBILE CRADLE DEFAULT



IBM 46XX TERMINALS

PORT 9B

4501 Protocol



(typical)

1520 Protocol



IBM 46XX TERMINALS

PORT 5B

1520 Protocol



(typical)

4501 Protocol



PEN INTERFACE SELECTION

Read the QuickScan™ Mobile cradle restore default code, then read the interface selection code for your application:

RESTORE QUICKSCAN MOBILE CRADLE DEFAULT



PEN INTERFACE



OPERATING TEST

Read the TEST codes below.

EAN-8



EAN-13



Code 39 (Normal)



Code 128



Interleaved 2 of 5



YOUR SYSTEM IS READY TO READ CODES AND TO SEND THE DATA TO THE HOST.

To change the defaults, refer to the "QuickScan™ Mobile Reference Manual", part number 820001971, or to the Datalogic Aladdin™ Configuration program, both downloadable from the website.

READER DEFAULT CONFIGURATION

DATA FORMAT

code identifier disabled (enabled for POS terminals), field adjustment disabled, code length tx not transmitted, character replacement disabled, address stamping disabled; address delimiter disabled

POWER SAVE

sleep state/USB suspend disabled, enter sleep timeout = 0.6 sec

READING PARAMETERS

hand-held operation = hardware trigger, stand operation = automatic, trigger active level, no timeout, Flash On = 1 sec, Flash Off = 0.6 sec, one read per cycle, safety time 0.5 sec, beeper intensity high, tone 2, beeper type monotone, beeper length short, good read spot duration medium, automatic operation aiming light enabled

DECODING PARAMETERS

ink spread enabled, overflow control enabled, interdigit control enabled, Puzzle Solver™ disabled, decoding safety = one read

CODE SELECTION

Enabled codes

- EAN 8/EAN 13 / UPC A/UPC E without ADD ON
check digit transmitted, no conversions
- Interleaved 2/5
check digit control and transmission, variable length code; 4-99 characters
- Standard Code 39
no check digit control, variable length code; 1-99 characters
- Code 128
variable length code; 1-99 characters
- EAN 128, ISBT128, Code 93, Codabar, pharmaceutical codes, MSI, Plessey, Telepen, Delta IBM, Code 11, Code 16K, Code 49, GS1 DataBar™ (GS1 DataBar™ includes the following symbologies: RSS-14, RSS-14 Stacked, RSS Expanded and RSS Limited).

ADVANCED FORMATTING PARAMETERS

concatenation disabled, no advanced formats defined

RADIO PARAMETERS

radio protocol timeout = 2 seconds, power-off timeout = 4 hours, single store disabled, beeper control for radio response = normal

CRADLE DEFAULT CONFIGURATION

USB DEFAULT SETTINGS

DATA FORMAT: code identifier disabled, code length not transmitted, character replacement disabled, address stamping disabled, address delimiter disabled.

USB KEYBOARD: USA keyboard, FIFO enabled, inter-character and inter-code delays disabled.

USB COM: handshaking disabled, delay disabled, rx timeout 5 sec., ack/nack disabled, FIFO enabled, serial trigger lock disabled.

Default Headers and Terminators for each USB mode:

- USB-KBD: no header, terminator = ENTER
- USB-KBD-ALT-MODE: no header, terminator = CR
- USB-COM: no header, terminator = CR-LF
- USB-IBM-TABLE TOP: not applicable
- USB-IBM-HAND HELD: not applicable

RS-232 Standard DEFAULT SETTINGS

9600 baud, no parity, 8 data bits, 1 stop bit, handshaking disabled, ACK/NACK disabled, FIFO enabled, inter-character delay disabled, 5 sec. rx timeout, serial trigger lock disabled.

DATA FORMAT: code identifier disabled, code length not transmitted, no header, terminator = CR-LF, character replacement disabled, address stamping disabled, address delimiter disabled.

RS-232 Nixdorf DEFAULT SETTINGS

9600 baud, odd parity, 8 data bits, 1 stop bit, handshaking hardware (RTS/CTS), ACK/NACK disabled, FIFO disabled, inter-character delay disabled, 9.9 sec. rx timeout, serial trigger lock disabled.

DATA FORMAT: code identifier enabled, code length not transmitted, no header, terminator = CR, character replacement disabled, address stamping disabled, address delimiter disabled.

RS-232 Fujitsu DEFAULT SETTINGS

9600 baud, no parity, 8 data bits, 1 stop bit, handshaking disabled, ACK/NACK disabled, FIFO enabled, inter-character delay disabled, 2 sec. rx timeout, serial trigger lock disabled.

DATA FORMAT: code identifier enabled, code length not transmitted, no header, terminator = CR, character replacement disabled, address stamping disabled, address delimiter disabled.

RS-232 ICL DEFAULT SETTINGS

9600 baud, even parity, 8 data bits, 1 stop bit, handshaking RTS always on, ACK/NACK disabled, FIFO enabled, inter-character delay disabled, 9.9 sec. rx timeout, serial trigger lock disabled.

DATA FORMAT: code identifier enabled, code length not transmitted, no header, terminator = CR, character replacement disabled, address stamping disabled, address delimiter disabled.

WEDGE DEFAULT SETTINGS (only for Quickscan M2 Type:130)

USA keyboard, caps lock off, caps lock auto-recognition enabled; num lock unchanged, inter-character and inter-code delay disabled.

DATA FORMAT: code identifier disabled, code length not transmitted, no header, terminator = ENTER, character replacement disabled, address stamping disabled, address delimiter disabled.

IBM DEFAULT SETTINGS (only for Quickscan M2 Type:110)

DATA FORMAT: IBM Standard, code identifier disabled, no header, no terminator

PEN DEFAULT SETTINGS

Interpret operating mode, minimum output pulse 600 μ s, conversion to Code 39, overflow medium, output level normal, idle level normal, inter-block delay disabled.

TECHNICAL FEATURES

QuickScan[®] Mobile Reader and Cradle

Electrical Features - READER	
Battery Type	1 Lithium battery 700 mAh
Time of recharge Lithium	max 6 hours with USB cable
Operating autonomy	typical 20000 reads
Indicators	LED, Beeper
Max scan rate	235 scans/sec
Electrical Features - CRADLE	
Supply voltage	5 VDC \pm 5%
Power consumption	max. 4 W (charging)
LED Indicators	Battery charging red Charge completed green Power / Data yellow
Optical Features	
Sensor	CCD solid state (2088 pixels)
Illuminator	LED array
Wavelength	630 ~ 670 nm
Max. LED Output Power	0.33 mW
LED safety class	Class 1 EN 60825-1
Reading field	see reading diagram
Max. resolution	0.10 mm, 4 mils
PCS minimum	20% (Datalogic Test Chart)

Environmental Features – READER	
Working Temperature	0° to + 40 °C (32° to 104 °F)
Storage Temperature (without battery)	-20° to 70 °C (-4° to 158 °F)
Humidity	90% non condensing
Drop resistance	IEC 68-2-32 Test ED 1.5 m (4 ft 9 in)
Protection class	IP30
Environmental Features - CRADLE	
Working temperature	0° to 40 °C (32° to 104 °F)
Storage temperature	-20° to 70 °C (-4° to 158 °F)
Humidity	90 % non condensing
Protection class	IP30
Mechanical Features – READER	
Weight (without batteries)	about 189 g (6.66 oz)
Dimensions	171 x 90 x 68 mm (6.72 x 3.54 x 2.80 in)
Material	Cycoloy C 2800 with desmopan 3855
Mechanical Features – CRADLE	
Weight	181 gr (6.38 oz)
Dimensions	80 x 130 x 90 mm (3.15 x 5.11 x 3.54 in)
Material	Cycoloy C 2800 with desmopan 3855

QuickScan® Mobile Radio Features

Radio Features	European Models	USA Models
Radio Frequency	433.92 MHz	910 MHz
Bit rate	19200 baud	36800 baud
Effective Radiated Power	<10 mW	<1 mW
Range (in open air)	12 m	12 m
RF Modulation	FSK	

WARRANTY

Datalogic warranties this product against defects in workmanship and materials, for a period of 36 months from the date of shipment, provided that the product is operated under normal and proper conditions.

Datalogic has the faculty to repair or replace the product; these provisions do not prolong the original warranty term. The warranty does not apply to any product that has been subject to misuse, accidental damage, unauthorized repair or tampering.

PATENTS

This product is licensed under the U.S. Patent 6,158,661

This product is covered by one or more of the following patents:

U.S. patents 5,992,740; 6,305,606 B1; 6,517,003 B2; 6,631,846 B2; 6,712,271 B2; 6,817,525 B2; 6,834,806 B2; and 6,871,785 B2

European patents 789,315 B1; 851,378 B1; 895,175 B1; 962,880 B1; 1,164,536 B1; 1,205,871 B1; and 1,205,873 B1

Additional patents pending.

SERVICES AND SUPPORT

Datalogic provides several services as well as technical support through its website. Log on to www.scanning.datalogic.com and click on the [links](#) indicated for further information including:

- **PRODUCTS**

Search through the links to arrive at your product page where you can download specific **Manuals** and **Software & Utilities** including:

- **Datalogic Aladdin™** a multi-platform utility program that allows device configuration using a PC. It provides RS-232 interface configuration as well as configuration barcode printing.

- **SERVICE & SUPPORT**

- **Technical Support** - Product documentation and programming guides and Technical Support Department in the world

- **Service Programs** - Warranty Extensions and Maintenance Agreements

- **Repair Services** - Flat Rate Repairs and Return Material Authorization (RMA) Repairs.

- **Downloads** – Manuals & Documentation, Data Sheets, Product Catalogues, etc.

- **CONTACT US**

- Information Request Form and Sales & Service Network

COMPLIANCE

**This device must be opened by qualified personnel only.
The batteries must be removed before opening the device.**

POWER SUPPLY

This device is intended to be supplied by a UL Listed/CSA Certified Power Unit marked "Class 2" or LPS power source rated 5 V, minimum 0.8 A and having a cable length <3 m.

FCC COMPLIANCE


Modifications or changes to this equipment without the expressed written approval of Datalogic could void the authority to use the equipment.

This device complies with PART 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference which may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

LED CLASS

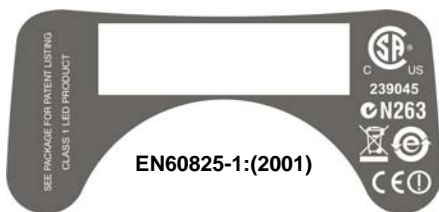

QuickScan™ Mobile Product Label

Class 1 LED product.

RADIO COMPLIANCE

Contact the competent authority responsible for the management of radio frequency devices of your country to verify the eventual necessity of a user license.

Refer to the web site <http://europa.eu.int/comm/enterprise/rte/spectr.htm> for further information.



WEEE COMPLIANCE

Waste Electrical and Electronic Equipment (WEEE) Statement



English

For information about the disposal of Waste Electrical and Electronic Equipment (WEEE), please refer to the website at www.scanning.datalogic.com.

Italian

Per informazioni sullo smaltimento delle apparecchiature elettriche ed elettroniche consultare il sito Web www.scanning.datalogic.com.

French

Pour toute information relative à l'élimination des déchets électroniques (WEEE), veuillez consulter le site Internet www.scanning.datalogic.com.

German

Informationen zur Entsorgung von Elektro- und Elektronik- Altgeräten (WEEE) erhalten Sie auf der Webseite www.scanning.datalogic.com.

Spanish

Si desea información acerca de los procedimientos para el desecho de los residuos del equipo eléctrico y electrónico (WEEE), visite la página Web www.scanning.datalogic.com.

Portuguese

Para informações sobre a disposição de Sucatagem de Equipamentos Eléctricos e Eletrónicos (WEEE - Waste Electrical and Electronic Equipment), consultar o site web www.scanning.datalogic.com.

Chinese


有关处理废弃电气电子设备 (WEEE) 的信息, 请参考Datalogic公司的网站:
<http://www.scanning.datalogic.com/>。

Japanese

廃電気電子機器(WEEE)の処理についての関連事項はDatalogicのサイト
www.scanning.datalogic.com, をご参照下さい。

READING DIAGRAM

Reading diagram at 25 °C and 300 lux ambient lighting
Reading Zones (10° skew angle)

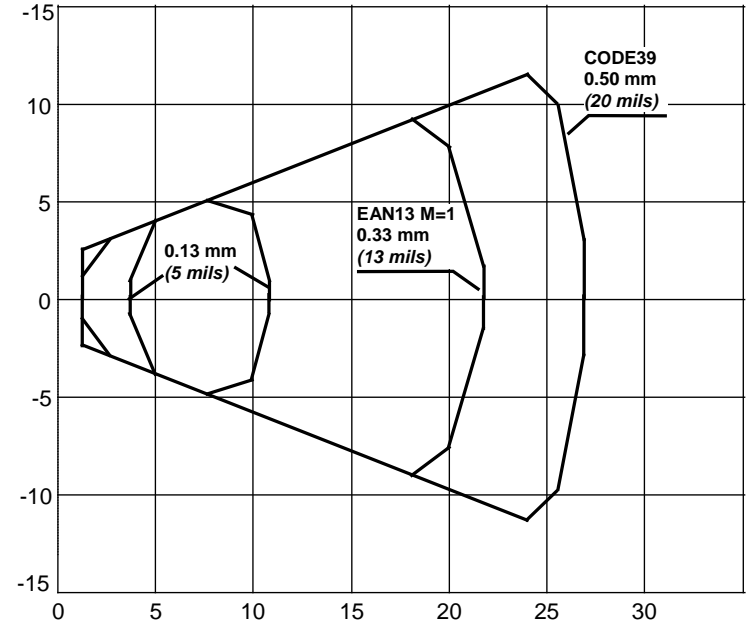

NUMERIC TABLE



dichiara che
declares that the
déclare que le
bescheinigt, daß das Gerät
declara que el

QUICKSCAN M21XX Kit 433Mhz; Cordless System

e tutti i suoi modelli
and all its models
et tous ses modèles
und seine Modelle
y todos sus modelos

sono conformi alla Direttiva del Consiglio Europeo sottoelencata:
are in conformity with the requirements of the European Council Directive listed below:
sont conformes aux spécifications de la Directive de l'Union Européenne ci-dessous:
den nachstehenden angeführten Direktive des Europäischen Rats entsprechen:
cumple con los requisitos de la Directiva del Consejo Europeo, según la lista siguiente:

1999/5/EEC R&TTE

Questa dichiarazione è basata sulla conformità dei prodotti alle norme seguenti:
This declaration is based upon compliance of the products to the following standards:
Cette déclaration repose sur la conformité des produits aux normes suivantes:
Diese Erklärung basiert darauf, daß das Produkt den folgenden Normen entspricht:
Esta declaración se basa en el cumplimiento de los productos con las siguientes normas:

**ETSI EN 301 489-3 V1.4.1,
AUGUST 2002 :**

*ELECTROMAGNETIC COMPATIBILITY AND RADIO SPECTRUM MATTERS (ERM);
ELECTROMAGNETIC COMPATIBILITY (EMC) STANDARD FOR RADIO EQUIPMENT AND SERVICES;
PART 3: SPECIFIC CONDITIONS FOR SHORT-RANGE DEVICES (SRD) OPERATING ON FREQUENCIES BETWEEN 9KHZ AND 40GHZ*

**ETSI EN 300 220-3 V1.1.1,
SEPTEMBER 2000 :**

ELECTROMAGNETIC COMPATIBILITY AND RADIO SPECTRUM MATTERS (ERM); SHORT RANGE DEVICES (SRD); RADIO EQUIPMENT TO BE USED IN THE 25MHZ TO 1000MHZ FREQUENCY RANGE WITH POWER LEVELS RANGING UP TO 500MW; PART 3: HARMONIZED EN COVERING ESSENTIAL REQUIREMENTS UNDER ARTICLE 3.2 OF THE R&TTE DIRECTIVE

EN 60950-1, DECEMBER 2001 :

INFORMATION TECHNOLOGY EQUIPMENT - SAFETY - PART 1 : GENERAL REQUIREMENTS

Australia

Datalogic Scanning Pty Ltd
Telephone: [61] (2) 9870 3200
australia.scanning@datalogic.com

France and Benelux

Datalogic Scanning SAS
Telephone: [33].01.64.86.71.00
france.scanning@datalogic.com

Germany

Datalogic Scanning GmbH
Telephone: 49 (0) 61 51/93 58-0
germany.scanning@datalogic.com

India

Datalogic Scanning India
Telephone: 91- 22 - 64504739
india.scanning@datalogic.com

Italy

Datalogic Scanning SpA
Telephone: [39] (0) 39/62903.1
italy.scanning@datalogic.com

Japan

Datalogic Scanning KK
Telephone: 81 (0)3 3491 6761
japan.scanning@datalogic.com

Latin America

Datalogic Scanning, Inc
Telephone: (305) 742-2206
latinamerica.scanning@datalogic.com

Singapore

Datalogic Scanning Singapore PTE LTD
Telephone: (65) 6435-1311
singapore.scanning@datalogic.com

Iberia

Datalogic Scanning SAS Sucursal en España
Telephone: 34 91 746 28 60
spain.scanning@datalogic.com

United Kingdom

Datalogic Scanning LTD
Telephone: 44 (0) 1582 464900
uk.scanning@datalogic.com



www.scanning.datalogic.com

Datalogic Scanning, Inc.

959 Terry Street
Eugene, OR 97402
USA
Telephone: (541) 683-5700
Fax: (541) 345-7140

