



DVI[®]
LIGHTING
VOLUME 7

2 0 2 3
BULB
CATALOGUE



DVI[®]
LIGHTING

2023

DESIGN FEATURES



MARSHMALLOW

Say it once and you'll immediately conjure up thoughts of campfires, candy, and camaraderie. The unique design and color temperature options make this the ideal bulb for light fixtures with exposed lightbulbs. While it is rated for enclosed light fixtures, we don't know why you would want to cover this adorable little guy up. It's so cute we can't stand it!



LANTERN

Eye catching, curvaceous, fun, even a little rugged. Our Lantern bulb adds a unique and retro feel to any space. Oh yeah! Add warm ambiance, fully dimmable, and energy efficient to the list of compliments we can't stop paying this bulb.



HOLLYWOOD

Form meets function with our Hollywood Metallic Dipped Bulb. Not only does this metallic dip reflect a warm white glow, it also allows you to look directly at its shimmering beauty. Available in metallic gold or metallic silver dip.



VINTAGE

Our vintage bulbs are similar to the original in design and form. They evoke a warm, cozy, and nostalgic feeling similar to all the other vintage bulbs on the market. To be clear, the DVI Vintage bulb is just like other vintage style bulbs currently on the market, but better. They're fully dimmable, come with a 5 year warranty, and will add some nostalgic charm to your current in-store offering.

Did you know that DVI's new packaging reflects our colour temperatures?


It comes in 5 different temperatures. 2200K, 2700K, 3000K, 4000K, and 5000K.



2200K




2700K

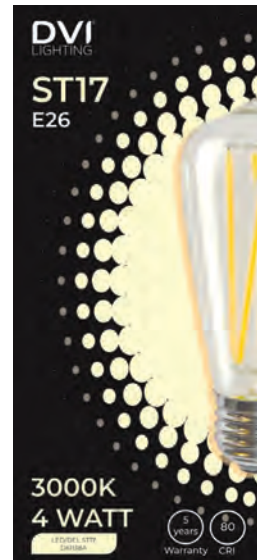


3000K



4000K

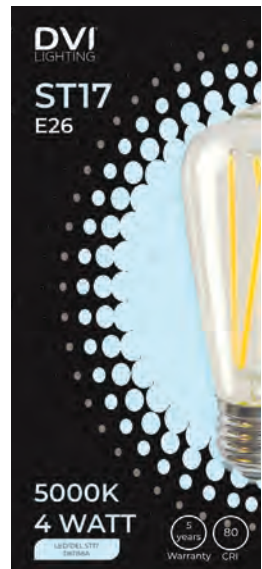

5000K

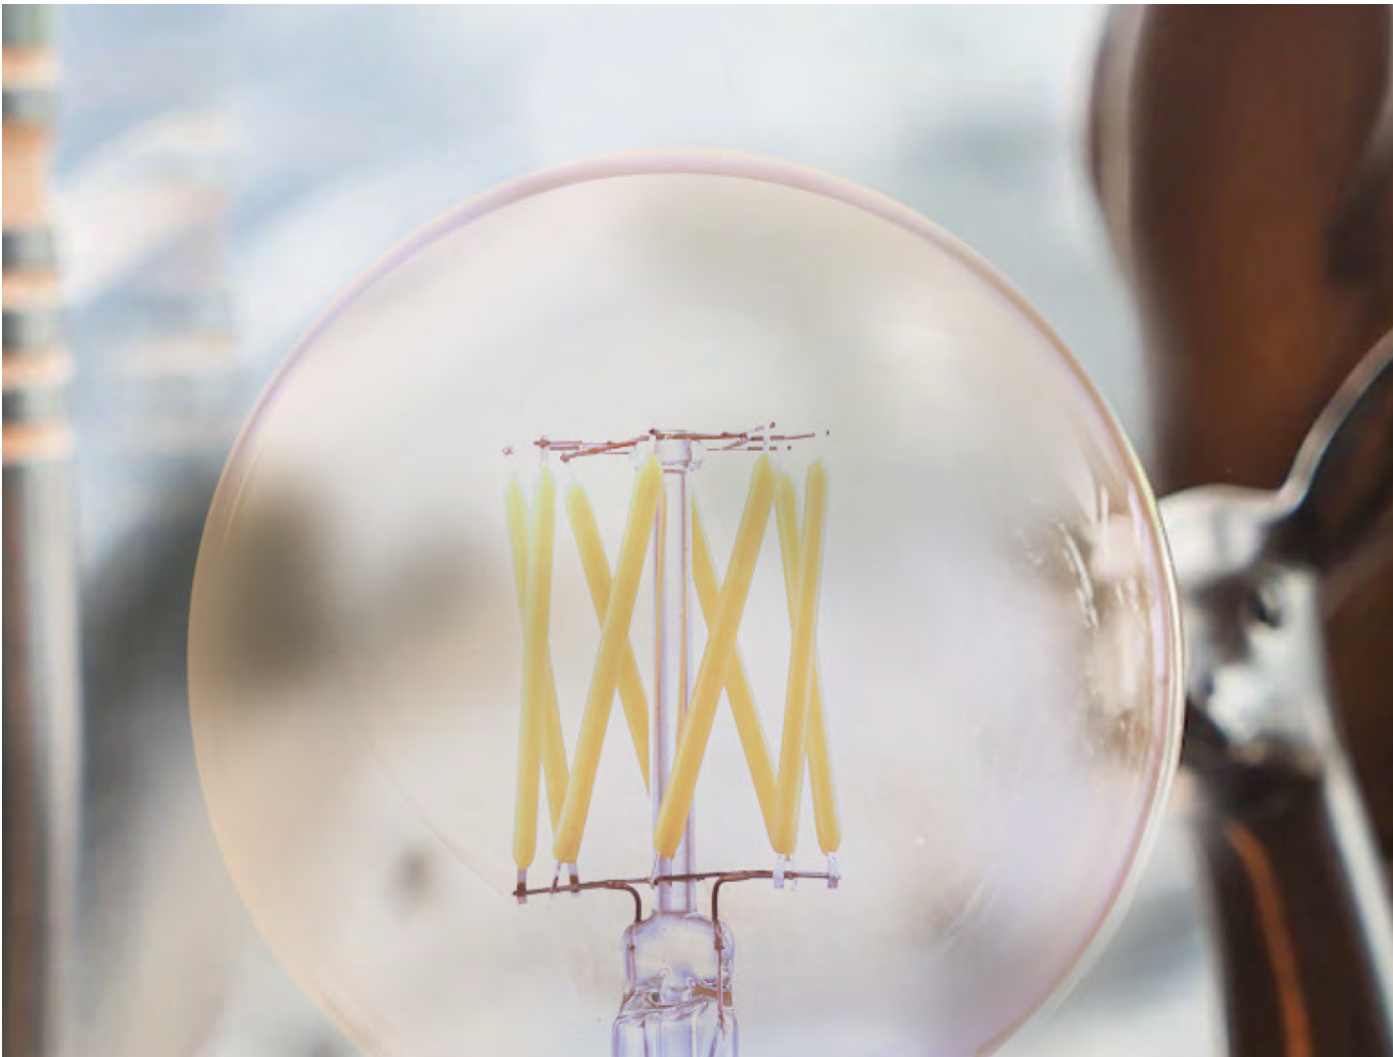

NEW TO THIS CATALOGUE

Now featuring several new and updated bulbs including:



E26 T10
Medium
"Railroad
Track" LED



E26 ST18
High Output
Edison LED



E26 A19
A19 Clear
LED HP



E26 A19
A19 Frosted
"Utility" LED

Stock code	Description	Replacing
D11339A	10W 1000 LM 3000K 90CRI A19 E26	NEW
D11349A	10W 1000 LM 4000K 90CRI A19 E26	NEW
D10339A	10W 1000 LM 3000K 90CRI A19 E26 FROSTED	NEW
D66138A	6.5W 700 LM 3000K 80CRI ST19 E26	NEW
D66148A	6.5W 700 LM 4000K 80CRI ST19 E26	NEW
D65239A	9W 900 LM 3000K 90CRI ST18 E26	NEW
D65249A	9W 900 LM 4000K 90CRI ST18 E26	NEW
D33129A	6W 600 LM 2700K 90CRI C35 E12	NEW
D33139A	6W 600 LM 3000K 90CRI C35 E12	NEW
D33149A	6W 600 LM 4000K 90CRI C35 E12	NEW
D77129A	6W 700 LM 2700K 90CRI T10 E26	NEW
D77139A	6W 700 LM 3000K 90CRI T10 E26	NEW
D77149A	6W 700 LM 4000K 90CRI T10 E26	NEW
D85139A	4W 420 LM 3000K 90CRI T6 E12 OPAL	NEW

Bulb listed below have improved driver circuitry culminating in higher energy efficiencies and upgraded to 90CRI.

Stock code	Description	Replacing
D92149A	5.6W 625 LM 4000K 90CRI G9	DVLG9BC40A
D92159A	5.6W 625 LM 5000K 90CRI G9	DVLG9BC50A
D75129A	4W 400 LM 2700K 90CRI T6 E12	DVIBLEDEI22700FL4A
D75139A	4W 400 LM 3000K 90CRI T6 E12	DVIBLEDEI23000FL4A
D75149A	4W 425 LM 4000K 90CRI T6 E12	DVIBLEDEI24000FL4A
D83129A	4W 400 LM 2700K 90CRI T6 E12	DVILE12B27C4
D83139A	4W 400 LM 3000K 90CRI T6 E12	DVILE12B30C4
D83149A	4W 400 LM 4000K 90CRI T6 E12	DVILE12B40C4

We have included the newest Lutron Dimmer on the Market - Maestro Pro MA-PRO-WH- in our bulb dimmability tables.

State of the LIGHT BULB

Lighting Showrooms understand the benefits that come from selling light bulbs with lighting fixtures. As LED bulbs continue to evolve in shape, style and quality, the potential ART (average revenue/transaction) increases from upselling the quality and quantity of lightbulbs. Upselling your customer by including bulbs is only the first step. By moving to a higher quality bulb package and increasing bulb wattage, lumens and CRI, you can increase profits as well as gain a customer who feels that they have purchased something unique and special.

In turn, selling a bulb package that suits the fixture both in shape, lumens, colour temperature and dimmability is one of the few true differentiators that a showroom can quickly demonstrate to a customer that sets a brick and mortar reseller apart from the many websites impersonally selling lighting products without the service or expertise a lighting professional brings to the table.

This year, we've improved our product line to create two discrete levels of bulb quality to

allow lighting showrooms to use the DVI line for both basic and advanced quality needs. Both our base and improved level bulbs are improved, and use new and improved chipsets and filament structures from prior year models. Our base level still focuses on product quality and maintains our impressive 5-year warranty in all but our G9 product offering while offering an aggressive price point. Our improved level differs from our base level with more expensive chipsets with improved 90 CRI technology, new filament types and higher wattage which, in turn, creates stronger lumen packages. While superficially the same, these two product classes create two distinct levels of product to offer to customers, and in turn allow you to even further separate your showroom from online market places that simply offer thousands of products for the consumer to blindly select.



Our brick and mortar industry face an all too common problem that not only plagues lighting showrooms, but all industries in todays retail world where choice can seem almost infinite at times. How do we as an industry differentiate physically identical lightbulbs when the consumer has an infinite variety of bulbs for sale on their phone, in their grocery store, on amazon and dozens of other web-sites, and in box stores and dollar stores? It is a tough question and one that can only be answered by the supplier of the products. In other words, it our job to arm you with the tools to explain to your customer why the DVI bulb is the right bulb, and I think that in this issue, we've done more than ever to give you the tools to succeed in that conversation.

From improved dimmability charts, to shorter part numbers (finally!) and increased technical information you have in your hands the most informative technical manual for light bulbs in the industry, a document we are proud to place in your hands for your consideration.

Robert Francis Borg
CEO & CREATIVE DIRECTOR

TABLE OF CONTENTS

E12/C35	Clear Candelabra LED.....	14
E12/C35	High Power LED Clear Candelabra	15
E12/C35	High Power CRI90 LED Clear Candelabra	16
E12/C35	True Opal Candelabra.....	17
E12/C35	“Cut Crystal” Candelabra LED.....	18
E12/G16	“Mini Globe” LED.....	19
E12/G16	“Mini Globe” True Opal LED.....	20
E12/ST12	“Mini” Edison LED.....	21
E12/S18	“Spear” LED.....	22
E12/T6	“Torpedo” LED.....	23
E12/T6	“Torpedo” Opal LED.....	24
E12/T6	“Lipstick” LED.....	25
E12/T9	CRI 90 “Torpedo” LED.....	26
E12/T20	“Marshmallow”LED.....	27
E26/ST18	“Vintage” Tungsten Incandescent.....	28
E26/A15	A15 LED Clear.....	29
E26/A19	A19 Frosted “Utility” LED.....	30
E26/A19	A19 Clear “Utility” LED.....	31
E26/A19	A19 Clear LED.....	32
E26/A19	A19 Clear LED HP.....	33
E26/ST17	Small Edison LED.....	34
E26/ST19	True Opal Edison LED.....	35
E26/ST19	Edison LED.....	36
E26/ST18	High Output Edison LED.....	37
E26/ST25	Oversize Edison LED.....	38
E26/BT22	“Lantern” LED.....	39
E26/T10	“Railroad Track” LED.....	40
E26/T10	“Medium Railroad” Track LED.....	41
E26/T10	“Large Railroad” Track LED.....	42
E26/T14	T14 LED.....	43
E26/T14	T14 Frosted LED.....	44
E26/T14	Double T14 LED.....	45
E26/G25	Clear “Hollywood” LED.....	46
E26/G25	Plated “Hollywood” LED.....	47
E26/G25	True Opal “Hollywood” LED.....	48
E26/G35	Mid Size “Hollywood” LED.....	49
E26/G40	Oversize “Hollywood” LED.....	50
E26/G40	True Opal “Oversize” Hollywood LED.....	51
E26/A165	CRI 90 “Jupiter” LED.....	52
E26/A165	True Opal “Jupiter” LED.....	53
G9	Clear G9 LED.....	54
G9	High Output G9 LED*.....	55
G9	Frosted G9 LED.....	56
G9	“Cut Crystal” G9 LED.....	57
GU5.3/MR16	MR16 LED.....	58
GU5.3/MR16	MR16 “Utility” MCOB.....	59
GU10/MR16	COB LED.....	60
GU10/MR16	GU10 “Utility” MCOB.....	61
E26/HR 16	COB LED.....	62
E12/CT24	Clear Candelabra LED Bulk Pack.....	63
E26/ST17	Small Edison LED Bulk Pack.....	64
AVRO	LED Disk Light.....	66-67
POLARIS	LED Disk Light.....	68-69
TEMPEST	LED Disk Light.....	70-71
TYPHOON	LED Disk Light.....	72-73
BULBS	STATUS.....	74-77
LED DISK LIGHTS	STATUS.....	78-79
ACCESSORIES	80
DIMMING TABLE	SUPERSESSION.....	81-82

GLOSSARY OF TERMS

ANSI

American National Standards Institute, a publisher of standards for US products and services. ANSI also coordinates national and international standards, allowing US products and services to be used elsewhere.

BASE

The part of the bulb that connects to the lighting fixture, providing both physical support and electric power for the bulb. A bulb and fixture can only be used together if the bulb base matches the fixture socket. The bases of most residential bulbs use either a screw or multiple pins.

A bulb can have more than one base: for example, fluorescent tubes have one on each end.

BEAM ANGLE


Beam angle, also known as beam spread, is a measure of the distribution of light emitted by an LED chip or filament. In most cases, with no hindrance such as reflectors or lenses, the beam angle is 360 degrees since light can shine equally in all directions. However when optics are employed, the light distribution changes. For example, consider a spotlight versus a floodlight.

COLOR RENDERING INDEX (CRI)

A metric used to describe how faithfully a light source can render the true colors of objects and spaces, where natural light sources like the sun have a perfect index of 100. Using lamps with a high CRI value is very important in high-end interior design, as they enhance the visibility of décor and fine details.

KELVIN (K)

Measurement unit for temperature, used in the lighting industry to indicate the correlated color temperature (CCT) of light sources.

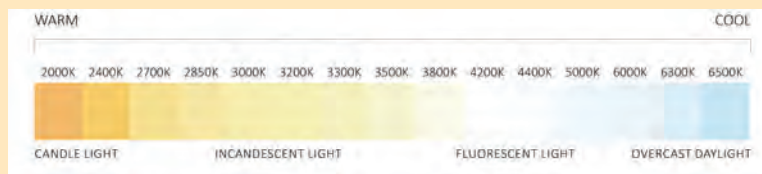

LUMENS

Measurement unit for the lighting output, or brightness, of lamps or fixtures. The total lumens emitted and their spatial distribution are of paramount importance when creating appealing and luxurious indoor spaces. In lighting, lumens can be compared to miles traveled and watts can be compared to fuel consumption.

A



E26 A15
A15 LED Clear
PG: 29

E26 A19
A19 Frosted
"Utility" LED
PG: 30

E26 A165
CRI 90 "Jupiter"
LED
PG: 52

E26 A165
True Opal
"Jupiter" LED
PG: 53

E26 A19
A19 Clear "Utility"
LED
PG: 31

E26 A19
A19 Clear LED
PG: 32

E26 A19
A19 Clear LED HP
PG: 33

ST/ S



E12 ST12
"Mini Edison" LED
PG: 21

E26 ST17
Small Edison LED
PG: 34

E26 ST18
"Vintage" Tungsten
Incandescent
PG: 28

E26 ST19
True Opal Edison
LED
PG: 35

E26 ST19
Edison LED
PG: 36

E26 ST18
High Output
Edison LED
PG: 37

E26 ST25
Oversize Edison LED
PG: 38

E26 S18
"Spear" LED
PG: 22

C



E12 C35
Clear Candelabra
LED
PG: 14

E12 C35
High Power LED
Candelabra Clear
PG: 15

E12 C35
High Power CRI90
LED Candelabra
Clear
PG: 16

E12 C35
True Opal LED
Candelabra
PG: 17

E12 C35
"Cut Crystal"
Candelabra LED
PG: 18

G



E12 G16
"Mini Globe" LED
PG: 19

E12 G16
"Mini Globe" True
Opal LED
PG: 20

E26 G25
Clear
"Hollywood" LED
PG: 46

E26 G25
Plated
"Hollywood" LED
PG: 47

E26 G25
True Opal
"Hollywood" LED
PG: 48

E26 G33
Mid Size
"Hollywood" LED
PG: 49

E26 G40
Oversize
"Hollywood" LED
PG: 50

E26 G40
True Opal
Oversize
"Hollywood" LED
PG: 51

T/ BT



E12 T6
"Torpedo" LED
PG: 24

E12 T6
"Lipstick" LED
PG: 23

E12 T9
CRI 90 "Torpedo"
LED
PG: 26

E26 T10
"Railroad Track"
LED
PG: 40

E26 T10
Medium "Railroad
Track" LED
PG: 41

E12 T10
Large "Railroad
Track" LED
PG: 42

E26 T14
T14 LED
PG: 43

E26 T14
T14 Frosted LED
PG: 44

E12 T6
"Torpedo" Opal LED
PG: 25

E26 T14
Double T14 LED
PG: 45

E12 T20
"Marshmallow" LED
PG: 27

E26 BT22
"Lantern" LED
PG: 39

DIRECTORY



MR/ HR



E26 HR16
COB LED
PG: 62



GU5.3 MR16
MR16 LED
PG: 58



GU5.3 MR16
MR16 "Utility" MCOB
PG: 59



GU10 MR16
COB LED
PG: 60



GU10 MR16
GU10 "Utility"
MCOB LED
PG: 61

G9



G9
Clear G9 LED
PG: 54



G9
Frosted G9 LED
PG: 55



G9
High Output
G9 LED
PG: 56



G9
"Cut Crystal"
G9 LED
PG: 57

LED DISK LIGHTS



AVRO
LED Disk Light
PG: 66-67



POLARIS
LED Disk Light
PG: 68-69



TEMPEST
LED Disk Light
PG: 70-71



TYPHOON
LED Disk Light
PG: 72-73

ADVANCED DIMMING ADJUSTMENTS*^

LUTRON MAESTRO MACL-153MH

Entering programming mode: Pull bottom service switch out, push and hold top portion of rocker switch then simultaneously push service switch back in while continuing to hold for 5 additional seconds at which point an indicator light will slowly blink.

To enter high/low end trim adjustment mode: Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side illuminate at the top position (high end trim) or second from the top (low end trim), then tap and release top portion of rocker switch – an indicator light will blink rapidly.

To adjust high/low end trim: Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side corresponds with the desired high/low end trim as shown in your luminaire, then then tap and release top portion of rocker switch to exit programming mode.

LUTRON DIVA C.L DVWCL-153PH

Entering programming mode: Turn off dimmer and remove wall plate to expose adjustment dial on lower left corner and take note of the colours (in order: White, White, White, Magenta, Orange, Blue, Green, Black).

To enter high/low end trim adjustment mode: Set slider on right side of dimmer to bottom, then rotate dial clockwise (to reduce luminaire output), or counter clockwise (to increase luminaire output) until bulbs no longer flicker and are dimly illuminated when slider is at bottom, then reinstall wall plate.

LEVITON DECORA SURESLIDE 6674-POW

Entering programming mode: Turn off dimmer and remove wall plate to expose switch at top with 'A' and 'B' markings.

To enter high end trim adjustment mode: Set switch to position 'A' and move main slider all the way to the top, then turn dimmer on and set switch to position 'B'.

To enter low end trim adjustment mode: Set switch to position 'A' and move main slider all the way to the bottom, then turn dimmer on and set switch to position 'B'.

To adjust high/low end trim: Move main slider to desired light level on luminaire, then set switch to 'A' the luminaire will momentarily flash confirming the setting – turn the dimmer off at this point.

LUTRON C.L SKYLARK COUNTOUR CTCL-153P

Entering programming mode: Turn off dimmer and remove wall plate to expose lever switch at side with '+' and '-' markings.

To enter low end trim adjustment mode: Turn dimmer on and move main slider all the way to the bottom.

To adjust low end trim: Move '+/-' lever to desired light level on luminaire, then cycle dimmer off/on to verify proper settings and reinstall wall plate.

Use 'My Leviton' app to adjust.



LUTRON CASETA WIRELESS PD-6WCL

Entering programming mode: Turn dimmer off, then press and hold the 'On'/top button along with the 'Brighter'/second button from top for 6 seconds – an illuminator light will begin to flash.

To enter low end trim adjustment mode: Turn dimmer off, then press and hold the 'On'/top button along with the 'Darker'/third button from top for 6 seconds – an illuminator light will begin to flash.

To adjust high/low end trim: Tap the 'Darker' and 'Brighter' buttons until bulbs no longer flicker and are dimly illuminated, then hold the 'Off'/bottom button until the illuminator light no longer flashes – tap off to cycle the dimmer and verify settings.

LEVITON DECORA ROCKER SLIDE DSL06-1LZ

Entering programming mode: Turn off dimmer and remove wall plate plus colour kit via the side tabs near the bottom of the switch panel to expose the bare actuators.

To enter high end trim adjustment mode: Move main slider bar all the way to the top, ensure mode selector with 'A/B' markings is set on 'A' then turn dimmer on by holding the 'On/Off' paddle while moving mode selector to position 'B'.

To enter low end trim adjustment mode: Move main slider bar all the way to the bottom, ensure mode selector with 'A/B' markings is set on 'A' then turn dimmer on by holding the 'On/Off' paddle while moving mode selector to position 'B'.

To adjust high/low end trim: Move main slider bar to desired light level on luminaire, then move mode selector to 'A' – the luminaire will momentarily flash confirming the setting at this point turn the dimmer off and replace colour kit plus wall plate.

LUTRON MAESTRO MA-PRO-WH

Entering programming mode: Pull bottom service switch out, push and hold top portion of rocker switch then simultaneously push service switch back in while continuing to hold for 5 additional seconds at which point an indicator light will slowly blink.

To enter high/low end trim adjustment mode: Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side illuminate at the top position (high end trim) or second from the top (low end trim), then tap and release top portion of rocker switch – an indicator light will blink rapidly.

To adjust high/low end trim: Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side corresponds with the desired high/low end trim as shown in your luminaire, then then tap and release top portion of rocker switch to exit programming mode.

To enter high/low end trim adjustment mode: Press and hold the raise button on the right side of the dimmer for 5 seconds until the bank of LEDs on the left-hand side illuminate at the top position (forward phase), middle (auto phase select), or bottom (reverse phase).

To adjust forward/reverse phase: Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side corresponds with the desired phase, then then tap and release top portion of rocker switch to exit programming mode.

*For full unabridged instructions and additional information, please visit websites of each vendor for the associated dimmer model you wish to utilize
^Text reproduced from Lutron and Leviton documentation - DVI does not warrant or guarantee performance and/or results


E12 C35

Clear Candelabra LED



H 3 7/8"

Ø 1 3/8"

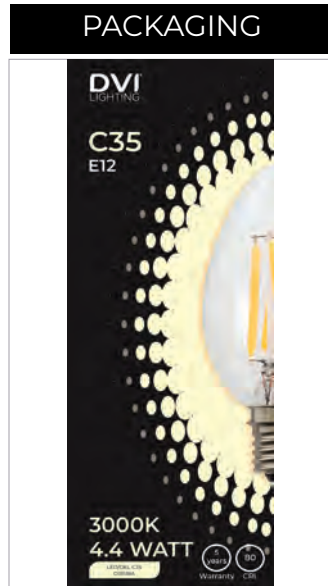

SPECIFICATIONS	
WATTS	4.4
DELIVERED LUMENS	400-500
LAMP SHAPE	C35
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 7/8"
MAXIMUM DIAMETER	1 3/8"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

ORDER CODES

- **D31128A / DVIBLEDE122700CT24***
2700 KELVIN · LUMENS 400 · CLEAR
- **D31138A / DVIBLEDE123000CT24***
3000 KELVIN · LUMENS 425 · CLEAR
- **D31148A / DVIBLEDE124000CT24***
4000 KELVIN · LUMENS 450 · CLEAR
- **D31158A / DVIBLEDE125000CT24***
5000 KELVIN · LUMENS 500 · CLEAR

* Item is discontinuing, see page 75 for dates

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		▲	MIN	✓	✓	✓		▲	MIN	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	MAX	✓
LEVITON DECORA SURESLIDE®		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	MAX		●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓		✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LEVITON DECORA SMART™			MIN	✓	✓	✓		✓	MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

E12

C35

High Power LED Clear Candelabra



H 37/8"

Ø 1 3/8"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **DVLC35CC27C**
2700 KELVIN · LUMENS 550 · CLEAR
- **D32138A / DVLC35CC30C***
3000 KELVIN · LUMENS 550 · CLEAR
- **D32148A / DVLC35CC40C***
4000 KELVIN · LUMENS 550 · CLEAR
- **DVLC35CC50C**
5000 KELVIN · LUMENS 600 · CLEAR

*Item is discontinuing, see page 75 for dates

SPECIFICATIONS

WATTS	5
DELIVERED LUMENS	500-600
LAMP SHAPE	C35
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 7/8"
MAXIMUM DIAMETER	1 3/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

*This chart is for D321x8A series only - for DVLC35CCxxC charts, please flip to Page 81 for superceded data

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✗	▲	✓	✓	✓	✓	✗	▲	✓	✓	✓	✓	✗
LEVITON DECORA SURESLIDE®	▲	●	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	●	●	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

C35

High Power CRI90 LED Clear Candelabra



H 3⁷/₈"

Ø 1³/₈"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D33129A NEW**
2700 KELVIN · LUMENS 600 · CLEAR
- **D33139A NEW**
3000 KELVIN · LUMENS 600 · CLEAR
- **D33149A NEW**
4000 KELVIN · LUMENS 600 · CLEAR

SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	600
LAMP SHAPE	C35
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 ⁷ / ₈ "
MAXIMUM DIAMETER	1 ³ / ₈ "
CRI	90+
BEAM ANGLE	360°
JAS CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	x	▲	✓	✓	✓	✓	x	▲	✓	✓	✓	✓	x
LEVITON DECORA SURESLIDE®	▲	●	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	●	●	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓


E12 C35

True Opal Candelabra LED



H 3⁷/₈"

Ø 1³/₈"

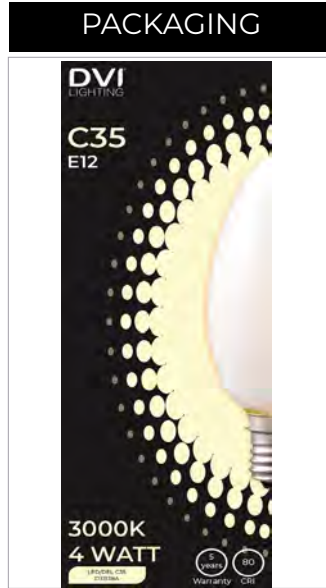

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D33138A / DVLC35CT30A***
3000 KELVIN · LUMENS 350 · TRUE OPAL
- **D33148A / DVLC35CT40A***
4000 KELVIN · LUMENS 350 · TRUE OPAL

* Item is discontinuing, see page 75 for dates

SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	350
LAMP SHAPE	C35
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 ⁷ / ₈ "
MAXIMUM DIAMETER	1 ³ / ₈ "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @ 10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	•	✓	✓


E12 C35

"Cut Crystal" Candelabra LED



H 3⁷/₈"

Ø 1³/₈"

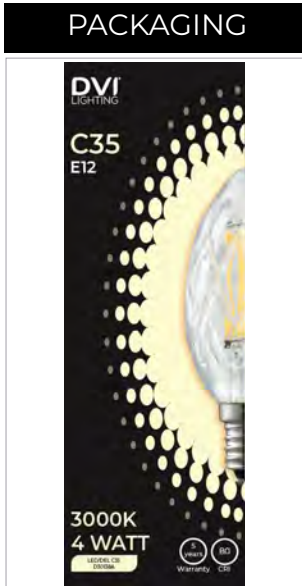

SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	C35
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 ⁷ / ₈ "
MAXIMUM DIAMETER	1 ³ / ₈ "
CRI	80+
BEAM ANGLE	360°
JAS CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	D30138A / DVLC35CB30A* 3000 KELVIN · LUMENS 400 · TRUE OPAL
●	D30148A / DVLC35CB40A* 4000 KELVIN · LUMENS 400 · TRUE OPAL

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

* Item is discontinuing, see page 75 for dates

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	•	✓	✓	✓	•	✓	✓	✓

E12 G16

"Mini Globe" LED



SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	400-450
LAMP SHAPE	G16
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 1/8"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	D4118A / DVILG16R22C4* 2200 KELVIN · LUMENS 400 · CLEAR
●	D41128A / DVILG16R27C4* 2700 KELVIN · LUMENS 400 · CLEAR
●	D41138A / DVILG16R30C4* 3000 KELVIN · LUMENS 400 · CLEAR
●	D41148A / DVILG16R40C4* 4000 KELVIN · LUMENS 425 · CLEAR
●	DVILG16R50C4 5000 KELVIN · LUMENS 450 · CLEAR

*Item is discontinuing, see page 75 for dates

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

E12

G16

"Mini Globe" True Opal LED



H 3 1/8"

Ø 2"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D40138A / DVLG16CT30A***
3000 KELVIN · LUMENS 350 · TRUE OPAL
- **DVLG16CT40A**
4000 KELVIN · LUMENS 350 · TRUE OPAL

* Item is discontinuing, see page 75 for dates

SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	350
LAMP SHAPE	G16
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 1/8"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	•	✓	•	✓	✓	•	✓	✓


E12 ST12

"Mini" Edison LED



H 37/8"

Ø 1½"

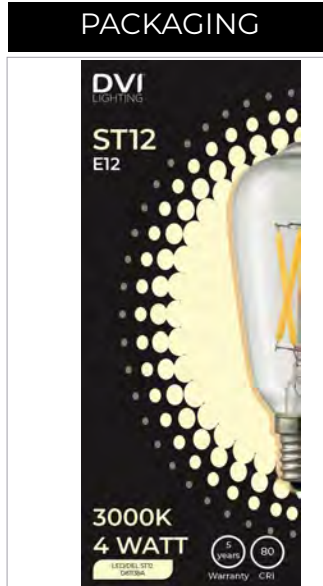

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D81118A / DVILE12S22C3***
2200 KELVIN · LUMENS 350 · CLEAR
- **D81138A / DVI LST12CC30A***
3000 KELVIN · LUMENS 400 · CLEAR

* Item is discontinuing, see page 76 for dates

SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	350-400
LAMP SHAPE	ST12
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	37/8"
MAXIMUM DIAMETER	1½"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	•	✓	•	✓	✓	•	✓	✓

E12


S18

“Spear” LED



H 4³/₄"

Ø 1¹/₂"

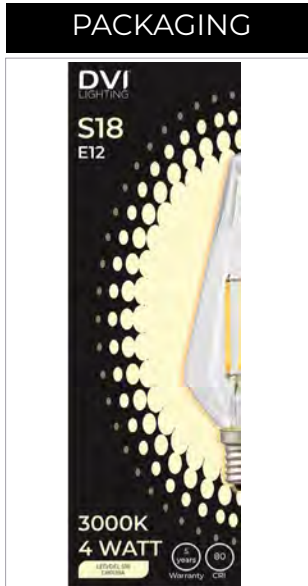

NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

ORDER CODES	
●	DVLS18CC27A 2700 KELVIN · LUMENS 375 · CLEAR
●	D80138A HAS FULLY REPLACED DVLS18CC30A 3000 KELVIN · LUMENS 400 · CLEAR
●	DVLS18CC40A 4000 KELVIN · LUMENS 425 · CLEAR
●	DVLS18CC50A 5000 KELVIN · LUMENS 450 · CLEAR

SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	375-450
LAMP SHAPE	S18
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	4 ³ / ₄ "
MAXIMUM DIAMETER	1 ¹ / ₂ "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING
Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

T6

“Torpedo” LED



H 3 1/4"

Ø 3/4"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D75129A / DVIBLEDE122700FL4A***
2700 KELVIN · LUMENS 400 · CLEAR
- **D75139A / DVIBLEDE123000FL4A***
3000 KELVIN · LUMENS 400 · CLEAR
- **D75149A / DVIBLEDE124000FL4A***
4000 KELVIN · LUMENS 425 · CLEAR

* Item is discontinuing, see page 77 for dates

SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	400-425
LAMP SHAPE	T6
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 1/4"
MAXIMUM DIAMETER	3/4"
CRI	90+
BEAM ANGLE	360°
JAS CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	✓	✓	✓	●	✓	●	✓	✓	●	✓	✓

E12


T6

“Torpedo” Opal LED



H 3½"

Ø ¾"

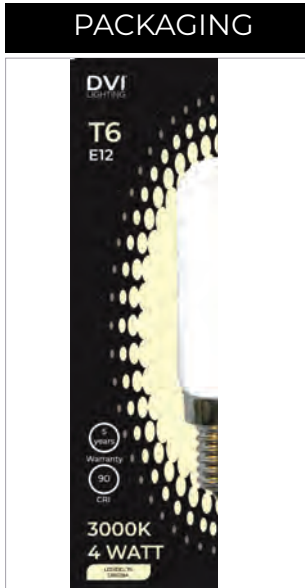

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	D85139A NEW 3000 KELVIN · LUMENS 420 · CLEAR

* Item is discontinuing, see page 77 for dates

SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	420
LAMP SHAPE	T6
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3½"
MAXIMUM DIAMETER	¾"
CRI	90+
BEAM ANGLE	360°
JAS CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING
Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

T6

"Lipstick" LED



H 3¾"

Ø ¾"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D83129A / DVILE12B27C4***
2700 KELVIN · LUMENS 400 · CLEAR
- **D83139A / DVILE12B30C4***
3000 KELVIN · LUMENS 400 · CLEAR
- **D83149A / DVILE12B40C4***
4000 KELVIN · LUMENS 400 · CLEAR

*Item is discontinuing, see page 77 for dates

SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	T6
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3¾"
MAXIMUM DIAMETER	¾"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	•	✓	•	✓	✓	•	✓	✓

E12

T9

CRI 90 "Torpedo" LED



H 3 1/4"

Ø 1"



NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

ORDER CODES

- **DVLT9CC27A**
2700 KELVIN · LUMENS 550 · CLEAR
- **D76139A / DVLT9CC30A***
3000 KELVIN · LUMENS 550 · CLEAR
- **D76149A / DVLT9CC40A***
4000 KELVIN · LUMENS 575 · CLEAR

* Item is discontinuing, see page 77 for dates

SPECIFICATIONS

WATTS	5
DELIVERED LUMENS	550-575
LAMP SHAPE	T9
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 1/4"
MAXIMUM DIAMETER	1"
CRI	90+
BEAM ANGLE	360°
JA8 CERTIFIED	Yes
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.51 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost


Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	●	✓	✓	✓	✓	●	●	✓	✓	✓	✓	✓

E12 T20

"Marshmallow" LED

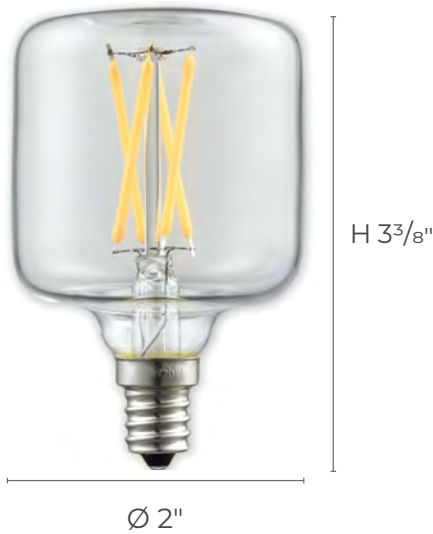

SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	T20
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 3/8"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JAS CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @ 10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	D82138A / DVL20CC30A* 3000 KELVIN · LUMENS 400 · CLEAR
●	D82148A / DVL20CC40A* 4000 KELVIN · LUMENS 400 · CLEAR

* Item is discontinuing, see page 77 for dates

DVI LIGHTING CORE OFFERING
Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	•	✓	•	✓	✓	•	✓	✓	✓

E26 ST18

"Vintage" Tungsten Incandescent



H 5 1/4"

Ø 3/4"

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

PACKAGING



ORDER CODES

● **DVIBA1960CARB**
2200 KELVIN · 60 WATTS · CLEAR

SPECIFICATIONS

WATTS	60
DELIVERED LUMENS	N/A
LAMP SHAPE	ST18
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	5 1/4"
MAXIMUM DIAMETER	3/4"
CRI	N/A
BEAM ANGLE	360°
JAS CERTIFIED	No
ENCLOSED RATED	N/A
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	1.8 years
ENERGY COST @10.65¢/kWh †	\$6.18 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

E26

A15

A15 LED Clear



H 3 1/2"

Ø 2"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D12128A / DVA15MC27A***
2700 KELVIN · LUMENS 575 · CLEAR
- **DVA15MC30A**
3000 KELVIN · LUMENS 600 · CLEAR
- **DVA15MC40A**
4000 KELVIN · LUMENS 615 · CLEAR
- **DVA15MC50A**
5000 KELVIN · LUMENS 625 · CLEAR

* Item is discontinuing, see page 74 for dates

SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	575-625
LAMP SHAPE	A15
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	3 1/2"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.62 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	^	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	^	✓	●	✓	✓	✓	✓	✓	●	^	^	✓	✓	✓	✓	^
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	^	^	✓	^	✓	x	✓	^	✓	✓	✓	x	^	✓	✓	^	^	x	x
LEVITON DECORA SURESLIDE®	^	✓	✓	✓	✓	✓	^	^	^	✓	✓	✓	^	^	^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	^	^	✓	✓	✓	^	^	^	^	✓	✓	^	^	^	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓	✓	^	^	^	^	✓	✓	✓
LEVITON DECORA SMART™	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	●	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	✓

E26


A19

A19 Frosted "Utility" LED



H 4"

Ø 2 3/8"

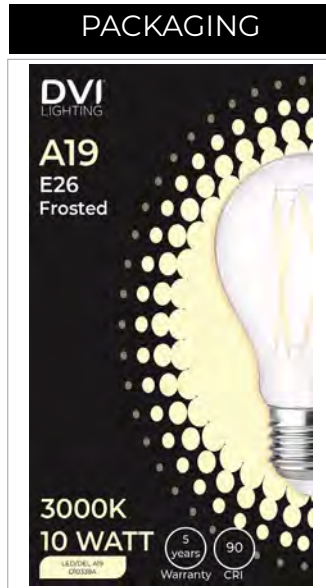

NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

ORDER CODES

- **D10138A / DVILA1930F5A***
3000 KELVIN · LUMENS 550 · FROSTED*
- **D10339A NEW**
3000 KELVIN · LUMENS 1000 · FROSTED* - CRI 90

* Item is discontinuing, see page 74 for dates
 * True Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

SPECIFICATIONS

WATTS	6-10
DELIVERED LUMENS	550-1000
LAMP SHAPE	A19
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4"
MAXIMUM DIAMETER	2 3/8"
CRI	80+/90+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	N/A
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.62-\$1.02 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E26

A19

A19 CLEAR "Utility" LED



H 4"

Ø 2 3/8"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D11128A / DVILA1927C5A****
2700 KELVIN · LUMENS 550 · CLEAR
- **D11138A HAS FULLY REPLACED DVILA1930C5A***
3000 KELVIN · LUMENS 550 · CLEAR
- **D11148A / DVILA1940C5A****
4000 KELVIN · LUMENS 550 · CLEAR
- **D11158A / DVILA1950C5A****
5000 KELVIN · LUMENS 550 · CLEAR

* Item is discontinuing, see page 74 for dates

SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	550
LAMP SHAPE	A19
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4"
MAXIMUM DIAMETER	2 3/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	N/A
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.62 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

*This chart is for D111x8A series only - for DVILA19xxC5A charts, please flip to Page 81 for superceded data

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	•	•	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	•	•	•	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E26

A19

A19 Clear LED



H 4"

Ø 2 3/8"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **DVLA19MC27C^A**
2700 KELVIN · LUMENS 750 · CLEAR
- **D11238A / DVLA19MC30C^A**
3000 KELVIN · LUMENS 750 · CLEAR
- **D11248A / DVLA19MC40C^A**
4000 KELVIN · LUMENS 750 · CLEAR

* Item is discontinuing, see page 74 for dates

SPECIFICATIONS

WATTS	7
DELIVERED LUMENS	750
LAMP SHAPE	A19
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4"
MAXIMUM DIAMETER	2 3/8"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	N/A
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

*This chart is for D112x8A series only - for DVLA19xxC5A charts, please flip to Page 81 for superceded data

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	•	•	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	•	•	•	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E26

A19

A19 Clear LED HP



H 4"

Ø 2 3/8"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D11339A NEW**
3000 KELVIN · LUMENS 1000 · CLEAR
- **D11349A NEW**
4000 KELVIN · LUMENS 1000 · CLEAR

SPECIFICATIONS

WATTS	10
DELIVERED LUMENS	1000
LAMP SHAPE	A19
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4"
MAXIMUM DIAMETER	2 3/8"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	N/A
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$1.02 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	•	•	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	•	•	•	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓


E26 ST17

Small Edison LED



H 4 1/2"

Ø 1 7/8"

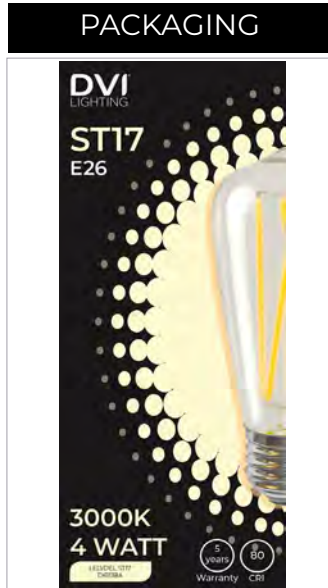

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D6118A / DVLST17MC22A***
2200 KELVIN · LUMENS 450 · CLEAR
- **D61128A / DVLST17MC27A***
2700 KELVIN · LUMENS 500 · CLEAR
- **D61138A / DVLST17MC30A***
3000 KELVIN · LUMENS 500 · CLEAR
- **D61148A / DVLST17MC40A***
4000 KELVIN · LUMENS 525 · CLEAR
- **D61158A / DVST17MC50A***
5000 KELVIN · LUMENS 525 · CLEAR

* Item is discontinuing, see page 76 for dates

SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	450-540
LAMP SHAPE	ST17
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4 1/2"
MAXIMUM DIAMETER	1 7/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @ 10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®				MIN	✓	✓		MIN	▲	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓


E26 ST19

True Opal Edison LED



H 5 1/8"

Ø 2 1/2"

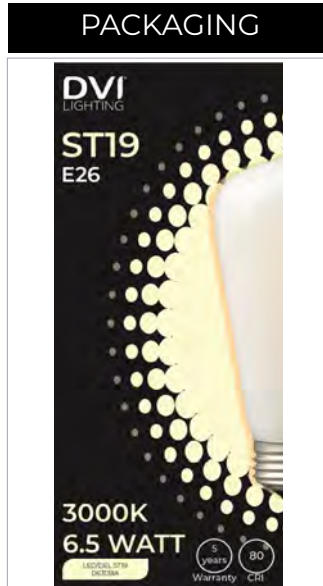

NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

ORDER CODES

- **D63138A / DVLST19MT30A***
3000 KELVIN · LUMENS 650 · TRUE OPAL*
- **DVLST19MT40A**
4000 KELVIN · LUMENS 650 · TRUE OPAL*

* Item is discontinuing, see page 76 for dates

* True Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

SPECIFICATIONS

WATTS	6.5
DELIVERED LUMENS	650
LAMP SHAPE	ST19
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	3 1/8"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.62 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U	•	✓	✓	✓	✓	✓	•	✓	✓	✓	▲	✓	•	✓	✓	✓	✓	▲	
LUTRON MAESTRO MACL-153MH	•	•	✓	✓	▲	▲	•	•	✓	✓	✓	▲	•	•	✓	✓	✓	✓	
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	▲	•	✓	✓	✓	✓	▲	
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	▲
LUTRON C.L SKYLARK CONTOUR CTL -153P	•	✓	✓	✓	✓	▲	•	✓	✓	✓	▲	✓	•	✓	✓	✓	✓	✓	
LUTRON CASETA® WIRELESS	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	▲	
LEVITON DECORA ROCKER SLIDE	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	▲	•	✓	✓	✓	✓	✓	
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	▲	✓	✓	✓	✓	▲	✓	✓	▲	✓	✓	✓	✓	✓	▲	


E26 ST19

Edison LED



H 5 1/2"

Ø 2 1/2"

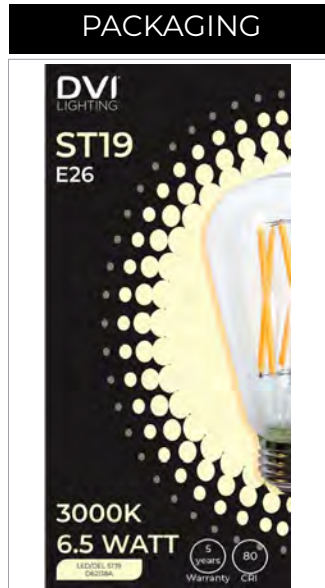

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D62118A / DVLST19MC22A***
2200 KELVIN · LUMENS 700 · CLEAR
- **DVLST19MC27A**
2700 KELVIN · LUMENS 700 · CLEAR
- **D62138A / DVLST19MC30A***
3000 KELVIN · LUMENS 700 · CLEAR
- **D62148A / DVLST19MC40A***
4000 KELVIN · LUMENS 700 · CLEAR
- **D62158A / DVLST19MC50A***
5000 KELVIN · LUMENS 700 · CLEAR

* Item is discontinuing, see page 76 for dates

SPECIFICATIONS

WATTS	6.5
DELIVERED LUMENS	700
LAMP SHAPE	ST19
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	5 1/2"
MAXIMUM DIAMETER	2 1/2"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72/ year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	MAX					✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MAX					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	X	X	X	X	X	✓	▲	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓


E26 ST18

High output Edison LED



H 5"

Ø 2 1/4"

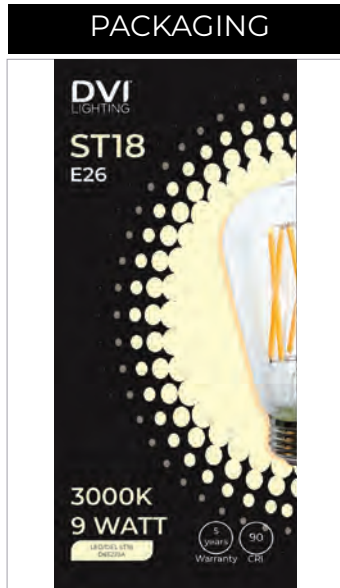

NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

SPECIFICATIONS

WATTS	9
DELIVERED LUMENS	900
LAMP SHAPE	ST18
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	5"
MAXIMUM DIAMETER	2 1/4"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.92/ year
WARRANTY	5 YRS / 20,000 HRS

ORDER CODES

- **D65239A NEW**
3000 KELVIN · LUMENS 900 · CLEAR
- **D65249A NEW**
4000 KELVIN · LUMENS 900 · CLEAR

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost


Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	•	✓	✓	✓	✓	✓	•	✓	✓	✓	^	✓	•	✓	✓	✓	✓	^
LUTRON MAESTRO MACL-153MH	•	•	✓	✓	^	^	•	•	✓	✓	✓	^	•	•	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	^	•	✓	✓	✓	✓	^
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	^
LUTRON C.L SKYLARK CONTOUR CTL-153P	•	✓	✓	✓	✓	^	•	✓	✓	✓	^	✓	•	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	^
LEVITON DECORA ROCKER SLIDE	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	^	•	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	^	✓	✓	✓	✓	^	✓	✓	^	✓	✓	✓	✓	✓	^

E26 ST25

Oversize Edison LED

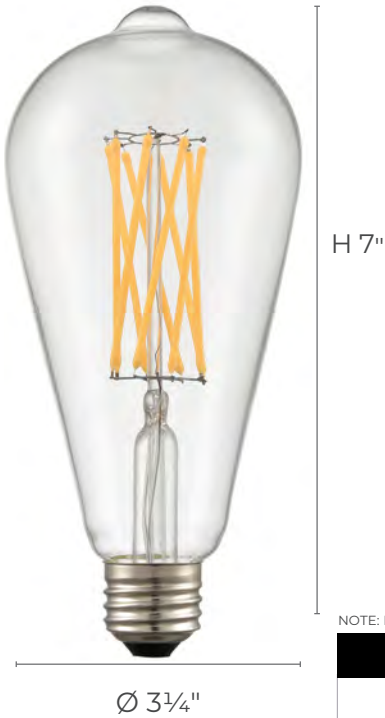

SPECIFICATIONS	
WATTS	8
DELIVERED LUMENS	950-1000
LAMP SHAPE	ST25
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	7"
MAXIMUM DIAMETER	3 1/4"
CRI	90+
BEAM ANGLE	360°
JA8 CERTIFIED	Yes
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.82 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	DVST25MC27A 2700 KELVIN · LUMENS 950 · CLEAR
●	D64238A / DVLST25MC30A* 3000 KELVIN · LUMENS 1000 · CLEAR

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

*Item is discontinuing, see page 76 for dates

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	▲	✓	▲	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	▲	▲	▲	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	▲	▲	▲	▲	▲	▲	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	▲	✓	✓	✓	✓	▲	▲	▲	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	▲	▲	▲	▲	▲	▲	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	▲	▲	▲	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	▲	▲	▲	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	✓

E26 BT22

"Lantern" LED



H 4⁵/₈"

Ø 3³/₈"

PACKAGING



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

● **DVLBT22MC30A**
3000 KELVIN · LUMENS 400 · CLEAR

* Item is discontinuing, see page 77 for dates

SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	BT22
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4 ⁵ / ₈ "
MAXIMUM DIAMETER	3 ³ / ₈ "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MAEL-153MH	✓	✓	✓	✓	✓	✓	MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	MIN	✓	✓	✓	✓	✓	MIN	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

E26

T10

“Railroad Track” LED



H 5"

Ø 1 1/4"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D72018A / DVIBLEDCAT10S2R***
2200 KELVIN · LUMENS 400 · CLEAR
- **D72028A / DVILT10S27C3***
2700 KELVIN · LUMENS 400 · CLEAR
- **D72038A / DVT10MC30A***
3000 KELVIN · LUMENS 400 · CLEAR
- **D72048A / DVT10MC40A***
4000 KELVIN · LUMENS 400 · CLEAR
- **DVT10MC50A**
5000 KELVIN · LUMENS 400 · CLEAR

* Item is discontinuing, see page 77 for dates

SPECIFICATIONS

WATTS	3
DELIVERED LUMENS	400
LAMP SHAPE	T10
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	5"
MAXIMUM DIAMETER	1 1/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.31 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	MAX				✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®		MIN	MAX				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	MAX				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E26

T10


Medium "Railroad Track" LED



H 9"

Ø 1 1/4"

PACKAGING

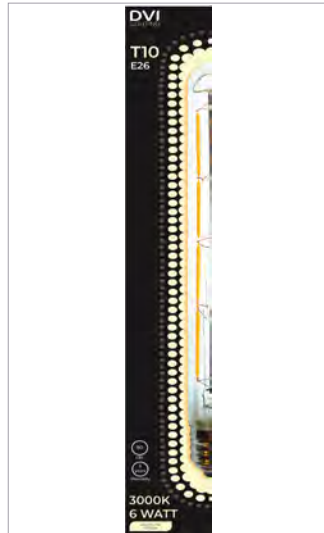

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D77129A NEW**
2700 KELVIN · LUMENS 700 · CLEAR
- **D77139A NEW**
3000 KELVIN · LUMENS 700 · CLEAR
- **D77149A NEW**
4000 KELVIN · LUMENS 700 · CLEAR

SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	700
LAMP SHAPE	T10
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	9"
MAXIMUM DIAMETER	1 1/4"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.67 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation


- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	^	✓	MAX			✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	•	✓	✓	✓	✓

E26


T10

Large "Railroad Track" LED

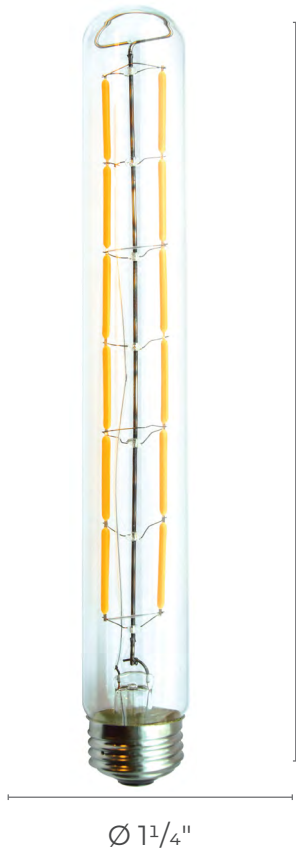

H 11³/₄"

Ø 1¹/₄"

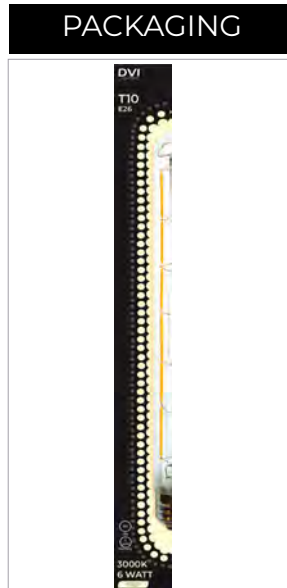

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **DVIBLEDCAT10L2R**
2200 KELVIN · LUMENS 550 · CLEAR
- **D77138A / DVILT10L30C6***
3000 KELVIN · LUMENS 550 · CLEAR

* Item is discontinuing, see page 76 for dates

SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	550
LAMP SHAPE	T10
BASE / ANSI BASE	Medium / 26
MAXIMUM HEIGHT	11 ³ / ₄ "
MAXIMUM DIAMETER	1 ¹ / ₄ "
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.67 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	X	X	X	X	X	X	✓	✓	▲	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	MAX	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	●	✓	●	✓	✓	✓	✓

E26

T14

T14 LED



H 5"

Ø 1 3/4"



NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	7
DELIVERED LUMENS	800
LAMP SHAPE	T14
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	5"
MAXIMUM DIAMETER	1 3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

ORDER CODES	
●	DVT14MC27A 2700 KELVIN · LUMENS 800 · CLEAR
●	D73238A / DVL14MC30A* 3000 KELVIN · LUMENS 800 · CLEAR
●	D73248A / DVL14MC30A* 4000 KELVIN · LUMENS 800 · CLEAR

* Item is discontinuing, see page 77 for dates

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	MAX		✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	^	✓	✓	✓	✓	✓	✓	✓	✓	MAX		✓	^	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓

E26

T14

T14 LED Frosted



H 5"

Ø 1 3/4"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D70238A / DVL T14MT30A***
3000 KELVIN · LUMENS 725 · FROSTED*
- **DVL T14MT40A**
4000 KELVIN · LUMENS 750 · FROSTED*

* Item is discontinuing, see page 77 for dates
* True Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

SPECIFICATIONS

WATTS	7
DELIVERED LUMENS	725-750
LAMP SHAPE	T14
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	5"
MAXIMUM DIAMETER	1 3/4"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	MAX		✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✗	▲	✓	✓	✓	✓	✓	✓	✓	✓	MAX		✓	▲	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

E26

T14

Double T14 LED



H 8"

Ø 1 3/4"

PACKAGING



NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

ORDER CODES

- **DVLT14MC27B**
2700 KELVIN · LUMENS 1200 · CLEAR
- **D74138A / DVLT14MC30B***
3000 KELVIN · LUMENS 1200 · CLEAR
- **DVLT14MC40B**
4000 KELVIN · LUMENS 1240 · CLEAR

* Item is discontinuing, see page 77 for dates

SPECIFICATIONS

WATTS	8
DELIVERED LUMENS	1200-1240
LAMP SHAPE	C35
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	8"
MAXIMUM DIAMETER	1 3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	MIN	✓	^	✓	✓	✓	^	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	x	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL-153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	^	^	^	^	^	^	^	^	^	^	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	^	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓

E26

G25

Clear "Hollywood" LED



H 4 1/2"

Ø 3 1/8"



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D41228B / DVG25MC27A***
2700 KELVIN · LUMENS 800 · CLEAR
- **DVG25MC30A**
3000 KELVIN · LUMENS 800 · CLEAR
- **DVG25MC40A**
4000 KELVIN · LUMENS 825 · CLEAR
- **D41258B / DVG25MC50A***
5000 KELVIN · LUMENS 850 · CLEAR

* Item is discontinuing, see page 75 for dates

SPECIFICATIONS

WATTS	8
DELIVERED LUMENS	800-850
LAMP SHAPE	G25
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4 1/2"
MAXIMUM DIAMETER	3 1/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.82 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	x	x	x	x	x	x
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	▲	✓	MAX			✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	•	✓	✓	✓

E26 G25

Plated "Hollywood" LED



H 4 1/2"

Ø 3 1/8"

* Diminished lumen output due to opaque metallic plating



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **DVILG2530G6A**
3000 KELVIN · LUMENS 800 · GOLD
- **DVILG2530H6A**
3000 KELVIN · LUMENS 800 · HALF SILVER

SPECIFICATIONS

WATTS	8*
DELIVERED LUMENS	600
LAMP SHAPE	G25
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4 1/2"
MAXIMUM DIAMETER	3 1/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.82 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	x	x	x	x	x	x	x
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	^	✓	MAX			✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	•	✓	✓	✓	✓

E26

G25

True Opal "Hollywood" LED



SPECIFICATIONS	
WATTS	8
DELIVERED LUMENS	750
LAMP SHAPE	G25
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4 1/2"
MAXIMUM DIAMETER	3 1/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.82 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D43238A / DVLG25MT30A***
3000 KELVIN · LUMENS 750 · TRUE OPAL+
- **DVLG25MT40A**
2200 KELVIN · LUMENS 750 · TRUE OPAL+

* Item is discontinuing, see page 75 for dates
 † True Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation


- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	x	x	x	x	x	x	x
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	▲	✓	MAX			✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	•	✓	✓	✓	✓

E26

G33

Mid Size "Hollywood" LED

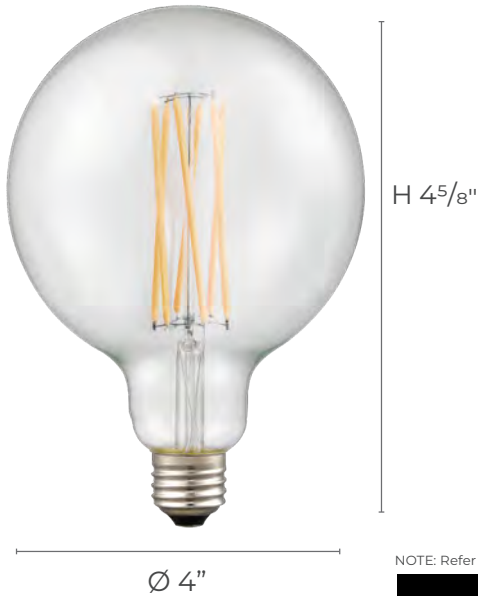

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

● **D44238A / DVLG33MC30A***
3000 KELVIN · LUMENS 700 · CLEAR

* Item is discontinuing, see page 75 for dates

SPECIFICATIONS

WATTS	8
DELIVERED LUMENS	700
LAMP SHAPE	G33
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4 5/8"
MAXIMUM DIAMETER	4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.82 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	▲	✓	✓	✓	✓	✓	▲	▲	▲	✓	✓	▲	✓	▲	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	▲	✓	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	▲	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	▲	▲	▲	▲	▲	▲	▲	✓	✓	▲	✓	✓	✗	✗	✗	✗	✗	✗
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

E26 G40

Oversize "Hollywood" LED



SPECIFICATIONS	
WATTS	8
DELIVERED LUMENS	800
LAMP SHAPE	G40
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4 7/8"
MAXIMUM DIAMETER	6 1/2"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.82 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	D45238A / DVLG40MC30A* 3000 KELVIN · LUMENS 800 · CLEAR

* Item is discontinuing, see page 75 for dates

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

*This chart is for D452x8A series only - for DVLG40MCxxA charts, please flip to Page 82 for superceded data

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	●	●	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	●	●	●	✓	✓	✓	●	✓	✓	✓	✓	✓	●	●	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E26 G40

True Opal Oversize "Hollywood" LED



SPECIFICATIONS	
WATTS	8
DELIVERED LUMENS	750
LAMP SHAPE	G40
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	4 7/9"
MAXIMUM DIAMETER	6 1/2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.82 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

ORDER CODES	
●	D46238A / DVLG40MT30A** 3000 KELVIN · LUMENS 750 · TRUE OPAL [†]

* Item is discontinuing, see page 77 for dates
[†] True Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

*This chart is for D462x8A series only - for DVLG40MTxxA charts, please flip to Page 82 for superceded data

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	•	•	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	•	•	•	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E26 A165

CRI 90 "Jupiter" LED



NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	DVLA165MC30A 3000 KELVIN • LUMENS 1100 • CLEAR

SPECIFICATIONS	
WATTS	10
DELIVERED LUMENS	1100
LAMP SHAPE	A165
BASE / ANSI BASE	E26
MAXIMUM HEIGHT	12"
MAXIMUM DIAMETER	6 3/4"
CRI	90+
BEAM ANGLE	360°
JA8 CERTIFIED	Yes
ENCLOSED RATED	N/A
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$1.02 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING	
Bulbs are only sold in sub-cartons (multiples) of 4.	


Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		MIN	✓	✓	✓	✓							
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓							
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓							

E26 A165

True Opal "Jupiter" LED

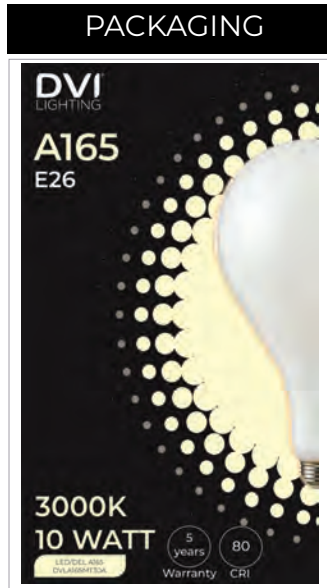

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

● **DVLA165MT30A**
3000 KELVIN · LUMENS 1050 · TRUE OPAL+

* True Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

SPECIFICATIONS	
WATTS	10
DELIVERED LUMENS	1050
LAMP SHAPE	A165
BASE / ANSI BASE	E26
MAXIMUM HEIGHT	12"
MAXIMUM DIAMETER	6¾"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	N/A
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$1.02 / year
WARRANTY	5 YRS / 20,000 HRS

DVI LIGHTING CORE OFFERING

Bulbs are only sold in sub-cartons (multiples) of 4.


Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		MIN	✓	✓	✓	✓							
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓							
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓							

G9

Clear G9 LED

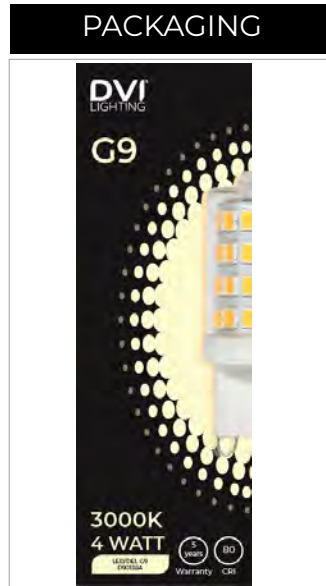

SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	350-450
LAMP SHAPE	G9
BASE / ANSI BASE	Double Loop / G9
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	5/8"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	2 YRS / 15,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	DVILG922C4 2200 KELVIN · LUMENS 350 · CLEAR
●	D90138A HAS FULLY REPLACED DVILG930C4 3000 KELVIN · LUMENS 450 · CLEAR
●	D90148A / DVILG940C4* 4000 KELVIN · LUMENS 450 · CLEAR

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

* Item is discontinuing, see page 74 for dates

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP73U		MIN	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			▲	✓	✓	✓			MIN	✓	▲	▲	▲	▲	▲	▲	▲	▲	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		▲	✓	✓	✓	x	✓	✓	▲	✓	▲	x	▲	▲	▲	✓	✓	✓	x
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	▲	✓	▲	✓	▲	✓	✓	✓	▲	✓	▲	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	▲	▲	✓	✓	✓	✓	▲	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	x	x	x	x	x	x		MIN	▲	▲	▲	✓		MIN	▲	▲	▲	▲	x
LEVITON DECORA ROCKER SLIDE	▲	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	x	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓


G9

Frosted G9 LED



H 2"

Ø 5/8"

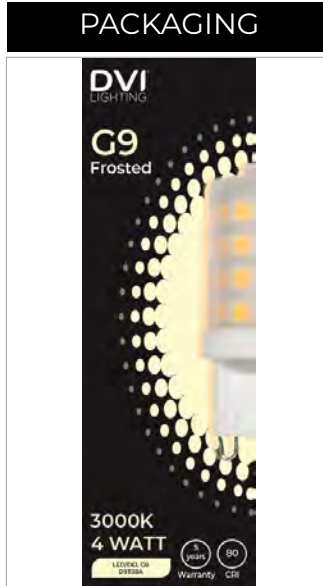

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **D91138A / DVILG930F4***
3000 KELVIN · LUMENS 400 · FROSTED+
- **DVILG940F4**
4000 KELVIN · LUMENS 450 · FROSTED+

* Item is discontinuing, see page 74 for dates
 * True Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	400-450
LAMP SHAPE	G9
BASE / ANSI BASE	Double Loop / G9
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	5/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	2 YRS / 15,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost


Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP73U		MIN	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			▲	✓	✓	✓			MIN	✓	▲	▲	▲	▲	▲	▲	▲	▲	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		▲	✓	✓	✓	✗	✓	✓	▲	✓	▲	✗	▲	▲	▲	✓	✓	✗	✗
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	▲	✓	▲	✓	▲	✓	✓	✓	▲	✓	▲	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	▲	▲	✓	✓	✓	✓	▲	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✗	✗	✗	✗	✗	✗	MIN	▲	▲	▲	✓		MIN	▲	▲	▲	✗	✗	✗
LEVITON DECORA ROCKER SLIDE	▲	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓

G9

High Output G9 LED

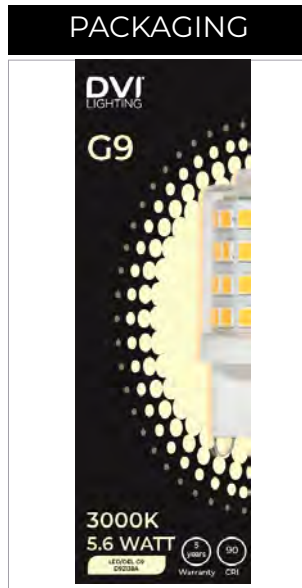

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	5.6
DELIVERED LUMENS	575-625
LAMP SHAPE	G9
BASE / ANSI BASE	Double Loop / G9
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	5/8"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.58 / year
WARRANTY	2 YRS / 15,000 HRS

ORDER CODES	
●	DVG9BC27A 2700 KELVIN · LUMENS 575 · CLEAR
●	D92138A / DVLC9BC30A* 3000 KELVIN · LUMENS 595 · CLEAR
●	D92149A / DVLC9BC40A* 4000 KELVIN · LUMENS 625 · CLEAR
●	D92159A / DVLC9BC50A* 5000 KELVIN · LUMENS 625 · CLEAR

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

* Item is discontinuing, see page 74 for dates

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓			MIN	✓	▲	▲	▲	▲	▲	▲	▲	▲	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	▲	✓	▲	X	▲	▲	▲	✓	✓	✓	X
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	▲	✓	▲	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	▲	▲	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	▲	▲	▲	✓		MIN	▲	▲	▲	▲	X
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	X	X	X	X	X	X	X	X	X	X	X	X	X
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓


G9

"Cut Crystal" G9 LED



H 2"

Ø 3/4"

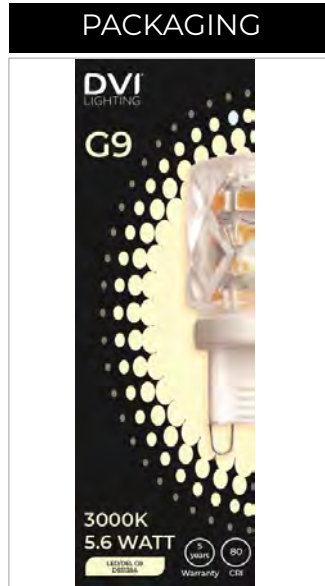

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES

- **DVG9BB27A**
2700 KELVIN · LUMENS 525 · CLEAR
- **D93138A / DVG9BB30A***
3000 KELVIN · LUMENS 550 · CLEAR
- **D93148A / DVG9BB40A***
4000 KELVIN · LUMENS 575 · CLEAR
- **D93158A / DVG9BB50A***
5000 KELVIN · LUMENS 575 · CLEAR

*Item is discontinuing, see page 74 for dates

SPECIFICATIONS

WATTS	5.6
DELIVERED LUMENS	525-575
LAMP SHAPE	G9
BASE / ANSI BASE	Double Loop / G9
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.51 / year
WARRANTY	2 YRS / 15,000 HRS

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	^	^	^	^	^	^	^	^	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH			MIN	✓	MAX		✓	✓	^	✓	^	X	^	^	^	✓	✓	✓	X
LEVITON DECORA SURESLIDE®		MIN	✓	✓	✓	✓	^	✓	^	✓	✓	✓	^	✓	^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	•	✓	✓	✓	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X		MIN	^	^	^	✓		MIN	^	^	^	^	X
LEVITON DECORA ROCKER SLIDE			MIN	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓

GU5.3 MR16

MR16 LED



SPECIFICATIONS	
WATTS / VOLTAGE	7 / 12V
DELIVERED LUMENS	580
LAMP SHAPE	MR16
BASE / ANSI BASE	GU5.3
MAXIMUM HEIGHT	1 7/9"
MAXIMUM DIAMETER	2 1/4"
CRI	80+
BEAM ANGLE	35°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	D53228A / DVIBLEDMR162750470C210* 2700 KELVIN · LUMENS 580 · CLEAR
●	D53238A / DVIBLEDMR163000470C210* 3000 KELVIN · LUMENS 580 · CLEAR
●	DVIBLEDMR164000470C210 4000 KELVIN · LUMENS 580 · CLEAR

* Item is discontinuing, see page 76 for dates

DVI LIGHTING CORE OFFERING
Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U			MIN	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	▲	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		MIN	▲	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓		MIN	●	●	✓	✓		MIN	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

GU5.3 MR16

MR16 "Utility" MCOB



SPECIFICATIONS	
WATTS / VOLTAGE	5 / 12V
DELIVERED LUMENS	400
LAMP SHAPE	MR16
BASE / ANSI BASE	GU5.3
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	2 1/4"
CRI	80+
BEAM ANGLE	35°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	D53138A / DVILM1630M5* 3000 KELVIN · LUMENS 400 · CLEAR
●	D53148A / DVILM1640M5* 4000 KELVIN · LUMENS 400 · CLEAR

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

* Item is discontinuing, see page 76 for dates

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH				MIN	✓	MAX				MIN	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	●	✓	●	MAX		✓	●	✓	✓	MAX		✓	●	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	MAX				✓	●	✓	●	✓	✓	✓	●	✓	●	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	●	●	✓	MAX		✓	●	●	✓	✓	✓	✓	✓	^	✓	✓	✓
LUTRON CASETA® WIRELESS				MIN	^	MAX	MIN	^	^	MAX				MIN	✓	^	MAX	
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™				MIN	✓	✓	MIN	^	^	✓	✓	^	✓	^	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

GU10 MR16

COB LED



SPECIFICATIONS	
WATTS	7
DELIVERED LUMENS	580
LAMP SHAPE	MR16
BASE / ANSI BASE	GU10
MAXIMUM HEIGHT	2 1/4"
MAXIMUM DIAMETER	2"
CRI	90+
BEAM ANGLE	35°
JAB CERTIFIED	Yes
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle



ORDER CODES	
●	D51239A / DVLGU10BC30A* 3000 KELVIN · LUMENS 580 · CLEAR

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

* Item is discontinuing, see page 76 for dates

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U			MIN	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	▲	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		MIN	▲	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓		MIN	●	●	✓	✓		MIN	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓

GU10 MR16

GU10 "Utility" MCOB LED



H 2"

Ø 2 1/4"

PACKAGING



SPECIFICATIONS

WATTS	5
DELIVERED LUMENS	400
LAMP SHAPE	MR16
BASE / ANSI BASE	GU10
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	2 1/4"
CRI	80+
BEAM ANGLE	35°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

ORDER CODES

- **D51138A**
3000 KELVIN · LUMENS 400 · CLEAR
- **D51148A**
4000 KELVIN · LUMENS 400 · CLEAR

DVI LIGHTING CORE OFFERING

Items are individually packaged for shelf or pegged retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individually packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 12.

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH				MIN	✓	MAX				MIN	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	•	✓	•	MAX		✓	•	✓	✓	MAX		✓	•	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	MAX				✓	•	✓	•	✓	✓	✓	•	✓	•	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	•	•	✓	MAX		✓	•	•	✓	✓	✓	✓	✓	^	✓	✓	✓
LUTRON CASETA® WIRELESS				MIN	^	MAX	MIN	^	^	MAX				MIN	✓	^	MAX	
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™				MIN	✓	✓	MIN	^	^	✓	✓	^	✓	^	✓	✓	✓	
LUTRON MAESTRO PRO MA-PRO-WH	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	

E26 HR16

COB LED



SPECIFICATIONS	
WATTS	7
DELIVERED LUMENS	580
LAMP SHAPE	MR16
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	2 1/4"
MAXIMUM DIAMETER	2"
CRI	90+
BEAM ANGLE	35°
JA8 CERTIFIED	Yes
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

ORDER CODES	
●	D52239A / DVLHR16BC30A* 3000 KELVIN · LUMENS 580 · CLEAR

DVI LIGHTING CORE OFFERING

Items are bulk packaged for shelf retail display. The master carton contains 4 sub-cartons and each sub-carton contains 6 bulk packaged bulbs for a total of 24 bulbs. Bulbs are only sold in subcartons (multiples) of 4.



* Item is discontinuing, see page 76 for dates

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™					MIN	✓	x	x	x	x	x	x	x	x	x	x	x	x
LUTRON MAESTRO PRO MA-PRO-WH	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓

BULB PACKS

E12 C35

Clear Candelabra LED
6 Pack



DVI LIGHTING CORE OFFERING

Items are bulk packaged for shelf retail display. The master carton contains 4 sub-cartons and each sub-carton contains 6 bulk packaged bulbs for a total of 144 bulbs. Bulbs are only sold in sub-cartons (multiples) of 4.

ORDER CODES

- **D34128A / DVCT24CC27H***
2700 KELVIN · LUMENS 400 · CLEAR
- **D34138A / DVCT24CC30H***
3000 KELVIN · LUMENS 420 · CLEAR
- **D34148A / DVCT24CC40H***
4000 KELVIN · LUMENS 450 · CLEAR
- **DVCT24CC50H**
5000 KELVIN · LUMENS 500 · CLEAR

NOTE: Refer to image for scale / Se référer à l'image pour l'échelle

* Item is discontinuing, see page 76 for dates

SPECIFICATIONS

WATTS	4.4
DELIVERED LUMENS	400-500
LAMP SHAPE	C35
BASE / ANSI BASE	Candelabra / E12
MAXIMUM HEIGHT	3 7/8"
MAXIMUM DIAMETER	1 3/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	6/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.41 / year
WARRANTY	5 YRS / 20,000 HRS

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓	✓	✓	✓	✓	✓	MAX	
LEVITON DECORA SURESLIDE®		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	▲	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	MAX		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LEVITON DECORA SMART™			MIN	✓	✓	✓		✓	MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	●	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

BULB PACKS

E26 ST19

Edison LED 4 Pack



5 1/2"

Ø 2 1/2"

DVI LIGHTING CORE OFFERING

Items are bulk packaged for shelf retail display. The master carton contains 36 sub-cartons and each sub-carton contains 4 bulk packaged bulbs for a total of 144 bulbs. Bulbs are only sold in subcartons(multiples) of 1.

ORDER CODES

- **D66138A 4 PACK NEW**
3000 KELVIN · LUMENS 700 · CLEAR
- **D66148A 4 PACK NEW**
4000 KELVIN · LUMENS 700 · CLEAR

SPECIFICATIONS

WATTS	6.5
DELIVERED LUMENS	700
LAMP SHAPE	ST19
BASE / ANSI BASE	Medium / E26
MAXIMUM HEIGHT	5 1/2"
MAXIMUM DIAMETER	2 1/2"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	No
ENCLOSED RATED	Yes
OPERATING TEMP.	-20° C to 45° C
CASE QUANTITY	4/144
LIFE CYCLE @ 3 HRS/DAY	18 years
ENERGY COST @10.65¢/kWh †	\$0.72 / year
WARRANTY	5 YRS / 20,000 HRS

NOTE: Refer to image for scale /Se référer à l'image pour l'échelle

† refers to Estimated annual cost

Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS						
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	MAX					✓	✓	▲	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MAX					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	X	X	X	X	X	✓	▲	✓	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

A photograph of a modern interior hallway. On the left is a light-colored wood-grain door. On the right is a sliding glass door with dark wood frames and frosted glass panels. The ceiling is white with a recessed circular LED disk light fixture that is illuminated. The walls are white with light-colored baseboards. The floor is made of large, light-colored marble tiles. A dark grey horizontal band is overlaid across the middle of the image, containing the text 'LED DISK LIGHTS' in white, bold, sans-serif capital letters.

LED DISK LIGHTS

DVP38908 | FLUSH MOUNT
 Ø5½" X H ½"
 6W LED
 3000K OR 4000K | 80 CRI
 AS SHOWN: MATTE WHITE
 WITH EMBEDDED MAGNET
 AND TRIM INCLUDED



DVP38918 | FLUSH MOUNT
 Ø7" X H ½"
 12W LED
 3000K OR 4000K | 80 CRI
 AS SHOWN: MATTE WHITE
 WITH EMBEDDED MAGNET
 AND TRIM INCLUDED



DVP38928 | FLUSH MOUNT
 Ø9" X H ½"
 18W LED
 3000K OR 4000K | 80 CRI
 AS SHOWN: MATTE WHITE
 WITH EMBEDDED MAGNET
 AND TRIM INCLUDED



DVP38938 | FLUSH MOUNT
 Ø12" X H ½"
 24W LED
 3000K OR 4000K | 80 CRI
 AS SHOWN: MATTE WHITE
 WITH EMBEDDED MAGNET
 AND TRIM INCLUDED



SOLD IN THE FOLLOWING
 OPTIONS

Chrome
 Brass
 Satin Nickel



Colour temperature available separately

	AVRO			
Diameter	5.5"	7"	9"	12"
Height	0.5"			
Wattage	6W	12W	18W	24W
Initial lumens	600LM	1400LM	2100LM	3200LM
Delivered lumens	360LM	840LM	1260LM	1920LM
Estimated annual cost*	\$0.70	\$1.40	\$2.10	\$2.80
Colour temperature	3000K or 4000K			
CRI	80+			
Beam angle	120°			
Power factor	0.9			
Embedded magnet	Yes			
Trim included	Yes			
Energy Star	Yes			
ETL	Yes			
Life cycle @ 3 hrs/day	20 Years			
Warranty	5 Years Residential/50,000 Hours Commercial @ L70 Standard			

*based on 3 hrs/day, 10.65¢/kWh.



Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ⚠ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	AVRO			
	SIZES			
	5.5"	7"	9"	12"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓



POLARIS

LED DISK LIGHTS

DVP39708 | FLUSH MOUNT
Ø5½" X H ¾"
8W LED
3000K | 80 CRI
AS SHOWN: MATTE BLACK
ALSO AVAILABLE IN: MATTE
WHITE



DVP39718 | FLUSH MOUNT
Ø7" X H ¾"
14W LED
3000K | 80 CRI
AS SHOWN: MATTE BLACK
ALSO AVAILABLE IN: MATTE
WHITE



DVP39728 | FLUSH MOUNT
Ø9" X H ¾"
20W LED
3000K | 80 CRI
AS SHOWN: MATTE BLACK
ALSO AVAILABLE IN: MATTE
WHITE



DVP39738 | FLUSH MOUNT
Ø12" X H ¾"
25W LED
3000K | 80 CRI
AS SHOWN: MATTE BLACK
ALSO AVAILABLE IN: MATTE
WHITE



POLARIS				
Diameter	5.5"	7"	9"	12"
Height	0.75"			
Wattage	8W	14W	20W	25W
Initial lumens	800LM	1640LM	2340LM	3340LM
Delivered lumens	480LM	980LM	1400LM	2000LM
Estimated annual cost*	\$0.93	\$1.63	\$2.33	\$2.92
Colour temperature	3000K			
CRI	80+			
Beam angle	120°			
Power factor	0.9			
Embedded magnet	No			
Trim included	No			
Energy Star	Yes			
ETL	Yes			
Life cycle @ 3 hrs/day	20 Years			
Warranty	5 Years Residential/50,000 Hours Commercial @ L70 Standard			

*based on 3 hrs/day, 10.65¢/kWh.



Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	POLARIS			
	SIZES			
	5.5"	7"	9"	12"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓



TEMPEST CCT

LED DISK LIGHTS


DVP39208 | FLUSH MOUNT
Ø5½" X H ½"
6W LED
3000K/4000K/5000K | 80 CRI
AS SHOWN: MATTE WHITE




DVP39218 | FLUSH MOUNT
Ø7" X H ½"
12W LED
3000K/4000K/5000K | 80 CRI
AS SHOWN: MATTE WHITE



DVP39228 | FLUSH MOUNT
Ø9" X H ½"
18W LED
3000K/4000K/5000K | 80 CRI
AS SHOWN: MATTE WHITE

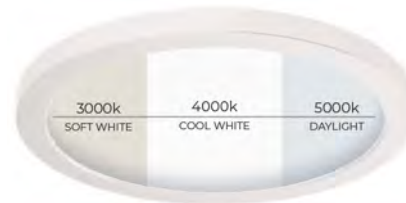


DVP39238 | FLUSH MOUNT
Ø12" X H ½"
24W LED
3000K/4000K/5000K | 80 CRI
AS SHOWN: MATTE WHITE

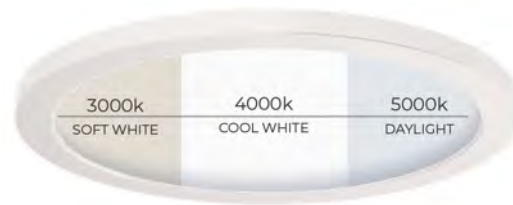

DVP39248 | FLUSH MOUNT
Ø16" X H ½"
30W LED
3000K/4000K/5000K | 80 CRI
AS SHOWN: MATTE WHITE



AVAILABLE TRIMS
(SOLD SEPARATELY)
Chrome
Brass
Satin Nickel
Cerulean Blue
Rose Quartz
Ultimate Grey

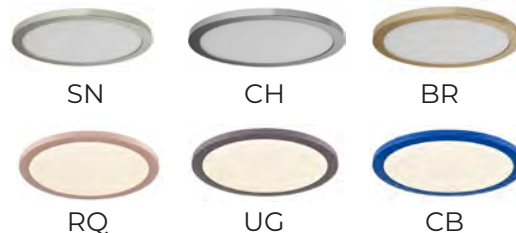

	TEMPEST				
Diameter	5.5"	7"	9"	12"	16"
Height	0.5"				1"
Wattage	6W	12W	18W	24W	30W
Initial lumens	600LM	1400LM	2100LM	3200LM	5000LM
Delivered lumens	360LM	840LM	1260LM	1920LM	2500LM
Estimated annual cost*	\$0.70	\$1.40	\$2.10	\$2.80	\$3.50
Colour temperature	3000K / 4000K / 5000K on switch				
CRI	80+				
Beam angle	120°				
Power factor	0.9				
Embedded magnet	Yes				No
Trim included	No				
Energy Star	Yes				
ETL	Yes				
Life cycle @ 3 hrs/day	20 Years				
Warranty	5 Years Residential/50,000 Hours Commercial @ L70 Standard				

*based on 3 hrs/day, 10.65¢/kWh.



Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	TEMPEST				
	SIZES				
	5.5"	7"	9"	12"	16"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓



TYPHOON CCT

LED DISK LIGHTS

DVP39608 | FLUSH MOUNT
Ø5½" X H ¾"
8W LED
3000/4000K/5000K | 80 CRI
AS SHOWN: MATTE BLACK
ALSO AVAILABLE IN: MATTE
WHITE



DVP39618 | FLUSH MOUNT
Ø7" X H ¾"
14W LED
3000/4000K/5000K | 80 CRI
AS SHOWN: MATTE BLACK
ALSO AVAILABLE IN: MATTE
WHITE



DVP39628 | FLUSH MOUNT
Ø9" X H ¾"
20W LED
3000/4000K/5000K | 80 CRI
AS SHOWN: MATTE BLACK
ALSO AVAILABLE IN: MATTE
WHITE



DVP39638 | FLUSH MOUNT
Ø12" X H ¾"
25W LED
3000/4000K/5000K | 80 CRI
AS SHOWN: MATTE BLACK
ALSO AVAILABLE IN: MATTE
WHITE



		TYPHOON			
Diameter	5.5"	7"	9"	12"	
Height	0.75"				
Wattage	8W	14W	20W	25W	
Initial lumens	800LM	1640LM	2340LM	3340LM	
Delivered lumens	480LM	980LM	1400LM	2000LM	
Estimated annual cost*	\$0.93	\$1.63	\$2.33	\$2.92	
Colour temperature	3000K / 4000K / 5000K on switch				
CRI	80+				
Beam angle	120°				
Power factor	0.9				
Embedded magnet	No				
Trim included	No				
Energy Star	Yes				
ETL	Yes				
Life cycle @ 3 hrs/day	20 Years				
Warranty	5 Years Residential/50,000 Hours Commercial @ L70 Standard				

*based on 3 hrs/day, 10.65¢/kWh.



Dimmability Data / Données de gradation

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	TYPHOON			
	SIZES			
	5.5"	7"	9"	12"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓



BULB STATUS INDEX

A SHAPE LAMPS

Old Stock code	New Stock code	New description	Shape	Base	Date of change to new stock code	OLD UPC	NEW UPC
DVA15MC27A	D12128A	6W 575 LM 2700K 80CRI A15 E26	A15	E26	End of 2023	061467025913	061467041418
DVA15MC30A		6W 600 LM 3000K 80CRI A15 E26	A15	E26		061467026019	
DVA15MC40A		6W 615 LM 4000K 80CRI A15 E26	A15	E26		061467026194	
DVA15MC50A		6W 625 LM 5000K 80CRI A15 E26	A15	E26		061467026309	
DVLA1927C5A	D11128A	6W 550 LM 2700K 80CRI A19 E26	A19	E26	End of 2023	061467005434	061467041012
DVLA1930C5A	D11138A	6W 550 LM 3000K 80CRI A19 E26	A19	E26	Start of 2023	061467005441	061467040312
DVLA1940C5A	D11148A	6W 550 LM 4000K 80CRI A19 E26	A19	E26	Start of 2023	061467005458	061467040343
DVLA1950C5A	D11158A	6W 550 LM 5000K 80CRI A19 E26	A19	E26	End of 2023	061467029041	061467040992
DVLA19MC27C		7W 750 LM 2700K 80CRI A19 E26	A19	E26		061467020420	
DVLA19MC30C	D11238A	7W 750 LM 3000K 80CRI A19 E26	A19	E26	Start of 2023	061467020413	061467040336
DVLA19MC40C	D11248A	7W 750 LM 4000K 80CRI A19 E26	A19	E26	Start of 2023	061467020406	061467040329
DVLA1930F5A	D10138A	6W 500 LM 3000K 80CRI A19 E26	A19	E26	End of 2023	061467007537	061467040961
DVLA165MC30A		10W 1100 LM 3000K 90CRI A165 E26	A165	E26		061467013507	
DVLA165MT30A		10W 1050 LM 3000K 80CRI A165 E26	A165	E26		061467003294	
	D10339A	10W 1000 LM 3000K 90CRI A19 E26 FROSTED	A19	E26			061467039897
	D11339A	10W 1000 LM 3000K 90CRI A19 E26	A19	E26			061467039903
	D11349A	10W 1000 LM 4000K 90CRI A19 E26	A19	E26			061467040664

G9

Old Stock code	New Stock code	New description	Shape	Base	Date of change to new stock code	OLD UPC	NEW UPC
DVILG922C4		4W 350 LM 2200K 80CRI G9	G9	G9		061467003584	
DVILG930C4	D90138A	4W 425 LM 3000K 80CRI G9	G9	G9	Start of 2023	061467160478	061467040374
DVILG940C4	D90148A	4W 450 LM 4000K 80CRI G9	G9	G9	Start of 2023	061467012586	061467040411
DVILG930F4	D91138A	4W 400 LM 3000K 80CRI G9 FROSTED	G9	G9	Start of 2023	061467166593	061467040404
DVILG940F4		4W 450 LM 4000K 80CRI G9	G9	G9		061467000613	
DVG9BB27A		5.6W 530 LM 2700K 80CRI G9	G9	G9		061467034014	
DVLC9BB30A	D93138A	5.6W 550 LM 3000K 80CRI G9	G9	G9	Start of 2023	061467005557	061467040350
DVLC9BB40A	D93148A	5.6W 575 LM 4000K 80CRI G9	G9	G9	Start of 2023	061467005564	061467040909
DVG9BB50A		5.6W 575 LM 5000K 80CRI G9	G9	G9		061467029058	
DVG9BC27A		5.6W 580 LM 2700K 80CRI G9	G9	G9		061467034045	
DVLC9BC30A	D92138A	5.6W 600 LM 3000K 80CRI G9	G9	G9	Mid of 2023	061467005502	061467040916
DVLC9BC40A	D92149A	5.6W 625 LM 4000K 90CRI G9	G9	G9	Start of 2023	061467005519	061467040473
DVLC9BC50A	D92159A	5.6W 625 LM 5000K 90CRI G9	G9	G9	Start of 2023	061467013408	061467040466

CHANDELIER BULLET LAMPS

Old Stock code	New Stock code	New description	Shape	Base	Date of change to new stock code	OLD UPC	NEW UPC
DVLC35CC27C		5W 550 LM 2700K 80CRI C35 E12	C35	E12		061467020437	
DVLC35CC30C	D32138A	5W 550 LM 3000K 80CRI C35 E12	C35	E12	Mid of 2023	061467020444	061467040923
DVLC35CC40C	D32148A	5W 575 LM 4000K 80CRI C35 E12	C35	E12	Start of 2023	061467020451	061467040435
DVLC35CC50C		5W 600 LM 5000K 80CRI C35 E12	C35	E12		061467020468	
DVIBLEDE122700CT24	D31128A	4.4W 400 LM 2700K 80CRI C35 E12	C35	E12	Start of 2023	061467049711	061467040367
DVIBLEDE123000CT24	D31138A	4.4W 425 LM 3000K 80CRI C35 E12	C35	E12	Start of 2023	061467049728	061467040381
DVIBLEDE124000CT24	D31148A	4.4W 450 LM 4000K 80CRI C35 E12	C35	E12	Start of 2023	061467112248	061467040398
DVIBLEDE125000CT24	D31158A	4.4W 500 LM 5000K 80CRI C35 E12	C35	E12	End of 2023	061467020475	061467041029
DVLC35CT30A	D33138A	4W 350 LM 3000K 80CRI C35 E12	C35	E12	Start of 2023	061467006080	061467040459
DVLC35CT40A	D33148A	4W 350 LM 4000K 80CRI C35 E12	C35	E12	Start of 2023	061467009791	061467040947
DVLC35CB30A	D30138A	4W 400 LM 3000K 80CRI C35 E12	C35	E12	End of 2023	061467005601	061467041005
DVLC35CB40A	D30148A	4W 400 LM 4000K 80CRI C35 E12	C35	E12	Mid of 2023	061467005618	061467040244
DVCT24CC27H	D34128A	4.4W 400 LM 2700K 80CRI C35 E12	C35	E12	End of 2023	061467031440	061467041036
DVCT24CC30H	D34138A	4.4W 425 LM 3000K 80CRI C35 E12	C35	E12	Mid of 2023	061467031457	061467040893
DVCT24CC40H	D34148A	4.4W 450 LM 4000K 80CRI C35 E12	C35	E12	End of 2023	061467032614	061467040978
DVCT24CC50H		4.4W 500 LM 5000K 80CRI C35 E12	C35	E12		061467032621	
	D33129A	6W 600 LM 2700K 90CRI C35 E12	C35	E12			061467039910
	D33139A	6W 600 LM 3000K 90CRI C35 E12	C35	E12			061467039927
	D33149A	6W 600 LM 4000K 90CRI C35 E12	C35	E12			061467039934

GLOBES - G16/G25/G33/G40

Old Stock code	New Stock code	New description	Shape	Base	Date of change to new stock code	OLD UPC	NEW UPC
DVILG16R22C4	D41118A	4W 400 LM 2200K 80CRI G16 E12	G16	E12	End of 2023	061467003263	061467040480
DVILG16R27C4	D41128A	4W 400 LM 2700K 80CRI G16 E12	G16	E12	End of 2023	061467003270	061467041074
DVILG16R30C4	D41138A	4W 400 LM 3000K 80CRI G16 E12	G16	E12	Start of 2023	061467003287	061467040107
DVILG16R40C4	D41148A	4W 425 LM 4000K 80CRI G16 E12	G16	E12	Start of 2023	061467020505	061467040152
DVILG16R50C4		4W 450 LM 5000K 80CRI G16 E12	G16	E12		061467029034	
DVILG16CT30A	D40138A	4W 350 LM 3000K 80CRI G16 E12	G16	E12	Start of 2023	061467003324	061467040091
DVILG16CT40A		4W 350 LM 4000K 80CRI G16 E12	G16	E12		061467005038	
DVILG25MT30A	D43238A	8W 750 LM 3000K 80CRI G25 E26 OPAL	G25	E26	Start of 2023	061467014092	061467040169
DVILG25MT40A		8W 750 LM 4000K 80CRI G25 E26 OPAL	G25	E26		061467005021	
DVG25MC27A	D41228B	8W 800 LM 2700K 80CRI G25 E26	G25	E26	End of 2023	061467033888	061467041265
DVG25MC30A	D41238B	8W 800 LM 3000K 80CRI G25 E26	G25	E26	End of 2023	061467034526	061467039972
DVG25MC40A	D41248B	8W 825 LM 4000K 80CRI G25 E26	G25	E26	End of 2023	061467033635	061467041135
DVG25MC50A		8W 850 LM 5000K 80CRI G25 E26	G25	E26		061467033659	
DVILG2530H6A		8W 600 LM 3000K 80CRI G25 E26	G25	E26		061467005496	
DVILG2530G6A		8W 600 LM 3000K 80CRI G25 E26	G25	E26		061467005489	
DVILG33MC30A	D44238A	8W 700 LM 3000K 80CRI G33 E26	G33	E26	End of 2023	061467019479	061467040497
DVILG40MC30A	D45238A	8W 800 LM 3000K 80CRI G40 E26	G40	E26	Mid of 2023	061467013392	061467040251
DVILG40MT30A	D46238A	8W 750 LM 3000K 80CRI G40 E26	G40	E26	Start of 2023	061467000439	061467040046

BULB STATUS INDEX

ST12/ST17/ST18/ST19/ST25							
Old Stock code	New Stock code	New description	Shape	Base	Date of change to new stock code	OLD UPC	NEW UPC
DVILE12S22C3	D8118A	4W 350 LM 2200K 80CRI ST12 E12	ST12	E12	Mid of 2023	061467001801	061467040220
DVILST12CC30A	D81138A	4W 400 LM 3000K 80CRI ST12 E12	ST12	E12	Start of 2023	061467005533	061467040756
DVLST17MC22A	D6118A	4W 450 LM 2200K 80CRI ST17 E26	ST17	E26	Start of 2023	061467005397	061467040213
DVLST17MC27A	D61128A	4W 500 LM 2700K 80CRI ST17 E26	ST17	E26	Start of 2023	061467005403	061467040237
DVLST17MC30A	D61138A	4W 500 LM 3000K 80CRI ST17 E26	ST17	E26	Start of 2023	061467021403	061467040121
DVLST17MC40A	D61148A	4W 525 LM 4000K 80CRI ST17 E26	ST17	E26	Start of 2023	061467022639	061467040084
DVST17MC50A	D61158A	4W 550 LM 5000K 80CRI ST17 E26	ST17	E26	Start of 2023	061467034205	061467040886
DVLST19MC22A	D6218A	6.5W 700 LM 2200K 80CRI ST19 E26	ST19	E26	Mid of 2023	061467005410	061467039460
DVLST19MC27A		6.5W 700 LM 2700K 80CRI ST19 E26	ST19	E26		061467005427	
DVLST19MC30A	D62138A	6.5W 700 LM 3000K 80CRI ST19 E26	ST19	E26	Start of 2023	061467011749	061467040138
DVLST19MC40A	D62148A	6.5W 700 LM 4000K 80CRI ST19 E26	ST19	E26	Start of 2023	061467011756	061467040053
DVST19MC50A	D62158A	6.5W 700 LM 5000K 80CRI ST19 E26	ST19	E26	Start of 2023	061467034212	061467040183
DVLST19MT30A	D63138A	6.5W 650 LM 3000K 80CRI ST19 E26	ST19	E26	Mid of 2023	061467002501	061467040503
DVLST19MT40A		6.5W 650 LM 4000K 80CRI ST19 E26	ST19	E26		061467009814	
DVST25MC27A		8W 950 LM 2700K 80CRI ST25 E26	ST25	E26		061467033895	
DVLST25MC30A	D64238A	8W 1000 LM 3000K 80CRI ST25 E26	ST25	E26	Mid of 2023	061467011763	061467040268
	D66138A	6.5W 700 LM 3000K 80CRI ST19 E26	ST19	E26			061467039552
	D66148A	6.5W 700 LM 4000K 80CRI ST19 E26	ST19	E26			061467039576
	D65239A	9W 900 LM 3000K 90CRI ST18 E26	ST18	E26			061467039521
	D65249A	9W 900 LM 4000K 90CRI ST18 E26	ST18	E26			061467039545
MR16/GU10/HR16							
Old Stock code	New Stock code	New description	Shape	Base	Date of change to new stock code	OLD UPC	NEW UPC
DVLGU10BC30A	D51239A	7W 580 LM 3000K 90CRI MR16 GU10	MR16	GU10	Start of 2023	061467013446	061467039941
DVIBLEDMR162750470C210	D53228A	7W 580 LM 2700K 80CRI MR16 GU5.3	MR16	GU5.3	End of 2023	061467048493	061467041081
DVIBLEDMR163000470C210	D53238A	7W 580 LM 3000K 80CRI MR16 GU5.3	MR16	GU5.3	Start of 2023	061467048509	061467039958
DVIBLEDMR164000470C210		7W 580 LM 4000K 80CRI MR16 GU5.3	MR16	GU5.3		061467048578	
DVILM1630M5	D53138A	5W 400 LM 3000K 80CRI MR16 GU5.3	MR16	GU5.3	End of 2023	061467114167	061467041111
DVILM1640M5		5W 400 LM 4000K 80CRI MR16 GU5.3	MR16	GU5.3		061467161574	
DVLRH16BC30A	D52239A	7W 580 LM 3000K 90CRI MR16 E26	HR16	E26	Mid of 2023	061467013477	061467039965
	D51138A	5W 400 LM 3000K 80CRI MR16 GU10	MR16	GU10			061467039347
	D51148A	5W 400 LM 4000K 80CRI MR16 GU10	MR16	GU10			061467039354

TORPEDOS - T6/T9/T10/T14

Old Stock code	New Stock code	New description	Shape	Base	Date of change to new stock code	OLD UPC	NEW UPC
DVIBLEDEI22700FL4A	D75129A	4W 400 LM 2700K 90CRI T6 E12	T6	E12	Start of 2023	061467005625	061467040114
DVIBLEDEI23000FL4A	D75139A	4W 400 LM 3000K 90CRI T6 E12	T6	E12	Start of 2023	061467005632	061467040145
DVIBLEDEI24000FL4A	D75149A	4W 425 LM 4000K 90CRI T6 E12	T6	E12	Start of 2023	061467020659	061467040060
DVT9CC27A		5W 550 LM 2700K 90CRI T9 E12	T9	E12		061467033857	
DVLT9CC30A	D76139A	5W 550 LM 3000K 90CRI T9 E12	T9	E12	Start of 2023	061467009760	061467040022
DVT9CC40A	D76149A	5W 575 LM 4000K 90CRI T9 E12	T9	E12	End of 2023	061467033864	061467041128
DVIBLEDCATI052R	D72018A	3W 400 LM 2200K 80CRI T10 E26	T10	E26	Mid of 2023	061467048707	061467040954
DVILT10S27C3	D72028A	3W 400 LM 2700K 80CRI T10 E26	T10	E26	Start of 2023	061467030474	061467040206
DVT10MC30A	D72038A	3W 400 LM 3000K 80CRI T10 E26	T10	E26	Start of 2023	061467033673	061467040930
DVT10MC40A	D72048A	3W 400 LM 4000K 80CRI T10 E26	T10	E26	End of 2023	061467033697	061467041067
DVT10MC50A		3W 400 LM 5000K 80CRI T10 E26	T10	E26		061467033703	
DVIBLEDCATI0L2R		6W 550 LM 2200K 80CRI T10 E26	T10	E26		061467048691	
DVILT10L30C6	D71138A	6W 550 LM 3000K 80CRI T10 E26	T10	E26	Start of 2023	061467021410	061467039989
DVT14MC27A		7W 800 LM 2700K 80CRI T14 E26	T14	E26		061467033710	
DVLT14MC30A	D73238A	7W 800 LM 3000K 80CRI T14 E26	T14	E26	Start of 2023	061467009777	061467040190
DVT14MC40A	D73248A	7W 800 LM 4000K 80CRI T14 E26	T14	E26	End of 2023	061467033734	061467041098
DVT14MC27B		8W 1200 LM 2700K 80CRI T14 E26	T14	E26		061467033741	
DVLT14MC30B	D74238A	8W 1200 LM 3000K 80CRI T14 E26	T14	E26	Start of 2023	061467015419	061467040008
DVT14MC40B		8W 1240 LM 4000K 80CRI T14 E26	T14	E26		061467033796	
DVT14MT30A	D70238A	7W 725 LM 3000K 80CRI T14 E26	T14	E26	End of 2023	061467033956	061467041050
DVT14MT40A		7W 750 LM 4000K 80CRI T14 E26	T14	E26		061467033987	
	D77129A	6W 700 LM 2700K 90CRI T10 E26	T10	E26			061467039866
	D77139A	6W 700 LM 3000K 90CRI T10 E26	T10	E26			061467039873
	D77149A	6W 700 LM 4000K 90CRI T10 E26	T10	E26			061467039880
	D85139A	4W420 LM 3000K 90CRI T6 E12 OPAL	T6	E12			061467041951

SPECIALTY SHAPE LAMPS

Old Stock code	New Stock code	New description	Shape	Base	Date of change to new stock code	OLD UPC	NEW UPC
DVLBT22MC30A		4W 400 LM 3000K 80CRI BT22 E26	BT22	E26		061467005595	
DVLS18CC27A		4W 375 LM 2700K 80CRI S18 E12	S18	E12		061467026316	
DVLS18CC30A	D80138A	4W 400 LM 3000K 80CRI S18 E12	S18	E12	Start of 2023	061467009807	061467040077
DVLS18CC40A		4W 425 LM 4000K 80CRI S18 E12	S18	E12		061467026385	
DVLS18CC50A		4W 450 LM 5000K 80CRI S18 E12	S18	E12		061467027078	
DVILE12B27C4	D83129A	4W 400 LM 2700K 90CRI T6 E12	T6	E12	Start of 2023	061467006363	061467040176
DVILE12B30C4	D83139A	4W 400 LM 3000K 90CRI T6 E12	T6	E12	Mid of 2023	061467044525	061467040282
DVILE12B40C4	D83149A	4W 400 LM 4000K 90CRI T6 E12	T6	E12	Mid of 2023	061467027726	061467040305
DVLT20CC30A	D82138A	4W 400 LM 3000K 80CRI T20 E12	T20	E12	Mid of 2023	061467005571	061467040299
DVLT20CC40A		4W 400 LM 4000K 80CRI T20 E12	T20	E12		061467005588	
DVIBA1960CARB		60W CARBON 2200K ST18 E26	ST18	E26		061467038012	

LED DISK LIGHTS STATUS INDEX

Stock code	Description	UPC
DVP38908BR-3K	AVRO 5.3" LED FLUSH MOUNT 1X6W 600 LUMENS 3000K	061467008923
DVP38908BR-4K	AVRO 5.3" LED FLUSH MOUNT 1X6W 360 LUMENS 4000K	061467008930
DVP38908CH-3K	AVRO 5.3" LED FLUSH MOUNT 1X6W 600 LUMENS 3000K	061467008947
DVP38908SN-3K	AVRO 5.3" LED FLUSH MOUNT 1X6W 600 LUMENS 3000K	061467008169
DVP38908SN-4K	AVRO 5.3" LED FLUSH MOUNT 1X6W 360 LUMENS 4000K	061467008176
DVP38918BR-3K	AVRO 7" LED FLUSH MOUNT 1X12W 1400 LUMENS 3000K	061467008985
DVP38918BR-4K	AVRO 7" LED FLUSH MOUNT 1X12W 840 LUMENS 4000K	061467008992
DVP38918CH-3K	AVRO 7" LED FLUSH MOUNT 1X12W 1400 LUMENS 3000K	061467009005
DVP38918CH-4K	AVRO 7" LED FLUSH MOUNT 1X12W 840 LUMENS 4000K	061467009012
DVP38918SN-3K	AVRO 7" LED FLUSH MOUNT 1X12W 1400 LUMENS 3000K	061467008282
DVP38918SN-4K	AVRO 7" LED FLUSH MOUNT 1X12W 840 LUMENS 4000K	061467008299
DVP38928BR-3K	AVRO 9" LED FLUSHMOUNT 1X18W 2100 LM 3000K	061467021373
DVP38928CH-3K	AVRO 9" LED FLUSHMOUNT 1X18W 2100 LM 3000K	061467020390
DVP38928SN-3K	AVRO 9" LED FLUSHMOUNT 1X18W 2100 LM 3000K	061467020383
DVP38938BR-3K	AVRO 12" LED FLUSH MOUNT 1X24W 3200 LUMENS 3000K	061467009043
DVP38938BR-4K	AVRO 12" LED FLUSHMOUNT 1X24W 1920 LUMENS 4000K	061467009050
DVP38938CH-3K	AVRO 12" LED FLUSH MOUNT 1X24W 3200 LUMENS 3000K	061467009067
DVP38938CH-4K	AVRO 12" LED FLUSH MOUNT 1X24W 1920 LUMENS 4000K	061467009074
DVP38938SN-3K	AVRO 12" LED FLUSH MOUNT 1X24W 3200 LUMENS 3000K	061467008596
DVP38938SN-4K	AVRO 12" LED FLUSH MOUNT 1X24W 1920 LUMENS 4000K	061467008602
DVP39208MW+MR	TEMPEST 5.3" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467034502
DVP39218MW+MR	TEMPEST 7" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467017307
DVP39228MW+MR	TEMPEST 9" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467034519
DVP39238MW+MR	TEMPEST 12" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467017314
DVP39248MW+NM	TEMPEST 16" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467034656
DVP39608MB	TYPHOON 5.3" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467041616
DVP39608MW	TYPHOON 5.3" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467041623
DVP39618MB	TYPHOON 7" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467041630
DVP39618MW	TYPHOON 7" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467041647
DVP39628MB	TYPHOON 9" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467041654
DVP39628MW	TYPHOON 9" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467041661
DVP39638MB	TYPHOON 12" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467041678
DVP39638MW	TYPHOON 12" LED FLUSHMOUNT SWITCHABLE TO 3K,4K,5K TEMP	061467041685
DVP39708MB-3K	POLARIS 5.3" LED FLUSHMOUNT 1X8W 480 LUMENS 3000K	061467040800
DVP39708MW-3K	POLARIS 5.3" LED FLUSHMOUNT 1X8W 480 LUMENS 3000K	061467040817
DVP39718MB-3K	POLARIS 7" LED FLUSHMOUNT 1X14W 980 LUMENS 3000K	061467040824
DVP39718MW-3K	POLARIS 7" LED FLUSHMOUNT 1X14W 980 LUMENS 3000K	061467040831
DVP39728MB-3K	POLARIS 9" LED FLUSHMOUNT 1X20W 1400 LUMENS 3000K	061467040848

Stock code	Description	UPC
DVP39728MW-3K	POLARIS 9" LED FLUSHMOUNT 1X20W 1400 LUMENS 3000K	061467040855
DVP39738MB-3K	POLARIS 12" LED FLUSHMOUNT 1X25W 2000 LUMENS 3000K	061467040862
DVP39738MW-3K	POLARIS 12" LED FLUSHMOUNT 1X25W 2000 LUMENS 3000K	061467040879

RINGS STATUS INDEX

	BRASS	CHROME	SATIN NICKEL	CERULIAN BLUE	ROSE QUARTZ	ULTIMATE GREY
5.3"	STR0404BR	STR0404CH	STR0404SN	-	-	-
7"	STR0405BR	STR0405CH	STR0405SN	-	-	-
9"	STR0461BR	STR0461CH	STR0461SN	STR0461CB	STR0461RQ	STR0461UG
12"	STR0407BR	STR0407CH	STR0407SN	STR0407CB	STR0407RQ	STR0407UG

ACCESORIES

ELECTRICAL POWER TO LUMINOUS FLUX CONVERSION TABLE

TABLE DE CONVERSION DU PUISSANCE ÉLECTRIQUE EN FLUX LUMINEUX

HALOGEN BULB / AMPOULE HALOGÈNE	LED BULB / AMPOULE À DEL
15 W	80-100 lm
25 W	101-200 lm
40 W	201-450 lm
60 W	451-800 lm
75 W	900-1100 lm
100 W	1300-1800 lm

ADAPTORS FOR COMMON BULB BASES

ADAPTATEURS POUR DOUILLE D'AMPOULE



ORDER CODE / CODE	DVIA2610	DVIA2609	DVIA2612
UPC	061467012593	061467011299	061467114044
Bulb Base / Douille d'ampoule	G9	GU10	E12
Adaptor Base / Douille de l'adapteur	E26	E26	E26

BULB ACCESSORIES

ACCESSOIRES D'AMPOULE

ORDER CODE / CODE	DVIBULBSUITCASE
Description / Description	Bulb Suitcase / Valise d'ampoules
Dimensions / Dimensions	L 16" x W 12" x H 5"



DIMMING TABLE SUPERSESSION

DVLC35CC27C
 DVLC35CC30C
 DVLC35CC40C
 DVLC35CC50C

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
	LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	^	^	^	✓	✓	✓	^	^	^	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	^	^	^	^	^	^	^	^	^	^	✓	✓	^	^	^	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	^	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	•	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓

DVILA1927C5A
 DVILA1930C5A
 DVILA1940C5A
 DVILA1950C5A

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS						5 BULBS						30 BULBS					
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
	LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	X	X	X	X	X	X
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	^	✓	MAX			y	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	•	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓

DVLG40MC30A

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
	LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	X	X	X	X	X	X
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	▲	✓	MAX			✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	•	✓	✓	✓

DVLG40MT30A

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
	LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	X	X	X	X	X	X
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	▲	V	MAX			✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	•	✓	✓	✓

DVLA19MC27C
DVLA19MC30C
DVLA19MC40C

- ✓ SMOOTH AND CONSISTENT DIMMING
- ✗ NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ▲ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
	LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	X	X	X	X	X	X
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	▲	✓	MAX			✓	▲	✓	✓	✓	✓	✓	▲	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	•	✓	✓	✓

DVI LIGHTING INC.

TORONTO OFFICE &
DISTRIBUTION CENTER
120 GREAT GULF DRIVE
CONCORD, ON L4K 5W1
CANADA

TOLL FREE

T 1.855.DVI.LITE (1.855.384.5483)

F 1.855.384.8435

T 905.660.2381

F 905.660.6814

CUSTOMERSERVICE@DVI.LIGHTING

WWW.DVI.LIGHTING

FOLLOW US ON SOCIAL MEDIA



american
lighting
association

