

MATERIAL


Cast iron.

STANDARD EXECUTIONS

- **DIN 6335-GG-C:** hub, reamed blind hole.
- **DIN 6335-GG-E:** hub, threaded blind hole.

SPECIAL EXECUTIONS ON REQUEST

- Solid hub (DIN 6335-GG-A).
- H7 reamed pass-through hole (DIN 6335-GG-B).
- Aluminium, glossy finish (DIN 6335-AL-PL).
- Aluminium, matte finish (DIN 6335-AL-MT).

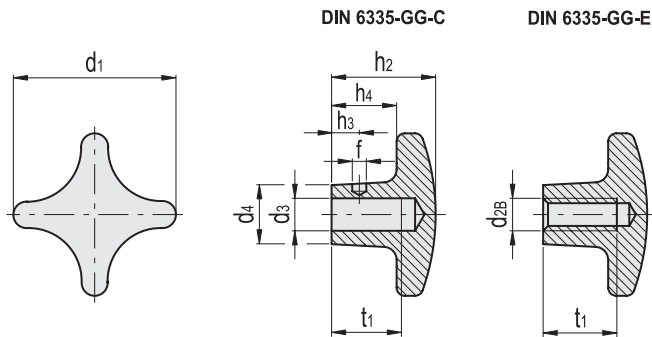

INCH

Code	Description	d1	d2B	d3	d4	h2	h3	t1 min	h4	f	ΔΔ
GN.910763	DIN 6335-GG-32-B1/4-C	1.26	-	0.250	0.47	0.79	0.24	0.47	0.35	0.09	0.06
GN.910762	DIN 6335-GG-32-1/4-20-E	1.26	1/4-20	-	0.47	0.79	-	0.47	0.35	-	0.07
GN.910767	DIN 6335-GG-40-B5/16-C	1.57	-	0.312	0.55	0.98	0.28	0.59	0.51	0.11	0.11
GN.910766	DIN 6335-GG-40-5/16-18-E	1.57	5/16-18	-	0.55	0.98	-	0.59	0.51	-	0.13
GN.910773	DIN 6335-GG-50-B3/8-C	1.97	-	0.375	0.71	1.26	0.31	0.71	0.71	0.11	0.23
GN.910772	DIN 6335-GG-50-3/8-16-E	1.97	3/8-16	-	0.71	1.26	-	0.71	0.71	-	0.23
GN.910777	DIN 6335-GG-63-B1/2-C	2.48	-	0.500	0.79	1.57	0.39	0.87	0.91	0.15	0.37
GN.910776	DIN 6335-GG-63-1/2-13-E	2.48	1/2-13	-	0.79	1.57	-	0.87	0.91	-	0.44
GN.910783	DIN 6335-GG-80-B5/8-C	3.15	-	0.625	0.98	1.97	0.47	1.1	1.1	0.15	0.75
GN.910782	DIN 6335-GG-80-5/8-11-E	3.15	5/8-11	-	0.98	1.97	-	1.1	1.1	-	0.77
GN.910787	DIN 6335-GG-100-B3/4-C	3.94	-	0.750	1.26	2.48	0.55	1.42	1.42	0.19	1.5
GN.910786	DIN 6335-GG-100-3/4-10-E	3.94	3/4-10	-	1.26	2.48	-	1.42	1.42	-	1.57

Clamping knobs